


# Leadtek Bluetooth Module

## LRBT02 Discrete

### Data Sheet

#### Highlights :

- Powered by nRF52810 low power core logic
- 2.4 GHz transceiver -96 dBm sensitivity in Bluetooth® low energy mode
- Reception for High BT 4.2 BT 5.0 availability and accuracy
- Compact module size for easy integration
- Dimension : 13.8 x 9 x 1.9 mm
- Internet of Things (IoT)
  - Home automation
  - Sensor networks
  - Building automation
  - Industrial
  - Retail



Rev 0.1

#### **Leadtek Research Inc.**

18F., No. 166, Jian-Yi Rd., Chung-Ho Dist.,  
New Taipei City 23511

Taiwan, R.O.C.

Tel : +886-2-8226-5800

Fax : +886-2-8226-5801

gps@leadtek.com.tw

www.leadtek.com.tw

## Contents

|                                        |           |
|----------------------------------------|-----------|
| <b>Contents</b>                        | <b>1</b>  |
| <b>Change History</b>                  | <b>2</b>  |
| <b>Table</b>                           | <b>3</b>  |
| <b>Figure</b>                          | <b>3</b>  |
| <b>1 Introduction</b>                  | <b>4</b>  |
| 1.1 Features                           | 4         |
| 1.1.1 Performance                      | 4         |
| 1.1.2 Hardware and Software            | 5         |
| 1.2 Advantages                         | 5         |
| <b>2 Technical Specification</b>       | <b>6</b>  |
| 2.1 Hardware Features                  | 6         |
| 2.1.1 Hardware Specification           | 6         |
| 2.1.2 Electrical Characteristics       | 7         |
| 2.1.3 Pin Assignment                   | 8         |
| 2.2 Physical Specification             | 9         |
| 2.3 Environmental Specification        | 9         |
| 2.4 Reference Design                   | 10        |
| <b>3 Package Specification → → TBD</b> | <b>11</b> |
| 3.1 Specifications                     | 11        |
| Polystyrene Alloy Taping Specification | 11        |
| <b>4 Soldering Profile (RoHS)</b>      | <b>12</b> |
| 4.1 Reflow Profile                     | 12        |
| 4.2 Storage and Baking Condition       | 13        |
| <b>5 Appendix</b>                      | <b>14</b> |

## Change History

| Rev. | Date       | Change Description | Modified by | Remark |
|------|------------|--------------------|-------------|--------|
| 1.0  | 2022/09/01 | Draft              | YoungLee    |        |

This document and the use of any information contained herein is subject to the acceptance of Leadtek terms and conditions. They can be downloaded from [www.leadtek.com](http://www.leadtek.com).

Leadtek makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Copyright © 2016, Leadtek Research In. Tel : +886-2-8226-5800, Fax : +886-2-8226-5801

## Table

|                                               |   |
|-----------------------------------------------|---|
| Table 2-1 : Hardware Specification .....      | 6 |
| Table 2-2 : Electrical Characteristics .....  | 7 |
| Table 2-3 : Pin Assignment.....               | 8 |
| Table 2-4 : Module's Dimension .....          | 9 |
| Table 2-5 : Environmental Specification ..... | 9 |

## Figure

|                                                           |    |
|-----------------------------------------------------------|----|
| Figure 1-1 : LR BT02 Image.....                           | 4  |
| Figure 2-2 : Typical Design Diagram .....                 | 10 |
| Figure 5-1 : TRAY specification .....                     | 11 |
| Figure 5-2 : Polystyrene alloy taping specification ..... | 11 |
| Figure 6-1 : Reflow profile (Time zone).....              | 12 |
| Figure 6-2 : Reflow profile (Parameters).....             | 12 |

## 1 Introduction

Leadtek new generation LRBT02 Bluetooth module products

The main unit's circuitry consists of a device chipset; the nRF52810 Microcontroller Unit and 2.4G RF, the nRF52810 chip has UART output interface transform. The system is powered by system supply with a nominal voltage of 3.3V volts.

The nRF52810 Microcontroller is the main processor responsible for driving the RF 2.4GHz signal communicate and data link to UART interface transform.




Figure 1-1 : LR BT02 Image

## 1.1 Features

### 1.1.1 Performance

- 2.4 GHz transceiver
  - -96 dBm sensitivity in Bluetooth® low energy mode
  - 1 Mbps, 2 Mbps supported data rates
  - TX power -20 to +4 dBm in 4 dB steps
  - Single-pin antenna interface
  - 5.3 mA peak current in TX (0 dBm)
  - 5.4 mA peak current in RX
  - RSSI (1 dB resolution)
- ARM® Cortex®-M4 32-bit processor with FPU, 64 MHz
  - 215 EEMBC CoreMark® score running from flash memory
  - 58 µA/MHz running from flash memory
  - 51.6 µA/MHz running from RAM
  - Data watchpoint and trace (DWT), embedded trace macrocell (ETM), and instrumentation trace macrocell (ITM)
  - Serial wire debug (SWD)
  - Trace port
  - Flexible power management
  - Supply voltage range 2.6 V–3.6 V
  - Fully automatic LDO and DC/DC regulator system
  - Fast wake-up using 64 MHz internal oscillator

### 1.1.2 Hardware and Software

- Support for concurrent multi-protocol
- 12-bit, 200 ksps ADC - 8 configurable channels with programmable gain
- 64 level comparator
- 15 level low power comparator with wakeup from System OFF mode
- General purpose I/O pins
- Digital microphone interface (PDM)
- 5x 32-bit timers with counter mode
- Up to SPI master/slave with EasyDMA
- Up to I2C compatible 2-Wire master/slave
- UART (CTS/RTS) with EasyDMA
- Programmable peripheral interconnect (PPI)
- AES HW encryption with EasyDMA

## 1.2 Advantages

- 2.4 GHz transceiver
- -96 dBm sensitivity in *Bluetooth*® low energy mode
- 1 Mbps, 2 Mbps supported data rates
- TX power -20 to +4 dBm in 4 dB steps

Flexible power management

- Supply voltage range 2.6 V–3.6 V
- Fully automatic LDO and DC/DC regulator system
- Serial wire debug (SWD)

## 2 Technical Specification

### 2.1 Hardware Features

- Based on the high performance features of Nordic™ low power single chipset
- SMT pads allow for fully automatic assembly processes equipment and reflow soldering
- RoHS compliant (lead-free and Halogen free)

#### 2.1.1 Hardware Specification

|                                       |                                 |
|---------------------------------------|---------------------------------|
| Specification                         | BT02                            |
| Processor                             | Nordic/ NRF52810                |
| Product                               | BLUETOOTH Module                |
| connector                             | 25Pin                           |
| Form Factor Size *DIMENSIONS          | 23x10.2x6mm                     |
| WEIGHT                                | 5g                              |
| BT4.0 & BLE                           | BT 4.0 & BT 5.0                 |
| RF(Frequency)                         | 2.405~2.480GHz                  |
| TX output power                       | 8~-20 dBm                       |
| RX Sensitivity                        | -90 dBm                         |
| Antenna                               | Internal                        |
| Communication range<br>* TX Power 0dB | BLE: 30m                        |
| Power consumption<br>* TX Power 0dB   | *.Transmitting mode < 15mA      |
|                                       | *.Receiving mode < 22mA         |
|                                       | *.standby mode < 8.5mA          |
| Environment                           | *.Operating temperature-30~75°C |
|                                       | *.Storage temperature-30~75°C   |
|                                       | *.Operating Humidity max.95%RH  |
| Power supply                          | 3.3 V                           |
| LED Indicator                         | NA                              |
| Data Rate                             | 77.7k bps                       |
| Compatibility                         | NA                              |
| Interface                             | UART / I2C /--                  |
| UART Baud Rate                        | 115200 ~ 230400                 |
| Regulatory/ Compliance                | NCC                             |

Table 2-1 : Hardware Specification

## 2.1.2 Electrical Characteristics

| Operation Conditions           |      |      |      |       |
|--------------------------------|------|------|------|-------|
| Parameter                      | Min. | Typ. | Max. | Units |
| Input Operation supply voltage | 2.6  | 3.3v | 3.6  | V     |
| Peak supply current            | --   | 15   | --   | mA    |
| Standby Backup current         | --   | --   | 60   | uA    |
| I/O Input high level (VIH)     | 1.8  | --   | 3.6  | V     |
| I/O Input low level (VIL)      | 0    | --   | 0.4  | V     |
| I/O Output high level (VoH)    | 1.82 | --   | 2.52 | V     |
| I/O Output low level (VoL)     | 0    | --   | 0.4  | V     |

Table 2-2 : Electrical Characteristics

### 2.1.3 Pin Assignment

| Pin # | Name     | Type | Description                                                |
|-------|----------|------|------------------------------------------------------------|
| 1     | VSS      | PWS  | Ground                                                     |
| 2     | VCC_IN   | PWS  | DC +3.6~2.6V input                                         |
| 3     | P0.25    | I/O  | General-purpose digital I/O                                |
| 4     | P0.26    | I/O  | General-purpose digital I/O                                |
| 5     | P0.29    | I/O  | General purpose I/O SAADC/COMP/LPCOMP input                |
| 6     | P0.30    | I/O  | General purpose I/O SAADC/COMP/LPCOMP input                |
| 7     | P0.31    | I/O  | General purpose I/O SAADC/COMP/LPCOMP input                |
| 8     | VSS      | PWS  | Ground                                                     |
| 9     | DEC_4    | PWS  | 1V3 regulator supply decoupling.                           |
| 10    | DCC      | PWS  | DC/DC converter output pin                                 |
| 11    | XL2      | I/O  | Connection to 32.768khz crystal                            |
| 12    | XL1      | I/O  | Connection to 32.768khz crystal                            |
| 13    | VSS      | PWS  | Ground                                                     |
| 26    | VSS      | PWS  | Ground                                                     |
| 27    | Reserved | N/A  | Keep floating                                              |
| 28    | CST      | N/A  | General purpose I/O ,default UART CST                      |
| 29    | RST      | N/A  | General purpose I/O, default UART RST                      |
| 30    | UART TX  | O    | General purpose I/O, default UART TX                       |
| 31    | UART RX  | I    | General purpose I/O, default UART RX                       |
| 32    | P0.18    | I/O  | General purpose I/O Single wire output / Trace port output |
| 33    | P0.19    | I/O  | General purpose I/O                                        |
| 34    | RESET    | I/O  | Configurable as pin reset                                  |
| 35    | SWDCLK   | I    | Serial wire debug clock input for debug and programming    |
| 36    | SWDIO    | I/O  | Serial wire debug I/O for debug and programming            |
| 37    | VSS      | PWS  | Ground                                                     |


Table 2-3 : Pin Assignment

## 2.2 Physical Specification

- Physical dimensions of the LR BT02 Bluetooth module are as follow:

| Items  | Description       |
|--------|-------------------|
| Length | $13.8 \pm 0.3$ mm |
| Width  | $9.0 \pm 0.3$ mm  |
| Height | $1.9 \pm 0.3$ mm  |
| Weight | 1.8 g             |

Table 2-4 : Module's Dimension

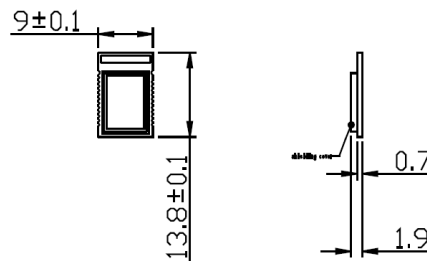

## 2.3 Environmental Specification

| Item                        | Description                                                      |
|-----------------------------|------------------------------------------------------------------|
| Operating temperature range | -30 deg. C to +75 deg. C                                         |
| Storage temperature range   | -35 deg. C to +75 deg. C                                         |
| Humidity                    | Up to 95% non-condensing or a wet Bulb temperature of +35 deg. C |

Table 2-5 : Environmental Specification

## 2.4 Reference Design

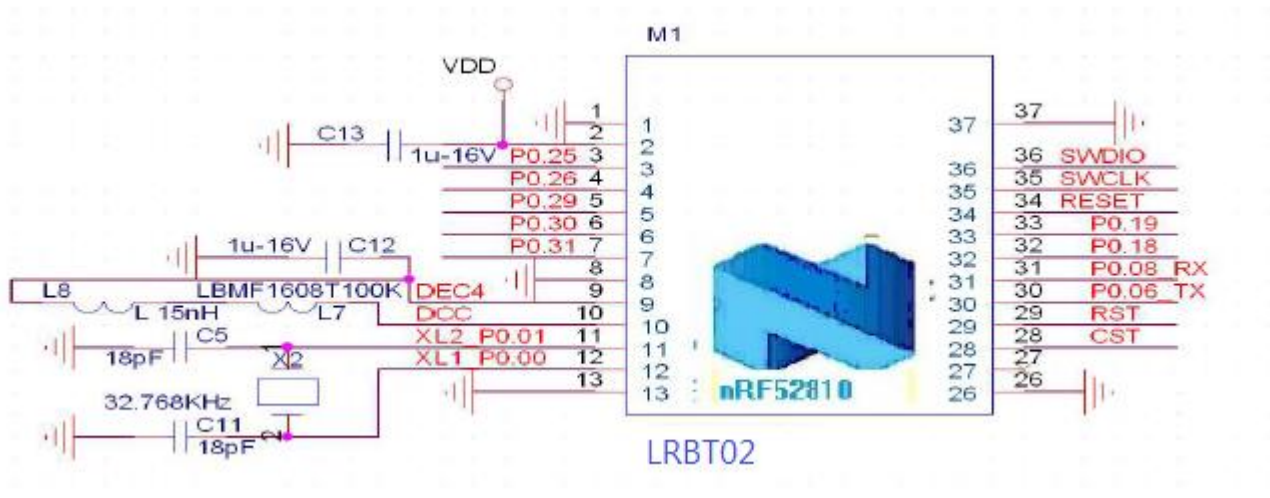


Figure 2-1 : Typical Design Diagram

### 3 Package Specification→→TBD

#### 3.1 Specifications

(Unit: mm)

Figure 5-2 : TRAY specification

#### Polystyrene Alloy Taping Specification

- 10 sprocket hole pitch cumulative tolerance  $\pm 0.20\text{mm}$
- Carrier camber is within 1mm in 100mm
- A0 and B0 are measured on a plane 0.3mm above the bottom of the pocket
- K0 is measured from a plane on the inside bottom of the pocket to the top surface of the carrier
- All dimensions conform to EIA standard EIA-481-2
- 22" 1R= 63M 3000PCS 13"21M 1000PCS

Figure 5-3 : Polystyrene alloy taping specification

## 4 Soldering Profile (RoHS)

### 4.1 Reflow Profile

High quality, low defect soldering requires identifying the optimum temperature profile for reflowing the solder paste. To have the correct profile assures components, boards, and solder joints are not damaged and reliable solder connection is achievable. Profiles are essential for establishing and maintaining processes. You must be able to repeat the profile to achieve process consistently. The heating and cooling rise rates must be compatible with the solder paste and components. The period of time that the assembly is exposed to certain temperatures must first be defined and then maintained.

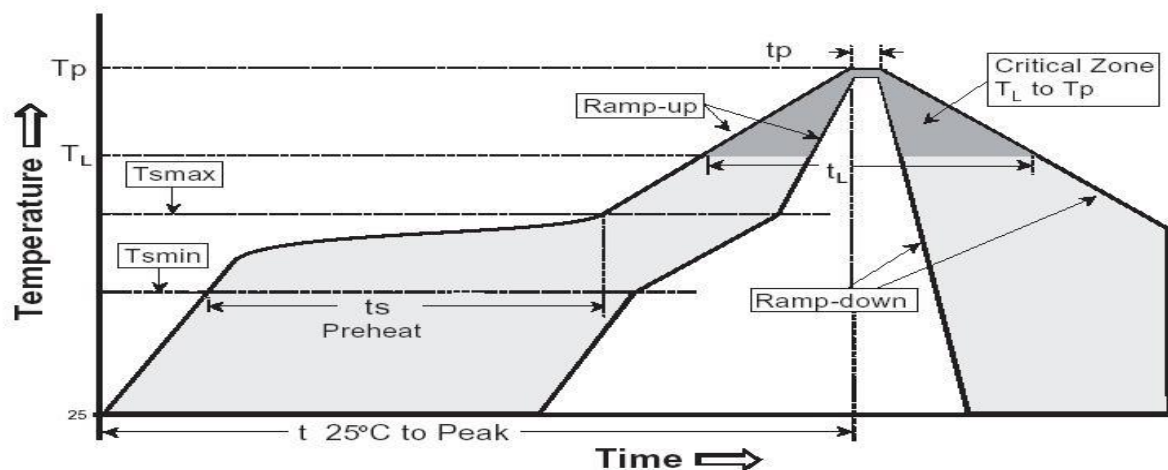


Figure 6-1 : Reflow profile (Time zone)

|                                                                   |                           |
|-------------------------------------------------------------------|---------------------------|
| Average ramp-up rate                                              | 3°C/second max.           |
| Preheat (T <sub>smax</sub> – T <sub>smin</sub> , t <sub>s</sub> ) | 150~200°C ; 60~180seconds |
| Time maintained above ( T <sub>L</sub> , t <sub>L</sub> )         | 217°C ; 60~150seconds     |
| Peak Temperature (T <sub>p</sub> )                                | 255~260°C ; 10~20seconds  |
| Ramp-down rate                                                    | 6°C/second max.           |
| Time 25°C to Peak Temperature                                     | 8 minutes max.            |
| Maximum number of reflow cycles                                   | ≤3                        |

Figure 6-2 : Reflow profile (Parameters)

## 4.2 Storage and Baking Condition

1. Calculated shelf life in sealed bag: 6 months at  $<40^{\circ}\text{C}$  and  $<90\%$  relative humidity(RH).
2. When the bag is opened, devices that will be subjected to reflow soldering or other high temperature process must be :
  - 2-1. Mount within: 24 hours of factory conditions  $\leq 30^{\circ}\text{C}$  /60% RH, or
  - 2-2. Store at  $<10\%$  RH under the protection against humidity and static electricity
3. Devices require bake before mounting, if :
  - 3-1. Humidity indicator card is  $>60\%$  when it reads at  $23\pm 5^{\circ}\text{C}$
  - 3-2. 2-1 or 2-2 not met
4. If baking is required, devices may be baked for 24 hours at  $125\pm 5^{\circ}\text{C}$

Note: if device containers cannot be subjected to high temperature or if shorter bake times are desired, please refer to IPC/JEDEC J-STD-020 for bake procedure

## Contact

### Headquarters and Global Market Administration

Leadtek Research Inc.,  
18F, No. 166, Jian-Yi Rd., Chung-Ho Dist.,  
New Taipei City 23511, Taiwan, R.O.C.  
Phone : +886-2-8226-5800  
Website : [www.leadtek.com](http://www.leadtek.com)

## 5 Appendix

TBA

# FCC Compliance

You are cautioned that changes or modifications not expressly approved by the part responsible for compliance could void the user's authority to operate the equipment.

This device complies with Part 15 of the FCC Rules. Its operation is subject to the following two conditions:

- 1) The device may not cause harmful interference.
- 2) This device must accept any interference received, including interference that may cause undesired operation.

## FCC Statement:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that

to which the receiver is connected.

- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. End users must follow the specific operating instructions for satisfying RF exposure compliance. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Any changes or modifications not expressly approved by the party responsible for compliance could void the authority to operate equipment.

## **FCC RF Radiation Exposure Statement:**

1. This Transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.
2. This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. End users must follow the specific operating instructions for satisfying RF exposure compliance.

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

## **End product labeling:**

In the event that these conditions cannot be met (for example certain laptop configurations or co-location with another transmitter), then the FCC authorization for this module in combination with the host equipment is no longer considered valid and the FCC ID of the module cannot be used on the final product. In these circumstances, the OEM integrator will be responsible for re-evaluating the end product (including the transmitter) and obtaining a separate FCC authorization.

Custom design antennas may be used, however the OEM installer must following the FCC 15.21 requirements and verify if new FCC approval will be necessary.

## **End product labeling:**

This transmitter module is authorized only for use in device where the antenna may be installed such that 20 cm may be maintained between the antenna and users. The final end product must be labeled in a visible area with the following: "Contains FCC ID: I2ILRBT02".

## **Information that must be placed in the end user manual:**

The OEM integrator has to be aware not to provide information to the end user regarding how to install or remove this RF module in the user's manual of the end product which integrates this module. The end user manual shall include all required regulatory information/warning as show in this manual.