




Appendix A. Test of AC Power Line Conducted Emission

Test Mode : 2TX 11be40 CH211 NSS1 MCS0
Voltage : From System(AC 240V/60Hz)
Phase : Line

Data: 11

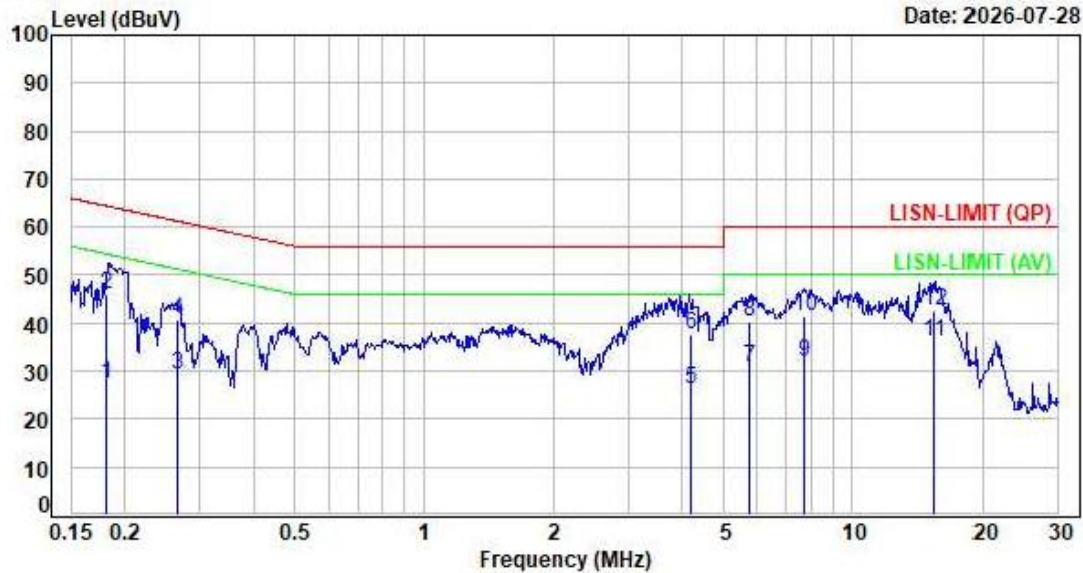

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1818	9.78	17.52	27.30	54.40	-27.10	Average	P
2	0.1818	9.78	36.04	45.82	64.40	-18.58	QP	P
3	0.2655	9.78	19.67	29.45	51.26	-21.81	Average	P
4	0.2655	9.78	30.97	40.75	61.26	-20.51	QP	P
5	4.1835	9.84	16.50	26.34	46.00	-19.66	Average	P
6	4.1835	9.84	27.96	37.80	56.00	-18.20	QP	P
7	5.7719	9.87	20.81	30.68	50.00	-19.32	Average	P
8	5.7719	9.87	30.32	40.19	60.00	-19.81	QP	P
9	7.7112	9.91	22.21	32.12	50.00	-17.88	Average	P
10	7.7112	9.91	31.41	41.32	60.00	-18.68	QP	P
11	15.4831	10.11	25.98	36.09	50.00	-13.91	Average	P
12	15.4831	10.11	32.57	42.68	60.00	-17.32	QP	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss



Test Mode : 2TX 11be40 CH211 NSS1 MCS0
Voltage : From System(AC 240V/60Hz)
Phase : Neutral

Data: 12

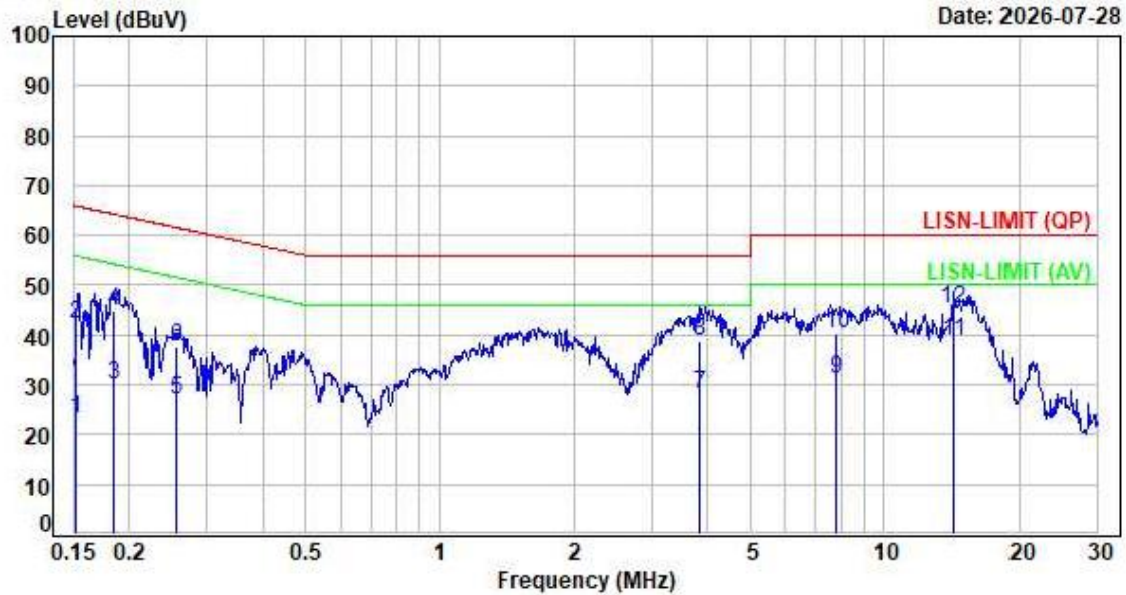

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F
1	0.1515	9.78	13.48	23.26	55.92	-32.66	Average	P
2	0.1515	9.78	32.33	42.11	65.92	-23.81	QP	P
3	0.1842	9.79	20.08	29.87	54.29	-24.42	Average	P
4	0.1842	9.79	35.16	44.95	64.29	-19.34	QP	P
5	0.2546	9.79	17.36	27.15	51.61	-24.46	Average	P
6	0.2546	9.79	27.85	37.64	61.61	-23.97	QP	P
7	3.8489	9.84	18.48	28.32	46.00	-17.68	Average	P
8	3.8489	9.84	28.86	38.70	56.00	-17.30	QP	P
9	7.7735	9.91	21.32	31.23	50.00	-18.77	Average	P
10	7.7735	9.91	30.31	40.22	60.00	-19.78	QP	P
11	14.2685	10.10	28.72	38.82	50.00	-11.18	Average	P
12	14.2685	10.10	35.04	45.14	60.00	-14.86	QP	P

Note: Level=Reading+Factor

Margin=Level-Limit

Factor=(LISN or ISN or Current Probe)Factor + Cable Loss