


**Appendix C. Test Result and Data (Bandedge)**


Test Mode : 2TX 11be20 CH01 NSS1 MCS0
Pol : Vertical Detector : Peak

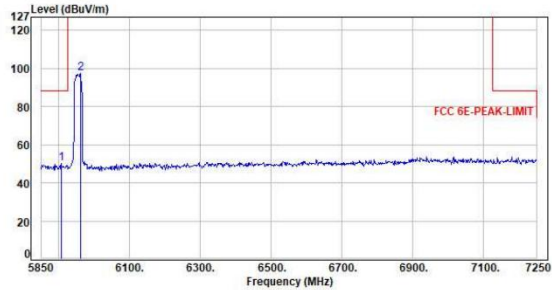

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5997.40	0.92	49.33	50.25	88.20	-37.95	Peak	206	27	P
2	5962.00	0.92	96.61	97.53	200.00	-102.47	Peak	206	27	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be20 CH01 NSS1 MCS0
Pol : Horizontal Detector : Peak

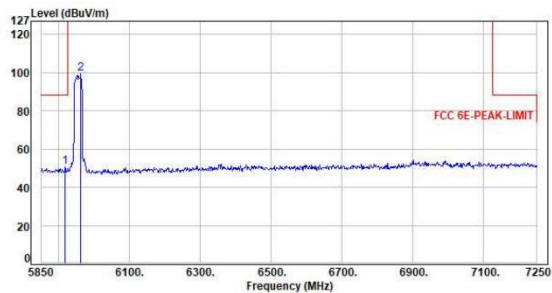


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5918.60	0.93	49.75	50.68	88.20	-37.52	Peak	120	63	P
2	5963.40	0.92	98.48	99.40	200.00	-100.60	Peak	120	63	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be20 CH45 NSS1 MCS0
Pol : Vertical Detector : Peak

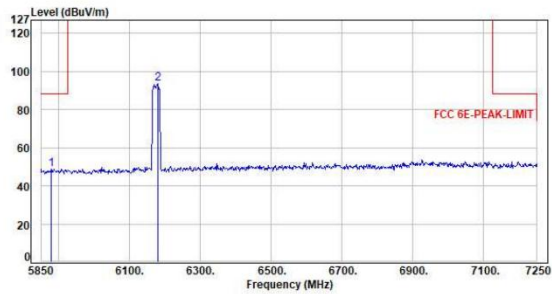

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5878.00	0.97	47.92	48.89	88.20	-39.31	Peak	319	180	P
2	6179.00	1.00	92.01	93.01	200.00	-106.99	Peak	319	180	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be20 CH45 NSS1 MCS0
Pol : Horizontal Detector : Peak

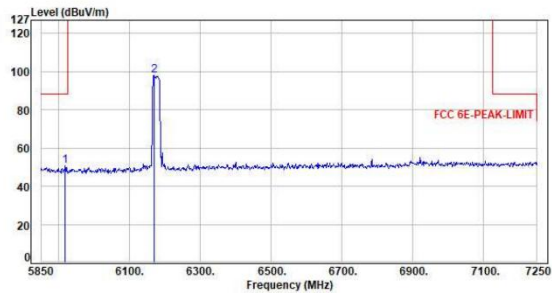


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5918.60	0.93	49.82	50.75	88.20	-37.45	Peak	100	226	P
2	6169.20	1.76	96.17	97.93	200.00	-102.07	Peak	100	226	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be20 CH93 NSS1 MCS0
Pol : Vertical Detector : Peak

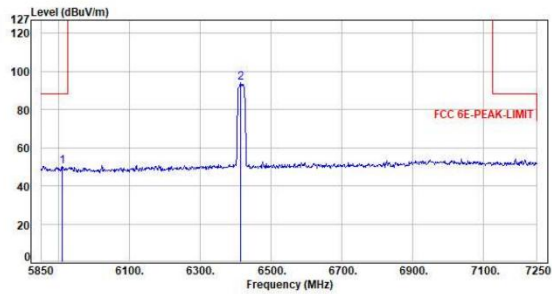

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5910.20	0.92	49.22	50.14	88.20	-38.06	Peak	289	190	P
2	6414.20	3.13	91.25	94.38	200.00	-105.62	Peak	289	190	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be20 CH93 NSS1 MCS0
Pol : Horizontal Detector : Peak

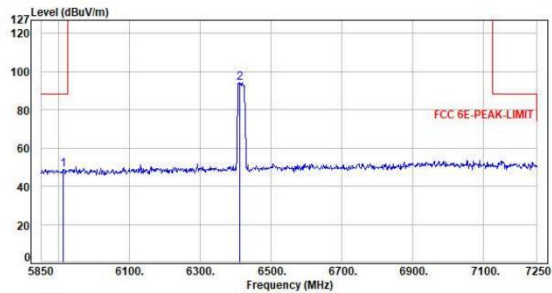


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5913.00	0.93	48.07	49.00	88.20	-39.20	Peak	282	185	P
2	6411.40	3.11	91.15	94.26	200.00	-105.74	Peak	282	185	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be20 CH97 NSS1 MCS0
Pol : Vertical Detector : Peak

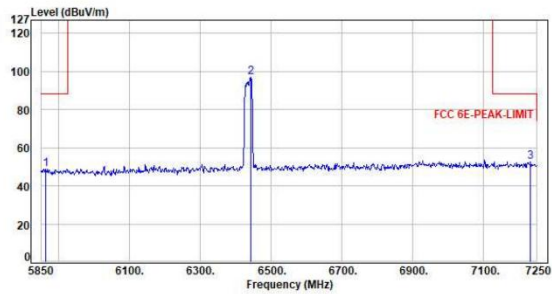

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5862.60	1.00	47.89	48.89	88.20	-39.31	Peak	296	188	P
2	6442.20	3.24	93.92	97.16	200.00	-102.84	Peak	296	188	P
3	7231.80	3.90	48.74	52.64	88.20	-35.56	Peak	296	188	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be20 CH97 NSS1 MCS0
Pol : Horizontal Detector : Peak

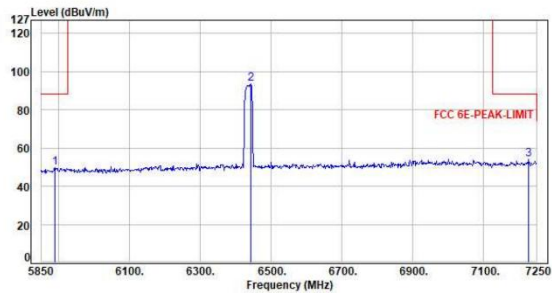


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5889.20	0.95	48.79	49.74	88.20	-38.46	Peak	272	198	P
2	6442.20	3.24	90.42	93.66	200.00	-106.34	Peak	272	198	P
3	7226.20	3.89	50.18	54.07	88.20	-34.13	Peak	272	198	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be20 CH113 NSS1 MCS0
Pol : Vertical Detector : Peak

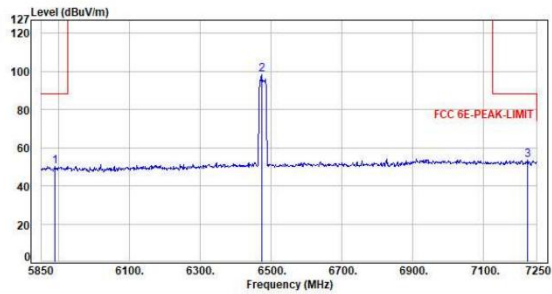

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5890.60	0.95	49.34	50.29	88.20	-37.91	Peak	265	192	P
2	6473.00	3.33	95.04	98.37	200.00	-101.63	Peak	265	192	P
3	7223.40	3.89	49.82	53.71	88.20	-34.49	Peak	265	192	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be20 CH113 NSS1 MCS0
Pol : Horizontal Detector : Peak

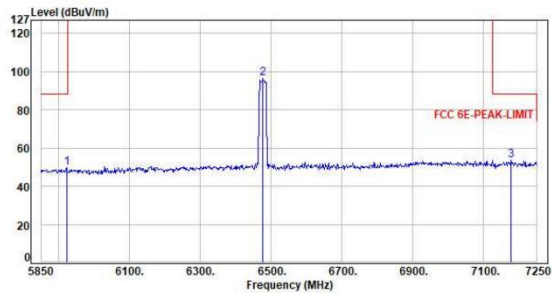


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5922.80	0.92	48.58	49.50	88.20	-38.70	Peak	128	0	P
2	6477.20	3.32	93.02	96.34	200.00	-103.66	Peak	128	0	P
3	7177.20	3.81	49.70	53.51	88.20	-34.69	Peak	128	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be20 CH117 NSS1 MCS0
Pol : Vertical Detector : Peak

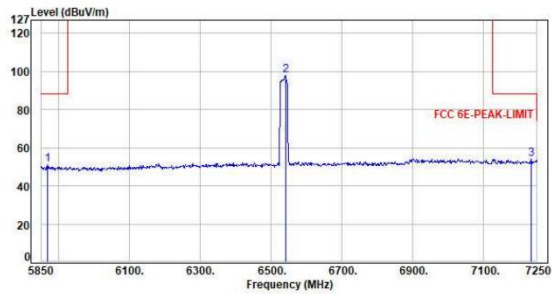

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5868.20	1.00	50.01	51.01	88.20	-37.19	Peak	283	185	P
2	6540.20	3.37	94.54	97.91	200.00	-102.09	Peak	283	185	P
3	7233.20	3.91	50.36	54.27	88.20	-33.93	Peak	283	185	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be20 CH117 NSS1 MCS0
Pol : Horizontal Detector : Peak

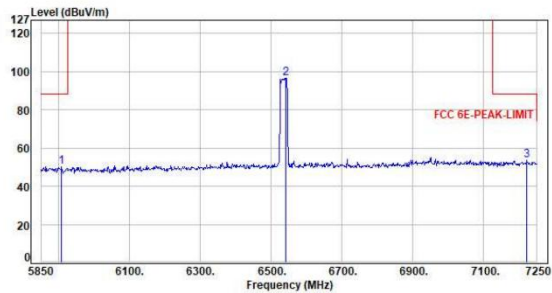


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5908.00	0.92	49.48	50.40	88.20	-37.80	Peak	100	5	P
2	6541.60	3.37	93.35	96.72	200.00	-103.28	Peak	100	5	P
3	7222.00	3.88	49.49	53.37	88.20	-34.83	Peak	100	5	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be20 CH153 NSS1 MCS0
Pol : Vertical Detector : Peak

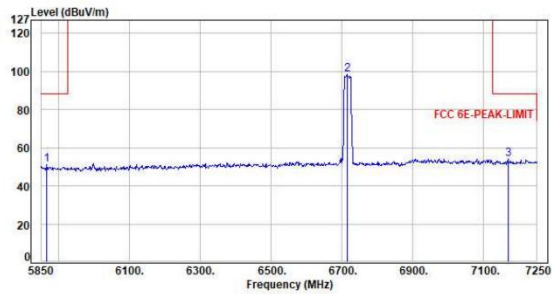

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5866.80	1.01	50.01	51.02	88.20	-37.18	Peak	288	186	P
2	6713.80	3.52	94.77	98.29	200.00	-101.71	Peak	288	186	P
3	7168.80	3.80	50.12	53.92	88.20	-34.28	Peak	288	186	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be20 CH153 NSS1 MCS0
Pol : Horizontal Detector : Peak

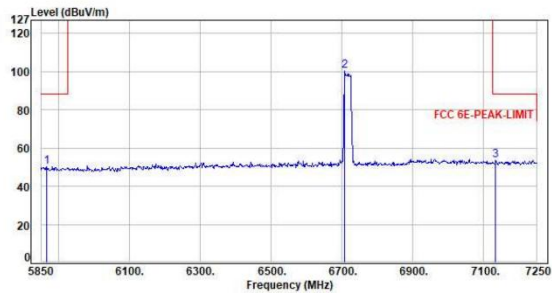


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5866.80	1.01	49.25	50.26	88.20	-37.94	Peak	100	8	P
2	6708.20	3.52	97.13	100.65	200.00	-99.35	Peak	100	8	P
3	7133.80	3.78	49.96	53.74	88.20	-34.46	Peak	100	8	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be20 CH181 NSS1 MCS0
Pol : Vertical Detector : Peak

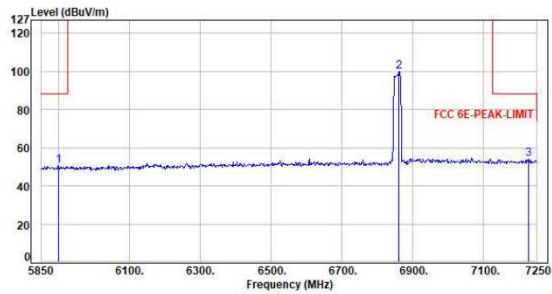

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5899.00	0.93	49.62	50.55	88.20	-37.65	Peak	285	189	P
2	6860.80	3.61	96.54	100.15	200.00	-99.85	Peak	285	189	P
3	7226.20	3.89	50.09	53.98	88.20	-34.22	Peak	285	189	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be20 CH181 NSS1 MCS0
Pol : Horizontal Detector : Peak

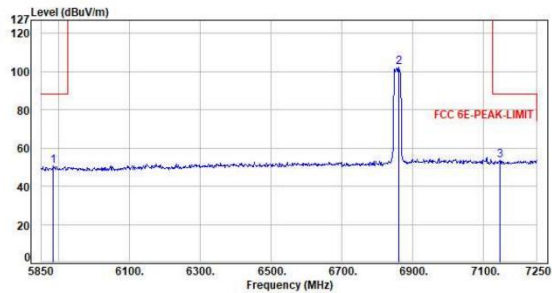


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5885.00	0.96	49.87	50.83	88.20	-37.37	Peak	100	7	P
2	6860.80	3.61	98.95	102.56	200.00	-97.44	Peak	100	7	P
3	7146.40	3.77	49.85	53.62	88.20	-34.58	Peak	100	7	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be20 CH189 NSS1 MCS0
Pol : Vertical Detector : Peak

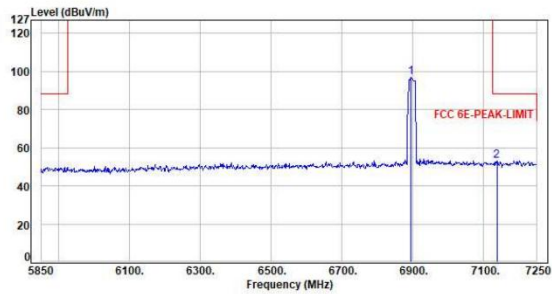

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6894.40	3.75	93.26	97.01	200.00	-102.99	Peak	100	14	P
2	7136.60	3.77	49.54	53.31	88.20	-34.89	Peak	100	14	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be20 CH189 NSS1 MCS0
Pol : Horizontal Detector : Peak

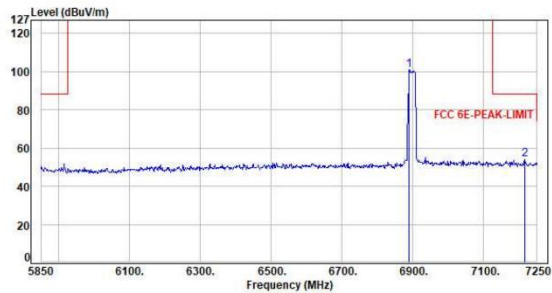


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6888.00	3.72	97.33	101.05	200.00	-98.95	Peak	100	9	P
2	7215.00	3.88	50.39	54.27	88.20	-33.93	Peak	100	9	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be20 CH213 NSS1 MCS0
Pol : Vertical Detector : Peak

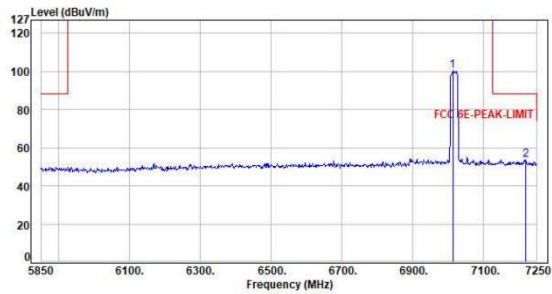

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7012.00	3.65	96.90	100.55	200.00	-99.45	Peak	100	13	P
2	7219.20	3.88	49.62	53.50	88.20	-34.70	Peak	100	13	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be20 CH213 NSS1 MCS0
Pol : Horizontal Detector : Peak

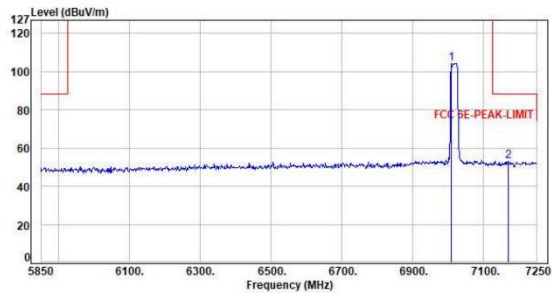


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7009.20	3.65	100.89	104.54	200.00	-95.46	Peak	100	9	P
2	7168.80	3.80	49.38	53.18	88.20	-35.02	Peak	100	9	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be20 CH229 NSS1 MCS0
Pol : Vertical Detector : Peak

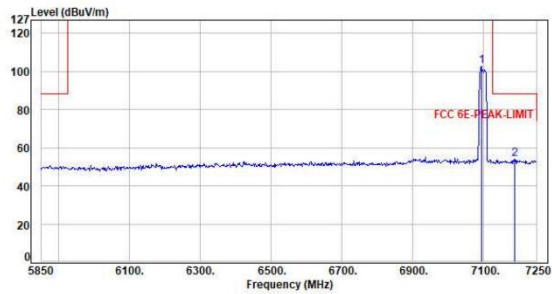

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7093.20	3.79	99.20	102.99	200.00	-97.01	Peak	111	10	P
2	7187.00	3.82	50.18	54.00	88.20	-34.20	Peak	111	10	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be20 CH229 NSS1 MCS0
Pol : Horizontal Detector : Peak

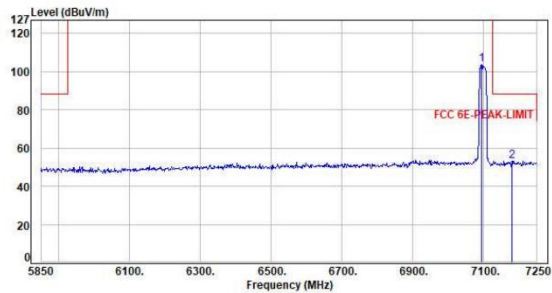


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7093.20	3.79	100.02	103.81	200.00	-96.19	Peak	100	11	P
2	7178.60	3.82	49.48	53.30	88.20	-34.90	Peak	100	11	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be20 CH233 NSS1 MCS0
Pol : Vertical Detector : Peak

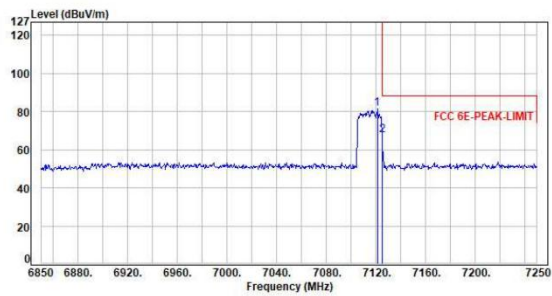

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7121.20	3.78	77.84	81.62	200.00	-118.38	Peak	100	10	P
2	7125.20	3.78	63.68	67.46	88.20	-20.74	Peak	100	10	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be20 CH233 NSS1 MCS0
Pol : Vertical Detector : Average

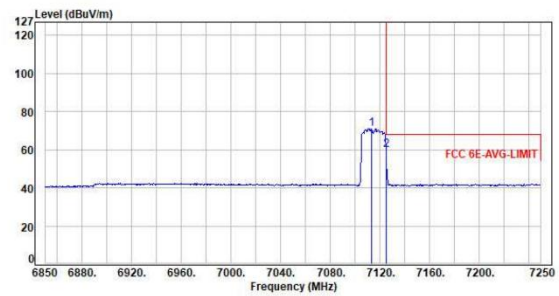

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7113.20	3.79	67.31	71.10	200.00	-128.90	Average	100	10	P
2	7125.20	3.78	55.96	59.74	68.20	-8.46	Average	100	10	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be20 CH233 NSS1 MCS0
Pol : Horizontal Detector : Peak

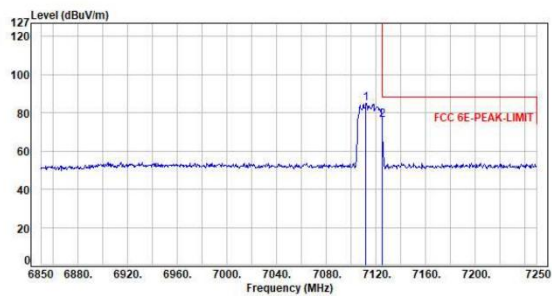

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7112.00	3.79	81.16	84.95	200.00	-115.05	Peak	101	10	P
2	7125.20	3.78	72.70	76.48	88.20	-11.72	Peak	101	10	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be20 CH233 NSS1 MCS0
Pol : Horizontal Detector : Average

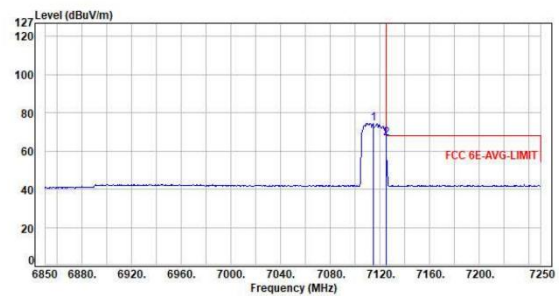


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7114.80	3.79	70.58	74.37	200.00	-125.63	Average	101	10	P
2	7125.20	3.78	62.97	66.75	68.20	-1.45	Average	101	10	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be40 CH03 NSS1 MCS0
Pol : Vertical Detector : Peak

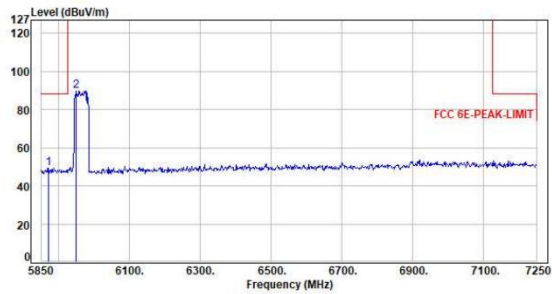

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5872.40	0.99	48.45	49.44	88.20	-38.76	Peak	180	23	P
2	5949.40	0.92	89.09	90.01	200.00	-109.99	Peak	180	23	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be40 CH03 NSS1 MCS0
Pol : Horizontal Detector : Peak

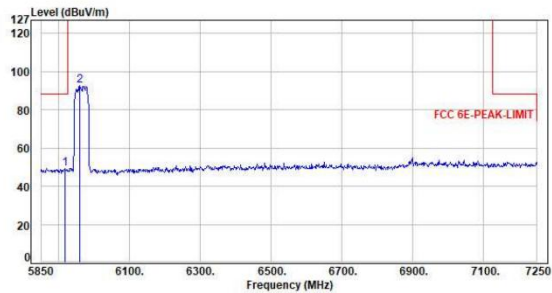


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5917.20	0.93	48.39	49.32	88.20	-38.88	Peak	248	30	P
2	5959.20	0.91	91.60	92.51	200.00	-107.49	Peak	248	30	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be40 CH43 NSS1 MCS0
Pol : Vertical Detector : Peak

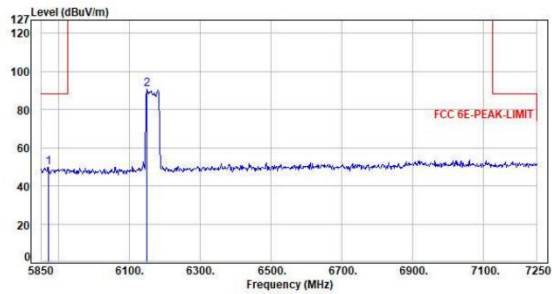

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5872.40	0.99	48.56	49.55	88.20	-38.65	Peak	101	188	P
2	6149.60	1.63	88.94	90.57	88.20	-109.43	Peak	101	188	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be40 CH43 NSS1 MCS0
Pol : Horizontal Detector : Peak

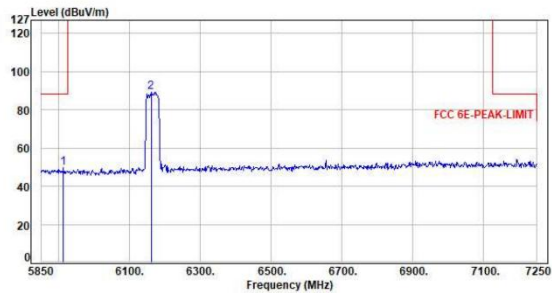


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5913.00	0.93	48.99	49.92	88.20	-38.28	Peak	170	209	P
2	6160.80	1.69	85.81	87.50	88.20	-110.81	Peak	170	209	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be40 CH91 NSS1 MCS0
Pol : Vertical Detector : Peak

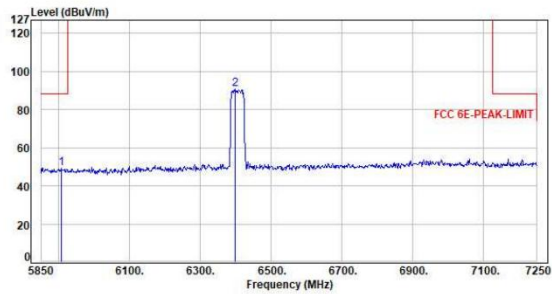

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5988.80	0.92	48.23	49.15	88.20	-39.05	Peak	302	188	P
2	6397.40	3.05	87.58	90.63	200.00	-109.37	Peak	302	188	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be40 CH91 NSS1 MCS0
Pol : Horizontal Detector : Peak

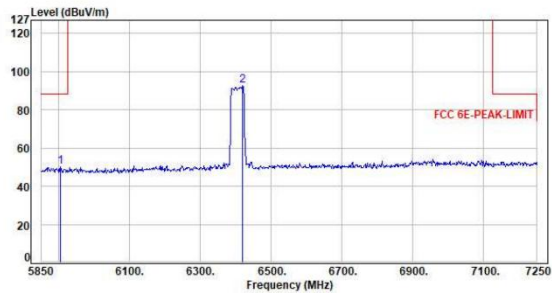


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5984.60	0.93	49.28	50.21	88.20	-37.99	Peak	305	180	P
2	6419.80	3.15	89.36	92.51	200.00	-107.49	Peak	305	180	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be40 CH99 NSS1 MCS0
Pol : Vertical Detector : Peak

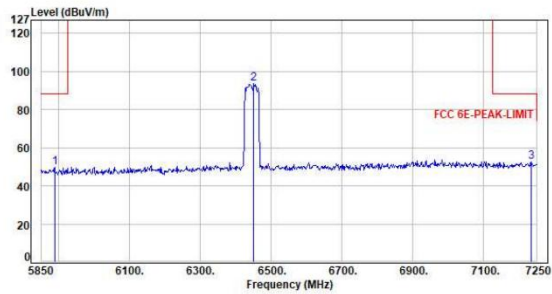

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5889.20	0.95	48.79	49.74	88.20	-38.46	Peak	297	183	P
2	6450.60	3.27	90.38	93.57	200.00	-106.43	Peak	297	183	P
3	7233.20	3.91	48.83	52.74	88.20	-35.46	Peak	297	183	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be40 CH99 NSS1 MCS0
Pol : Horizontal Detector : Peak

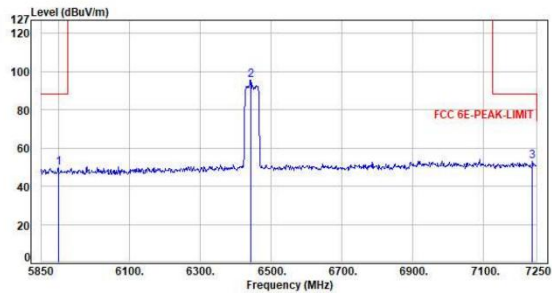


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5899.00	0.93	48.79	49.72	88.20	-38.48	Peak	281	183	P
2	6442.20	3.24	92.55	95.79	200.00	-104.21	Peak	281	183	P
3	7237.40	3.98	49.17	53.07	88.20	-35.13	Peak	281	183	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be40 CH107 NSS1 MCS0
Pol : Vertical Detector : Peak

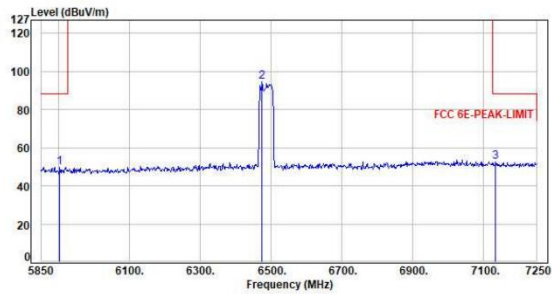

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5993.20	0.93	48.78	49.71	88.20	-38.49	Peak	262	188	P
2	6474.40	3.33	91.47	94.80	200.00	-105.20	Peak	262	188	P
3	7133.80	3.78	48.89	52.67	88.20	-35.53	Peak	262	188	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be40 CH107 NSS1 MCS0
Pol : Horizontal Detector : Peak

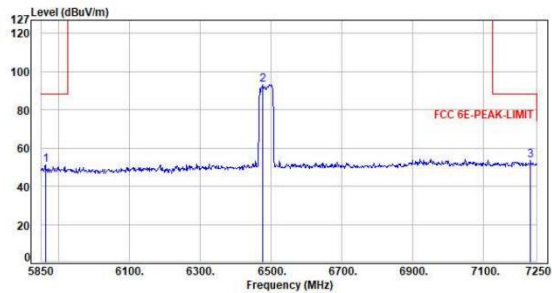


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5862.60	1.00	49.99	50.99	88.20	-37.21	Peak	289	186	P
2	6477.20	3.32	90.09	93.41	200.00	-106.59	Peak	289	186	P
3	7231.80	3.90	49.62	53.52	88.20	-34.68	Peak	289	186	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be40 CH123 NSS1 MCS0
Pol : Vertical Detector : Peak

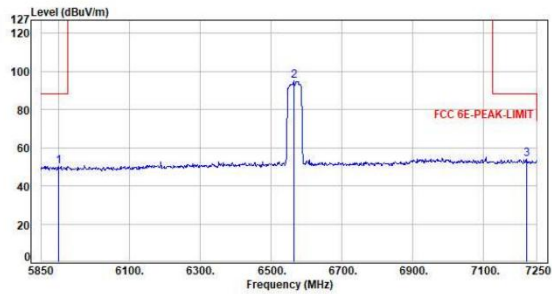

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5899.00	0.93	49.36	50.29	88.20	-37.91	Peak	283	184	P
2	6564.00	3.36	91.79	95.15	200.00	-104.85	Peak	283	184	P
3	7222.00	3.88	49.96	53.84	88.20	-34.36	Peak	283	184	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be40 CH123 NSS1 MCS0
Pol : Horizontal Detector : Peak

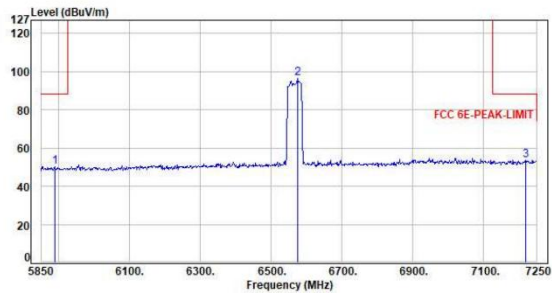


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5889.20	0.95	49.27	50.22	88.20	-37.98	Peak	103	8	P
2	6573.80	3.36	93.09	96.45	200.00	-103.55	Peak	103	8	P
3	7217.80	3.88	49.91	53.79	88.20	-34.41	Peak	103	8	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be40 CH155 NSS1 MCS0
Pol : Vertical Detector : Peak

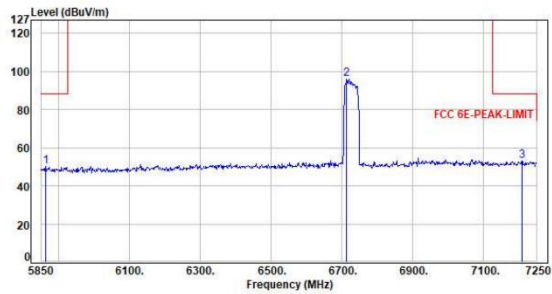

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5862.60	1.00	49.15	50.15	88.20	-38.05	Peak	299	192	P
2	6712.40	3.52	92.74	96.26	200.00	-103.74	Peak	299	192	P
3	7200.00	3.86	49.02	52.88	88.20	-35.32	Peak	299	192	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be40 CH155 NSS1 MCS0
Pol : Horizontal Detector : Peak

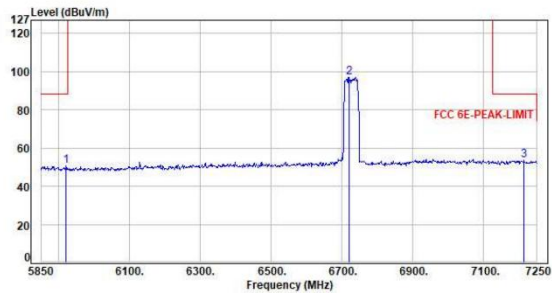


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5921.40	0.92	49.98	50.90	88.20	-37.30	Peak	110	12	P
2	6720.80	3.51	93.63	97.14	200.00	-102.86	Peak	110	12	P
3	7213.60	3.88	49.66	53.54	88.20	-34.66	Peak	110	12	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be40 CH179 NSS1 MCS0
Pol : Vertical Detector : Peak

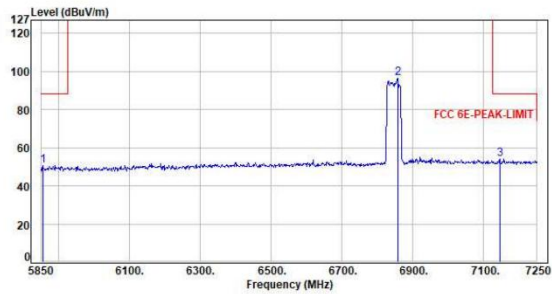

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5855.60	1.03	49.70	50.73	88.20	-37.47	Peak	275	194	P
2	6886.60	3.60	93.02	96.62	200.00	-103.38	Peak	275	194	P
3	7145.00	3.78	50.33	54.11	88.20	-34.09	Peak	275	194	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be40 CH179 NSS1 MCS0
Pol : Horizontal Detector : Peak

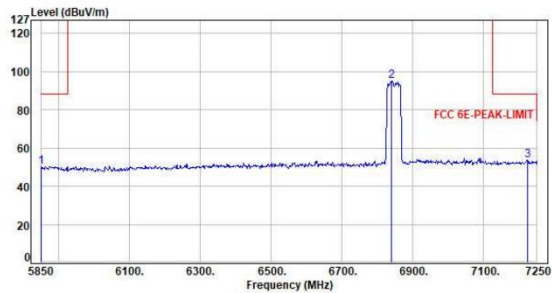


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5851.40	1.04	49.36	50.40	88.20	-37.80	Peak	111	18	P
2	6838.40	3.58	91.41	94.99	200.00	-105.01	Peak	111	18	P
3	7223.40	3.89	49.73	53.62	88.20	-34.58	Peak	111	18	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be40 CH195 NSS1 MCS0
Pol : Vertical Detector : Peak

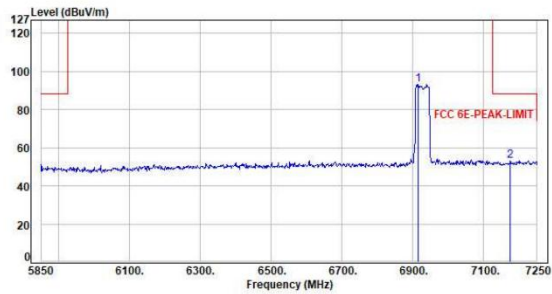

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6915.40	3.75	89.66	93.41	200.00	-106.59	Peak	115	15	P
2	7174.40	3.81	49.52	53.33	88.20	-34.87	Peak	115	15	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be40 CH195 NSS1 MCS0
Pol : Horizontal Detector : Peak

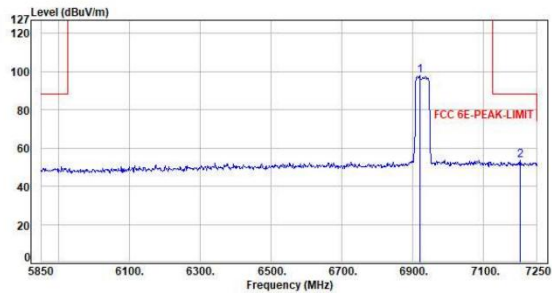


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6919.60	3.75	94.21	97.96	200.00	-102.04	Peak	106	9	P
2	7203.80	3.86	49.52	53.38	88.20	-34.82	Peak	106	9	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be40 CH211 NSS1 MCS0
Pol : Vertical Detector : Peak

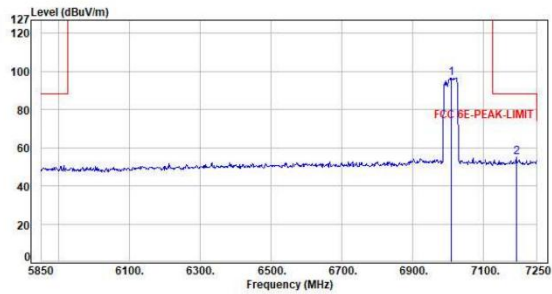

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7009.20	3.65	92.98	96.63	200.00	-103.37	Peak	111	13	P
2	7191.20	3.83	50.98	54.81	88.20	-33.39	Peak	111	13	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be40 CH211 NSS1 MCS0
Pol : Horizontal Detector : Peak

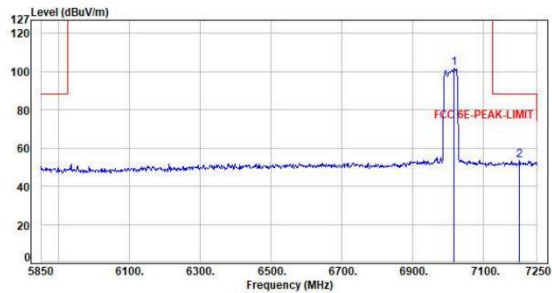


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7016.20	3.65	98.26	101.91	200.00	-98.09	Peak	100	9	P
2	7201.00	3.85	49.53	53.38	88.20	-34.82	Peak	100	9	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be40 CH227 NSS1 MCS0
Pol : Vertical Detector : Peak

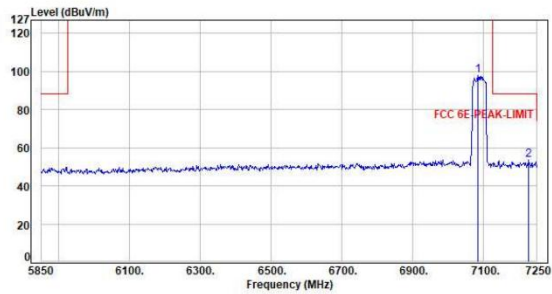

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7093.40	3.77	94.33	98.10	200.00	-101.90	Peak	112	10	P
2	7226.20	3.89	49.77	53.66	88.20	-34.54	Peak	112	10	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be40 CH227 NSS1 MCS0
Pol : Horizontal Detector : Peak

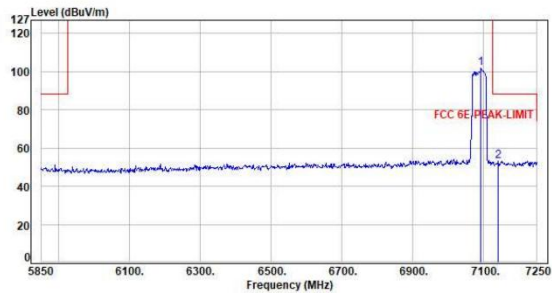


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7091.80	3.78	98.31	102.09	200.00	-97.91	Peak	105	10	P
2	7140.80	3.77	49.46	53.23	88.20	-34.97	Peak	105	10	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be80 CH07 NSS1 MCS0
Pol : Vertical Detector : Peak

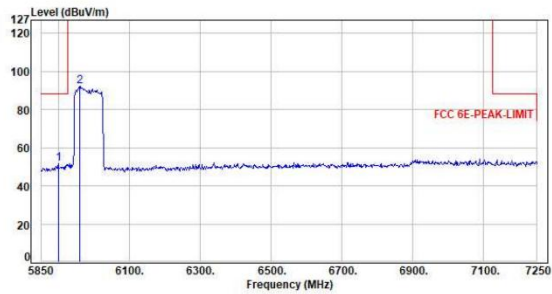

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5999.00	0.93	50.87	51.80	88.20	-36.40	Peak	246	28	P
2	5959.20	0.91	91.52	92.43	200.00	-107.57	Peak	246	28	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be80 CH07 NSS1 MCS0
Pol : Horizontal Detector : Peak

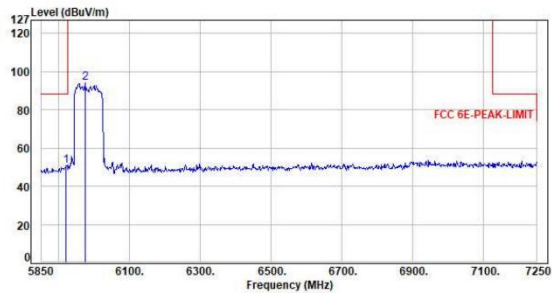


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5921.40	0.92	49.70	50.62	88.20	-37.58	Peak	132	39	P
2	5976.00	0.92	93.17	94.09	200.00	-105.91	Peak	132	39	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be80 CH39 NSS1 MCS0
Pol : Vertical Detector : Peak

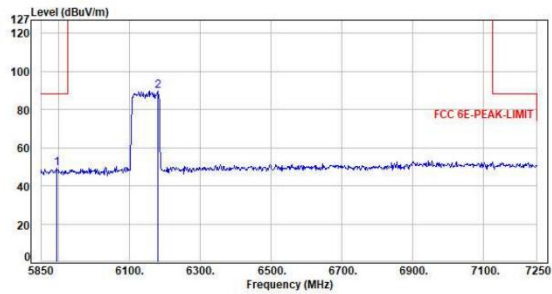

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5894.00	0.93	48.42	49.35	88.20	-38.85	Peak	272	23	P
2	6179.00	1.80	87.96	89.76	88.20	-110.24	Peak	272	23	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be80 CH39 NSS1 MCS0
Pol : Horizontal Detector : Peak

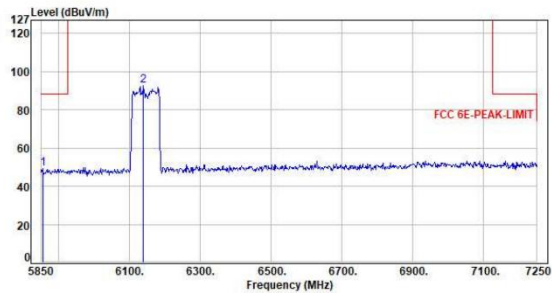


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5855.60	1.03	48.04	49.07	88.20	-39.13	Peak	101	51	P
2	6139.80	1.57	90.99	92.56	88.20	-107.44	Peak	101	51	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be80 CH87 NSS1 MCS0
Pol : Vertical Detector : Peak

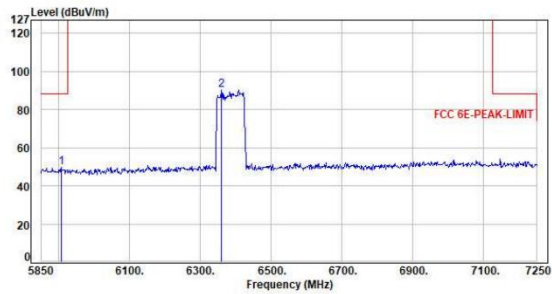

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5997.40	0.92	48.58	49.50	88.20	-38.70	Peak	302	185	P
2	6359.60	2.90	87.64	90.54	200.00	-109.46	Peak	302	185	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be80 CH87 NSS1 MCS0
Pol : Horizontal Detector : Peak

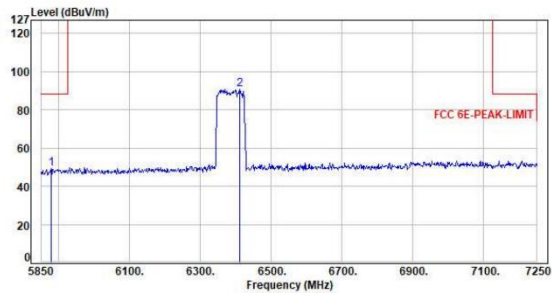


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5878.00	0.97	48.20	49.17	88.20	-39.03	Peak	100	228	P
2	6410.00	3.10	87.70	90.80	200.00	-109.20	Peak	100	228	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be80 CH103 NSS1 MCS0
Pol : Vertical Detector : Peak

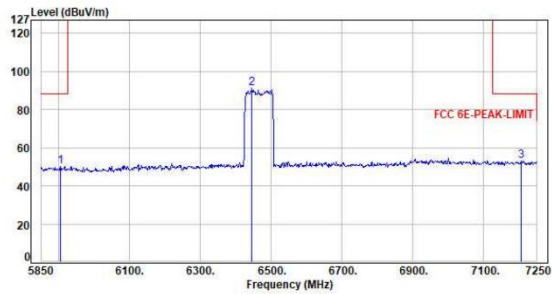

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5994.60	0.93	49.40	50.33	88.20	-37.87	Peak	282	185	P
2	6445.00	3.25	88.16	91.41	200.00	-108.59	Peak	282	185	P
3	7205.20	3.85	49.16	53.01	88.20	-35.19	Peak	282	185	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be80 CH103 NSS1 MCS0
Pol : Horizontal Detector : Peak

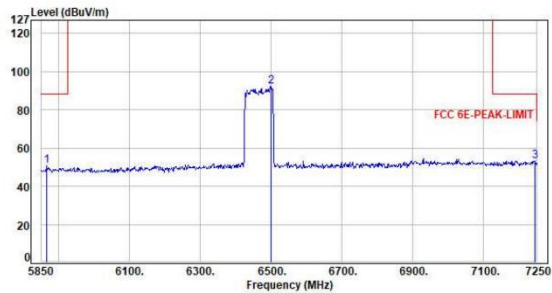


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5866.80	1.01	49.68	50.69	88.20	-37.51	Peak	100	221	P
2	6499.60	3.38	88.63	92.01	200.00	-107.99	Peak	100	221	P
3	7244.40	3.93	49.39	53.32	88.20	-34.88	Peak	100	221	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be80 CH135 NSS1 MCS0
Pol : Vertical Detector : Peak

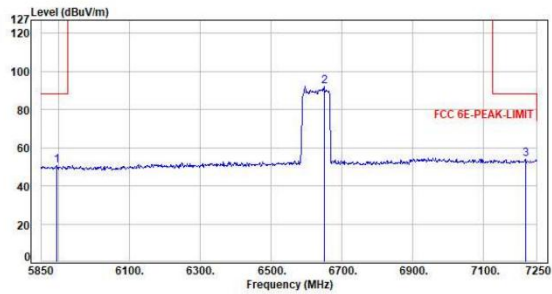

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5894.80	0.93	49.71	50.64	88.20	-37.56	Peak	299	196	P
2	6649.40	3.33	89.94	92.37	200.00	-107.63	Peak	299	196	P
3	7217.80	3.88	50.10	53.98	88.20	-34.22	Peak	299	196	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be80 CH135 NSS1 MCS0
Pol : Horizontal Detector : Peak

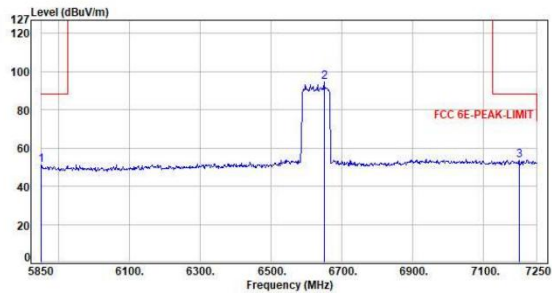


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5850.00	1.04	49.96	51.00	88.20	-37.20	Peak	112	17	P
2	6649.40	3.33	91.13	94.46	200.00	-105.54	Peak	112	17	P
3	7199.60	3.85	49.78	53.63	88.20	-34.57	Peak	112	17	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be80 CH151 NSS1 MCS0
Pol : Vertical Detector : Peak

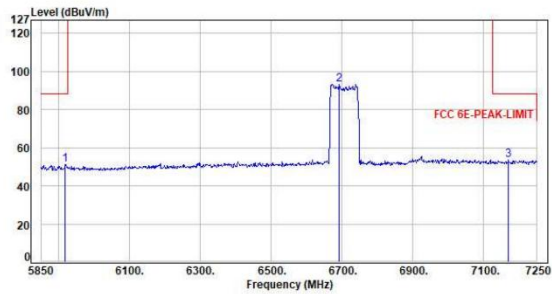

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5918.60	0.93	50.19	51.12	88.20	-37.08	Peak	292	179	P
2	6691.40	3.49	89.95	93.44	200.00	-106.56	Peak	292	179	P
3	7170.20	3.80	49.57	53.37	88.20	-34.83	Peak	292	179	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be80 CH151 NSS1 MCS0
Pol : Horizontal Detector : Peak

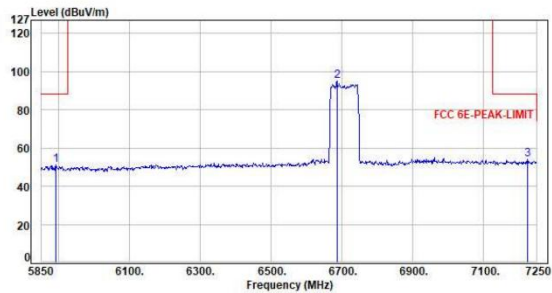


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5892.00	0.95	50.07	51.02	88.20	-37.18	Peak	105	10	P
2	6685.80	3.46	91.64	95.10	200.00	-104.90	Peak	105	10	P
3	7223.40	3.89	50.10	53.99	88.20	-34.21	Peak	105	10	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be80 CH167 NSS1 MCS0
Pol : Vertical Detector : Peak

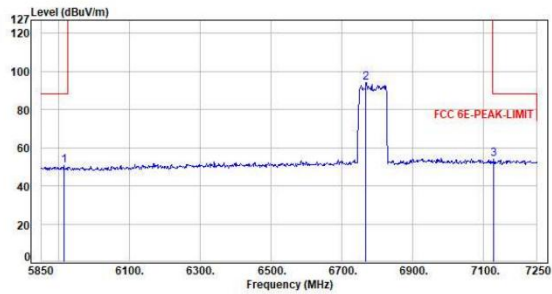

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5914.40	0.93	49.75	50.68	88.20	-37.52	Peak	289	190	P
2	6767.00	3.53	90.76	94.29	200.00	-105.71	Peak	289	190	P
3	7128.20	3.78	50.17	53.95	88.20	-34.25	Peak	289	190	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be80 CH167 NSS1 MCS0
Pol : Horizontal Detector : Peak

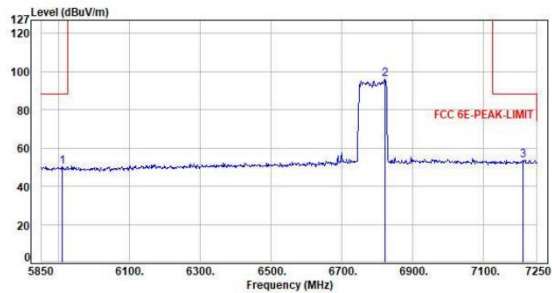


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5910.20	0.92	49.30	50.22	88.20	-37.98	Peak	107	11	P
2	6820.20	3.58	92.50	96.08	200.00	-103.92	Peak	107	11	P
3	7209.40	3.87	49.85	53.72	88.20	-34.48	Peak	107	11	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be80 CH199 NSS1 MCS0
Pol : Vertical Detector : Peak

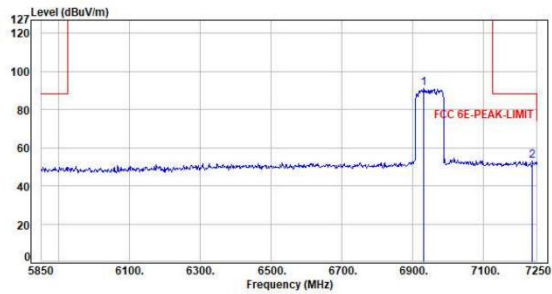

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6930.80	3.75	87.39	91.14	200.00	-108.86	Peak	100	11	P
2	7237.40	3.90	49.11	53.01	88.20	-35.19	Peak	100	11	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be80 CH199 NSS1 MCS0
Pol : Horizontal Detector : Peak

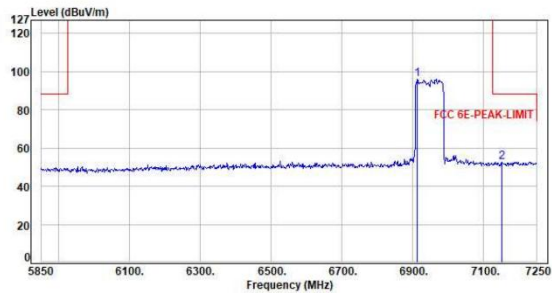


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	6912.60	3.76	92.41	96.17	200.00	-103.83	Peak	100	9	P
2	7152.00	3.77	49.08	52.85	88.20	-35.35	Peak	100	9	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be80 CH215 NSS1 MCS0
Pol : Vertical Detector : Peak

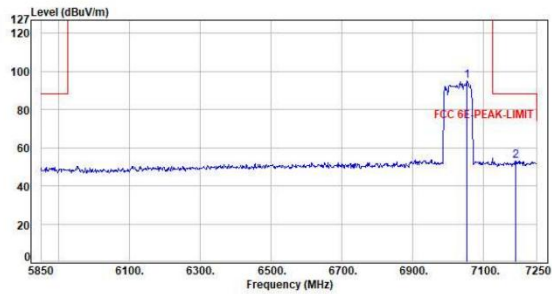

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7051.20	3.71	91.66	95.37	200.00	-104.63	Peak	100	16	P
2	7189.80	3.83	49.45	53.28	88.20	-34.92	Peak	100	16	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be80 CH215 NSS1 MCS0
Pol : Horizontal Detector : Peak

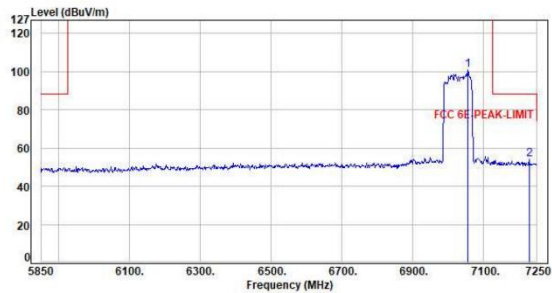


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7055.40	3.71	97.29	101.00	200.00	-99.00	Peak	100	10	P
2	7227.60	3.90	50.07	53.97	88.20	-34.23	Peak	100	10	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be160 CH15 NSS1 MCS0
Pol : Vertical Detector : Peak

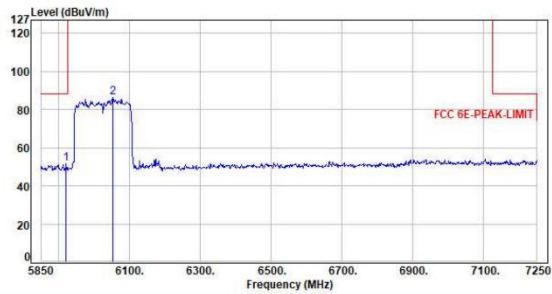

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5921.40	0.92	50.72	51.64	88.20	-36.56	Peak	104	185	P
2	6053.00	1.04	85.30	86.34	200.00	-113.66	Peak	104	185	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be160 CH15 NSS1 MCS0
Pol : Horizontal Detector : Peak

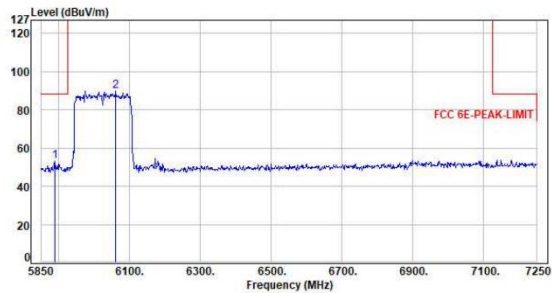


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5889.20	0.95	52.32	53.27	88.20	-34.93	Peak	101	64	P
2	6061.40	1.09	88.62	89.71	200.00	-110.29	Peak	101	64	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be160 CH47 NSS1 MCS0
Pol : Vertical Detector : Peak

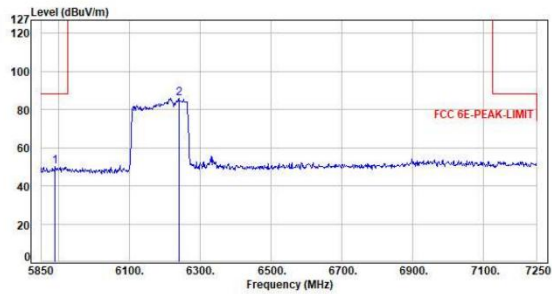

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5890.60	0.95	49.18	50.13	88.20	-38.07	Peak	354	185	P
2	6239.20	2.26	83.84	86.10	200.00	-113.90	Peak	354	185	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be160 CH47 NSS1 MCS0
Pol : Horizontal Detector : Peak

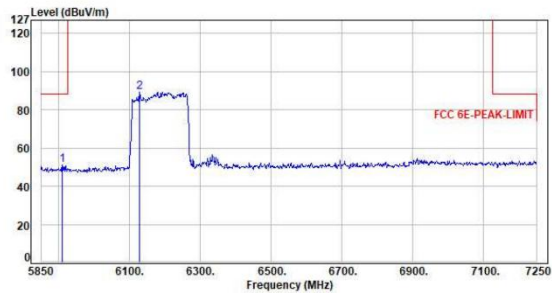


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5910.20	0.92	50.04	50.96	88.20	-37.24	Peak	100	53	P
2	6128.60	1.50	87.97	89.47	200.00	-110.53	Peak	100	53	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be160 CH79 NSS1 MCS0
Pol : Vertical Detector : Peak

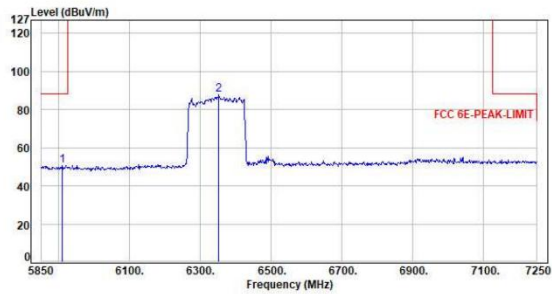

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5910.20	0.92	49.90	50.82	88.20	-37.38	Peak	278	188	P
2	6352.60	2.87	85.18	88.05	200.00	-111.95	Peak	278	188	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be160 CH79 NSS1 MCS0
Pol : Horizontal Detector : Peak

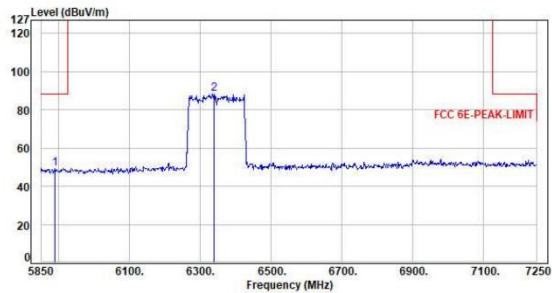


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5890.60	0.95	48.36	49.31	88.20	-38.89	Peak	108	52	P
2	6338.60	2.79	85.75	88.54	200.00	-111.46	Peak	108	52	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be160 CH143 NSS1 MCS0
Pol : Vertical Detector : Peak

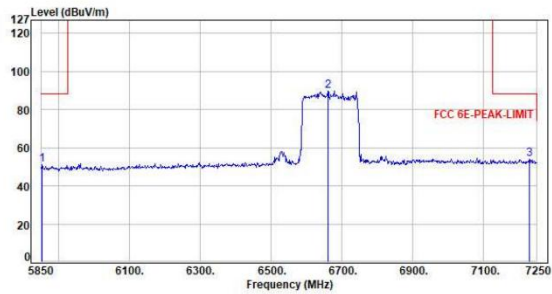

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5854.20	1.03	50.18	51.21	88.20	-36.99	Peak	293	196	P
2	6659.20	3.37	86.62	89.99	200.00	-110.01	Peak	293	196	P
3	7227.60	3.90	50.05	53.95	88.20	-34.25	Peak	293	196	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be160 CH143 NSS1 MCS0
Pol : Horizontal Detector : Peak

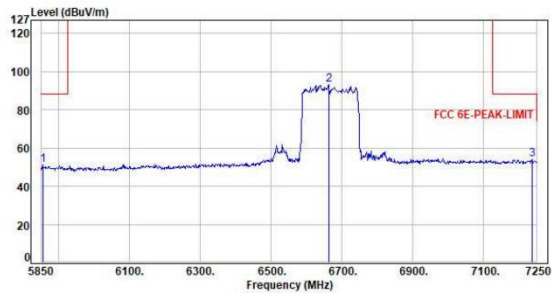


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5855.60	1.03	50.01	51.04	88.20	-37.16	Peak	100	6	P
2	6662.00	3.38	89.78	93.16	200.00	-106.84	Peak	100	6	P
3	7236.00	3.90	50.08	53.98	88.20	-34.22	Peak	100	6	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be160 CH207 NSS1 MCS0
Pol : Vertical Detector : Peak

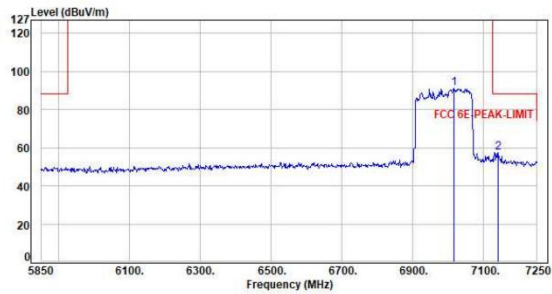

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7014.80	3.66	87.57	91.23	200.00	-108.77	Peak	100	10	P
2	7140.80	3.77	53.91	57.68	88.20	-30.52	Peak	100	10	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be160 CH207 NSS1 MCS0
Pol : Horizontal Detector : Peak

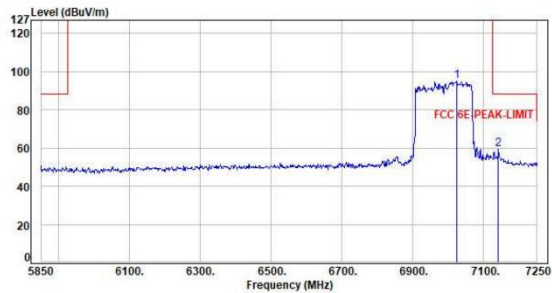

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7023.20	3.67	91.24	94.91	200.00	-105.09	Peak	100	9	P
2	7140.80	3.77	55.77	59.54	88.20	-28.66	Peak	100	9	P


Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

**Straddle Channel**

Test Mode : 2TX 11be20 CH185 NSS1 MCS0

Pol : Vertical

Detector : Peak

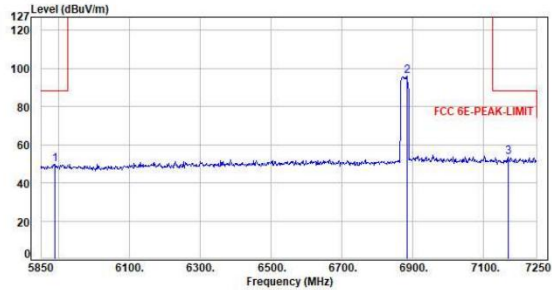

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5890.60	0.95	48.98	49.93	88.20	-38.27	Peak	107	14	P
2	6883.20	3.70	92.36	96.06	200.00	-103.94	Peak	107	14	P
3	7168.80	3.80	49.71	53.51	88.20	-34.69	Peak	107	14	P

Note: Level=Reading+Factor


Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be20 CH185 NSS1 MCS0

Pol : Horizontal

Detector : Peak

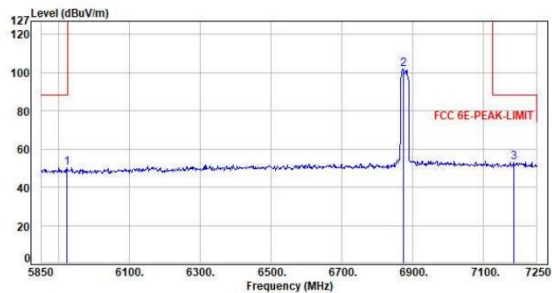

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5922.80	0.92	49.48	50.40	88.20	-37.80	Peak	105	8	P
2	6872.00	3.66	98.47	102.13	200.00	-97.87	Peak	105	8	P
3	7185.60	3.82	49.36	53.18	88.20	-35.02	Peak	105	8	P


Note: Level=Reading+Factor

Margin=Level-Limit

Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be40 CH115 NSS1 MCS0
Pol : Vertical Detector : Peak

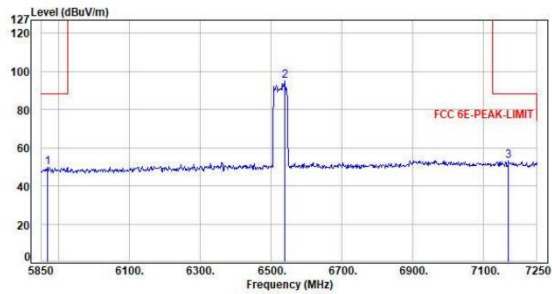

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5869.60	0.99	48.77	49.76	88.20	-38.44	Peak	299	190	P
2	6537.40	3.37	91.61	94.98	200.00	-105.02	Peak	299	190	P
3	7170.20	3.80	49.40	53.20	88.20	-35.00	Peak	299	190	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be40 CH115 NSS1 MCS0
Pol : Horizontal Detector : Peak

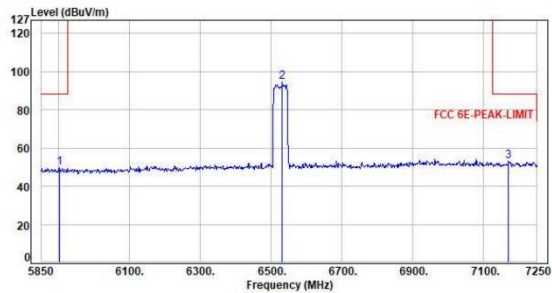


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5903.20	0.93	48.95	49.88	88.20	-38.32	Peak	100	3	P
2	6531.80	3.37	91.04	94.41	200.00	-105.59	Peak	100	3	P
3	7170.20	3.80	49.42	53.22	88.20	-34.98	Peak	100	3	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be40 CH187 NSS1 MCS0
Pol : Vertical Detector : Peak

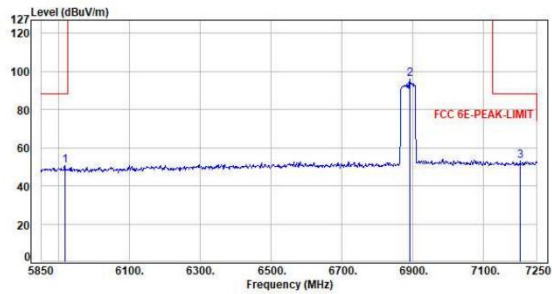

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5917.20	0.93	49.98	50.91	88.20	-37.29	Peak	100	13	P
2	6898.20	3.72	92.35	96.07	200.00	-103.93	Peak	100	13	P
3	7203.80	3.86	49.35	53.21	88.20	-34.99	Peak	100	13	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be40 CH187 NSS1 MCS0
Pol : Horizontal Detector : Peak

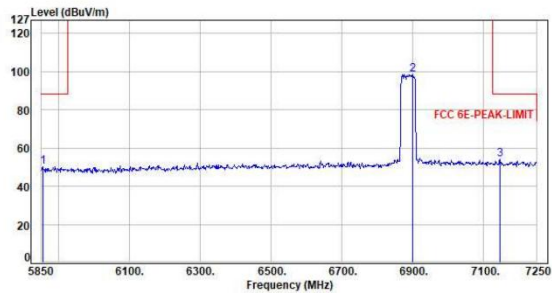


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5855.60	1.03	49.10	50.13	88.20	-38.07	Peak	100	8	P
2	6898.60	3.75	94.95	98.70	200.00	-101.30	Peak	100	8	P
3	7145.00	3.78	50.41	54.19	88.20	-34.01	Peak	100	8	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be80 CH119 NSS1 MCS0
Pol : Vertical Detector : Peak

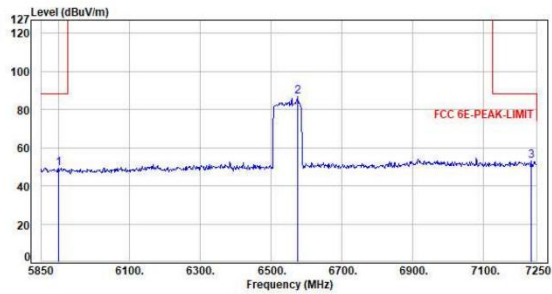

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5899.00	0.93	48.56	49.49	88.20	-38.71	Peak	145	17	P
2	6573.00	3.36	83.32	86.68	200.00	-113.32	Peak	145	17	P
3	7233.20	3.91	49.37	53.28	88.20	-34.92	Peak	145	17	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be80 CH119 NSS1 MCS0
Pol : Horizontal Detector : Peak

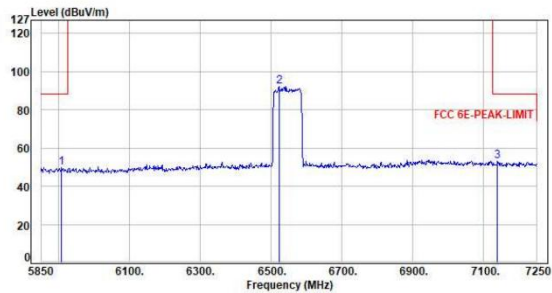


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5908.00	0.92	48.78	49.70	88.20	-38.50	Peak	101	7	P
2	6522.00	3.38	89.09	92.47	200.00	-107.53	Peak	101	7	P
3	7138.00	3.77	49.21	52.98	88.20	-35.22	Peak	101	7	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be80 CH183 NSS1 MCS0
Pol : Vertical Detector : Peak

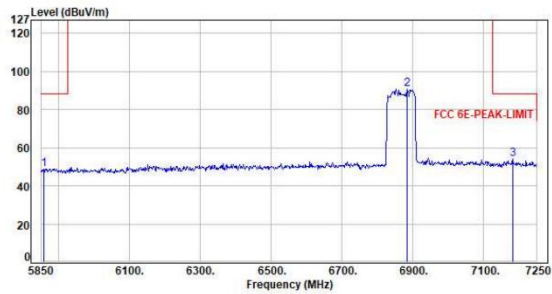

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5850.40	1.01	47.88	48.89	88.20	-39.31	Peak	100	14	P
2	6894.60	3.71	86.96	90.67	200.00	-109.33	Peak	100	14	P
3	7181.40	3.82	50.13	53.95	88.20	-34.25	Peak	100	14	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be80 CH183 NSS1 MCS0
Pol : Horizontal Detector : Peak

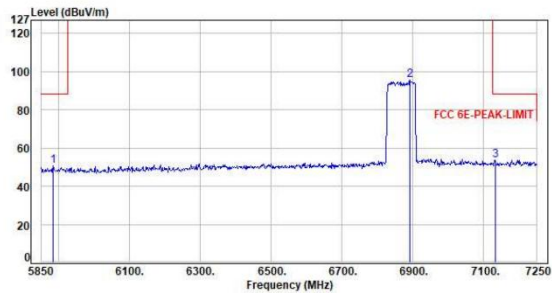


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5885.00	0.96	49.79	50.75	88.20	-37.45	Peak	101	9	P
2	6890.20	3.72	91.73	95.45	200.00	-104.55	Peak	101	9	P
3	7132.40	3.78	50.03	53.81	88.20	-34.39	Peak	101	9	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be160 CH111 NSS1 MC50
Pol : Vertical Detector : Peak

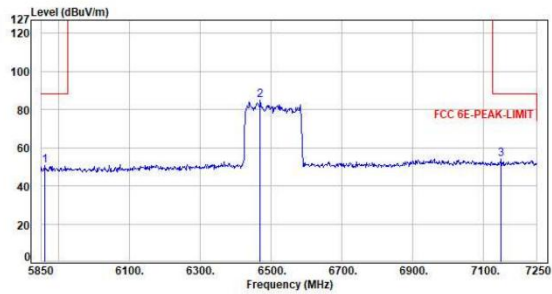

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5859.80	1.01	49.54	50.55	88.20	-37.65	Peak	103	12	P
2	6458.80	3.32	81.88	85.20	200.00	-114.80	Peak	103	12	P
3	7149.20	3.77	50.19	53.96	88.20	-34.24	Peak	103	12	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be160 CH111 NSS1 MC50
Pol : Horizontal Detector : Peak

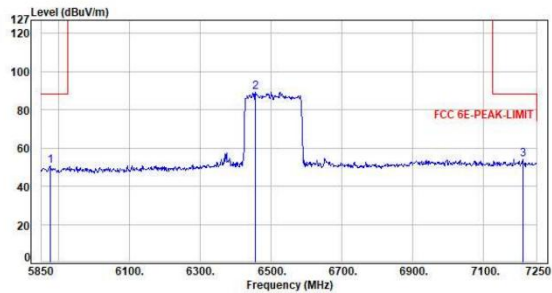


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5876.60	0.98	49.62	50.60	88.20	-37.60	Peak	102	1	P
2	6454.80	3.29	86.18	89.47	200.00	-110.53	Peak	102	1	P
3	7209.40	3.87	50.06	53.93	88.20	-34.27	Peak	102	1	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be160 CH175 NSS1 MCS0
Pol : Vertical Detector : Peak

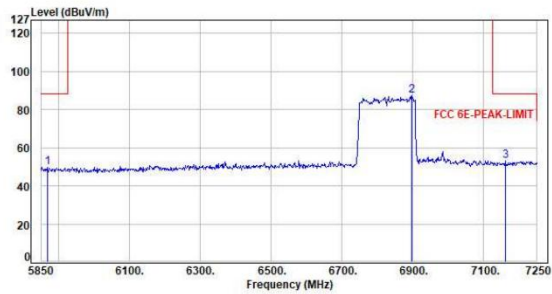

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5868.20	1.00	48.78	49.78	88.20	-38.42	Peak	100	13	P
2	6897.20	3.75	83.50	87.25	200.00	-112.75	Peak	100	13	P
3	7160.40	3.79	49.12	52.91	88.20	-35.29	Peak	100	13	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be160 CH175 NSS1 MCS0
Pol : Horizontal Detector : Peak

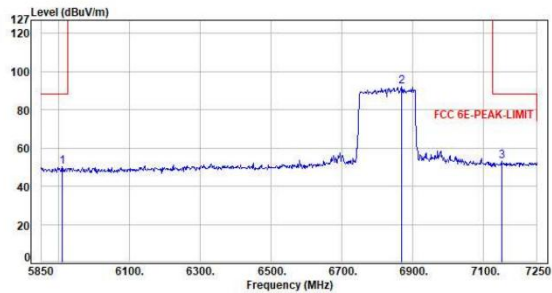


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	5910.20	0.92	49.44	50.36	88.20	-37.84	Peak	100	13	P
2	6869.20	3.65	88.67	92.32	200.00	-107.68	Peak	100	13	P
3	7150.60	3.77	49.11	52.88	88.20	-35.32	Peak	100	13	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor



Test Result and Data (1GHz ~ 7.5GHz)


Test Mode : 2TX 11be20 CH01 NSS1 MCS0
Pol : Vertical Detector : Peak

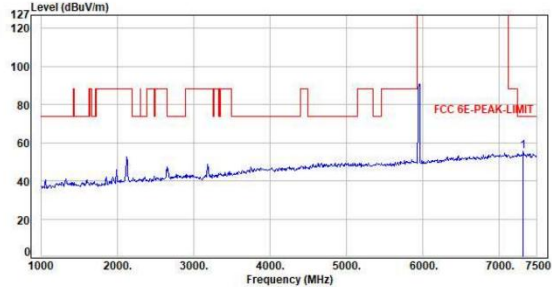

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7318.00	4.10	51.36	55.46	74.00	-18.54	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be20 CH01 NSS1 MCS0
Pol : Vertical Detector : Average

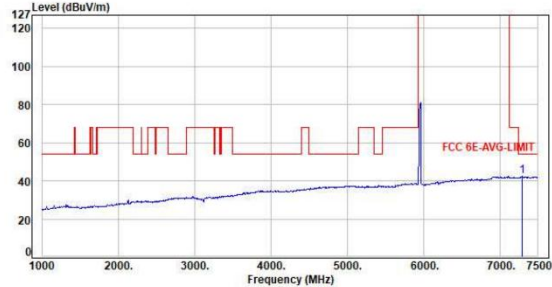

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7292.00	4.09	38.24	42.33	54.00	-11.67	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be20 CH01 NSS1 MCS0
Pol : Horizontal Detector : Peak

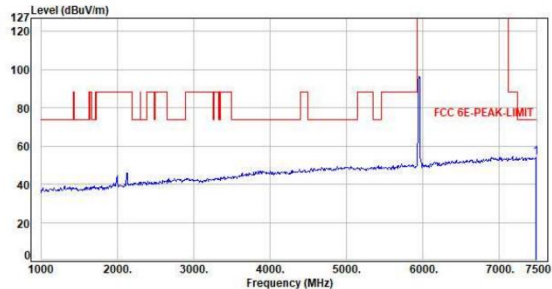

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7480.50	4.02	49.87	53.89	74.00	-20.11	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be20 CH01 NSS1 MCS0
Pol : Horizontal Detector : Average

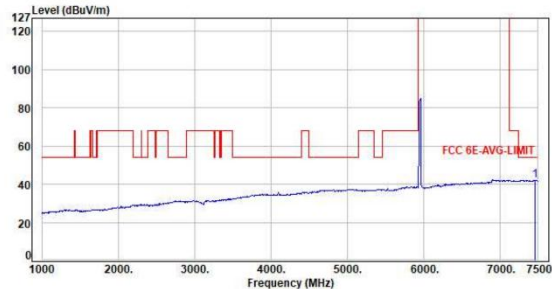


No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7461.00	4.11	38.07	42.18	54.00	-11.82	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor




Test Mode : 2TX 11be20 CH45 NSS1 MCS0
Pol : Vertical Detector : Peak

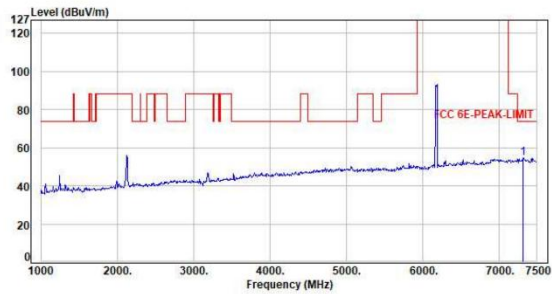

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7311.50	4.11	50.40	54.51	74.00	-19.49	Peak	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be20 CH45 NSS1 MCS0
Pol : Vertical Detector : Average

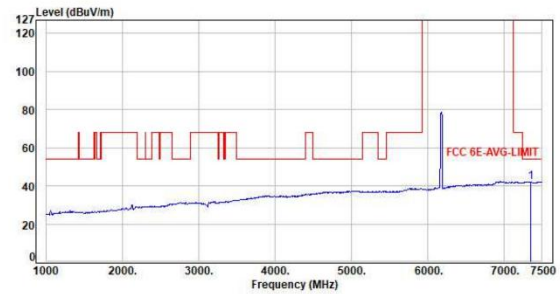

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7350.50	4.09	38.16	42.25	54.00	-11.75	Average	100	360	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor


Test Mode : 2TX 11be20 CH45 NSS1 MCS0
Pol : Horizontal Detector : Peak

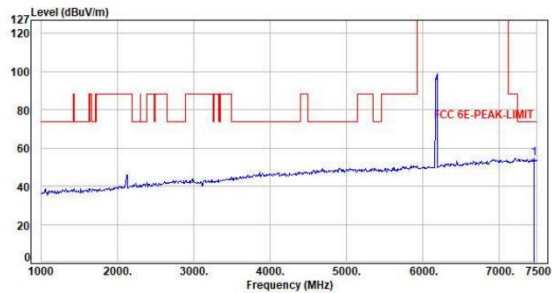

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7461.00	4.11	50.30	54.41	74.00	-19.59	Peak	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor

Test Mode : 2TX 11be20 CH45 NSS1 MCS0
Pol : Horizontal Detector : Average

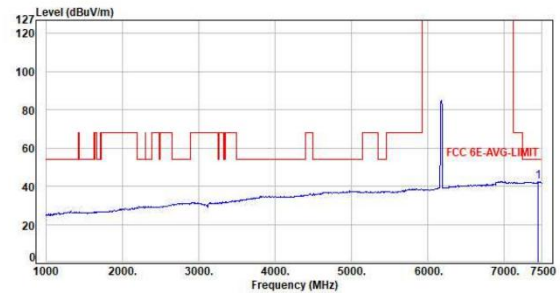

No.	Frequency (MHz)	Factor (dB)	Reading (dBuV)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg)	P/F
1	7454.50	4.13	38.22	42.35	54.00	-11.65	Average	100	0	P

Note: Level=Reading+Factor
Margin=Level-Limit
Factor=Antenna Factor + cable loss - Amplifier Factor