



Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5200		
	MHz		
Polarization:	Vertical		
Remark:			

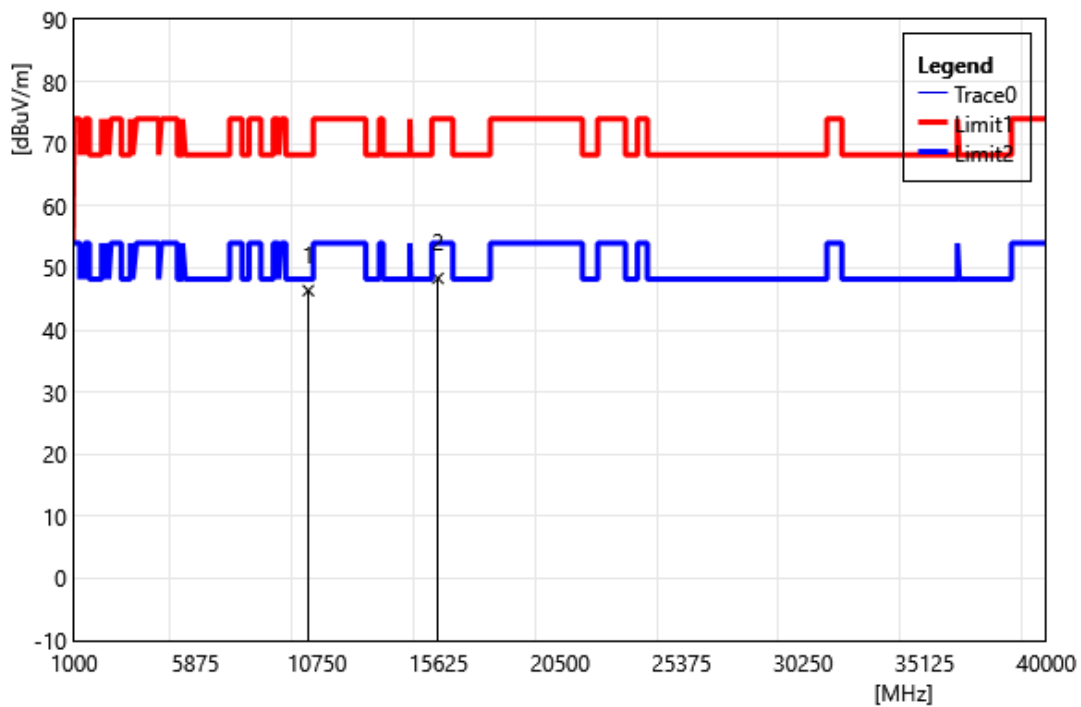


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10400.00	34.98	11.38	46.36	68.20	-21.84	PEAK
2	15600.00	34.37	13.96	48.33	74.00	-25.67	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5200		
	MHz		
Polarization:	Horizontal		
Remark:			

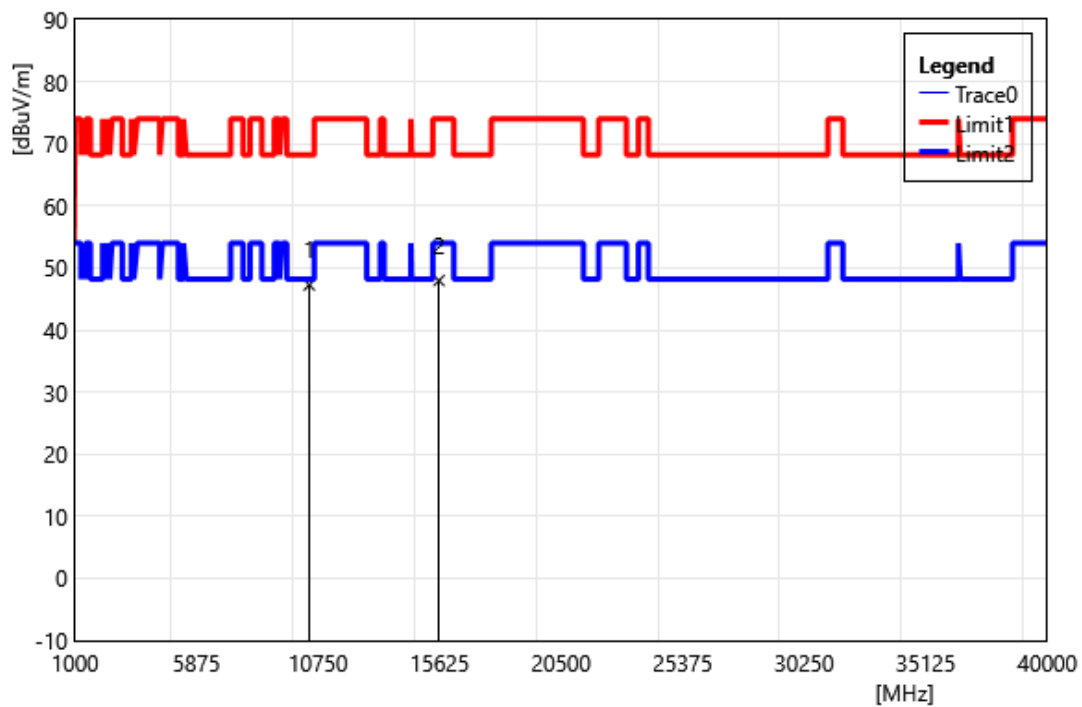


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10400.00	35.89	11.38	47.27	68.20	-20.93	PEAK
2	15600.00	34.02	13.96	47.98	74.00	-26.02	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5240		
	MHz		
Polarization:	Vertical		
Remark:			

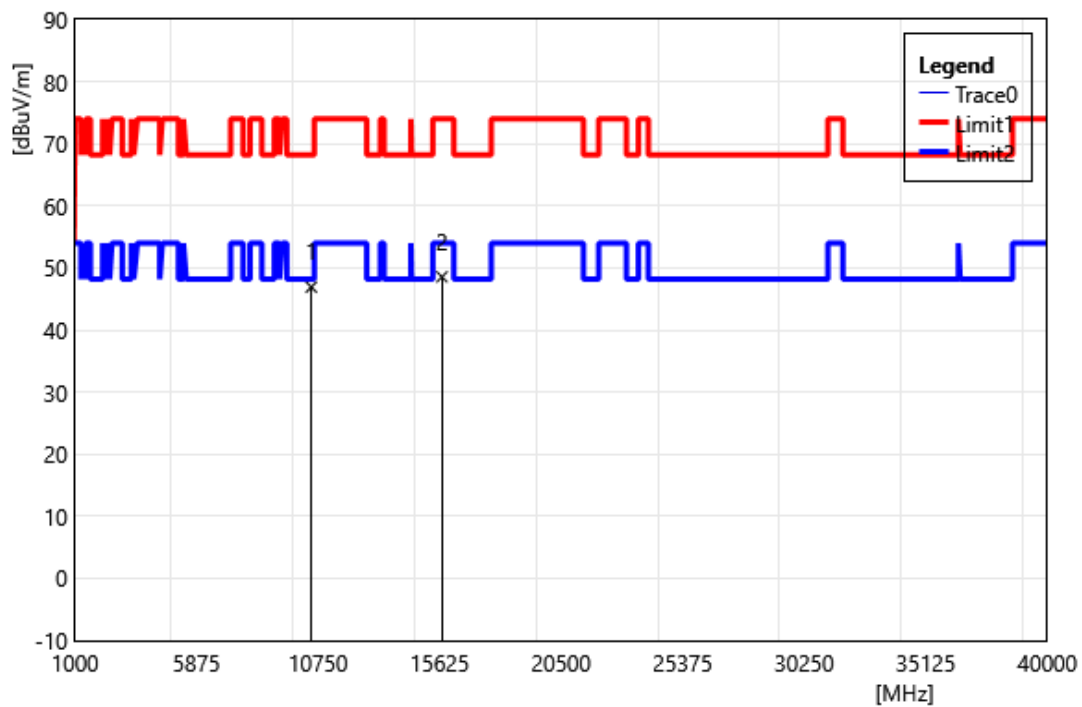


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10480.00	35.37	11.56	46.93	68.20	-21.27	PEAK
2	15720.00	34.76	13.82	48.58	74.00	-25.42	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5240		
	MHz		
Polarization:	Horizontal		
Remark:			

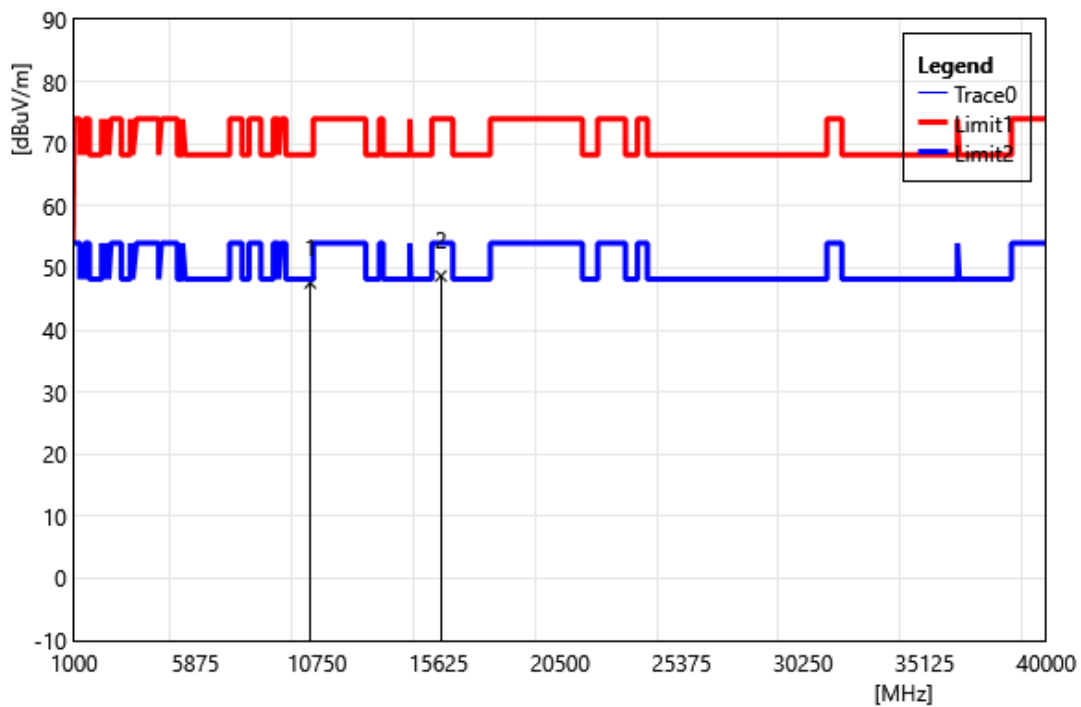


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10480.00	36.04	11.56	47.60	68.20	-20.60	PEAK
2	15720.00	34.88	13.82	48.70	74.00	-25.30	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5260		
	MHz		
Polarization:	Vertical		
Remark:			

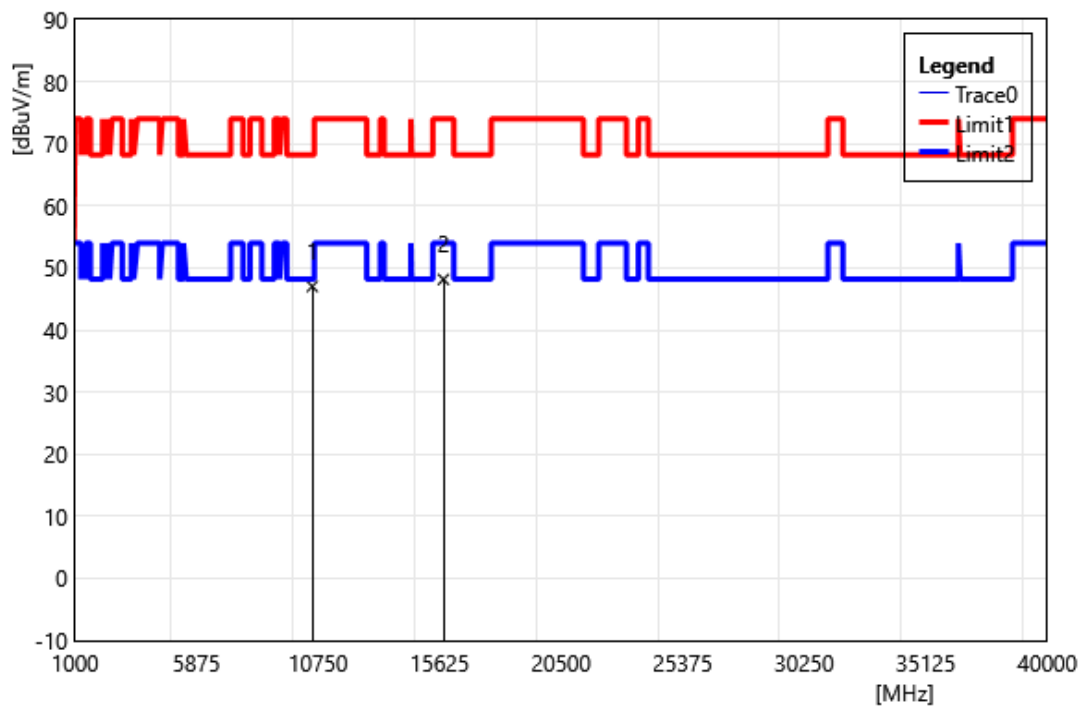


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10520.00	35.44	11.59	47.03	68.20	-21.17	PEAK
2	15780.00	34.41	13.75	48.16	74.00	-25.84	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5260		
	MHz		
Polarization:	Horizontal		
Remark:			

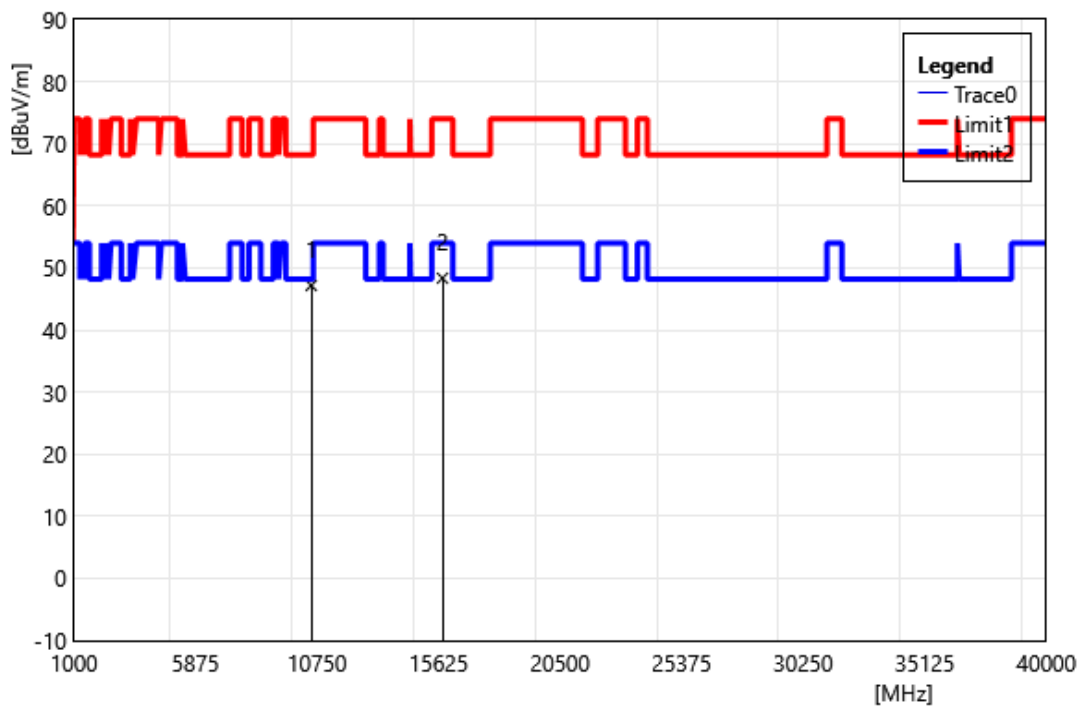


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10520.00	35.60	11.59	47.19	68.20	-21.01	PEAK
2	15780.00	34.61	13.75	48.36	74.00	-25.64	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5280		
	MHz		
Polarization:	Vertical		
Remark:			

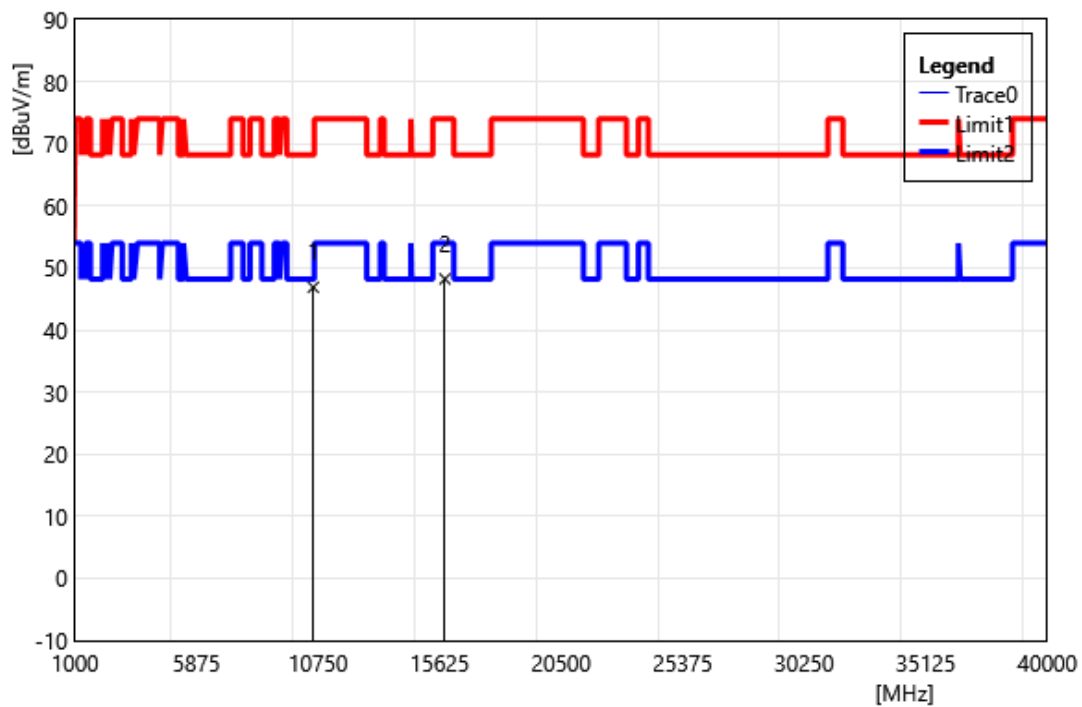


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10560.00	35.34	11.56	46.90	68.20	-21.30	PEAK
2	15840.00	34.64	13.60	48.24	74.00	-25.76	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5280		
	MHz		
Polarization:	Horizontal		
Remark:			

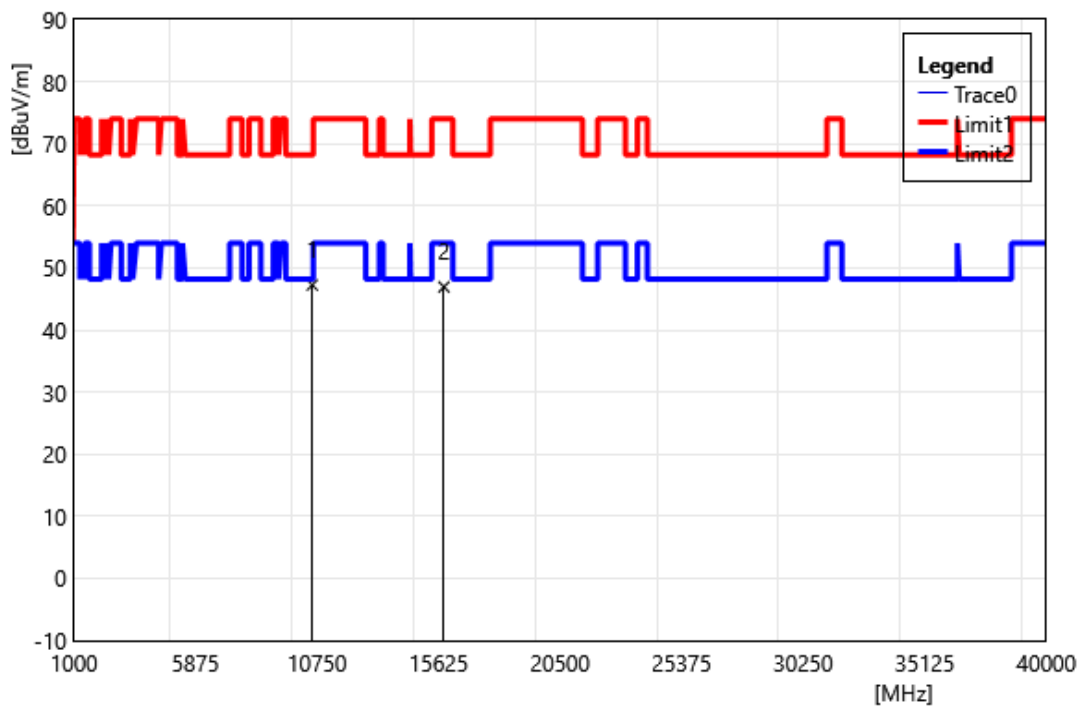


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10560.00	35.69	11.56	47.25	68.20	-20.95	PEAK
2	15840.00	33.34	13.60	46.94	74.00	-27.06	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5320		
	MHz		
Polarization:	Vertical		
Remark:			

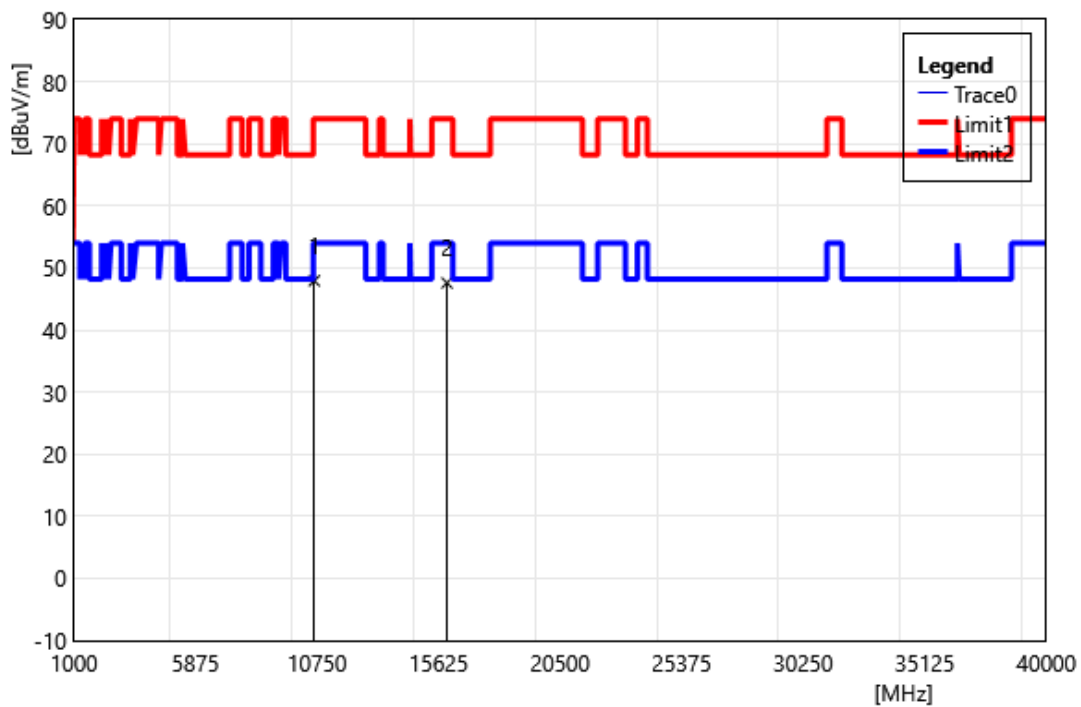


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10640.00	36.38	11.55	47.93	74.00	-26.07	PEAK
2	15960.00	34.38	13.22	47.60	74.00	-26.40	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5320		
	MHz		
Polarization:	Horizontal		
Remark:			

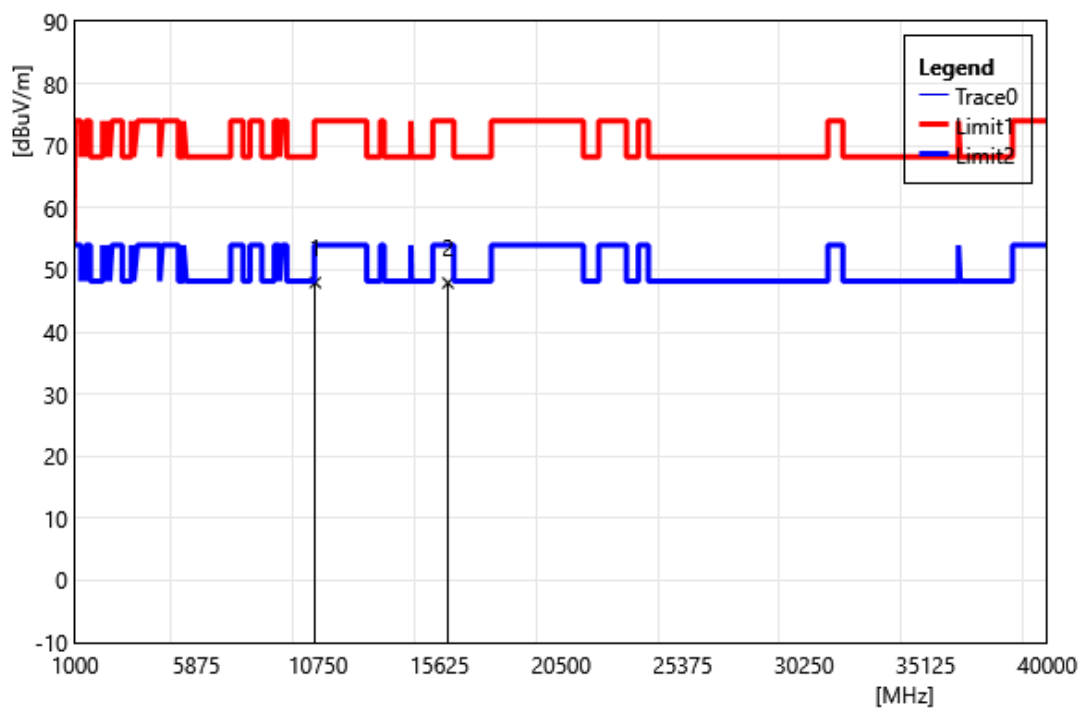


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10640.00	36.40	11.55	47.95	74.00	-26.05	PEAK
2	15960.00	34.69	13.22	47.91	74.00	-26.09	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5500		
	MHz		
Polarization:	Vertical		
Remark:			

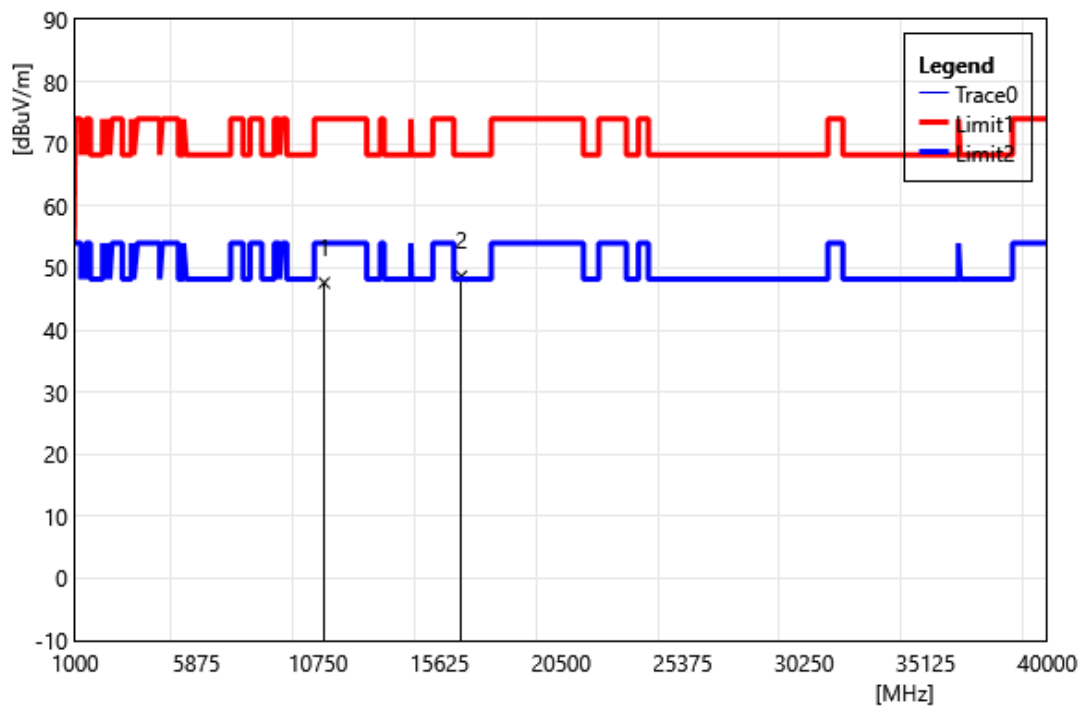


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11000.00	35.81	11.79	47.60	74.00	-26.40	PEAK
2	16500.00	34.35	14.31	48.66	68.20	-19.54	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5500		
	MHz		
Polarization:	Horizontal		
Remark:			

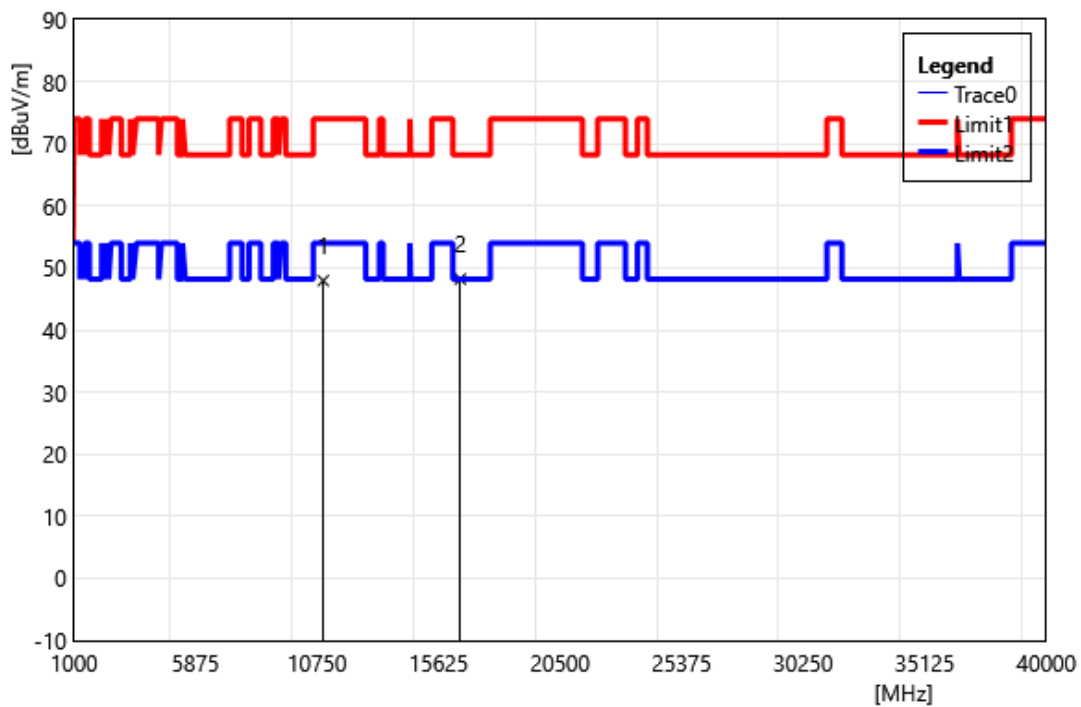


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11000.00	36.16	11.79	47.95	74.00	-26.05	PEAK
2	16500.00	33.90	14.31	48.21	68.20	-19.99	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5560		
	MHz		
Polarization:	Vertical		
Remark:			

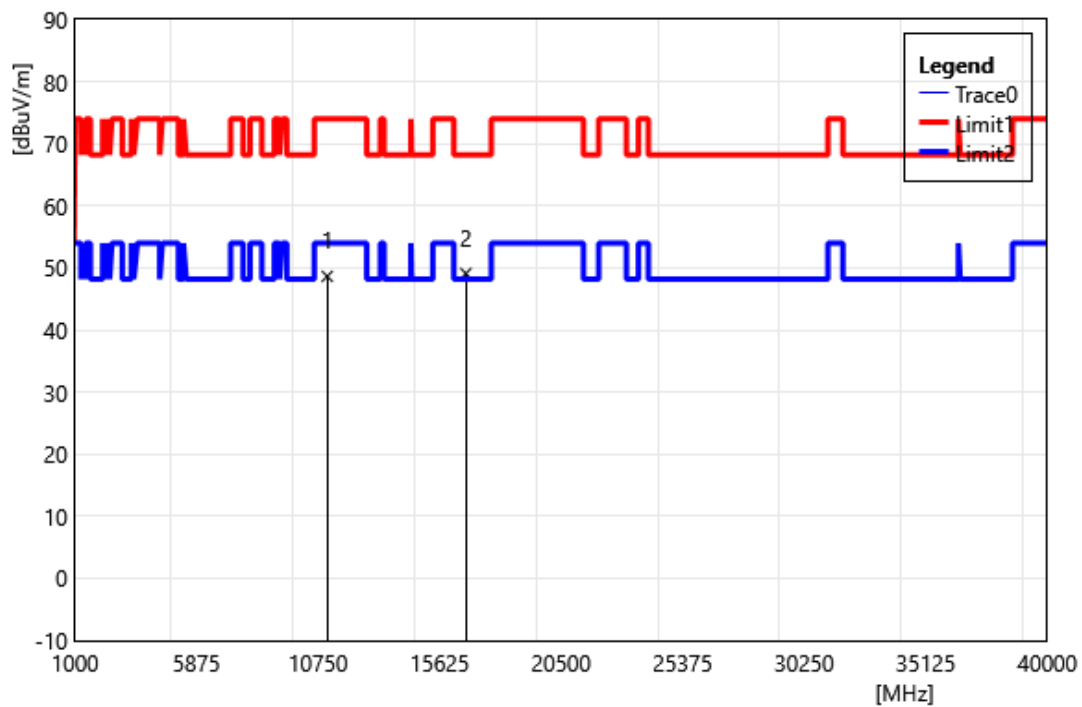


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11120.00	36.61	12.03	48.64	74.00	-25.36	PEAK
2	16680.00	33.89	15.21	49.10	68.20	-19.10	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5560		
	MHz		
Polarization:	Horizontal		
Remark:			

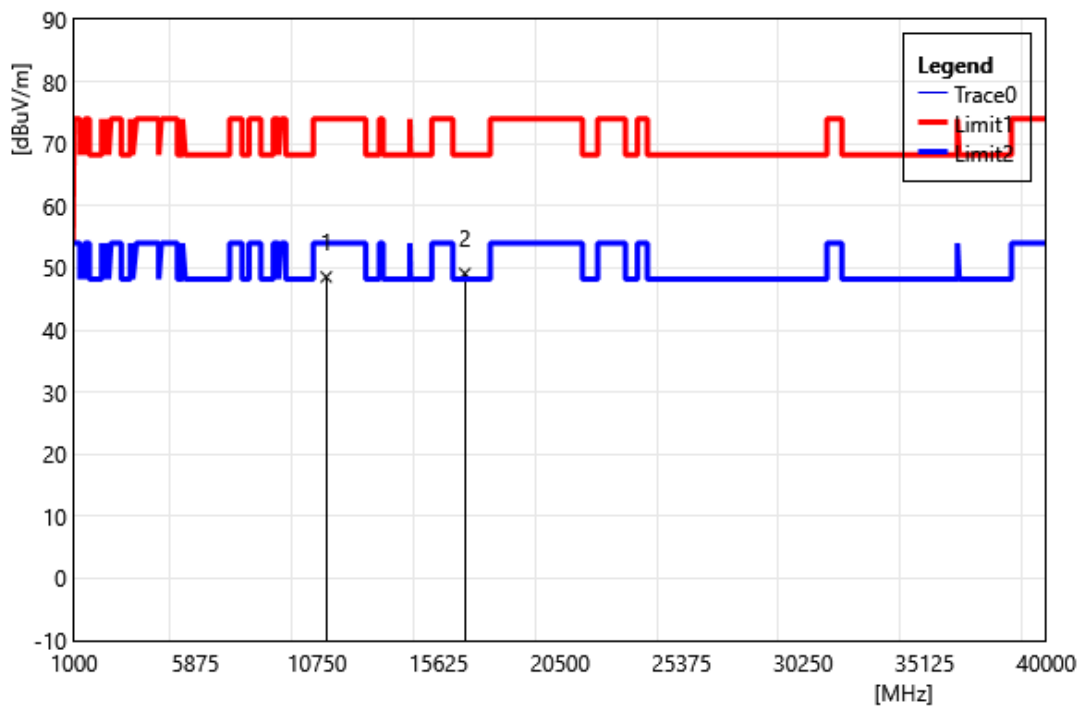


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11120.00	36.52	12.03	48.55	74.00	-25.45	PEAK
2	16680.00	33.90	15.21	49.11	68.20	-19.09	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5700		
	MHz		
Polarization:	Vertical		
Remark:			

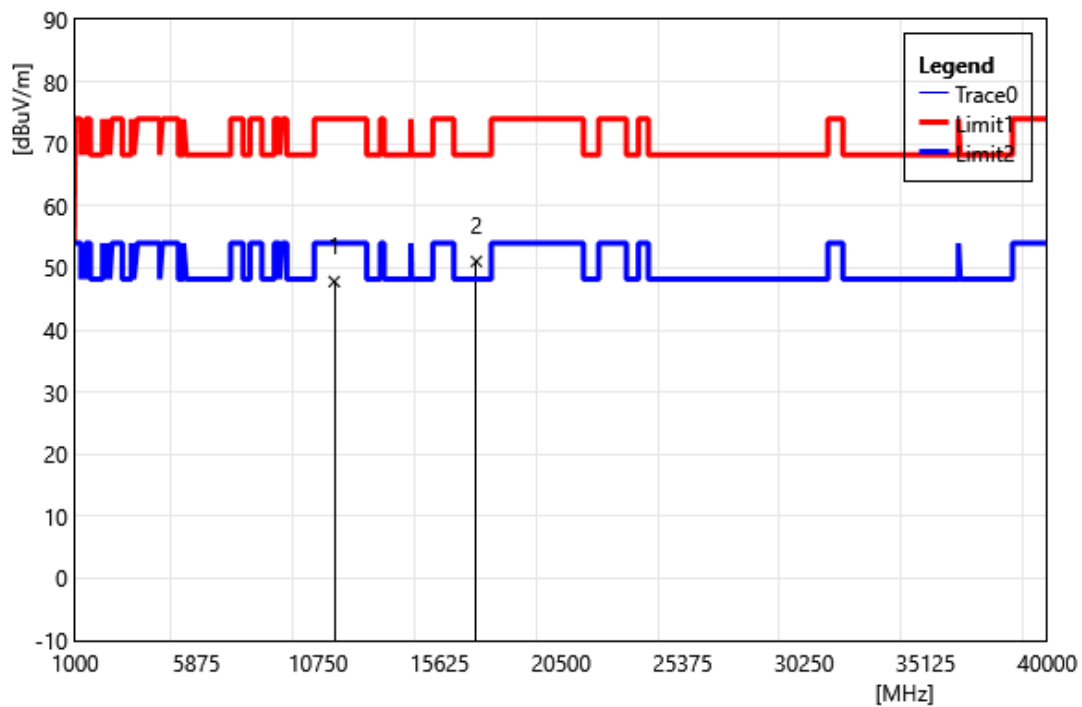


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11400.00	35.59	12.21	47.81	74.00	-26.19	PEAK
2	17100.00	33.70	17.37	51.07	68.20	-17.13	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5700		
	MHz		
Polarization:	Horizontal		
Remark:			

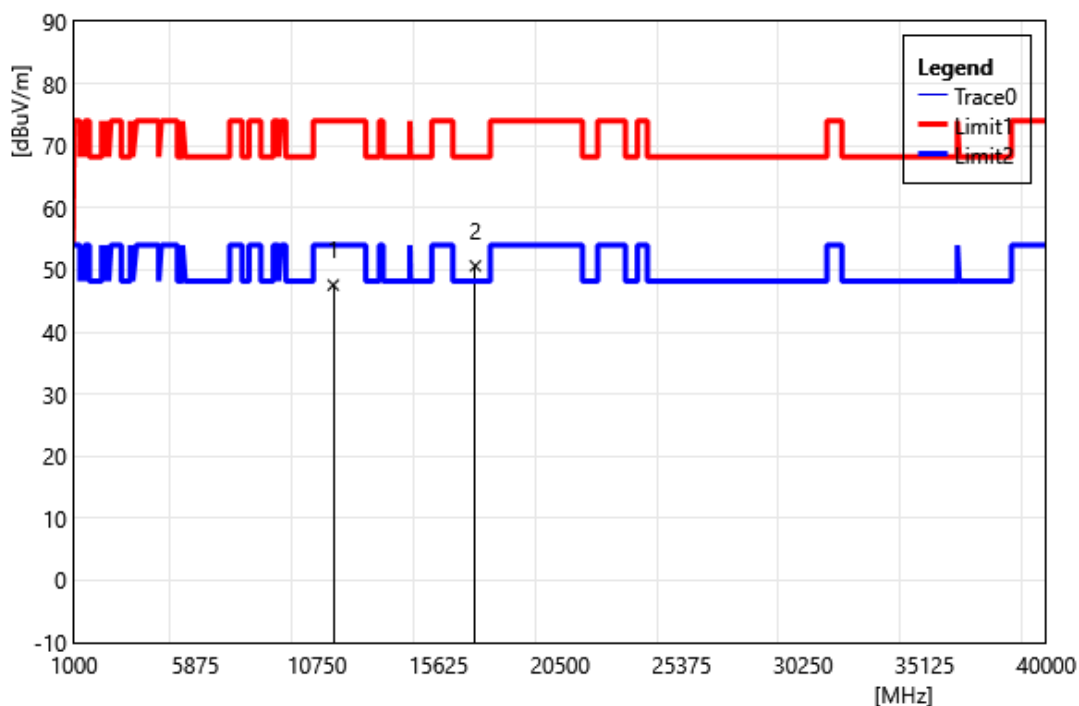


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11400.00	35.35	12.21	47.57	74.00	-26.43	PEAK
2	17100.00	33.29	17.37	50.66	68.20	-17.54	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5720		
	MHz		
Polarization:	Vertical		
Remark:			

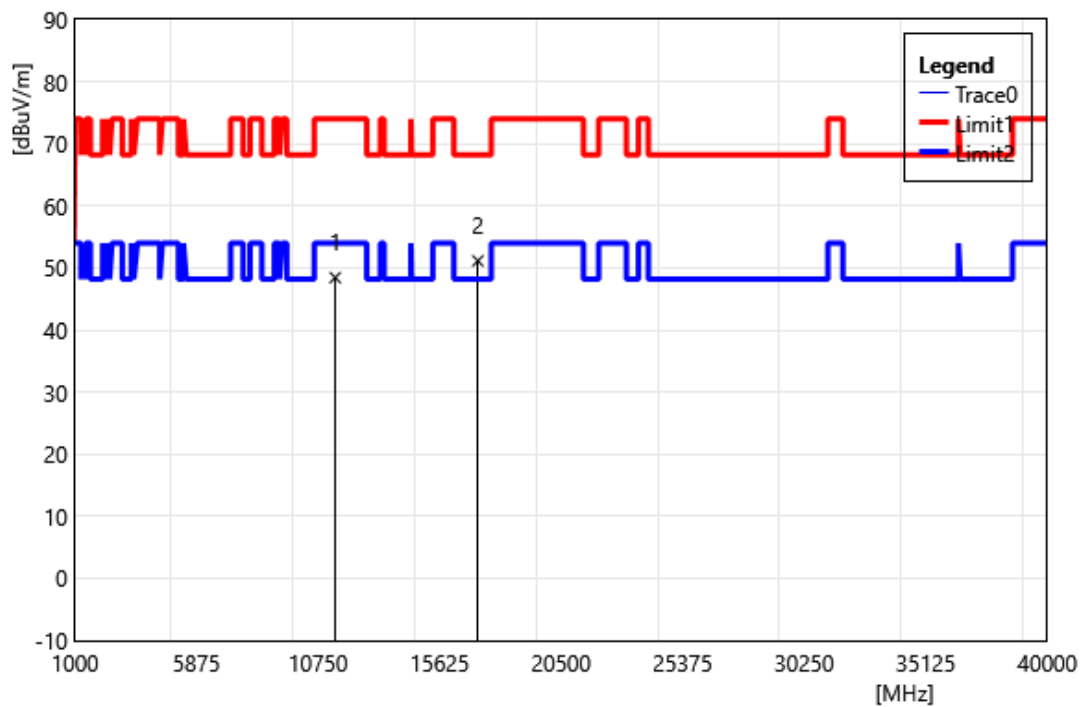


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11440.00	36.03	12.41	48.44	74.00	-25.56	PEAK
2	17160.00	33.34	17.82	51.16	68.20	-17.04	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5720		
	MHz		
Polarization:	Horizontal		
Remark:			

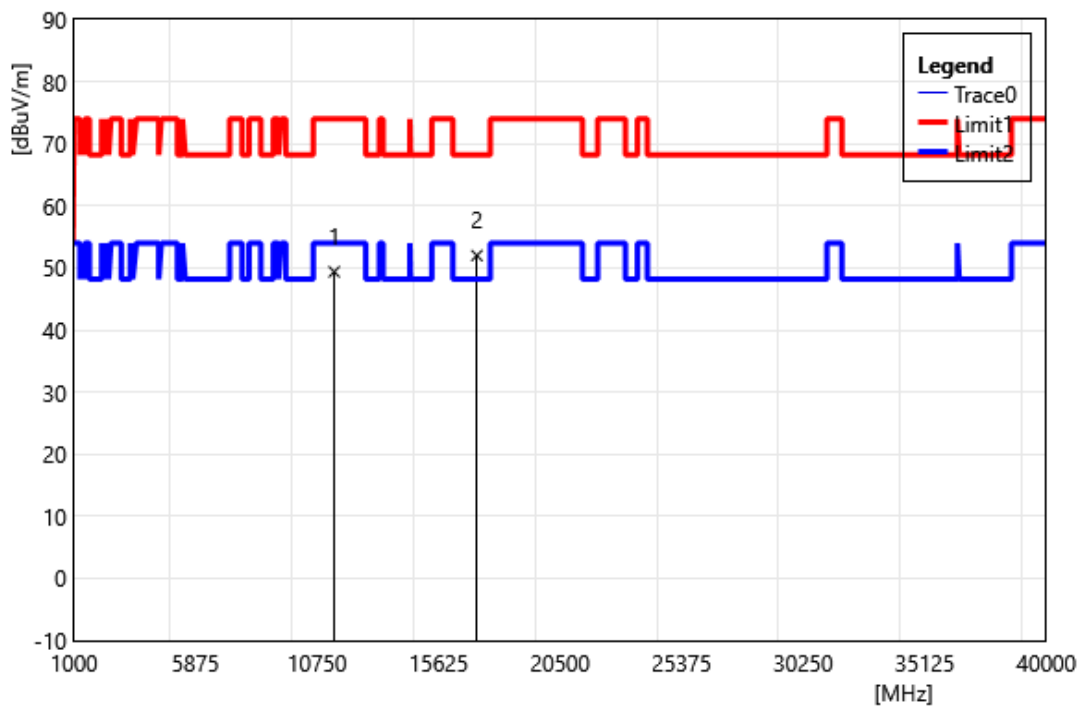


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11440.00	36.98	12.41	49.39	74.00	-24.61	PEAK
2	17160.00	34.19	17.82	52.01	68.20	-16.19	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5745		
	MHz		
Polarization:	Vertical		
Remark:			

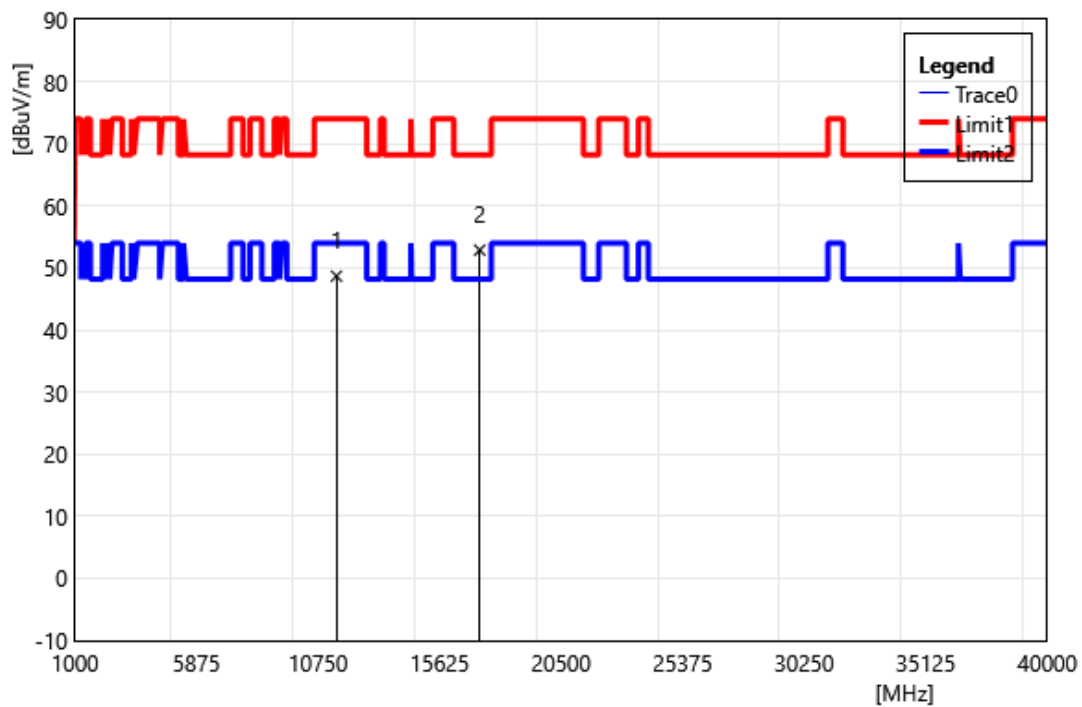


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11490.00	36.04	12.65	48.69	74.00	-25.31	PEAK
2	17235.00	34.43	18.45	52.88	68.20	-15.32	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5745		
	MHz		
Polarization:	Horizontal		
Remark:			

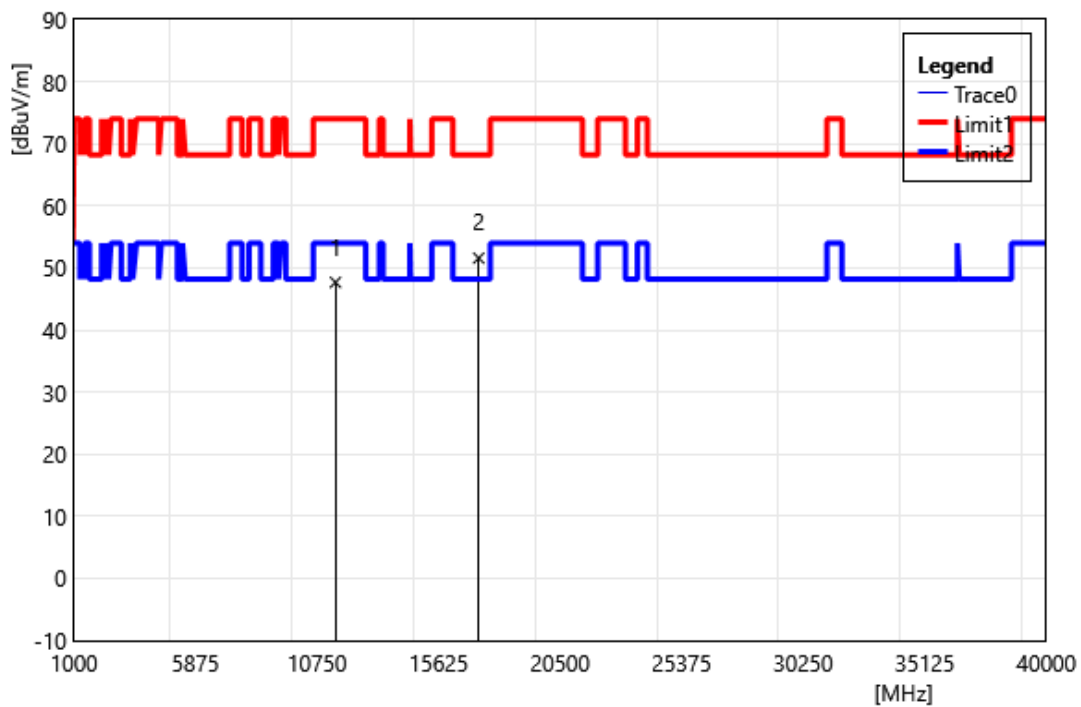


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11490.00	35.03	12.65	47.68	74.00	-26.32	PEAK
2	17235.00	33.14	18.45	51.59	68.20	-16.61	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5785		
	MHz		
Polarization:	Vertical		
Remark:			

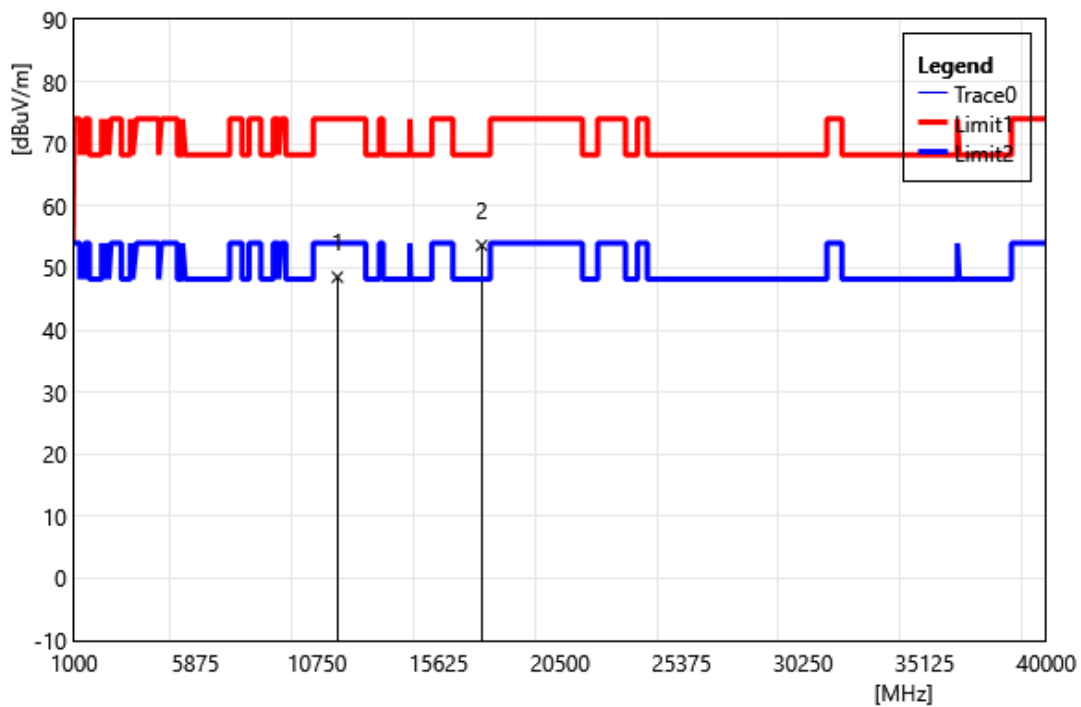


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11570.00	36.09	12.42	48.51	74.00	-25.49	PEAK
2	17355.00	34.27	19.36	53.63	68.20	-14.57	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5785		
	MHz		
Polarization:	Horizontal		
Remark:			

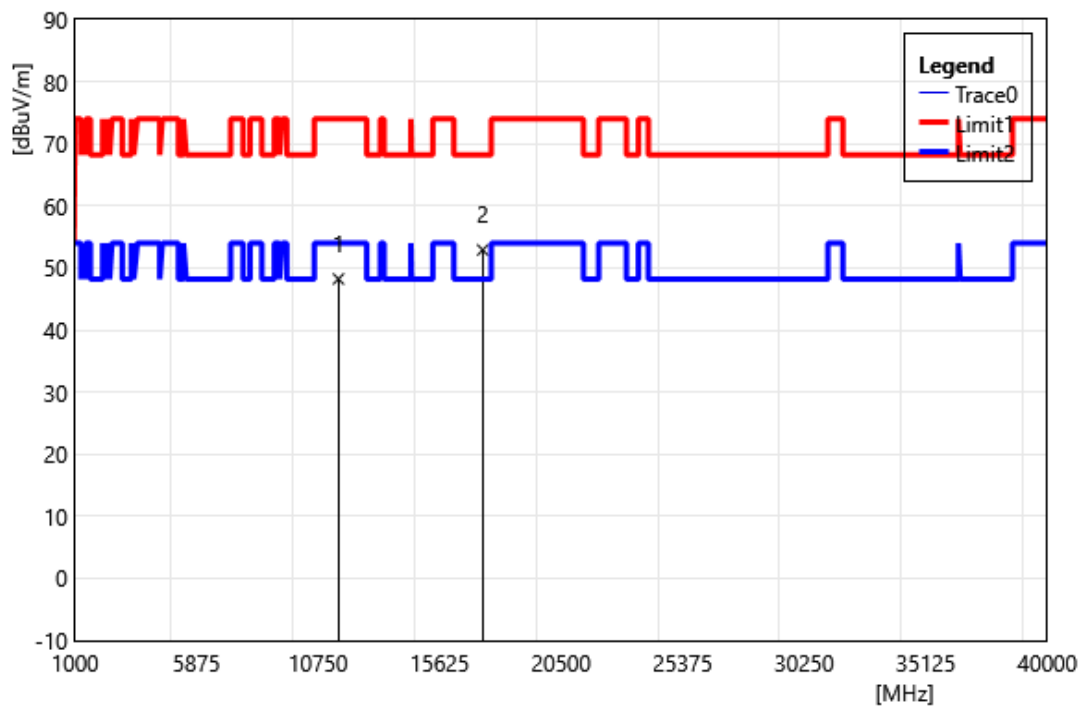


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11570.00	35.81	12.42	48.23	74.00	-25.77	PEAK
2	17355.00	33.55	19.36	52.91	68.20	-15.29	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5825		
	MHz		
Polarization:	Vertical		
Remark:			

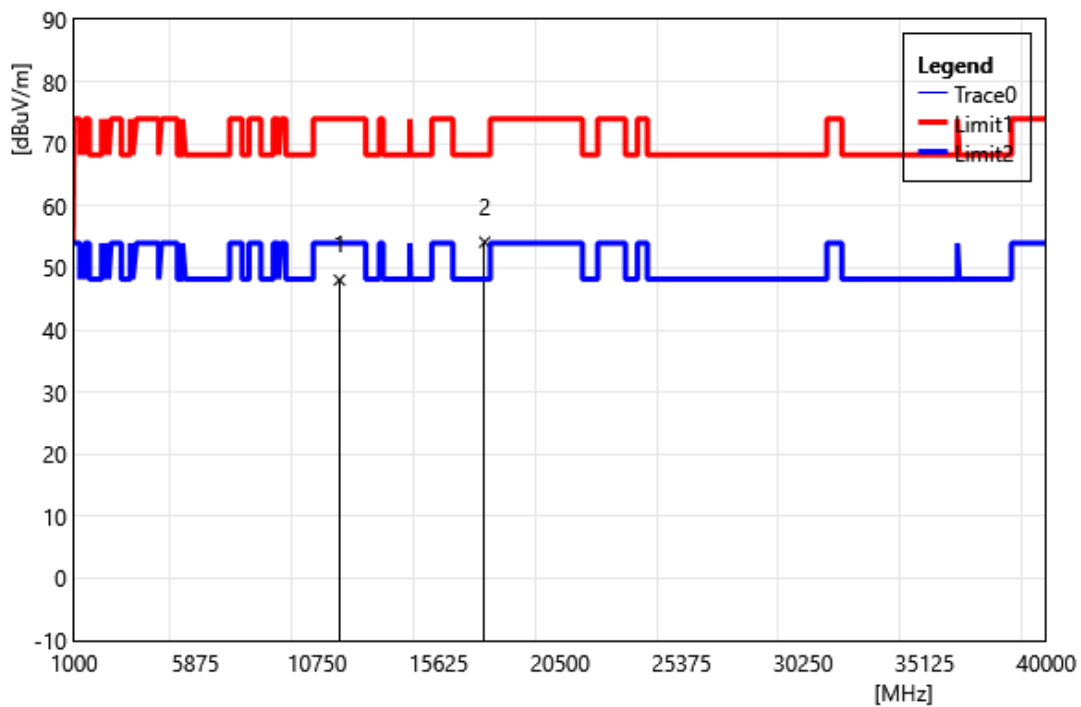


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11650.00	35.89	12.16	48.05	74.00	-25.95	PEAK
2	17475.00	33.83	20.31	54.14	68.20	-14.06	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5825		
	MHz		
Polarization:	Horizontal		
Remark:			

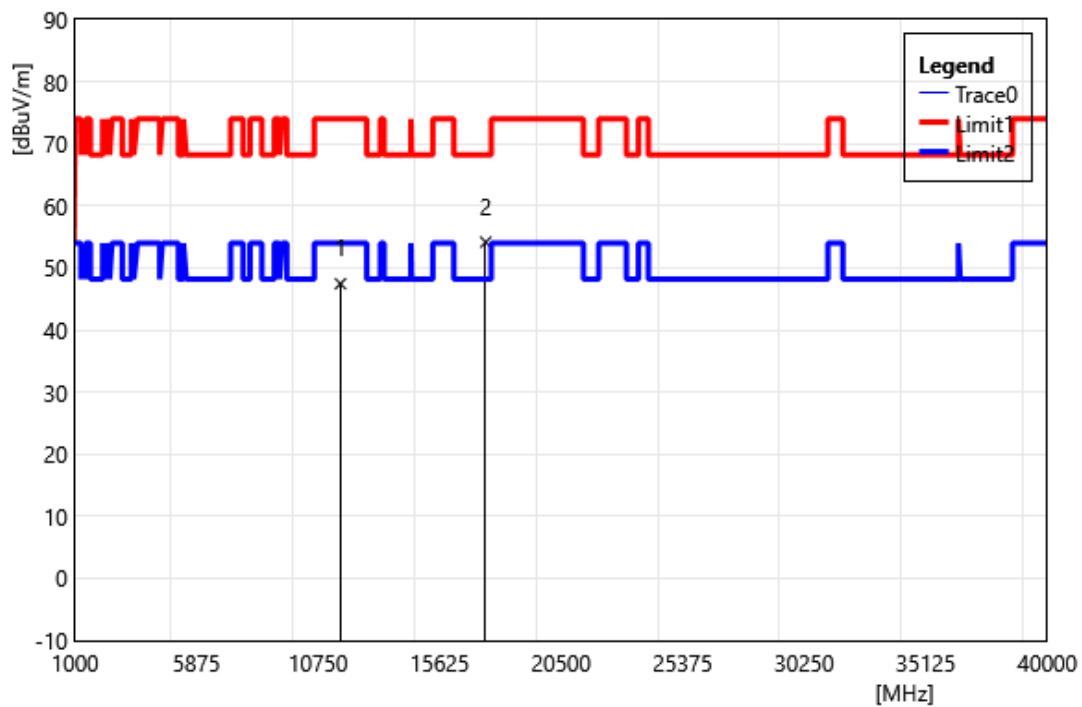


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11650.00	35.30	12.16	47.46	74.00	-26.54	PEAK
2	17475.00	33.86	20.31	54.17	68.20	-14.03	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5190		
	MHz		
Polarization:	Vertical		
Remark:			

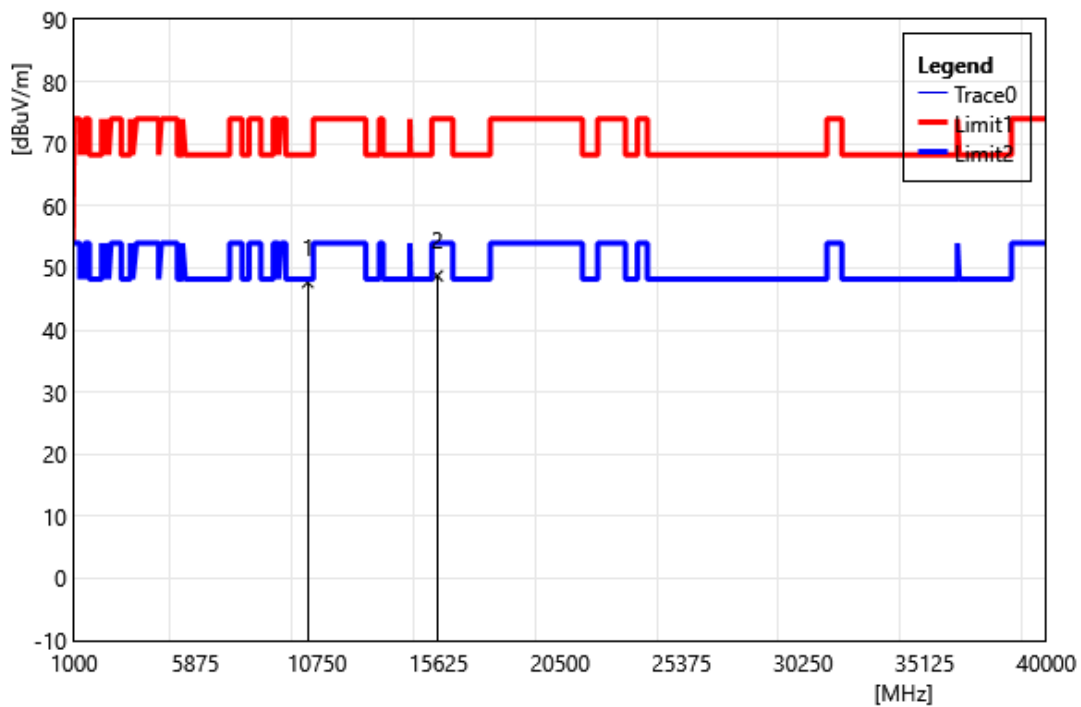


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10380.00	36.40	11.28	47.68	68.20	-20.52	PEAK
2	15570.00	34.71	14.02	48.73	74.00	-25.27	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5190		
	MHz		
Polarization:	Horizontal		
Remark:			

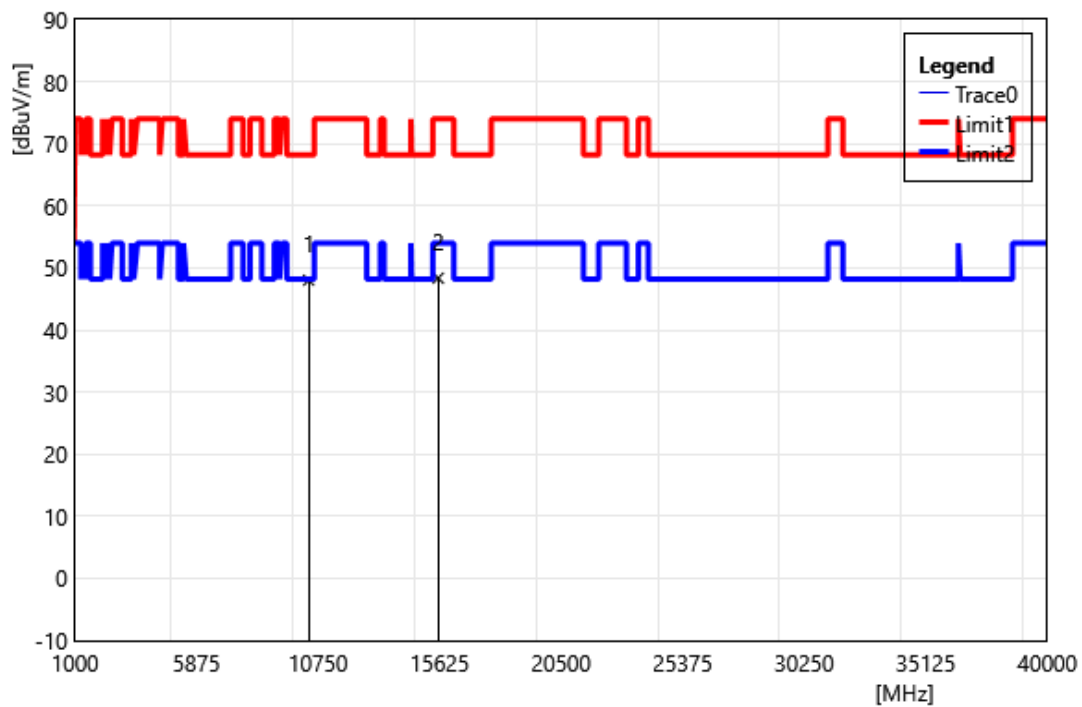


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10380.00	36.75	11.28	48.03	68.20	-20.17	PEAK
2	15570.00	34.35	14.02	48.37	74.00	-25.63	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5230		
	MHz		
Polarization:	Vertical		
Remark:			

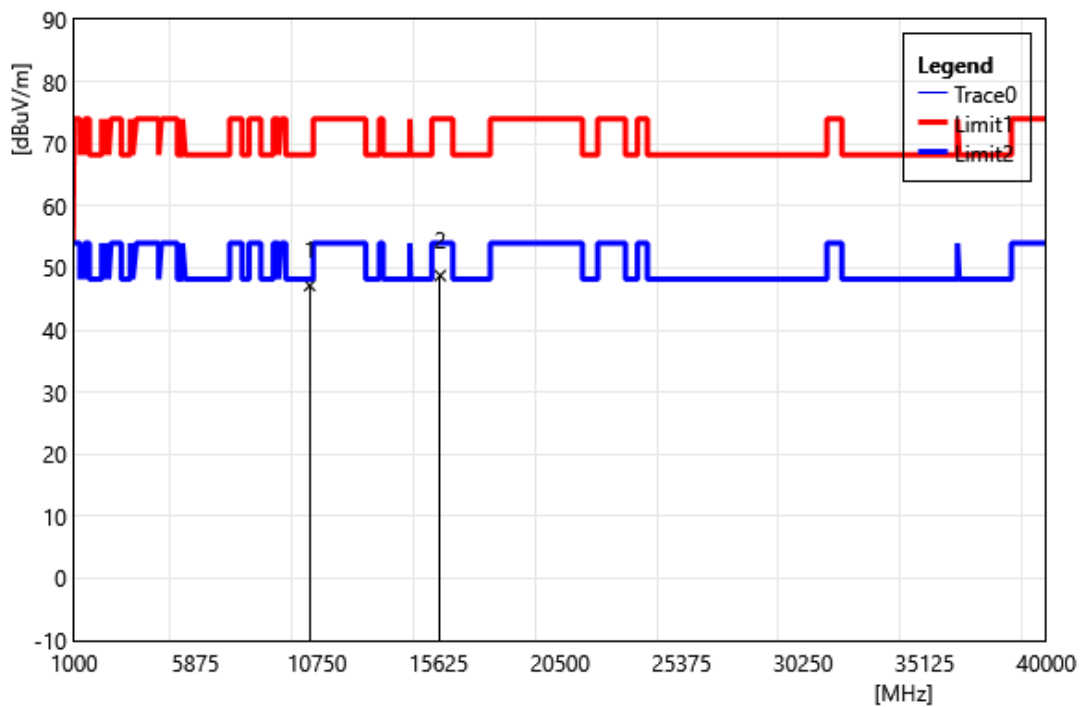


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10460.00	35.66	11.51	47.17	68.20	-21.03	PEAK
2	15690.00	34.91	13.85	48.76	74.00	-25.24	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5230		
	MHz		
Polarization:	Horizontal		
Remark:			

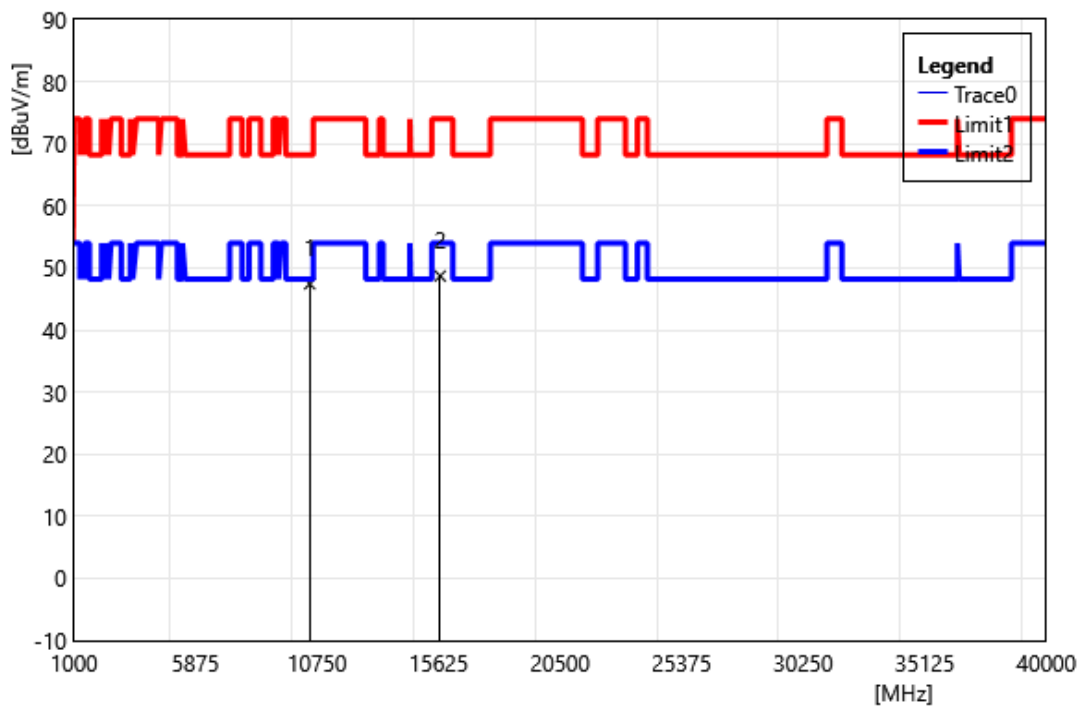


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10460.00	35.93	11.51	47.44	68.20	-20.76	PEAK
2	15690.00	34.86	13.85	48.71	74.00	-25.29	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5270		
	MHz		
Polarization:	Vertical		
Remark:			

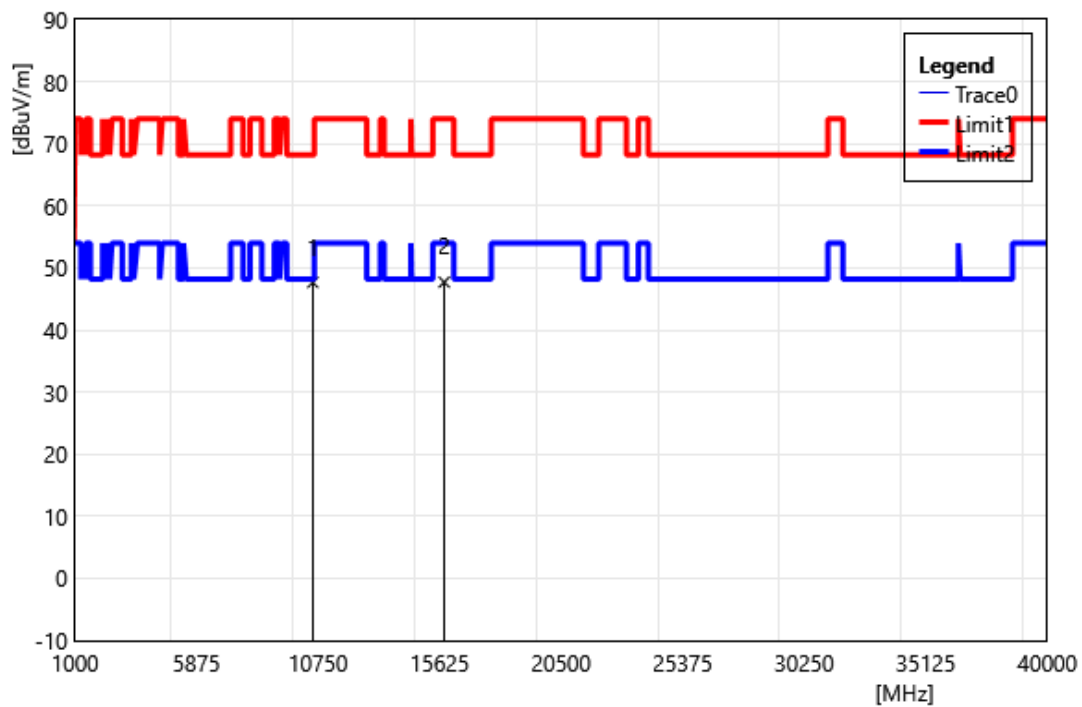


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10540.00	36.10	11.58	47.68	68.20	-20.52	PEAK
2	15810.00	34.02	13.69	47.71	74.00	-26.29	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5270		
	MHz		
Polarization:	Horizontal		
Remark:			

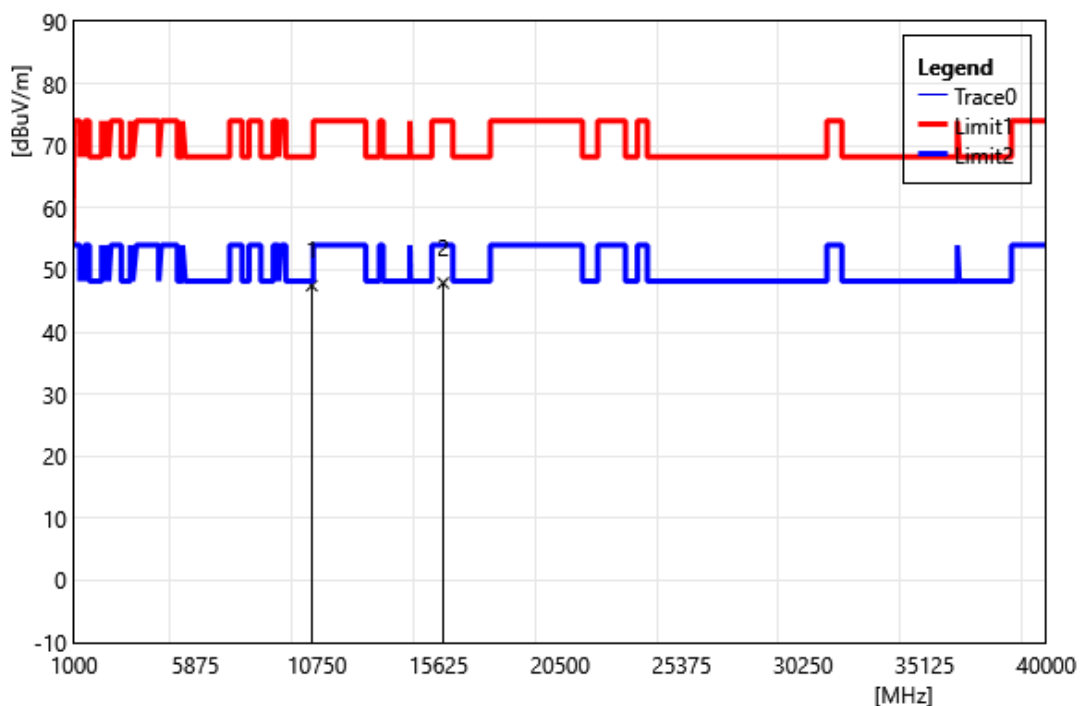


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10540.00	35.89	11.58	47.47	68.20	-20.73	PEAK
2	15810.00	34.21	13.69	47.90	74.00	-26.10	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5310		
	MHz		
Polarization:	Vertical		
Remark:			

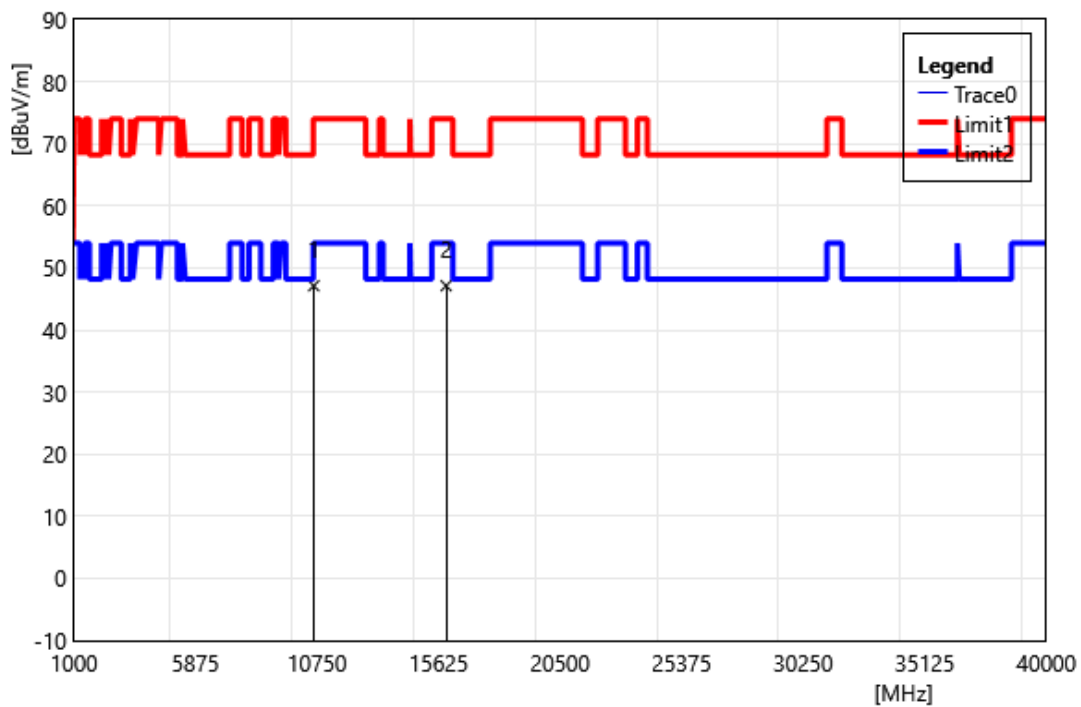


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10620.00	35.59	11.55	47.14	74.00	-26.86	PEAK
2	15930.00	33.83	13.31	47.14	74.00	-26.86	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5310		
	MHz		
Polarization:	Horizontal		
Remark:			

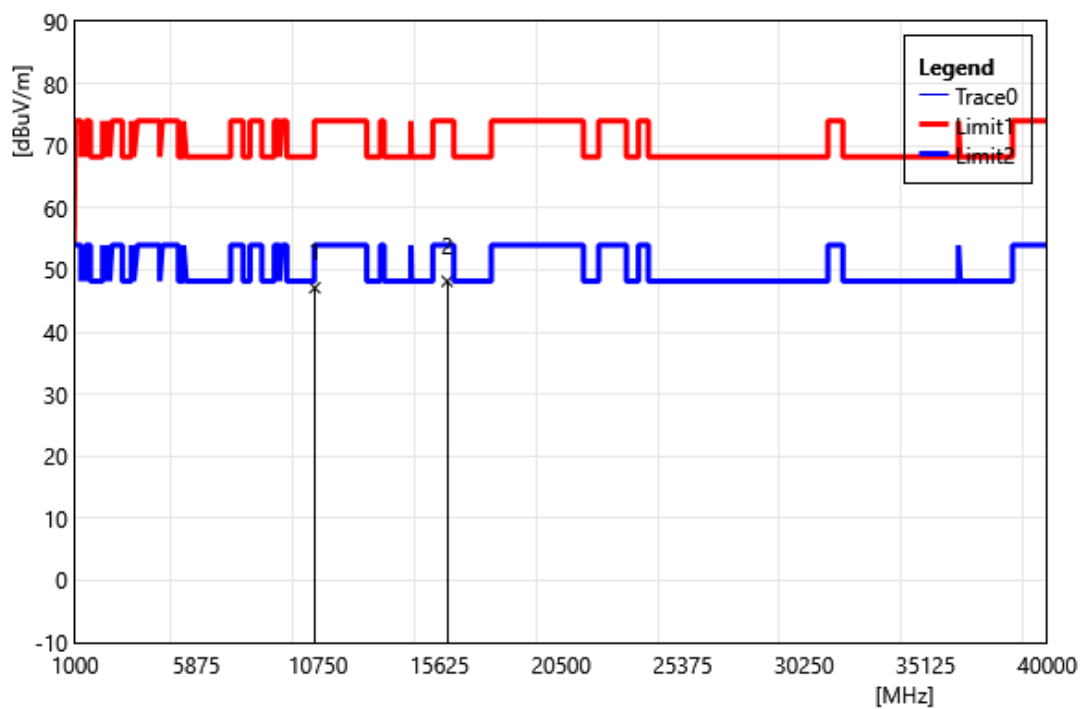


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10620.00	35.59	11.55	47.14	74.00	-26.86	PEAK
2	15930.00	34.87	13.31	48.18	74.00	-25.82	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5510		
	MHz		
Polarization:	Vertical		
Remark:			

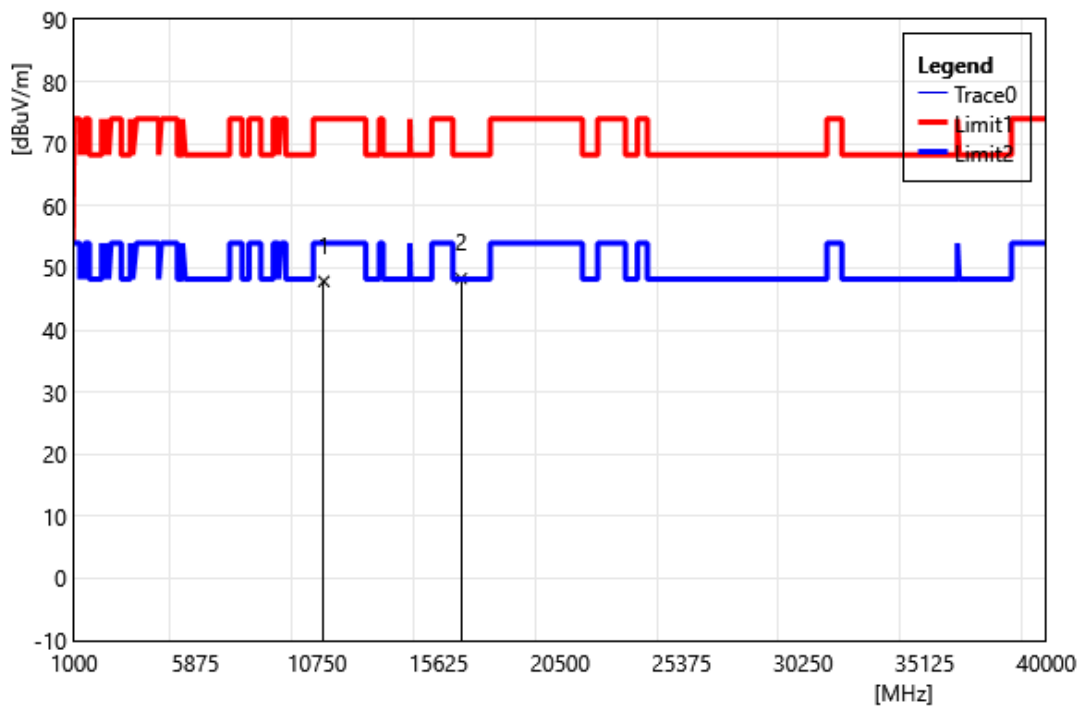


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11020.00	35.99	11.85	47.84	74.00	-26.16	PEAK
2	16530.00	33.83	14.47	48.30	68.20	-19.90	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5510		
	MHz		
Polarization:	Horizontal		
Remark:			

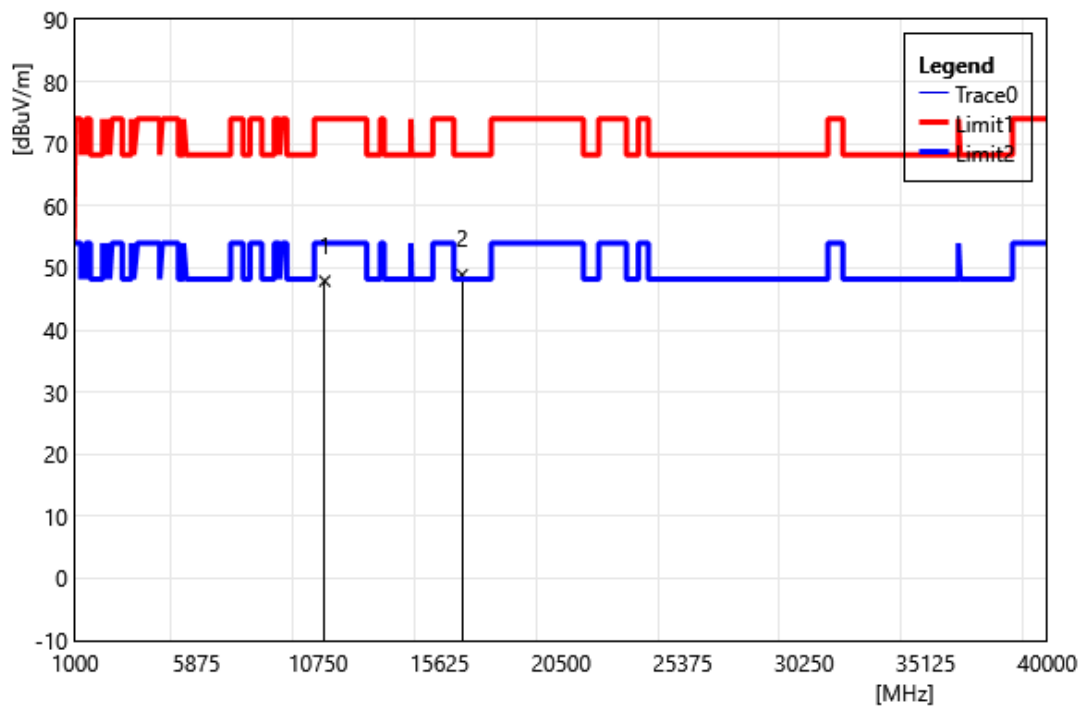


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11020.00	36.04	11.85	47.89	74.00	-26.11	PEAK
2	16530.00	34.44	14.47	48.91	68.20	-19.29	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5550		
	MHz		
Polarization:	Vertical		
Remark:			

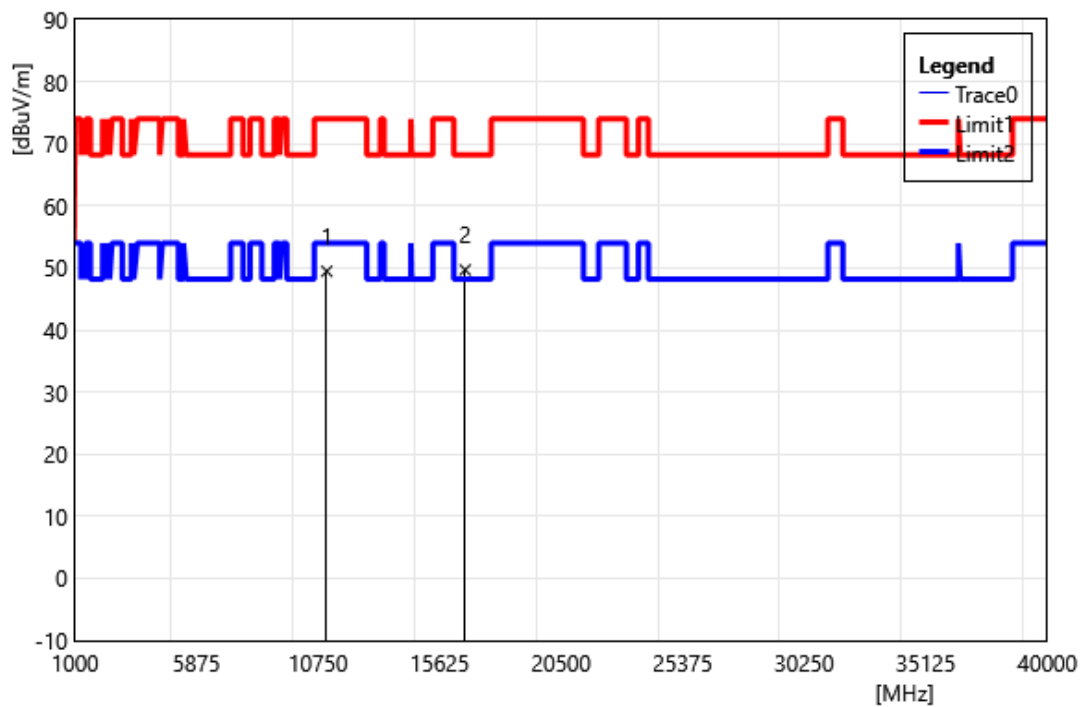


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11100.00	37.39	12.07	49.46	74.00	-24.54	PEAK
2	16650.00	34.62	15.08	49.70	68.20	-18.50	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5550		
	MHz		
Polarization:	Horizontal		
Remark:			

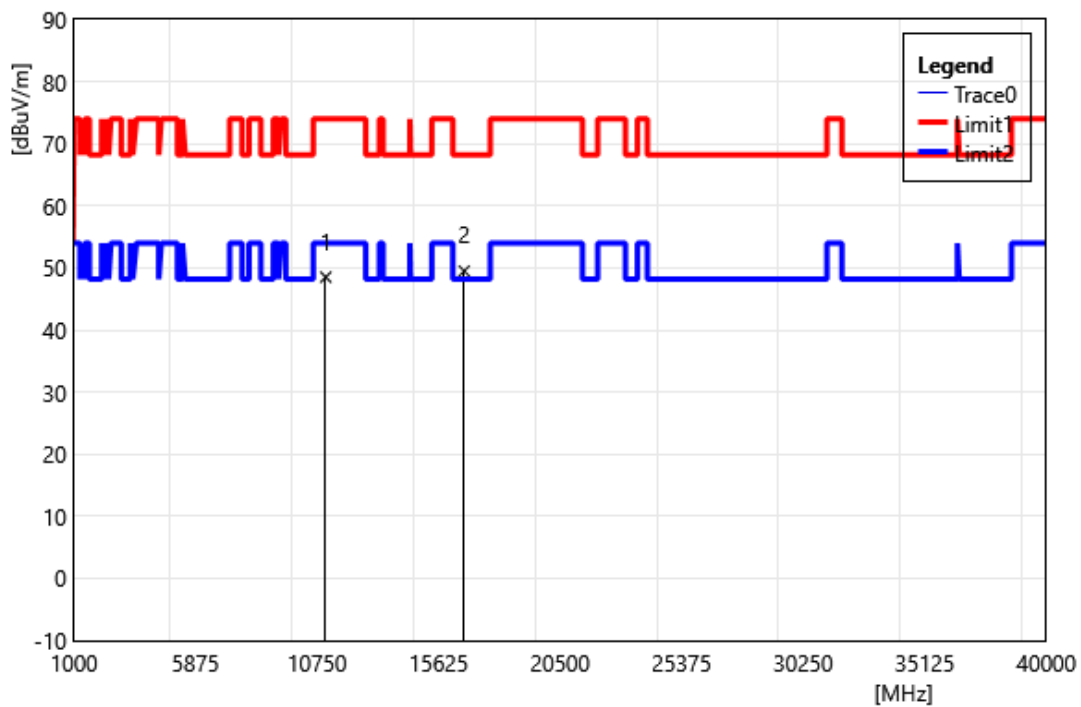


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11100.00	36.46	12.07	48.53	74.00	-25.47	PEAK
2	16650.00	34.42	15.08	49.50	68.20	-18.70	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5670		
	MHz		
Polarization:	Vertical		
Remark:			

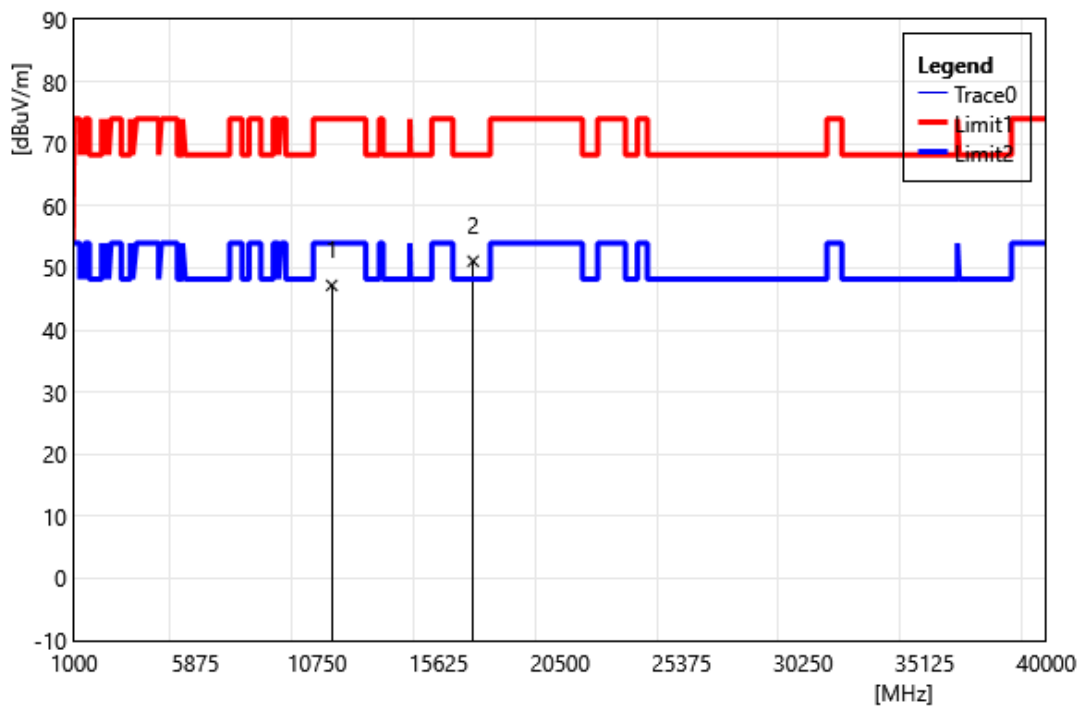


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11340.00	35.15	12.05	47.20	74.00	-26.80	PEAK
2	17010.00	34.31	16.79	51.10	68.20	-17.10	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5670		
	MHz		
Polarization:	Horizontal		
Remark:			

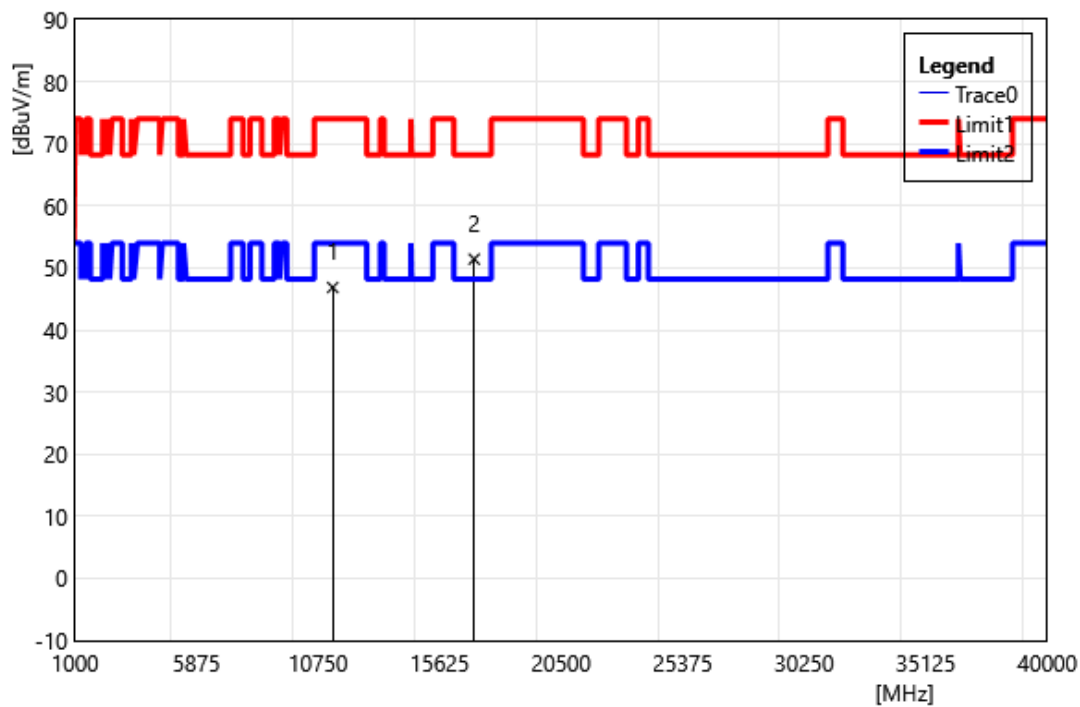


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11340.00	34.81	12.05	46.86	74.00	-27.14	PEAK
2	17010.00	34.64	16.79	51.43	68.20	-16.77	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5710		
	MHz		
Polarization:	Vertical		
Remark:			

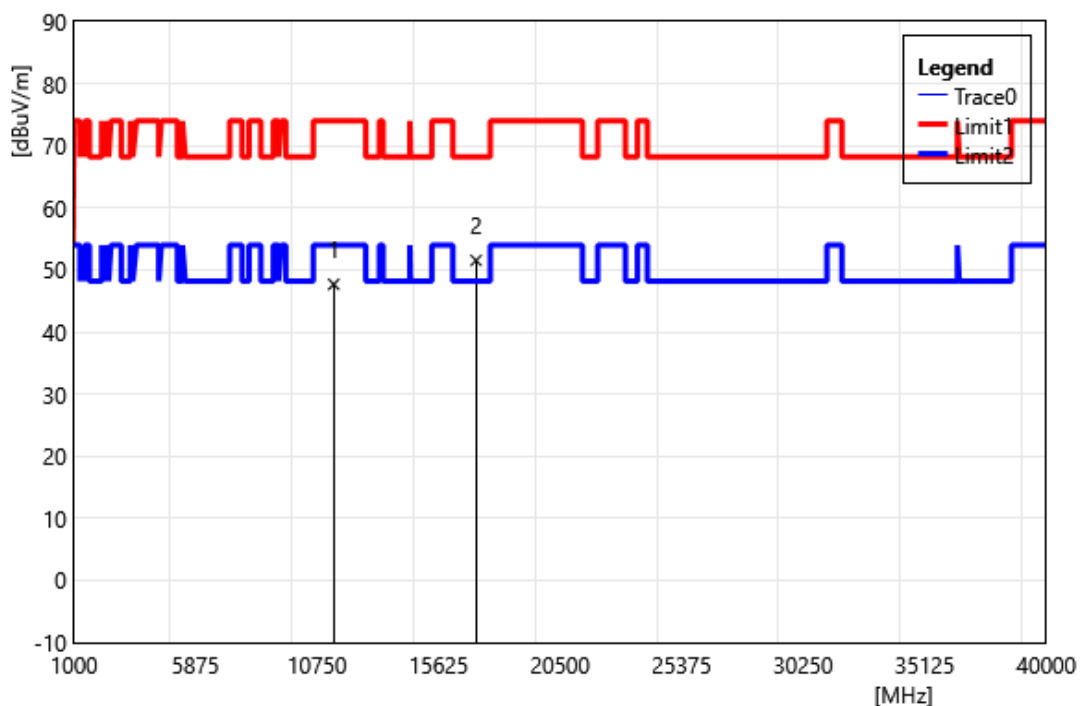


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11420.00	35.38	12.31	47.69	74.00	-26.31	PEAK
2	17130.00	33.94	17.60	51.54	68.20	-16.66	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5710		
	MHz		
Polarization:	Horizontal		
Remark:			

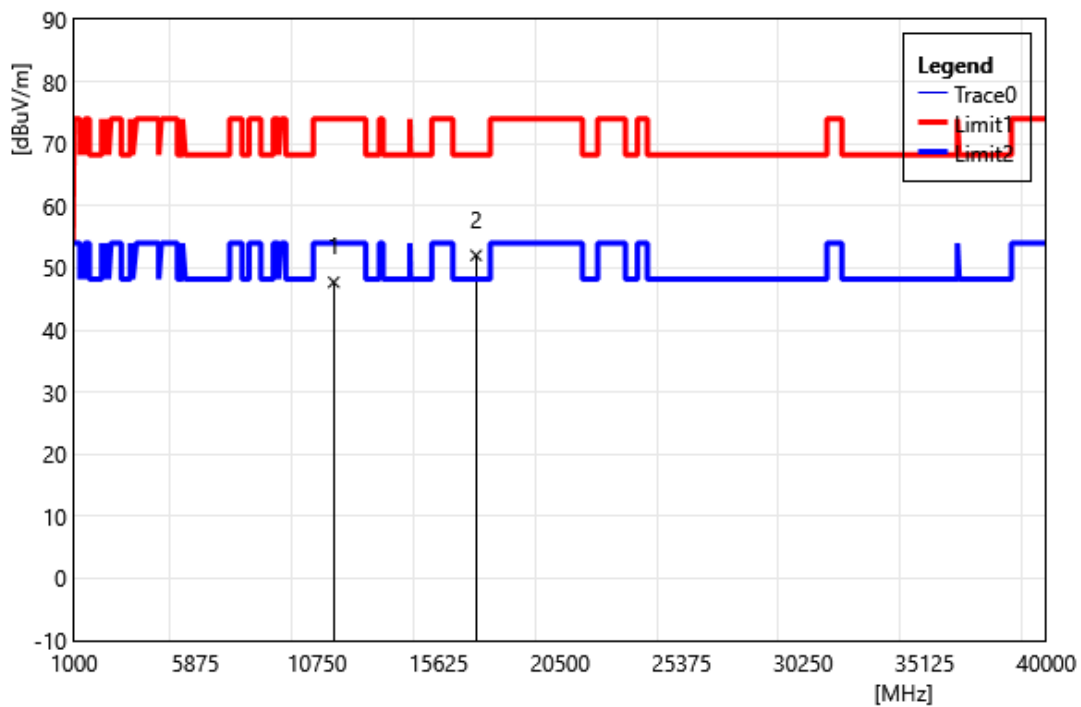


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11420.00	35.39	12.31	47.70	74.00	-26.30	PEAK
2	17130.00	34.43	17.60	52.03	68.20	-16.17	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5755		
	MHz		
Polarization:	Vertical		
Remark:			

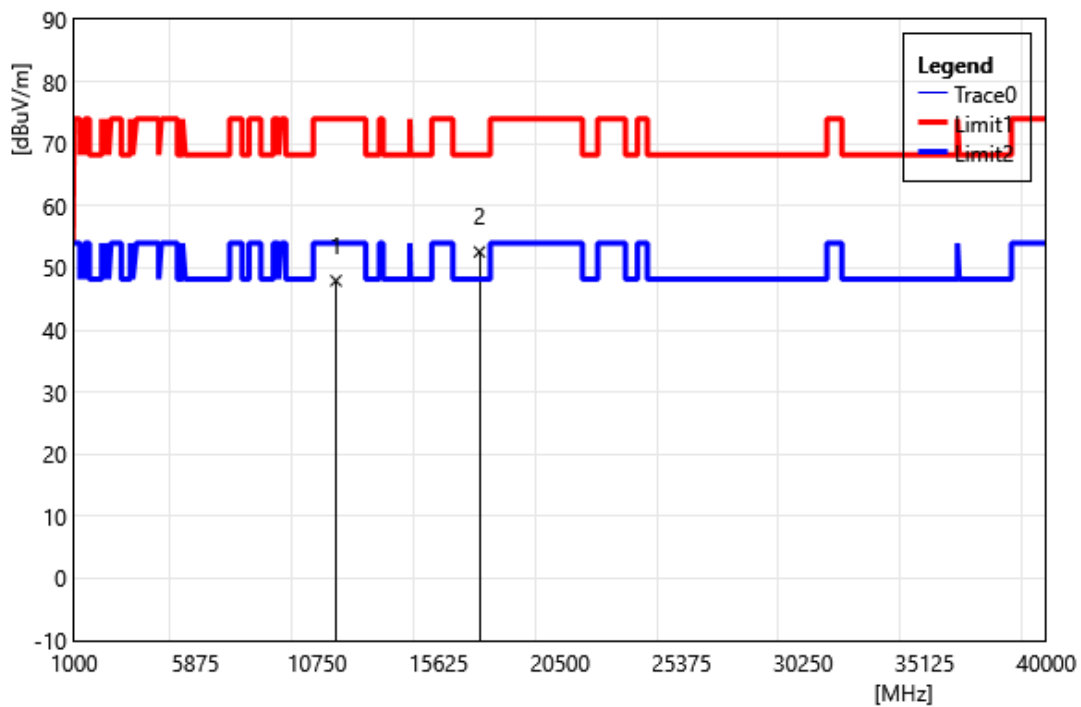


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11510.00	35.29	12.66	47.95	74.00	-26.05	PEAK
2	17265.00	33.86	18.73	52.59	68.20	-15.61	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5755		
	MHz		
Polarization:	Horizontal		
Remark:			

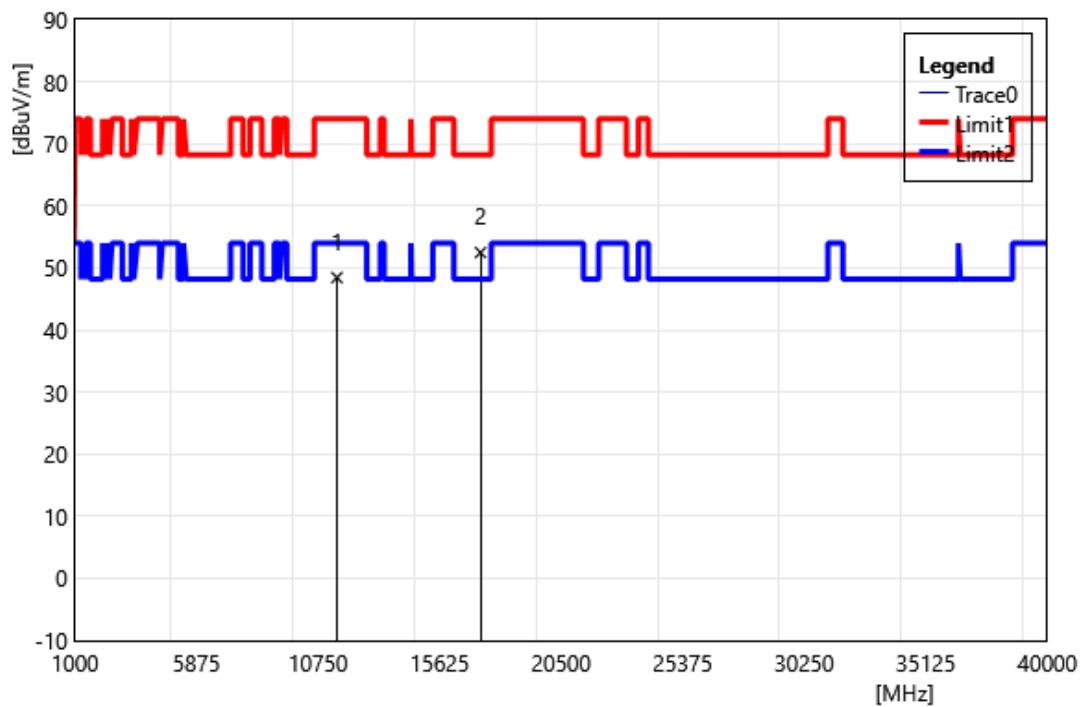


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11510.00	35.79	12.66	48.45	74.00	-25.55	PEAK
2	17265.00	33.75	18.73	52.49	68.20	-15.72	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5795		
	MHz		
Polarization:	Vertical		
Remark:			

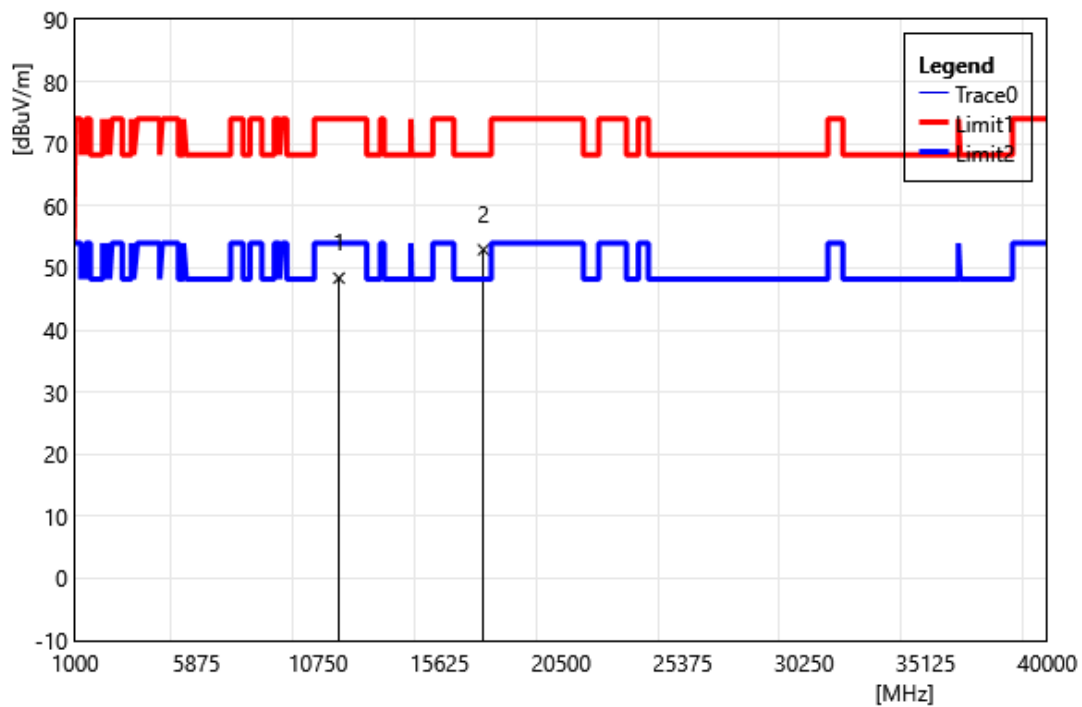


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11590.00	36.03	12.34	48.37	74.00	-25.63	PEAK
2	17385.00	33.42	19.52	52.94	68.20	-15.26	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5795		
	MHz		
Polarization:	Horizontal		
Remark:			

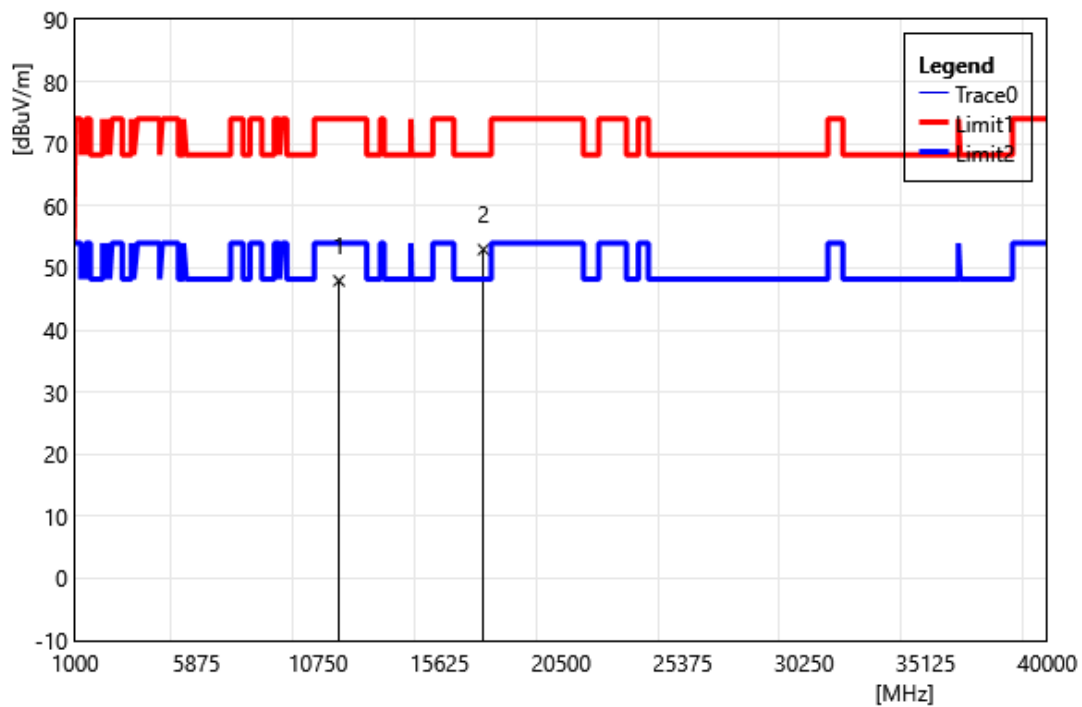


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11590.00	35.59	12.34	47.93	74.00	-26.07	PEAK
2	17385.00	33.43	19.52	52.95	68.20	-15.25	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

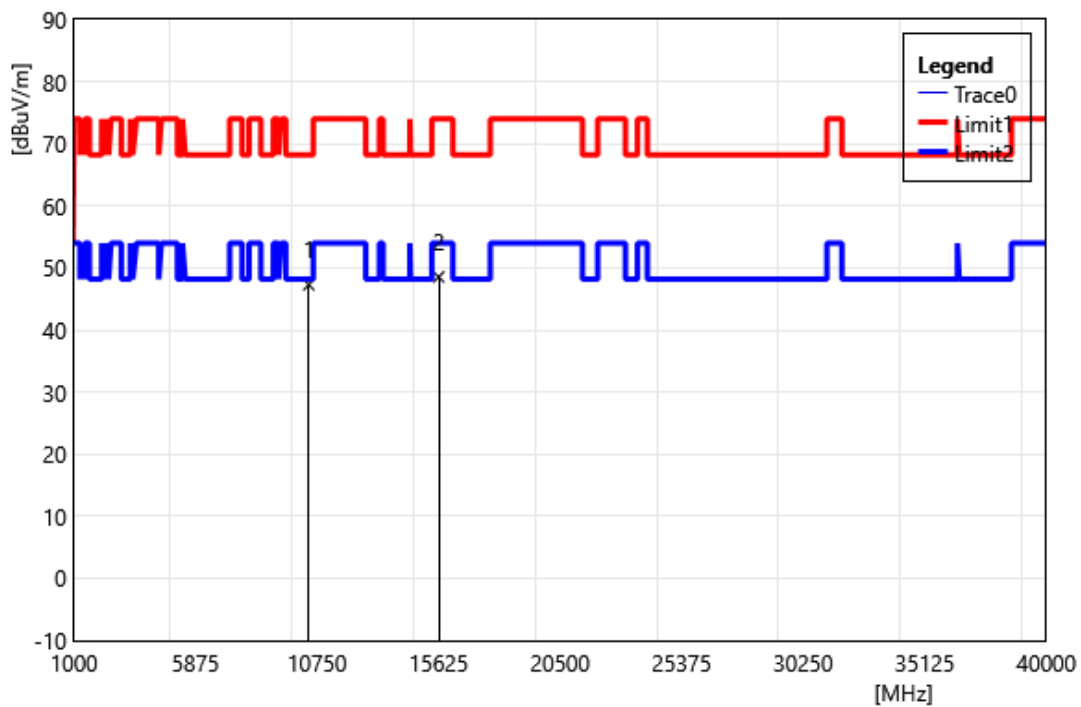


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10420.00	35.87	11.42	47.29	68.20	-20.91	PEAK
2	15630.00	34.63	13.92	48.55	74.00	-25.45	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5210		
	MHz		
Polarization:	Horizontal		
Remark:			

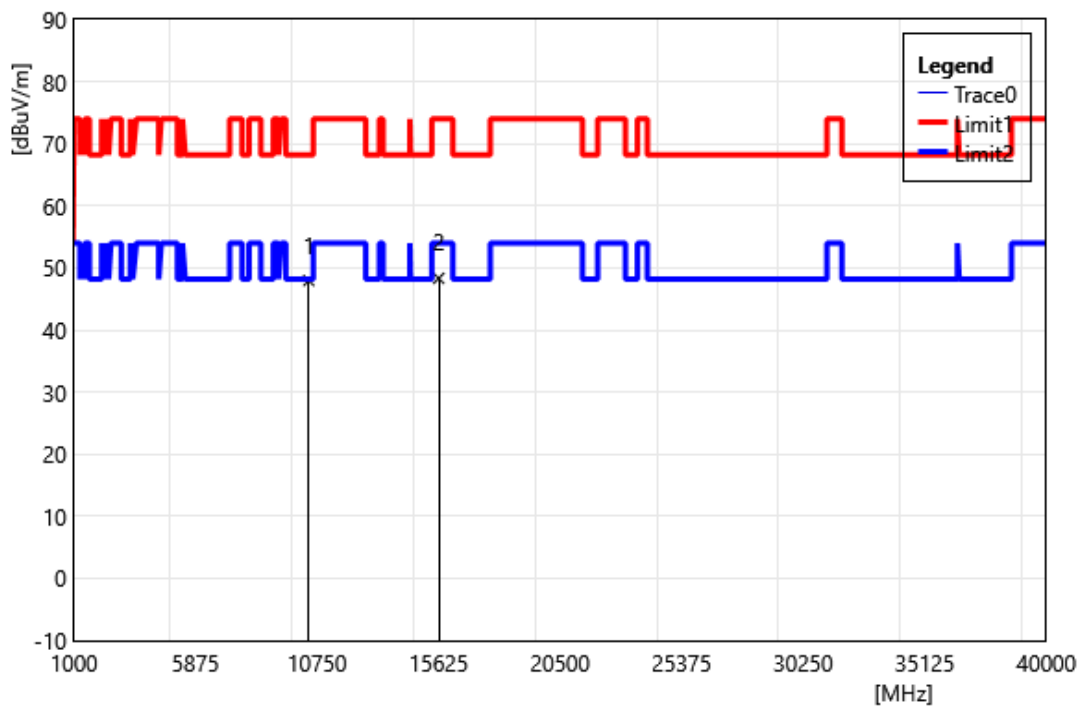


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10420.00	36.56	11.42	47.98	68.20	-20.22	PEAK
2	15630.00	34.41	13.92	48.33	74.00	-25.67	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5290		
	MHz		
Polarization:	Vertical		
Remark:			

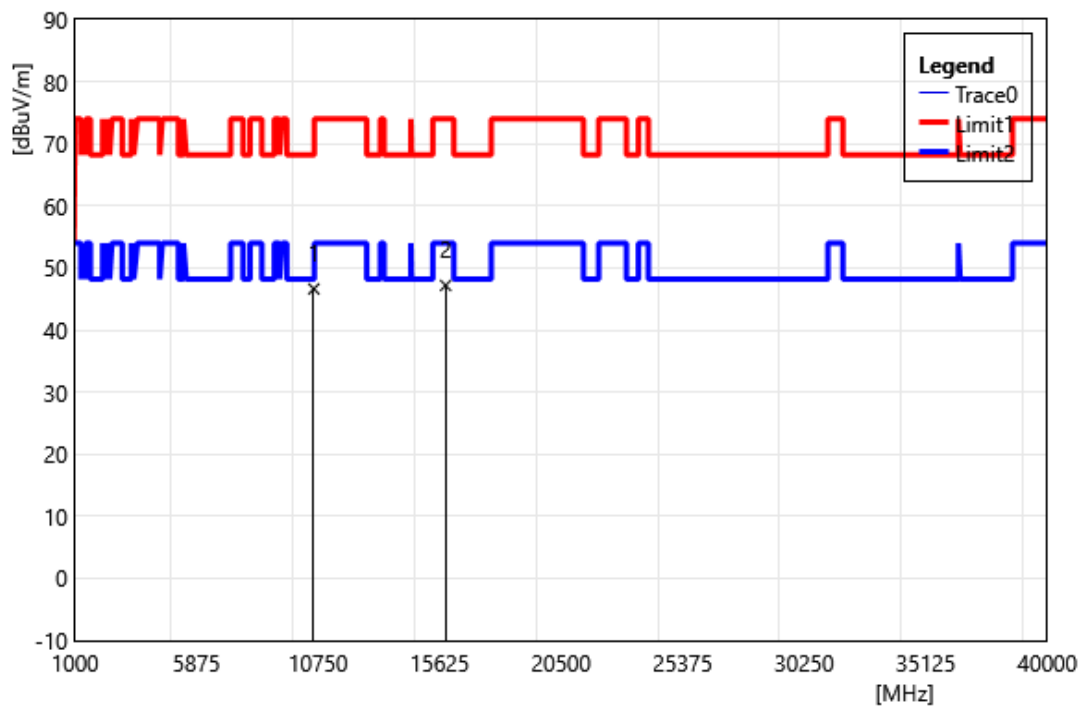


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10580.00	35.08	11.55	46.63	68.20	-21.57	PEAK
2	15870.00	33.68	13.50	47.18	74.00	-26.82	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5290		
	MHz		
Polarization:	Horizontal		
Remark:			

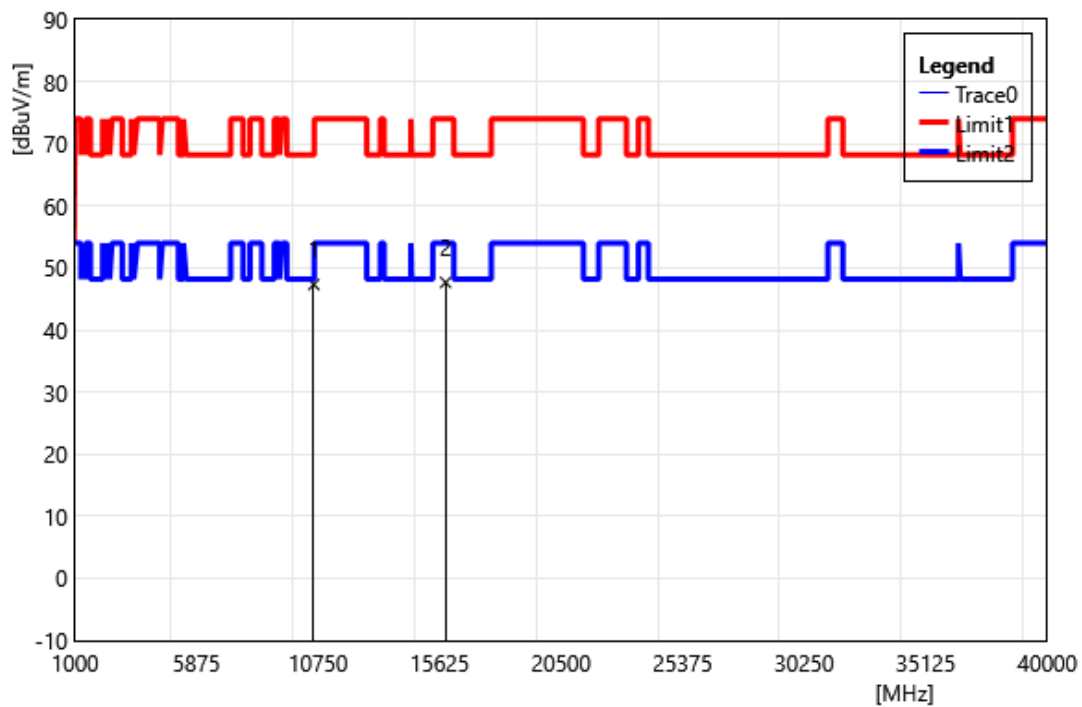


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10580.00	35.79	11.55	47.34	68.20	-20.86	PEAK
2	15870.00	34.18	13.50	47.68	74.00	-26.32	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5530		
	MHz		
Polarization:	Vertical		
Remark:			

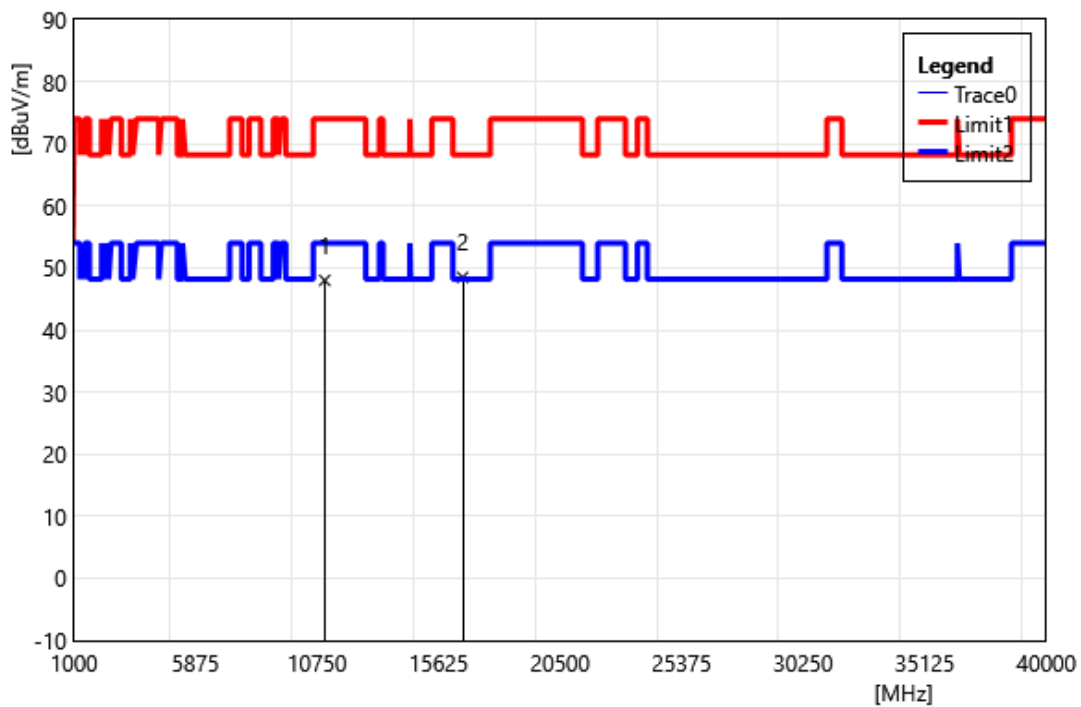


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11060.00	36.03	11.96	47.99	74.00	-26.01	PEAK
2	16590.00	33.69	14.80	48.49	68.20	-19.71	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5530		
	MHz		
Polarization:	Horizontal		
Remark:			

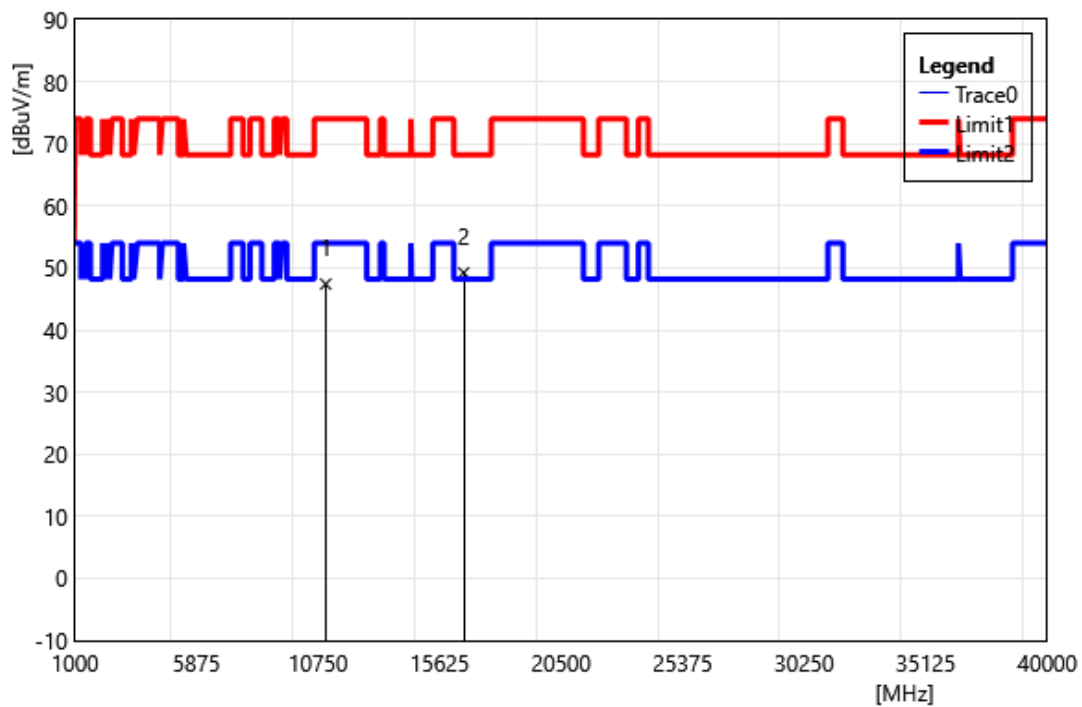


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11060.00	35.46	11.96	47.42	74.00	-26.58	PEAK
2	16590.00	34.43	14.80	49.23	68.20	-18.97	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5610		
	MHz		
Polarization:	Vertical		
Remark:			

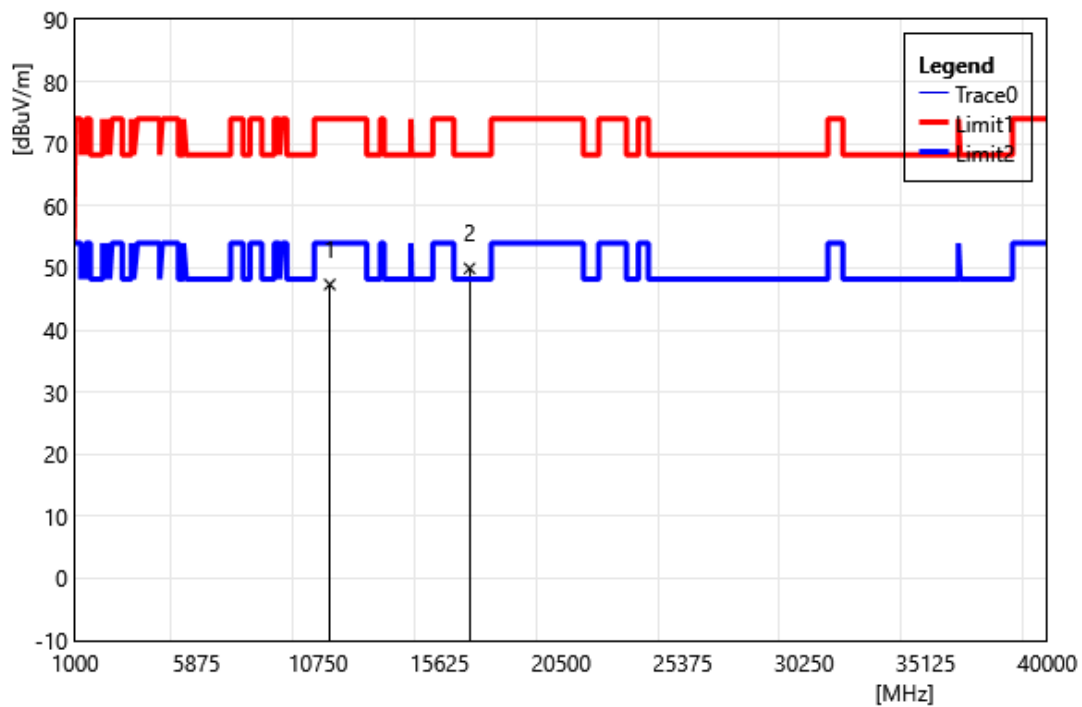


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11220.00	35.46	11.87	47.33	74.00	-26.67	PEAK
2	16830.00	33.82	16.11	49.93	68.20	-18.27	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5610		
	MHz		
Polarization:	Horizontal		
Remark:			

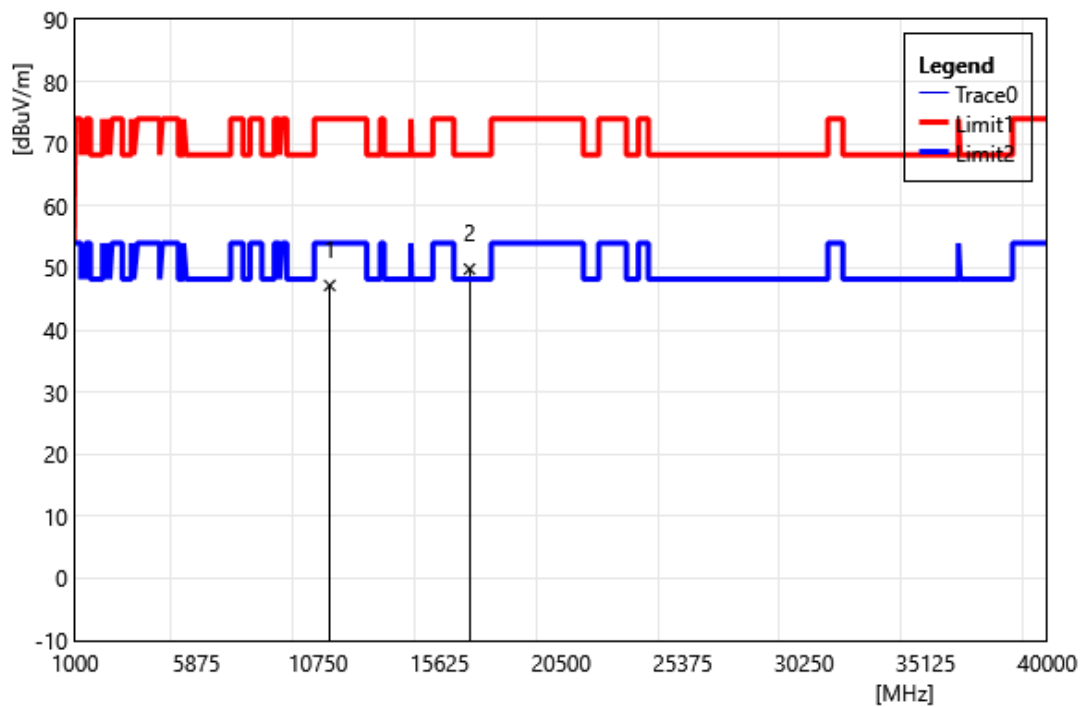


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11220.00	35.31	11.87	47.18	74.00	-26.82	PEAK
2	16830.00	33.72	16.11	49.83	68.20	-18.37	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5690		
	MHz		
Polarization:	Vertical		
Remark:			

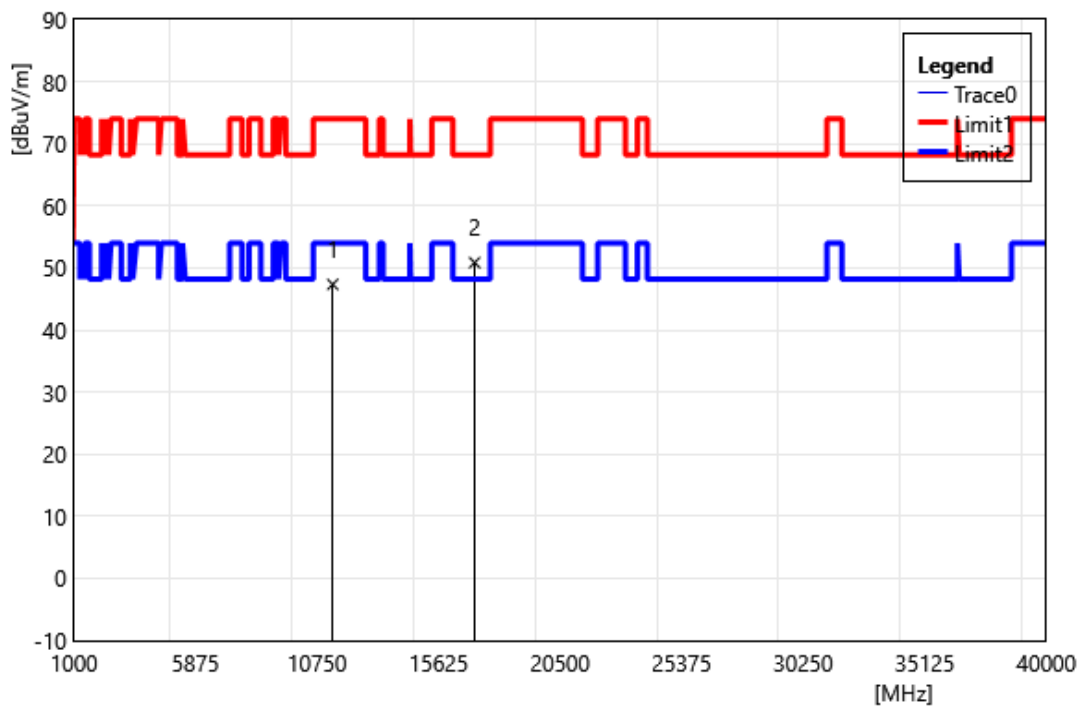


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11380.00	35.20	12.16	47.36	74.00	-26.64	PEAK
2	17070.00	33.68	17.18	50.86	68.20	-17.34	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5690		
	MHz		
Polarization:	Horizontal		
Remark:			

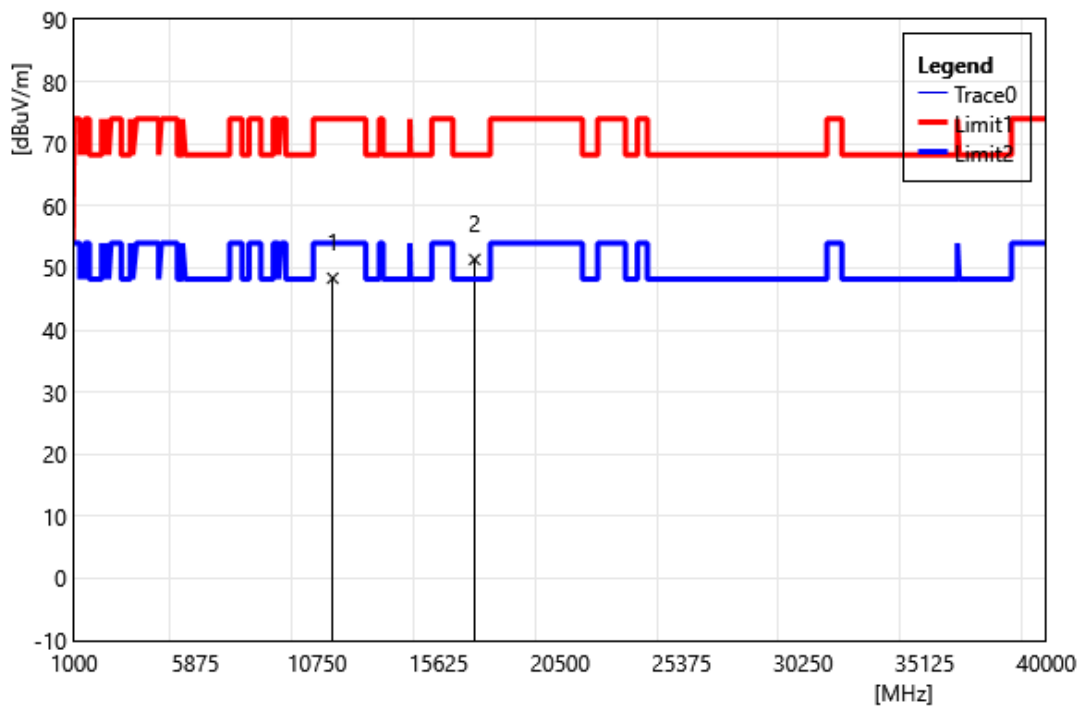


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11380.00	36.19	12.16	48.35	74.00	-25.65	PEAK
2	17070.00	34.18	17.18	51.36	68.20	-16.84	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5775		
	MHz		
Polarization:	Vertical		
Remark:			

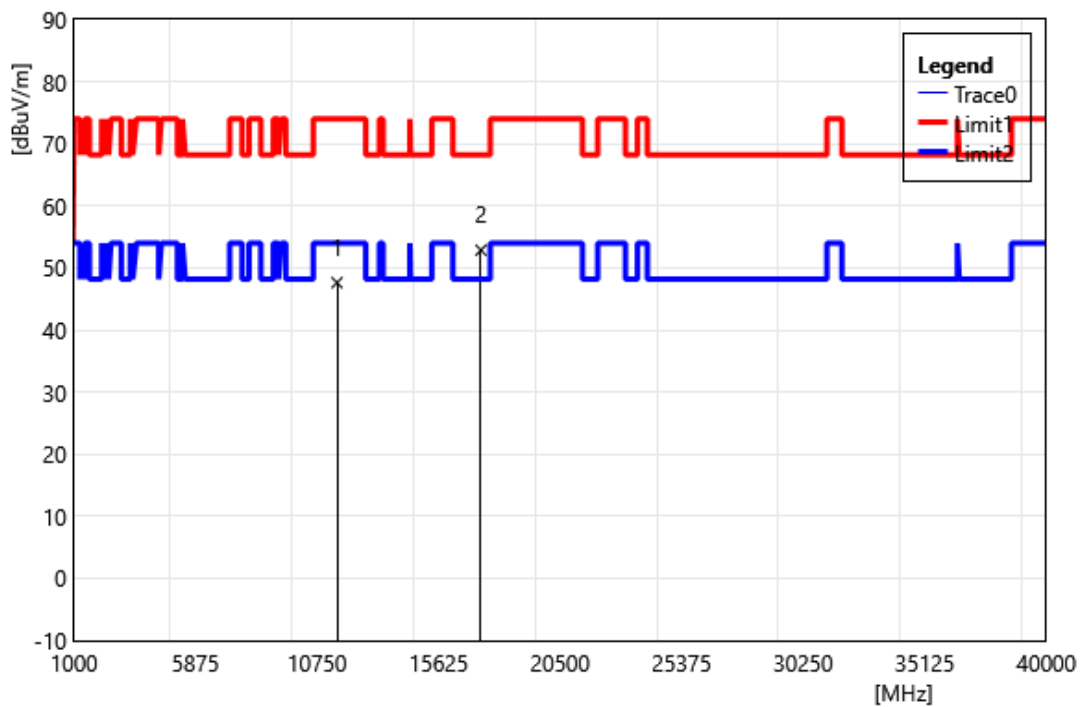


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11550.00	35.14	12.50	47.64	74.00	-26.36	PEAK
2	17325.00	33.67	19.19	52.86	68.20	-15.34	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5775		
	MHz		
Polarization:	Horizontal		
Remark:			

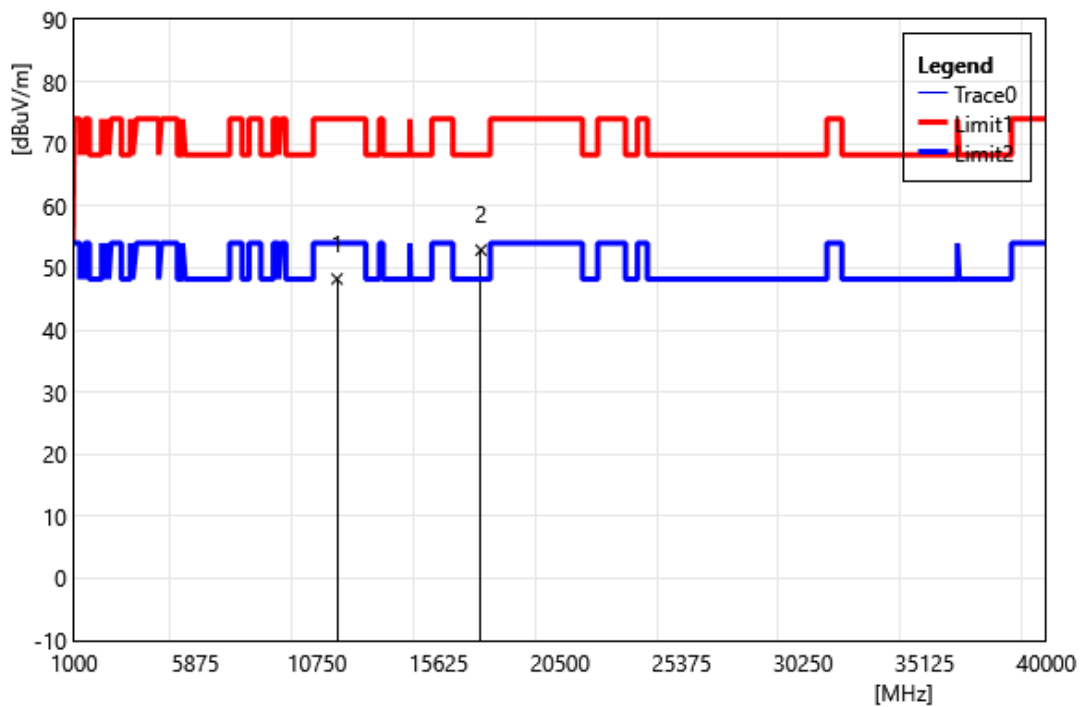


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11550.00	35.73	12.50	48.23	74.00	-25.77	PEAK
2	17325.00	33.69	19.19	52.88	68.20	-15.32	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 5250 MHz		
Polarization:	Vertical		
Remark:			

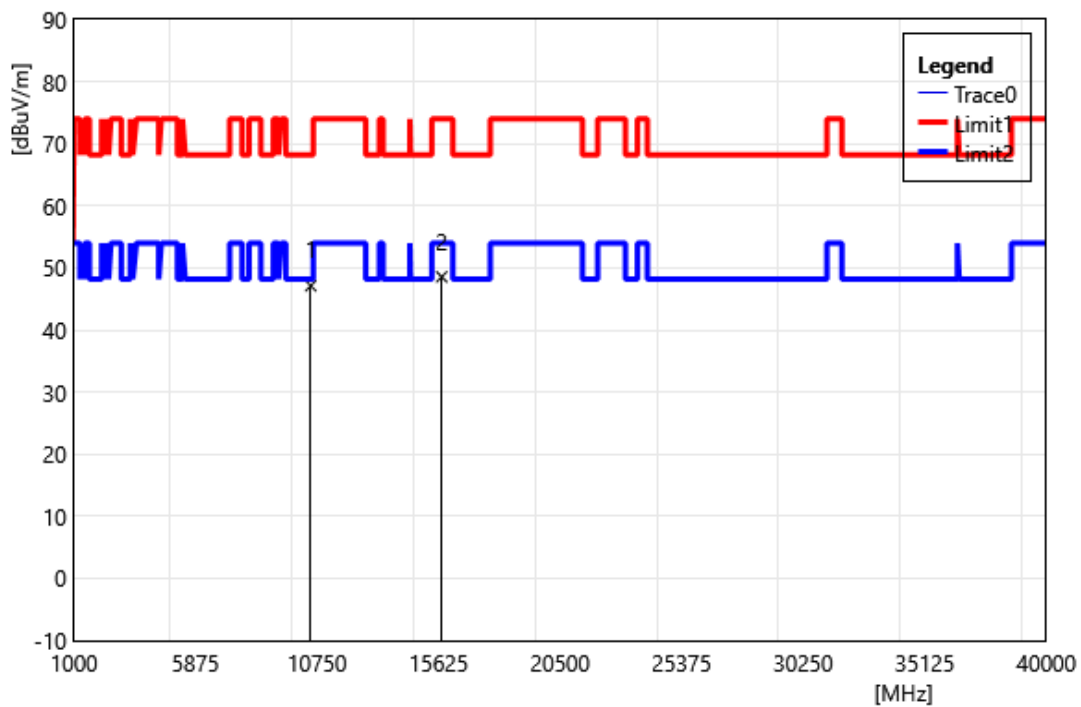


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10500.00	35.52	11.60	47.12	68.20	-21.08	PEAK
2	15750.00	34.80	13.78	48.58	74.00	-25.42	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 5250 MHz		
Polarization:	Horizontal		
Remark:			

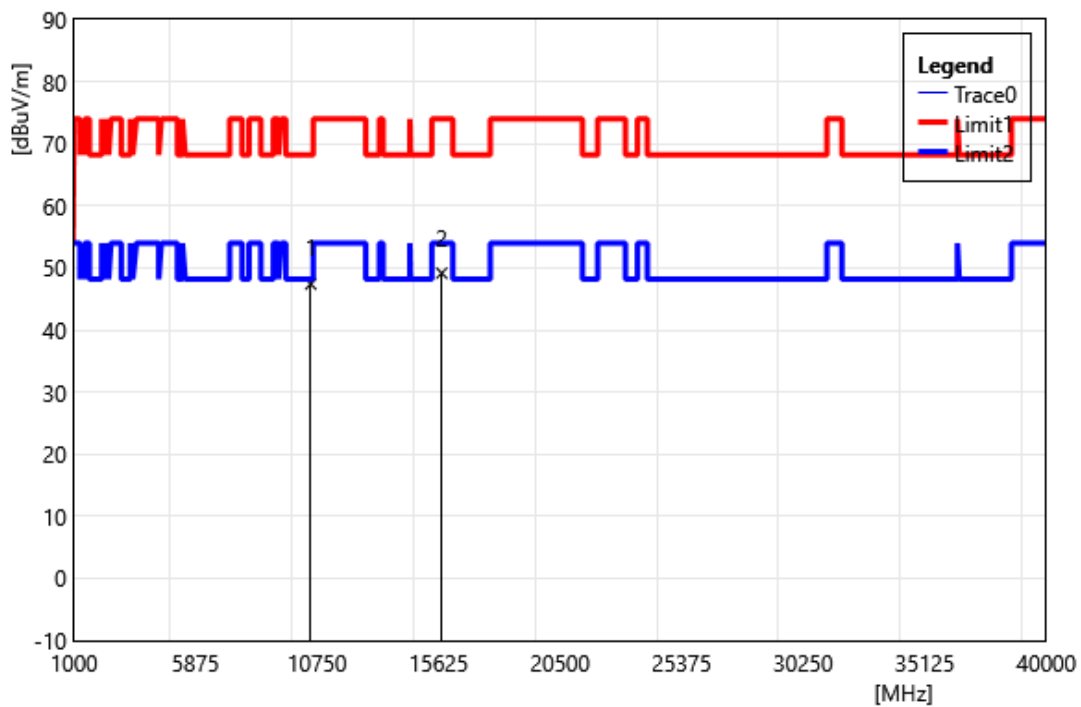


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	10500.00	35.81	11.60	47.41	68.20	-20.79	PEAK
2	15750.00	35.39	13.78	49.17	74.00	-24.83	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 5570 MHz		
Polarization:	Vertical		
Remark:			

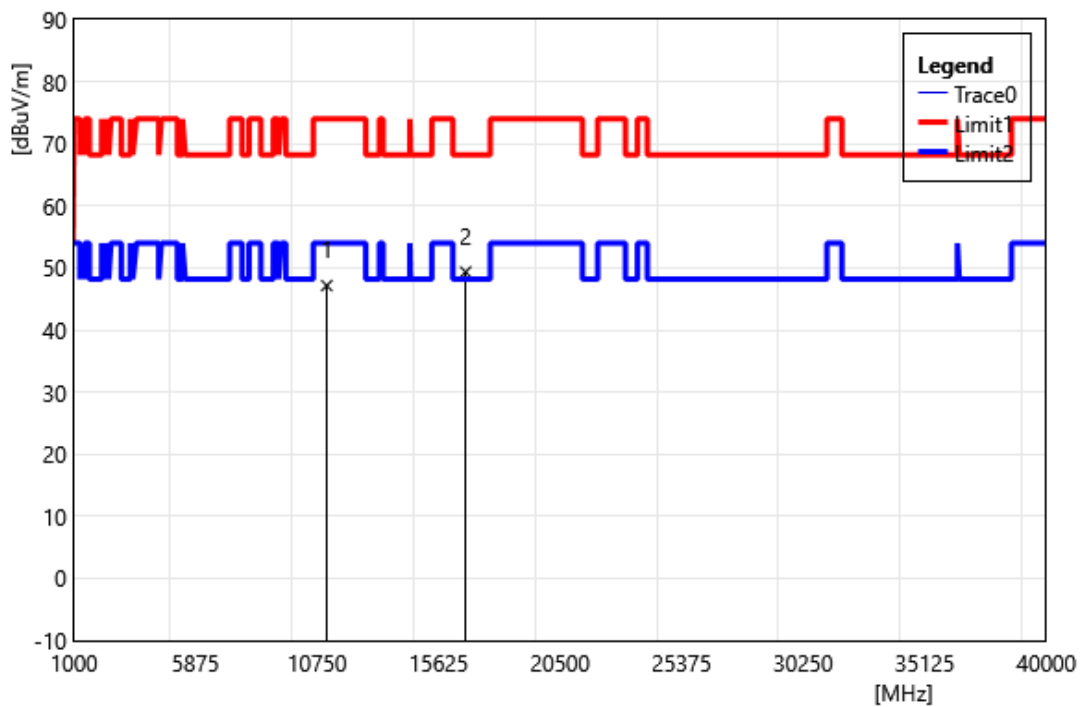


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11140.00	35.17	11.98	47.15	74.00	-26.85	PEAK
2	16710.00	34.00	15.36	49.36	68.20	-18.84	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 5570		
	MHz		
Polarization:	Horizontal		
Remark:			

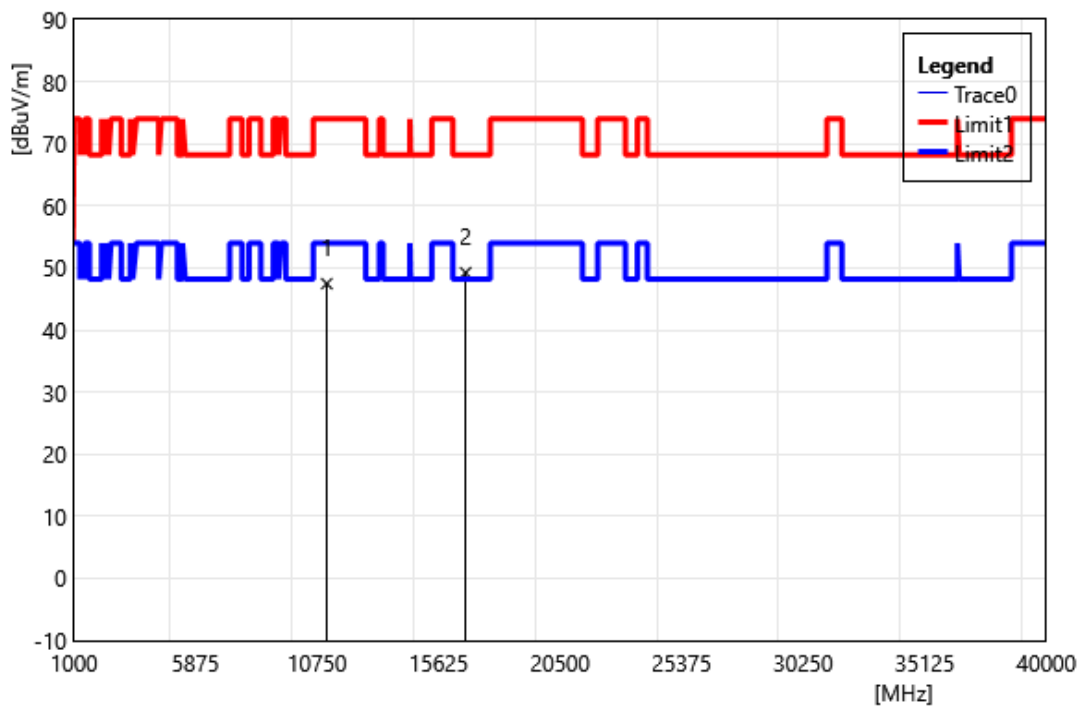


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11140.00	35.50	11.98	47.48	74.00	-26.52	PEAK
2	16710.00	33.88	15.36	49.24	68.20	-18.96	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT240 5610 MHz		
Polarization:	Vertical		
Remark:			

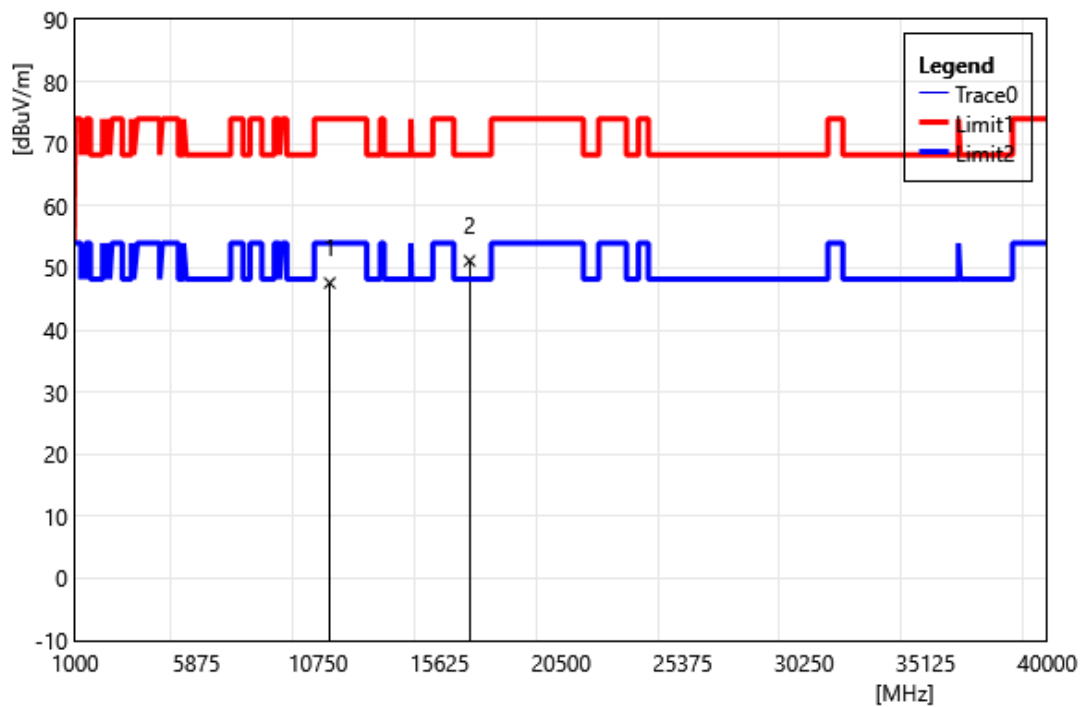


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11220.00	35.72	11.87	47.59	74.00	-26.41	PEAK
2	16830.00	35.05	16.11	51.16	68.20	-17.04	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT240 5610		
	MHz		
Polarization:	Horizontal		
Remark:			

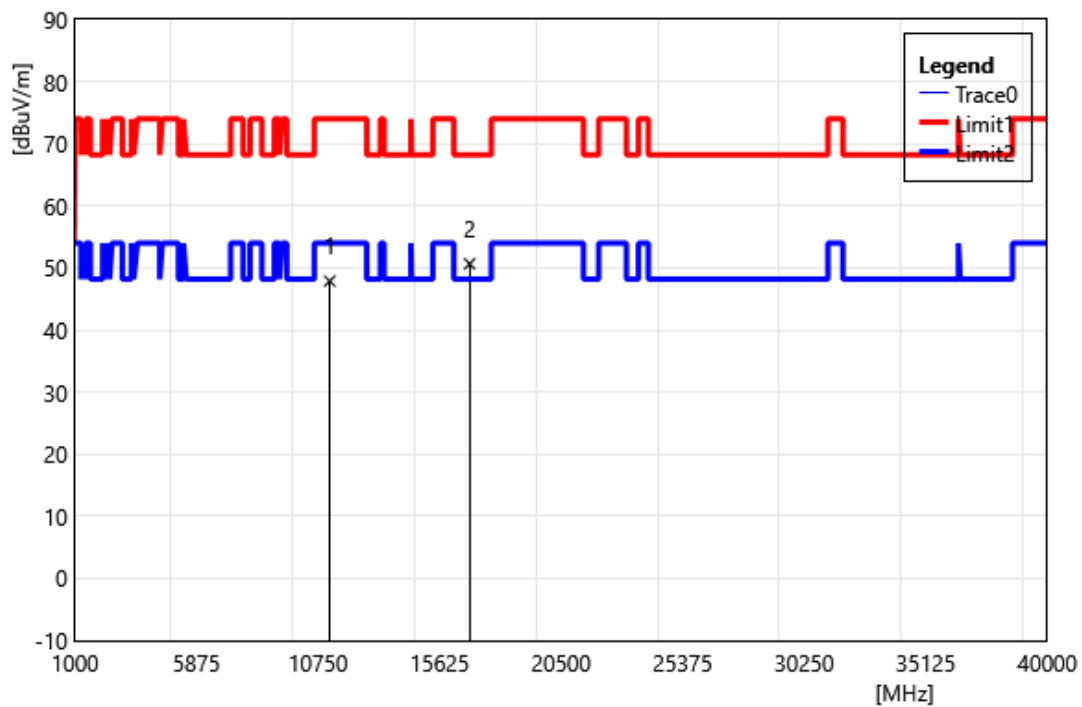


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	11220.00	36.01	11.87	47.88	74.00	-26.12	PEAK
2	16830.00	34.56	16.11	50.67	68.20	-17.53	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	Simultaneous Transmitting (WLAN 5 GHz + WLAN 2.4 GHz)		
Polarization:	Vertical		
Remark:			

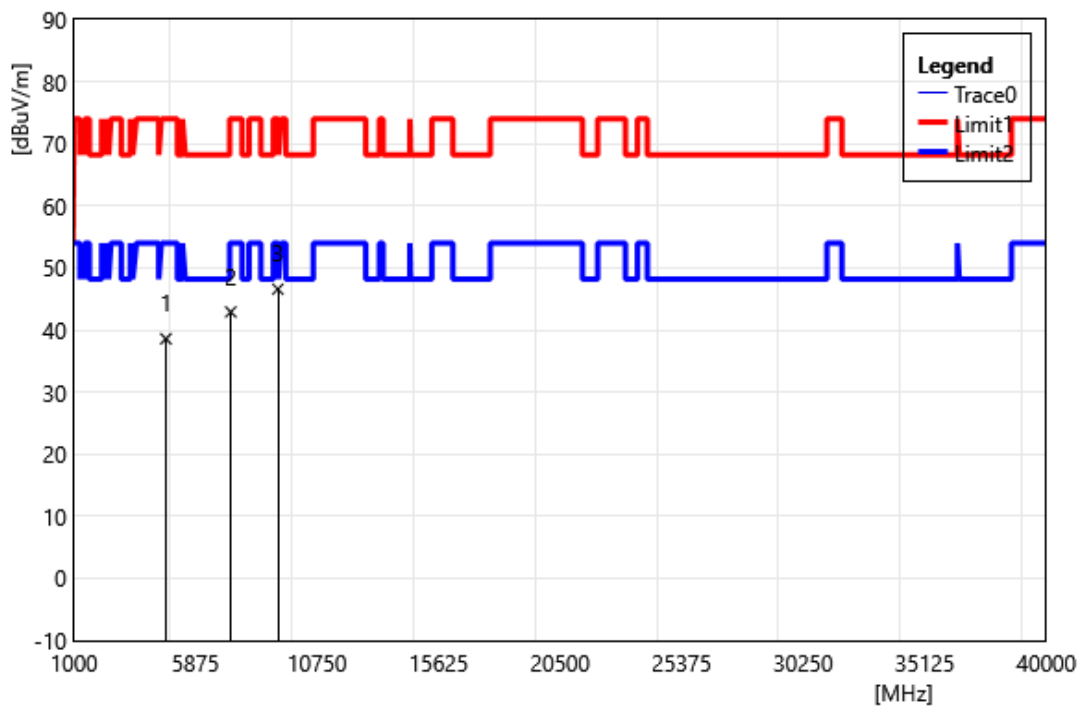

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4689.00	40.81	-2.21	38.60	74.00	-35.40	PEAK
2	7290.00	37.56	5.36	42.93	74.00	-31.08	PEAK
3	9177.00	37.45	9.13	46.58	74.00	-27.42	PEAK


Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	Simultaneous Transmitting (WLAN 5 GHz + WLAN 2.4 GHz)		
Polarization:	Horizontal		
Remark:			

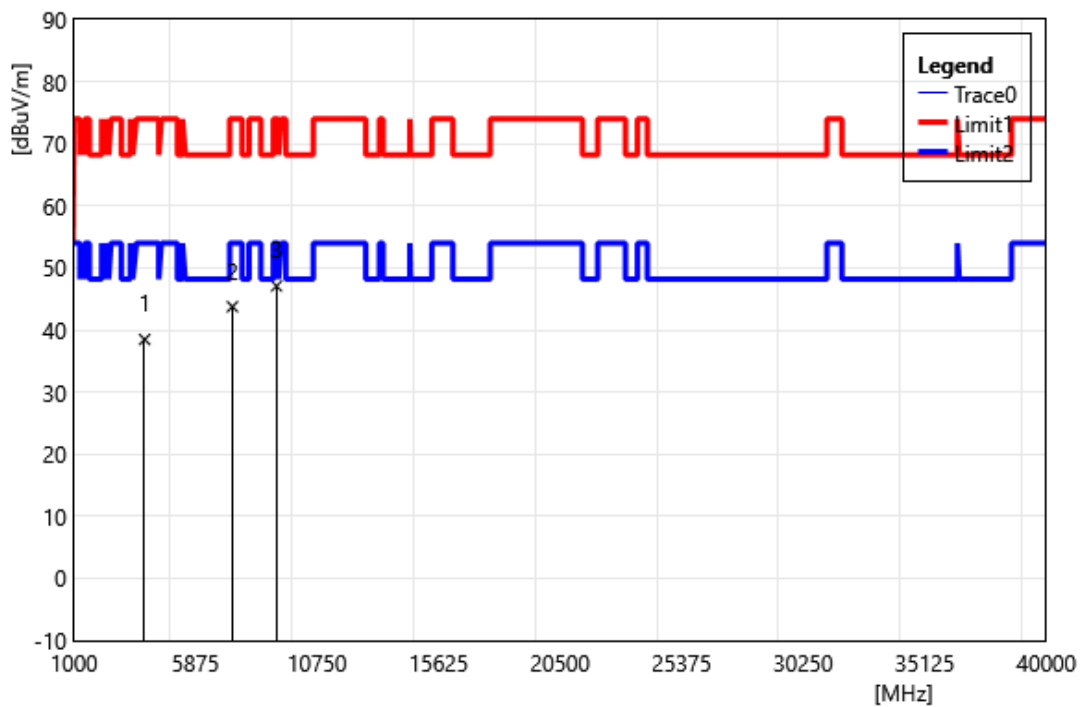

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	3839.00	43.12	-4.63	38.49	74.00	-35.52	PEAK
2	7358.00	38.25	5.51	43.76	74.00	-30.24	PEAK
3	9126.00	38.29	8.82	47.11	74.00	-26.89	PEAK


Band Edge

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5180 MHz		
Polarization:	Vertical		
Remark:			

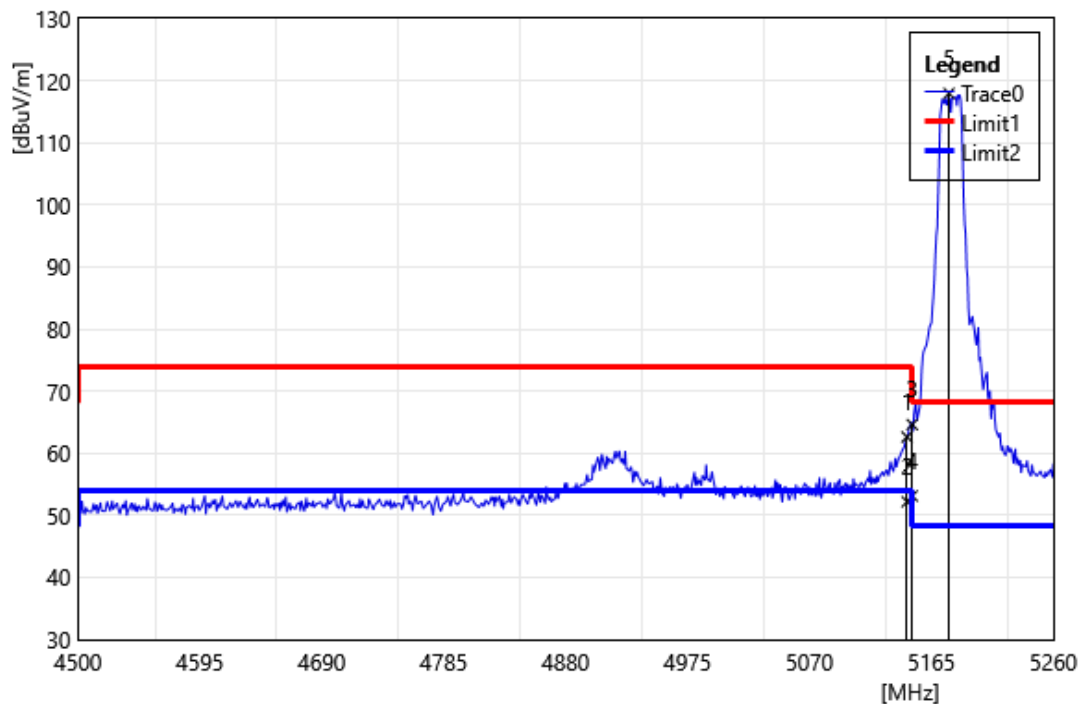


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.00	59.98	2.64	62.62	74.00	-11.38	PEAK
2	5146.00	49.55	2.64	52.19	54.00	-1.81	AVG
3	5150.00	61.99	2.64	64.63	74.00	-9.37	PEAK
4	5150.00	50.49	2.64	53.13	54.00	-0.87	AVG
5	5178.68	115.49	2.47	117.96	68.20	49.76	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5180 MHz		
Polarization:	Horizontal		
Remark:			

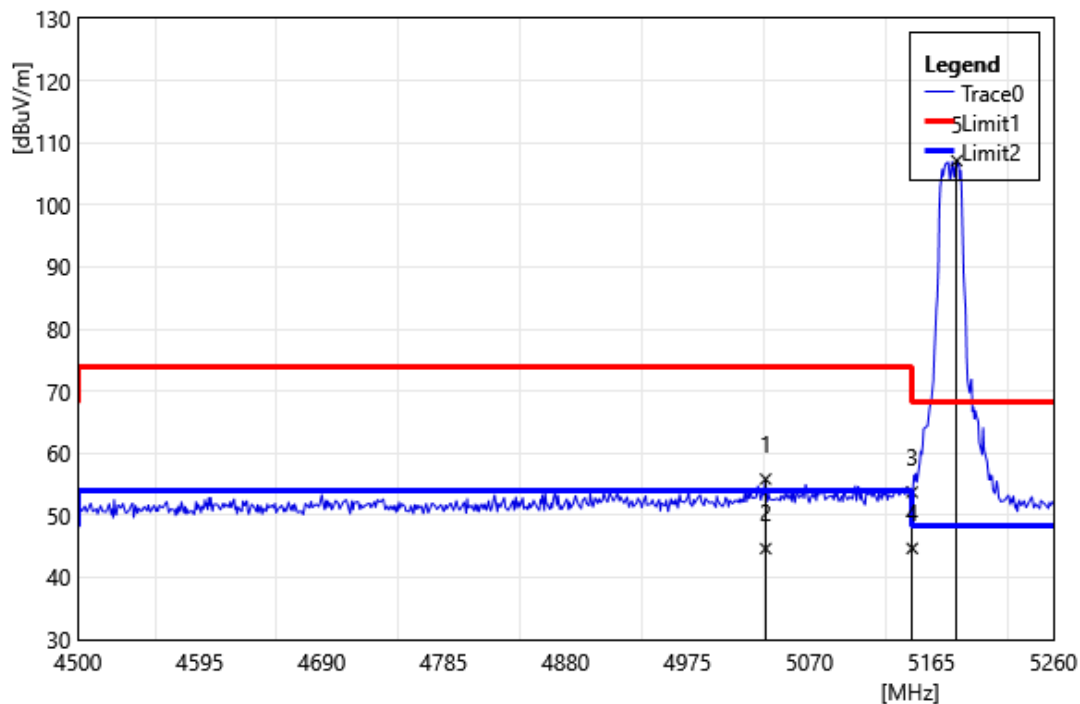


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5035.80	53.47	2.37	55.84	74.00	-18.16	PEAK
2	5035.80	42.27	2.37	44.64	54.00	-9.36	AVG
3	5150.00	51.09	2.64	53.73	74.00	-20.27	PEAK
4	5150.00	42.04	2.64	44.68	54.00	-9.32	AVG
5	5184.76	104.67	2.44	107.11	68.20	38.91	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5200 MHz		
Polarization:	Vertical		
Remark:			

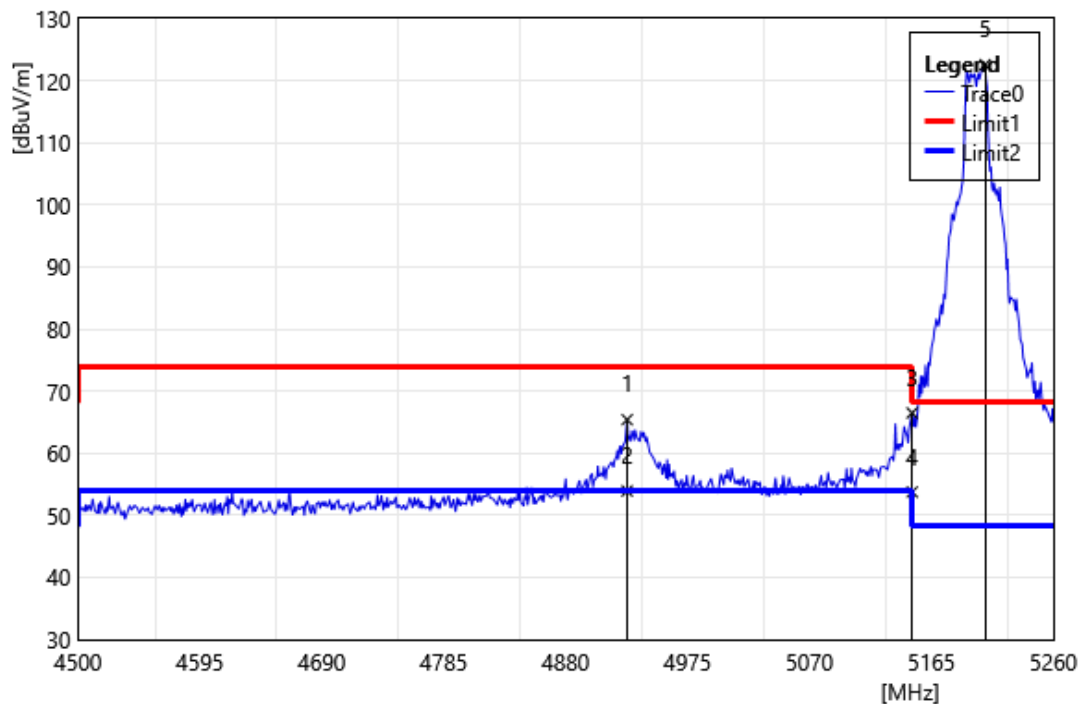

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4927.88	63.52	1.89	65.41	74.00	-8.59	PEAK
2	4927.88	52.05	1.89	53.94	54.00	-0.06	AVG
3	5150.00	63.85	2.64	66.49	74.00	-7.51	PEAK
4	5150.00	51.13	2.64	53.77	54.00	-0.23	AVG
5	5206.80	120.28	2.30	122.58	68.20	54.38	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5200 MHz		
Polarization:	Horizontal		
Remark:			

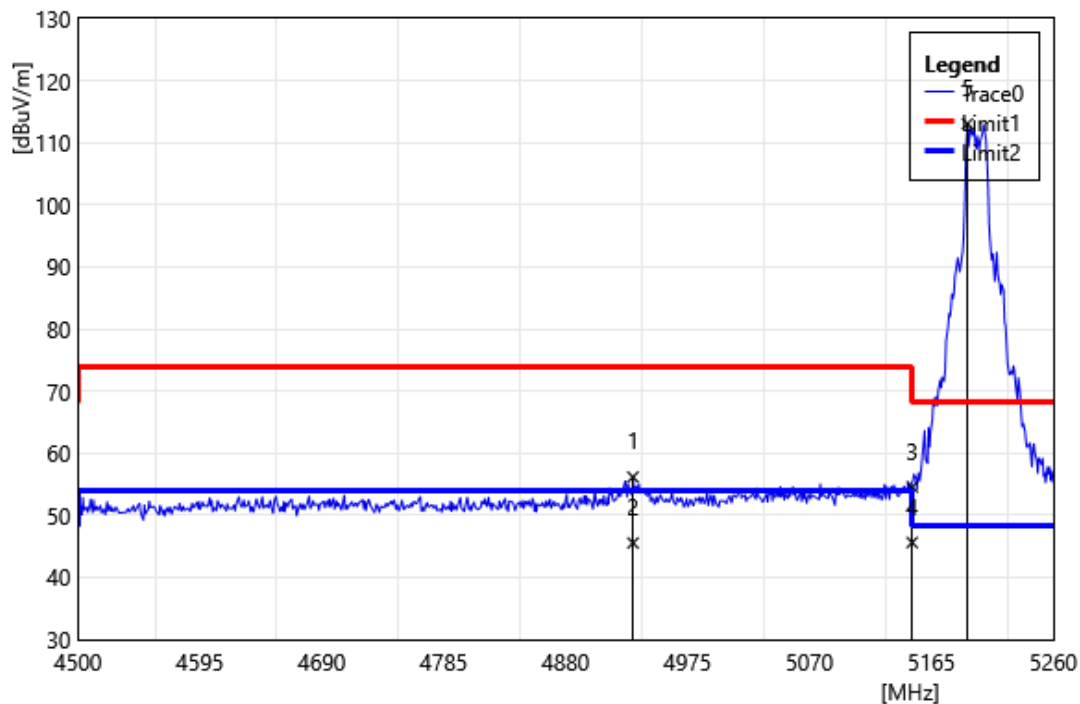

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4932.44	54.29	1.88	56.17	74.00	-17.83	PEAK
2	4932.44	43.67	1.88	45.55	54.00	-8.45	AVG
3	5150.00	51.94	2.64	54.57	74.00	-19.43	PEAK
4	5150.00	42.98	2.64	45.62	54.00	-8.38	AVG
5	5193.12	110.67	2.39	113.06	68.20	44.86	PEAK