



Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5240 MHz		
Polarization:	Vertical		
Remark:			

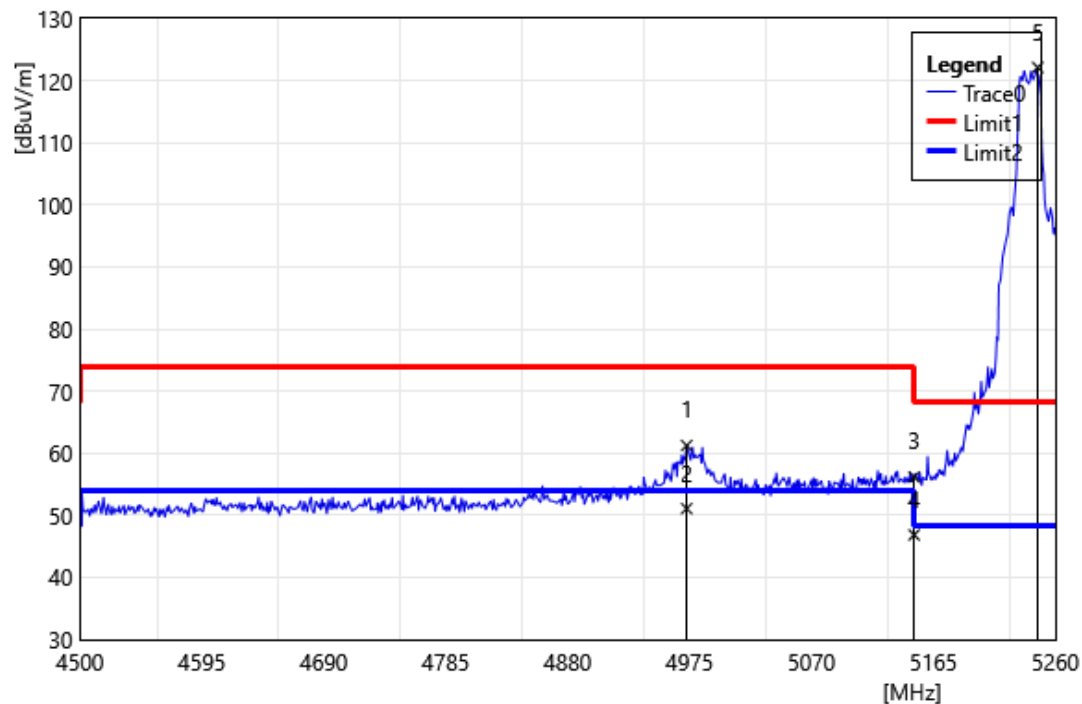


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4972.72	59.34	1.92	61.26	74.00	-12.74	PEAK
2	4972.72	49.17	1.92	51.09	54.00	-2.91	AVG
3	5150.00	53.54	2.64	56.18	74.00	-17.82	PEAK
4	5150.00	44.21	2.64	46.85	54.00	-7.15	AVG
5	5246.32	120.14	1.99	122.13	68.20	53.93	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5240 MHz		
Polarization:	Horizontal		
Remark:			

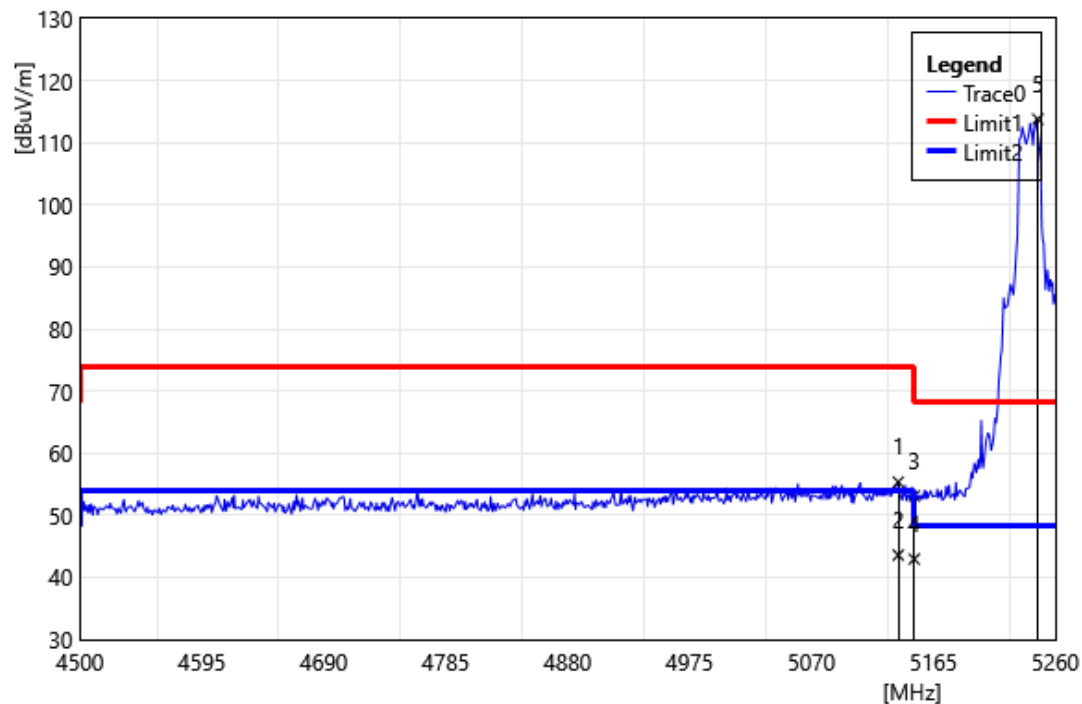


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5137.64	52.70	2.66	55.36	74.00	-18.64	PEAK
2	5137.64	40.94	2.66	43.60	54.00	-10.40	AVG
3	5150.00	50.47	2.64	53.11	74.00	-20.89	PEAK
4	5150.00	40.32	2.64	42.96	54.00	-11.04	AVG
5	5246.32	111.82	1.99	113.81	68.20	45.61	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5260 MHz		
Polarization:	Vertical		
Remark:			

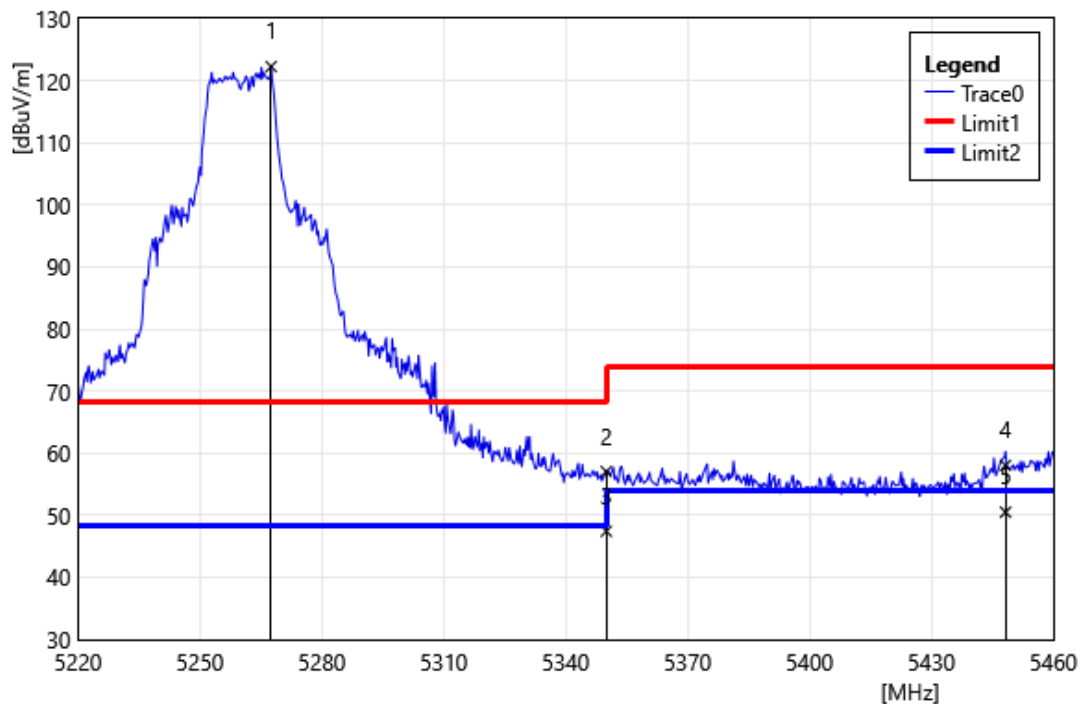


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5267.52	120.38	1.90	122.28	68.20	54.08	PEAK
2	5350.00	54.96	2.09	57.05	74.00	-16.95	PEAK
3	5350.00	45.35	2.09	47.44	54.00	-6.56	AVG
4	5448.24	55.36	2.70	58.06	74.00	-15.94	PEAK
5	5448.24	47.82	2.70	50.52	54.00	-3.48	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5260 MHz		
Polarization:	Horizontal		
Remark:			

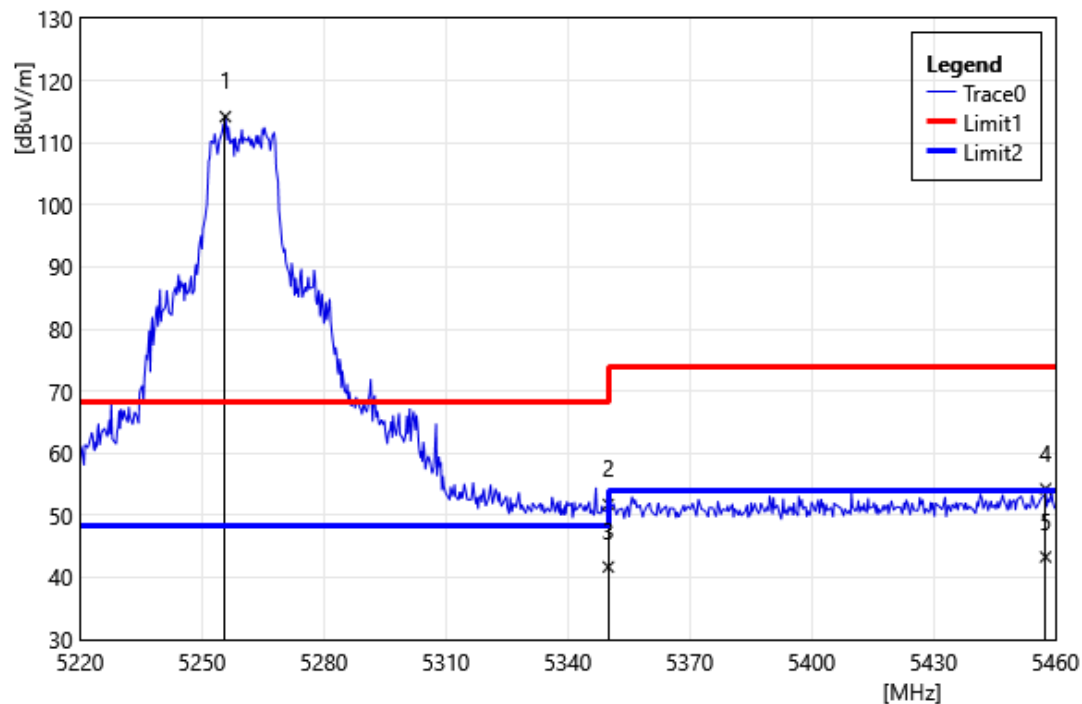


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5255.76	112.27	1.94	114.21	68.20	46.01	PEAK
2	5350.00	49.67	2.09	51.76	74.00	-22.24	PEAK
3	5350.00	39.60	2.09	41.69	54.00	-12.31	AVG
4	5457.60	51.56	2.71	54.27	74.00	-19.73	PEAK
5	5457.60	40.58	2.71	43.29	54.00	-10.71	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5280 MHz		
Polarization:	Vertical		
Remark:			

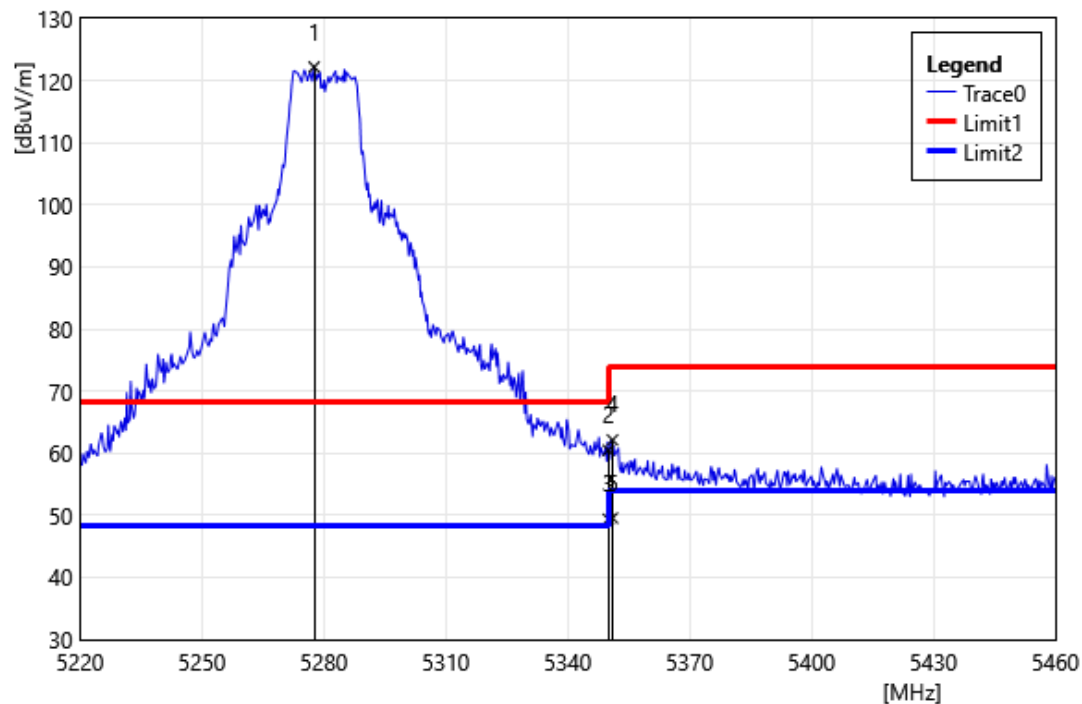


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5277.60	120.34	1.86	122.20	68.20	54.00	PEAK
2	5350.00	58.40	2.09	60.48	74.00	-13.52	PEAK
3	5350.00	47.30	2.09	49.39	54.00	-4.61	AVG
4	5351.04	60.06	2.09	62.15	74.00	-11.85	PEAK
5	5351.04	47.47	2.09	49.56	54.00	-4.44	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5280 MHz		
Polarization:	Horizontal		
Remark:			

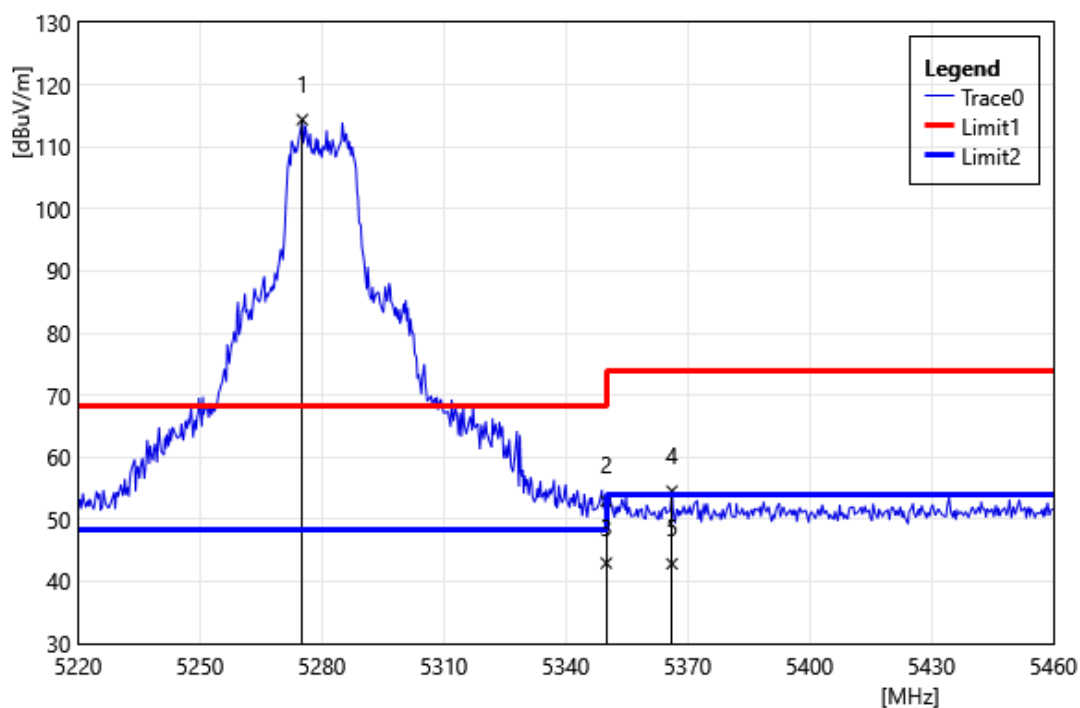


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5275.20	112.49	1.87	114.36	68.20	46.16	PEAK
2	5350.00	50.83	2.09	52.92	74.00	-21.08	PEAK
3	5350.00	40.87	2.09	42.96	54.00	-11.04	AVG
4	5366.16	52.35	2.19	54.54	74.00	-19.46	PEAK
5	5366.16	40.65	2.19	42.84	54.00	-11.16	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5320 MHz		
Polarization:	Vertical		
Remark:			

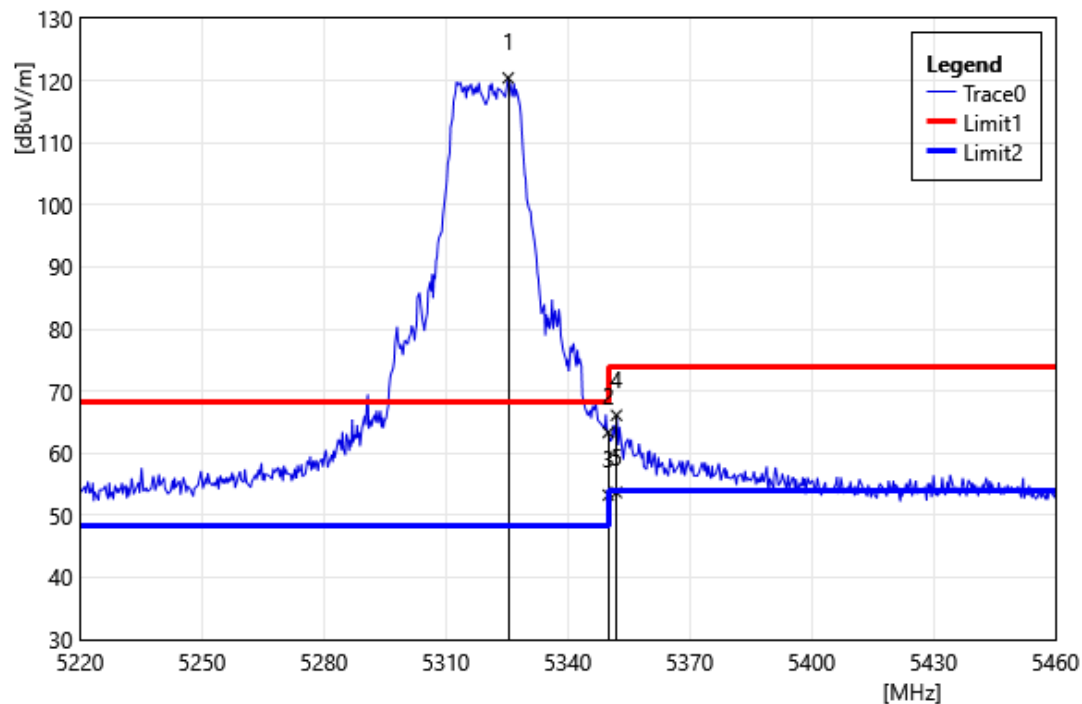


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5325.36	118.52	1.93	120.45	68.20	52.25	PEAK
2	5350.00	61.26	2.09	63.35	74.00	-10.65	PEAK
3	5350.00	51.17	2.09	53.26	54.00	-0.74	AVG
4	5352.00	64.02	2.10	66.12	74.00	-7.88	PEAK
5	5352.00	51.60	2.10	53.70	54.00	-0.30	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5320 MHz		
Polarization:	Horizontal		
Remark:			

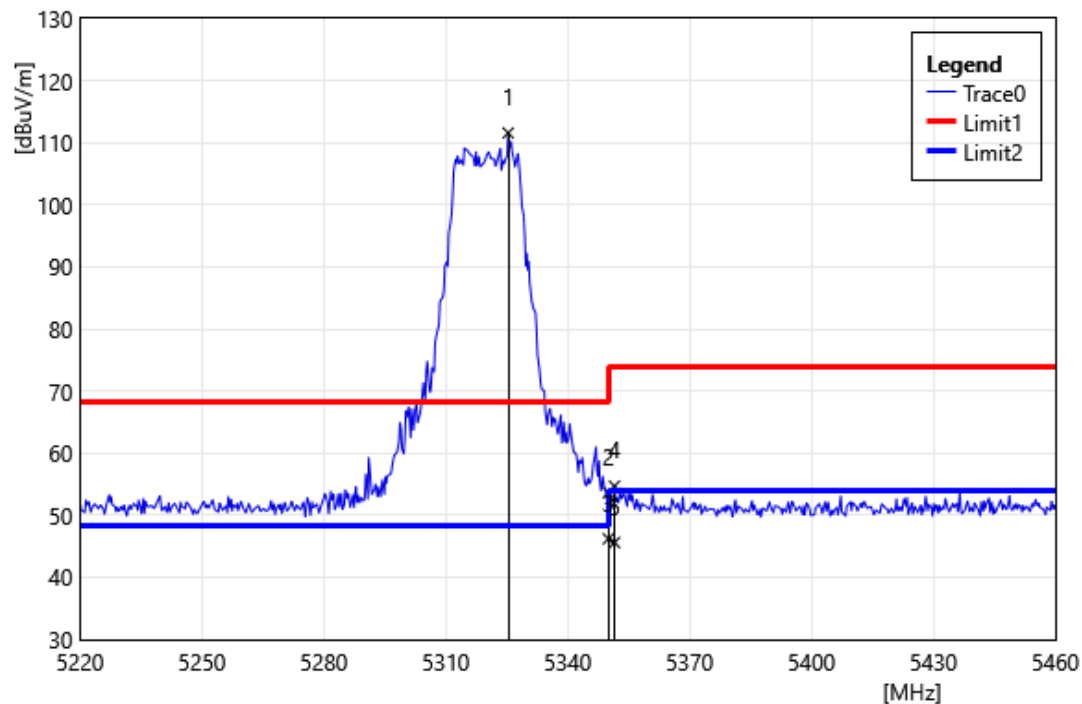


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5325.36	109.67	1.93	111.60	68.20	43.40	PEAK
2	5350.00	51.58	2.09	53.67	74.00	-20.33	PEAK
3	5350.00	44.14	2.09	46.23	54.00	-7.77	AVG
4	5351.52	52.61	2.10	54.71	74.00	-19.29	PEAK
5	5351.52	43.53	2.10	45.63	54.00	-8.37	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5500 MHz		
Polarization:	Vertical		
Remark:			

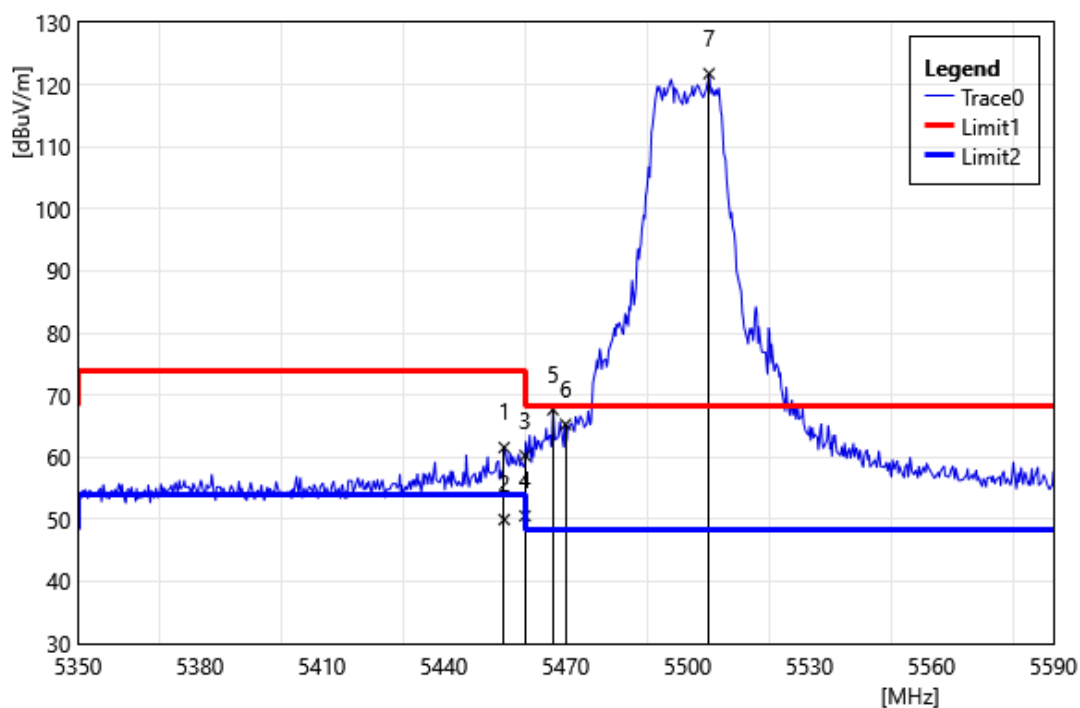


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5454.88	58.86	2.71	61.57	74.00	-12.43	PEAK
2	5454.88	47.25	2.71	49.96	54.00	-4.04	AVG
3	5460.00	57.56	2.71	60.27	74.00	-13.73	PEAK
4	5460.00	47.86	2.71	50.57	54.00	-3.43	AVG
5	5466.88	64.94	2.72	67.66	68.20	-0.54	PEAK
6	5470.00	62.56	2.72	65.28	68.20	-2.92	PEAK
7	5505.28	119.06	2.72	121.78	68.20	53.58	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5500 MHz		
Polarization:	Horizontal		
Remark:			

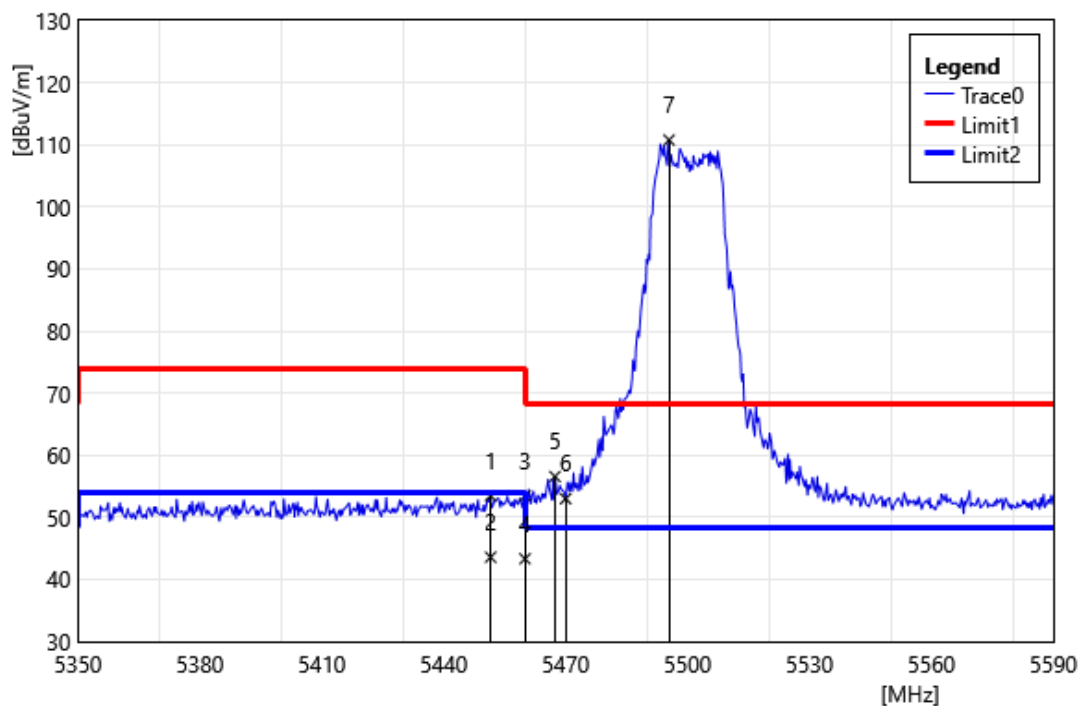


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5451.52	50.76	2.71	53.47	74.00	-20.53	PEAK
2	5451.52	40.87	2.71	43.58	54.00	-10.42	AVG
3	5460.00	50.77	2.71	53.48	74.00	-20.52	PEAK
4	5460.00	40.62	2.71	43.33	54.00	-10.67	AVG
5	5467.36	53.86	2.72	56.58	68.20	-11.62	PEAK
6	5470.00	50.29	2.72	53.01	68.20	-15.19	PEAK
7	5495.44	108.05	2.72	110.77	68.20	42.57	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5560 MHz		
Polarization:	Vertical		
Remark:			

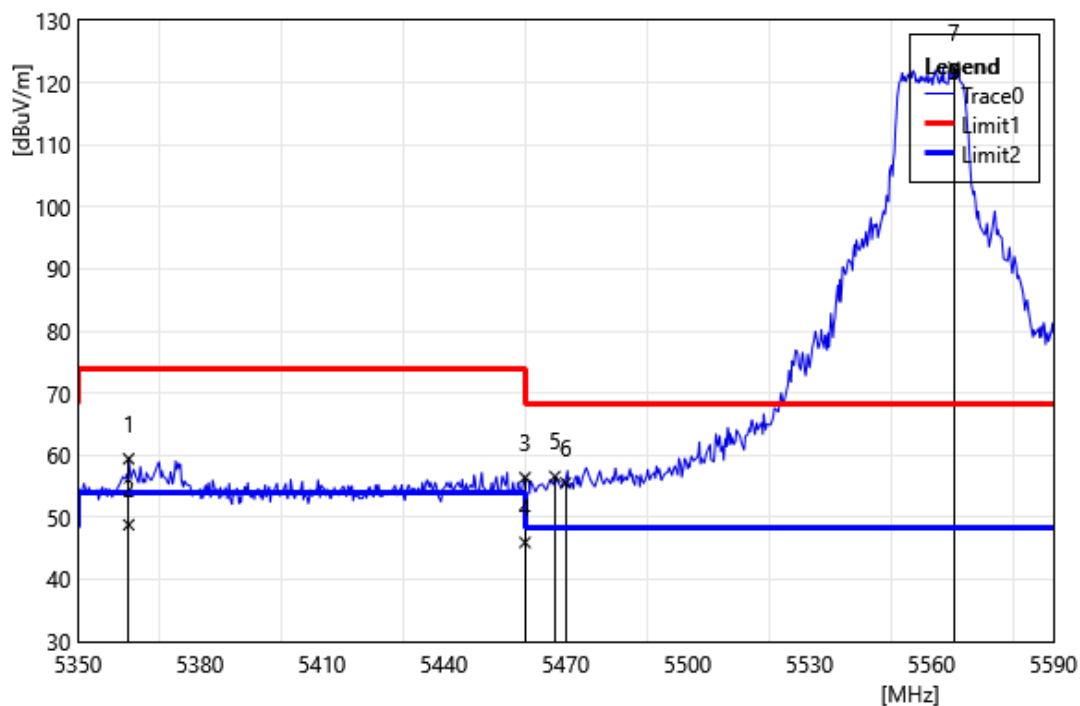


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5362.48	57.26	2.17	59.43	74.00	-14.57	PEAK
2	5362.48	46.63	2.17	48.80	54.00	-5.20	AVG
3	5460.00	53.68	2.71	56.39	74.00	-17.61	PEAK
4	5460.00	43.25	2.71	45.96	54.00	-8.04	AVG
5	5467.36	53.87	2.72	56.59	68.20	-11.61	PEAK
6	5470.00	52.83	2.72	55.55	68.20	-12.65	PEAK
7	5565.52	119.78	2.68	122.47	68.20	54.27	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5560 MHz		
Polarization:	Horizontal		
Remark:			

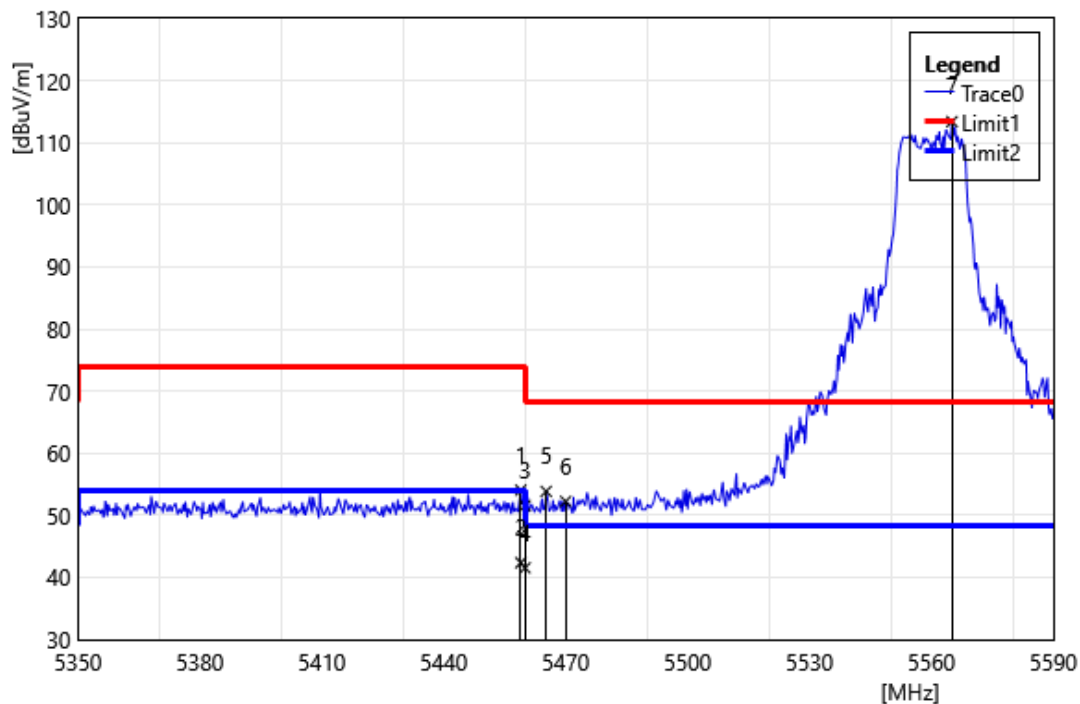


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.96	51.34	2.71	54.06	74.00	-19.95	PEAK
2	5458.96	39.66	2.71	42.37	54.00	-11.63	AVG
3	5460.00	48.85	2.71	51.56	74.00	-22.44	PEAK
4	5460.00	38.84	2.71	41.55	54.00	-12.45	AVG
5	5465.20	51.13	2.72	53.85	68.20	-14.35	PEAK
6	5470.00	49.52	2.72	52.24	68.20	-15.96	PEAK
7	5565.04	110.73	2.68	113.41	68.20	45.21	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5700 MHz		
Polarization:	Vertical		
Remark:			

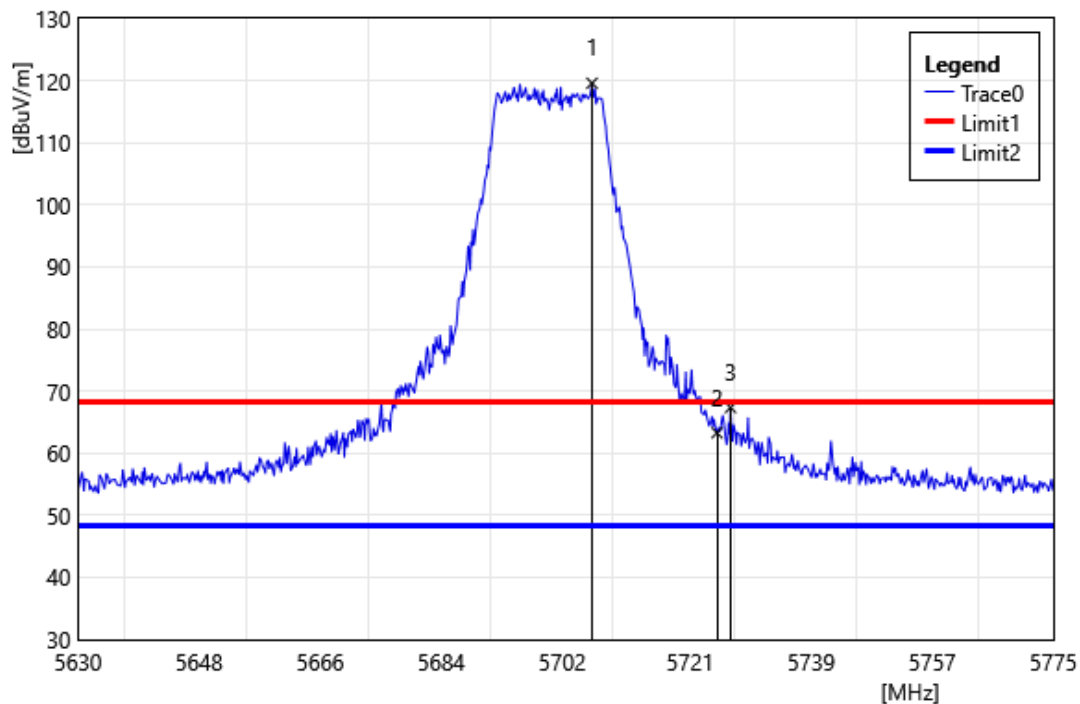


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5706.42	117.05	2.54	119.59	68.20	51.39	PEAK
2	5725.00	60.57	2.72	63.29	68.20	-4.91	PEAK
3	5727.01	64.63	2.74	67.37	68.20	-0.83	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5700 MHz		
Polarization:	Horizontal		
Remark:			

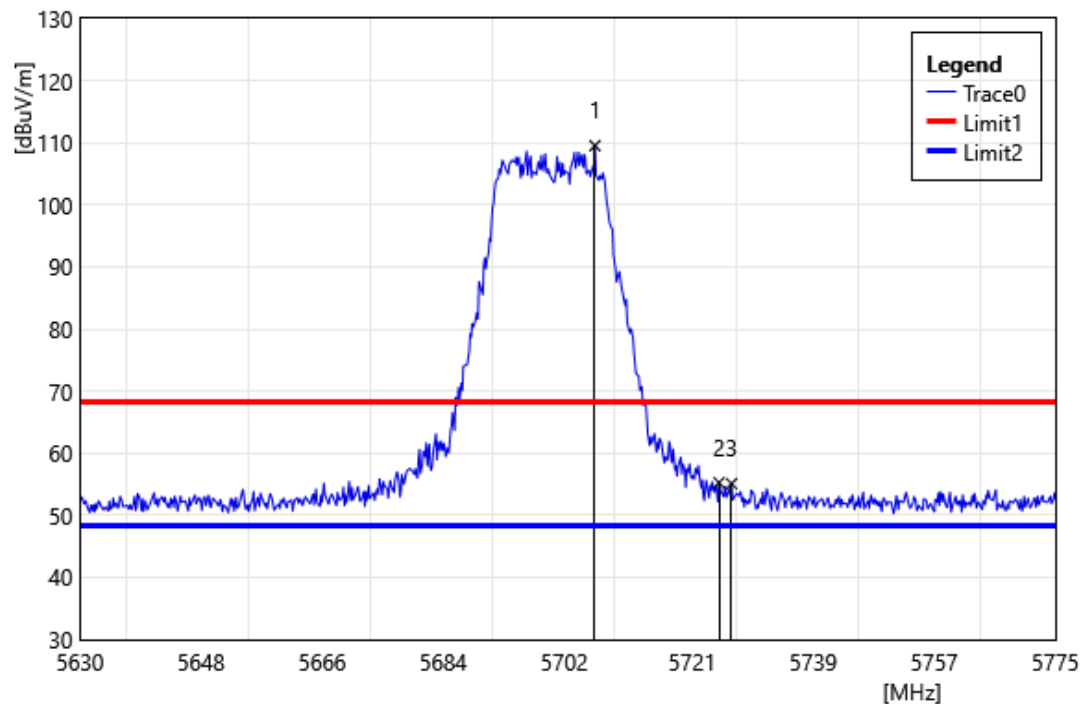


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5706.56	107.00	2.54	109.54	68.20	41.34	PEAK
2	5725.00	52.53	2.72	55.25	68.20	-12.95	PEAK
3	5726.86	52.36	2.74	55.10	68.20	-13.10	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5720 MHz		
Polarization:	Vertical		
Remark:			

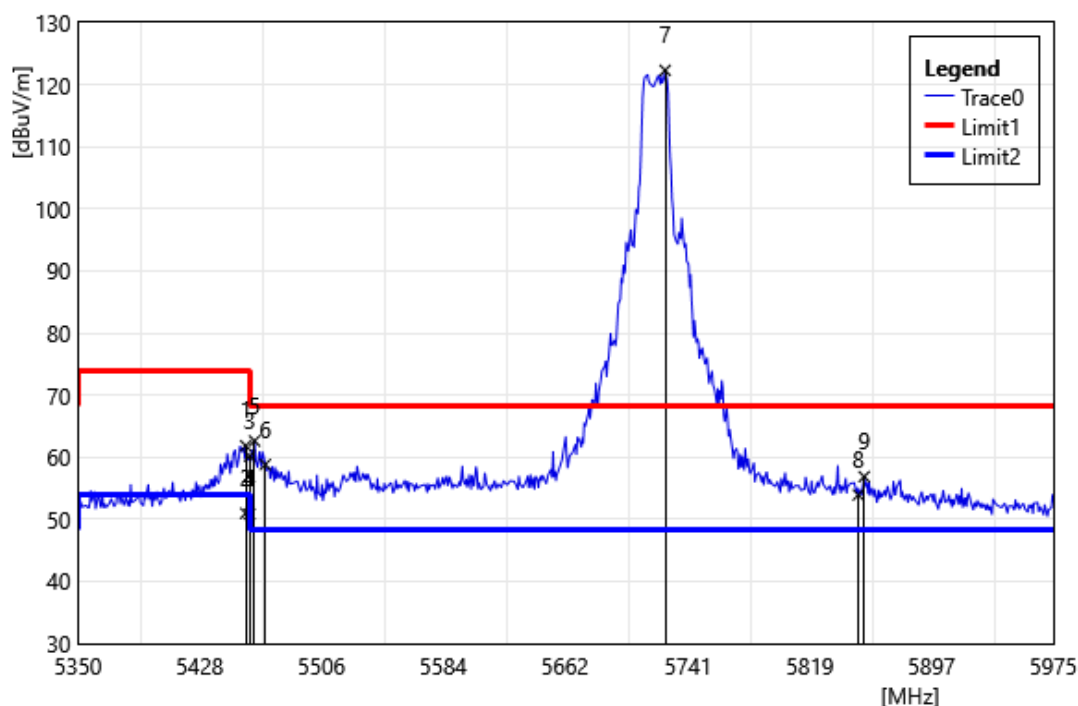


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5457.50	59.14	2.71	61.85	74.00	-12.15	PEAK
2	5457.50	48.26	2.71	50.97	54.00	-3.03	AVG
3	5460.00	57.49	2.71	60.20	74.00	-13.80	PEAK
4	5460.00	48.15	2.71	50.86	54.00	-3.14	AVG
5	5463.13	59.90	2.72	62.63	68.20	-5.58	PEAK
6	5470.00	56.10	2.72	58.82	68.20	-9.38	PEAK
7	5726.25	119.58	2.74	122.32	68.20	54.12	PEAK
8	5850.00	50.69	3.24	53.93	68.20	-14.27	PEAK
9	5853.75	53.62	3.25	56.87	68.20	-11.33	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5720 MHz		
Polarization:	Horizontal		
Remark:			

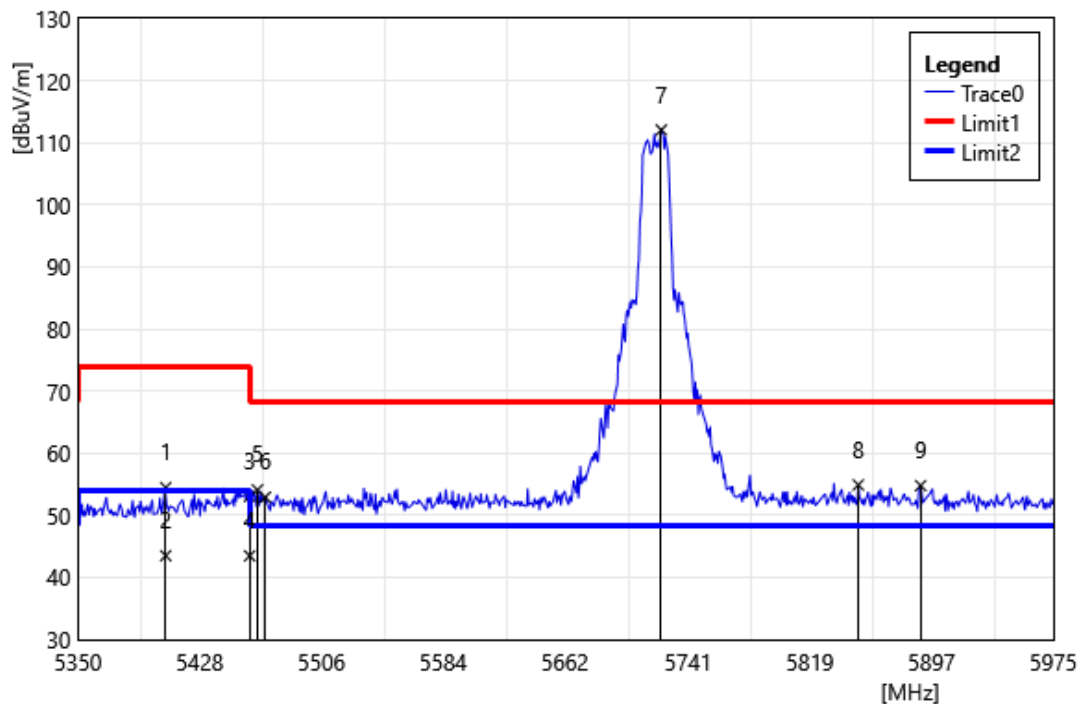


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5406.25	52.05	2.44	54.49	74.00	-19.51	PEAK
2	5406.25	41.05	2.44	43.49	54.00	-10.51	AVG
3	5460.00	50.34	2.71	53.05	74.00	-20.95	PEAK
4	5460.00	40.77	2.71	43.48	54.00	-10.52	AVG
5	5465.00	51.40	2.72	54.12	68.20	-14.08	PEAK
6	5470.00	50.20	2.72	52.92	68.20	-15.28	PEAK
7	5723.75	109.36	2.71	112.07	68.20	43.87	PEAK
8	5850.00	51.65	3.24	54.90	68.20	-13.30	PEAK
9	5890.00	51.47	3.32	54.79	68.20	-13.41	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5745 MHz		
Polarization:	Vertical		
Remark:			

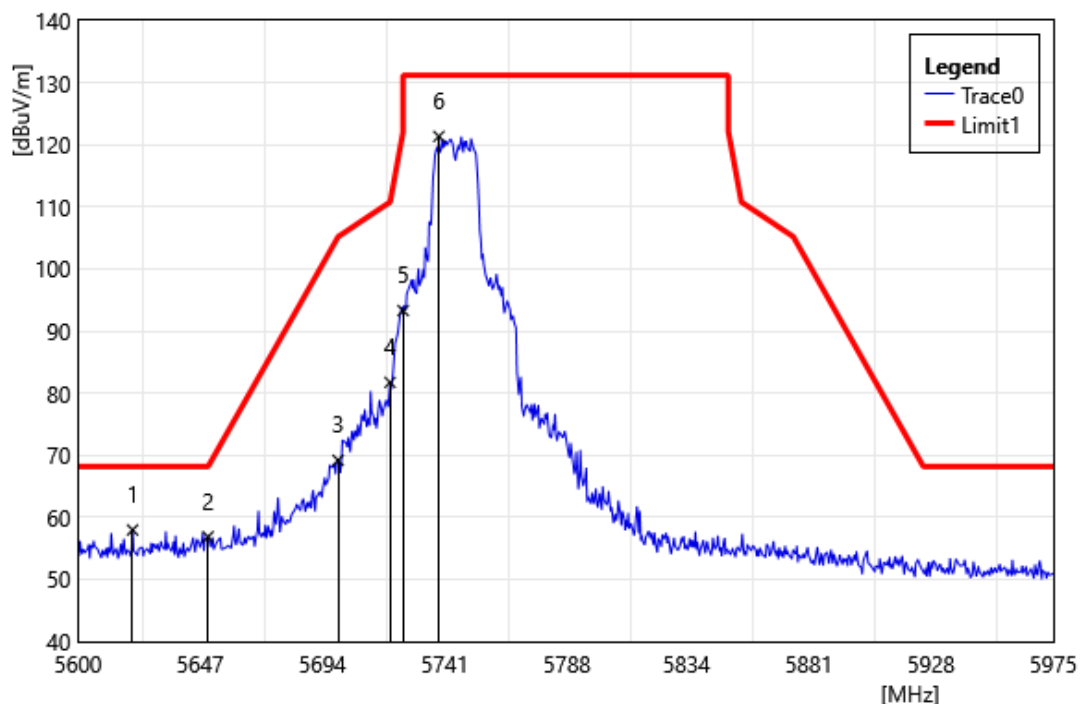


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5621.00	55.41	2.56	57.97	68.20	-10.23	PEAK
2	5650.00	54.38	2.49	56.87	68.20	-11.33	PEAK
3	5700.00	66.70	2.48	69.18	105.20	-36.02	PEAK
4	5720.00	79.07	2.67	81.74	110.80	-29.06	PEAK
5	5725.00	90.58	2.72	93.30	122.20	-28.90	PEAK
6	5738.75	118.49	2.86	121.35	131.20	-9.85	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5745 MHz		
Polarization:	Horizontal		
Remark:			

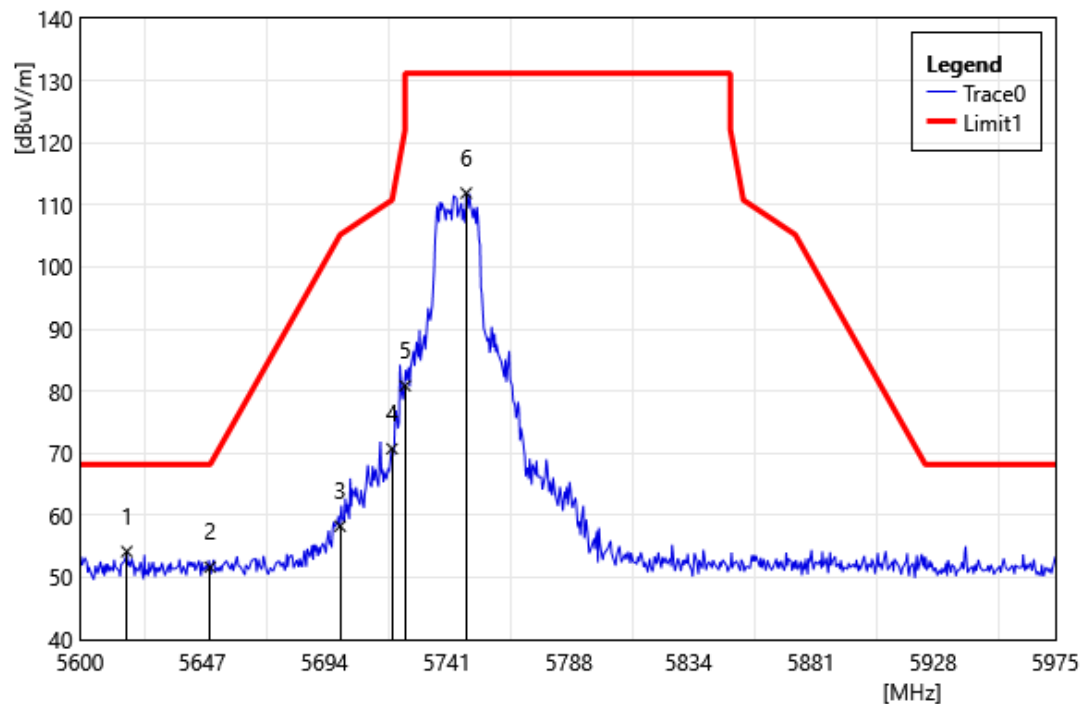


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5618.00	51.60	2.56	54.16	68.20	-14.04	PEAK
2	5650.00	49.16	2.49	51.65	68.20	-16.55	PEAK
3	5700.00	55.78	2.48	58.26	105.20	-46.94	PEAK
4	5720.00	68.05	2.67	70.72	110.80	-40.08	PEAK
5	5725.00	78.14	2.72	80.86	122.20	-41.34	PEAK
6	5748.50	108.96	2.95	111.91	131.20	-19.29	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5785 MHz		
Polarization:	Vertical		
Remark:			

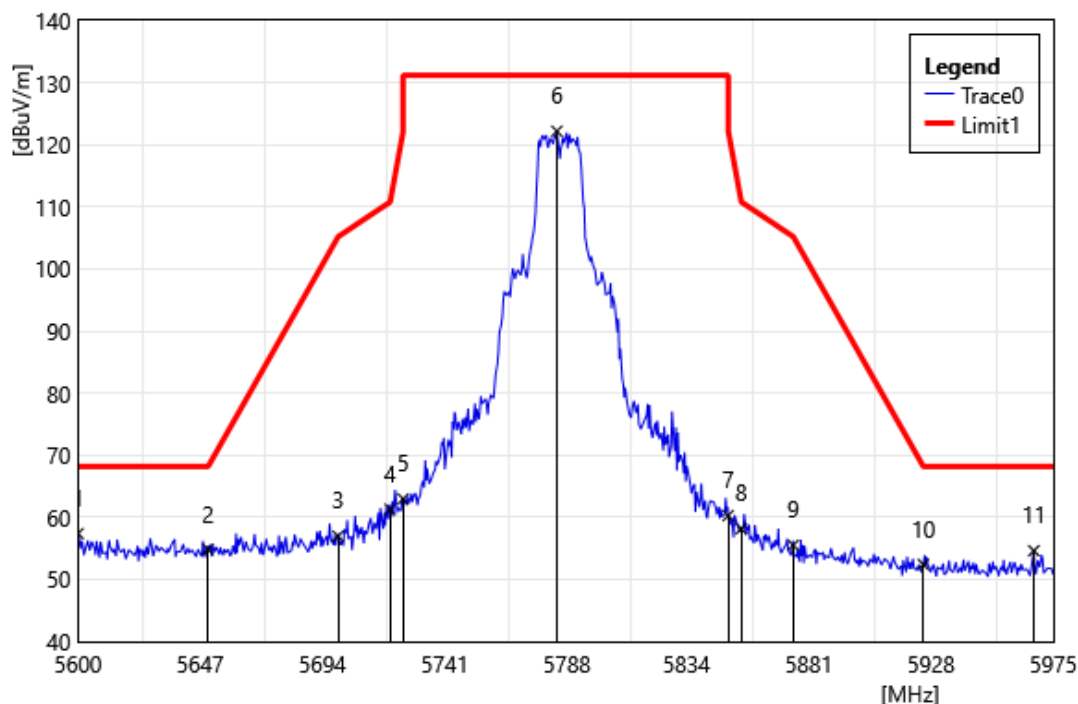


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5600.00	54.78	2.60	57.39	68.20	-10.81	PEAK
2	5650.00	52.34	2.49	54.83	68.20	-13.37	PEAK
3	5700.00	54.48	2.48	56.96	105.20	-48.24	PEAK
4	5720.00	58.63	2.67	61.30	110.80	-49.50	PEAK
5	5725.00	60.25	2.72	62.97	122.20	-59.23	PEAK
6	5784.13	119.09	3.10	122.19	131.20	-9.01	PEAK
7	5850.00	57.04	3.24	60.28	122.20	-61.92	PEAK
8	5855.00	54.92	3.25	58.17	110.80	-52.63	PEAK
9	5875.00	52.22	3.29	55.51	105.20	-49.69	PEAK
10	5925.00	49.23	3.18	52.41	68.20	-15.79	PEAK
11	5967.50	51.57	3.05	54.62	68.20	-13.58	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5785 MHz		
Polarization:	Horizontal		
Remark:			

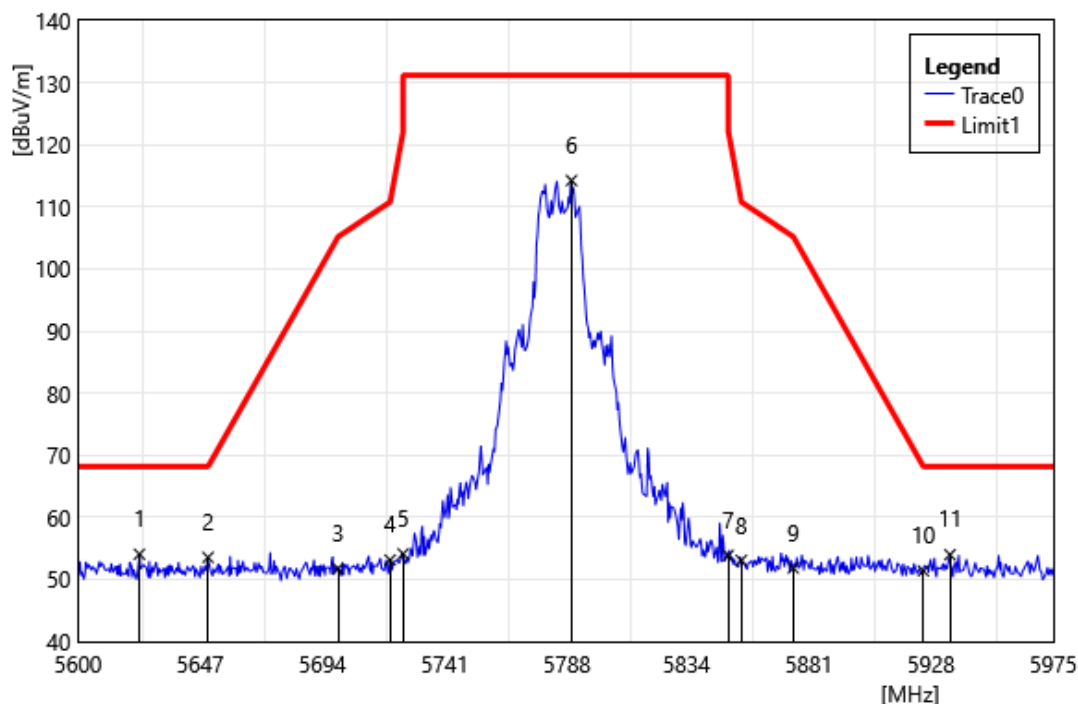


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5623.63	51.51	2.55	54.06	68.20	-14.14	PEAK
2	5650.00	51.06	2.49	53.55	68.20	-14.65	PEAK
3	5700.00	49.27	2.48	51.75	105.20	-53.45	PEAK
4	5720.00	50.47	2.67	53.14	110.80	-57.66	PEAK
5	5725.00	51.41	2.72	54.13	122.20	-68.07	PEAK
6	5789.75	111.13	3.12	114.25	131.20	-16.95	PEAK
7	5850.00	50.62	3.24	53.87	122.20	-68.33	PEAK
8	5855.00	49.81	3.25	53.06	110.80	-57.74	PEAK
9	5875.00	48.55	3.29	51.84	105.20	-53.36	PEAK
10	5925.00	48.22	3.18	51.40	68.20	-16.80	PEAK
11	5935.25	50.87	3.11	53.98	68.20	-14.22	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5825 MHz		
Polarization:	Vertical		
Remark:			

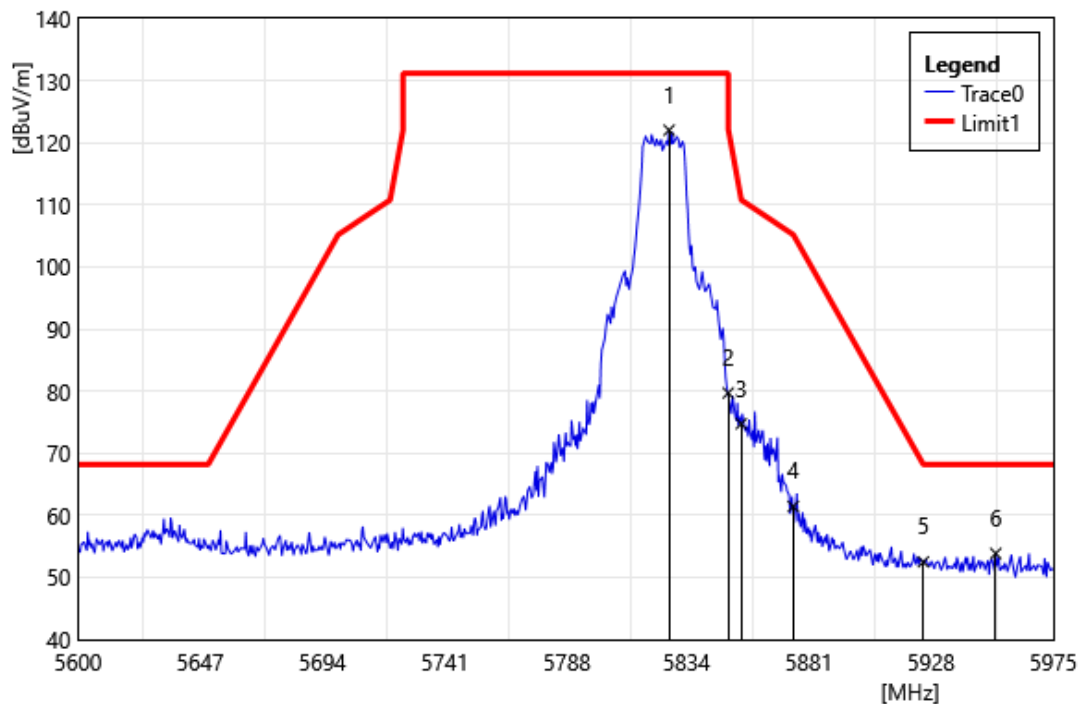


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5827.25	118.83	3.20	122.03	131.20	-9.17	PEAK
2	5850.00	76.47	3.24	79.72	122.20	-42.48	PEAK
3	5855.00	71.50	3.25	74.75	110.80	-36.05	PEAK
4	5875.00	58.15	3.29	61.44	105.20	-43.76	PEAK
5	5925.00	49.33	3.18	52.51	68.20	-15.69	PEAK
6	5952.88	50.84	3.03	53.87	68.20	-14.34	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11a 5825 MHz		
Polarization:	Horizontal		
Remark:			

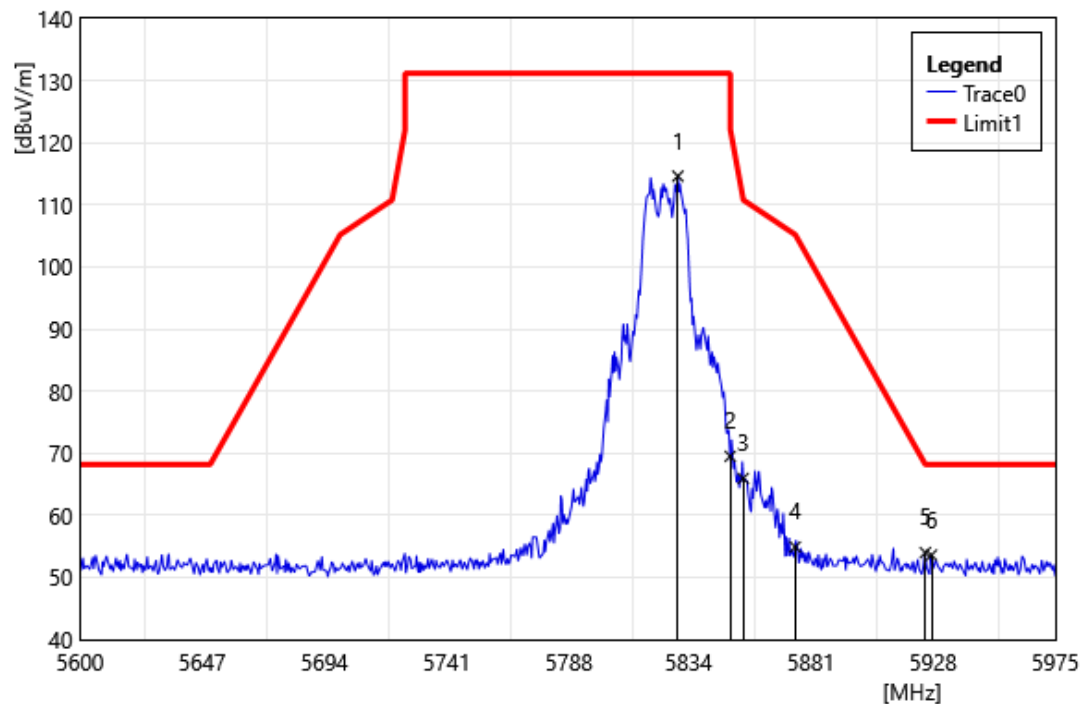


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5829.88	111.42	3.21	114.63	131.20	-16.57	PEAK
2	5850.00	66.27	3.24	69.51	122.20	-52.69	PEAK
3	5855.00	62.71	3.25	65.96	110.80	-44.84	PEAK
4	5875.00	51.62	3.29	54.91	105.20	-50.29	PEAK
5	5925.00	50.82	3.18	54.00	68.20	-14.20	PEAK
6	5927.38	50.44	3.16	53.60	68.20	-14.60	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT20 5180		
	MHz		
Polarization:	Vertical		
Remark:			

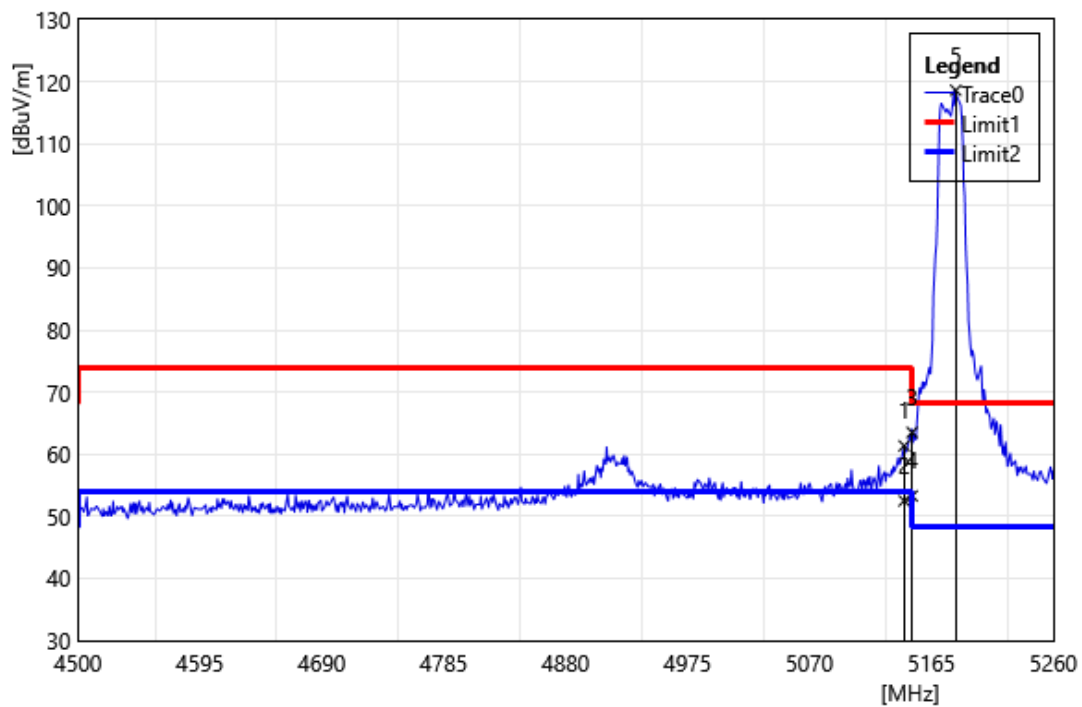


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5143.72	58.70	2.65	61.35	74.00	-12.65	PEAK
2	5143.72	49.85	2.65	52.50	54.00	-1.50	AVG
3	5150.00	60.87	2.64	63.51	74.00	-10.49	PEAK
4	5150.00	50.65	2.64	53.29	54.00	-0.71	AVG
5	5184.00	116.18	2.44	118.62	68.20	50.42	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT20 5180		
	MHz		
Polarization:	Horizontal		
Remark:			

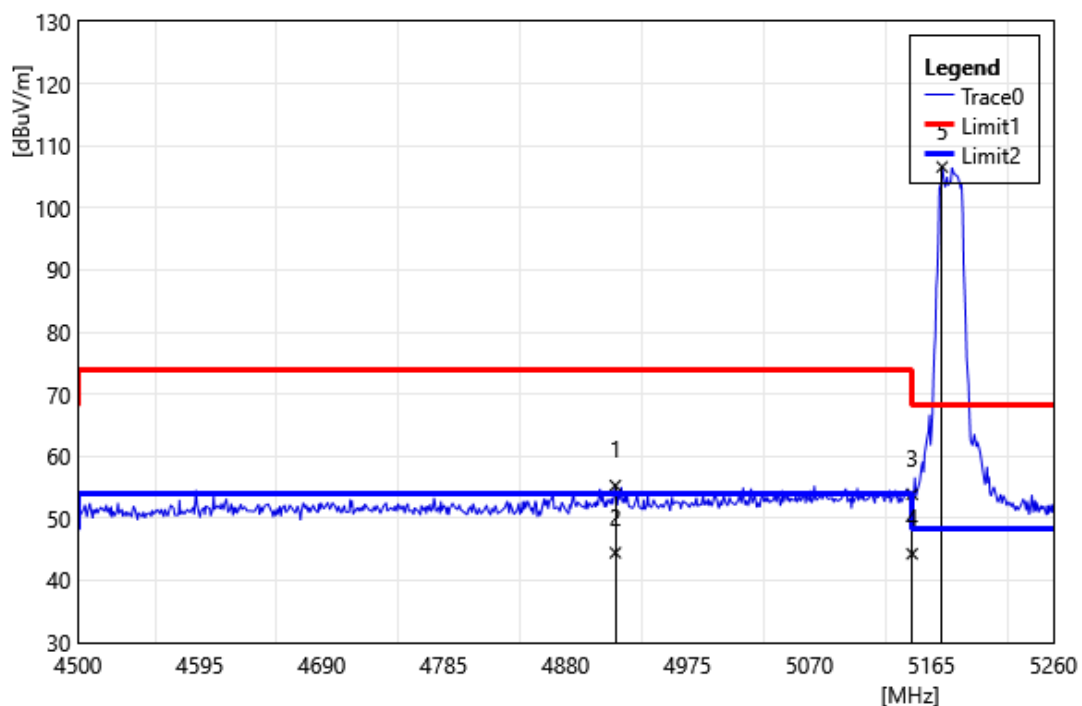


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4918.76	53.37	1.90	55.27	74.00	-18.73	PEAK
2	4918.76	42.56	1.90	44.46	54.00	-9.54	AVG
3	5150.00	51.23	2.64	53.87	74.00	-20.13	PEAK
4	5150.00	41.65	2.64	44.29	54.00	-9.71	AVG
5	5173.36	104.09	2.50	106.59	68.20	38.39	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT20 5200		
	MHz		
Polarization:	Vertical		
Remark:			

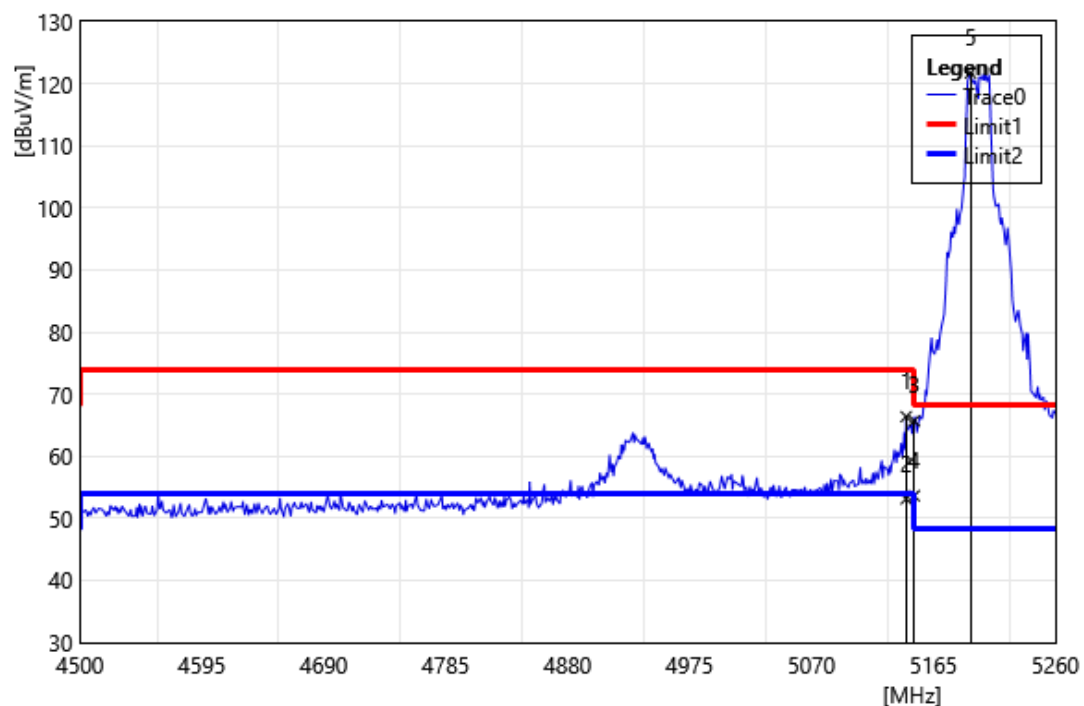


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5143.72	63.73	2.65	66.38	74.00	-7.62	PEAK
2	5143.72	50.49	2.65	53.14	54.00	-0.86	AVG
3	5150.00	63.06	2.64	65.70	74.00	-8.30	PEAK
4	5150.00	50.99	2.64	53.63	54.00	-0.37	AVG
5	5193.88	119.34	2.39	121.73	68.20	53.53	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT20 5200		
	MHz		
Polarization:	Horizontal		
Remark:			

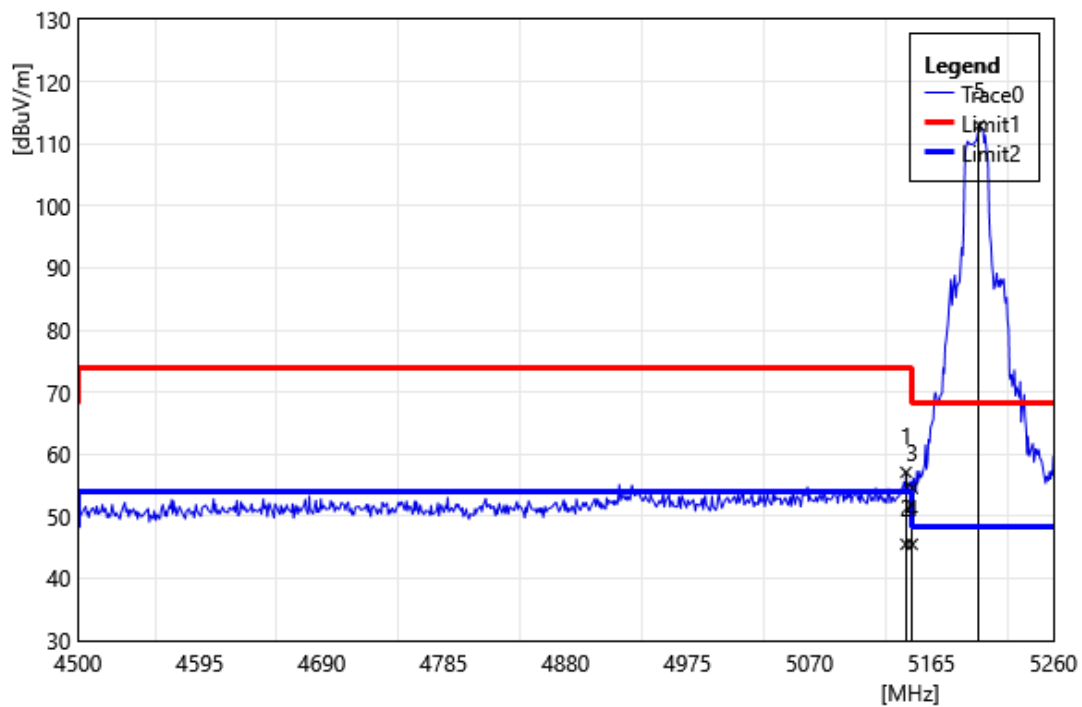


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5145.24	54.44	2.65	57.10	74.00	-16.91	PEAK
2	5145.24	42.86	2.65	45.51	54.00	-8.49	AVG
3	5150.00	51.91	2.64	54.54	74.00	-19.46	PEAK
4	5150.00	42.85	2.64	45.49	54.00	-8.51	AVG
5	5202.24	110.60	2.33	112.94	68.20	44.74	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT20 5240		
	MHz		
Polarization:	Vertical		
Remark:			

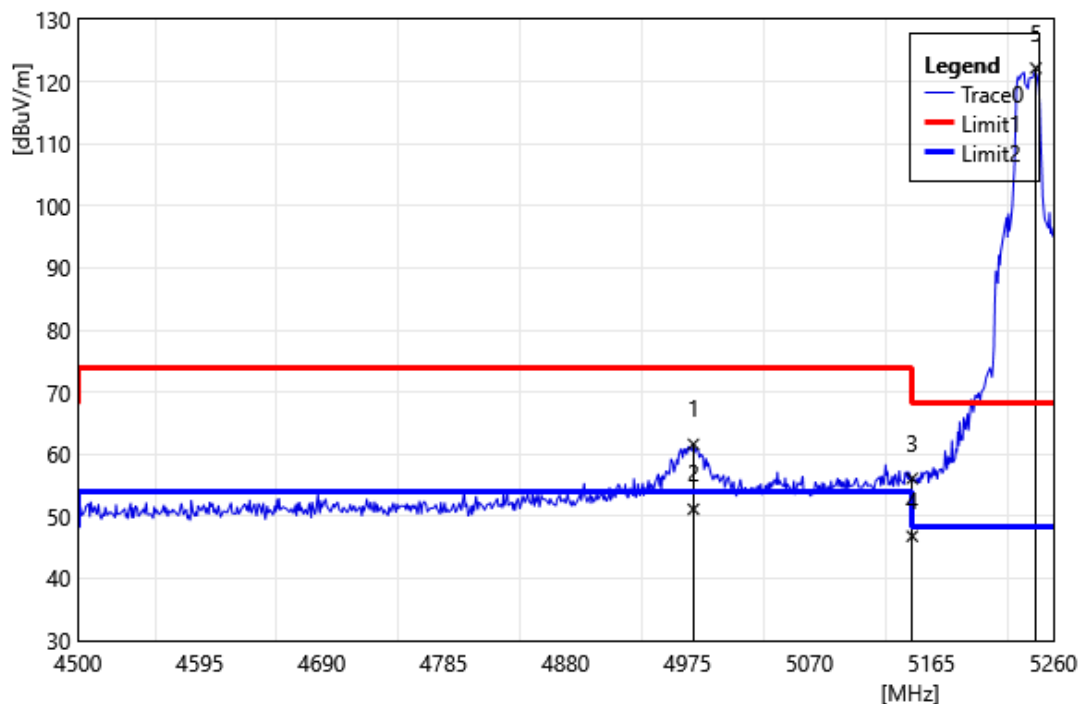


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4979.56	59.67	1.94	61.61	74.00	-12.39	PEAK
2	4979.56	49.21	1.94	51.15	54.00	-2.85	AVG
3	5150.00	53.47	2.64	56.11	74.00	-17.89	PEAK
4	5150.00	44.16	2.64	46.80	54.00	-7.20	AVG
5	5246.32	120.19	1.99	122.18	68.20	53.98	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT20 5240		
	MHz		
Polarization:	Horizontal		
Remark:			

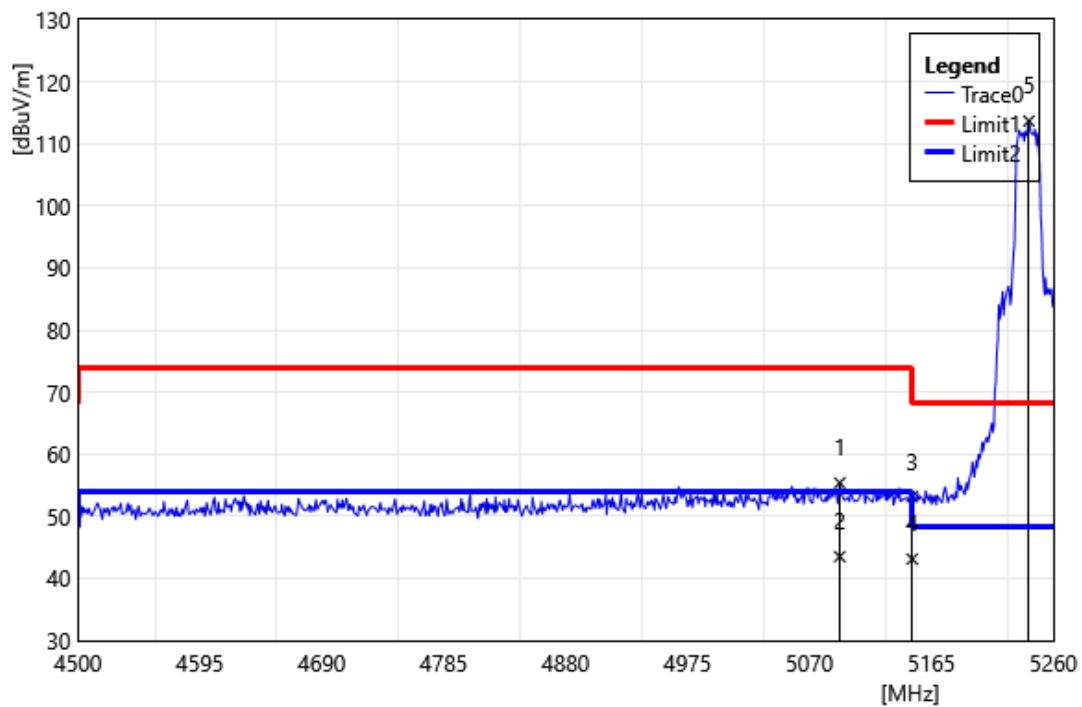


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5093.56	52.70	2.70	55.40	74.00	-18.60	PEAK
2	5093.56	40.81	2.70	43.51	54.00	-10.49	AVG
3	5150.00	50.54	2.64	53.18	74.00	-20.82	PEAK
4	5150.00	40.48	2.64	43.12	54.00	-10.88	AVG
5	5241.00	111.64	2.03	113.67	68.20	45.47	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT20 5260		
	MHz		
Polarization:	Vertical		
Remark:			

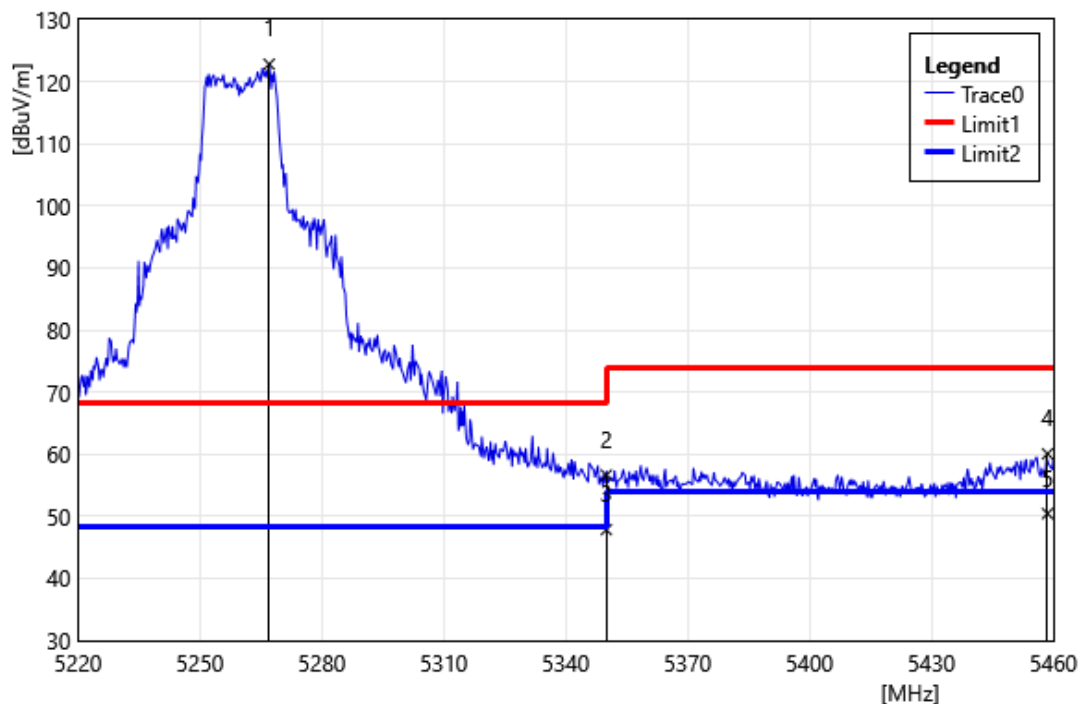

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5267.04	120.92	1.90	122.82	68.20	54.62	PEAK
2	5350.00	54.55	2.09	56.64	74.00	-17.36	PEAK
3	5350.00	45.78	2.09	47.87	54.00	-6.13	AVG
4	5458.56	57.36	2.71	60.07	74.00	-13.93	PEAK
5	5458.56	47.74	2.71	50.45	54.00	-3.55	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT20 5260		
	MHz		
Polarization:	Horizontal		
Remark:			

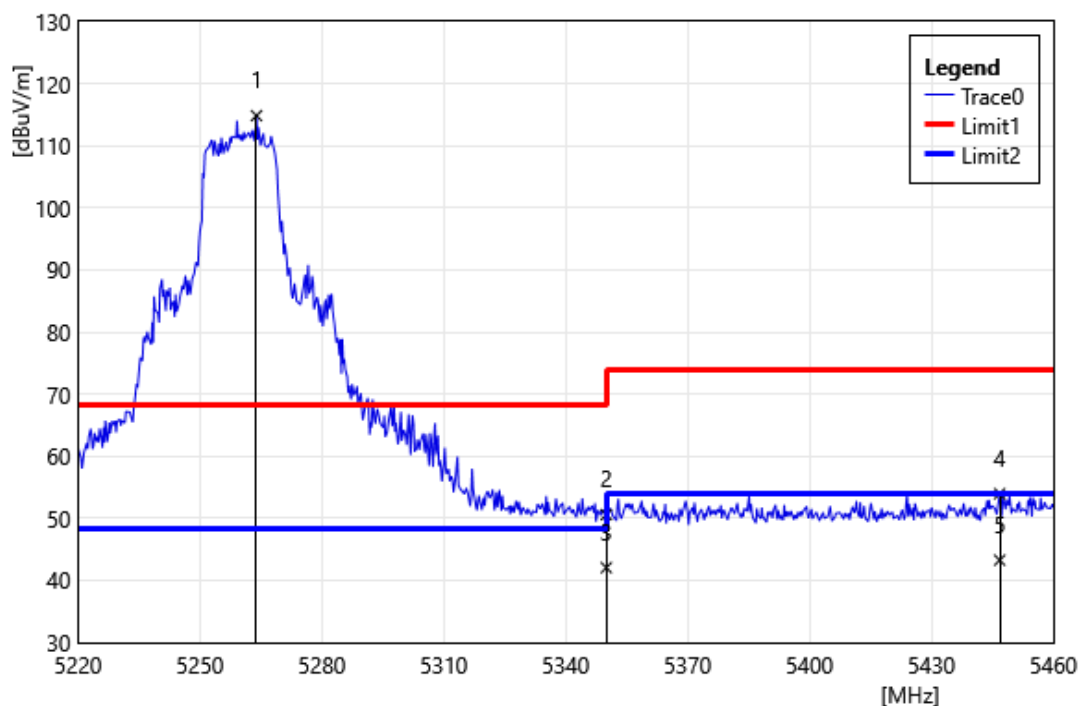

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5263.92	112.93	1.91	114.84	68.20	46.64	PEAK
2	5350.00	48.51	2.09	50.59	74.00	-23.41	PEAK
3	5350.00	39.97	2.09	42.06	54.00	-11.94	AVG
4	5446.80	51.27	2.69	53.96	74.00	-20.04	PEAK
5	5446.80	40.58	2.69	43.27	54.00	-10.73	AVG