



Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT20 5280		
	MHz		
Polarization:	Vertical		
Remark:			

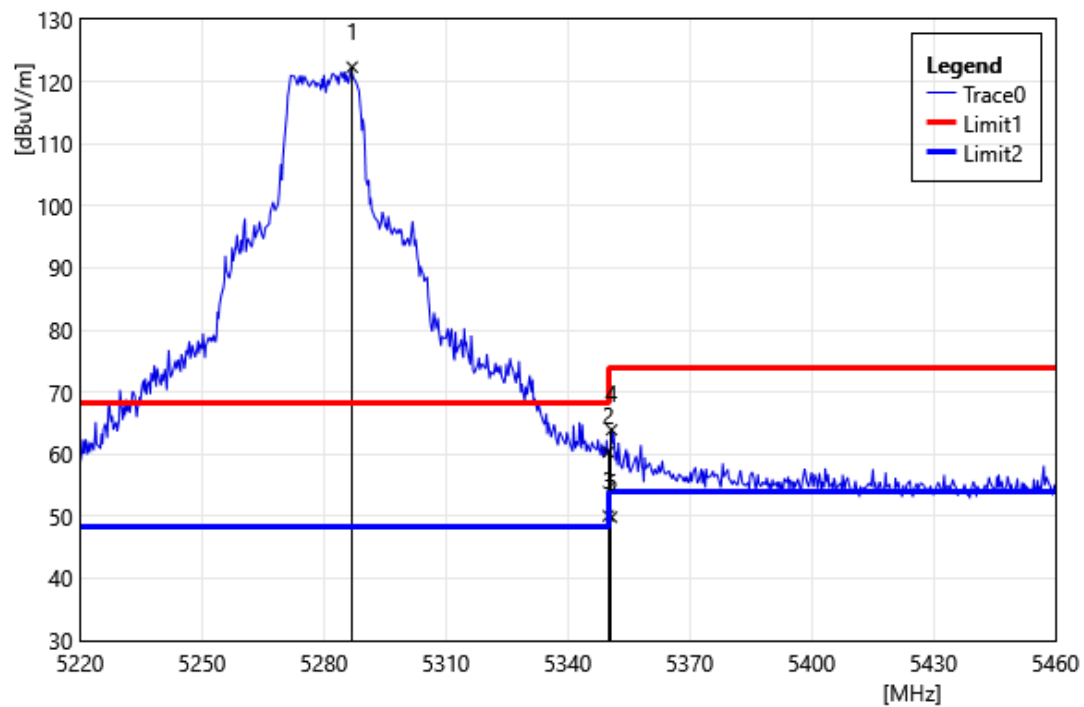


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5286.96	120.52	1.82	122.35	68.20	54.15	PEAK
2	5350.00	58.27	2.09	60.36	74.00	-13.64	PEAK
3	5350.00	47.99	2.09	50.08	54.00	-3.92	AVG
4	5350.80	61.85	2.09	63.94	74.00	-10.06	PEAK
5	5350.80	47.78	2.09	49.87	54.00	-4.13	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT20 5280		
	MHz		
Polarization:	Horizontal		
Remark:			

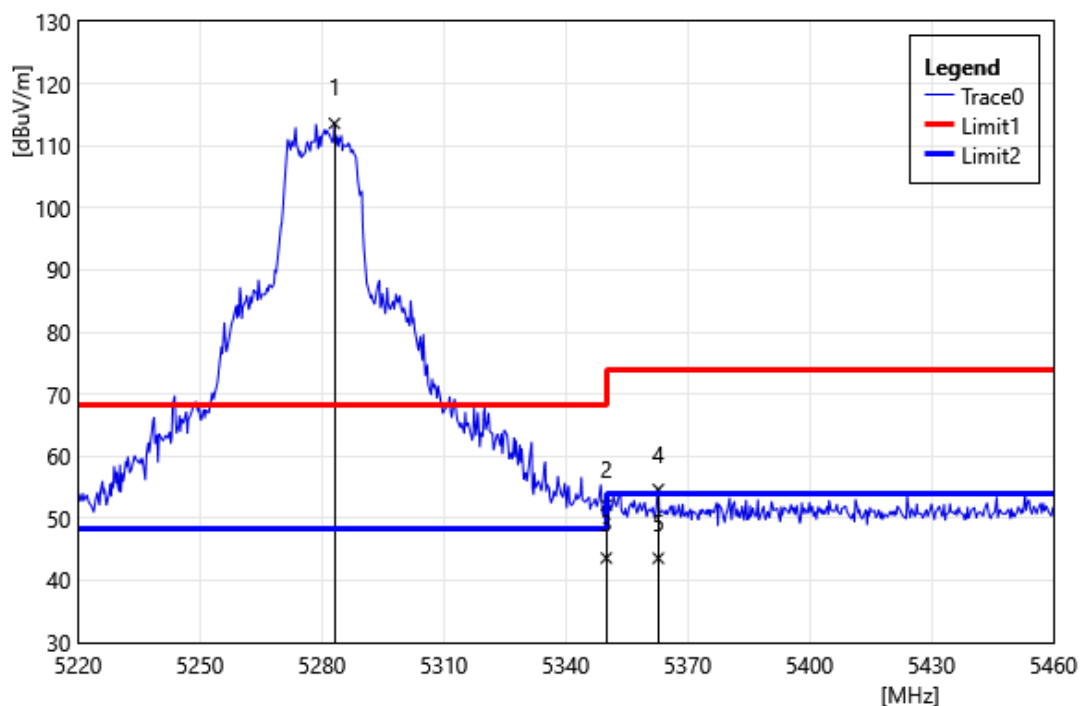


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5283.12	111.76	1.84	113.60	68.20	45.40	PEAK
2	5350.00	50.04	2.09	52.13	74.00	-21.87	PEAK
3	5350.00	41.52	2.09	43.61	54.00	-10.39	AVG
4	5362.80	52.47	2.17	54.64	74.00	-19.36	PEAK
5	5362.80	41.40	2.17	43.57	54.00	-10.43	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT20 5280		
	MHz		
Polarization:	Vertical		
Remark:			

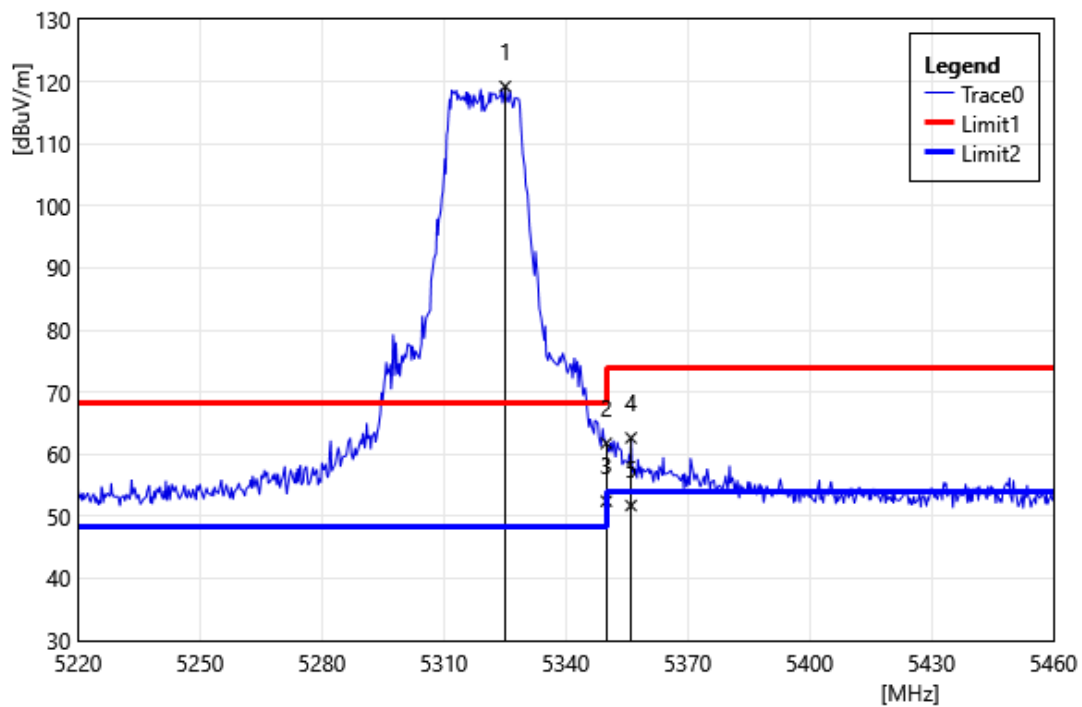


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5325.12	117.30	1.93	119.23	68.20	51.03	PEAK
2	5350.00	59.67	2.09	61.76	74.00	-12.24	PEAK
3	5350.00	50.36	2.09	52.45	54.00	-1.55	AVG
4	5356.08	60.50	2.13	62.63	74.00	-11.37	PEAK
5	5356.08	49.61	2.13	51.74	54.00	-2.26	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT20 5280		
	MHz		
Polarization:	Horizontal		
Remark:			

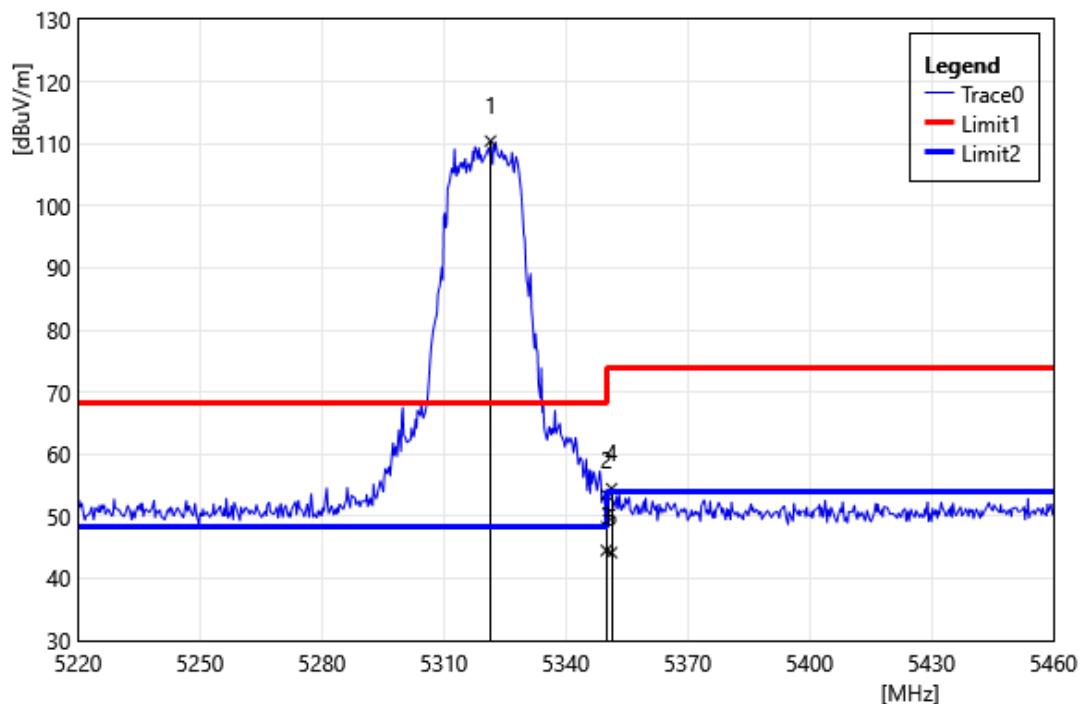


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5321.52	108.54	1.91	110.45	68.20	42.25	PEAK
2	5350.00	51.38	2.09	53.46	74.00	-20.54	PEAK
3	5350.00	42.41	2.09	44.50	54.00	-9.50	AVG
4	5351.28	52.36	2.10	54.46	74.00	-19.54	PEAK
5	5351.28	42.06	2.10	44.16	54.00	-9.84	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT20 5500		
	MHz		
Polarization:	Vertical		
Remark:			

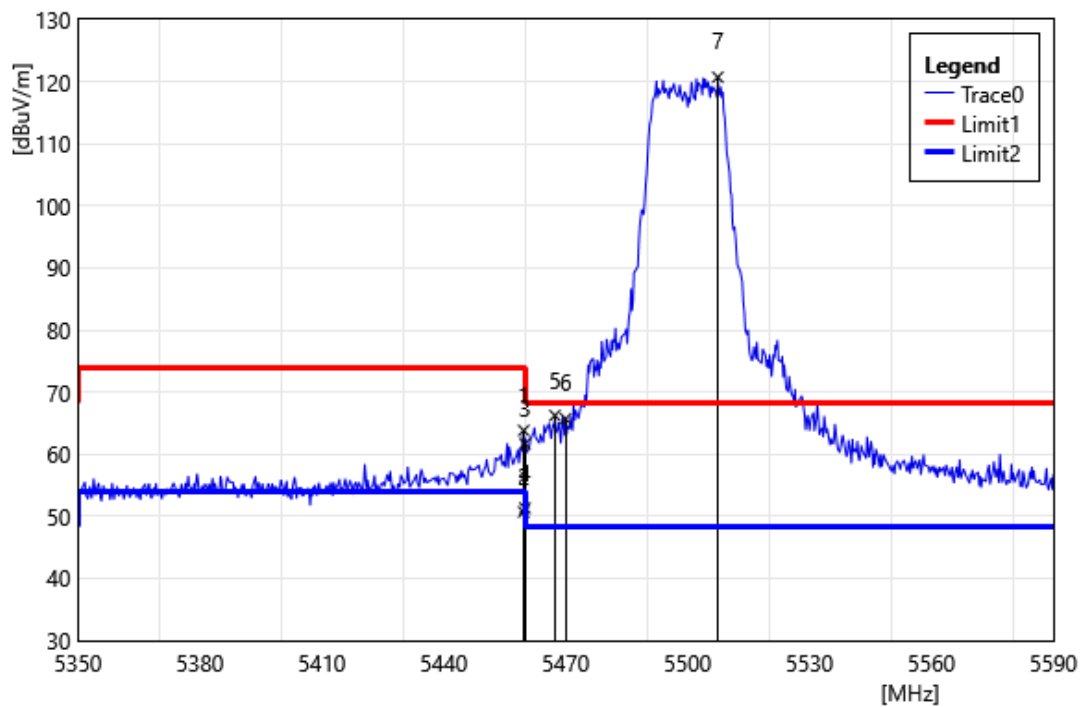


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5459.68	61.13	2.71	63.84	74.00	-10.16	PEAK
2	5459.68	48.00	2.71	50.71	54.00	-3.29	AVG
3	5460.00	58.99	2.71	61.70	74.00	-12.30	PEAK
4	5460.00	48.62	2.71	51.33	54.00	-2.67	AVG
5	5467.36	63.52	2.72	66.24	68.20	-1.96	PEAK
6	5470.00	63.00	2.72	65.72	68.20	-2.48	PEAK
7	5507.44	118.01	2.72	120.73	68.20	52.53	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT20 5500		
	MHz		
Polarization:	Horizontal		
Remark:			

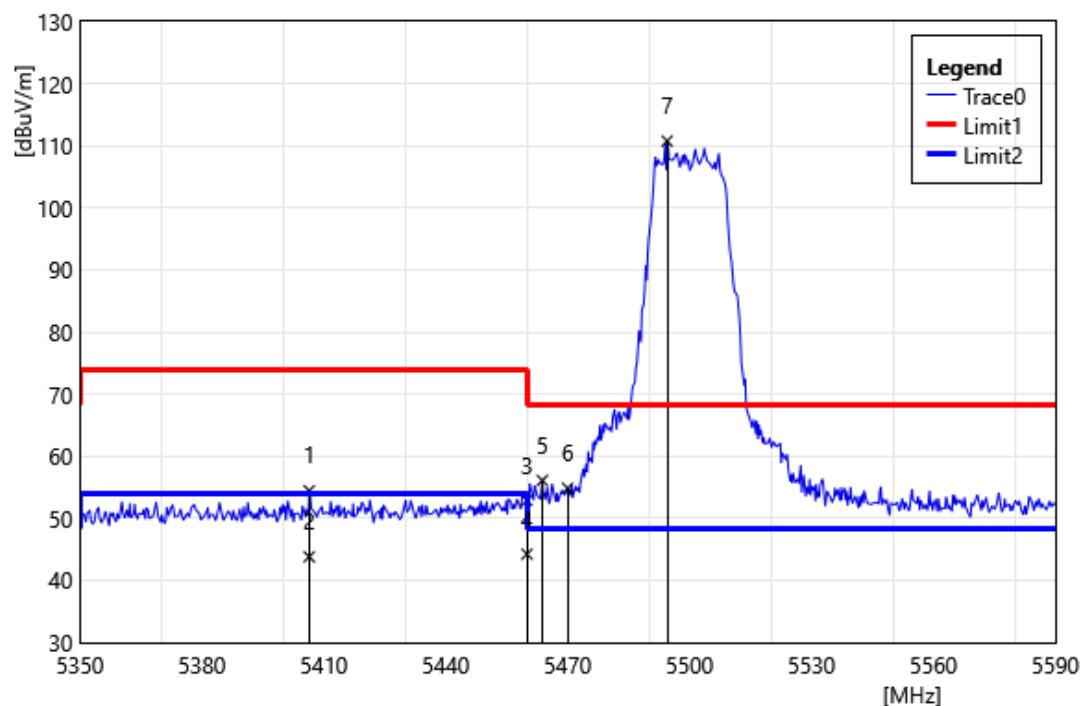


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5406.40	52.01	2.44	54.45	74.00	-19.55	PEAK
2	5406.40	41.38	2.44	43.82	54.00	-10.18	AVG
3	5460.00	50.17	2.71	52.88	74.00	-21.12	PEAK
4	5460.00	41.52	2.71	44.23	54.00	-9.77	AVG
5	5463.76	53.38	2.72	56.10	68.20	-12.10	PEAK
6	5470.00	52.14	2.72	54.86	68.20	-13.34	PEAK
7	5494.48	108.04	2.72	110.76	68.20	42.56	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT20 5560		
	MHz		
Polarization:	Vertical		
Remark:			

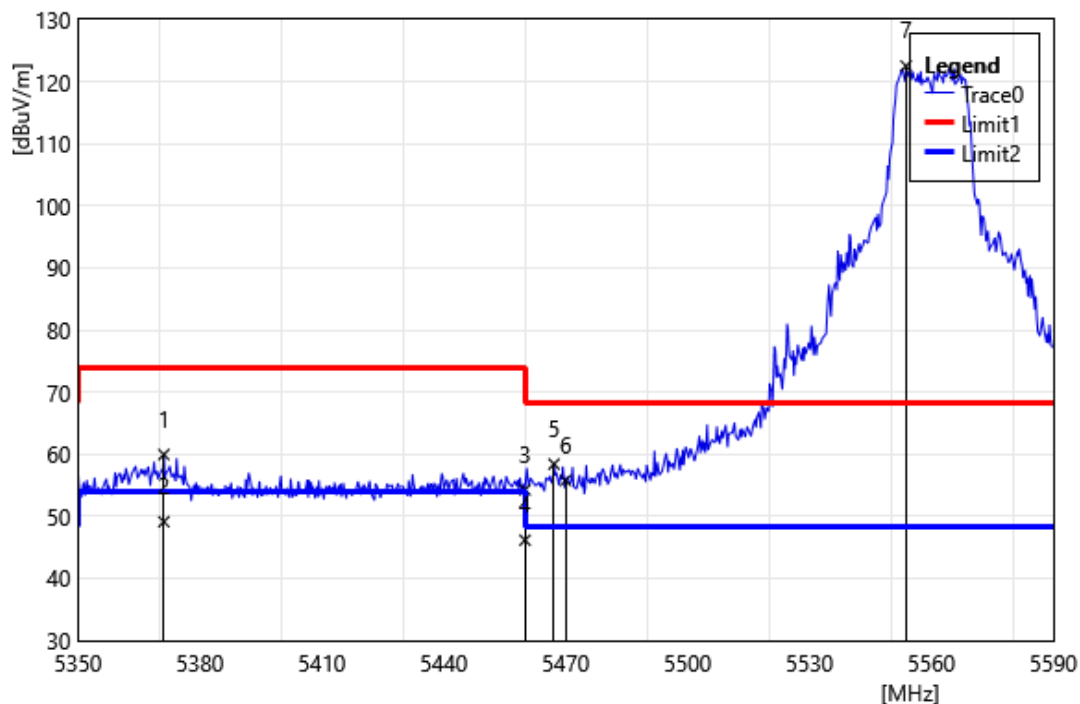


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5371.12	57.74	2.22	59.96	74.00	-14.04	PEAK
2	5371.12	46.91	2.22	49.13	54.00	-4.87	AVG
3	5460.00	51.56	2.71	54.27	74.00	-19.73	PEAK
4	5460.00	43.45	2.71	46.16	54.00	-7.84	AVG
5	5467.12	55.70	2.72	58.42	68.20	-9.78	PEAK
6	5470.00	53.06	2.72	55.78	68.20	-12.42	PEAK
7	5553.76	119.82	2.71	122.53	68.20	54.33	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT20 5560		
	MHz		
Polarization:	Horizontal		
Remark:			

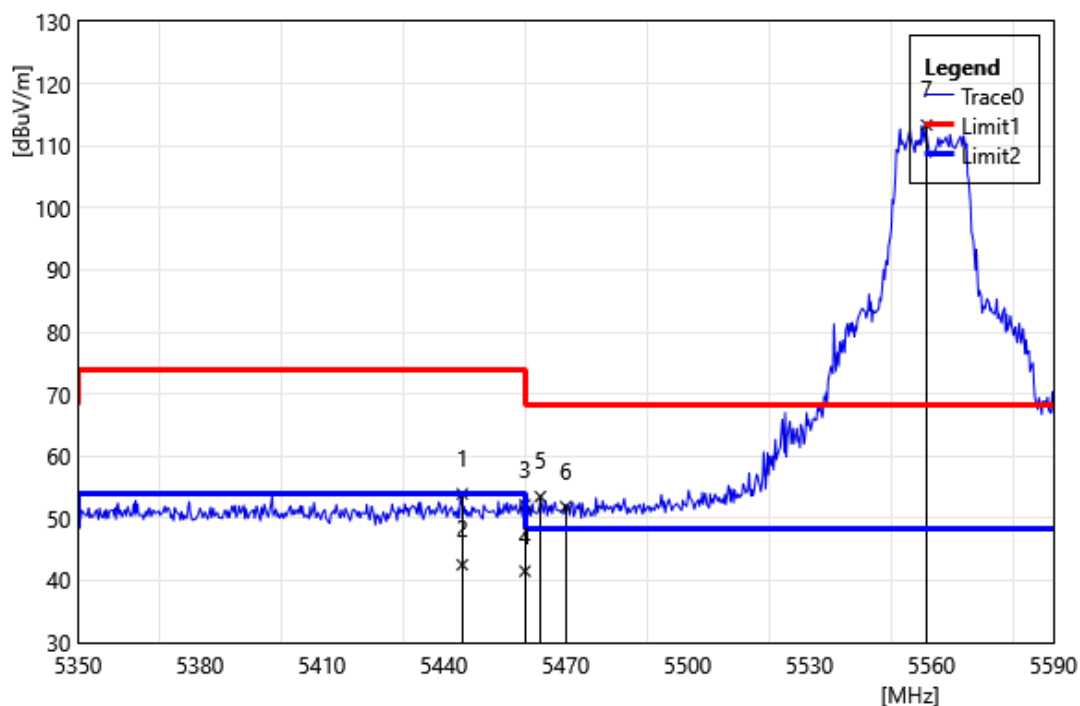


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5444.56	51.26	2.68	53.94	74.00	-20.06	PEAK
2	5444.56	39.85	2.68	42.53	54.00	-11.47	AVG
3	5460.00	49.46	2.71	52.17	74.00	-21.83	PEAK
4	5460.00	38.78	2.71	41.49	54.00	-12.51	AVG
5	5463.76	50.78	2.72	53.50	68.20	-14.70	PEAK
6	5470.00	49.17	2.72	51.89	68.20	-16.31	PEAK
7	5558.80	110.65	2.69	113.34	68.20	45.14	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT20 5700		
	MHz		
Polarization:	Vertical		
Remark:			

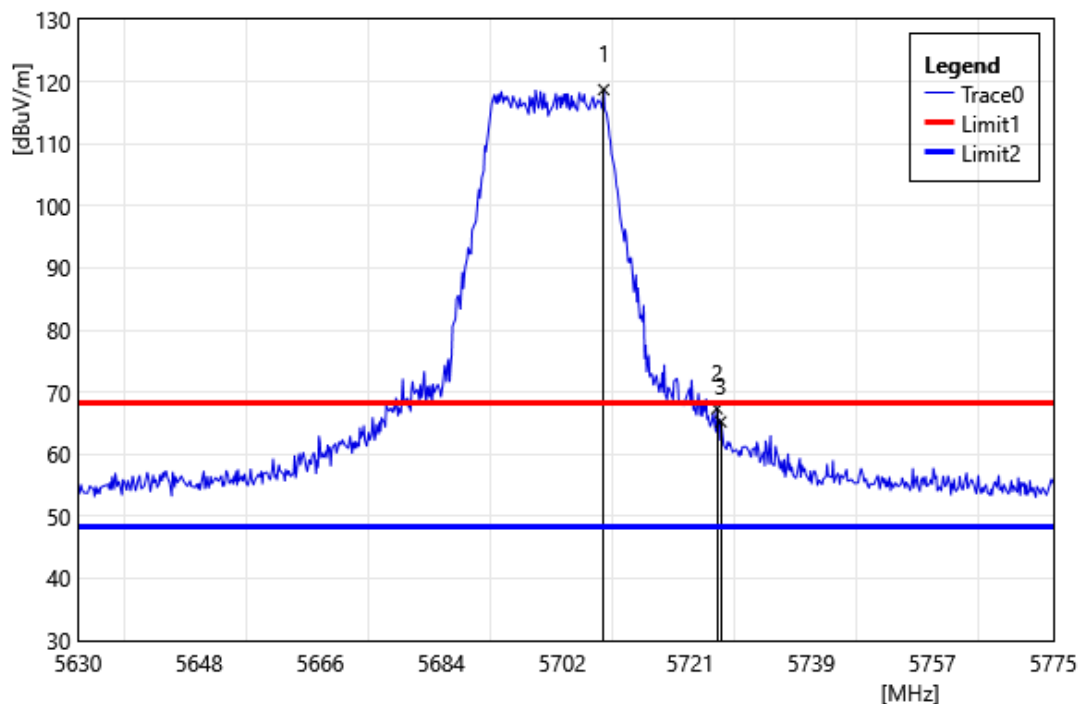


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5708.16	116.16	2.56	118.72	68.20	50.52	PEAK
2	5725.00	64.62	2.72	67.34	68.20	-0.86	PEAK
3	5725.56	62.51	2.73	65.24	68.20	-2.96	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT20 5700		
	MHz		
Polarization:	Horizontal		
Remark:			

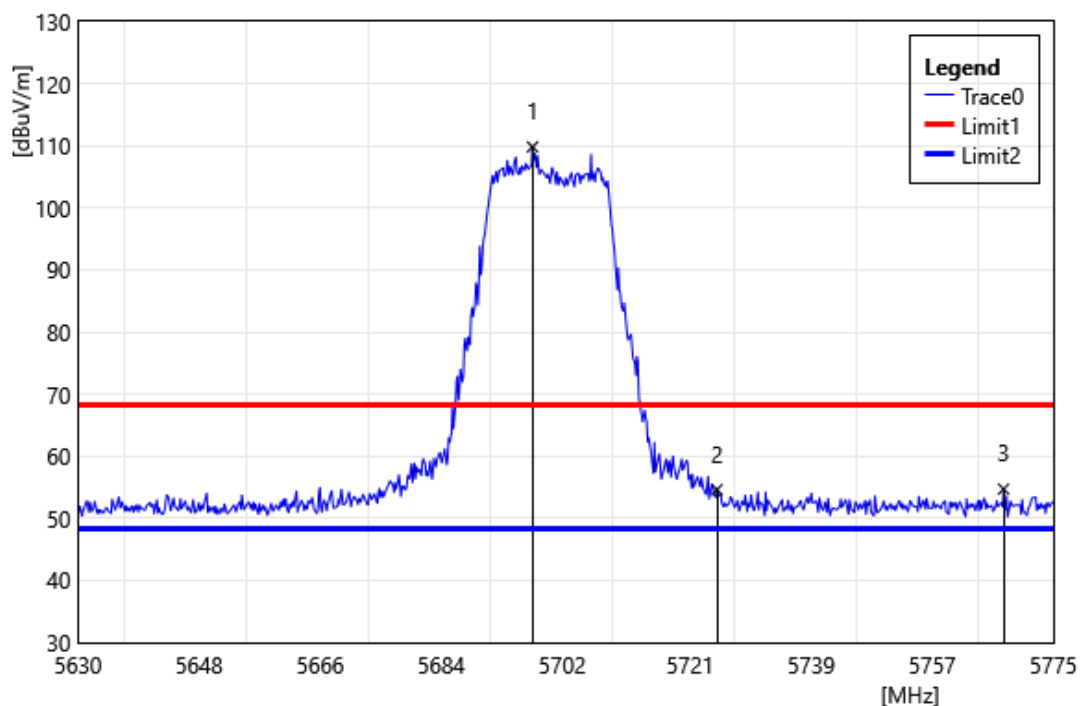


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5697.57	107.34	2.48	109.82	68.20	41.62	PEAK
2	5725.00	51.90	2.72	54.62	68.20	-13.58	PEAK
3	5767.61	51.67	3.03	54.70	68.20	-13.50	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT20 5720 MHz		
Polarization:	Vertical		
Remark:			

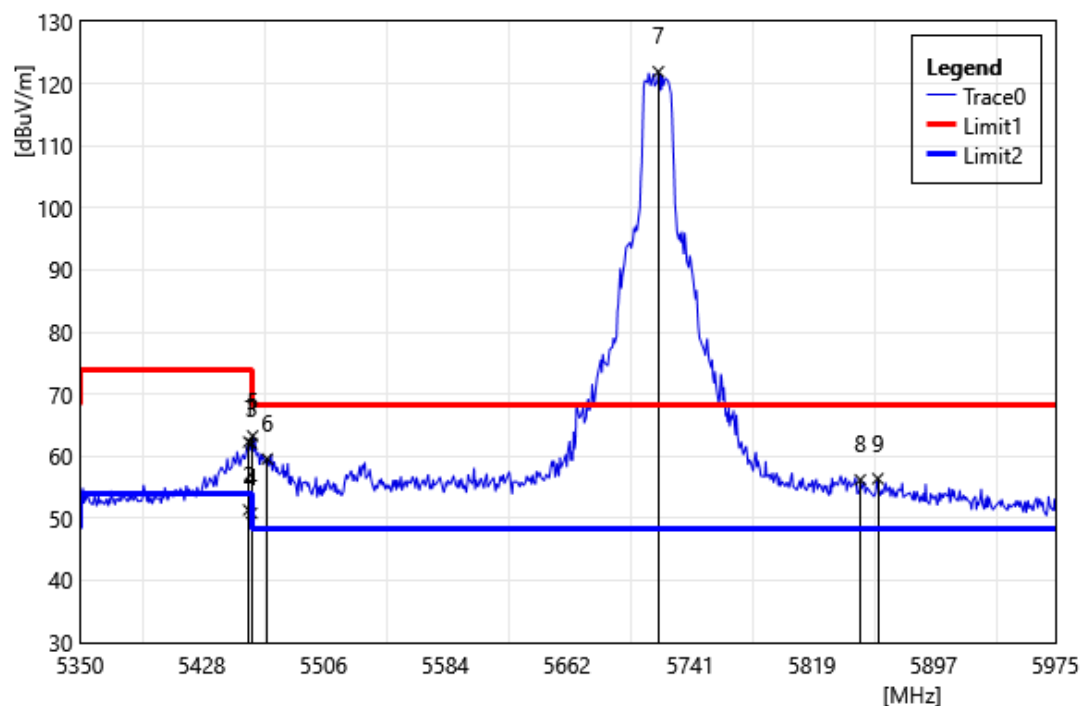


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.13	59.60	2.71	62.31	74.00	-11.69	PEAK
2	5458.13	48.63	2.71	51.34	54.00	-2.66	AVG
3	5460.00	59.31	2.71	62.02	74.00	-11.98	PEAK
4	5460.00	48.13	2.71	50.84	54.00	-3.16	AVG
5	5460.63	60.55	2.71	63.26	68.20	-4.94	PEAK
6	5470.00	56.84	2.72	59.56	68.20	-8.64	PEAK
7	5720.63	119.26	2.68	121.94	68.20	53.74	PEAK
8	5850.00	52.96	3.24	56.20	68.20	-12.00	PEAK
9	5861.25	53.12	3.26	56.39	68.20	-11.82	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT20 5720 MHz		
Polarization:	Horizontal		
Remark:			

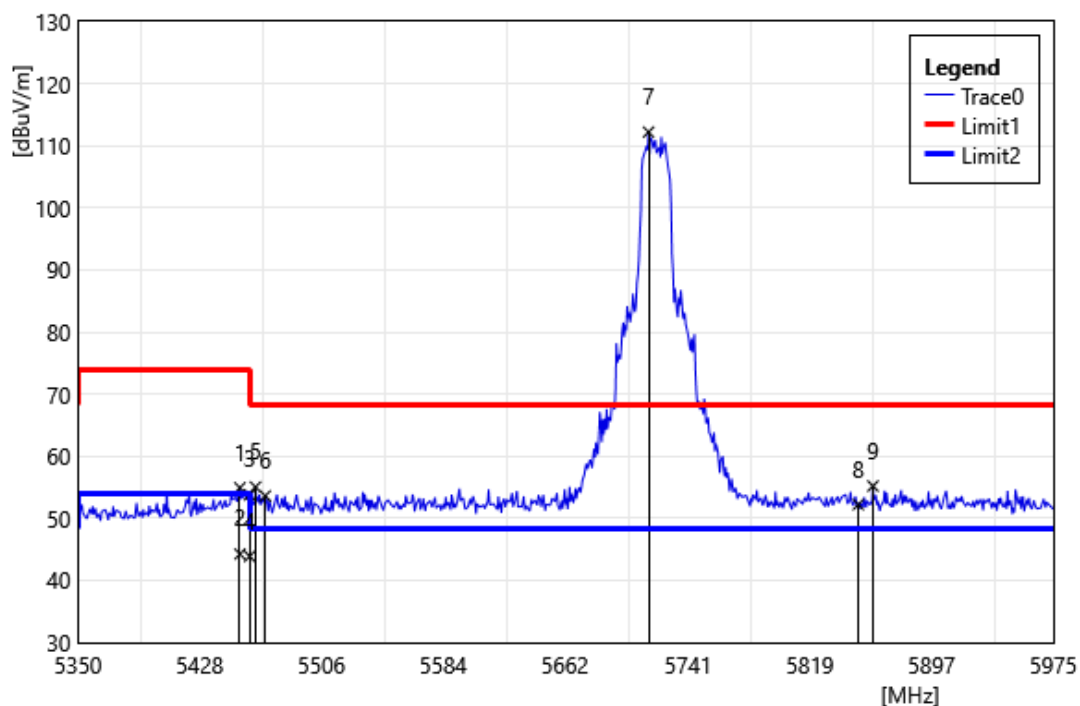


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5453.75	52.22	2.71	54.93	74.00	-19.07	PEAK
2	5453.75	41.55	2.71	44.26	54.00	-9.74	AVG
3	5460.00	51.08	2.71	53.79	74.00	-20.21	PEAK
4	5460.00	41.18	2.71	43.89	54.00	-10.11	AVG
5	5463.75	52.34	2.72	55.06	68.20	-13.14	PEAK
6	5470.00	50.89	2.72	53.61	68.20	-14.59	PEAK
7	5715.63	109.58	2.63	112.21	68.20	44.01	PEAK
8	5850.00	48.97	3.24	52.22	68.20	-15.98	PEAK
9	5859.38	51.94	3.26	55.20	68.20	-13.00	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT20 5745		
	MHz		
Polarization:	Vertical		
Remark:			

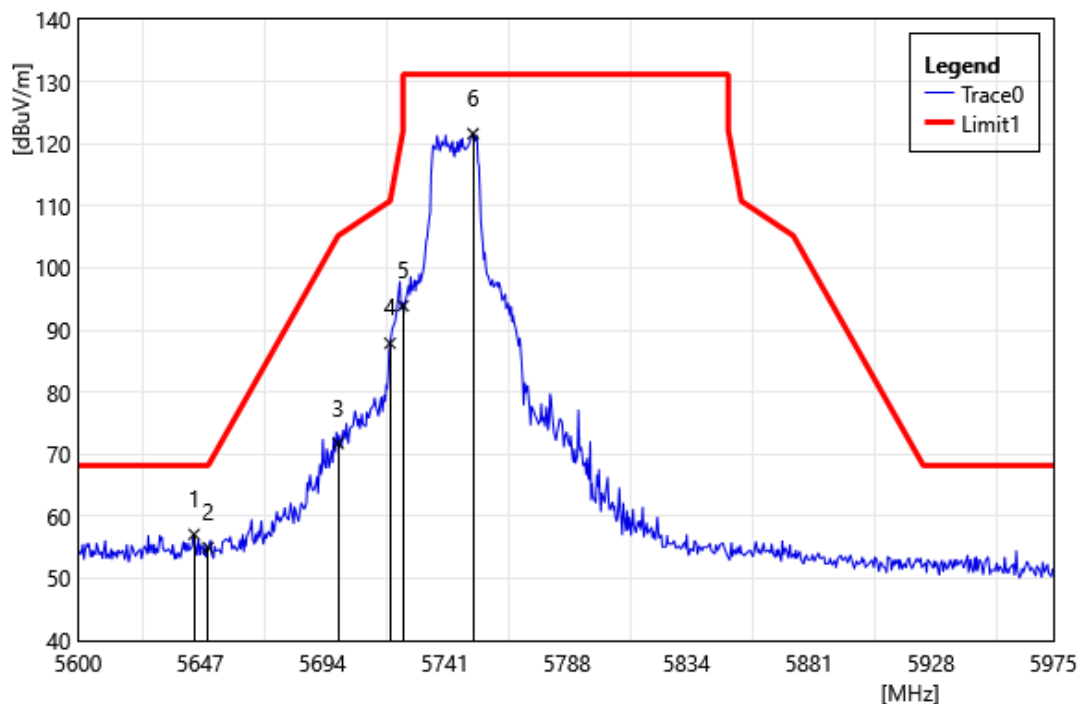


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5644.63	54.58	2.50	57.08	68.20	-11.12	PEAK
2	5650.00	52.47	2.49	54.96	68.20	-13.24	PEAK
3	5700.00	69.29	2.48	71.77	105.20	-33.43	PEAK
4	5720.00	85.21	2.67	87.88	110.80	-22.92	PEAK
5	5725.00	91.18	2.72	93.90	122.20	-28.30	PEAK
6	5751.88	118.64	2.98	121.62	131.20	-9.58	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT20 5745		
	MHz		
Polarization:	Horizontal		
Remark:			

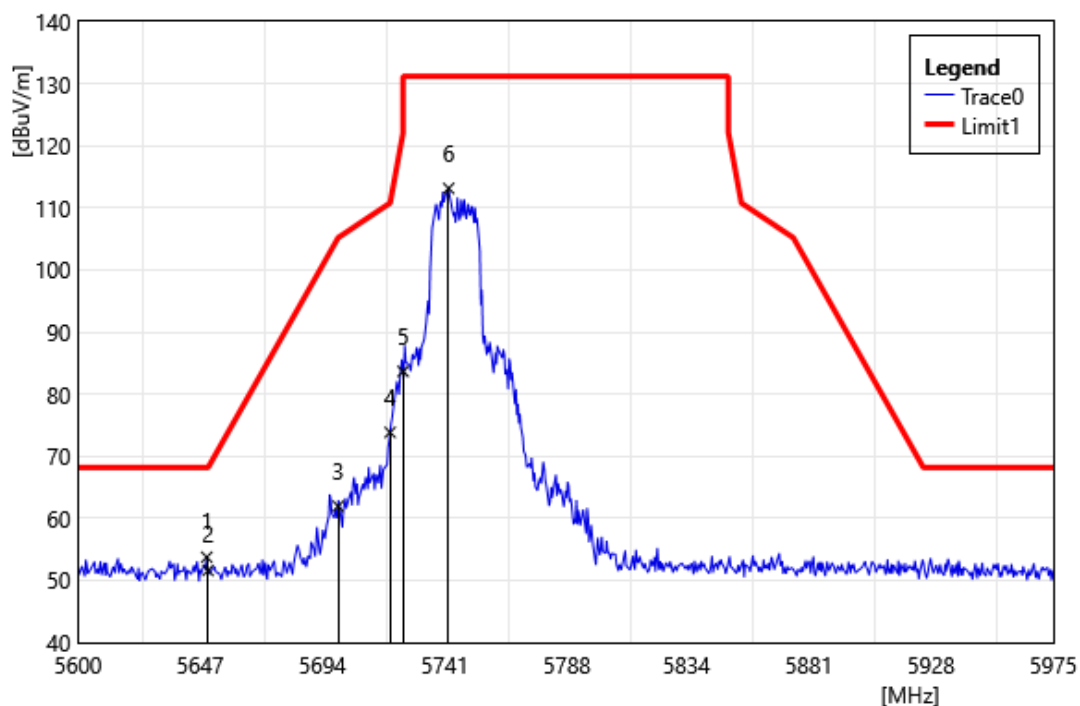

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5649.50	51.26	2.49	53.76	68.20	-14.45	PEAK
2	5650.00	49.11	2.49	51.60	68.20	-16.60	PEAK
3	5700.00	59.48	2.48	61.95	105.20	-43.25	PEAK
4	5720.00	71.18	2.67	73.85	110.80	-36.95	PEAK
5	5725.00	80.95	2.72	83.67	122.20	-38.53	PEAK
6	5742.50	110.25	2.89	113.14	131.20	-18.06	PEAK


Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT20 5785 MHz		
Polarization:	Vertical		
Remark:			

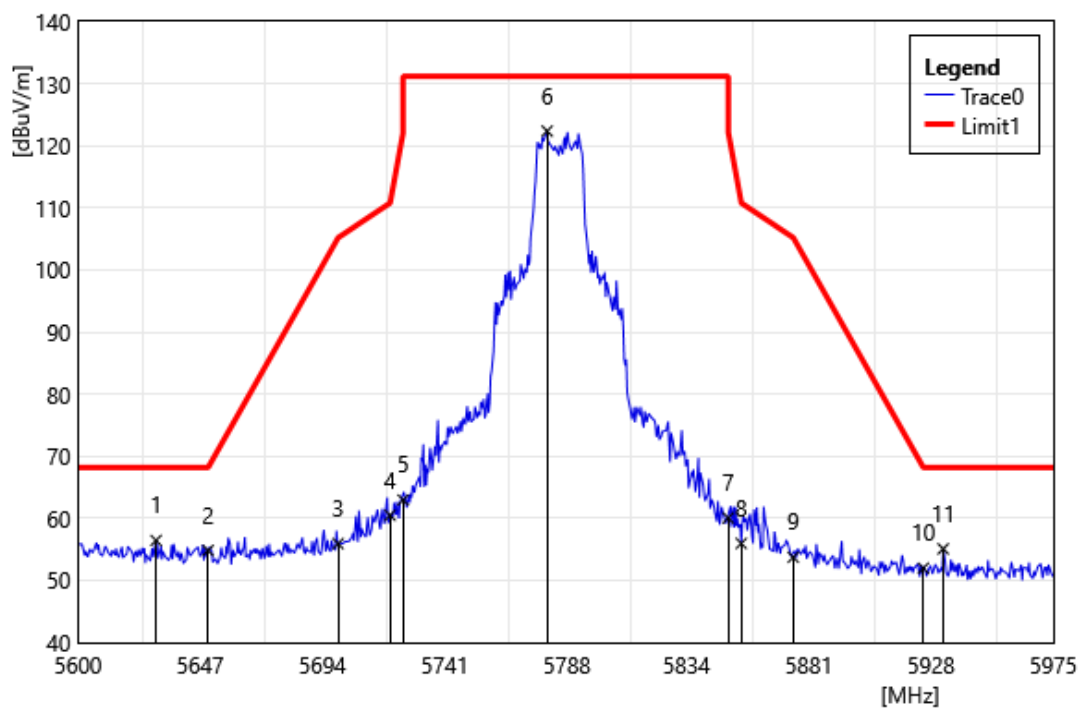

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT20 5785 MHz		
Polarization:	Vertical		
Remark:			

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5630.00	53.91	2.53	56.44	68.20	-11.76	PEAK
2	5650.00	52.34	2.49	54.83	68.20	-13.37	PEAK
3	5700.00	53.46	2.48	55.94	105.20	-49.26	PEAK
4	5720.00	57.82	2.67	60.49	110.80	-50.31	PEAK
5	5725.00	60.25	2.72	62.97	122.20	-59.23	PEAK
6	5780.38	119.30	3.08	122.38	131.20	-8.82	PEAK
7	5850.00	56.81	3.24	60.06	122.20	-62.14	PEAK
8	5855.00	52.72	3.25	55.97	110.80	-54.83	PEAK
9	5875.00	50.45	3.29	53.74	105.20	-51.46	PEAK
10	5925.00	48.80	3.18	51.98	68.20	-16.22	PEAK
11	5932.63	51.96	3.13	55.09	68.20	-13.11	PEAK


Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT20 5785 MHz		
Polarization:	Horizontal		
Remark:			

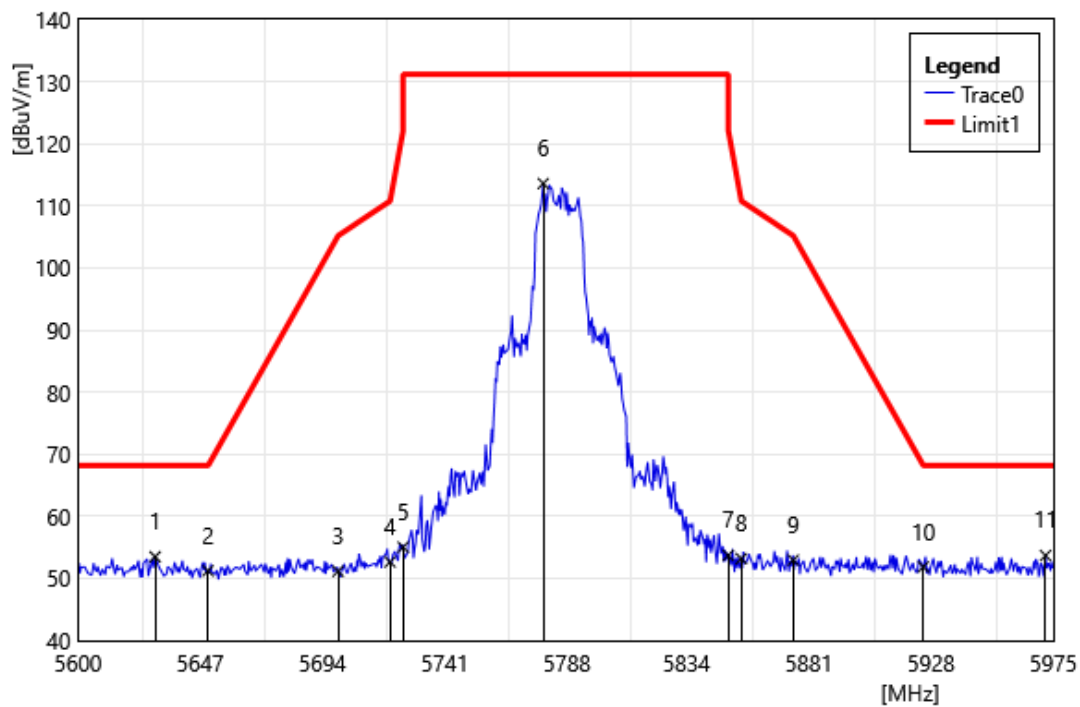

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT20 5785 MHz		
Polarization:	Horizontal		
Remark:			


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5629.63	50.95	2.54	53.49	68.20	-14.71	PEAK
2	5650.00	48.74	2.49	51.23	68.20	-16.97	PEAK
3	5700.00	48.67	2.48	51.15	105.20	-54.05	PEAK
4	5720.00	49.98	2.67	52.65	110.80	-58.15	PEAK
5	5725.00	52.33	2.72	55.05	122.20	-67.15	PEAK
6	5778.88	110.52	3.08	113.60	131.20	-17.60	PEAK
7	5850.00	50.47	3.24	53.72	122.20	-68.48	PEAK
8	5855.00	49.94	3.25	53.19	110.80	-57.61	PEAK
9	5875.00	49.66	3.29	52.96	105.20	-52.25	PEAK
10	5925.00	48.67	3.18	51.85	68.20	-16.35	PEAK
11	5972.00	50.65	3.06	53.71	68.20	-14.49	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT20 5825		
	MHz		
Polarization:	Vertical		
Remark:			

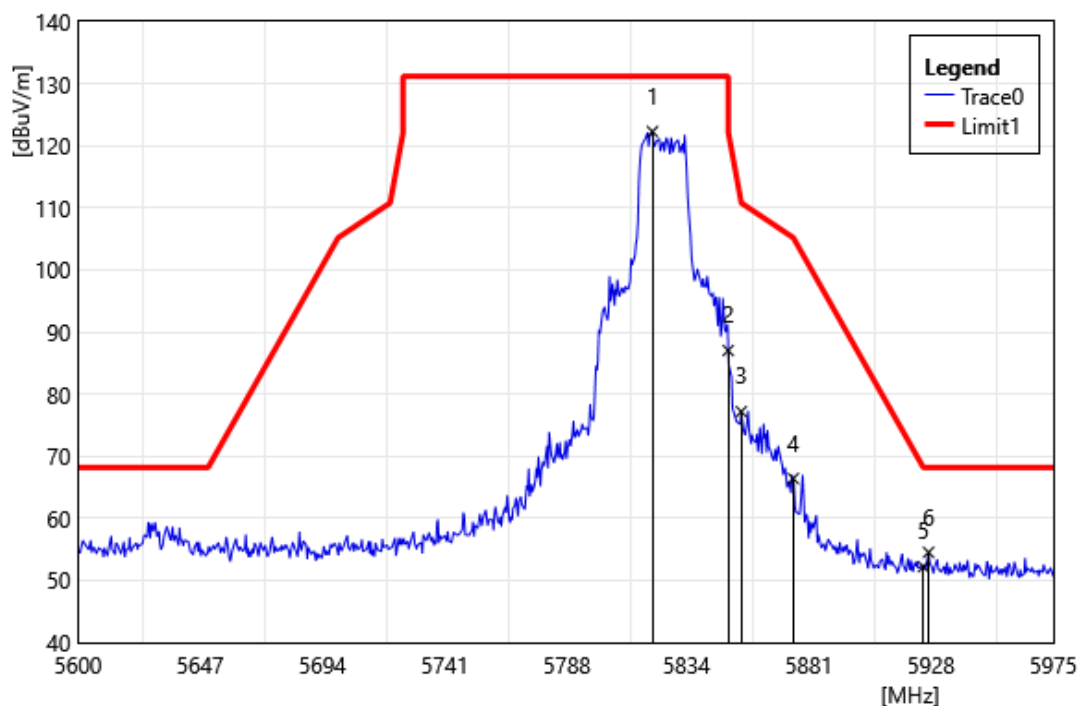


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5820.88	119.09	3.19	122.28	131.20	-8.92	PEAK
2	5850.00	83.78	3.24	87.03	122.20	-35.17	PEAK
3	5855.00	73.93	3.25	77.18	110.80	-33.62	PEAK
4	5875.00	63.12	3.29	66.41	105.20	-38.79	PEAK
5	5925.00	49.04	3.18	52.22	68.20	-15.98	PEAK
6	5927.00	51.36	3.17	54.53	68.20	-13.67	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT20 5825		
	MHz		
Polarization:	Horizontal		
Remark:			

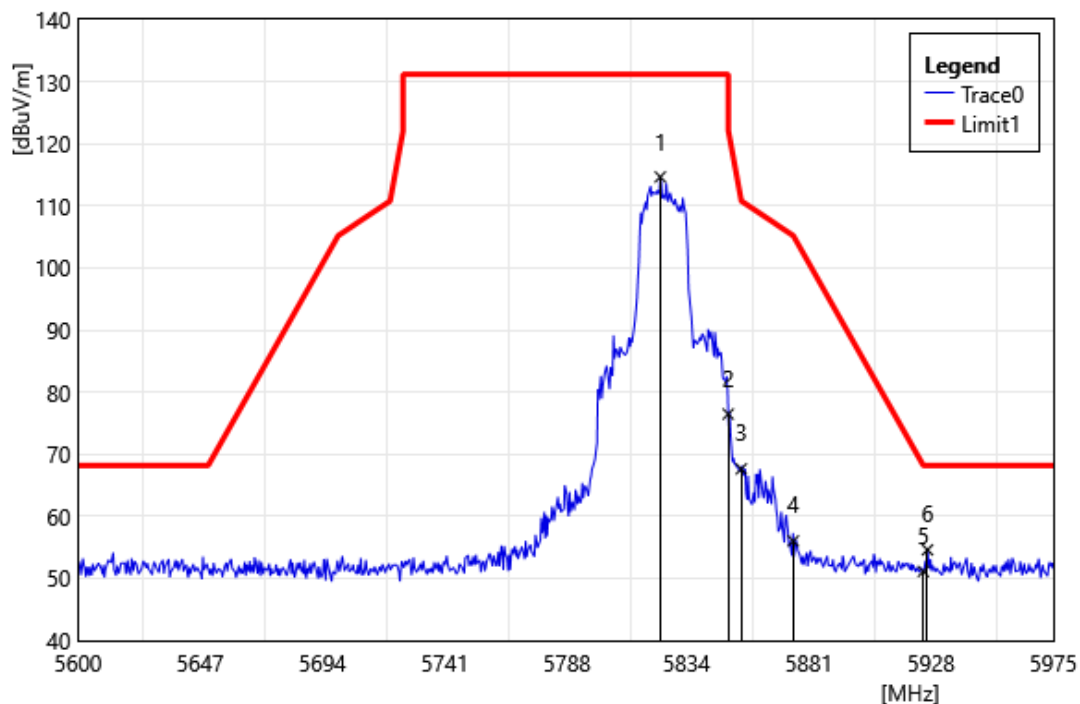


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5823.88	111.46	3.20	114.66	131.20	-16.54	PEAK
2	5850.00	73.24	3.24	76.48	122.20	-45.72	PEAK
3	5855.00	64.40	3.25	67.65	110.80	-43.15	PEAK
4	5875.00	52.76	3.29	56.05	105.20	-49.15	PEAK
5	5925.00	47.96	3.18	51.14	68.20	-17.06	PEAK
6	5926.63	51.43	3.17	54.60	68.20	-13.60	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT40 5190		
	MHz		
Polarization:	Vertical		
Remark:			

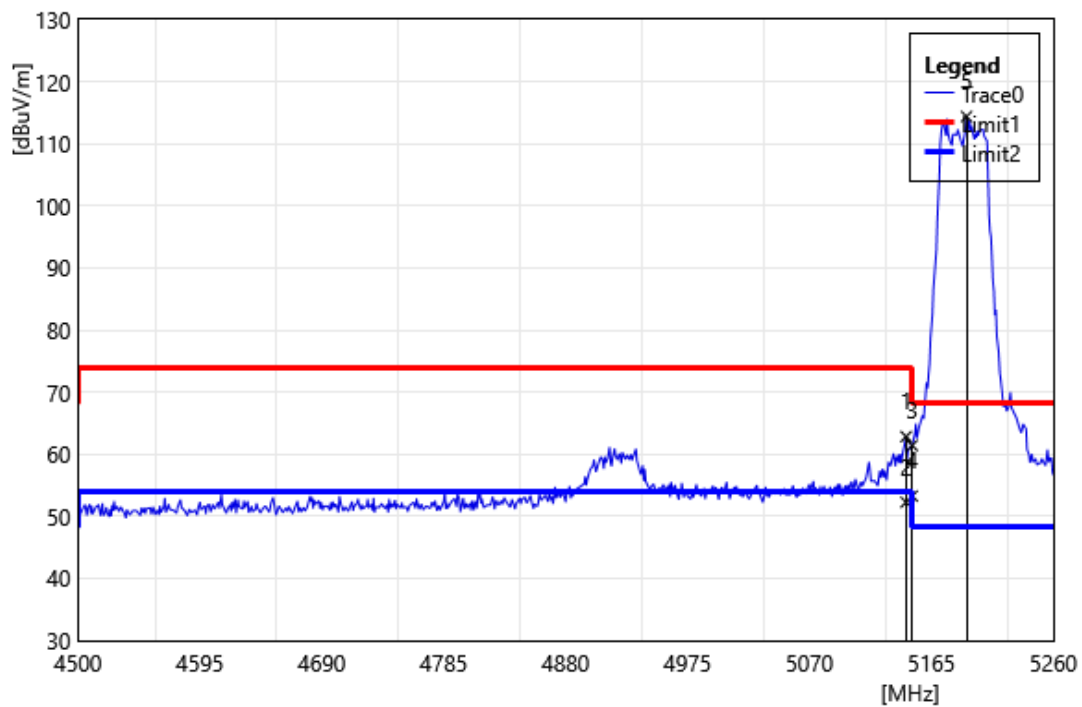


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5145.24	60.20	2.65	62.85	74.00	-11.15	PEAK
2	5145.24	49.63	2.65	52.28	54.00	-1.72	AVG
3	5150.00	58.79	2.64	61.43	74.00	-12.57	PEAK
4	5150.00	50.64	2.64	53.28	54.00	-0.72	AVG
5	5192.36	112.00	2.39	114.39	68.20	46.19	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT40 5190		
	MHz		
Polarization:	Vertical		
Remark:			

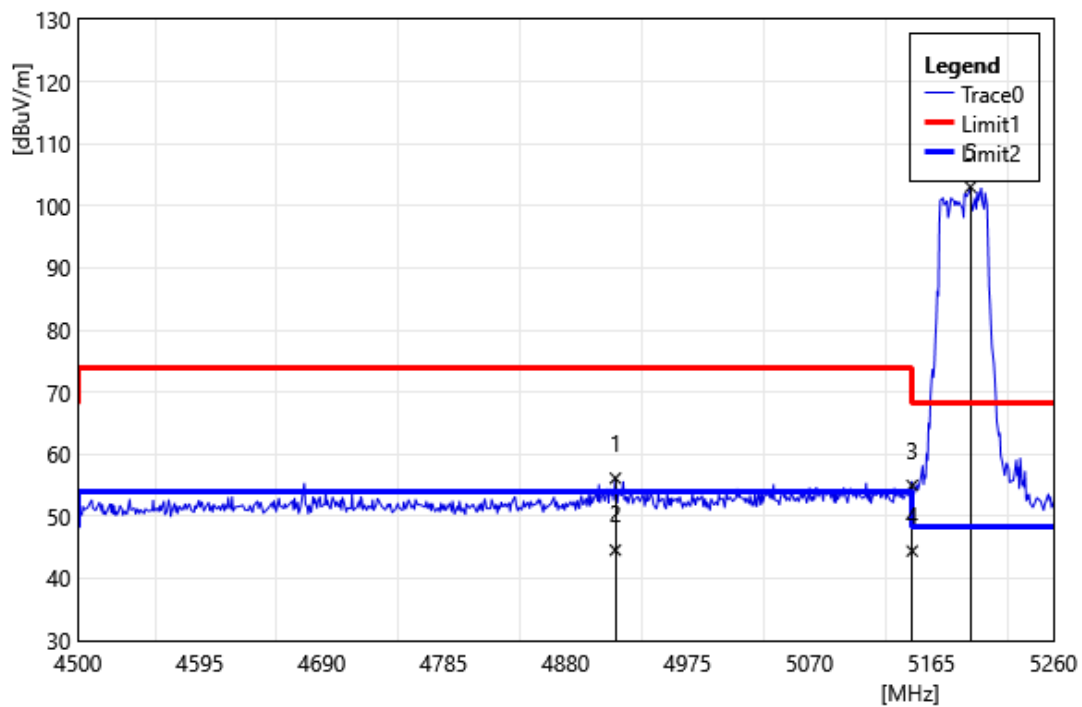


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4918.76	54.24	1.90	56.14	74.00	-17.86	PEAK
2	4918.76	42.67	1.90	44.57	54.00	-9.43	AVG
3	5150.00	52.32	2.64	54.96	74.00	-19.04	PEAK
4	5150.00	41.76	2.64	44.40	54.00	-9.60	AVG
5	5195.40	100.68	2.38	103.06	68.20	34.86	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT40 5230		
	MHz		
Polarization:	Vertical		
Remark:			

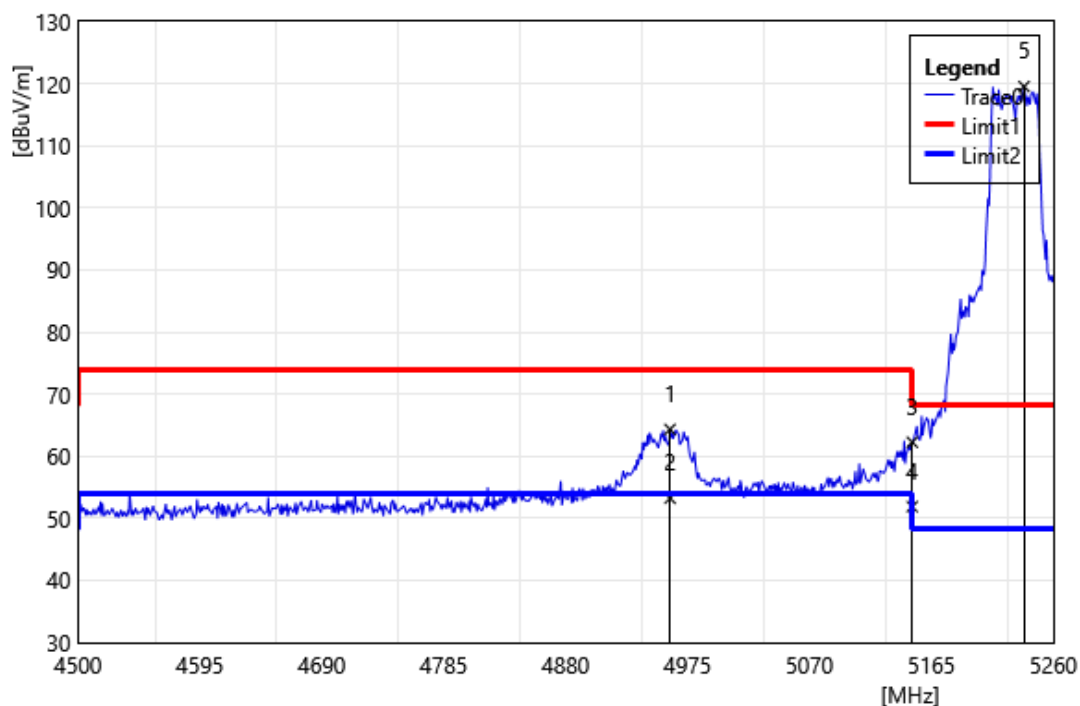


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4961.32	62.44	1.89	64.33	74.00	-9.67	PEAK
2	4961.32	51.35	1.89	53.24	54.00	-0.77	AVG
3	5150.00	59.63	2.64	62.27	74.00	-11.73	PEAK
4	5150.00	49.25	2.64	51.89	54.00	-2.11	AVG
5	5237.20	117.49	2.06	119.55	68.20	51.35	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT40 5230		
	MHz		
Polarization:	Vertical		
Remark:			

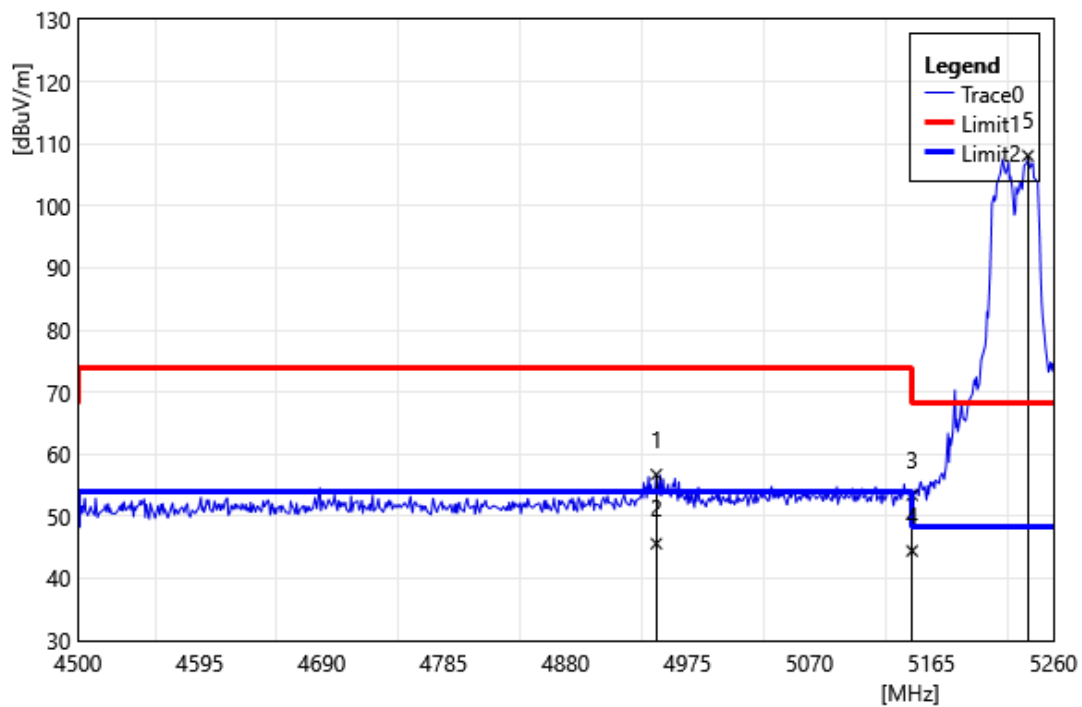


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4950.68	54.88	1.86	56.74	74.00	-17.26	PEAK
2	4950.68	43.74	1.86	45.60	54.00	-8.41	AVG
3	5150.00	50.77	2.64	53.41	74.00	-20.59	PEAK
4	5150.00	41.80	2.64	44.44	54.00	-9.56	AVG
5	5240.24	106.05	2.04	108.09	68.20	39.89	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT40 5270		
	MHz		
Polarization:	Vertical		
Remark:			

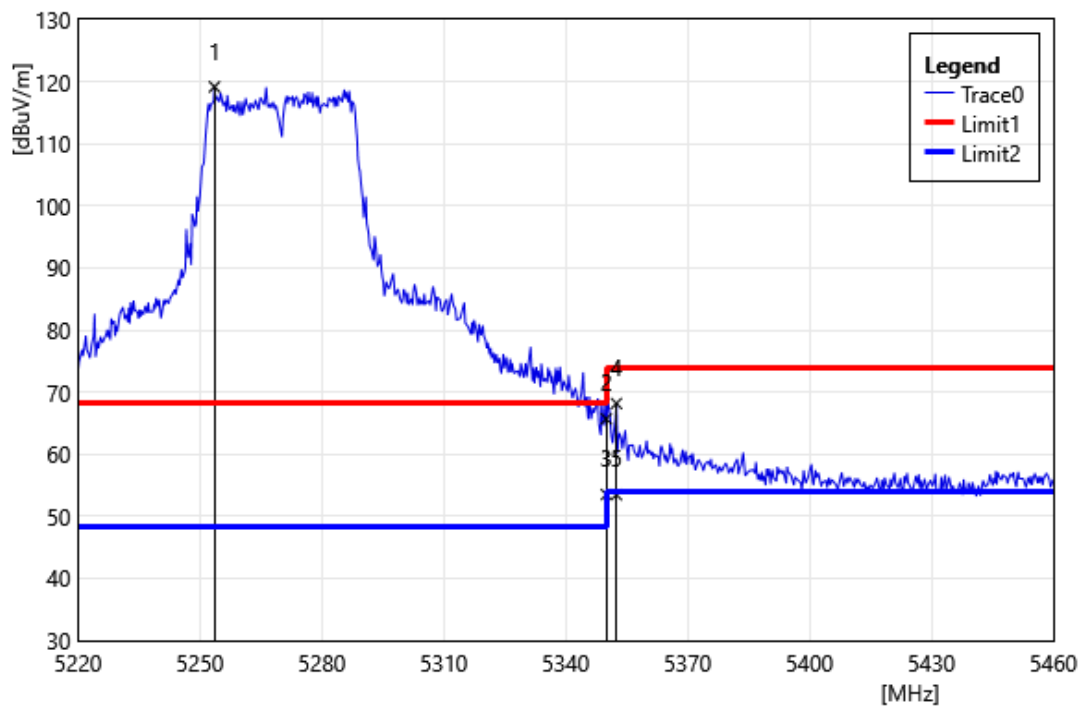


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5253.60	117.22	1.95	119.17	68.20	50.97	PEAK
2	5350.00	63.62	2.09	65.70	74.00	-8.30	PEAK
3	5350.00	51.43	2.09	53.52	54.00	-0.48	AVG
4	5352.48	66.07	2.10	68.17	74.00	-5.83	PEAK
5	5352.48	51.39	2.10	53.49	54.00	-0.51	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT40 5230		
	MHz		
Polarization:	Horizontal		
Remark:			

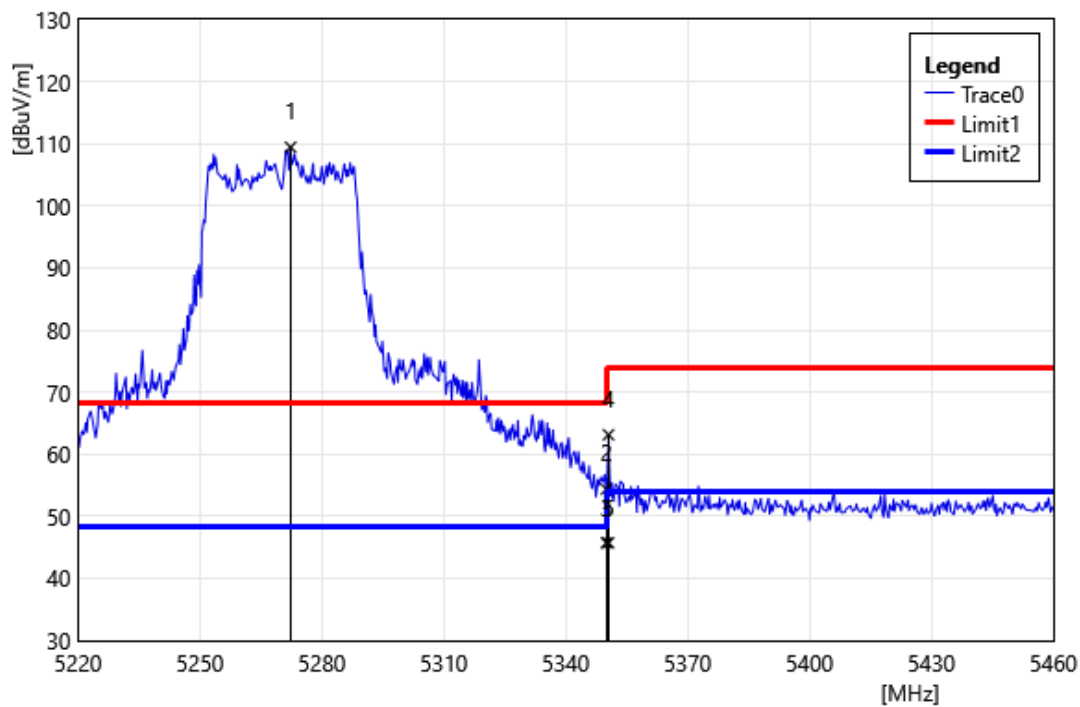


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5272.32	107.56	1.88	109.44	68.20	41.24	PEAK
2	5350.00	52.29	2.09	54.38	74.00	-19.62	PEAK
3	5350.00	43.64	2.09	45.73	54.00	-8.27	AVG
4	5350.56	61.05	2.09	63.14	74.00	-10.86	PEAK
5	5350.56	43.65	2.09	45.74	54.00	-8.26	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT40 5310		
	MHz		
Polarization:	Vertical		
Remark:			

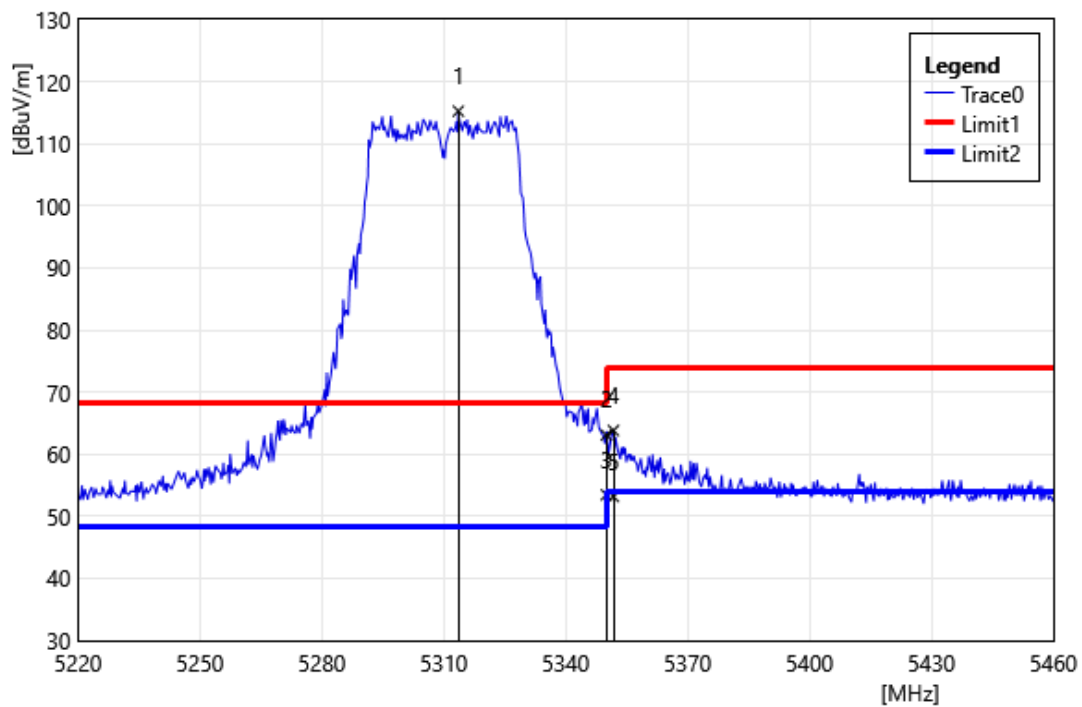


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5313.60	113.39	1.86	115.25	68.20	47.05	PEAK
2	5350.00	61.01	2.09	63.10	74.00	-10.90	PEAK
3	5350.00	51.37	2.09	53.46	54.00	-0.54	AVG
4	5351.76	61.72	2.10	63.82	74.00	-10.18	PEAK
5	5351.76	51.08	2.10	53.18	54.00	-0.82	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT40 5310		
	MHz		
Polarization:	Horizontal		
Remark:			

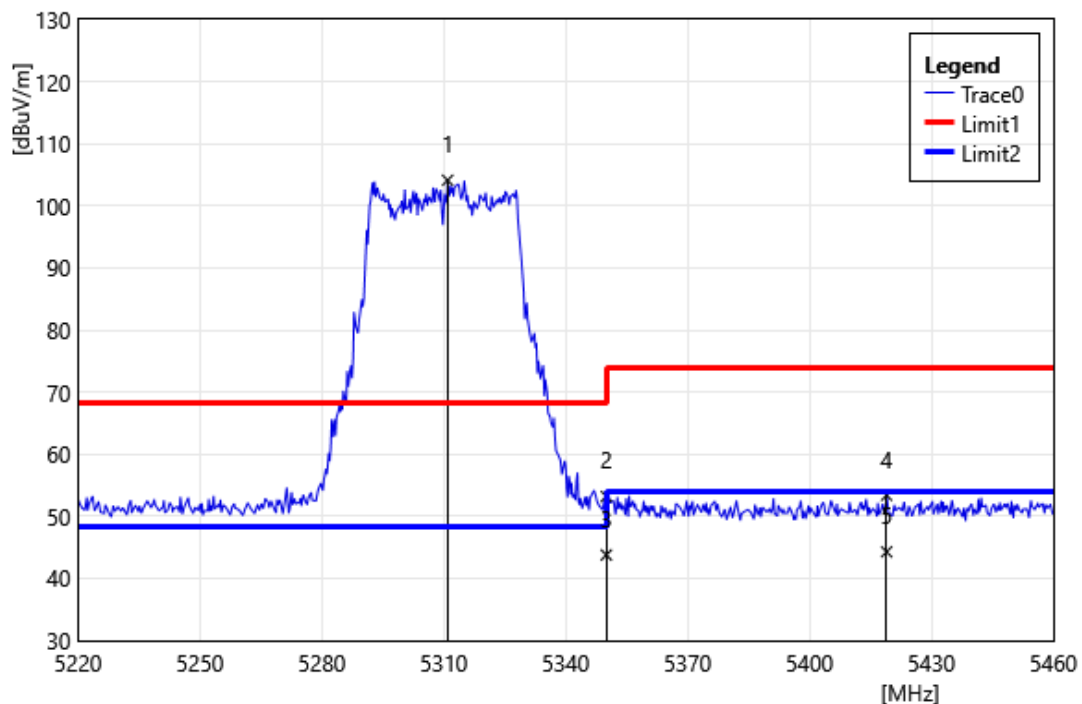


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5310.96	102.30	1.84	104.14	68.20	35.94	PEAK
2	5350.00	51.11	2.09	53.20	74.00	-20.80	PEAK
3	5350.00	41.70	2.09	43.79	54.00	-10.21	AVG
4	5418.96	50.89	2.52	53.41	74.00	-20.59	PEAK
5	5418.96	41.77	2.52	44.29	54.00	-9.71	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT40 5510		
	MHz		
Polarization:	Vertical		
Remark:			

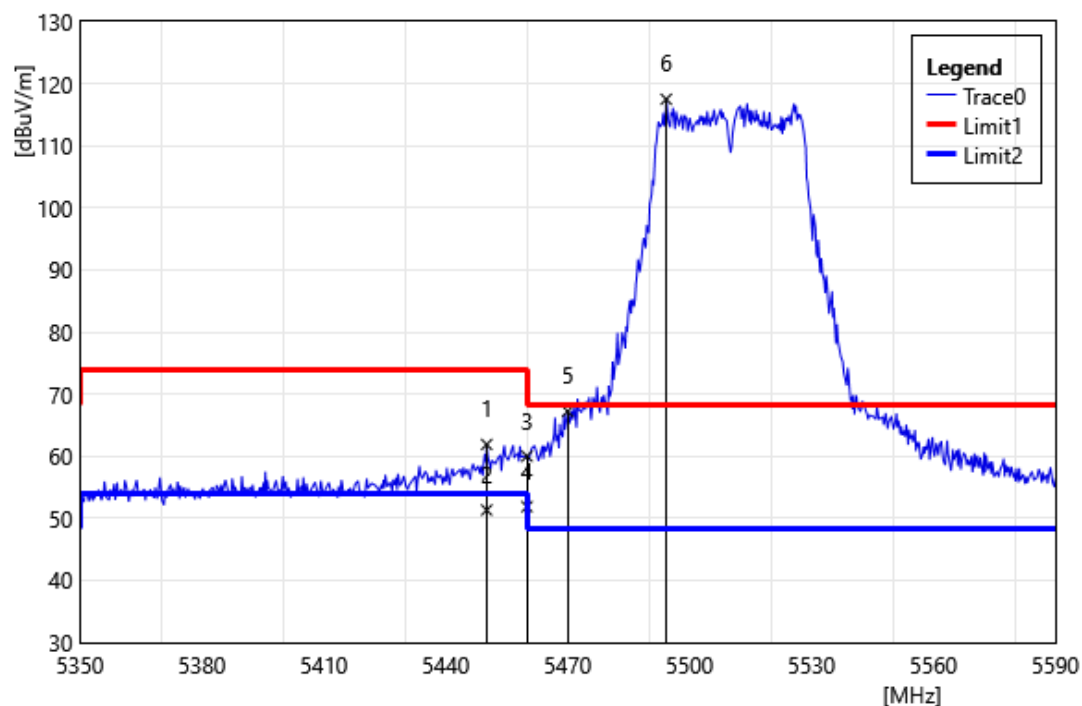


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5450.08	59.20	2.71	61.91	74.00	-12.10	PEAK
2	5450.08	48.63	2.71	51.34	54.00	-2.66	AVG
3	5460.00	57.29	2.71	60.00	74.00	-14.00	PEAK
4	5460.00	49.18	2.71	51.89	54.00	-2.11	AVG
5	5470.00	64.50	2.72	67.22	68.20	-0.98	PEAK
6	5494.24	114.78	2.72	117.50	68.20	49.30	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT40 5510		
	MHz		
Polarization:	Horizontal		
Remark:			

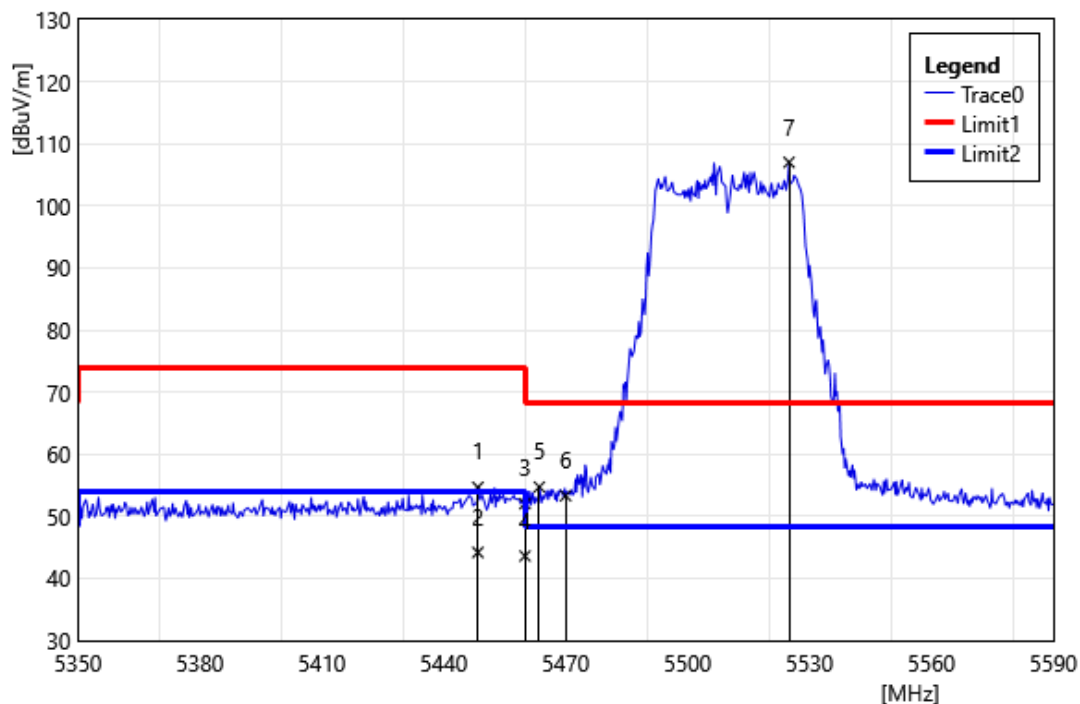


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5448.40	51.98	2.70	54.68	74.00	-19.32	PEAK
2	5448.40	41.49	2.70	44.19	54.00	-9.81	AVG
3	5460.00	49.33	2.71	52.04	74.00	-21.96	PEAK
4	5460.00	40.90	2.71	43.61	54.00	-10.39	AVG
5	5463.52	52.01	2.72	54.73	68.20	-13.47	PEAK
6	5470.00	50.59	2.72	53.31	68.20	-14.89	PEAK
7	5524.96	104.29	2.72	107.01	68.20	38.81	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT40 5550		
	MHz		
Polarization:	Vertical		
Remark:			

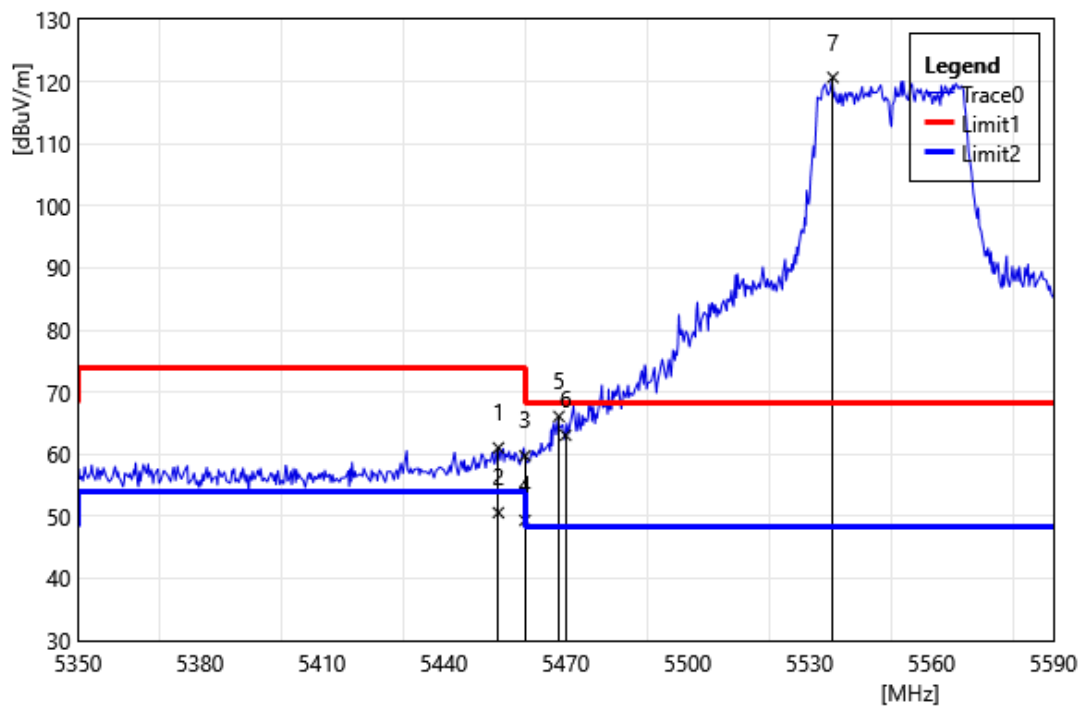


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5453.44	58.33	2.71	61.04	74.00	-12.96	PEAK
2	5453.44	47.89	2.71	50.60	54.00	-3.40	AVG
3	5460.00	57.03	2.71	59.74	74.00	-14.26	PEAK
4	5460.00	46.65	2.71	49.36	54.00	-4.64	AVG
5	5468.32	63.38	2.72	66.10	68.20	-2.10	PEAK
6	5470.00	60.34	2.72	63.06	68.20	-5.14	PEAK
7	5535.76	117.96	2.72	120.68	68.20	52.48	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT40 5550		
	MHz		
Polarization:	Horizontal		
Remark:			

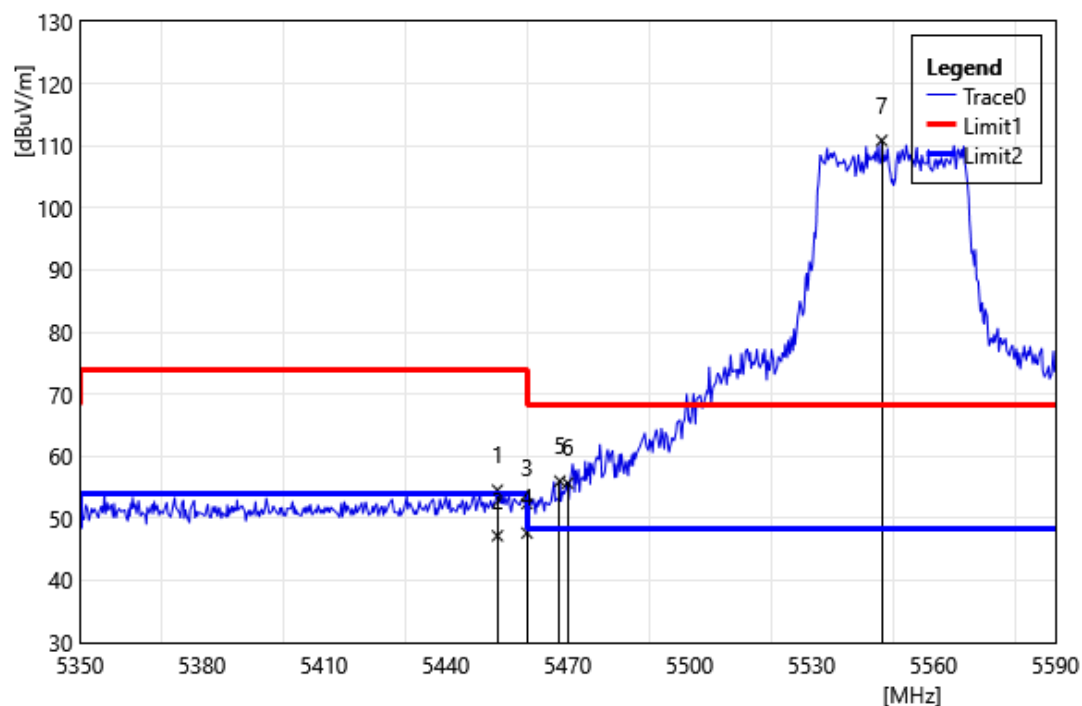


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5452.72	51.83	2.71	54.54	74.00	-19.46	PEAK
2	5452.72	44.48	2.71	47.19	54.00	-6.81	AVG
3	5460.00	49.65	2.71	52.36	74.00	-21.64	PEAK
4	5460.00	44.93	2.71	47.64	54.00	-6.36	AVG
5	5468.08	53.27	2.72	55.99	68.20	-12.21	PEAK
6	5470.00	52.96	2.72	55.68	68.20	-12.52	PEAK
7	5547.28	108.14	2.71	110.85	68.20	42.65	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT40 5670		
	MHz		
Polarization:	Vertical		
Remark:			

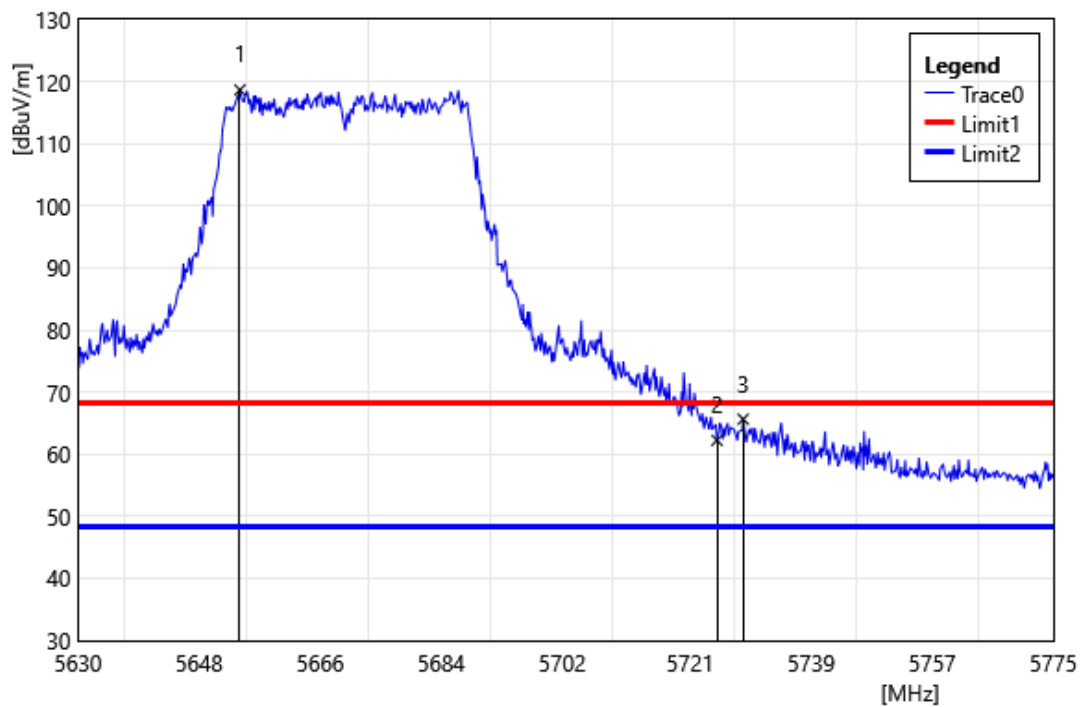


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5654.07	116.18	2.49	118.67	68.20	50.47	PEAK
2	5725.00	59.52	2.72	62.24	68.20	-5.96	PEAK
3	5728.89	62.89	2.76	65.65	68.20	-2.55	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT40 5670		
	MHz		
Polarization:	Horizontal		
Remark:			

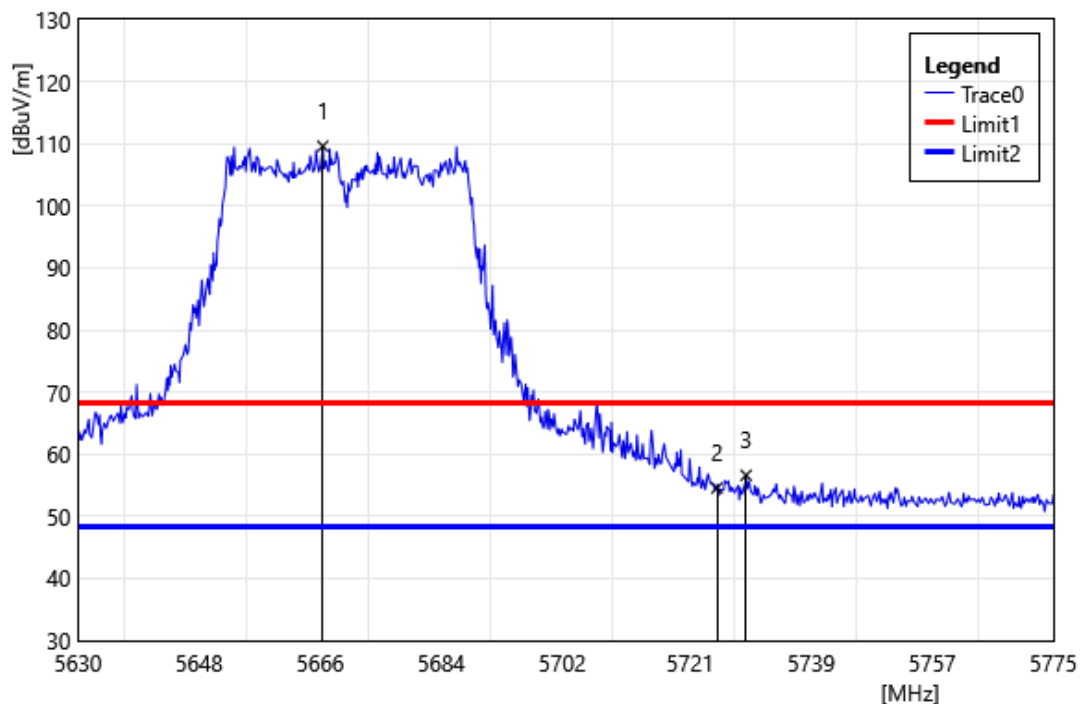


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5666.40	107.13	2.49	109.62	68.20	41.42	PEAK
2	5725.00	51.85	2.72	54.57	68.20	-13.63	PEAK
3	5729.33	53.84	2.77	56.61	68.20	-11.59	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT40 5710		
	MHz		
Polarization:	Vertical		
Remark:			

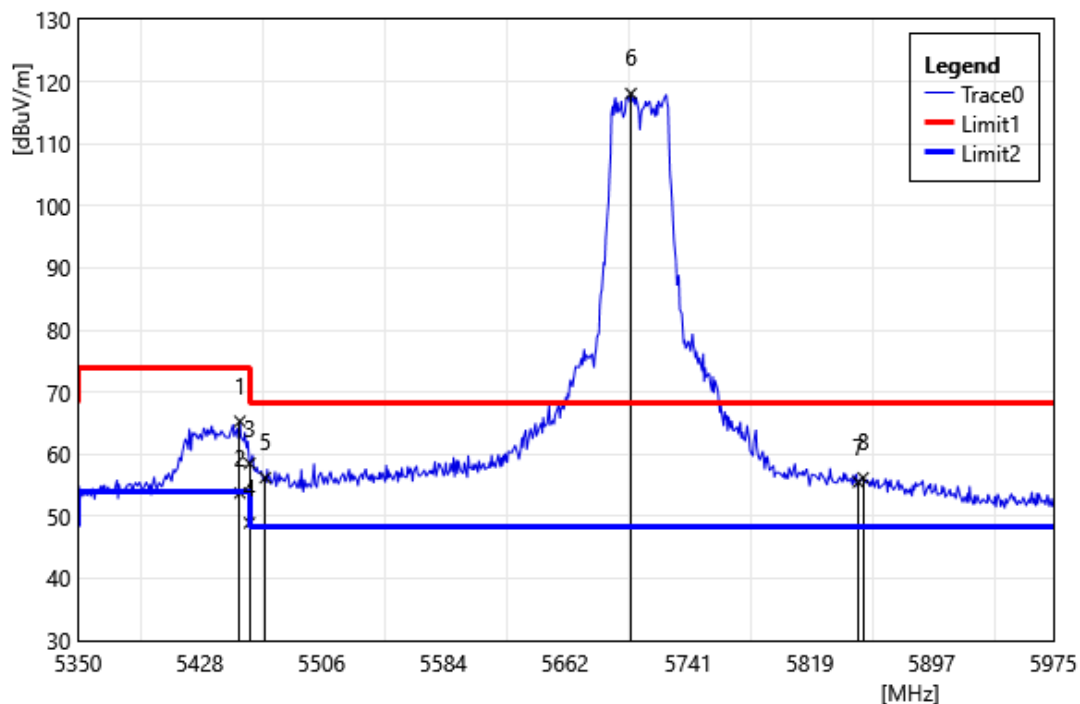


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5453.75	62.60	2.71	65.31	74.00	-8.69	PEAK
2	5453.75	51.05	2.71	53.76	54.00	-0.24	AVG
3	5460.00	55.81	2.71	58.52	74.00	-15.48	PEAK
4	5460.00	46.24	2.71	48.95	54.00	-5.05	AVG
5	5470.00	53.50	2.72	56.22	68.20	-11.98	PEAK
6	5704.38	115.55	2.52	118.07	68.20	49.87	PEAK
7	5850.00	52.27	3.24	55.52	68.20	-12.68	PEAK
8	5853.13	52.94	3.25	56.19	68.20	-12.01	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT40 5710		
	MHz		
Polarization:	Horizontal		
Remark:			

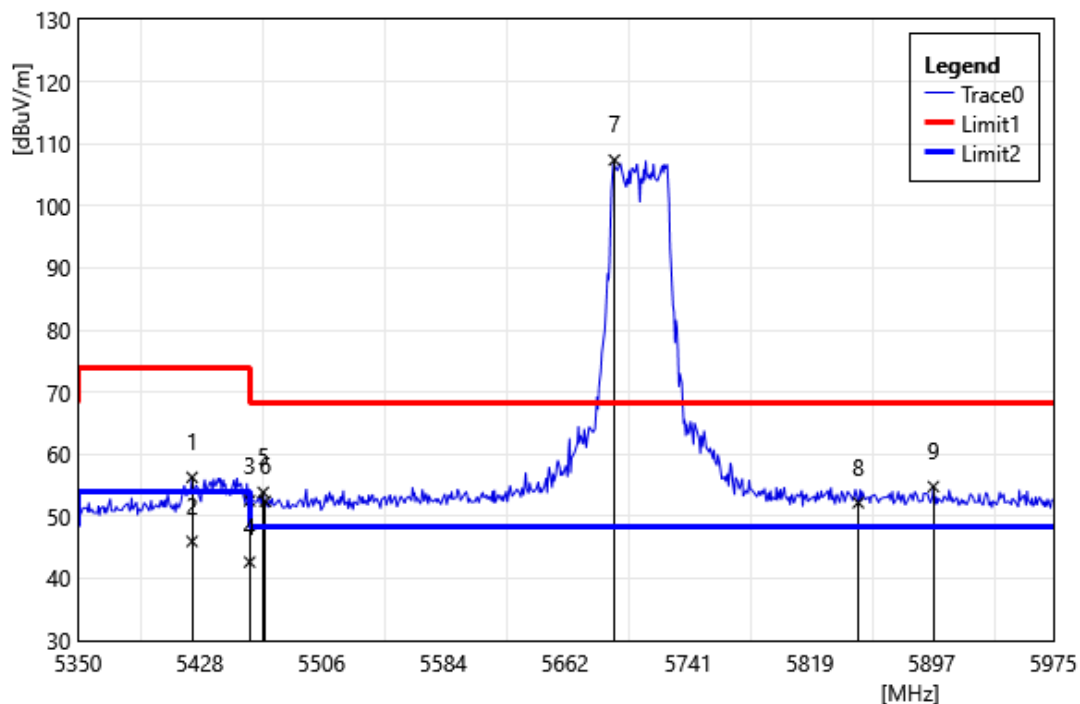


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5423.13	53.74	2.54	56.28	74.00	-17.72	PEAK
2	5423.13	43.43	2.54	45.97	54.00	-8.03	AVG
3	5460.00	49.79	2.71	52.50	74.00	-21.50	PEAK
4	5460.00	39.94	2.71	42.65	54.00	-11.35	AVG
5	5468.75	51.14	2.72	53.86	68.20	-14.34	PEAK
6	5470.00	49.69	2.72	52.41	68.20	-15.79	PEAK
7	5693.75	104.90	2.48	107.38	68.20	39.18	PEAK
8	5850.00	48.96	3.24	52.21	68.20	-15.99	PEAK
9	5898.13	51.46	3.33	54.80	68.20	-13.41	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT40 5755		
	MHz		
Polarization:	Vertical		
Remark:			

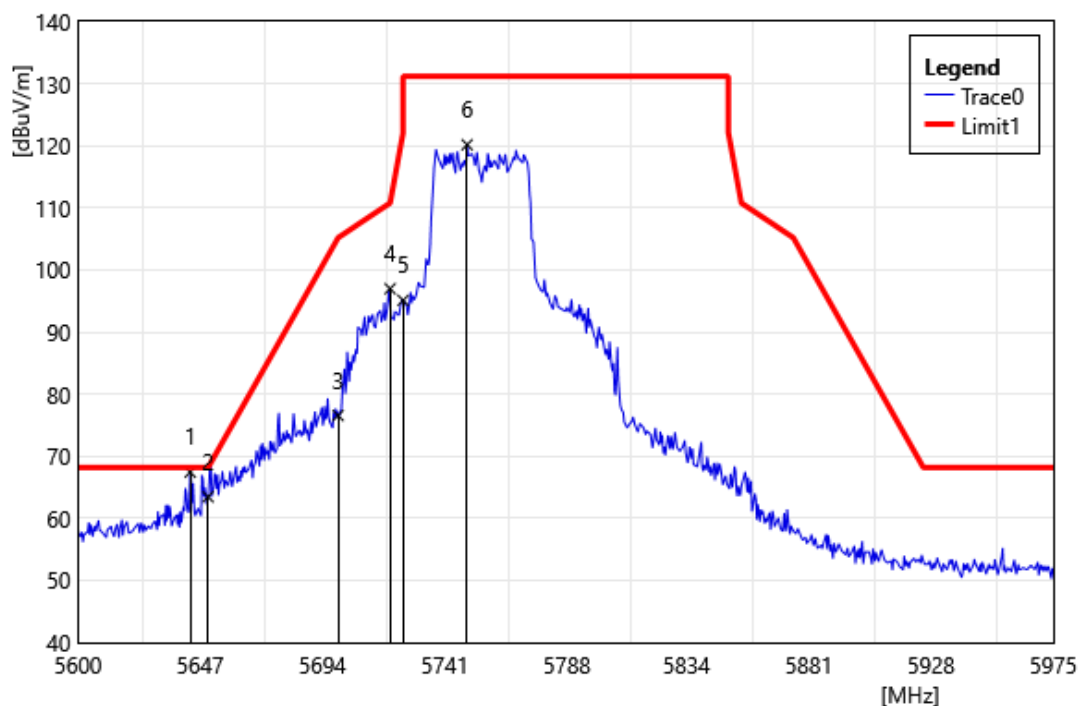


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5643.13	64.94	2.51	67.45	68.20	-0.75	PEAK
2	5650.00	60.97	2.49	63.46	68.20	-4.74	PEAK
3	5700.00	74.07	2.48	76.55	105.20	-28.65	PEAK
4	5720.00	94.31	2.67	96.98	110.80	-13.82	PEAK
5	5725.00	92.40	2.72	95.12	122.20	-27.08	PEAK
6	5749.63	117.21	2.96	120.17	131.20	-11.03	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT40 5755		
	MHz		
Polarization:	Horizontal		
Remark:			

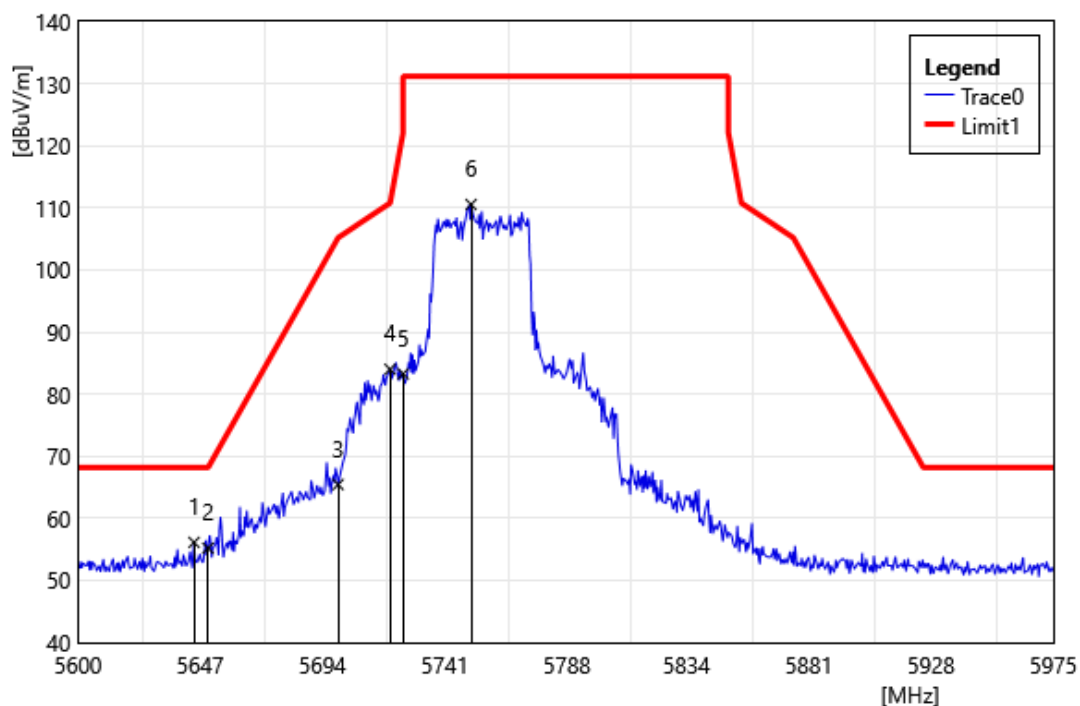


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5644.63	53.63	2.50	56.13	68.20	-12.07	PEAK
2	5650.00	52.71	2.49	55.20	68.20	-13.00	PEAK
3	5700.00	62.98	2.48	65.45	105.20	-39.75	PEAK
4	5720.00	81.35	2.67	84.02	110.80	-26.78	PEAK
5	5725.00	80.57	2.72	83.29	122.20	-38.91	PEAK
6	5751.13	107.58	2.97	110.55	131.20	-20.66	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT40 5795		
	MHz		
Polarization:	Vertical		
Remark:			

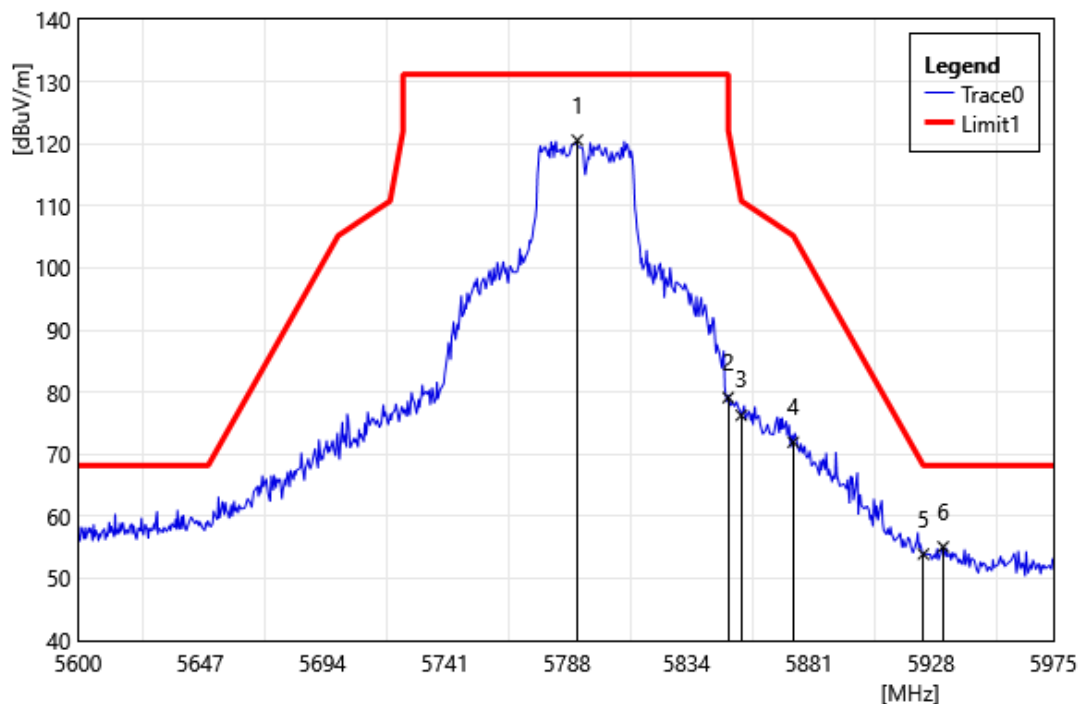


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5792.00	117.45	3.13	120.58	131.20	-10.62	PEAK
2	5850.00	75.88	3.24	79.13	122.20	-43.07	PEAK
3	5855.00	73.03	3.25	76.28	110.80	-34.52	PEAK
4	5875.00	68.66	3.29	71.95	105.20	-33.25	PEAK
5	5925.00	50.73	3.18	53.91	68.20	-14.29	PEAK
6	5932.63	51.96	3.13	55.09	68.20	-13.11	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT40 5795		
	MHz		
Polarization:	Horizontal		
Remark:			

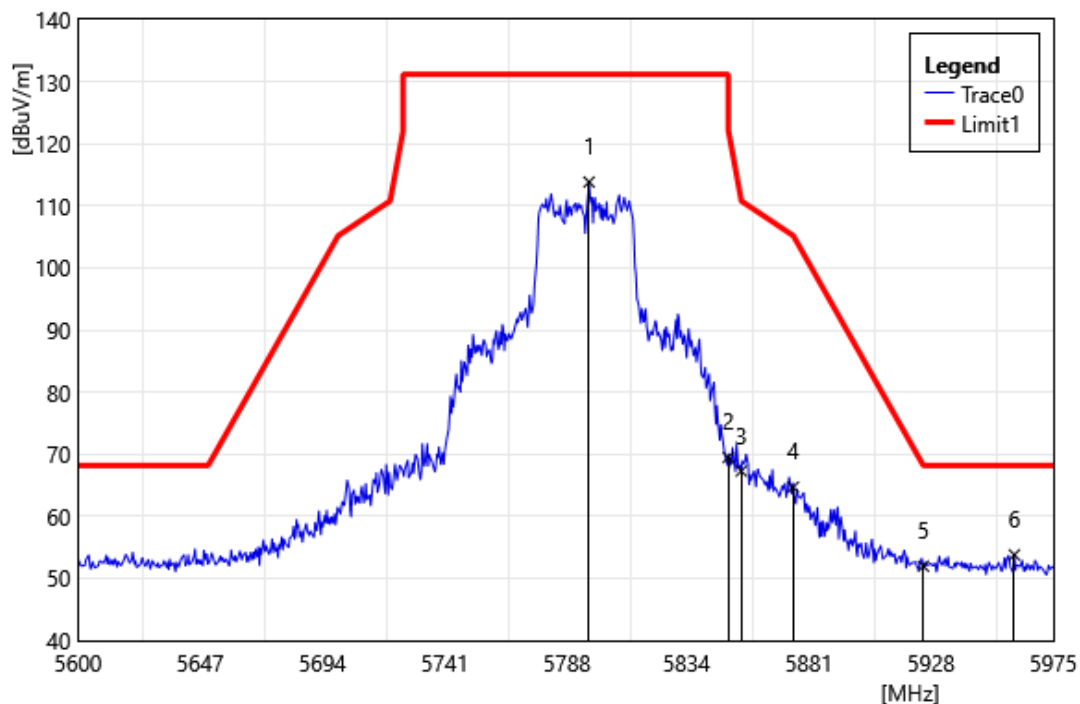


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5796.50	110.70	3.14	113.85	131.20	-17.36	PEAK
2	5850.00	66.24	3.24	69.48	122.20	-52.72	PEAK
3	5855.00	64.06	3.25	67.31	110.80	-43.49	PEAK
4	5875.00	61.42	3.29	64.71	105.20	-40.49	PEAK
5	5925.00	48.80	3.18	51.98	68.20	-16.22	PEAK
6	5960.00	50.77	3.04	53.81	68.20	-14.39	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

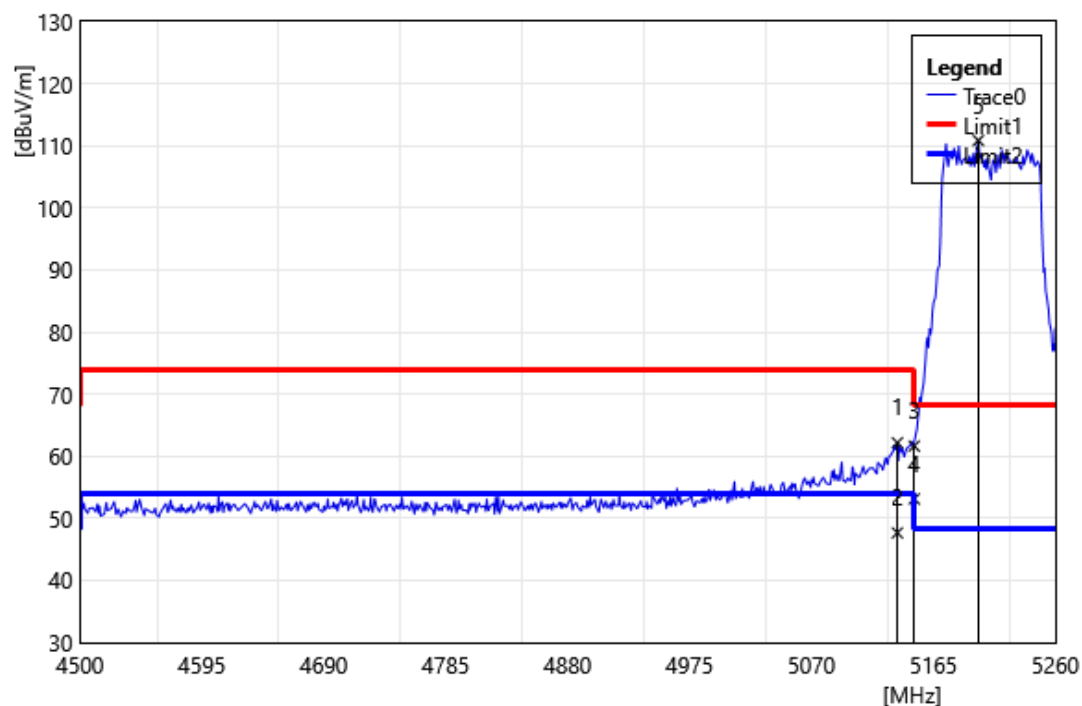


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5136.88	59.52	2.66	62.18	74.00	-11.82	PEAK
2	5136.88	45.00	2.66	47.66	54.00	-6.34	AVG
3	5150.00	59.00	2.64	61.64	74.00	-12.36	PEAK
4	5150.00	50.49	2.64	53.13	54.00	-0.87	AVG
5	5199.96	108.51	2.35	110.86	68.20	42.66	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT80 5210		
	MHz		
Polarization:	Horizontal		
Remark:			

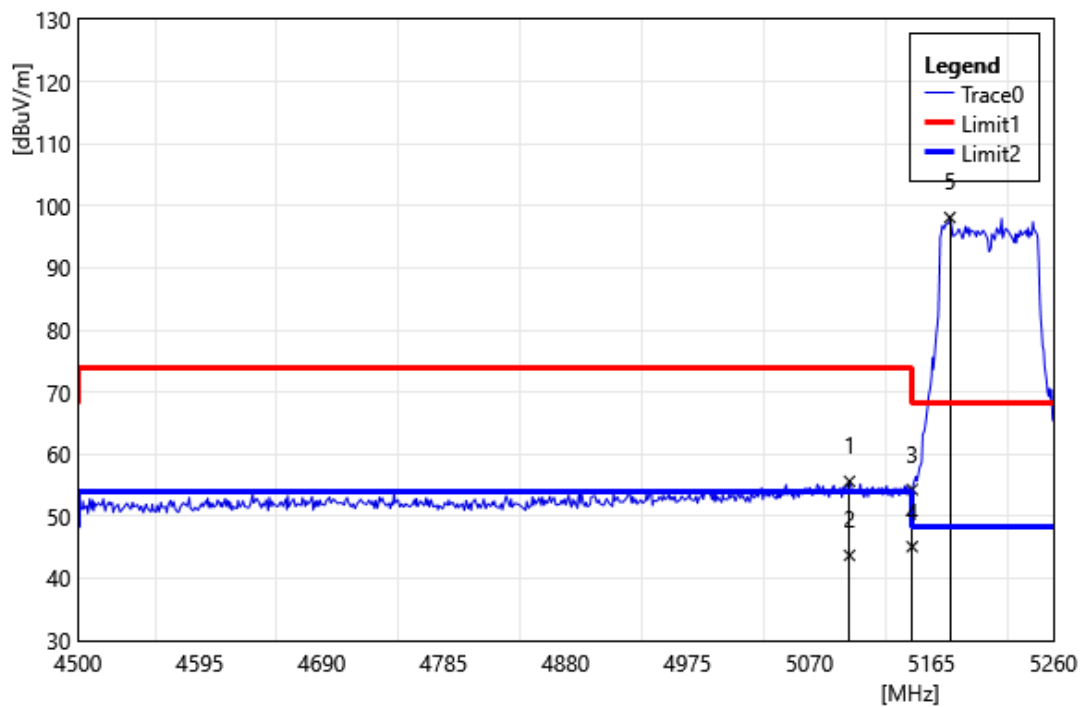


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5101.16	52.91	2.72	55.63	74.00	-18.37	PEAK
2	5101.16	41.00	2.72	43.72	54.00	-10.28	AVG
3	5150.00	51.68	2.64	54.32	74.00	-19.68	PEAK
4	5150.00	42.48	2.64	45.12	54.00	-8.88	AVG
5	5179.44	95.65	2.47	98.12	68.20	29.92	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT80 5290		
	MHz		
Polarization:	Vertical		
Remark:			

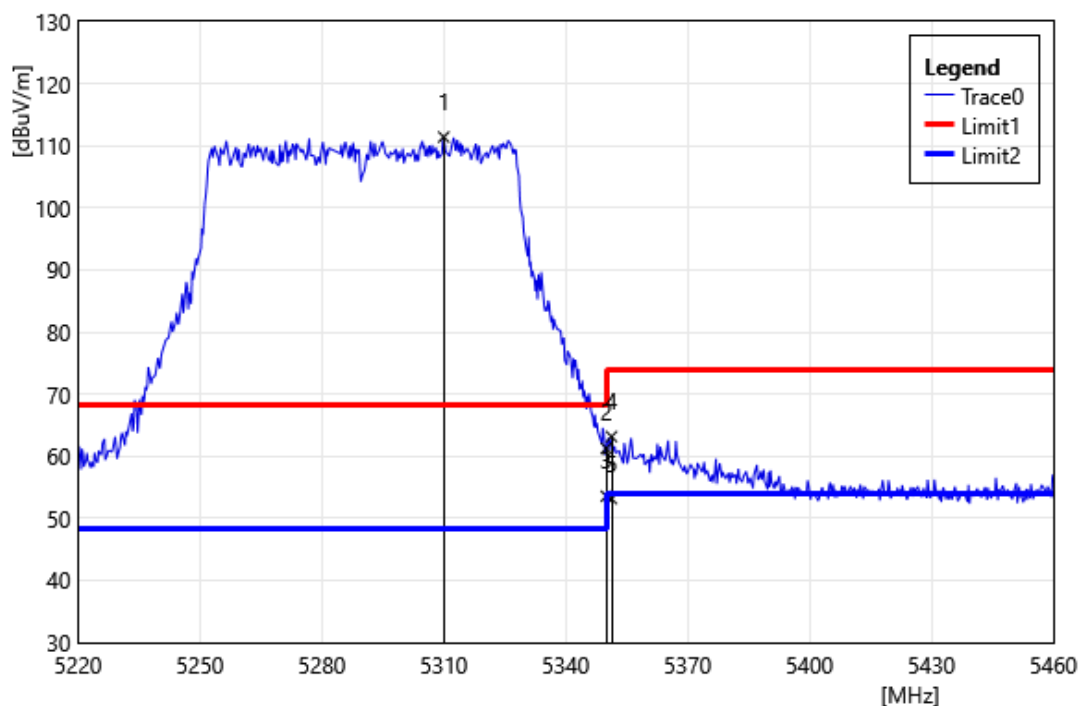


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5310.00	109.57	1.84	111.41	68.20	43.21	PEAK
2	5350.00	59.18	2.09	61.27	74.00	-12.73	PEAK
3	5350.00	51.48	2.09	53.57	54.00	-0.43	AVG
4	5351.28	61.07	2.10	63.17	74.00	-10.83	PEAK
5	5351.28	51.07	2.10	53.17	54.00	-0.83	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT80 5290		
	MHz		
Polarization:	Horizontal		
Remark:			

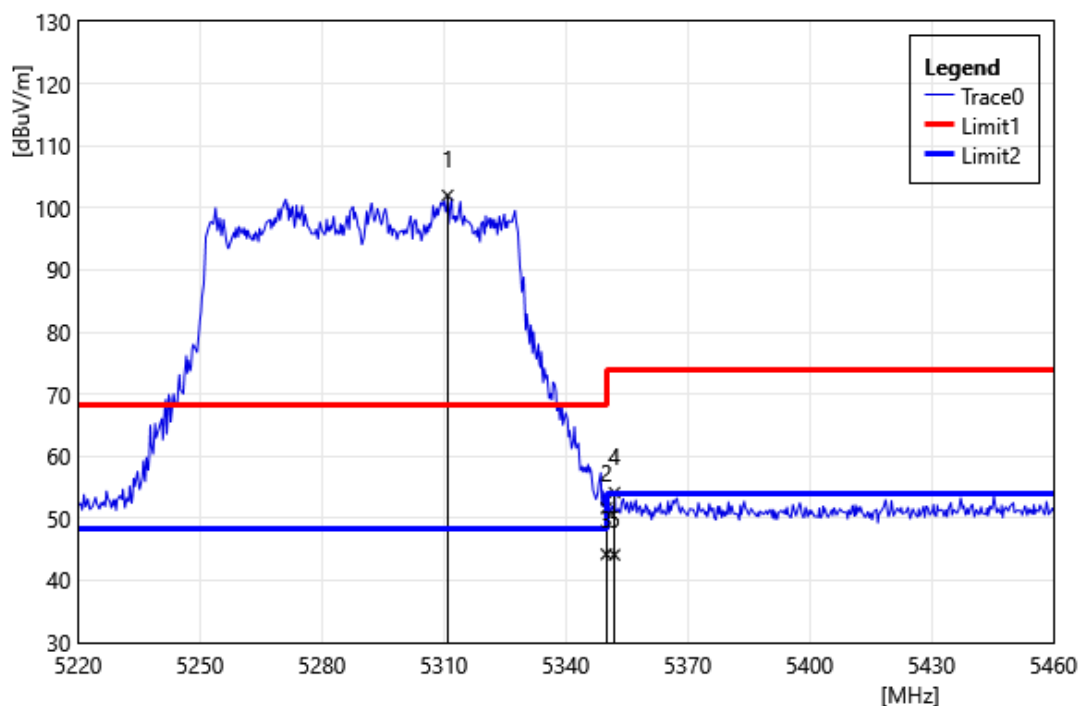


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5310.96	100.17	1.84	102.01	68.20	33.81	PEAK
2	5350.00	49.57	2.09	51.66	74.00	-22.34	PEAK
3	5350.00	42.14	2.09	44.23	54.00	-9.77	AVG
4	5352.00	52.04	2.10	54.14	74.00	-19.86	PEAK
5	5352.00	42.02	2.10	44.12	54.00	-9.88	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT80 5530		
	MHz		
Polarization:	Vertical		
Remark:			

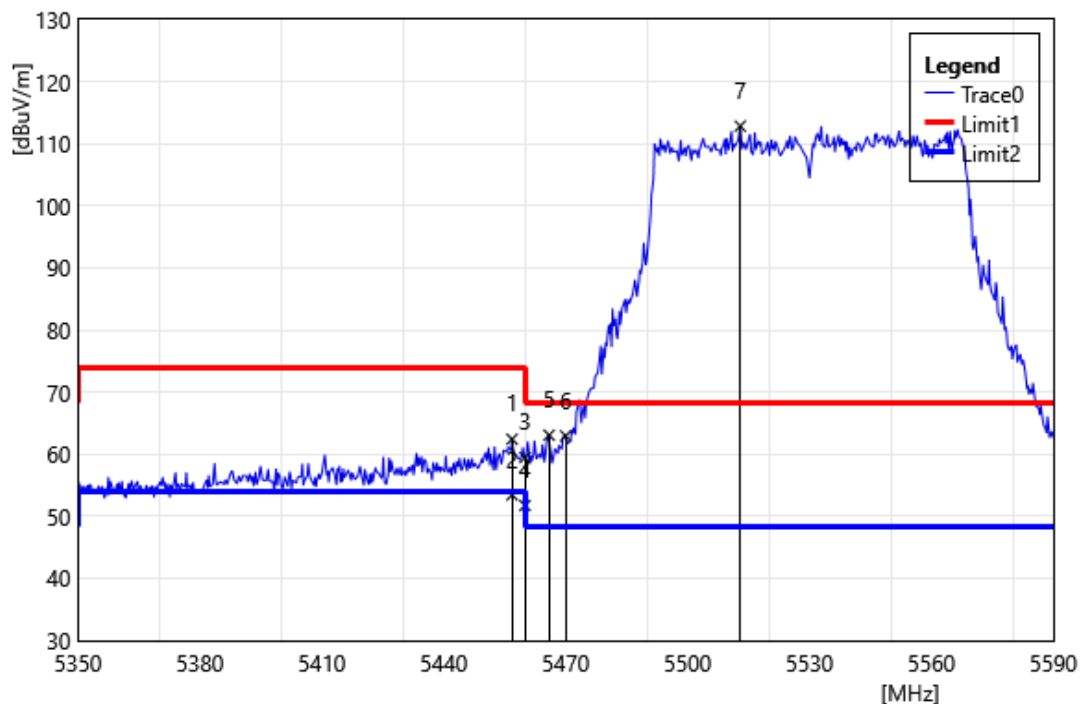


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5456.80	59.71	2.71	62.42	74.00	-11.58	PEAK
2	5456.80	50.74	2.71	53.45	54.00	-0.55	AVG
3	5460.00	56.77	2.71	59.48	74.00	-14.52	PEAK
4	5460.00	49.03	2.71	51.74	54.00	-2.26	AVG
5	5465.92	60.36	2.72	63.08	68.20	-5.12	PEAK
6	5470.00	60.23	2.72	62.95	68.20	-5.25	PEAK
7	5512.96	110.13	2.72	112.85	68.20	44.65	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT80 5530		
	MHz		
Polarization:	Horizontal		
Remark:			

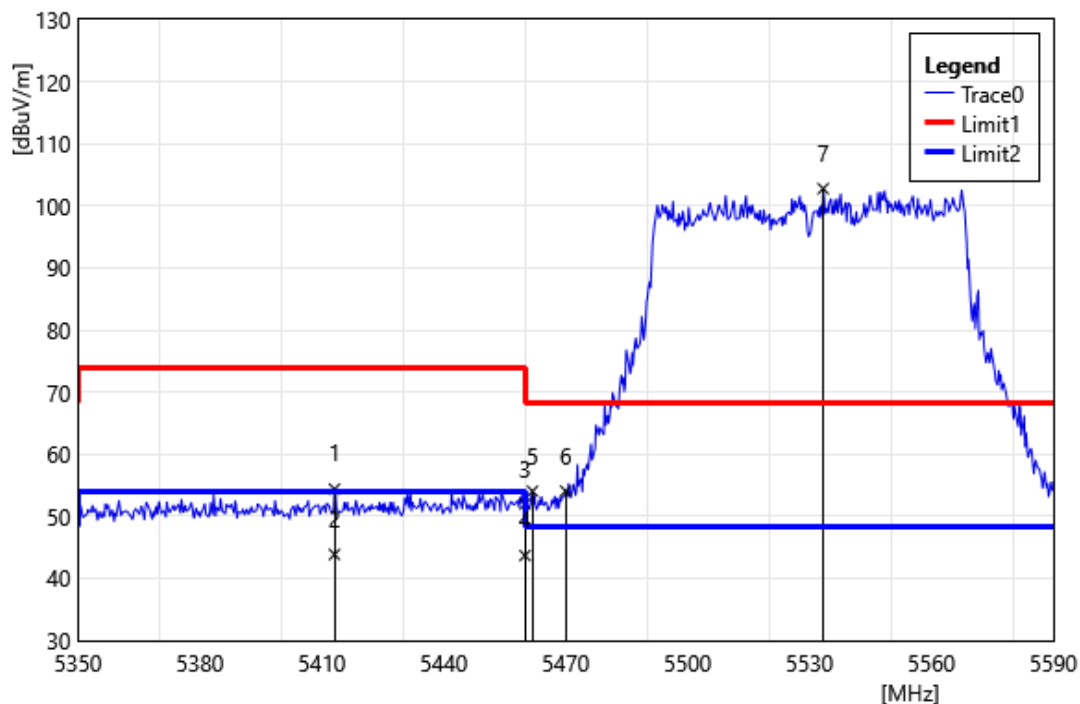


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5413.12	51.91	2.48	54.39	74.00	-19.61	PEAK
2	5413.12	41.39	2.48	43.87	54.00	-10.13	AVG
3	5460.00	49.26	2.71	51.97	74.00	-22.03	PEAK
4	5460.00	40.97	2.71	43.68	54.00	-10.32	AVG
5	5461.84	51.31	2.72	54.03	68.20	-14.17	PEAK
6	5470.00	51.33	2.72	54.05	68.20	-14.15	PEAK
7	5533.36	100.06	2.72	102.78	68.20	34.58	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT160 5250		
	MHz		
Polarization:	Vertical		
Remark:			

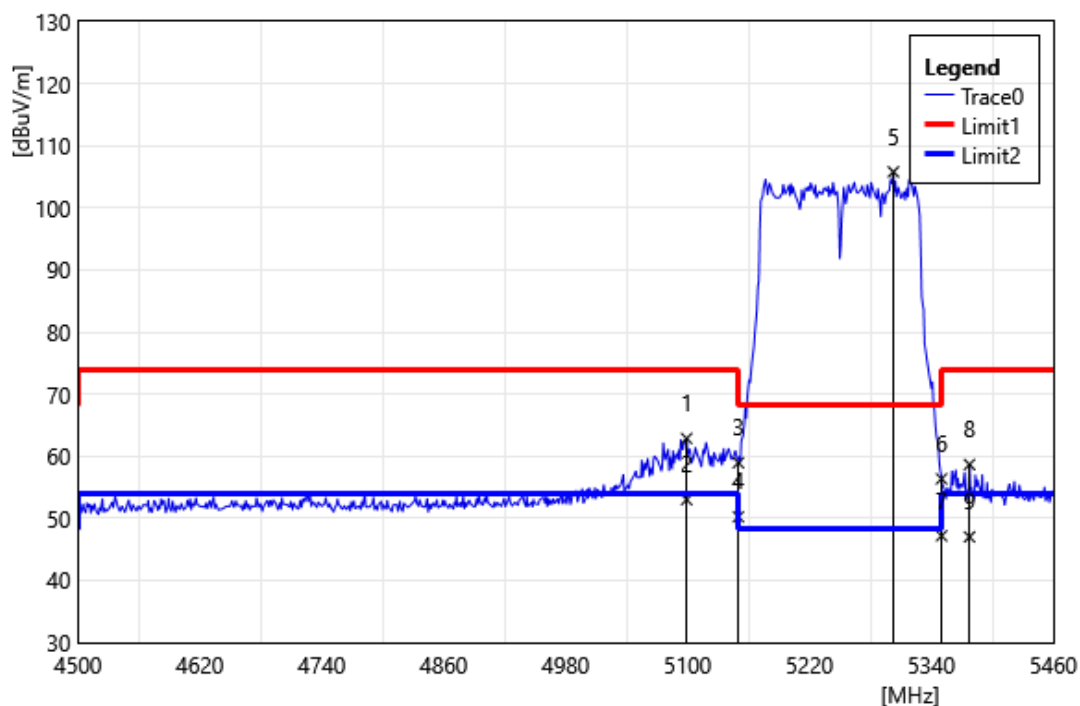


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5099.04	60.16	2.72	62.88	74.00	-11.12	PEAK
2	5099.04	50.29	2.72	53.01	54.00	-0.99	AVG
3	5150.00	56.31	2.64	58.95	74.00	-15.05	PEAK
4	5150.00	47.61	2.64	50.25	54.00	-3.75	AVG
5	5302.56	104.01	1.79	105.80	68.20	37.60	PEAK
6	5350.00	54.28	2.09	56.37	74.00	-17.63	PEAK
7	5350.00	45.10	2.09	47.19	54.00	-6.81	AVG
8	5377.44	56.41	2.26	58.67	74.00	-15.33	PEAK
9	5377.44	44.75	2.26	47.01	54.00	-6.99	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT160 5250 MHz		
Polarization:	Horizontal		
Remark:			

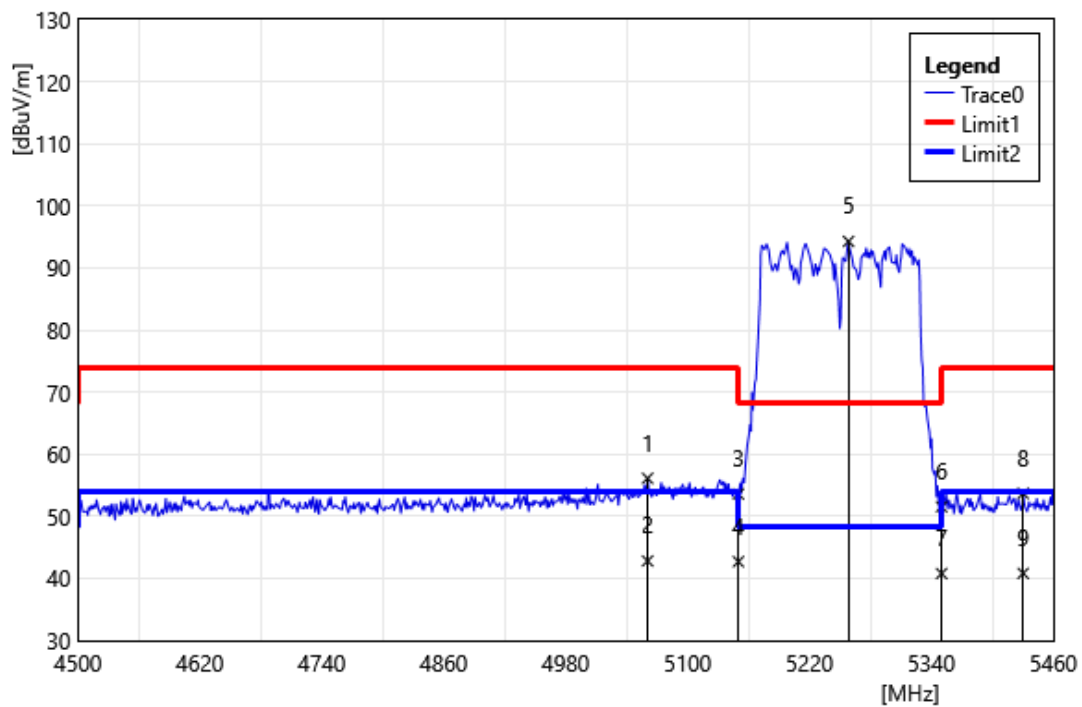


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5060.64	53.57	2.56	56.13	74.00	-17.87	PEAK
2	5060.64	40.26	2.56	42.82	54.00	-11.18	AVG
3	5150.00	50.96	2.64	53.60	74.00	-20.40	PEAK
4	5150.00	40.08	2.64	42.72	54.00	-11.28	AVG
5	5258.40	92.35	1.93	94.28	68.20	26.08	PEAK
6	5350.00	49.45	2.09	51.54	74.00	-22.46	PEAK
7	5350.00	38.70	2.09	40.79	54.00	-13.21	AVG
8	5430.24	51.12	2.59	53.71	74.00	-20.29	PEAK
9	5430.24	38.23	2.59	40.82	54.00	-13.18	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT160 5570		
	MHz		
Polarization:	Vertical		
Remark:			

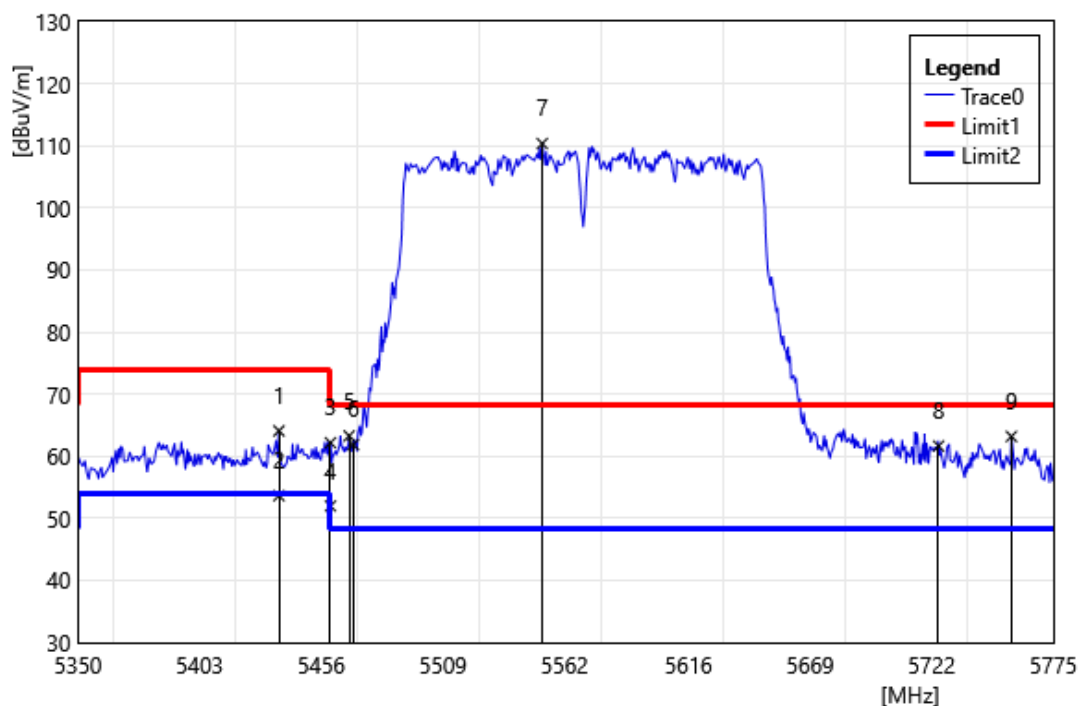


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5437.55	61.46	2.63	64.09	74.00	-9.91	PEAK
2	5437.55	51.02	2.63	53.65	54.00	-0.35	AVG
3	5460.00	59.48	2.71	62.19	74.00	-11.81	PEAK
4	5460.00	49.28	2.71	51.99	54.00	-2.01	AVG
5	5468.15	60.56	2.72	63.28	68.20	-4.92	PEAK
6	5470.00	59.15	2.72	61.87	68.20	-6.33	PEAK
7	5552.30	107.66	2.71	110.37	68.20	42.17	PEAK
8	5725.00	58.93	2.72	61.65	68.20	-6.55	PEAK
9	5756.73	60.20	2.99	63.19	68.20	-5.01	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11ac VHT160 5570		
	MHz		
Polarization:	Horizontal		
Remark:			

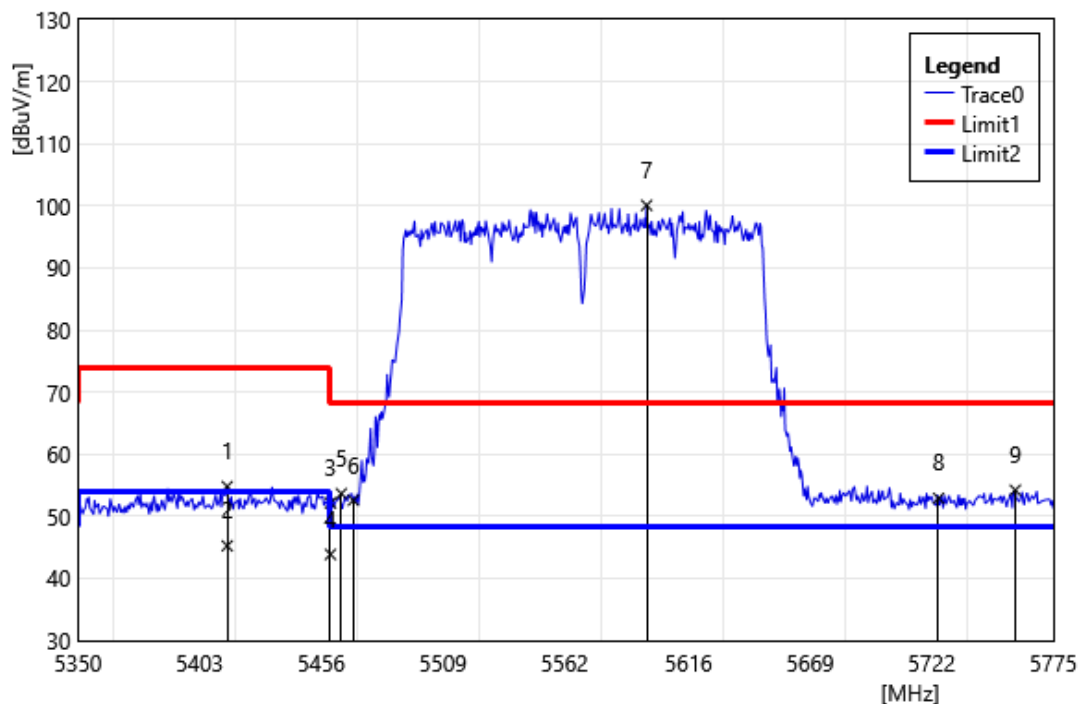


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5415.03	52.31	2.49	54.80	74.00	-19.20	PEAK
2	5415.03	42.76	2.49	45.25	54.00	-8.75	AVG
3	5460.00	49.44	2.71	52.15	74.00	-21.85	PEAK
4	5460.00	41.16	2.71	43.87	54.00	-10.13	AVG
5	5464.75	50.93	2.72	53.65	68.20	-14.55	PEAK
6	5470.00	49.87	2.72	52.59	68.20	-15.61	PEAK
7	5597.78	97.48	2.61	100.09	68.20	31.89	PEAK
8	5725.00	50.18	2.72	52.90	68.20	-15.30	PEAK
9	5758.43	51.22	3.00	54.22	68.20	-13.99	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5180		
	MHz		
Polarization:	Vertical		
Remark:			

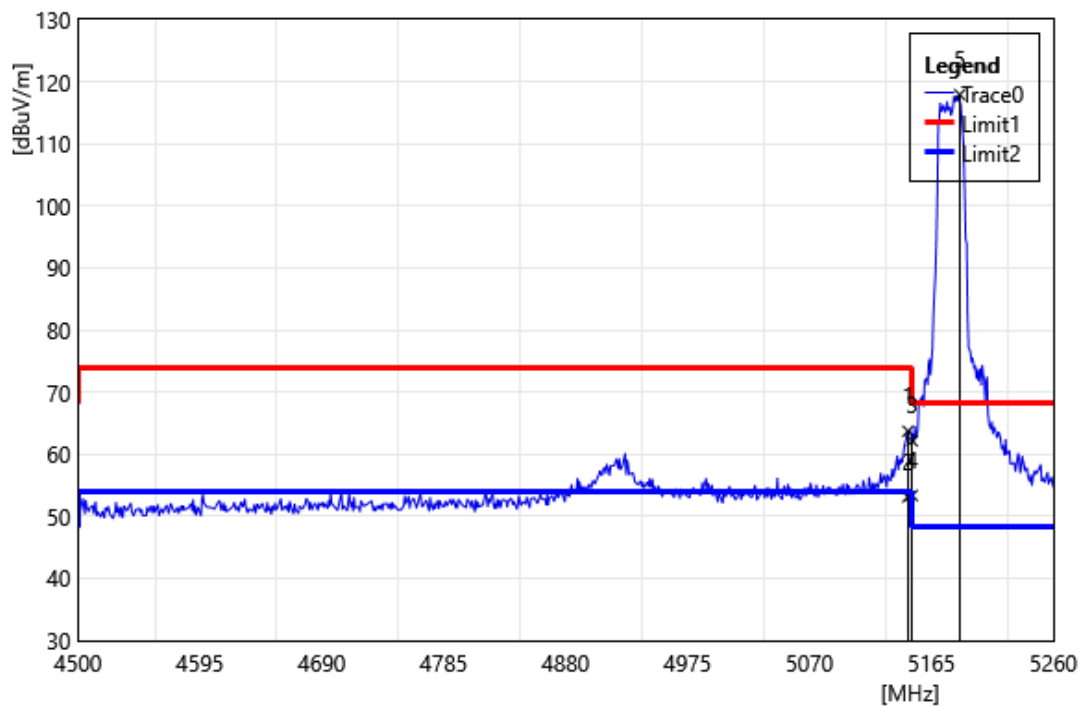


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5146.76	61.07	2.64	63.71	74.00	-10.29	PEAK
2	5146.76	50.50	2.64	53.14	54.00	-0.86	AVG
3	5150.00	59.50	2.64	62.14	74.00	-11.86	PEAK
4	5150.00	50.72	2.64	53.36	54.00	-0.64	AVG
5	5187.04	115.50	2.42	117.92	68.20	49.72	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5180		
	MHz		
Polarization:	Horizontal		
Remark:			

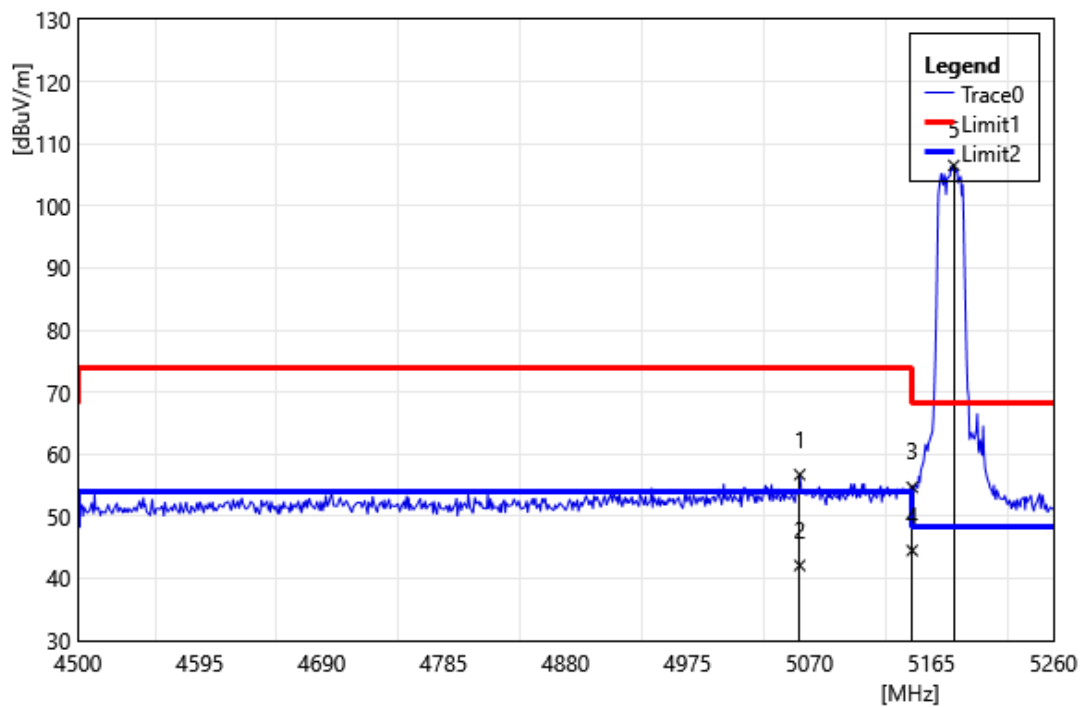


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5062.40	54.14	2.57	56.71	74.00	-17.29	PEAK
2	5062.40	39.51	2.57	42.08	54.00	-11.92	AVG
3	5150.00	52.06	2.64	54.69	74.00	-19.31	PEAK
4	5150.00	41.86	2.64	44.50	54.00	-9.50	AVG
5	5182.48	104.07	2.45	106.52	68.20	38.32	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5200		
	MHz		
Polarization:	Vertical		
Remark:			

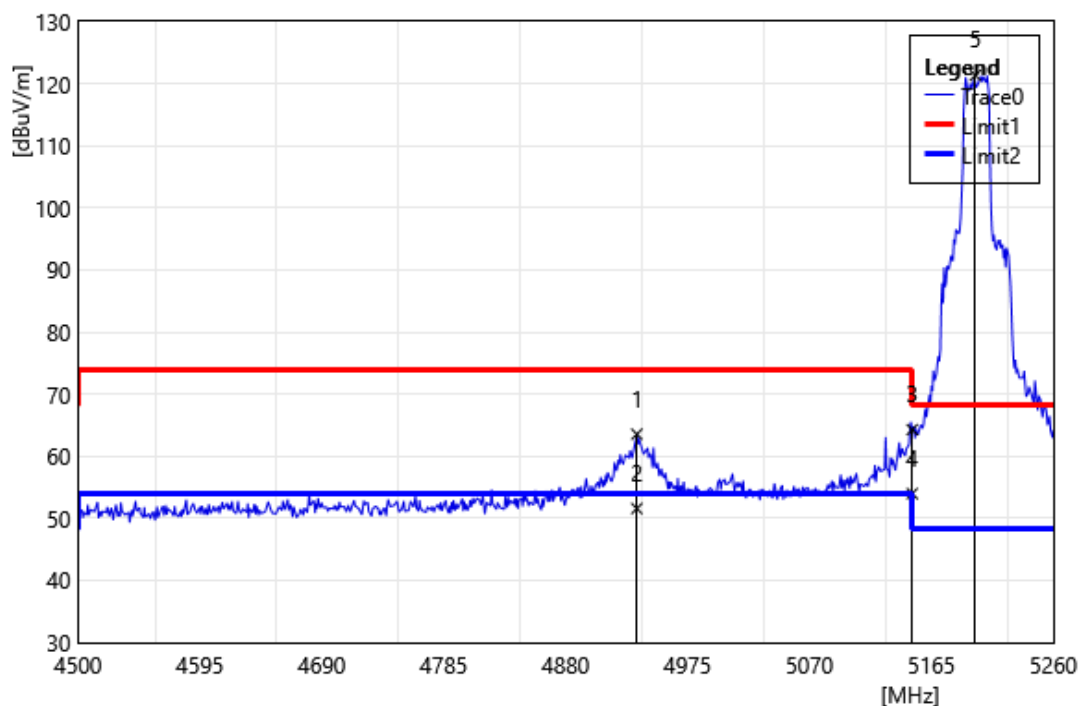


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4935.48	61.68	1.88	63.56	74.00	-10.44	PEAK
2	4935.48	49.70	1.88	51.58	54.00	-2.42	AVG
3	5150.00	61.64	2.64	64.28	74.00	-9.72	PEAK
4	5150.00	51.34	2.64	53.98	54.00	-0.02	AVG
5	5199.20	118.98	2.35	121.34	68.20	53.14	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5200		
	MHz		
Polarization:	Horizontal		
Remark:			

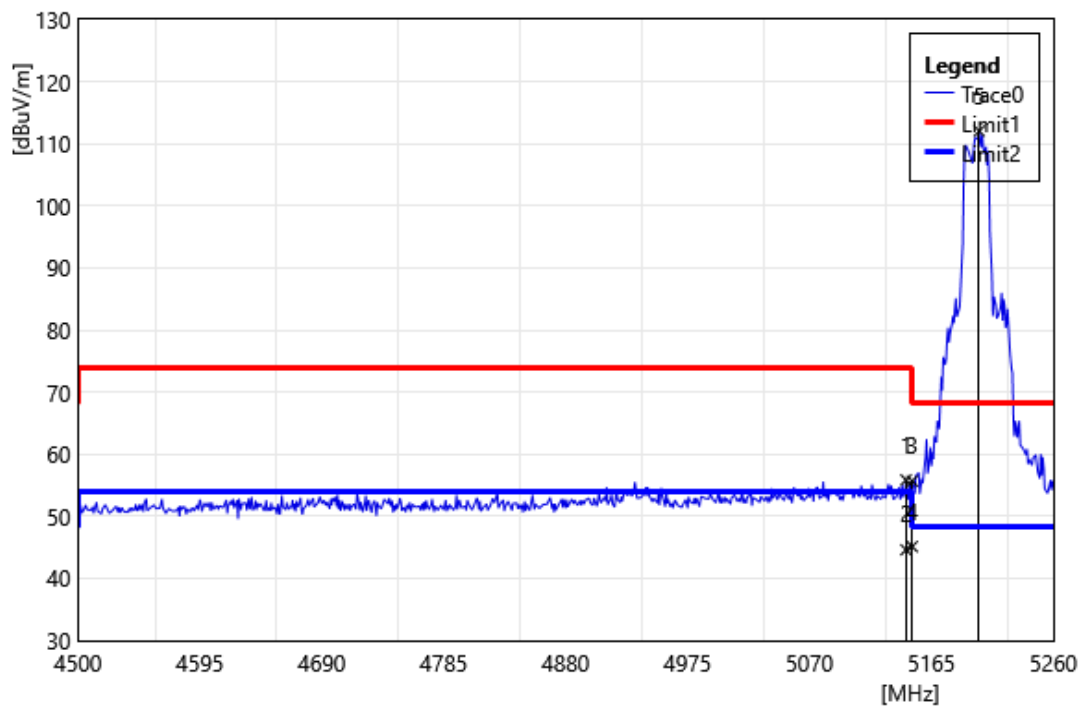


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5145.24	53.21	2.65	55.86	74.00	-18.14	PEAK
2	5145.24	41.96	2.65	44.61	54.00	-9.39	AVG
3	5150.00	53.05	2.64	55.69	74.00	-18.31	PEAK
4	5150.00	42.49	2.64	45.13	54.00	-8.87	AVG
5	5202.24	109.72	2.33	112.06	68.20	43.86	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5240		
	MHz		
Polarization:	Vertical		
Remark:			

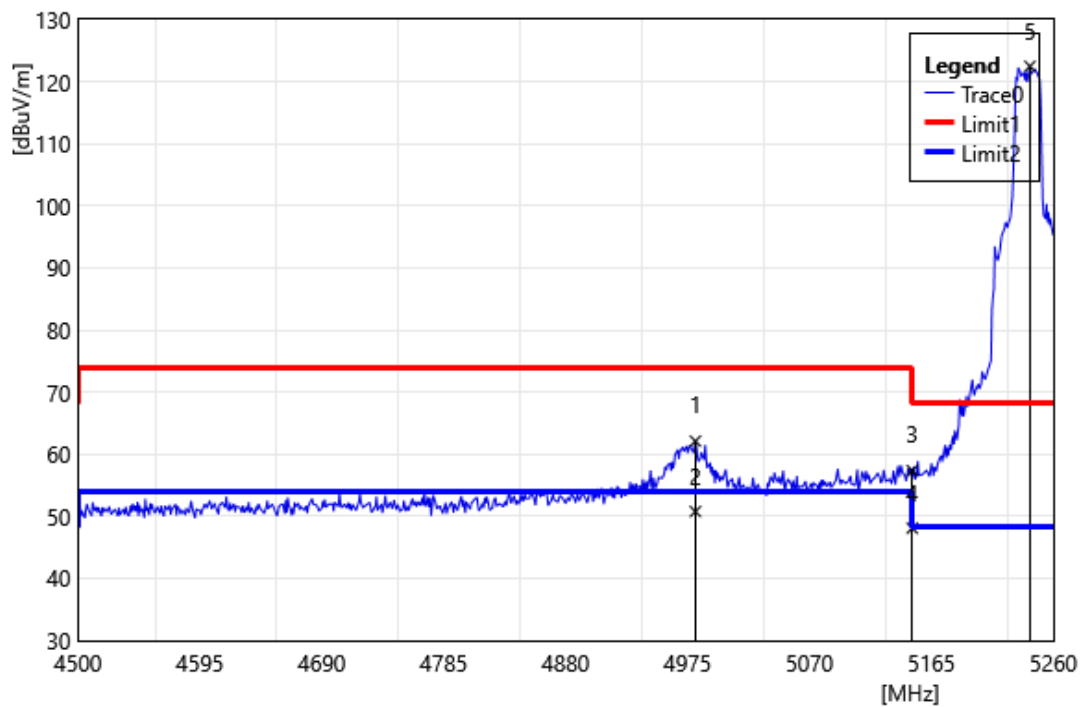


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4981.08	60.17	1.95	62.12	74.00	-11.88	PEAK
2	4981.08	48.83	1.95	50.78	54.00	-3.22	AVG
3	5150.00	54.73	2.64	57.37	74.00	-16.63	PEAK
4	5150.00	45.46	2.64	48.10	54.00	-5.90	AVG
5	5241.76	120.44	2.03	122.47	68.20	54.27	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5240		
	MHz		
Polarization:	Horizontal		
Remark:			

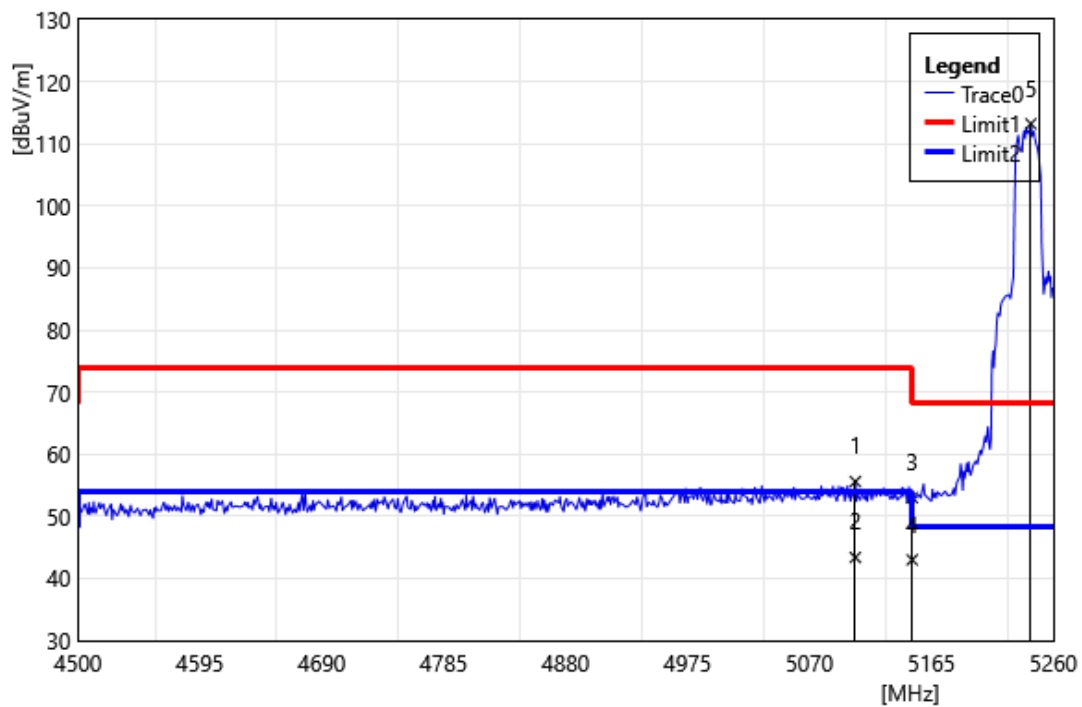


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5105.72	52.89	2.72	55.61	74.00	-18.39	PEAK
2	5105.72	40.66	2.72	43.38	54.00	-10.62	AVG
3	5150.00	50.38	2.64	53.02	74.00	-20.98	PEAK
4	5150.00	40.35	2.64	42.99	54.00	-11.01	AVG
5	5242.52	111.19	2.02	113.21	68.20	45.01	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5260		
	MHz		
Polarization:	Vertical		
Remark:			

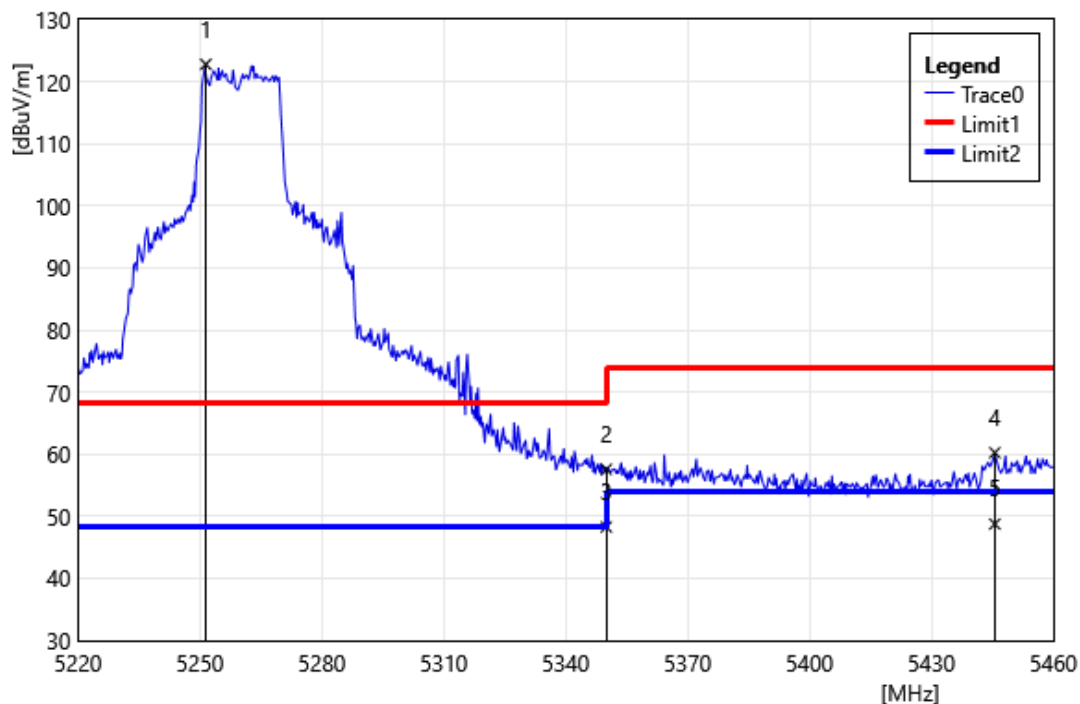

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5251.44	120.84	1.96	122.80	68.20	54.60	PEAK
2	5350.00	55.48	2.09	57.57	74.00	-16.43	PEAK
3	5350.00	46.20	2.09	48.29	54.00	-5.71	AVG
4	5445.60	57.57	2.68	60.25	74.00	-13.75	PEAK
5	5445.60	46.08	2.68	48.76	54.00	-5.24	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5260		
	MHz		
Polarization:	Horizontal		
Remark:			

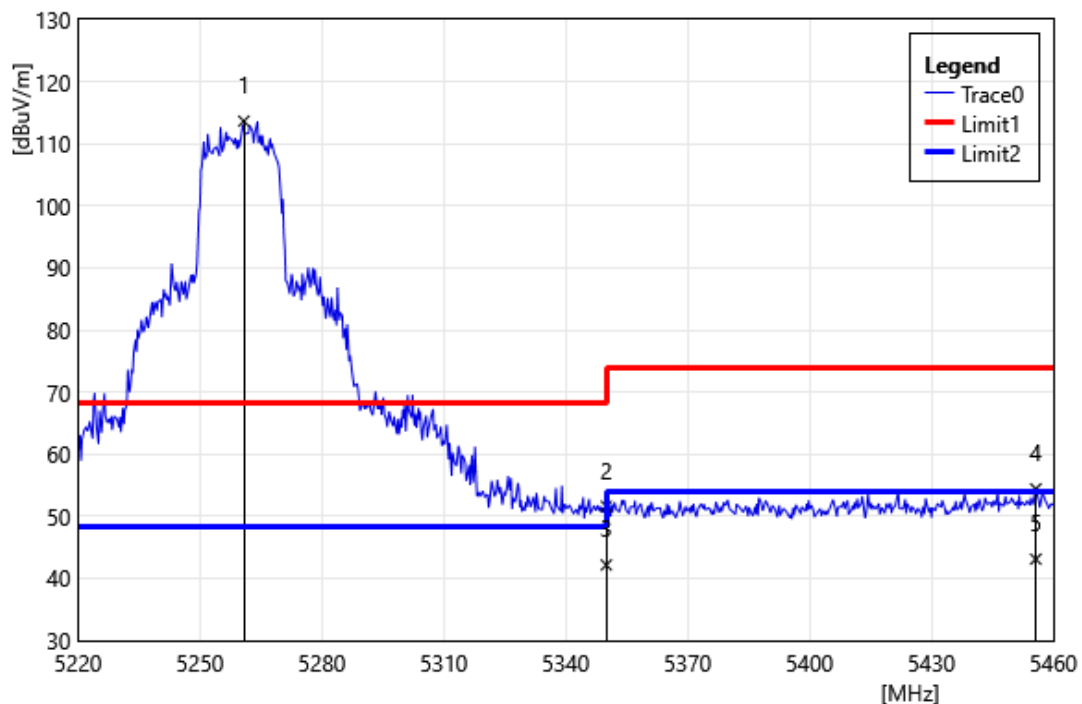

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5260.80	111.73	1.92	113.65	68.20	45.45	PEAK
2	5350.00	49.51	2.09	51.60	74.00	-22.40	PEAK
3	5350.00	40.09	2.09	42.18	54.00	-11.82	AVG
4	5455.68	51.71	2.71	54.42	74.00	-19.58	PEAK
5	5455.68	40.39	2.71	43.10	54.00	-10.90	AVG