



Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5280		
	MHz		
Polarization:	Vertical		
Remark:			

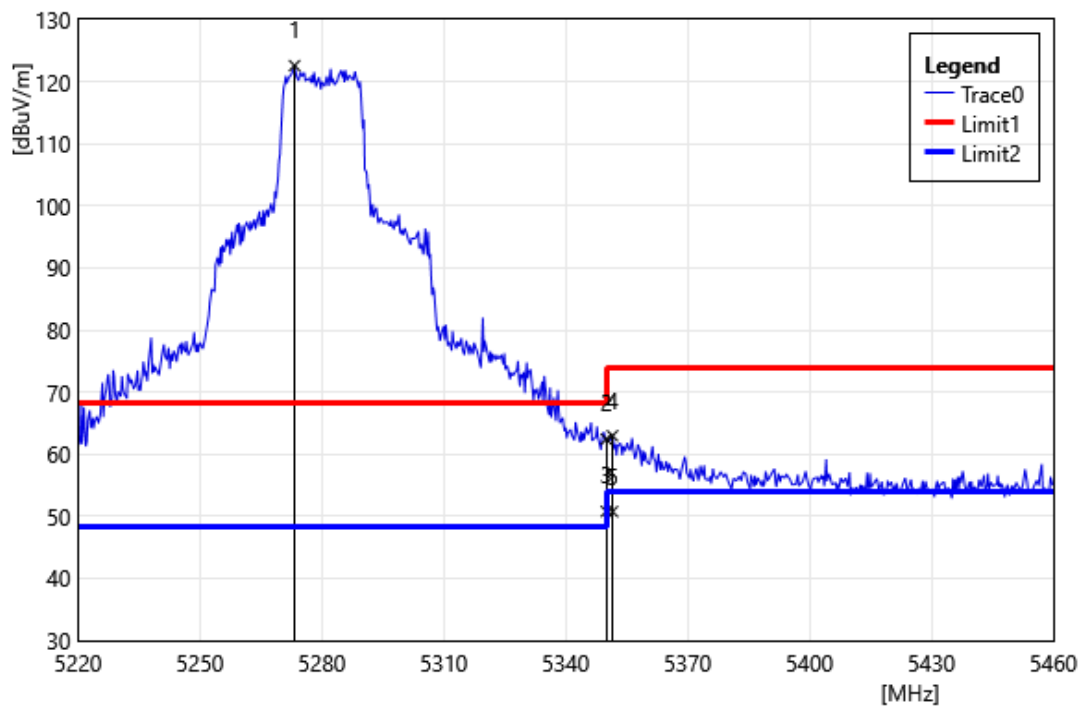


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5273.28	120.72	1.87	122.59	68.20	54.39	PEAK
2	5350.00	60.35	2.09	62.44	74.00	-11.56	PEAK
3	5350.00	48.72	2.09	50.81	54.00	-3.19	AVG
4	5351.52	60.89	2.10	62.99	74.00	-11.01	PEAK
5	5351.52	48.67	2.10	50.77	54.00	-3.23	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5280		
	MHz		
Polarization:	Horizontal		
Remark:			

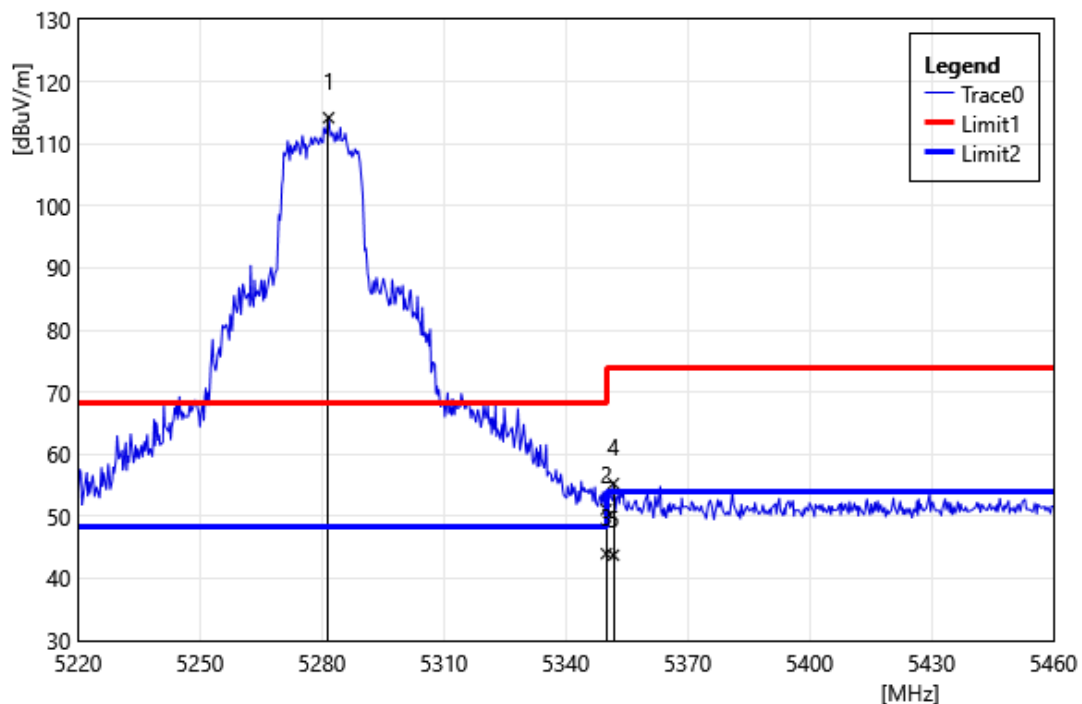


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5281.68	112.35	1.84	114.19	68.20	45.99	PEAK
2	5350.00	49.00	2.09	51.09	74.00	-22.91	PEAK
3	5350.00	41.90	2.09	43.99	54.00	-10.01	AVG
4	5351.76	53.18	2.10	55.28	74.00	-18.72	PEAK
5	5351.76	41.65	2.10	43.75	54.00	-10.25	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5320		
	MHz		
Polarization:	Vertical		
Remark:			

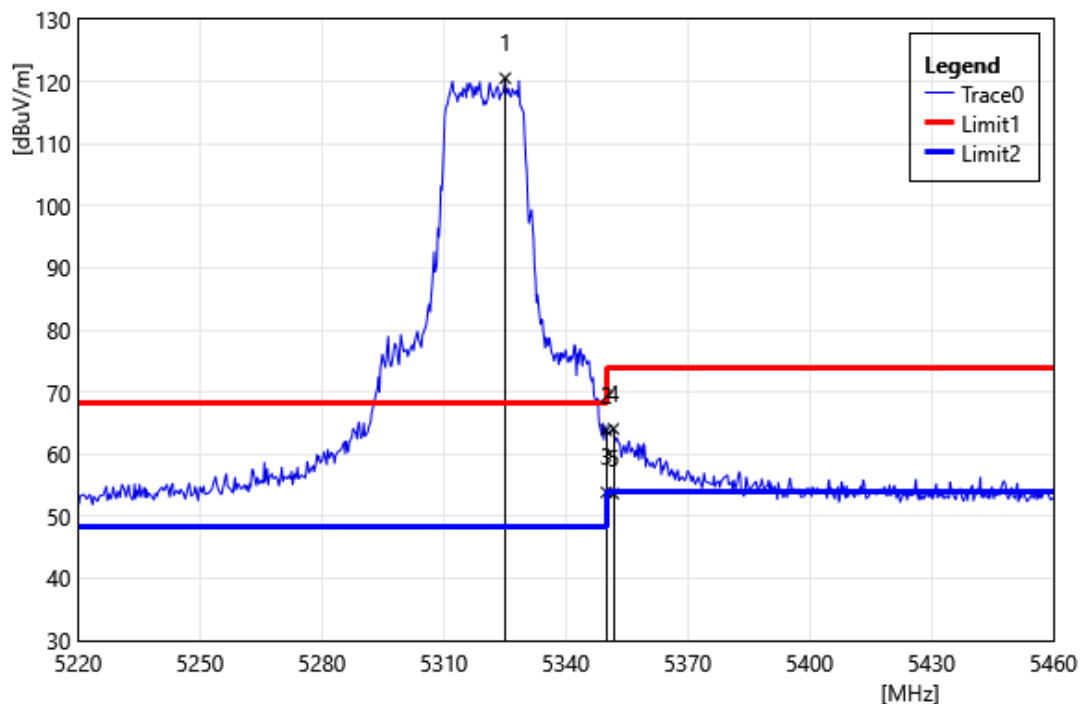


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5325.12	118.63	1.93	120.56	68.20	52.36	PEAK
2	5350.00	61.78	2.09	63.86	74.00	-10.14	PEAK
3	5350.00	51.78	2.09	53.87	54.00	-0.13	AVG
4	5351.76	62.00	2.10	64.10	74.00	-9.90	PEAK
5	5351.76	51.56	2.10	53.66	54.00	-0.34	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5320		
	MHz		
Polarization:	Horizontal		
Remark:			

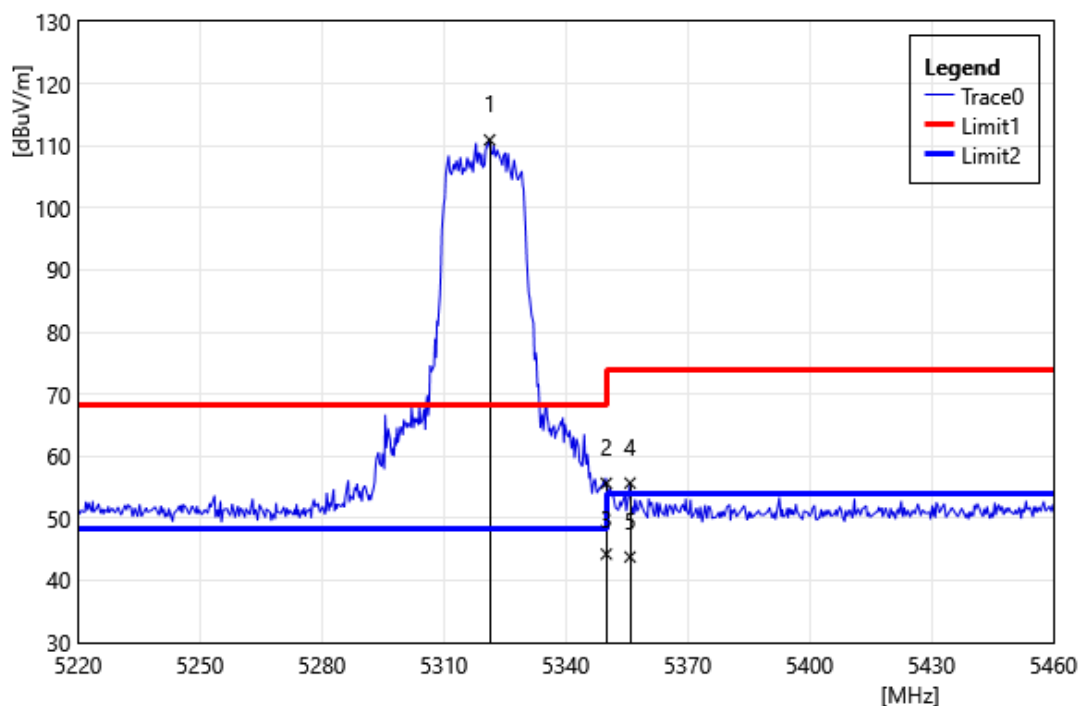


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5321.28	109.04	1.91	110.95	68.20	42.75	PEAK
2	5350.00	53.56	2.09	55.65	74.00	-18.35	PEAK
3	5350.00	42.15	2.09	44.24	54.00	-9.76	AVG
4	5355.84	53.57	2.12	55.69	74.00	-18.32	PEAK
5	5355.84	41.66	2.12	43.78	54.00	-10.22	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5500		
	MHz		
Polarization:	Vertical		
Remark:			

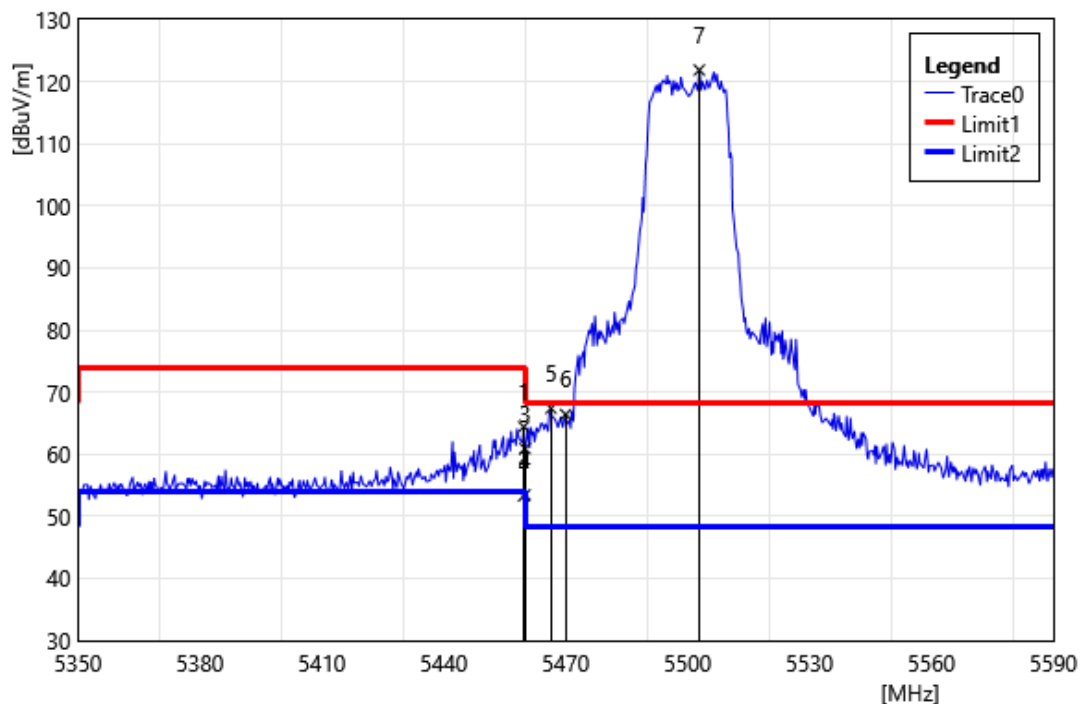


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5459.68	61.70	2.71	64.41	74.00	-9.59	PEAK
2	5459.68	50.58	2.71	53.29	54.00	-0.71	AVG
3	5460.00	58.20	2.71	60.91	74.00	-13.09	PEAK
4	5460.00	50.75	2.71	53.46	54.00	-0.54	AVG
5	5466.40	64.69	2.72	67.41	68.20	-0.79	PEAK
6	5470.00	63.68	2.72	66.40	68.20	-1.80	PEAK
7	5502.88	119.16	2.72	121.88	68.20	53.68	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5500		
	MHz		
Polarization:	Horizontal		
Remark:			

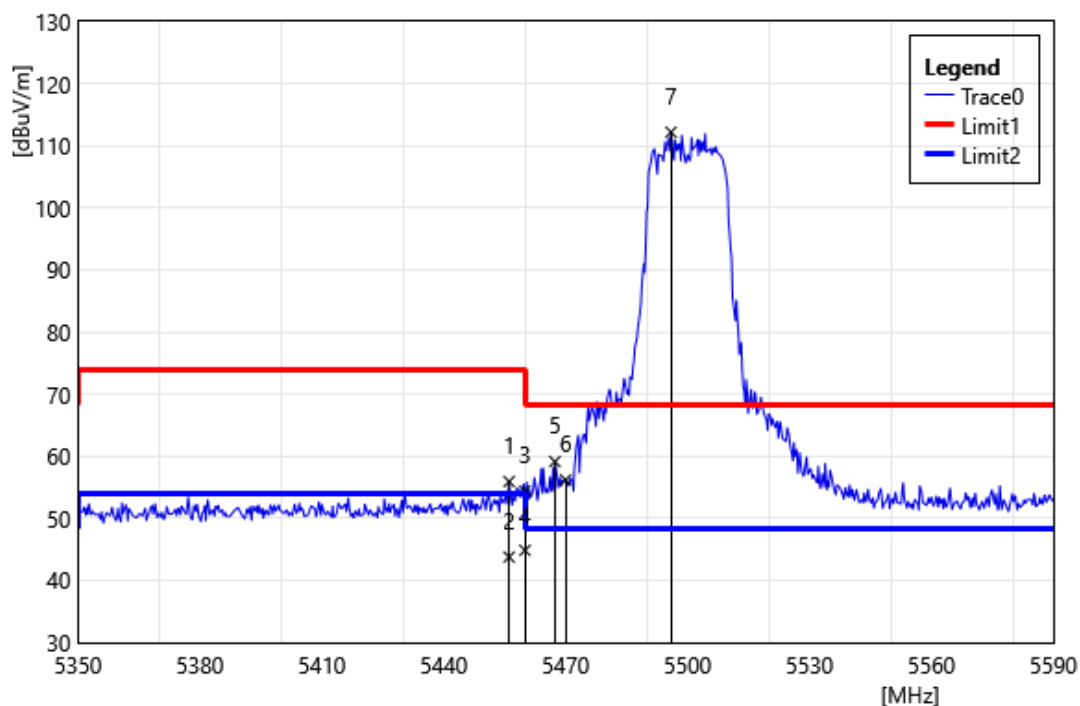


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5456.08	53.22	2.71	55.93	74.00	-18.07	PEAK
2	5456.08	41.06	2.71	43.77	54.00	-10.23	AVG
3	5460.00	51.68	2.71	54.39	74.00	-19.61	PEAK
4	5460.00	42.14	2.71	44.85	54.00	-9.15	AVG
5	5467.36	56.44	2.72	59.16	68.20	-9.04	PEAK
6	5470.00	53.48	2.72	56.20	68.20	-12.00	PEAK
7	5495.92	109.47	2.72	112.19	68.20	43.99	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5560		
	MHz		
Polarization:	Vertical		
Remark:			

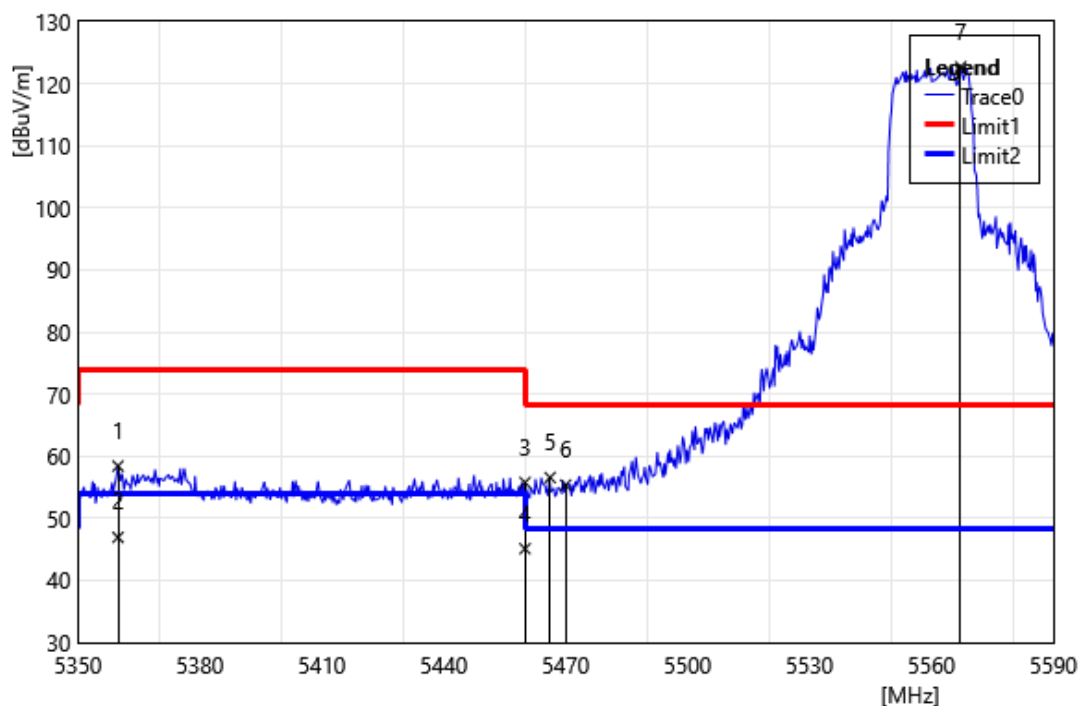


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5359.84	56.28	2.15	58.43	74.00	-15.57	PEAK
2	5359.84	44.79	2.15	46.94	54.00	-7.06	AVG
3	5460.00	53.07	2.71	55.78	74.00	-18.22	PEAK
4	5460.00	42.41	2.71	45.12	54.00	-8.88	AVG
5	5466.16	53.86	2.72	56.58	68.20	-11.62	PEAK
6	5470.00	52.65	2.72	55.37	68.20	-12.83	PEAK
7	5567.20	120.02	2.68	122.70	68.20	54.50	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5560		
	MHz		
Polarization:	Horizontal		
Remark:			

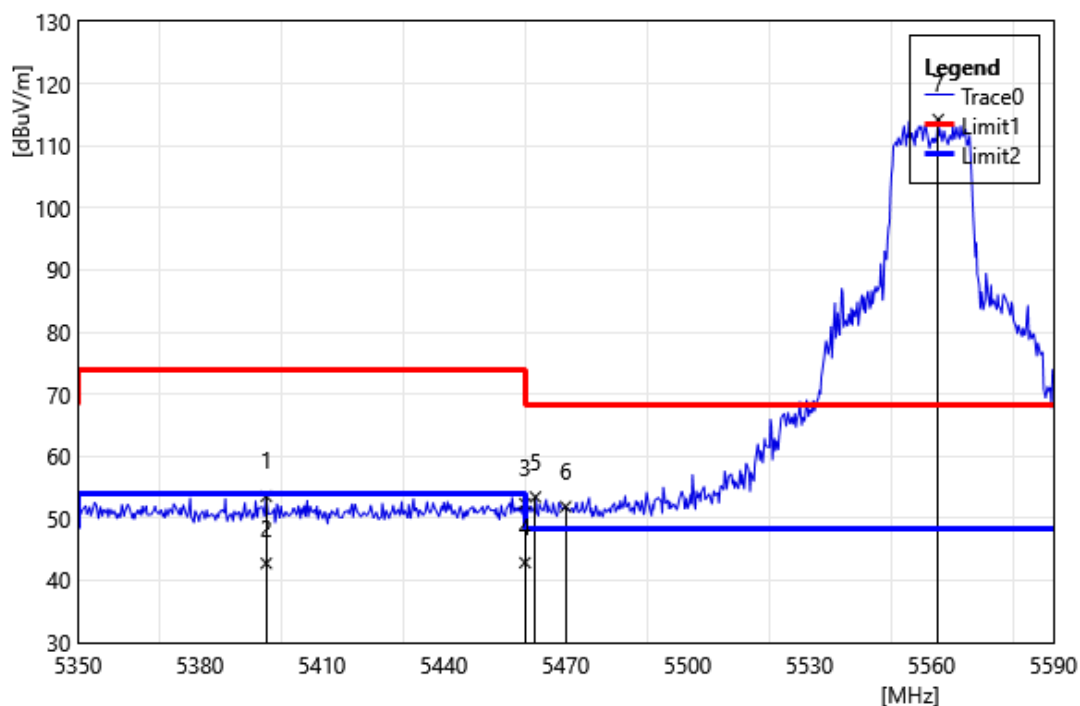


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5396.32	51.17	2.38	53.55	74.00	-20.45	PEAK
2	5396.32	40.37	2.38	42.75	54.00	-11.25	AVG
3	5460.00	49.66	2.71	52.37	74.00	-21.63	PEAK
4	5460.00	40.16	2.71	42.87	54.00	-11.13	AVG
5	5462.56	50.73	2.72	53.45	68.20	-14.75	PEAK
6	5470.00	49.15	2.72	51.87	68.20	-16.33	PEAK
7	5561.68	111.54	2.69	114.23	68.20	46.03	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5700		
	MHz		
Polarization:	Vertical		
Remark:			

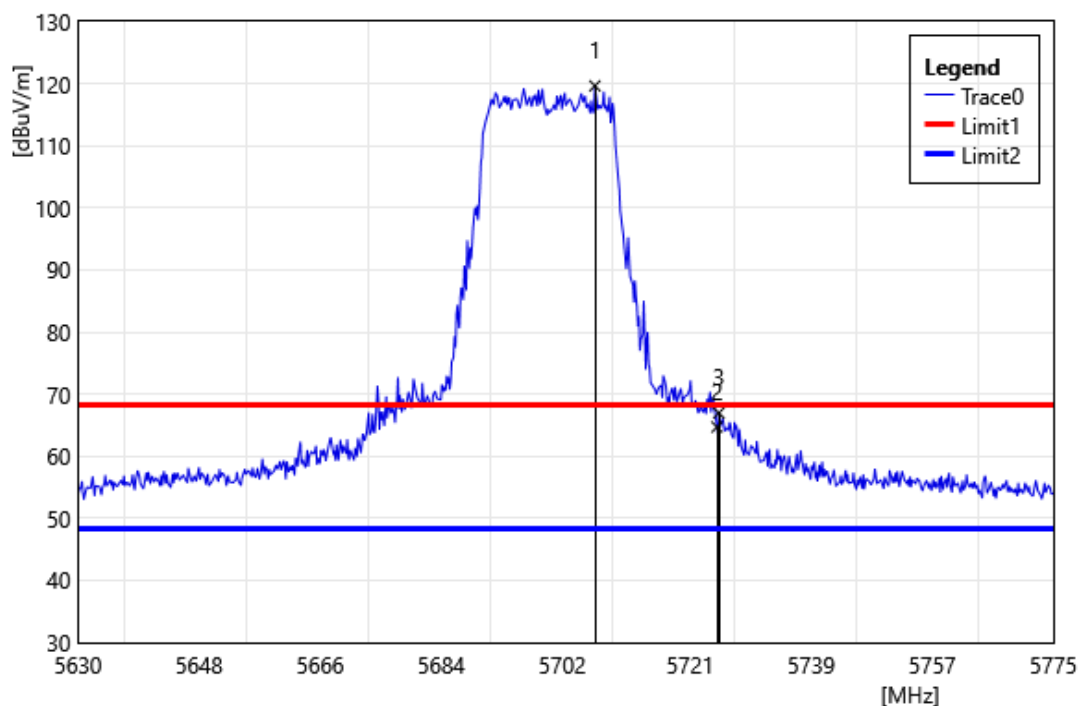


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5706.85	117.10	2.55	119.65	68.20	51.45	PEAK
2	5725.00	61.99	2.72	64.71	68.20	-3.49	PEAK
3	5725.27	64.24	2.73	66.97	68.20	-1.23	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5700 MHz		
Polarization:	Horizontal		
Remark:			

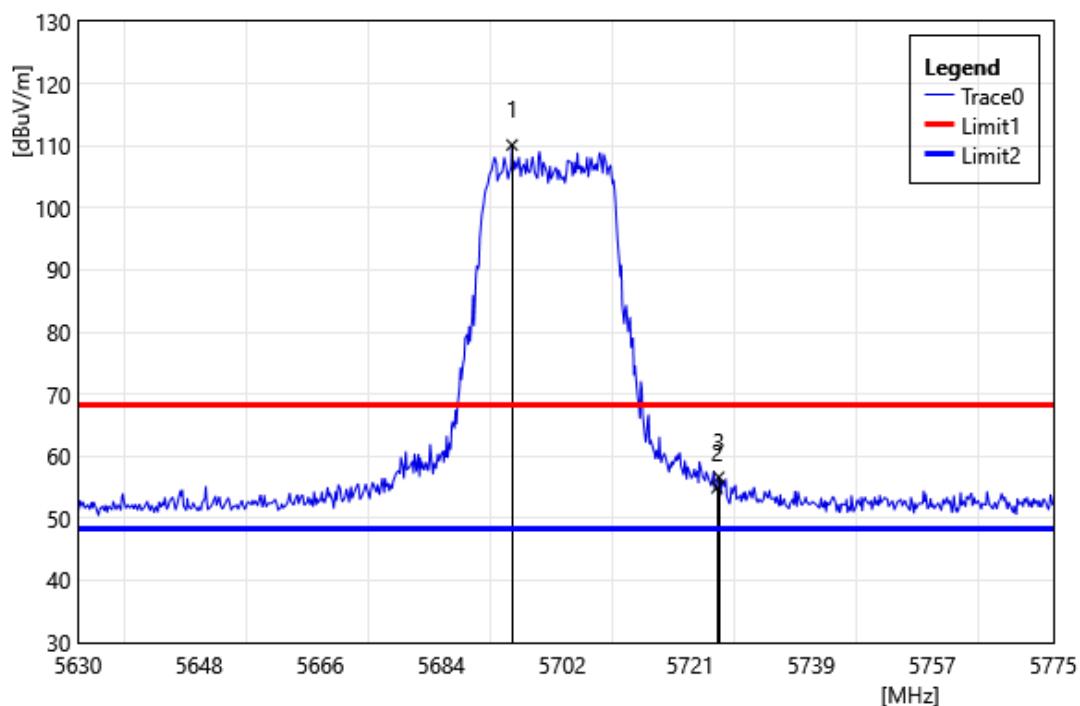


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5694.53	107.65	2.48	110.13	68.20	41.93	PEAK
2	5725.00	52.20	2.72	54.92	68.20	-13.28	PEAK
3	5725.27	53.90	2.73	56.63	68.20	-11.57	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5720		
	MHz		
Polarization:	Vertical		
Remark:			

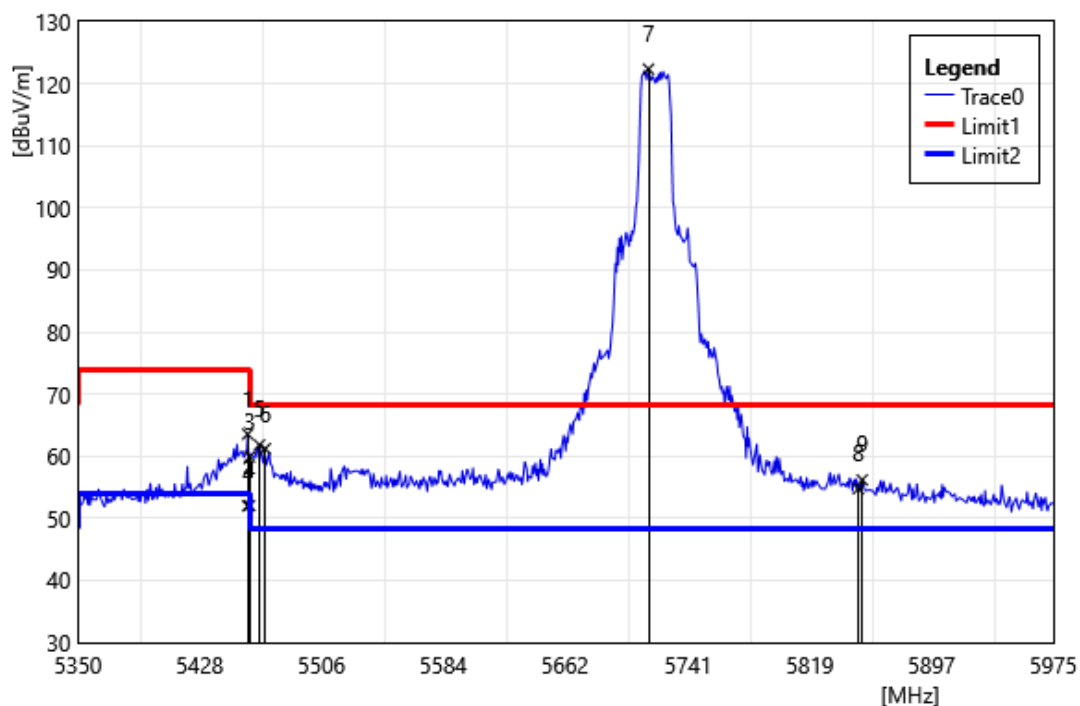


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.75	60.86	2.71	63.57	74.00	-10.43	PEAK
2	5458.75	49.30	2.71	52.01	54.00	-1.99	AVG
3	5460.00	57.18	2.71	59.89	74.00	-14.11	PEAK
4	5460.00	49.36	2.71	52.07	54.00	-1.93	AVG
5	5466.25	59.11	2.72	61.83	68.20	-6.37	PEAK
6	5470.00	58.49	2.72	61.21	68.20	-6.99	PEAK
7	5715.63	119.72	2.63	122.35	68.20	54.15	PEAK
8	5850.00	51.51	3.24	54.75	68.20	-13.45	PEAK
9	5852.50	52.94	3.25	56.19	68.20	-12.01	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5720		
	MHz		
Polarization:	Horizontal		
Remark:			

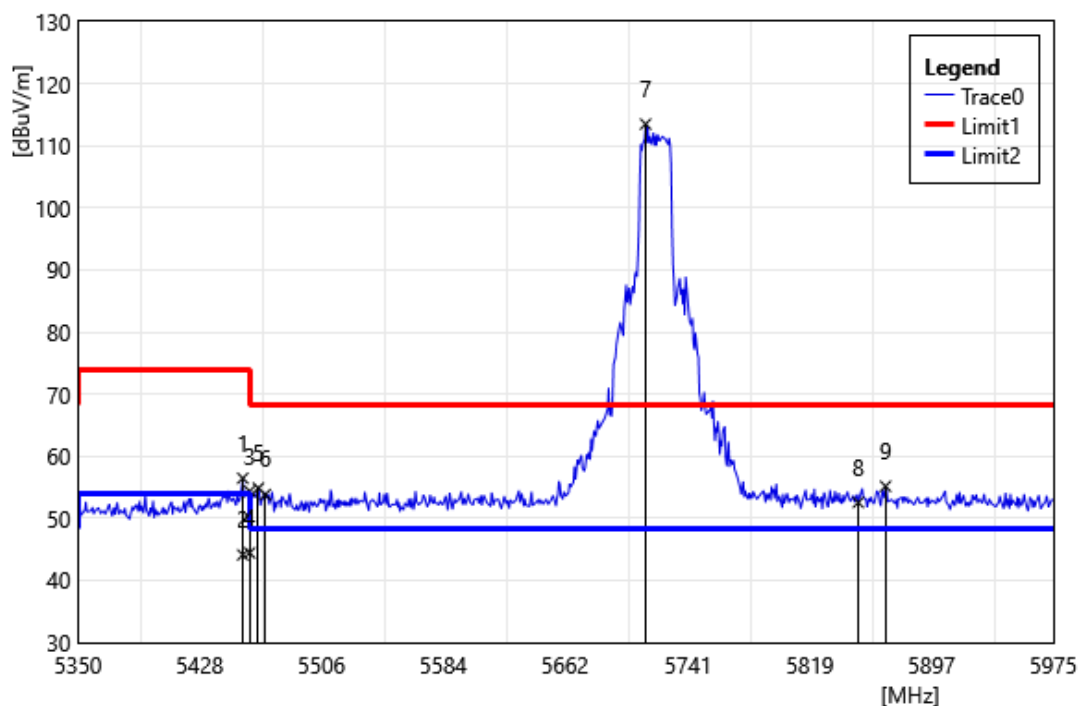


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5455.63	53.74	2.71	56.45	74.00	-17.55	PEAK
2	5455.63	41.40	2.71	44.11	54.00	-9.89	AVG
3	5460.00	51.66	2.71	54.37	74.00	-19.63	PEAK
4	5460.00	41.74	2.71	44.45	54.00	-9.55	AVG
5	5465.63	52.15	2.72	54.87	68.20	-13.33	PEAK
6	5470.00	51.11	2.72	53.83	68.20	-14.37	PEAK
7	5713.75	110.88	2.61	113.49	68.20	45.29	PEAK
8	5850.00	49.33	3.24	52.58	68.20	-15.62	PEAK
9	5867.50	51.88	3.28	55.16	68.20	-13.04	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5745		
	MHz		
Polarization:	Vertical		
Remark:			

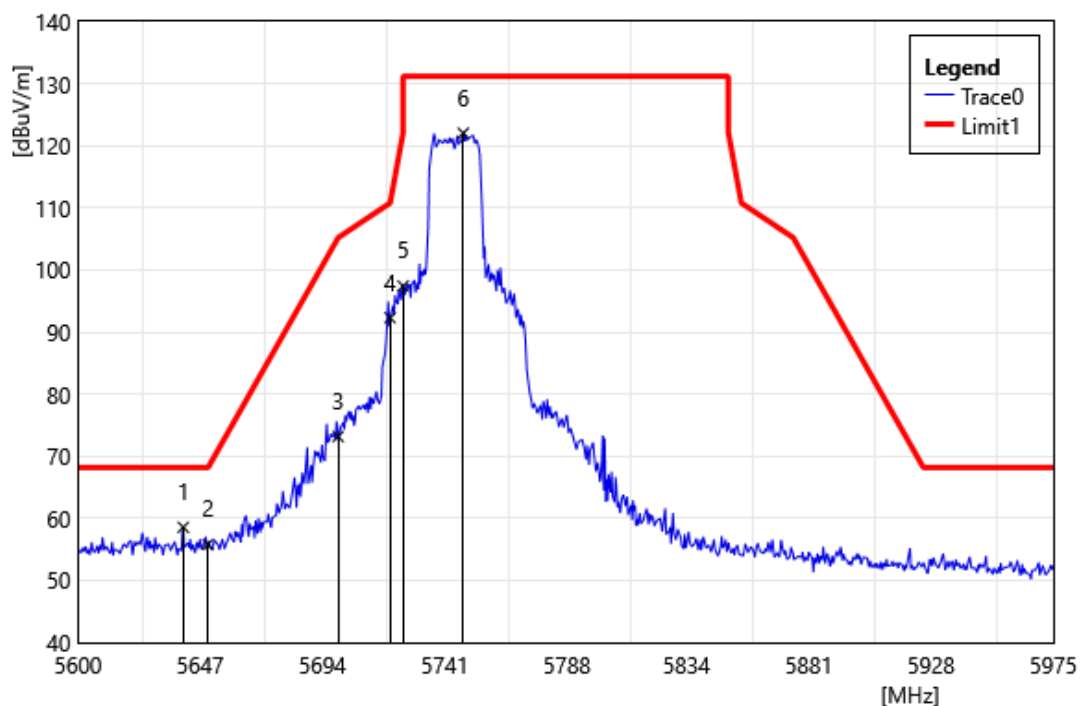


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5640.50	56.04	2.51	58.55	68.20	-9.65	PEAK
2	5650.00	53.31	2.49	55.80	68.20	-12.40	PEAK
3	5700.00	70.70	2.48	73.18	105.20	-32.02	PEAK
4	5720.00	89.64	2.67	92.31	110.80	-18.49	PEAK
5	5725.00	94.69	2.72	97.41	122.20	-24.79	PEAK
6	5748.13	119.07	2.95	122.02	131.20	-9.18	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5745		
	MHz		
Polarization:	Horizontal		
Remark:			

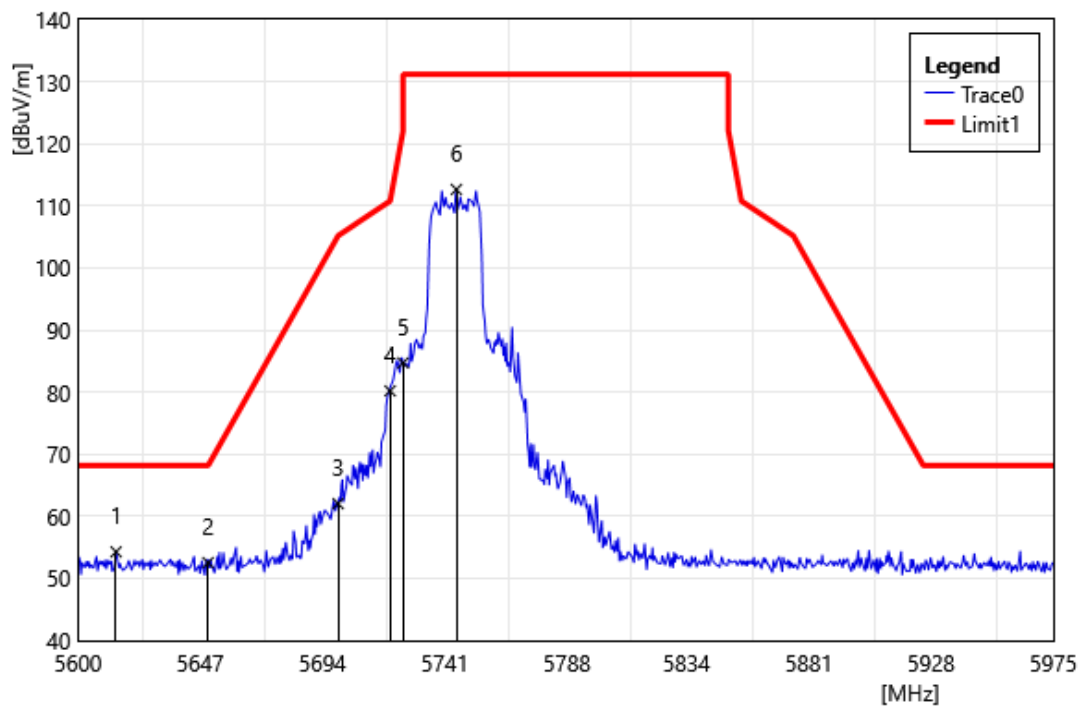

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5614.63	51.70	2.57	54.28	68.20	-13.93	PEAK
2	5650.00	50.06	2.49	52.55	68.20	-15.65	PEAK
3	5700.00	59.57	2.48	62.05	105.20	-43.15	PEAK
4	5720.00	77.54	2.67	80.21	110.80	-30.59	PEAK
5	5725.00	82.00	2.72	84.72	122.20	-37.48	PEAK
6	5745.50	109.72	2.92	112.64	131.20	-18.56	PEAK


Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5785		
	MHz		
Polarization:	Vertical		
Remark:			

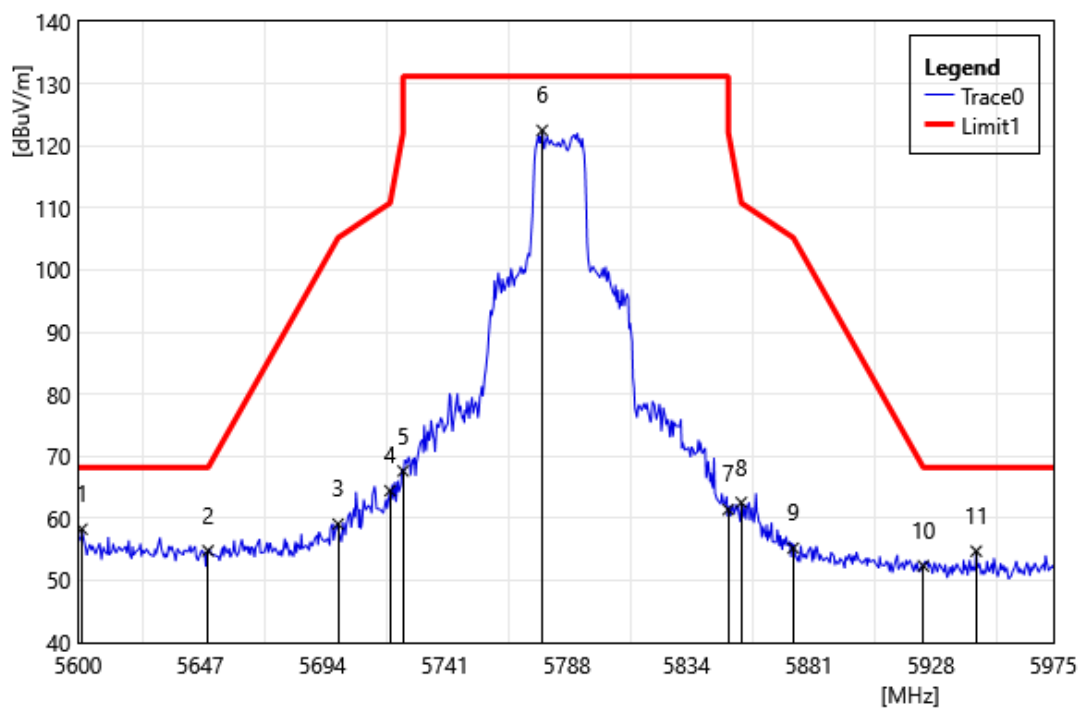

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5785 MHz		
Polarization:	Vertical		
Remark:			

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5601.50	55.66	2.60	58.26	68.20	-9.94	PEAK
2	5650.00	52.30	2.49	54.79	68.20	-13.41	PEAK
3	5700.00	56.60	2.48	59.08	105.20	-46.12	PEAK
4	5720.00	61.78	2.67	64.45	110.80	-46.35	PEAK
5	5725.00	64.91	2.72	67.63	122.20	-54.57	PEAK
6	5778.50	119.41	3.08	122.49	131.20	-8.71	PEAK
7	5850.00	58.15	3.24	61.40	122.20	-60.80	PEAK
8	5855.00	59.30	3.25	62.55	110.80	-48.25	PEAK
9	5875.00	51.92	3.29	55.21	105.20	-49.99	PEAK
10	5925.00	49.15	3.18	52.33	68.20	-15.87	PEAK
11	5945.38	51.67	3.05	54.72	68.20	-13.49	PEAK


Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5785		
	MHz		
Polarization:	Horizontal		
Remark:			

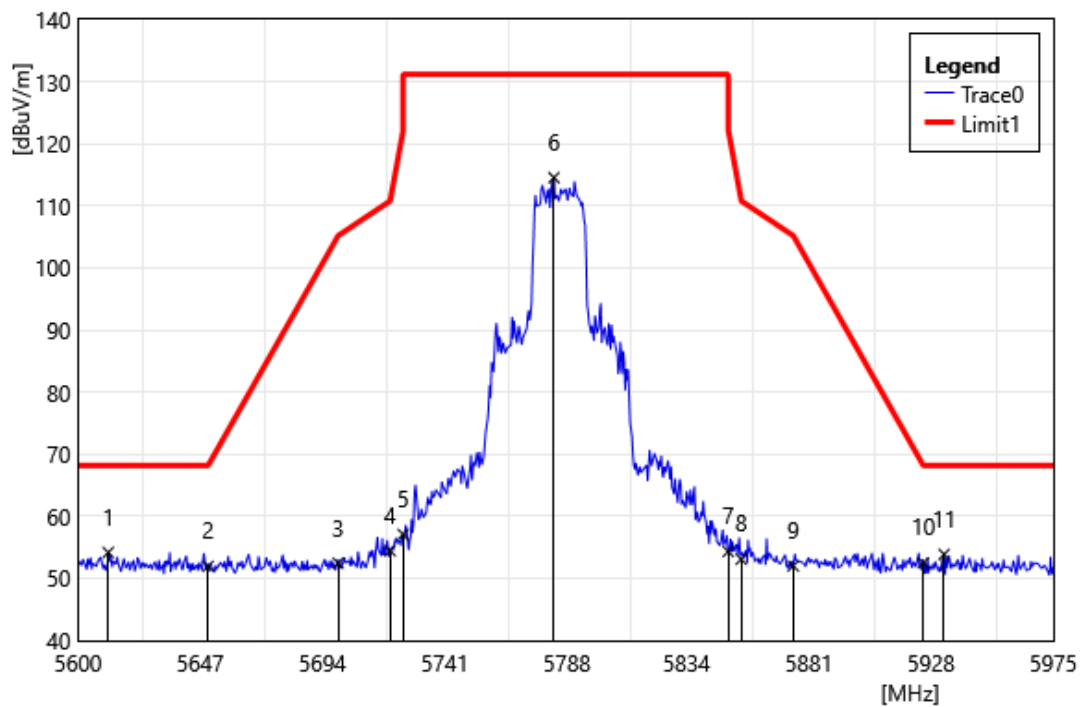

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5785 MHz		
Polarization:	Horizontal		
Remark:			


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5611.63	51.60	2.58	54.18	68.20	-14.02	PEAK
2	5650.00	49.46	2.49	51.95	68.20	-16.25	PEAK
3	5700.00	49.97	2.48	52.45	105.20	-52.75	PEAK
4	5720.00	51.80	2.67	54.47	110.80	-56.33	PEAK
5	5725.00	54.38	2.72	57.10	122.20	-65.10	PEAK
6	5783.00	111.46	3.09	114.55	131.20	-16.65	PEAK
7	5850.00	51.11	3.24	54.35	122.20	-67.85	PEAK
8	5855.00	49.83	3.25	53.08	110.80	-57.72	PEAK
9	5875.00	48.72	3.29	52.01	105.20	-53.19	PEAK
10	5925.00	49.32	3.18	52.50	68.20	-15.70	PEAK
11	5933.00	50.73	3.13	53.86	68.20	-14.34	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5825		
	MHz		
Polarization:	Vertical		
Remark:			

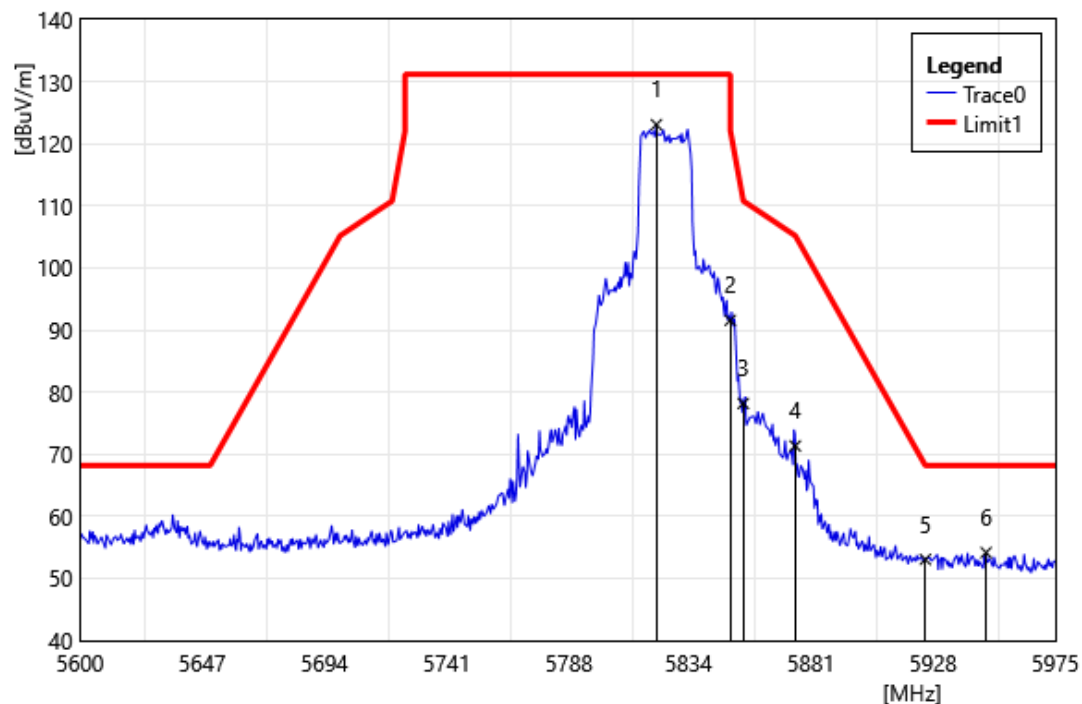


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5821.63	119.90	3.19	123.09	131.20	-8.11	PEAK
2	5850.00	88.33	3.24	91.57	122.20	-30.63	PEAK
3	5855.00	74.93	3.25	78.18	110.80	-32.62	PEAK
4	5875.00	68.05	3.29	71.34	105.20	-33.86	PEAK
5	5925.00	49.88	3.18	53.06	68.20	-15.14	PEAK
6	5948.38	51.14	3.03	54.17	68.20	-14.03	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT20 5825		
	MHz		
Polarization:	Horizontal		
Remark:			

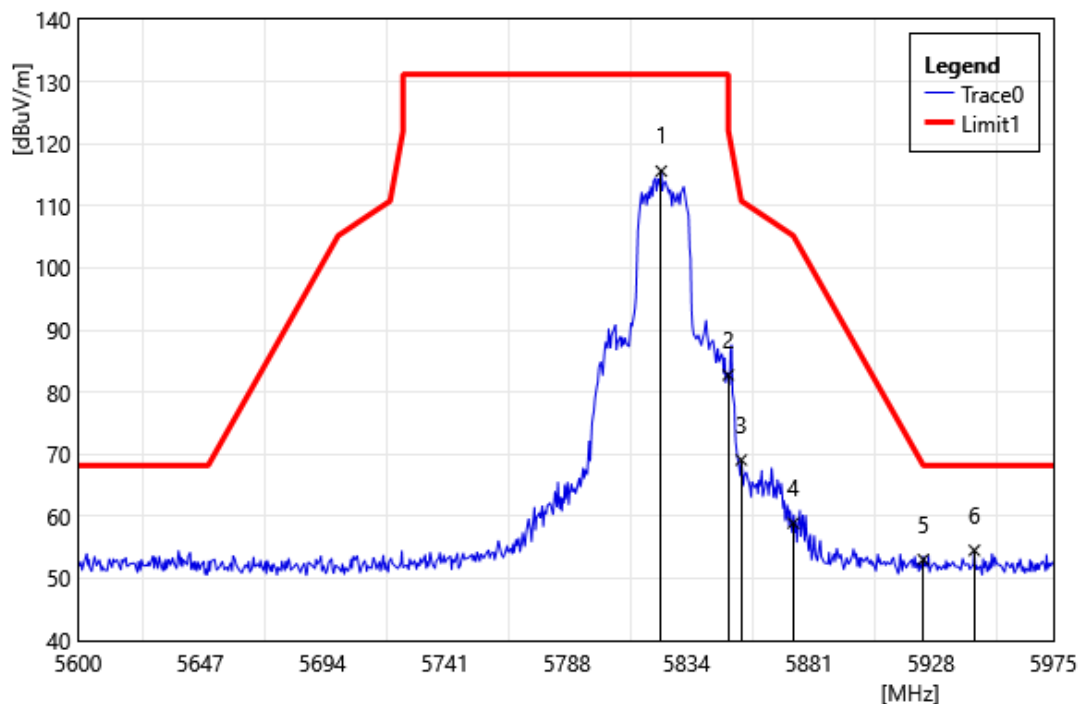


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5824.25	112.40	3.20	115.60	131.20	-15.60	PEAK
2	5850.00	79.52	3.24	82.76	122.20	-39.44	PEAK
3	5855.00	65.83	3.25	69.08	110.80	-41.72	PEAK
4	5875.00	55.61	3.29	58.90	105.20	-46.30	PEAK
5	5925.00	49.86	3.18	53.04	68.20	-15.16	PEAK
6	5944.63	51.46	3.06	54.52	68.20	-13.68	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5190		
	MHz		
Polarization:	Vertical		
Remark:			

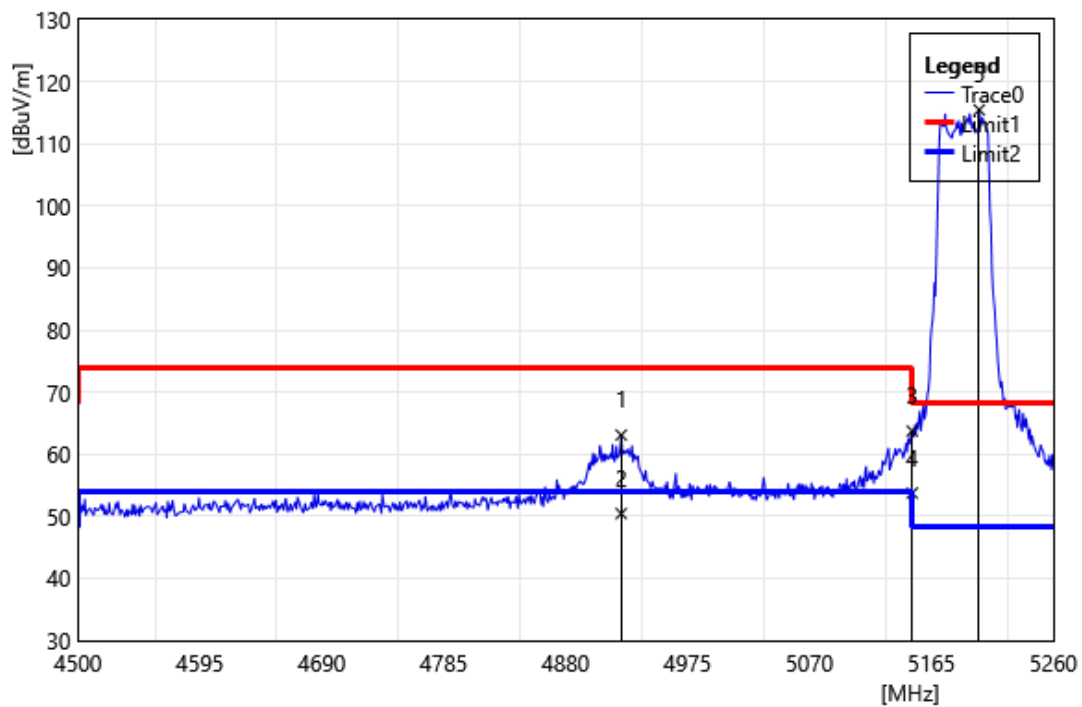


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4923.32	61.20	1.90	63.10	74.00	-10.90	PEAK
2	4923.32	48.55	1.90	50.45	54.00	-3.55	AVG
3	5150.00	61.11	2.64	63.75	74.00	-10.25	PEAK
4	5150.00	51.10	2.64	53.74	54.00	-0.26	AVG
5	5202.24	113.13	2.33	115.46	68.20	47.26	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5190		
	MHz		
Polarization:	Horizontal		
Remark:			

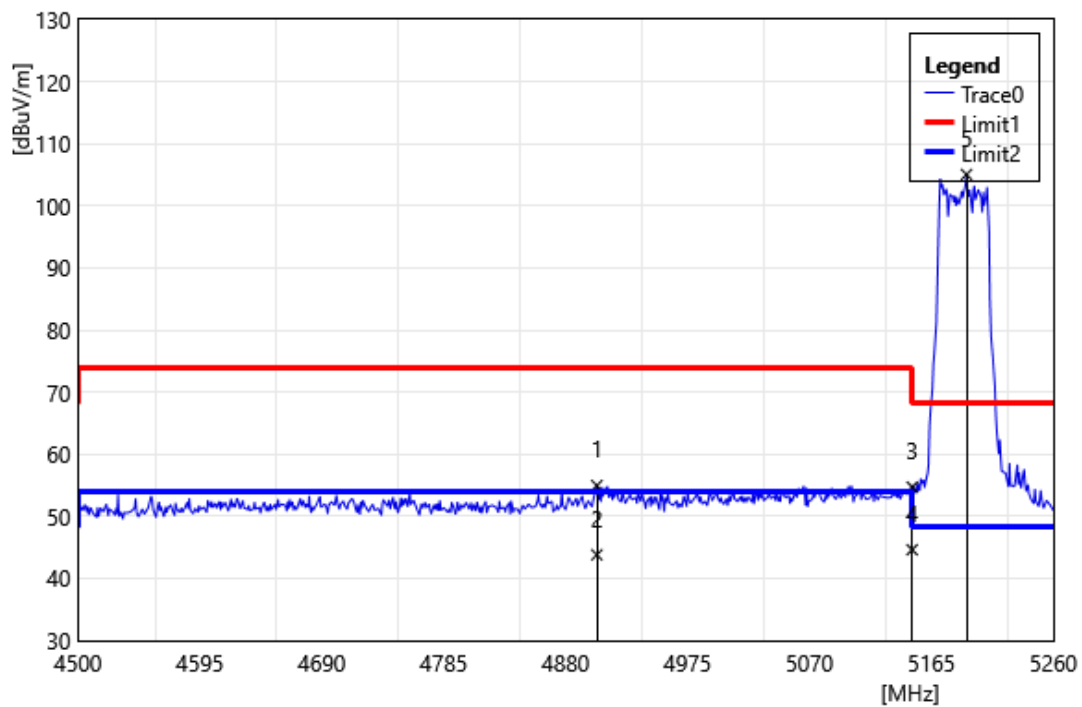


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4904.32	53.05	1.92	54.97	74.00	-19.03	PEAK
2	4904.32	41.89	1.92	43.81	54.00	-10.19	AVG
3	5150.00	52.08	2.64	54.72	74.00	-19.28	PEAK
4	5150.00	41.98	2.64	44.62	54.00	-9.38	AVG
5	5192.36	102.68	2.39	105.07	68.20	36.87	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5230		
	MHz		
Polarization:	Vertical		
Remark:			

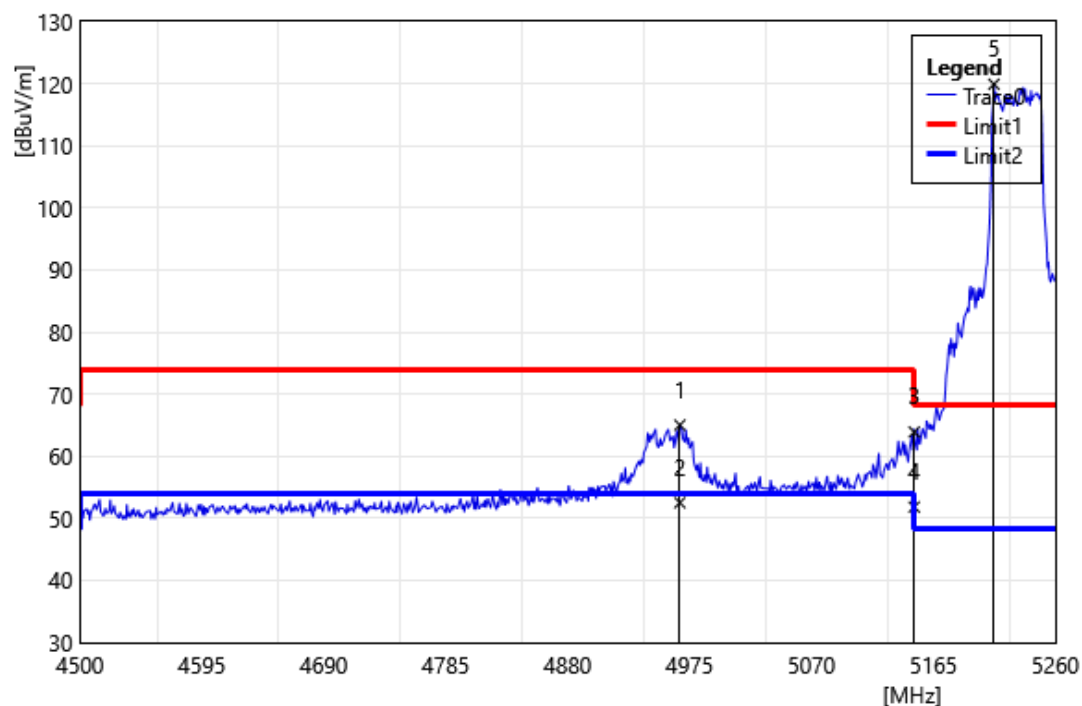


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4967.40	63.11	1.91	65.02	74.00	-8.98	PEAK
2	4967.40	50.61	1.91	52.52	54.00	-1.48	AVG
3	5150.00	61.28	2.64	63.92	74.00	-10.08	PEAK
4	5150.00	49.19	2.64	51.83	54.00	-2.17	AVG
5	5212.12	117.66	2.26	119.92	68.20	51.72	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5230		
	MHz		
Polarization:	Horizontal		
Remark:			

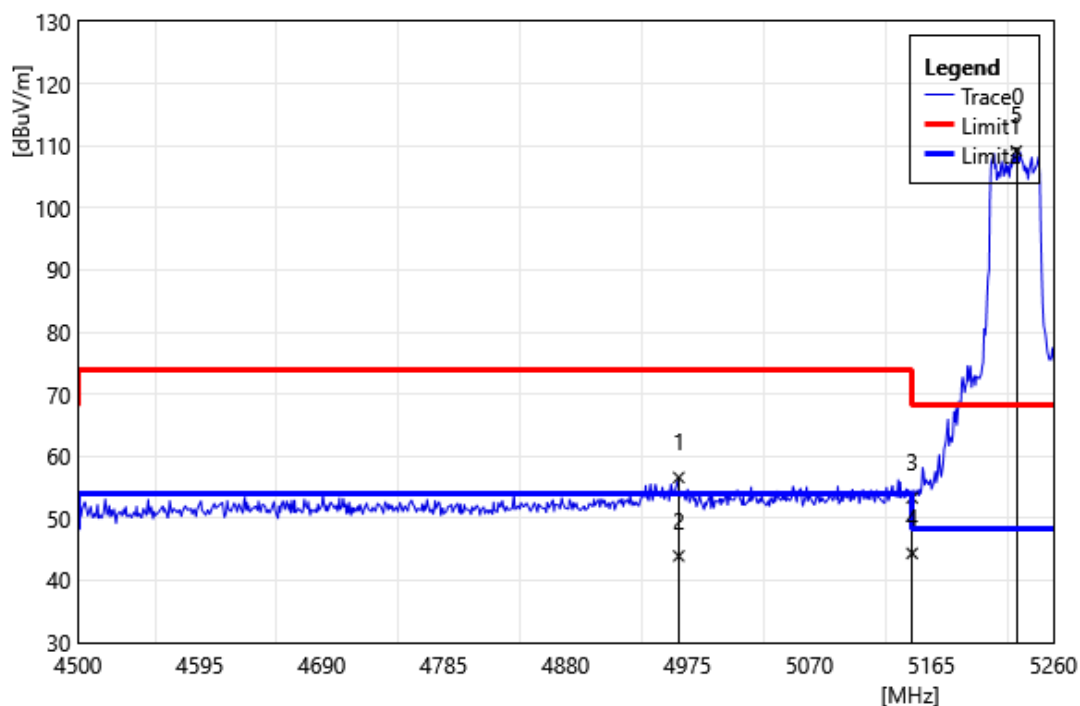


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4968.16	54.68	1.91	56.59	74.00	-17.41	PEAK
2	4968.16	42.03	1.91	43.94	54.00	-10.06	AVG
3	5150.00	50.65	2.64	53.28	74.00	-20.72	PEAK
4	5150.00	41.72	2.64	44.36	54.00	-9.64	AVG
5	5231.12	107.04	2.11	109.15	68.20	40.95	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5270		
	MHz		
Polarization:	Vertical		
Remark:			

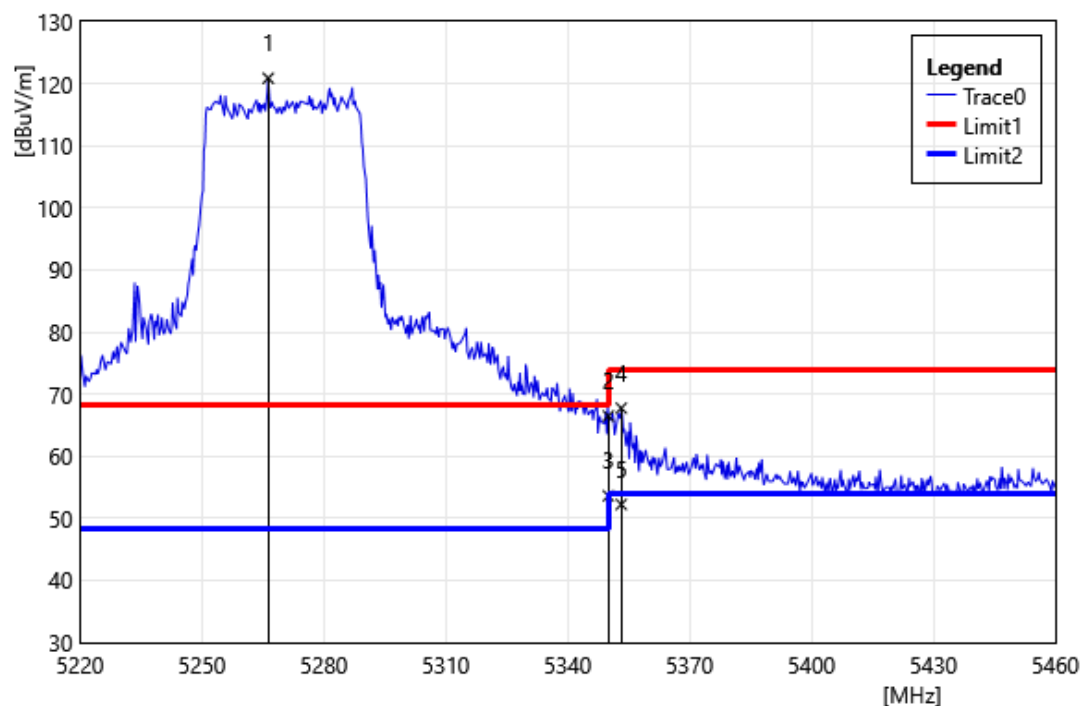


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5266.32	118.98	1.90	120.88	68.20	52.68	PEAK
2	5350.00	64.40	2.09	66.49	74.00	-7.51	PEAK
3	5350.00	51.54	2.09	53.63	54.00	-0.37	AVG
4	5353.20	65.63	2.11	67.74	74.00	-6.26	PEAK
5	5353.20	50.13	2.11	52.24	54.00	-1.76	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5270		
	MHz		
Polarization:	Horizontal		
Remark:			

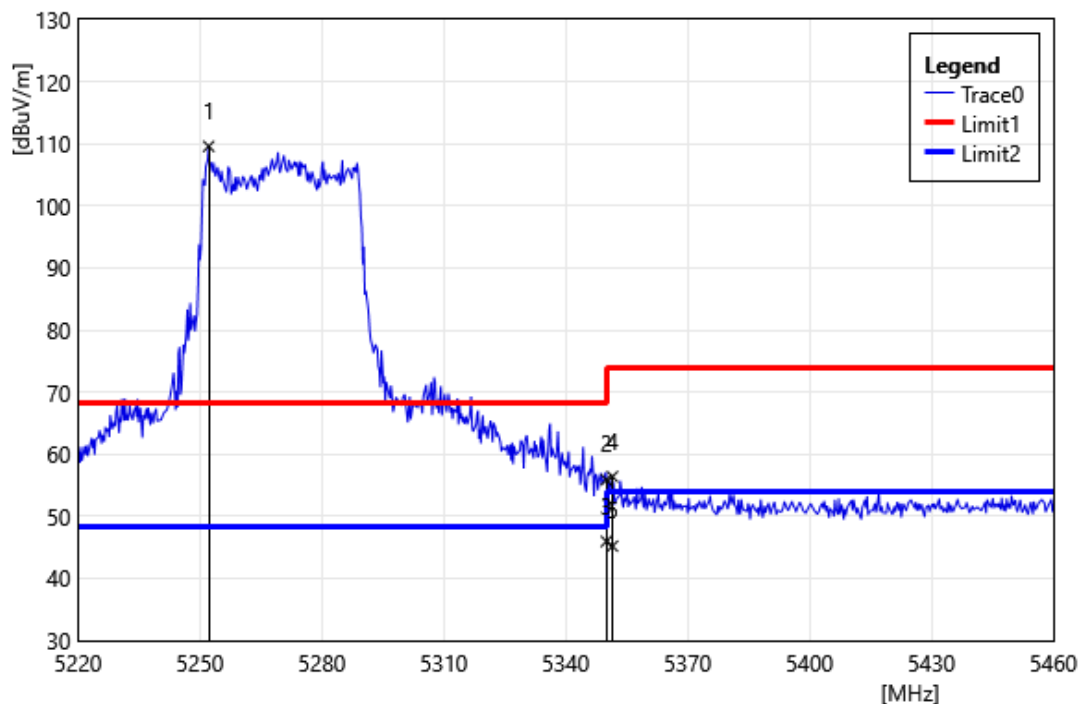


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5252.16	107.63	1.95	109.58	68.20	41.38	PEAK
2	5350.00	53.80	2.09	55.88	74.00	-18.12	PEAK
3	5350.00	43.86	2.09	45.95	54.00	-8.05	AVG
4	5351.52	54.30	2.10	56.41	74.00	-17.60	PEAK
5	5351.52	43.11	2.10	45.21	54.00	-8.79	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5310		
	MHz		
Polarization:	Vertical		
Remark:			

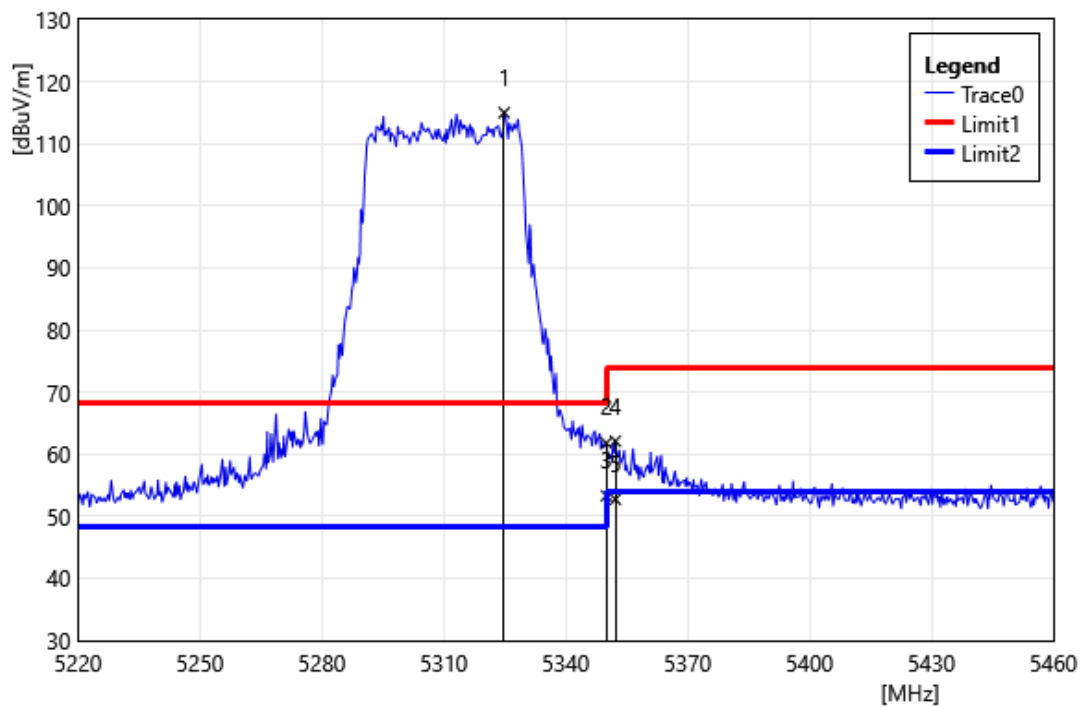


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5324.88	113.07	1.93	115.00	68.20	46.80	PEAK
2	5350.00	59.73	2.09	61.82	74.00	-12.18	PEAK
3	5350.00	51.23	2.09	53.32	54.00	-0.68	AVG
4	5352.24	60.01	2.10	62.11	74.00	-11.89	PEAK
5	5352.24	50.64	2.10	52.74	54.00	-1.26	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5310		
	MHz		
Polarization:	Horizontal		
Remark:			

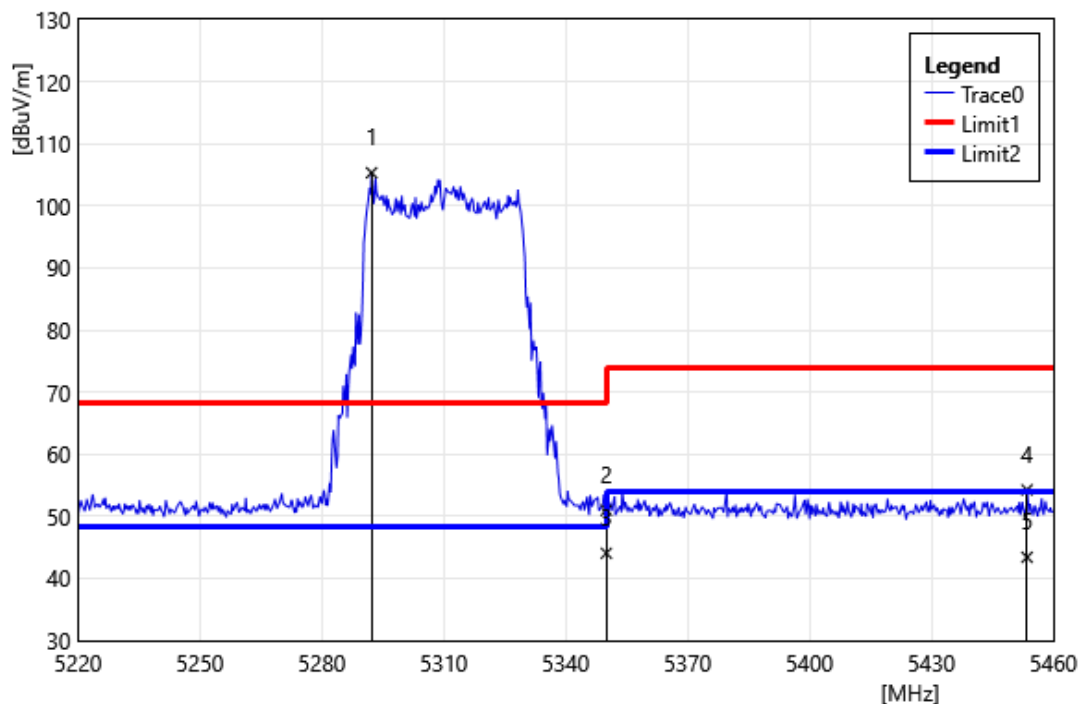


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5292.24	103.54	1.80	105.34	68.20	37.14	PEAK
2	5350.00	48.88	2.09	50.97	74.00	-23.03	PEAK
3	5350.00	41.97	2.09	44.06	54.00	-9.94	AVG
4	5453.52	51.55	2.71	54.26	74.00	-19.74	PEAK
5	5453.52	40.70	2.71	43.41	54.00	-10.59	AVG

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5510		
	MHz		
Polarization:	Vertical		
Remark:			

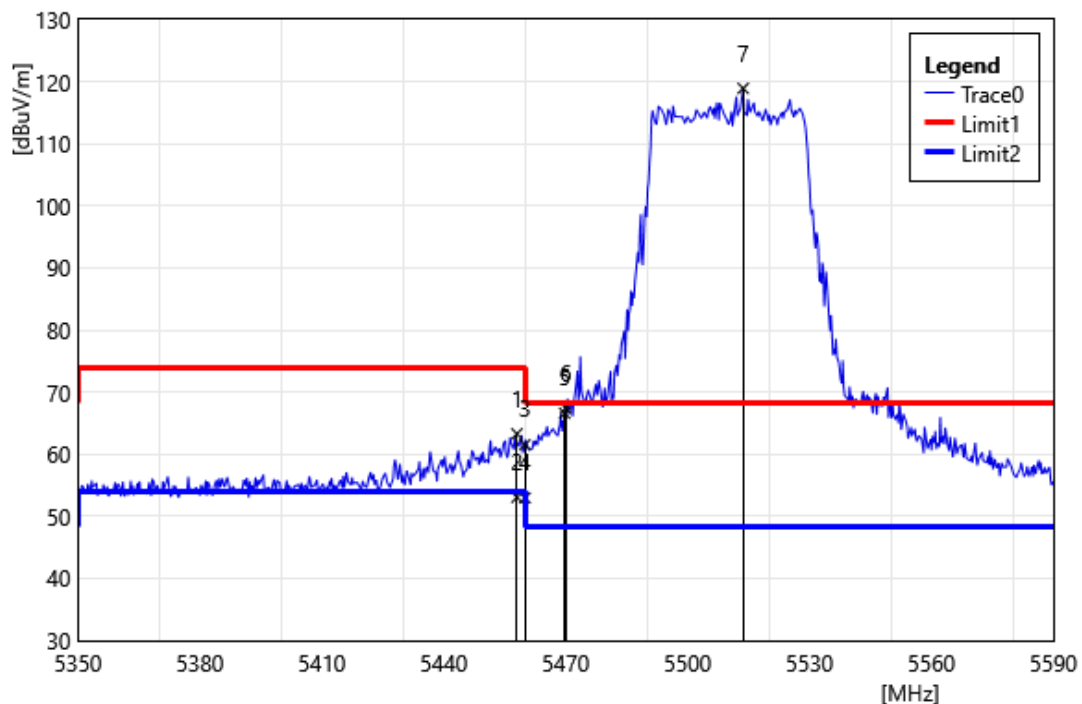


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.00	60.58	2.71	63.30	74.00	-10.71	PEAK
2	5458.00	50.36	2.71	53.07	54.00	-0.93	AVG
3	5460.00	58.83	2.71	61.54	74.00	-12.46	PEAK
4	5460.00	50.26	2.71	52.97	54.00	-1.03	AVG
5	5469.76	63.90	2.72	66.62	68.20	-1.58	PEAK
6	5470.00	64.72	2.72	67.44	68.20	-0.76	PEAK
7	5513.68	116.20	2.72	118.92	68.20	50.72	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5510		
	MHz		
Polarization:	Horizontal		
Remark:			

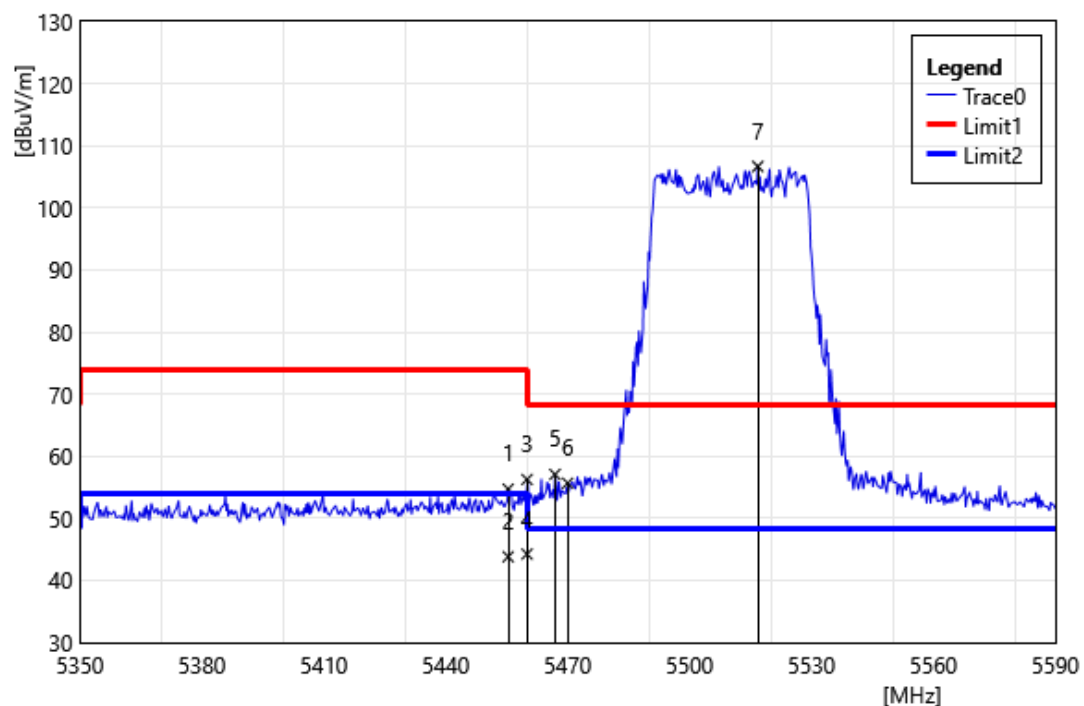


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5455.36	52.00	2.71	54.71	74.00	-19.29	PEAK
2	5455.36	41.10	2.71	43.81	54.00	-10.19	AVG
3	5460.00	53.55	2.71	56.26	68.20	-11.94	PEAK
4	5460.00	41.54	2.71	44.25	54.00	-9.75	AVG
5	5466.88	54.36	2.72	57.08	68.20	-11.12	PEAK
6	5470.00	52.94	2.72	55.66	68.20	-12.54	PEAK
7	5516.80	103.96	2.72	106.68	68.20	38.48	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5550		
	MHz		
Polarization:	Vertical		
Remark:			

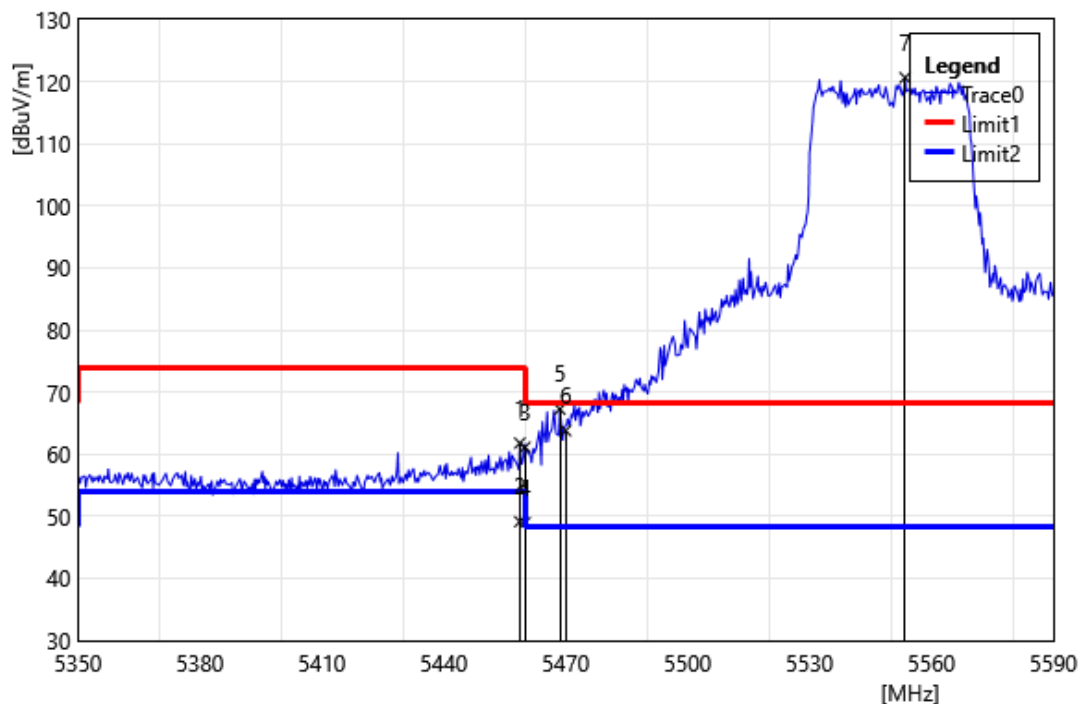


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.72	59.09	2.71	61.80	74.00	-12.20	PEAK
2	5458.72	46.43	2.71	49.14	54.00	-4.86	AVG
3	5460.00	58.41	2.71	61.12	74.00	-12.88	PEAK
4	5460.00	46.27	2.71	48.98	54.00	-5.02	AVG
5	5468.56	64.55	2.72	67.27	68.20	-0.93	PEAK
6	5470.00	61.09	2.72	63.81	68.20	-4.39	PEAK
7	5553.52	117.94	2.71	120.65	68.20	52.45	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5550		
	MHz		
Polarization:	Horizontal		
Remark:			

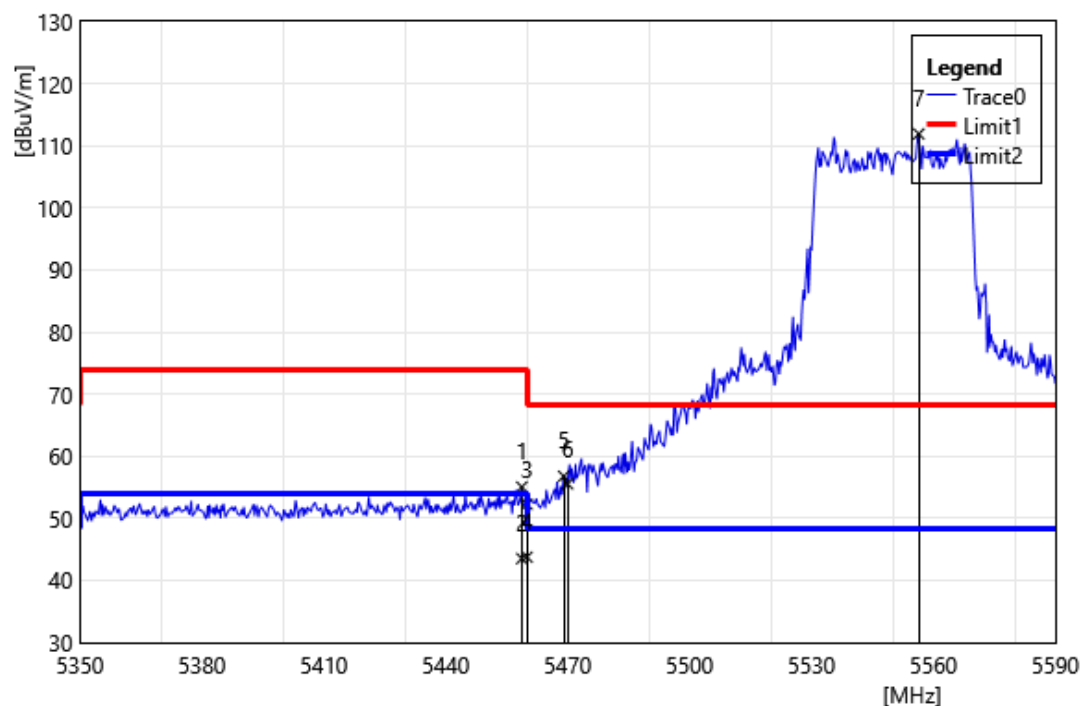


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5458.72	52.35	2.71	55.06	74.00	-18.94	PEAK
2	5458.72	40.81	2.71	43.52	54.00	-10.48	AVG
3	5460.00	49.57	2.71	52.28	74.00	-21.72	PEAK
4	5460.00	41.05	2.71	43.76	54.00	-10.24	AVG
5	5469.04	54.07	2.72	56.79	68.20	-11.41	PEAK
6	5470.00	52.82	2.72	55.54	68.20	-12.66	PEAK
7	5556.40	109.21	2.70	111.91	68.20	43.71	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5670		
	MHz		
Polarization:	Vertical		
Remark:			

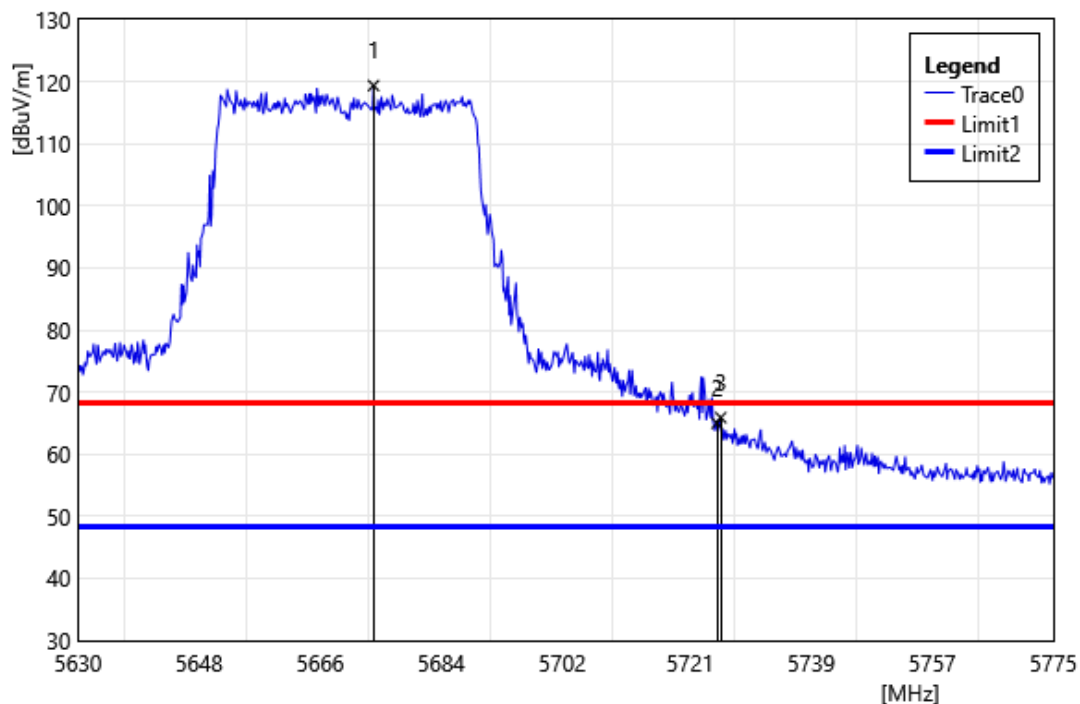


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5673.94	116.90	2.48	119.38	68.20	51.18	PEAK
2	5725.00	62.28	2.72	65.00	68.20	-3.21	PEAK
3	5725.56	63.18	2.73	65.91	68.20	-2.30	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5670		
	MHz		
Polarization:	Horizontal		
Remark:			

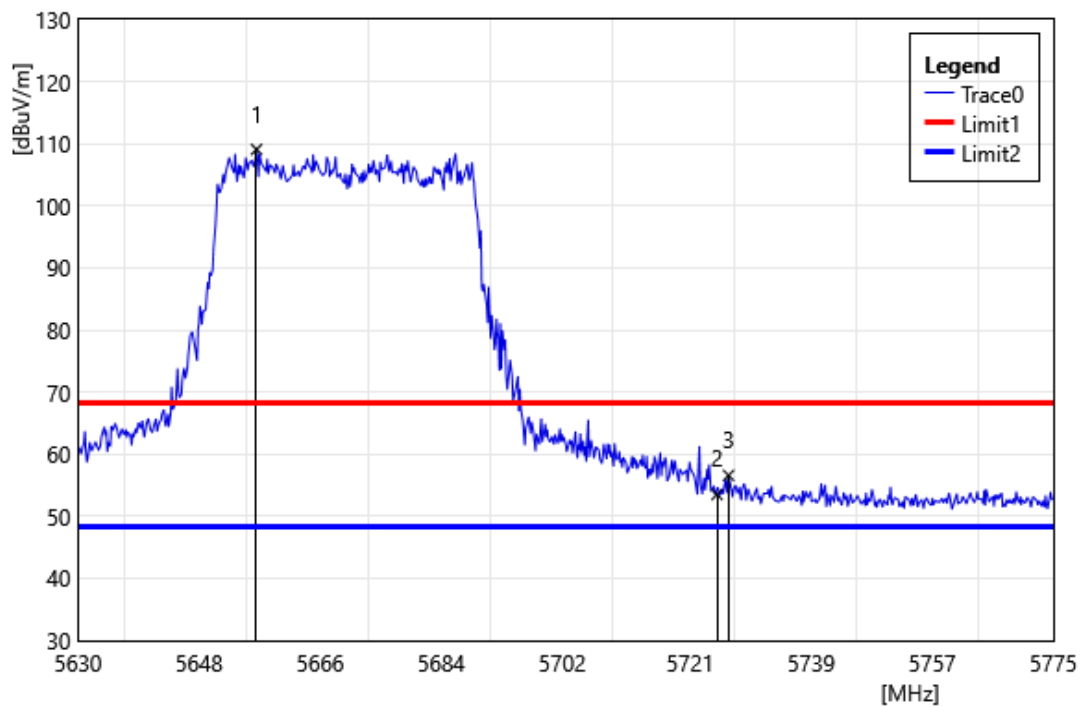


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5656.54	106.60	2.49	109.09	68.20	40.89	PEAK
2	5725.00	50.79	2.72	53.51	68.20	-14.69	PEAK
3	5726.72	53.87	2.74	56.61	68.20	-11.59	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5710		
	MHz		
Polarization:	Vertical		
Remark:			

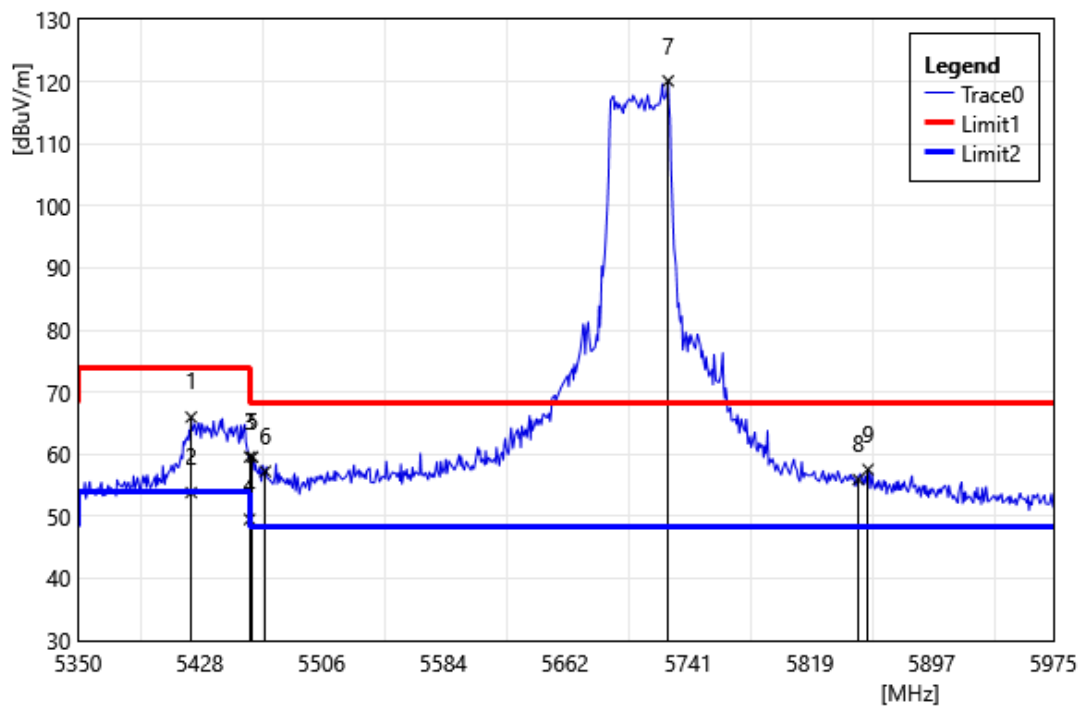


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5422.50	63.44	2.54	65.98	74.00	-8.02	PEAK
2	5422.50	51.29	2.54	53.83	54.00	-0.17	AVG
3	5460.00	56.87	2.71	59.58	74.00	-14.42	PEAK
4	5460.00	46.80	2.71	49.51	54.00	-4.49	AVG
5	5461.88	56.84	2.72	59.56	68.20	-8.64	PEAK
6	5470.00	54.52	2.72	57.24	68.20	-10.96	PEAK
7	5728.13	117.37	2.75	120.12	68.20	51.92	PEAK
8	5850.00	52.69	3.24	55.94	68.20	-12.26	PEAK
9	5856.25	54.28	3.26	57.54	68.20	-10.66	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5710		
	MHz		
Polarization:	Horizontal		
Remark:			

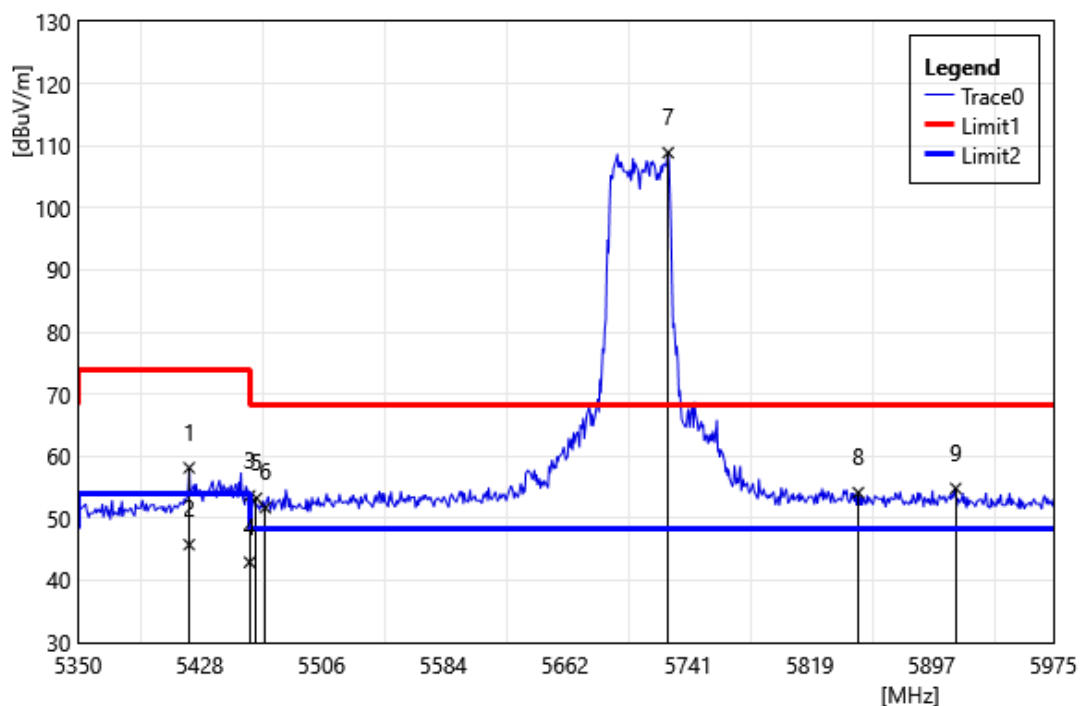


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5421.25	55.62	2.53	58.16	74.00	-15.85	PEAK
2	5421.25	43.23	2.53	45.76	54.00	-8.24	AVG
3	5460.00	50.90	2.71	53.61	74.00	-20.39	PEAK
4	5460.00	40.22	2.71	42.93	54.00	-11.07	AVG
5	5464.38	50.52	2.72	53.24	68.20	-14.96	PEAK
6	5470.00	49.00	2.72	51.72	68.20	-16.48	PEAK
7	5728.13	106.14	2.75	108.89	68.20	40.69	PEAK
8	5850.00	50.89	3.24	54.14	68.20	-14.06	PEAK
9	5912.50	51.57	3.26	54.83	68.20	-13.37	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5755		
	MHz		
Polarization:	Vertical		
Remark:			

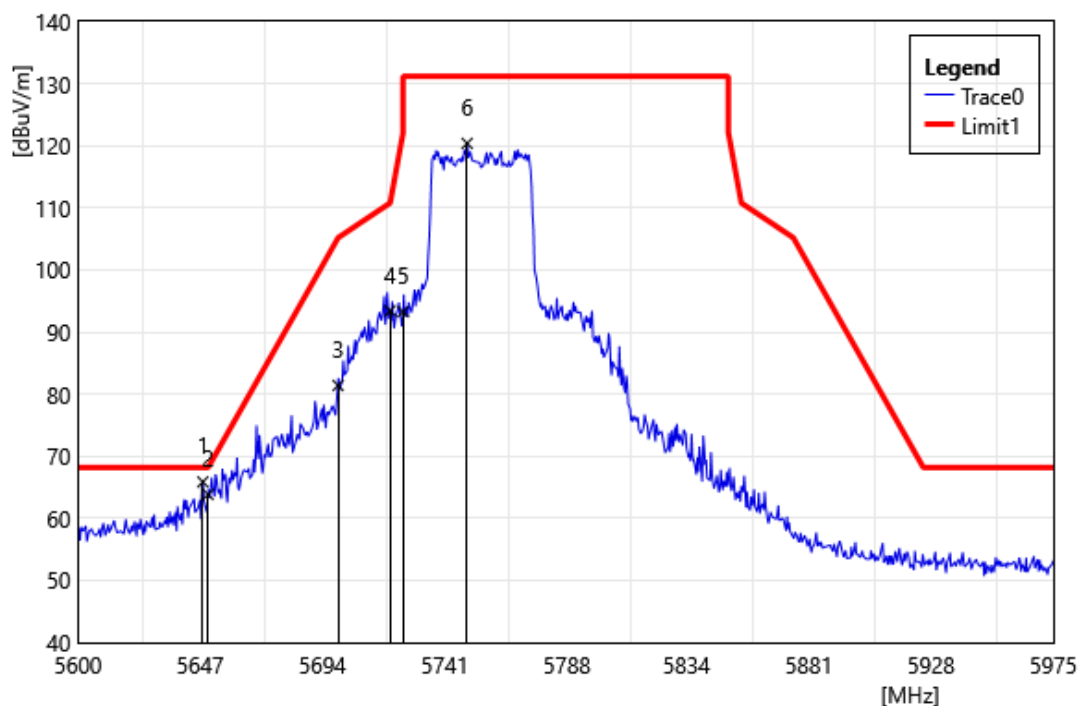


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5648.00	63.37	2.49	65.86	68.20	-2.34	PEAK
2	5650.00	61.36	2.49	63.85	68.20	-4.35	PEAK
3	5700.00	78.93	2.48	81.41	105.20	-23.79	PEAK
4	5720.00	90.76	2.67	93.43	110.80	-17.37	PEAK
5	5725.00	90.55	2.72	93.27	122.20	-28.93	PEAK
6	5749.63	117.42	2.96	120.38	131.20	-10.82	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5755		
	MHz		
Polarization:	Horizontal		
Remark:			

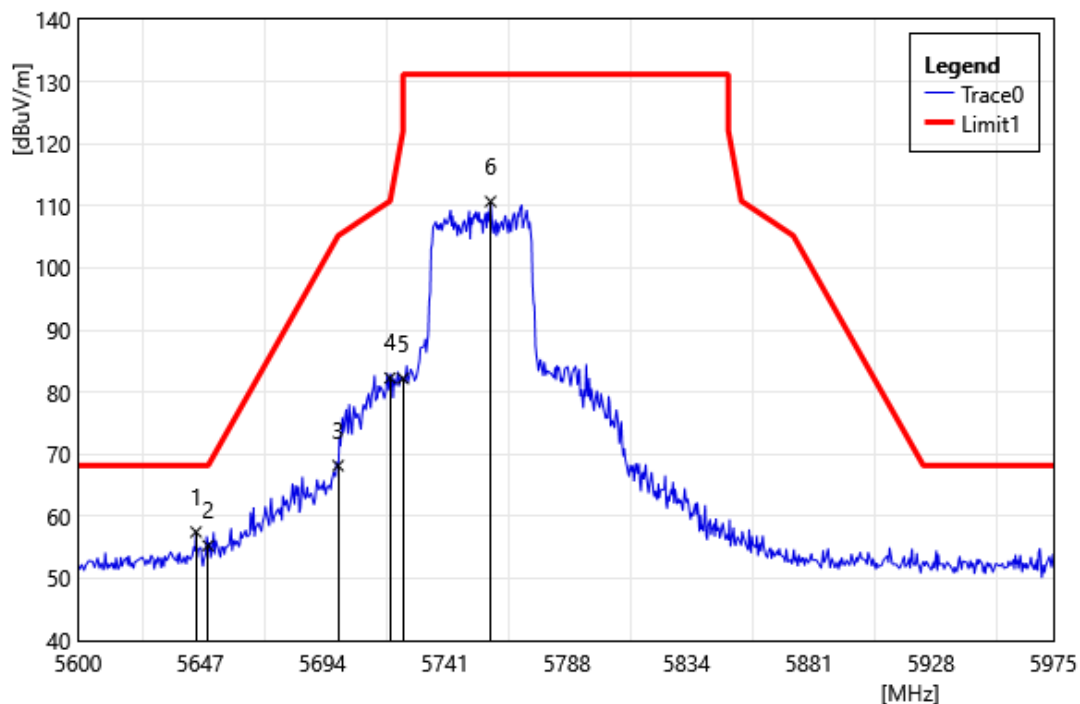


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5645.38	54.98	2.50	57.48	68.20	-10.72	PEAK
2	5650.00	52.79	2.49	55.28	68.20	-12.92	PEAK
3	5700.00	65.69	2.48	68.17	105.20	-37.03	PEAK
4	5720.00	79.61	2.67	82.28	110.80	-28.52	PEAK
5	5725.00	79.48	2.72	82.20	122.20	-40.00	PEAK
6	5758.63	107.69	3.00	110.69	131.20	-20.51	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5795		
	MHz		
Polarization:	Vertical		
Remark:			

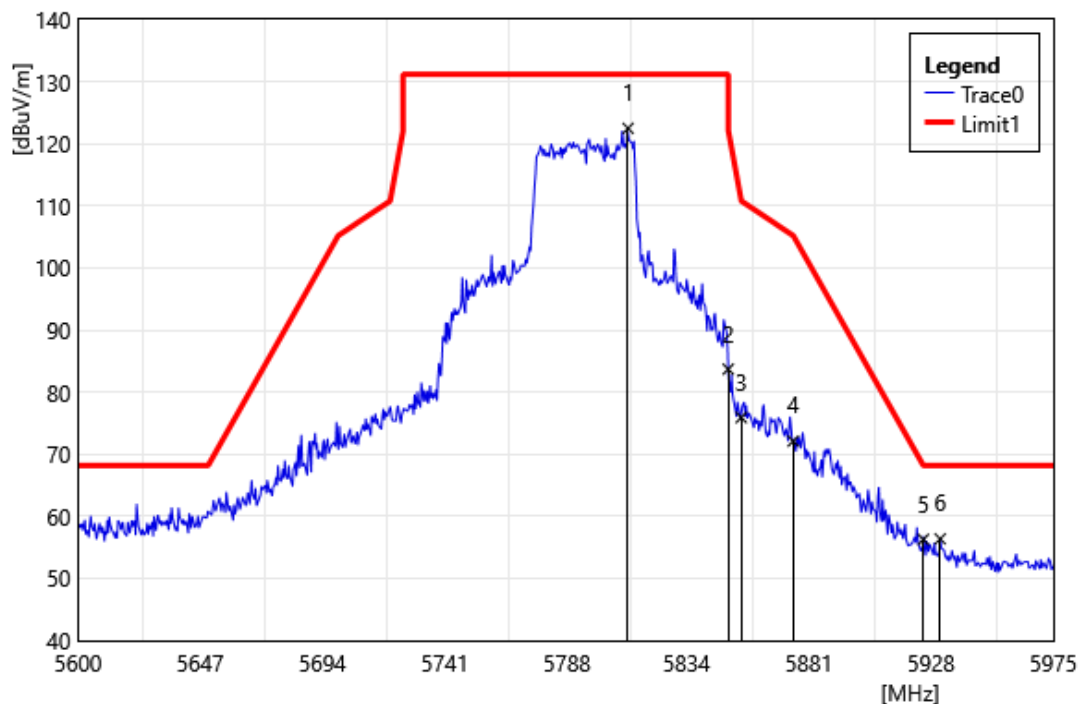


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5811.50	119.32	3.18	122.50	131.20	-8.70	PEAK
2	5850.00	80.46	3.24	83.70	122.20	-38.50	PEAK
3	5855.00	72.67	3.25	75.92	110.80	-34.88	PEAK
4	5875.00	68.83	3.29	72.12	105.20	-33.08	PEAK
5	5925.00	53.10	3.18	56.28	68.20	-11.92	PEAK
6	5931.50	53.24	3.14	56.38	68.20	-11.82	PEAK

Test Site:	966 Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT40 5795		
	MHz		
Polarization:	Horizontal		
Remark:			

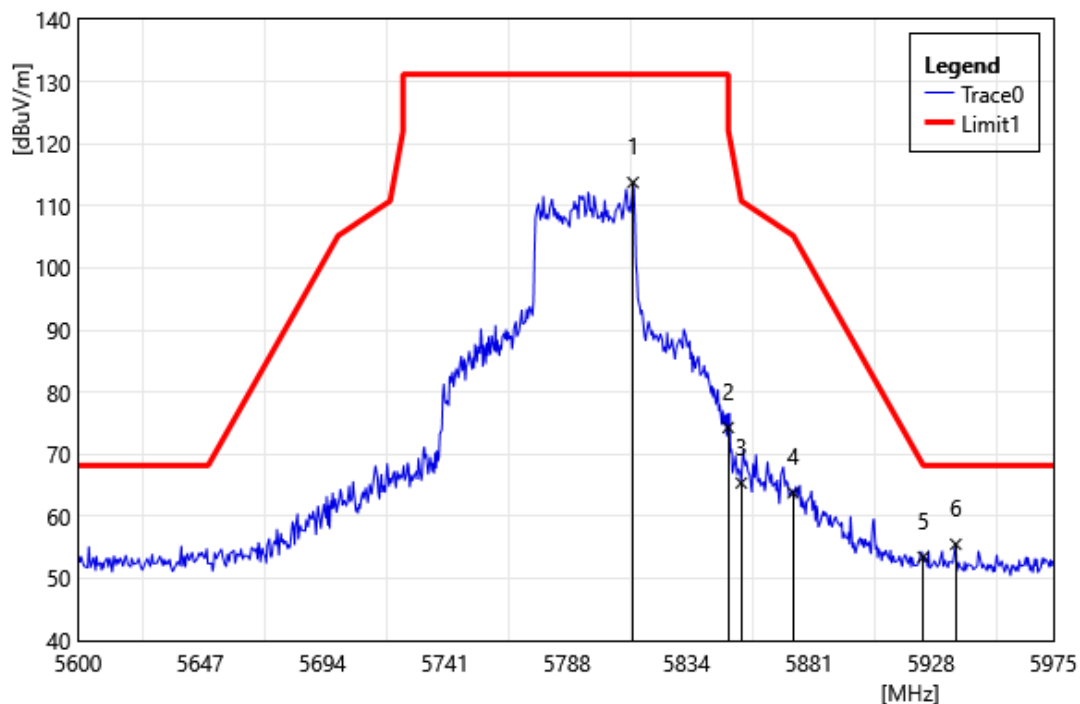


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5813.38	110.59	3.18	113.77	131.20	-17.43	PEAK
2	5850.00	71.07	3.24	74.31	122.20	-47.89	PEAK
3	5855.00	62.13	3.25	65.38	110.80	-45.42	PEAK
4	5875.00	60.49	3.29	63.78	105.20	-41.42	PEAK
5	5925.00	50.27	3.18	53.45	68.20	-14.75	PEAK
6	5937.50	52.40	3.10	55.50	68.20	-12.70	PEAK

Test Site:	966C Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5210		
	MHz		
Polarization:	Vertical		
Remark:			

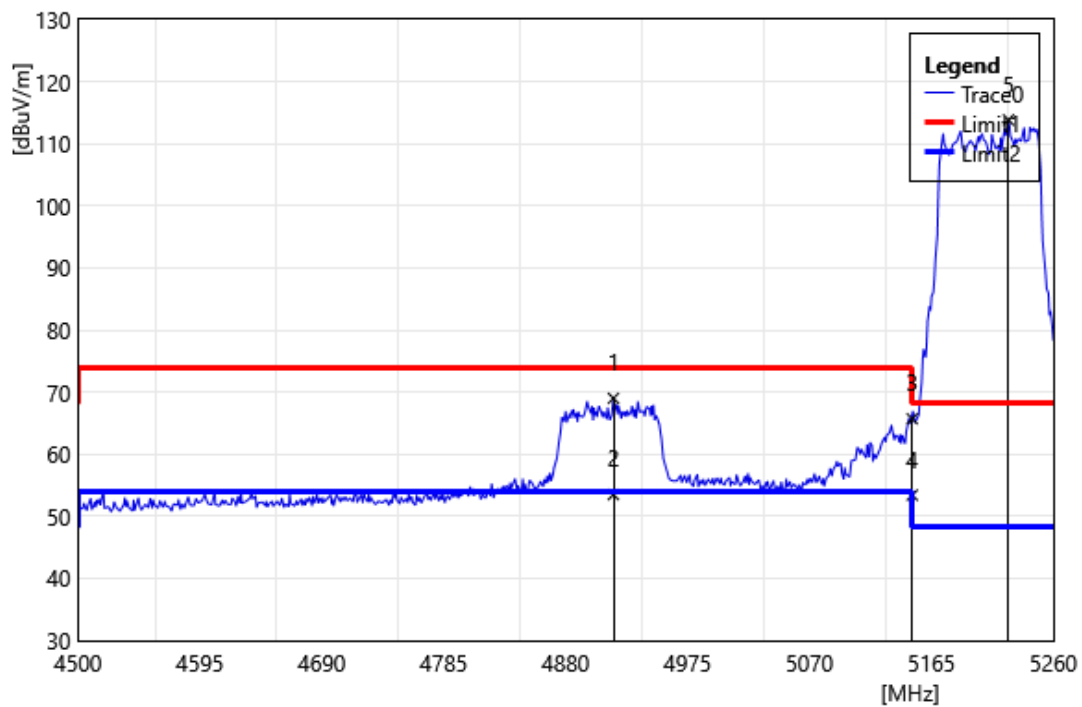


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4917.24	67.11	1.90	69.01	74.00	-4.99	PEAK
2	4917.24	51.61	1.90	53.51	54.00	-0.49	AVG
3	5150.00	63.09	2.64	65.72	74.00	-8.28	PEAK
4	5150.00	50.78	2.64	53.42	54.00	-0.58	AVG
5	5225.04	111.67	2.16	113.83	68.20	45.63	PEAK

Test Site:	966C Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5210		
	MHz		
Polarization:	Horizontal		
Remark:			

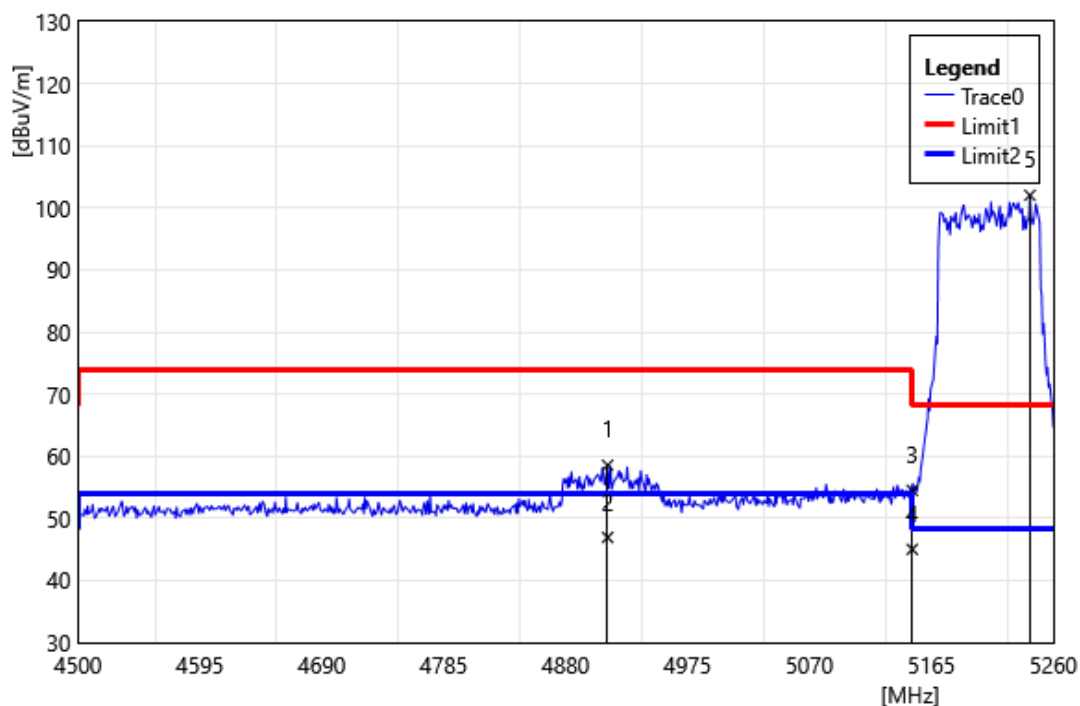


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	4912.68	56.65	1.91	58.56	74.00	-15.44	PEAK
2	4912.68	45.02	1.91	46.93	54.00	-7.07	AVG
3	5150.00	51.88	2.64	54.52	74.00	-19.48	PEAK
4	5150.00	42.37	2.64	45.01	54.00	-8.99	AVG
5	5241.76	100.01	2.03	102.04	68.20	33.84	PEAK

Test Site:	966C Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5290		
	MHz		
Polarization:	Vertical		
Remark:			

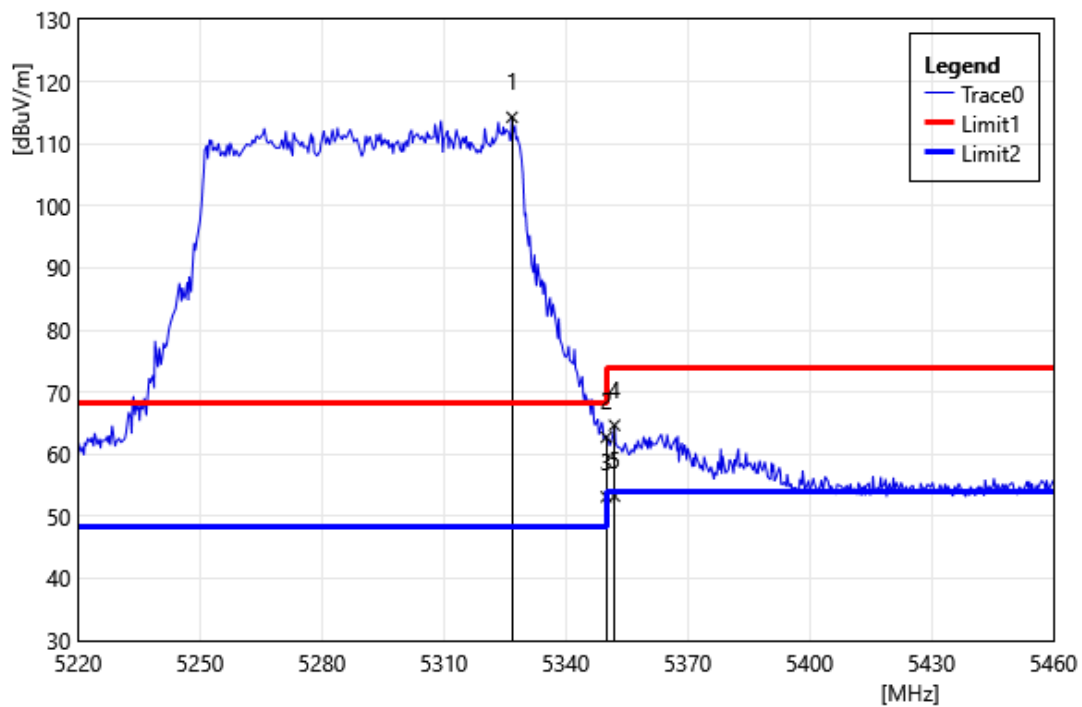


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5326.80	112.34	1.94	114.28	68.20	46.08	PEAK
2	5350.00	60.63	2.09	62.72	74.00	-11.28	PEAK
3	5350.00	51.06	2.09	53.15	54.00	-0.85	AVG
4	5352.00	62.57	2.10	64.67	74.00	-9.33	PEAK
5	5352.00	51.16	2.10	53.26	54.00	-0.74	AVG

Test Site:	966C Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5290		
	MHz		
Polarization:	Horizontal		
Remark:			

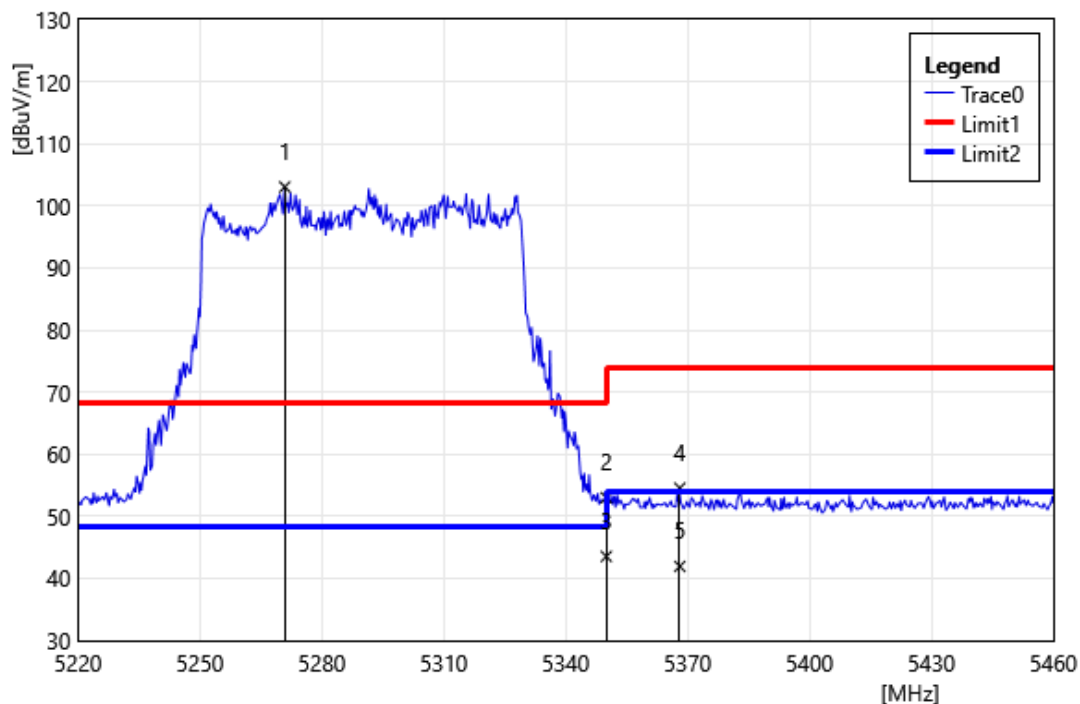


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5270.88	101.18	1.88	103.06	68.20	34.86	PEAK
2	5350.00	50.92	2.09	53.01	74.00	-20.99	PEAK
3	5350.00	41.46	2.09	43.55	54.00	-10.45	AVG
4	5368.08	52.36	2.20	54.56	74.00	-19.44	PEAK
5	5368.08	39.73	2.20	41.93	54.00	-12.07	AVG

Test Site:	966C Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5530		
	MHz		
Polarization:	Vertical		
Remark:			

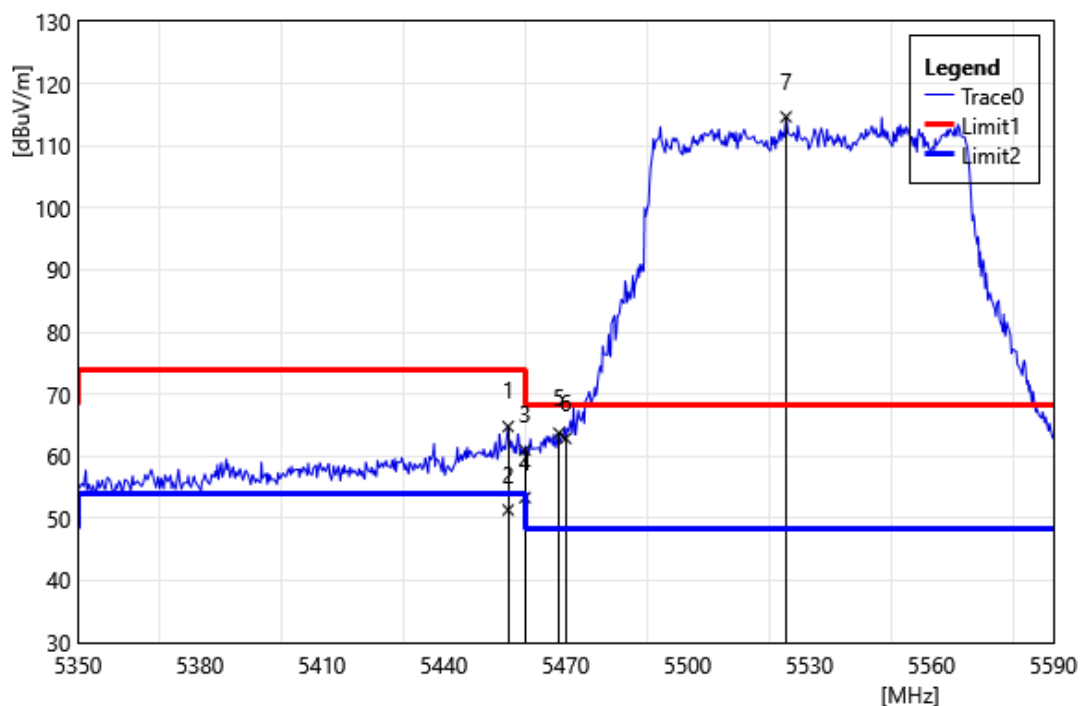


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5455.84	62.08	2.71	64.79	74.00	-9.21	PEAK
2	5455.84	48.64	2.71	51.35	54.00	-2.65	AVG
3	5460.00	58.29	2.71	61.00	74.00	-13.00	PEAK
4	5460.00	50.63	2.71	53.34	54.00	-0.66	AVG
5	5468.32	61.01	2.72	63.73	68.20	-4.47	PEAK
6	5470.00	60.16	2.72	62.88	68.20	-5.32	PEAK
7	5524.24	111.94	2.72	114.66	68.20	46.46	PEAK

Test Site:	966C Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5530		
	MHz		
Polarization:	Horizontal		
Remark:			

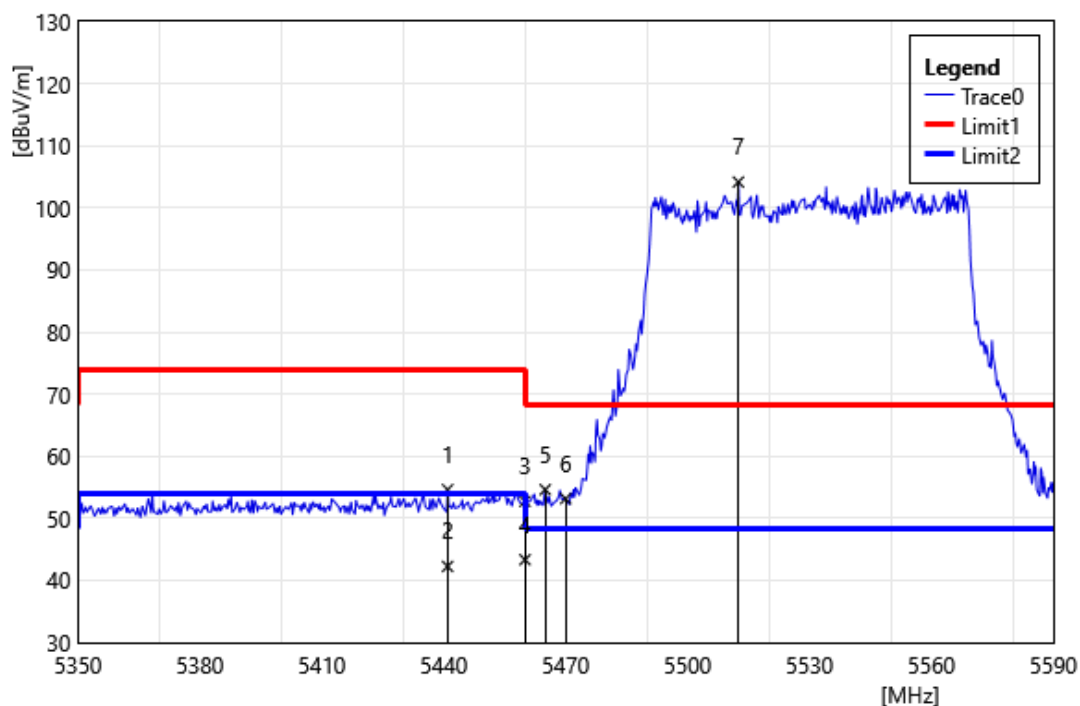


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5440.96	51.98	2.66	54.64	74.00	-19.36	PEAK
2	5440.96	39.60	2.66	42.26	54.00	-11.74	AVG
3	5460.00	50.03	2.71	52.74	74.00	-21.26	PEAK
4	5460.00	40.63	2.71	43.34	54.00	-10.66	AVG
5	5464.96	51.90	2.72	54.62	68.20	-13.58	PEAK
6	5470.00	50.46	2.72	53.18	68.20	-15.02	PEAK
7	5512.48	101.45	2.72	104.17	68.20	35.97	PEAK

Test Site:	966C Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5610		
	MHz		
Polarization:	Vertical		
Remark:			

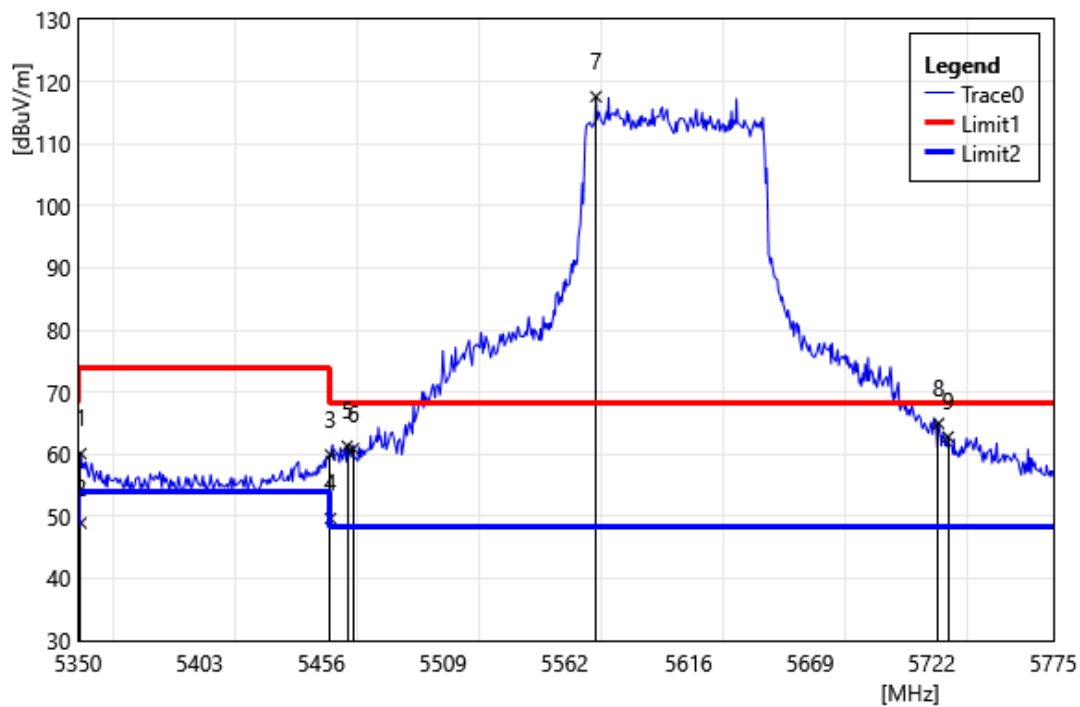


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5351.28	58.00	2.10	60.10	74.00	-13.91	PEAK
2	5351.28	46.83	2.10	48.93	54.00	-5.07	AVG
3	5460.00	57.19	2.71	59.90	74.00	-14.10	PEAK
4	5460.00	46.95	2.71	49.66	54.00	-4.34	AVG
5	5467.30	58.57	2.72	61.29	68.20	-6.91	PEAK
6	5470.00	58.15	2.72	60.87	68.20	-7.33	PEAK
7	5575.68	114.93	2.66	117.59	68.20	49.39	PEAK
8	5725.00	62.23	2.72	64.95	68.20	-3.25	PEAK
9	5729.10	60.03	2.76	62.79	68.20	-5.41	PEAK

Test Site:	966C Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5610		
	MHz		
Polarization:	Horizontal		
Remark:			

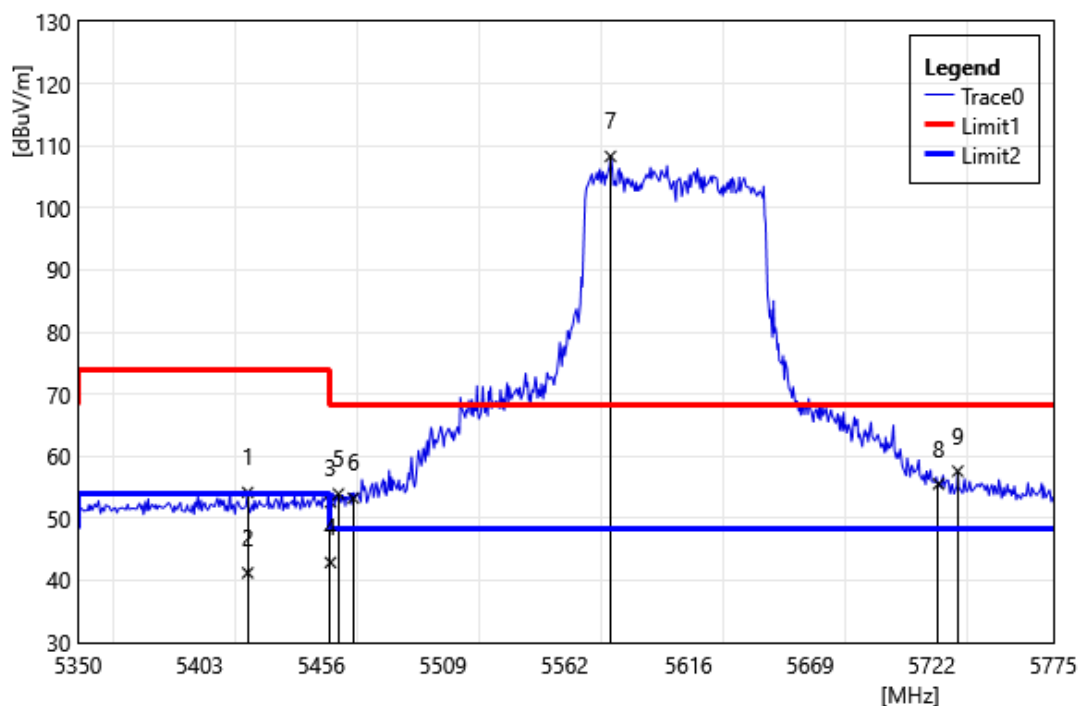


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5423.95	51.62	2.55	54.17	74.00	-19.83	PEAK
2	5423.95	38.67	2.55	41.22	54.00	-12.78	AVG
3	5460.00	49.86	2.71	52.57	74.00	-21.43	PEAK
4	5460.00	40.18	2.71	42.89	54.00	-11.11	AVG
5	5463.48	51.22	2.72	53.94	68.20	-14.26	PEAK
6	5470.00	50.54	2.72	53.26	68.20	-14.94	PEAK
7	5582.05	105.64	2.64	108.28	68.20	40.08	PEAK
8	5725.00	52.82	2.72	55.54	68.20	-12.66	PEAK
9	5733.35	54.79	2.81	57.60	68.20	-10.60	PEAK

Test Site:	966C Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5690		
	MHz		
Polarization:	Vertical		
Remark:			

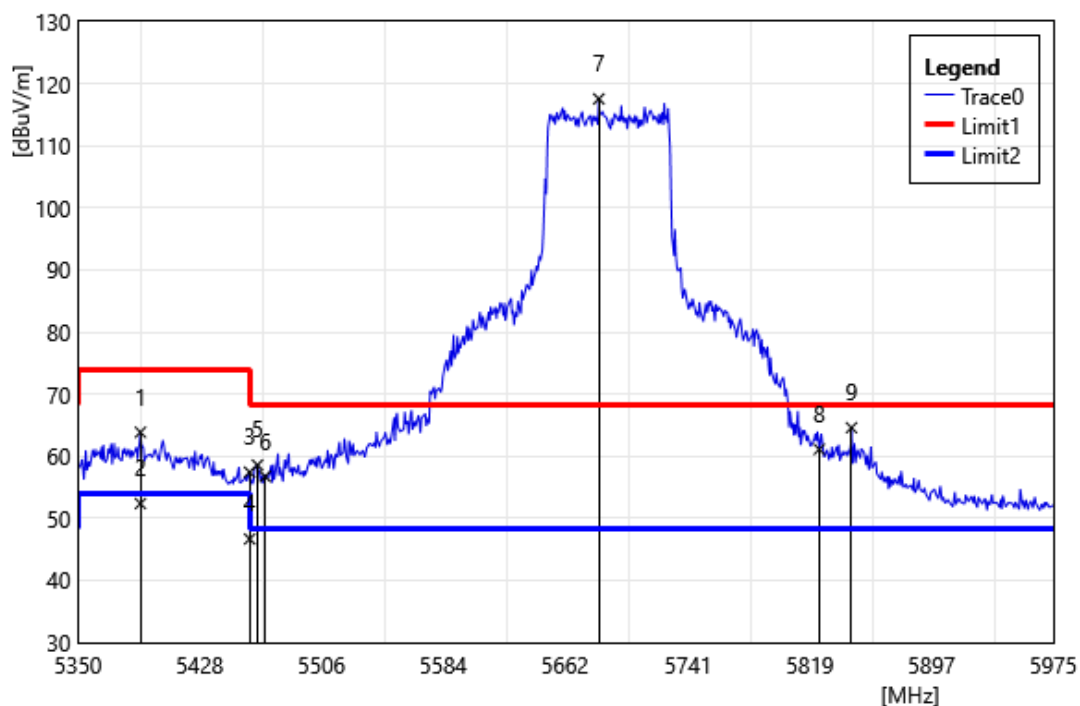


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5390.00	61.53	2.34	63.87	74.00	-10.13	PEAK
2	5390.00	50.05	2.34	52.39	54.00	-1.61	AVG
3	5460.00	54.72	2.71	57.43	74.00	-16.57	PEAK
4	5460.00	43.97	2.71	46.68	54.00	-7.32	AVG
5	5465.00	55.87	2.72	58.59	68.20	-9.61	PEAK
6	5470.00	54.02	2.72	56.74	68.20	-11.46	PEAK
7	5683.75	115.08	2.48	117.56	68.20	49.36	PEAK
8	5825.00	57.92	3.20	61.12	68.20	-7.08	PEAK
9	5845.63	61.36	3.24	64.60	68.20	-3.60	PEAK

Test Site:	966C Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5690		
	MHz		
Polarization:	Horizontal		
Remark:			

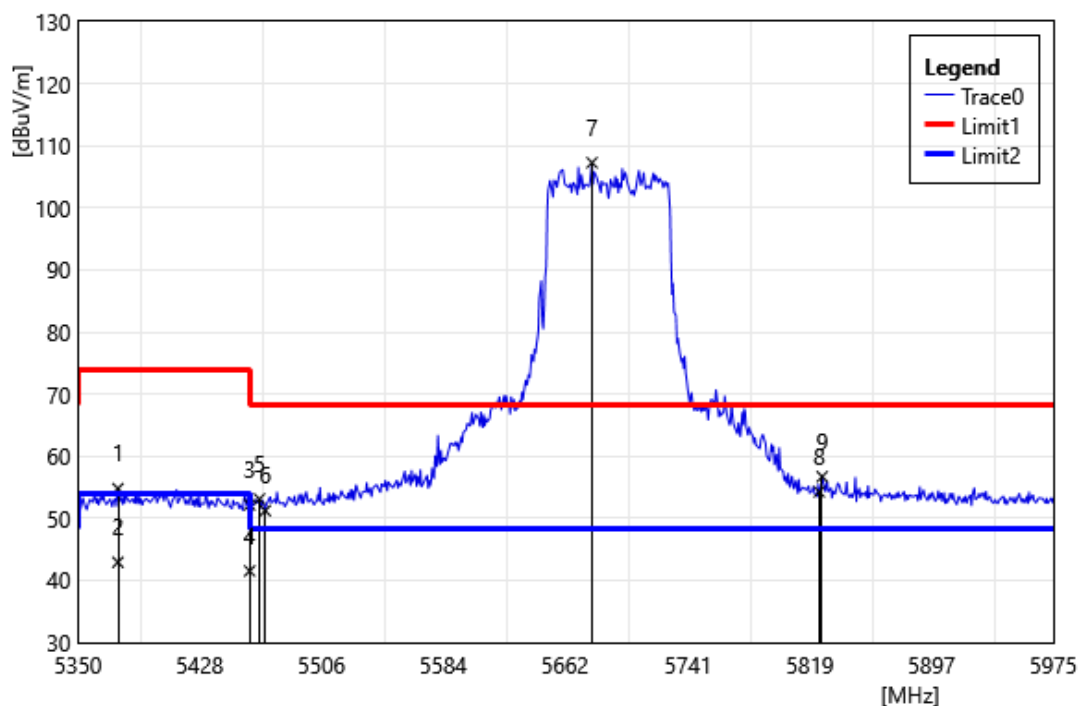

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5375.63	52.54	2.25	54.79	74.00	-19.21	PEAK
2	5375.63	40.68	2.25	42.93	54.00	-11.07	AVG
3	5460.00	49.48	2.71	52.19	74.00	-21.81	PEAK
4	5460.00	38.81	2.71	41.52	54.00	-12.48	AVG
5	5466.25	50.41	2.72	53.13	68.20	-15.07	PEAK
6	5470.00	48.52	2.72	51.24	68.20	-16.96	PEAK
7	5679.38	104.80	2.48	107.28	68.20	39.08	PEAK
8	5825.00	51.08	3.20	54.28	68.20	-13.92	PEAK
9	5826.88	53.52	3.20	56.72	68.20	-11.48	PEAK


Test Site:	966C Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5775		
	MHz		
Polarization:	Vertical		
Remark:			

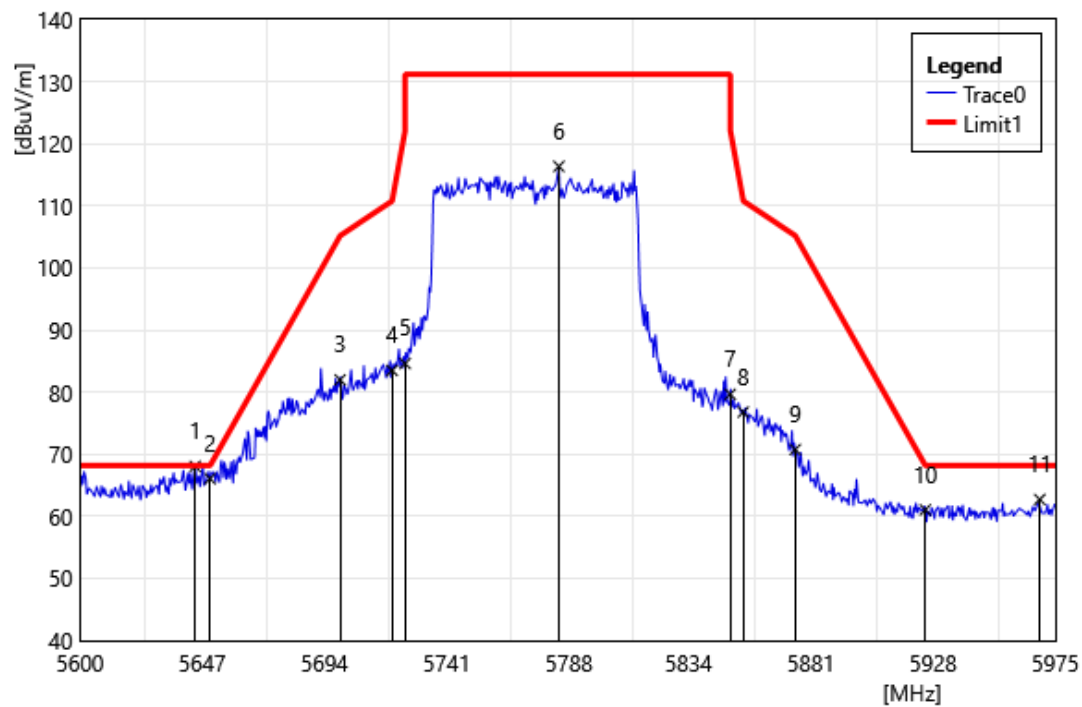

Test Site:	966C Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5775 MHz		
Polarization:	Vertical		
Remark:			

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5644.25	65.57	2.50	68.07	68.20	-0.13	PEAK
2	5650.00	63.58	2.49	66.07	68.20	-2.13	PEAK
3	5700.00	79.51	2.48	81.98	105.20	-23.22	PEAK
4	5720.00	80.83	2.67	83.50	110.80	-27.30	PEAK
5	5725.00	81.89	2.72	84.61	122.20	-37.59	PEAK
6	5784.13	113.27	3.10	116.37	131.20	-14.83	PEAK
7	5850.00	76.41	3.24	79.66	122.20	-42.54	PEAK
8	5855.00	73.55	3.25	76.80	110.80	-34.00	PEAK
9	5875.00	67.48	3.29	70.77	105.20	-34.43	PEAK
10	5925.00	57.86	3.18	61.04	68.20	-7.16	PEAK
11	5969.00	59.66	3.06	62.72	68.20	-5.48	PEAK


Test Site:	966C Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5775		
	MHz		
Polarization:	Horizontal		
Remark:			

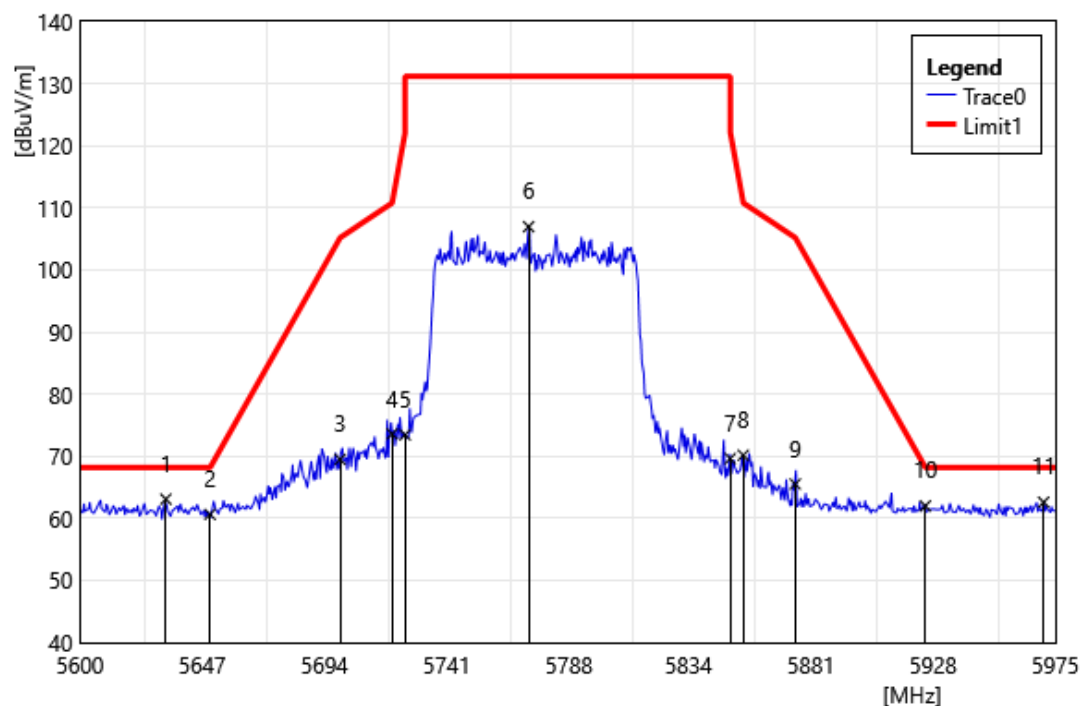

Test Site:	966C Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT80 5775 MHz		
Polarization:	Horizontal		
Remark:			


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5633.00	60.57	2.53	63.10	68.20	-5.10	PEAK
2	5650.00	58.16	2.49	60.65	68.20	-7.55	PEAK
3	5700.00	67.03	2.48	69.51	105.20	-35.69	PEAK
4	5720.00	70.92	2.67	73.59	110.80	-37.21	PEAK
5	5725.00	70.72	2.72	73.44	122.20	-48.76	PEAK
6	5772.50	103.92	3.05	106.97	131.20	-24.23	PEAK
7	5850.00	66.39	3.24	69.63	122.20	-52.57	PEAK
8	5855.00	66.93	3.25	70.18	110.80	-40.62	PEAK
9	5875.00	62.24	3.29	65.53	105.20	-39.67	PEAK
10	5925.00	58.82	3.18	62.00	68.20	-6.20	PEAK
11	5970.50	59.54	3.06	62.60	68.20	-5.60	PEAK

Test Site:	966C Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 5250 MHz		
Polarization:	Vertical		
Remark:			

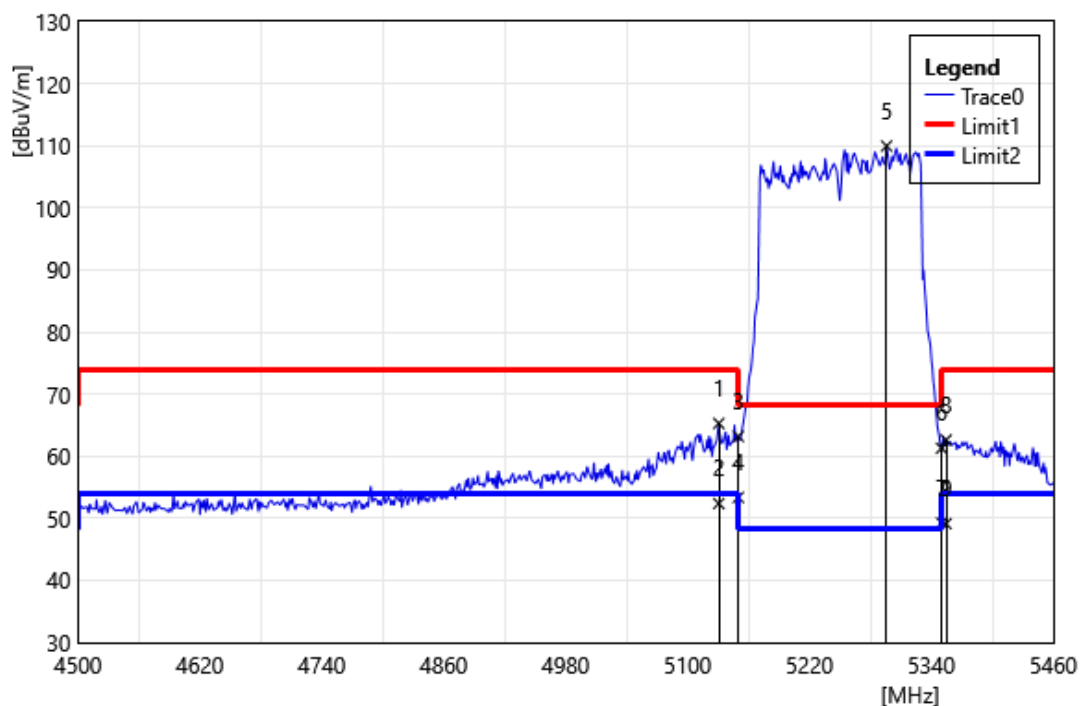


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5130.72	62.62	2.67	65.29	74.00	-8.71	PEAK
2	5130.72	49.72	2.67	52.39	54.00	-1.61	AVG
3	5150.00	60.57	2.64	63.20	74.00	-10.80	PEAK
4	5150.00	50.73	2.64	53.37	54.00	-0.63	AVG
5	5295.84	108.17	1.79	109.96	68.20	41.76	PEAK
6	5350.00	59.22	2.09	61.30	74.00	-12.70	PEAK
7	5350.00	47.18	2.09	49.27	54.00	-4.73	AVG
8	5354.40	60.51	2.11	62.62	74.00	-11.38	PEAK
9	5354.40	47.04	2.11	49.15	54.00	-4.85	AVG

Test Site:	966C Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 5250 MHz		
Polarization:	Horizontal		
Remark:			

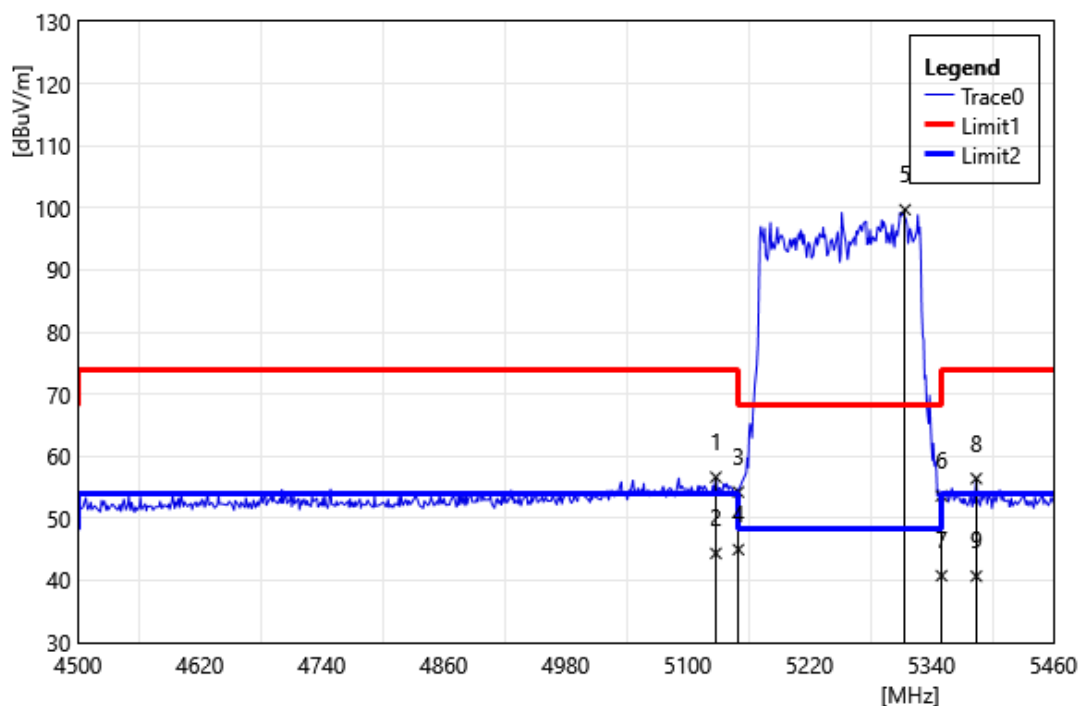


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5127.84	53.96	2.68	56.64	74.00	-17.36	PEAK
2	5127.84	41.68	2.68	44.36	54.00	-9.64	AVG
3	5150.00	51.60	2.64	54.24	74.00	-19.76	PEAK
4	5150.00	42.32	2.64	44.96	54.00	-9.04	AVG
5	5314.08	97.86	1.86	99.72	68.20	31.52	PEAK
6	5350.00	51.52	2.09	53.61	74.00	-20.39	PEAK
7	5350.00	38.67	2.09	40.76	54.00	-13.24	AVG
8	5384.16	54.13	2.30	56.43	74.00	-17.57	PEAK
9	5384.16	38.39	2.30	40.69	54.00	-13.31	AVG

Test Site:	966C Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 5570		
	MHz		
Polarization:	Vertical		
Remark:			

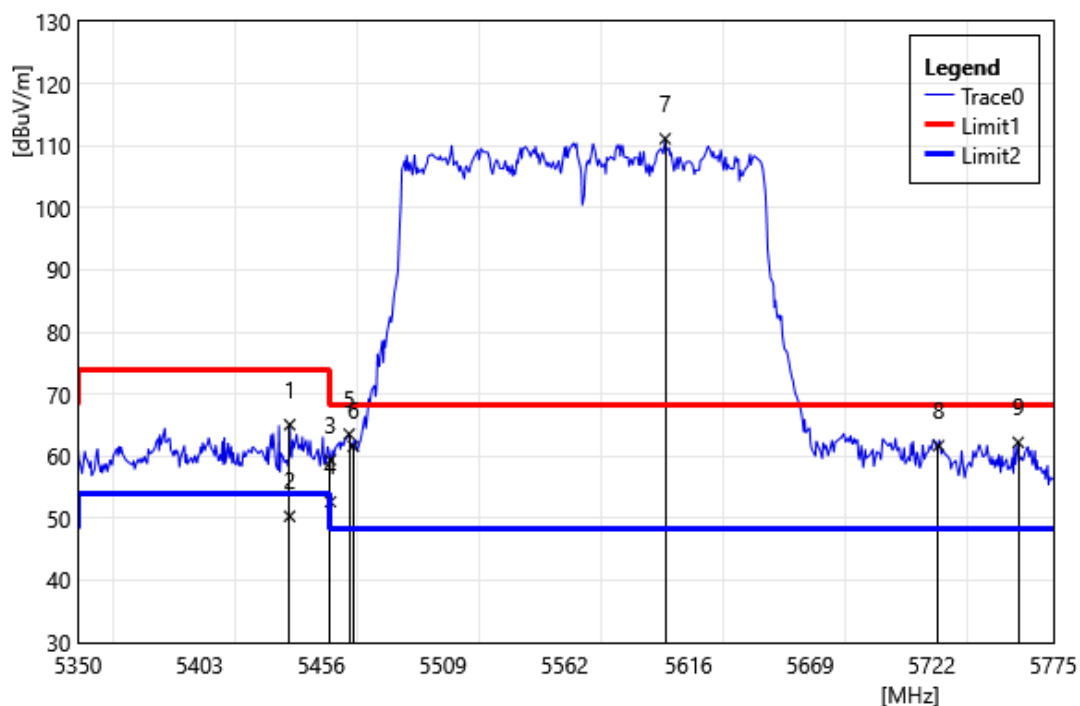


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5442.23	62.42	2.66	65.08	74.00	-8.93	PEAK
2	5442.23	47.67	2.66	50.33	54.00	-3.67	AVG
3	5460.00	56.69	2.71	59.40	74.00	-14.60	PEAK
4	5460.00	49.96	2.71	52.67	54.00	-1.33	AVG
5	5468.15	60.84	2.72	63.56	68.20	-4.64	PEAK
6	5470.00	58.89	2.72	61.61	68.20	-6.59	PEAK
7	5605.85	108.55	2.59	111.14	68.20	42.94	PEAK
8	5725.00	58.97	2.72	61.69	68.20	-6.51	PEAK
9	5759.70	59.24	3.00	62.24	68.20	-5.96	PEAK

Test Site:	966C Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT160 5570		
	MHz		
Polarization:	Horizontal		
Remark:			

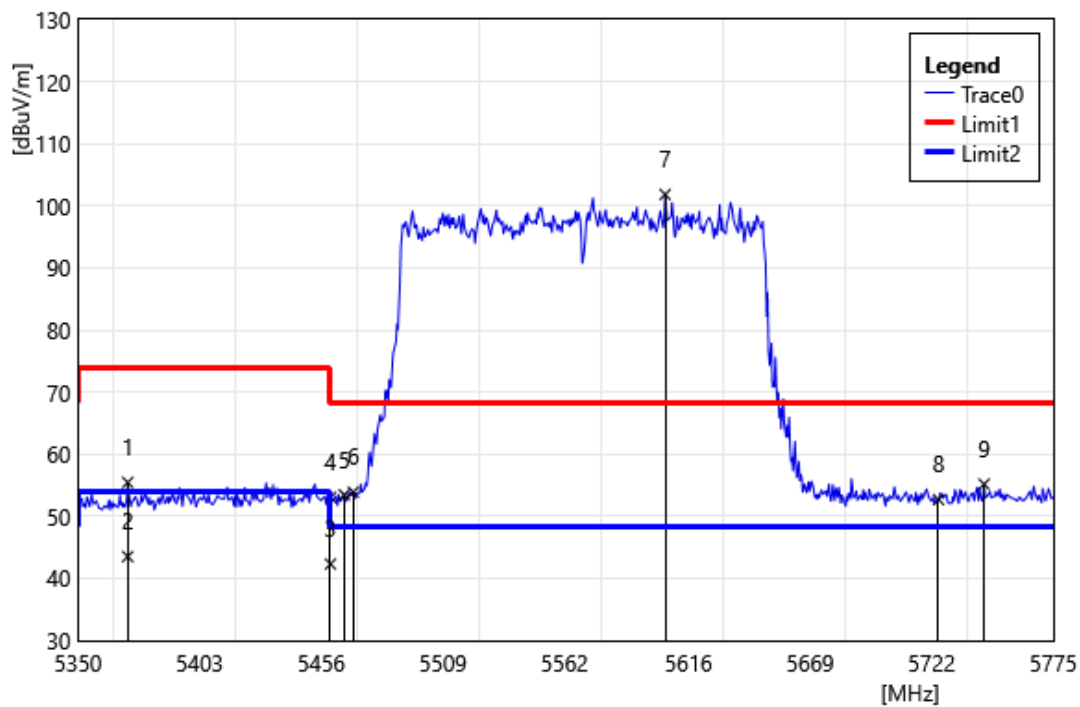


ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5371.68	53.25	2.22	55.47	74.00	-18.53	PEAK
2	5371.68	41.30	2.22	43.52	54.00	-10.48	AVG
3	5460.00	39.62	2.71	42.33	74.00	-31.67	PEAK
4	5460.00	50.35	2.71	53.06	54.00	-0.94	AVG
5	5466.03	50.74	2.72	53.46	68.20	-14.75	PEAK
6	5470.00	51.19	2.72	53.91	68.20	-14.29	PEAK
7	5605.85	99.26	2.59	101.85	68.20	33.65	PEAK
8	5725.00	49.98	2.72	52.70	68.20	-15.50	PEAK
9	5744.83	52.28	2.92	55.20	68.20	-13.00	PEAK

Test Site:	966C Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT240 5610		
	MHz		
Polarization:	Vertical		
Remark:			

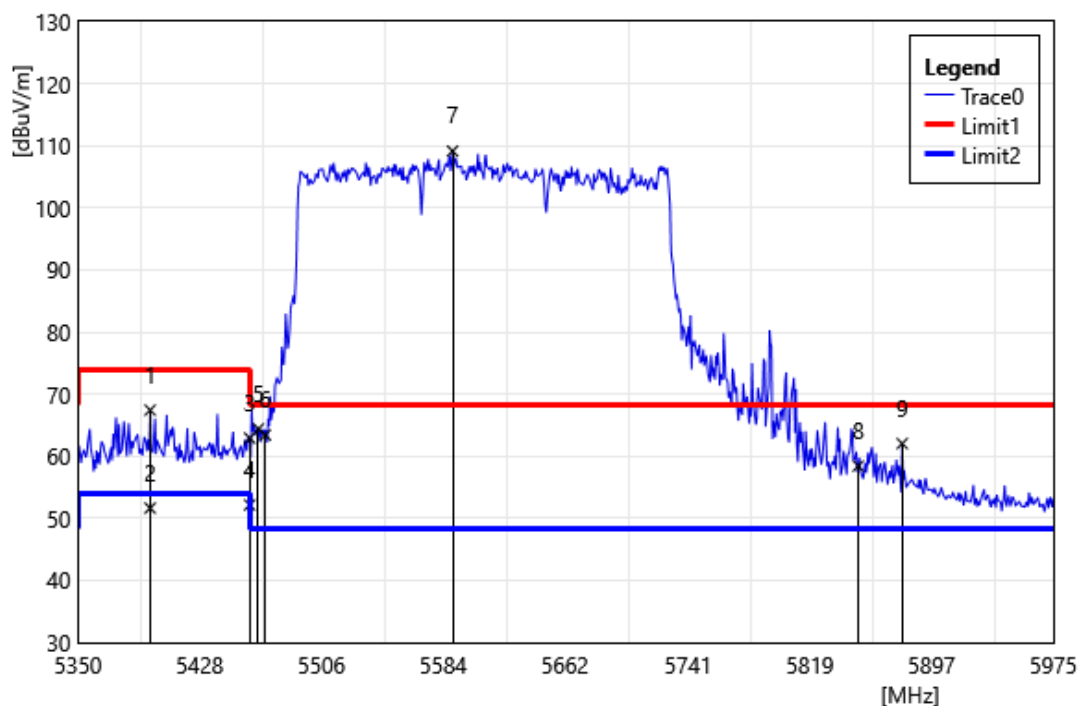

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5396.25	65.05	2.38	67.43	74.00	-6.57	PEAK
2	5396.25	49.27	2.38	51.65	54.00	-2.35	AVG
3	5460.00	60.21	2.71	62.92	74.00	-11.08	PEAK
4	5460.00	49.45	2.71	52.16	54.00	-1.84	AVG
5	5465.63	61.69	2.72	64.41	68.20	-3.79	PEAK
6	5470.00	60.71	2.72	63.43	68.20	-4.77	PEAK
7	5590.00	106.53	2.62	109.15	68.20	40.95	PEAK
8	5850.00	55.19	3.24	58.43	68.20	-9.77	PEAK
9	5878.13	58.75	3.29	62.04	68.20	-6.16	PEAK

Test Site:	966C Chamber	Standard:	Part 15E
Test Mode:	802.11be EHT240 5610 MHz		
Polarization:	Horizontal		
Remark:			

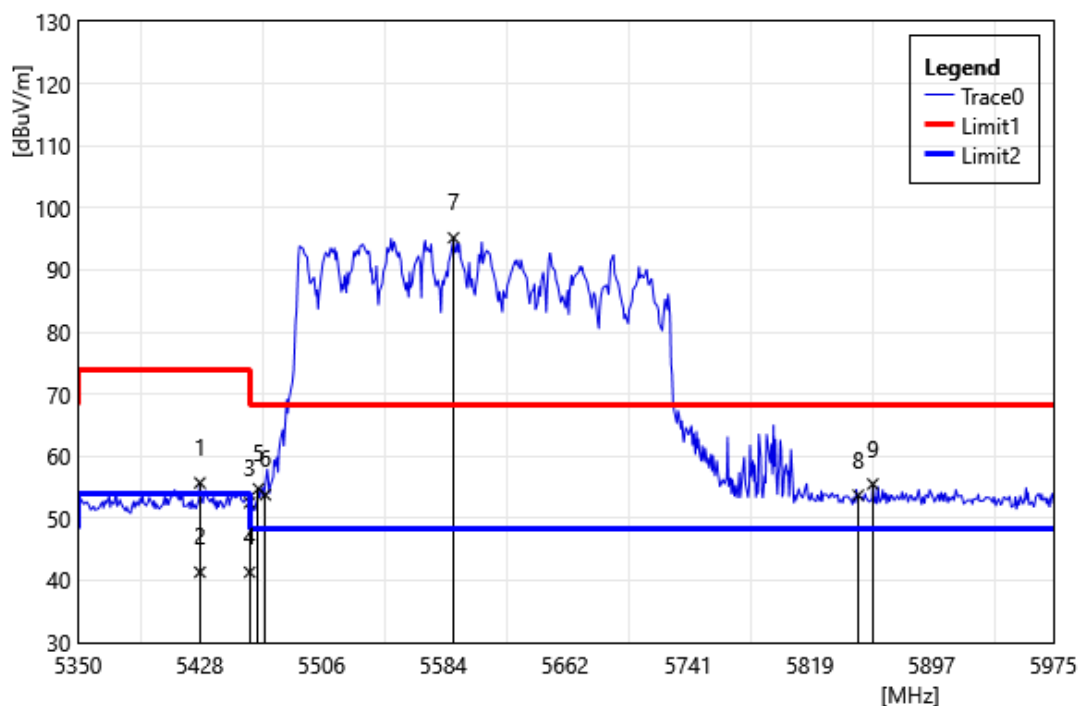

ID	Frequency MHz	Reading dBuV	Correct Factor dB/m	Result dBuV/m	Limit dBuV/m	Margin dB	Remark
1	5428.13	53.14	2.58	55.72	74.00	-18.28	PEAK
2	5428.13	38.75	2.58	41.33	54.00	-12.67	AVG
3	5460.00	49.82	2.71	52.53	74.00	-21.47	PEAK
4	5460.00	38.61	2.71	41.32	54.00	-12.68	AVG
5	5465.63	52.04	2.72	54.76	68.20	-13.44	PEAK
6	5470.00	51.07	2.72	53.79	68.20	-14.41	PEAK
7	5590.63	92.56	2.62	95.18	68.20	26.98	PEAK
8	5850.00	50.48	3.24	53.72	68.20	-14.48	PEAK
9	5859.38	52.26	3.26	55.52	68.20	-12.68	PEAK

5.3. Conducted Test Results

Duty cycle

Reference Appendix A / Appendix B

Maximum Conducted Output Power Measurement

Reference Appendix A

Maximum Conducted Output Power Measurement

Reference Appendix A

26 dB RF Bandwidth Measurement & 99 % Occupied Bandwidth Measurement

Reference Appendix A / Appendix B

6 dB RF Bandwidth Measurement

Reference Appendix A / Appendix B

Maximum Power Spectral Density Measurement

Reference Appendix A / Appendix B

---END---