





Modulation	be EHT40	Test Freq. (MHz)	5755						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):24 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4604.00	48.33	54.00	-5.67	48.58	-0.25	Average	105	129
2	4604.00	52.35	74.00	-21.65	52.60	-0.25	Peak	105	129
3	5650.00	57.86	68.20	-10.34	57.20	0.66	Peak	100	336
4	5700.00	74.42	105.20	-30.78	73.52	0.90	Peak	100	336
5	5720.00	84.91	110.80	-25.89	83.97	0.94	Peak	100	336
6	5725.00	86.61	122.20	-35.59	85.66	0.95	Peak	100	336
7 *	5755.00	110.53			109.51	1.02	Average	100	336
8 *	5755.00	123.26			122.24	1.02	Peak	100	336
9	5925.00	56.68	68.20	-11.52	55.24	1.44	Peak	100	336
10	11510.00	41.07	54.00	-12.93	32.61	8.46	Average	100	40
11	11510.00	54.87	74.00	-19.13	46.41	8.46	Peak	100	40
12	17265.00	57.61	68.20	-10.59	52.15	5.46	Peak	100	60

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

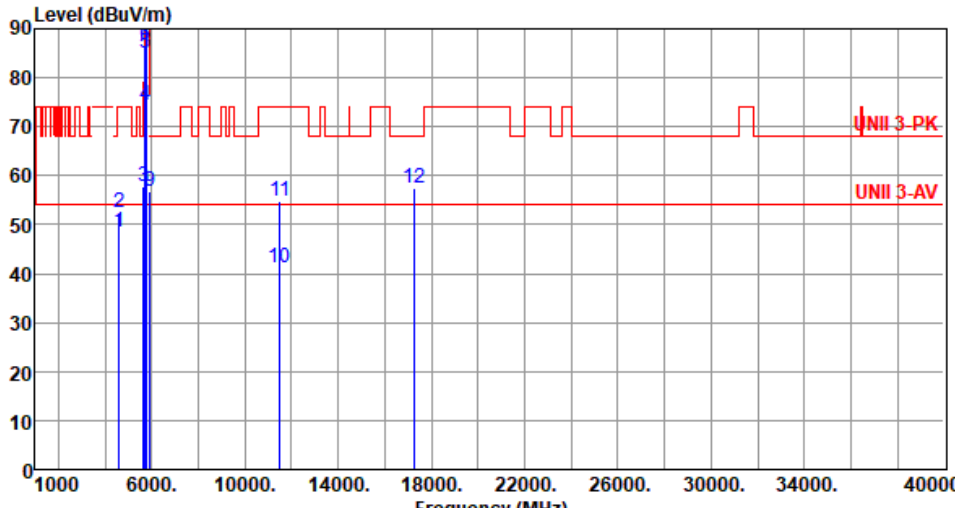


Modulation	be EHT40	Test Freq. (MHz)	5755
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):24 Humidity(%):62			
Level (dBUV/m)			

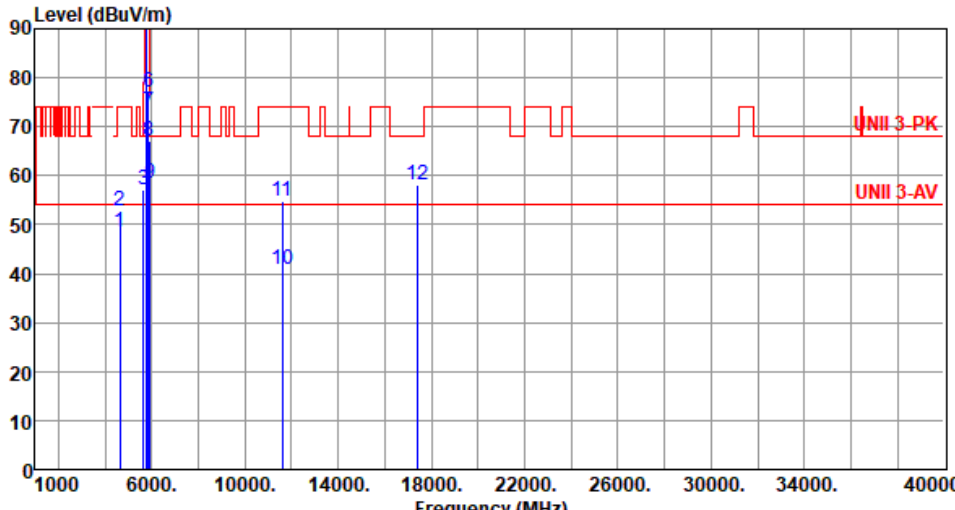

Modulation	be EHT40	Test Freq. (MHz)	5795						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):21 Humidity(%):63									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4636.00	48.65	54.00	-5.35	48.77	-0.12	Average	124	141
2	4636.00	52.84	74.00	-21.16	52.96	-0.12	Peak	124	141
3	5650.00	57.24	68.20	-10.96	56.58	0.66	Peak	100	334
4 *	5795.00	110.10			109.06	1.04	Average	100	334
5 *	5795.00	121.49			120.45	1.04	Peak	100	334
6	5850.00	76.92	122.20	-45.28	75.84	1.08	Peak	100	334
7	5855.00	73.00	110.80	-37.80	71.88	1.12	Peak	100	334
8	5875.00	67.19	105.20	-38.01	65.94	1.25	Peak	100	334
9	5925.00	58.39	68.20	-9.81	56.95	1.44	Peak	100	334
10	11590.00	40.79	54.00	-13.21	32.62	8.17	Average	100	40
11	11590.00	54.76	74.00	-19.24	46.59	8.17	Peak	100	40
12	17385.00	58.12	68.20	-10.08	52.11	6.01	Peak	100	55

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

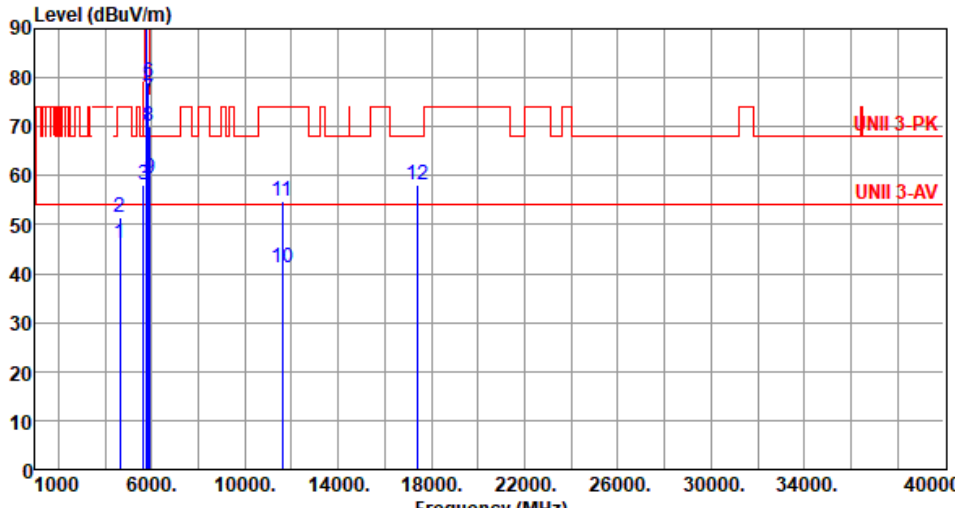


Modulation	be EHT40	Test Freq. (MHz)	5795						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):21 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4636.00	46.14	54.00	-7.86	46.26	-0.12	Average	155	8
2	4636.00	51.42	74.00	-22.58	51.54	-0.12	Peak	155	8
3	5650.00	58.20	68.20	-10.00	57.54	0.66	Peak	196	334
4 *	5795.00	112.12			111.08	1.04	Average	196	334
5 *	5795.00	123.67			122.63	1.04	Peak	196	334
6	5850.00	79.11	122.20	-43.09	78.03	1.08	Peak	196	334
7	5855.00	75.83	110.80	-34.97	74.71	1.12	Peak	196	334
8	5875.00	70.21	105.20	-34.99	68.96	1.25	Peak	196	334
9	5925.00	59.45	68.20	-8.75	58.01	1.44	Peak	196	334
10	11590.00	41.02	54.00	-12.98	32.85	8.17	Average	100	30
11	11590.00	54.93	74.00	-19.07	46.76	8.17	Peak	100	30
12	17385.00	58.23	68.20	-9.97	52.22	6.01	Peak	100	50

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency




Modulation	be EHT40	Test Freq. (MHz)	5835																																																																																																																																		
Polarization	Horizontal																																																																																																																																				
Test By :Roger Lu Temperature(°C):21 Humidity(%):63																																																																																																																																					
Level (dBuV/m) UNII 4 AP-PK UNII 4 AP-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>4668.00</td><td>52.43</td><td>54.00</td><td>-1.57</td><td>52.45</td><td>-0.02</td><td>Average</td><td>100</td><td>127</td></tr><tr><td>2</td><td>4668.00</td><td>55.49</td><td>74.00</td><td>-18.51</td><td>55.51</td><td>-0.02</td><td>Peak</td><td>100</td><td>127</td></tr><tr><td>3</td><td>5650.00</td><td>57.11</td><td>68.20</td><td>-11.09</td><td>56.45</td><td>0.66</td><td>Peak</td><td>102</td><td>335</td></tr><tr><td>4 *</td><td>5835.00</td><td>109.28</td><td></td><td></td><td>108.21</td><td>1.07</td><td>Average</td><td>102</td><td>335</td></tr><tr><td>5 *</td><td>5835.00</td><td>120.45</td><td></td><td></td><td>119.38</td><td>1.07</td><td>Peak</td><td>102</td><td>335</td></tr><tr><td>6</td><td>5895.00</td><td>59.97</td><td>110.20</td><td>-50.23</td><td>58.59</td><td>1.38</td><td>Average</td><td>102</td><td>335</td></tr><tr><td>7</td><td>5895.00</td><td>72.90</td><td>130.20</td><td>-57.30</td><td>71.52</td><td>1.38</td><td>Peak</td><td>102</td><td>335</td></tr><tr><td>8</td><td>5925.00</td><td>48.69</td><td>88.20</td><td>-39.51</td><td>47.25</td><td>1.44</td><td>Average</td><td>102</td><td>335</td></tr><tr><td>9</td><td>5925.00</td><td>61.46</td><td>108.20</td><td>-46.74</td><td>60.02</td><td>1.44</td><td>Peak</td><td>102</td><td>335</td></tr><tr><td>10</td><td>11670.00</td><td>40.95</td><td>54.00</td><td>-13.05</td><td>33.02</td><td>7.93</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>11</td><td>11670.00</td><td>53.80</td><td>74.00</td><td>-20.20</td><td>45.87</td><td>7.93</td><td>Peak</td><td>100</td><td>40</td></tr><tr><td>12</td><td>17505.00</td><td>57.92</td><td>68.20</td><td>-10.28</td><td>51.43</td><td>6.49</td><td>Peak</td><td>100</td><td>30</td></tr></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4668.00	52.43	54.00	-1.57	52.45	-0.02	Average	100	127	2	4668.00	55.49	74.00	-18.51	55.51	-0.02	Peak	100	127	3	5650.00	57.11	68.20	-11.09	56.45	0.66	Peak	102	335	4 *	5835.00	109.28			108.21	1.07	Average	102	335	5 *	5835.00	120.45			119.38	1.07	Peak	102	335	6	5895.00	59.97	110.20	-50.23	58.59	1.38	Average	102	335	7	5895.00	72.90	130.20	-57.30	71.52	1.38	Peak	102	335	8	5925.00	48.69	88.20	-39.51	47.25	1.44	Average	102	335	9	5925.00	61.46	108.20	-46.74	60.02	1.44	Peak	102	335	10	11670.00	40.95	54.00	-13.05	33.02	7.93	Average	100	40	11	11670.00	53.80	74.00	-20.20	45.87	7.93	Peak	100	40	12	17505.00	57.92	68.20	-10.28	51.43	6.49	Peak	100	30
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																												
1	4668.00	52.43	54.00	-1.57	52.45	-0.02	Average	100	127																																																																																																																												
2	4668.00	55.49	74.00	-18.51	55.51	-0.02	Peak	100	127																																																																																																																												
3	5650.00	57.11	68.20	-11.09	56.45	0.66	Peak	102	335																																																																																																																												
4 *	5835.00	109.28			108.21	1.07	Average	102	335																																																																																																																												
5 *	5835.00	120.45			119.38	1.07	Peak	102	335																																																																																																																												
6	5895.00	59.97	110.20	-50.23	58.59	1.38	Average	102	335																																																																																																																												
7	5895.00	72.90	130.20	-57.30	71.52	1.38	Peak	102	335																																																																																																																												
8	5925.00	48.69	88.20	-39.51	47.25	1.44	Average	102	335																																																																																																																												
9	5925.00	61.46	108.20	-46.74	60.02	1.44	Peak	102	335																																																																																																																												
10	11670.00	40.95	54.00	-13.05	33.02	7.93	Average	100	40																																																																																																																												
11	11670.00	53.80	74.00	-20.20	45.87	7.93	Peak	100	40																																																																																																																												
12	17505.00	57.92	68.20	-10.28	51.43	6.49	Peak	100	30																																																																																																																												

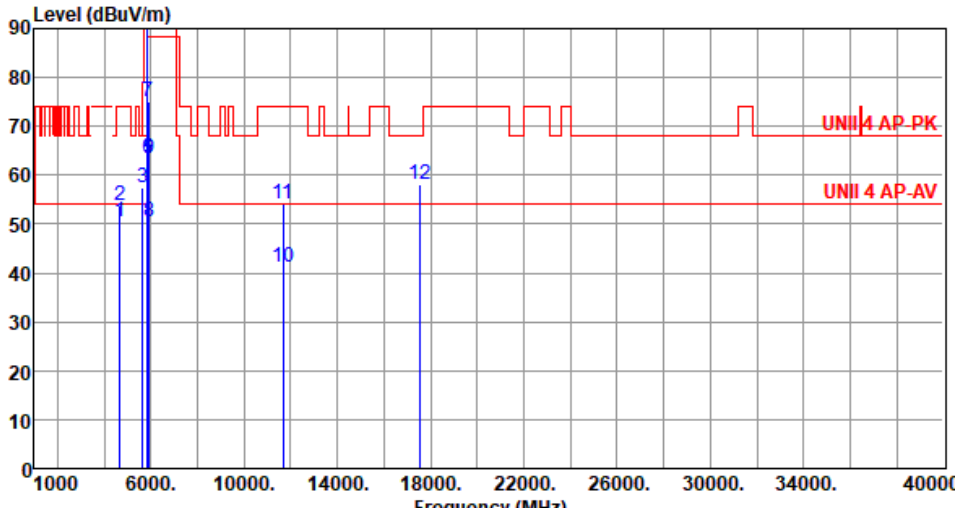

Modulation	be EHT40	Test Freq. (MHz)	5835																																																																																																																																			
Polarization	Vertical																																																																																																																																					
Test By :Roger Lu Temperature(°C):21 Humidity(%):63																																																																																																																																						
																																																																																																																																						
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>4668.00</td><td>50.64</td><td>54.00</td><td>-3.36</td><td>50.66</td><td>-0.02</td><td>Average</td><td>161</td><td>5</td></tr><tr><td>2</td><td>4668.00</td><td>53.83</td><td>74.00</td><td>-20.17</td><td>53.85</td><td>-0.02</td><td>Peak</td><td>161</td><td>5</td></tr><tr><td>3</td><td>5650.00</td><td>57.55</td><td>68.20</td><td>-10.65</td><td>56.89</td><td>0.66</td><td>Peak</td><td>196</td><td>333</td></tr><tr><td>4 *</td><td>5835.00</td><td>111.40</td><td></td><td></td><td>110.33</td><td>1.07</td><td>Average</td><td>196</td><td>333</td></tr><tr><td>5 *</td><td>5835.00</td><td>122.56</td><td></td><td></td><td>121.49</td><td>1.07</td><td>Peak</td><td>196</td><td>333</td></tr><tr><td>6</td><td>5895.00</td><td>63.29</td><td>110.20</td><td>-46.91</td><td>61.91</td><td>1.38</td><td>Average</td><td>196</td><td>333</td></tr><tr><td>7</td><td>5895.00</td><td>75.03</td><td>130.20</td><td>-55.17</td><td>73.65</td><td>1.38</td><td>Peak</td><td>196</td><td>333</td></tr><tr><td>8</td><td>5925.00</td><td>50.34</td><td>88.20</td><td>-37.86</td><td>48.90</td><td>1.44</td><td>Average</td><td>196</td><td>333</td></tr><tr><td>9</td><td>5925.00</td><td>63.56</td><td>108.20</td><td>-44.64</td><td>62.12</td><td>1.44</td><td>Peak</td><td>196</td><td>333</td></tr><tr><td>10</td><td>11670.00</td><td>41.18</td><td>54.00</td><td>-12.82</td><td>33.25</td><td>7.93</td><td>Average</td><td>100</td><td>35</td></tr><tr><td>11</td><td>11670.00</td><td>54.04</td><td>74.00</td><td>-19.96</td><td>46.11</td><td>7.93</td><td>Peak</td><td>100</td><td>35</td></tr><tr><td>12</td><td>17505.00</td><td>58.08</td><td>68.20</td><td>-10.12</td><td>51.59</td><td>6.49</td><td>Peak</td><td>100</td><td>20</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4668.00	50.64	54.00	-3.36	50.66	-0.02	Average	161	5	2	4668.00	53.83	74.00	-20.17	53.85	-0.02	Peak	161	5	3	5650.00	57.55	68.20	-10.65	56.89	0.66	Peak	196	333	4 *	5835.00	111.40			110.33	1.07	Average	196	333	5 *	5835.00	122.56			121.49	1.07	Peak	196	333	6	5895.00	63.29	110.20	-46.91	61.91	1.38	Average	196	333	7	5895.00	75.03	130.20	-55.17	73.65	1.38	Peak	196	333	8	5925.00	50.34	88.20	-37.86	48.90	1.44	Average	196	333	9	5925.00	63.56	108.20	-44.64	62.12	1.44	Peak	196	333	10	11670.00	41.18	54.00	-12.82	33.25	7.93	Average	100	35	11	11670.00	54.04	74.00	-19.96	46.11	7.93	Peak	100	35	12	17505.00	58.08	68.20	-10.12	51.59	6.49	Peak	100	20			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																													
1	4668.00	50.64	54.00	-3.36	50.66	-0.02	Average	161	5																																																																																																																													
2	4668.00	53.83	74.00	-20.17	53.85	-0.02	Peak	161	5																																																																																																																													
3	5650.00	57.55	68.20	-10.65	56.89	0.66	Peak	196	333																																																																																																																													
4 *	5835.00	111.40			110.33	1.07	Average	196	333																																																																																																																													
5 *	5835.00	122.56			121.49	1.07	Peak	196	333																																																																																																																													
6	5895.00	63.29	110.20	-46.91	61.91	1.38	Average	196	333																																																																																																																													
7	5895.00	75.03	130.20	-55.17	73.65	1.38	Peak	196	333																																																																																																																													
8	5925.00	50.34	88.20	-37.86	48.90	1.44	Average	196	333																																																																																																																													
9	5925.00	63.56	108.20	-44.64	62.12	1.44	Peak	196	333																																																																																																																													
10	11670.00	41.18	54.00	-12.82	33.25	7.93	Average	100	35																																																																																																																													
11	11670.00	54.04	74.00	-19.96	46.11	7.93	Peak	100	35																																																																																																																													
12	17505.00	58.08	68.20	-10.12	51.59	6.49	Peak	100	20																																																																																																																													
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																																																																						

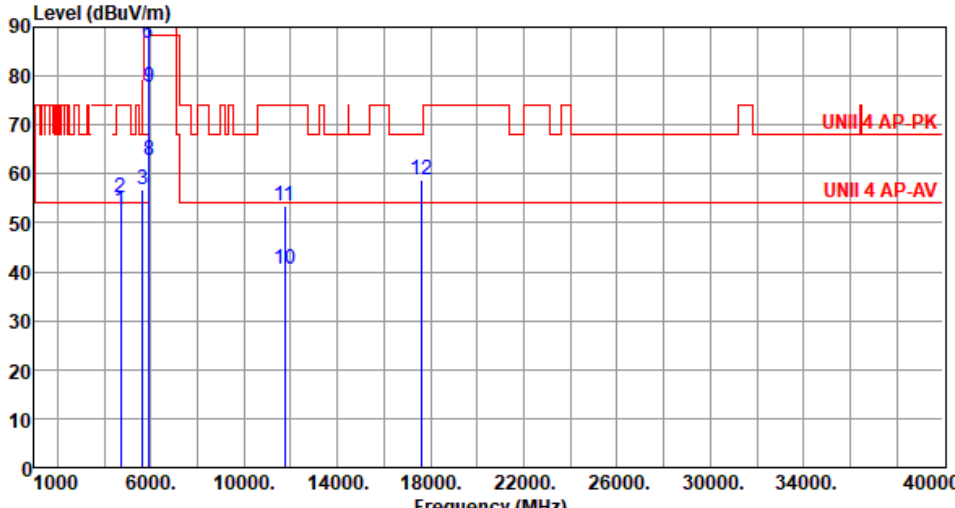


Modulation	be EHT40	Test Freq. (MHz)	5875																																																																																																																																		
Polarization	Horizontal																																																																																																																																				
Test By :Roger Lu Temperature(°C):21 Humidity(%):63																																																																																																																																					
Level (dBUV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>4700.00</td><td>52.52</td><td>54.00</td><td>-1.48</td><td>52.47</td><td>0.05</td><td>Average</td><td>100</td><td>153</td></tr><tr><td>2</td><td>4700.00</td><td>55.05</td><td>74.00</td><td>-18.95</td><td>55.00</td><td>0.05</td><td>Peak</td><td>100</td><td>153</td></tr><tr><td>3</td><td>5650.00</td><td>56.87</td><td>68.20</td><td>-11.33</td><td>56.21</td><td>0.66</td><td>Peak</td><td>100</td><td>334</td></tr><tr><td>4 *</td><td>5875.00</td><td>109.40</td><td></td><td></td><td>108.15</td><td>1.25</td><td>Average</td><td>100</td><td>334</td></tr><tr><td>5 *</td><td>5875.00</td><td>121.81</td><td></td><td></td><td>120.56</td><td>1.25</td><td>Peak</td><td>100</td><td>334</td></tr><tr><td>6</td><td>5895.00</td><td>86.53</td><td>110.20</td><td>-23.67</td><td>85.15</td><td>1.38</td><td>Average</td><td>100</td><td>334</td></tr><tr><td>7</td><td>5895.00</td><td>102.94</td><td>130.20</td><td>-27.26</td><td>101.56</td><td>1.38</td><td>Peak</td><td>100</td><td>334</td></tr><tr><td>8</td><td>5925.00</td><td>62.89</td><td>88.20</td><td>-25.31</td><td>61.45</td><td>1.44</td><td>Average</td><td>100</td><td>334</td></tr><tr><td>9</td><td>5925.00</td><td>77.72</td><td>108.20</td><td>-30.48</td><td>76.28</td><td>1.44</td><td>Peak</td><td>100</td><td>334</td></tr><tr><td>10</td><td>11750.00</td><td>40.60</td><td>54.00</td><td>-13.40</td><td>33.13</td><td>7.47</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>11</td><td>11750.00</td><td>53.62</td><td>74.00</td><td>-20.38</td><td>46.15</td><td>7.47</td><td>Peak</td><td>100</td><td>60</td></tr><tr><td>12</td><td>17625.00</td><td>58.76</td><td>68.20</td><td>-9.44</td><td>51.65</td><td>7.11</td><td>Peak</td><td>100</td><td>80</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4700.00	52.52	54.00	-1.48	52.47	0.05	Average	100	153	2	4700.00	55.05	74.00	-18.95	55.00	0.05	Peak	100	153	3	5650.00	56.87	68.20	-11.33	56.21	0.66	Peak	100	334	4 *	5875.00	109.40			108.15	1.25	Average	100	334	5 *	5875.00	121.81			120.56	1.25	Peak	100	334	6	5895.00	86.53	110.20	-23.67	85.15	1.38	Average	100	334	7	5895.00	102.94	130.20	-27.26	101.56	1.38	Peak	100	334	8	5925.00	62.89	88.20	-25.31	61.45	1.44	Average	100	334	9	5925.00	77.72	108.20	-30.48	76.28	1.44	Peak	100	334	10	11750.00	40.60	54.00	-13.40	33.13	7.47	Average	100	60	11	11750.00	53.62	74.00	-20.38	46.15	7.47	Peak	100	60	12	17625.00	58.76	68.20	-9.44	51.65	7.11	Peak	100	80
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																												
1	4700.00	52.52	54.00	-1.48	52.47	0.05	Average	100	153																																																																																																																												
2	4700.00	55.05	74.00	-18.95	55.00	0.05	Peak	100	153																																																																																																																												
3	5650.00	56.87	68.20	-11.33	56.21	0.66	Peak	100	334																																																																																																																												
4 *	5875.00	109.40			108.15	1.25	Average	100	334																																																																																																																												
5 *	5875.00	121.81			120.56	1.25	Peak	100	334																																																																																																																												
6	5895.00	86.53	110.20	-23.67	85.15	1.38	Average	100	334																																																																																																																												
7	5895.00	102.94	130.20	-27.26	101.56	1.38	Peak	100	334																																																																																																																												
8	5925.00	62.89	88.20	-25.31	61.45	1.44	Average	100	334																																																																																																																												
9	5925.00	77.72	108.20	-30.48	76.28	1.44	Peak	100	334																																																																																																																												
10	11750.00	40.60	54.00	-13.40	33.13	7.47	Average	100	60																																																																																																																												
11	11750.00	53.62	74.00	-20.38	46.15	7.47	Peak	100	60																																																																																																																												
12	17625.00	58.76	68.20	-9.44	51.65	7.11	Peak	100	80																																																																																																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																																					



Modulation	be EHT40	Test Freq. (MHz)	5875																																																																																																																																		
Polarization	Vertical																																																																																																																																				
Test By :Roger Lu Temperature(°C):21 Humidity(%):63																																																																																																																																					
Level (dBUV/m) UNII 4 AP-PK UNII 4 AP-AV Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>4700.00</td><td>51.54</td><td>54.00</td><td>-2.46</td><td>51.49</td><td>0.05</td><td>Average</td><td>131</td><td>5</td></tr><tr><td>2</td><td>4700.00</td><td>54.65</td><td>74.00</td><td>-19.35</td><td>54.60</td><td>0.05</td><td>Peak</td><td>131</td><td>5</td></tr><tr><td>3</td><td>5650.00</td><td>57.14</td><td>68.20</td><td>-11.06</td><td>56.48</td><td>0.66</td><td>Peak</td><td>195</td><td>334</td></tr><tr><td>4 *</td><td>5875.00</td><td>111.55</td><td></td><td></td><td>110.30</td><td>1.25</td><td>Average</td><td>195</td><td>334</td></tr><tr><td>5 *</td><td>5875.00</td><td>123.70</td><td></td><td></td><td>122.45</td><td>1.25</td><td>Peak</td><td>195</td><td>334</td></tr><tr><td>6</td><td>5895.00</td><td>88.83</td><td>110.20</td><td>-21.37</td><td>87.45</td><td>1.38</td><td>Average</td><td>195</td><td>334</td></tr><tr><td>7</td><td>5895.00</td><td>104.75</td><td>130.20</td><td>-25.45</td><td>103.37</td><td>1.38</td><td>Peak</td><td>195</td><td>334</td></tr><tr><td>8</td><td>5925.00</td><td>65.17</td><td>88.20</td><td>-23.03</td><td>63.73</td><td>1.44</td><td>Average</td><td>195</td><td>334</td></tr><tr><td>9</td><td>5925.00</td><td>80.19</td><td>108.20</td><td>-28.01</td><td>78.75</td><td>1.44</td><td>Peak</td><td>195</td><td>334</td></tr><tr><td>10</td><td>11750.00</td><td>40.82</td><td>54.00</td><td>-13.18</td><td>33.35</td><td>7.47</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>11</td><td>11750.00</td><td>53.72</td><td>74.00</td><td>-20.28</td><td>46.25</td><td>7.47</td><td>Peak</td><td>100</td><td>40</td></tr><tr><td>12</td><td>17625.00</td><td>58.96</td><td>68.20</td><td>-9.24</td><td>51.85</td><td>7.11</td><td>Peak</td><td>100</td><td>90</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4700.00	51.54	54.00	-2.46	51.49	0.05	Average	131	5	2	4700.00	54.65	74.00	-19.35	54.60	0.05	Peak	131	5	3	5650.00	57.14	68.20	-11.06	56.48	0.66	Peak	195	334	4 *	5875.00	111.55			110.30	1.25	Average	195	334	5 *	5875.00	123.70			122.45	1.25	Peak	195	334	6	5895.00	88.83	110.20	-21.37	87.45	1.38	Average	195	334	7	5895.00	104.75	130.20	-25.45	103.37	1.38	Peak	195	334	8	5925.00	65.17	88.20	-23.03	63.73	1.44	Average	195	334	9	5925.00	80.19	108.20	-28.01	78.75	1.44	Peak	195	334	10	11750.00	40.82	54.00	-13.18	33.35	7.47	Average	100	40	11	11750.00	53.72	74.00	-20.28	46.25	7.47	Peak	100	40	12	17625.00	58.96	68.20	-9.24	51.85	7.11	Peak	100	90
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																												
1	4700.00	51.54	54.00	-2.46	51.49	0.05	Average	131	5																																																																																																																												
2	4700.00	54.65	74.00	-19.35	54.60	0.05	Peak	131	5																																																																																																																												
3	5650.00	57.14	68.20	-11.06	56.48	0.66	Peak	195	334																																																																																																																												
4 *	5875.00	111.55			110.30	1.25	Average	195	334																																																																																																																												
5 *	5875.00	123.70			122.45	1.25	Peak	195	334																																																																																																																												
6	5895.00	88.83	110.20	-21.37	87.45	1.38	Average	195	334																																																																																																																												
7	5895.00	104.75	130.20	-25.45	103.37	1.38	Peak	195	334																																																																																																																												
8	5925.00	65.17	88.20	-23.03	63.73	1.44	Average	195	334																																																																																																																												
9	5925.00	80.19	108.20	-28.01	78.75	1.44	Peak	195	334																																																																																																																												
10	11750.00	40.82	54.00	-13.18	33.35	7.47	Average	100	40																																																																																																																												
11	11750.00	53.72	74.00	-20.28	46.25	7.47	Peak	100	40																																																																																																																												
12	17625.00	58.96	68.20	-9.24	51.85	7.11	Peak	100	90																																																																																																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																																					



Unwanted Emissions (Above 1GHz) for be EHT80

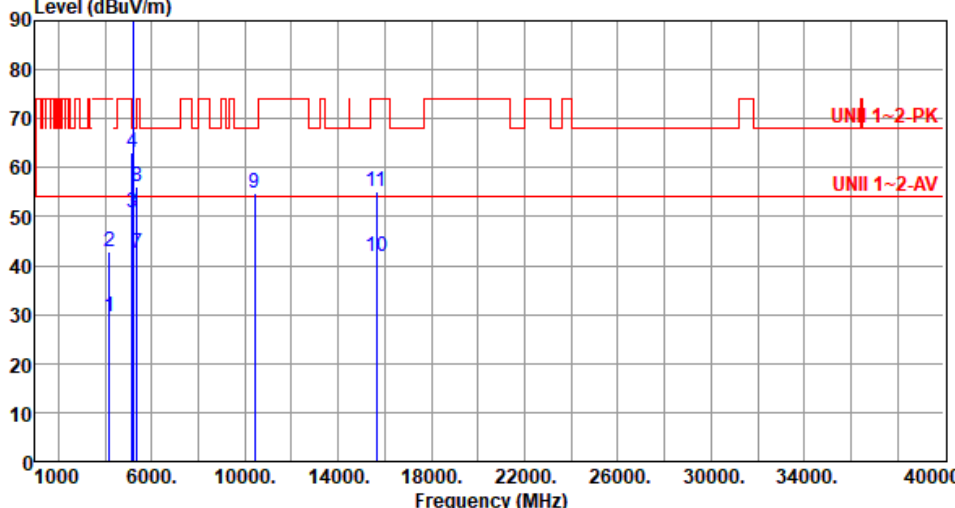Modulation	be EHT80	Test Freq. (MHz)	5210																																																																																																																								
Polarization	Horizontal																																																																																																																										
Test By :Brad Wu Temperature(°C):22 Humidity(%):63																																																																																																																											
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>4168.00</td><td>29.72</td><td>54.00</td><td>-24.28</td><td>30.87</td><td>-1.15</td><td>Average</td><td>100</td><td>19</td></tr><tr><td>2</td><td>4168.00</td><td>42.95</td><td>74.00</td><td>-31.05</td><td>44.10</td><td>-1.15</td><td>Peak</td><td>100</td><td>19</td></tr><tr><td>3</td><td>5150.00</td><td>50.89</td><td>54.00</td><td>-3.11</td><td>50.24</td><td>0.65</td><td>Average</td><td>100</td><td>138</td></tr><tr><td>4</td><td>5150.00</td><td>63.10</td><td>74.00</td><td>-10.90</td><td>62.45</td><td>0.65</td><td>Peak</td><td>100</td><td>138</td></tr><tr><td>5 *</td><td>5210.00</td><td>101.13</td><td></td><td></td><td>100.63</td><td>0.50</td><td>Average</td><td>100</td><td>138</td></tr><tr><td>6 *</td><td>5210.00</td><td>113.53</td><td></td><td></td><td>113.03</td><td>0.50</td><td>Peak</td><td>100</td><td>138</td></tr><tr><td>7</td><td>5350.00</td><td>42.36</td><td>54.00</td><td>-11.64</td><td>42.22</td><td>0.14</td><td>Average</td><td>100</td><td>138</td></tr><tr><td>8</td><td>5350.00</td><td>56.28</td><td>74.00</td><td>-17.72</td><td>56.14</td><td>0.14</td><td>Peak</td><td>100</td><td>138</td></tr><tr><td>9</td><td>10420.00</td><td>54.72</td><td>68.20</td><td>-13.48</td><td>46.22</td><td>8.50</td><td>Peak</td><td>100</td><td>20</td></tr><tr><td>10</td><td>15630.00</td><td>41.90</td><td>54.00</td><td>-12.10</td><td>37.24</td><td>4.66</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>11</td><td>15630.00</td><td>55.12</td><td>74.00</td><td>-18.88</td><td>50.46</td><td>4.66</td><td>Peak</td><td>100</td><td>40</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4168.00	29.72	54.00	-24.28	30.87	-1.15	Average	100	19	2	4168.00	42.95	74.00	-31.05	44.10	-1.15	Peak	100	19	3	5150.00	50.89	54.00	-3.11	50.24	0.65	Average	100	138	4	5150.00	63.10	74.00	-10.90	62.45	0.65	Peak	100	138	5 *	5210.00	101.13			100.63	0.50	Average	100	138	6 *	5210.00	113.53			113.03	0.50	Peak	100	138	7	5350.00	42.36	54.00	-11.64	42.22	0.14	Average	100	138	8	5350.00	56.28	74.00	-17.72	56.14	0.14	Peak	100	138	9	10420.00	54.72	68.20	-13.48	46.22	8.50	Peak	100	20	10	15630.00	41.90	54.00	-12.10	37.24	4.66	Average	100	40	11	15630.00	55.12	74.00	-18.88	50.46	4.66	Peak	100	40
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																		
1	4168.00	29.72	54.00	-24.28	30.87	-1.15	Average	100	19																																																																																																																		
2	4168.00	42.95	74.00	-31.05	44.10	-1.15	Peak	100	19																																																																																																																		
3	5150.00	50.89	54.00	-3.11	50.24	0.65	Average	100	138																																																																																																																		
4	5150.00	63.10	74.00	-10.90	62.45	0.65	Peak	100	138																																																																																																																		
5 *	5210.00	101.13			100.63	0.50	Average	100	138																																																																																																																		
6 *	5210.00	113.53			113.03	0.50	Peak	100	138																																																																																																																		
7	5350.00	42.36	54.00	-11.64	42.22	0.14	Average	100	138																																																																																																																		
8	5350.00	56.28	74.00	-17.72	56.14	0.14	Peak	100	138																																																																																																																		
9	10420.00	54.72	68.20	-13.48	46.22	8.50	Peak	100	20																																																																																																																		
10	15630.00	41.90	54.00	-12.10	37.24	4.66	Average	100	40																																																																																																																		
11	15630.00	55.12	74.00	-18.88	50.46	4.66	Peak	100	40																																																																																																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																																																											



Modulation	be EHT80	Test Freq. (MHz)	5210																																																																																																																								
Polarization	Vertical																																																																																																																										
Test By :Brad Wu Temperature(°C):22 Humidity(%):63																																																																																																																											
Level (dBuV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>4168.00</td><td>29.68</td><td>54.00</td><td>-24.32</td><td>30.83</td><td>-1.15</td><td>Average</td><td>100</td><td>21</td></tr><tr><td>2</td><td>4168.00</td><td>43.04</td><td>74.00</td><td>-30.96</td><td>44.19</td><td>-1.15</td><td>Peak</td><td>100</td><td>21</td></tr><tr><td>3</td><td>5150.00</td><td>53.53</td><td>54.00</td><td>-0.47</td><td>52.88</td><td>0.65</td><td>Average</td><td>123</td><td>9</td></tr><tr><td>4</td><td>5150.00</td><td>66.06</td><td>74.00</td><td>-7.94</td><td>65.41</td><td>0.65</td><td>Peak</td><td>123</td><td>9</td></tr><tr><td>5 *</td><td>5210.00</td><td>102.97</td><td></td><td></td><td>102.47</td><td>0.50</td><td>Average</td><td>123</td><td>9</td></tr><tr><td>6 *</td><td>5210.00</td><td>115.54</td><td></td><td></td><td>115.04</td><td>0.50</td><td>Peak</td><td>123</td><td>9</td></tr><tr><td>7</td><td>5350.00</td><td>42.82</td><td>54.00</td><td>-11.18</td><td>42.68</td><td>0.14</td><td>Average</td><td>123</td><td>9</td></tr><tr><td>8</td><td>5350.00</td><td>55.72</td><td>74.00</td><td>-18.28</td><td>55.58</td><td>0.14</td><td>Peak</td><td>123</td><td>9</td></tr><tr><td>9</td><td>10420.00</td><td>54.74</td><td>68.20</td><td>-13.46</td><td>46.24</td><td>8.50</td><td>Peak</td><td>100</td><td>30</td></tr><tr><td>10</td><td>15630.00</td><td>41.76</td><td>54.00</td><td>-12.24</td><td>37.10</td><td>4.66</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>11</td><td>15630.00</td><td>54.78</td><td>74.00</td><td>-19.22</td><td>50.12</td><td>4.66</td><td>Peak</td><td>100</td><td>40</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4168.00	29.68	54.00	-24.32	30.83	-1.15	Average	100	21	2	4168.00	43.04	74.00	-30.96	44.19	-1.15	Peak	100	21	3	5150.00	53.53	54.00	-0.47	52.88	0.65	Average	123	9	4	5150.00	66.06	74.00	-7.94	65.41	0.65	Peak	123	9	5 *	5210.00	102.97			102.47	0.50	Average	123	9	6 *	5210.00	115.54			115.04	0.50	Peak	123	9	7	5350.00	42.82	54.00	-11.18	42.68	0.14	Average	123	9	8	5350.00	55.72	74.00	-18.28	55.58	0.14	Peak	123	9	9	10420.00	54.74	68.20	-13.46	46.24	8.50	Peak	100	30	10	15630.00	41.76	54.00	-12.24	37.10	4.66	Average	100	40	11	15630.00	54.78	74.00	-19.22	50.12	4.66	Peak	100	40
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																		
1	4168.00	29.68	54.00	-24.32	30.83	-1.15	Average	100	21																																																																																																																		
2	4168.00	43.04	74.00	-30.96	44.19	-1.15	Peak	100	21																																																																																																																		
3	5150.00	53.53	54.00	-0.47	52.88	0.65	Average	123	9																																																																																																																		
4	5150.00	66.06	74.00	-7.94	65.41	0.65	Peak	123	9																																																																																																																		
5 *	5210.00	102.97			102.47	0.50	Average	123	9																																																																																																																		
6 *	5210.00	115.54			115.04	0.50	Peak	123	9																																																																																																																		
7	5350.00	42.82	54.00	-11.18	42.68	0.14	Average	123	9																																																																																																																		
8	5350.00	55.72	74.00	-18.28	55.58	0.14	Peak	123	9																																																																																																																		
9	10420.00	54.74	68.20	-13.46	46.24	8.50	Peak	100	30																																																																																																																		
10	15630.00	41.76	54.00	-12.24	37.10	4.66	Average	100	40																																																																																																																		
11	15630.00	54.78	74.00	-19.22	50.12	4.66	Peak	100	40																																																																																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																											



Modulation	be EHT80	Test Freq. (MHz)	5290
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):22 Humidity(%):63			
Level (dBuV/m)			




Modulation	be EHT80	Test Freq. (MHz)	5290																																																																																																																								
Polarization	Vertical																																																																																																																										
Test By :Brad Wu Temperature(°C):22 Humidity(%):63																																																																																																																											
Level (dBuV/m) UNII 1-2-PK UNII 1-2-AV <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>4232.00</td><td>29.24</td><td>54.00</td><td>-24.76</td><td>30.47</td><td>-1.23</td><td>Average</td><td>100</td><td>23</td></tr><tr><td>2</td><td>4232.00</td><td>43.31</td><td>74.00</td><td>-30.69</td><td>44.54</td><td>-1.23</td><td>Peak</td><td>100</td><td>23</td></tr><tr><td>3</td><td>5150.00</td><td>44.91</td><td>54.00</td><td>-9.09</td><td>44.26</td><td>0.65</td><td>Average</td><td>139</td><td>6</td></tr><tr><td>4</td><td>5150.00</td><td>56.38</td><td>74.00</td><td>-17.62</td><td>55.73</td><td>0.65</td><td>Peak</td><td>139</td><td>6</td></tr><tr><td>5 *</td><td>5290.00</td><td>100.94</td><td></td><td></td><td>100.72</td><td>0.22</td><td>Average</td><td>139</td><td>6</td></tr><tr><td>6 *</td><td>5290.00</td><td>114.01</td><td></td><td></td><td>113.79</td><td>0.22</td><td>Peak</td><td>139</td><td>6</td></tr><tr><td>7</td><td>5350.00</td><td>53.78</td><td>54.00</td><td>-0.22</td><td>53.64</td><td>0.14</td><td>Average</td><td>139</td><td>6</td></tr><tr><td>8</td><td>5350.00</td><td>66.43</td><td>74.00</td><td>-7.57</td><td>66.29</td><td>0.14</td><td>Peak</td><td>139</td><td>6</td></tr><tr><td>9</td><td>10580.00</td><td>54.41</td><td>68.20</td><td>-13.79</td><td>46.12</td><td>8.29</td><td>Peak</td><td>100</td><td>30</td></tr><tr><td>10</td><td>15870.00</td><td>41.56</td><td>54.00</td><td>-12.44</td><td>36.95</td><td>4.61</td><td>Average</td><td>100</td><td>60</td></tr><tr><td>11</td><td>15870.00</td><td>54.99</td><td>74.00</td><td>-19.01</td><td>50.38</td><td>4.61</td><td>Peak</td><td>100</td><td>60</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4232.00	29.24	54.00	-24.76	30.47	-1.23	Average	100	23	2	4232.00	43.31	74.00	-30.69	44.54	-1.23	Peak	100	23	3	5150.00	44.91	54.00	-9.09	44.26	0.65	Average	139	6	4	5150.00	56.38	74.00	-17.62	55.73	0.65	Peak	139	6	5 *	5290.00	100.94			100.72	0.22	Average	139	6	6 *	5290.00	114.01			113.79	0.22	Peak	139	6	7	5350.00	53.78	54.00	-0.22	53.64	0.14	Average	139	6	8	5350.00	66.43	74.00	-7.57	66.29	0.14	Peak	139	6	9	10580.00	54.41	68.20	-13.79	46.12	8.29	Peak	100	30	10	15870.00	41.56	54.00	-12.44	36.95	4.61	Average	100	60	11	15870.00	54.99	74.00	-19.01	50.38	4.61	Peak	100	60
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																		
1	4232.00	29.24	54.00	-24.76	30.47	-1.23	Average	100	23																																																																																																																		
2	4232.00	43.31	74.00	-30.69	44.54	-1.23	Peak	100	23																																																																																																																		
3	5150.00	44.91	54.00	-9.09	44.26	0.65	Average	139	6																																																																																																																		
4	5150.00	56.38	74.00	-17.62	55.73	0.65	Peak	139	6																																																																																																																		
5 *	5290.00	100.94			100.72	0.22	Average	139	6																																																																																																																		
6 *	5290.00	114.01			113.79	0.22	Peak	139	6																																																																																																																		
7	5350.00	53.78	54.00	-0.22	53.64	0.14	Average	139	6																																																																																																																		
8	5350.00	66.43	74.00	-7.57	66.29	0.14	Peak	139	6																																																																																																																		
9	10580.00	54.41	68.20	-13.79	46.12	8.29	Peak	100	30																																																																																																																		
10	15870.00	41.56	54.00	-12.44	36.95	4.61	Average	100	60																																																																																																																		
11	15870.00	54.99	74.00	-19.01	50.38	4.61	Peak	100	60																																																																																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																											



Modulation	be EHT80	Test Freq. (MHz)	5530
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):21 Humidity(%):63			
Level (dBUV/m)			

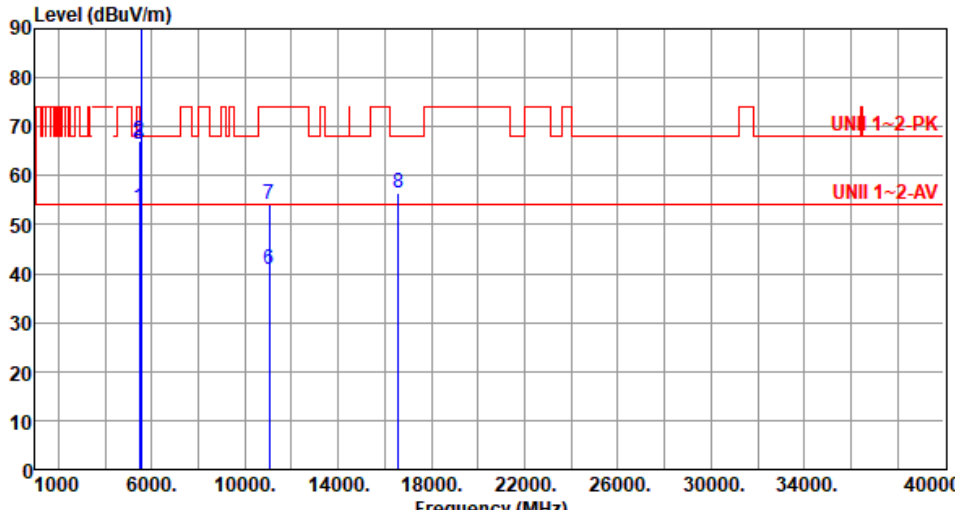

Modulation	be EHT80	Test Freq. (MHz)	5530						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):21 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	53.61	54.00	-0.39	53.11	0.50	Average	176	348
2	5460.00	66.96	74.00	-7.04	66.46	0.50	Peak	176	348
3	5470.00	66.57	68.20	-1.63	66.05	0.52	Peak	176	333
4 *	5530.00	100.64			100.10	0.54	Average	176	333
5 *	5530.00	111.99			111.45	0.54	Peak	176	333
6	11060.00	40.81	54.00	-13.19	32.42	8.39	Average	100	40
7	11060.00	54.01	74.00	-19.99	45.62	8.39	Peak	100	40
8	16590.00	56.49	68.20	-11.71	50.65	5.84	Peak	100	20

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	5610
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):21 Humidity(%):63			
Level (dBUV/m) </			




Modulation	be EHT80	Test Freq. (MHz)	5610						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):21 Humidity(%):63									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4488.00	46.41	68.20	-21.79	46.92	-0.51	Peak	100	15
2	5460.00	45.65	54.00	-8.35	45.15	0.50	Average	175	336
3	5460.00	56.71	74.00	-17.29	56.21	0.50	Peak	175	336
4	5470.00	56.97	68.20	-11.23	56.45	0.52	Peak	175	336
5 *	5610.00	101.81			101.24	0.57	Average	175	336
6 *	5610.00	112.91			112.34	0.57	Peak	175	336
7	5725.00	58.40	68.20	-9.80	57.45	0.95	Peak	175	336
8	11220.00	40.69	54.00	-13.31	32.55	8.14	Average	100	60
9	11220.00	54.03	74.00	-19.97	45.89	8.14	Peak	100	60
10	16830.00	57.13	68.20	-11.07	50.74	6.39	Peak	100	50

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	5690
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):21 Humidity(%):63			
Level (dBuV/m)			

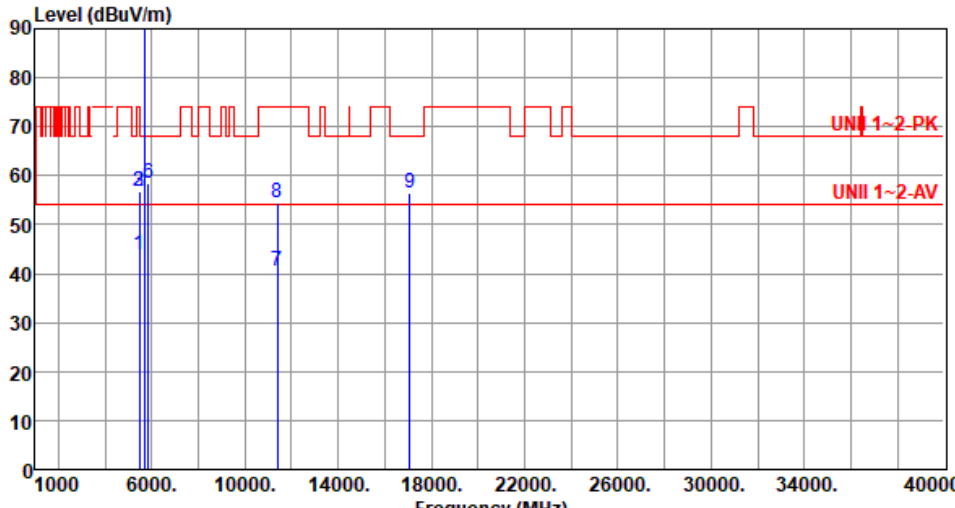


Modulation	be EHT80	Test Freq. (MHz)	5690																																																																																																				
Polarization	Vertical																																																																																																						
Test By :Roger Lu Temperature(°C):21 Humidity(%):63																																																																																																							
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>43.95</td><td>54.00</td><td>-10.05</td><td>43.45</td><td>0.50</td><td>Average</td><td>175</td><td>335</td></tr><tr><td>2</td><td>5460.00</td><td>56.75</td><td>74.00</td><td>-17.25</td><td>56.25</td><td>0.50</td><td>Peak</td><td>175</td><td>335</td></tr><tr><td>3</td><td>5470.00</td><td>56.85</td><td>68.20</td><td>-11.35</td><td>56.33</td><td>0.52</td><td>Peak</td><td>175</td><td>335</td></tr><tr><td>4 *</td><td>5690.00</td><td>102.15</td><td></td><td></td><td>101.30</td><td>0.85</td><td>Average</td><td>175</td><td>335</td></tr><tr><td>5 *</td><td>5690.00</td><td>113.62</td><td></td><td></td><td>112.77</td><td>0.85</td><td>Peak</td><td>175</td><td>335</td></tr><tr><td>6</td><td>5850.00</td><td>58.43</td><td>68.20</td><td>-9.77</td><td>57.35</td><td>1.08</td><td>Peak</td><td>175</td><td>335</td></tr><tr><td>7</td><td>11380.00</td><td>40.59</td><td>54.00</td><td>-13.41</td><td>32.49</td><td>8.10</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>8</td><td>11380.00</td><td>54.35</td><td>74.00</td><td>-19.65</td><td>46.25</td><td>8.10</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>9</td><td>17070.00</td><td>56.61</td><td>68.20</td><td>-11.59</td><td>50.65</td><td>5.96</td><td>Peak</td><td>100</td><td>20</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	43.95	54.00	-10.05	43.45	0.50	Average	175	335	2	5460.00	56.75	74.00	-17.25	56.25	0.50	Peak	175	335	3	5470.00	56.85	68.20	-11.35	56.33	0.52	Peak	175	335	4 *	5690.00	102.15			101.30	0.85	Average	175	335	5 *	5690.00	113.62			112.77	0.85	Peak	175	335	6	5850.00	58.43	68.20	-9.77	57.35	1.08	Peak	175	335	7	11380.00	40.59	54.00	-13.41	32.49	8.10	Average	100	50	8	11380.00	54.35	74.00	-19.65	46.25	8.10	Peak	100	50	9	17070.00	56.61	68.20	-11.59	50.65	5.96	Peak	100	20
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																														
1	5460.00	43.95	54.00	-10.05	43.45	0.50	Average	175	335																																																																																														
2	5460.00	56.75	74.00	-17.25	56.25	0.50	Peak	175	335																																																																																														
3	5470.00	56.85	68.20	-11.35	56.33	0.52	Peak	175	335																																																																																														
4 *	5690.00	102.15			101.30	0.85	Average	175	335																																																																																														
5 *	5690.00	113.62			112.77	0.85	Peak	175	335																																																																																														
6	5850.00	58.43	68.20	-9.77	57.35	1.08	Peak	175	335																																																																																														
7	11380.00	40.59	54.00	-13.41	32.49	8.10	Average	100	50																																																																																														
8	11380.00	54.35	74.00	-19.65	46.25	8.10	Peak	100	50																																																																																														
9	17070.00	56.61	68.20	-11.59	50.65	5.96	Peak	100	20																																																																																														
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																							



Modulation	be EHT80	Test Freq. (MHz)	5775
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):21 Humidity(%):63			
Level (dBUV/m) <			

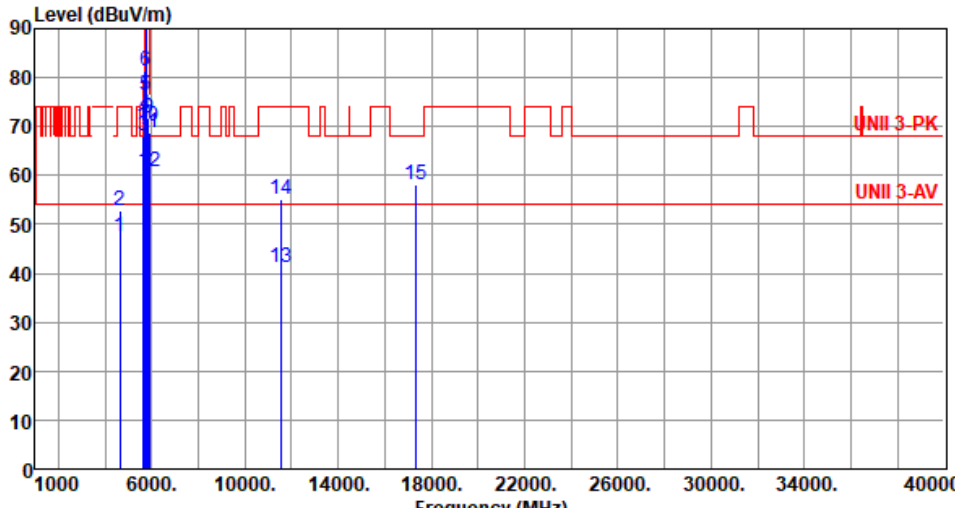


Modulation	be EHT80	Test Freq. (MHz)	5775																																																																																																																																																																	
Polarization	Vertical																																																																																																																																																																			
Test By :Brad Wu Temperature(°C):21 Humidity(%):63																																																																																																																																																																				
																																																																																																																																																																				
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>4620.00</td><td>47.61</td><td>54.00</td><td>-6.39</td><td>47.79</td><td>-0.18</td><td>Average</td><td>175</td><td>9</td></tr><tr><td>2</td><td>4620.00</td><td>52.84</td><td>74.00</td><td>-21.16</td><td>53.02</td><td>-0.18</td><td>Peak</td><td>175</td><td>9</td></tr><tr><td>3</td><td>5650.00</td><td>68.00</td><td>68.20</td><td>-0.20</td><td>67.34</td><td>0.66</td><td>Peak</td><td>186</td><td>328</td></tr><tr><td>4</td><td>5700.00</td><td>72.41</td><td>105.20</td><td>-32.79</td><td>71.51</td><td>0.90</td><td>Peak</td><td>186</td><td>328</td></tr><tr><td>5</td><td>5720.00</td><td>76.52</td><td>110.80</td><td>-34.28</td><td>75.58</td><td>0.94</td><td>Peak</td><td>186</td><td>328</td></tr><tr><td>6</td><td>5725.00</td><td>81.42</td><td>122.20</td><td>-40.78</td><td>80.47</td><td>0.95</td><td>Peak</td><td>186</td><td>328</td></tr><tr><td>7 *</td><td>5775.00</td><td>107.72</td><td></td><td></td><td>106.69</td><td>1.03</td><td>Average</td><td>186</td><td>328</td></tr><tr><td>8 *</td><td>5775.00</td><td>120.74</td><td></td><td></td><td>119.71</td><td>1.03</td><td>Peak</td><td>186</td><td>328</td></tr><tr><td>9</td><td>5850.00</td><td>71.89</td><td>122.20</td><td>-50.31</td><td>70.81</td><td>1.08</td><td>Peak</td><td>186</td><td>328</td></tr><tr><td>10</td><td>5855.00</td><td>70.02</td><td>110.80</td><td>-40.78</td><td>68.90</td><td>1.12</td><td>Peak</td><td>186</td><td>328</td></tr><tr><td>11</td><td>5875.00</td><td>68.60</td><td>105.20</td><td>-36.60</td><td>67.35</td><td>1.25</td><td>Peak</td><td>186</td><td>328</td></tr><tr><td>12</td><td>5925.00</td><td>60.83</td><td>68.20</td><td>-7.37</td><td>59.39</td><td>1.44</td><td>Peak</td><td>186</td><td>328</td></tr><tr><td>13</td><td>11550.00</td><td>41.09</td><td>54.00</td><td>-12.91</td><td>32.61</td><td>8.48</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>14</td><td>11550.00</td><td>55.02</td><td>74.00</td><td>-18.98</td><td>46.54</td><td>8.48</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>15</td><td>17325.00</td><td>58.05</td><td>68.20</td><td>-10.15</td><td>52.38</td><td>5.67</td><td>Peak</td><td>100</td><td>60</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4620.00	47.61	54.00	-6.39	47.79	-0.18	Average	175	9	2	4620.00	52.84	74.00	-21.16	53.02	-0.18	Peak	175	9	3	5650.00	68.00	68.20	-0.20	67.34	0.66	Peak	186	328	4	5700.00	72.41	105.20	-32.79	71.51	0.90	Peak	186	328	5	5720.00	76.52	110.80	-34.28	75.58	0.94	Peak	186	328	6	5725.00	81.42	122.20	-40.78	80.47	0.95	Peak	186	328	7 *	5775.00	107.72			106.69	1.03	Average	186	328	8 *	5775.00	120.74			119.71	1.03	Peak	186	328	9	5850.00	71.89	122.20	-50.31	70.81	1.08	Peak	186	328	10	5855.00	70.02	110.80	-40.78	68.90	1.12	Peak	186	328	11	5875.00	68.60	105.20	-36.60	67.35	1.25	Peak	186	328	12	5925.00	60.83	68.20	-7.37	59.39	1.44	Peak	186	328	13	11550.00	41.09	54.00	-12.91	32.61	8.48	Average	100	50	14	11550.00	55.02	74.00	-18.98	46.54	8.48	Peak	100	50	15	17325.00	58.05	68.20	-10.15	52.38	5.67	Peak	100	60			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																																																											
1	4620.00	47.61	54.00	-6.39	47.79	-0.18	Average	175	9																																																																																																																																																											
2	4620.00	52.84	74.00	-21.16	53.02	-0.18	Peak	175	9																																																																																																																																																											
3	5650.00	68.00	68.20	-0.20	67.34	0.66	Peak	186	328																																																																																																																																																											
4	5700.00	72.41	105.20	-32.79	71.51	0.90	Peak	186	328																																																																																																																																																											
5	5720.00	76.52	110.80	-34.28	75.58	0.94	Peak	186	328																																																																																																																																																											
6	5725.00	81.42	122.20	-40.78	80.47	0.95	Peak	186	328																																																																																																																																																											
7 *	5775.00	107.72			106.69	1.03	Average	186	328																																																																																																																																																											
8 *	5775.00	120.74			119.71	1.03	Peak	186	328																																																																																																																																																											
9	5850.00	71.89	122.20	-50.31	70.81	1.08	Peak	186	328																																																																																																																																																											
10	5855.00	70.02	110.80	-40.78	68.90	1.12	Peak	186	328																																																																																																																																																											
11	5875.00	68.60	105.20	-36.60	67.35	1.25	Peak	186	328																																																																																																																																																											
12	5925.00	60.83	68.20	-7.37	59.39	1.44	Peak	186	328																																																																																																																																																											
13	11550.00	41.09	54.00	-12.91	32.61	8.48	Average	100	50																																																																																																																																																											
14	11550.00	55.02	74.00	-18.98	46.54	8.48	Peak	100	50																																																																																																																																																											
15	17325.00	58.05	68.20	-10.15	52.38	5.67	Peak	100	60																																																																																																																																																											
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																																																																				



Modulation	be EHT80	Test Freq. (MHz)	5855						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):21 Humidity(%):63									
Level (dBuV/m) UNII 4 AP-PK UNII 4 AP-AV Frequency (MHz)									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	4684.00	52.47	54.00	-1.53	52.45	0.02	Average	135	127
2	4684.00	55.13	74.00	-18.87	55.11	0.02	Peak	135	127
3	5650.00	59.11	68.20	-9.09	58.45	0.66	Peak	100	330
4 *	5855.00	106.36			105.24	1.12	Average	100	330
5 *	5855.00	117.40			116.28	1.12	Peak	100	330
6	5895.00	93.86	110.20	-16.34	92.48	1.38	Average	100	330
7	5895.00	102.07	130.20	-28.13	100.69	1.38	Peak	100	330
8	5925.00	74.66	88.20	-13.54	73.22	1.44	Average	100	330
9	5925.00	87.39	108.20	-20.81	85.95	1.44	Peak	100	330
10	11710.00	40.94	54.00	-13.06	33.09	7.85	Average	100	20
11	11710.00	53.93	74.00	-20.07	46.08	7.85	Peak	100	20
12	17565.00	58.28	68.20	-9.92	51.45	6.83	Peak	100	55

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

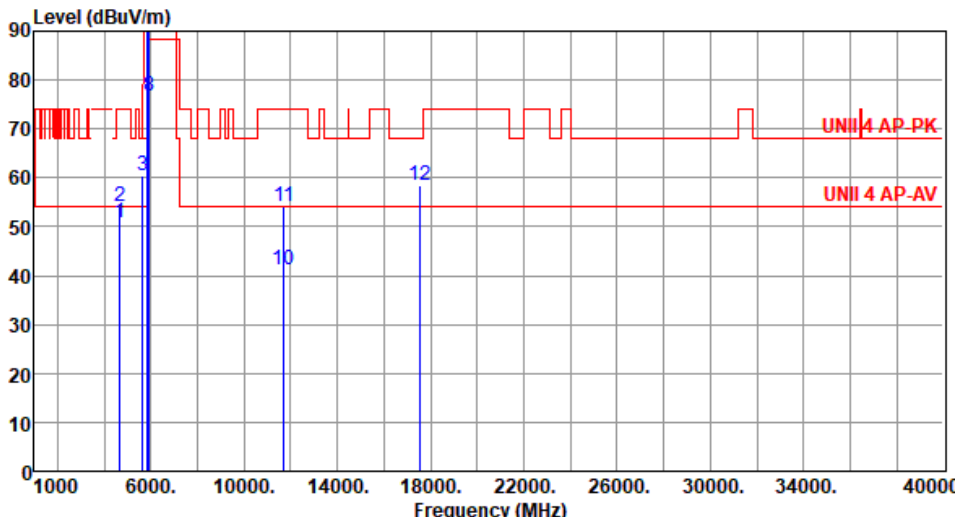


Modulation	be EHT80	Test Freq. (MHz)	5855						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):21 Humidity(%):63									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4684.00	50.72	54.00	-3.28	50.70	0.02	Average	135	1
2	4684.00	54.09	74.00	-19.91	54.07	0.02	Peak	135	1
3	5650.00	60.49	68.20	-7.71	59.83	0.66	Peak	175	332
4 *	5855.00	108.57			107.45	1.12	Average	175	332
5 *	5855.00	119.53			118.41	1.12	Peak	175	332
6	5895.00	95.94	110.20	-14.26	94.56	1.38	Average	175	332
7	5895.00	104.12	130.20	-26.08	102.74	1.38	Peak	175	332
8	5925.00	76.61	88.20	-11.59	75.17	1.44	Average	175	332
9	5925.00	88.68	108.20	-19.52	87.24	1.44	Peak	175	332
10	11710.00	41.06	54.00	-12.94	33.21	7.85	Average	100	30
11	11710.00	54.00	74.00	-20.00	46.15	7.85	Peak	100	30
12	17565.00	58.45	68.20	-9.75	51.62	6.83	Peak	100	60

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency



Unwanted Emissions (Above 1GHz) for be EHT160

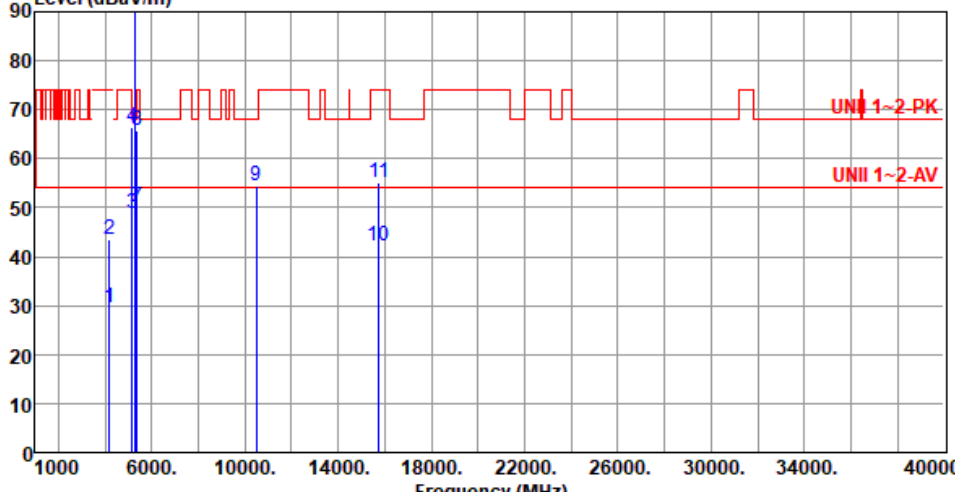Modulation	be EHT160	Test Freq. (MHz)	5250																																																																																																																								
Polarization	Horizontal																																																																																																																										
Test By :Brad Wu Temperature(°C):22 Humidity(%):63																																																																																																																											
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>4200.00</td><td>29.42</td><td>54.00</td><td>-24.58</td><td>30.63</td><td>-1.21</td><td>Average</td><td>100</td><td>56</td></tr><tr><td>2</td><td>4200.00</td><td>43.54</td><td>74.00</td><td>-30.46</td><td>44.75</td><td>-1.21</td><td>Peak</td><td>100</td><td>56</td></tr><tr><td>3</td><td>5150.00</td><td>48.86</td><td>54.00</td><td>-5.14</td><td>48.21</td><td>0.65</td><td>Average</td><td>100</td><td>122</td></tr><tr><td>4</td><td>5150.00</td><td>66.40</td><td>74.00</td><td>-7.60</td><td>65.75</td><td>0.65</td><td>Peak</td><td>100</td><td>122</td></tr><tr><td>5 *</td><td>5250.00</td><td>96.42</td><td></td><td></td><td>96.14</td><td>0.28</td><td>Average</td><td>100</td><td>122</td></tr><tr><td>6 *</td><td>5250.00</td><td>108.13</td><td></td><td></td><td>107.85</td><td>0.28</td><td>Peak</td><td>100</td><td>122</td></tr><tr><td>7</td><td>5350.00</td><td>50.15</td><td>54.00</td><td>-3.85</td><td>50.01</td><td>0.14</td><td>Average</td><td>100</td><td>122</td></tr><tr><td>8</td><td>5350.00</td><td>65.68</td><td>74.00</td><td>-8.32</td><td>65.54</td><td>0.14</td><td>Peak</td><td>100</td><td>122</td></tr><tr><td>9</td><td>10500.00</td><td>54.57</td><td>68.20</td><td>-13.63</td><td>46.11</td><td>8.46</td><td>Peak</td><td>100</td><td>20</td></tr><tr><td>10</td><td>15750.00</td><td>42.02</td><td>54.00</td><td>-11.98</td><td>37.02</td><td>5.00</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>11</td><td>15750.00</td><td>55.25</td><td>74.00</td><td>-18.75</td><td>50.25</td><td>5.00</td><td>Peak</td><td>100</td><td>30</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4200.00	29.42	54.00	-24.58	30.63	-1.21	Average	100	56	2	4200.00	43.54	74.00	-30.46	44.75	-1.21	Peak	100	56	3	5150.00	48.86	54.00	-5.14	48.21	0.65	Average	100	122	4	5150.00	66.40	74.00	-7.60	65.75	0.65	Peak	100	122	5 *	5250.00	96.42			96.14	0.28	Average	100	122	6 *	5250.00	108.13			107.85	0.28	Peak	100	122	7	5350.00	50.15	54.00	-3.85	50.01	0.14	Average	100	122	8	5350.00	65.68	74.00	-8.32	65.54	0.14	Peak	100	122	9	10500.00	54.57	68.20	-13.63	46.11	8.46	Peak	100	20	10	15750.00	42.02	54.00	-11.98	37.02	5.00	Average	100	30	11	15750.00	55.25	74.00	-18.75	50.25	5.00	Peak	100	30
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																		
1	4200.00	29.42	54.00	-24.58	30.63	-1.21	Average	100	56																																																																																																																		
2	4200.00	43.54	74.00	-30.46	44.75	-1.21	Peak	100	56																																																																																																																		
3	5150.00	48.86	54.00	-5.14	48.21	0.65	Average	100	122																																																																																																																		
4	5150.00	66.40	74.00	-7.60	65.75	0.65	Peak	100	122																																																																																																																		
5 *	5250.00	96.42			96.14	0.28	Average	100	122																																																																																																																		
6 *	5250.00	108.13			107.85	0.28	Peak	100	122																																																																																																																		
7	5350.00	50.15	54.00	-3.85	50.01	0.14	Average	100	122																																																																																																																		
8	5350.00	65.68	74.00	-8.32	65.54	0.14	Peak	100	122																																																																																																																		
9	10500.00	54.57	68.20	-13.63	46.11	8.46	Peak	100	20																																																																																																																		
10	15750.00	42.02	54.00	-11.98	37.02	5.00	Average	100	30																																																																																																																		
11	15750.00	55.25	74.00	-18.75	50.25	5.00	Peak	100	30																																																																																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																											



Modulation	be EHT160	Test Freq. (MHz)	5250
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):22 Humidity(%):63			
Level (dBuV/m)			




Modulation	be EHT160	Test Freq. (MHz)	5570																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Brad Wu Temperature(°C):22 Humidity(%):63																																																																																																																	
Level (dBUV/m) UNII 1-2-PK UNII 1-2-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>4456.00</td><td>44.45</td><td>68.20</td><td>-23.75</td><td>45.03</td><td>-0.58</td><td>Peak</td><td>100</td><td>138</td></tr><tr><td>2</td><td>5460.00</td><td>50.93</td><td>54.00</td><td>-3.07</td><td>50.43</td><td>0.50</td><td>Average</td><td>100</td><td>215</td></tr><tr><td>3</td><td>5460.00</td><td>65.54</td><td>74.00</td><td>-8.46</td><td>65.04</td><td>0.50</td><td>Peak</td><td>100</td><td>215</td></tr><tr><td>4</td><td>5470.00</td><td>66.94</td><td>68.20</td><td>-1.26</td><td>66.42</td><td>0.52</td><td>Peak</td><td>100</td><td>215</td></tr><tr><td>5 *</td><td>5570.00</td><td>93.81</td><td></td><td></td><td>93.29</td><td>0.52</td><td>Average</td><td>133</td><td>215</td></tr><tr><td>6 *</td><td>5570.00</td><td>105.66</td><td></td><td></td><td>105.14</td><td>0.52</td><td>Peak</td><td>133</td><td>215</td></tr><tr><td>7</td><td>5725.00</td><td>61.28</td><td>68.20</td><td>-6.92</td><td>60.33</td><td>0.95</td><td>Peak</td><td>133</td><td>215</td></tr><tr><td>8</td><td>11140.00</td><td>40.66</td><td>54.00</td><td>-13.34</td><td>32.36</td><td>8.30</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>9</td><td>11140.00</td><td>53.81</td><td>74.00</td><td>-20.19</td><td>45.51</td><td>8.30</td><td>Peak</td><td>100</td><td>40</td></tr><tr><td>10</td><td>16710.00</td><td>56.67</td><td>68.20</td><td>-11.53</td><td>50.44</td><td>6.23</td><td>Peak</td><td>100</td><td>50</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4456.00	44.45	68.20	-23.75	45.03	-0.58	Peak	100	138	2	5460.00	50.93	54.00	-3.07	50.43	0.50	Average	100	215	3	5460.00	65.54	74.00	-8.46	65.04	0.50	Peak	100	215	4	5470.00	66.94	68.20	-1.26	66.42	0.52	Peak	100	215	5 *	5570.00	93.81			93.29	0.52	Average	133	215	6 *	5570.00	105.66			105.14	0.52	Peak	133	215	7	5725.00	61.28	68.20	-6.92	60.33	0.95	Peak	133	215	8	11140.00	40.66	54.00	-13.34	32.36	8.30	Average	100	40	9	11140.00	53.81	74.00	-20.19	45.51	8.30	Peak	100	40	10	16710.00	56.67	68.20	-11.53	50.44	6.23	Peak	100	50
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	4456.00	44.45	68.20	-23.75	45.03	-0.58	Peak	100	138																																																																																																								
2	5460.00	50.93	54.00	-3.07	50.43	0.50	Average	100	215																																																																																																								
3	5460.00	65.54	74.00	-8.46	65.04	0.50	Peak	100	215																																																																																																								
4	5470.00	66.94	68.20	-1.26	66.42	0.52	Peak	100	215																																																																																																								
5 *	5570.00	93.81			93.29	0.52	Average	133	215																																																																																																								
6 *	5570.00	105.66			105.14	0.52	Peak	133	215																																																																																																								
7	5725.00	61.28	68.20	-6.92	60.33	0.95	Peak	133	215																																																																																																								
8	11140.00	40.66	54.00	-13.34	32.36	8.30	Average	100	40																																																																																																								
9	11140.00	53.81	74.00	-20.19	45.51	8.30	Peak	100	40																																																																																																								
10	16710.00	56.67	68.20	-11.53	50.44	6.23	Peak	100	50																																																																																																								



Modulation	be EHT160	Test Freq. (MHz)	5570						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):22 Humidity(%):63									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4456.00	44.46	68.20	-23.74	45.04	-0.58	Peak	100	24
2	5460.00	53.88	54.00	-0.12	53.38	0.50	Average	128	318
3	5460.00	68.42	74.00	-5.58	67.92	0.50	Peak	128	318
4	5470.00	67.66	68.20	-0.54	67.14	0.52	Peak	128	318
5 *	5570.00	97.74			97.22	0.52	Average	146	318
6 *	5570.00	111.65			111.13	0.52	Peak	146	318
7	5725.00	64.01	68.20	-4.19	63.06	0.95	Peak	146	318
8	11140.00	40.73	54.00	-13.27	32.43	8.30	Average	100	20
9	11140.00	53.93	74.00	-20.07	45.63	8.30	Peak	100	20
10	16710.00	56.77	68.20	-11.43	50.54	6.23	Peak	100	60

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

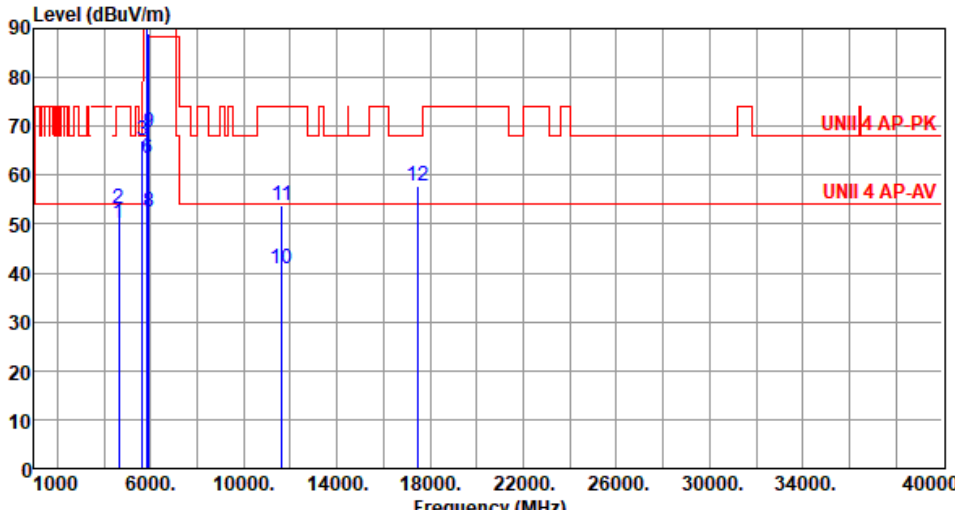

Modulation	be EHT160	Test Freq. (MHz)	5815																																																																																																																																			
Polarization	Horizontal																																																																																																																																					
Test By :Brad Wu Temperature(°C):22 Humidity(%):63																																																																																																																																						
																																																																																																																																						
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>4652.00</td><td>50.15</td><td>54.00</td><td>-3.85</td><td>50.21</td><td>-0.06</td><td>Average</td><td>100</td><td>150</td></tr><tr><td>2</td><td>4652.00</td><td>53.29</td><td>74.00</td><td>-20.71</td><td>53.35</td><td>-0.06</td><td>Peak</td><td>100</td><td>150</td></tr><tr><td>3</td><td>5650.00</td><td>67.04</td><td>68.20</td><td>-1.16</td><td>66.38</td><td>0.66</td><td>Peak</td><td>205</td><td>318</td></tr><tr><td>4 *</td><td>5815.00</td><td>97.97</td><td></td><td></td><td>96.92</td><td>1.05</td><td>Average</td><td>205</td><td>318</td></tr><tr><td>5 *</td><td>5815.00</td><td>110.07</td><td></td><td></td><td>109.02</td><td>1.05</td><td>Peak</td><td>205</td><td>318</td></tr><tr><td>6</td><td>5895.00</td><td>63.49</td><td>110.20</td><td>-46.71</td><td>62.11</td><td>1.38</td><td>Average</td><td>205</td><td>318</td></tr><tr><td>7</td><td>5895.00</td><td>88.95</td><td>130.20</td><td>-41.25</td><td>87.57</td><td>1.38</td><td>Peak</td><td>205</td><td>318</td></tr><tr><td>8</td><td>5925.00</td><td>52.53</td><td>88.20</td><td>-35.67</td><td>51.09</td><td>1.44</td><td>Average</td><td>205</td><td>318</td></tr><tr><td>9</td><td>5925.00</td><td>68.60</td><td>108.20</td><td>-39.60</td><td>67.16</td><td>1.44</td><td>Peak</td><td>205</td><td>318</td></tr><tr><td>10</td><td>11630.00</td><td>40.88</td><td>54.00</td><td>-13.12</td><td>32.89</td><td>7.99</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>11</td><td>11630.00</td><td>53.94</td><td>74.00</td><td>-20.06</td><td>45.95</td><td>7.99</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>12</td><td>17445.00</td><td>57.73</td><td>68.20</td><td>-10.47</td><td>51.55</td><td>6.18</td><td>Peak</td><td>100</td><td>40</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4652.00	50.15	54.00	-3.85	50.21	-0.06	Average	100	150	2	4652.00	53.29	74.00	-20.71	53.35	-0.06	Peak	100	150	3	5650.00	67.04	68.20	-1.16	66.38	0.66	Peak	205	318	4 *	5815.00	97.97			96.92	1.05	Average	205	318	5 *	5815.00	110.07			109.02	1.05	Peak	205	318	6	5895.00	63.49	110.20	-46.71	62.11	1.38	Average	205	318	7	5895.00	88.95	130.20	-41.25	87.57	1.38	Peak	205	318	8	5925.00	52.53	88.20	-35.67	51.09	1.44	Average	205	318	9	5925.00	68.60	108.20	-39.60	67.16	1.44	Peak	205	318	10	11630.00	40.88	54.00	-13.12	32.89	7.99	Average	100	50	11	11630.00	53.94	74.00	-20.06	45.95	7.99	Peak	100	50	12	17445.00	57.73	68.20	-10.47	51.55	6.18	Peak	100	40			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																													
1	4652.00	50.15	54.00	-3.85	50.21	-0.06	Average	100	150																																																																																																																													
2	4652.00	53.29	74.00	-20.71	53.35	-0.06	Peak	100	150																																																																																																																													
3	5650.00	67.04	68.20	-1.16	66.38	0.66	Peak	205	318																																																																																																																													
4 *	5815.00	97.97			96.92	1.05	Average	205	318																																																																																																																													
5 *	5815.00	110.07			109.02	1.05	Peak	205	318																																																																																																																													
6	5895.00	63.49	110.20	-46.71	62.11	1.38	Average	205	318																																																																																																																													
7	5895.00	88.95	130.20	-41.25	87.57	1.38	Peak	205	318																																																																																																																													
8	5925.00	52.53	88.20	-35.67	51.09	1.44	Average	205	318																																																																																																																													
9	5925.00	68.60	108.20	-39.60	67.16	1.44	Peak	205	318																																																																																																																													
10	11630.00	40.88	54.00	-13.12	32.89	7.99	Average	100	50																																																																																																																													
11	11630.00	53.94	74.00	-20.06	45.95	7.99	Peak	100	50																																																																																																																													
12	17445.00	57.73	68.20	-10.47	51.55	6.18	Peak	100	40																																																																																																																													
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																																						



Modulation	be EHT160	Test Freq. (MHz)	5815
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):22 Humidity(%):63			
Level (dBuV/m)			


Unwanted Emissions (Above 1GHz) for be EHT240

Modulation	be EHT240	Test Freq. (MHz)	5610
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):22 Humidity(%):63			
Level (dBUV/m)			




Modulation	be EHT240	Test Freq. (MHz)	5610																																																																																																														
Polarization	Vertical																																																																																																																
Test By :Sean Yu Temperature(°C):22 Humidity(%):63																																																																																																																	
Level (dBUV/m) UNII 1-2-PK UNII 1-2-AV <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>4488.00</td><td>44.26</td><td>68.20</td><td>-23.94</td><td>44.77</td><td>-0.51</td><td>Peak</td><td>100</td><td>11</td></tr><tr><td>2</td><td>5460.00</td><td>49.79</td><td>54.00</td><td>-4.21</td><td>49.29</td><td>0.50</td><td>Average</td><td>142</td><td>322</td></tr><tr><td>3</td><td>5460.00</td><td>67.60</td><td>74.00</td><td>-6.40</td><td>67.10</td><td>0.50</td><td>Peak</td><td>142</td><td>322</td></tr><tr><td>4</td><td>5470.00</td><td>67.94</td><td>68.20</td><td>-0.26</td><td>67.42</td><td>0.52</td><td>Peak</td><td>142</td><td>322</td></tr><tr><td>5 *</td><td>5610.00</td><td>94.59</td><td></td><td></td><td>94.02</td><td>0.57</td><td>Average</td><td>142</td><td>322</td></tr><tr><td>6 *</td><td>5610.00</td><td>107.82</td><td></td><td></td><td>107.25</td><td>0.57</td><td>Peak</td><td>142</td><td>322</td></tr><tr><td>7</td><td>5850.00</td><td>59.17</td><td>68.20</td><td>-9.03</td><td>58.09</td><td>1.08</td><td>Peak</td><td>142</td><td>322</td></tr><tr><td>8</td><td>11220.00</td><td>40.30</td><td>54.00</td><td>-13.70</td><td>32.16</td><td>8.14</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>9</td><td>11220.00</td><td>53.59</td><td>74.00</td><td>-20.41</td><td>45.45</td><td>8.14</td><td>Peak</td><td>100</td><td>20</td></tr><tr><td>10</td><td>16830.00</td><td>56.67</td><td>68.20</td><td>-11.53</td><td>50.28</td><td>6.39</td><td>Peak</td><td>100</td><td>65</td></tr></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4488.00	44.26	68.20	-23.94	44.77	-0.51	Peak	100	11	2	5460.00	49.79	54.00	-4.21	49.29	0.50	Average	142	322	3	5460.00	67.60	74.00	-6.40	67.10	0.50	Peak	142	322	4	5470.00	67.94	68.20	-0.26	67.42	0.52	Peak	142	322	5 *	5610.00	94.59			94.02	0.57	Average	142	322	6 *	5610.00	107.82			107.25	0.57	Peak	142	322	7	5850.00	59.17	68.20	-9.03	58.09	1.08	Peak	142	322	8	11220.00	40.30	54.00	-13.70	32.16	8.14	Average	100	20	9	11220.00	53.59	74.00	-20.41	45.45	8.14	Peak	100	20	10	16830.00	56.67	68.20	-11.53	50.28	6.39	Peak	100	65
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	4488.00	44.26	68.20	-23.94	44.77	-0.51	Peak	100	11																																																																																																								
2	5460.00	49.79	54.00	-4.21	49.29	0.50	Average	142	322																																																																																																								
3	5460.00	67.60	74.00	-6.40	67.10	0.50	Peak	142	322																																																																																																								
4	5470.00	67.94	68.20	-0.26	67.42	0.52	Peak	142	322																																																																																																								
5 *	5610.00	94.59			94.02	0.57	Average	142	322																																																																																																								
6 *	5610.00	107.82			107.25	0.57	Peak	142	322																																																																																																								
7	5850.00	59.17	68.20	-9.03	58.09	1.08	Peak	142	322																																																																																																								
8	11220.00	40.30	54.00	-13.70	32.16	8.14	Average	100	20																																																																																																								
9	11220.00	53.59	74.00	-20.41	45.45	8.14	Peak	100	20																																																																																																								
10	16830.00	56.67	68.20	-11.53	50.28	6.39	Peak	100	65																																																																																																								
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	


Peak Trace (Blue)	Detector = Peak
Average Trace (Orange)	Detector = RMS

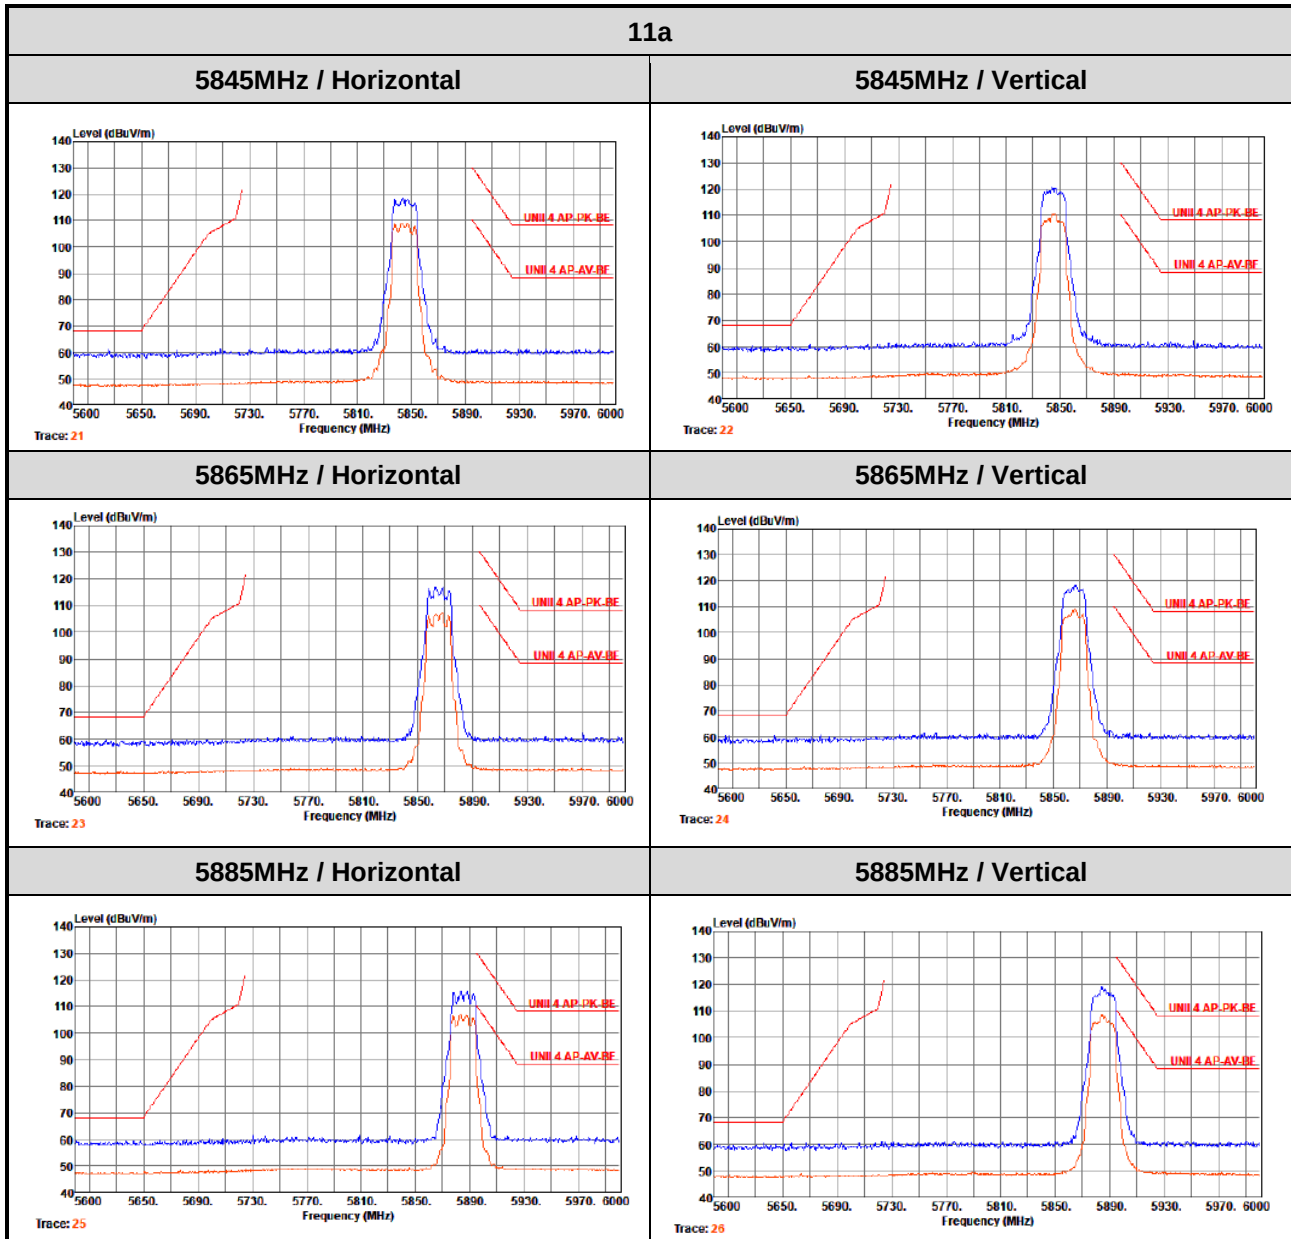

Peak Trace (Blue)	Detector = Peak
Average Trace (Orange)	Detector = RMS

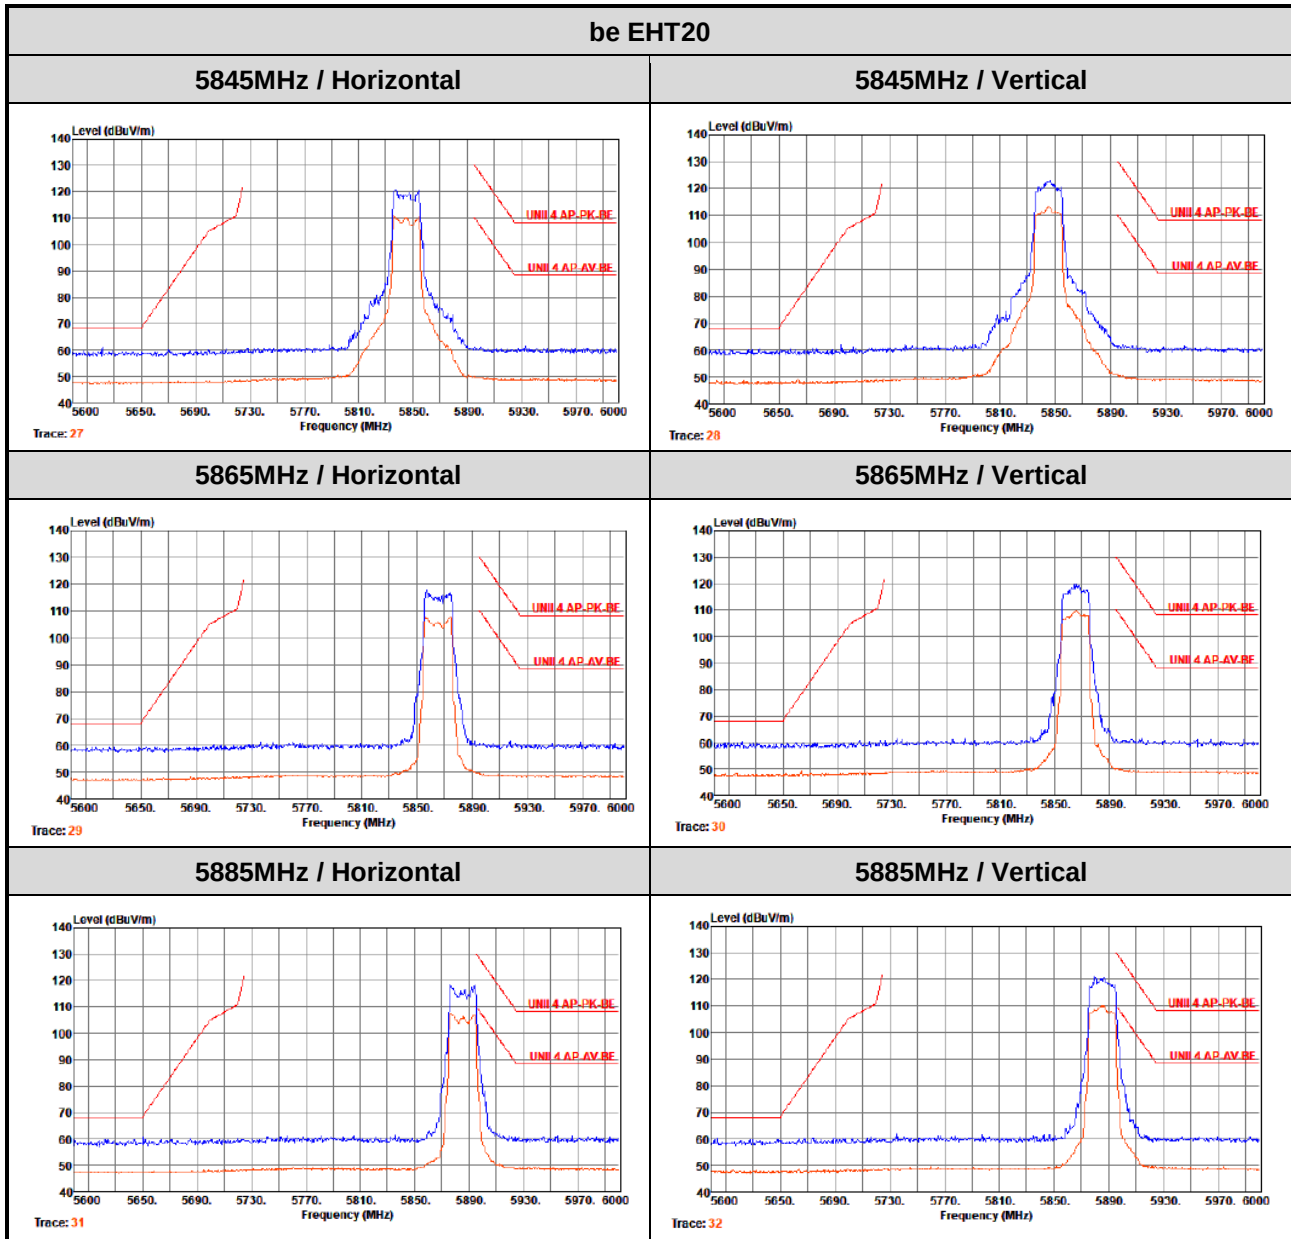


Peak Trace (Blue)	Detector = Peak
Average Trace (Orange)	Detector = RMS

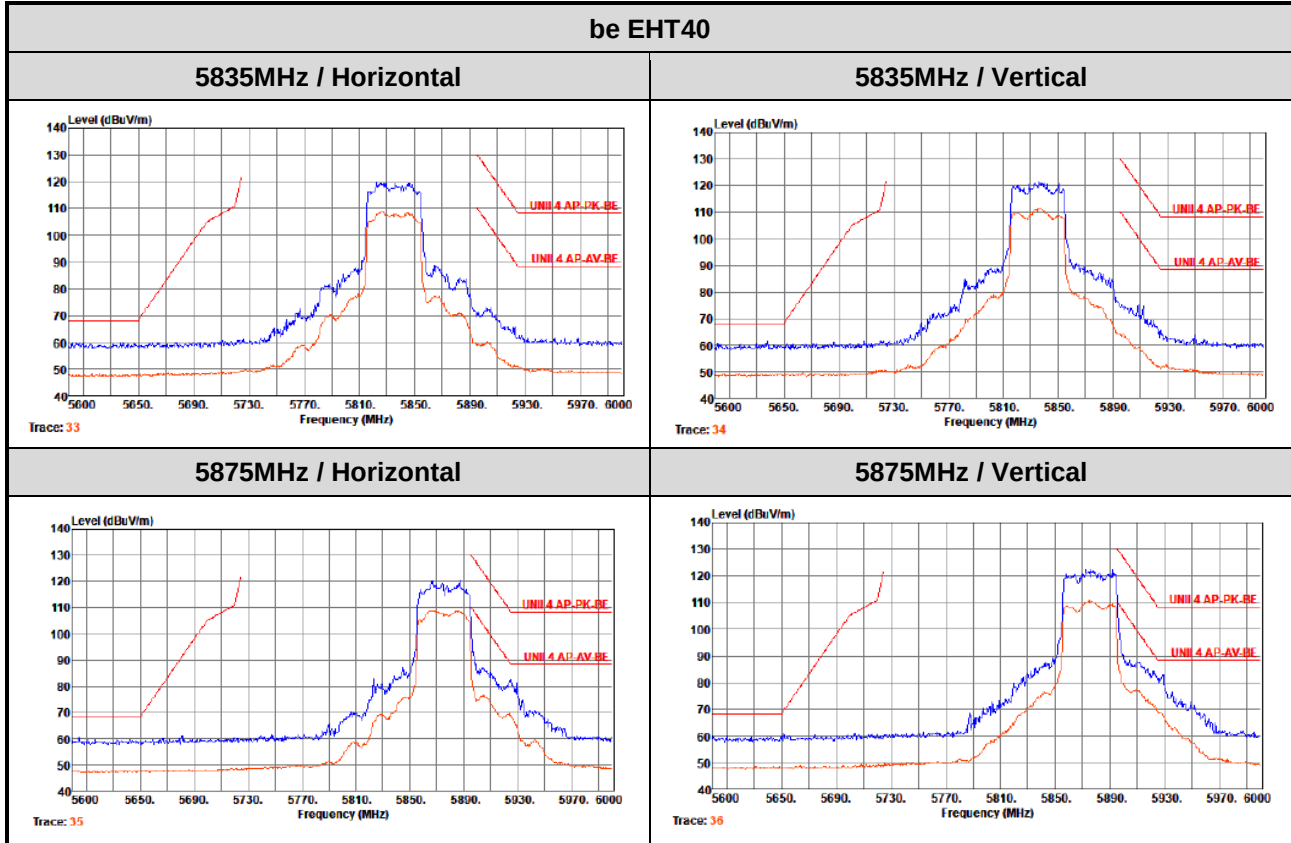




Peak Trace (Blue)	Detector = Peak
Average Trace (Orange)	Detector = RMS

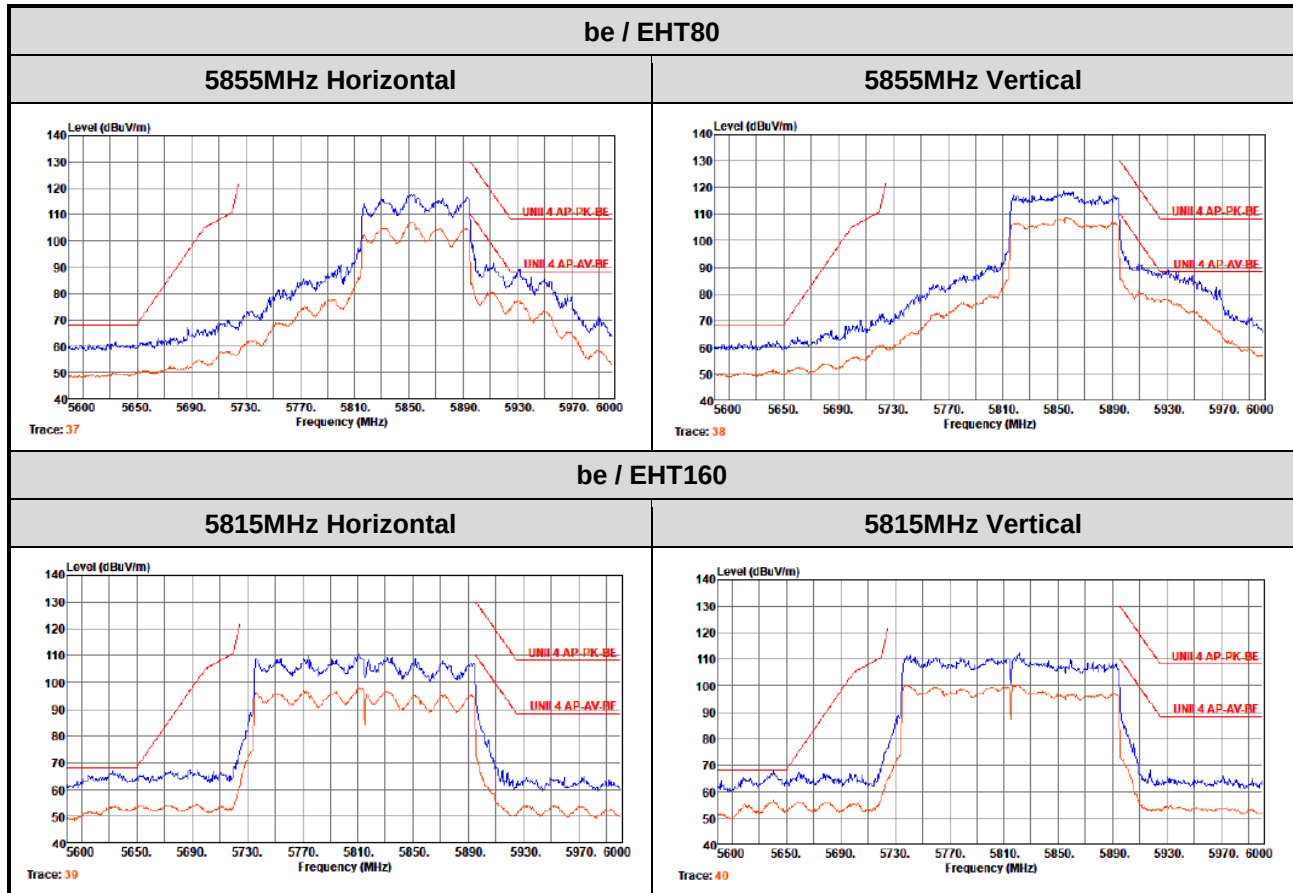



For 2T2S mode

Unwanted Emissions (Above 1GHz) for be EHT20

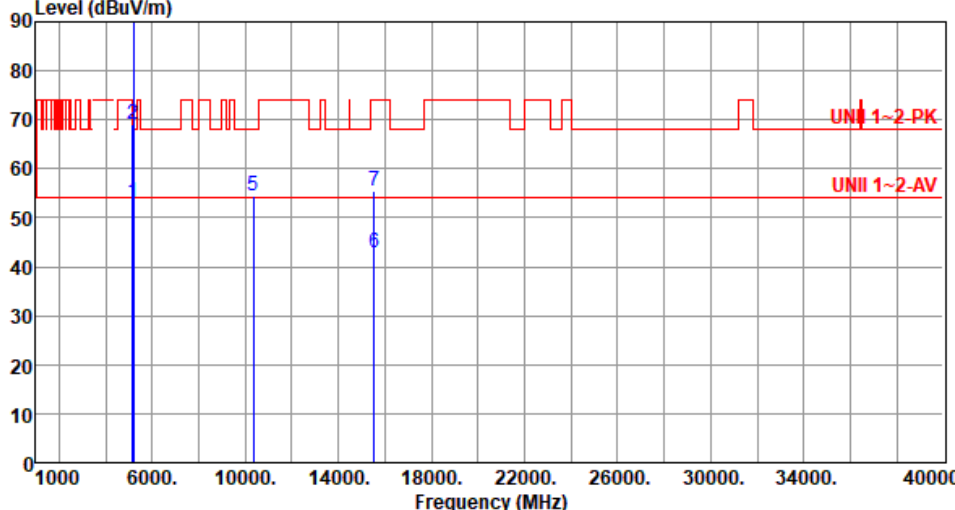Modulation	be EHT20		Test Freq. (MHz)		5180																																																																																				
Polarization	Horizontal																																																																																								
Test By :Sean Yu Temperature(°C):24 Humidity(%):62																																																																																									
Level (dBuV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>53.26</td><td>54.00</td><td>-0.74</td><td>52.61</td><td>0.65</td><td>Average</td><td>100</td><td>125</td></tr><tr><td>2</td><td>5150.00</td><td>69.07</td><td>74.00</td><td>-4.93</td><td>68.42</td><td>0.65</td><td>Peak</td><td>100</td><td>125</td></tr><tr><td>3 *</td><td>5180.00</td><td>107.68</td><td></td><td></td><td>107.08</td><td>0.60</td><td>Average</td><td>114</td><td>125</td></tr><tr><td>4 *</td><td>5180.00</td><td>121.03</td><td></td><td></td><td>120.43</td><td>0.60</td><td>Peak</td><td>114</td><td>125</td></tr><tr><td>5</td><td>10360.00</td><td>54.52</td><td>68.20</td><td>-13.68</td><td>46.40</td><td>8.12</td><td>Peak</td><td>100</td><td>35</td></tr><tr><td>6</td><td>15540.00</td><td>42.85</td><td>54.00</td><td>-11.15</td><td>37.93</td><td>4.92</td><td>Average</td><td>100</td><td>39</td></tr><tr><td>7</td><td>15540.00</td><td>55.42</td><td>74.00</td><td>-18.58</td><td>50.50</td><td>4.92</td><td>Peak</td><td>100</td><td>39</td></tr></tbody></table>											Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	53.26	54.00	-0.74	52.61	0.65	Average	100	125	2	5150.00	69.07	74.00	-4.93	68.42	0.65	Peak	100	125	3 *	5180.00	107.68			107.08	0.60	Average	114	125	4 *	5180.00	121.03			120.43	0.60	Peak	114	125	5	10360.00	54.52	68.20	-13.68	46.40	8.12	Peak	100	35	6	15540.00	42.85	54.00	-11.15	37.93	4.92	Average	100	39	7	15540.00	55.42	74.00	-18.58	50.50	4.92	Peak	100	39
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																
1	5150.00	53.26	54.00	-0.74	52.61	0.65	Average	100	125																																																																																
2	5150.00	69.07	74.00	-4.93	68.42	0.65	Peak	100	125																																																																																
3 *	5180.00	107.68			107.08	0.60	Average	114	125																																																																																
4 *	5180.00	121.03			120.43	0.60	Peak	114	125																																																																																
5	10360.00	54.52	68.20	-13.68	46.40	8.12	Peak	100	35																																																																																
6	15540.00	42.85	54.00	-11.15	37.93	4.92	Average	100	39																																																																																
7	15540.00	55.42	74.00	-18.58	50.50	4.92	Peak	100	39																																																																																
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																									




Modulation	be EHT20	Test Freq. (MHz)	5180
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):24 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT20	Test Freq. (MHz)	5200																																																																																																																								
Polarization	Horizontal																																																																																																																										
Test By :Brad Wu Temperature(°C):23 Humidity(%):62																																																																																																																											
Level (dBuV/m) Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>4160.00</td><td>29.83</td><td>54.00</td><td>-24.17</td><td>30.96</td><td>-1.13</td><td>Average</td><td>100</td><td>35</td></tr><tr><td>2</td><td>4160.00</td><td>43.09</td><td>74.00</td><td>-30.91</td><td>44.22</td><td>-1.13</td><td>Peak</td><td>100</td><td>35</td></tr><tr><td>3</td><td>5150.00</td><td>48.42</td><td>54.00</td><td>-5.58</td><td>47.77</td><td>0.65</td><td>Average</td><td>114</td><td>128</td></tr><tr><td>4</td><td>5150.00</td><td>61.59</td><td>74.00</td><td>-12.41</td><td>60.94</td><td>0.65</td><td>Peak</td><td>114</td><td>128</td></tr><tr><td>5 *</td><td>5200.00</td><td>109.82</td><td></td><td></td><td>109.26</td><td>0.56</td><td>Average</td><td>114</td><td>128</td></tr><tr><td>6 *</td><td>5200.00</td><td>122.61</td><td></td><td></td><td>122.05</td><td>0.56</td><td>Peak</td><td>114</td><td>128</td></tr><tr><td>7</td><td>5350.00</td><td>45.64</td><td>54.00</td><td>-8.36</td><td>45.50</td><td>0.14</td><td>Average</td><td>114</td><td>128</td></tr><tr><td>8</td><td>5350.00</td><td>58.71</td><td>74.00</td><td>-15.29</td><td>58.57</td><td>0.14</td><td>Peak</td><td>114</td><td>128</td></tr><tr><td>9</td><td>10400.00</td><td>54.75</td><td>68.20</td><td>-13.45</td><td>46.29</td><td>8.46</td><td>Peak</td><td>100</td><td>66</td></tr><tr><td>10</td><td>15600.00</td><td>42.19</td><td>54.00</td><td>-11.81</td><td>37.52</td><td>4.67</td><td>Average</td><td>100</td><td>39</td></tr><tr><td>11</td><td>15600.00</td><td>54.84</td><td>74.00</td><td>-19.16</td><td>50.17</td><td>4.67</td><td>Peak</td><td>100</td><td>39</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4160.00	29.83	54.00	-24.17	30.96	-1.13	Average	100	35	2	4160.00	43.09	74.00	-30.91	44.22	-1.13	Peak	100	35	3	5150.00	48.42	54.00	-5.58	47.77	0.65	Average	114	128	4	5150.00	61.59	74.00	-12.41	60.94	0.65	Peak	114	128	5 *	5200.00	109.82			109.26	0.56	Average	114	128	6 *	5200.00	122.61			122.05	0.56	Peak	114	128	7	5350.00	45.64	54.00	-8.36	45.50	0.14	Average	114	128	8	5350.00	58.71	74.00	-15.29	58.57	0.14	Peak	114	128	9	10400.00	54.75	68.20	-13.45	46.29	8.46	Peak	100	66	10	15600.00	42.19	54.00	-11.81	37.52	4.67	Average	100	39	11	15600.00	54.84	74.00	-19.16	50.17	4.67	Peak	100	39
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																		
1	4160.00	29.83	54.00	-24.17	30.96	-1.13	Average	100	35																																																																																																																		
2	4160.00	43.09	74.00	-30.91	44.22	-1.13	Peak	100	35																																																																																																																		
3	5150.00	48.42	54.00	-5.58	47.77	0.65	Average	114	128																																																																																																																		
4	5150.00	61.59	74.00	-12.41	60.94	0.65	Peak	114	128																																																																																																																		
5 *	5200.00	109.82			109.26	0.56	Average	114	128																																																																																																																		
6 *	5200.00	122.61			122.05	0.56	Peak	114	128																																																																																																																		
7	5350.00	45.64	54.00	-8.36	45.50	0.14	Average	114	128																																																																																																																		
8	5350.00	58.71	74.00	-15.29	58.57	0.14	Peak	114	128																																																																																																																		
9	10400.00	54.75	68.20	-13.45	46.29	8.46	Peak	100	66																																																																																																																		
10	15600.00	42.19	54.00	-11.81	37.52	4.67	Average	100	39																																																																																																																		
11	15600.00	54.84	74.00	-19.16	50.17	4.67	Peak	100	39																																																																																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																											

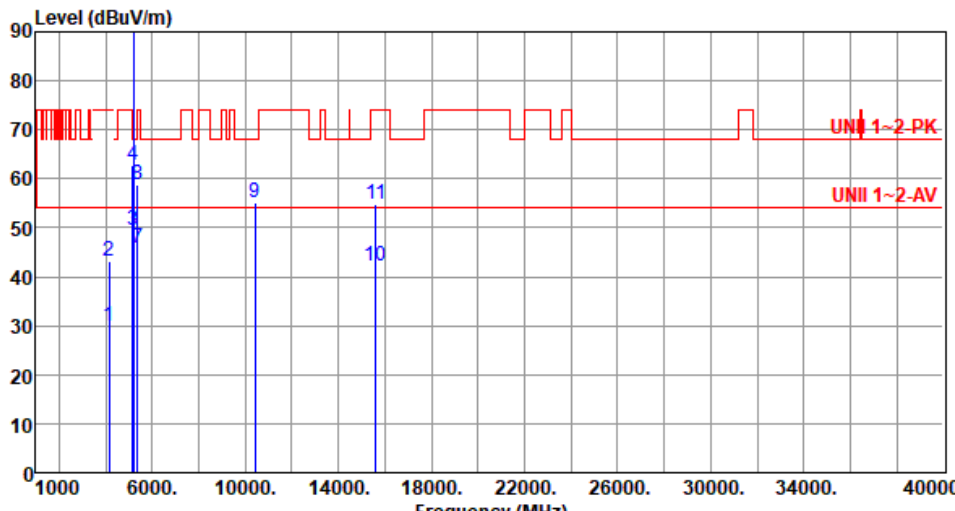

Modulation	be EHT20	Test Freq. (MHz)	5200						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):23 Humidity(%):62									
									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	4160.00	29.77	54.00	-24.23	30.90	-1.13	Average	100	16
2	4160.00	43.14	74.00	-30.86	44.27	-1.13	Peak	100	16
3	5150.00	49.57	54.00	-4.43	48.92	0.65	Average	146	11
4	5150.00	62.86	74.00	-11.14	62.21	0.65	Peak	146	11
5 *	5200.00	110.94			110.38	0.56	Average	146	11
6 *	5200.00	123.76	-----	-----	123.20	0.56	Peak	146	11
7	5350.00	45.78	54.00	-8.22	45.64	0.14	Average	146	11
8	5350.00	58.76	74.00	-15.24	58.62	0.14	Peak	146	11
9	10400.00	55.28	68.20	-12.92	46.82	8.46	Peak	100	65
10	15600.00	42.31	54.00	-11.69	37.64	4.67	Average	100	36
11	15600.00	54.89	74.00	-19.11	50.22	4.67	Peak	100	36

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5240
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):23 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT20	Test Freq. (MHz)	5240
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):23 Humidity(%):62			
Level (dBuV/m) <			




Modulation	be EHT20	Test Freq. (MHz)	5260
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):23 Humidity(%):62			
Level (dBUV/m) </			



Modulation	be EHT20	Test Freq. (MHz)	5260																																																																																
Polarization	Vertical																																																																																		
Test By :Brad Wu Temperature(°C):23 Humidity(%):62																																																																																			
<table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>5150.00</td><td>45.35</td><td>54.00</td><td>-8.65</td><td>44.70</td><td>0.65</td><td>Average</td><td>145</td><td>9</td></tr><tr><td>2</td><td>5150.00</td><td>58.13</td><td>74.00</td><td>-15.87</td><td>57.48</td><td>0.65</td><td>Peak</td><td>145</td><td>9</td></tr><tr><td>3 *</td><td>5260.00</td><td>104.94</td><td></td><td></td><td>104.67</td><td>0.27</td><td>Average</td><td>145</td><td>9</td></tr><tr><td>4 *</td><td>5260.00</td><td>117.41</td><td></td><td></td><td>117.14</td><td>0.27</td><td>Peak</td><td>145</td><td>9</td></tr><tr><td>5</td><td>10520.00</td><td>54.65</td><td>68.20</td><td>-13.55</td><td>46.27</td><td>8.38</td><td>Peak</td><td>100</td><td>48</td></tr><tr><td>6</td><td>15780.00</td><td>41.91</td><td>54.00</td><td>-12.09</td><td>37.17</td><td>4.74</td><td>Average</td><td>100</td><td>29</td></tr><tr><td>7</td><td>15780.00</td><td>54.36</td><td>74.00</td><td>-19.64</td><td>49.62</td><td>4.74</td><td>Peak</td><td>100</td><td>29</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5150.00	45.35	54.00	-8.65	44.70	0.65	Average	145	9	2	5150.00	58.13	74.00	-15.87	57.48	0.65	Peak	145	9	3 *	5260.00	104.94			104.67	0.27	Average	145	9	4 *	5260.00	117.41			117.14	0.27	Peak	145	9	5	10520.00	54.65	68.20	-13.55	46.27	8.38	Peak	100	48	6	15780.00	41.91	54.00	-12.09	37.17	4.74	Average	100	29	7	15780.00	54.36	74.00	-19.64	49.62	4.74	Peak	100	29
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																										
1	5150.00	45.35	54.00	-8.65	44.70	0.65	Average	145	9																																																																										
2	5150.00	58.13	74.00	-15.87	57.48	0.65	Peak	145	9																																																																										
3 *	5260.00	104.94			104.67	0.27	Average	145	9																																																																										
4 *	5260.00	117.41			117.14	0.27	Peak	145	9																																																																										
5	10520.00	54.65	68.20	-13.55	46.27	8.38	Peak	100	48																																																																										
6	15780.00	41.91	54.00	-12.09	37.17	4.74	Average	100	29																																																																										
7	15780.00	54.36	74.00	-19.64	49.62	4.74	Peak	100	29																																																																										
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																			

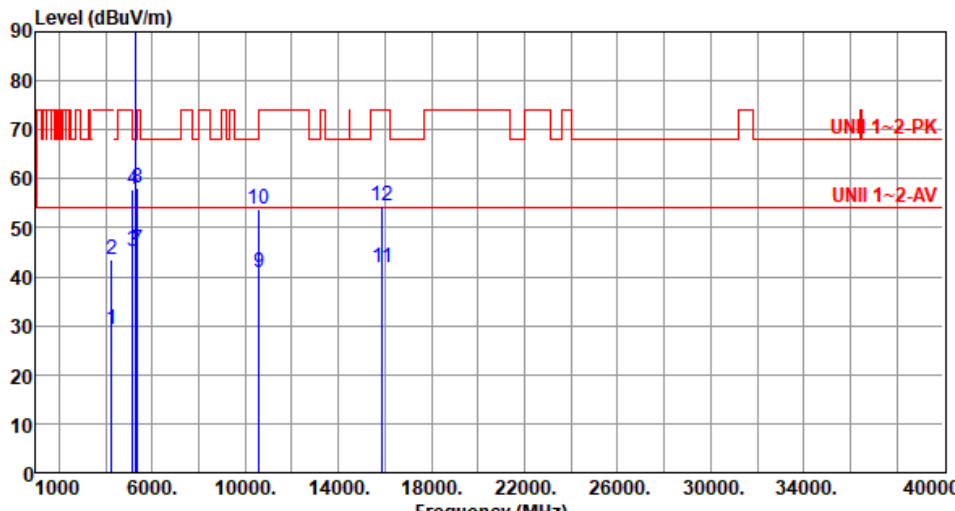

Modulation	be EHT20	Test Freq. (MHz)	5300						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):23 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4240.00	29.31	54.00	-24.69	30.54	-1.23	Average	100	19
2	4240.00	43.42	74.00	-30.58	44.65	-1.23	Peak	100	19
3	5150.00	45.26	54.00	-8.74	44.61	0.65	Average	114	128
4	5150.00	57.88	74.00	-16.12	57.23	0.65	Peak	114	128
5 *	5300.00	104.02			103.81	0.21	Average	114	128
6 *	5300.00	116.49			116.28	0.21	Peak	114	128
7	5350.00	45.48	54.00	-8.52	45.34	0.14	Average	114	128
8	5350.00	57.96	74.00	-16.04	57.82	0.14	Peak	114	128
9	10600.00	40.85	54.00	-13.15	32.52	8.33	Average	100	32
10	10600.00	53.94	74.00	-20.06	45.61	8.33	Peak	100	32
11	15900.00	41.68	54.00	-12.32	36.96	4.72	Average	100	36
12	15900.00	54.32	74.00	-19.68	49.60	4.72	Peak	100	36
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency									



Modulation	be EHT20	Test Freq. (MHz)	5300
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):23 Humidity(%):62			
Level (dBuV/m) <			



Modulation	be EHT20	Test Freq. (MHz)	5320
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):23 Humidity(%):62			
Level (dBuV/m) </			




Modulation	be EHT20	Test Freq. (MHz)	5320
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):23 Humidity(%):62			
Level (dBUV/m) </			



Modulation	be EHT20	Test Freq. (MHz)	5500
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):23 Humidity(%):62			
Level (dBUV/m) </			

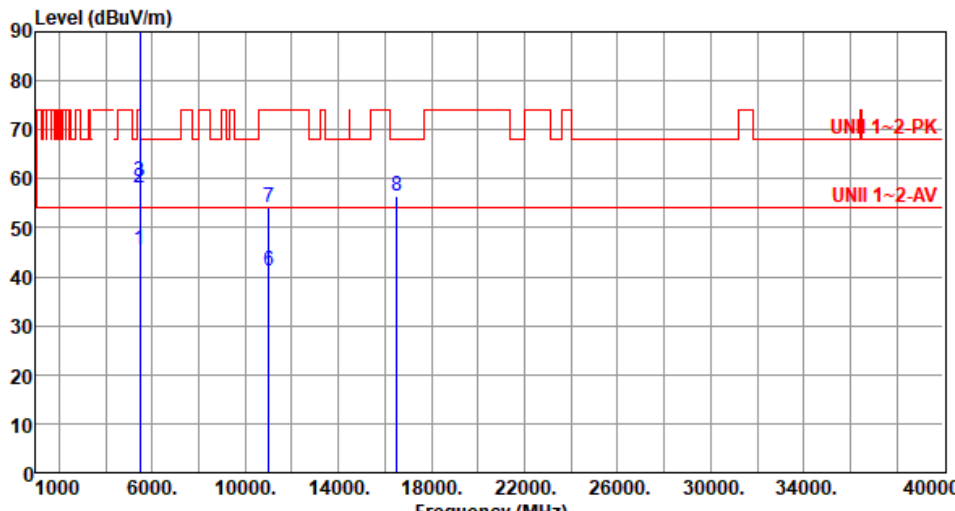

Modulation	be EHT20	Test Freq. (MHz)	5500																																																																																										
Polarization	Vertical																																																																																												
Test By :Brad Wu Temperature(°C):23 Humidity(%):62																																																																																													
Level (dBuV/m)  <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>5460.00</td><td>45.54</td><td>54.00</td><td>-8.46</td><td>45.04</td><td>0.50</td><td>Average</td><td>143</td><td>15</td></tr><tr><td>2</td><td>5460.00</td><td>58.21</td><td>74.00</td><td>-15.79</td><td>57.71</td><td>0.50</td><td>Peak</td><td>143</td><td>15</td></tr><tr><td>3</td><td>5470.00</td><td>59.38</td><td>68.20</td><td>-8.82</td><td>58.86</td><td>0.52</td><td>Peak</td><td>143</td><td>15</td></tr><tr><td>4 *</td><td>5500.00</td><td>103.17</td><td></td><td></td><td>102.58</td><td>0.59</td><td>Average</td><td>143</td><td>15</td></tr><tr><td>5 *</td><td>5500.00</td><td>116.91</td><td></td><td></td><td>116.32</td><td>0.59</td><td>Peak</td><td>143</td><td>15</td></tr><tr><td>6</td><td>11000.00</td><td>41.22</td><td>54.00</td><td>-12.78</td><td>32.52</td><td>8.70</td><td>Average</td><td>100</td><td>54</td></tr><tr><td>7</td><td>11000.00</td><td>54.23</td><td>74.00</td><td>-19.77</td><td>45.53</td><td>8.70</td><td>Peak</td><td>100</td><td>54</td></tr><tr><td>8</td><td>16500.00</td><td>56.48</td><td>68.20</td><td>-11.72</td><td>50.22</td><td>6.26</td><td>Peak</td><td>100</td><td>36</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	5460.00	45.54	54.00	-8.46	45.04	0.50	Average	143	15	2	5460.00	58.21	74.00	-15.79	57.71	0.50	Peak	143	15	3	5470.00	59.38	68.20	-8.82	58.86	0.52	Peak	143	15	4 *	5500.00	103.17			102.58	0.59	Average	143	15	5 *	5500.00	116.91			116.32	0.59	Peak	143	15	6	11000.00	41.22	54.00	-12.78	32.52	8.70	Average	100	54	7	11000.00	54.23	74.00	-19.77	45.53	8.70	Peak	100	54	8	16500.00	56.48	68.20	-11.72	50.22	6.26	Peak	100	36
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																				
1	5460.00	45.54	54.00	-8.46	45.04	0.50	Average	143	15																																																																																				
2	5460.00	58.21	74.00	-15.79	57.71	0.50	Peak	143	15																																																																																				
3	5470.00	59.38	68.20	-8.82	58.86	0.52	Peak	143	15																																																																																				
4 *	5500.00	103.17			102.58	0.59	Average	143	15																																																																																				
5 *	5500.00	116.91			116.32	0.59	Peak	143	15																																																																																				
6	11000.00	41.22	54.00	-12.78	32.52	8.70	Average	100	54																																																																																				
7	11000.00	54.23	74.00	-19.77	45.53	8.70	Peak	100	54																																																																																				
8	16500.00	56.48	68.20	-11.72	50.22	6.26	Peak	100	36																																																																																				
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													



Modulation	be EHT20	Test Freq. (MHz)	5580						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):23 Humidity(%):62									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4464.00	44.26	68.20	-23.94	44.82	-0.56	Peak	100	139
2	5460.00	45.31	54.00	-8.69	44.81	0.50	Average	116	219
3	5460.00	58.09	74.00	-15.91	57.59	0.50	Peak	116	219
4	5470.00	58.61	68.20	-9.59	58.09	0.52	Peak	116	219
5 *	5580.00	103.07			102.54	0.53	Average	116	219
6 *	5580.00	116.97			116.44	0.53	Peak	116	219
7	5725.00	58.46	68.20	-9.74	57.51	0.95	Peak	116	219
8	11160.00	40.62	54.00	-13.38	32.35	8.27	Average	100	25
9	11160.00	53.57	74.00	-20.43	45.30	8.27	Peak	100	25
10	16740.00	56.92	68.20	-11.28	50.61	6.31	Peak	100	51

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5580
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):23 Humidity(%):62			
Level (dBUV/m) </			



Modulation	be EHT20	Test Freq. (MHz)	5700																																																																																										
Polarization	Horizontal																																																																																												
Test By :Brad Wu Temperature(°C):23 Humidity(%):62																																																																																													
Level (dBUV/m) Frequency (MHz) <table><thead><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 *</td><td>5700.00</td><td>102.31</td><td></td><td></td><td>101.41</td><td>0.90</td><td>Average</td><td>115</td><td>216</td></tr><tr><td>2 *</td><td>5700.00</td><td>115.86</td><td></td><td></td><td>114.96</td><td>0.90</td><td>Peak</td><td>115</td><td>216</td></tr><tr><td>3</td><td>5725.00</td><td>62.84</td><td>68.20</td><td>-5.36</td><td>61.89</td><td>0.95</td><td>Peak</td><td>115</td><td>216</td></tr><tr><td>4</td><td>11400.00</td><td>40.52</td><td>54.00</td><td>-13.48</td><td>32.46</td><td>8.06</td><td>Average</td><td>100</td><td>22</td></tr><tr><td>5</td><td>11400.00</td><td>53.49</td><td>74.00</td><td>-20.51</td><td>45.43</td><td>8.06</td><td>Peak</td><td>100</td><td>22</td></tr><tr><td>6</td><td>17100.00</td><td>56.36</td><td>68.20</td><td>-11.84</td><td>50.59</td><td>5.77</td><td>Peak</td><td>100</td><td>45</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	5700.00	102.31			101.41	0.90	Average	115	216	2 *	5700.00	115.86			114.96	0.90	Peak	115	216	3	5725.00	62.84	68.20	-5.36	61.89	0.95	Peak	115	216	4	11400.00	40.52	54.00	-13.48	32.46	8.06	Average	100	22	5	11400.00	53.49	74.00	-20.51	45.43	8.06	Peak	100	22	6	17100.00	56.36	68.20	-11.84	50.59	5.77	Peak	100	45
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1 *	5700.00	102.31			101.41	0.90	Average	115	216																																																																																				
2 *	5700.00	115.86			114.96	0.90	Peak	115	216																																																																																				
3	5725.00	62.84	68.20	-5.36	61.89	0.95	Peak	115	216																																																																																				
4	11400.00	40.52	54.00	-13.48	32.46	8.06	Average	100	22																																																																																				
5	11400.00	53.49	74.00	-20.51	45.43	8.06	Peak	100	22																																																																																				
6	17100.00	56.36	68.20	-11.84	50.59	5.77	Peak	100	45																																																																																				




Modulation	be EHT20	Test Freq. (MHz)	5700
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):23 Humidity(%):62			
Level (dBUV/m) <			



Modulation	be EHT20	Test Freq. (MHz)	5720
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):23 Humidity(%):62			
Level (dBuV/m) <			

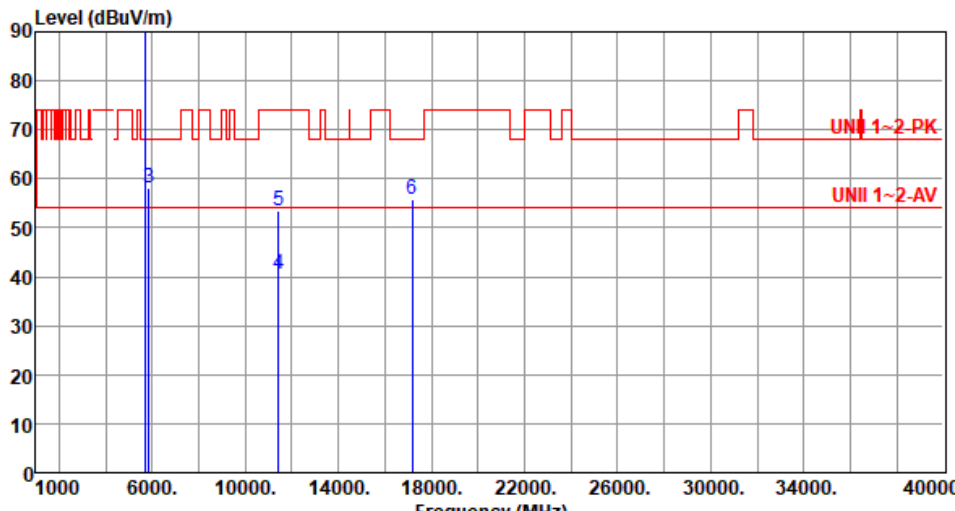

Modulation	be EHT20	Test Freq. (MHz)	5720																																																																																										
Polarization	Vertical																																																																																												
Test By :Brad Wu Temperature(°C):23 Humidity(%):62																																																																																													
																																																																																													
	<table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th>dBuV/m</th><th></th><th></th><th>dBuV</th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1 *</td><td>5720.00</td><td>103.05</td><td></td><td></td><td>102.11</td><td>0.94</td><td>Average</td><td>129</td><td>1</td></tr><tr><td>2 *</td><td>5720.00</td><td>116.48</td><td></td><td></td><td>115.54</td><td>0.94</td><td>Peak</td><td>129</td><td>1</td></tr><tr><td>3</td><td>5850.00</td><td>58.24</td><td>68.20</td><td>-9.96</td><td>57.16</td><td>1.08</td><td>Peak</td><td>129</td><td>1</td></tr><tr><td>4</td><td>11440.00</td><td>40.53</td><td>54.00</td><td>-13.47</td><td>32.39</td><td>8.14</td><td>Average</td><td>100</td><td>66</td></tr><tr><td>5</td><td>11440.00</td><td>53.62</td><td>74.00</td><td>-20.38</td><td>45.48</td><td>8.14</td><td>Peak</td><td>100</td><td>66</td></tr><tr><td>6</td><td>17160.00</td><td>55.95</td><td>68.20</td><td>-12.25</td><td>50.49</td><td>5.46</td><td>Peak</td><td>100</td><td>47</td></tr></table>		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table			dBuV/m			dBuV			cm	deg	1 *	5720.00	103.05			102.11	0.94	Average	129	1	2 *	5720.00	116.48			115.54	0.94	Peak	129	1	3	5850.00	58.24	68.20	-9.96	57.16	1.08	Peak	129	1	4	11440.00	40.53	54.00	-13.47	32.39	8.14	Average	100	66	5	11440.00	53.62	74.00	-20.38	45.48	8.14	Peak	100	66	6	17160.00	55.95	68.20	-12.25	50.49	5.46	Peak	100	47		
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																				
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																				
		dBuV/m			dBuV			cm	deg																																																																																				
1 *	5720.00	103.05			102.11	0.94	Average	129	1																																																																																				
2 *	5720.00	116.48			115.54	0.94	Peak	129	1																																																																																				
3	5850.00	58.24	68.20	-9.96	57.16	1.08	Peak	129	1																																																																																				
4	11440.00	40.53	54.00	-13.47	32.39	8.14	Average	100	66																																																																																				
5	11440.00	53.62	74.00	-20.38	45.48	8.14	Peak	100	66																																																																																				
6	17160.00	55.95	68.20	-12.25	50.49	5.46	Peak	100	47																																																																																				
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																													



Modulation	be EHT20	Test Freq. (MHz)	5745
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):23 Humidity(%):62			
Level (dBUV/m) </			




Modulation	be EHT20	Test Freq. (MHz)	5745
Polarization	Vertical		
Test By :Brad Wu Temperature(°C):23 Humidity(%):62			
Level (dBUV/m) </			



Modulation	be EHT20	Test Freq. (MHz)	5785
Polarization	Horizontal		
Test By :Brad Wu Temperature(°C):23 Humidity(%):62			
Level (dBuV/m) <			

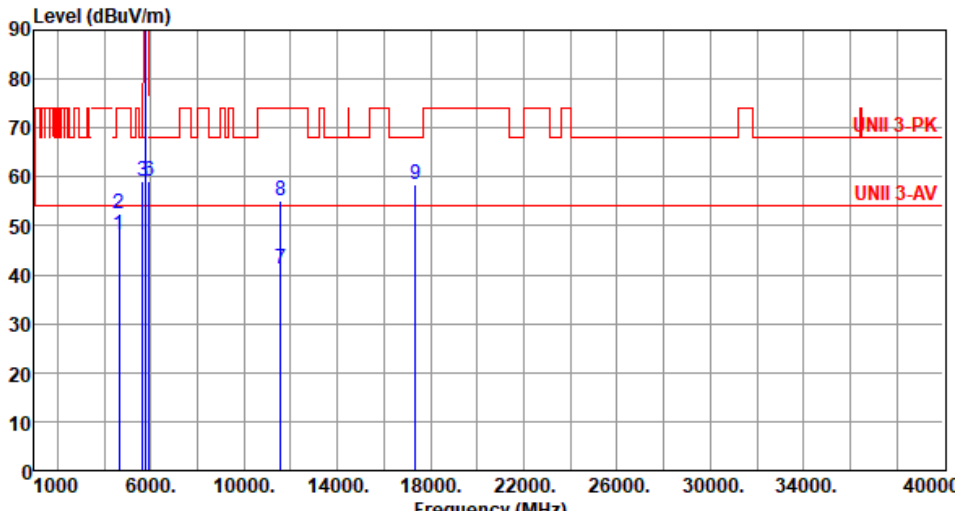


Modulation	be EHT20	Test Freq. (MHz)	5785						
Polarization	Vertical								
Test By :Brad Wu Temperature(°C):23 Humidity(%):62									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4628.00	48.07	54.00	-5.93	48.22	-0.15	Average	175	7
2	4628.00	52.40	74.00	-21.60	52.55	-0.15	Peak	175	7
3	5650.00	59.00	68.20	-9.20	58.34	0.66	Peak	174	328
4 *	5785.00	111.39			110.35	1.04	Average	174	328
5 *	5785.00	124.93			123.89	1.04	Peak	174	328
6	5925.00	59.12	68.20	-9.08	57.68	1.44	Peak	174	328
7	11570.00	41.21	54.00	-12.79	32.88	8.33	Average	100	54
8	11570.00	55.18	74.00	-18.82	46.85	8.33	Peak	100	54
9	17355.00	58.29	68.20	-9.91	52.45	5.84	Peak	100	47

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency




Modulation	be EHT20	Test Freq. (MHz)	5825																																																																																																																								
Polarization	Horizontal																																																																																																																										
Test By :Brad Wu Temperature(°C):23 Humidity(%):62																																																																																																																											
Level (dBUV/m) Freq. Emission Limit Margin SA Factor Remark ANT Turn level MHz dBuV/m dBuV/m dB dBuV dB/m cm Table deg <table><tr><td>1</td><td>4660.00</td><td>50.83</td><td>54.00</td><td>-3.17</td><td>50.87</td><td>-0.04</td><td>Average</td><td>126</td><td>125</td></tr><tr><td>2</td><td>4660.00</td><td>54.65</td><td>74.00</td><td>-19.35</td><td>54.69</td><td>-0.04</td><td>Peak</td><td>126</td><td>125</td></tr><tr><td>3</td><td>5650.00</td><td>59.68</td><td>68.20</td><td>-8.52</td><td>59.02</td><td>0.66</td><td>Peak</td><td>214</td><td>325</td></tr><tr><td>4 *</td><td>5825.00</td><td>108.62</td><td></td><td></td><td>107.56</td><td>1.06</td><td>Average</td><td>214</td><td>325</td></tr><tr><td>5 *</td><td>5825.00</td><td>122.03</td><td></td><td></td><td>120.97</td><td>1.06</td><td>Peak</td><td>214</td><td>325</td></tr><tr><td>6</td><td>5850.00</td><td>85.26</td><td>122.20</td><td>-36.94</td><td>84.18</td><td>1.08</td><td>Peak</td><td>214</td><td>325</td></tr><tr><td>7</td><td>5855.00</td><td>74.24</td><td>110.80</td><td>-36.56</td><td>73.12</td><td>1.12</td><td>Peak</td><td>214</td><td>325</td></tr><tr><td>8</td><td>5875.00</td><td>61.09</td><td>105.20</td><td>-44.11</td><td>59.84</td><td>1.25</td><td>Peak</td><td>214</td><td>325</td></tr><tr><td>9</td><td>5925.00</td><td>59.94</td><td>68.20</td><td>-8.26</td><td>58.50</td><td>1.44</td><td>Peak</td><td>214</td><td>325</td></tr><tr><td>10</td><td>11650.00</td><td>40.58</td><td>54.00</td><td>-13.42</td><td>32.66</td><td>7.92</td><td>Average</td><td>100</td><td>36</td></tr><tr><td>11</td><td>11650.00</td><td>54.39</td><td>74.00</td><td>-19.61</td><td>46.47</td><td>7.92</td><td>Peak</td><td>100</td><td>36</td></tr><tr><td>12</td><td>17475.00</td><td>58.45</td><td>68.20</td><td>-9.75</td><td>52.13</td><td>6.32</td><td>Peak</td><td>100</td><td>48</td></tr></table>				1	4660.00	50.83	54.00	-3.17	50.87	-0.04	Average	126	125	2	4660.00	54.65	74.00	-19.35	54.69	-0.04	Peak	126	125	3	5650.00	59.68	68.20	-8.52	59.02	0.66	Peak	214	325	4 *	5825.00	108.62			107.56	1.06	Average	214	325	5 *	5825.00	122.03			120.97	1.06	Peak	214	325	6	5850.00	85.26	122.20	-36.94	84.18	1.08	Peak	214	325	7	5855.00	74.24	110.80	-36.56	73.12	1.12	Peak	214	325	8	5875.00	61.09	105.20	-44.11	59.84	1.25	Peak	214	325	9	5925.00	59.94	68.20	-8.26	58.50	1.44	Peak	214	325	10	11650.00	40.58	54.00	-13.42	32.66	7.92	Average	100	36	11	11650.00	54.39	74.00	-19.61	46.47	7.92	Peak	100	36	12	17475.00	58.45	68.20	-9.75	52.13	6.32	Peak	100	48
1	4660.00	50.83	54.00	-3.17	50.87	-0.04	Average	126	125																																																																																																																		
2	4660.00	54.65	74.00	-19.35	54.69	-0.04	Peak	126	125																																																																																																																		
3	5650.00	59.68	68.20	-8.52	59.02	0.66	Peak	214	325																																																																																																																		
4 *	5825.00	108.62			107.56	1.06	Average	214	325																																																																																																																		
5 *	5825.00	122.03			120.97	1.06	Peak	214	325																																																																																																																		
6	5850.00	85.26	122.20	-36.94	84.18	1.08	Peak	214	325																																																																																																																		
7	5855.00	74.24	110.80	-36.56	73.12	1.12	Peak	214	325																																																																																																																		
8	5875.00	61.09	105.20	-44.11	59.84	1.25	Peak	214	325																																																																																																																		
9	5925.00	59.94	68.20	-8.26	58.50	1.44	Peak	214	325																																																																																																																		
10	11650.00	40.58	54.00	-13.42	32.66	7.92	Average	100	36																																																																																																																		
11	11650.00	54.39	74.00	-19.61	46.47	7.92	Peak	100	36																																																																																																																		
12	17475.00	58.45	68.20	-9.75	52.13	6.32	Peak	100	48																																																																																																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																											

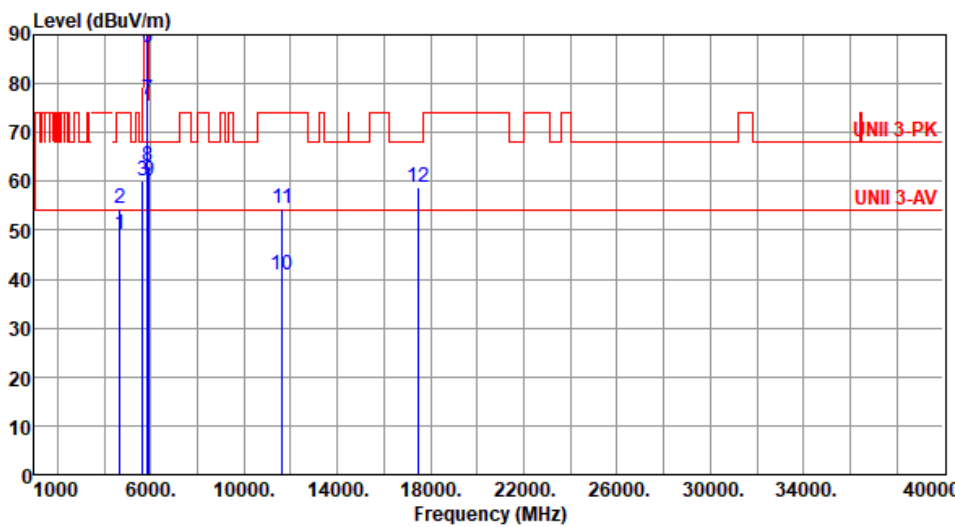


Modulation	be EHT20	Test Freq. (MHz)	5825																																																																																																																																		
Polarization	Vertical																																																																																																																																				
Test By :Brad Wu Temperature(°C):23 Humidity(%):62																																																																																																																																					
																																																																																																																																					
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>4660.00</td><td>49.14</td><td>54.00</td><td>-4.86</td><td>49.18</td><td>-0.04</td><td>Average</td><td>176</td><td>8</td></tr><tr><td>2</td><td>4660.00</td><td>54.32</td><td>74.00</td><td>-19.68</td><td>54.36</td><td>-0.04</td><td>Peak</td><td>176</td><td>8</td></tr><tr><td>3</td><td>5650.00</td><td>60.27</td><td>68.20</td><td>-7.93</td><td>59.61</td><td>0.66</td><td>Peak</td><td>196</td><td>328</td></tr><tr><td>4 *</td><td>5825.00</td><td>110.89</td><td></td><td></td><td>109.83</td><td>1.06</td><td>Average</td><td>196</td><td>328</td></tr><tr><td>5 *</td><td>5825.00</td><td>124.14</td><td></td><td></td><td>123.08</td><td>1.06</td><td>Peak</td><td>196</td><td>328</td></tr><tr><td>6</td><td>5850.00</td><td>87.41</td><td>122.20</td><td>-34.79</td><td>86.33</td><td>1.08</td><td>Peak</td><td>196</td><td>328</td></tr><tr><td>7</td><td>5855.00</td><td>76.72</td><td>110.80</td><td>-34.08</td><td>75.60</td><td>1.12</td><td>Peak</td><td>196</td><td>328</td></tr><tr><td>8</td><td>5875.00</td><td>63.24</td><td>105.20</td><td>-41.96</td><td>61.99</td><td>1.25</td><td>Peak</td><td>196</td><td>328</td></tr><tr><td>9</td><td>5925.00</td><td>60.15</td><td>68.20</td><td>-8.05</td><td>58.71</td><td>1.44</td><td>Peak</td><td>196</td><td>328</td></tr><tr><td>10</td><td>11650.00</td><td>40.69</td><td>54.00</td><td>-13.31</td><td>32.77</td><td>7.92</td><td>Average</td><td>100</td><td>21</td></tr><tr><td>11</td><td>11650.00</td><td>54.58</td><td>74.00</td><td>-19.42</td><td>46.66</td><td>7.92</td><td>Peak</td><td>100</td><td>21</td></tr><tr><td>12</td><td>17475.00</td><td>58.66</td><td>68.20</td><td>-9.54</td><td>52.34</td><td>6.32</td><td>Peak</td><td>100</td><td>29</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4660.00	49.14	54.00	-4.86	49.18	-0.04	Average	176	8	2	4660.00	54.32	74.00	-19.68	54.36	-0.04	Peak	176	8	3	5650.00	60.27	68.20	-7.93	59.61	0.66	Peak	196	328	4 *	5825.00	110.89			109.83	1.06	Average	196	328	5 *	5825.00	124.14			123.08	1.06	Peak	196	328	6	5850.00	87.41	122.20	-34.79	86.33	1.08	Peak	196	328	7	5855.00	76.72	110.80	-34.08	75.60	1.12	Peak	196	328	8	5875.00	63.24	105.20	-41.96	61.99	1.25	Peak	196	328	9	5925.00	60.15	68.20	-8.05	58.71	1.44	Peak	196	328	10	11650.00	40.69	54.00	-13.31	32.77	7.92	Average	100	21	11	11650.00	54.58	74.00	-19.42	46.66	7.92	Peak	100	21	12	17475.00	58.66	68.20	-9.54	52.34	6.32	Peak	100	29		
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																												
1	4660.00	49.14	54.00	-4.86	49.18	-0.04	Average	176	8																																																																																																																												
2	4660.00	54.32	74.00	-19.68	54.36	-0.04	Peak	176	8																																																																																																																												
3	5650.00	60.27	68.20	-7.93	59.61	0.66	Peak	196	328																																																																																																																												
4 *	5825.00	110.89			109.83	1.06	Average	196	328																																																																																																																												
5 *	5825.00	124.14			123.08	1.06	Peak	196	328																																																																																																																												
6	5850.00	87.41	122.20	-34.79	86.33	1.08	Peak	196	328																																																																																																																												
7	5855.00	76.72	110.80	-34.08	75.60	1.12	Peak	196	328																																																																																																																												
8	5875.00	63.24	105.20	-41.96	61.99	1.25	Peak	196	328																																																																																																																												
9	5925.00	60.15	68.20	-8.05	58.71	1.44	Peak	196	328																																																																																																																												
10	11650.00	40.69	54.00	-13.31	32.77	7.92	Average	100	21																																																																																																																												
11	11650.00	54.58	74.00	-19.42	46.66	7.92	Peak	100	21																																																																																																																												
12	17475.00	58.66	68.20	-9.54	52.34	6.32	Peak	100	29																																																																																																																												
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																																					

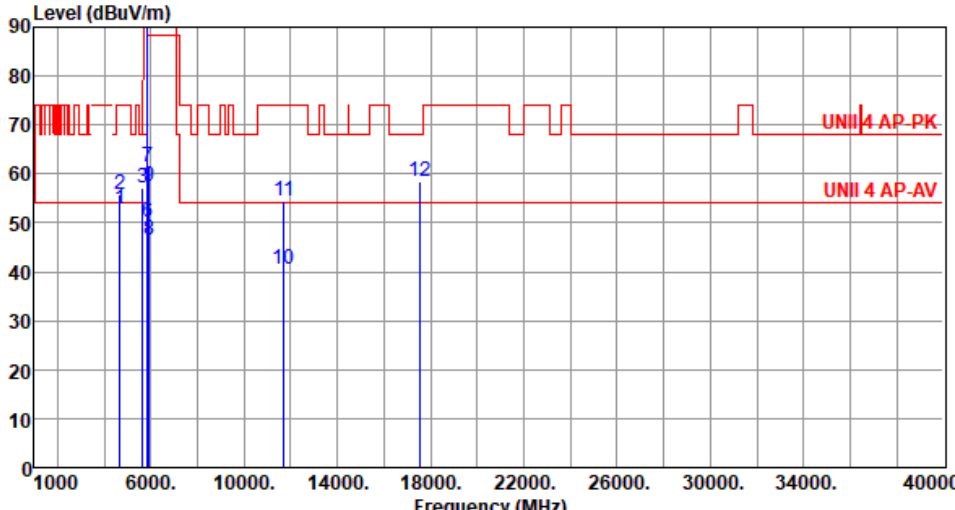

Modulation	be EHT20	Test Freq. (MHz)	5845						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):23 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4676.00	52.87	54.00	-1.13	52.88	-0.01	Average	100	126
2	4676.00	55.79	74.00	-18.21	55.80	-0.01	Peak	100	126
3	5650.00	57.08	68.20	-11.12	56.42	0.66	Peak	215	322
4 *	5845.00	109.14			108.06	1.08	Average	215	322
5 *	5845.00	120.73			119.65	1.08	Peak	215	322
6	5895.00	50.04	110.20	-60.16	48.66	1.38	Average	215	322
7	5895.00	61.49	130.20	-68.71	60.11	1.38	Peak	215	322
8	5925.00	46.46	88.20	-41.74	45.02	1.44	Average	215	322
9	5925.00	57.56	108.20	-50.64	56.12	1.44	Peak	215	322
10	11690.00	40.60	54.00	-13.40	32.66	7.94	Average	100	40
11	11690.00	54.36	74.00	-19.64	46.42	7.94	Peak	100	40
12	17535.00	58.55	68.20	-9.65	51.89	6.66	Peak	100	50


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

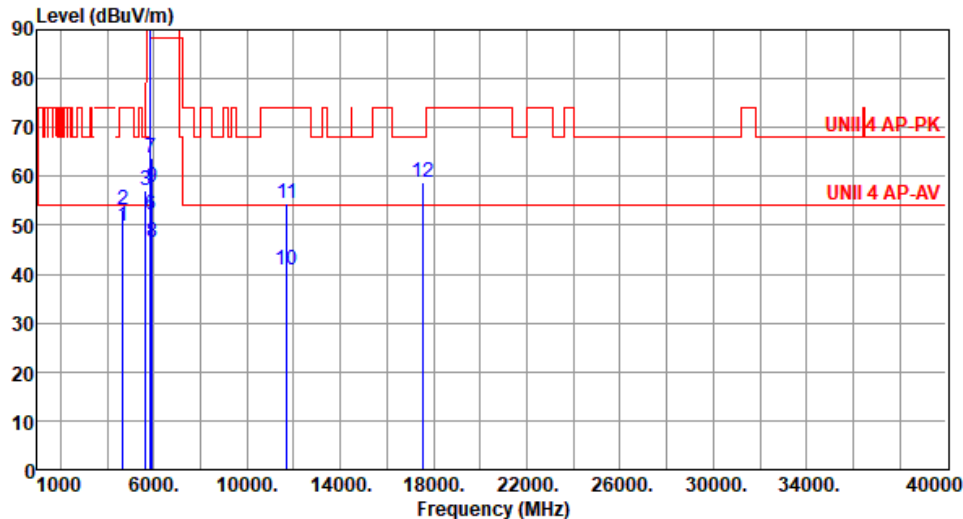

Modulation	be EHT20	Test Freq. (MHz)	5845						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):23 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4676.00	49.92	54.00	-4.08	49.93	-0.01	Average	135	12
2	4676.00	53.24	74.00	-20.76	53.25	-0.01	Peak	135	12
3	5650.00	57.17	68.20	-11.03	56.51	0.66	Peak	195	330
4 *	5845.00	111.23			110.15	1.08	Average	195	330
5 *	5845.00	122.79			121.71	1.08	Peak	195	330
6	5895.00	52.09	110.20	-58.11	50.71	1.38	Average	195	330
7	5895.00	63.64	130.20	-66.56	62.26	1.38	Peak	195	330
8	5925.00	46.56	88.20	-41.64	45.12	1.44	Average	195	330
9	5925.00	57.76	108.20	-50.44	56.32	1.44	Peak	195	330
10	11690.00	40.79	54.00	-13.21	32.85	7.94	Average	100	50
11	11690.00	54.46	74.00	-19.54	46.52	7.94	Peak	100	50
12	17535.00	58.88	68.20	-9.32	52.22	6.66	Peak	100	60

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

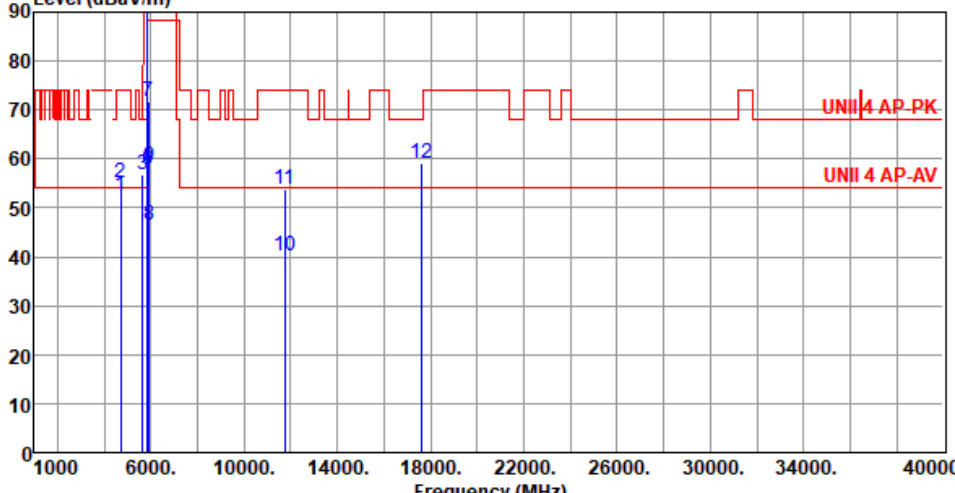

Modulation	be EHT20	Test Freq. (MHz)	5865																																																																																																																																		
Polarization	Horizontal																																																																																																																																				
Test By :Roger Lu Temperature(°C):23 Humidity(%):62																																																																																																																																					
Level (dBUV/m)  Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>4692.00</td><td>52.58</td><td>54.00</td><td>-1.42</td><td>52.56</td><td>0.02</td><td>Average</td><td>105</td><td>155</td></tr><tr><td>2</td><td>4692.00</td><td>55.20</td><td>74.00</td><td>-18.80</td><td>55.18</td><td>0.02</td><td>Peak</td><td>105</td><td>155</td></tr><tr><td>3</td><td>5650.00</td><td>56.81</td><td>68.20</td><td>-11.39</td><td>56.15</td><td>0.66</td><td>Peak</td><td>210</td><td>322</td></tr><tr><td>4 *</td><td>5865.00</td><td>107.62</td><td></td><td></td><td>106.43</td><td>1.19</td><td>Average</td><td>210</td><td>322</td></tr><tr><td>5 *</td><td>5865.00</td><td>118.84</td><td></td><td></td><td>117.65</td><td>1.19</td><td>Peak</td><td>210</td><td>322</td></tr><tr><td>6</td><td>5895.00</td><td>57.83</td><td>110.20</td><td>-52.37</td><td>56.45</td><td>1.38</td><td>Average</td><td>210</td><td>322</td></tr><tr><td>7</td><td>5895.00</td><td>71.80</td><td>130.20</td><td>-58.40</td><td>70.42</td><td>1.38</td><td>Peak</td><td>210</td><td>322</td></tr><tr><td>8</td><td>5925.00</td><td>46.62</td><td>88.20</td><td>-41.58</td><td>45.18</td><td>1.44</td><td>Average</td><td>210</td><td>322</td></tr><tr><td>9</td><td>5925.00</td><td>58.39</td><td>108.20</td><td>-49.81</td><td>56.95</td><td>1.44</td><td>Peak</td><td>210</td><td>322</td></tr><tr><td>10</td><td>11730.00</td><td>40.21</td><td>54.00</td><td>-13.79</td><td>32.55</td><td>7.66</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>11</td><td>11730.00</td><td>53.84</td><td>74.00</td><td>-20.16</td><td>46.18</td><td>7.66</td><td>Peak</td><td>100</td><td>40</td></tr><tr><td>12</td><td>17595.00</td><td>59.10</td><td>68.20</td><td>-9.10</td><td>52.11</td><td>6.99</td><td>Peak</td><td>100</td><td>70</td></tr></tbody></table> Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4692.00	52.58	54.00	-1.42	52.56	0.02	Average	105	155	2	4692.00	55.20	74.00	-18.80	55.18	0.02	Peak	105	155	3	5650.00	56.81	68.20	-11.39	56.15	0.66	Peak	210	322	4 *	5865.00	107.62			106.43	1.19	Average	210	322	5 *	5865.00	118.84			117.65	1.19	Peak	210	322	6	5895.00	57.83	110.20	-52.37	56.45	1.38	Average	210	322	7	5895.00	71.80	130.20	-58.40	70.42	1.38	Peak	210	322	8	5925.00	46.62	88.20	-41.58	45.18	1.44	Average	210	322	9	5925.00	58.39	108.20	-49.81	56.95	1.44	Peak	210	322	10	11730.00	40.21	54.00	-13.79	32.55	7.66	Average	100	40	11	11730.00	53.84	74.00	-20.16	46.18	7.66	Peak	100	40	12	17595.00	59.10	68.20	-9.10	52.11	6.99	Peak	100	70
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																												
1	4692.00	52.58	54.00	-1.42	52.56	0.02	Average	105	155																																																																																																																												
2	4692.00	55.20	74.00	-18.80	55.18	0.02	Peak	105	155																																																																																																																												
3	5650.00	56.81	68.20	-11.39	56.15	0.66	Peak	210	322																																																																																																																												
4 *	5865.00	107.62			106.43	1.19	Average	210	322																																																																																																																												
5 *	5865.00	118.84			117.65	1.19	Peak	210	322																																																																																																																												
6	5895.00	57.83	110.20	-52.37	56.45	1.38	Average	210	322																																																																																																																												
7	5895.00	71.80	130.20	-58.40	70.42	1.38	Peak	210	322																																																																																																																												
8	5925.00	46.62	88.20	-41.58	45.18	1.44	Average	210	322																																																																																																																												
9	5925.00	58.39	108.20	-49.81	56.95	1.44	Peak	210	322																																																																																																																												
10	11730.00	40.21	54.00	-13.79	32.55	7.66	Average	100	40																																																																																																																												
11	11730.00	53.84	74.00	-20.16	46.18	7.66	Peak	100	40																																																																																																																												
12	17595.00	59.10	68.20	-9.10	52.11	6.99	Peak	100	70																																																																																																																												




Modulation	be EHT20	Test Freq. (MHz)	5865
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):23 Humidity(%):62			
Level (dBUV/m) </			



Modulation	be EHT20	Test Freq. (MHz)	5885
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):23 Humidity(%):62			
Level (dBuV/m)			

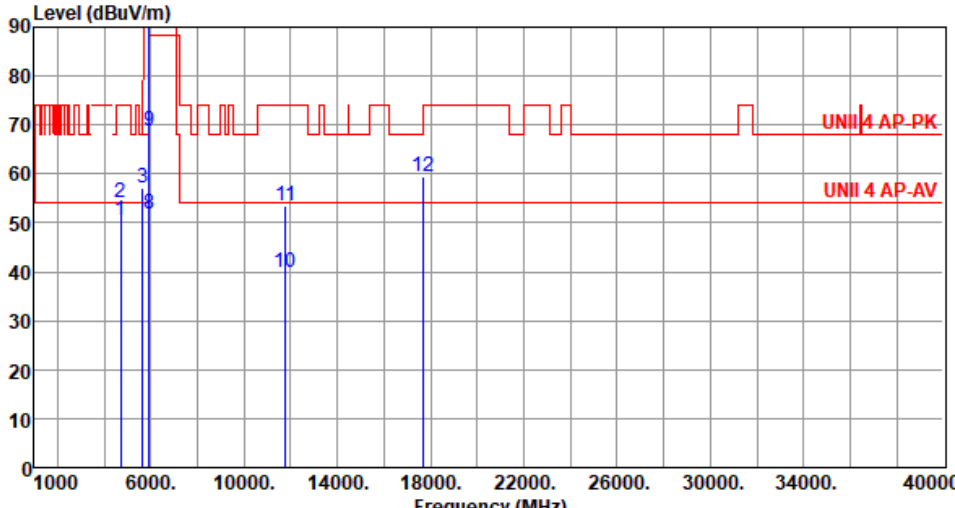

Modulation	be EHT20	Test Freq. (MHz)	5885						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):23 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4708.00	50.34	54.00	-3.66	50.31	0.03	Average	215	9
2	4708.00	54.00	74.00	-20.00	53.97	0.03	Peak	215	9
3	5650.00	57.03	68.20	-11.17	56.37	0.66	Peak	196	325
4 *	5885.00	110.34			109.03	1.31	Average	196	325
5 *	5885.00	121.44			120.13	1.31	Peak	196	325
6	5895.00	98.54	110.20	-11.66	97.16	1.38	Average	196	325
7	5895.00	111.64	130.20	-18.56	110.26	1.38	Peak	196	325
8	5925.00	51.81	88.20	-36.39	50.37	1.44	Average	196	325
9	5925.00	68.70	108.20	-39.50	67.26	1.44	Peak	196	325
10	11770.00	39.94	54.00	-14.06	32.54	7.40	Average	100	20
11	11770.00	53.55	74.00	-20.45	46.15	7.40	Peak	100	20
12	17655.00	59.40	68.20	-8.80	52.16	7.24	Peak	100	50

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

Unwanted Emissions (Above 1GHz) for be EHT40

Modulation	be EHT40	Test Freq. (MHz)	5190						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):24 Humidity(%):62									
Level (dBUV/m) Frequency (MHz)									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	51.44	54.00	-2.56	50.79	0.65	Average	100	121
2	5150.00	64.92	74.00	-9.08	64.27	0.65	Peak	100	121
3 *	5190.00	103.27			102.70	0.57	Average	111	121
4 *	5190.00	116.34			115.77	0.57	Peak	111	121
5	10380.00	54.40	68.20	-13.80	46.10	8.30	Peak	100	80
6	15570.00	42.01	54.00	-11.99	37.21	4.80	Average	100	40
7	15570.00	54.90	74.00	-19.10	50.10	4.80	Peak	100	40

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3: "*" is Peak / Average value of fundamental frequency




Modulation	be EHT40	Test Freq. (MHz)	5190
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):24 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT40	Test Freq. (MHz)	5230
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):23 Humidity(%):62			
Level (dBUV/m)			

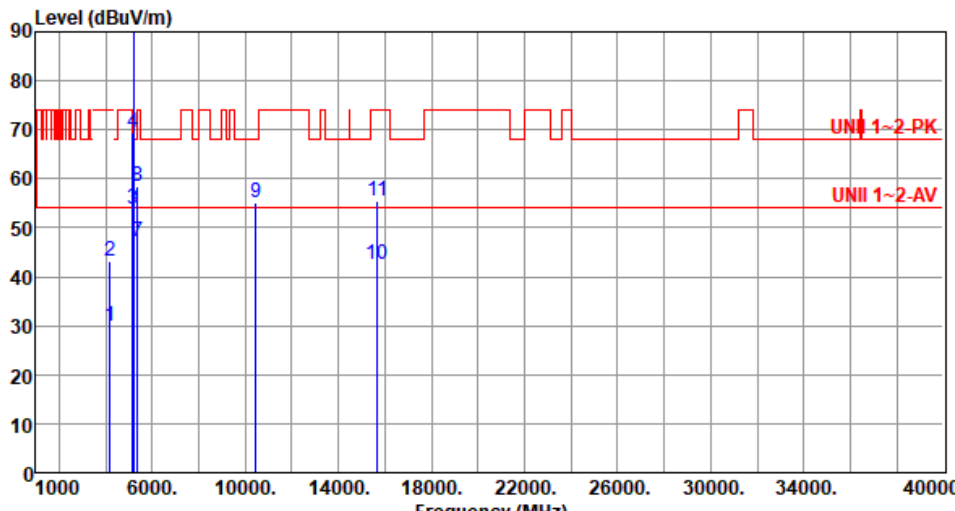


Modulation	be EHT40	Test Freq. (MHz)	5230						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):23 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4184.00	29.85	54.00	-24.15	31.03	-1.18	Average	100	31
2	4184.00	43.14	74.00	-30.86	44.32	-1.18	Peak	100	31
3	5150.00	53.78	54.00	-0.22	53.13	0.65	Average	133	9
4	5150.00	69.27	74.00	-4.73	68.62	0.65	Peak	133	9
5 *	5230.00	108.94			108.55	0.39	Average	133	9
6 *	5230.00	121.85			121.46	0.39	Peak	133	9
7	5350.00	47.03	54.00	-6.97	46.89	0.14	Average	133	9
8	5350.00	58.56	74.00	-15.44	58.42	0.14	Peak	133	9
9	10460.00	55.13	68.20	-13.07	46.59	8.54	Peak	100	40
10	15690.00	42.35	54.00	-11.65	37.49	4.86	Average	100	30
11	15690.00	55.32	74.00	-18.68	50.46	4.86	Peak	100	30
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency									



Modulation	be EHT40	Test Freq. (MHz)	5270
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):23 Humidity(%):62			
Level (dBUV/m) </			

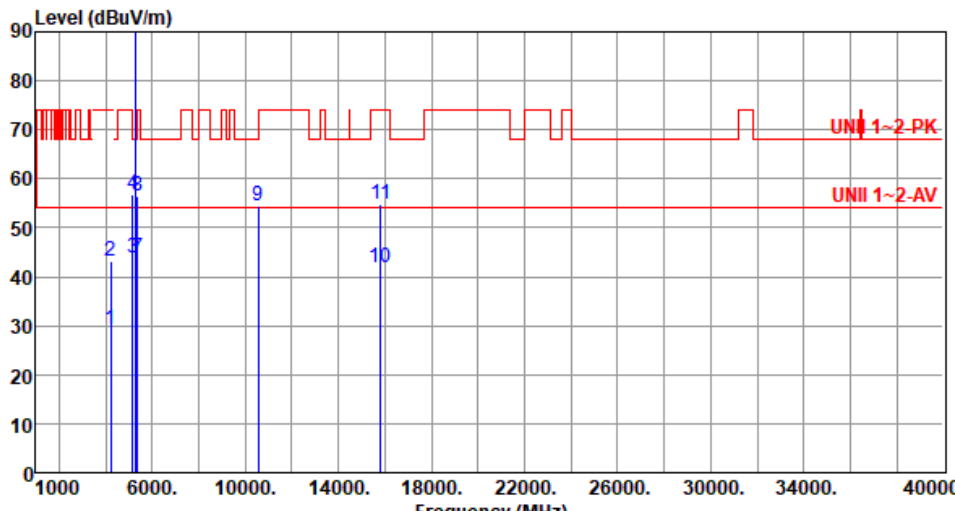

Modulation	be EHT40	Test Freq. (MHz)	5270						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):23 Humidity(%):62									
									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level			reading			High	Table
		dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	4216.00	29.25	54.00	-24.75	30.47	-1.22	Average	100	18
2	4216.00	43.22	74.00	-30.78	44.44	-1.22	Peak	100	18
3	5150.00	43.91	54.00	-10.09	43.26	0.65	Average	132	11
4	5150.00	56.93	74.00	-17.07	56.28	0.65	Peak	132	11
5 *	5270.00	103.45			103.19	0.26	Average	132	11
6 *	5270.00	115.71			115.45	0.26	Peak	132	11
7	5350.00	43.96	54.00	-10.04	43.82	0.14	Average	132	11
8	5350.00	56.59	74.00	-17.41	56.45	0.14	Peak	132	11
9	10540.00	54.57	68.20	-13.63	46.28	8.29	Peak	100	90
10	15810.00	41.85	54.00	-12.15	37.28	4.57	Average	100	50
11	15810.00	54.85	74.00	-19.15	50.28	4.57	Peak	100	50

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	5310
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):23 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT40	Test Freq. (MHz)	5310
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):23 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT40	Test Freq. (MHz)	5510
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):23 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT40	Test Freq. (MHz)	5510
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):23 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT40	Test Freq. (MHz)	5590						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):23 Humidity(%):62									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4472.00	45.58	68.20	-22.62	46.14	-0.56	Peak	100	142
2	5460.00	45.15	54.00	-8.85	44.65	0.50	Average	116	223
3	5460.00	57.18	74.00	-16.82	56.68	0.50	Peak	116	223
4	5470.00	57.41	68.20	-10.79	56.89	0.52	Peak	116	223
5 *	5590.00	99.98			99.45	0.53	Average	116	223
6 *	5590.00	111.74			111.21	0.53	Peak	116	223
7	5725.00	57.53	68.20	-10.67	56.58	0.95	Peak	116	223
8	11180.00	40.55	54.00	-13.45	32.33	8.22	Average	100	30
9	11180.00	53.35	74.00	-20.65	45.13	8.22	Peak	100	30
10	16770.00	56.63	68.20	-11.57	50.28	6.35	Peak	100	80
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency									



Modulation	be EHT40	Test Freq. (MHz)	5590						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):23 Humidity(%):62									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4472.00	45.51	68.20	-22.69	46.07	-0.56	Peak	100	32
2	5460.00	45.39	54.00	-8.61	44.89	0.50	Average	125	8
3	5460.00	57.39	74.00	-16.61	56.89	0.50	Peak	125	8
4	5470.00	57.54	68.20	-10.66	57.02	0.52	Peak	125	8
5 *	5590.00	101.21			100.68	0.53	Average	125	8
6 *	5590.00	112.85			112.32	0.53	Peak	125	8
7	5725.00	57.83	68.20	-10.37	56.88	0.95	Peak	125	8
8	11180.00	40.64	54.00	-13.36	32.42	8.22	Average	100	50
9	11180.00	53.48	74.00	-20.52	45.26	8.22	Peak	100	50
10	16770.00	56.90	68.20	-11.30	50.55	6.35	Peak	100	40

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	5670
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):23 Humidity(%):62			
Level (dBuV/m) </			



Modulation	be EHT40	Test Freq. (MHz)	5670
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):23 Humidity(%):62			
Level (dBuV/m) </			




Modulation	be EHT40	Test Freq. (MHz)	5710
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):23 Humidity(%):62			
Level (dBUV/m)			




Modulation	be EHT40	Test Freq. (MHz)	5710
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):23 Humidity(%):62			
Level (dBuV/m) </			

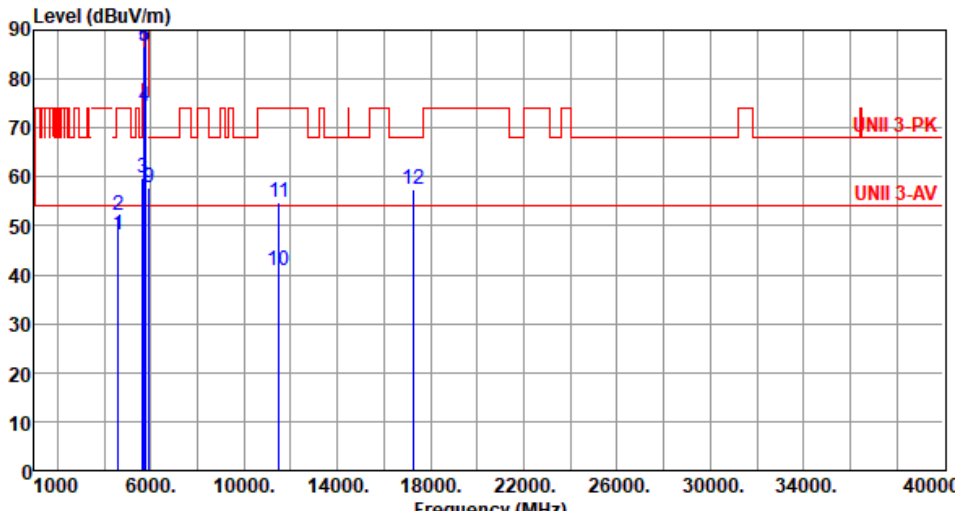

Modulation	be EHT40	Test Freq. (MHz)	5755						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):23 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4604.00	48.26	54.00	-5.74	48.51	-0.25	Average	100	129
2	4604.00	52.09	74.00	-21.91	52.34	-0.25	Peak	100	129
3	5650.00	59.87	68.20	-8.33	59.21	0.66	Peak	215	326
4	5700.00	74.33	105.20	-30.87	73.43	0.90	Peak	215	326
5	5720.00	86.80	110.80	-24.00	85.86	0.94	Peak	215	326
6	5725.00	86.64	122.20	-35.56	85.69	0.95	Peak	215	326
7 *	5755.00	106.12			105.10	1.02	Average	215	326
8 *	5755.00	118.47			117.45	1.02	Peak	215	326
9	5925.00	57.89	68.20	-10.31	56.45	1.44	Peak	215	326
10	11510.00	40.96	54.00	-13.04	32.50	8.46	Average	100	20
11	11510.00	54.63	74.00	-19.37	46.17	8.46	Peak	100	20
12	17265.00	57.57	68.20	-10.63	52.11	5.46	Peak	100	30

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

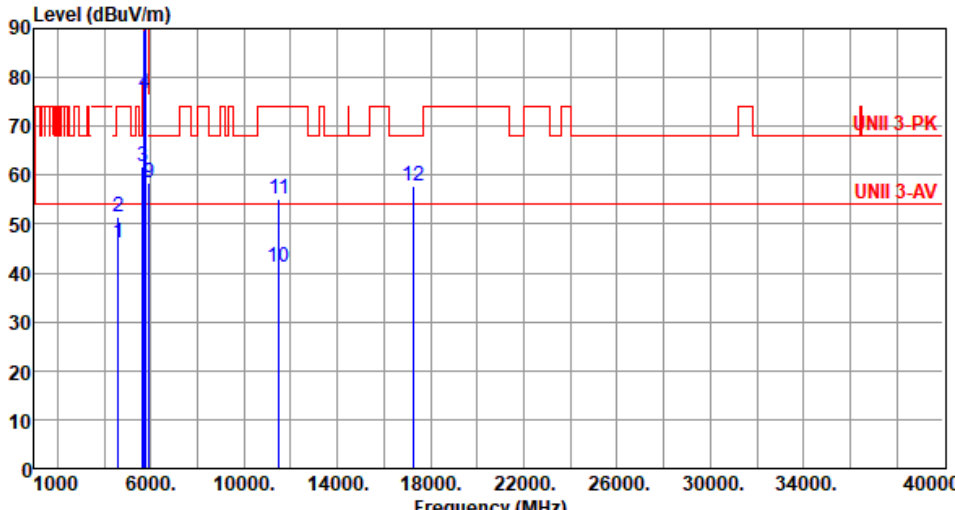

Modulation	be EHT40	Test Freq. (MHz)	5755																																																																																																																																			
Polarization	Vertical																																																																																																																																					
Test By :Roger Lu Temperature(°C):23 Humidity(%):62																																																																																																																																						
																																																																																																																																						
	<table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>4604.00</td><td>46.30</td><td>54.00</td><td>-7.70</td><td>46.55</td><td>-0.25</td><td>Average</td><td>141</td><td>12</td></tr><tr><td>2</td><td>4604.00</td><td>51.43</td><td>74.00</td><td>-22.57</td><td>51.68</td><td>-0.25</td><td>Peak</td><td>141</td><td>12</td></tr><tr><td>3</td><td>5650.00</td><td>61.75</td><td>68.20</td><td>-6.45</td><td>61.09</td><td>0.66</td><td>Peak</td><td>195</td><td>336</td></tr><tr><td>4</td><td>5700.00</td><td>76.56</td><td>105.20</td><td>-28.64</td><td>75.66</td><td>0.90</td><td>Peak</td><td>195</td><td>336</td></tr><tr><td>5</td><td>5720.00</td><td>88.90</td><td>110.80</td><td>-21.90</td><td>87.96</td><td>0.94</td><td>Peak</td><td>195</td><td>336</td></tr><tr><td>6</td><td>5725.00</td><td>89.54</td><td>122.20</td><td>-32.66</td><td>88.59</td><td>0.95</td><td>Peak</td><td>195</td><td>336</td></tr><tr><td>7 *</td><td>5755.00</td><td>108.23</td><td></td><td></td><td>107.21</td><td>1.02</td><td>Average</td><td>195</td><td>336</td></tr><tr><td>8 *</td><td>5755.00</td><td>120.64</td><td></td><td></td><td>119.62</td><td>1.02</td><td>Peak</td><td>195</td><td>336</td></tr><tr><td>9</td><td>5925.00</td><td>58.32</td><td>68.20</td><td>-9.88</td><td>56.88</td><td>1.44</td><td>Peak</td><td>195</td><td>336</td></tr><tr><td>10</td><td>11510.00</td><td>41.10</td><td>54.00</td><td>-12.90</td><td>32.64</td><td>8.46</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>11</td><td>11510.00</td><td>55.00</td><td>74.00</td><td>-19.00</td><td>46.54</td><td>8.46</td><td>Peak</td><td>100</td><td>30</td></tr><tr><td>12</td><td>17265.00</td><td>57.67</td><td>68.20</td><td>-10.53</td><td>52.21</td><td>5.46</td><td>Peak</td><td>100</td><td>20</td></tr></table>		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4604.00	46.30	54.00	-7.70	46.55	-0.25	Average	141	12	2	4604.00	51.43	74.00	-22.57	51.68	-0.25	Peak	141	12	3	5650.00	61.75	68.20	-6.45	61.09	0.66	Peak	195	336	4	5700.00	76.56	105.20	-28.64	75.66	0.90	Peak	195	336	5	5720.00	88.90	110.80	-21.90	87.96	0.94	Peak	195	336	6	5725.00	89.54	122.20	-32.66	88.59	0.95	Peak	195	336	7 *	5755.00	108.23			107.21	1.02	Average	195	336	8 *	5755.00	120.64			119.62	1.02	Peak	195	336	9	5925.00	58.32	68.20	-9.88	56.88	1.44	Peak	195	336	10	11510.00	41.10	54.00	-12.90	32.64	8.46	Average	100	30	11	11510.00	55.00	74.00	-19.00	46.54	8.46	Peak	100	30	12	17265.00	57.67	68.20	-10.53	52.21	5.46	Peak	100	20			
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																													
1	4604.00	46.30	54.00	-7.70	46.55	-0.25	Average	141	12																																																																																																																													
2	4604.00	51.43	74.00	-22.57	51.68	-0.25	Peak	141	12																																																																																																																													
3	5650.00	61.75	68.20	-6.45	61.09	0.66	Peak	195	336																																																																																																																													
4	5700.00	76.56	105.20	-28.64	75.66	0.90	Peak	195	336																																																																																																																													
5	5720.00	88.90	110.80	-21.90	87.96	0.94	Peak	195	336																																																																																																																													
6	5725.00	89.54	122.20	-32.66	88.59	0.95	Peak	195	336																																																																																																																													
7 *	5755.00	108.23			107.21	1.02	Average	195	336																																																																																																																													
8 *	5755.00	120.64			119.62	1.02	Peak	195	336																																																																																																																													
9	5925.00	58.32	68.20	-9.88	56.88	1.44	Peak	195	336																																																																																																																													
10	11510.00	41.10	54.00	-12.90	32.64	8.46	Average	100	30																																																																																																																													
11	11510.00	55.00	74.00	-19.00	46.54	8.46	Peak	100	30																																																																																																																													
12	17265.00	57.67	68.20	-10.53	52.21	5.46	Peak	100	20																																																																																																																													
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																																						




Modulation	be EHT40	Test Freq. (MHz)	5795
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):23 Humidity(%):62			
Level (dBUV/m) </			




Modulation	be EHT40	Test Freq. (MHz)	5795
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):23 Humidity(%):62			
Level (dBuV/m)			

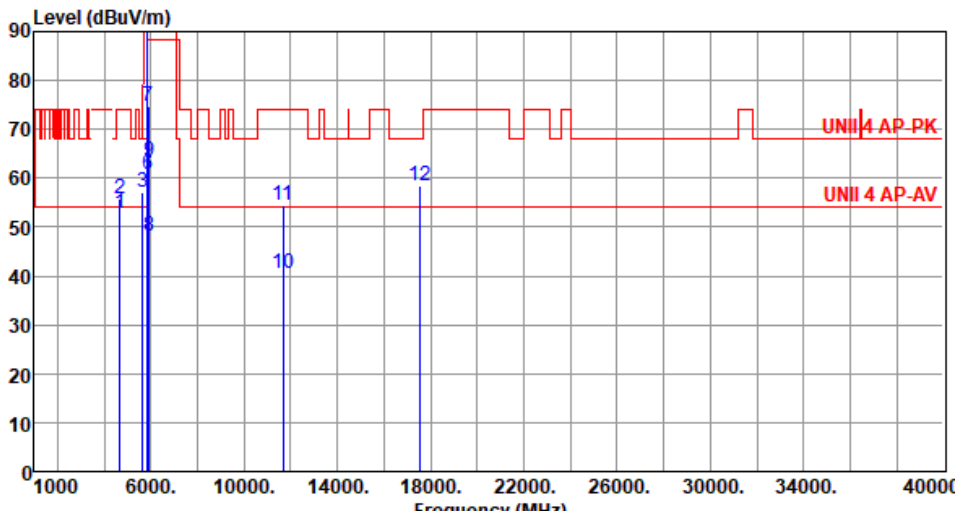

Modulation	be EHT40	Test Freq. (MHz)	5835						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):23 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4668.00	52.87	54.00	-1.13	52.89	-0.02	Average	100	127
2	4668.00	55.78	74.00	-18.22	55.80	-0.02	Peak	100	127
3	5650.00	57.24	68.20	-10.96	56.58	0.66	Peak	216	322
4 *	5835.00	107.36			106.29	1.07	Average	216	322
5 *	5835.00	119.39			118.32	1.07	Peak	216	322
6	5895.00	60.83	110.20	-49.37	59.45	1.38	Average	216	322
7	5895.00	74.66	130.20	-55.54	73.28	1.38	Peak	216	322
8	5925.00	48.29	88.20	-39.91	46.85	1.44	Average	216	322
9	5925.00	63.33	108.20	-44.87	61.89	1.44	Peak	216	322
10	11670.00	40.38	54.00	-13.62	32.45	7.93	Average	100	50
11	11670.00	54.31	74.00	-19.69	46.38	7.93	Peak	100	50
12	17505.00	58.61	68.20	-9.59	52.12	6.49	Peak	100	70


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

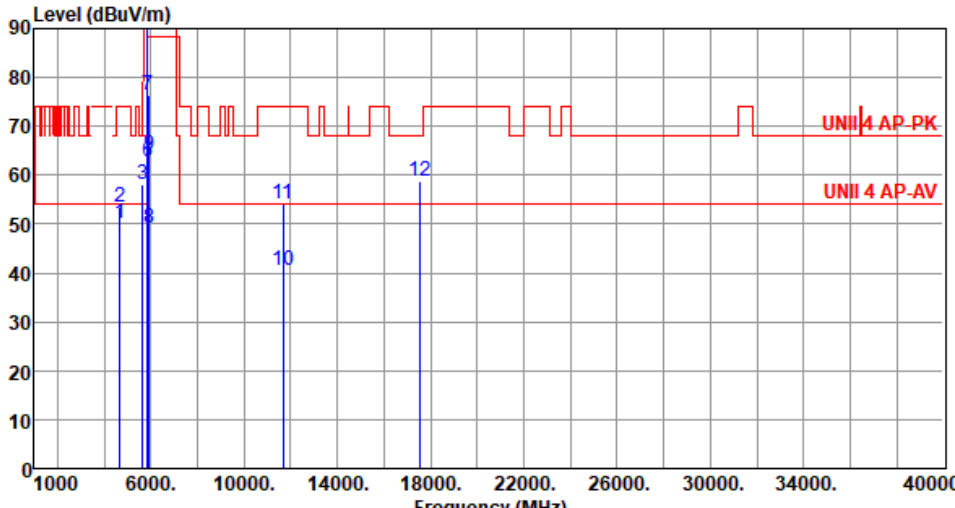

Modulation	be EHT40	Test Freq. (MHz)	5835						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):23 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4668.00	50.20	54.00	-3.80	50.22	-0.02	Average	161	5
2	4668.00	53.31	74.00	-20.69	53.33	-0.02	Peak	161	5
3	5650.00	58.22	68.20	-9.98	57.56	0.66	Peak	196	332
4 *	5835.00	109.53			108.46	1.07	Average	196	332
5 *	5835.00	121.09			120.02	1.07	Peak	196	332
6	5895.00	62.60	110.20	-47.60	61.22	1.38	Average	196	332
7	5895.00	76.51	130.20	-53.69	75.13	1.38	Peak	196	332
8	5925.00	49.17	88.20	-39.03	47.73	1.44	Average	196	332
9	5925.00	64.15	108.20	-44.05	62.71	1.44	Peak	196	332
10	11670.00	40.55	54.00	-13.45	32.62	7.93	Average	100	40
11	11670.00	54.22	74.00	-19.78	46.29	7.93	Peak	100	40
12	17505.00	58.76	68.20	-9.44	52.27	6.49	Peak	100	100


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

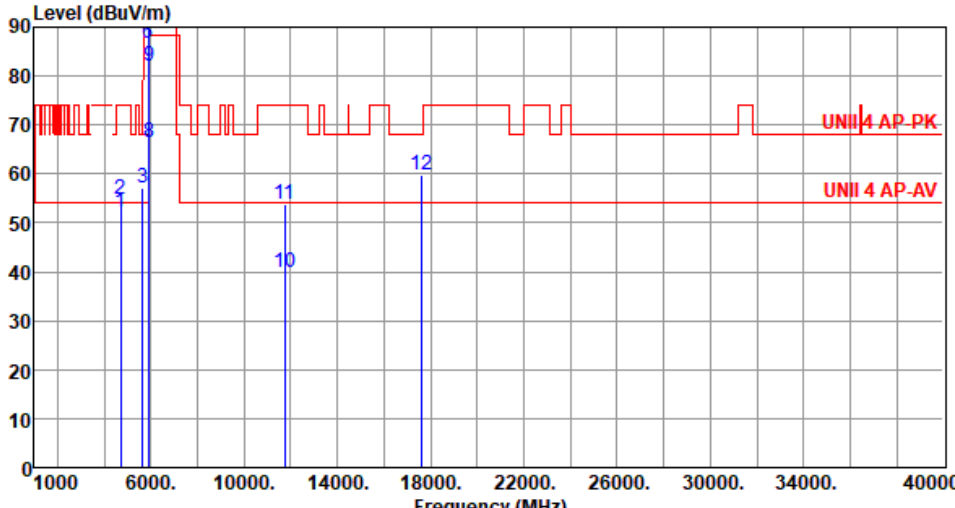

Modulation	be EHT40	Test Freq. (MHz)	5875						
Polarization	Horizontal								
Test By :Roger Lu Temperature(°C):23 Humidity(%):62									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4700.00	52.05	54.00	-1.95	52.00	0.05	Average	100	157
2	4700.00	54.93	74.00	-19.07	54.88	0.05	Peak	100	157
3	5650.00	57.11	68.20	-11.09	56.45	0.66	Peak	208	319
4 *	5875.00	107.28			106.03	1.25	Average	208	319
5 *	5875.00	119.47			118.22	1.25	Peak	208	319
6	5895.00	86.63	110.20	-23.57	85.25	1.38	Average	208	319
7	5895.00	103.53	130.20	-26.67	102.15	1.38	Peak	208	319
8	5925.00	66.59	88.20	-21.61	65.15	1.44	Average	208	319
9	5925.00	82.03	108.20	-26.17	80.59	1.44	Peak	208	319
10	11750.00	39.95	54.00	-14.05	32.48	7.47	Average	100	30
11	11750.00	53.75	74.00	-20.25	46.28	7.47	Peak	100	30
12	17625.00	59.68	68.20	-8.52	52.57	7.11	Peak	100	90

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

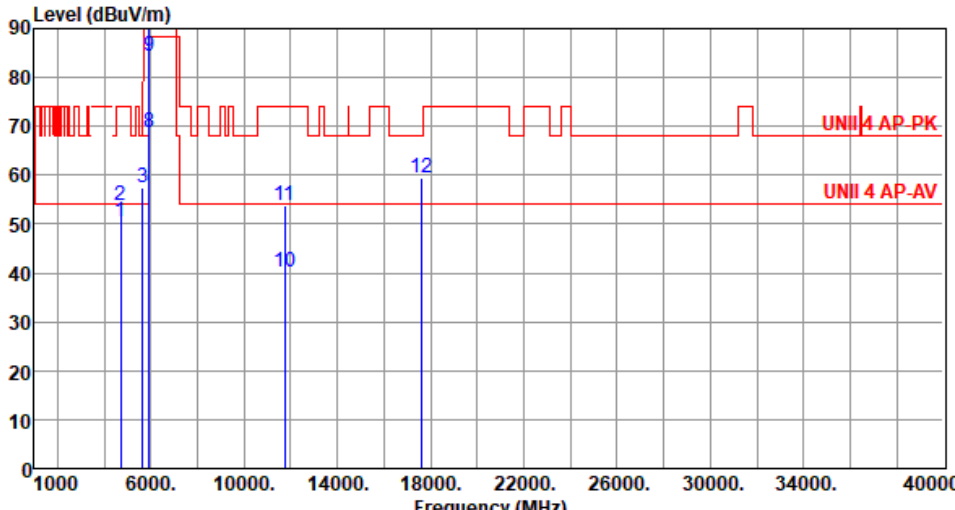

Modulation	be EHT40	Test Freq. (MHz)	5875						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):23 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4700.00	50.46	54.00	-3.54	50.41	0.05	Average	161	35
2	4700.00	53.73	74.00	-20.27	53.68	0.05	Peak	161	35
3	5650.00	57.54	68.20	-10.66	56.88	0.66	Peak	193	334
4 *	5875.00	109.37			108.12	1.25	Average	193	334
5 *	5875.00	121.60			120.35	1.25	Peak	193	334
6	5895.00	89.12	110.20	-21.08	87.74	1.38	Average	193	334
7	5895.00	106.76	130.20	-23.44	105.38	1.38	Peak	193	334
8	5925.00	68.71	88.20	-19.49	67.27	1.44	Average	193	334
9	5925.00	84.24	108.20	-23.96	82.80	1.44	Peak	193	334
10	11750.00	40.02	54.00	-13.98	32.55	7.47	Average	100	20
11	11750.00	53.85	74.00	-20.15	46.38	7.47	Peak	100	20
12	17625.00	59.49	68.20	-8.71	52.38	7.11	Peak	100	80

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency


Unwanted Emissions (Above 1GHz) for be EHT80

Modulation	be EHT80	Test Freq. (MHz)	5210																																																																																																																								
Polarization	Horizontal																																																																																																																										
Test By :Sean Yu Temperature(°C):24 Humidity(%):62																																																																																																																											
Level (dBUV/m) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBUV/m</th><th>Limit dBUV/m</th><th>Margin dB</th><th>SA reading dBUV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>4168.00</td><td>29.64</td><td>54.00</td><td>-24.36</td><td>30.79</td><td>-1.15</td><td>Average</td><td>100</td><td>22</td></tr><tr><td>2</td><td>4168.00</td><td>42.91</td><td>74.00</td><td>-31.09</td><td>44.06</td><td>-1.15</td><td>Peak</td><td>100</td><td>22</td></tr><tr><td>3</td><td>5150.00</td><td>51.78</td><td>54.00</td><td>-2.22</td><td>51.13</td><td>0.65</td><td>Average</td><td>123</td><td>119</td></tr><tr><td>4</td><td>5150.00</td><td>65.31</td><td>74.00</td><td>-8.69</td><td>64.66</td><td>0.65</td><td>Peak</td><td>123</td><td>119</td></tr><tr><td>5 *</td><td>5210.00</td><td>99.68</td><td></td><td></td><td>99.18</td><td>0.50</td><td>Average</td><td>123</td><td>119</td></tr><tr><td>6 *</td><td>5210.00</td><td>112.35</td><td></td><td></td><td>111.85</td><td>0.50</td><td>Peak</td><td>123</td><td>119</td></tr><tr><td>7</td><td>5350.00</td><td>43.90</td><td>54.00</td><td>-10.10</td><td>43.76</td><td>0.14</td><td>Average</td><td>123</td><td>119</td></tr><tr><td>8</td><td>5350.00</td><td>55.98</td><td>74.00</td><td>-18.02</td><td>55.84</td><td>0.14</td><td>Peak</td><td>123</td><td>119</td></tr><tr><td>9</td><td>10420.00</td><td>54.94</td><td>68.20</td><td>-13.26</td><td>46.44</td><td>8.50</td><td>Peak</td><td>100</td><td>10</td></tr><tr><td>10</td><td>15630.00</td><td>41.76</td><td>54.00</td><td>-12.24</td><td>37.10</td><td>4.66</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>11</td><td>15630.00</td><td>55.24</td><td>74.00</td><td>-18.76</td><td>50.58</td><td>4.66</td><td>Peak</td><td>100</td><td>50</td></tr></tbody></table>					Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4168.00	29.64	54.00	-24.36	30.79	-1.15	Average	100	22	2	4168.00	42.91	74.00	-31.09	44.06	-1.15	Peak	100	22	3	5150.00	51.78	54.00	-2.22	51.13	0.65	Average	123	119	4	5150.00	65.31	74.00	-8.69	64.66	0.65	Peak	123	119	5 *	5210.00	99.68			99.18	0.50	Average	123	119	6 *	5210.00	112.35			111.85	0.50	Peak	123	119	7	5350.00	43.90	54.00	-10.10	43.76	0.14	Average	123	119	8	5350.00	55.98	74.00	-18.02	55.84	0.14	Peak	123	119	9	10420.00	54.94	68.20	-13.26	46.44	8.50	Peak	100	10	10	15630.00	41.76	54.00	-12.24	37.10	4.66	Average	100	50	11	15630.00	55.24	74.00	-18.76	50.58	4.66	Peak	100	50
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																		
1	4168.00	29.64	54.00	-24.36	30.79	-1.15	Average	100	22																																																																																																																		
2	4168.00	42.91	74.00	-31.09	44.06	-1.15	Peak	100	22																																																																																																																		
3	5150.00	51.78	54.00	-2.22	51.13	0.65	Average	123	119																																																																																																																		
4	5150.00	65.31	74.00	-8.69	64.66	0.65	Peak	123	119																																																																																																																		
5 *	5210.00	99.68			99.18	0.50	Average	123	119																																																																																																																		
6 *	5210.00	112.35			111.85	0.50	Peak	123	119																																																																																																																		
7	5350.00	43.90	54.00	-10.10	43.76	0.14	Average	123	119																																																																																																																		
8	5350.00	55.98	74.00	-18.02	55.84	0.14	Peak	123	119																																																																																																																		
9	10420.00	54.94	68.20	-13.26	46.44	8.50	Peak	100	10																																																																																																																		
10	15630.00	41.76	54.00	-12.24	37.10	4.66	Average	100	50																																																																																																																		
11	15630.00	55.24	74.00	-18.76	50.58	4.66	Peak	100	50																																																																																																																		
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																																																											



Modulation	be EHT80	Test Freq. (MHz)	5210																																																																																																																								
Polarization	Vertical																																																																																																																										
Test By :Sean Yu Temperature(°C):24 Humidity(%):62																																																																																																																											
Level (dBuV/m) UNII 1~2-PK UNII 1~2-AV <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>4168.00</td><td>29.62</td><td>54.00</td><td>-24.38</td><td>30.77</td><td>-1.15</td><td>Average</td><td>100</td><td>25</td></tr><tr><td>2</td><td>4168.00</td><td>42.86</td><td>74.00</td><td>-31.14</td><td>44.01</td><td>-1.15</td><td>Peak</td><td>100</td><td>25</td></tr><tr><td>3</td><td>5150.00</td><td>53.54</td><td>54.00</td><td>-0.46</td><td>52.89</td><td>0.65</td><td>Average</td><td>134</td><td>8</td></tr><tr><td>4</td><td>5150.00</td><td>67.56</td><td>74.00</td><td>-6.44</td><td>66.91</td><td>0.65</td><td>Peak</td><td>134</td><td>8</td></tr><tr><td>5 *</td><td>5210.00</td><td>101.64</td><td></td><td></td><td>101.14</td><td>0.50</td><td>Average</td><td>130</td><td>8</td></tr><tr><td>6 *</td><td>5210.00</td><td>114.35</td><td></td><td></td><td>113.85</td><td>0.50</td><td>Peak</td><td>130</td><td>8</td></tr><tr><td>7</td><td>5350.00</td><td>44.23</td><td>54.00</td><td>-9.77</td><td>44.09</td><td>0.14</td><td>Average</td><td>130</td><td>8</td></tr><tr><td>8</td><td>5350.00</td><td>56.80</td><td>74.00</td><td>-17.20</td><td>56.66</td><td>0.14</td><td>Peak</td><td>130</td><td>8</td></tr><tr><td>9</td><td>10420.00</td><td>54.64</td><td>68.20</td><td>-13.56</td><td>46.14</td><td>8.50</td><td>Peak</td><td>100</td><td>80</td></tr><tr><td>10</td><td>15630.00</td><td>41.81</td><td>54.00</td><td>-12.19</td><td>37.15</td><td>4.66</td><td>Average</td><td>100</td><td>20</td></tr><tr><td>11</td><td>15630.00</td><td>54.94</td><td>74.00</td><td>-19.06</td><td>50.28</td><td>4.66</td><td>Peak</td><td>100</td><td>20</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4168.00	29.62	54.00	-24.38	30.77	-1.15	Average	100	25	2	4168.00	42.86	74.00	-31.14	44.01	-1.15	Peak	100	25	3	5150.00	53.54	54.00	-0.46	52.89	0.65	Average	134	8	4	5150.00	67.56	74.00	-6.44	66.91	0.65	Peak	134	8	5 *	5210.00	101.64			101.14	0.50	Average	130	8	6 *	5210.00	114.35			113.85	0.50	Peak	130	8	7	5350.00	44.23	54.00	-9.77	44.09	0.14	Average	130	8	8	5350.00	56.80	74.00	-17.20	56.66	0.14	Peak	130	8	9	10420.00	54.64	68.20	-13.56	46.14	8.50	Peak	100	80	10	15630.00	41.81	54.00	-12.19	37.15	4.66	Average	100	20	11	15630.00	54.94	74.00	-19.06	50.28	4.66	Peak	100	20
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																		
1	4168.00	29.62	54.00	-24.38	30.77	-1.15	Average	100	25																																																																																																																		
2	4168.00	42.86	74.00	-31.14	44.01	-1.15	Peak	100	25																																																																																																																		
3	5150.00	53.54	54.00	-0.46	52.89	0.65	Average	134	8																																																																																																																		
4	5150.00	67.56	74.00	-6.44	66.91	0.65	Peak	134	8																																																																																																																		
5 *	5210.00	101.64			101.14	0.50	Average	130	8																																																																																																																		
6 *	5210.00	114.35			113.85	0.50	Peak	130	8																																																																																																																		
7	5350.00	44.23	54.00	-9.77	44.09	0.14	Average	130	8																																																																																																																		
8	5350.00	56.80	74.00	-17.20	56.66	0.14	Peak	130	8																																																																																																																		
9	10420.00	54.64	68.20	-13.56	46.14	8.50	Peak	100	80																																																																																																																		
10	15630.00	41.81	54.00	-12.19	37.15	4.66	Average	100	20																																																																																																																		
11	15630.00	54.94	74.00	-19.06	50.28	4.66	Peak	100	20																																																																																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																											

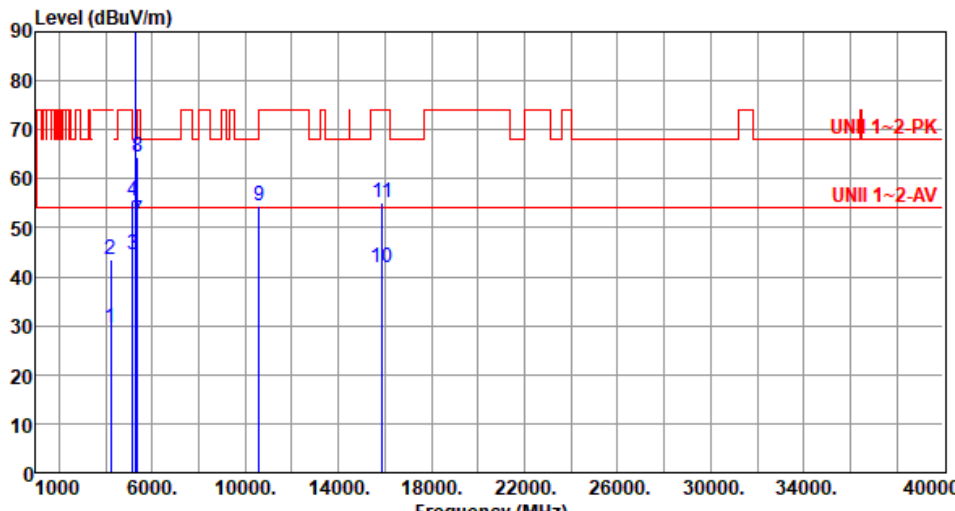

Modulation	be EHT80	Test Freq. (MHz)	5290						
Polarization	Horizontal								
Test By :Sean Yu Temperature(°C):24 Humidity(%):62									
									
	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4232.00	29.42	54.00	-24.58	30.65	-1.23	Average	100	39
2	4232.00	43.51	74.00	-30.49	44.74	-1.23	Peak	100	39
3	5150.00	44.42	54.00	-9.58	43.77	0.65	Average	118	129
4	5150.00	55.59	74.00	-18.41	54.94	0.65	Peak	118	129
5 *	5290.00	97.79			97.57	0.22	Average	118	129
6 *	5290.00	111.09			110.87	0.22	Peak	118	129
7	5350.00	51.34	54.00	-2.66	51.20	0.14	Average	118	129
8	5350.00	64.55	74.00	-9.45	64.41	0.14	Peak	118	129
9	10580.00	54.58	68.20	-13.62	46.29	8.29	Peak	100	50
10	15870.00	41.83	54.00	-12.17	37.22	4.61	Average	100	10
11	15870.00	55.09	74.00	-18.91	50.48	4.61	Peak	100	10

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	5290																																																																																																																																												
Polarization	Vertical																																																																																																																																														
Test By :Sean Yu Temperature(°C):24 Humidity(%):62																																																																																																																																															
Level (dBuV/m) <table><tr><th></th><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th></th><th>MHz</th><th>level</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th></th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4232.00</td><td>29.28</td><td>54.00</td><td>-24.72</td><td>30.51</td><td>-1.23</td><td>Average</td><td>100</td><td>33</td></tr><tr><td>2</td><td>4232.00</td><td>43.42</td><td>74.00</td><td>-30.58</td><td>44.65</td><td>-1.23</td><td>Peak</td><td>100</td><td>33</td></tr><tr><td>3</td><td>5150.00</td><td>44.63</td><td>54.00</td><td>-9.37</td><td>43.98</td><td>0.65</td><td>Average</td><td>125</td><td>12</td></tr><tr><td>4</td><td>5150.00</td><td>56.08</td><td>74.00</td><td>-17.92</td><td>55.43</td><td>0.65</td><td>Peak</td><td>125</td><td>12</td></tr><tr><td>5 *</td><td>5290.00</td><td>99.49</td><td></td><td></td><td>99.27</td><td>0.22</td><td>Average</td><td>125</td><td>12</td></tr><tr><td>6 *</td><td>5290.00</td><td>112.17</td><td>-----</td><td>-----</td><td>111.95</td><td>0.22</td><td>Peak</td><td>125</td><td>12</td></tr><tr><td>7</td><td>5350.00</td><td>53.59</td><td>54.00</td><td>-0.41</td><td>53.45</td><td>0.14</td><td>Average</td><td>125</td><td>12</td></tr><tr><td>8</td><td>5350.00</td><td>66.45</td><td>74.00</td><td>-7.55</td><td>66.31</td><td>0.14</td><td>Peak</td><td>125</td><td>12</td></tr><tr><td>9</td><td>10580.00</td><td>54.64</td><td>68.20</td><td>-13.56</td><td>46.35</td><td>8.29</td><td>Peak</td><td>100</td><td>100</td></tr><tr><td>10</td><td>15870.00</td><td>41.74</td><td>54.00</td><td>-12.26</td><td>37.13</td><td>4.61</td><td>Average</td><td>100</td><td>30</td></tr><tr><td>11</td><td>15870.00</td><td>55.17</td><td>74.00</td><td>-18.83</td><td>50.56</td><td>4.61</td><td>Peak</td><td>100</td><td>30</td></tr></table>					Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn		MHz	level	dBuV/m	dB	reading	dB/m		High	Table									cm	deg	1	4232.00	29.28	54.00	-24.72	30.51	-1.23	Average	100	33	2	4232.00	43.42	74.00	-30.58	44.65	-1.23	Peak	100	33	3	5150.00	44.63	54.00	-9.37	43.98	0.65	Average	125	12	4	5150.00	56.08	74.00	-17.92	55.43	0.65	Peak	125	12	5 *	5290.00	99.49			99.27	0.22	Average	125	12	6 *	5290.00	112.17	-----	-----	111.95	0.22	Peak	125	12	7	5350.00	53.59	54.00	-0.41	53.45	0.14	Average	125	12	8	5350.00	66.45	74.00	-7.55	66.31	0.14	Peak	125	12	9	10580.00	54.64	68.20	-13.56	46.35	8.29	Peak	100	100	10	15870.00	41.74	54.00	-12.26	37.13	4.61	Average	100	30	11	15870.00	55.17	74.00	-18.83	50.56	4.61	Peak	100	30
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																																						
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table																																																																																																																																						
								cm	deg																																																																																																																																						
1	4232.00	29.28	54.00	-24.72	30.51	-1.23	Average	100	33																																																																																																																																						
2	4232.00	43.42	74.00	-30.58	44.65	-1.23	Peak	100	33																																																																																																																																						
3	5150.00	44.63	54.00	-9.37	43.98	0.65	Average	125	12																																																																																																																																						
4	5150.00	56.08	74.00	-17.92	55.43	0.65	Peak	125	12																																																																																																																																						
5 *	5290.00	99.49			99.27	0.22	Average	125	12																																																																																																																																						
6 *	5290.00	112.17	-----	-----	111.95	0.22	Peak	125	12																																																																																																																																						
7	5350.00	53.59	54.00	-0.41	53.45	0.14	Average	125	12																																																																																																																																						
8	5350.00	66.45	74.00	-7.55	66.31	0.14	Peak	125	12																																																																																																																																						
9	10580.00	54.64	68.20	-13.56	46.35	8.29	Peak	100	100																																																																																																																																						
10	15870.00	41.74	54.00	-12.26	37.13	4.61	Average	100	30																																																																																																																																						
11	15870.00	55.17	74.00	-18.83	50.56	4.61	Peak	100	30																																																																																																																																						
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																																															



Modulation	be EHT80	Test Freq. (MHz)	5530
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):23 Humidity(%):62			
Level (dBuV/m) <			



Modulation	be EHT80	Test Freq. (MHz)	5530
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):23 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT80	Test Freq. (MHz)	5610
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):23 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT80	Test Freq. (MHz)	5610						
Polarization	Vertical								
Test By :Roger Lu Temperature(°C):23 Humidity(%):62									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4488.00	46.29	68.20	-21.91	46.80	-0.51	Peak	100	19
2	5460.00	45.35	54.00	-8.65	44.85	0.50	Average	142	2
3	5460.00	56.62	74.00	-17.38	56.12	0.50	Peak	142	2
4	5470.00	58.11	68.20	-10.09	57.59	0.52	Peak	142	349
5 *	5610.00	99.45			98.88	0.57	Average	142	345
6 *	5610.00	111.95			111.38	0.57	Peak	142	345
7	5725.00	58.20	68.20	-10.00	57.25	0.95	Peak	142	349
8	11220.00	40.49	54.00	-13.51	32.35	8.14	Average	100	60
9	11220.00	53.59	74.00	-20.41	45.45	8.14	Peak	100	60
10	16830.00	56.83	68.20	-11.37	50.44	6.39	Peak	100	90

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).
Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	5690
Polarization	Horizontal		
Test By :Roger Lu Temperature(°C):23 Humidity(%):62			
Level (dBuV/m)			




Modulation	be EHT80	Test Freq. (MHz)	5690
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):23 Humidity(%):62			
Level (dBuV/m)			



Modulation	be EHT80	Test Freq. (MHz)	5775
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):24 Humidity(%):62			
Level (dBUV/m)			

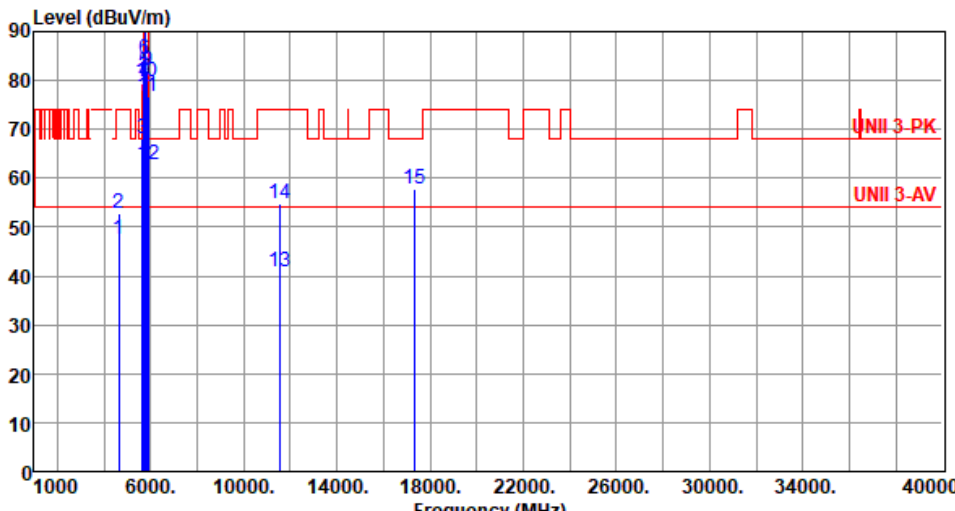

Modulation	be EHT80	Test Freq. (MHz)	5775						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):24 Humidity(%):62									
									
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
								cm	deg
1	4620.00	47.42	54.00	-6.58	47.60	-0.18	Average	168	13
2	4620.00	52.66	74.00	-21.34	52.84	-0.18	Peak	168	13
3	5650.00	68.03	68.20	-0.17	67.37	0.66	Peak	149	320
4	5700.00	79.75	105.20	-25.45	78.85	0.90	Peak	149	320
5	5720.00	81.84	110.80	-28.96	80.90	0.94	Peak	149	320
6	5725.00	84.22	122.20	-37.98	83.27	0.95	Peak	149	320
7 *	5775.00	102.76			101.73	1.03	Average	149	320
8 *	5775.00	115.94			114.91	1.03	Peak	149	320
9	5850.00	82.05	122.20	-40.15	80.97	1.08	Peak	149	320
10	5855.00	79.66	110.80	-31.14	78.54	1.12	Peak	149	320
11	5875.00	76.65	105.20	-28.55	75.40	1.25	Peak	149	320
12	5925.00	62.72	68.20	-5.48	61.28	1.44	Peak	149	320
13	11550.00	40.83	54.00	-13.17	32.35	8.48	Average	100	40
14	11550.00	54.76	74.00	-19.24	46.28	8.48	Peak	100	40
15	17325.00	57.89	68.20	-10.31	52.22	5.67	Peak	100	50

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency




Modulation	be EHT80	Test Freq. (MHz)	5855																																																																																																																																		
Polarization	Horizontal																																																																																																																																				
Test By :Roger Lu Temperature(°C):23 Humidity(%):62																																																																																																																																					
Level (dBuV/m) UNII 4 AP-PK UNII 4 AP-AV Frequency (MHz) <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>4684.00</td><td>52.74</td><td>54.00</td><td>-1.26</td><td>52.72</td><td>0.02</td><td>Average</td><td>136</td><td>124</td></tr><tr><td>2</td><td>4684.00</td><td>55.39</td><td>74.00</td><td>-18.61</td><td>55.37</td><td>0.02</td><td>Peak</td><td>136</td><td>124</td></tr><tr><td>3</td><td>5650.00</td><td>58.80</td><td>68.20</td><td>-9.40</td><td>58.14</td><td>0.66</td><td>Peak</td><td>215</td><td>326</td></tr><tr><td>4 *</td><td>5855.00</td><td>103.66</td><td></td><td></td><td>102.54</td><td>1.12</td><td>Average</td><td>215</td><td>326</td></tr><tr><td>5 *</td><td>5855.00</td><td>114.78</td><td></td><td></td><td>113.66</td><td>1.12</td><td>Peak</td><td>215</td><td>326</td></tr><tr><td>6</td><td>5895.00</td><td>82.03</td><td>110.20</td><td>-28.17</td><td>80.65</td><td>1.38</td><td>Average</td><td>215</td><td>326</td></tr><tr><td>7</td><td>5895.00</td><td>101.63</td><td>130.20</td><td>-28.57</td><td>100.25</td><td>1.38</td><td>Peak</td><td>215</td><td>326</td></tr><tr><td>8</td><td>5925.00</td><td>68.93</td><td>88.20</td><td>-19.27</td><td>67.49</td><td>1.44</td><td>Average</td><td>215</td><td>326</td></tr><tr><td>9</td><td>5925.00</td><td>81.12</td><td>108.20</td><td>-27.08</td><td>79.68</td><td>1.44</td><td>Peak</td><td>215</td><td>326</td></tr><tr><td>10</td><td>11710.00</td><td>40.01</td><td>54.00</td><td>-13.99</td><td>32.16</td><td>7.85</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>11</td><td>11710.00</td><td>53.93</td><td>74.00</td><td>-20.07</td><td>46.08</td><td>7.85</td><td>Peak</td><td>100</td><td>40</td></tr><tr><td>12</td><td>17565.00</td><td>58.94</td><td>68.20</td><td>-9.26</td><td>52.11</td><td>6.83</td><td>Peak</td><td>100</td><td>90</td></tr></tbody></table> Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4684.00	52.74	54.00	-1.26	52.72	0.02	Average	136	124	2	4684.00	55.39	74.00	-18.61	55.37	0.02	Peak	136	124	3	5650.00	58.80	68.20	-9.40	58.14	0.66	Peak	215	326	4 *	5855.00	103.66			102.54	1.12	Average	215	326	5 *	5855.00	114.78			113.66	1.12	Peak	215	326	6	5895.00	82.03	110.20	-28.17	80.65	1.38	Average	215	326	7	5895.00	101.63	130.20	-28.57	100.25	1.38	Peak	215	326	8	5925.00	68.93	88.20	-19.27	67.49	1.44	Average	215	326	9	5925.00	81.12	108.20	-27.08	79.68	1.44	Peak	215	326	10	11710.00	40.01	54.00	-13.99	32.16	7.85	Average	100	40	11	11710.00	53.93	74.00	-20.07	46.08	7.85	Peak	100	40	12	17565.00	58.94	68.20	-9.26	52.11	6.83	Peak	100	90
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																												
1	4684.00	52.74	54.00	-1.26	52.72	0.02	Average	136	124																																																																																																																												
2	4684.00	55.39	74.00	-18.61	55.37	0.02	Peak	136	124																																																																																																																												
3	5650.00	58.80	68.20	-9.40	58.14	0.66	Peak	215	326																																																																																																																												
4 *	5855.00	103.66			102.54	1.12	Average	215	326																																																																																																																												
5 *	5855.00	114.78			113.66	1.12	Peak	215	326																																																																																																																												
6	5895.00	82.03	110.20	-28.17	80.65	1.38	Average	215	326																																																																																																																												
7	5895.00	101.63	130.20	-28.57	100.25	1.38	Peak	215	326																																																																																																																												
8	5925.00	68.93	88.20	-19.27	67.49	1.44	Average	215	326																																																																																																																												
9	5925.00	81.12	108.20	-27.08	79.68	1.44	Peak	215	326																																																																																																																												
10	11710.00	40.01	54.00	-13.99	32.16	7.85	Average	100	40																																																																																																																												
11	11710.00	53.93	74.00	-20.07	46.08	7.85	Peak	100	40																																																																																																																												
12	17565.00	58.94	68.20	-9.26	52.11	6.83	Peak	100	90																																																																																																																												




Modulation	be EHT80	Test Freq. (MHz)	5855
Polarization	Vertical		
Test By :Roger Lu Temperature(°C):23 Humidity(%):62			
Level (dBUV/m) </			

Unwanted Emissions (Above 1GHz) for be EHT160

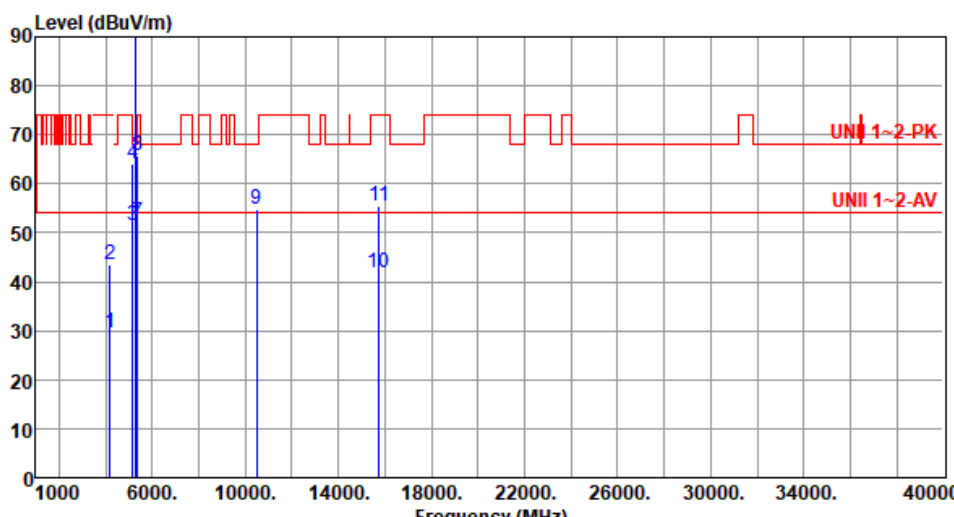Modulation	be EHT160	Test Freq. (MHz)	5250																																																																																																																								
Polarization	Horizontal																																																																																																																										
Test By :Sean Yu Temperature(°C):24 Humidity(%):62																																																																																																																											
Level (dBuV/m)  <table><thead><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr></thead><tbody><tr><td>1</td><td>4200.00</td><td>29.45</td><td>54.00</td><td>-24.55</td><td>30.66</td><td>-1.21</td><td>Average</td><td>100</td><td>61</td></tr><tr><td>2</td><td>4200.00</td><td>43.58</td><td>74.00</td><td>-30.42</td><td>44.79</td><td>-1.21</td><td>Peak</td><td>100</td><td>61</td></tr><tr><td>3</td><td>5150.00</td><td>51.38</td><td>54.00</td><td>-2.62</td><td>50.73</td><td>0.65</td><td>Average</td><td>106</td><td>127</td></tr><tr><td>4</td><td>5150.00</td><td>64.20</td><td>74.00</td><td>-9.80</td><td>63.55</td><td>0.65</td><td>Peak</td><td>106</td><td>127</td></tr><tr><td>5 *</td><td>5250.00</td><td>93.93</td><td></td><td></td><td>93.65</td><td>0.28</td><td>Average</td><td>127</td><td>127</td></tr><tr><td>6 *</td><td>5250.00</td><td>107.11</td><td></td><td></td><td>106.83</td><td>0.28</td><td>Peak</td><td>127</td><td>127</td></tr><tr><td>7</td><td>5350.00</td><td>52.29</td><td>54.00</td><td>-1.71</td><td>52.15</td><td>0.14</td><td>Average</td><td>119</td><td>127</td></tr><tr><td>8</td><td>5350.00</td><td>65.72</td><td>74.00</td><td>-8.28</td><td>65.58</td><td>0.14</td><td>Peak</td><td>119</td><td>127</td></tr><tr><td>9</td><td>10500.00</td><td>54.75</td><td>68.20</td><td>-13.45</td><td>46.29</td><td>8.46</td><td>Peak</td><td>100</td><td>30</td></tr><tr><td>10</td><td>15750.00</td><td>41.89</td><td>54.00</td><td>-12.11</td><td>36.89</td><td>5.00</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>11</td><td>15750.00</td><td>55.59</td><td>74.00</td><td>-18.41</td><td>50.59</td><td>5.00</td><td>Peak</td><td>100</td><td>40</td></tr></tbody></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4200.00	29.45	54.00	-24.55	30.66	-1.21	Average	100	61	2	4200.00	43.58	74.00	-30.42	44.79	-1.21	Peak	100	61	3	5150.00	51.38	54.00	-2.62	50.73	0.65	Average	106	127	4	5150.00	64.20	74.00	-9.80	63.55	0.65	Peak	106	127	5 *	5250.00	93.93			93.65	0.28	Average	127	127	6 *	5250.00	107.11			106.83	0.28	Peak	127	127	7	5350.00	52.29	54.00	-1.71	52.15	0.14	Average	119	127	8	5350.00	65.72	74.00	-8.28	65.58	0.14	Peak	119	127	9	10500.00	54.75	68.20	-13.45	46.29	8.46	Peak	100	30	10	15750.00	41.89	54.00	-12.11	36.89	5.00	Average	100	40	11	15750.00	55.59	74.00	-18.41	50.59	5.00	Peak	100	40
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																																		
1	4200.00	29.45	54.00	-24.55	30.66	-1.21	Average	100	61																																																																																																																		
2	4200.00	43.58	74.00	-30.42	44.79	-1.21	Peak	100	61																																																																																																																		
3	5150.00	51.38	54.00	-2.62	50.73	0.65	Average	106	127																																																																																																																		
4	5150.00	64.20	74.00	-9.80	63.55	0.65	Peak	106	127																																																																																																																		
5 *	5250.00	93.93			93.65	0.28	Average	127	127																																																																																																																		
6 *	5250.00	107.11			106.83	0.28	Peak	127	127																																																																																																																		
7	5350.00	52.29	54.00	-1.71	52.15	0.14	Average	119	127																																																																																																																		
8	5350.00	65.72	74.00	-8.28	65.58	0.14	Peak	119	127																																																																																																																		
9	10500.00	54.75	68.20	-13.45	46.29	8.46	Peak	100	30																																																																																																																		
10	15750.00	41.89	54.00	-12.11	36.89	5.00	Average	100	40																																																																																																																		
11	15750.00	55.59	74.00	-18.41	50.59	5.00	Peak	100	40																																																																																																																		
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: "*" is Peak / Average value of fundamental frequency																																																																																																																											

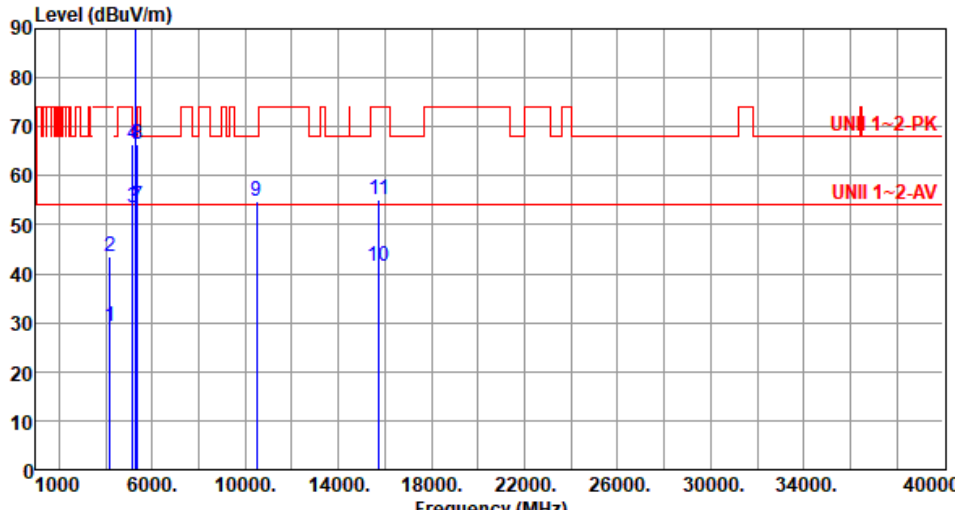

Modulation	be EHT160	Test Freq. (MHz)	5250						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):24 Humidity(%):62									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4200.00	29.39	54.00	-24.61	30.60	-1.21	Average	100	14
2	4200.00	43.45	74.00	-30.55	44.66	-1.21	Peak	100	14
3	5150.00	53.37	54.00	-0.63	52.72	0.65	Average	151	7
4	5150.00	66.39	74.00	-7.61	65.74	0.65	Peak	151	7
5 *	5250.00	96.62			96.34	0.28	Average	139	7
6 *	5250.00	109.04			108.76	0.28	Peak	139	7
7	5350.00	53.67	54.00	-0.33	53.53	0.14	Average	130	7
8	5350.00	66.27	74.00	-7.73	66.13	0.14	Peak	130	7
9	10500.00	54.65	68.20	-13.55	46.19	8.46	Peak	100	40
10	15750.00	41.63	54.00	-12.37	36.63	5.00	Average	100	20
11	15750.00	55.29	74.00	-18.71	50.29	5.00	Peak	100	20

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency




Modulation	be EHT160	Test Freq. (MHz)	5570
Polarization	Horizontal		
Test By :Sean Yu Temperature(°C):24 Humidity(%):62			
Level (dBUV/m)			




Modulation	be EHT160	Test Freq. (MHz)	5570
Polarization	Vertical		
Test By :Sean Yu Temperature(°C):24 Humidity(%):62			
Level (dBUV/m) </			

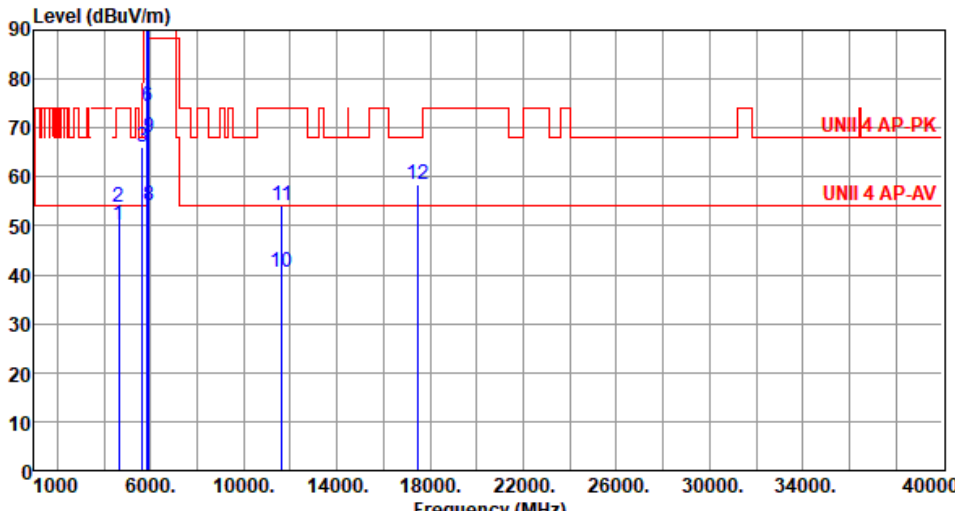


Modulation	be EHT160	Test Freq. (MHz)	5815						
Polarization	Horizontal								
Test By :Brad Wu Temperature(°C):24 Humidity(%):61									
Level (dBuV/m)  Frequency (MHz)									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4652.00	50.14	54.00	-3.86	50.20	-0.06	Average	100	150
2	4652.00	53.70	74.00	-20.30	53.76	-0.06	Peak	100	150
3	5650.00	66.18	68.20	-2.02	65.52	0.66	Peak	210	323
4 *	5815.00	95.23			94.18	1.05	Average	210	323
5 *	5815.00	108.76			107.71	1.05	Peak	210	323
6	5895.00	74.50	110.20	-35.70	73.12	1.38	Average	210	323
7	5895.00	95.49	130.20	-34.71	94.11	1.38	Peak	210	323
8	5925.00	53.99	88.20	-34.21	52.55	1.44	Average	210	323
9	5925.00	68.01	108.20	-40.19	66.57	1.44	Peak	210	323
10	11630.00	40.51	54.00	-13.49	32.52	7.99	Average	100	40
11	11630.00	54.14	74.00	-19.86	46.15	7.99	Peak	100	40
12	17445.00	58.43	68.20	-9.77	52.25	6.18	Peak	100	60

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
Note 3:"*" is Peak / Average value of fundamental frequency

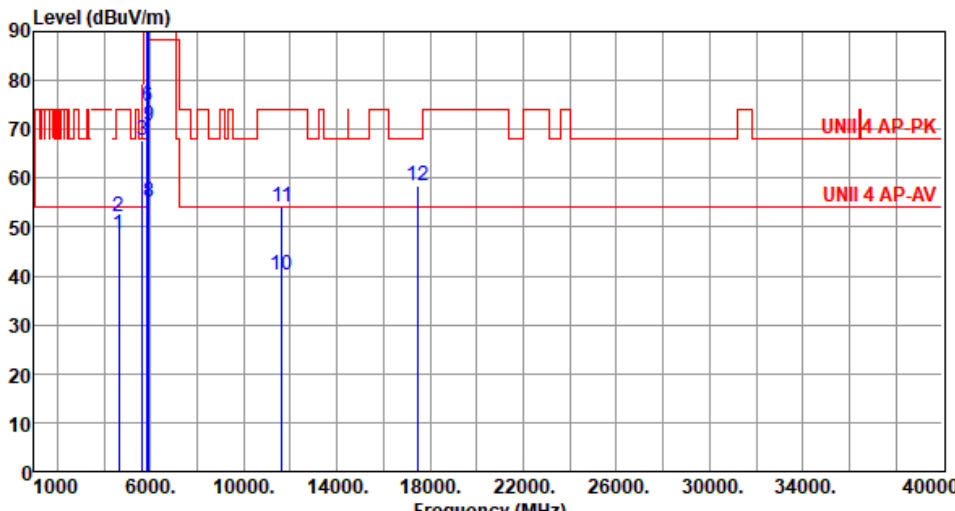

Modulation	be EHT160	Test Freq. (MHz)	5815																																																																																																																																																			
Polarization	Vertical																																																																																																																																																					
Test By :Brad Wu Temperature(°C):24 Humidity(%):61																																																																																																																																																						
Level (dBuV/m)  <table><tr><th>Freq.</th><th>Emission</th><th>Limit</th><th>Margin</th><th>SA</th><th>Factor</th><th>Remark</th><th>ANT</th><th>Turn</th></tr><tr><th>MHz</th><th>level</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>reading</th><th>dB/m</th><th>High</th><th>Table</th></tr><tr><th></th><th></th><th></th><th></th><th></th><th>dBuV</th><th></th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4652.00</td><td>48.62</td><td>54.00</td><td>-5.38</td><td>48.68</td><td>-0.06</td><td>Average</td><td>146</td><td>1</td></tr><tr><td>2</td><td>4652.00</td><td>52.20</td><td>74.00</td><td>-21.80</td><td>52.26</td><td>-0.06</td><td>Peak</td><td>146</td><td>1</td></tr><tr><td>3</td><td>5650.00</td><td>67.77</td><td>68.20</td><td>-0.43</td><td>67.11</td><td>0.66</td><td>Peak</td><td>135</td><td>319</td></tr><tr><td>4 *</td><td>5815.00</td><td>96.09</td><td></td><td></td><td>95.04</td><td>1.05</td><td>Average</td><td>130</td><td>319</td></tr><tr><td>5 *</td><td>5815.00</td><td>109.69</td><td></td><td></td><td>108.64</td><td>1.05</td><td>Peak</td><td>130</td><td>319</td></tr><tr><td>6</td><td>5895.00</td><td>74.79</td><td>110.20</td><td>-35.41</td><td>73.41</td><td>1.38</td><td>Average</td><td>130</td><td>319</td></tr><tr><td>7</td><td>5895.00</td><td>95.22</td><td>130.20</td><td>-34.98</td><td>93.84</td><td>1.38</td><td>Peak</td><td>130</td><td>319</td></tr><tr><td>8</td><td>5925.00</td><td>55.26</td><td>88.20</td><td>-32.94</td><td>53.82</td><td>1.44</td><td>Average</td><td>130</td><td>319</td></tr><tr><td>9</td><td>5925.00</td><td>70.64</td><td>108.20</td><td>-37.56</td><td>69.20</td><td>1.44</td><td>Peak</td><td>130</td><td>319</td></tr><tr><td>10</td><td>11630.00</td><td>40.30</td><td>54.00</td><td>-13.70</td><td>32.31</td><td>7.99</td><td>Average</td><td>100</td><td>50</td></tr><tr><td>11</td><td>11630.00</td><td>54.07</td><td>74.00</td><td>-19.93</td><td>46.08</td><td>7.99</td><td>Peak</td><td>100</td><td>50</td></tr><tr><td>12</td><td>17445.00</td><td>58.28</td><td>68.20</td><td>-9.92</td><td>52.10</td><td>6.18</td><td>Peak</td><td>100</td><td>80</td></tr></table>				Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	MHz	level	dBuV/m	dBuV/m	dB	reading	dB/m	High	Table						dBuV		cm	deg	1	4652.00	48.62	54.00	-5.38	48.68	-0.06	Average	146	1	2	4652.00	52.20	74.00	-21.80	52.26	-0.06	Peak	146	1	3	5650.00	67.77	68.20	-0.43	67.11	0.66	Peak	135	319	4 *	5815.00	96.09			95.04	1.05	Average	130	319	5 *	5815.00	109.69			108.64	1.05	Peak	130	319	6	5895.00	74.79	110.20	-35.41	73.41	1.38	Average	130	319	7	5895.00	95.22	130.20	-34.98	93.84	1.38	Peak	130	319	8	5925.00	55.26	88.20	-32.94	53.82	1.44	Average	130	319	9	5925.00	70.64	108.20	-37.56	69.20	1.44	Peak	130	319	10	11630.00	40.30	54.00	-13.70	32.31	7.99	Average	100	50	11	11630.00	54.07	74.00	-19.93	46.08	7.99	Peak	100	50	12	17445.00	58.28	68.20	-9.92	52.10	6.18	Peak	100	80
Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn																																																																																																																																														
MHz	level	dBuV/m	dBuV/m	dB	reading	dB/m	High	Table																																																																																																																																														
					dBuV		cm	deg																																																																																																																																														
1	4652.00	48.62	54.00	-5.38	48.68	-0.06	Average	146	1																																																																																																																																													
2	4652.00	52.20	74.00	-21.80	52.26	-0.06	Peak	146	1																																																																																																																																													
3	5650.00	67.77	68.20	-0.43	67.11	0.66	Peak	135	319																																																																																																																																													
4 *	5815.00	96.09			95.04	1.05	Average	130	319																																																																																																																																													
5 *	5815.00	109.69			108.64	1.05	Peak	130	319																																																																																																																																													
6	5895.00	74.79	110.20	-35.41	73.41	1.38	Average	130	319																																																																																																																																													
7	5895.00	95.22	130.20	-34.98	93.84	1.38	Peak	130	319																																																																																																																																													
8	5925.00	55.26	88.20	-32.94	53.82	1.44	Average	130	319																																																																																																																																													
9	5925.00	70.64	108.20	-37.56	69.20	1.44	Peak	130	319																																																																																																																																													
10	11630.00	40.30	54.00	-13.70	32.31	7.99	Average	100	50																																																																																																																																													
11	11630.00	54.07	74.00	-19.93	46.08	7.99	Peak	100	50																																																																																																																																													
12	17445.00	58.28	68.20	-9.92	52.10	6.18	Peak	100	80																																																																																																																																													
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																																																						


Unwanted Emissions (Above 1GHz) for be EHT240

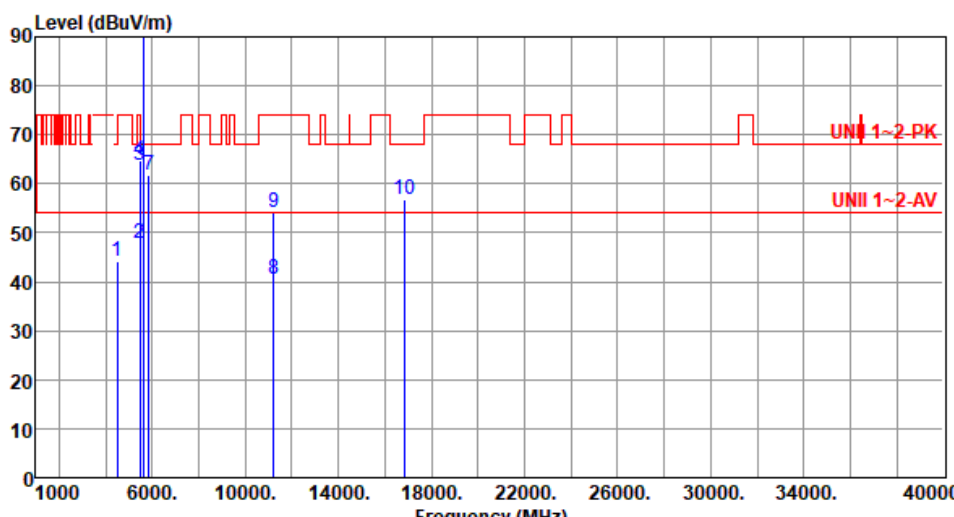Modulation	be EHT240	Test Freq. (MHz)	5610																																																																																																														
Polarization	Horizontal																																																																																																																
Test By :Sean Yu Temperature(°C):24 Humidity(%):62																																																																																																																	
Level (dBuV/m)  Frequency (MHz) <table><tr><th></th><th>Freq. MHz</th><th>Emission level dBuV/m</th><th>Limit dBuV/m</th><th>Margin dB</th><th>SA reading dBuV</th><th>Factor dB/m</th><th>Remark</th><th>ANT High cm</th><th>Turn Table deg</th></tr><tr><td>1</td><td>4488.00</td><td>44.25</td><td>68.20</td><td>-23.95</td><td>44.76</td><td>-0.51</td><td>Peak</td><td>100</td><td>139</td></tr><tr><td>2</td><td>5460.00</td><td>47.97</td><td>54.00</td><td>-6.03</td><td>47.47</td><td>0.50</td><td>Average</td><td>146</td><td>226</td></tr><tr><td>3</td><td>5460.00</td><td>63.68</td><td>74.00</td><td>-10.32</td><td>63.18</td><td>0.50</td><td>Peak</td><td>146</td><td>226</td></tr><tr><td>4</td><td>5470.00</td><td>64.85</td><td>68.20</td><td>-3.35</td><td>64.33</td><td>0.52</td><td>Peak</td><td>146</td><td>226</td></tr><tr><td>5 *</td><td>5610.00</td><td>90.72</td><td></td><td></td><td>90.15</td><td>0.57</td><td>Average</td><td>146</td><td>226</td></tr><tr><td>6 *</td><td>5610.00</td><td>102.84</td><td></td><td></td><td>102.27</td><td>0.57</td><td>Peak</td><td>146</td><td>226</td></tr><tr><td>7</td><td>5850.00</td><td>61.68</td><td>68.20</td><td>-6.52</td><td>60.60</td><td>1.08</td><td>Peak</td><td>146</td><td>226</td></tr><tr><td>8</td><td>11220.00</td><td>40.43</td><td>54.00</td><td>-13.57</td><td>32.29</td><td>8.14</td><td>Average</td><td>100</td><td>40</td></tr><tr><td>9</td><td>11220.00</td><td>54.27</td><td>74.00</td><td>-19.73</td><td>46.13</td><td>8.14</td><td>Peak</td><td>100</td><td>40</td></tr><tr><td>10</td><td>16830.00</td><td>56.83</td><td>68.20</td><td>-11.37</td><td>50.44</td><td>6.39</td><td>Peak</td><td>100</td><td>90</td></tr></table>					Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	1	4488.00	44.25	68.20	-23.95	44.76	-0.51	Peak	100	139	2	5460.00	47.97	54.00	-6.03	47.47	0.50	Average	146	226	3	5460.00	63.68	74.00	-10.32	63.18	0.50	Peak	146	226	4	5470.00	64.85	68.20	-3.35	64.33	0.52	Peak	146	226	5 *	5610.00	90.72			90.15	0.57	Average	146	226	6 *	5610.00	102.84			102.27	0.57	Peak	146	226	7	5850.00	61.68	68.20	-6.52	60.60	1.08	Peak	146	226	8	11220.00	40.43	54.00	-13.57	32.29	8.14	Average	100	40	9	11220.00	54.27	74.00	-19.73	46.13	8.14	Peak	100	40	10	16830.00	56.83	68.20	-11.37	50.44	6.39	Peak	100	90
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg																																																																																																								
1	4488.00	44.25	68.20	-23.95	44.76	-0.51	Peak	100	139																																																																																																								
2	5460.00	47.97	54.00	-6.03	47.47	0.50	Average	146	226																																																																																																								
3	5460.00	63.68	74.00	-10.32	63.18	0.50	Peak	146	226																																																																																																								
4	5470.00	64.85	68.20	-3.35	64.33	0.52	Peak	146	226																																																																																																								
5 *	5610.00	90.72			90.15	0.57	Average	146	226																																																																																																								
6 *	5610.00	102.84			102.27	0.57	Peak	146	226																																																																																																								
7	5850.00	61.68	68.20	-6.52	60.60	1.08	Peak	146	226																																																																																																								
8	11220.00	40.43	54.00	-13.57	32.29	8.14	Average	100	40																																																																																																								
9	11220.00	54.27	74.00	-19.73	46.13	8.14	Peak	100	40																																																																																																								
10	16830.00	56.83	68.20	-11.37	50.44	6.39	Peak	100	90																																																																																																								
Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3:"*" is Peak / Average value of fundamental frequency																																																																																																																	




Modulation	be EHT240	Test Freq. (MHz)	5610						
Polarization	Vertical								
Test By :Sean Yu Temperature(°C):24 Humidity(%):62									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	4488.00	44.29	68.20	-23.91	44.80	-0.51	Peak	100	13
2	5460.00	50.18	54.00	-3.82	49.68	0.50	Average	135	313
3	5460.00	67.07	74.00	-6.93	66.57	0.50	Peak	135	313
4	5470.00	67.75	68.20	-0.45	67.23	0.52	Peak	135	313
5 *	5610.00	92.27			91.70	0.57	Average	135	313
6 *	5610.00	105.81	-----	-----	105.24	0.57	Peak	135	313
7	5850.00	60.56	68.20	-7.64	59.48	1.08	Peak	135	313
8	11220.00	40.40	54.00	-13.60	32.26	8.14	Average	100	40
9	11220.00	54.27	74.00	-19.73	46.13	8.14	Peak	100	40
10	16830.00	56.87	68.20	-11.33	50.48	6.39	Peak	100	65
Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m). Note 3:"*" is Peak / Average value of fundamental frequency									

Peak Trace (Blue)	Detector = Peak
Average Trace (Orange)	Detector = RMS

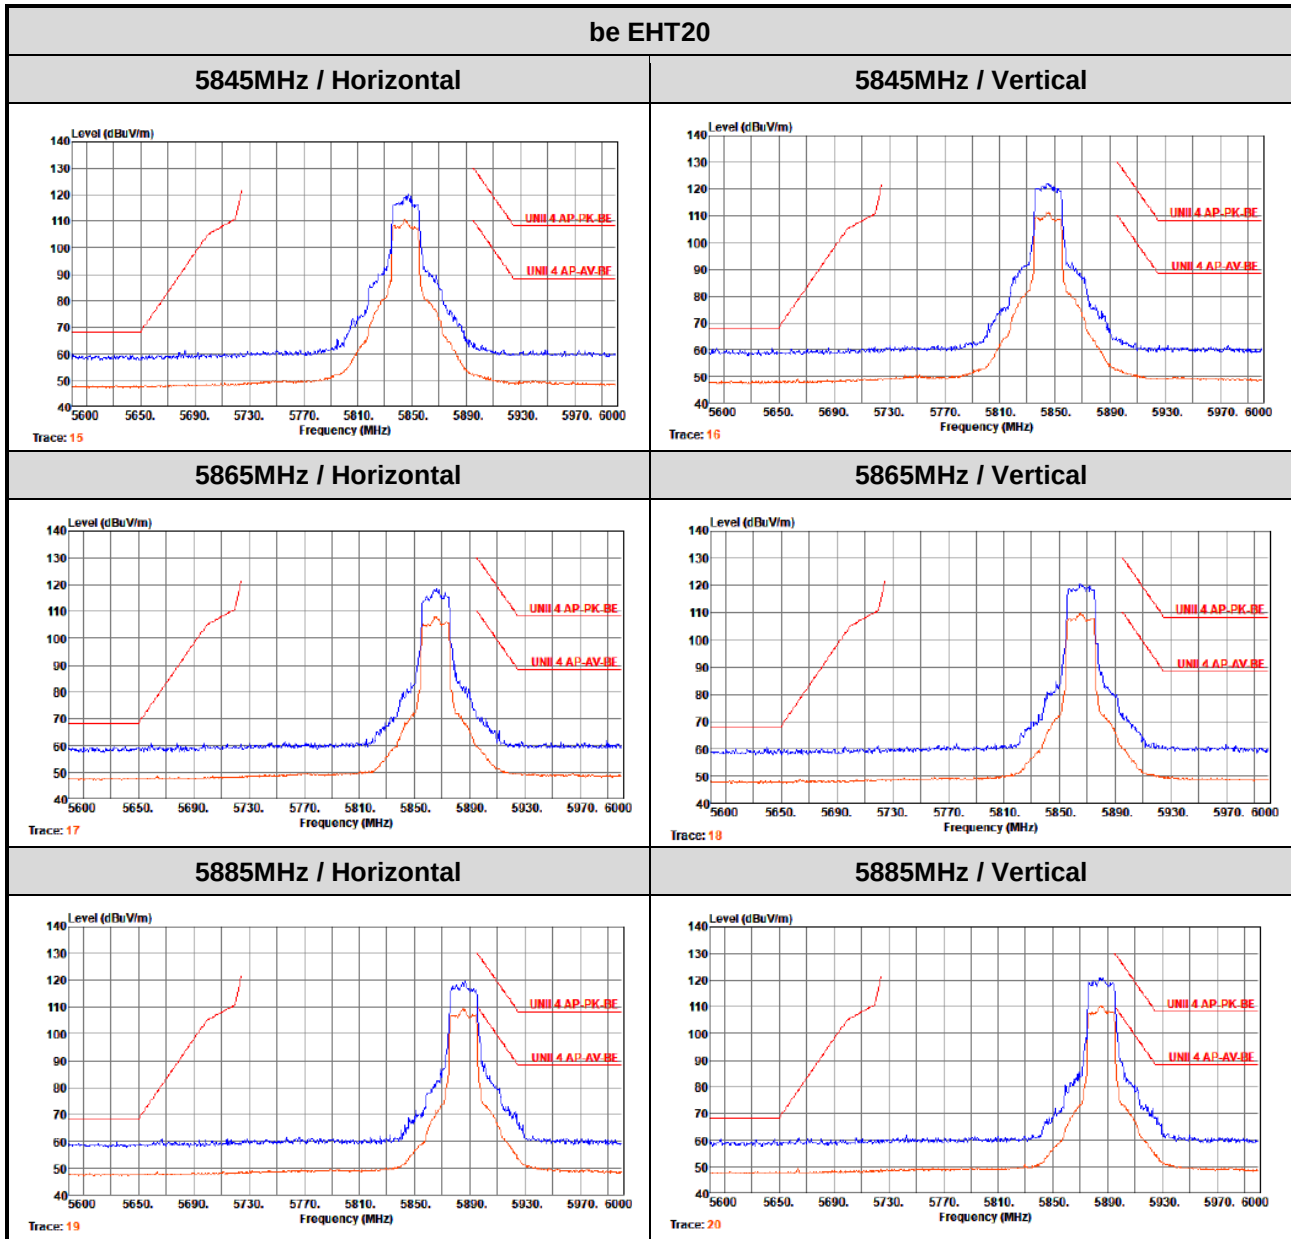





Peak Trace (Blue)	Detector = Peak
Average Trace (Orange)	Detector = RMS

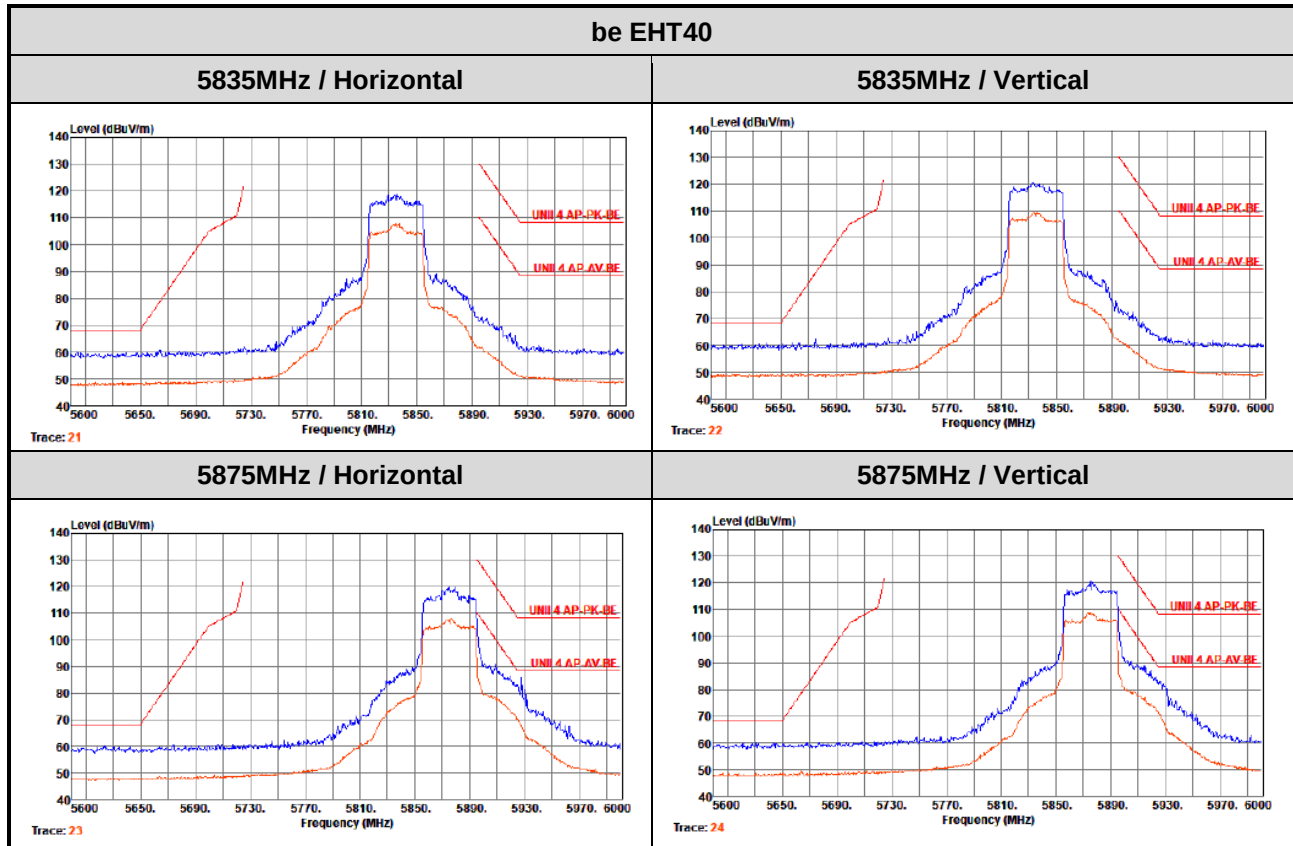



Peak Trace (Blue)	Detector = Peak
Average Trace (Orange)	Detector = RMS

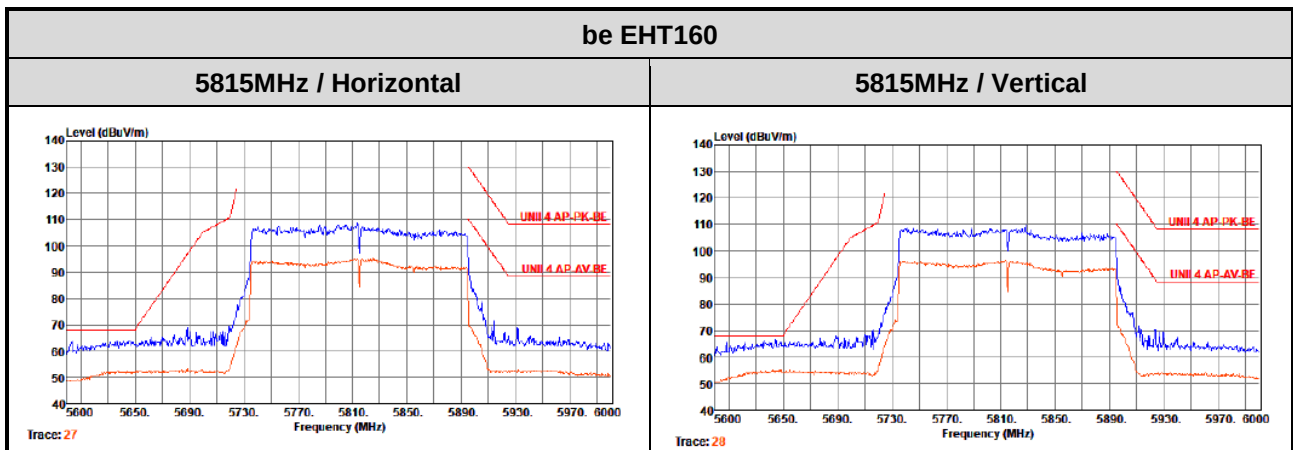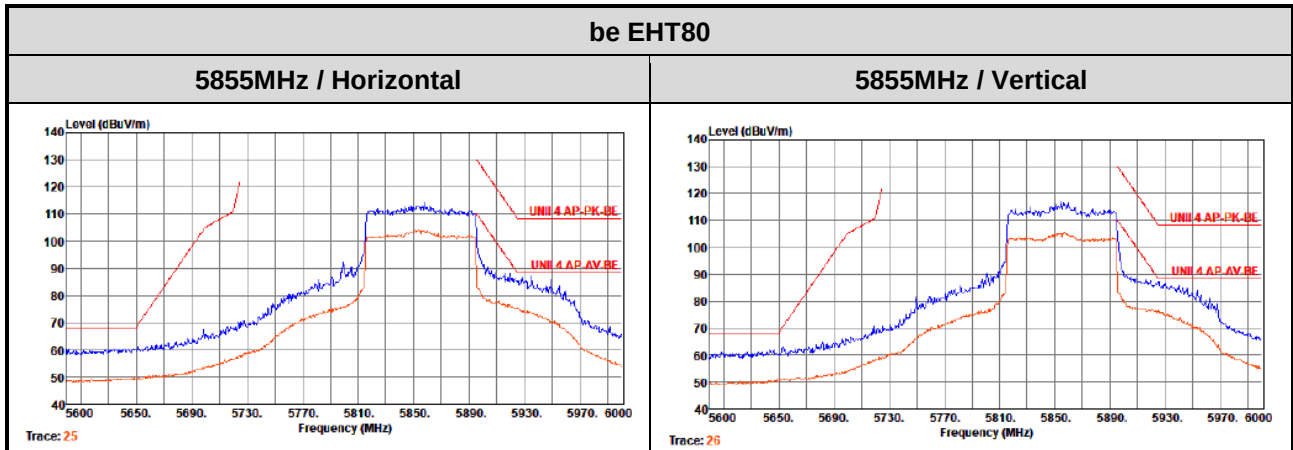

Frequency: 5300 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax	-7.02	-7.22	-7.02	-6.66
T20°CVmin	-6.89	-6.41	-6.39	-7.20
T40°CVnom	-5.75	-5.64	-6.13	-5.41
T30°CVnom	-6.29	-6.40	-6.00	-6.43
T20°CVnom	-6.70	-6.73	-6.15	-6.38
T10°CVnom	-4.38	-3.52	-4.56	-4.62
T0°CVnom	-2.04	-1.48	-1.63	-1.44
Vnom [V]: 110	Vmax [V]: 126.5		Vmin [V]: 93.5	
Tnom [°C]: 20	Tmax [°C]: 40		Tmin [°C]: 10	

Frequency: 5785 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax	-6.43	-6.36	-6.18	-6.04
T20°CVmin	-6.31	-6.73	-5.74	-6.21
T40°CVnom	-5.27	-4.60	-4.79	-5.64
T30°CVnom	-5.76	-5.50	-5.54	-5.38
T20°CVnom	-6.14	-5.65	-5.96	-5.89
T10°CVnom	-4.01	-3.63	-3.42	-4.27
T0°CVnom	-1.87	-1.82	-1.39	-2.16
Vnom [V]: 110	Vmax [V]: 126.5		Vmin [V]: 93.5	
Tnom [°C]: 20	Tmax [°C]: 40		Tmin [°C]: 10	

Frequency: 5865 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax	-6.34	-5.96	-6.45	-5.87
T20°CVmin	-6.22	-6.32	-6.45	-6.00
T40°CVnom	-5.20	-4.55	-4.92	-4.81
T30°CVnom	-5.68	-5.59	-5.38	-5.04
T20°CVnom	-6.05	-6.21	-6.18	-6.08
T10°CVnom	-3.96	-3.66	-3.69	-3.86
T0°CVnom	-1.84	-1.20	-1.51	-1.43
Vnom [V]: 110	Vmax [V]: 126.5		Vmin [V]: 93.5	
Tnom [°C]: 20	Tmax [°C]: 40		Tmin [°C]: 10	




Modulation Mode	be EHT40	Test Freq. (MHz)	5230
Power Phase	Line		

Test by : Joe Liao

Temperature: 25°C

Humidity: 61%

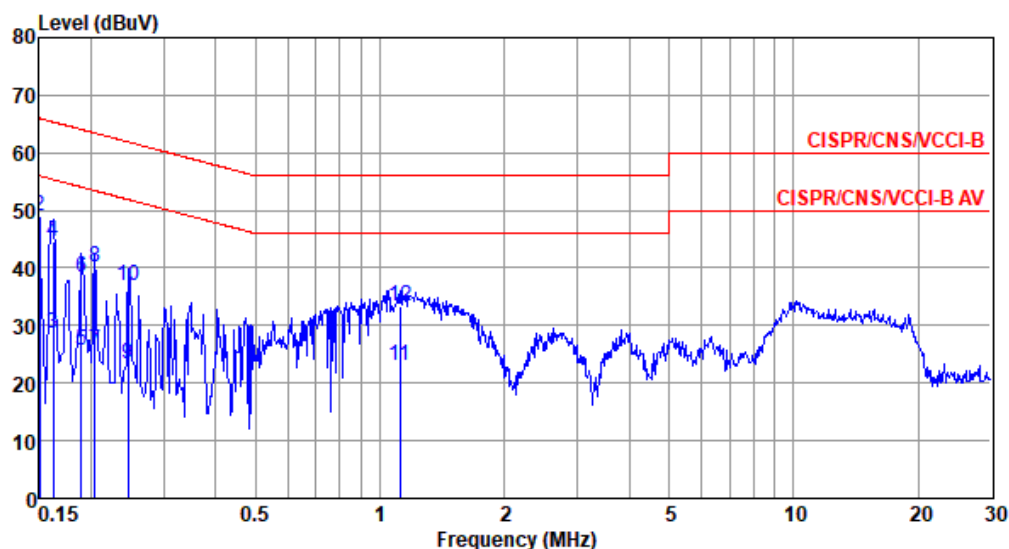

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.150	30.43	56.00	-25.57	20.52	9.63	0.08	0.20	Average
2*	0.150	48.97	66.00	-17.03	39.06	9.63	0.08	0.20	QP
3	0.162	28.74	55.34	-26.60	18.83	9.63	0.07	0.21	Average
4	0.162	44.48	65.34	-20.86	34.57	9.63	0.07	0.21	QP
5	0.189	25.55	54.06	-28.51	15.63	9.62	0.06	0.24	Average
6	0.189	38.46	64.06	-25.60	28.54	9.62	0.06	0.24	QP
7	0.204	25.63	53.45	-27.82	15.70	9.62	0.06	0.25	Average
8	0.204	40.29	63.45	-23.16	30.36	9.62	0.06	0.25	QP
9	0.246	23.41	51.91	-28.50	13.45	9.62	0.07	0.27	Average
10	0.246	36.90	61.91	-25.01	26.94	9.62	0.07	0.27	QP
11	1.117	23.01	46.00	-22.99	12.93	9.63	0.09	0.36	Average
12	1.117	33.42	56.00	-22.58	23.34	9.63	0.09	0.36	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).




Modulation Mod	be EHT40	Test Freq. (MHz)	5230
Power Phase	Neutral		

Test by : Joe Liao

Temperature: 25°C

Humidity: 61%

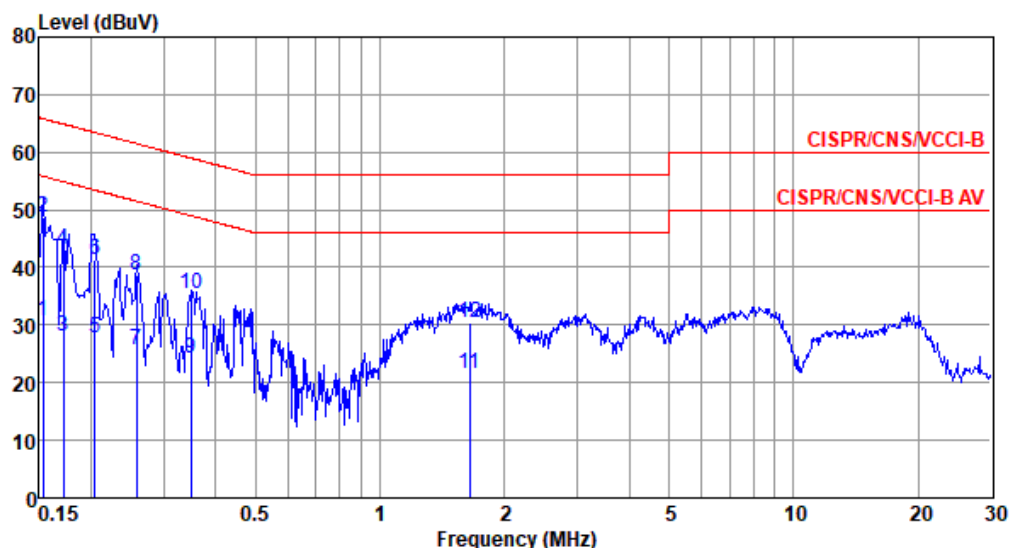

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.153	30.57	55.82	-25.25	20.74	9.63	0.08	0.12	Average
2*	0.153	48.64	65.82	-17.18	38.81	9.63	0.08	0.12	QP
3	0.171	28.18	54.90	-26.72	18.34	9.63	0.07	0.14	Average
4	0.171	43.10	64.90	-21.80	33.26	9.63	0.07	0.14	QP
5	0.204	27.68	53.45	-25.77	17.82	9.63	0.06	0.17	Average
6	0.204	41.45	63.45	-22.00	31.59	9.63	0.06	0.17	QP
7	0.258	25.76	51.51	-25.75	15.86	9.63	0.07	0.20	Average
8	0.258	38.60	61.51	-22.91	28.70	9.63	0.07	0.20	QP
9	0.348	24.13	49.00	-24.87	14.20	9.62	0.08	0.23	Average
10	0.348	35.36	59.00	-23.64	25.43	9.62	0.08	0.23	QP
11	1.645	21.66	46.00	-24.34	11.59	9.64	0.10	0.33	Average
12	1.645	30.49	56.00	-25.51	20.42	9.64	0.10	0.33	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).




Modulation Mode	be EHT80	Test Freq. (MHz)	5855
Power Phase	Line		

Test by : Joe Liao

Temperature: 25°C

Humidity: 61%

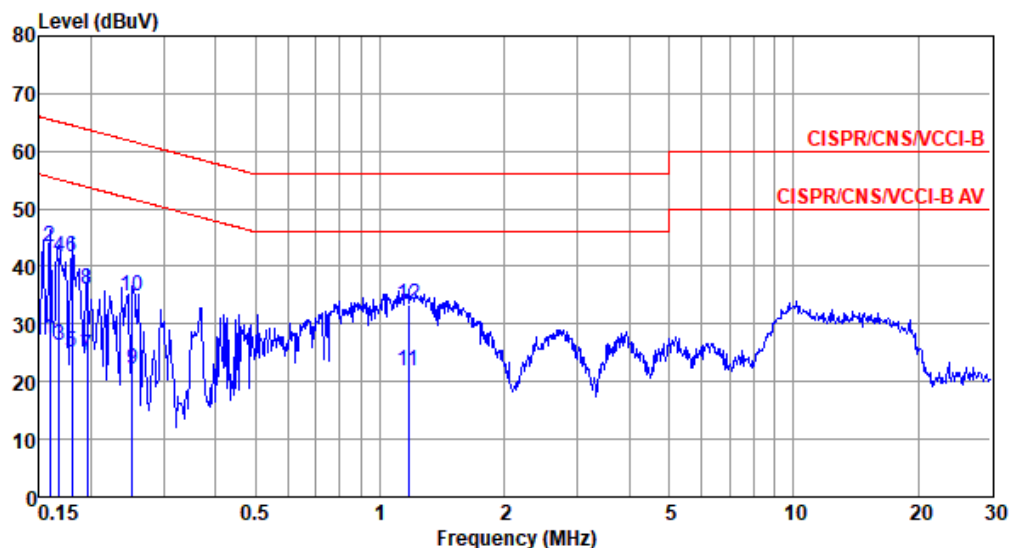

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.159	27.34	55.52	-28.18	17.42	9.63	0.08	0.21	Average
2*	0.159	43.45	65.52	-22.07	33.53	9.63	0.08	0.21	QP
3	0.168	26.21	55.08	-28.87	16.29	9.63	0.07	0.22	Average
4	0.168	41.69	65.08	-23.39	31.77	9.63	0.07	0.22	QP
5	0.180	25.05	54.50	-29.45	15.13	9.62	0.07	0.23	Average
6	0.180	41.62	64.50	-22.88	31.70	9.62	0.07	0.23	QP
7	0.195	24.37	53.80	-29.43	14.44	9.62	0.06	0.25	Average
8	0.195	36.06	63.80	-27.74	26.13	9.62	0.06	0.25	QP
9	0.252	22.02	51.69	-29.67	12.05	9.62	0.07	0.28	Average
10	0.252	34.88	61.69	-26.81	24.91	9.62	0.07	0.28	QP
11	1.172	21.82	46.00	-24.18	11.74	9.63	0.09	0.36	Average
12	1.172	33.22	56.00	-22.78	23.14	9.63	0.09	0.36	QP


Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).



Modulation Mod	be EHT80	Test Freq. (MHz)	5855
Power Phase	Neutral		

Test by : Joe Liao Temperature: 25°C Humidity: 61%

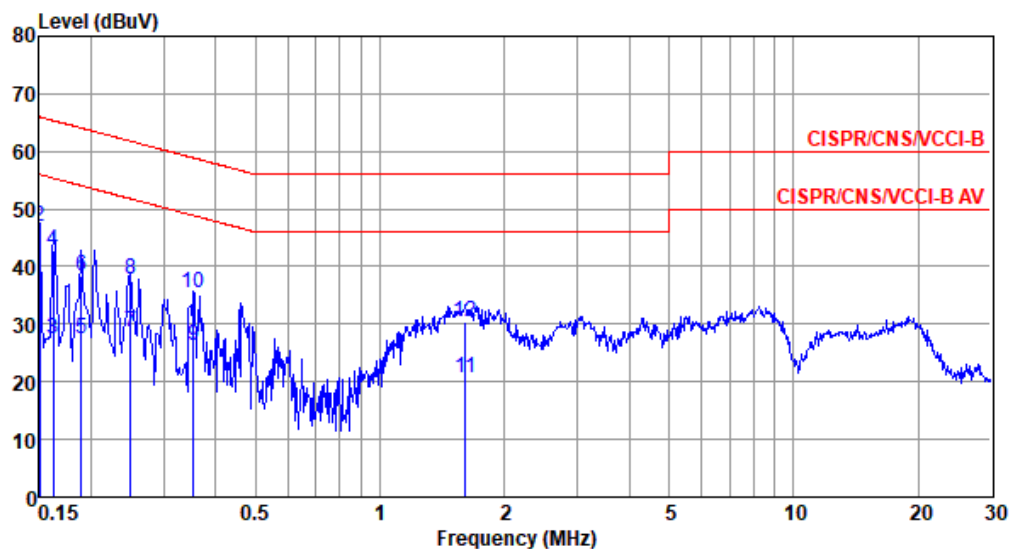

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.150	28.23	56.00	-27.77	18.40	9.63	0.08	0.12	Average
2*	0.150	46.85	66.00	-19.15	37.02	9.63	0.08	0.12	QP
3	0.162	27.48	55.34	-27.86	17.65	9.63	0.07	0.13	Average
4	0.162	42.72	65.34	-22.62	32.89	9.63	0.07	0.13	QP
5	0.189	27.57	54.06	-26.49	17.72	9.63	0.06	0.16	Average
6	0.189	38.41	64.06	-25.65	28.56	9.63	0.06	0.16	QP
7	0.249	28.62	51.78	-23.16	18.72	9.63	0.07	0.20	Average
8	0.249	37.90	61.78	-23.88	28.00	9.63	0.07	0.20	QP
9	0.354	26.29	48.87	-22.58	16.35	9.62	0.08	0.24	Average
10	0.354	35.52	58.87	-23.35	25.58	9.62	0.08	0.24	QP
11	1.610	20.63	46.00	-25.37	10.56	9.64	0.10	0.33	Average
12	1.610	30.39	56.00	-25.61	20.32	9.64	0.10	0.33	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).




Modulation Mod	11a	Test Freq. (MHz)	5825
Power Phase	Line		

Test by : Joe Liao

Temperature: 25°C

Humidity: 61%

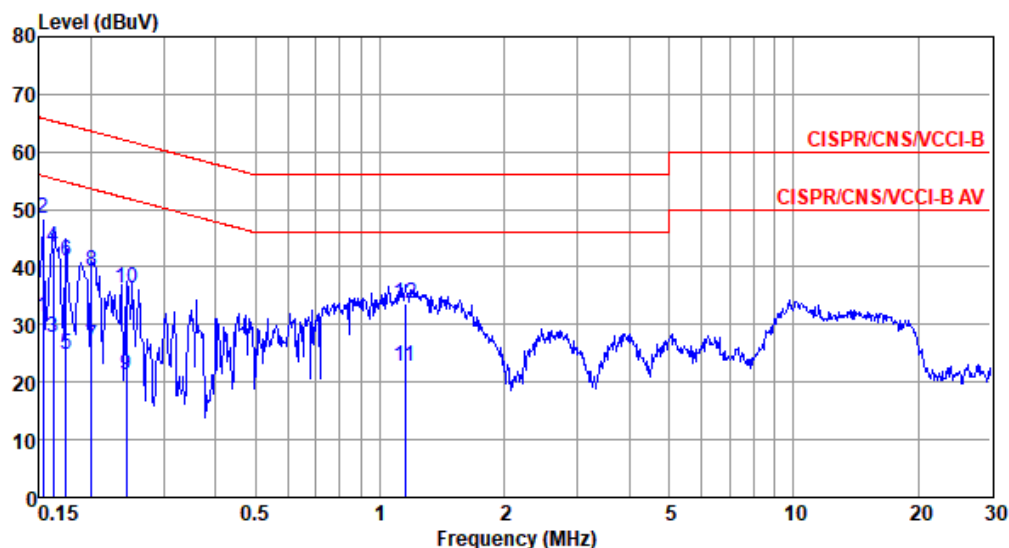

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.153	31.33	55.82	-24.49	21.42	9.63	0.08	0.20	Average
2*	0.153	48.33	65.82	-17.49	38.42	9.63	0.08	0.20	QP
3	0.162	27.77	55.34	-27.57	17.86	9.63	0.07	0.21	Average
4	0.162	43.42	65.34	-21.92	33.51	9.63	0.07	0.21	QP
5	0.174	24.93	54.77	-29.84	15.01	9.62	0.07	0.23	Average
6	0.174	40.89	64.77	-23.88	30.97	9.62	0.07	0.23	QP
7	0.201	26.40	53.58	-27.18	16.47	9.62	0.06	0.25	Average
8	0.201	39.15	63.58	-24.43	29.22	9.62	0.06	0.25	QP
9	0.243	21.21	52.00	-30.79	11.25	9.62	0.07	0.27	Average
10	0.243	36.20	62.00	-25.80	26.24	9.62	0.07	0.27	QP
11	1.147	22.72	46.00	-23.28	12.64	9.63	0.09	0.36	Average
12	1.147	33.70	56.00	-22.30	23.62	9.63	0.09	0.36	QP


Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).



Modulation Mod	11a	Test Freq. (MHz)	5825
Power Phase	Neutral		

Test by : Joe Liao Temperature: 25°C Humidity: 61%

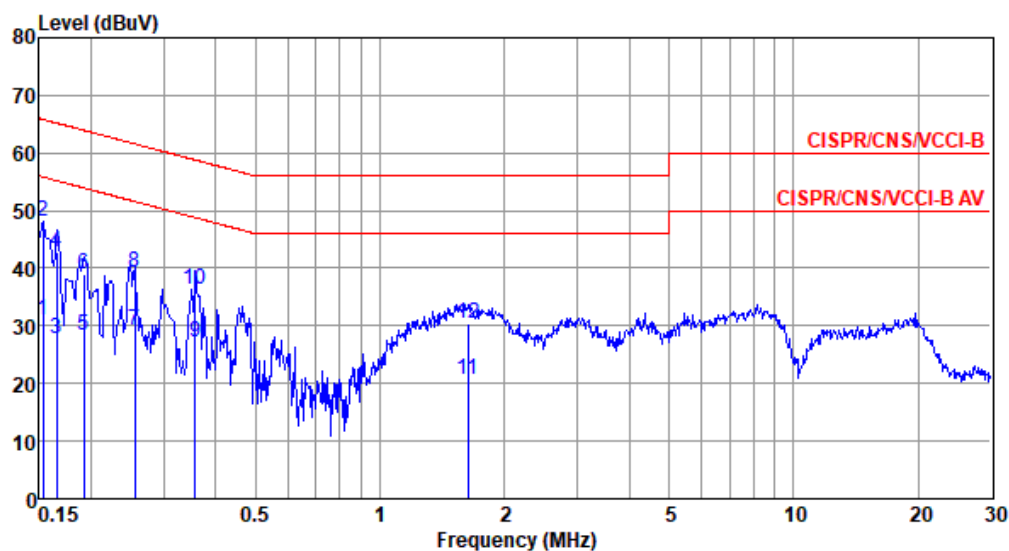

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.153	30.99	55.82	-24.83	21.16	9.63	0.08	0.12	Average
2*	0.153	48.14	65.82	-17.68	38.31	9.63	0.08	0.12	QP
3	0.165	27.78	55.21	-27.43	17.94	9.63	0.07	0.14	Average
4	0.165	42.82	65.21	-22.39	32.98	9.63	0.07	0.14	QP
5	0.192	28.34	53.93	-25.59	18.49	9.63	0.06	0.16	Average
6	0.192	38.96	63.93	-24.97	29.11	9.63	0.06	0.16	QP
7	0.255	29.23	51.60	-22.37	19.33	9.63	0.07	0.20	Average
8	0.255	39.38	61.60	-22.22	29.48	9.63	0.07	0.20	QP
9	0.358	27.13	48.78	-21.65	17.19	9.62	0.08	0.24	Average
10	0.358	36.20	58.78	-22.58	26.26	9.62	0.08	0.24	QP
11	1.628	20.65	46.00	-25.35	10.58	9.64	0.10	0.33	Average
12	1.628	30.27	56.00	-25.73	20.20	9.64	0.10	0.33	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).