

TEST REPORT

Product Name : Tablet
Model Number : MS-NB41
FCC ID : I4L-NB41

Prepared for : Micro-Star Int'l Co.,Ltd.
Address : No.69, Lide St., Zhonghe Dist., New Taipei City 235,
Taiwan

Prepared by : EMTEK (SHENZHEN) CO., LTD.
Address : Building 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China

Tel: (0755) 26954280
Fax: (0755) 26954282

Report Number : ENS2502210188W00202R
Date(s) of Tests : February 25, 2025 to June 3, 2025
Date of issue : June 6, 2025

TABLE OF CONTENTS

1 TEST RESULT CERTIFICATION.....	4
2 EUT TECHNICAL DESCRIPTION.....	5
2.1 FEATURE OF EUT.....	5
3 SUMMARY OF TEST RESULT.....	6
4 TEST METHODOLOGY.....	7
4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	7
4.2 MEASUREMENT EQUIPMENT USED.....	7
4.3 DESCRIPTION OF TEST MODES.....	9
5 FACILITIES AND ACCREDITATIONS.....	10
5.1 FACILITIES.....	10
5.2 EQUIPMENT.....	10
6 TEST SYSTEM UNCERTAINTY.....	11
7 SETUP OF EQUIPMENT UNDER TEST.....	12
7.1 RADIO FREQUENCY TEST SETUP 1.....	12
7.2 RADIO FREQUENCY TEST SETUP 2.....	12
7.3 CONDUCTED EMISSION TEST SETUP.....	14
7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM.....	15
7.5 SUPPORT EQUIPMENT.....	15
8 TEST REQUIREMENTS.....	16
8.1 DTS 6DB BANDWIDTH.....	16
8.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER.....	20
8.3 MAXIMUM POWER SPECTRAL DENSITY.....	24
8.4 UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS.....	28
8.5 RADIATED SPURIOUS EMISSION.....	41
8.6 CONDUCTED EMISSIONS TEST.....	54
8.7 ANTENNA APPLICATION.....	57

Modified Information

Version	Report No.	Revision Date	Summary
Ver.1.0	ENS2502210188W00202R	/	Original Report

1 TEST RESULT CERTIFICATION

Applicant : Micro-Star Int'l Co.,Ltd.
Address : No.69, Lide St., Zhonghe Dist., New Taipei City 235, Taiwan
Manufacturer : Micro-Star International Co., Ltd.
Address : No.88 East Qianjin Road, Kunshan city, Jiangsu province, China
EUT : Tablet
Model Name : MS-NB41
Trademark : MSI

Measurement Procedure Used:

APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2 , Subpart J FCC 47 CFR Part 15, Subpart C	PASS

The above equipment was tested by EMTEK(SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the above table standards requirement.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : February 25, 2025 to June 3, 2025

Prepared by : 
Una Yu/Editor

Reviewer : 
Joe Xia/Supervisor

Approved & Authorized Signer : 
Lisa Wang/Manager

2 EUT TECHNICAL DESCRIPTION

Product Name:	Tablet
Model Number:	MS-NB41
BLE Version:	V5.3
Device Type:	Bluetooth with BLE mode
Data Rate :	1Mbps and 2Mbps
Modulation:	GFSK
Operating Frequency Range:	2402-2480MHz
Number of Channels:	40 Channels
Power Supply:	Rechargeable Li-Polymer Battery 7.68V, 8600mAh/66Wh AC 120V/60Hz by Adapter Adapter: Model: A20-065N3A Input: 100-240V~50/60Hz, 1.6A Output: 5V, 3A, 15W; 9V, 3A; 12V, 3A; 15V, 3A; 20V, 3.25A, 65W
Temperature Range:	-10°C~50°C

2.1 FEATURE OF EUT

a) Antenna information

Specification	Antenna	Brand	Model	Antenna Type	Gain
BT	1	/	/	Integrated Antenna	0.74dBi
BLE	1	/	/	Integrated Antenna	0.74dBi
2.4G WIFI	1	/	/	Integrated Antenna	0.71dBi
2.4G WIFI	2	/	/	Integrated Antenna	0.74dBi
5G WIFI	1	/	/	Integrated Antenna	4.37dBi
5G WIFI	2	/	/	Integrated Antenna	4.33dBi
WIFI 6E	1	/	/	Integrated Antenna	4.81dBi
WIFI 6E	2	/	/	Integrated Antenna	3.29dBi
NFC	1	/	/	Induction Coil Antenna	0dBi
GNSS	1	/	/	Integrated Antenna	N/A, Only Rx

Note: The antenna information provided by the manufacturer will have a certain impact on the test results.

b) Modification Record

There were no modifications required for compliance.

c) For more details, please refer to the user's manual of the EUT.

3 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
15.247(a)(2)	DTS (6dB) Bandwidth	PASS	
15.247(b)(3)	Maximum Peak Conducted Output Power	PASS	
15.247(e)	Maximum Power Spectral Density Level	PASS	
15.247(d)	Unwanted Emission Into Non-Restricted Frequency Bands	PASS	
15.247(d) 15.209	Unwanted Emission Into Restricted Frequency Bands (conducted)	PASS	
15.247(d) 15.209	Radiated Spurious Emission	PASS	
15.207	Conducted Emission Test	PASS	
15.247(b)	Antenna Application	PASS	

NOTE1: The results of this report do not take into account the uncertainty.

NOTE2: According to FCC OET KDB 558074, the report use radiated measurements in the restricted frequency bands. In addition, the radiated test is also performed to ensure the emissions emanating from the device cabinet also comply with the applicable limits.

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is filing to comply with the above table standards requirement.

4 TEST METHODOLOGY

4.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:
 FCC 47 CFR Part 2, Subpart J
 FCC 47 CFR Part 15, Subpart C
 FCC KDB 558074 D01 15.247 Meas Guidance v05r02

4.2 MEASUREMENT EQUIPMENT USED

For Conducted Emission Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	Rohde & Schwarz	ESCI	101384	2024/5/11 2025/5/9	1Year
AMN	Rohde & Schwarz	ENV216	101161	2024/5/10 2025/5/9	1Year

For Spurious Emissions Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Pre-Amplifier	Bonn	BLMA 011001N	2213967A	2024/10/18	1Year
EMI Test Receiver	Rohde & Schwarz	ESR7	102551	2024/10/18	1Year
Bilog Antenna	Schwarzbeck	VULB9163	9163142	2024/7/8	2Year
Horn antenna	Schwarzbeck	BBHA9120D	9120D-1198	2023/6/2 2025/5/13	2Year
Pre-Amplifier	Bonn	BLMA 0118-5G	2213967B-01	2024/10/18	1Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	100967	2024/5/10 2025/5/9	1Year
Horn antenna	Schwarzbeck	BBHA9170	9170-399	2023/5/12 2025/5/11	2Year
Pre-Amplifier	Lunar EM	LNA18G26-40	J1012131010 001	2024/5/11 2025/5/9	1Year
Pre-Amplifier	Lunar EM	LNA26G40-40	J1013131028 001	2024/5/11 2025/5/9	1Year
Loop Antenna	Schwarzbeck	FMZB1519	1519-012	2023/5/12 2025/5/11	2Year
Wideband Radio Communication Tester	R&S	CMW500	171168	2024/9/18	1Year
Coaxial Cable	TIMES	NmNm-7-C1570 2	N/A	2024/5/23 2025/5/22	1Year
Coaxial Cable	TIMES	HF290-NMSM-6. 5M	N/A	2024/5/23 2025/5/22	1Year

For Other Test

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Wideband Radio Communication Tester	R&S	CMW500	171168	2024/9/18	1Year
Frequency Extender	R&S	CMW-Z800A	100430	2024/9/18	1Year
Spectrum Analyzer	R&S	FSV3044	101289	2024/12/17	1Year
Analog Signal Generator	R&S	SMB100A	183237	2024/9/18	1Year
Vector Signal	R&S	SMM100A	101808	2024/9/18	1Year

Generator					
RF Control Unit(Power Meter)	Tonscend	JS0806-2	22C8060567	2024/9/18	1Year
Temperature&Humidity Chamber	ESPEC	EL-02KA	12107166	2024/5/11 2025/5/10	1 Year
DC Power Supply	KEYSIGHT	E3642A	MY53030016	2024/9/18	1 Year



4.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its typical operating condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Test of channel included the lowest and middle and highest frequency to perform the test, then record on this report.

Those data rates (BLE :1Mbps and 2Mbps) were used for all test.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting and receiving mode is programmed.

Frequency and Channel list for BLE:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	19	2440	...	...
1	2404	20	2442	37	2476
2	2406	21	2444	38	2478
...	...	...	...	39	2480
Note: $f_c = 2402\text{MHz} + k \times 1\text{MHz}$ $k=1$ to 39					

Test Frequency and channel for BLE:

Lowest Frequency		Middle Frequency		Highest Frequency	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	19	2440	39	2480

5 FACILITIES AND ACCREDITATIONS

5.1 FACILITIES

Site Description

EMC Lab. : **Accredited by CNAS**
The Certificate Registration Number is L2291
The Laboratory has been assessed and proved to be in compliance with
CNAS-CL01 (identical to ISO/IEC 17025:2017)

Accredited by FCC
Designation Number: CN1204
Test Firm Registration Number: 882943

Accredited by A2LA
The Certificate Number is 4321.01

Accredited by Industry Canada
The Conformity Assessment Body Identifier is CN0008

Name of Firm : EMTEK (SHENZHEN) CO., LTD.
Site Location : Building 69, Majialong Industry Zone, Nanshan District, Shenzhen,
Guangdong, China

5.2 EQUIPMENT

Radiated emissions are measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, and/or ridged waveguide, horn. Spectrum analyzers with preselectors and quasi-peak detectors are used to perform radiated measurements.

Conducted emissions are measured with Line Impedance Stabilization Networks and EMI Test Receivers.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

6 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Maximum Peak Output Power Test	$\pm 1.0\text{dB}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
Band Edge Test	$\pm 3\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Antenna Port Emission	$\pm 3\text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$


Measurement Uncertainty for a level of Confidence of 95%.



7 SETUP OF EQUIPMENT UNDER TEST

7.1 RADIO FREQUENCY TEST SETUP 1

The BLE component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



7.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.

Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.


30MHz-1GHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


Above 1GHz:

The EUT is placed on a turntable 1.5 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).


(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

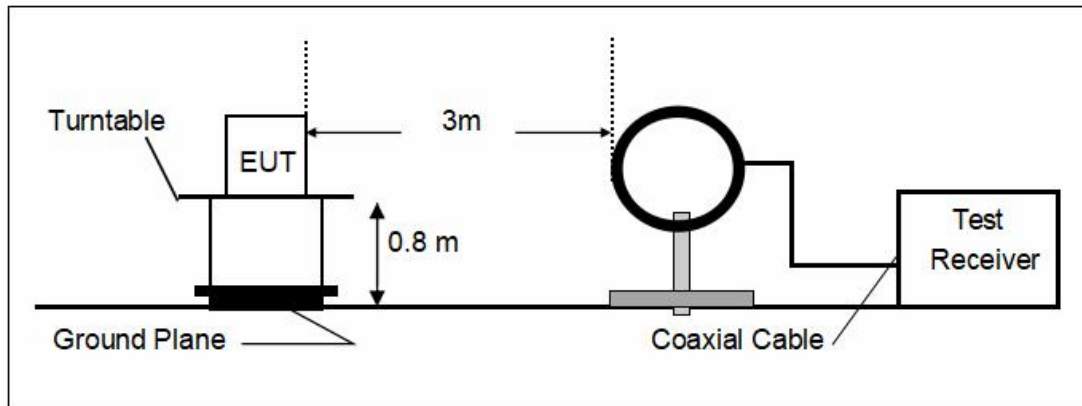

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

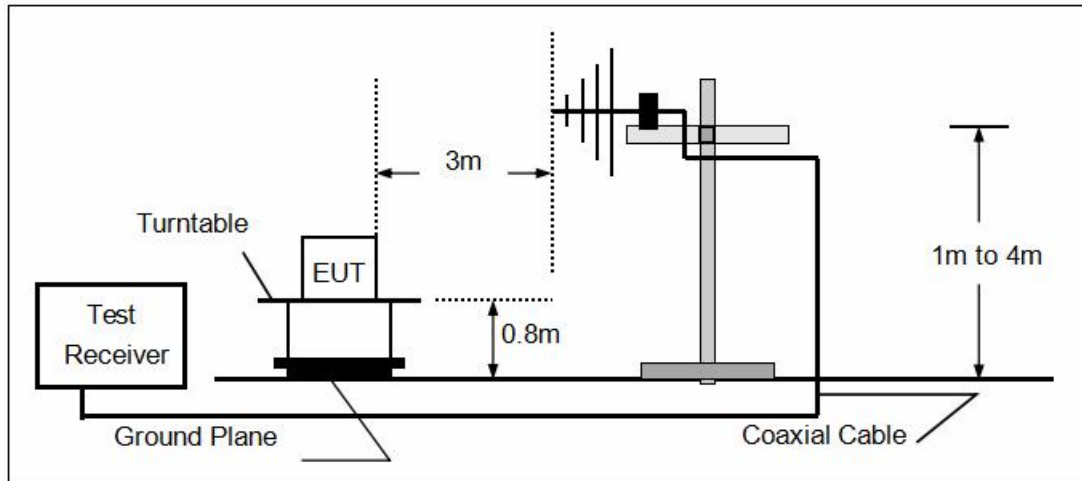

(c) Radiated Emission Test Set-Up, Frequency above 1000MHz

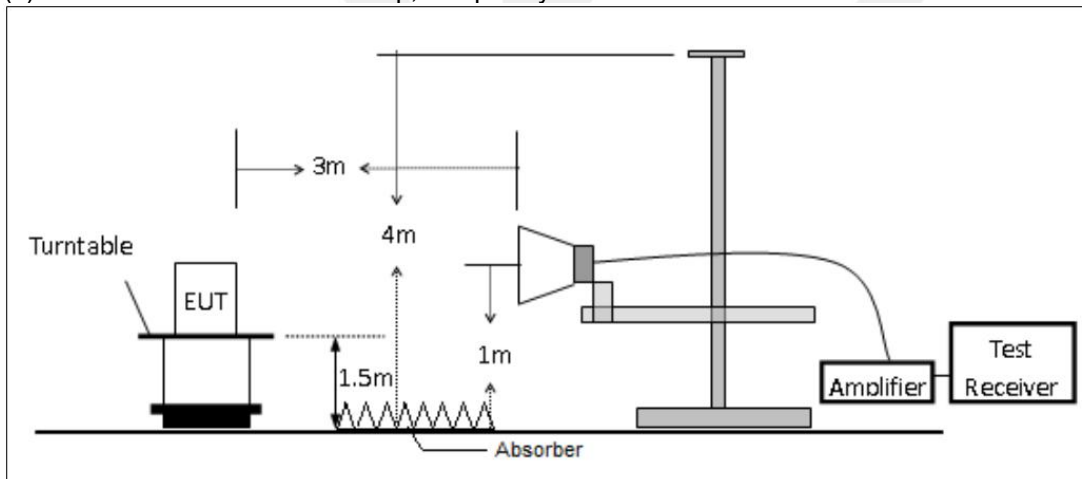


7.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

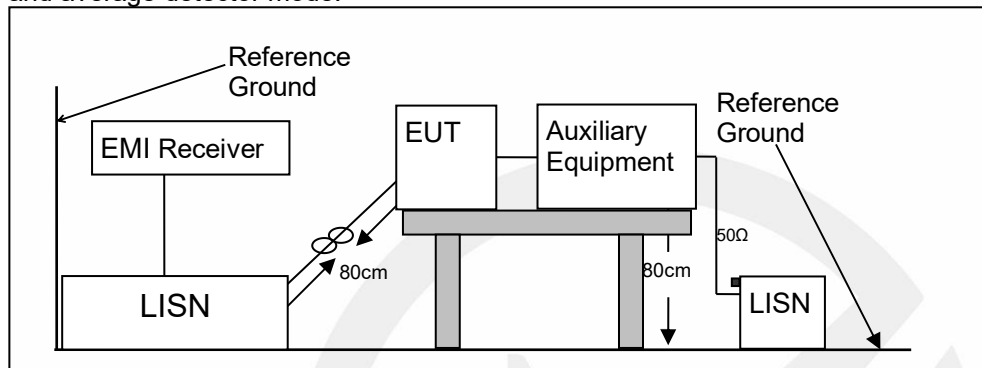

7.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

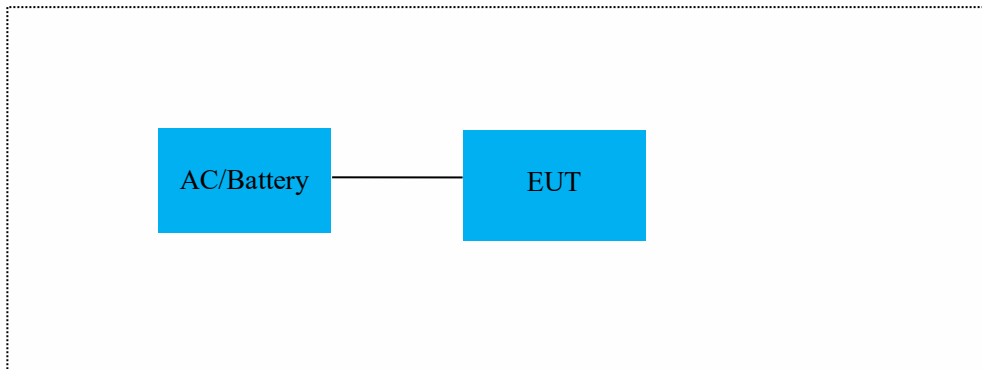

7.5 SUPPORT EQUIPMENT

N/A

Notes:

- 1.All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
- 2.Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

8 TEST REQUIREMENTS

8.1 DTS 6DB BANDWIDTH

8.1.1 Applicable Standard

According to FCC Part 15.247(a)(2) and KDB 558074 D01 15.247 Meas Guidance v05r02.

8.1.2 Conformance Limit

The minimum -6 dB bandwidth shall be at least 500 kHz.

8.1.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1.

8.1.4 Test Procedure

The EUT was operating in BLE mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously.

Set RBW = 100 kHz.

Set the video bandwidth (VBW) = 300 kHz.

Set Span = 2 times OBW.

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

Allow the trace to stabilize.

Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


Measure and record the results in the test report.

Test Results


Temperature : 25°C ATM Pressure: 1011 mbar
Humidity : 45 % Test Engineer: GJ

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant1	2402	0.68	2401.64	2402.32	0.5	PASS
BLE_1M	Ant1	2440	0.68	2439.64	2440.32	0.5	PASS
BLE_1M	Ant1	2480	0.69	2479.63	2480.32	0.5	PASS
BLE_2M	Ant1	2402	1.12	2401.42	2402.54	0.5	PASS
BLE_2M	Ant1	2440	1.12	2439.42	2440.55	0.5	PASS
BLE_2M	Ant1	2480	1.15	2479.41	2480.56	0.5	PASS


BLE_1M-Ant1-2402-PASS

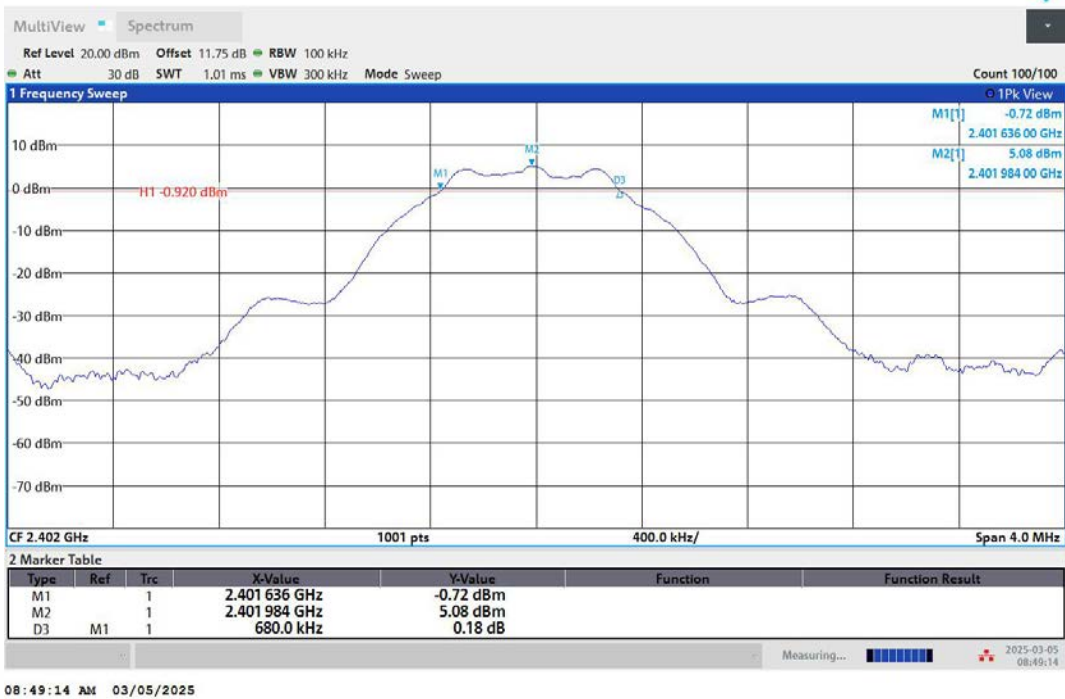


BLE_1M-Ant1-2440-PASS

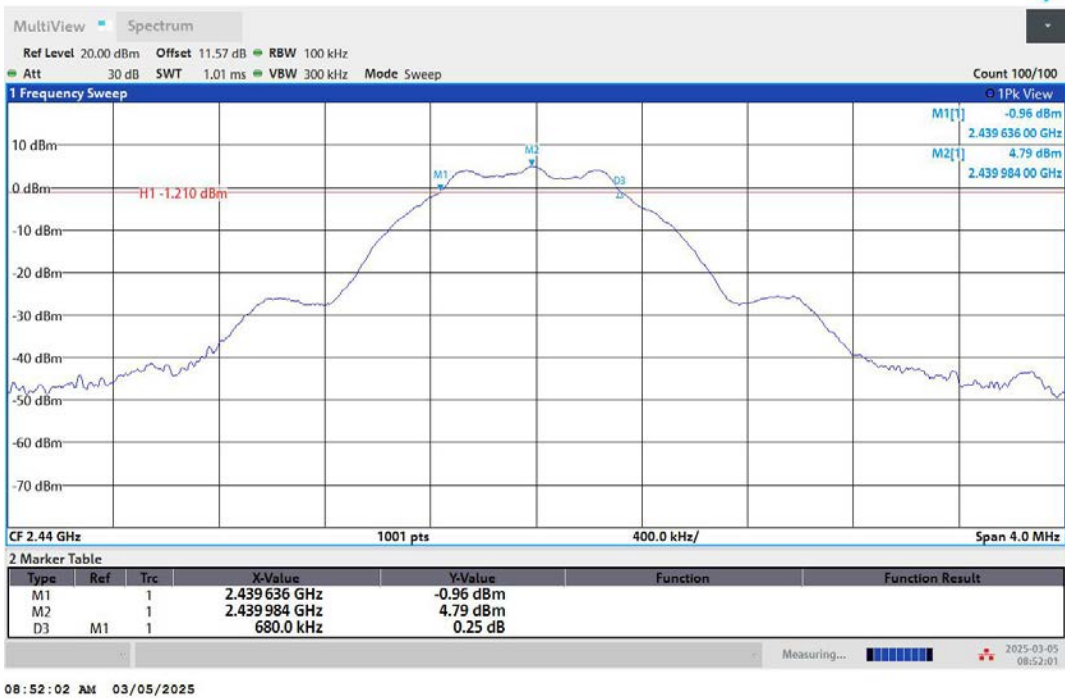


BLE_1M-Ant1-2480-PASS

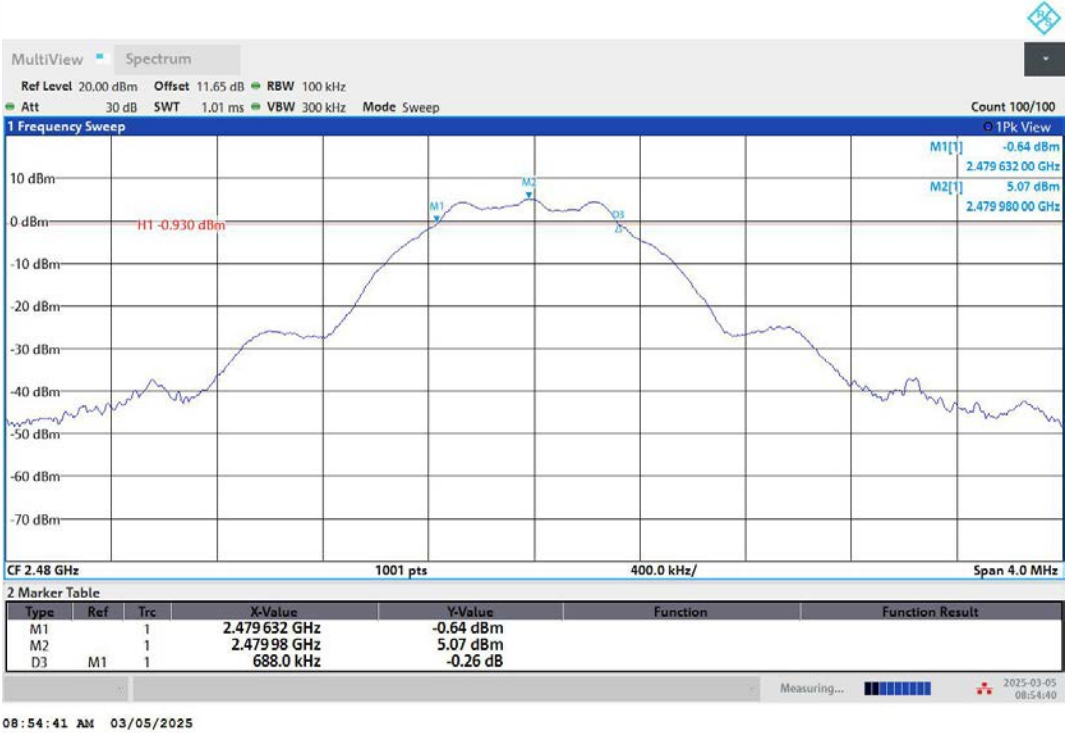

BLE_2M-Ant1-2402-PASS

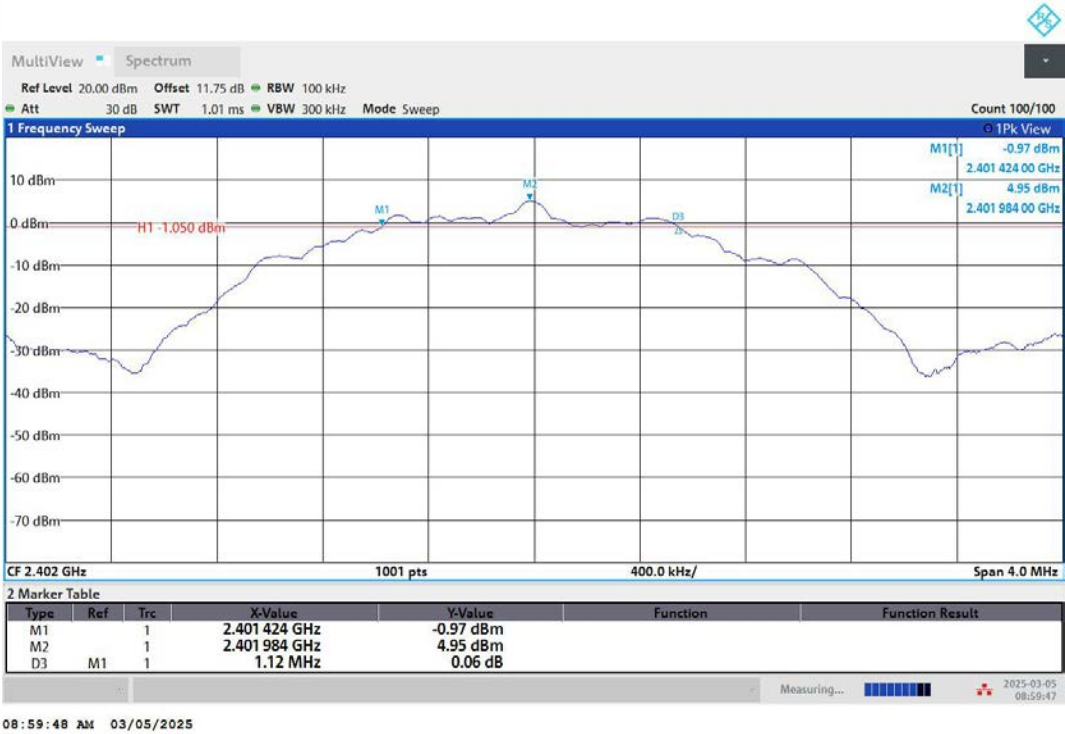

BLE_2M-Ant1-2440-PASS

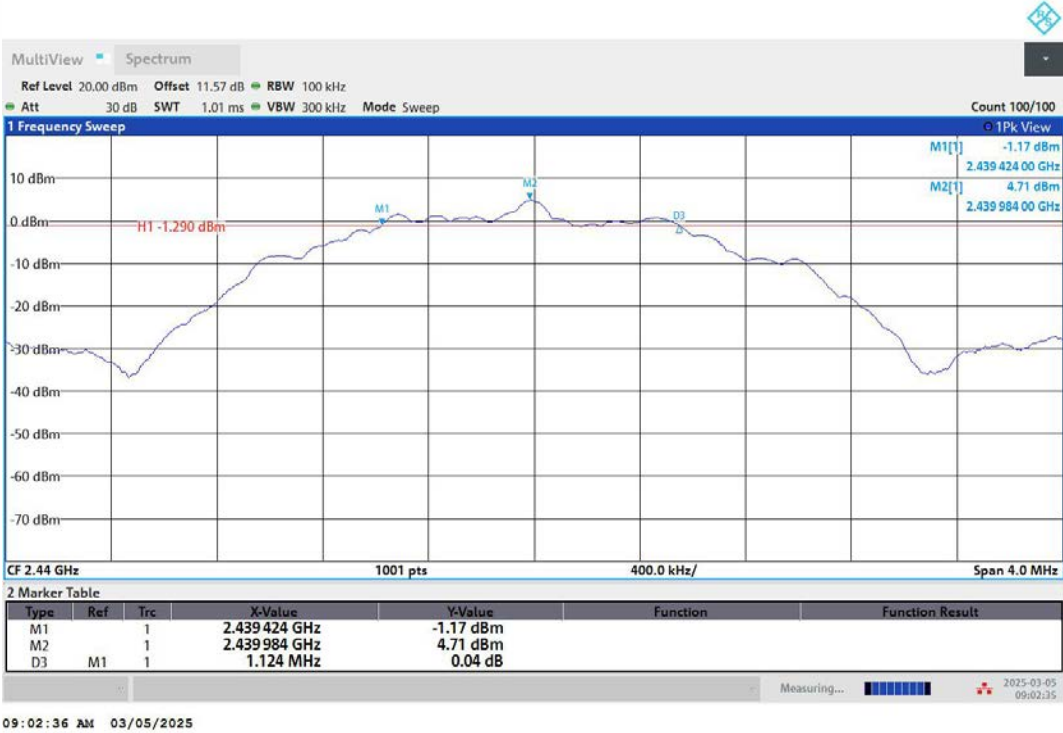

09:02:36 AM 03/05/2025

BLE_2M-Ant1-2480-PASS



09:05:02 AM 03/05/2025

8.2 MAXIMUM PEAK CONDUCTED OUTPUT POWER

8.2.1 Applicable Standard

According to FCC Part 15.247(b)(3) and KDB 558074 D01 15.247 Meas Guidance v05r02.

8.2.2 Conformance Limit

The maximum peak conducted output power of the intentional radiator for systems using digital modulation in the 2400 - 2483.5 MHz bands shall not exceed: 1 Watt (30dBm).

8.2.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1.

8.2.4 Test Procedure

■ According to FCC Part 15.247(b)(3)

As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. For smart system, Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

Set the RBW $\geq$ DTS bandwidth (about 1MHz).

Set VBW = 3*RBW (about 3MHz).

Set the span $\geq$ 3*RBW.

Set Sweep time = auto couple.

Set Detector = peak.

Set Trace mode = max hold.

Allow trace to fully stabilize. Use peak marker function to determine the peak amplitude level.

■ According to FCC Part 15.247(b)(4):


Conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. If transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Test Results


Temperature : 25°C ATM Pressure: 1011 mbar
Humidity : 45 % Test Engineer: GJ

TestMode	Antenna	Frequency[MHz]	Conducted Peak Power[dBm]	Conducted Limit[dBm]	EIRP[dBm]	EIRP Limit[dBm]	Verdict
BLE_1M	Ant1	2402	5.19	≤ 30	5.93	≤ 36	PASS
BLE_1M	Ant1	2440	4.89	≤ 30	5.63	≤ 36	PASS
BLE_1M	Ant1	2480	5.19	≤ 30	5.93	≤ 36	PASS
BLE_2M	Ant1	2402	5.08	≤ 30	5.82	≤ 36	PASS
BLE_2M	Ant1	2440	4.83	≤ 30	5.57	≤ 36	PASS
BLE_2M	Ant1	2480	5.13	≤ 30	5.87	≤ 36	PASS


BLE_1M-Ant1-2402-PASS

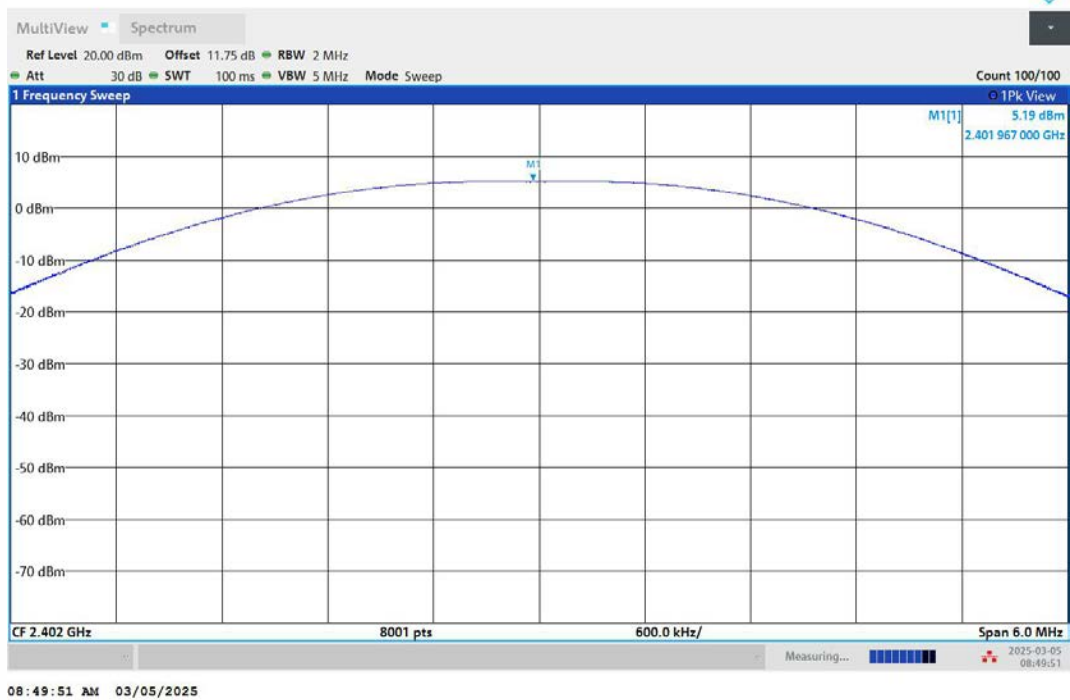


BLE_1M-Ant1-2440-PASS

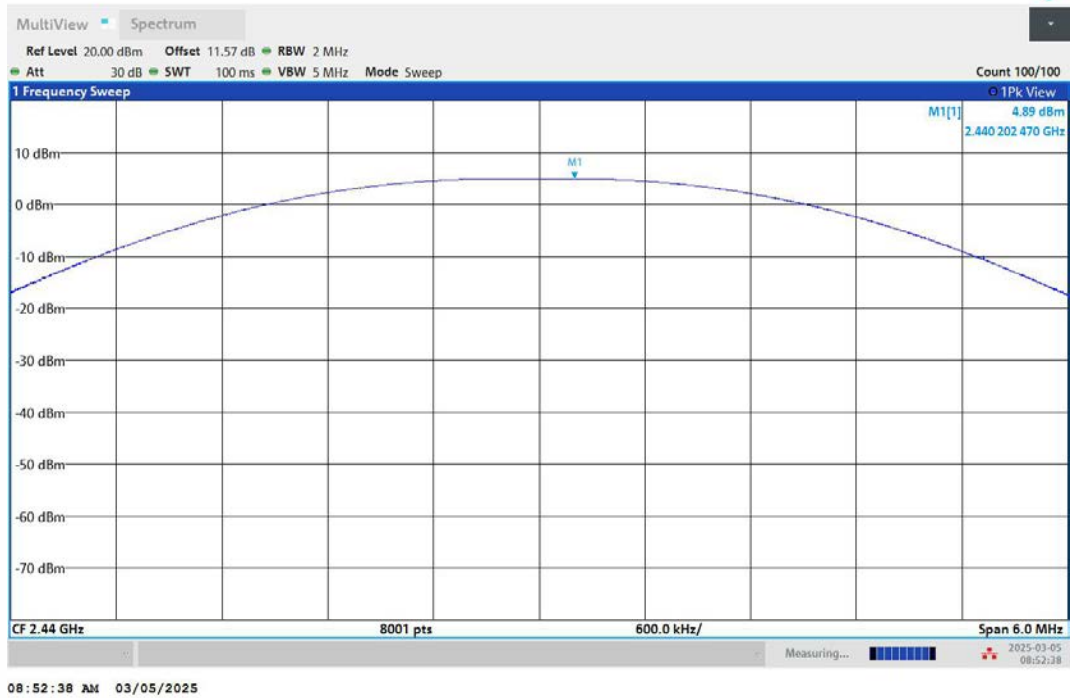


BLE_1M-Ant1-2480-PASS

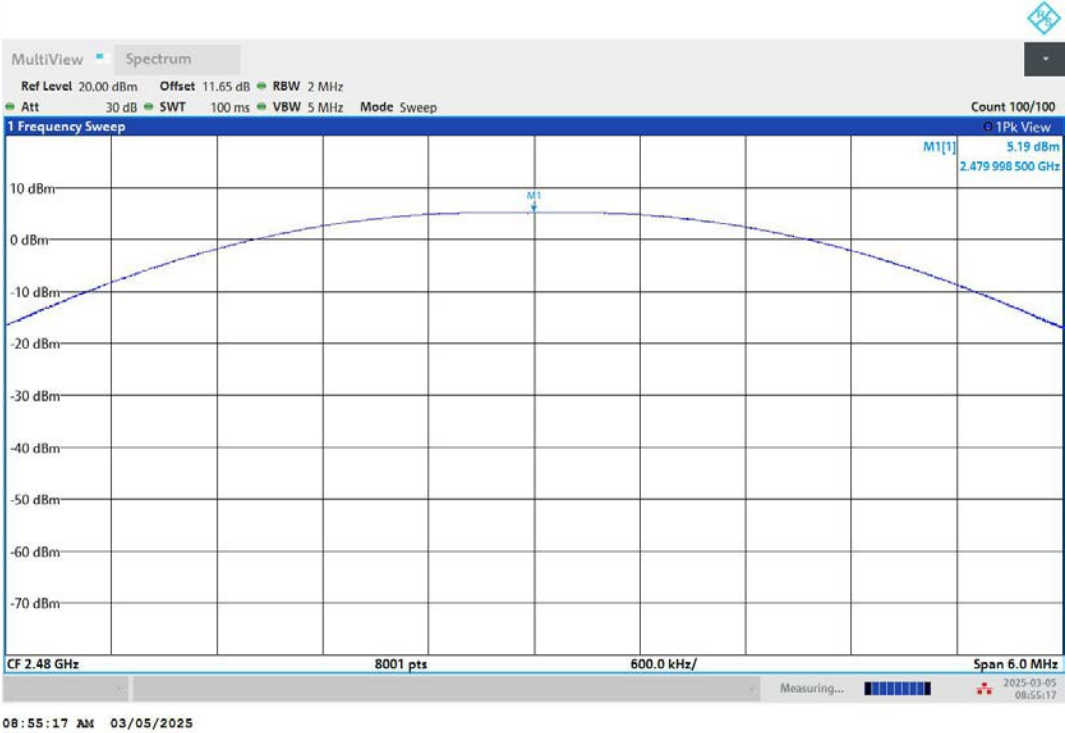


BLE_2M-Ant1-2402-PASS

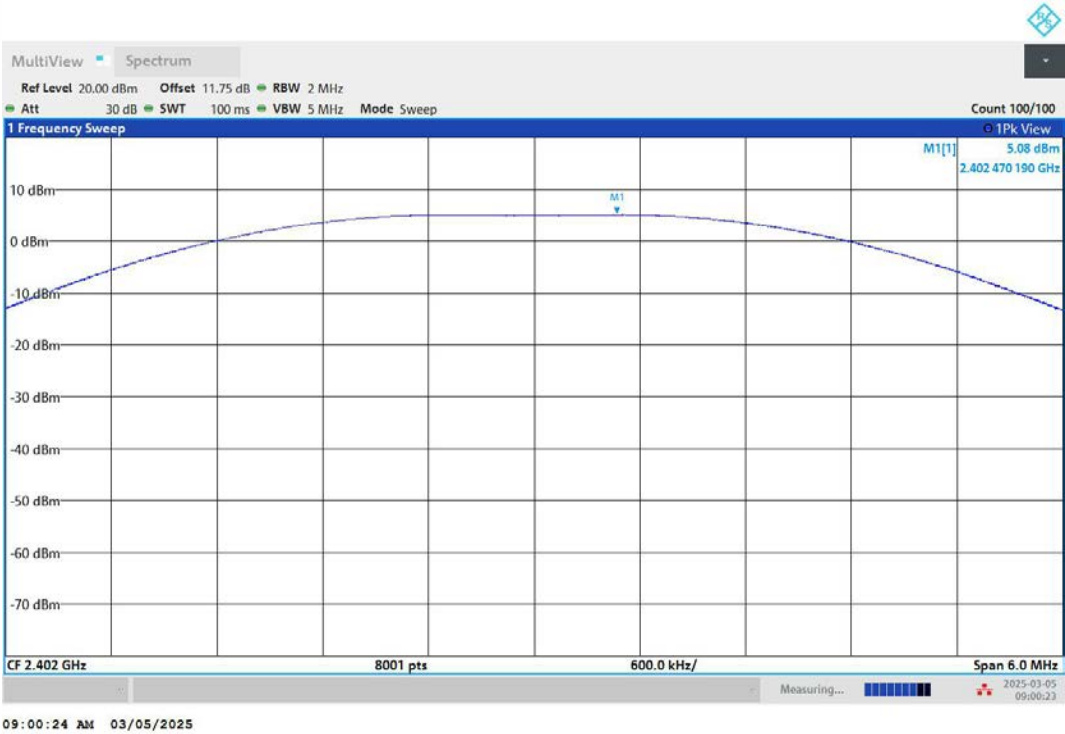

BLE_2M-Ant1-2440-PASS

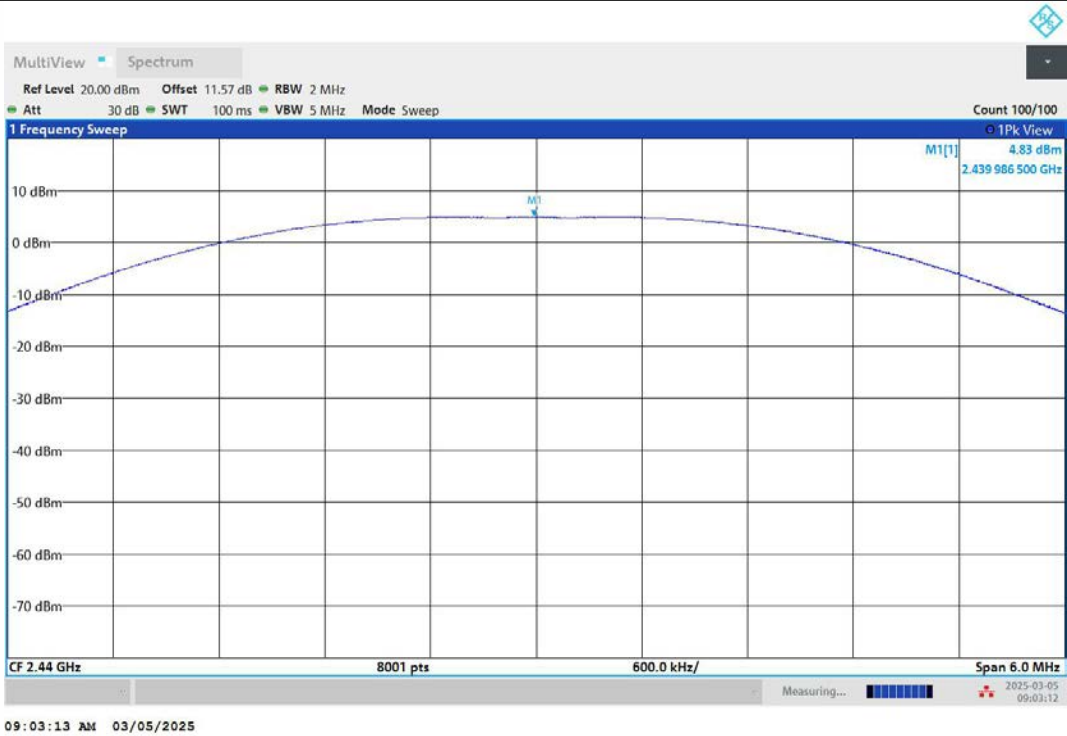

BLE_2M-Ant1-2480-PASS

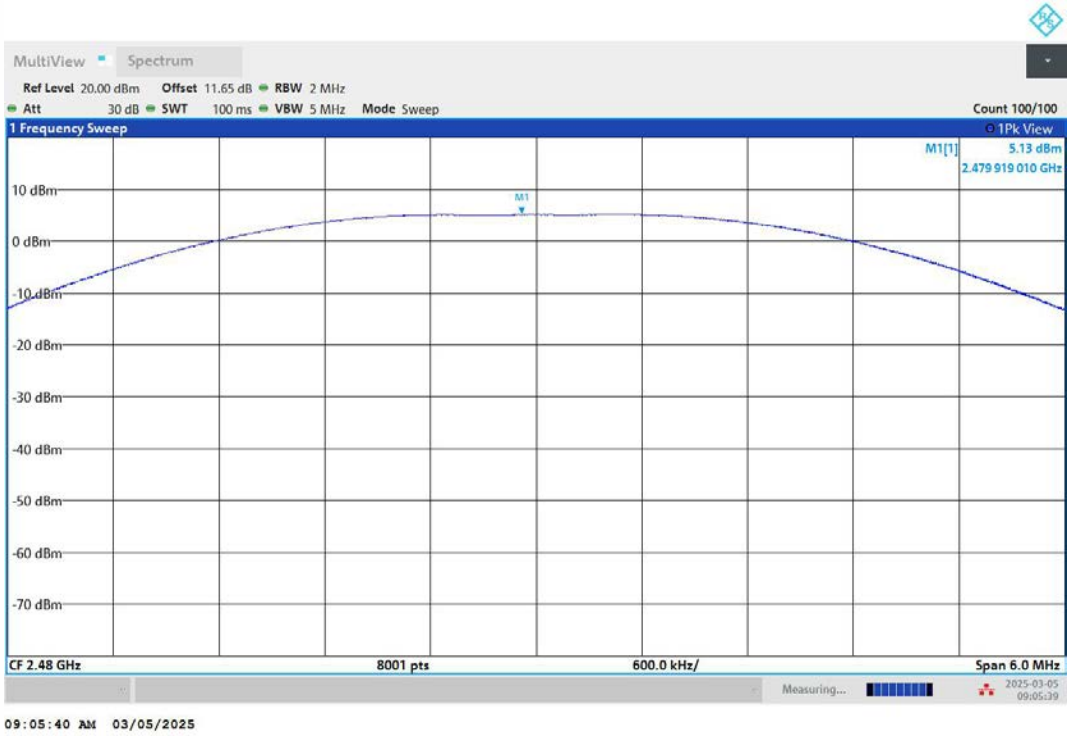

8.3 MAXIMUM POWER SPECTRAL DENSITY

8.3.1 Applicable Standard

According to FCC Part 15.247(e) and KDB 558074 D01 15.247 Meas Guidance v05r02.

8.3.2 Conformance Limit

The transmitter power spectral density conducted from the transmitter to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.3.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1.

8.3.4 Test Procedure

This procedure shall be used if maximum peak conducted output power was used to demonstrate compliance.

The transmitter output (antenna port) was connected to the spectrum analyzer.

Set analyzer center frequency to DTS channel center frequency.

Set the span to 1.5 times the DTS bandwidth.

Set the RBW to: 3 kHz

Set the VBW to: 10 kHz.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level within the RBW.

8.3.5 Test Results

Temperature : 25°C


Humidity : 45 %

ATM Pressure: 1011 mbar


Test Engineer: GJ

TestMode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant1	2402	-10.04	≤8.00	PASS
BLE_1M	Ant1	2440	-10.58	≤8.00	PASS
BLE_1M	Ant1	2480	-10.53	≤8.00	PASS
BLE_2M	Ant1	2402	-12.58	≤8.00	PASS
BLE_2M	Ant1	2440	-12.94	≤8.00	PASS
BLE_2M	Ant1	2480	-12.51	≤8.00	PASS


BLE_1M-Ant1-2402-PASS

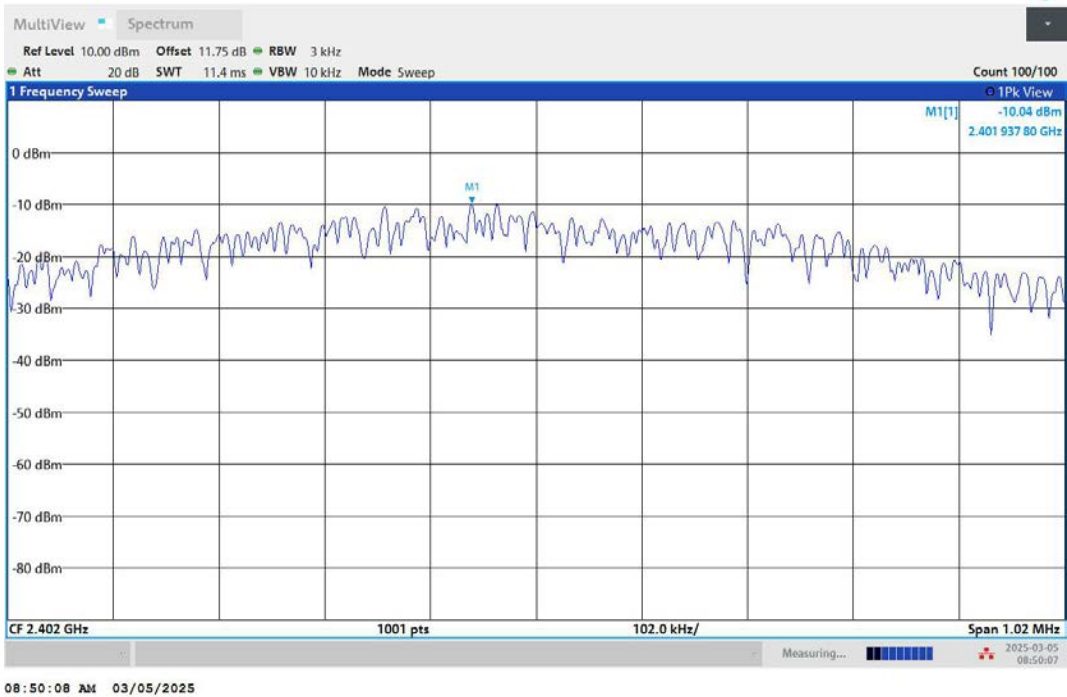

BLE_1M-Ant1-2440-PASS

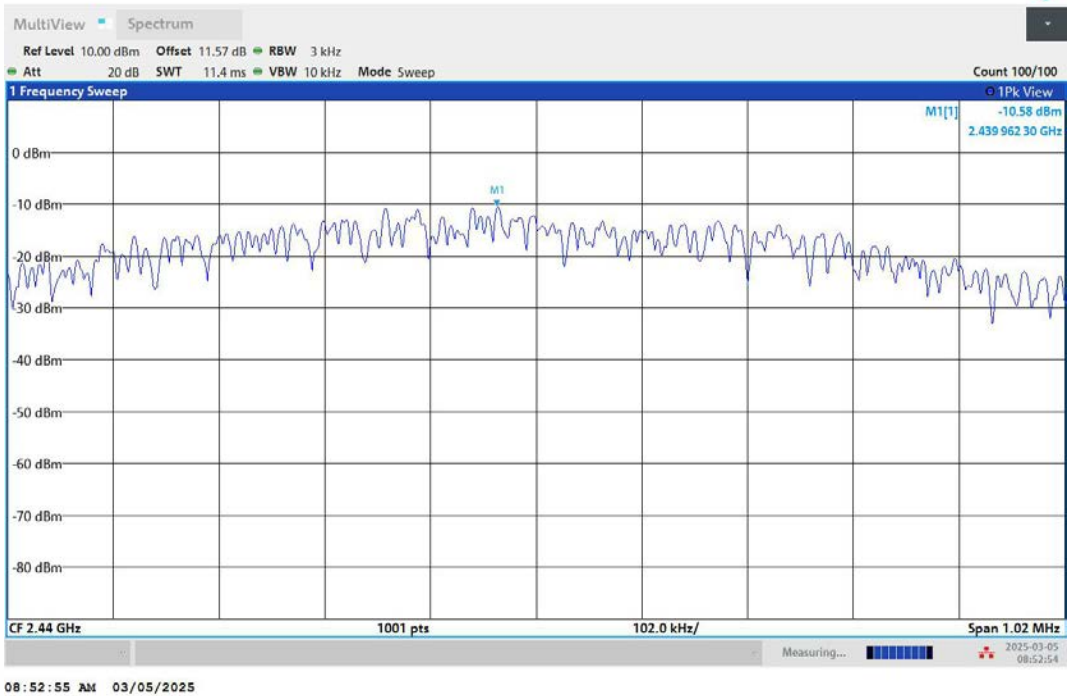


BLE_1M-Ant1-2480-PASS

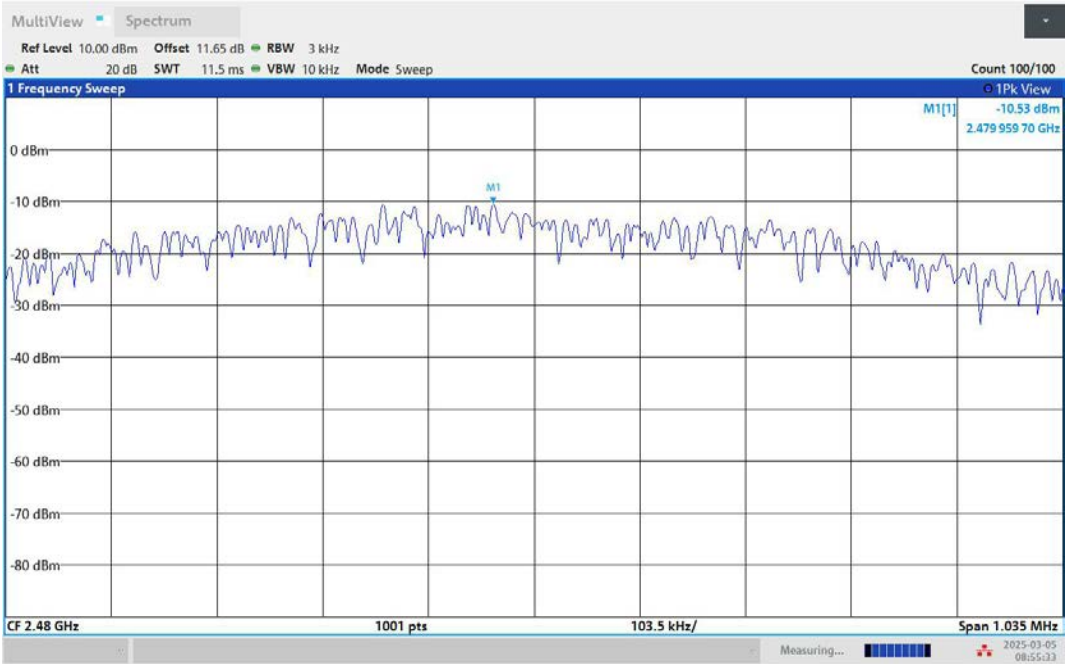


08:55:34 AM 03/05/2025

BLE_2M-Ant1-2402-PASS

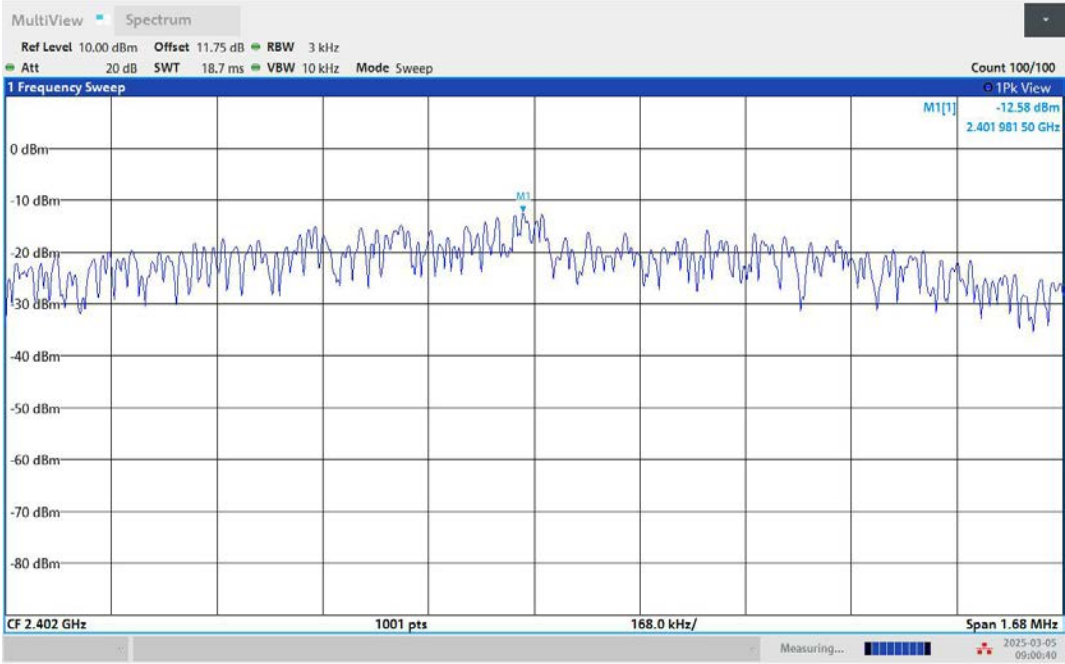


09:00:40 AM 03/05/2025

BLE_2M-Ant1-2440-PASS

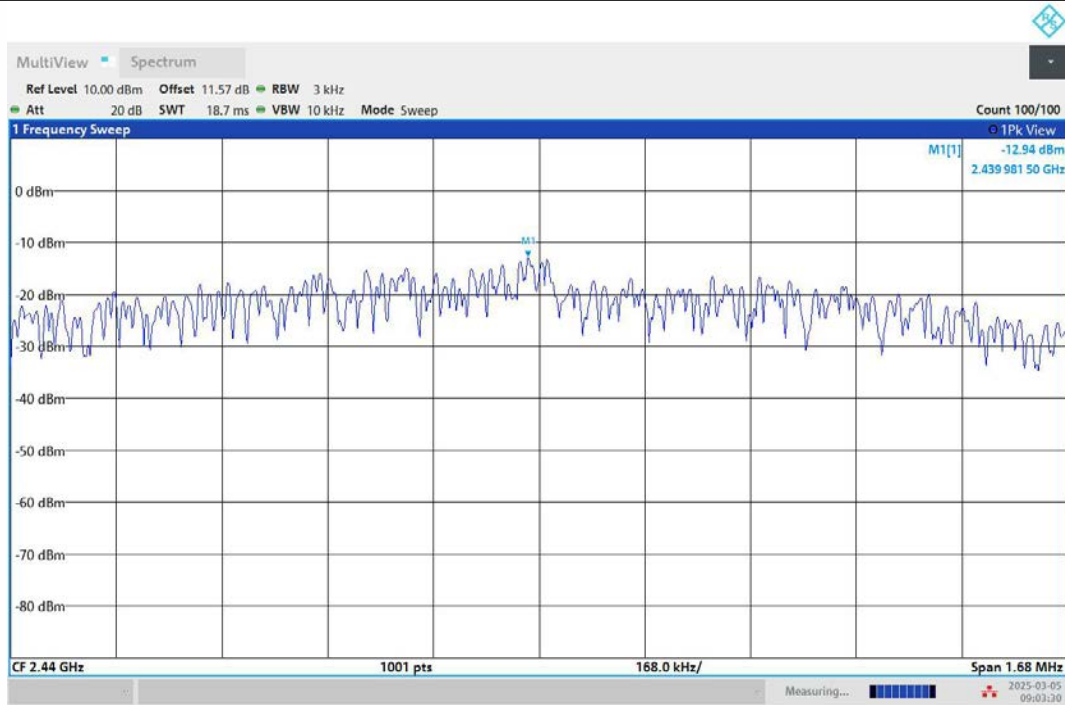

09:03:30 AM 03/05/2025

BLE_2M-Ant1-2480-PASS

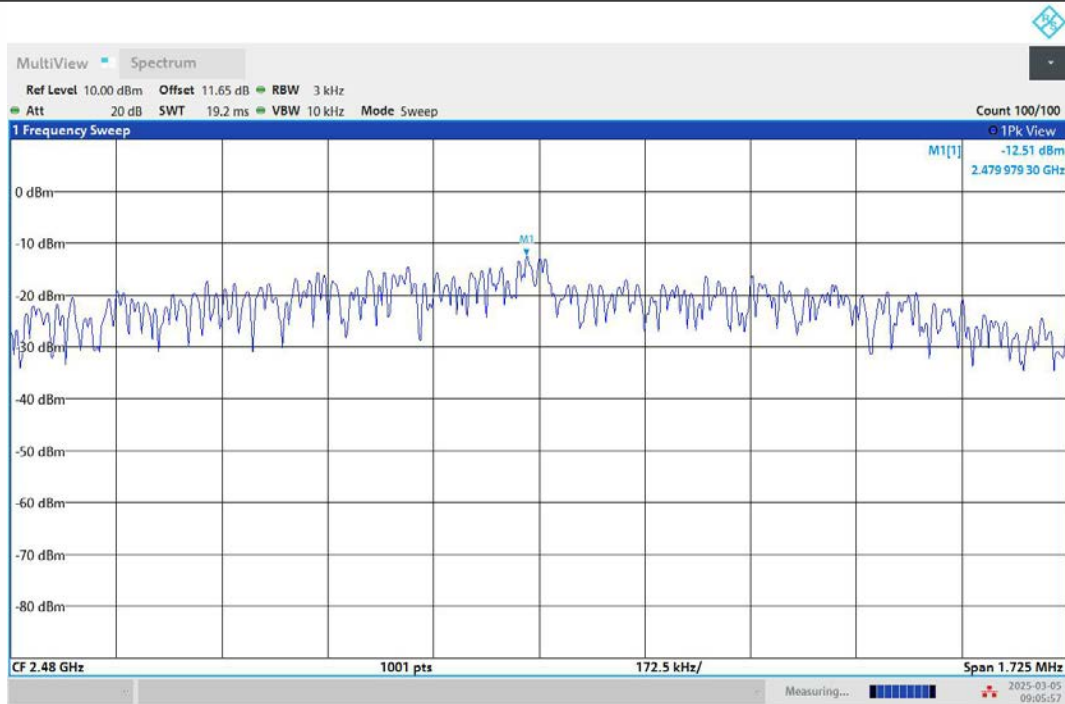

09:05:58 AM 03/05/2025

8.4 UNWANTED EMISSIONS IN NON-RESTRICTED FREQUENCY BANDS

8.4.1 Applicable Standard

According to FCC Part 15.247(d) and KDB 558074 D01 15.247 Meas Guidance v05r02.

8.4.2 Conformance Limit

According to FCC Part 15.247(d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.

8.4.3 Test Configuration

Test according to clause 7.1 radio frequency test setup 1.

8.4.4 Test Procedure

The transmitter output (antenna port) was connected to the spectrum analyzer.

■ Reference level measurement

Establish a reference level by using the following procedure:

Set instrument center frequency to DTS channel center frequency.

Set the span to = 1.5 times the DTS bandwidth.

Set the RBW = 100 kHz.

Set the VBW $\geq 3 \times$ RBW.

Set Detector = peak.

Set Sweep time = auto couple.

Set Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum PSD level.

Note that the channel found to contain the maximum PSD level can be used to establish the reference level.

■ Emission level measurement

Set the center frequency and span to encompass frequency range to be measured.

Set the RBW = 100 kHz.

Set the VBW = 300 kHz.

Set Detector = peak.

Sweep time = auto couple.

Trace mode = max hold.

Allow trace to fully stabilize.

Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements. Report the three highest emissions relative to the limit.

8.4.5 Test Results

Temperature : 25°C ATM Pressure: 1011 mbar
Humidity : 45 % Test Engineer: GJ

All the modes were tested and the data of the worst modes are attached the following pages.

Reference level measurement

TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm]
BLE_1M	Ant1	2402	2401.98	5.03
BLE_1M	Ant1	2440	2439.98	4.73
BLE_1M	Ant1	2480	2479.98	5.02
BLE_2M	Ant1	2402	2401.98	4.91
BLE_2M	Ant1	2440	2439.98	4.66
BLE_2M	Ant1	2480	2479.98	4.97

Band edge measurements


TestMode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	Low	2402	5.03	-38.33	≤-14.97	PASS
BLE_1M	Ant1	High	2480	5.02	-41.89	≤-14.98	PASS
BLE_2M	Ant1	Low	2402	4.91	-26.15	≤-15.09	PASS
BLE_2M	Ant1	High	2480	4.97	-43.38	≤-15.03	PASS

Conducted Spurious Emission

TestMode	Antenna	Frequency[MHz]	FreqRange [MHz]	RefLevel [dBm]	Result[dBm]	Limit[dBm]	Verdict
BLE_1M	Ant1	2402	30~1000	5.03	-63.32	≤-14.97	PASS
BLE_1M	Ant1	2402	1000~26500	5.03	-57.29	≤-14.97	PASS
BLE_1M	Ant1	2440	30~1000	4.73	-63.66	≤-15.27	PASS
BLE_1M	Ant1	2440	1000~26500	4.73	-56.15	≤-15.27	PASS
BLE_1M	Ant1	2480	30~1000	5.02	-63.61	≤-14.98	PASS
BLE_1M	Ant1	2480	1000~26500	5.02	-56.39	≤-14.98	PASS
BLE_2M	Ant1	2402	30~1000	4.91	-63.87	≤-15.09	PASS
BLE_2M	Ant1	2402	1000~26500	4.91	-57.76	≤-15.09	PASS
BLE_2M	Ant1	2440	30~1000	4.66	-63.16	≤-15.34	PASS
BLE_2M	Ant1	2440	1000~26500	4.66	-56.26	≤-15.34	PASS
BLE_2M	Ant1	2480	30~1000	4.97	-63.68	≤-15.03	PASS
BLE_2M	Ant1	2480	1000~26500	4.97	-56.83	≤-15.03	PASS


Reference level measurement



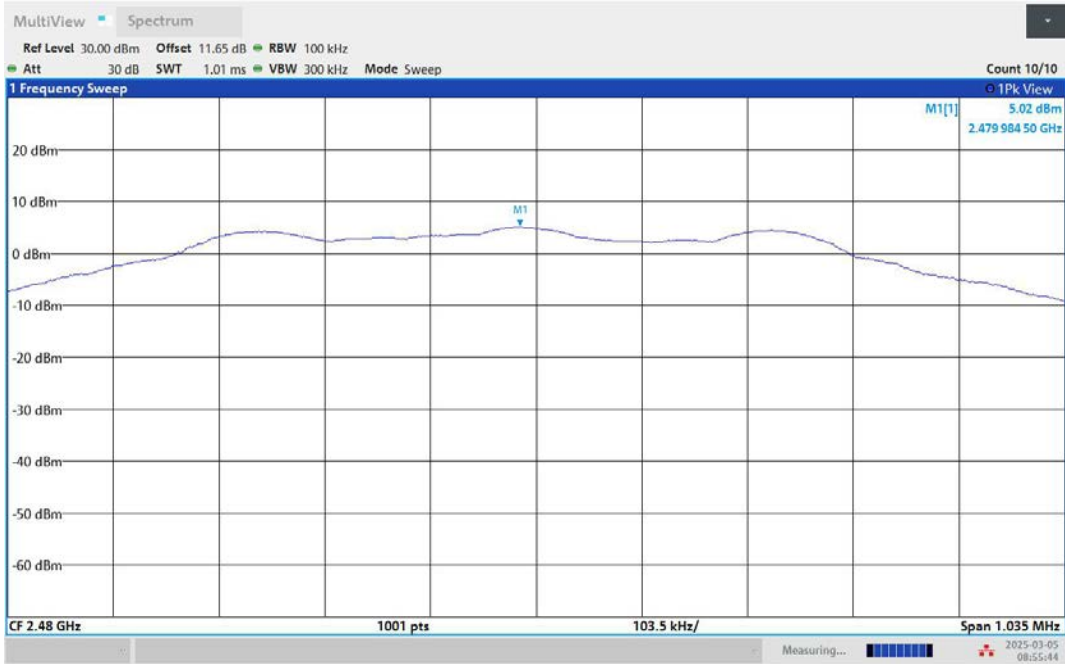


08:55:45 AM 03/05/2025

BLE_2M-Ant1-2402-PASS

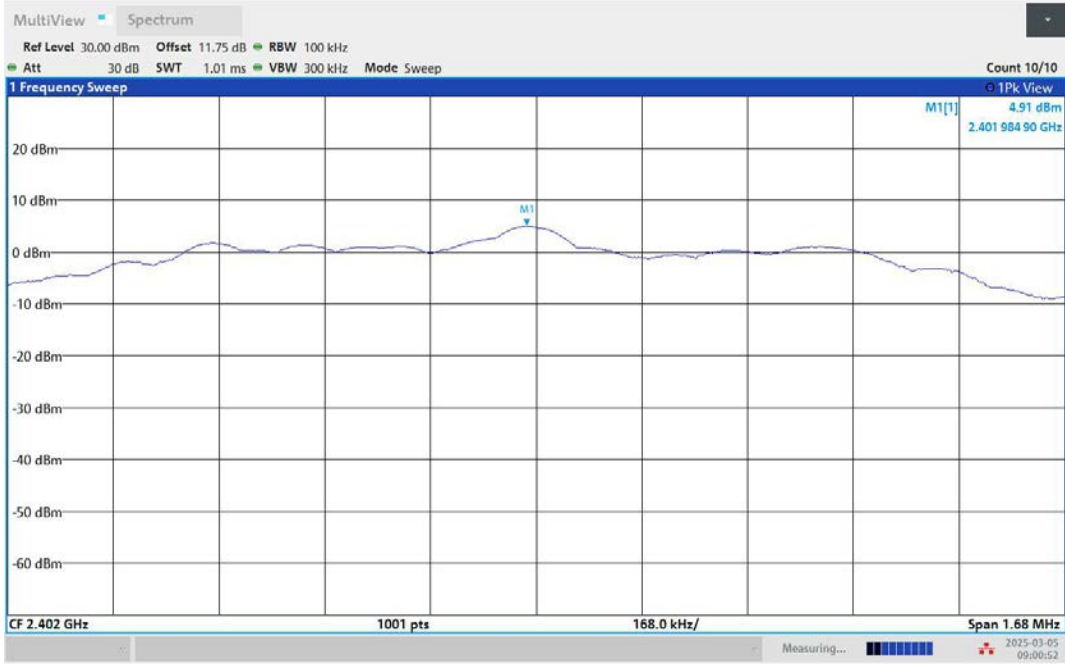


09:00:52 AM 03/05/2025

BLE_2M-Ant1-2440-PASS

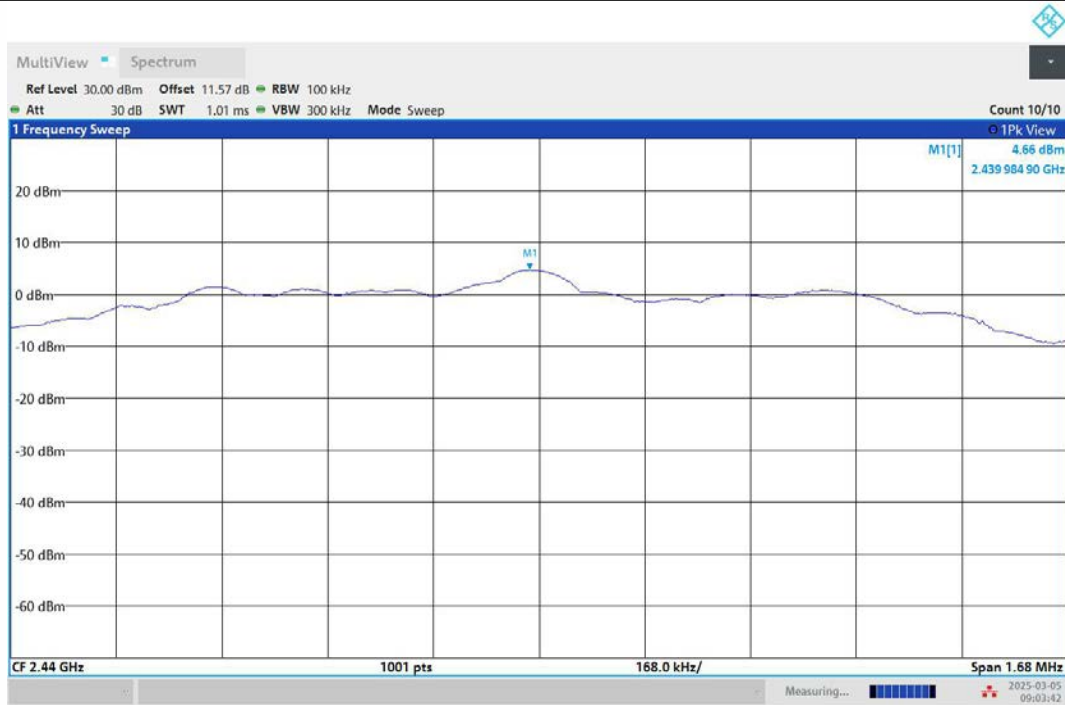


09:03:42 AM 03/05/2025


BLE_2M-Ant1-2480-PASS

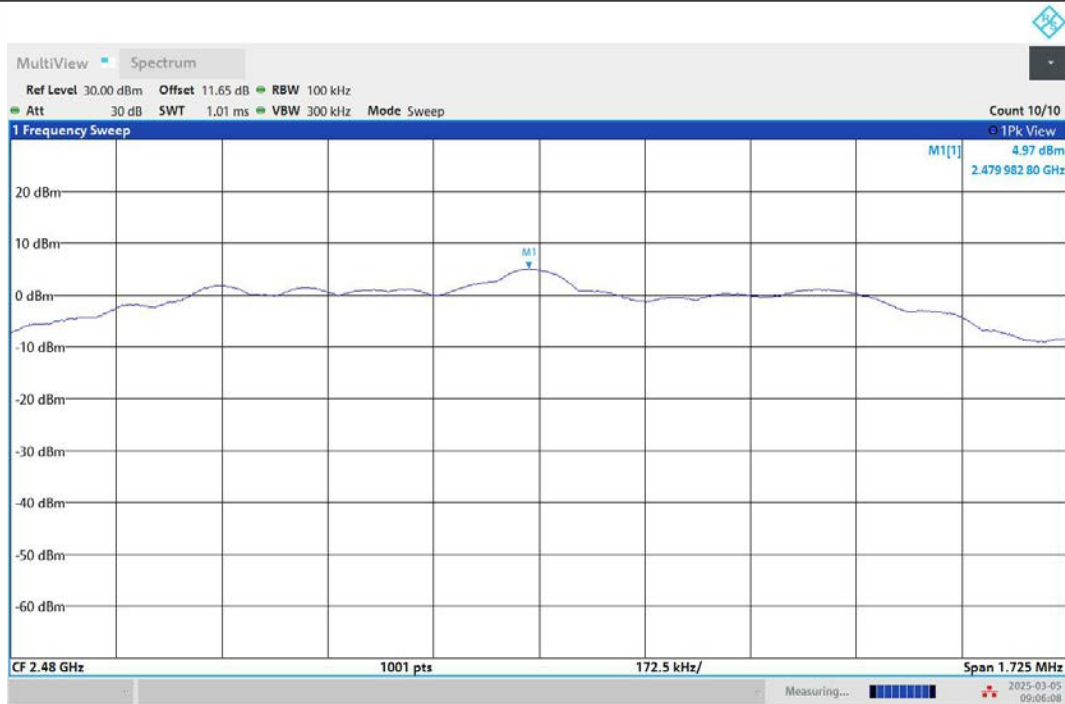


09:06:08 AM 03/05/2025

Band edge measurements

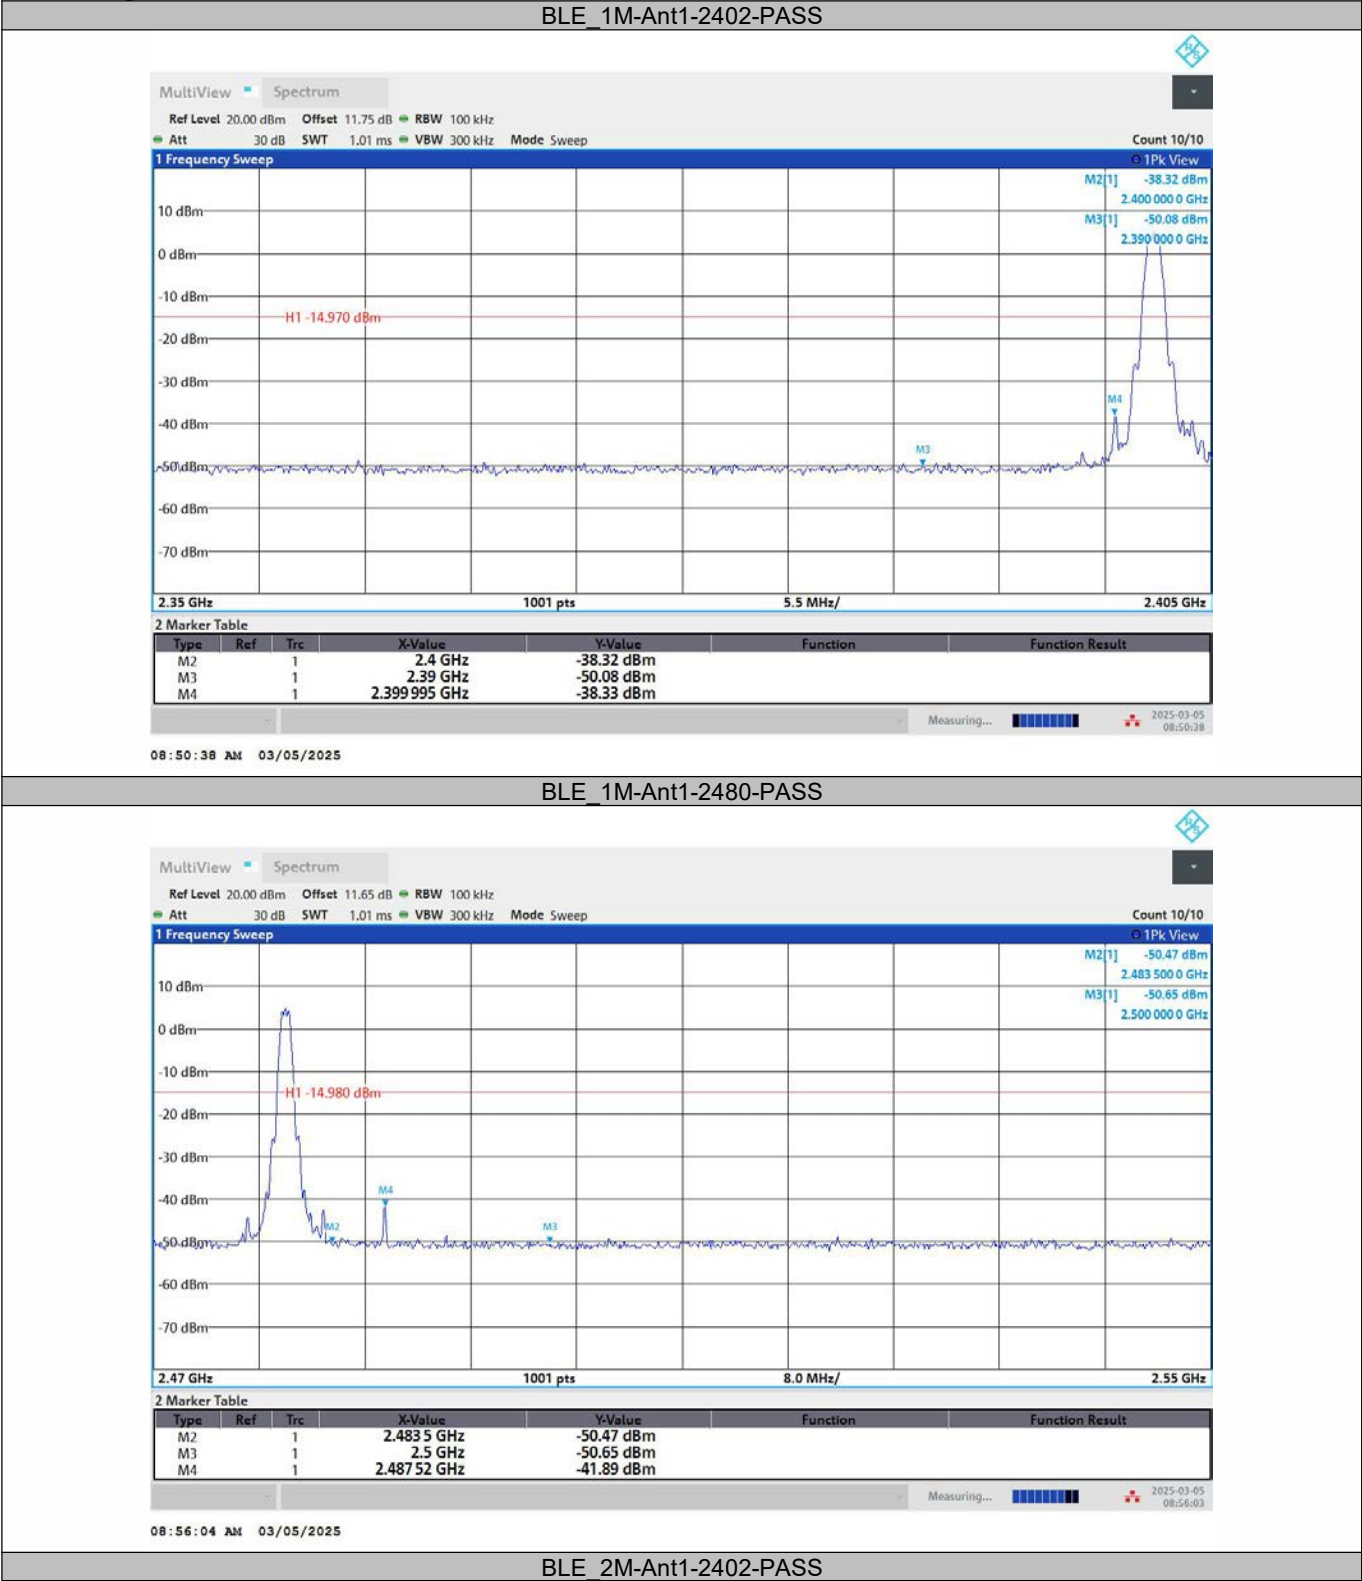

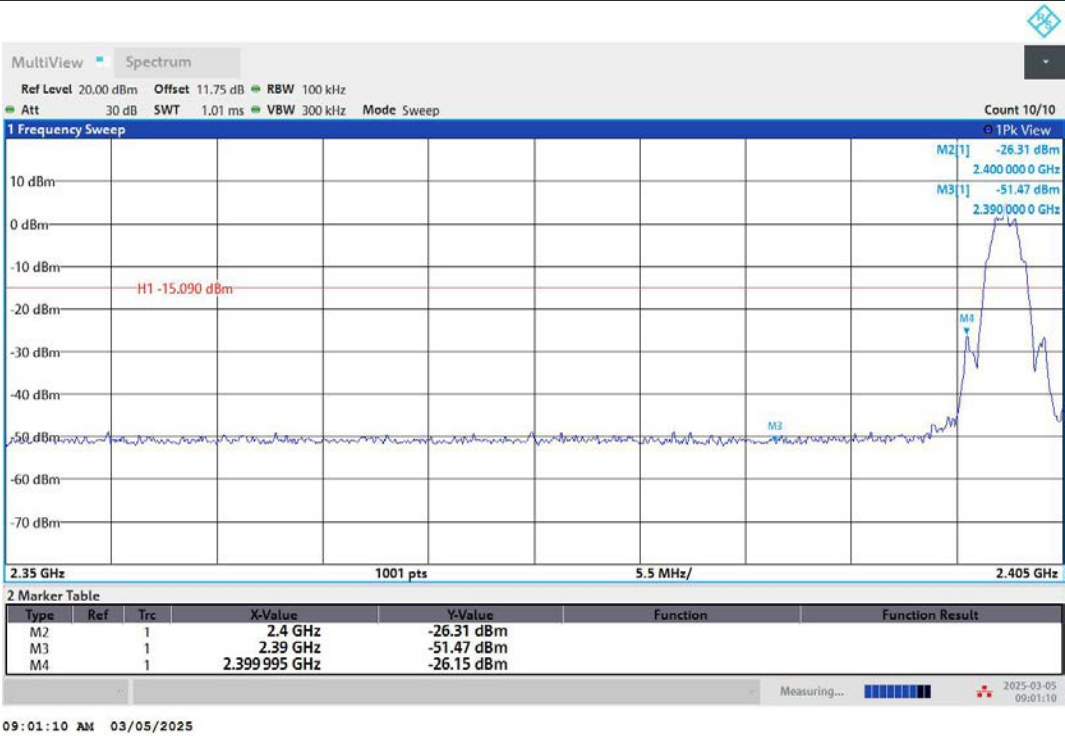


BLE_2M-Ant1-2480-PASS

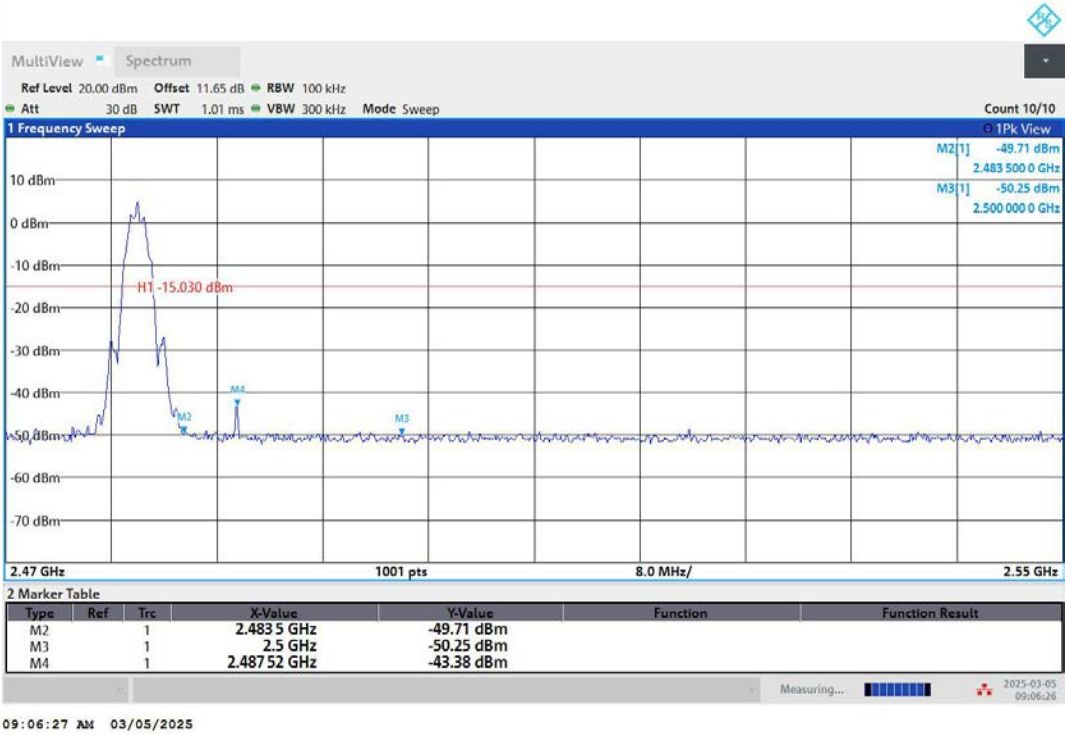


Conducted Spurious Emission


BLE_1M-Ant1-2402-30~1000-PASS

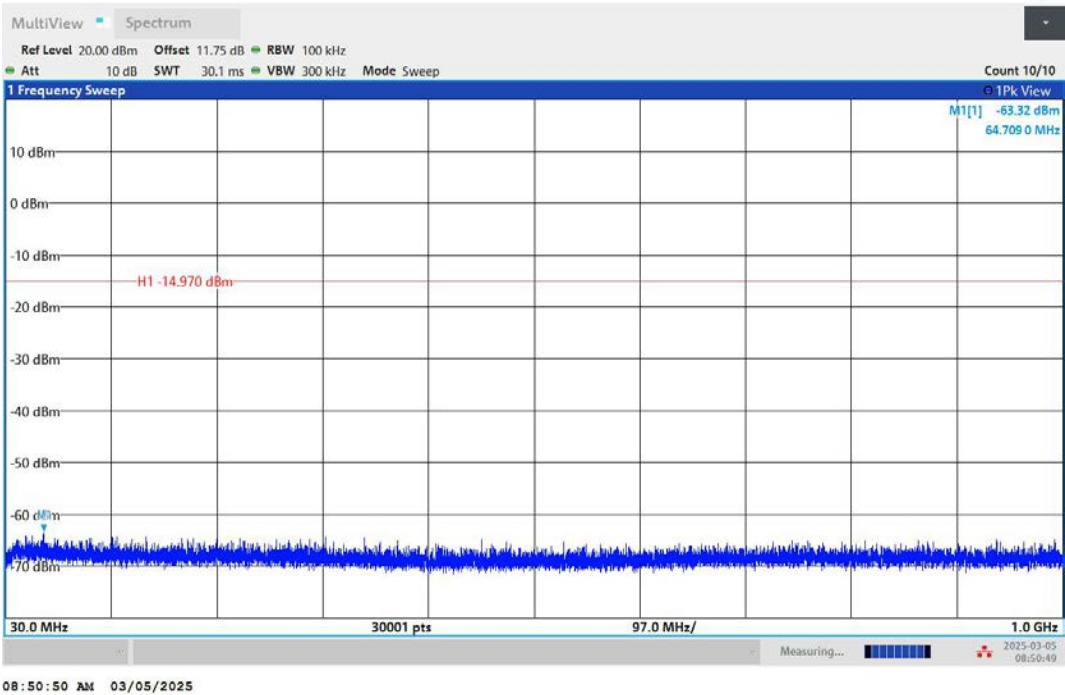


BLE_1M-Ant1-2402-1000~26500-PASS

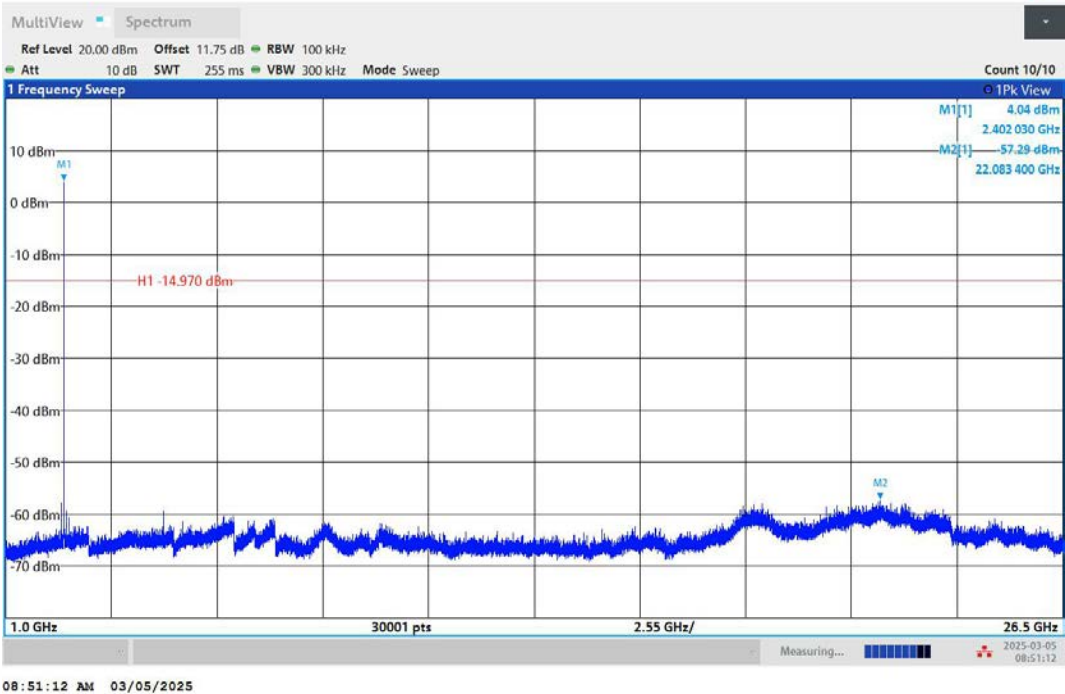


BLE_1M-Ant1-2440-30~1000-PASS

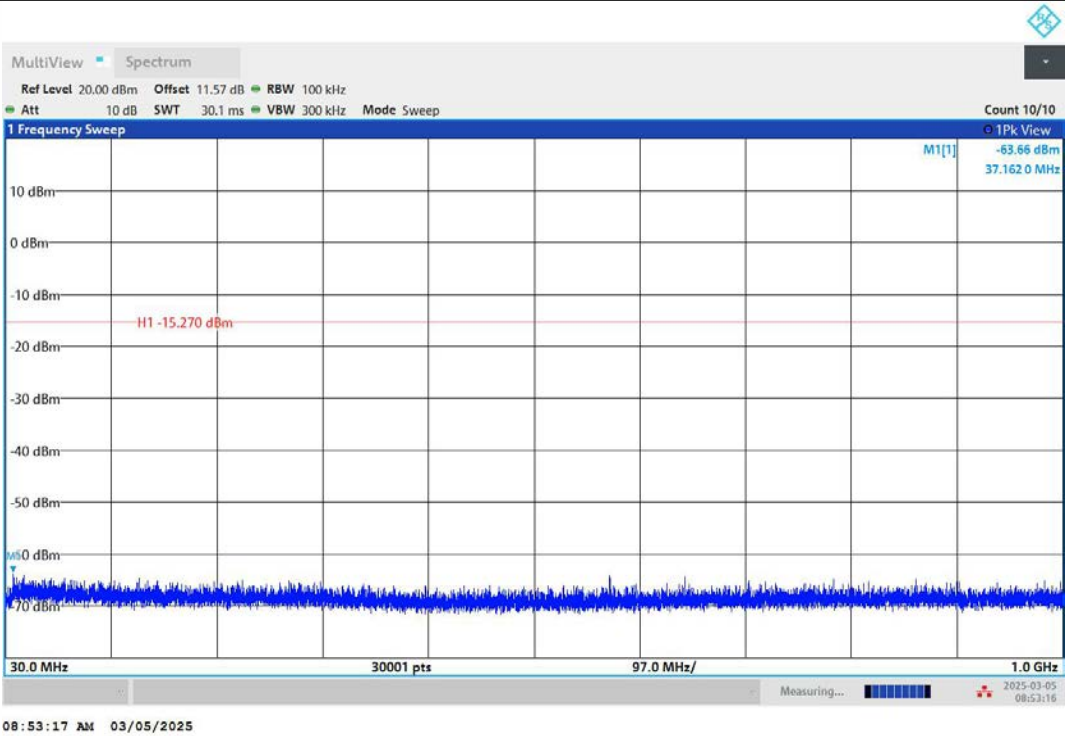

BLE_1M-Ant1-2440-1000~26500-PASS

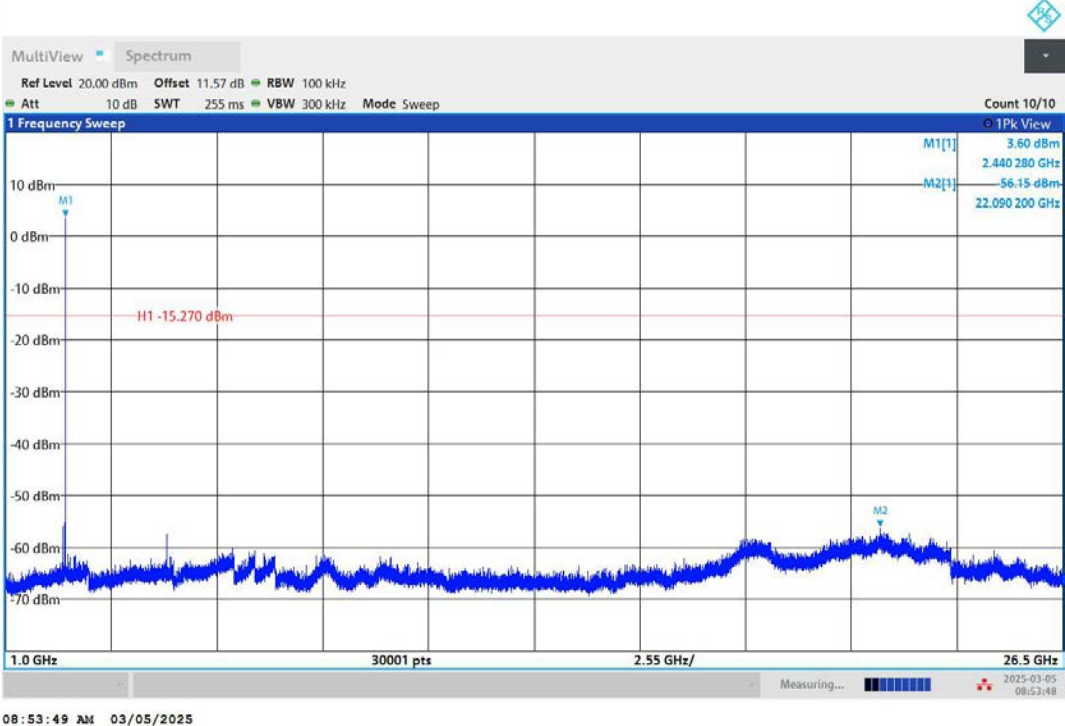


BLE_1M-Ant1-2480-30~1000-PASS

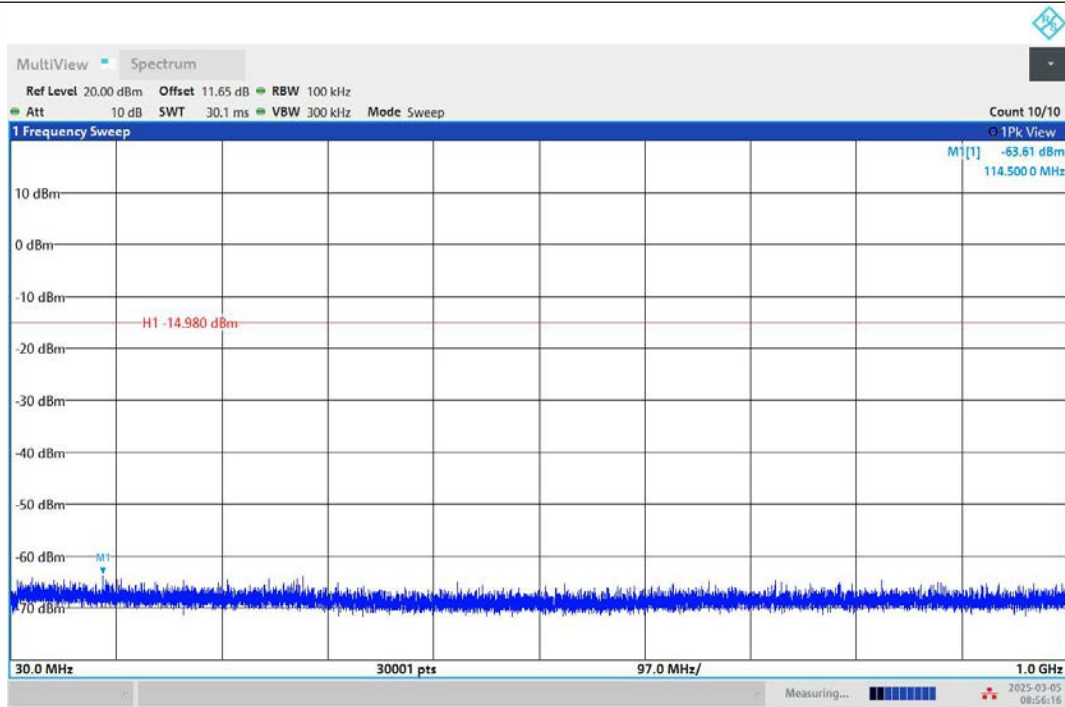


08:56:17 AM 03/05/2025

BLE_1M-Ant1-2480-1000~26500-PASS

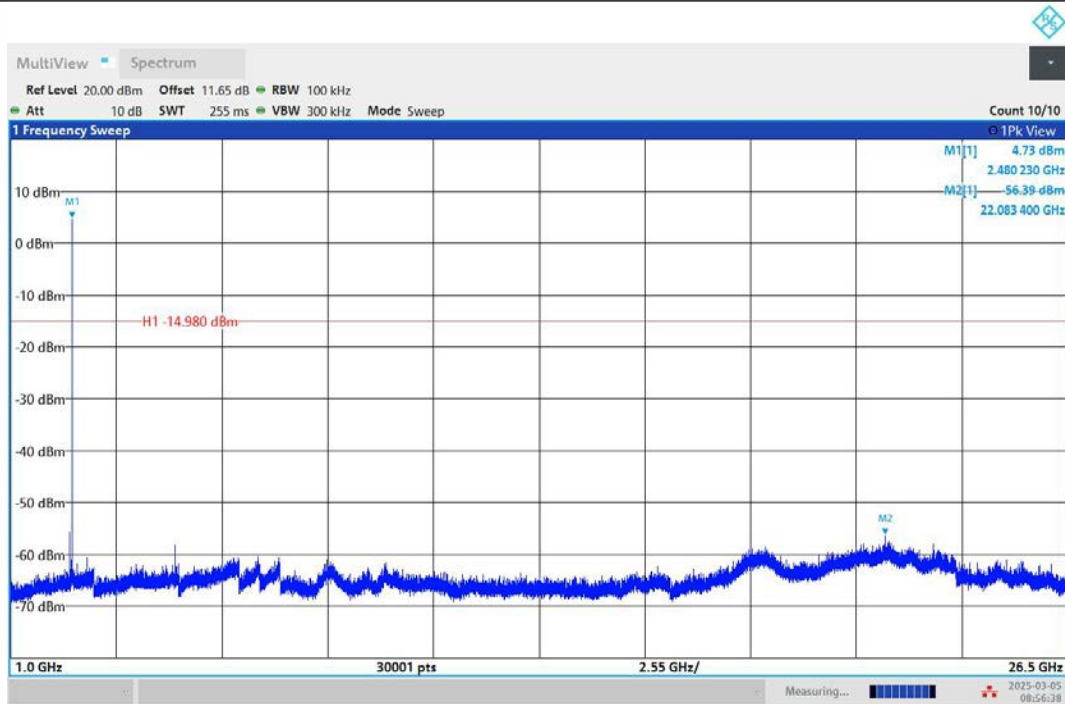


08:56:39 AM 03/05/2025

BLE_2M-Ant1-2402-30~1000-PASS

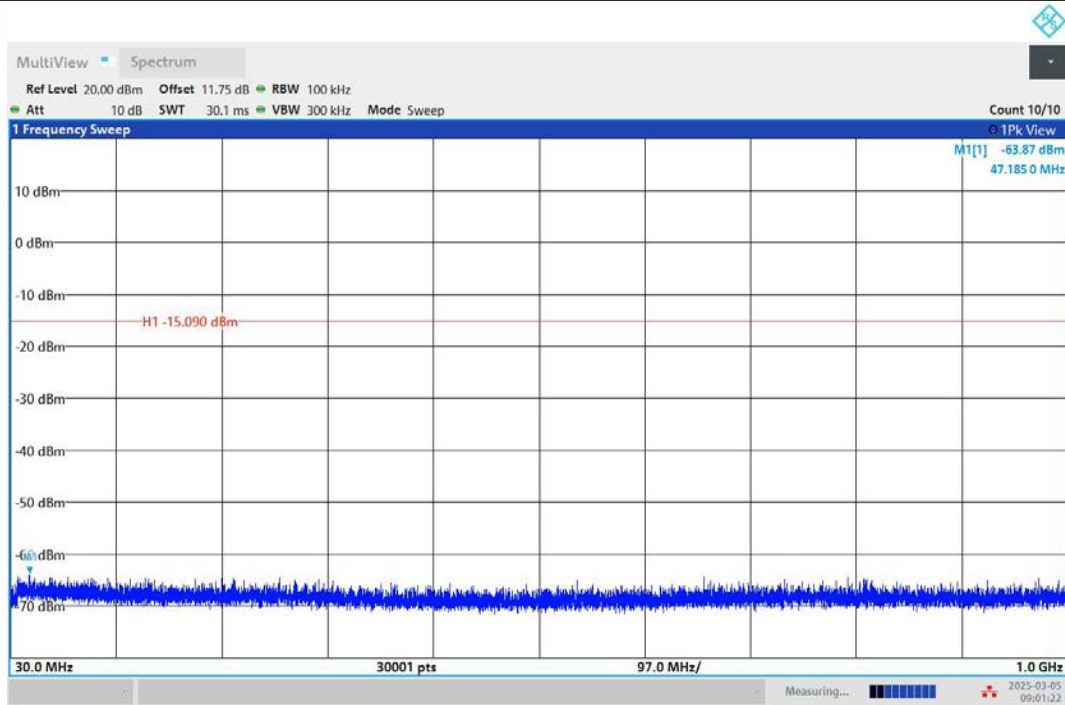


09:01:23 AM 03/05/2025

BLE_2M-Ant1-2402-1000~26500-PASS

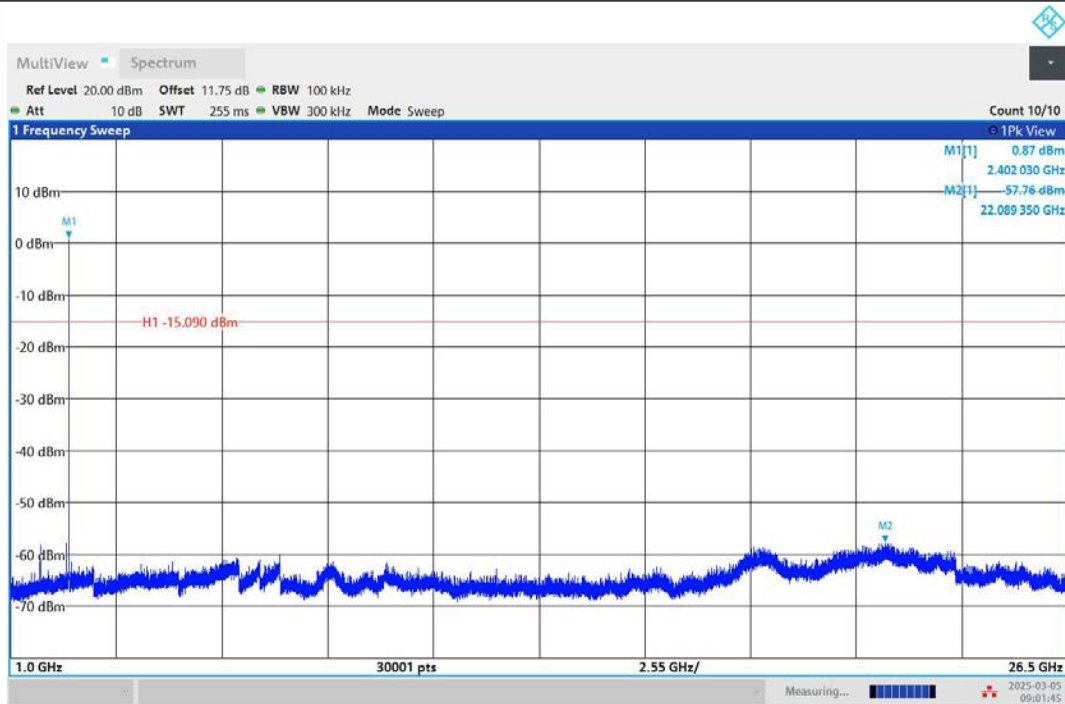


09:01:45 AM 03/05/2025


BLE_2M-Ant1-2440-30~1000-PASS

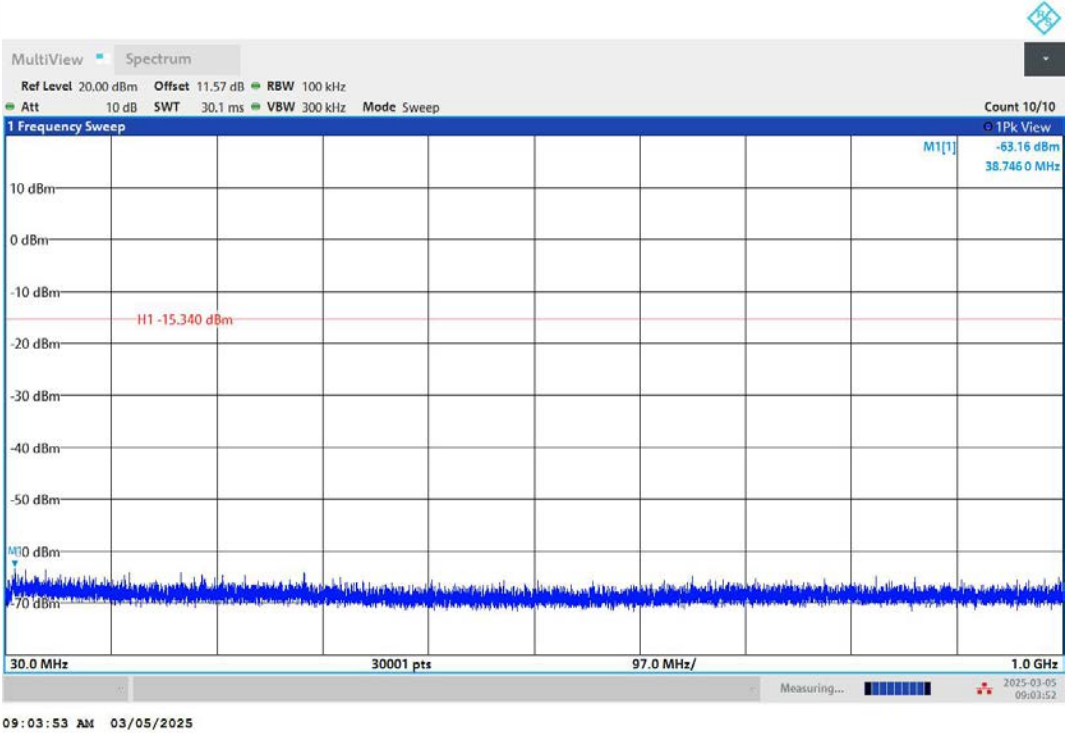


BLE_2M-Ant1-2440-1000~26500-PASS

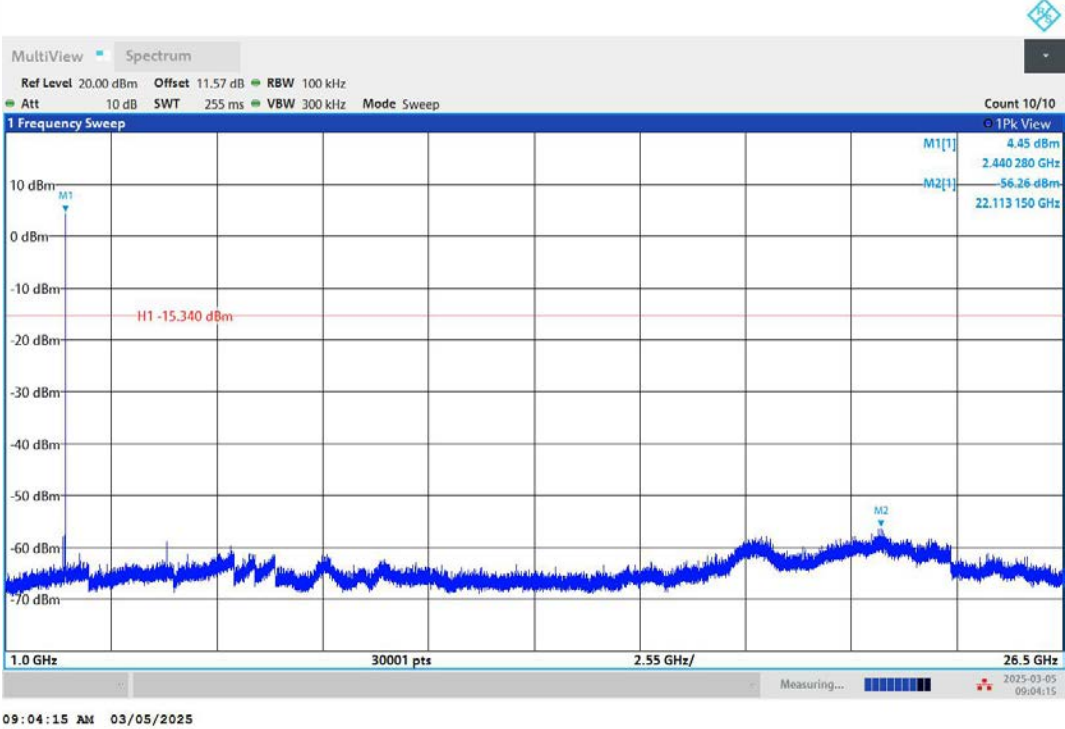

BLE_2M-Ant1-2480-30~1000-PASS

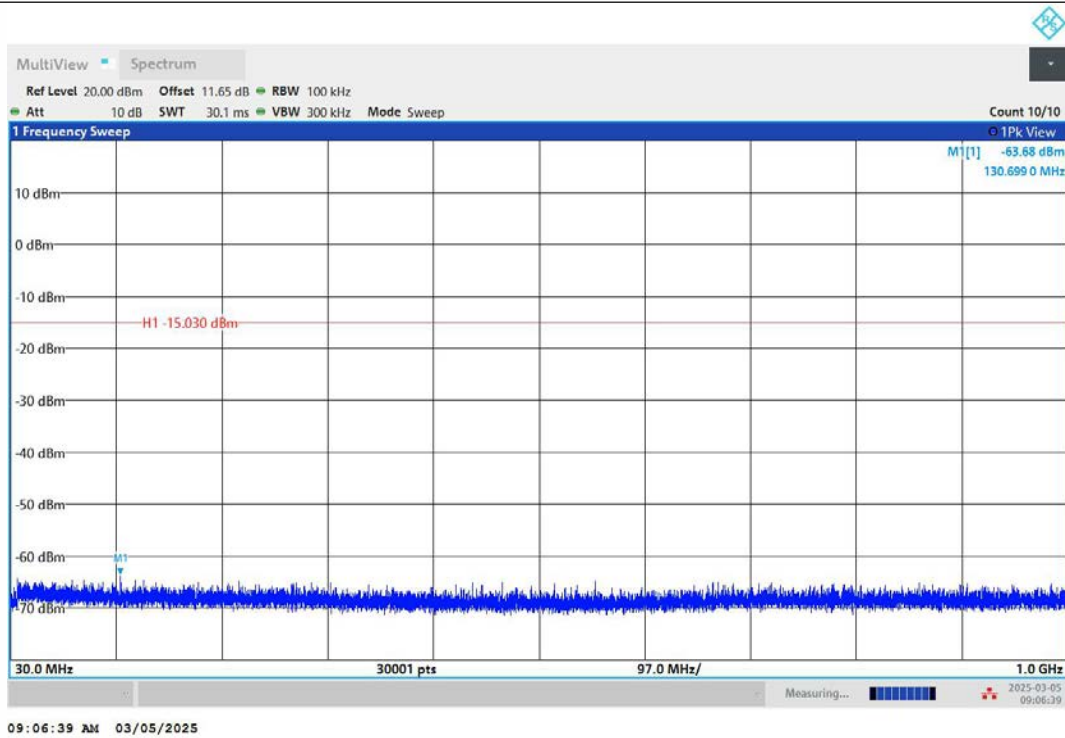

BLE_2M-Ant1-2480-1000~26500-PASS

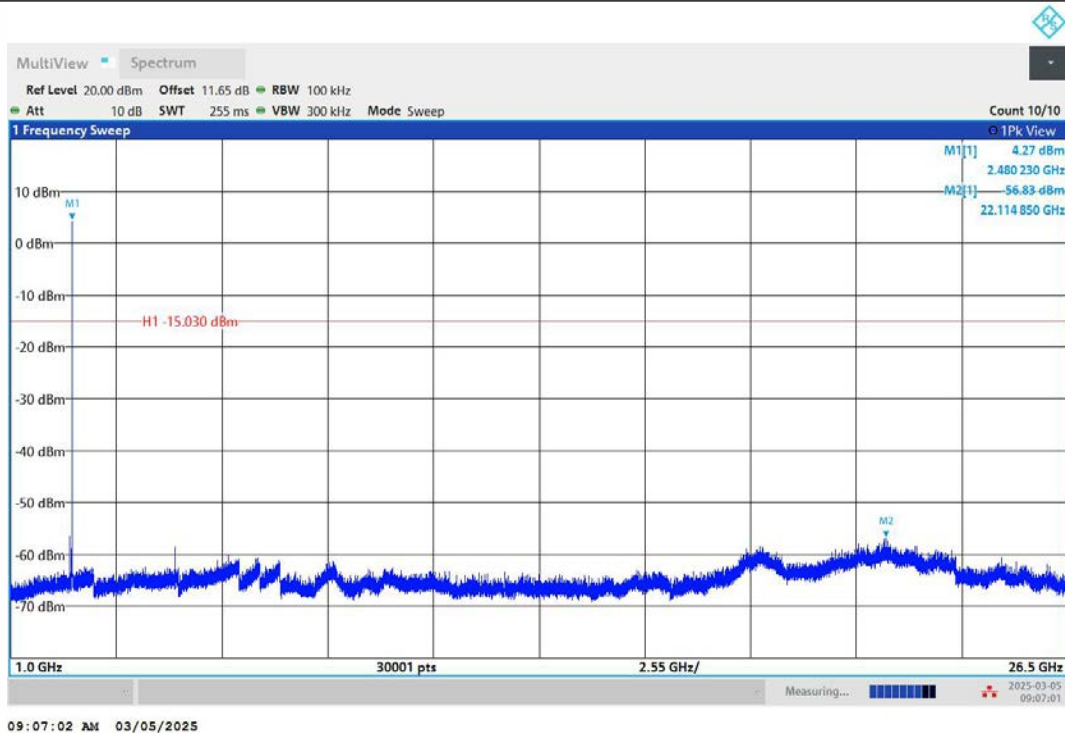

8.5 RADIATED SPURIOUS EMISSION

8.5.1 Applicable Standard

According to FCC Part 15.247(d) and 15.209 and KDB 558074 D01 15.247 Meas Guidance v05r02.

8.5.2 Conformance Limit

According to FCC Part 15.247(d): radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

According to FCC Part 15.205, Restricted bands:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(2)
13.36-13.41			

According to FCC Part 15.205, the level of any transmitter spurious emission in Restricted bands shall not exceed the level of the emission specified in the following table.

Restricted Frequency(MHz)	Field Strength (μV/m)	Field Strength (dBμV/m)	Measurement Distance
0.009-0.490	2400/F(KHz)	20 log (uV/m)	300
0.490-1.705	24000/F(KHz)	20 log (uV/m)	30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

8.5.3 Test Configuration

Test according to clause 7.2 radio frequency test setup 2.

8.5.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured.

RBW = 1 MHz for $f \geq 1$ GHz(1GHz to 25GHz), 100 kHz for $f < 1$ GHz(30MHz to 1GHz).

VBW $\geq$ RBW.

Sweep = auto.

Detector function = peak.

Trace = max hold.

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

Repeat above procedures until all frequency measured was complete.



8.5.5 Test Results

Temperature : 25°C ATM Pressure: 1011 mbar
Humidity : 45 % Test Engineer: CZF

All of the configurations or modes are tested, the data of the worst case is recorded as below.

■ Spurious Emission below 30MHz (9KHz to 30MHz)

Freq. (MHz)	Ant.Pol. H/V	Emission Level(dBuV/m)		Limit 3m(dBuV/m)		Over(dB)	
		PK	AV	PK	AV	PK	AV
--	--	--	--	--	--	--	--

Note: Data of measurement within this frequency range shown “ -- ” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Spurious Emission Above 1GHz (1GHz to 25GHz)

Test mode: BLE(1M) Frequency: Channel 0: 2402MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
7269.37	V	53.41	74.00	20.59	peak
9905.62	V	61.22	74.00	12.78	peak
12639.3	V	62.79	74.00	11.21	peak
7269.37	V	37.86	54.00	16.14	AVG
9905.62	V	42.40	54.00	11.60	AVG
12639.3	V	45.36	54.00	8.64	AVG
8107.5	H	55.24	74.00	18.76	peak
9892.5	H	61.69	74.00	12.31	peak
12635.6	H	61.98	74.00	12.02	peak
8107.5	H	39.67	54.00	14.33	AVG
9892.5	H	42.39	54.00	11.61	AVG
12635.6	H	45.25	54.00	8.75	AVG

Test mode: BLE(1M) Frequency: Channel 19: 2440MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
7498.125	V	55.10	74.00	18.90	peak
9911.25	V	61.33	74.00	12.67	peak
12588.75	V	62.45	74.00	11.55	peak
7498.125	V	39.55	54.00	14.45	AVG
9911.25	V	42.56	54.00	11.44	AVG
12588.75	V	45.12	54.00	8.88	AVG
7447.5	H	54.35	74.00	19.65	peak
9890.625	H	61.58	74.00	12.42	peak
12598.125	H	61.61	74.00	12.39	peak
7447.5	H	38.36	54.00	15.64	AVG
9890.625	H	42.15	54.00	11.85	AVG
12598.125	H	45.25	54.00	8.75	AVG

Test mode: BLE(1M) Frequency: Channel 39: 2480MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
7623.75	V	54.63	74.00	19.37	peak
9922.5	V	61.74	74.00	12.26	peak
12635.6	V	62.12	74.00	11.88	peak
7623.75	V	39.53	54.00	14.47	AVG
9922.5	V	42.40	54.00	11.60	AVG
12635.6	V	45.47	54.00	8.53	AVG
6870	H	54.19	74.00	19.81	peak
9890.62	H	61.50	74.00	12.50	peak
12450	H	60.64	74.00	13.36	peak
6870	H	37.88	54.00	16.12	AVG
9890.62	H	42.33	54.00	11.67	AVG
12450	H	43.23	54.00	10.77	AVG

- Note:** (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Correct Factor.
 (3) Correct Factor= Ant_F + Cab_L - Preamp
 (4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

■ Spurious Emission in Restricted Band 2310-2390MHz and 2483.5-2500MHz

Test mode: BLE(1M) Frequency: Channel 0: 2402MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
2385.97	V	44.86	74.00	29.14	peak
2385.97	V	37.69	54.00	16.31	AVG
2388.47	H	44.64	74.00	29.36	peak
2388.47	H	38.27	54.00	15.73	AVG

Test mode: BLE(1M) Frequency: Channel 39: 2480MHz

Freq. (MHz)	Ant.Pol.	Emission Level(dBuV/m)	Limit 3m(dBuV/m)	Over(dB)	Detector
2311.28	V	44.65	74.00	29.35	peak
2311.28	V	37.58	54.00	16.42	AVG
2314.82	H	44.52	74.00	29.48	peak
2314.82	H	37.85	54.00	16.15	AVG


- Note:** (1) All Readings are Peak Value (VBW=3MHz) and Average Value (VBW=10Hz).
 (2) Emission Level= Reading Level+Correct Factor.
 (3) Correct Factor= Ant_F + Cab_L - Preamp
 ((4) The reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

Test Model

Spurious Emission in Restricted Band 2310-2390MHz
BLE(1M)

Channel 0: 2402MHz

H

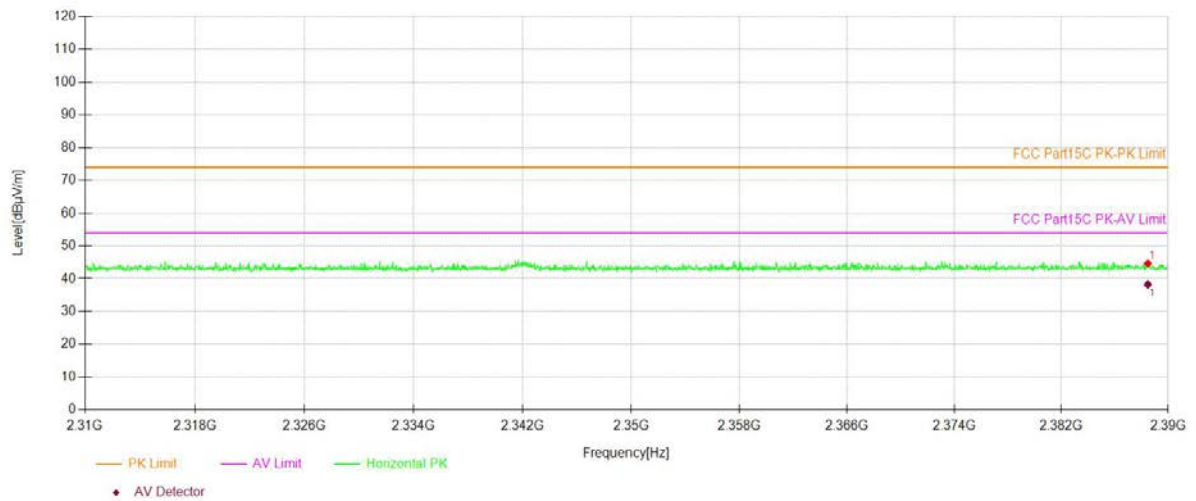


Test Model


Spurious Emission in Restricted Band 2310-2390MHz
BLE(1M)

Channel 0: 2402MHz


V

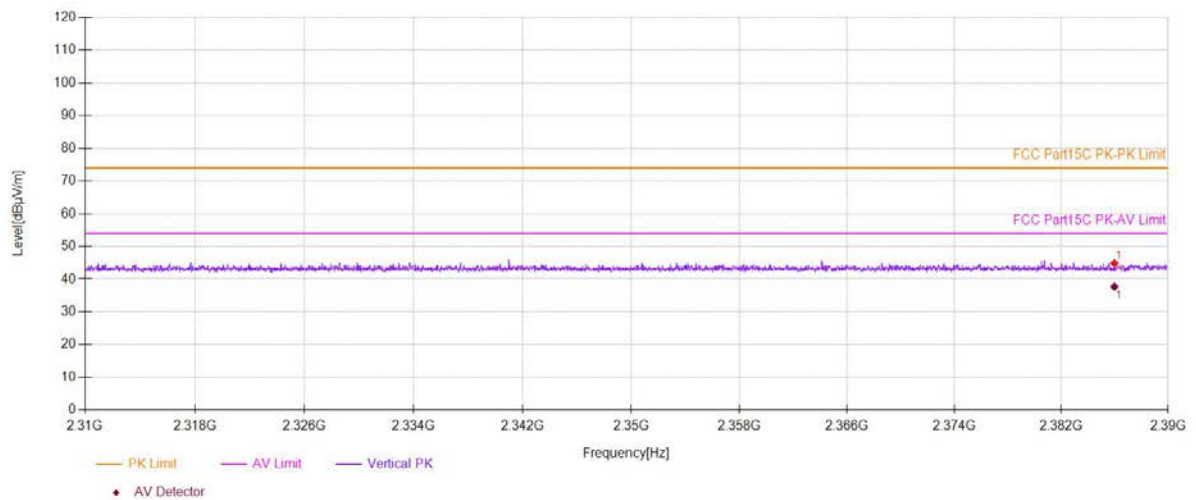

Test Model	Spurious Emission in Restricted Band 2483.5-2500MHz	
	BLE(1M)	
	Channel 39: 2480MHz	H

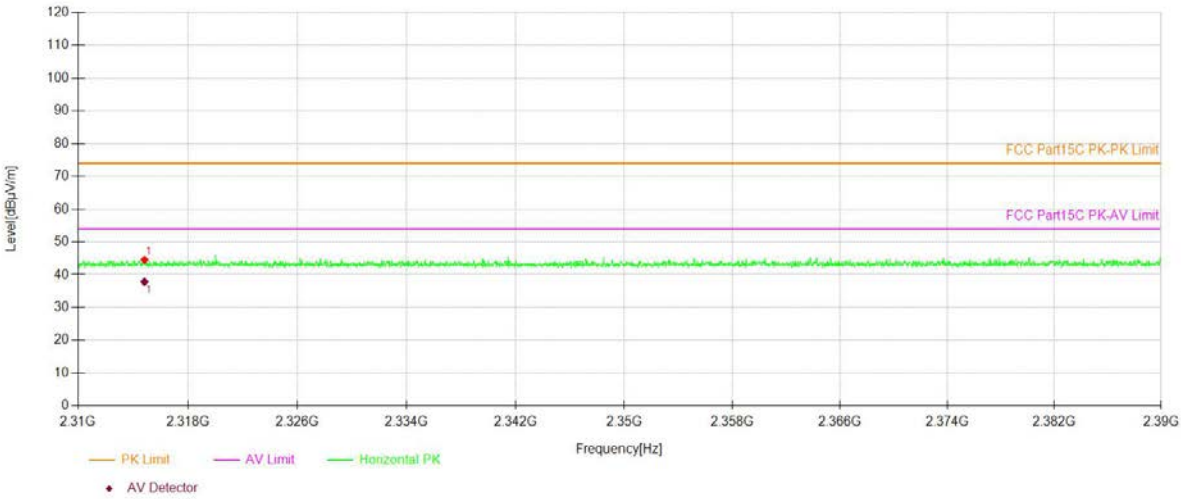


Test Model	Spurious Emission in Restricted Band 2483.5-2500MHz	
	BLE(1M)	
	Channel 39: 2480MHz	V

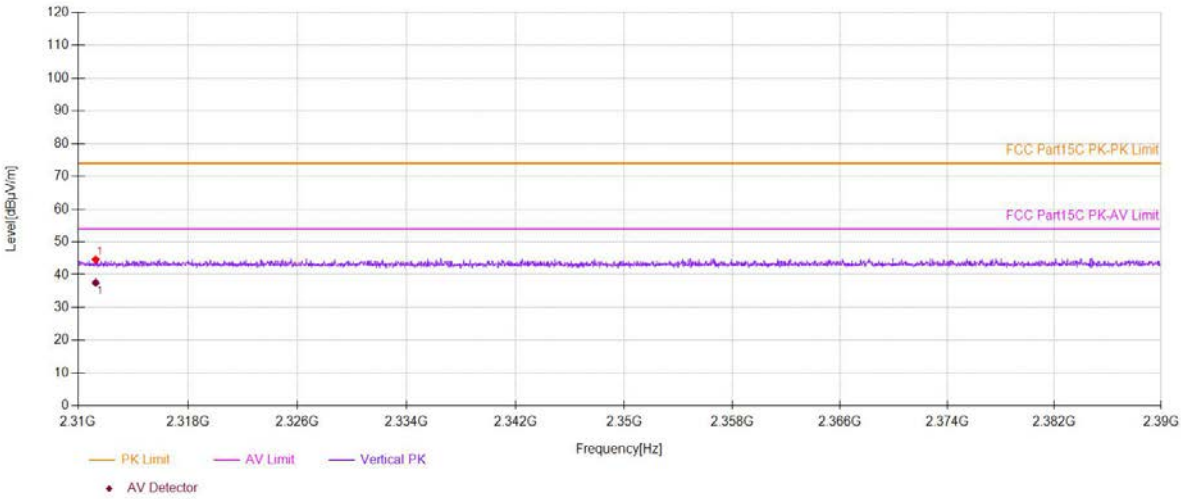

■ Spurious Emission below 1GHz (30MHz to 1GHz)

Test mode: BLE(1M) Frequency: Channel 0: 2402MHz

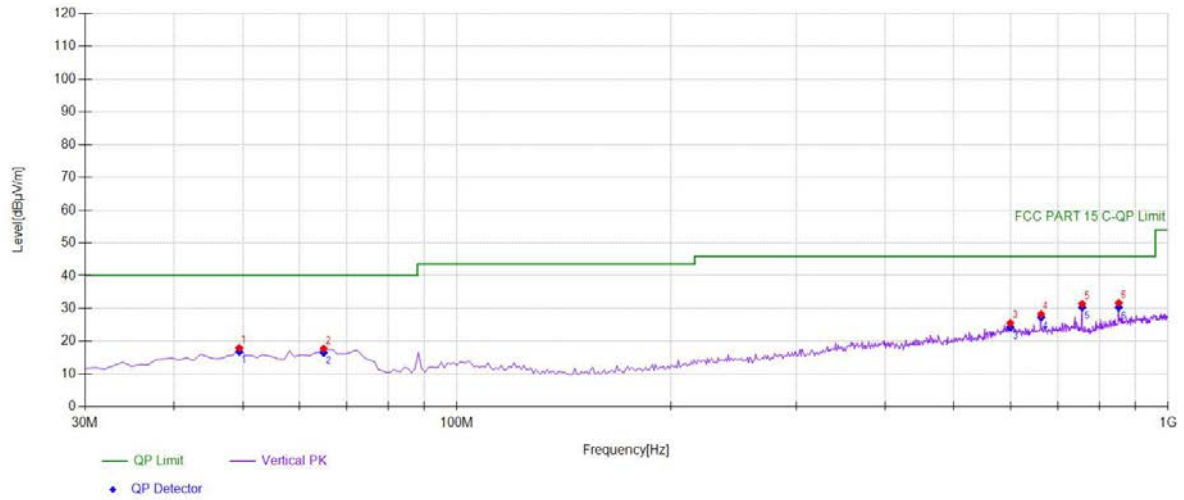


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	49.4194	34.13	-16.17	17.96	PK	40.00	22.04	Vertical
2	64.955	35.85	-18.11	17.74	PK	40.00	22.26	Vertical
3	599.96	31.93	-6.42	25.51	PK	46.00	20.49	Vertical
4	663.073	35.22	-6.95	28.27	PK	46.00	17.73	Vertical
5	757.257	38.05	-6.67	31.38	PK	46.00	14.62	Vertical
6	852.412	35.83	-4.10	31.73	PK	46.00	14.27	Vertical

Final Data List


NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	49.4194	-16.17	16.84	40.00	23.16
2	64.955	-18.11	16.54	40.00	23.46
3	599.96	-6.42	24.31	46.00	21.69
4	663.0731	-6.95	27.25	46.00	18.75
5	757.2573	-6.67	30.36	46.00	15.64
6	852.4124	-4.10	30.39	46.00	15.61

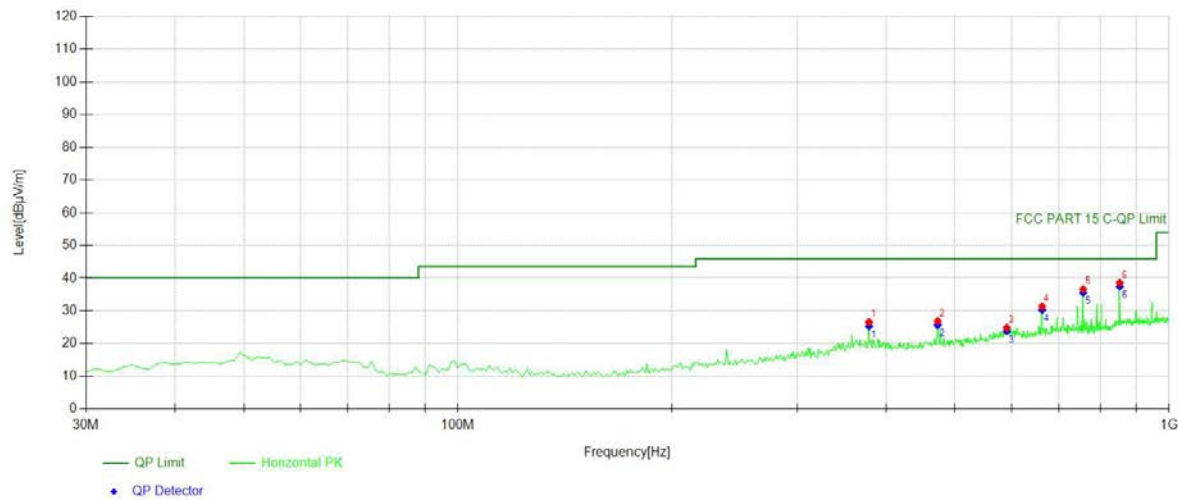

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	378.578	38.27	-11.71	26.56	PK	46.00	19.44	Horizontal
2	472.762	37.08	-10.23	26.85	PK	46.00	19.15	Horizontal
3	591.221	31.75	-6.91	24.84	PK	46.00	21.16	Horizontal
4	663.073	38.27	-6.95	31.32	PK	46.00	14.68	Horizontal
5	757.257	43.33	-6.67	36.66	PK	46.00	9.34	Horizontal
6	852.412	42.66	-4.10	38.56	PK	46.00	7.44	Horizontal

Final Data List					
NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	378.5786	-11.71	25.35	46.00	20.65
2	472.7628	-10.23	25.64	46.00	20.36
3	591.2212	-6.91	23.81	46.00	22.19
4	663.0731	-6.95	30.29	46.00	15.71
5	757.2573	-6.67	35.55	46.00	10.45
6	852.4124	-4.10	37.45	46.00	8.55

Test mode: BLE(1M) Frequency: Channel 19: 2440MHz

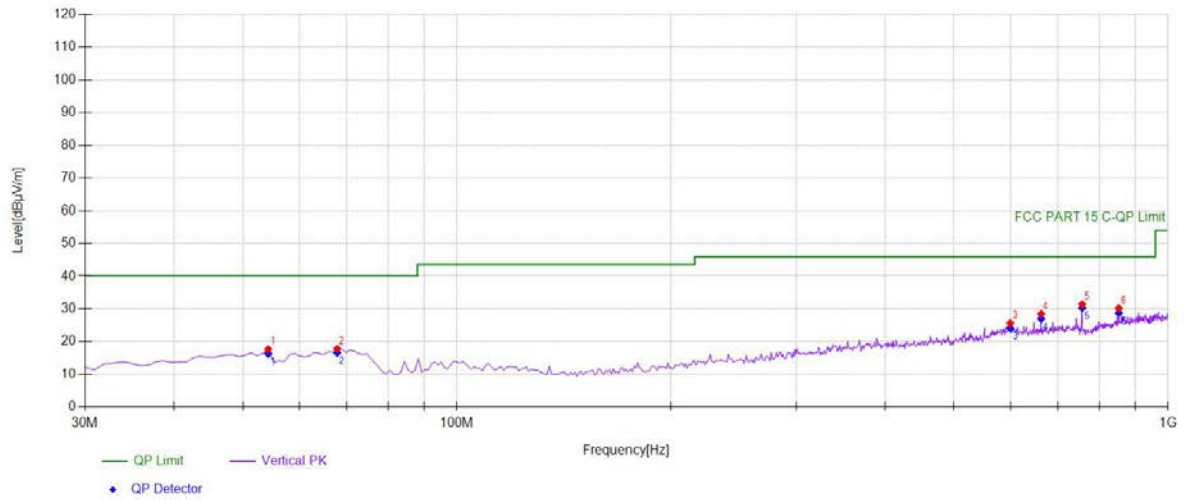


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	54.2743	34.31	-16.66	17.65	PK	40.00	22.35	Vertical
2	67.8679	36.29	-18.50	17.79	PK	40.00	22.21	Vertical
3	599.96	32.01	-6.42	25.59	PK	46.00	20.41	Vertical
4	663.073	35.41	-6.95	28.46	PK	46.00	17.54	Vertical
5	757.257	38.04	-6.67	31.37	PK	46.00	14.63	Vertical
6	852.412	34.28	-4.10	30.18	PK	46.00	15.82	Vertical

Final Data List


NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	54.2743	-16.66	16.31	40.00	23.69
2	67.8679	-18.50	16.63	40.00	23.37
3	599.96	-6.42	24.11	46.00	21.89
4	663.0731	-6.95	26.98	46.00	19.02
5	757.2573	-6.67	30.31	46.00	15.69
6	852.4124	-4.10	28.80	46.00	17.20

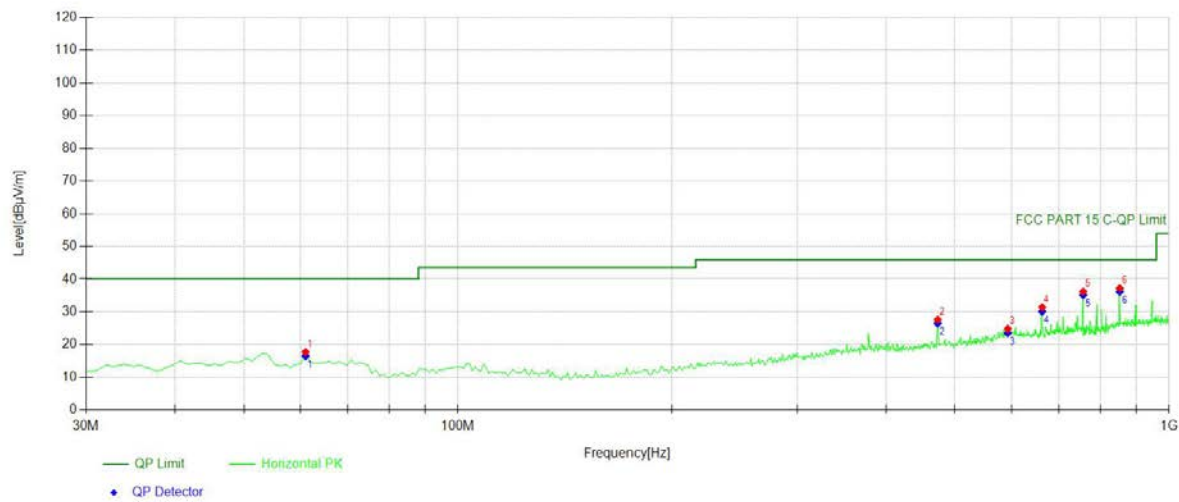

Suspected Data List								
NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	61.0711	35.27	-17.58	17.69	PK	40.00	22.31	Horizontal
2	472.762	37.86	-10.23	27.63	PK	46.00	18.37	Horizontal
3	593.163	31.60	-6.80	24.80	PK	46.00	21.20	Horizontal
4	663.073	38.33	-6.95	31.38	PK	46.00	14.62	Horizontal
5	757.257	42.86	-6.67	36.19	PK	46.00	9.81	Horizontal
6	852.412	41.34	-4.10	37.24	PK	46.00	8.76	Horizontal

Final Data List					
NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	61.0711	-17.58	16.49	40.00	23.51
2	472.7628	-10.23	26.43	46.00	19.57
3	593.1632	-6.80	23.52	46.00	22.48
4	663.0731	-6.95	30.10	46.00	15.90
5	757.2573	-6.67	35.09	46.00	10.91
6	852.4124	-4.10	36.14	46.00	9.86

Test mode: BLE(1M) Frequency: Channel 39: 2480MHz

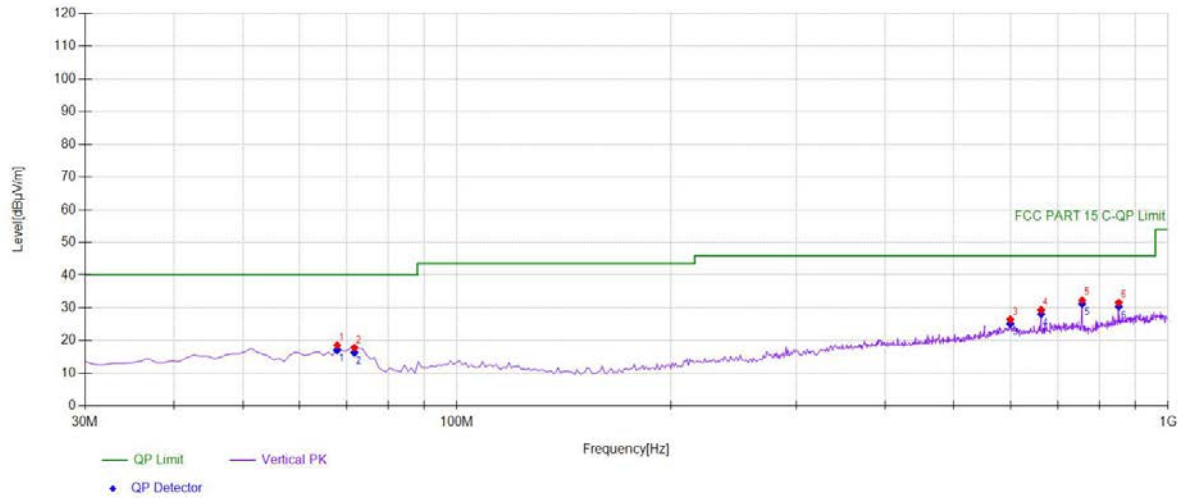


Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	67.8679	37.05	-18.50	18.55	PK	40.00	21.45	Vertical
2	71.7518	36.85	-19.05	17.80	PK	40.00	22.20	Vertical
3	599.96	32.84	-6.42	26.42	PK	46.00	19.58	Vertical
4	663.073	36.33	-6.95	29.38	PK	46.00	16.62	Vertical
5	757.257	39.01	-6.67	32.34	PK	46.00	13.66	Vertical
6	852.412	35.71	-4.10	31.61	PK	46.00	14.39	Vertical

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	67.8679	-18.50	17.09	40.00	22.91
2	71.7518	-19.05	16.34	40.00	23.66
3	599.96	-6.42	25.14	46.00	20.86
4	663.0731	-6.95	28.10	46.00	17.90
5	757.2573	-6.67	31.24	46.00	14.76
6	852.4124	-4.10	30.42	46.00	15.58

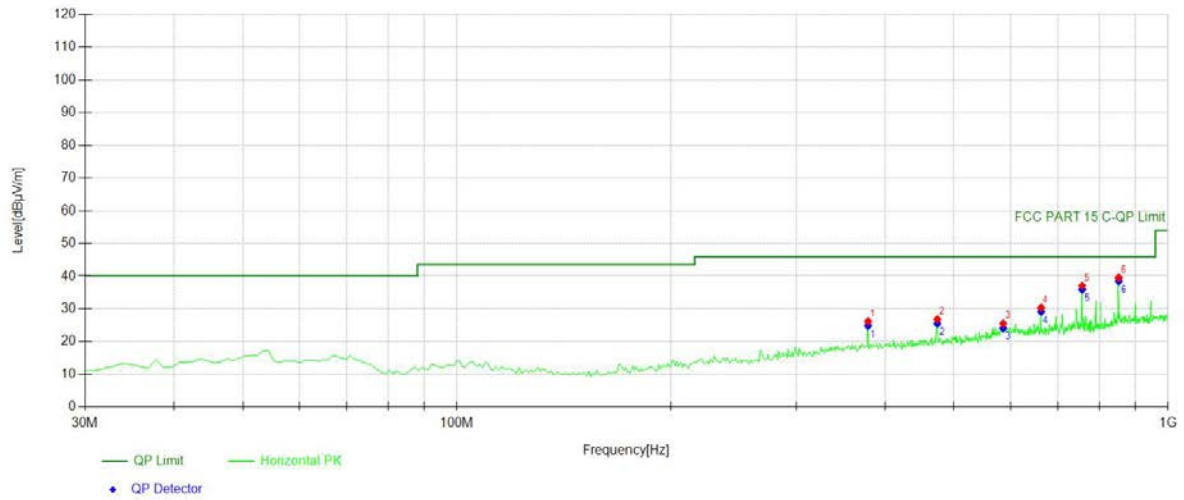

Suspected Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB/m]	Level [dBμV/m]	Detector	Limit [dBμV/m]	Margin [dB]	Polarity
1	378.578	37.86	-11.71	26.15	PK	46.00	19.85	Horizontal
2	473.733	37.03	-10.22	26.81	PK	46.00	19.19	Horizontal
3	586.366	32.66	-7.15	25.51	PK	46.00	20.49	Horizontal
4	663.073	37.30	-6.95	30.35	PK	46.00	15.65	Horizontal
5	757.257	43.73	-6.67	37.06	PK	46.00	8.94	Horizontal
6	852.412	43.62	-4.10	39.52	PK	46.00	6.48	Horizontal

Final Data List

NO.	Freq. [MHz]	Factor [dB/m]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]
1	378.5786	-11.71	24.82	46.00	21.18
2	473.7337	-10.22	25.48	46.00	20.52
3	586.3664	-7.15	24.10	46.00	21.90
4	663.0731	-6.95	29.12	46.00	16.88
5	757.2573	-6.67	35.83	46.00	10.17
6	852.4124	-4.10	38.47	46.00	7.53

8.6 CONDUCTED EMISSIONS TEST

8.6.1 Applicable Standard

According to FCC Part 15.207(a)

8.6.2 Conformance Limit

Frequency(MHz)	Conducted Emission Limit	
	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

8.6.3 Test Configuration

Test according to clause 7.3 conducted emission test setup

8.6.4 Test Procedure


The EUT was placed on a table which is 0.8m above ground plane.
Maximum procedure was performed on the highest emissions to ensure EUT compliance.
Repeat above procedures until all frequency measured were complete.

8.6.5 Test Results


Pass

Temperature :	21.2°C	ATM Pressure:	1011 mbar
Humidity :	55%	Test Engineer:	Zhuowen Sheng

All of the configurations or modes are tested, the data of the worst case is recorded as below.

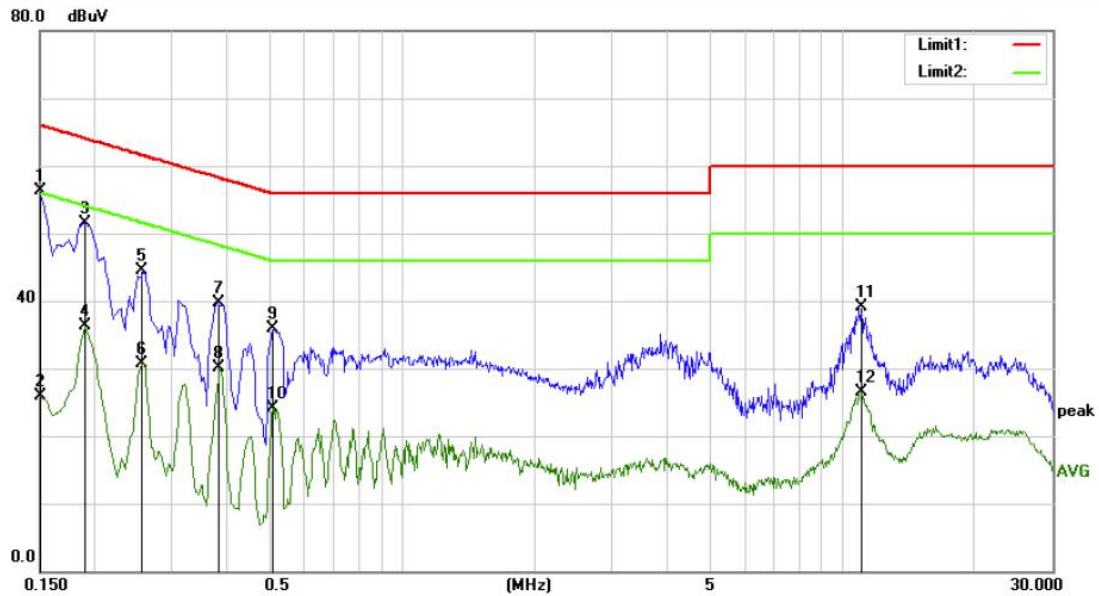

Site Conduction #1				Phase: L1		Temperature: 21.2		
No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector Comment
1	*	0.1500	46.28	10.01	56.29	66.00	-9.71	QP
2		0.1500	15.98	10.01	25.99	56.00	-30.01	AVG
3		0.1900	41.55	10.03	51.58	64.04	-12.46	QP
4		0.1900	26.21	10.03	36.24	54.04	-17.80	AVG
5		0.2550	34.56	10.02	44.58	61.59	-17.01	QP
6		0.2550	20.66	10.02	30.68	51.59	-20.91	AVG
7		0.3850	29.71	9.95	39.66	58.17	-18.51	QP
8		0.3850	20.24	9.95	30.19	48.17	-17.98	AVG
9		0.5100	25.98	9.96	35.94	56.00	-20.06	QP
10		0.5100	14.20	9.96	24.16	46.00	-21.84	AVG
11		11.0550	28.85	10.17	39.02	60.00	-20.98	QP
12		11.0550	16.30	10.17	26.47	50.00	-23.53	AVG

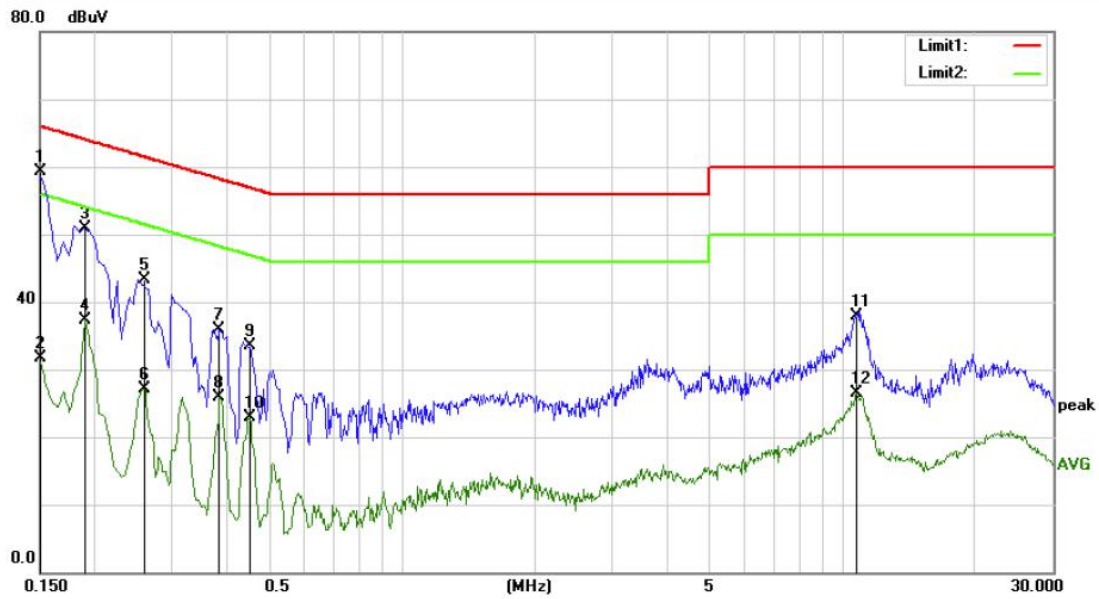

Site Conduction #1 Phase: **N** Temperature: 21.2

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1	*	0.1500	49.30	9.93	59.23	66.00	-6.77	QP	
2		0.1500	21.84	9.93	31.77	56.00	-24.23	AVG	
3		0.1903	41.02	9.91	50.93	64.02	-13.09	QP	
4		0.1903	27.37	9.91	37.28	54.02	-16.74	AVG	
5		0.2600	33.41	9.93	43.34	61.43	-18.09	QP	
6		0.2600	17.16	9.93	27.09	51.43	-24.34	AVG	
7		0.3850	26.07	9.90	35.97	58.17	-22.20	QP	
8		0.3850	16.07	9.90	25.97	48.17	-22.20	AVG	
9		0.4500	23.66	9.91	33.57	56.88	-23.31	QP	
10		0.4500	13.07	9.91	22.98	46.88	-23.90	AVG	
11		10.7550	27.70	10.24	37.94	60.00	-22.06	QP	
12		10.7550	16.20	10.24	26.44	50.00	-23.56	AVG	

8.7 ANTENNA APPLICATION

8.7.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.7.2 Result

PASS

Temperature :	25°C	ATM Pressure:	1011 mbar
Humidity :	45 %	Test Engineer:	GJ

The EUT is integrated antenna, the antenna gain is 0.74 dBi.

- ☒ Antenna use a permanently attached antenna which is not replaceable.
- ☐ Not using a standard antenna jack or electrical connector for antenna replacement
- ☐ The antenna has to be professionally installed (please provide method of installation)

which in accordance to section 15.203, please refer to the internal photos.

Detail of factor for radiated emission:

Frequency(MHz)	Ant_F(dB)	Cab_L(dB)	Preamp(dB)	Correct Factor(dB)
0.009	20.6	0.03	\	20.63
0.15	20.7	0.1	\	20.8
1	20.9	0.15	\	21.05
10	20.1	0.28	\	20.38
30	18.8	0.45	\	19.25
30	11.7	0.62	27.9	-15.58
100	12.5	1.02	27.8	-14.28
300	12.9	1.91	27.5	-12.69
600	19.2	2.92	27	-4.88
800	21.1	3.54	26.6	-1.96
1000	22.3	4.17	26.2	0.27
1000	25.6	1.76	41.4	-14.04
3000	28.9	3.27	43.2	-11.03
5000	31.1	4.2	44.6	-9.3
8000	36.2	5.95	44.7	-2.55
10000	38.4	6.3	43.9	0.8
12000	38.5	7.14	42.3	3.34
15000	40.2	8.15	41.4	6.95
18000	45.4	9.02	41.3	13.12
18000	37.9	1.81	47.9	-8.19
21000	37.9	1.95	48.7	-8.85
25000	39.3	2.01	42.8	-1.49
28000	39.6	2.16	46.0	-4.24
31000	41.2	2.24	44.5	-1.06
34000	41.5	2.29	46.6	-2.81
37000	43.8	2.30	46.4	-0.3
40000	43.2	2.50	42.2	3.5

--- End of Report ---

声 明 Statement

1. 本报告无授权批准人签字及“检验检测专用章”无效。

1. This report is invalid without the signature of the authorized approver and "special seal for testing".

2. 未经许可本报告不得部分复制。

2. This report shall not be copied partly without authorization.

3. 本报告的检测结果仅对送测样品有效，委托方对样品的代表性和资料的真实性负责。

3. The test results or observations are applicable only to tested sample. Client shall be responsible for representativeness of the sample and authenticity of the material.

4. 本检测报告中检测项目标注有特殊符号则该项目不在资质认定范围内，仅作为客户委托、科研、教学或内部质量控制等目的使用。

4. The observations or tests with special mark fall outside the scope of accreditation, and are only used for purpose of commission, research, training, internal quality control etc.

5. 本检测报告以实测值进行符合性判定，未考虑不确定度所带来的风险，本实验室不承担相关责任，特别约定、标准或规范中有明确规定的除外。

5. The test results or observations are provided in accordance with measured value, without taking risks caused by uncertainty into account. Without explicit stipulation in special agreements, standards or regulations, EMTEK shall not assume any responsibility.

6. 对本检验报告若有异议，请于收到报告之日起 20 日内提出。

6. Objections shall be raised within 20 days from the date receiving the report.