

## FCC PART 15.247

## TEST REPORT

For

### GTO Access Systems, LLC

3121 Hartsfield Road, Tallahassee, Florida 32303 United States

**FCC ID: I6H-MM136G3BASE**

|                                        |                                                                                                                                                                                                                                                       |
|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Report Type:</b><br>Original Report | <b>Product Name:</b><br>INTERCOM BASE UNIT                                                                                                                                                                                                            |
| <b>Report Number:</b> RDG170905007-00A |                                                                                                                                                                                                                                                       |
| <b>Report Date:</b> 2017-12-19         |                                                                                                                                                                                                                                                       |
| Jerry Zhang                            |                                                                                                                                                                                                                                                       |
| <b>Reviewed By:</b>                    | EMC Manager <i>Jerry Zhang</i>                                                                                                                                                                                                                        |
| <b>Test Laboratory:</b>                | Bay Area Compliance Laboratories Corp. (Dongguan)<br>No.69 Pulongcun, Puxinhu Industry Area,<br>Tangxia, Dongguan, Guangdong, China<br>Tel: +86-769-86858888<br>Fax: +86-769-86858891<br><a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a> |

**Note:** This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan).

## **TABLE OF CONTENTS**

|                                                                                      |           |
|--------------------------------------------------------------------------------------|-----------|
| <b>GENERAL INFORMATION.....</b>                                                      | <b>4</b>  |
| PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) .....                             | 4         |
| OBJECTIVE .....                                                                      | 4         |
| RELATED SUBMITTAL(S)/GRANT(S).....                                                   | 4         |
| TEST METHODOLOGY .....                                                               | 4         |
| MEASUREMENT UNCERTAINTY .....                                                        | 5         |
| TEST FACILITY .....                                                                  | 5         |
| <b>SYSTEM TEST CONFIGURATION.....</b>                                                | <b>6</b>  |
| DESCRIPTION OF TEST CONFIGURATION .....                                              | 6         |
| EUT EXERCISE SOFTWARE .....                                                          | 6         |
| EQUIPMENT MODIFICATIONS .....                                                        | 6         |
| EXTERNAL CABLE.....                                                                  | 6         |
| BLOCK DIAGRAM OF TEST SETUP .....                                                    | 7         |
| <b>SUMMARY OF TEST RESULTS .....</b>                                                 | <b>8</b>  |
| <b>FCC §15.247 (i) , §1.1310 , §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE) .....</b> | <b>9</b>  |
| APPLICABLE STANDARD .....                                                            | 9         |
| <b>FCC §15.203 - ANTENNA REQUIREMENT.....</b>                                        | <b>10</b> |
| APPLICABLE STANDARD .....                                                            | 10        |
| ANTENNA CONNECTOR CONSTRUCTION .....                                                 | 10        |
| <b>FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS .....</b>                           | <b>11</b> |
| APPLICABLE STANDARD .....                                                            | 11        |
| EUT SETUP .....                                                                      | 11        |
| EMI TEST RECEIVER SETUP.....                                                         | 11        |
| TEST PROCEDURE .....                                                                 | 11        |
| CORRECTED AMPLITUDE & MARGIN CALCULATION .....                                       | 12        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                 | 12        |
| TEST DATA .....                                                                      | 12        |
| <b>FCC §15.209, §15.205 &amp; §15.247(d) - SPURIOUS EMISSIONS.....</b>               | <b>15</b> |
| APPLICABLE STANDARD .....                                                            | 15        |
| EUT SETUP .....                                                                      | 15        |
| EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP .....                                    | 16        |
| TEST PROCEDURE .....                                                                 | 16        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                 | 16        |
| CORRECTED AMPLITUDE & MARGIN CALCULATION .....                                       | 17        |
| TEST DATA .....                                                                      | 17        |
| <b>FCC §15.247(a) (1) - CHANNEL SEPARATION TEST .....</b>                            | <b>22</b> |
| APPLICABLE STANDARD .....                                                            | 22        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                 | 22        |
| TEST PROCEDURE .....                                                                 | 22        |
| TEST DATA .....                                                                      | 22        |
| <b>FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING .....</b>                            | <b>25</b> |
| APPLICABLE STANDARD .....                                                            | 25        |
| TEST PROCEDURE .....                                                                 | 25        |
| TEST EQUIPMENT LIST AND DETAILS.....                                                 | 25        |
| TEST DATA .....                                                                      | 25        |

|                                                                        |           |
|------------------------------------------------------------------------|-----------|
| <b>FCC §15.247(a) (1) (i) - QUANTITY OF HOPPING CHANNEL TEST .....</b> | <b>28</b> |
| APPLICABLE STANDARD .....                                              | 28        |
| TEST PROCEDURE .....                                                   | 28        |
| TEST EQUIPMENT LIST AND DETAILS.....                                   | 28        |
| TEST DATA .....                                                        | 28        |
| <b>FCC §15.247(a) (1) (i) - TIME OF OCCUPANCY (DWELL TIME).....</b>    | <b>30</b> |
| APPLICABLE STANDARD .....                                              | 30        |
| TEST PROCEDURE .....                                                   | 30        |
| TEST EQUIPMENT LIST AND DETAILS.....                                   | 30        |
| TEST DATA .....                                                        | 30        |
| <b>FCC §15.247(b) (2) - PEAK OUTPUT POWER MEASUREMENT .....</b>        | <b>35</b> |
| APPLICABLE STANDARD .....                                              | 35        |
| TEST PROCEDURE .....                                                   | 35        |
| TEST EQUIPMENT LIST AND DETAILS.....                                   | 35        |
| TEST DATA .....                                                        | 35        |
| <b>FCC §15.247(d) - BAND EDGES TESTING .....</b>                       | <b>37</b> |
| APPLICABLE STANDARD .....                                              | 37        |
| TEST PROCEDURE .....                                                   | 37        |
| TEST EQUIPMENT LIST AND DETAILS.....                                   | 37        |
| TEST DATA .....                                                        | 38        |

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

|                             |                |                                           |
|-----------------------------|----------------|-------------------------------------------|
| <b>EUT Name:</b>            |                | INTERCOM BASE UNIT                        |
| <b>EUT Model:</b>           |                | MM136B                                    |
| <b>Multiple Model:</b>      |                | F6101MBC                                  |
| <b>FCC ID:</b>              |                | I6H-MM136G3BASE                           |
| <b>Rated Input Voltage:</b> |                | DC 9V from adapter or DC3.6V from battery |
| <b>Adapter Information</b>  | <b>Model:</b>  | HNBL090030WU                              |
|                             | <b>Input:</b>  | AC100-240V, 50/60Hz, 0.2A MAX             |
|                             | <b>Output:</b> | DC9.0V, 0.3A                              |
| <b>External Dimension:</b>  |                | 14.6cm(L)*14.1cm(W)*3cm(H)                |
| <b>Serial Number:</b>       |                | 170905007                                 |
| <b>EUT Received Date:</b>   |                | 2017-09-06                                |

*Note: The series product, models MM136B, F6101MBC are electrically identical, the differences between them just the appearance of silk screen, we selected MM136B for full test .The detailed differences were explained in the declaration letter.*

### Objective

This report is prepared on behalf of **GTO Access Systems, LLC** in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communications Commission's rules.

The tests were performed in order to determine the EUT compliance with FCC Rules Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

### Related Submittal(s)/Grant(s)

Part of system submission with FCC ID: I6H-MM136KP.

### Test Methodology

All measurements detailed in this Test Report were performed in accordance with ANSI C63.10-2013 "American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices".

All emissions measurement was performed and Bay Area Compliance Laboratories Corp. (Dongguan).

**Measurement Uncertainty**

| Parameter                         | Measurement Uncertainty                                                                                                                                      |
|-----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Occupied Channel Bandwidth        | ±5 %                                                                                                                                                         |
| RF output power, conducted        | ±0.61dB                                                                                                                                                      |
| Power Spectral Density, conducted | ±0.61 dB                                                                                                                                                     |
| Unwanted Emissions, radiated      | 30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical<br>200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical<br>1G~6GHz: 4.45 dB, 6G~26.5GHz: 5.23 dB |
| Unwanted Emissions, conducted     | ±1.5 dB                                                                                                                                                      |
| Temperature                       | ±1 °C                                                                                                                                                        |
| Humidity                          | ±5%                                                                                                                                                          |
| DC and low frequency voltages     | ±0.4%                                                                                                                                                        |
| Duty Cycle                        | 1%                                                                                                                                                           |
| AC Power Lines Conducted Emission | 3.12 dB (150 kHz to 30 MHz)                                                                                                                                  |

**Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China

Bay Area Compliance Laboratories Corp. (Dongguan) has been accredited to ISO/IEC 17025 by CNAS(Lab code: L5662). And accredited to ISO/IEC 17025 by NVLAP(Test Laboratory Accreditation Certificate Number 500069-0), the FCC Designation No. CN5002 under the KDB 974614 D01.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 273710. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Bay Area Compliance Laboratories Corp. (Dongguan) was registered with ISED Canada under ISED Canada Registration Number 3062D.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in an engineering mode. 60 hopping channels are provided:

| Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) | Channel | Frequency (MHz) |
|---------|-----------------|---------|-----------------|---------|-----------------|---------|-----------------|
| 1       | 907.5           | 16      | 911.25          | 31      | 915             | 46      | 918.75          |
| 2       | 907.75          | 17      | 911.5           | 32      | 915.25          | 47      | 919             |
| 3       | 908             | 18      | 911.75          | 33      | 915.5           | 48      | 919.25          |
| 4       | 908.25          | 19      | 912             | 34      | 915.75          | 49      | 919.5           |
| 5       | 908.5           | 20      | 912.25          | 35      | 916             | 50      | 919.75          |
| 6       | 908.75          | 21      | 912.5           | 36      | 916.25          | 51      | 920             |
| 7       | 909             | 22      | 912.75          | 37      | 916.5           | 52      | 920.25          |
| 8       | 909.25          | 23      | 913             | 38      | 916.75          | 53      | 920.5           |
| 9       | 909.5           | 24      | 913.25          | 39      | 917             | 54      | 920.75          |
| 10      | 909.75          | 25      | 913.5           | 40      | 917.25          | 55      | 921             |
| 11      | 910             | 26      | 913.75          | 41      | 917.5           | 56      | 921.25          |
| 12      | 910.25          | 27      | 914             | 42      | 917.75          | 57      | 921.5           |
| 13      | 910.5           | 28      | 914.25          | 43      | 918             | 58      | 921.75          |
| 14      | 910.75          | 29      | 914.5           | 44      | 918.25          | 59      | 922             |
| 15      | 911             | 30      | 914.75          | 45      | 918.5           | 60      | 922.25          |

Channel 1, 31, 60 were selected to test.

### EUT Exercise Software

The engineering mode configured the maximum power as default setting.


### Equipment Modifications

No modification was made to the EUT.

### External Cable

| Cable Description | Shielding Type | Ferrite Core | Length (m) | From    | To  |
|-------------------|----------------|--------------|------------|---------|-----|
| Adapter Cable     | no             | no           | 1.92       | Adapter | EUT |

## Block Diagram of Test Setup

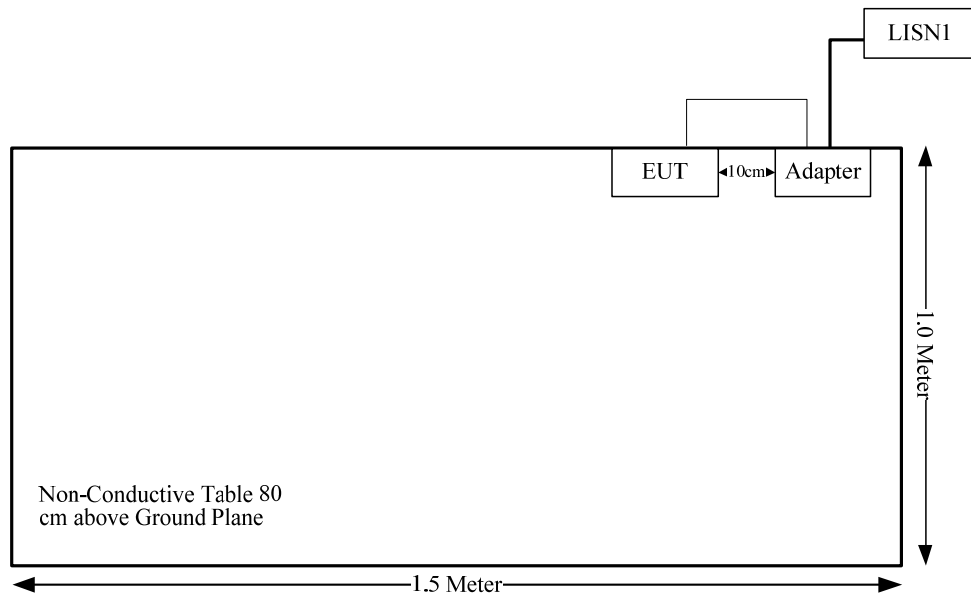

**SUMMARY OF TEST RESULTS**

| FCC Rules                           | Description of Test                | Result     |
|-------------------------------------|------------------------------------|------------|
| FCC §15.247 (i) & §1.1310 & §2.1091 | Maximum Permissible Exposure (MPE) | Compliance |
| §15.203                             | Antenna Requirement                | Compliance |
| §15.207 (a)                         | Conducted Emissions                | Compliance |
| §15.205, §15.209, §15.247(d)        | Spurious Emissions                 | Compliance |
| §15.247 (a)(1)                      | 20 dB Bandwidth                    | Compliance |
| §15.247(a)(1)                       | Channel Separation Test            | Compliance |
| §15.247(a)(1)(i)                    | Time of Occupancy (Dwell Time)     | Compliance |
| §15.247(a)(1)(i)                    | Quantity of hopping channel Test   | Compliance |
| §15.247(b)(2)                       | Peak Output Power Measurement      | Compliance |
| §15.247(d)                          | Band Edges                         | Compliance |



## FCC §15.247 (i) , §1.1310 , §2.1091- MAXIMUM PERMISSIBLE EXPOSURE (MPE)

### Applicable Standard

According to subpart 15.247(i) and subpart §1.1310, systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

Limits for Maximum Permissible Exposure (MPE) (§1.1310, §2.1091)

| (B) Limits for General Population/Uncontrolled Exposure |                               |                               |                                     |                          |
|---------------------------------------------------------|-------------------------------|-------------------------------|-------------------------------------|--------------------------|
| Frequency Range (MHz)                                   | Electric Field Strength (V/m) | Magnetic Field Strength (A/m) | Power Density (mW/cm <sup>2</sup> ) | Averaging Time (minutes) |
| 0.3–1.34                                                | 614                           | 1.63                          | *(100)                              | 30                       |
| 1.34–30                                                 | 824/f                         | 2.19/f                        | *(180/f <sup>2</sup> )              | 30                       |
| 30–300                                                  | 27.5                          | 0.073                         | 0.2                                 | 30                       |
| 300–1500                                                | /                             | /                             | f/1500                              | 30                       |
| 1500–100,000                                            | /                             | /                             | 1.0                                 | 30                       |

f = frequency in MHz; \* = Plane-wave equivalent power density;

According to §1.1310 and §2.1091 RF exposure is calculated.

### Calculation Formula:

Prediction of power density at the distance of the applicable MPE limit:

$S = PG/4\pi R^2$  = power density (in appropriate units, e.g. mW/cm<sup>2</sup>);

P = power input to the antenna (in appropriate units, e.g., mW);

G = power gain of the antenna in the direction of interest relative to an isotropic radiator, the power gain factor, is normally numeric gain;

R = distance to the center of radiation of the antenna (appropriate units, e.g., cm);

### Calculated Data:

| Frequency (MHz) | Antenna Gain |           | Tune-up Power |      | Evaluation Distance (cm) | Power Density (mW/cm <sup>2</sup> ) | MPE Limit (mW/cm <sup>2</sup> ) |
|-----------------|--------------|-----------|---------------|------|--------------------------|-------------------------------------|---------------------------------|
|                 | (dBi)        | (numeric) | (dBm)         | (mW) |                          |                                     |                                 |
| 907.5-922.25    | 0            | 1.00      | 7             | 5.01 | 20.00                    | 0.0010                              | 0.607                           |

**Result: Compliance,** The device meets MPE requirement for Devices Used by the General Public (Uncontrolled Environment) at distance  $\geq 20$  cm.

**FCC §15.203 - ANTENNA REQUIREMENT**

---

**Applicable Standard**

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

**Antenna Connector Construction**

The EUT has one external antenna with a unique coupling to the EUT, and the antenna gain is 0 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


**Result:** Compliance.

## FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

FCC§15.207(a)

### EUT Setup

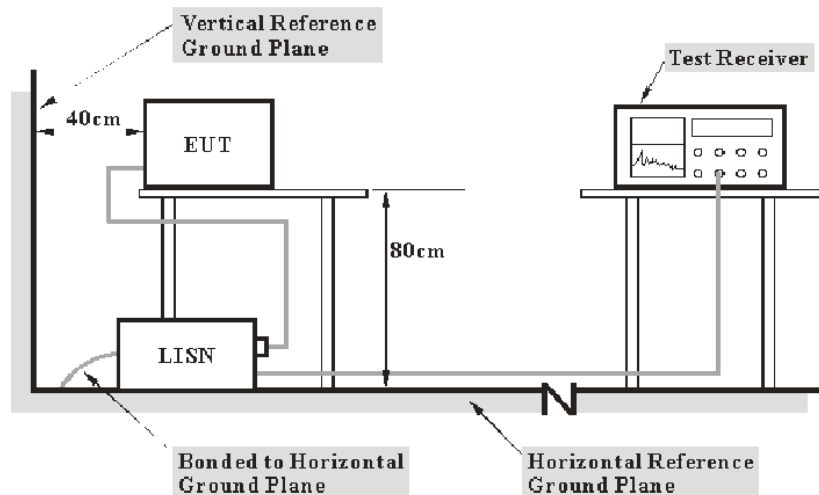

Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter was connected to the main lisn with a 120 V/60 Hz AC power source.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

| Frequency Range  | IF B/W |
|------------------|--------|
| 150 kHz – 30 MHz | 9 kHz  |

### Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the first LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

## Corrected Amplitude & Margin Calculation

The basic equation is as follows:

$$V_C = V_R + A_C + VDF$$

Herein,

$V_C$ : corrected voltage amplitude

$V_R$ : reading voltage amplitude

$A_C$ : attenuation caused by cable loss

VDF: voltage division factor of AMN or ISN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Equipment List and Details

| Manufacturer | Description        | Model     | Serial Number | Calibration Date | Calibration Due Date |
|--------------|--------------------|-----------|---------------|------------------|----------------------|
| R&S          | EMI Test Receiver  | ESCS 30   | 830245/006    | 2016-12-08       | 2017-12-08           |
| R&S          | L.I.S.N            | ESH2-Z5   | 892107/021    | 2016-09-25       | 2017-09-25           |
| R&S          | Two-line V-network | ENV 216   | 3560.6550.12  | 2016-12-08       | 2017-12-08           |
| R&S          | Test Software      | EMC32     | Version8.53.0 | N/A              | N/A                  |
| N/A          | Coaxial Cable      | C-NJNJ-50 | C-0200-01     | 2017-09-05       | 2018-09-05           |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

## Test Data


### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 27.1 °C   |
| Relative Humidity: | 40 %      |
| ATM Pressure:      | 100.2 kPa |

The testing was performed by Gaochao Gong on 2017-09-07.


Test Mode: Transmitting

AC120V, 60 Hz, Line:

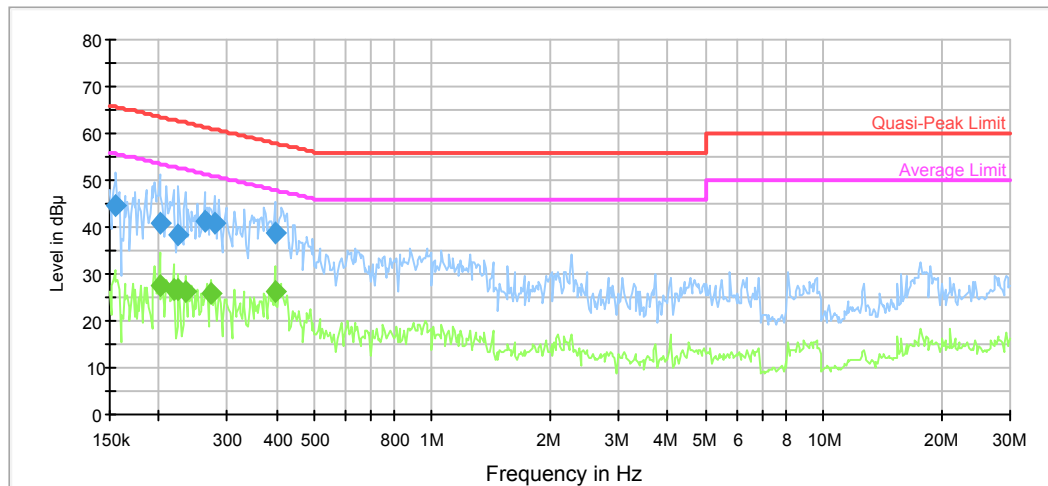

| Frequency (MHz) | QuasiPeak (dBμV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) | Comment    |
|-----------------|------------------|-----------------|------|------------|-------------|--------------|------------|
| 0.156097        | 44.6             | 9.000           | L1   | 11.1       | 21.1        | 65.7         | Compliance |
| 0.201433        | 40.8             | 9.000           | L1   | 10.6       | 22.8        | 63.6         | Compliance |
| 0.225205        | 38.4             | 9.000           | L1   | 10.5       | 24.2        | 62.6         | Compliance |
| 0.262017        | 41.2             | 9.000           | L1   | 10.3       | 20.2        | 61.4         | Compliance |
| 0.279263        | 40.9             | 9.000           | L1   | 10.2       | 19.9        | 60.8         | Compliance |
| 0.396530        | 38.7             | 9.000           | L1   | 10.0       | 19.2        | 57.9         | Compliance |

| Frequency (MHz) | Average (dBμV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) | Comment    |
|-----------------|----------------|-----------------|------|------------|-------------|--------------|------------|
| 0.201433        | 27.7           | 9.000           | L1   | 10.6       | 25.9        | 53.6         | Compliance |
| 0.218141        | 26.7           | 9.000           | L1   | 10.5       | 26.2        | 52.9         | Compliance |
| 0.225205        | 26.9           | 9.000           | L1   | 10.5       | 25.7        | 52.6         | Compliance |
| 0.234359        | 26.1           | 9.000           | L1   | 10.4       | 26.2        | 52.3         | Compliance |
| 0.272666        | 25.9           | 9.000           | L1   | 10.2       | 25.1        | 51.0         | Compliance |
| 0.396530        | 26.2           | 9.000           | L1   | 10.0       | 21.7        | 47.9         | Compliance |

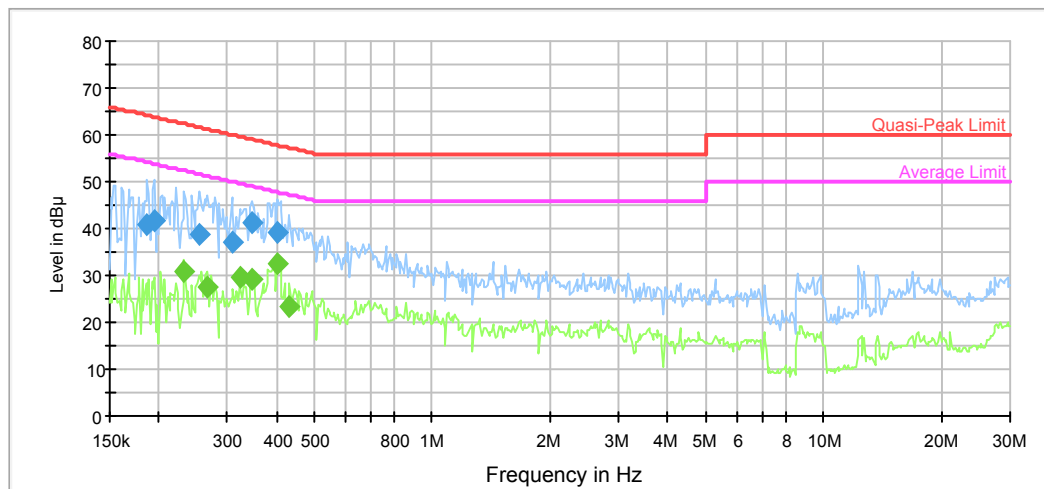**AC120V, 60 Hz, Neutral:**

| Frequency (MHz) | QuasiPeak (dBμV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) | Comment    |
|-----------------|------------------|-----------------|------|------------|-------------|--------------|------------|
| 0.187494        | 41.0             | 9.000           | N    | 10.7       | 23.1        | 64.1         | Compliance |
| 0.195114        | 41.6             | 9.000           | N    | 10.7       | 22.2        | 63.8         | Compliance |
| 0.253797        | 38.9             | 9.000           | N    | 10.3       | 22.7        | 61.6         | Compliance |
| 0.307284        | 36.9             | 9.000           | N    | 10.1       | 23.1        | 60.0         | Compliance |
| 0.346296        | 41.1             | 9.000           | N    | 10.0       | 18.0        | 59.1         | Compliance |
| 0.402900        | 39.3             | 9.000           | N    | 10.0       | 18.5        | 57.8         | Compliance |

| Frequency (MHz) | Average (dBμV) | Bandwidth (kHz) | Line | Corr. (dB) | Margin (dB) | Limit (dBμV) | Comment    |
|-----------------|----------------|-----------------|------|------------|-------------|--------------|------------|
| 0.232499        | 30.9           | 9.000           | N    | 10.4       | 21.5        | 52.4         | Compliance |
| 0.266226        | 27.5           | 9.000           | N    | 10.3       | 23.7        | 51.2         | Compliance |
| 0.322331        | 29.4           | 9.000           | N    | 10.1       | 20.2        | 49.6         | Compliance |
| 0.346296        | 29.0           | 9.000           | N    | 10.0       | 20.1        | 49.1         | Compliance |
| 0.402900        | 32.6           | 9.000           | N    | 10.0       | 15.2        | 47.8         | Compliance |
| 0.432855        | 23.3           | 9.000           | N    | 9.9        | 23.9        | 47.2         | Compliance |


## FCC §15.209, §15.205 & §15.247(d) - SPURIOUS EMISSIONS

### Applicable Standard


FCC §15.247 (d); §15.209; §15.205;

### EUT Setup

#### Below 1GHz:

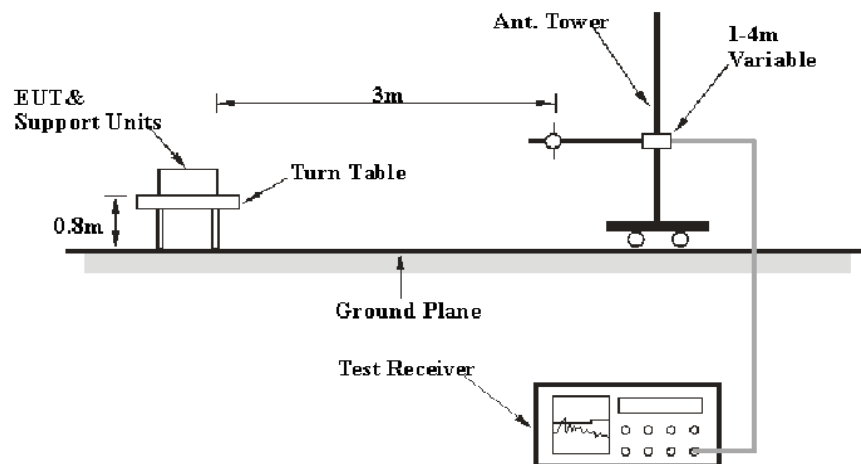

#### Above 1GHz:

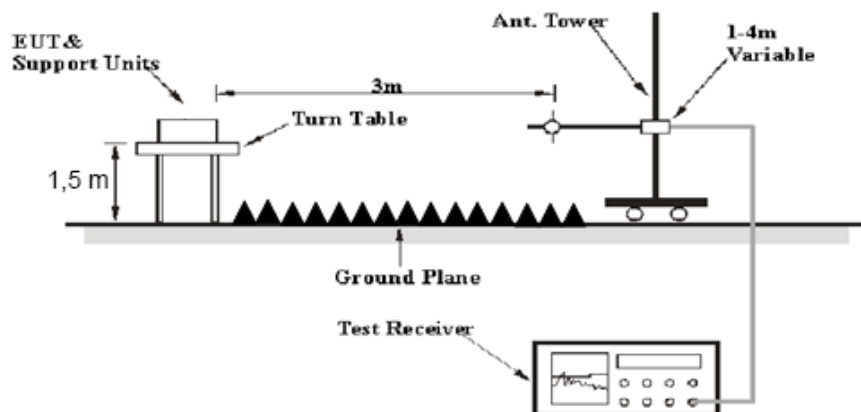

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

## EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 10 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

| Frequency Range   | RBW     | Video B/W | IF B/W  | Measurement |
|-------------------|---------|-----------|---------|-------------|
| 30 MHz – 1000 MHz | 120 kHz | 300 kHz   | 120 kHz | QP          |
| Above 1 GHz       | 1MHz    | 3 MHz     | /       | PK          |
|                   | 1MHz    | 10 Hz     | /       | AV          |

## Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz - 1 GHz, peak and average detection modes for frequencies above 1 GHz.

## Test Equipment List and Details

| Manufacturer   | Description       | Model                  | Serial Number | Calibration Date | Calibration Due Date |
|----------------|-------------------|------------------------|---------------|------------------|----------------------|
| R&S            | EMI Test Receiver | ESCI                   | 100224        | 2017-09-01       | 2018-09-01           |
| Sunol Sciences | Antenna           | JB3                    | A060611-2     | 2017-08-25       | 2020-08-25           |
| HP             | Amplifier         | 8447D                  | 2727A05902    | 2017-09-05       | 2018-09-05           |
| Agilent        | Spectrum Analyzer | E4440A                 | SG43360054    | 2016-12-08       | 2017-12-08           |
| Agilent        | Spectrum Analyzer | E4440A                 | SG43360054    | 2017-12-08       | 2018-12-08           |
| ETS-Lindgren   | Horn Antenna      | 3115                   | 000 527 35    | 2016-01-05       | 2019-01-04           |
| MITEQ          | Amplifier         | AFS42-00101800-25-S-42 | 2001271       | 2017-09-05       | 2018-09-05           |
| N/A            | Coaxial Cable     | C-NJNJ-50              | C-0400-01     | 2017-09-05       | 2018-09-05           |
| N/A            | Coaxial Cable     | C-NJNJ-50              | C-0075-01     | 2017-09-05       | 2018-09-05           |
| N/A            | Coaxial Cable     | C-NJNJ-50              | C-1000-01     | 2017-09-05       | 2018-09-05           |
| N/A            | Coaxial Cable     | C-SJSJ-50              | C-0800-01     | 2017-09-05       | 2018-09-05           |
| Farad          | Test Software     | EZ-EMC                 | V1.1.4.2      | N/A              | N/A                  |

**\* Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).



## Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Data

### Environmental Conditions

|                           |                 |
|---------------------------|-----------------|
| <b>Temperature:</b>       | 20~26.8 °C      |
| <b>Relative Humidity:</b> | 34~41 %         |
| <b>ATM Pressure:</b>      | 100.2~101.1 kPa |

\* The testing was performed by Tony Zeng & Blake Yang on 2017-10-08&2017-12-18.

*Test Mode: Transmitting*



**30MHz-10GHz:**

| Frequency<br>(MHz)        | Receiver          |             | Rx Antenna     |                | Cable<br>loss<br>(dB) | Amplifier<br>Gain<br>(dB) | Corrected<br>Amplitude<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|---------------------------|-------------------|-------------|----------------|----------------|-----------------------|---------------------------|------------------------------------|-------------------|----------------|
|                           | Reading<br>(dBμV) | Measurement | Polar<br>(H/V) | Factor<br>(dB) |                       |                           |                                    |                   |                |
| Low Channel: 907.50 MHz   |                   |             |                |                |                       |                           |                                    |                   |                |
| 907.50                    | 74.20             | QP          | H              | 22.40          | 4.24                  | 0.00                      | 100.84                             | N/A               | N/A            |
| 907.50                    | 67.80             | QP          | V              | 22.40          | 4.24                  | 0.00                      | 94.44                              | N/A               | N/A            |
| 902.00                    | 16.50             | QP          | H              | 22.34          | 4.29                  | 0.00                      | 43.13                              | 46.00             | 2.87           |
| 248.00                    | 17.40             | QP          | H              | 11.50          | 1.87                  | 0.00                      | 30.77                              | 46.00             | 15.23          |
| 1815.00                   | 68.12             | PK          | H              | 26.52          | 1.66                  | 35.92                     | 60.38                              | 74.00             | 13.62          |
| 1815.00                   | 57.41             | AV          | H              | 26.52          | 1.66                  | 35.92                     | 49.67                              | 54.00             | 4.33           |
| 1815.00                   | 69.13             | PK          | V              | 26.52          | 1.66                  | 35.92                     | 61.39                              | 74.00             | 12.61          |
| 1815.00                   | 57.77             | AV          | V              | 26.52          | 1.66                  | 35.92                     | 50.03                              | 54.00             | 3.97           |
| 2722.50                   | 55.61             | PK          | H              | 29.10          | 1.89                  | 36.48                     | 50.12                              | 74.00             | 23.88          |
| 2722.50                   | 43.69             | AV          | H              | 29.10          | 1.89                  | 36.48                     | 38.20                              | 54.00             | 15.80          |
| 2722.50                   | 50.64             | PK          | V              | 29.10          | 1.89                  | 36.48                     | 45.15                              | 74.00             | 28.85          |
| 2722.50                   | 39.48             | AV          | V              | 29.10          | 1.89                  | 36.48                     | 33.99                              | 54.00             | 20.01          |
| 3630.00                   | 56.84             | PK          | H              | 31.59          | 2.45                  | 37.09                     | 53.79                              | 74.00             | 20.21          |
| 3630.00                   | 44.89             | AV          | H              | 31.59          | 2.45                  | 37.09                     | 41.84                              | 54.00             | 12.16          |
| 3630.00                   | 56.47             | PK          | V              | 31.59          | 2.45                  | 37.09                     | 53.42                              | 74.00             | 20.58          |
| 3630.00                   | 44.32             | AV          | V              | 31.59          | 2.45                  | 37.09                     | 41.27                              | 54.00             | 12.73          |
| Middle Channel: 915.0 MHz |                   |             |                |                |                       |                           |                                    |                   |                |
| 915.00                    | 68.60             | QP          | H              | 22.40          | 4.21                  | 0.00                      | 95.21                              | N/A               | N/A            |
| 915.00                    | 63.50             | QP          | V              | 22.40          | 4.21                  | 0.00                      | 90.11                              | N/A               | N/A            |
| 436.00                    | 16.80             | QP          | H              | 16.52          | 2.66                  | 0.00                      | 35.98                              | 46.00             | 10.02          |
| 372.00                    | 17.30             | QP          | H              | 14.74          | 2.44                  | 0.00                      | 34.48                              | 46.00             | 11.52          |
| 1830.00                   | 67.45             | PK          | H              | 26.59          | 1.66                  | 35.95                     | 59.75                              | 74.00             | 14.25          |
| 1830.00                   | 55.14             | AV          | H              | 26.59          | 1.66                  | 35.95                     | 47.44                              | 54.00             | 6.56           |
| 1830.00                   | 66.48             | PK          | V              | 26.59          | 1.66                  | 35.95                     | 58.78                              | 74.00             | 15.22          |
| 1830.00                   | 54.16             | AV          | V              | 26.59          | 1.66                  | 35.95                     | 46.46                              | 54.00             | 7.54           |
| 2745.00                   | 50.31             | PK          | H              | 29.18          | 1.91                  | 36.51                     | 44.89                              | 74.00             | 29.11          |
| 2745.00                   | 38.97             | AV          | H              | 29.18          | 1.91                  | 36.51                     | 33.55                              | 54.00             | 20.45          |
| 2745.00                   | 48.69             | PK          | V              | 29.18          | 1.91                  | 36.51                     | 43.27                              | 74.00             | 30.73          |
| 2745.00                   | 36.45             | AV          | V              | 29.18          | 1.91                  | 36.51                     | 31.03                              | 54.00             | 22.97          |
| 3660.00                   | 58.75             | PK          | H              | 31.65          | 2.50                  | 37.06                     | 55.84                              | 74.00             | 18.16          |
| 3660.00                   | 45.16             | AV          | H              | 31.65          | 2.50                  | 37.06                     | 42.25                              | 54.00             | 11.75          |
| 3660.00                   | 58.47             | PK          | V              | 31.65          | 2.50                  | 37.06                     | 55.56                              | 74.00             | 18.44          |
| 3660.00                   | 45.49             | AV          | V              | 31.65          | 2.50                  | 37.06                     | 42.58                              | 54.00             | 11.42          |



| Frequency<br>(MHz)       | Receiver          |             | Rx Antenna     |                | Cable<br>loss<br>(dB) | Amplifier<br>Gain<br>(dB) | Corrected<br>Amplitude<br>(dBμV/m) | Limit<br>(dBμV/m) | Margin<br>(dB) |
|--------------------------|-------------------|-------------|----------------|----------------|-----------------------|---------------------------|------------------------------------|-------------------|----------------|
|                          | Reading<br>(dBμV) | Measurement | Polar<br>(H/V) | Factor<br>(dB) |                       |                           |                                    |                   |                |
| High Channel: 922.25 MHz |                   |             |                |                |                       |                           |                                    |                   |                |
| 922.25                   | 71.60             | QP          | H              | 22.45          | 4.32                  | 0.00                      | 98.37                              | N/A               | N/A            |
| 922.25                   | 64.80             | QP          | V              | 22.45          | 4.32                  | 0.00                      | 91.57                              | N/A               | N/A            |
| 928.00                   | 16.10             | QP          | H              | 22.56          | 4.34                  | 0.00                      | 43.00                              | 46.00             | 3.00           |
| 342.00                   | 17.20             | QP          | H              | 14.08          | 2.33                  | 0.00                      | 33.61                              | 46.00             | 12.39          |
| 1844.50                  | 70.18             | PK          | H              | 26.65          | 1.66                  | 35.97                     | 62.52                              | 74.00             | 11.48          |
| 1844.50                  | 59.13             | AV          | H              | 26.65          | 1.66                  | 35.97                     | 51.47                              | 54.00             | 2.53           |
| 1844.50                  | 66.85             | PK          | V              | 26.65          | 1.66                  | 35.97                     | 59.19                              | 74.00             | 14.81          |
| 1844.50                  | 54.67             | AV          | V              | 26.65          | 1.66                  | 35.97                     | 47.01                              | 54.00             | 6.99           |
| 2766.75                  | 51.55             | PK          | H              | 29.26          | 1.92                  | 36.53                     | 46.20                              | 74.00             | 27.80          |
| 2766.75                  | 39.94             | AV          | H              | 29.26          | 1.92                  | 36.53                     | 34.59                              | 54.00             | 19.41          |
| 2766.75                  | 48.52             | PK          | V              | 29.26          | 1.92                  | 36.53                     | 43.17                              | 74.00             | 30.83          |
| 2766.75                  | 37.02             | AV          | V              | 29.26          | 1.92                  | 36.53                     | 31.67                              | 54.00             | 22.33          |
| 3689.00                  | 58.50             | PK          | H              | 31.72          | 2.56                  | 37.03                     | 55.75                              | 74.00             | 18.25          |
| 3689.00                  | 45.92             | AV          | H              | 31.72          | 2.56                  | 37.03                     | 43.17                              | 54.00             | 10.83          |
| 3689.00                  | 54.79             | PK          | V              | 31.72          | 2.56                  | 37.03                     | 52.04                              | 74.00             | 21.96          |
| 3689.00                  | 42.86             | AV          | V              | 31.72          | 2.56                  | 37.03                     | 40.11                              | 54.00             | 13.89          |

# Worst plots (High Channel)

Horizontal:

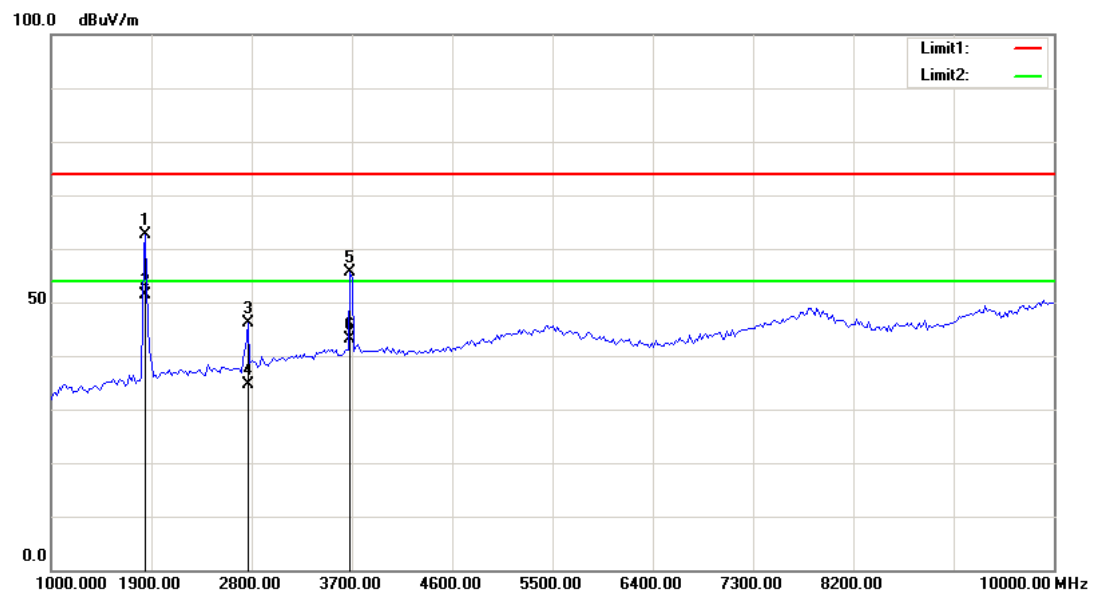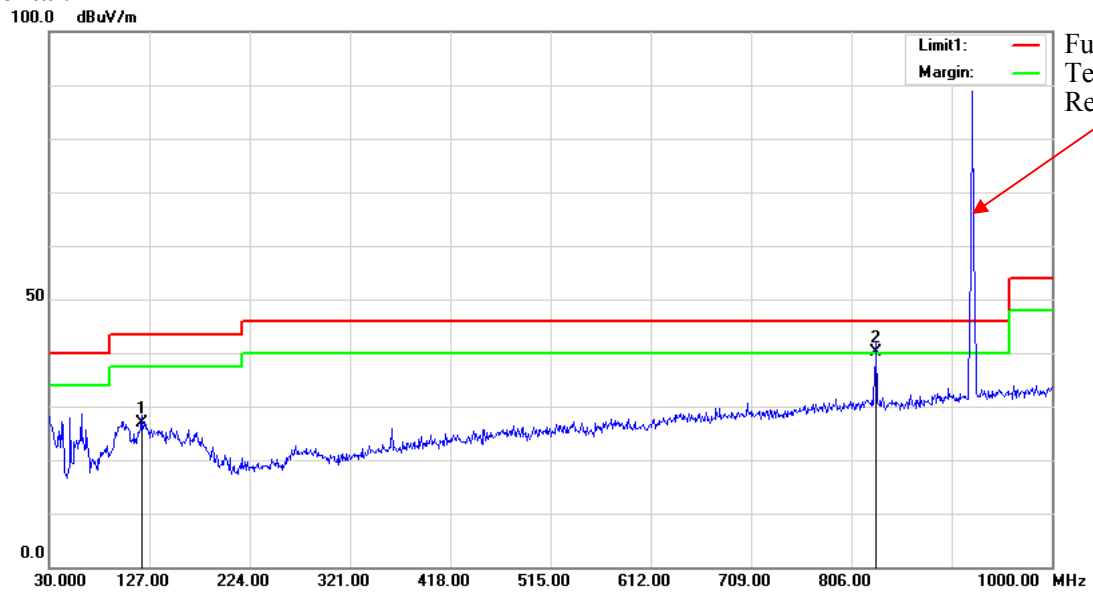

Vertical:

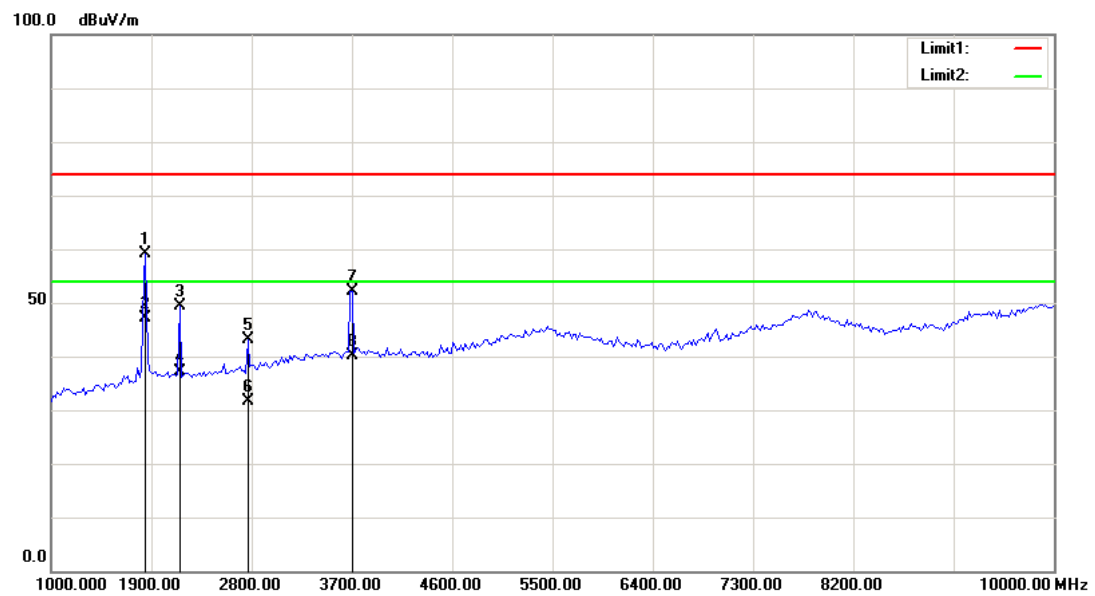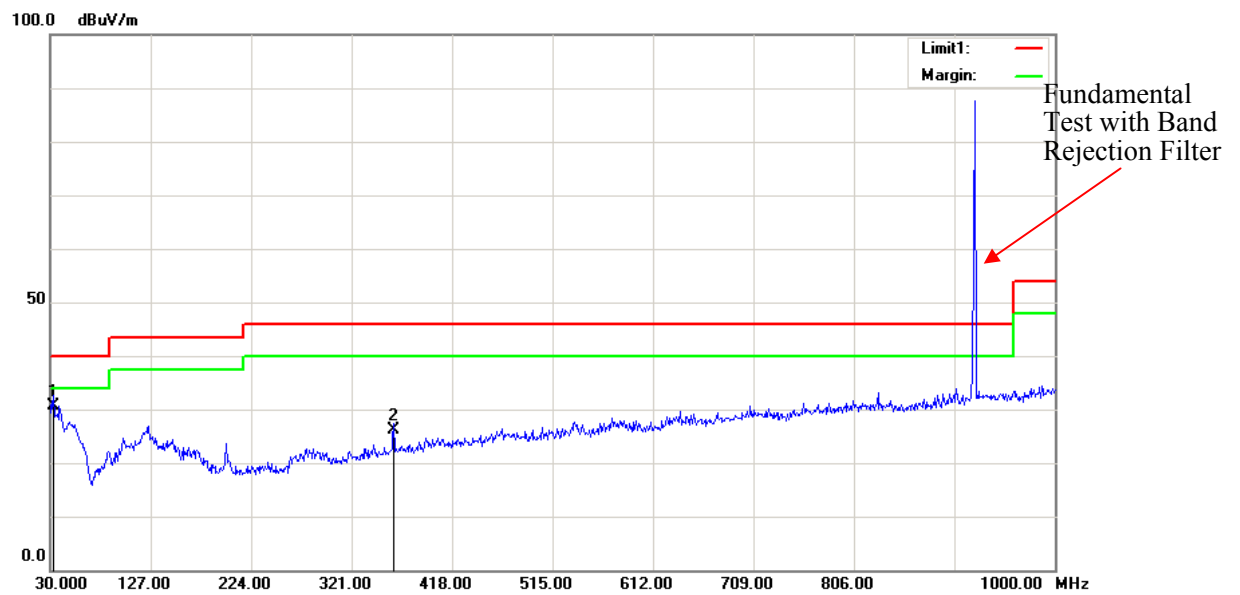

**FCC §15.247(a) (1) - CHANNEL SEPARATION TEST****Applicable Standard**

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

**Test Equipment List and Details**

| Manufacturer | Description       | Model  | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|--------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer | FSU 26 | 200256        | 2016-12-08       | 2017-12-08           |
| Unknown      | RF Cable          | 0.1m   | C-1           | Each Time        | /                    |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Procedure**

1. Set the EUT in transmitting mode, spectrum Bandwidth was set at 10 kHz, maxhold the channel.
2. Set the adjacent channel of the EUT maxhold another trace.
3. Measure the channel separation.

**Test Data****Environmental Conditions**

|                    |           |
|--------------------|-----------|
| Temperature:       | 27.1 °C   |
| Relative Humidity: | 59 %      |
| ATM Pressure:      | 101.4 kPa |

\* The testing was performed by Harry Yang on 2017-11-20.


**Test Result:** Compliance.

Please refer to following tables and plots

Test Mode: Transmitting


| Channel | Frequency (MHz) | Channel Separation (MHz) | Limit (MHz)  |
|---------|-----------------|--------------------------|--------------|
| Low     | 907.5           | 0.250                    | $\geq 0.206$ |
| Middle  | 915             | 0.250                    | $\geq 0.198$ |
| High    | 922.25          | 0.248                    | $\geq 0.196$ |

## Low Channel

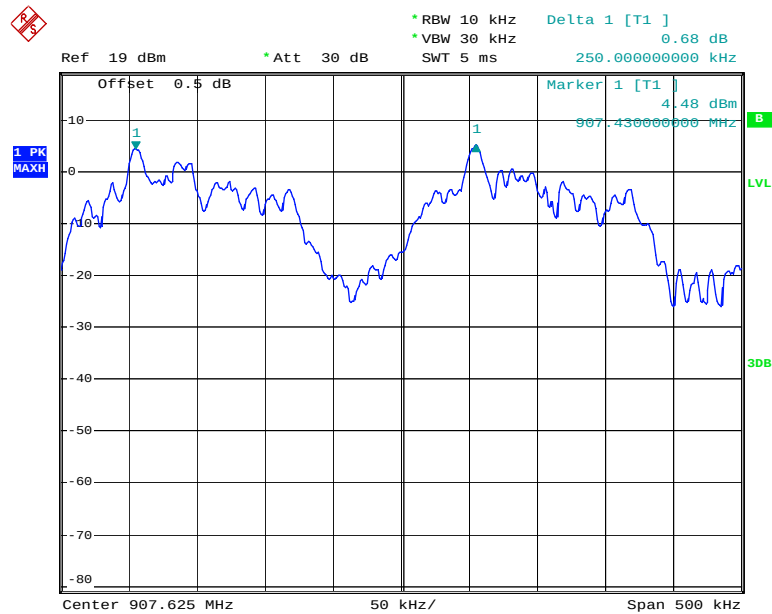


Date: 20.NOV.2017 09:25:18

### Middle Channel

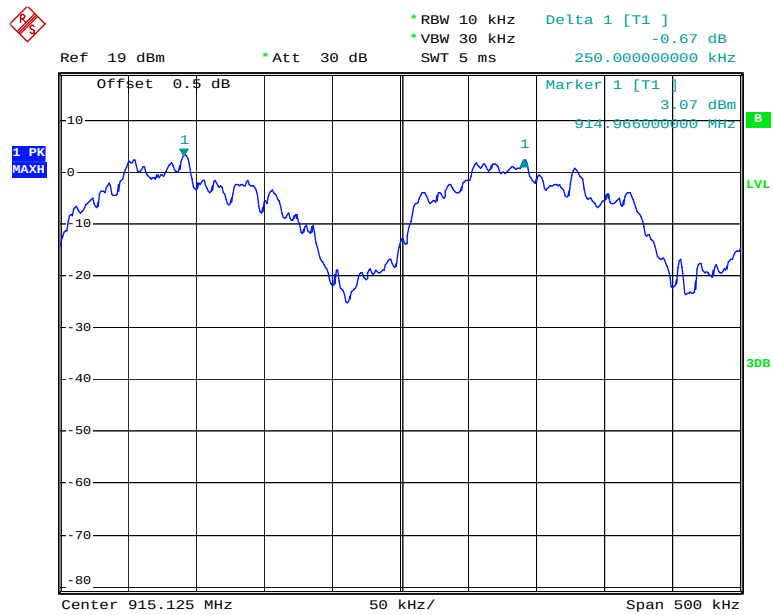

Date: 20.NOV.2017 09:31:44

### High Channel

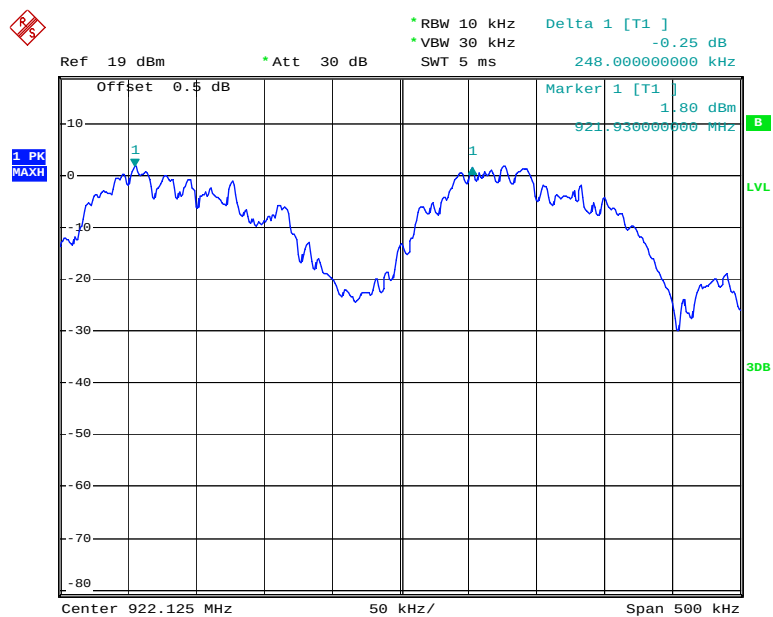

Date: 20.NOV.2017 09:33:12



## FCC §15.247(a) (1) – 20 dB BANDWIDTH TESTING

### Applicable Standard

(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT on the test table without connection to measurement instrument. Turn on the EUT. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20 dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

### Test Equipment List and Details

| Manufacturer | Description       | Model       | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|-------------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer | FSU 26      | 200256        | 2016-12-08       | 2017-12-08           |
| N/A          | Coaxial Cable     | C-SJ00-0010 | C0010/01      | Each Time        | /                    |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

### Test Data

#### Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 27.1 °C   |
| Relative Humidity: | 59 %      |
| ATM Pressure:      | 101.4 kPa |

\* The testing was performed by Harry Yang on 2017-11-20.


**Test Result:** Compliance.

Please refer to following tables and plots

Test Mode: Transmitting


| Channel | Frequency (MHz) | 20 dB Bandwidth (MHz) | Limit (MHz) |
|---------|-----------------|-----------------------|-------------|
| Low     | 907.5           | 0.206                 | ≤0.25       |
| Middle  | 915             | 0.198                 | ≤0.25       |
| High    | 922.25          | 0.196                 | ≤0.25       |

## Low Channel

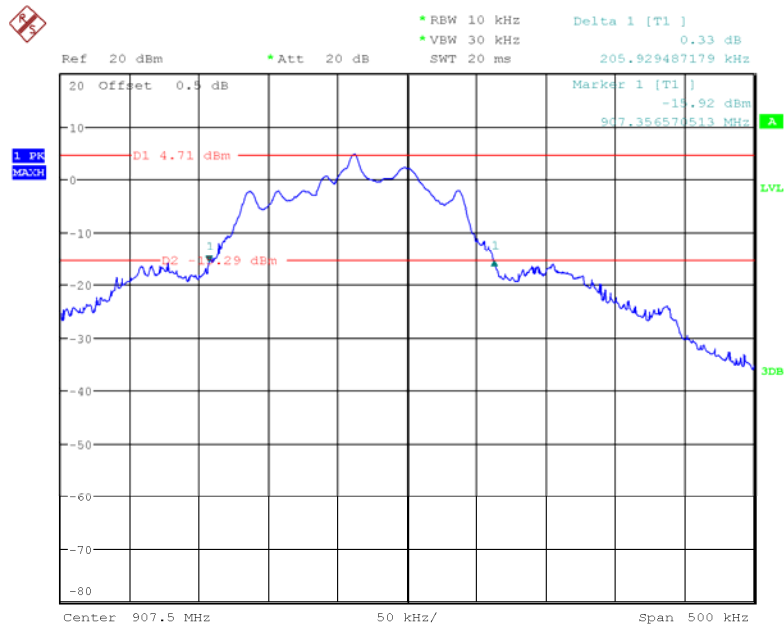


Date: 20.NOV.2017 15:05:13

### Middle Channel

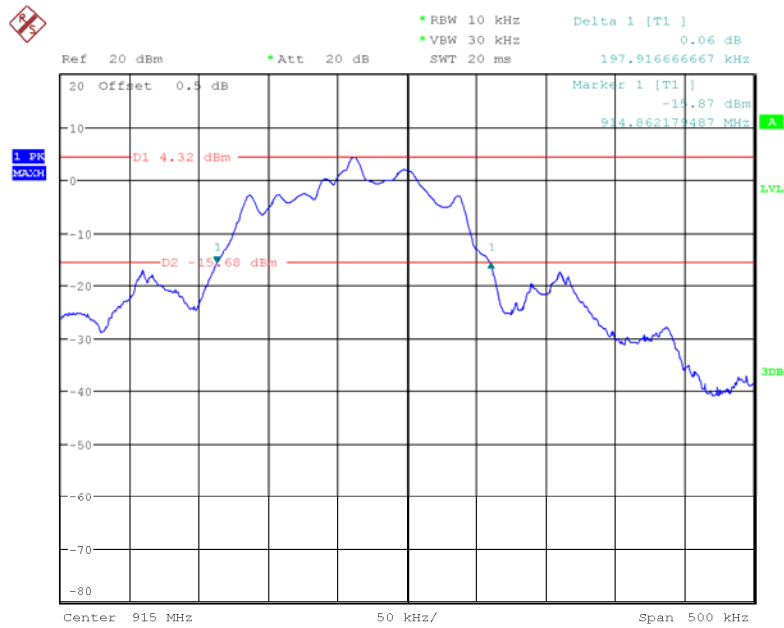

Date: 20.NOV.2017 15:18:31

### High Channel

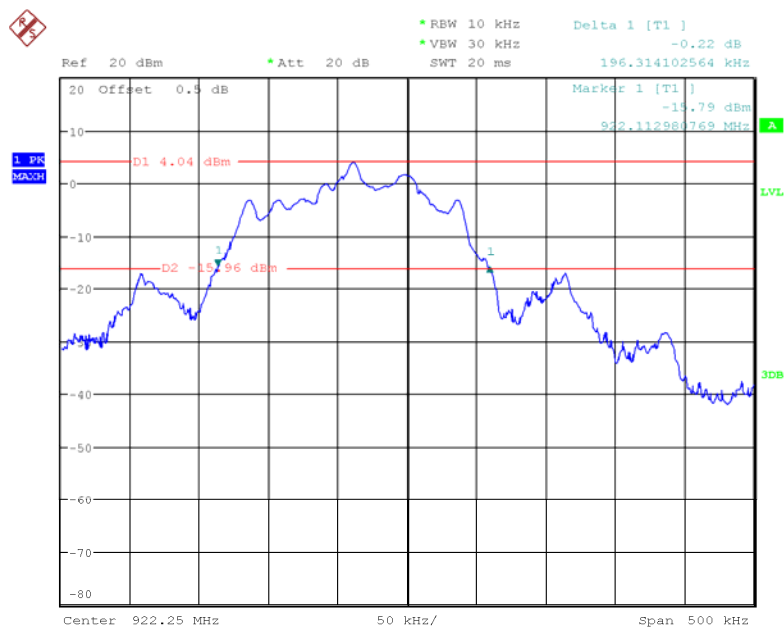

Date: 20.NOV.2017 14:51:28

**FCC §15.247(a) (1) (i) - QUANTITY OF HOPPING CHANNEL TEST****Applicable Standard**

(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

**Test Procedure**

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the Max-Hold function record the Quantity of the channel.

**Test Equipment List and Details**

| Manufacturer | Description       | Model       | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|-------------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer | FSU 26      | 200256        | 2016-12-08       | 2017-12-08           |
| N/A          | Coaxial Cable     | C-SJ00-0010 | C0010/01      | Each Time        | /                    |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

|                    |           |
|--------------------|-----------|
| Temperature:       | 27.1 °C   |
| Relative Humidity: | 59 %      |
| ATM Pressure:      | 101.4 kPa |


\* The testing was performed by Harry Yang on 2017-11-20.

**Test Result:** Compliance.

Please refer to following tables and plots

*Test Mode: Transmitting*

| Frequency Range (MHz) | Number of Hopping Channel | Limit |
|-----------------------|---------------------------|-------|
| 902-928               | 60                        | ≥50   |

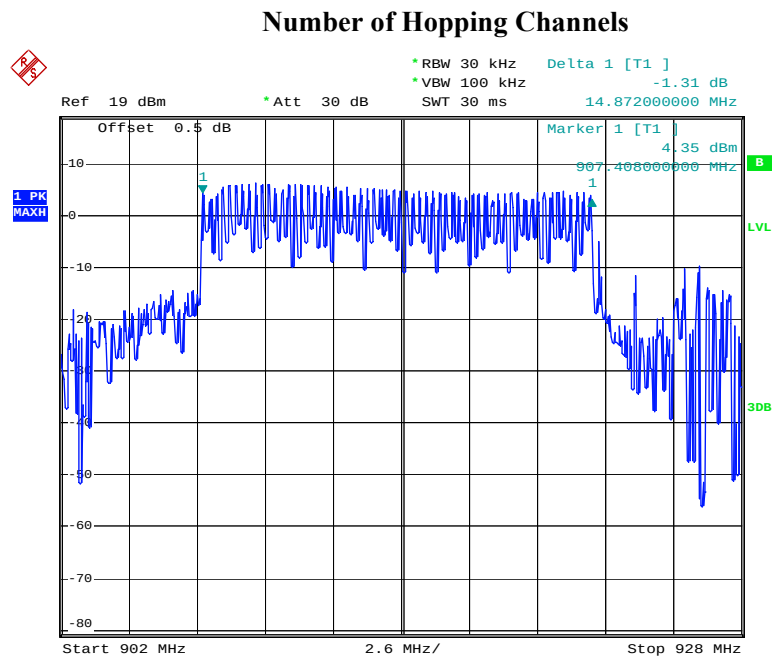

Date: 20.NOV.2017 08:52:01

**FCC §15.247(a) (1) (i) - TIME OF OCCUPANCY (DWELL TIME)****Applicable Standard**

(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

**Test Procedure**

The EUT was worked in channel hopping; the time of single pulses was tested.

**Test Equipment List and Details**

| Manufacturer | Description       | Model       | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|-------------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer | FSU 26      | 200256        | 2016-12-08       | 2017-12-08           |
| N/A          | Coaxial Cable     | C-SJ00-0010 | C0010/01      | Each Time        | /                    |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

|                    |           |
|--------------------|-----------|
| Temperature:       | 27.1 °C   |
| Relative Humidity: | 59 %      |
| ATM Pressure:      | 101.4 kPa |


\* The testing was performed by Harry Yang on 2017-11-20.

**Test Result:** Compliance.

Please refer to following tables and plots


*Test Mode: Transmitting*

| Channel                                                                                                                                                       | Occupancy Time For Single Hop (ms) | Hops in 10s | Hops in Observed Period | Dwell time (s) | Limit (s) | Result     |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|-------------|-------------------------|----------------|-----------|------------|
| Low                                                                                                                                                           | 4.01                               | 16          | 32                      | 0.128          | 0.4       | Compliance |
| Middle                                                                                                                                                        | 4                                  | 17          | 34                      | 0.136          | 0.4       | Compliance |
| High                                                                                                                                                          | 3.98                               | 14          | 28                      | 0.111          | 0.4       | Compliance |
| Dwell time=Pulse time (ms) × hopping number per channel in Observed Period<br>Observed Period=20S<br>Hops in Observed Period= Hops in 10s ×Observed Period/10 |                                    |             |                         |                |           |            |

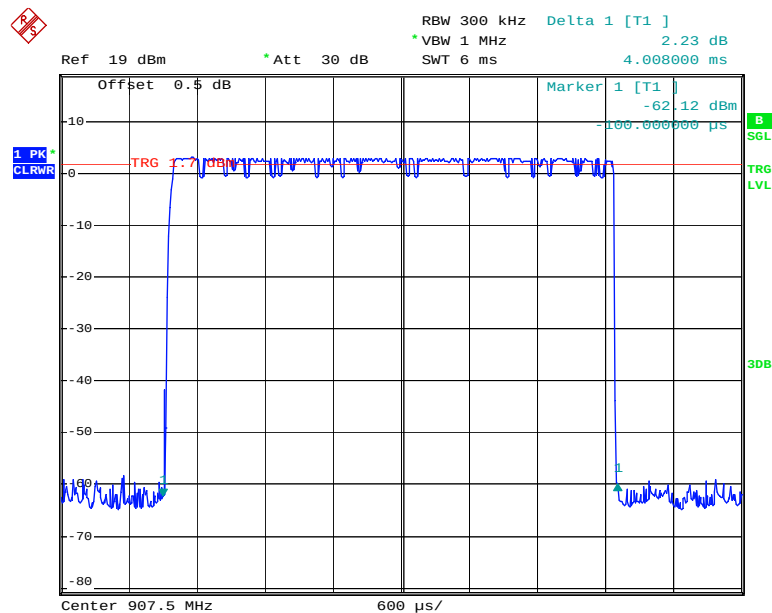**Low Channel**


Date: 20.NOV.2017 09:40:39

### Middle Channel

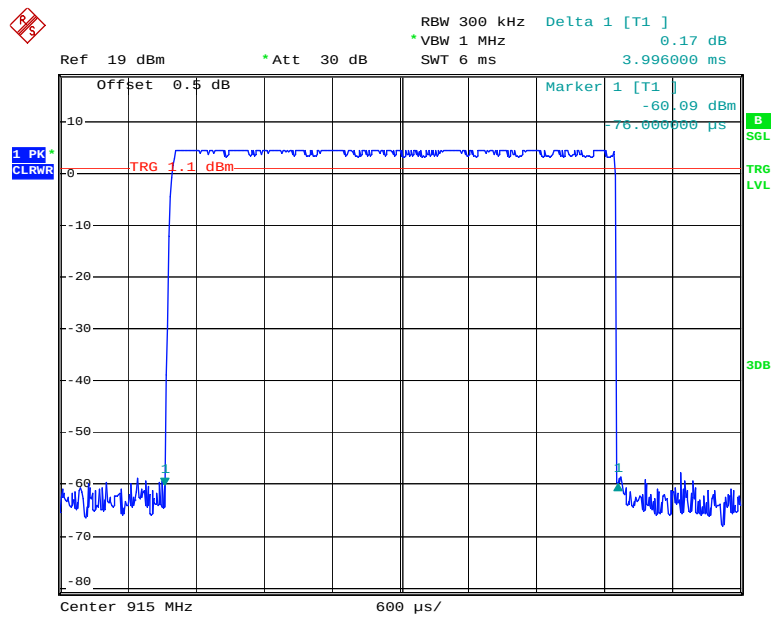

Date: 20.NOV.2017 09:54:02


### High Channel

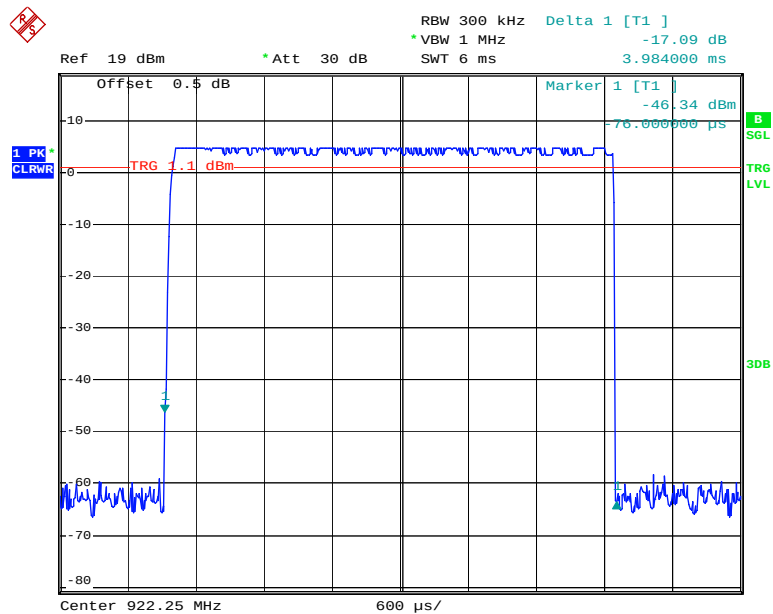

Date: 20.NOV.2017 09:53:23




### 10S: Low Channel

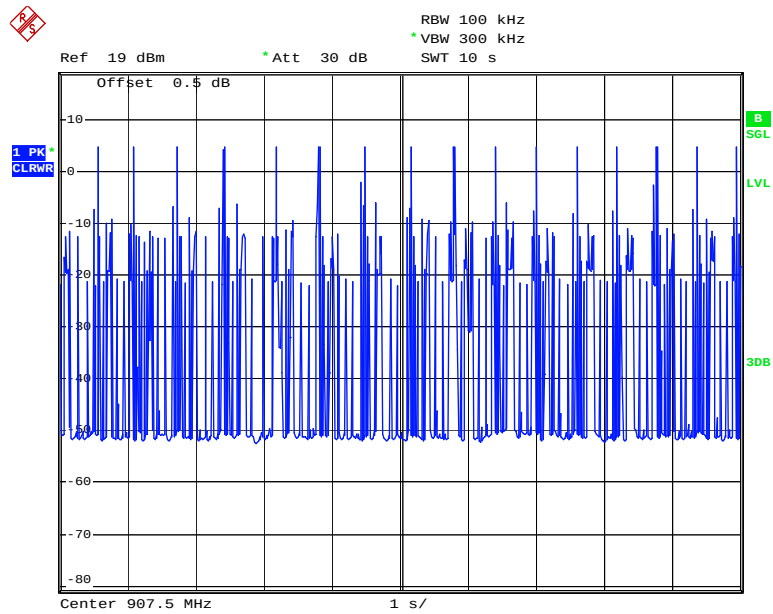


Date: 20.NOV.2017 09:47:41

### 10S: Middle Channel

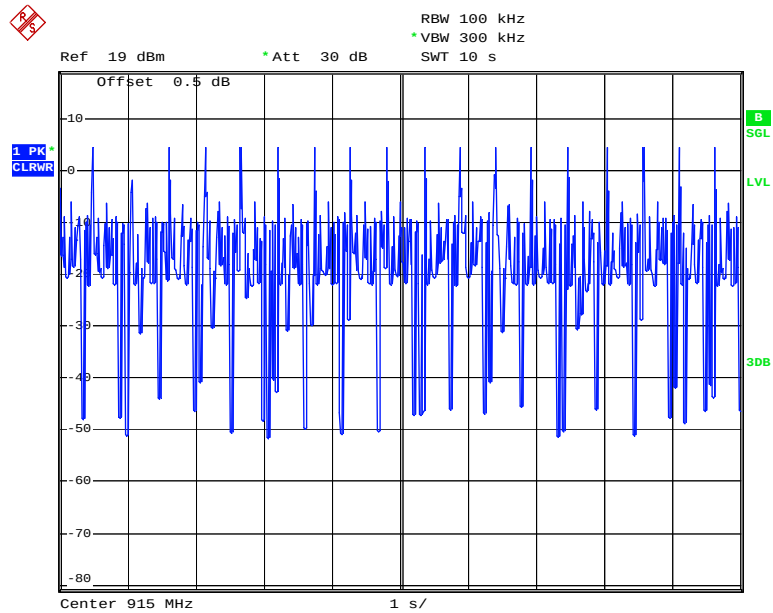

Date: 20.NOV.2017 09:50:19

### 10S: High Channel

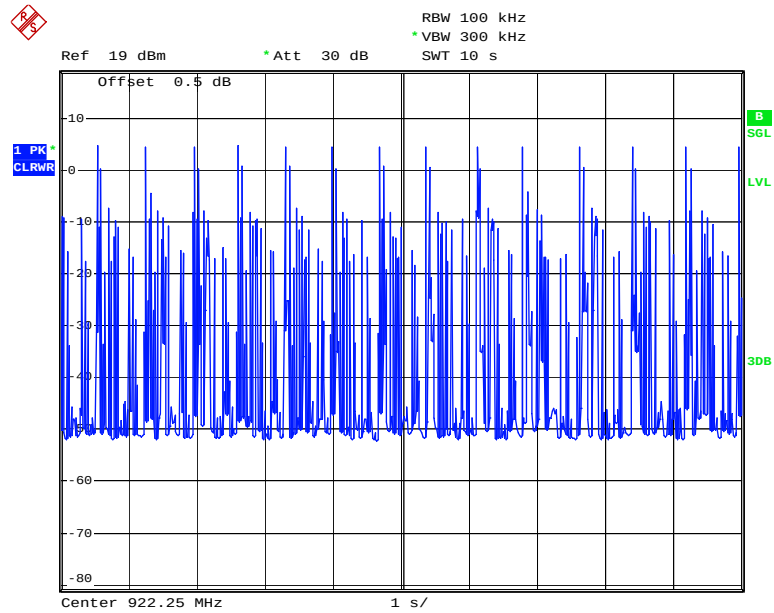

Date: 20.NOV.2017 09:51:14

**FCC §15.247(b) (2) - PEAK OUTPUT POWER MEASUREMENT****Applicable Standard**

According to §15.247(b) (2) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

**Test Procedure**

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

**Test Equipment List and Details**

| Manufacturer | Description           | Model       | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-----------------------|-------------|---------------|------------------|----------------------|
| Agilent      | Wideband Power Sensor | N1921A      | MY54210016    | 2017-11-03       | 2018-11-03           |
| Agilent      | P-Series Power Meter  | N1912A      | MY5000448     | 2017-11-03       | 2018-11-03           |
| N/A          | Coaxial Cable         | C-SJ00-0010 | C0010/01      | Each Time        | /                    |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 27.1 °C   |
| <b>Relative Humidity:</b> | 59 %      |
| <b>ATM Pressure:</b>      | 101.4 kPa |

\* The testing was performed by Harry Yang on 2017-11-20.

**Test Result:** Compliance.

*Test Mode: Transmitting*

| Frequency<br>(MHz) | Peak Conducted<br>Output power<br>(dBm) | Limit<br>(dBm) |
|--------------------|-----------------------------------------|----------------|
| 907.5              | 5.64                                    | 30             |
| 910                | 6.87                                    | 30             |
| 915                | 5.44                                    | 30             |
| 922.25             | 5.19                                    | 30             |

Note: The data above was tested in conducted mode.

## FCC §15.247(d) - BAND EDGES TESTING

### Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW/ VBW of spectrum analyzer to 100/300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

### Test Equipment List and Details

| Manufacturer | Description       | Model       | Serial Number | Calibration Date | Calibration Due Date |
|--------------|-------------------|-------------|---------------|------------------|----------------------|
| R&S          | Spectrum Analyzer | FSU 26      | 200256        | 2016-12-08       | 2017-12-08           |
| N/A          | Coaxial Cable     | C-SJ00-0010 | C0010/01      | Each Time        | /                    |

\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


**Test Data****Environmental Conditions**

|                           |           |
|---------------------------|-----------|
| <b>Temperature:</b>       | 26.8 °C   |
| <b>Relative Humidity:</b> | 56 %      |
| <b>ATM Pressure:</b>      | 101.6 kPa |

*\* The testing was performed by Harry Yang on 2017-11-22.*


**Test Result:** Compliance(All emissions are under the fundamental more than 20dB)

### Band Edge, Left Side

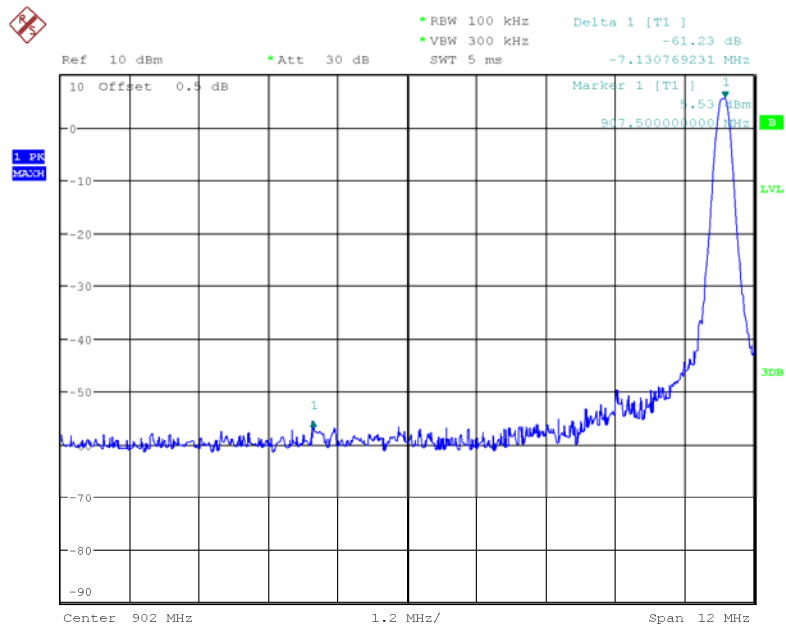

Date: 22.NOV.2017 16:09:07

### Band Edge, Right Side

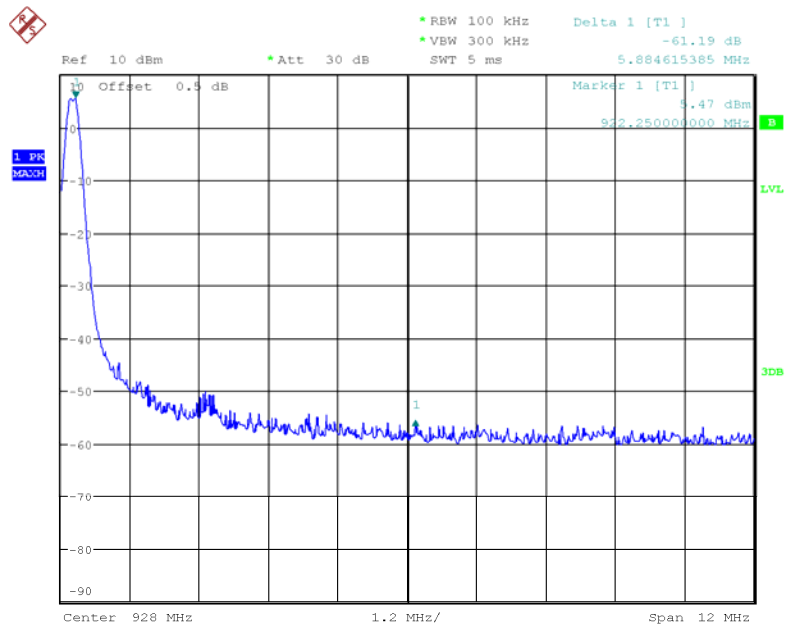

Date: 22.NOV.2017 16:08:34

\*\*\*\*\* END OF REPORT \*\*\*\*\*