


## 802.11n-HT20 Out-of-Band Emissions - Ant 3

## Channel 01 (2412 MHz)


## Reference Level

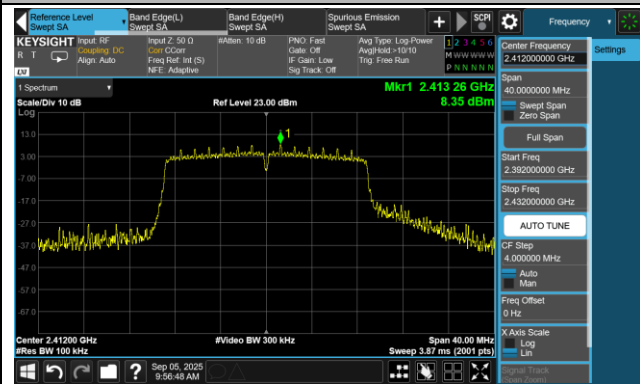

## Low Band Edge




## Spurious Emission

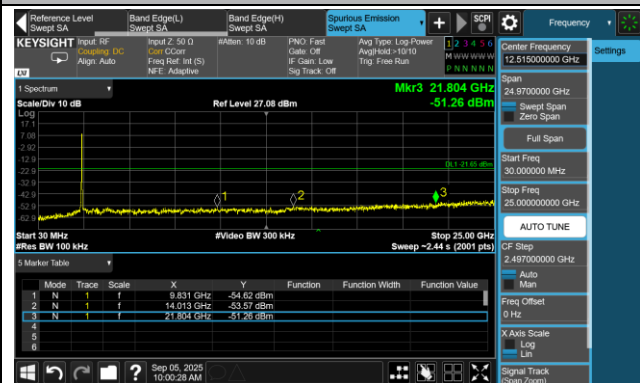


## Channel 06 (2437 MHz)

## Reference Level

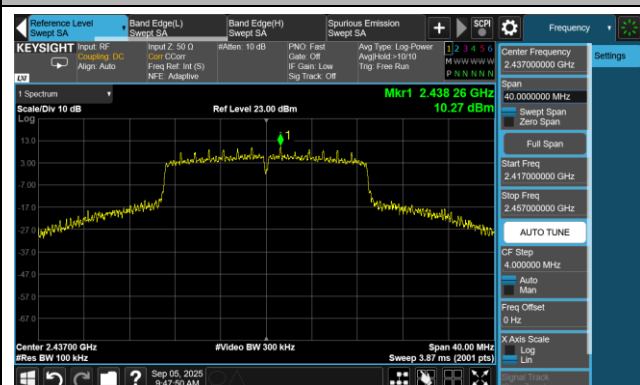


## Spurious Emission

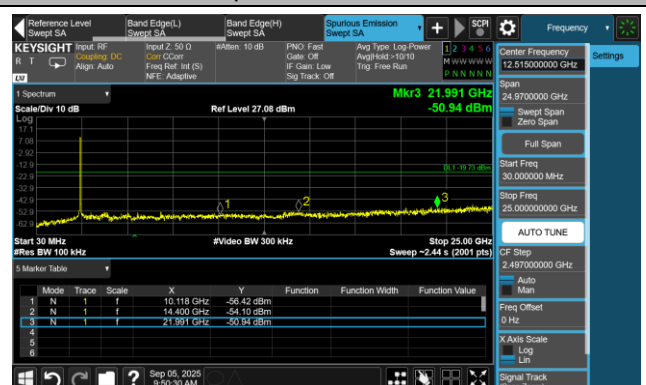


## 802.11n-HT20 Out-of-Band Emissions - Ant 3

## Channel 11 (2462 MHz)


## Reference Level

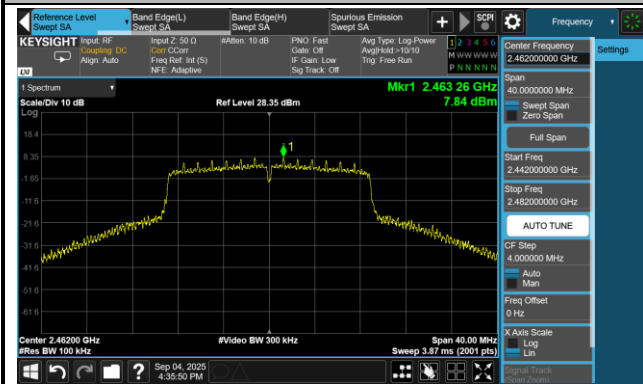

## High Band Edge

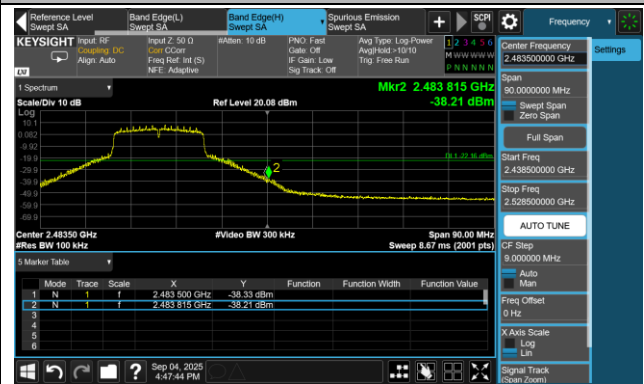


## Spurious Emission

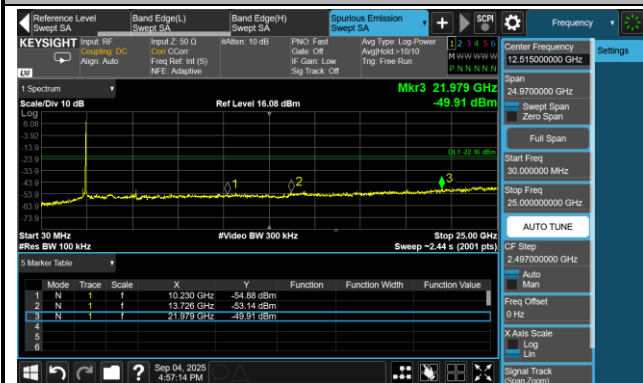


## 802.11n-HT40 Out-of-Band Emissions - Ant 3

## Channel 03 (2422 MHz)


## Reference Level

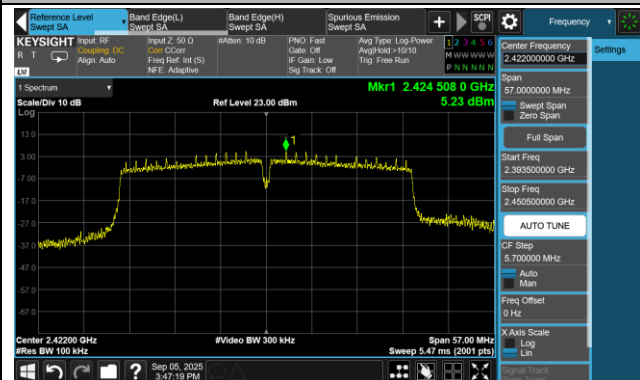

## Low Band Edge

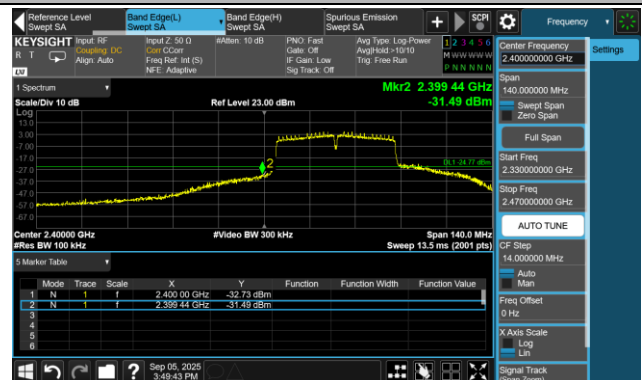

## Spurious Emission

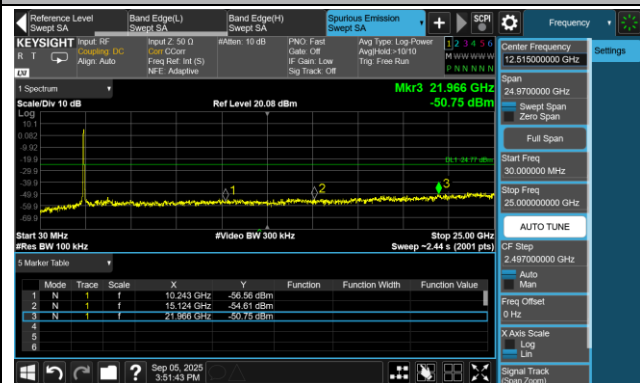


## Channel 06 (2437 MHz)

## Reference Level




## Spurious Emission

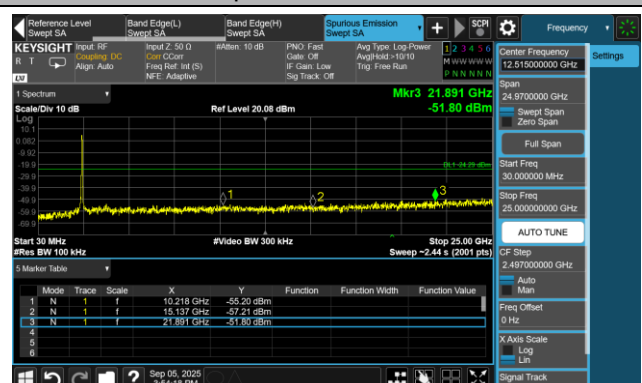


## 802.11n-HT40 Out-of-Band Emissions - Ant 3

## Channel 09 (2452 MHz)


## Reference Level

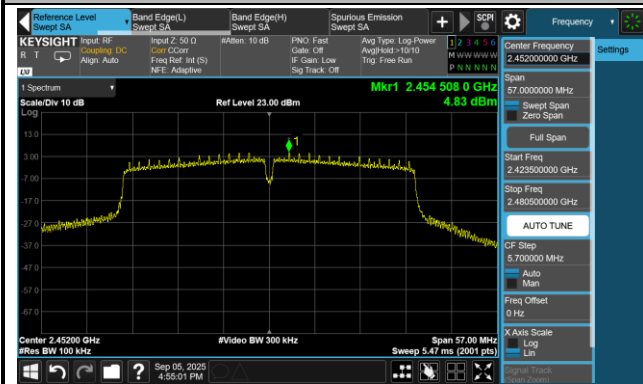

## High Band Edge

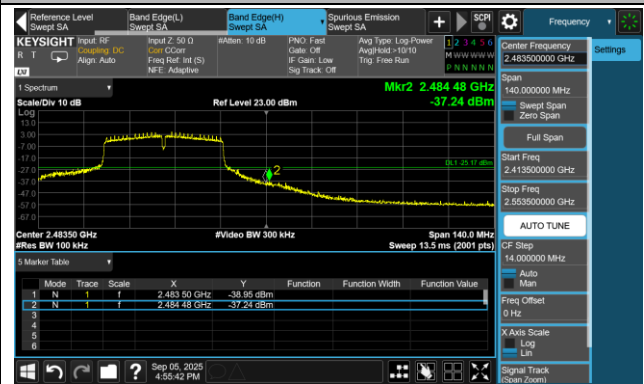

## Spurious Emission

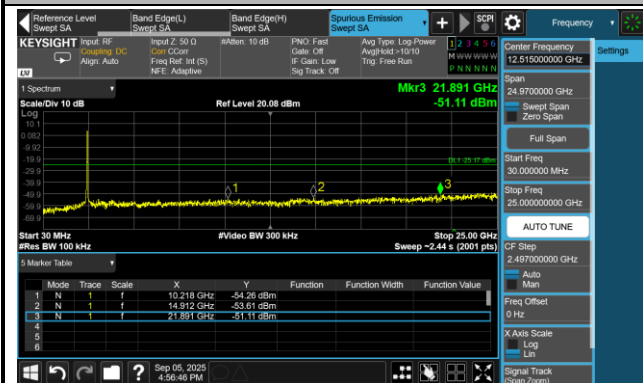


## 802.11be-EHT20 Out-of-Band Emissions - Ant 3

## Channel 01 (2412 MHz)


## Reference Level



## Low Band Edge

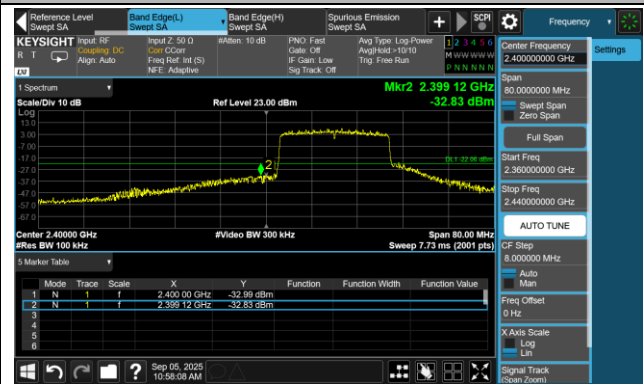


## Spurious Emission

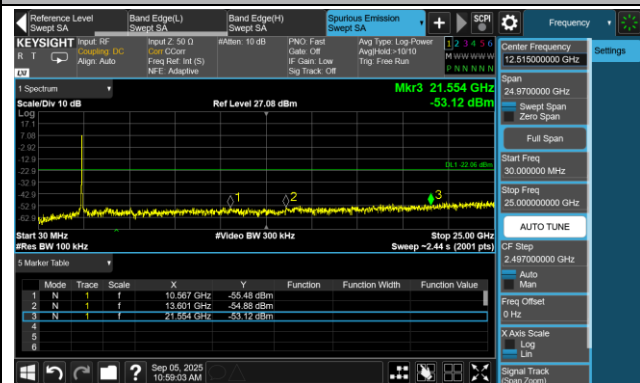


## Channel 06 (2437 MHz)

## Reference Level

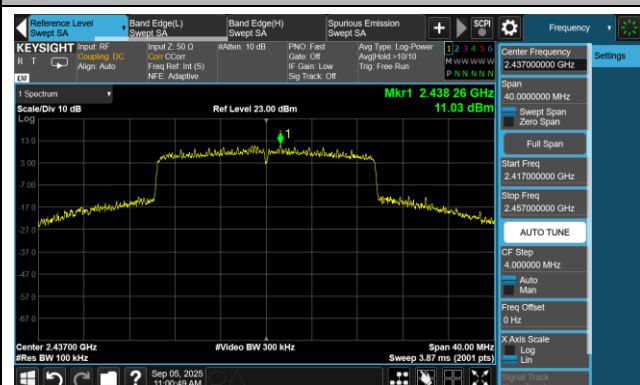


## Spurious Emission

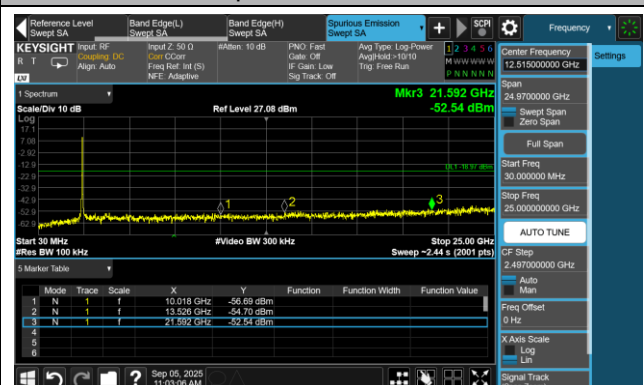


## 802.11be-EHT20 Out-of-Band Emissions - Ant 3

## Channel 11 (2462 MHz)


## Reference Level

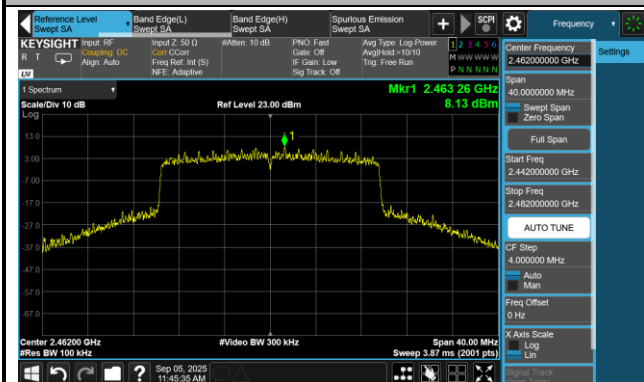

## High Band Edge

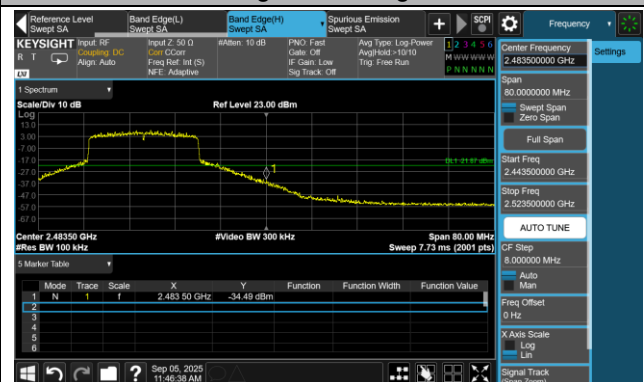

## Spurious Emission

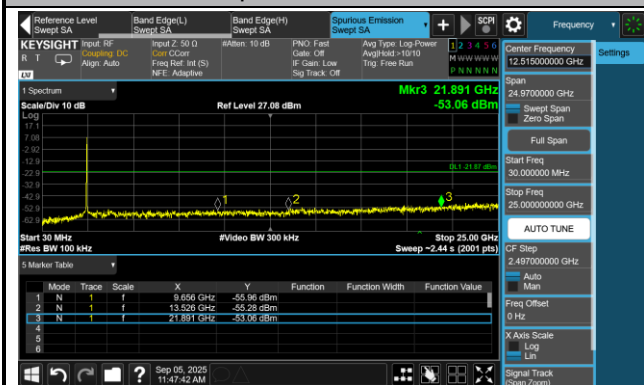

## 802.11be-EHT40 Out-of-Band Emissions - Ant 3

## Channel 03 (2422 MHz)


## Reference Level



## Low Band Edge



## Spurious Emission

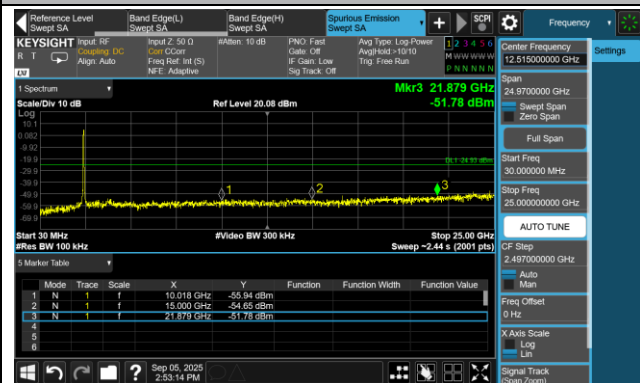


## Channel 06 (2437 MHz)

## Reference Level



## Spurious Emission

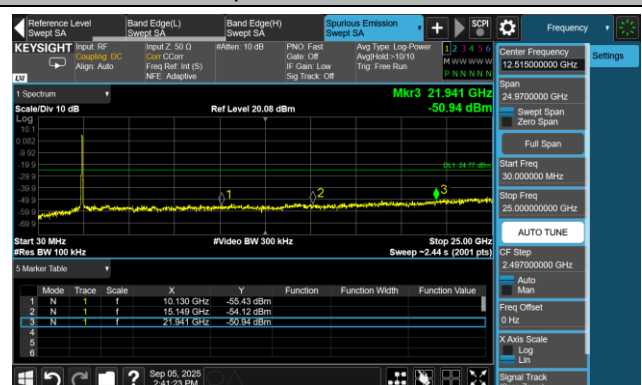


## 802.11be-EHT40 Out-of-Band Emissions - Ant 3

## Channel 09 (2452 MHz)


## Reference Level



## High Band Edge

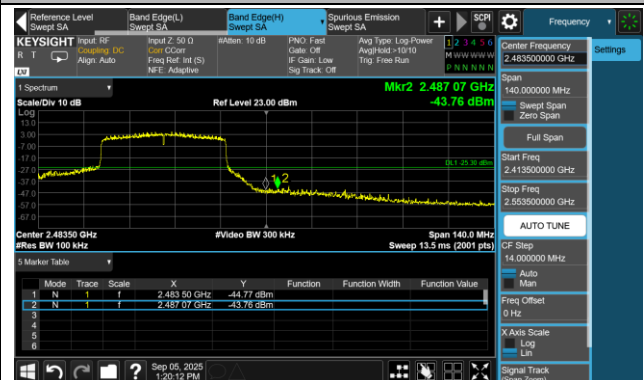

## Spurious Emission

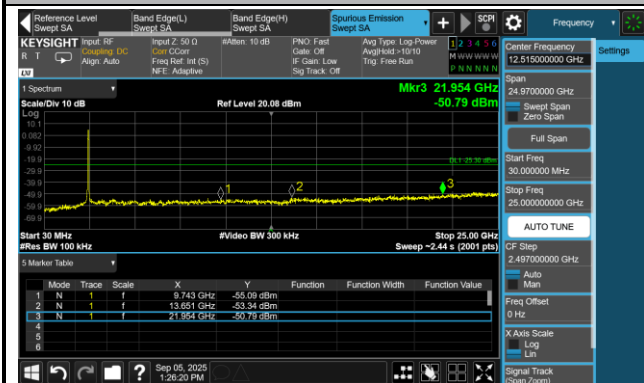

### A.6 Radiated Spurious Emissions Test Result

|           |                                                                                                                                                                                     |               |           |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------|
| Test Site | WJ-AC2                                                                                                                                                                              | Test Engineer | Bob Zhang |
| Test Date | 2025-08-22 ~ 2025-09-05                                                                                                                                                             | Test Mode     | 802.11b   |
| Remark:   | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |           |

| Test Channel | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|--------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| 01           | 3745.50         | 42.72                | -1.54         | 41.18                  | 74.00          | -32.82      | Peak     | Horizontal   |
|              | 4825.00         | 53.48                | 0.06          | 53.54                  | 54.00          | -0.46       | Average  | Horizontal   |
|              | 4825.00         | 55.83                | 0.06          | 55.89                  | 74.00          | -18.11      | Peak     | Horizontal   |
|              | 11733.80        | 41.44                | 5.10          | 46.54                  | 74.00          | -27.46      | Peak     | Horizontal   |
|              | 4060.00         | 42.56                | -1.56         | 41.00                  | 74.00          | -33.00      | Peak     | Vertical     |
|              | 4823.30         | 45.22                | 0.05          | 45.27                  | 54.00          | -8.73       | Average  | Vertical     |
|              | 4823.30         | 47.95                | 0.05          | 48.00                  | 74.00          | -26.00      | Peak     | Vertical     |
|              | 12043.20        | 43.92                | 5.21          | 49.13                  | 74.00          | -24.87      | Peak     | Vertical     |
| 06           | 4874.30         | 53.25                | 0.19          | 53.44                  | 54.00          | -0.56       | Average  | Horizontal   |
|              | 4874.30         | 54.84                | 0.19          | 55.03                  | 74.00          | -18.97      | Peak     | Horizontal   |
|              | 7312.10         | 45.76                | 5.19          | 50.95                  | 74.00          | -23.05      | Peak     | Horizontal   |
|              | 11143.90        | 39.49                | 5.49          | 44.98                  | 74.00          | -29.02      | Peak     | Horizontal   |
|              | 4874.30         | 50.11                | 0.19          | 50.30                  | 54.00          | -3.70       | Average  | Vertical     |
|              | 4874.30         | 52.71                | 0.19          | 52.90                  | 74.00          | -21.10      | Peak     | Vertical     |
|              | 7312.10         | 42.16                | 5.19          | 47.35                  | 54.00          | -6.65       | Average  | Vertical     |
|              | 7312.10         | 44.92                | 5.19          | 50.11                  | 74.00          | -23.89      | Peak     | Vertical     |
|              | 11451.60        | 40.11                | 5.41          | 45.52                  | 74.00          | -28.48      | Peak     | Vertical     |
| 11           | 4843.70         | 42.51                | 0.10          | 42.61                  | 74.00          | -31.39      | Peak     | Horizontal   |
|              | 4923.60         | 48.97                | 0.35          | 49.32                  | 54.00          | -4.68       | Average  | Horizontal   |
|              | 4923.60         | 51.45                | 0.35          | 51.80                  | 74.00          | -22.20      | Peak     | Horizontal   |
|              | 11094.60        | 39.61                | 5.53          | 45.14                  | 54.00          | -8.86       | Average  | Horizontal   |
|              | 11094.60        | 44.62                | 5.53          | 50.15                  | 74.00          | -23.85      | Peak     | Horizontal   |
|              | 4275.90         | 42.20                | -1.72         | 40.48                  | 74.00          | -33.52      | Peak     | Vertical     |
|              | 4923.60         | 47.41                | 0.35          | 47.76                  | 54.00          | -6.24       | Average  | Vertical     |
|              | 4923.60         | 50.58                | 0.35          | 50.93                  | 74.00          | -23.07      | Peak     | Vertical     |
|              | 10781.80        | 38.95                | 5.69          | 44.64                  | 54.00          | -9.36       | Average  | Vertical     |
|              | 10781.80        | 42.80                | 5.69          | 48.49                  | 74.00          | -25.51      | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)



Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |           |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------|
| Test Site | WJ-AC2                                                                                                                                                                              | Test Engineer | Bob Zhang |
| Test Date | 2025-08-22 ~ 2025-09-05                                                                                                                                                             | Test Mode     | 802.11g   |
| Remark:   | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |           |

| Test Channel | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|--------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| 01           | 3827.10         | 40.12                | -1.41         | 38.71                  | 74.00          | -35.29      | Peak     | Horizontal   |
|              | 4826.70         | 45.26                | 0.06          | 45.32                  | 54.00          | -8.68       | Average  | Horizontal   |
|              | 4826.70         | 48.42                | 0.06          | 48.48                  | 74.00          | -25.52      | Peak     | Horizontal   |
|              | 11249.30        | 34.16                | 5.82          | 39.98                  | 54.00          | -14.02      | Average  | Horizontal   |
|              | 11249.30        | 42.20                | 5.82          | 48.02                  | 74.00          | -25.98      | Peak     | Horizontal   |
|              | 3854.30         | 43.26                | -1.30         | 41.96                  | 74.00          | -32.04      | Peak     | Vertical     |
|              | 4826.70         | 44.22                | 0.06          | 44.28                  | 74.00          | -29.72      | Peak     | Vertical     |
|              | 7521.20         | 39.41                | 5.24          | 44.65                  | 74.00          | -29.35      | Peak     | Vertical     |
| 06           | 3845.80         | 38.66                | -1.20         | 37.46                  | 74.00          | -36.54      | Peak     | Horizontal   |
|              | 4876.00         | 46.07                | 0.17          | 46.24                  | 74.00          | -27.76      | Peak     | Horizontal   |
|              | 10781.80        | 40.16                | 5.69          | 45.85                  | 54.00          | -8.15       | Average  | Horizontal   |
|              | 10781.80        | 44.86                | 5.69          | 50.55                  | 74.00          | -23.45      | Peak     | Horizontal   |
|              | 4352.40         | 42.30                | -1.33         | 40.97                  | 74.00          | -33.03      | Peak     | Vertical     |
|              | 4877.70         | 42.18                | 0.15          | 42.33                  | 74.00          | -31.67      | Peak     | Vertical     |
|              | 11300.30        | 38.76                | 5.65          | 44.41                  | 74.00          | -29.59      | Peak     | Vertical     |
| 11           | 3896.80         | 39.10                | -1.13         | 37.97                  | 74.00          | -36.03      | Peak     | Horizontal   |
|              | 4852.20         | 39.79                | 0.16          | 39.95                  | 74.00          | -34.05      | Peak     | Horizontal   |
|              | 11817.10        | 40.70                | 4.90          | 45.60                  | 74.00          | -28.40      | Peak     | Horizontal   |
|              | 3776.10         | 40.37                | -1.44         | 38.93                  | 74.00          | -35.07      | Peak     | Vertical     |
|              | 4938.90         | 39.51                | 0.30          | 39.81                  | 74.00          | -34.19      | Peak     | Vertical     |
|              | 8189.30         | 36.91                | 5.96          | 42.87                  | 74.00          | -31.13      | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------------|
| Test Site | WJ-AC2                                                                                                                                                                              | Test Engineer | Bob Zhang    |
| Test Date | 2025-08-22 ~ 2025-09-05                                                                                                                                                             | Test Mode     | 802.11n-HT20 |
| Remark:   | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |              |

| Test Channel | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|--------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| 01           | 4039.60         | 38.90                | -1.25         | 37.65                  | 74.00          | -36.35      | Peak     | Horizontal   |
|              | 4816.50         | 45.09                | 0.06          | 45.15                  | 74.00          | -28.85      | Peak     | Horizontal   |
|              | 11094.60        | 44.45                | 5.53          | 49.98                  | 74.00          | -24.02      | Peak     | Horizontal   |
|              | 4083.80         | 41.55                | -1.52         | 40.03                  | 74.00          | -33.97      | Peak     | Vertical     |
|              | 4794.40         | 43.14                | -0.05         | 43.09                  | 74.00          | -30.91      | Peak     | Vertical     |
|              | 11608.00        | 40.78                | 5.10          | 45.88                  | 74.00          | -28.12      | Peak     | Vertical     |
| 06           | 4877.70         | 43.98                | 0.15          | 44.13                  | 74.00          | -29.87      | Peak     | Horizontal   |
|              | 7487.20         | 38.18                | 5.23          | 43.41                  | 74.00          | -30.59      | Peak     | Horizontal   |
|              | 10781.80        | 40.11                | 5.69          | 45.80                  | 54.00          | -8.20       | Average  | Horizontal   |
|              | 10781.80        | 43.64                | 5.69          | 49.33                  | 74.00          | -24.67      | Peak     | Horizontal   |
|              | 4002.20         | 38.01                | -1.07         | 36.94                  | 74.00          | -37.06      | Peak     | Vertical     |
|              | 4961.00         | 38.48                | 0.32          | 38.80                  | 74.00          | -35.20      | Peak     | Vertical     |
|              | 11555.30        | 41.04                | 5.36          | 46.40                  | 74.00          | -27.60      | Peak     | Vertical     |
| 11           | 3835.60         | 42.10                | -1.38         | 40.72                  | 74.00          | -33.28      | Peak     | Horizontal   |
|              | 4830.10         | 39.14                | 0.07          | 39.21                  | 74.00          | -34.79      | Peak     | Horizontal   |
|              | 7968.30         | 46.46                | 5.60          | 52.06                  | 68.20          | -16.14      | Peak     | Horizontal   |
|              | 11200.00        | 39.21                | 5.39          | 44.60                  | 74.00          | -29.40      | Peak     | Horizontal   |
|              | 3949.50         | 36.82                | -1.21         | 35.61                  | 74.00          | -38.39      | Peak     | Vertical     |
|              | 4983.10         | 37.27                | 0.24          | 37.51                  | 74.00          | -36.49      | Peak     | Vertical     |
|              | 11922.50        | 39.38                | 5.20          | 44.58                  | 74.00          | -29.42      | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |              |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|--------------|
| Test Site | WJ-AC2                                                                                                                                                                              | Test Engineer | Bob Zhang    |
| Test Date | 2025-08-22 ~ 2025-09-05                                                                                                                                                             | Test Mode     | 802.11n-HT40 |
| Remark:   | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |              |

| Test Channel | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|--------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| 03           | 4017.50         | 37.62                | -1.52         | 36.10                  | 74.00          | -37.90      | Peak     | Horizontal   |
|              | 4843.70         | 43.61                | 0.10          | 43.71                  | 74.00          | -30.29      | Peak     | Horizontal   |
|              | 7968.30         | 47.24                | 5.60          | 52.84                  | 68.20          | -15.36      | Peak     | Horizontal   |
|              | 11322.40        | 40.24                | 5.72          | 45.96                  | 74.00          | -28.04      | Peak     | Horizontal   |
|              | 4034.50         | 41.74                | -1.20         | 40.54                  | 74.00          | -33.46      | Peak     | Vertical     |
|              | 4840.30         | 39.39                | 0.09          | 39.48                  | 74.00          | -34.52      | Peak     | Vertical     |
|              | 11177.90        | 38.00                | 5.42          | 43.42                  | 74.00          | -30.58      | Peak     | Vertical     |
| 06           | 3839.00         | 39.11                | -1.35         | 37.76                  | 74.00          | -36.24      | Peak     | Horizontal   |
|              | 4865.80         | 42.35                | 0.22          | 42.57                  | 74.00          | -31.43      | Peak     | Horizontal   |
|              | 11177.90        | 40.21                | 5.42          | 45.63                  | 74.00          | -28.37      | Peak     | Horizontal   |
|              | 3839.00         | 39.61                | -1.35         | 38.26                  | 74.00          | -35.74      | Peak     | Vertical     |
|              | 4903.20         | 39.23                | 0.15          | 39.38                  | 74.00          | -34.62      | Peak     | Vertical     |
|              | 11618.20        | 39.78                | 5.16          | 44.94                  | 74.00          | -29.06      | Peak     | Vertical     |
| 09           | 3890.00         | 38.86                | -1.20         | 37.66                  | 74.00          | -36.34      | Peak     | Horizontal   |
|              | 5064.70         | 38.67                | 0.24          | 38.91                  | 74.00          | -35.09      | Peak     | Horizontal   |
|              | 11177.90        | 39.00                | 5.42          | 44.42                  | 74.00          | -29.58      | Peak     | Horizontal   |
|              | 3990.30         | 38.48                | -1.35         | 37.13                  | 74.00          | -36.87      | Peak     | Vertical     |
|              | 4809.70         | 40.06                | 0.09          | 40.15                  | 74.00          | -33.85      | Peak     | Vertical     |
|              | 11177.90        | 40.51                | 5.42          | 45.93                  | 74.00          | -28.07      | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------------|
| Test Site | WJ-AC2                                                                                                                                                                              | Test Engineer | Bob Zhang      |
| Test Date | 2025-08-22 ~ 2025-09-05                                                                                                                                                             | Test Mode     | 802.11be-EHT20 |
| Remark:   | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                |

| Test Channel | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|--------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| 01           | 3782.90         | 40.28                | -1.39         | 38.89                  | 74.00          | -35.11      | Peak     | Horizontal   |
|              | 4825.00         | 45.55                | 0.06          | 45.61                  | 74.00          | -28.39      | Peak     | Horizontal   |
|              | 11094.60        | 41.02                | 5.53          | 46.55                  | 54.00          | -7.45       | Average  | Horizontal   |
|              | 11094.60        | 43.26                | 5.53          | 48.79                  | 74.00          | -25.21      | Peak     | Horizontal   |
|              | 3791.40         | 41.50                | -1.36         | 40.14                  | 74.00          | -33.86      | Peak     | Vertical     |
|              | 4779.10         | 39.59                | -0.10         | 39.49                  | 74.00          | -34.51      | Peak     | Vertical     |
|              | 10781.80        | 41.20                | 5.69          | 46.89                  | 54.00          | -7.11       | Average  | Vertical     |
|              | 10781.80        | 43.55                | 5.69          | 49.24                  | 74.00          | -24.76      | Peak     | Vertical     |
| 06           | 4870.90         | 42.90                | 0.22          | 43.12                  | 54.00          | -10.88      | Average  | Horizontal   |
|              | 4870.90         | 46.72                | 0.22          | 46.94                  | 74.00          | -27.06      | Peak     | Horizontal   |
|              | 7322.30         | 43.25                | 5.27          | 48.52                  | 74.00          | -25.48      | Peak     | Horizontal   |
|              | 11157.50        | 32.55                | 5.61          | 38.16                  | 54.00          | -15.84      | Average  | Horizontal   |
|              | 11157.50        | 39.96                | 5.61          | 45.57                  | 74.00          | -28.43      | Peak     | Horizontal   |
|              | 4870.90         | 44.02                | 0.22          | 44.24                  | 54.00          | -9.76       | Average  | Vertical     |
|              | 4870.90         | 46.72                | 0.22          | 46.94                  | 74.00          | -27.06      | Peak     | Vertical     |
|              | 7322.30         | 39.26                | 5.27          | 44.53                  | 54.00          | -9.47       | Average  | Vertical     |
|              | 7322.30         | 43.25                | 5.27          | 48.52                  | 74.00          | -25.48      | Peak     | Vertical     |
|              | 11094.60        | 37.88                | 5.53          | 43.41                  | 54.00          | -10.59      | Average  | Vertical     |
|              | 11094.60        | 43.00                | 5.53          | 48.53                  | 74.00          | -25.47      | Peak     | Vertical     |
|              |                 |                      |               |                        |                |             |          |              |
| 11           | 4036.20         | 40.60                | -1.17         | 39.43                  | 74.00          | -34.57      | Peak     | Horizontal   |
|              | 4782.50         | 42.20                | -0.15         | 42.05                  | 74.00          | -31.95      | Peak     | Horizontal   |
|              | 11094.60        | 41.02                | 5.53          | 46.55                  | 54.00          | -7.45       | Average  | Horizontal   |
|              | 11094.60        | 44.78                | 5.53          | 50.31                  | 74.00          | -23.69      | Peak     | Horizontal   |
|              | 3874.70         | 40.50                | -1.43         | 39.07                  | 74.00          | -34.93      | Peak     | Vertical     |
|              | 4833.50         | 39.15                | 0.08          | 39.23                  | 74.00          | -34.77      | Peak     | Vertical     |
|              | 11597.80        | 42.09                | 5.16          | 47.25                  | 74.00          | -26.75      | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

|           |                                                                                                                                                                                     |               |                |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|----------------|
| Test Site | WJ-AC2                                                                                                                                                                              | Test Engineer | Bob Zhang      |
| Test Date | 2025-08-22 ~ 2025-09-05                                                                                                                                                             | Test Mode     | 802.11be-EHT40 |
| Remark:   | 1. Average measurement was not performed if peak level lower than average limit.<br>2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report. |               |                |


| Test Channel | Frequency (MHz) | Reading Level (dBμV) | Factor (dB/m) | Measure Level (dBμV/m) | Limit (dBμV/m) | Margin (dB) | Detector | Polarization |
|--------------|-----------------|----------------------|---------------|------------------------|----------------|-------------|----------|--------------|
| 03           | 4090.60         | 41.70                | -1.55         | 40.15                  | 74.00          | -33.85      | Peak     | Horizontal   |
|              | 4843.70         | 43.89                | 0.10          | 43.99                  | 74.00          | -30.01      | Peak     | Horizontal   |
|              | 10781.80        | 41.72                | 5.69          | 47.41                  | 54.00          | -6.59       | Average  | Horizontal   |
|              | 10781.80        | 44.17                | 5.69          | 49.86                  | 74.00          | -24.14      | Peak     | Horizontal   |
|              | 3835.60         | 41.07                | -1.38         | 39.69                  | 74.00          | -34.31      | Peak     | Vertical     |
|              | 4796.10         | 42.38                | -0.02         | 42.36                  | 74.00          | -31.64      | Peak     | Vertical     |
|              | 10781.80        | 41.43                | 5.69          | 47.12                  | 54.00          | -6.88       | Average  | Vertical     |
|              | 10781.80        | 43.14                | 5.69          | 48.83                  | 74.00          | -25.17      | Peak     | Vertical     |
| 06           | 3903.60         | 40.80                | -1.07         | 39.73                  | 74.00          | -34.27      | Peak     | Horizontal   |
|              | 4843.70         | 43.28                | 0.10          | 43.38                  | 74.00          | -30.62      | Peak     | Horizontal   |
|              | 11346.20        | 40.35                | 5.62          | 45.97                  | 74.00          | -28.03      | Peak     | Horizontal   |
|              | 3830.50         | 40.53                | -1.42         | 39.11                  | 74.00          | -34.89      | Peak     | Vertical     |
|              | 4755.30         | 40.88                | 0.11          | 40.99                  | 74.00          | -33.01      | Peak     | Vertical     |
|              | 11094.60        | 42.52                | 5.53          | 48.05                  | 74.00          | -25.95      | Peak     | Vertical     |
| 09           | 3992.00         | 40.57                | -1.31         | 39.26                  | 74.00          | -34.74      | Peak     | Horizontal   |
|              | 4843.70         | 43.88                | 0.10          | 43.98                  | 74.00          | -30.02      | Peak     | Horizontal   |
|              | 11660.70        | 43.29                | 5.16          | 48.45                  | 74.00          | -25.55      | Peak     | Horizontal   |
|              | 3822.00         | 40.75                | -1.41         | 39.34                  | 74.00          | -34.66      | Peak     | Vertical     |
|              | 4738.30         | 40.66                | 0.37          | 41.03                  | 74.00          | -32.97      | Peak     | Vertical     |
|              | 11976.90        | 43.20                | 5.17          | 48.37                  | 74.00          | -25.63      | Peak     | Vertical     |

Note: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre\_Amplifier Gain (dB)

### The Result of Radiated Emission below 1 GHz:

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WJ-AC1                          | Test Date     | 2025-08-08 |
| Temperature  | 24.2 °C                         | Humidity      | 49.3%      |
| Limit        | FCC_Part 15.209_RSE (3 m)       | Test Engineer | Carl Jiang |
| Test Voltage | AC 120 V/60 Hz                  | Polarity      | Horizontal |
| Test Mode    | Transmit by 802.11b at 2437 MHz |               |            |

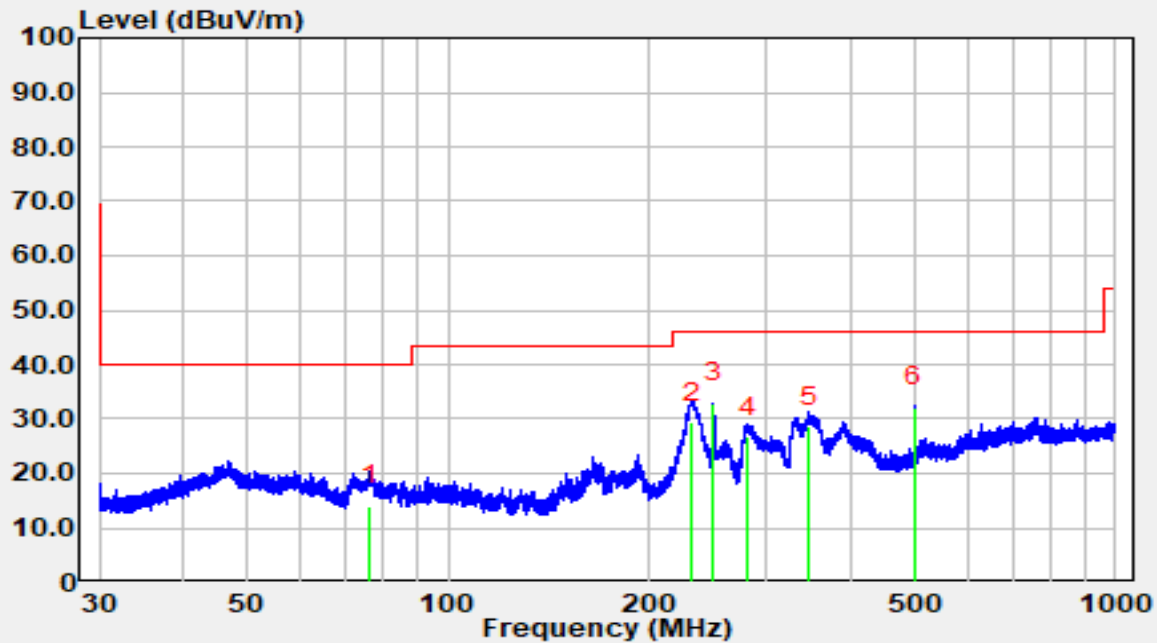


Trace:

| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 76.27           | 1.00           | 13.03      | 14.03                | -25.97      | 40.00          | QP       |
| 2  |      | 231.64          | 11.60          | 17.68      | 29.28                | -16.72      | 46.00          | QP       |
| 3  | *    | 250.04          | 14.50          | 18.38      | 32.88                | -13.12      | 46.00          | QP       |
| 4  |      | 281.11          | 8.10           | 18.60      | 26.70                | -19.30      | 46.00          | QP       |
| 5  |      | 347.66          | 7.80           | 20.74      | 28.54                | -17.46      | 46.00          | QP       |
| 6  |      | 500.13          | 9.10           | 23.08      | 32.18                | -13.82      | 46.00          | QP       |

#### Notes:

- "\*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
- The amplitude of radiated emissions (frequency range from 9 kHz to 30 MHz and 18 GHz to 25 GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WJ-AC1                          | Test Date     | 2025-08-08 |
| Temperature  | 24.2 °C                         | Humidity      | 49.3%      |
| Limit        | FCC_Part 15.209_RSE (3 m)       | Test Engineer | Carl Jiang |
| Test Voltage | AC 120 V/60 Hz                  | Polarity      | Vertical   |
| Test Mode    | Transmit by 802.11b at 2437 MHz |               |            |

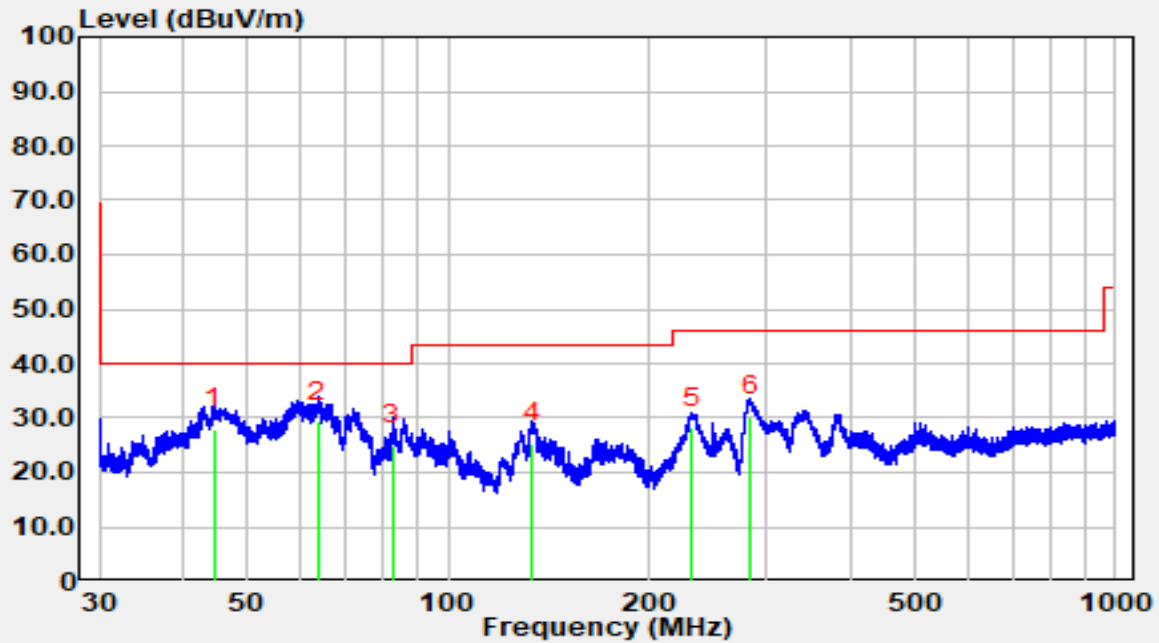

Trace:


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 44.59           | 8.40           | 19.61      | 28.01                | -11.99      | 40.00          | QP       |
| 2  | *    | 63.85           | 11.90          | 17.43      | 29.33                | -10.67      | 40.00          | QP       |
| 3  |      | 82.59           | 11.90          | 13.06      | 24.96                | -15.04      | 40.00          | QP       |
| 4  |      | 133.76          | 11.40          | 13.98      | 25.38                | -18.12      | 43.50          | QP       |
| 5  |      | 232.12          | 10.50          | 17.72      | 28.22                | -17.78      | 46.00          | QP       |
| 6  |      | 283.88          | 11.60          | 18.68      | 30.28                | -15.72      | 46.00          | QP       |

## Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).
4. The amplitude of radiated emissions (frequency range from 9 kHz to 30 MHz and 18 GHz to 25 GHz) is that proximity to ambient noise, which also are attenuated more than 20 dB below the permissible value. Therefore, the data is not presented in the report.

### A.7 Radiated Restricted Band Edge Test Result

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC1                                          | Test Date     | 2025-08-11     |
| Temperature | 26.9 °C                                         | Humidity      | 45.4%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Carl Jiang     |
| Factor      | HF907_07205                                     | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11b at 2412 MHz                 |               |                |

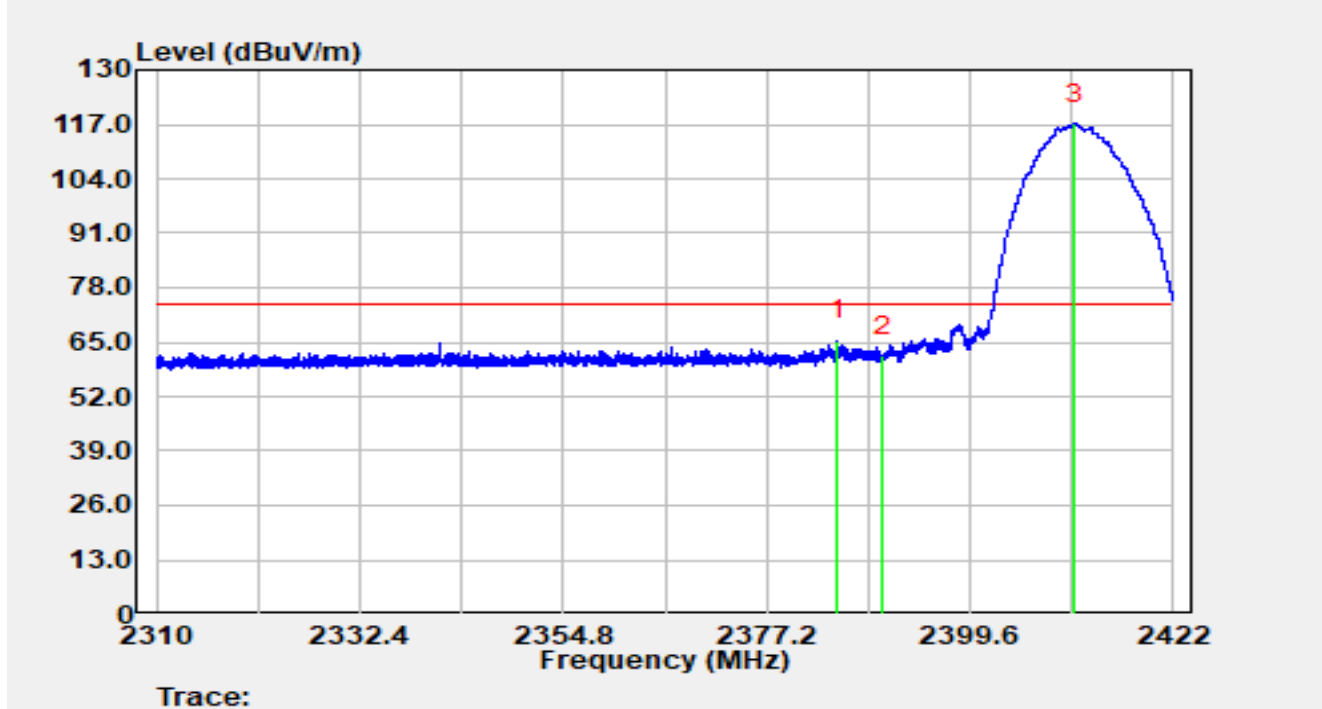


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2385.01         | 31.81          | 33.48      | 65.29                | -8.71       | 74.00          | Peak     |
| 2  |      | 2390.00         | 28.24          | 33.50      | 61.74                | -12.26      | 74.00          | Peak     |
| 3  |      | 2411.16         | 83.49          | 33.64      | 117.13               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC1                                          | Test Date     | 2025-08-11     |
| Temperature | 26.9 °C                                         | Humidity      | 45.4%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Carl Jiang     |
| Factor      | HF907_07205                                     | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11b at 2412 MHz                 |               |                |

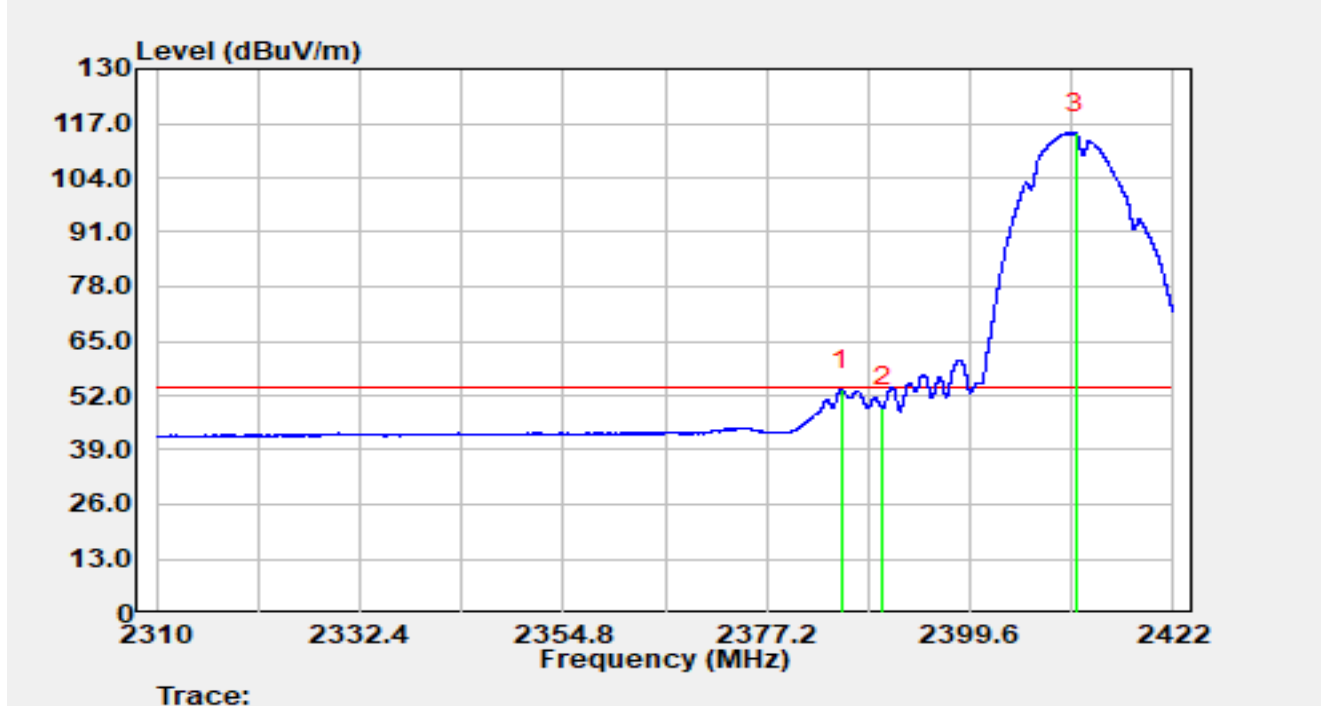


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2385.38         | 19.87          | 33.48      | 53.34                | -0.66       | 54.00          | Average  |
| 2  |      | 2390.00         | 15.58          | 33.50      | 49.08                | -4.92       | 54.00          | Average  |
| 3  |      | 2411.19         | 81.04          | 33.64      | 114.68               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC1                                          | Test Date     | 2025-08-11     |
| Temperature | 26.9 °C                                         | Humidity      | 45.4%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Carl Jiang     |
| Factor      | HF907_07205                                     | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11b at 2412 MHz                 |               |                |

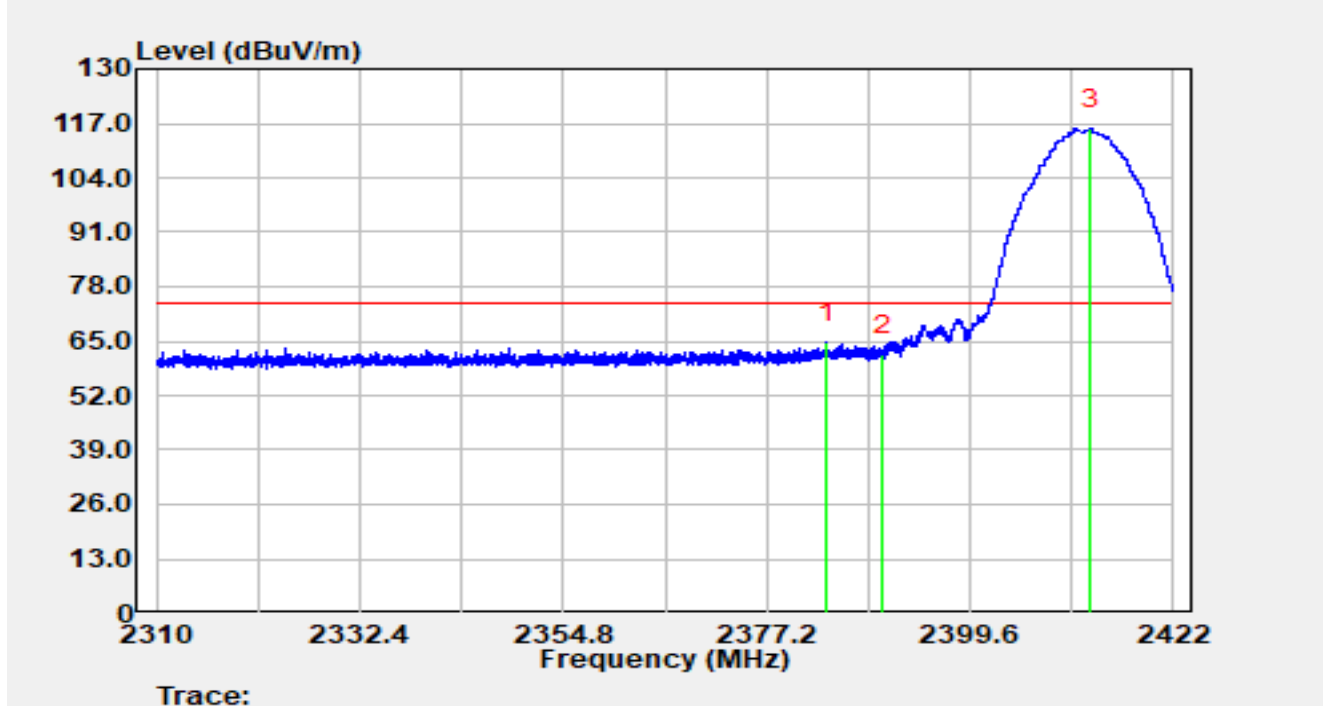


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2383.81         | 31.18          | 33.47      | 64.65                | -9.35       | 74.00          | Peak     |
| 2  |      | 2390.00         | 28.29          | 33.50      | 61.79                | -12.21      | 74.00          | Peak     |
| 3  |      | 2412.94         | 82.10          | 33.65      | 115.75               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC1                                          | Test Date     | 2025-08-11     |
| Temperature | 26.9 °C                                         | Humidity      | 45.4%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Carl Jiang     |
| Factor      | HF907_07205                                     | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11b at 2412 MHz                 |               |                |

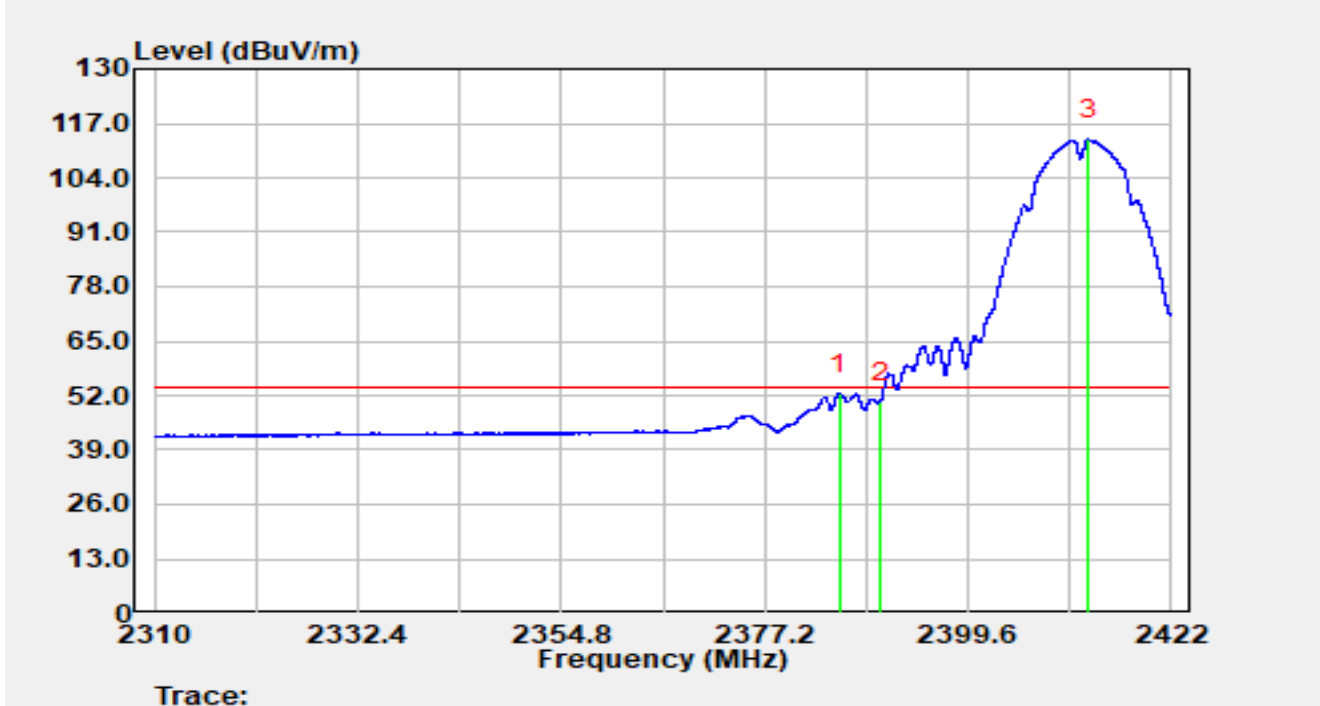


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2385.37         | 18.92          | 33.48      | 52.40                | -1.60       | 54.00          | Average  |
| 2  |      | 2390.00         | 16.98          | 33.50      | 50.48                | -3.52       | 54.00          | Average  |
| 3  |      | 2412.83         | 79.52          | 33.65      | 113.17               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-17     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11b at 2437 MHz                 |               |                |

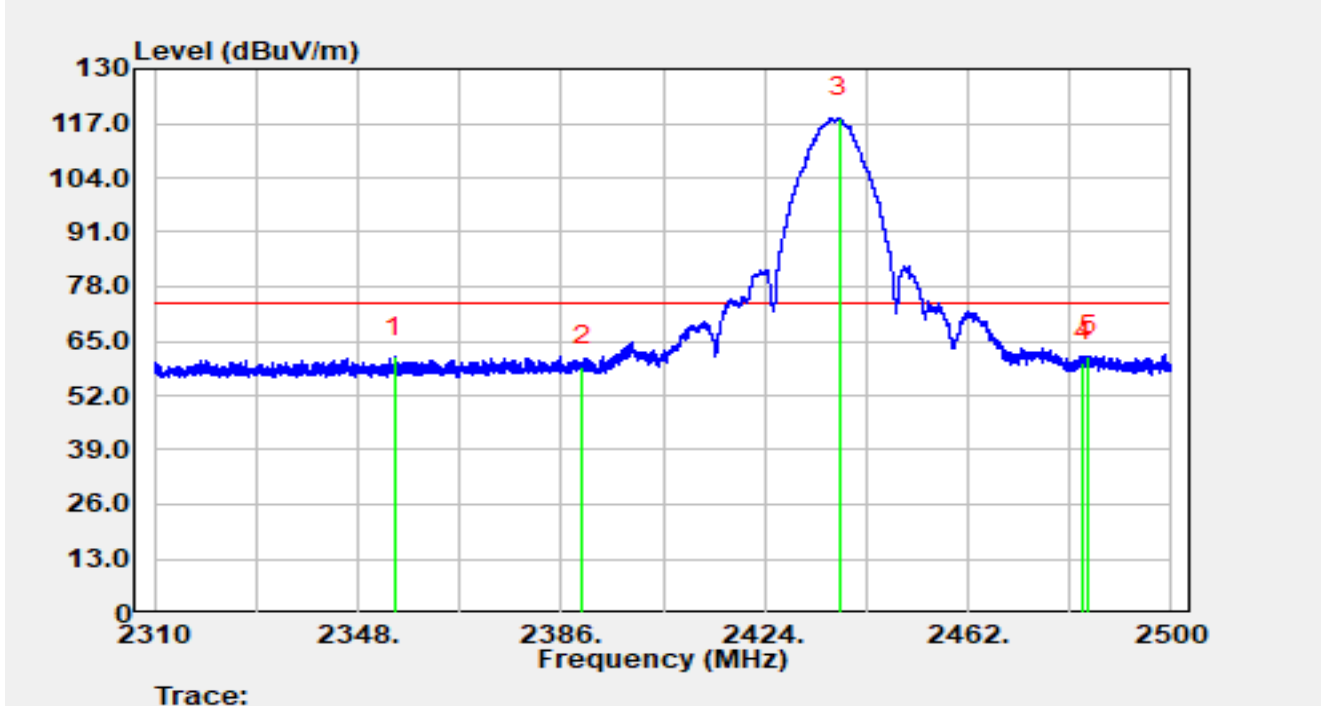


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2354.88         | 31.68          | 29.53      | 61.21                | -12.79      | 74.00          | Peak     |
| 2  |      | 2390.00         | 29.38          | 29.59      | 58.97                | -15.03      | 74.00          | Peak     |
| 3  |      | 2437.95         | 88.62          | 29.68      | 118.30               | N/A         | N/A            | Peak     |
| 4  |      | 2483.50         | 30.20          | 29.76      | 59.96                | -14.04      | 74.00          | Peak     |
| 5  | *    | 2484.55         | 31.63          | 29.77      | 61.40                | -12.60      | 74.00          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-17     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11b at 2437 MHz                 |               |                |

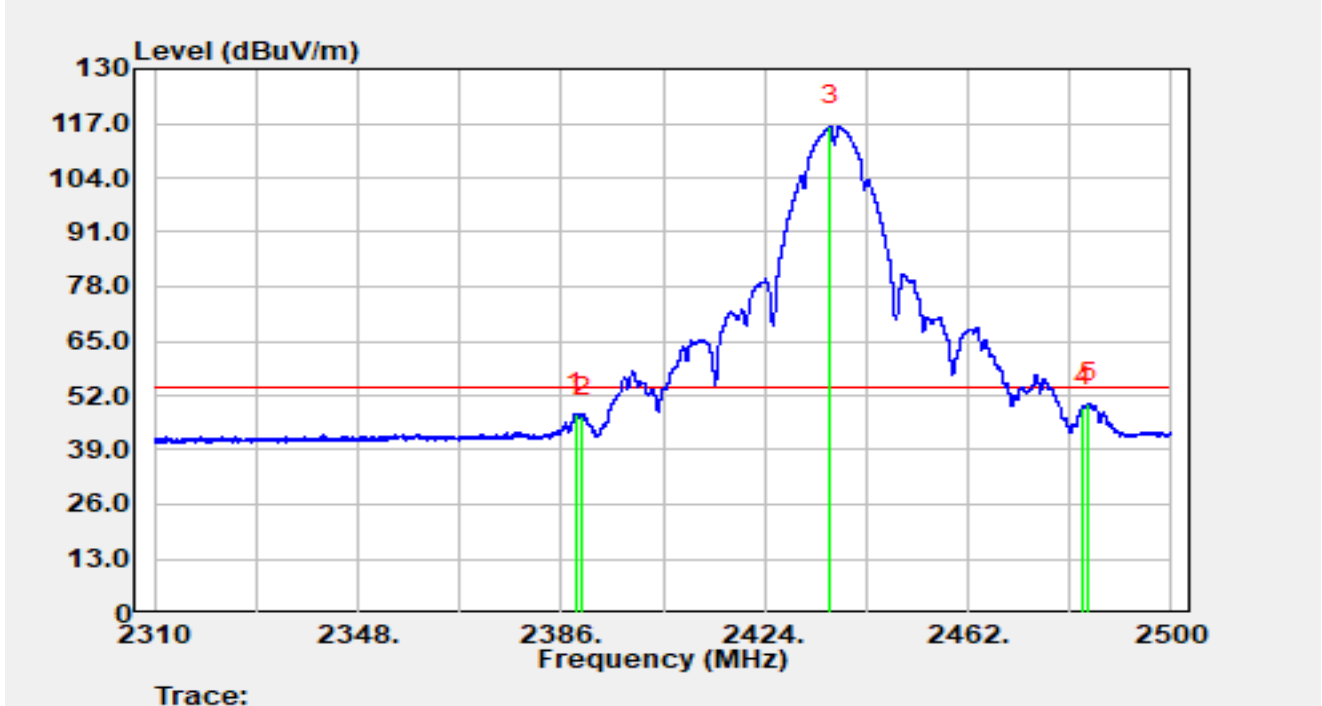


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2388.72         | 18.05          | 29.59      | 47.64                | -6.36       | 54.00          | Average  |
| 2  |      | 2390.00         | 17.41          | 29.59      | 47.01                | -6.99       | 54.00          | Average  |
| 3  |      | 2436.24         | 86.71          | 29.67      | 116.39               | N/A         | N/A            | Average  |
| 4  |      | 2483.50         | 19.48          | 29.76      | 49.24                | -4.76       | 54.00          | Average  |
| 5  | *    | 2484.57         | 20.31          | 29.77      | 50.08                | -3.92       | 54.00          | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-17     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11b at 2437 MHz                 |               |                |

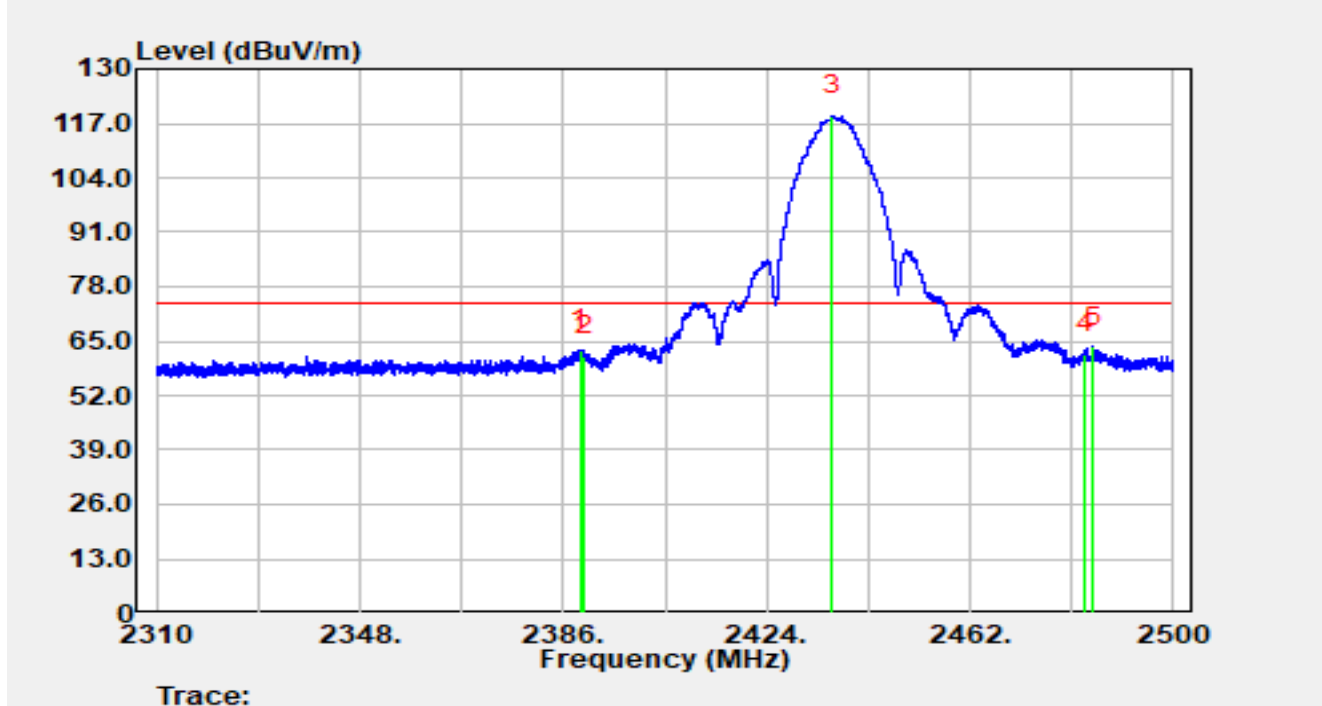


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2389.08         | 33.28          | 29.59      | 62.87                | -11.13      | 74.00          | Peak     |
| 2  |      | 2390.00         | 31.77          | 29.59      | 61.36                | -12.64      | 74.00          | Peak     |
| 3  |      | 2436.24         | 89.14          | 29.67      | 118.81               | N/A         | N/A            | Peak     |
| 4  |      | 2483.50         | 32.21          | 29.76      | 61.97                | -12.03      | 74.00          | Peak     |
| 5  | *    | 2485.09         | 33.90          | 29.77      | 63.67                | -10.33      | 74.00          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-17     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11b at 2437 MHz                 |               |                |

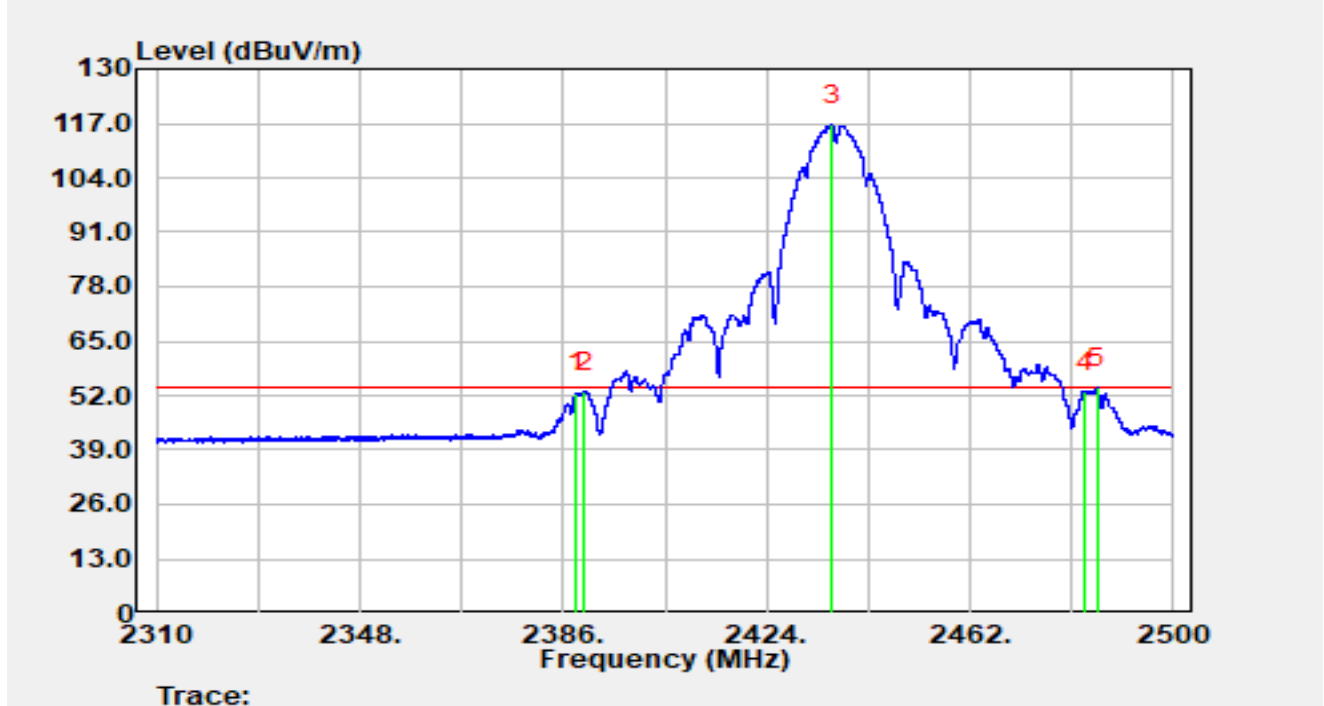


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2388.36         | 23.15          | 29.59      | 52.73                | -1.27       | 54.00          | Average  |
| 2  |      | 2390.00         | 23.24          | 29.59      | 52.83                | -1.17       | 54.00          | Average  |
| 3  |      | 2436.24         | 87.08          | 29.67      | 116.75               | N/A         | N/A            | Average  |
| 4  |      | 2483.50         | 23.04          | 29.76      | 52.80                | -1.20       | 54.00          | Average  |
| 5  | *    | 2485.85         | 23.98          | 29.77      | 53.75                | -0.25       | 54.00          | Average  |

#### Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-19     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11b at 2457 MHz                 |               |                |

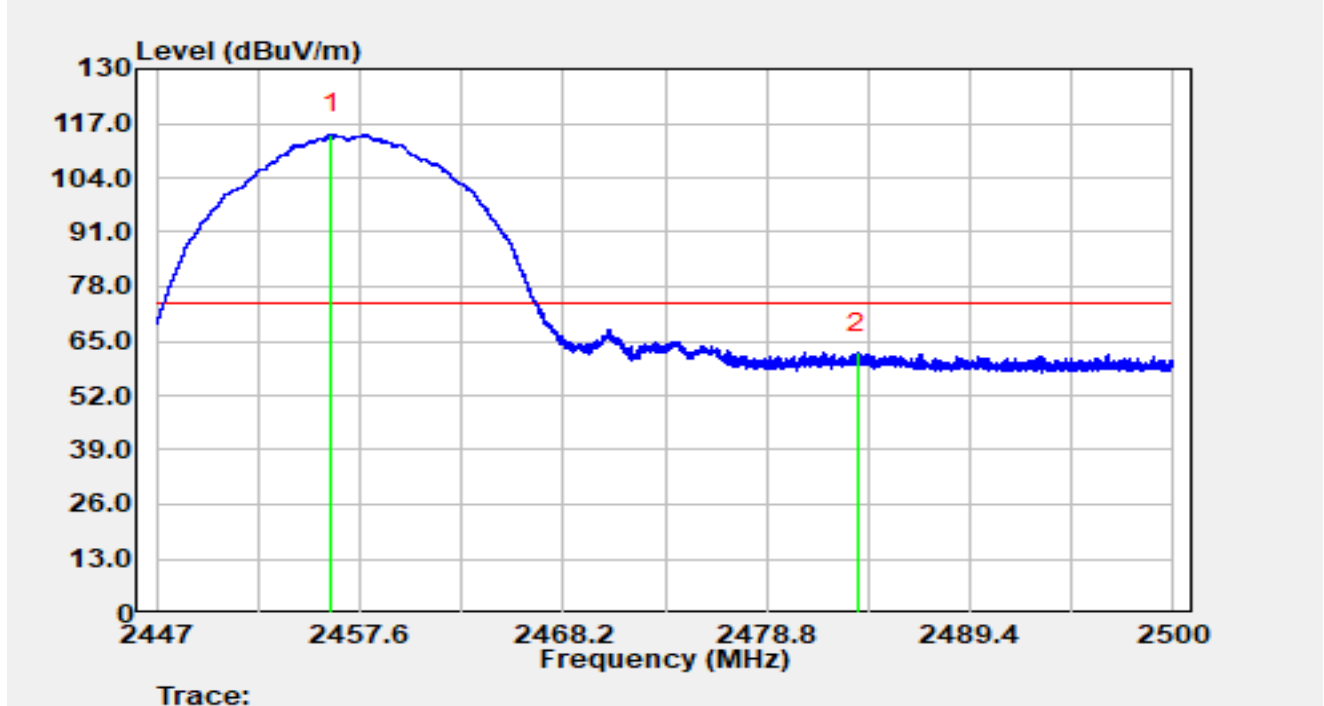


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2456.10         | 84.68          | 29.70      | 114.39               | N/A         | N/A            | Peak     |
| 2  | *    | 2483.50         | 32.31          | 29.76      | 62.07                | -11.93      | 74.00          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-19     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11b at 2457 MHz                 |               |                |

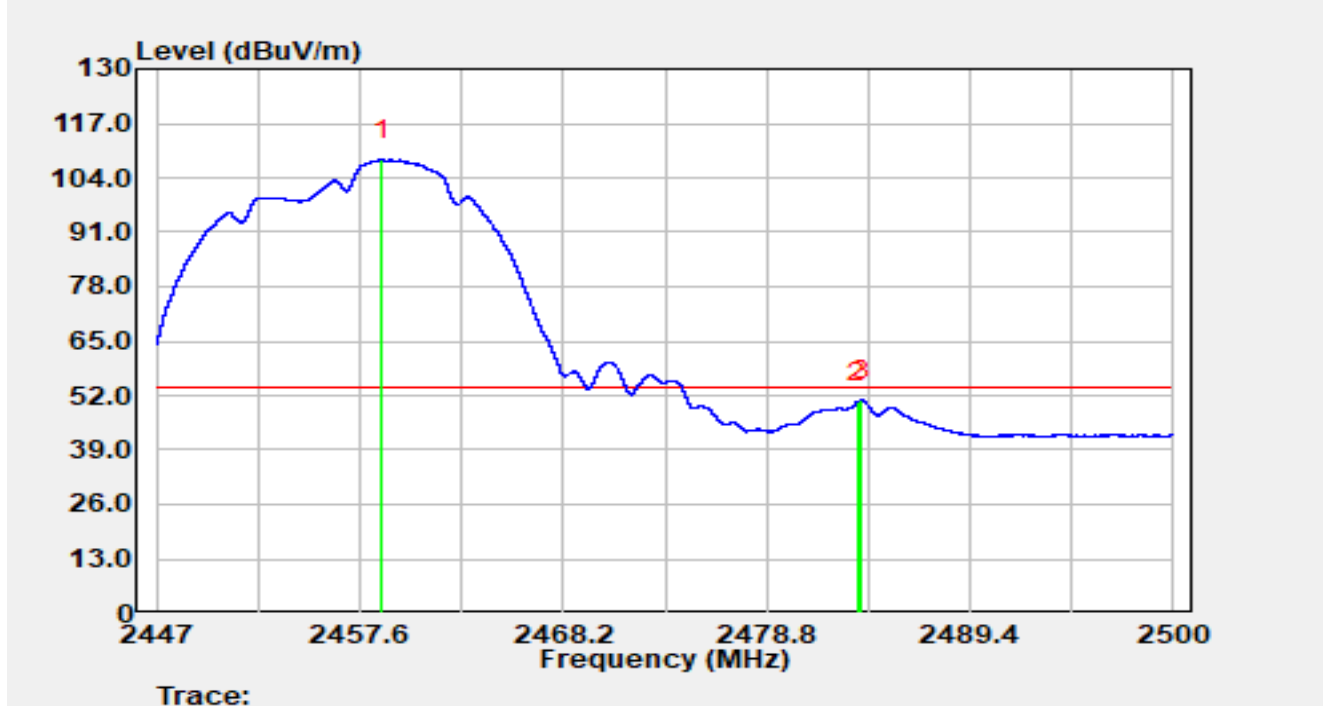


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2458.73         | 78.59          | 29.71      | 108.30               | N/A         | N/A            | Average  |
| 2  |      | 2483.50         | 20.56          | 29.76      | 50.33                | -3.67       | 54.00          | Average  |
| 3  | *    | 2483.71         | 21.08          | 29.76      | 50.85                | -3.15       | 54.00          | Average  |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-19     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11b at 2457 MHz                 |               |                |

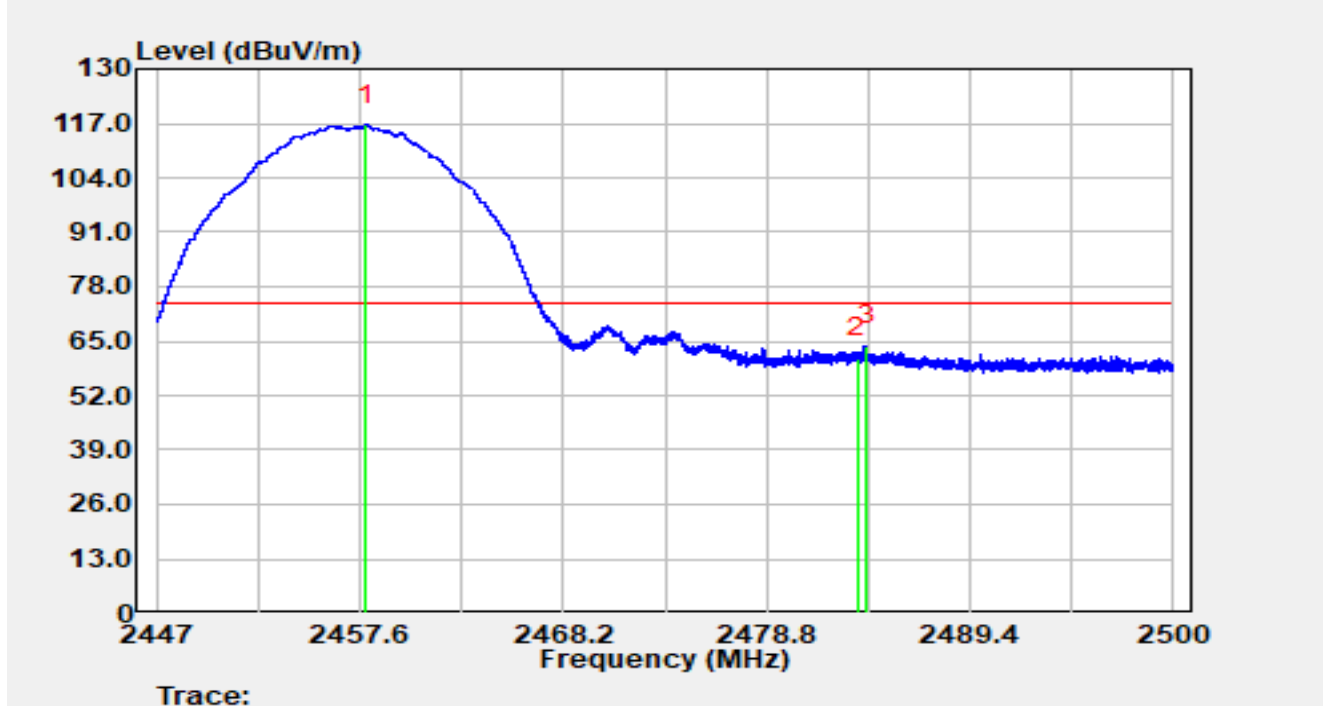


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2457.91         | 86.89          | 29.70      | 116.60               | N/A         | N/A            | Peak     |
| 2  |      | 2483.50         | 31.13          | 29.76      | 60.89                | -13.11      | 74.00          | Peak     |
| 3  | *    | 2484.03         | 34.20          | 29.77      | 63.96                | -10.04      | 74.00          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-19     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11b at 2457 MHz                 |               |                |

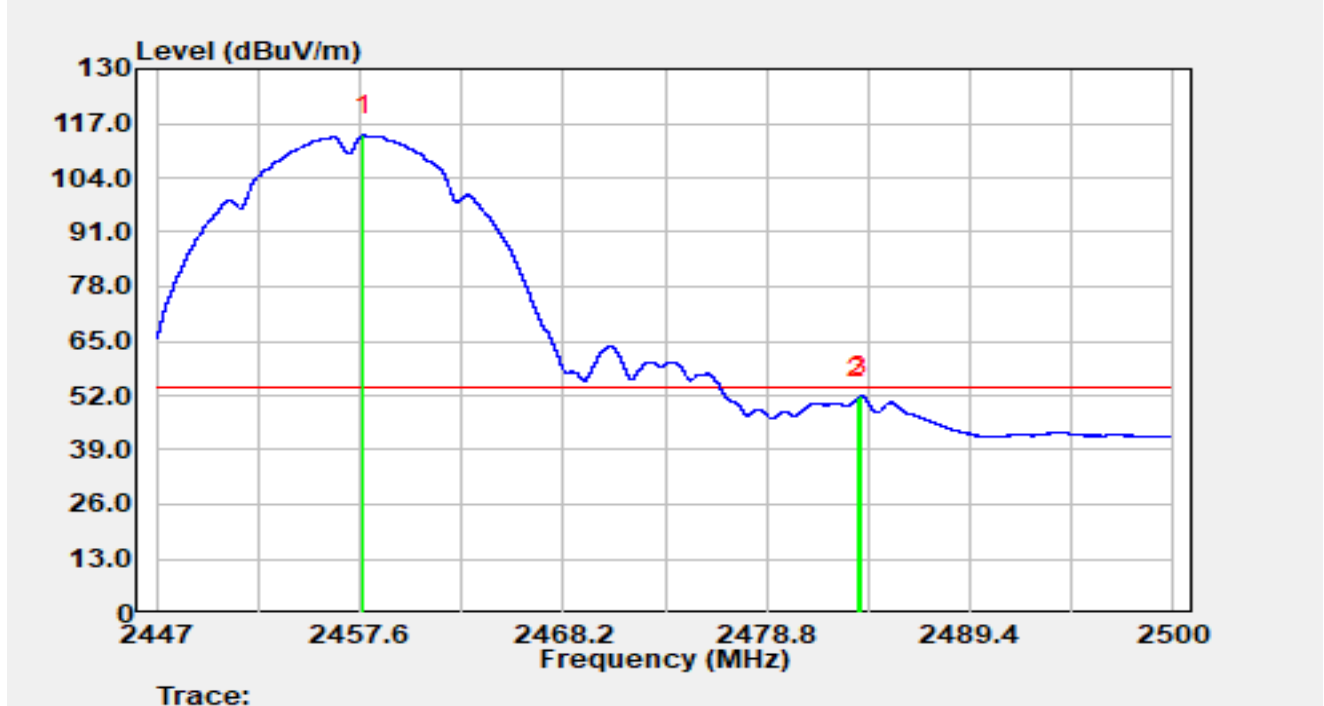


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2457.77         | 84.43          | 29.70      | 114.13               | N/A         | N/A            | Average  |
| 2  |      | 2483.50         | 21.51          | 29.76      | 51.28                | -2.72       | 54.00          | Average  |
| 3  | *    | 2483.70         | 22.03          | 29.76      | 51.79                | -2.21       | 54.00          | Average  |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC1                                          | Test Date     | 2025-08-11     |
| Temperature | 26.9 °C                                         | Humidity      | 45.4%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Carl Jiang     |
| Factor      | HF907_07205                                     | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11b at 2462 MHz                 |               |                |

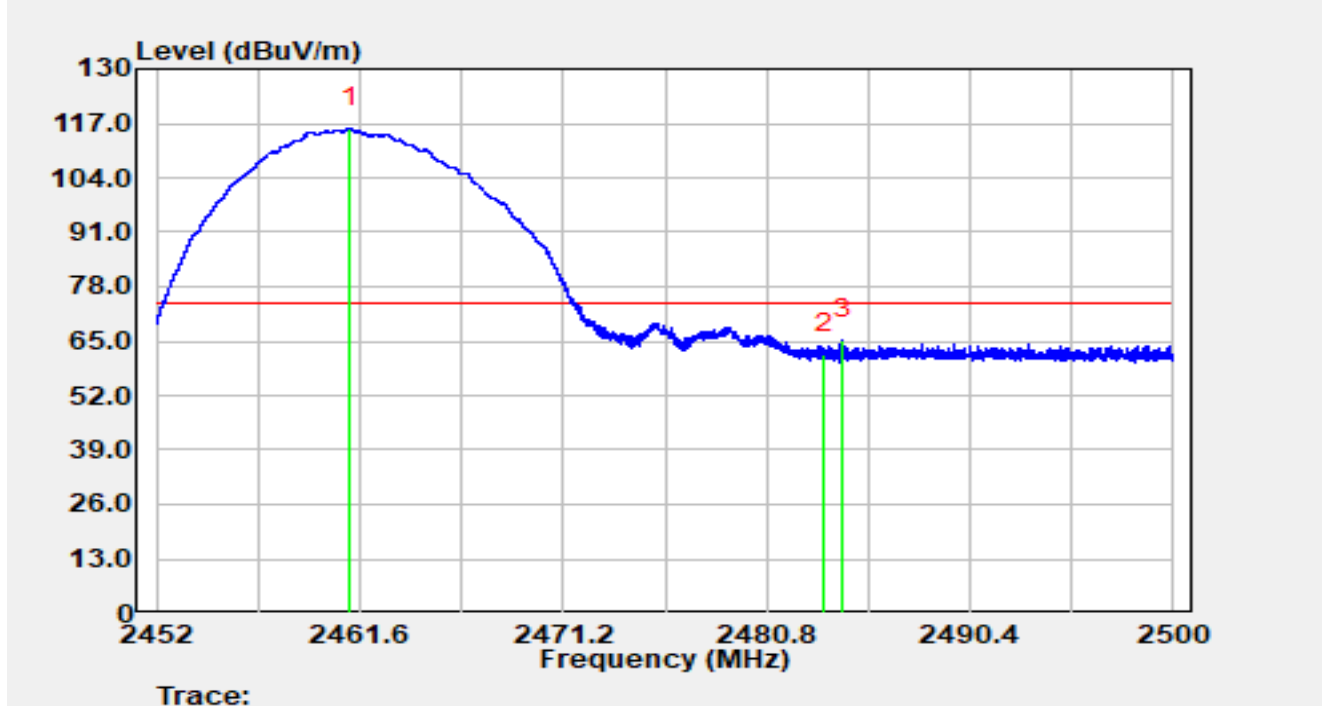


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2461.14         | 81.94          | 33.86      | 115.80               | N/A         | N/A            | Peak     |
| 2  |      | 2483.50         | 27.87          | 34.00      | 61.87                | -12.13      | 74.00          | Peak     |
| 3  | *    | 2484.40         | 31.36          | 34.00      | 65.37                | -8.63       | 74.00          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC1                                          | Test Date     | 2025-08-11     |
| Temperature | 26.9 °C                                         | Humidity      | 45.4%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Carl Jiang     |
| Factor      | HF907_07205                                     | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11b at 2462 MHz                 |               |                |

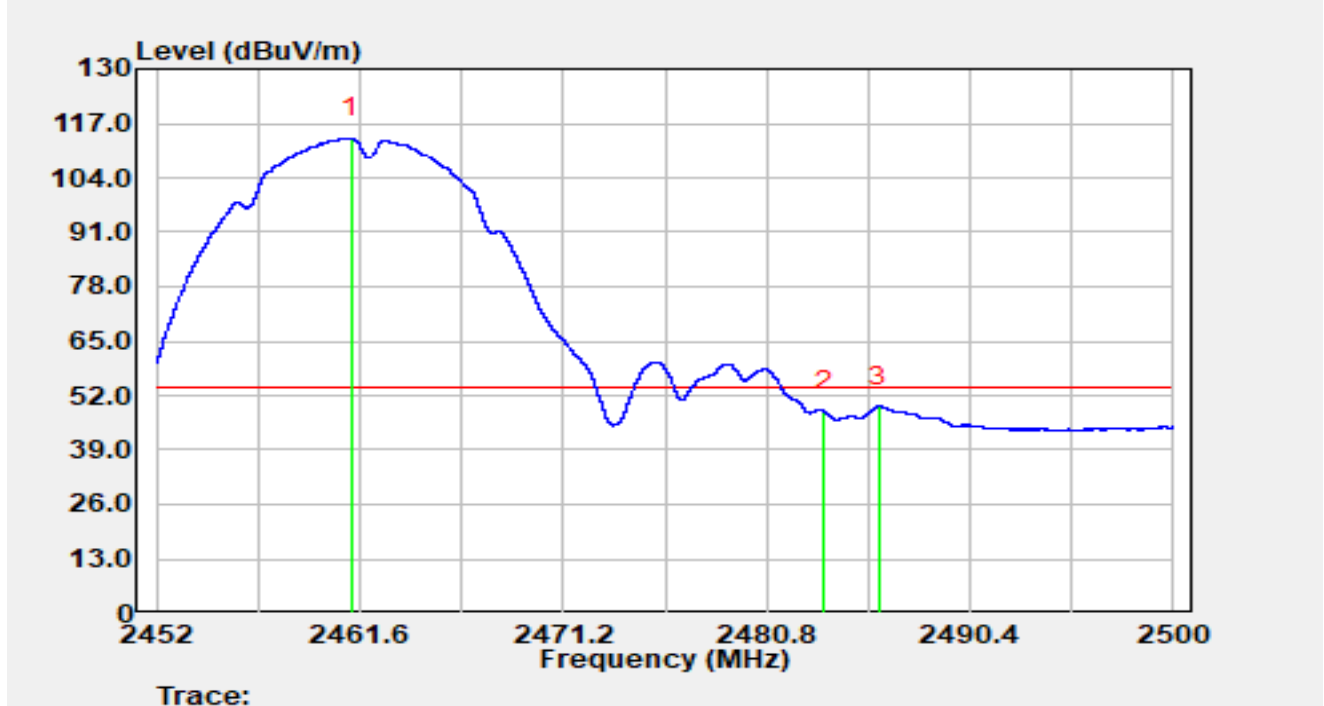


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2461.19         | 79.64          | 33.86      | 113.50               | N/A         | N/A            | Average  |
| 2  |      | 2483.50         | 14.22          | 34.00      | 48.22                | -5.78       | 54.00          | Average  |
| 3  | *    | 2486.09         | 15.40          | 34.01      | 49.42                | -4.58       | 54.00          | Average  |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC1                                          | Test Date     | 2025-08-11     |
| Temperature | 26.9 °C                                         | Humidity      | 45.4%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Carl Jiang     |
| Factor      | HF907_07205                                     | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11b at 2462 MHz                 |               |                |

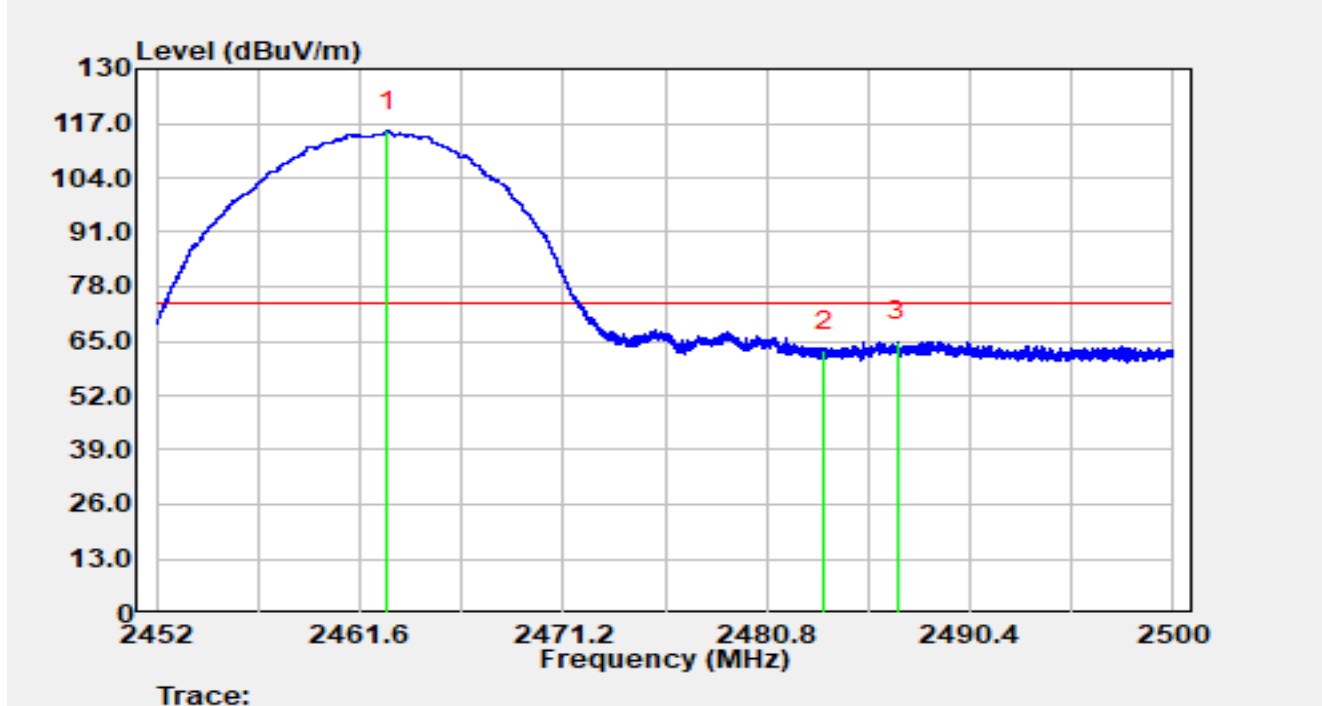


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2462.91         | 81.22          | 33.87      | 115.09               | N/A         | N/A            | Peak     |
| 2  |      | 2483.50         | 28.56          | 34.00      | 62.56                | -11.44      | 74.00          | Peak     |
| 3  | *    | 2486.96         | 30.92          | 34.02      | 64.94                | -9.06       | 74.00          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC1                                          | Test Date     | 2025-08-11     |
| Temperature | 26.9 °C                                         | Humidity      | 45.4%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Carl Jiang     |
| Factor      | HF907_07205                                     | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11b at 2462 MHz                 |               |                |

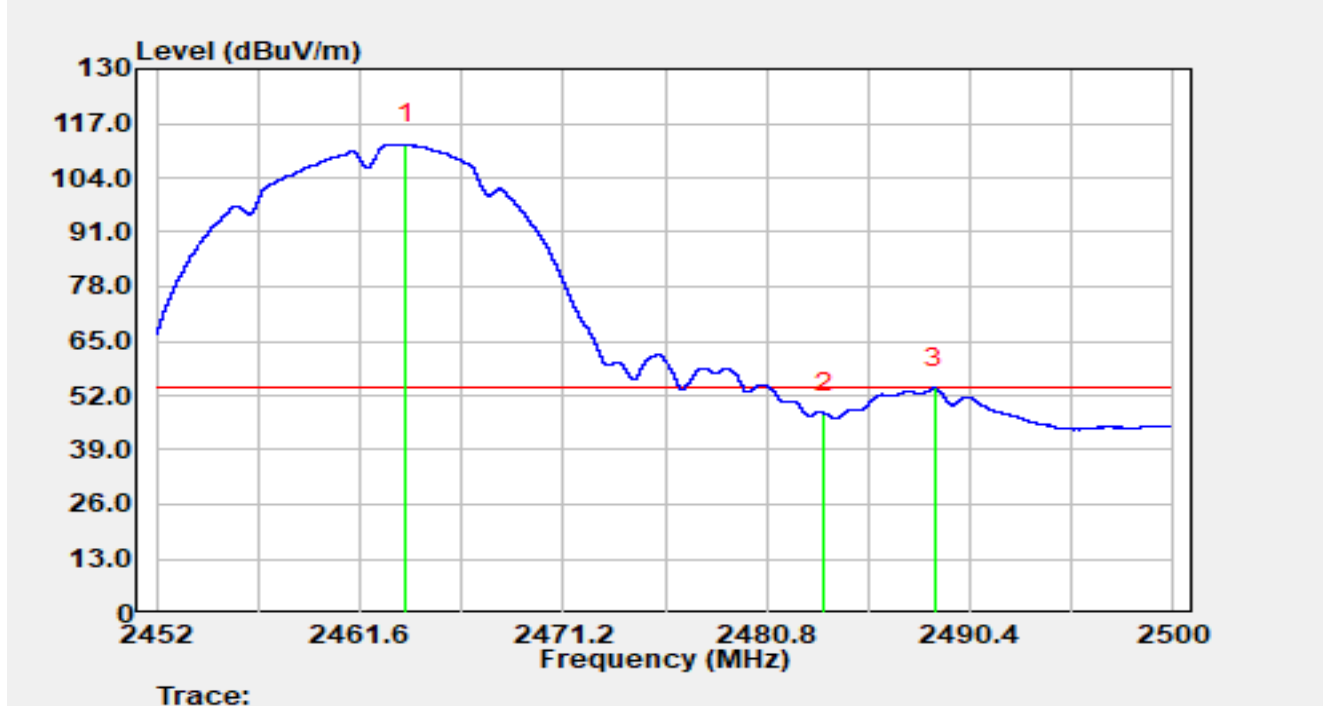


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2463.75         | 78.16          | 33.88      | 112.04               | N/A         | N/A            | Average  |
| 2  |      | 2483.50         | 13.82          | 34.00      | 47.82                | -6.18       | 54.00          | Average  |
| 3  | *    | 2488.73         | 19.73          | 34.03      | 53.77                | -0.23       | 54.00          | Average  |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC1                                          | Test Date     | 2025-08-11     |
| Temperature | 26.9 °C                                         | Humidity      | 45.4%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Carl Jiang     |
| Factor      | HF907_07205                                     | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11g at 2412 MHz                 |               |                |

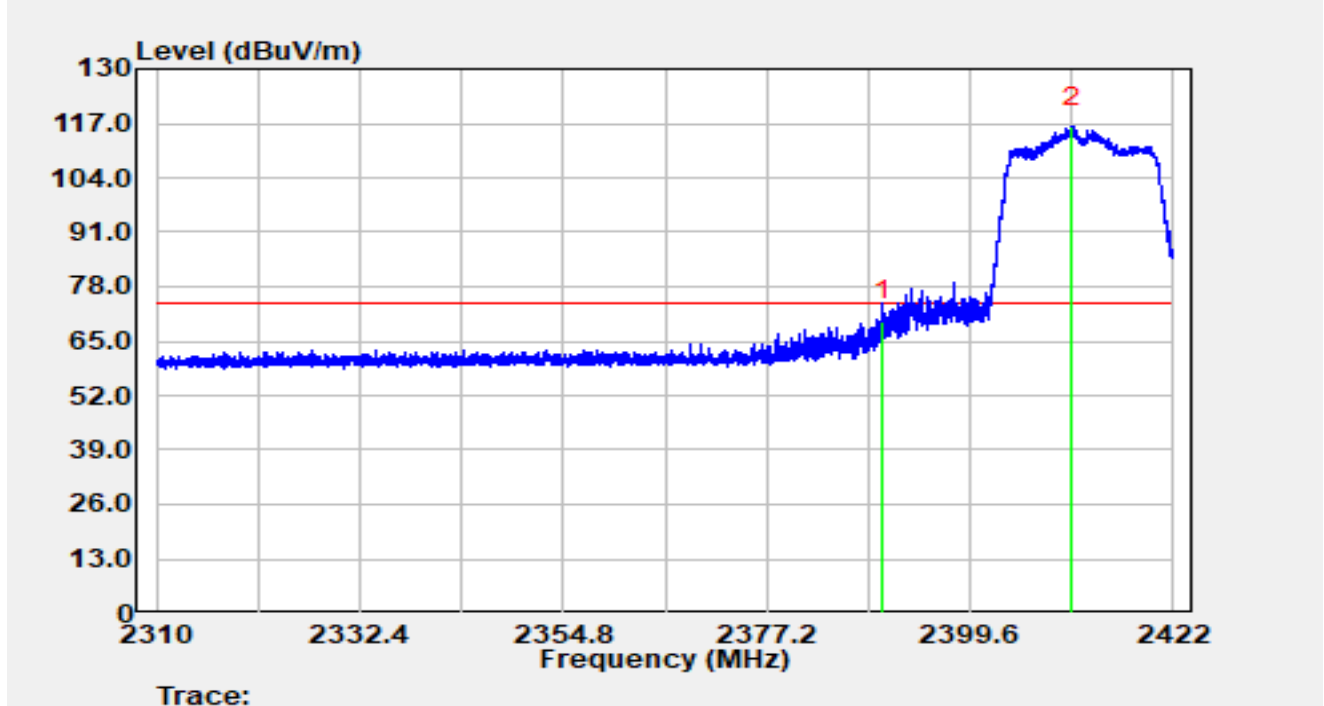


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2390.00         | 36.29          | 33.50      | 69.79                | -4.21       | 74.00          | Peak     |
| 2  |      | 2410.89         | 82.51          | 33.64      | 116.15               | N/A         | N/A            | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC1                                          | Test Date     | 2025-08-11     |
| Temperature | 26.9 °C                                         | Humidity      | 45.4%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Carl Jiang     |
| Factor      | HF907_07205                                     | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11g at 2412 MHz                 |               |                |

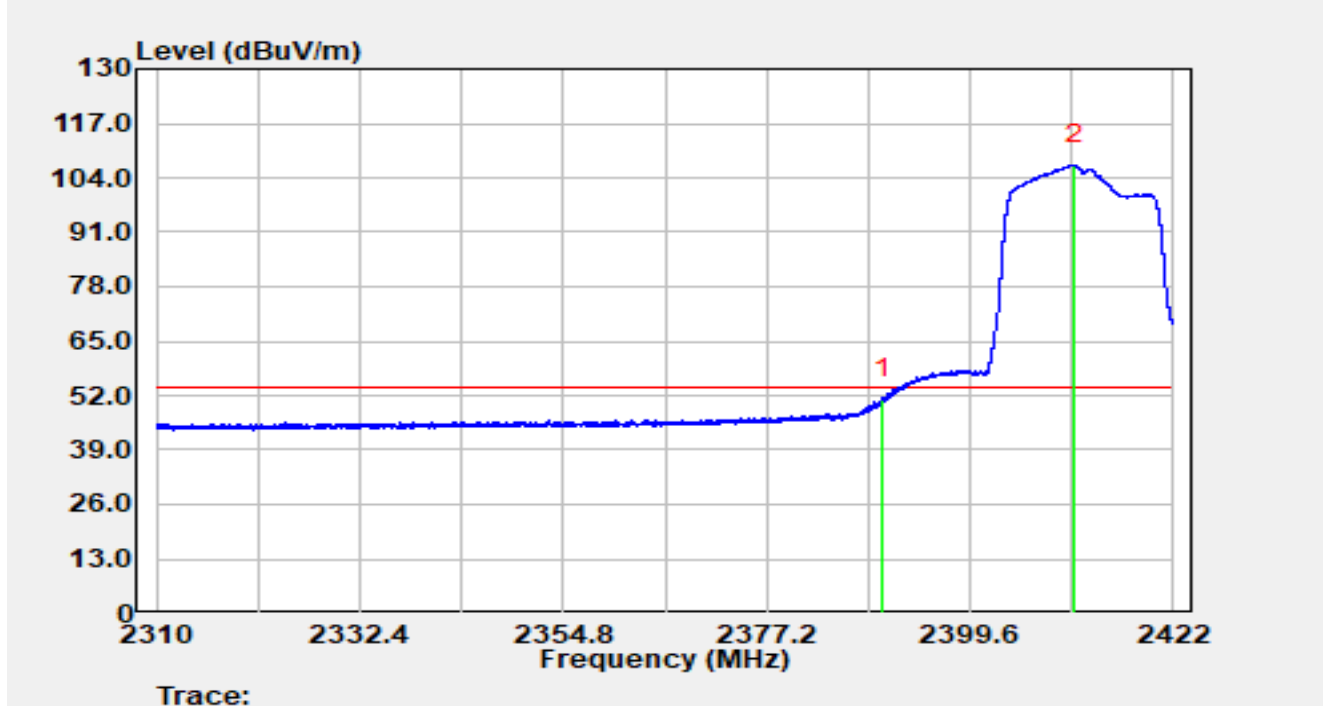


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2390.00         | 17.57          | 33.50      | 51.07                | -2.93       | 54.00          | Average  |
| 2  |      | 2411.16         | 73.42          | 33.64      | 107.06               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC1                                          | Test Date     | 2025-08-11     |
| Temperature | 26.9 °C                                         | Humidity      | 45.4%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Carl Jiang     |
| Factor      | HF907_07205                                     | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11g at 2412 MHz                 |               |                |

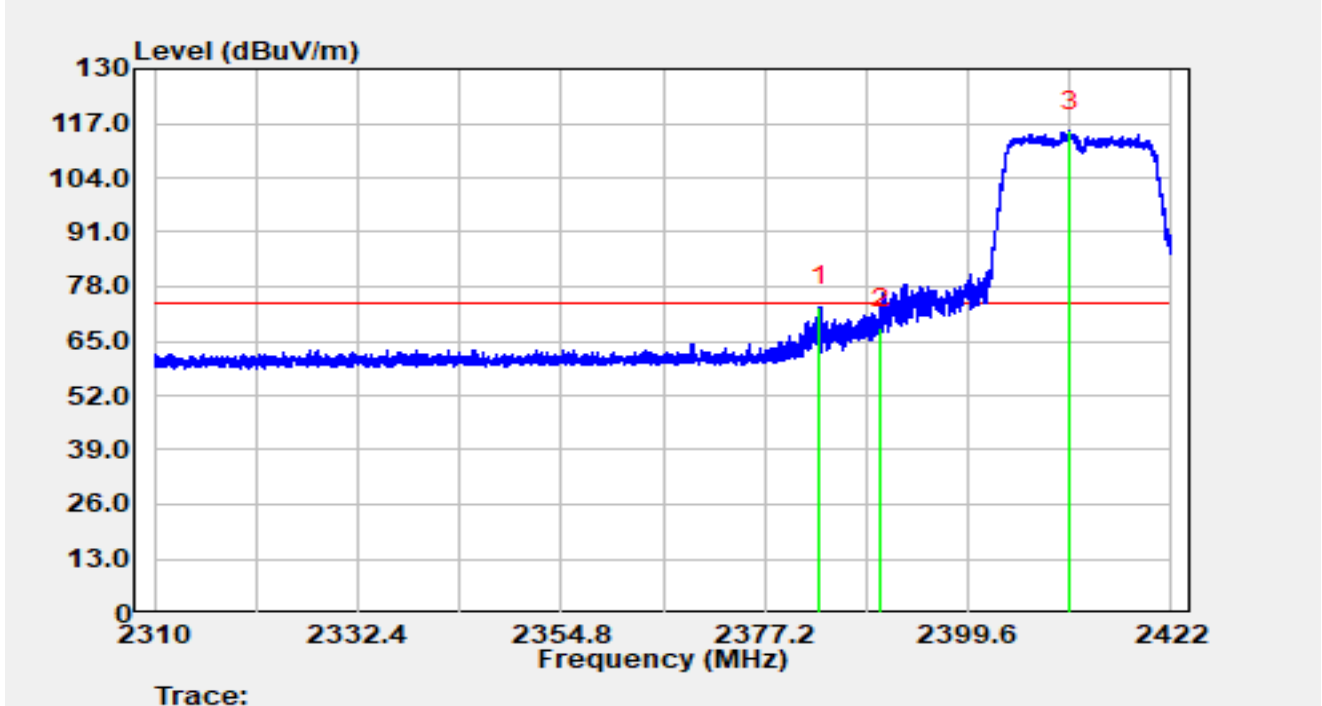


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2383.26         | 39.68          | 33.47      | 73.14                | -0.86       | 74.00          | Peak     |
| 2  |      | 2390.00         | 34.63          | 33.50      | 68.13                | -5.87       | 74.00          | Peak     |
| 3  |      | 2410.80         | 81.60          | 33.64      | 115.24               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC1                                          | Test Date     | 2025-08-11     |
| Temperature | 26.9 °C                                         | Humidity      | 45.4%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Carl Jiang     |
| Factor      | HF907_07205                                     | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11g at 2412 MHz                 |               |                |

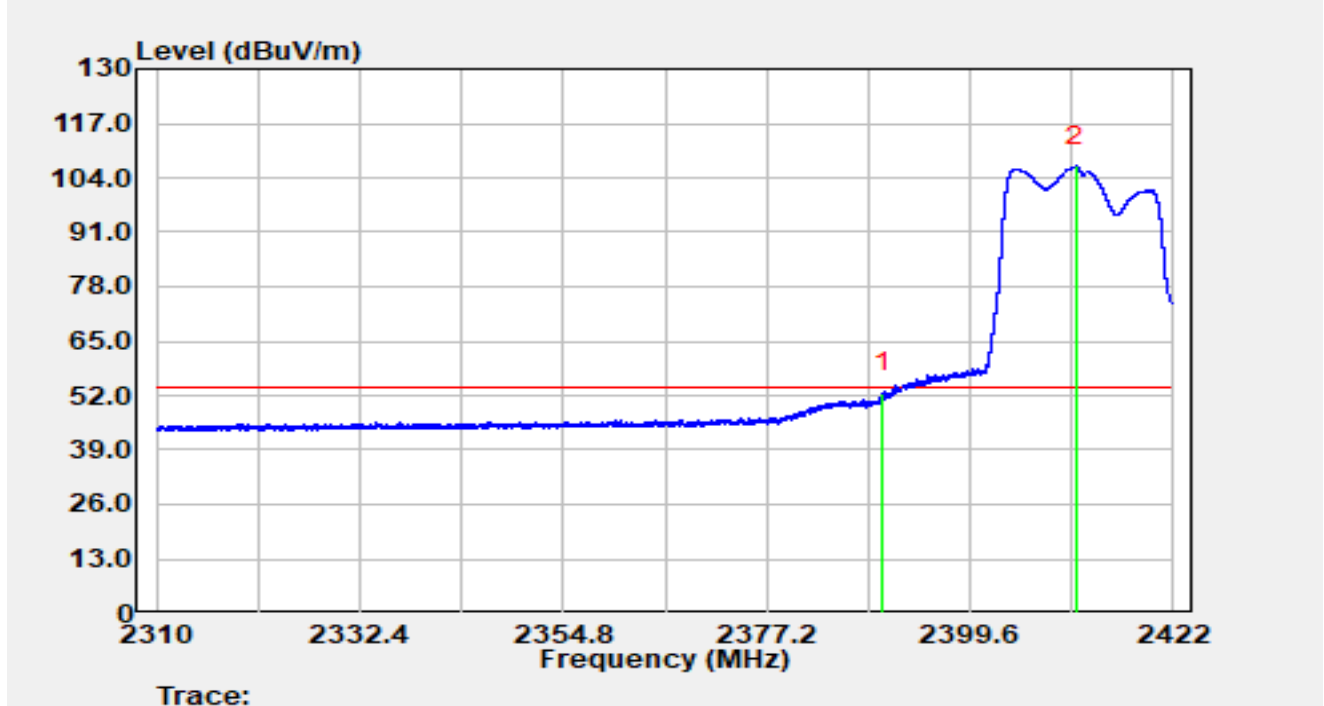


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2390.00         | 19.13          | 33.50      | 52.63                | -1.37       | 54.00          | Average  |
| 2  |      | 2411.21         | 73.09          | 33.64      | 106.73               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-09-02     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11g at 2437 MHz                 |               |                |

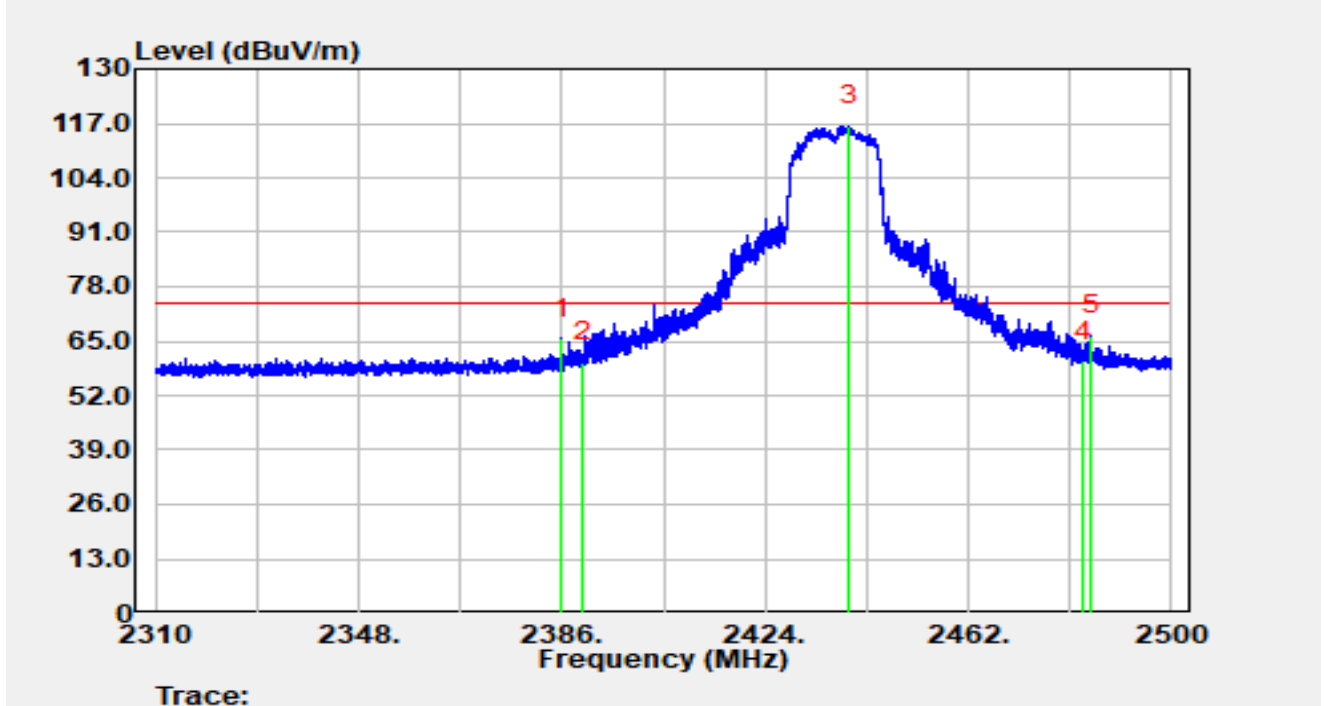


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2385.94         | 35.94          | 29.58      | 65.51                | -8.49       | 74.00          | Peak     |
| 2  |      | 2390.00         | 30.35          | 29.59      | 59.94                | -14.06      | 74.00          | Peak     |
| 3  |      | 2439.77         | 86.81          | 29.68      | 116.49               | N/A         | N/A            | Peak     |
| 4  |      | 2483.50         | 30.50          | 29.76      | 60.26                | -13.74      | 74.00          | Peak     |
| 5  | *    | 2484.90         | 36.57          | 29.77      | 66.34                | -7.66       | 74.00          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-09-02     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11g at 2437 MHz                 |               |                |

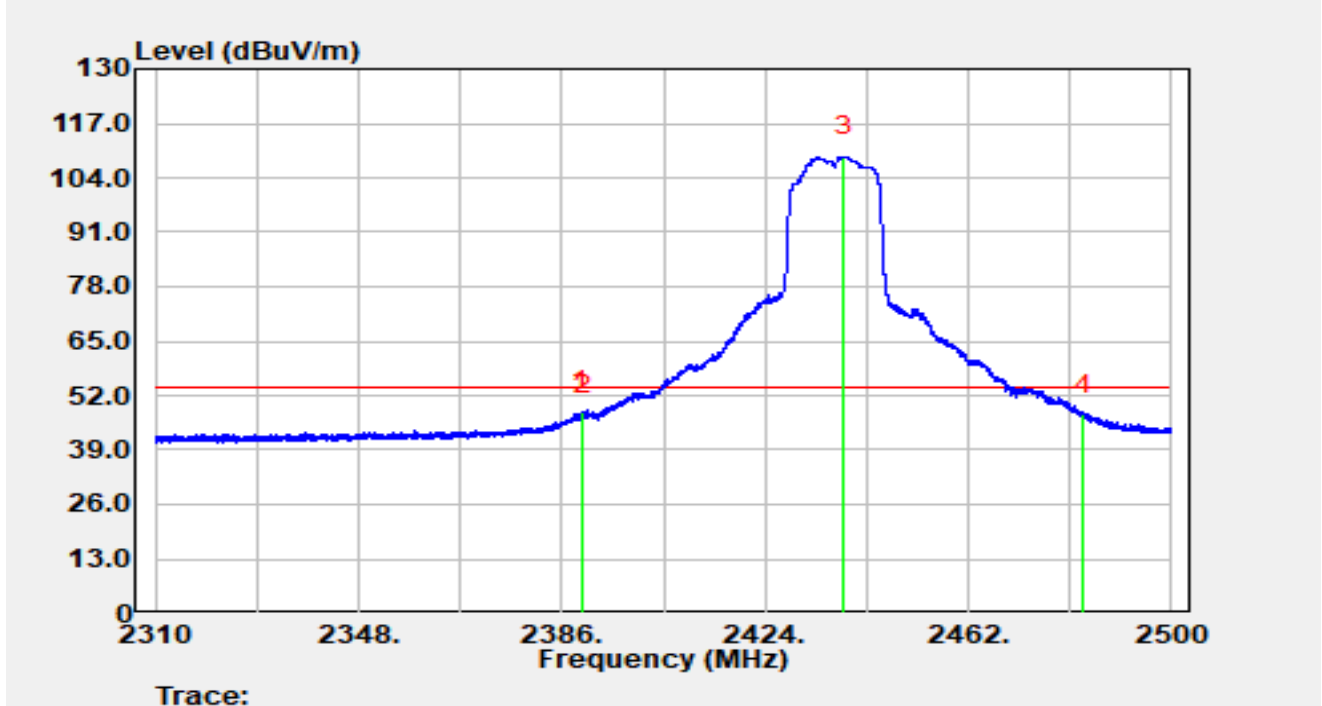


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2389.63         | 18.67          | 29.59      | 48.26                | -5.74       | 54.00          | Average  |
| 2  |      | 2390.00         | 17.67          | 29.59      | 47.26                | -6.74       | 54.00          | Average  |
| 3  |      | 2438.80         | 79.45          | 29.68      | 109.13               | N/A         | N/A            | Average  |
| 4  |      | 2483.50         | 17.65          | 29.76      | 47.41                | -6.59       | 54.00          | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-09-02     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11g at 2437 MHz                 |               |                |

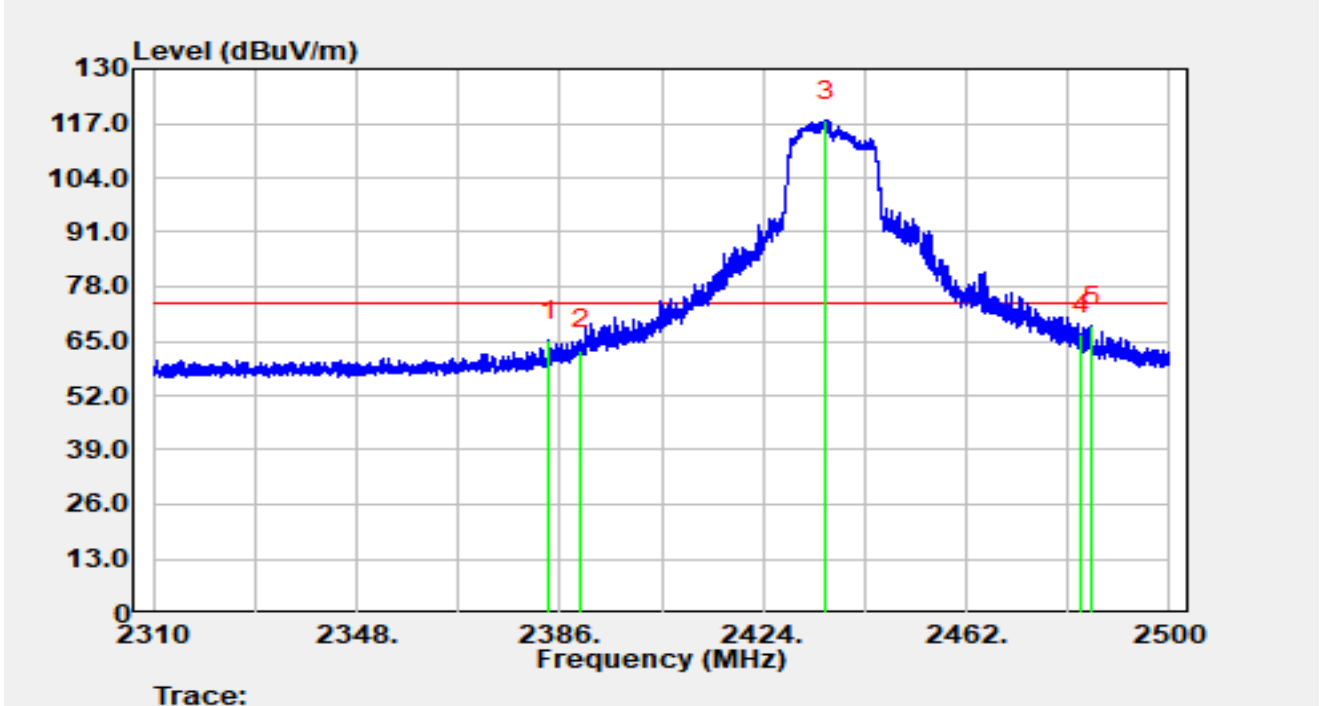


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2383.95         | 35.59          | 29.57      | 65.16                | -8.84       | 74.00          | Peak     |
| 2  |      | 2390.00         | 33.20          | 29.59      | 62.79                | -11.21      | 74.00          | Peak     |
| 3  |      | 2435.72         | 88.05          | 29.67      | 117.72               | N/A         | N/A            | Peak     |
| 4  |      | 2483.50         | 36.83          | 29.76      | 66.59                | -7.41       | 74.00          | Peak     |
| 5  | *    | 2485.43         | 38.70          | 29.77      | 68.48                | -5.52       | 74.00          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-09-02     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11g at 2437 MHz                 |               |                |

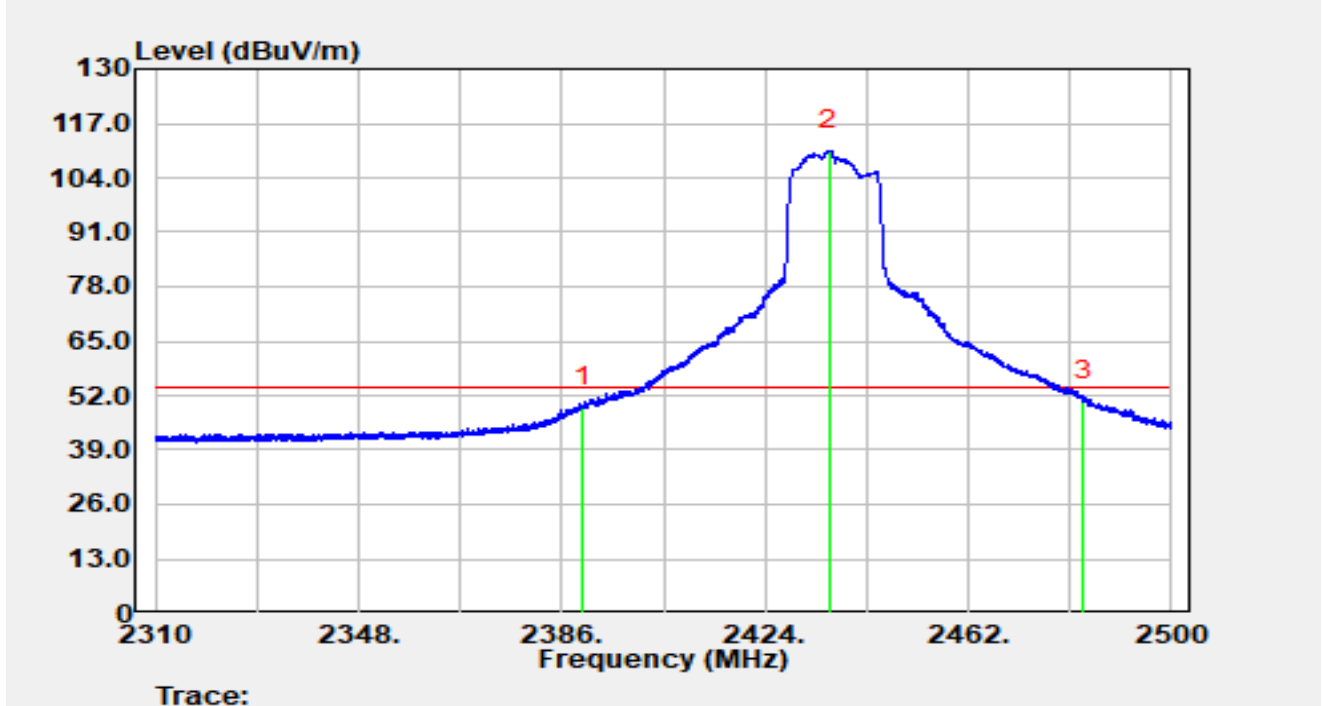


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2390.00         | 19.54          | 29.59      | 49.14                | -4.86       | 54.00          | Average  |
| 2  |      | 2436.10         | 80.77          | 29.67      | 110.45               | N/A         | N/A            | Average  |
| 3  | *    | 2483.50         | 20.83          | 29.76      | 50.60                | -3.40       | 54.00          | Average  |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC1                                          | Test Date     | 2025-08-11     |
| Temperature | 26.9 °C                                         | Humidity      | 45.4%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Carl Jiang     |
| Factor      | HF907_07205                                     | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11g at 2462 MHz                 |               |                |

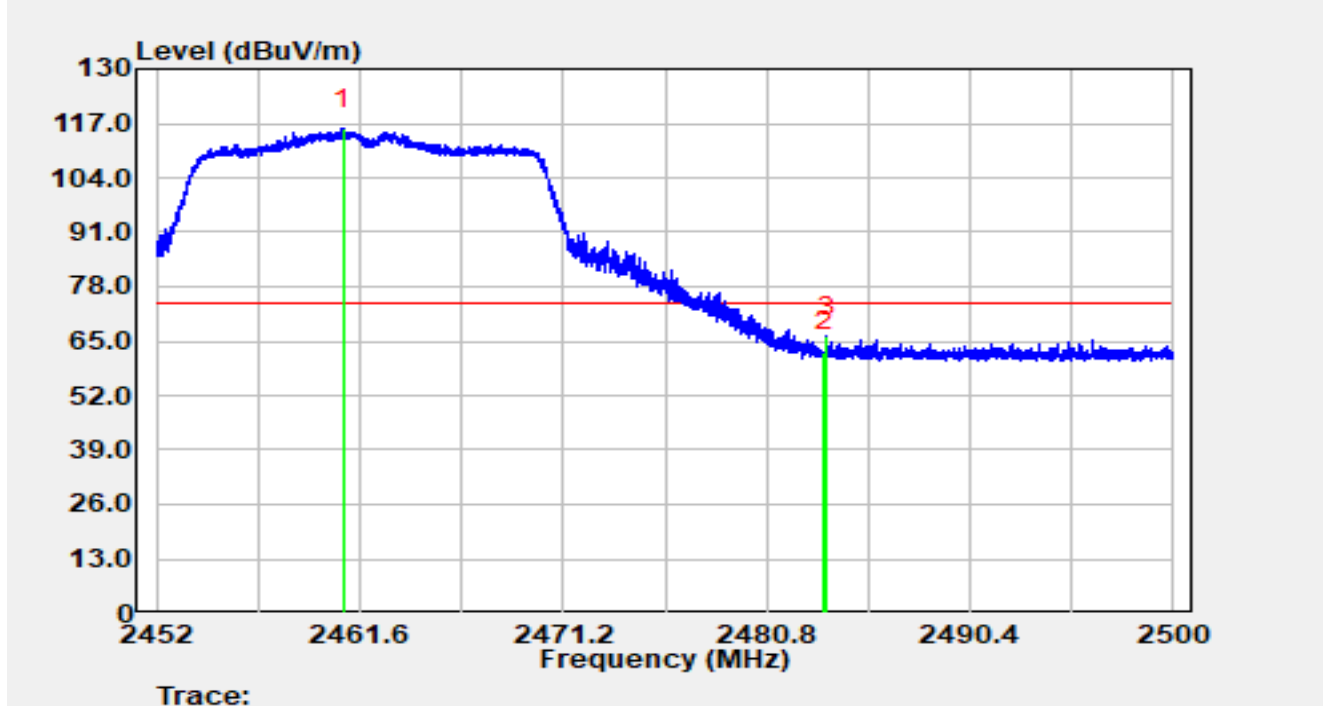


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2460.79         | 81.89          | 33.86      | 115.75               | N/A         | N/A            | Peak     |
| 2  |      | 2483.50         | 28.34          | 34.00      | 62.34                | -11.66      | 74.00          | Peak     |
| 3  | *    | 2483.61         | 32.02          | 34.00      | 66.02                | -7.98       | 74.00          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC1                                          | Test Date     | 2025-08-11     |
| Temperature | 26.9 °C                                         | Humidity      | 45.4%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Carl Jiang     |
| Factor      | HF907_07205                                     | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11g at 2462 MHz                 |               |                |

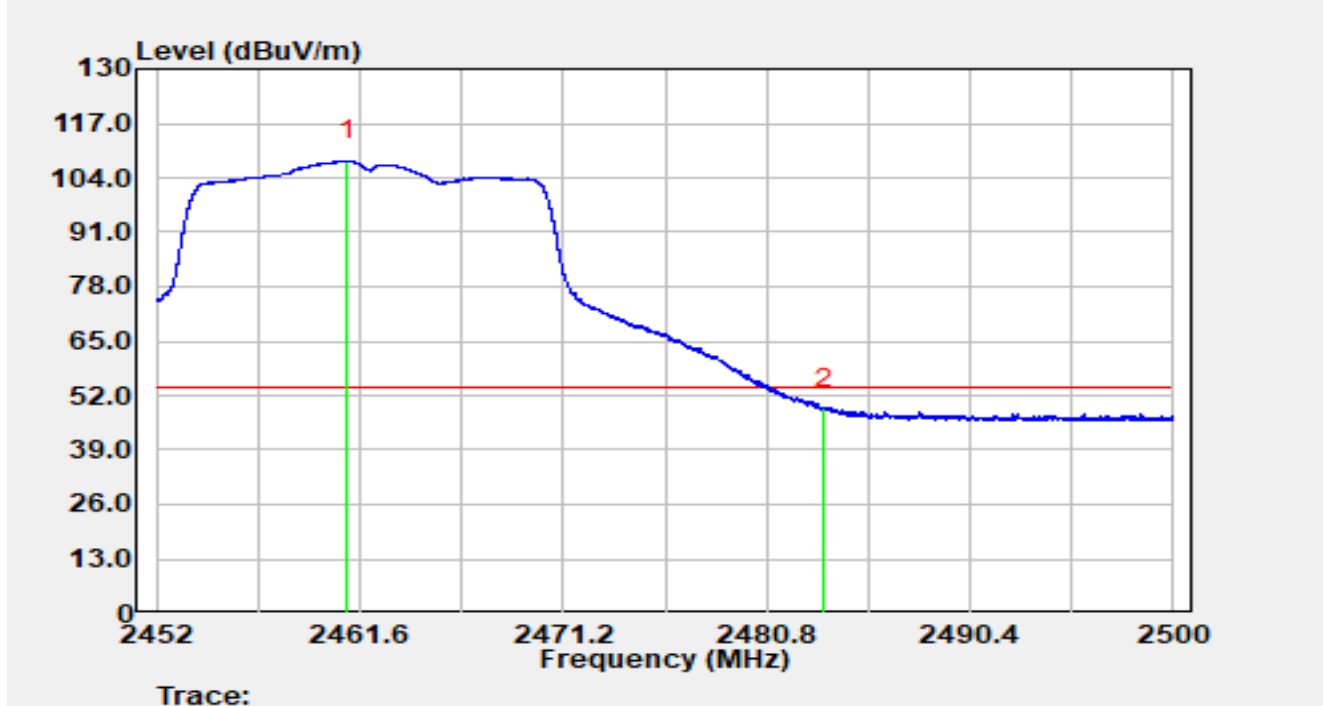


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2461.01         | 74.24          | 33.86      | 108.10               | N/A         | N/A            | Average  |
| 2  | *    | 2483.50         | 14.91          | 34.00      | 48.91                | -5.09       | 54.00          | Average  |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC1                                          | Test Date     | 2025-08-11     |
| Temperature | 26.9 °C                                         | Humidity      | 45.4%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Carl Jiang     |
| Factor      | HF907_07205                                     | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11g at 2462 MHz                 |               |                |

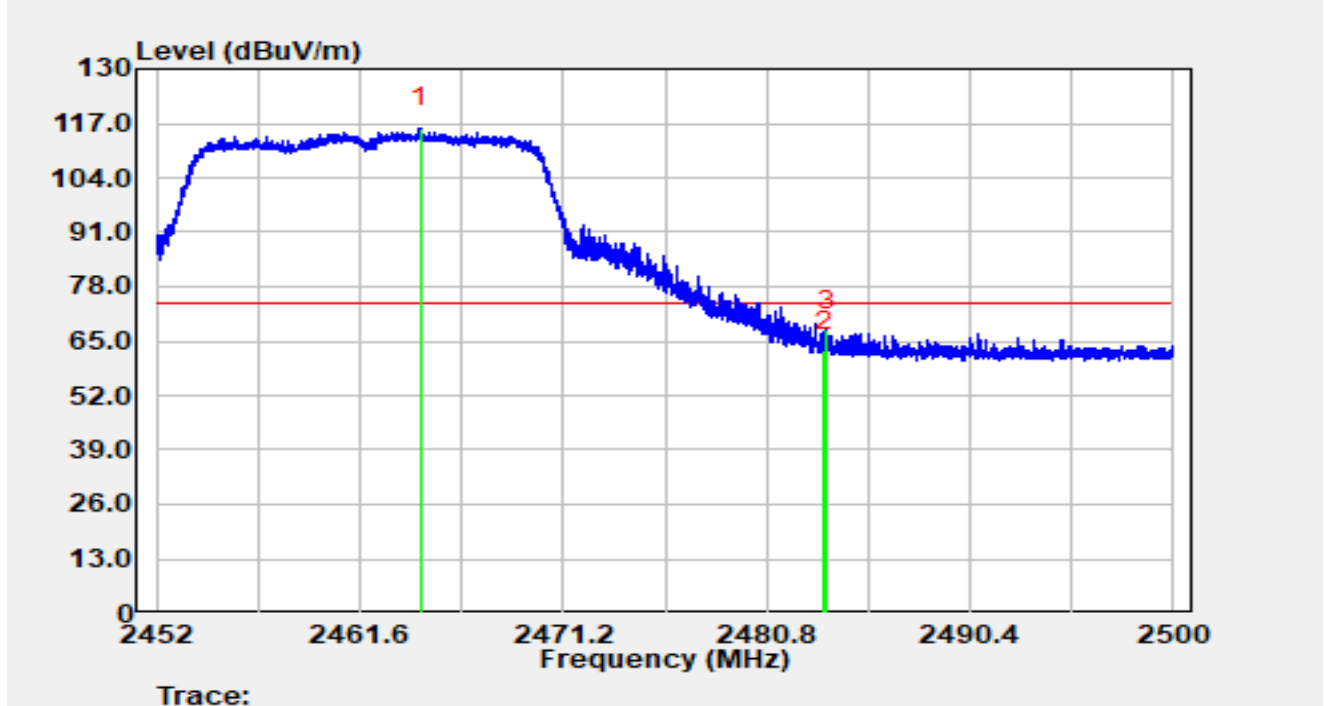


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2464.43         | 81.98          | 33.88      | 115.86               | N/A         | N/A            | Peak     |
| 2  |      | 2483.50         | 28.78          | 34.00      | 62.77                | -11.23      | 74.00          | Peak     |
| 3  | *    | 2483.65         | 33.51          | 34.00      | 67.51                | -6.49       | 74.00          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC1                                          | Test Date     | 2025-08-11     |
| Temperature | 26.9 °C                                         | Humidity      | 45.4%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Carl Jiang     |
| Factor      | HF907_07205                                     | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11g at 2462 MHz                 |               |                |

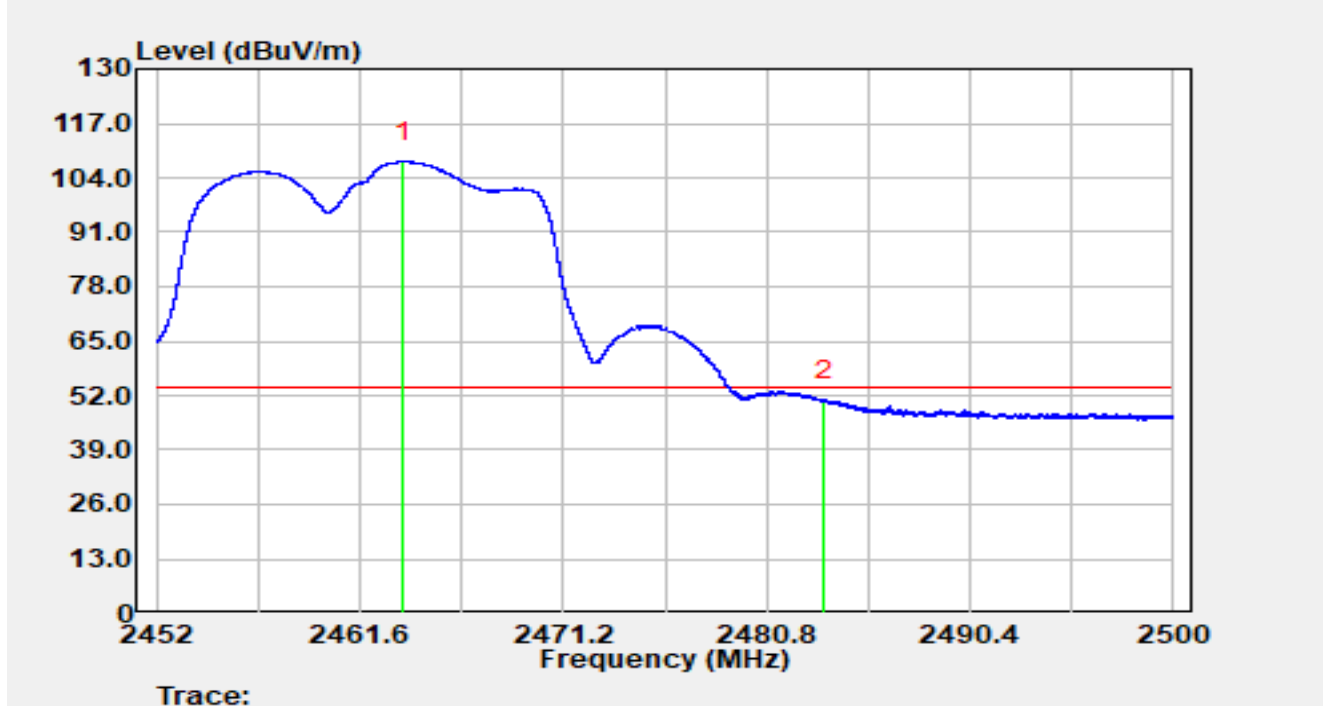


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2463.63         | 73.96          | 33.87      | 107.84               | N/A         | N/A            | Average  |
| 2  | *    | 2483.50         | 16.76          | 34.00      | 50.76                | -3.24       | 54.00          | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC1                                          | Test Date     | 2025-08-11     |
| Temperature | 26.9 °C                                         | Humidity      | 45.4%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Carl Jiang     |
| Factor      | HF907_07205                                     | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11n-HT20 at 2412 MHz            |               |                |

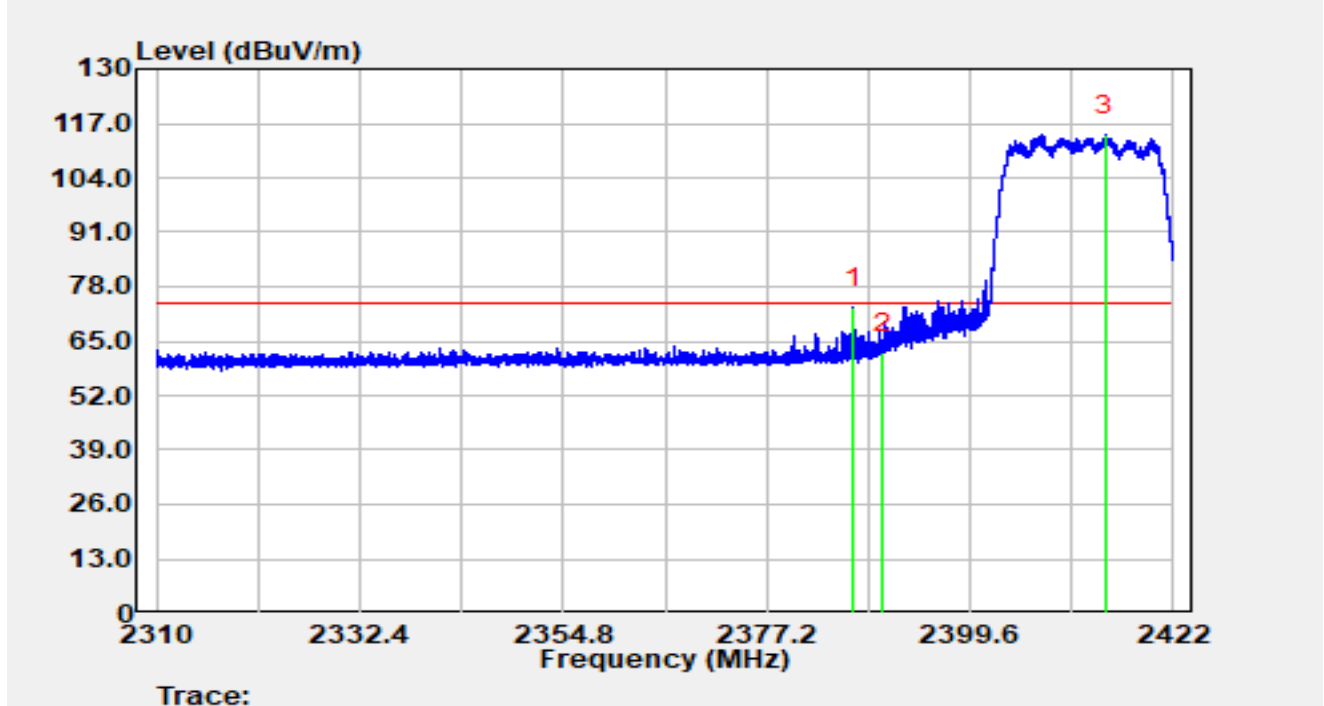


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2386.77         | 39.43          | 33.48      | 72.92                | -1.08       | 74.00          | Peak     |
| 2  |      | 2390.00         | 28.71          | 33.50      | 62.21                | -11.79      | 74.00          | Peak     |
| 3  |      | 2414.50         | 80.61          | 33.66      | 114.27               | N/A         | N/A            | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC1                                          | Test Date     | 2025-08-11     |
| Temperature | 26.9 °C                                         | Humidity      | 45.4%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Carl Jiang     |
| Factor      | HF907_07205                                     | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11n-HT20 at 2412 MHz            |               |                |

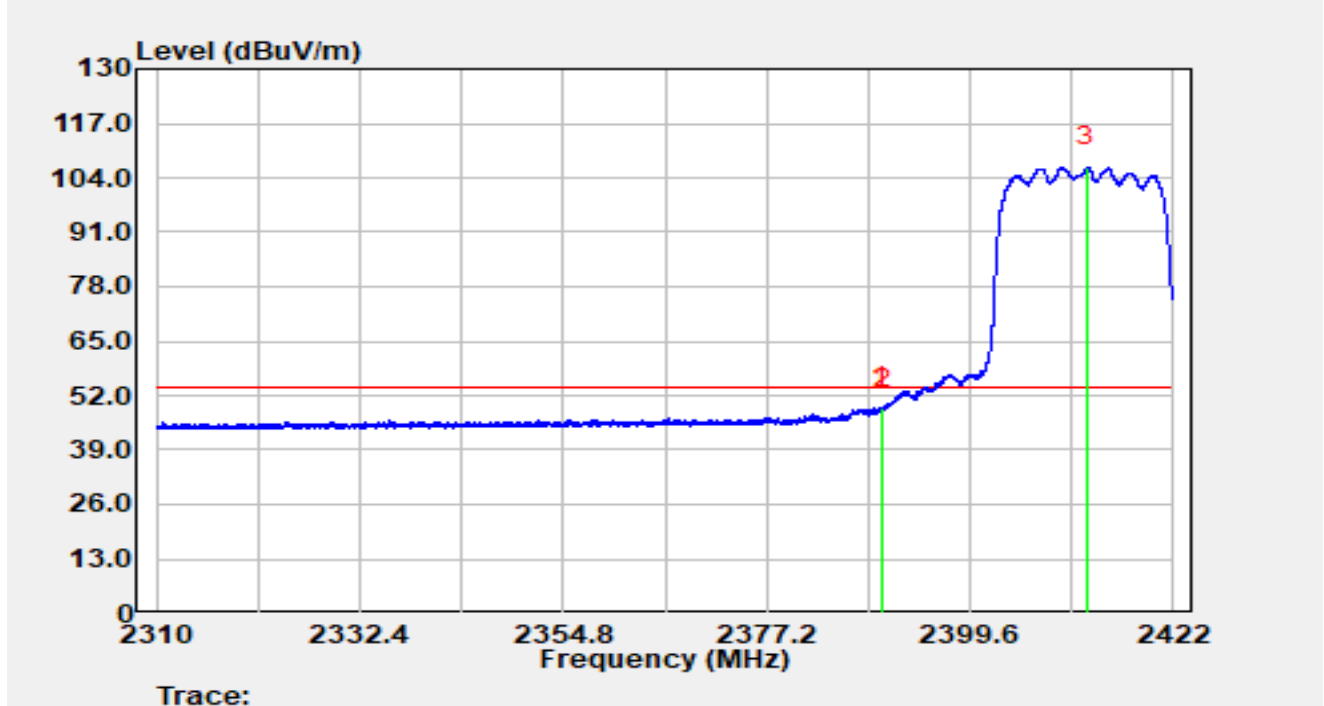


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2389.85         | 15.72          | 33.50      | 49.22                | -4.78       | 54.00          | Average  |
| 2  |      | 2390.00         | 15.37          | 33.50      | 48.87                | -5.13       | 54.00          | Average  |
| 3  |      | 2412.50         | 72.87          | 33.65      | 106.52               | N/A         | N/A            | Average  |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC1                                          | Test Date     | 2025-08-11     |
| Temperature | 26.9 °C                                         | Humidity      | 45.4%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Carl Jiang     |
| Factor      | HF907_07205                                     | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11n-HT20 at 2412 MHz            |               |                |

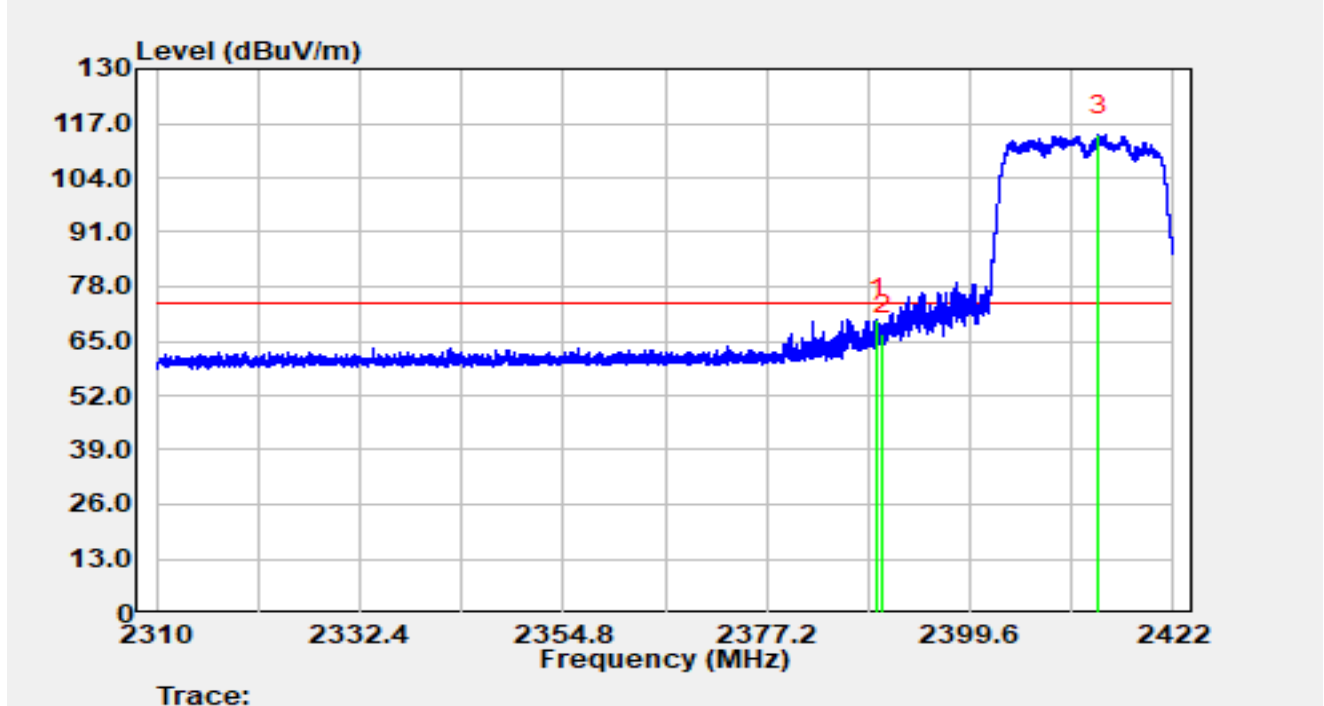


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2389.40         | 36.89          | 33.50      | 70.39                | -3.61       | 74.00          | Peak     |
| 2  |      | 2390.00         | 33.04          | 33.50      | 66.54                | -7.46       | 74.00          | Peak     |
| 3  |      | 2413.71         | 80.45          | 33.66      | 114.10               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC1                                          | Test Date     | 2025-08-11     |
| Temperature | 26.9 °C                                         | Humidity      | 45.4%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Carl Jiang     |
| Factor      | HF907_07205                                     | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11n-HT20 at 2412 MHz            |               |                |

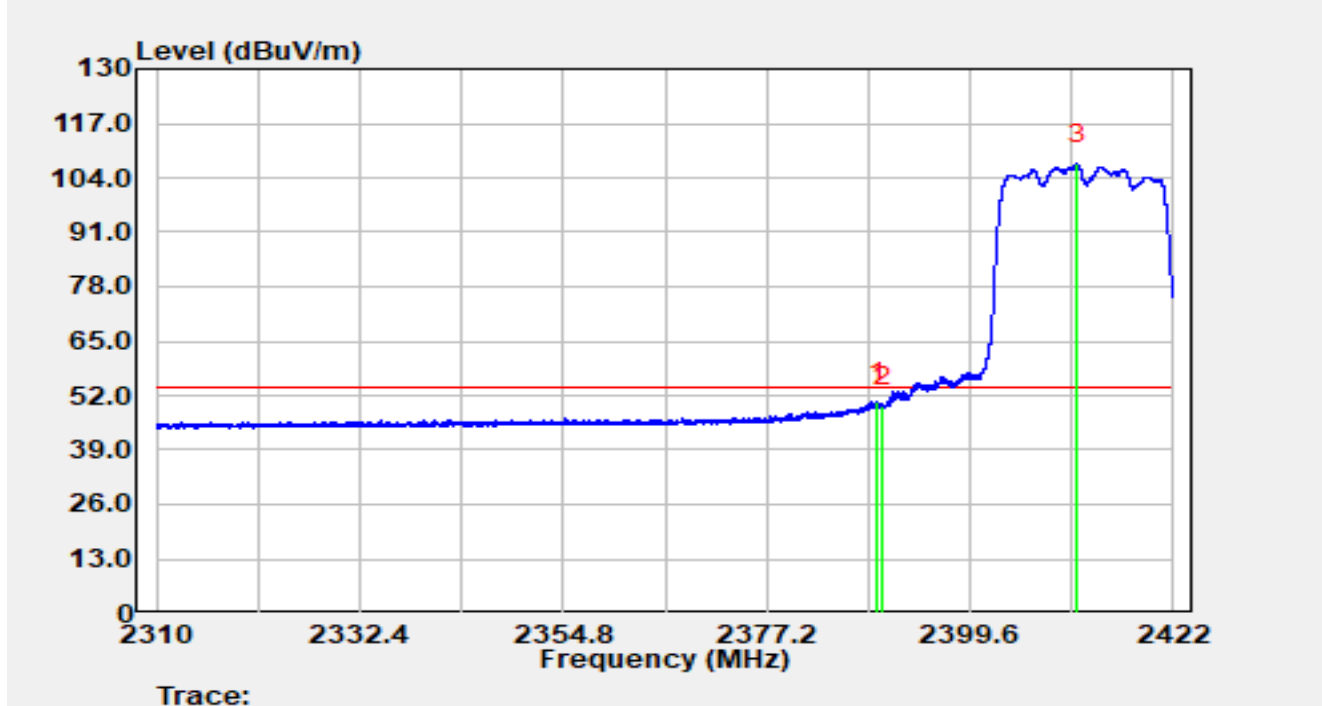


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2389.39         | 16.86          | 33.50      | 50.35                | -3.65       | 54.00          | Average  |
| 2  |      | 2390.00         | 15.87          | 33.50      | 49.38                | -4.62       | 54.00          | Average  |
| 3  |      | 2411.44         | 73.59          | 33.65      | 107.24               | N/A         | N/A            | Average  |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-09-02     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11n-HT20 at 2437 MHz            |               |                |

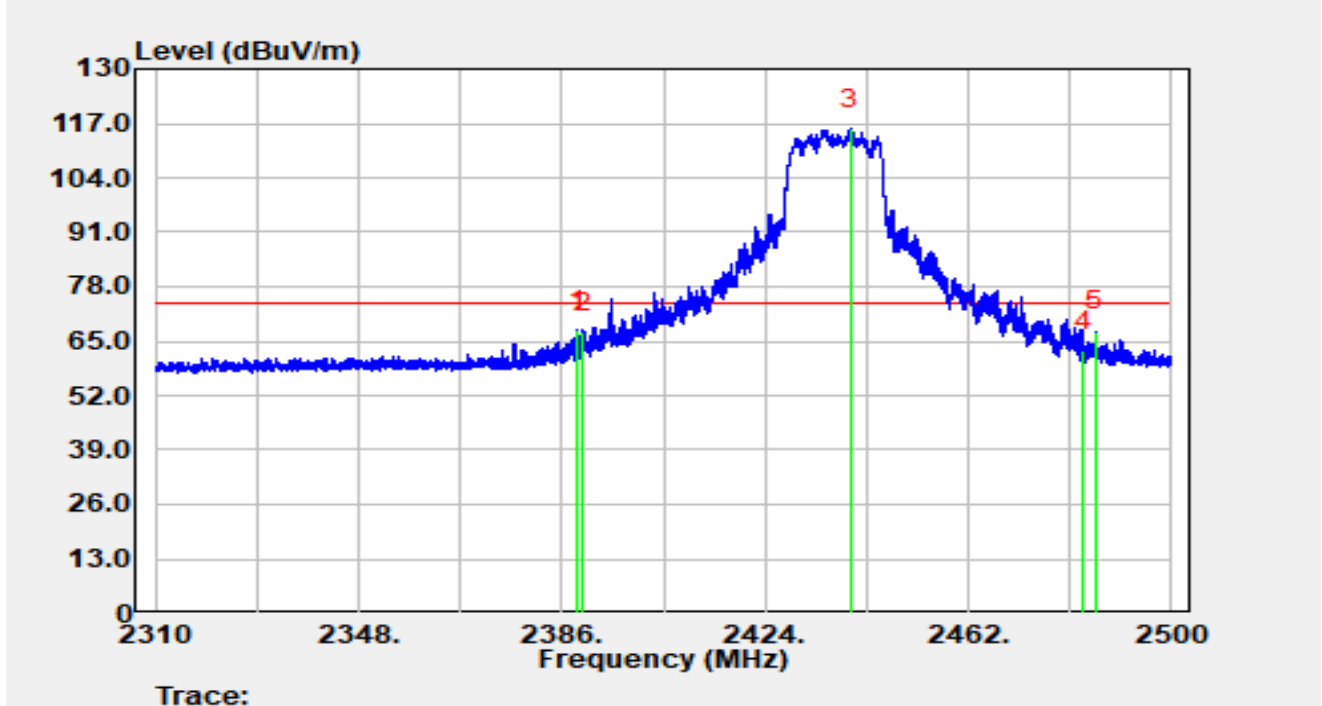


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2389.02         | 38.03          | 29.59      | 67.61                | -6.39       | 74.00          | Peak     |
| 2  |      | 2390.00         | 37.56          | 29.59      | 67.15                | -6.85       | 74.00          | Peak     |
| 3  |      | 2439.96         | 85.90          | 29.68      | 115.59               | N/A         | N/A            | Peak     |
| 4  |      | 2483.51         | 32.87          | 29.76      | 62.63                | -11.37      | 74.00          | Peak     |
| 5  |      | 2485.86         | 37.67          | 29.77      | 67.44                | -6.56       | 74.00          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-09-02     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11n-HT20 at 2437 MHz            |               |                |

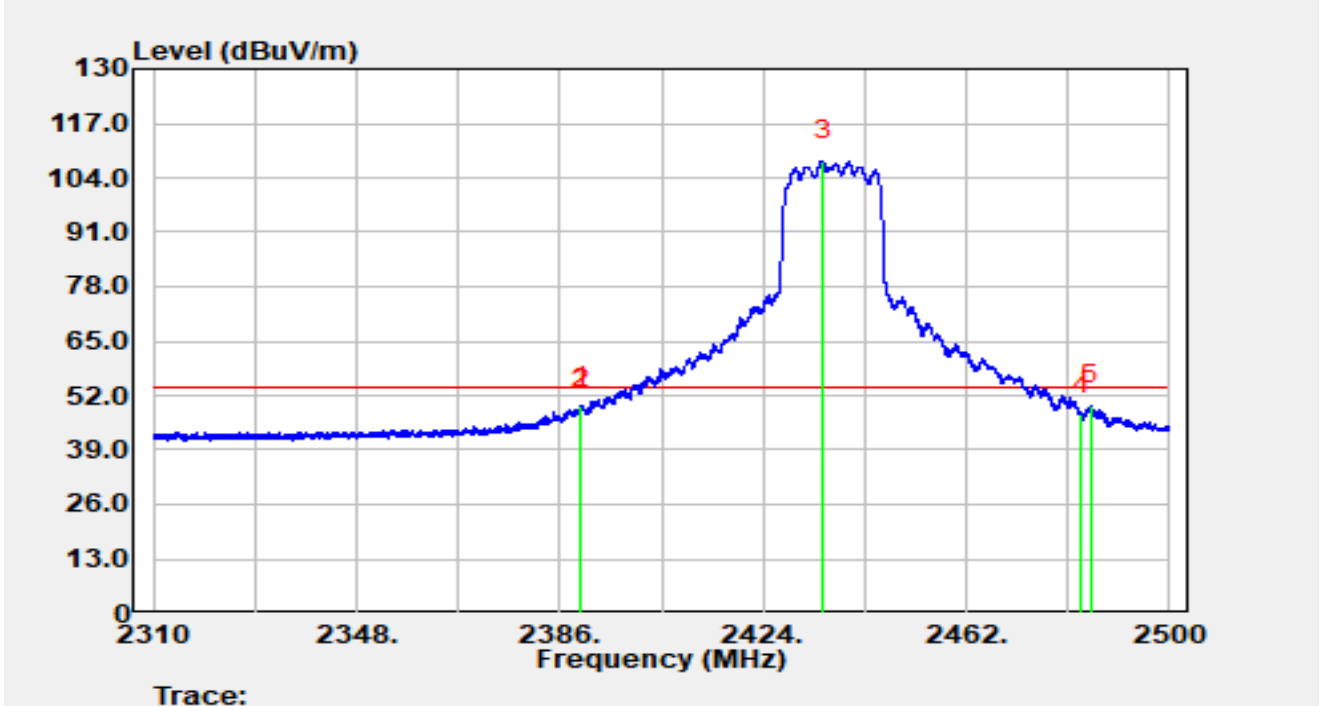


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2389.99         | 19.80          | 29.59      | 49.39                | -4.61       | 54.00          | Average  |
| 2  |      | 2390.00         | 19.43          | 29.59      | 49.02                | -4.98       | 54.00          | Average  |
| 3  |      | 2435.17         | 78.46          | 29.67      | 108.13               | N/A         | N/A            | Average  |
| 4  |      | 2483.50         | 17.79          | 29.76      | 47.55                | -6.45       | 54.00          | Average  |
| 5  | *    | 2485.14         | 19.79          | 29.77      | 49.56                | -4.44       | 54.00          | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-09-02     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11n-HT20 at 2437 MHz            |               |                |

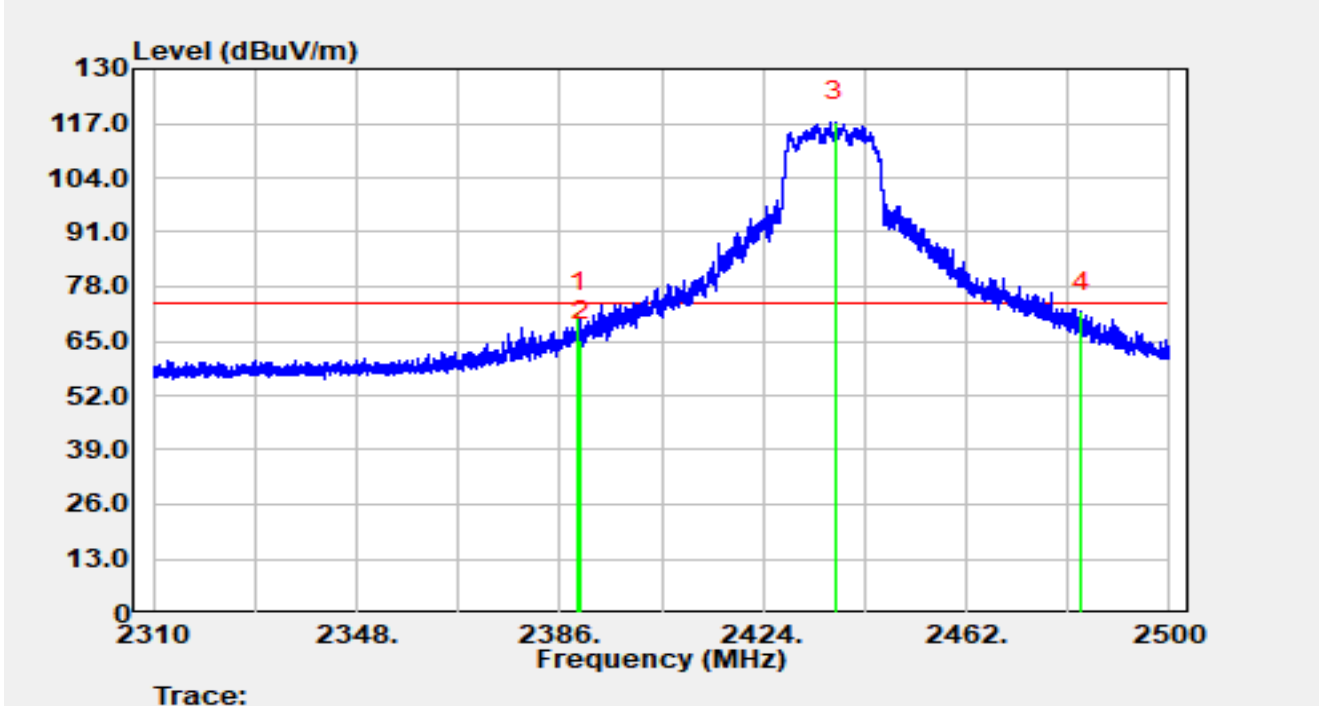


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2389.33         | 42.08          | 29.59      | 71.67                | -2.33       | 74.00          | Peak     |
| 2  |      | 2390.00         | 35.65          | 29.59      | 65.24                | -8.76       | 74.00          | Peak     |
| 3  |      | 2437.59         | 87.66          | 29.68      | 117.33               | N/A         | N/A            | Peak     |
| 4  | *    | 2483.50         | 42.18          | 29.76      | 71.95                | -2.05       | 74.00          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-09-02     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11n-HT20 at 2437 MHz            |               |                |

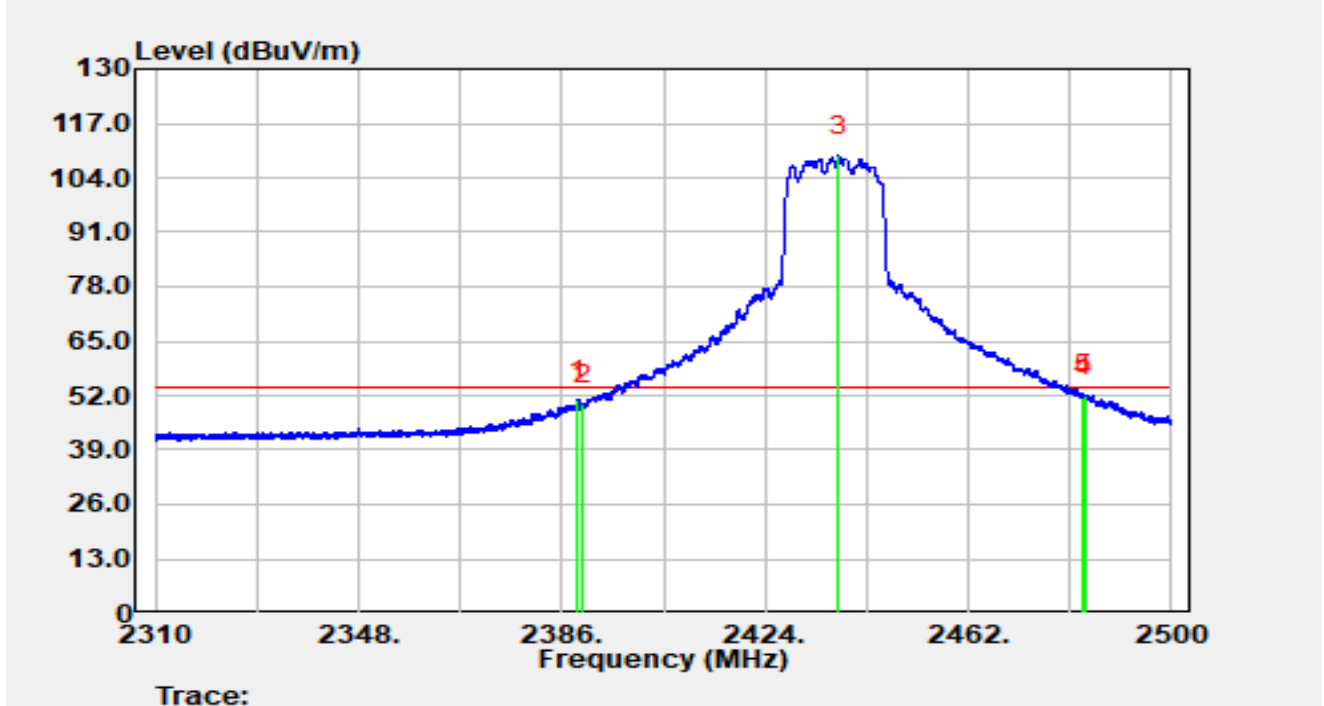


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2389.02         | 21.34          | 29.59      | 50.93                | -3.07       | 54.00          | Average  |
| 2  |      | 2390.00         | 20.41          | 29.59      | 50.00                | -4.00       | 54.00          | Average  |
| 3  |      | 2437.78         | 79.54          | 29.68      | 109.22               | N/A         | N/A            | Average  |
| 4  |      | 2483.50         | 21.89          | 29.76      | 51.65                | -2.35       | 54.00          | Average  |
| 5  | *    | 2483.77         | 22.46          | 29.76      | 52.22                | -1.78       | 54.00          | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-09-02     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11n-HT20 at 2462 MHz            |               |                |

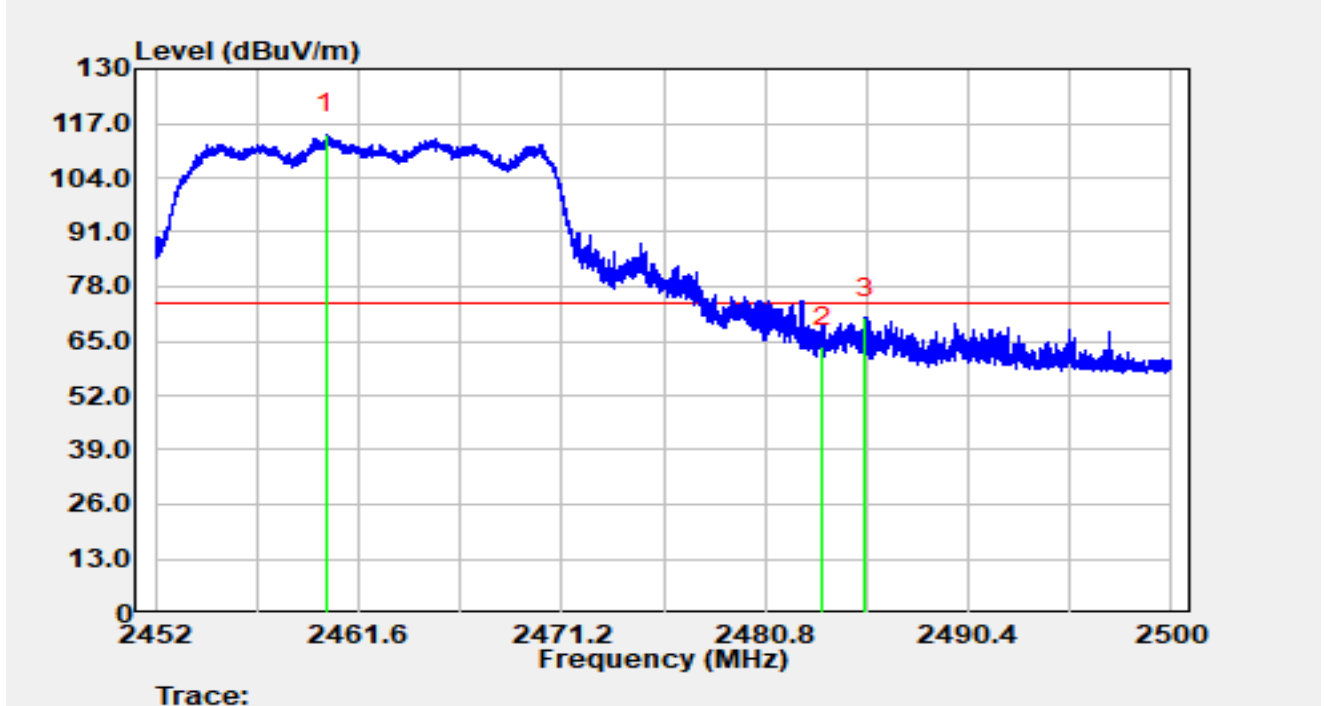


| No | Mark | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2460.06         | 84.75          | 29.71      | 114.46               | N/A         | N/A            | Peak     |
| 2  |      | 2483.50         | 33.96          | 29.76      | 63.73                | -10.27      | 74.00          | Peak     |
| 3  | *    | 2485.51         | 40.78          | 29.77      | 70.55                | -3.45       | 74.00          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-09-02     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11n-HT20 at 2462 MHz            |               |                |

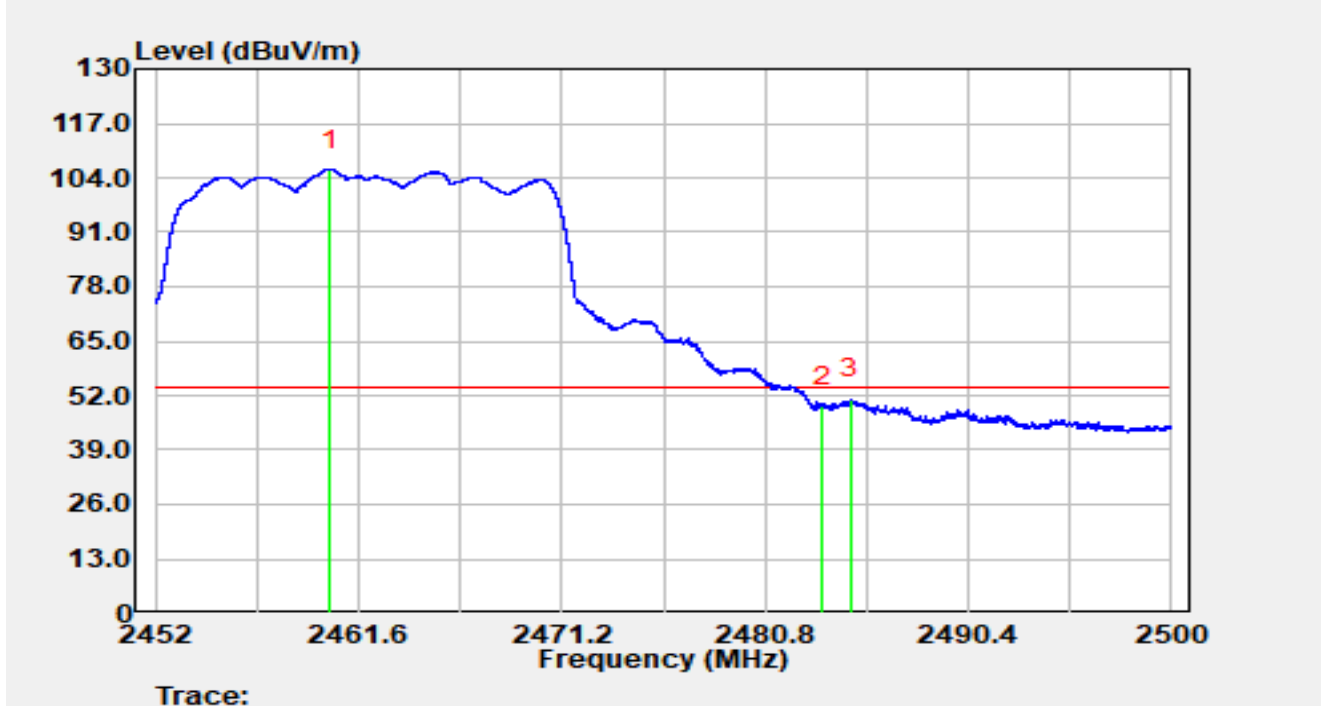


| No | Mark | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2460.22         | 76.23          | 29.71      | 105.94               | N/A         | N/A            | Average  |
| 2  |      | 2483.50         | 19.63          | 29.76      | 49.39                | -4.61       | 54.00          | Average  |
| 3  | *    | 2484.85         | 21.41          | 29.77      | 51.18                | -2.82       | 54.00          | Average  |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBUV/m) = Reading(dBUV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-09-02     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11n-HT20 at 2462 MHz            |               |                |

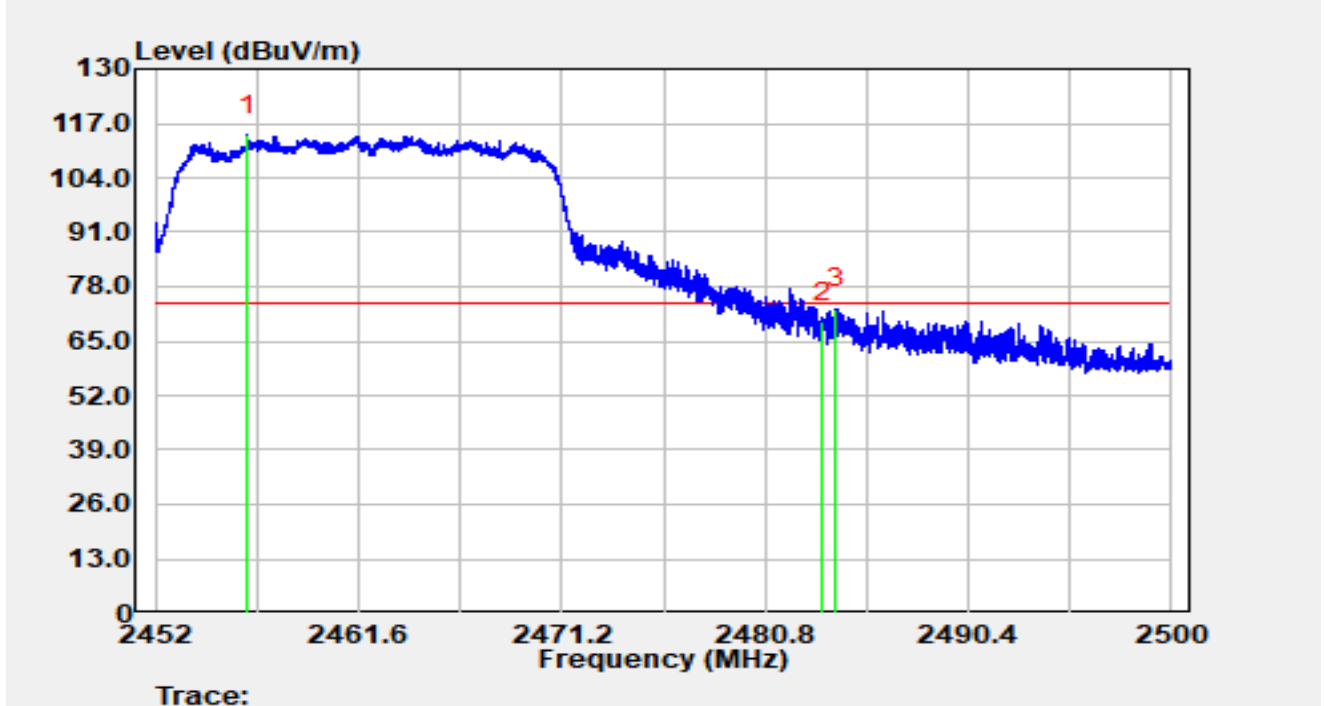


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2456.37         | 84.42          | 29.70      | 114.13               | N/A         | N/A            | Peak     |
| 2  |      | 2483.50         | 39.72          | 29.76      | 69.48                | -4.52       | 74.00          | Peak     |
| 3  | *    | 2484.16         | 42.95          | 29.77      | 72.71                | -1.29       | 74.00          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-09-02     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11n-HT20 at 2462 MHz            |               |                |

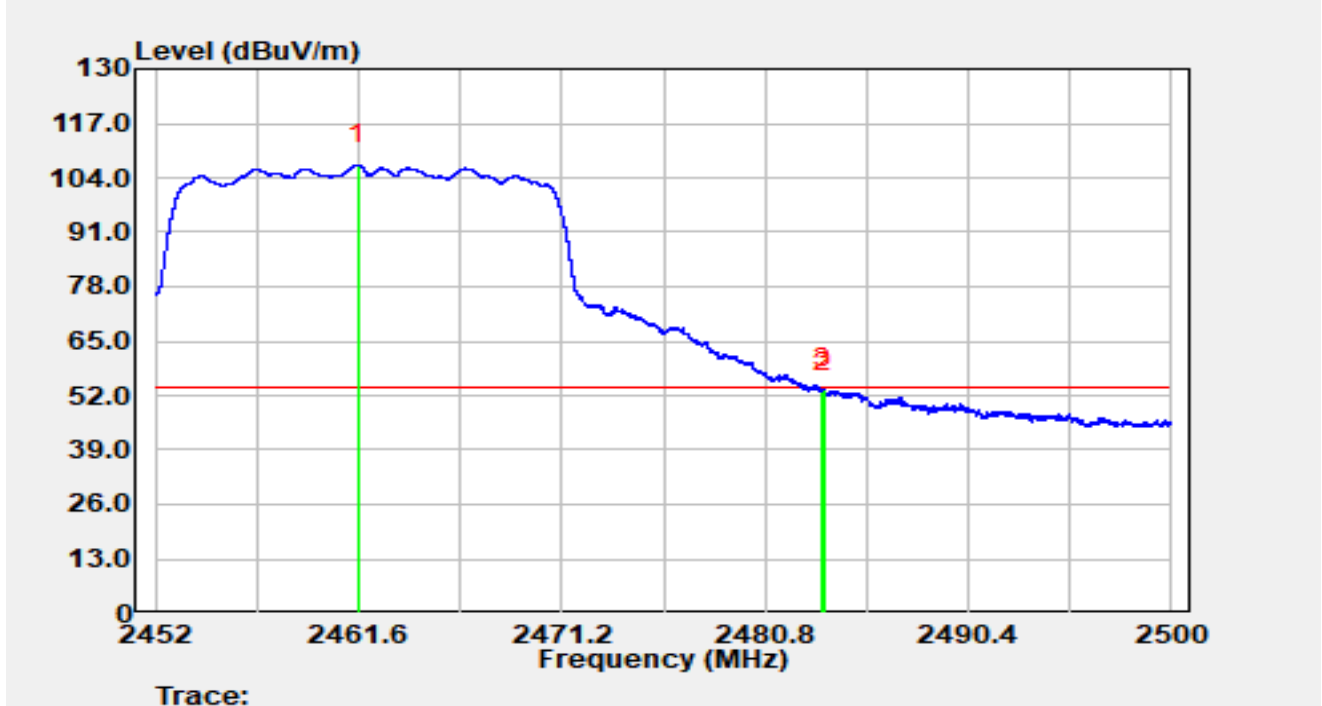


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2461.57         | 77.27          | 29.71      | 106.98               | N/A         | N/A            | Average  |
| 2  |      | 2483.50         | 23.11          | 29.76      | 52.88                | -1.12       | 54.00          | Average  |
| 3  | *    | 2483.56         | 23.91          | 29.76      | 53.68                | -0.32       | 54.00          | Average  |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC1                                          | Test Date     | 2025-08-11     |
| Temperature | 26.9 °C                                         | Humidity      | 45.4%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Carl Jiang     |
| Factor      | HF907_07205                                     | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11n-HT40 at 2422 MHz            |               |                |

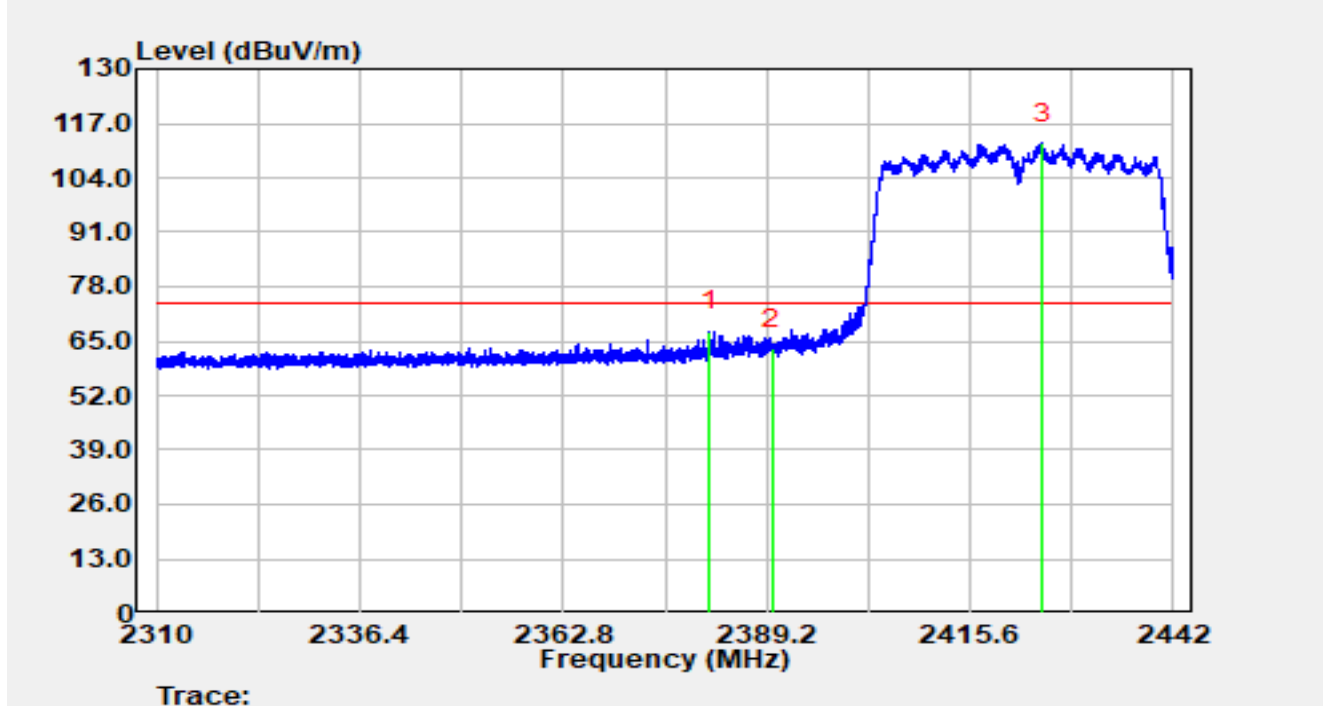


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2381.72         | 33.97          | 33.46      | 67.43                | -6.57       | 74.00          | Peak     |
| 2  |      | 2390.00         | 29.70          | 33.50      | 63.21                | -10.79      | 74.00          | Peak     |
| 3  |      | 2424.97         | 78.51          | 33.71      | 112.23               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC1                                          | Test Date     | 2025-08-11     |
| Temperature | 26.9 °C                                         | Humidity      | 45.4%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Carl Jiang     |
| Factor      | HF907_07205                                     | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11n-HT40 at 2422 MHz            |               |                |

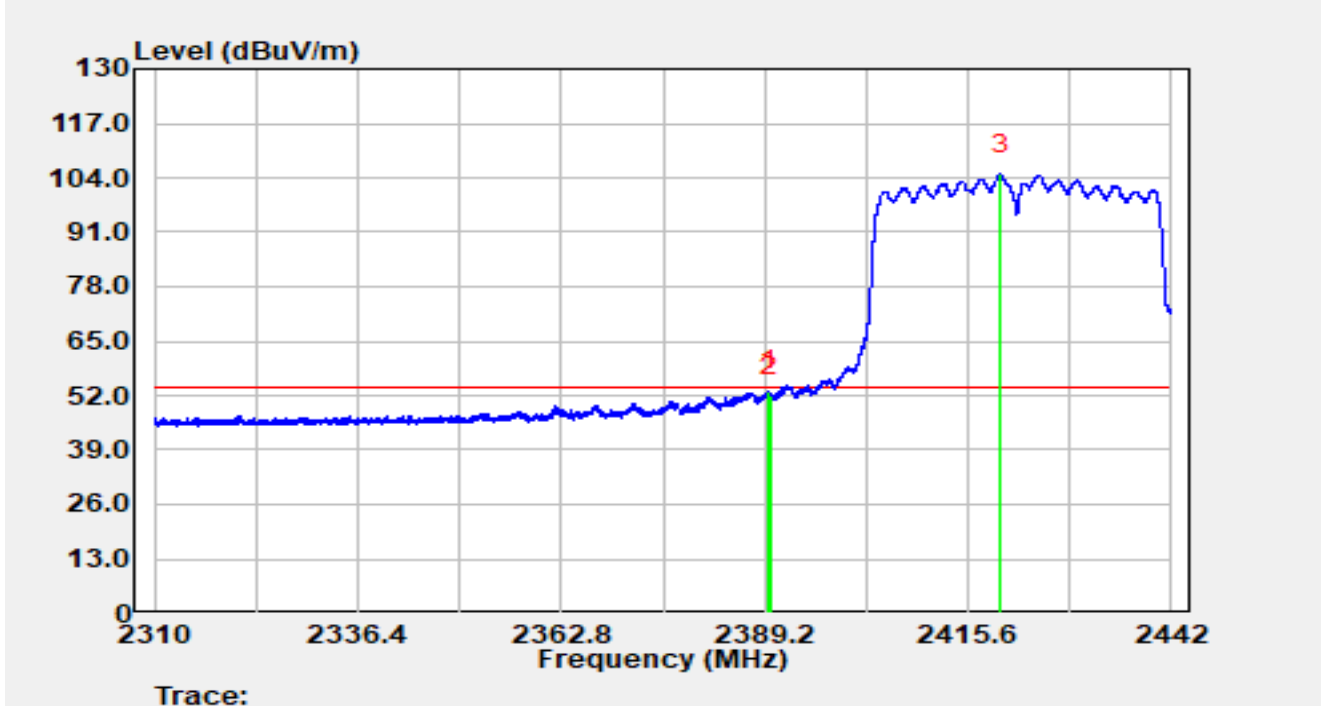


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2389.73         | 19.51          | 33.50      | 53.01                | -0.99       | 54.00          | Average  |
| 2  |      | 2390.00         | 18.32          | 33.50      | 51.82                | -2.18       | 54.00          | Average  |
| 3  |      | 2419.88         | 71.12          | 33.68      | 104.80               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC1                                          | Test Date     | 2025-08-11     |
| Temperature | 26.9 °C                                         | Humidity      | 45.4%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Carl Jiang     |
| Factor      | HF907_07205                                     | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11n-HT40 at 2422 MHz            |               |                |

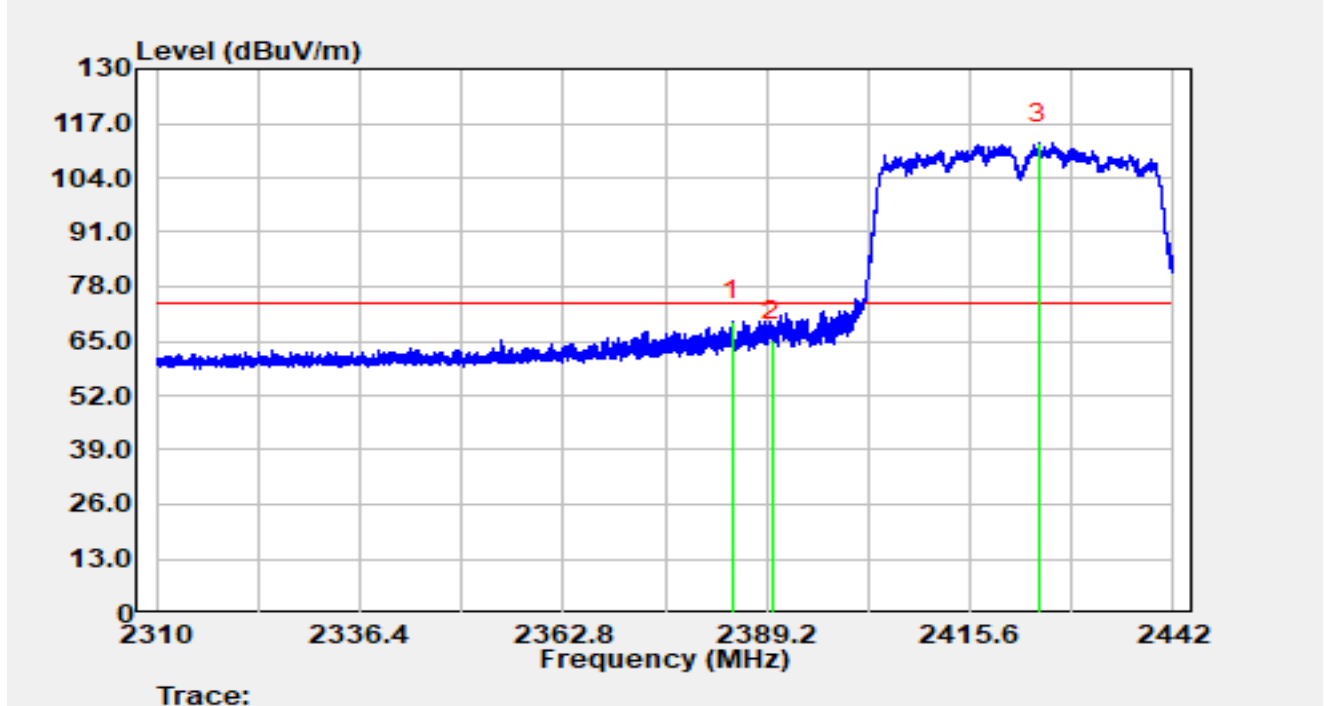


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2384.75         | 36.35          | 33.47      | 69.83                | -4.17       | 74.00          | Peak     |
| 2  |      | 2390.00         | 31.53          | 33.50      | 65.03                | -8.97       | 74.00          | Peak     |
| 3  |      | 2424.54         | 78.53          | 33.71      | 112.24               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC1                                          | Test Date     | 2025-08-11     |
| Temperature | 26.9 °C                                         | Humidity      | 45.4%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Carl Jiang     |
| Factor      | HF907_07205                                     | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11n-HT40 at 2422 MHz            |               |                |

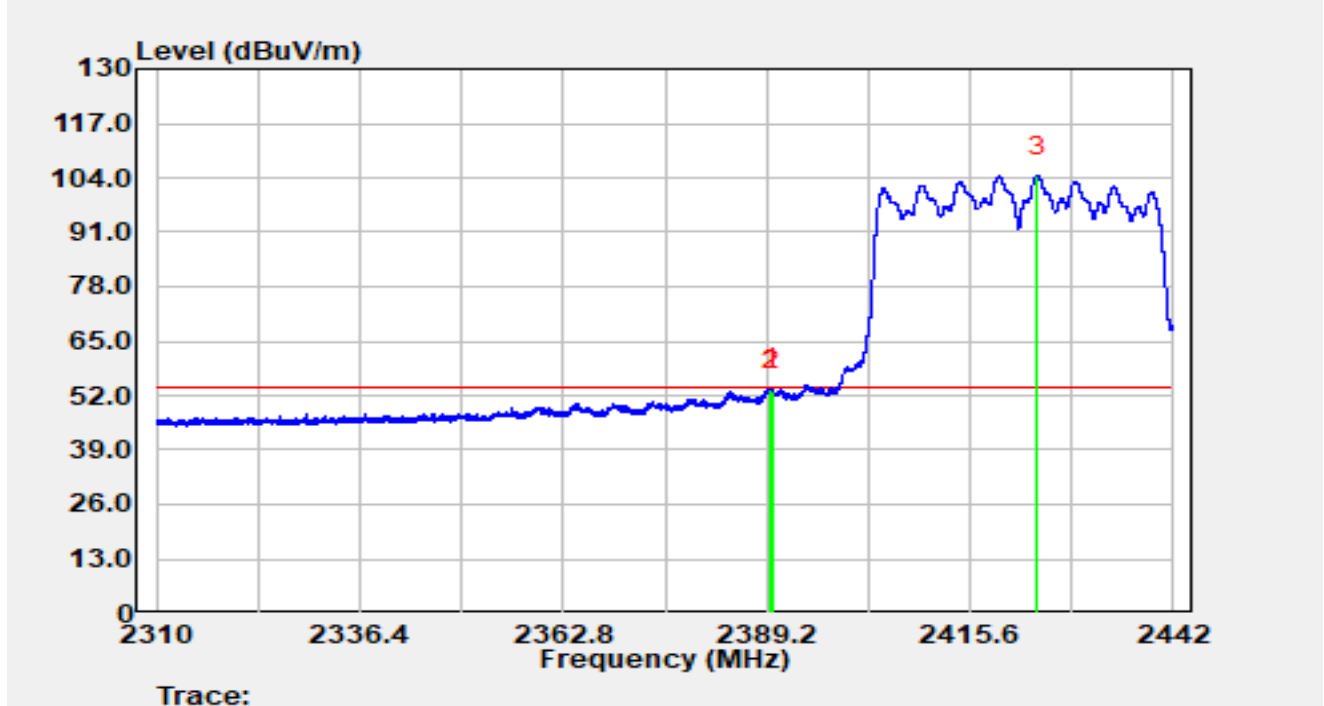


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2389.66         | 20.13          | 33.50      | 53.62                | -0.38       | 54.00          | Average  |
| 2  |      | 2390.00         | 19.69          | 33.50      | 53.19                | -0.81       | 54.00          | Average  |
| 3  |      | 2424.27         | 70.78          | 33.71      | 104.49               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-17     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11n-HT40 at 2437 MHz            |               |                |

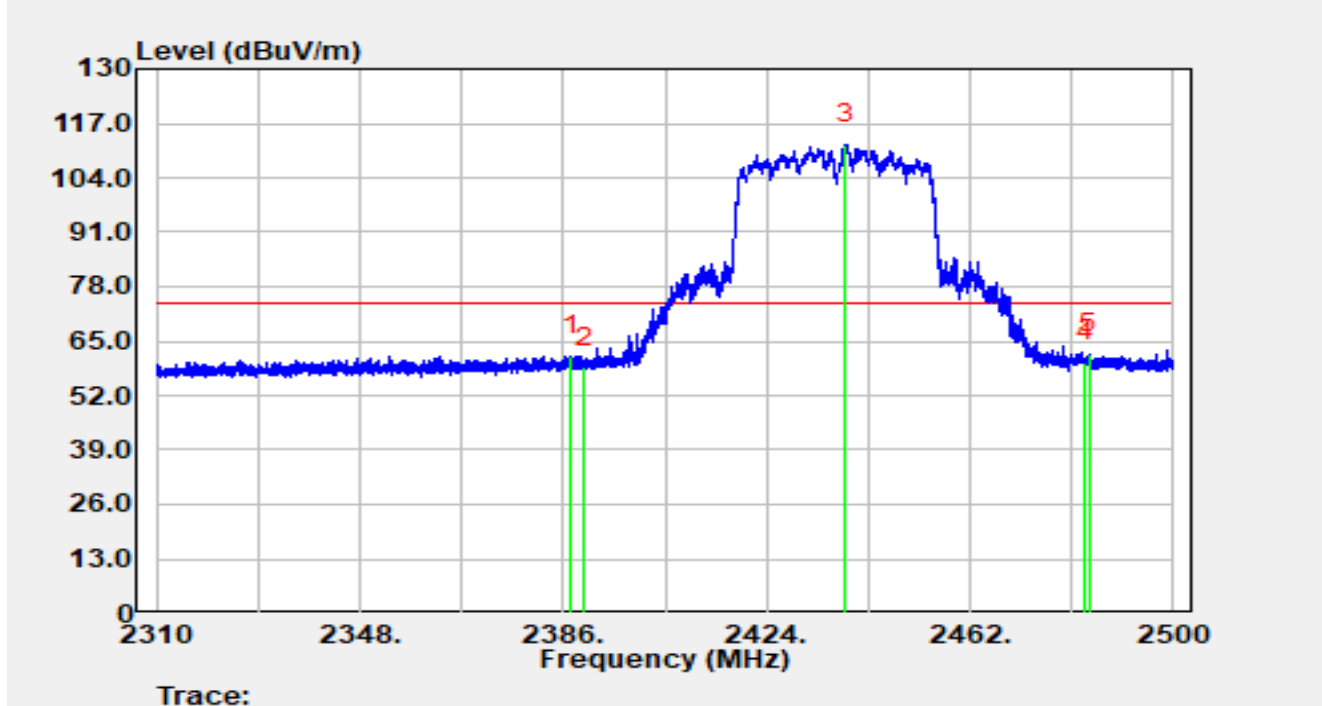


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2387.48         | 31.84          | 29.58      | 61.42                | -12.58      | 74.00          | Peak     |
| 2  |      | 2390.00         | 29.09          | 29.59      | 58.68                | -15.32      | 74.00          | Peak     |
| 3  |      | 2438.78         | 82.22          | 29.68      | 111.90               | N/A         | N/A            | Peak     |
| 4  |      | 2483.50         | 30.13          | 29.76      | 59.90                | -14.10      | 74.00          | Peak     |
| 5  | *    | 2484.17         | 32.11          | 29.77      | 61.88                | -12.12      | 74.00          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-17     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11n-HT40 at 2437 MHz            |               |                |

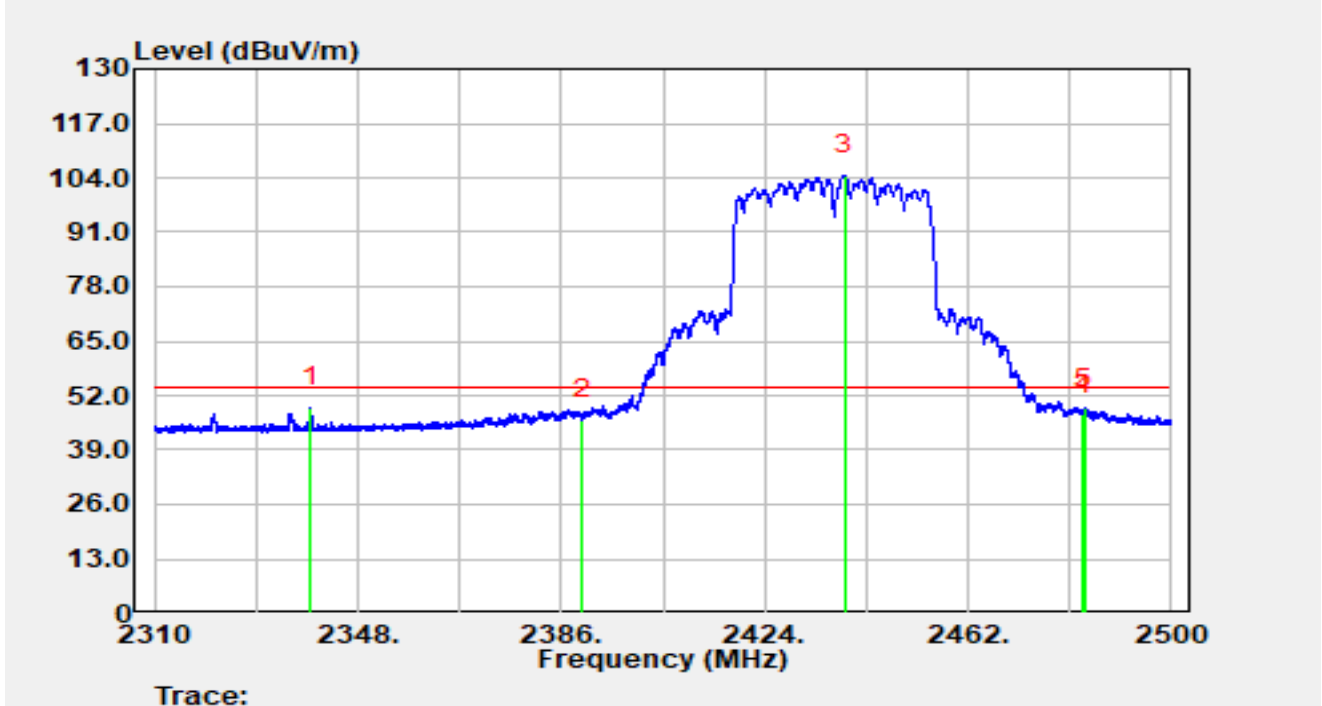


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2339.18         | 19.65          | 29.48      | 49.14                | -4.86       | 54.00          | Average  |
| 2  |      | 2390.00         | 16.60          | 29.59      | 46.19                | -7.81       | 54.00          | Average  |
| 3  |      | 2438.93         | 74.96          | 29.68      | 104.64               | N/A         | N/A            | Average  |
| 4  |      | 2483.51         | 17.67          | 29.76      | 47.43                | -6.57       | 54.00          | Average  |
| 5  |      | 2483.77         | 19.06          | 29.76      | 48.82                | -5.18       | 54.00          | Average  |

#### Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-17     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11n-HT40 at 2437 MHz            |               |                |

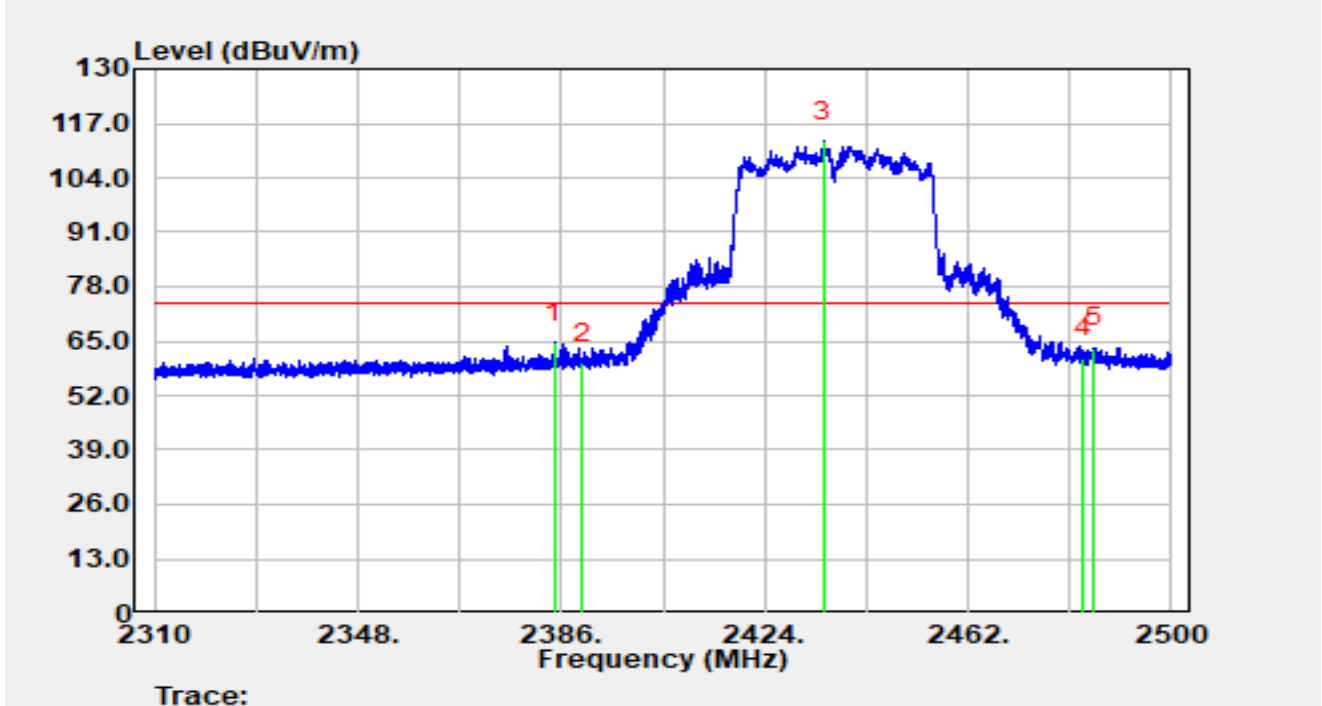


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2384.80         | 35.04          | 29.57      | 64.61                | -9.39       | 74.00          | Peak     |
| 2  |      | 2390.00         | 30.24          | 29.59      | 59.83                | -14.17      | 74.00          | Peak     |
| 3  |      | 2435.04         | 82.97          | 29.67      | 112.64               | N/A         | N/A            | Peak     |
| 4  |      | 2483.50         | 31.11          | 29.76      | 60.87                | -13.13      | 74.00          | Peak     |
| 5  |      | 2485.41         | 33.54          | 29.77      | 63.31                | -10.69      | 74.00          | Peak     |

#### Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-17     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11n-HT40 at 2437 MHz            |               |                |

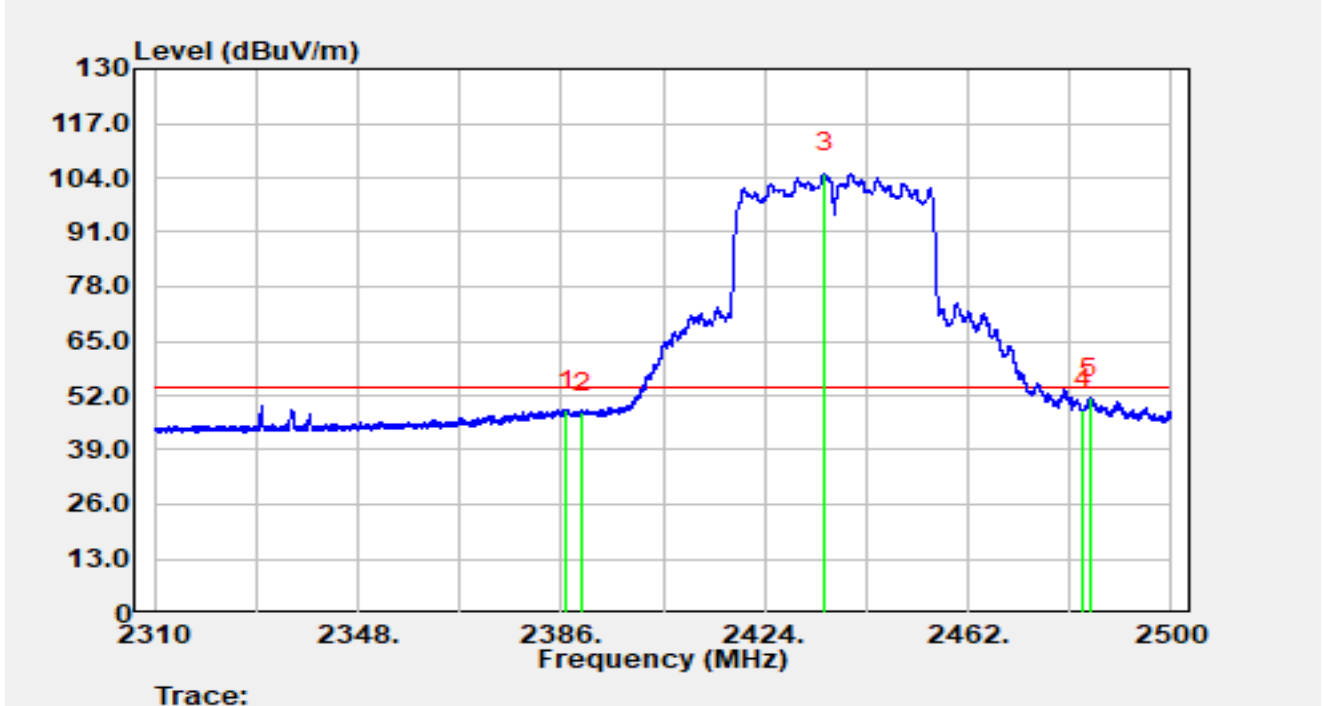


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2387.06         | 18.94          | 29.58      | 48.52                | -5.48       | 54.00          | Average  |
| 2  |      | 2390.00         | 18.29          | 29.59      | 47.88                | -6.12       | 54.00          | Average  |
| 3  |      | 2435.21         | 75.32          | 29.67      | 104.99               | N/A         | N/A            | Average  |
| 4  |      | 2483.50         | 18.94          | 29.76      | 48.70                | -5.30       | 54.00          | Average  |
| 5  | *    | 2484.76         | 21.70          | 29.77      | 51.47                | -2.53       | 54.00          | Average  |

#### Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC1                                          | Test Date     | 2025-08-11     |
| Temperature | 26.9 °C                                         | Humidity      | 45.4%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Carl Jiang     |
| Factor      | HF907_07205                                     | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11n-HT40 at 2452 MHz            |               |                |

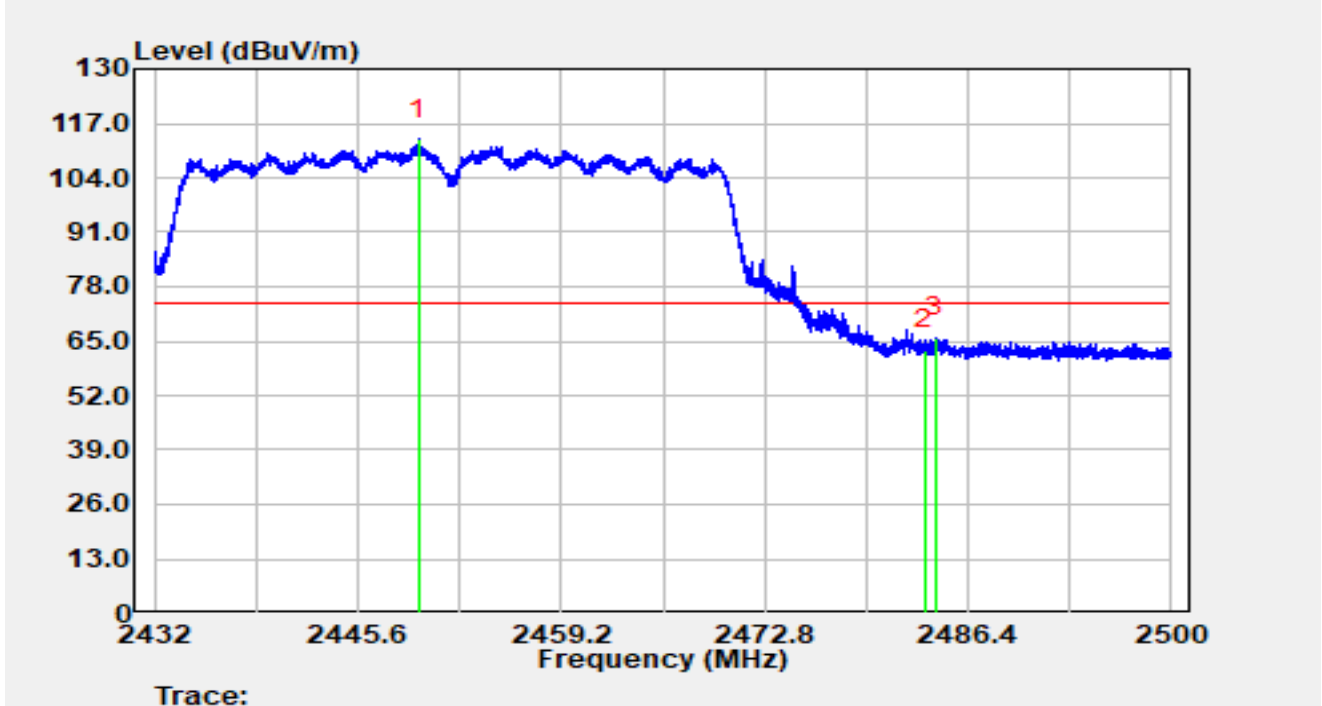


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2449.63         | 79.44          | 33.81      | 113.25               | N/A         | N/A            | Peak     |
| 2  |      | 2483.50         | 28.97          | 34.00      | 62.97                | -11.03      | 74.00          | Peak     |
| 3  | *    | 2484.20         | 31.97          | 34.00      | 65.97                | -8.03       | 74.00          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC1                                          | Test Date     | 2025-08-11     |
| Temperature | 26.9 °C                                         | Humidity      | 45.4%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Carl Jiang     |
| Factor      | HF907_07205                                     | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11n-HT40 at 2452 MHz            |               |                |

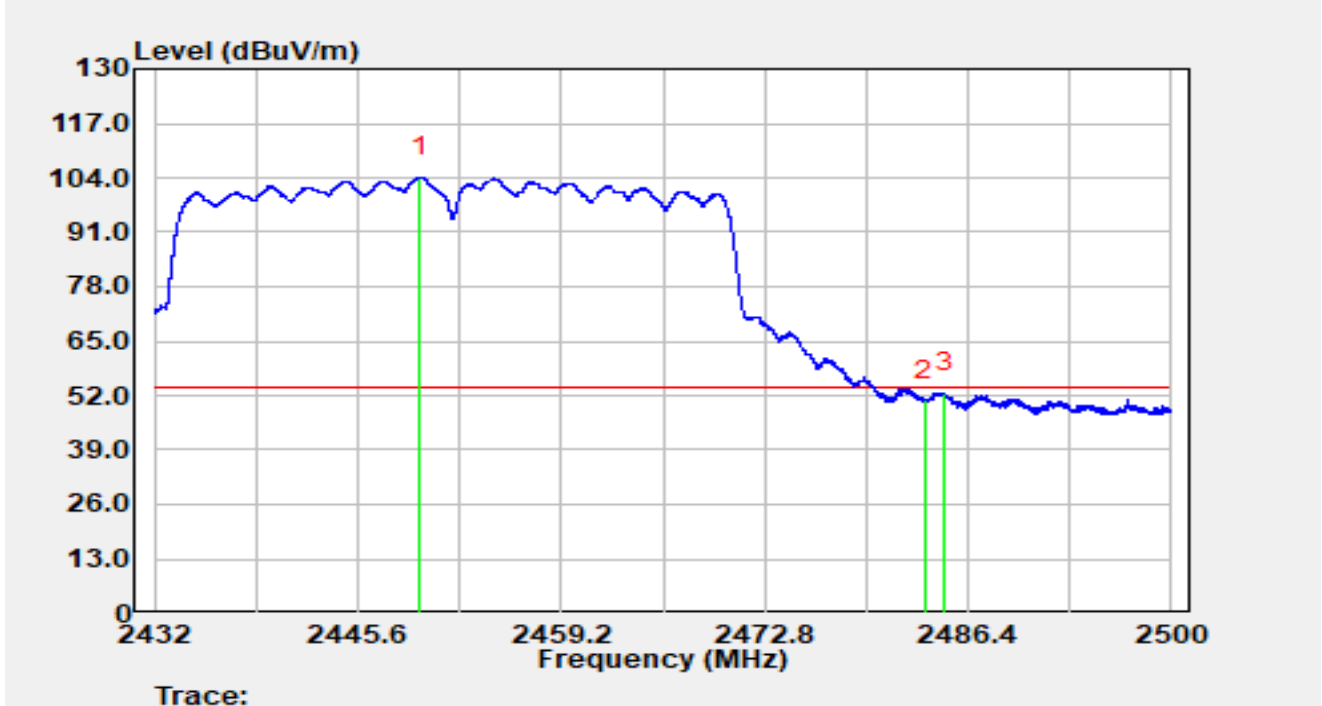


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2449.79         | 70.37          | 33.81      | 104.19               | N/A         | N/A            | Average  |
| 2  |      | 2483.50         | 16.79          | 34.00      | 50.79                | -3.21       | 54.00          | Average  |
| 3  | *    | 2484.82         | 18.71          | 34.01      | 52.72                | -1.28       | 54.00          | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC1                                          | Test Date     | 2025-08-11     |
| Temperature | 26.9 °C                                         | Humidity      | 45.4%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Carl Jiang     |
| Factor      | HF907_07205                                     | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11n-HT40 at 2452 MHz            |               |                |

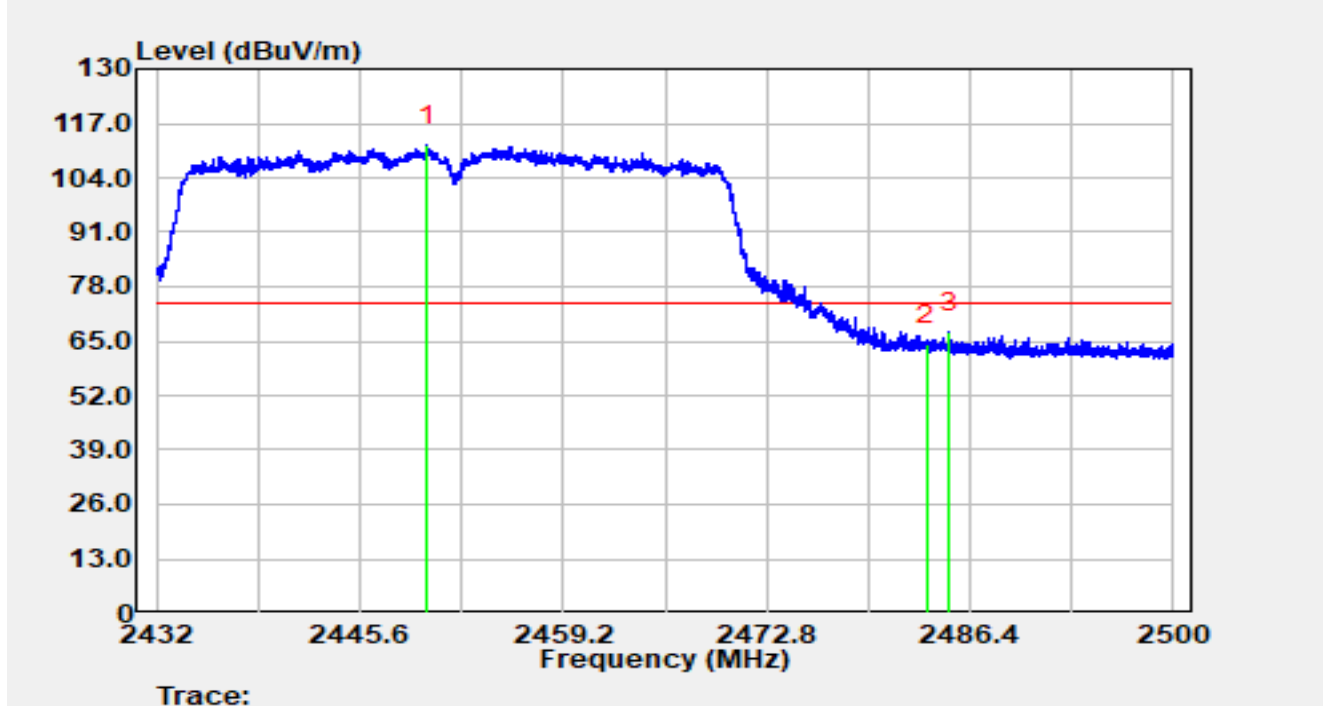


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2450.08         | 77.88          | 33.82      | 111.70               | N/A         | N/A            | Peak     |
| 2  |      | 2483.50         | 30.10          | 34.00      | 64.09                | -9.91       | 74.00          | Peak     |
| 3  | *    | 2485.05         | 32.97          | 34.01      | 66.98                | -7.02       | 74.00          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC1                                          | Test Date     | 2025-08-11     |
| Temperature | 26.9 °C                                         | Humidity      | 45.4%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Carl Jiang     |
| Factor      | HF907_07205                                     | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11n-HT40 at 2452 MHz            |               |                |

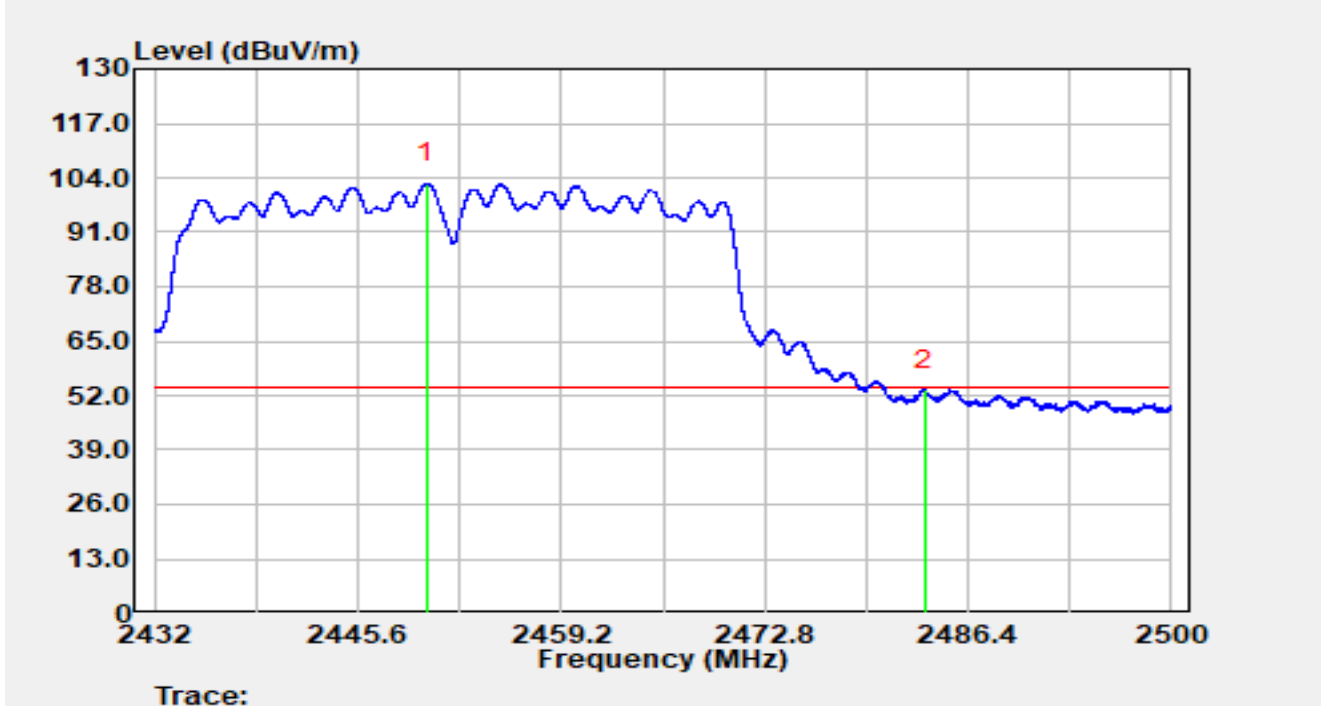


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2450.17         | 68.85          | 33.82      | 102.67               | N/A         | N/A            | Average  |
| 2  | *    | 2483.50         | 19.25          | 34.00      | 53.25                | -0.75       | 54.00          | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-15     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11be-EHT20 at 2412 MHz          |               |                |

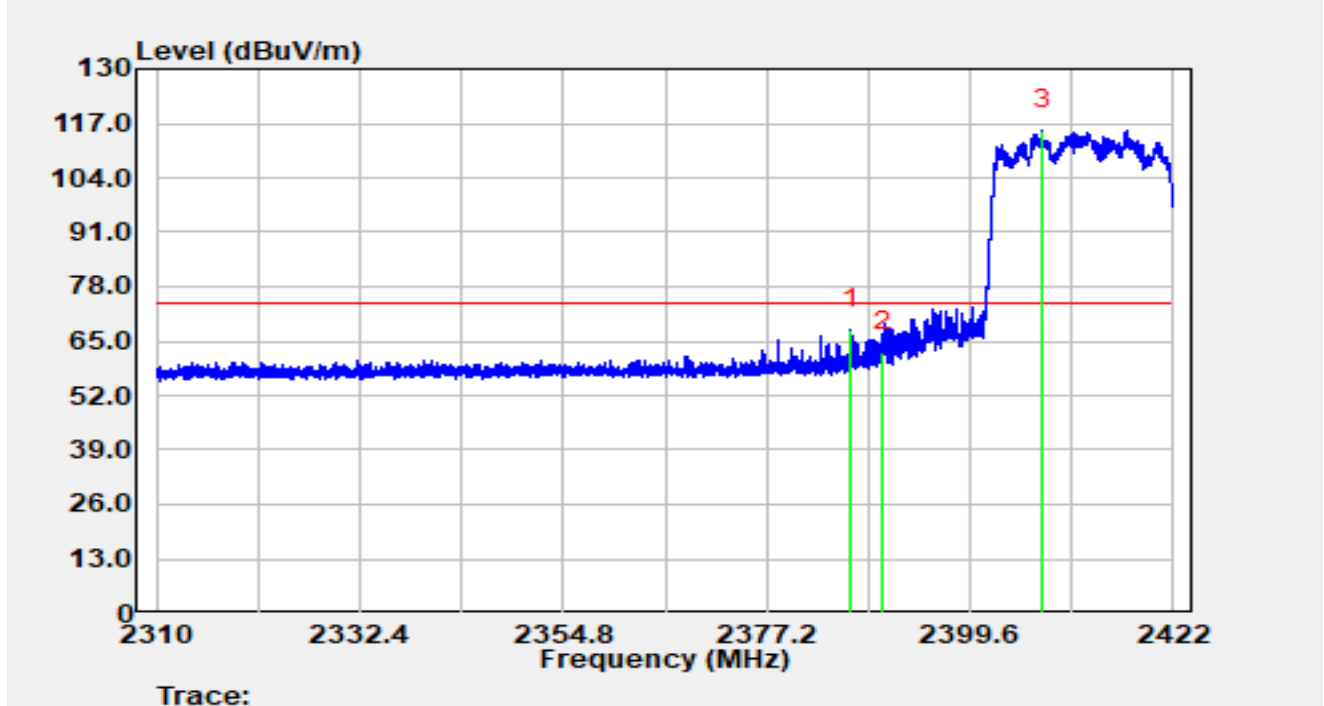


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2386.47         | 38.17          | 29.58      | 67.75                | -6.25       | 74.00          | Peak     |
| 2  |      | 2390.00         | 32.89          | 29.59      | 62.48                | -11.52      | 74.00          | Peak     |
| 3  |      | 2407.55         | 85.89          | 29.64      | 115.52               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-15     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11be-EHT20 at 2412 MHz          |               |                |

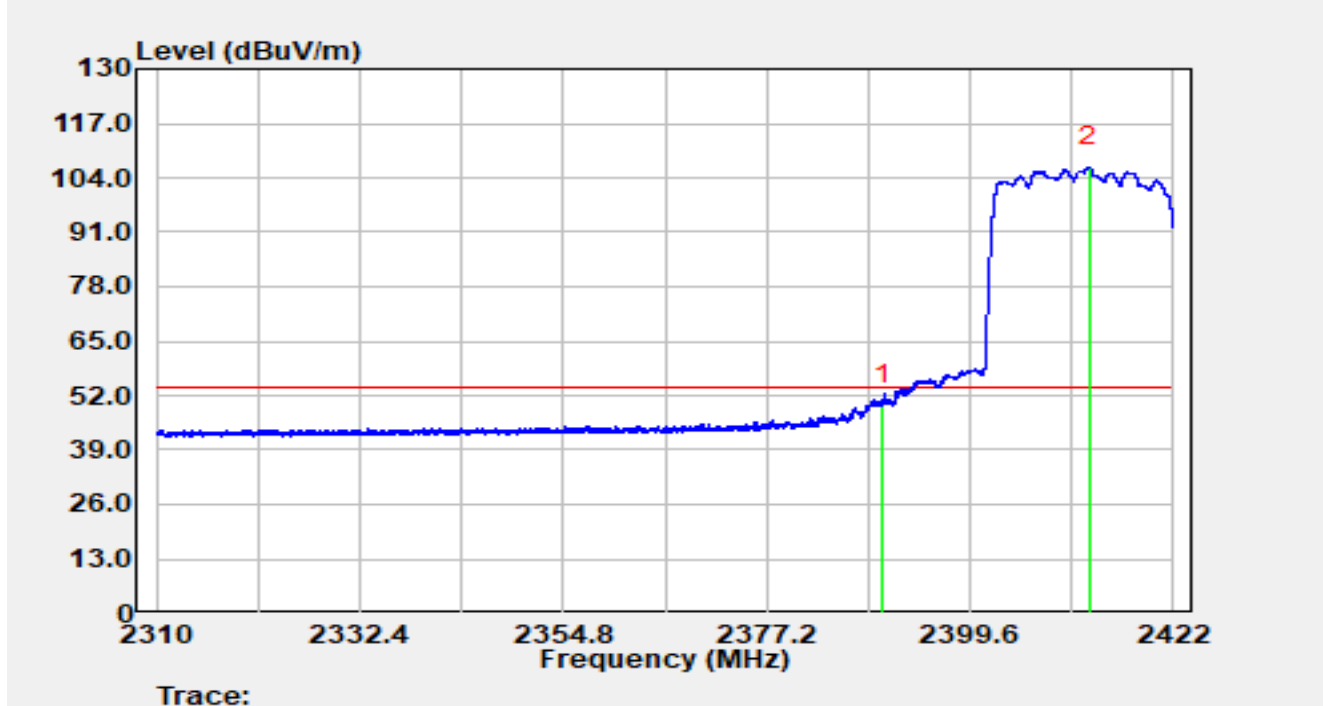


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2390.00         | 19.99          | 29.59      | 49.58                | -4.42       | 54.00          | Average  |
| 2  |      | 2412.67         | 76.88          | 29.63      | 106.52               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-15     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11be-EHT20 at 2412 MHz          |               |                |

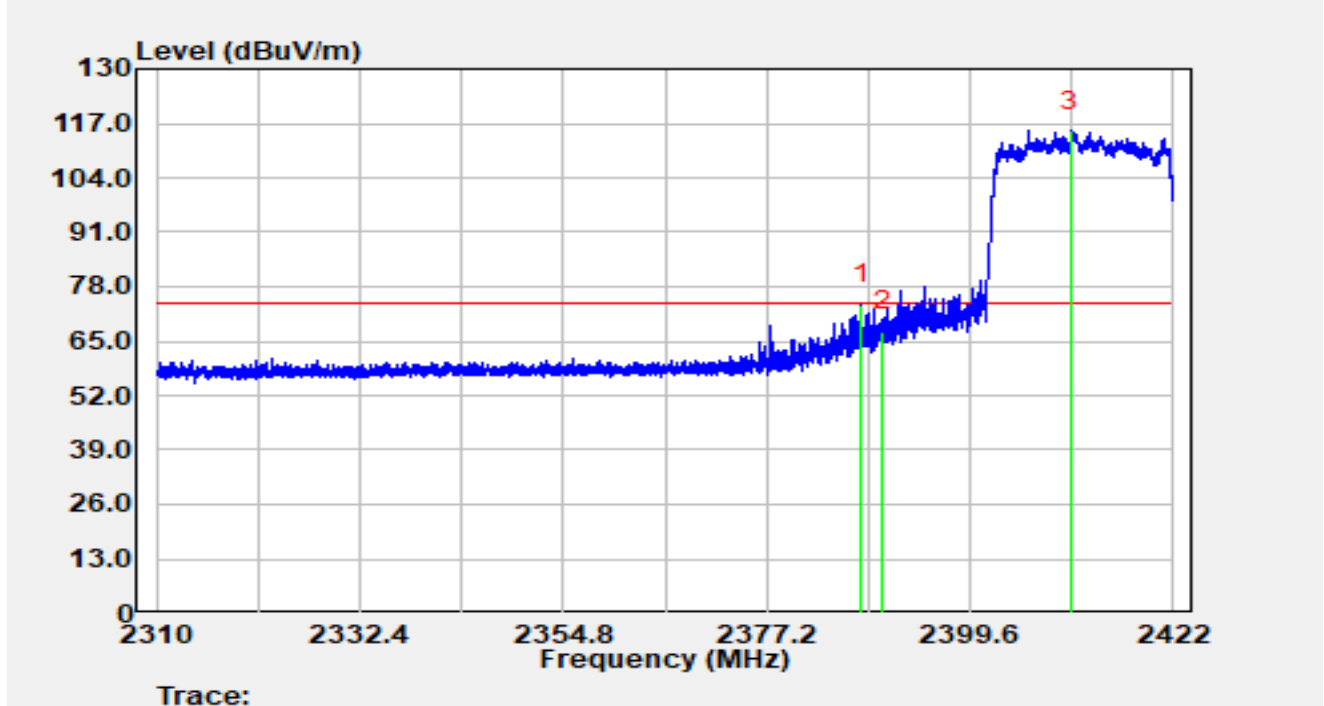


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2387.62         | 44.09          | 29.58      | 73.67                | -0.33       | 74.00          | Peak     |
| 2  |      | 2390.00         | 37.69          | 29.59      | 67.28                | -6.72       | 74.00          | Peak     |
| 3  |      | 2410.67         | 85.64          | 29.63      | 115.27               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-15     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11be-EHT20 at 2412 MHz          |               |                |

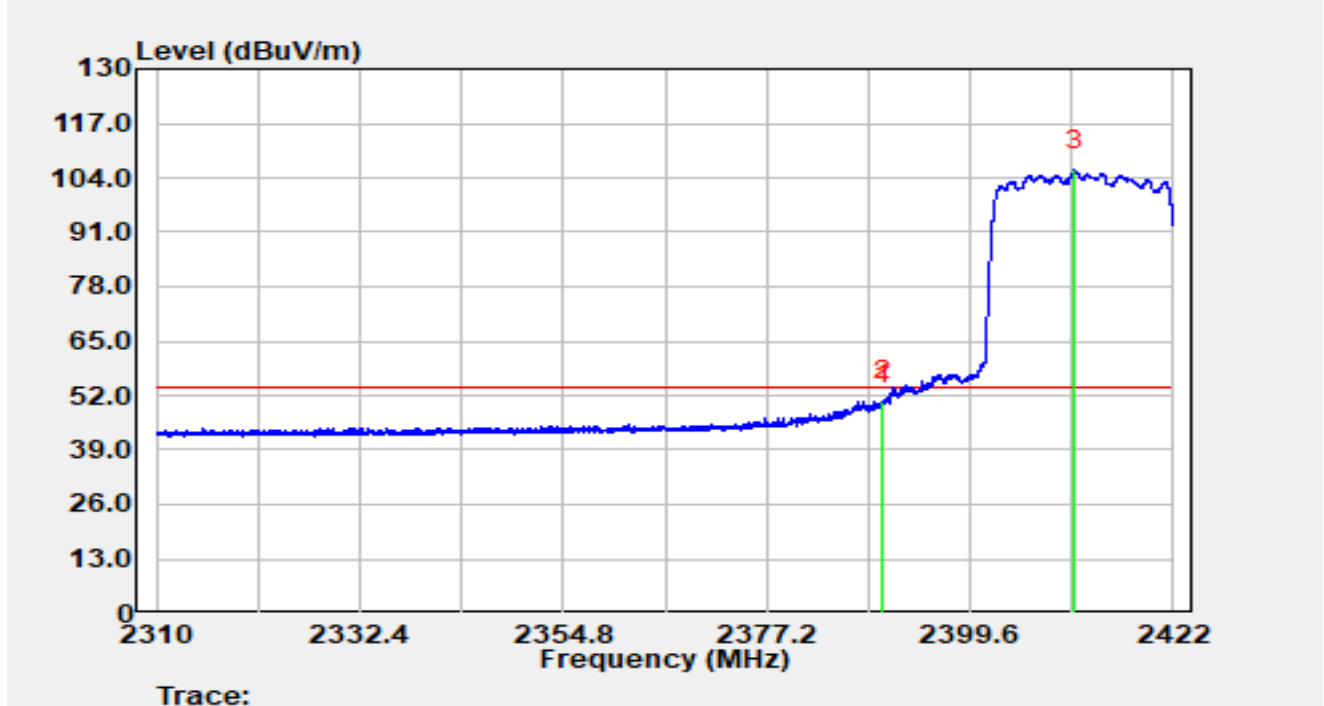


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2390.00         | 20.19          | 29.59      | 49.78                | -4.22       | 54.00          | Average  |
| 2  | *    | 2390.02         | 21.15          | 29.59      | 50.74                | -3.26       | 54.00          | Average  |
| 3  |      | 2411.06         | 76.11          | 29.63      | 105.74               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-15     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11be-EHT20 at 2437 MHz          |               |                |

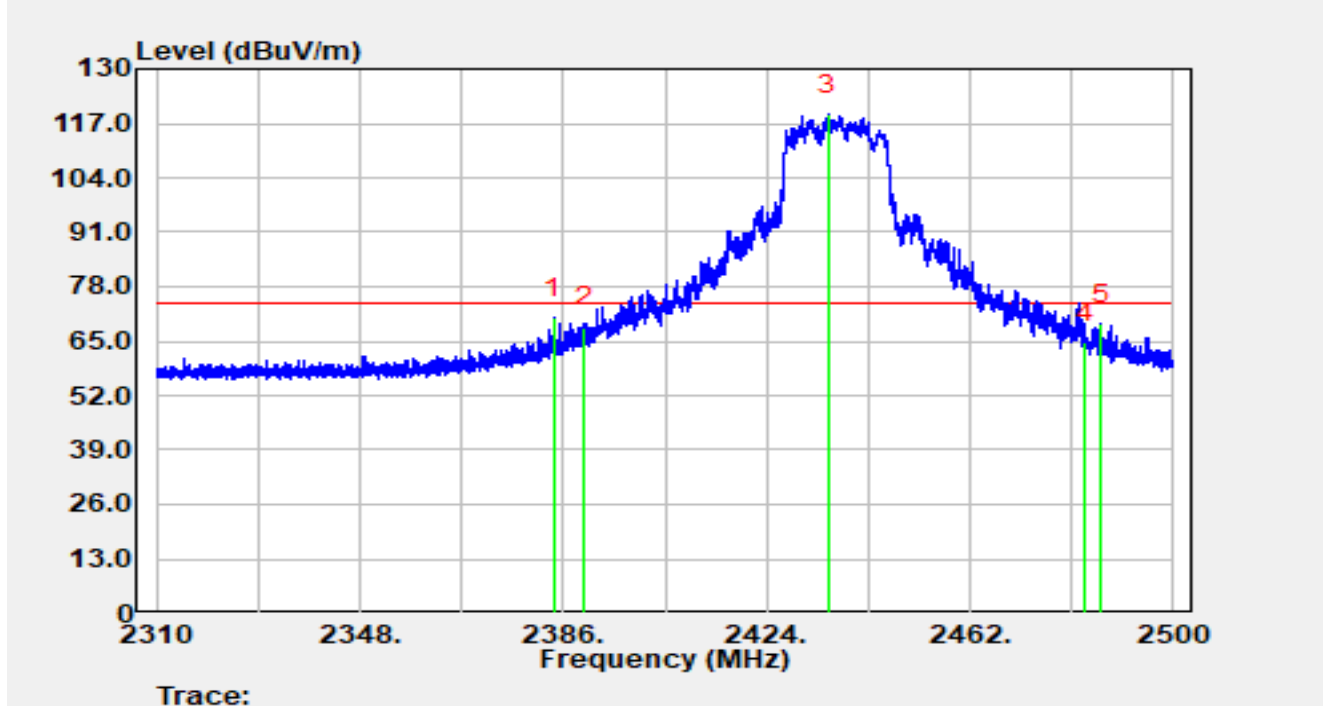


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2384.21         | 40.93          | 29.57      | 70.50                | -3.50       | 74.00          | Peak     |
| 2  |      | 2390.00         | 38.61          | 29.59      | 68.20                | -5.80       | 74.00          | Peak     |
| 3  |      | 2435.53         | 89.46          | 29.67      | 119.13               | N/A         | N/A            | Peak     |
| 4  |      | 2483.50         | 34.87          | 29.76      | 64.63                | -9.37       | 74.00          | Peak     |
| 5  |      | 2486.49         | 39.16          | 29.77      | 68.93                | -5.07       | 74.00          | Peak     |

#### Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-15     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11be-EHT20 at 2437 MHz          |               |                |

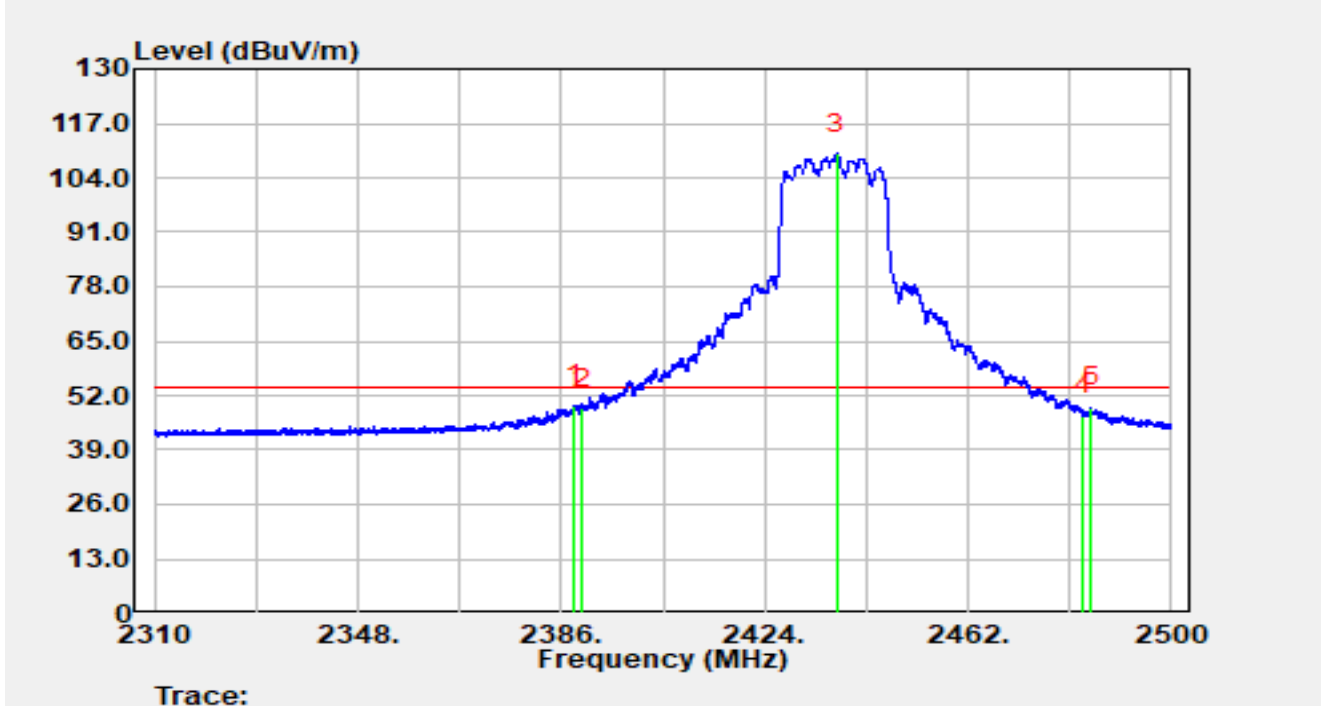


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2388.57         | 20.19          | 29.59      | 49.77                | -4.23       | 54.00          | Average  |
| 2  |      | 2390.00         | 19.46          | 29.59      | 49.06                | -4.94       | 54.00          | Average  |
| 3  |      | 2437.53         | 79.98          | 29.68      | 109.65               | N/A         | N/A            | Average  |
| 4  |      | 2483.50         | 17.57          | 29.76      | 47.34                | -6.66       | 54.00          | Average  |
| 5  |      | 2484.93         | 19.29          | 29.77      | 49.06                | -4.94       | 54.00          | Average  |

#### Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-15     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11be-EHT20 at 2437 MHz          |               |                |

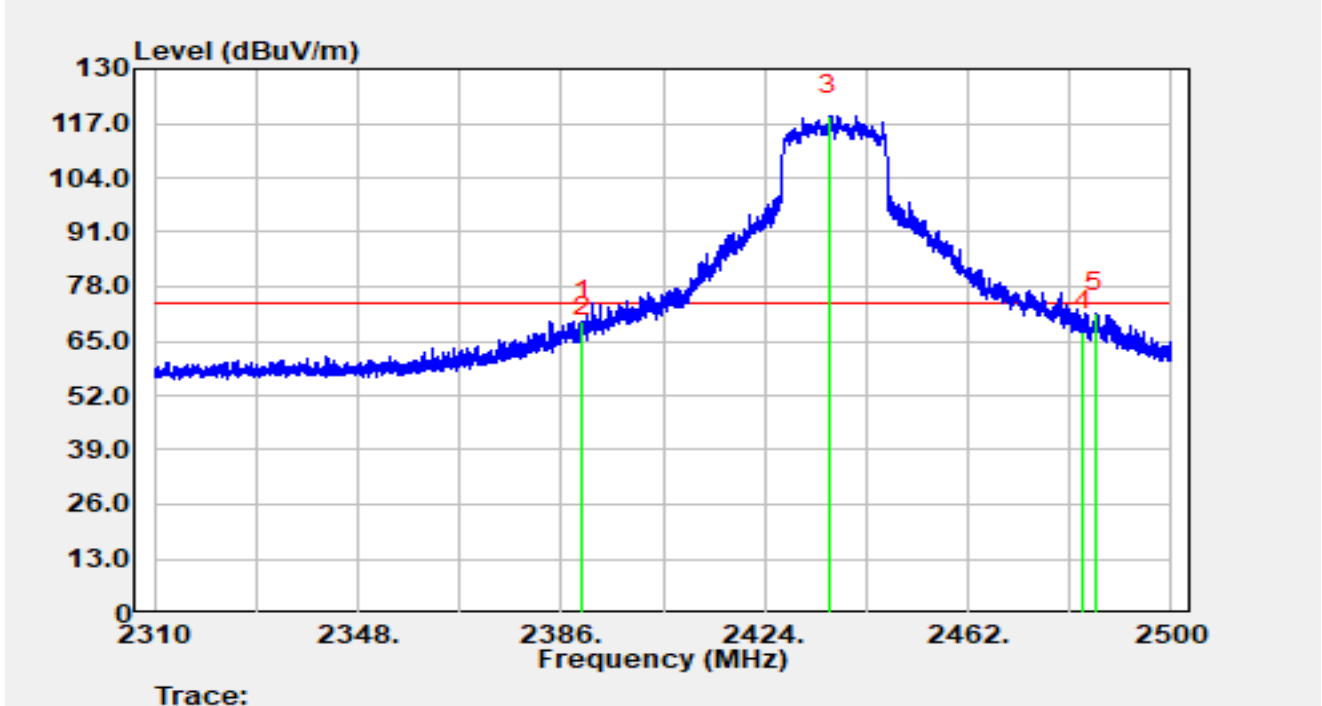


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2389.86         | 40.28          | 29.59      | 69.87                | -4.13       | 74.00          | Peak     |
| 2  |      | 2390.00         | 36.51          | 29.59      | 66.10                | -7.90       | 74.00          | Peak     |
| 3  |      | 2436.08         | 89.17          | 29.67      | 118.84               | N/A         | N/A            | Peak     |
| 4  |      | 2483.50         | 37.64          | 29.76      | 67.41                | -6.59       | 74.00          | Peak     |
| 5  | *    | 2485.85         | 41.98          | 29.77      | 71.75                | -2.25       | 74.00          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-15     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11be-EHT20 at 2437 MHz          |               |                |

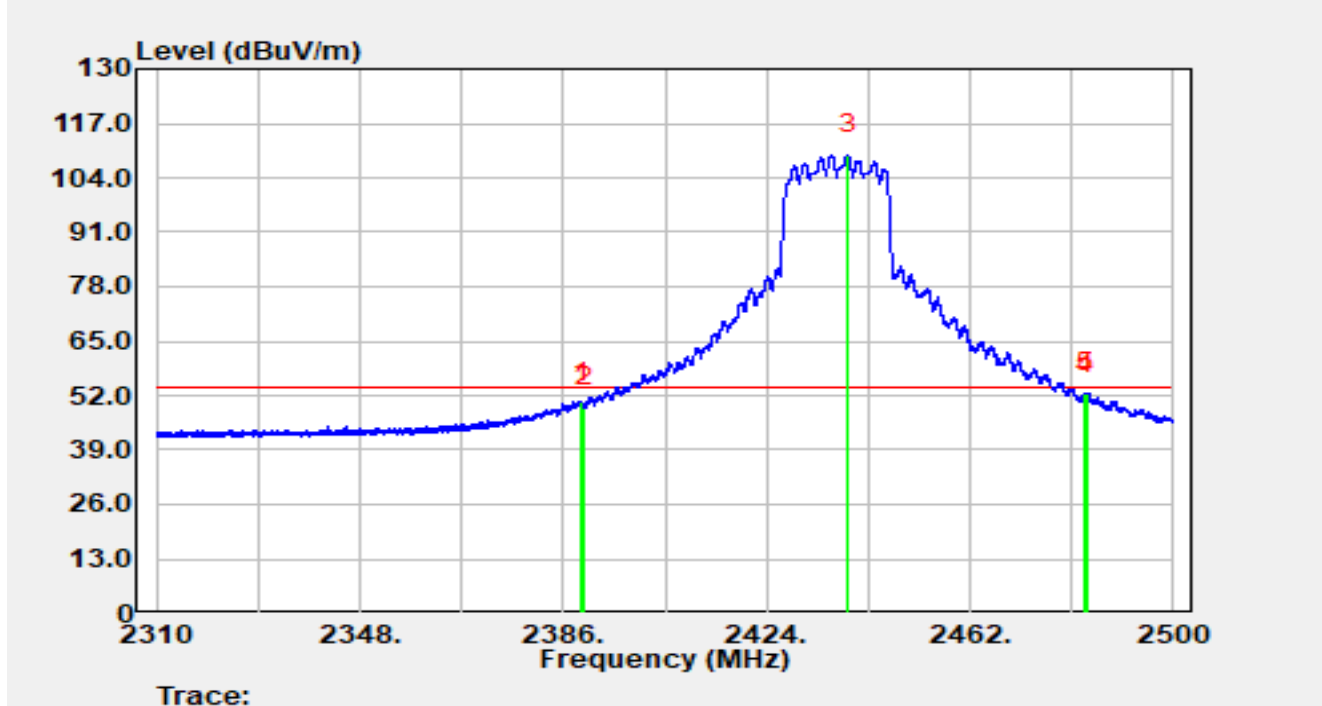


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2389.36         | 20.87          | 29.59      | 50.46                | -3.54       | 54.00          | Average  |
| 2  |      | 2390.00         | 19.59          | 29.59      | 49.18                | -4.82       | 54.00          | Average  |
| 3  |      | 2439.18         | 79.75          | 29.68      | 109.43               | N/A         | N/A            | Average  |
| 4  |      | 2483.50         | 22.67          | 29.76      | 52.43                | -1.57       | 54.00          | Average  |
| 5  | *    | 2483.85         | 22.86          | 29.77      | 52.62                | -1.38       | 54.00          | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-15     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11be-EHT20 at 2462 MHz          |               |                |

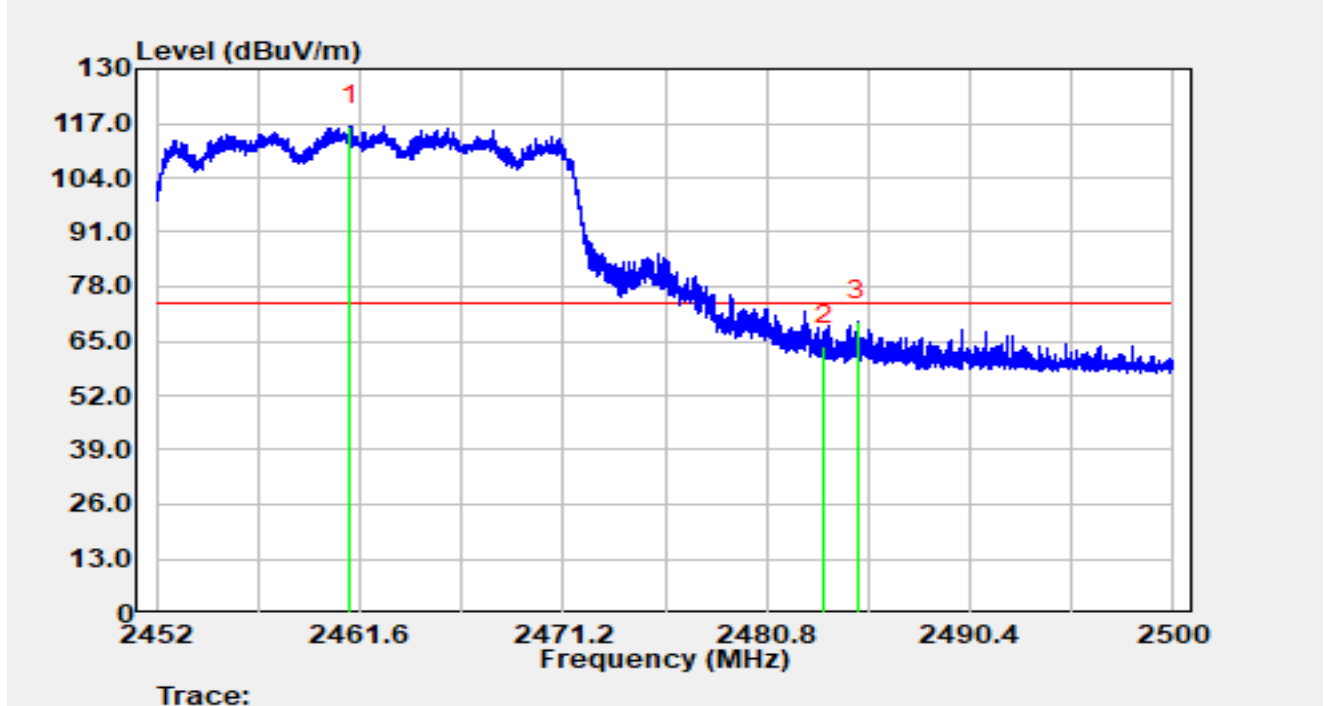


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2461.16         | 86.59          | 29.71      | 116.30               | N/A         | N/A            | Peak     |
| 2  |      | 2483.50         | 34.01          | 29.76      | 63.77                | -10.23      | 74.00          | Peak     |
| 3  | *    | 2485.09         | 40.13          | 29.77      | 69.90                | -4.10       | 74.00          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-15     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11be-EHT20 at 2462 MHz          |               |                |

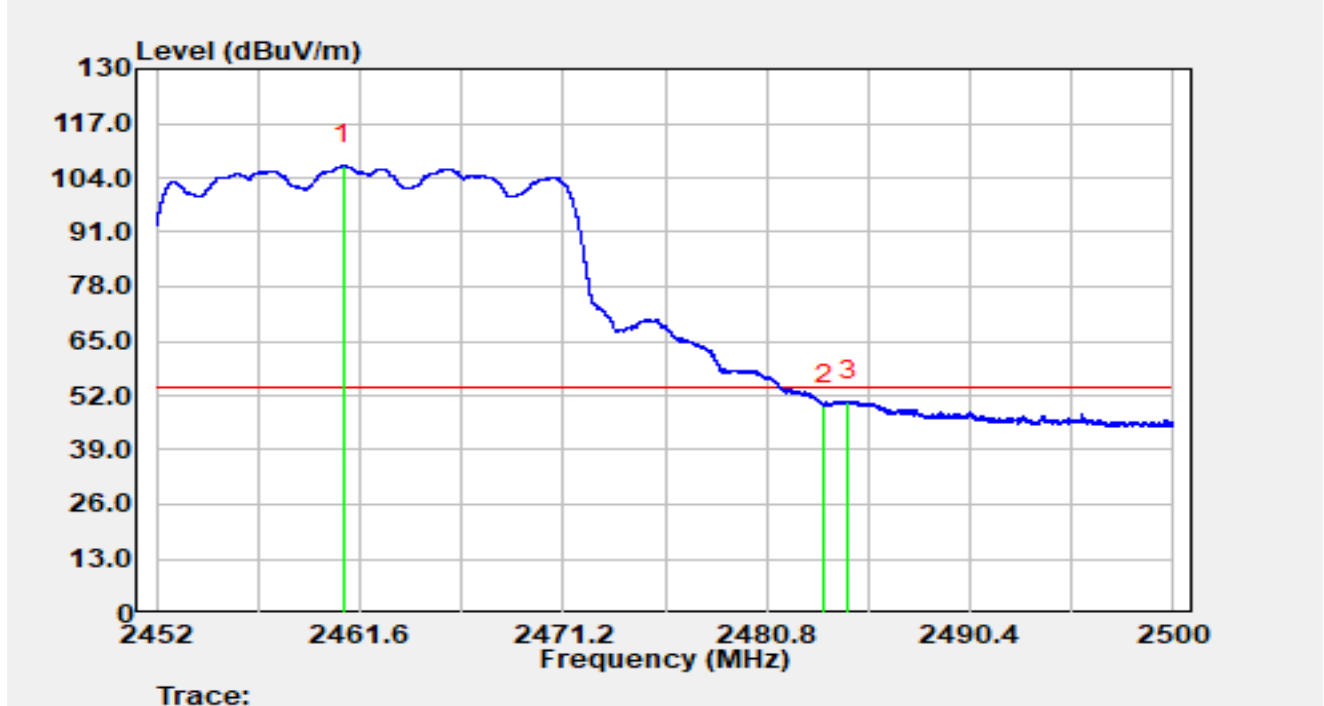


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2460.84         | 77.25          | 29.71      | 106.96               | N/A         | N/A            | Average  |
| 2  |      | 2483.50         | 19.82          | 29.76      | 49.58                | -4.42       | 54.00          | Average  |
| 3  | *    | 2484.65         | 20.95          | 29.77      | 50.71                | -3.29       | 54.00          | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-15     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11be-EHT20 at 2462 MHz          |               |                |

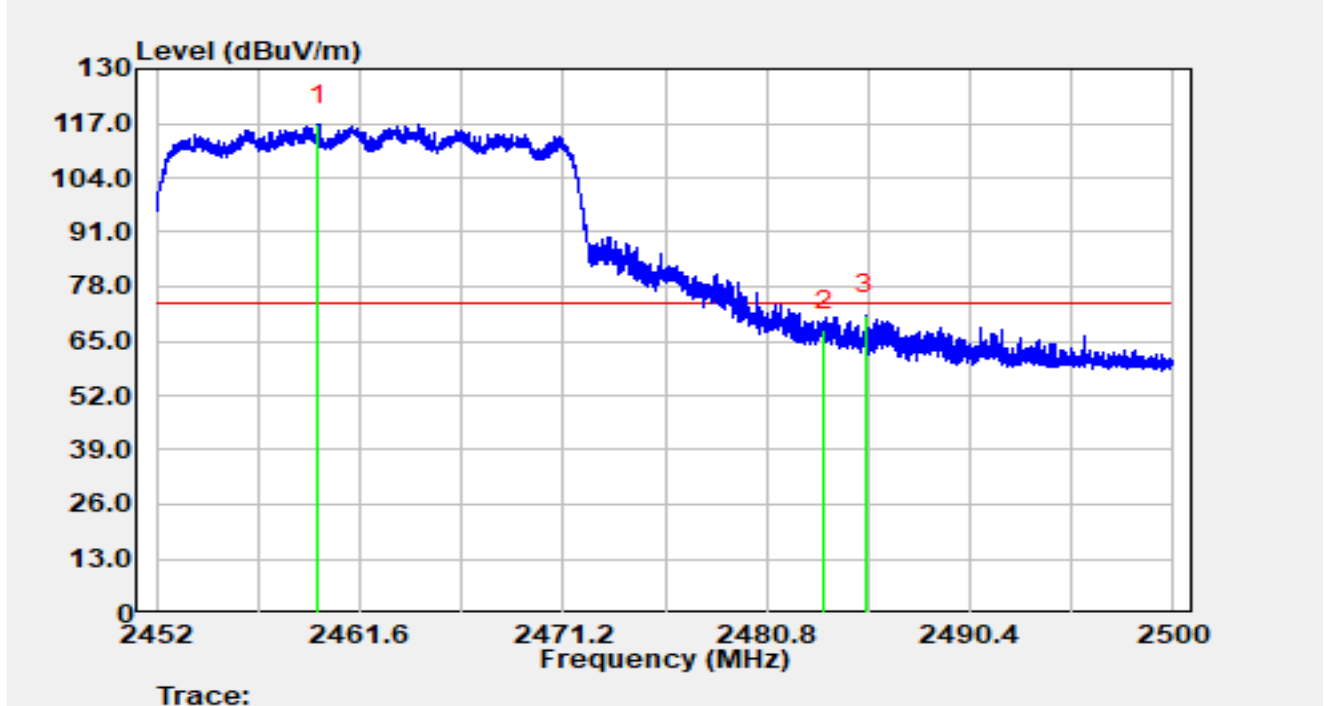


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2459.65         | 87.02          | 29.71      | 116.72               | N/A         | N/A            | Peak     |
| 2  |      | 2483.50         | 37.75          | 29.76      | 67.51                | -6.49       | 74.00          | Peak     |
| 3  | *    | 2485.47         | 41.45          | 29.77      | 71.22                | -2.78       | 74.00          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-15     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11be-EHT20 at 2462 MHz          |               |                |

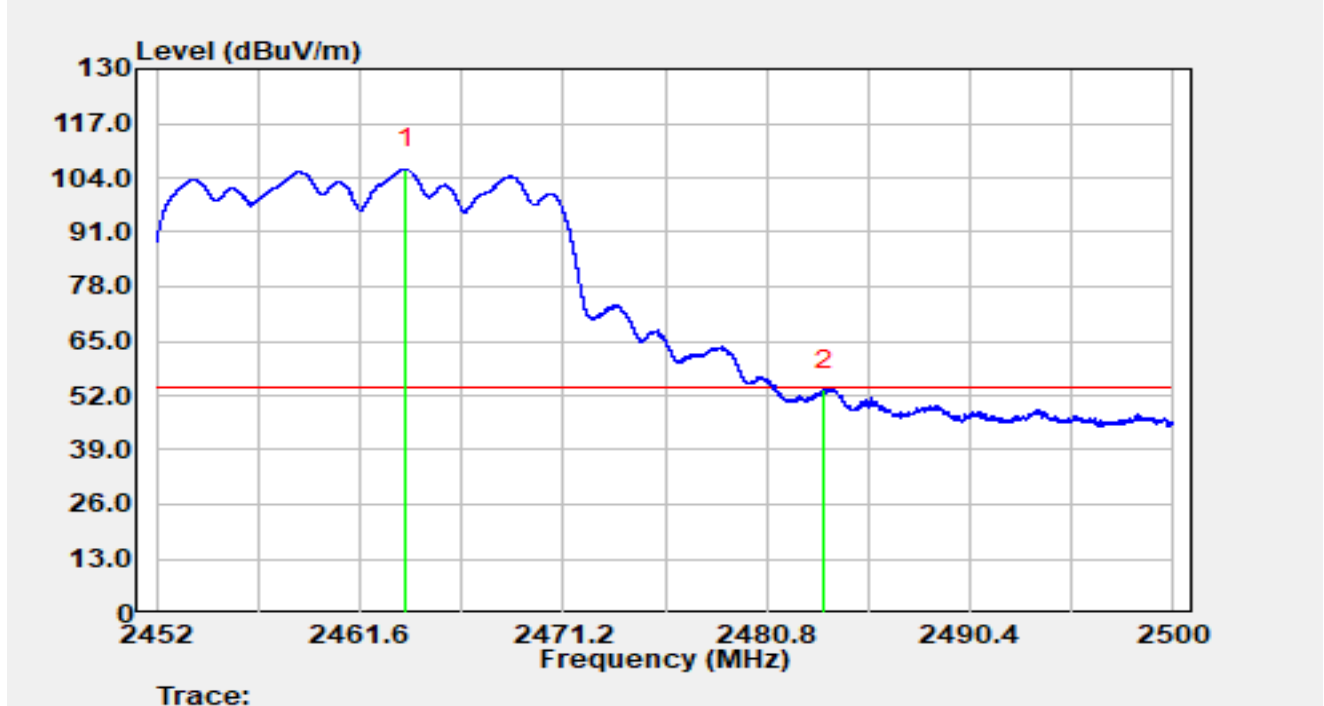


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2463.77         | 76.34          | 29.71      | 106.05               | N/A         | N/A            | Average  |
| 2  | *    | 2483.50         | 23.70          | 29.76      | 53.46                | -0.54       | 54.00          | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-15     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11be-EHT40 at 2422 MHz          |               |                |

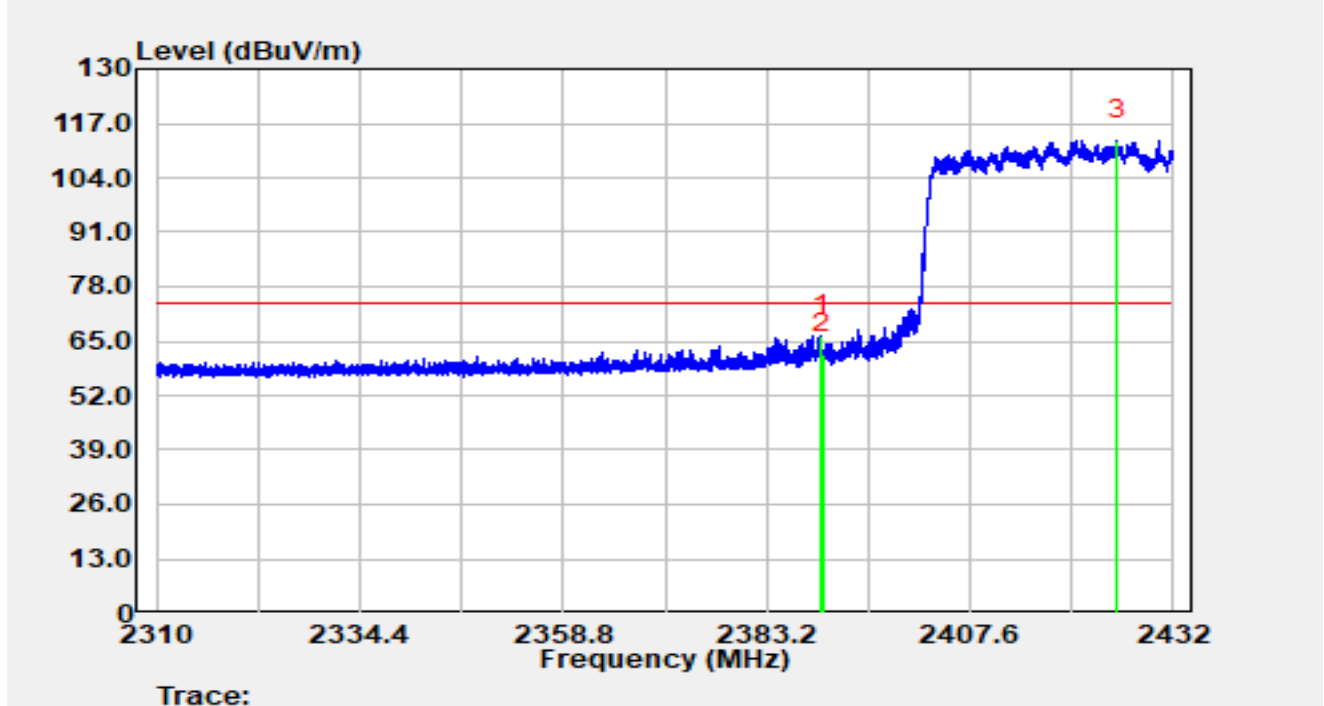


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2389.80         | 36.87          | 29.59      | 66.46                | -7.54       | 74.00          | Peak     |
| 2  |      | 2390.00         | 32.31          | 29.59      | 61.90                | -12.10      | 74.00          | Peak     |
| 3  |      | 2425.23         | 83.28          | 29.64      | 112.92               | N/A         | N/A            | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-15     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11be-EHT40 at 2422 MHz          |               |                |

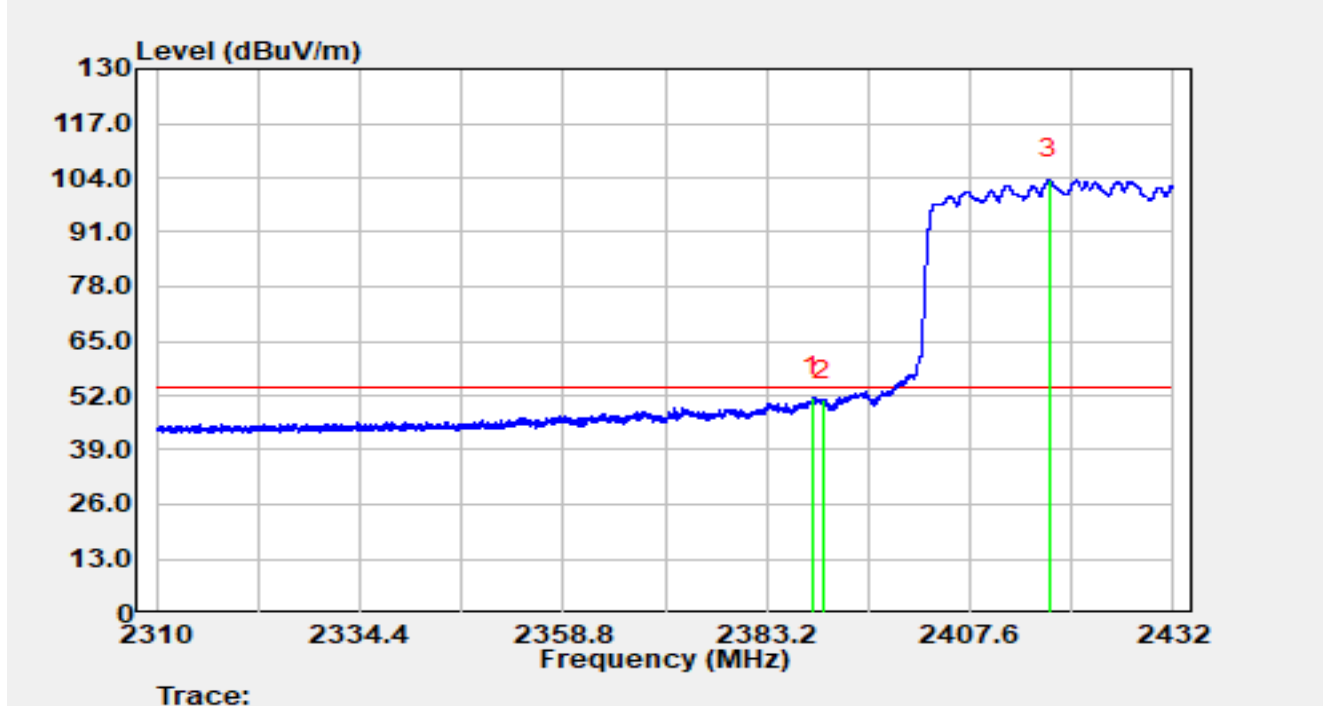


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2388.73         | 21.95          | 29.59      | 51.54                | -2.46       | 54.00          | Average  |
| 2  |      | 2390.00         | 21.36          | 29.59      | 50.95                | -3.05       | 54.00          | Average  |
| 3  |      | 2417.13         | 73.98          | 29.63      | 103.61               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-15     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11be-EHT40 at 2422 MHz          |               |                |

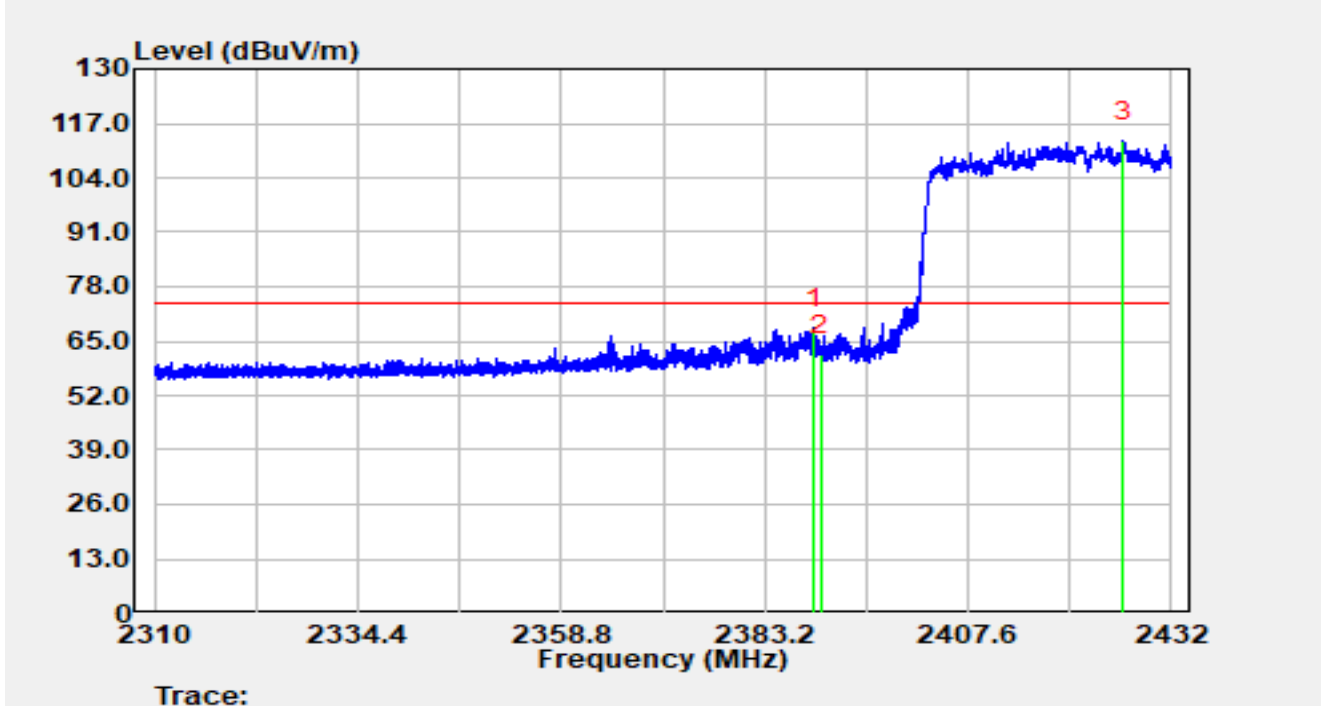


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2389.15         | 38.60          | 29.59      | 68.19                | -5.81       | 74.00          | Peak     |
| 2  |      | 2390.00         | 32.15          | 29.59      | 61.74                | -12.26      | 74.00          | Peak     |
| 3  |      | 2426.19         | 83.01          | 29.65      | 112.66               | N/A         | N/A            | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-15     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11be-EHT40 at 2422 MHz          |               |                |

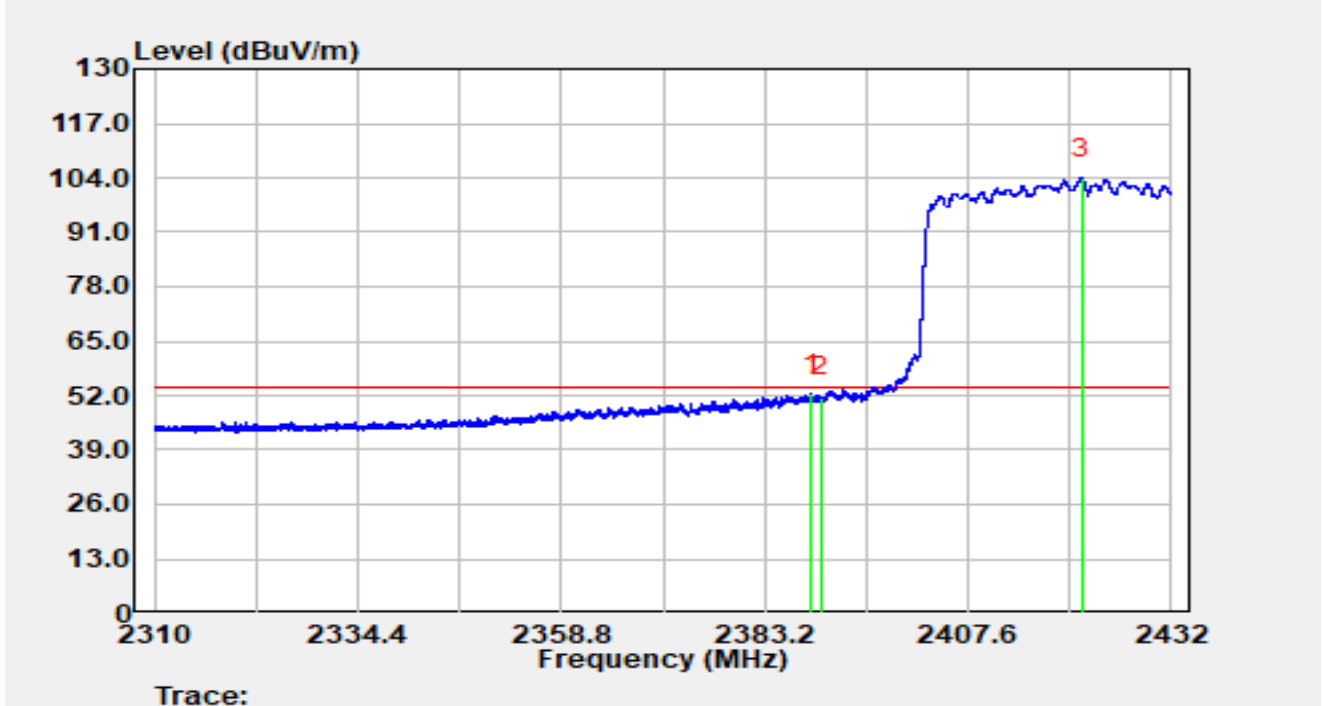


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2388.80         | 22.74          | 29.59      | 52.32                | -1.68       | 54.00          | Average  |
| 2  |      | 2390.00         | 22.01          | 29.59      | 51.60                | -2.40       | 54.00          | Average  |
| 3  |      | 2421.18         | 74.28          | 29.63      | 103.91               | N/A         | N/A            | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-15     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11be-EHT40 at 2437 MHz          |               |                |

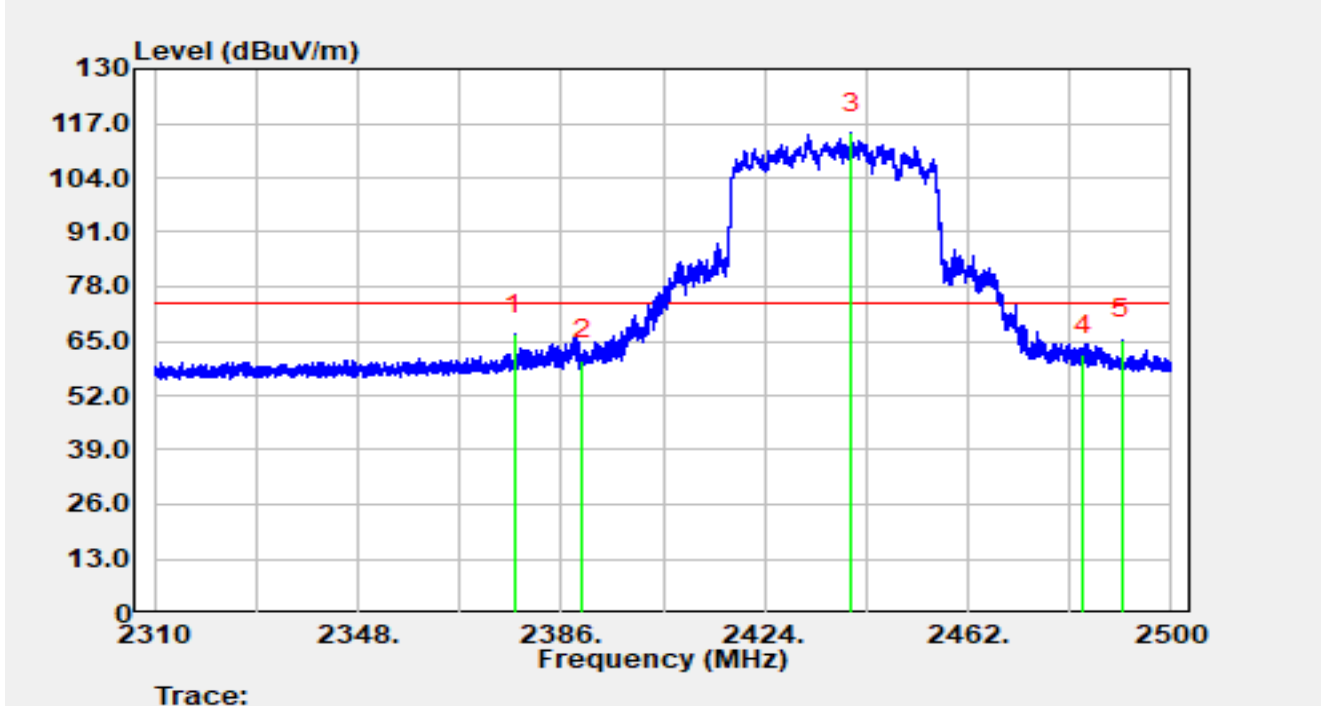


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2377.26         | 36.98          | 29.56      | 66.54                | -7.46       | 74.00          | Peak     |
| 2  |      | 2390.00         | 30.83          | 29.59      | 60.42                | -13.58      | 74.00          | Peak     |
| 3  |      | 2440.11         | 84.87          | 29.68      | 114.56               | N/A         | N/A            | Peak     |
| 4  |      | 2483.50         | 31.88          | 29.76      | 61.64                | -12.36      | 74.00          | Peak     |
| 5  |      | 2490.71         | 35.59          | 29.79      | 65.38                | -8.62       | 74.00          | Peak     |

#### Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-15     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11be-EHT40 at 2437 MHz          |               |                |

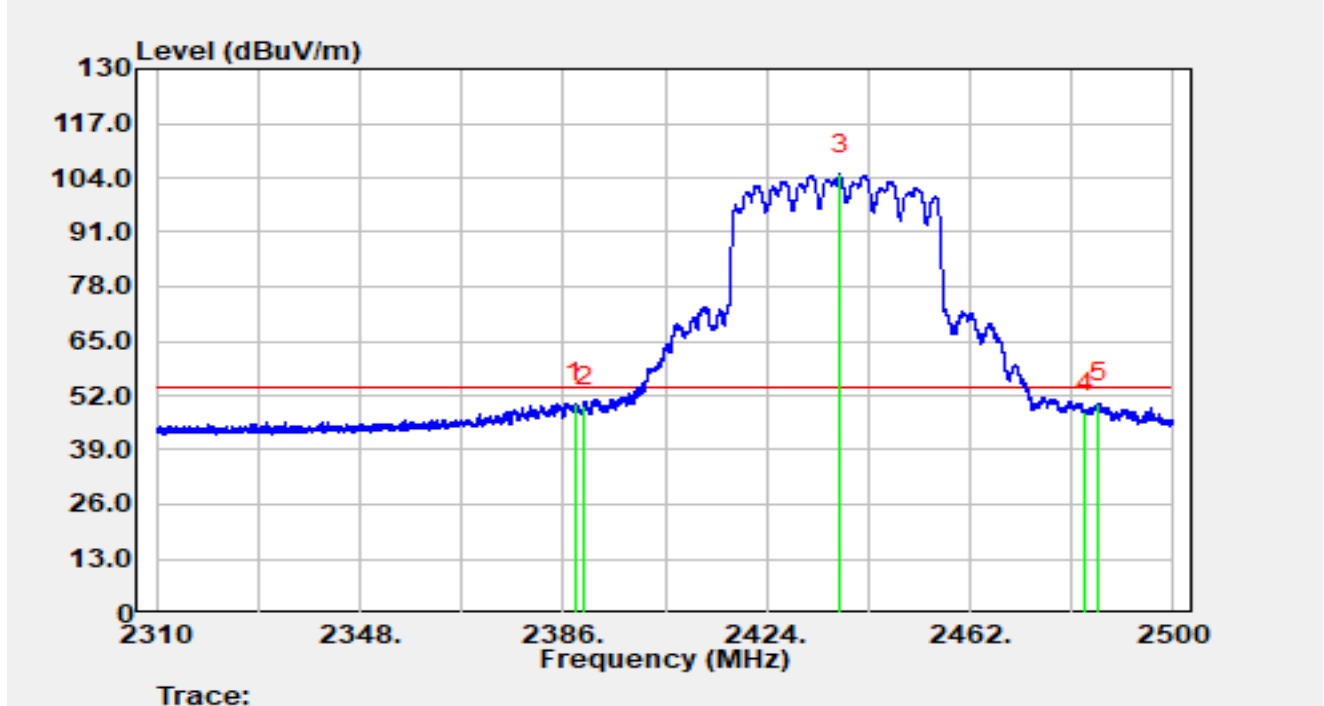


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  | *    | 2388.13         | 20.67          | 29.58      | 50.25                | -3.75       | 54.00          | Average  |
| 2  |      | 2390.00         | 19.78          | 29.59      | 49.37                | -4.63       | 54.00          | Average  |
| 3  |      | 2437.62         | 75.09          | 29.68      | 104.76               | N/A         | N/A            | Average  |
| 4  |      | 2483.50         | 18.09          | 29.76      | 47.85                | -6.15       | 54.00          | Average  |
| 5  |      | 2486.00         | 20.42          | 29.77      | 50.19                | -3.81       | 54.00          | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-15     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11be-EHT40 at 2437 MHz          |               |                |

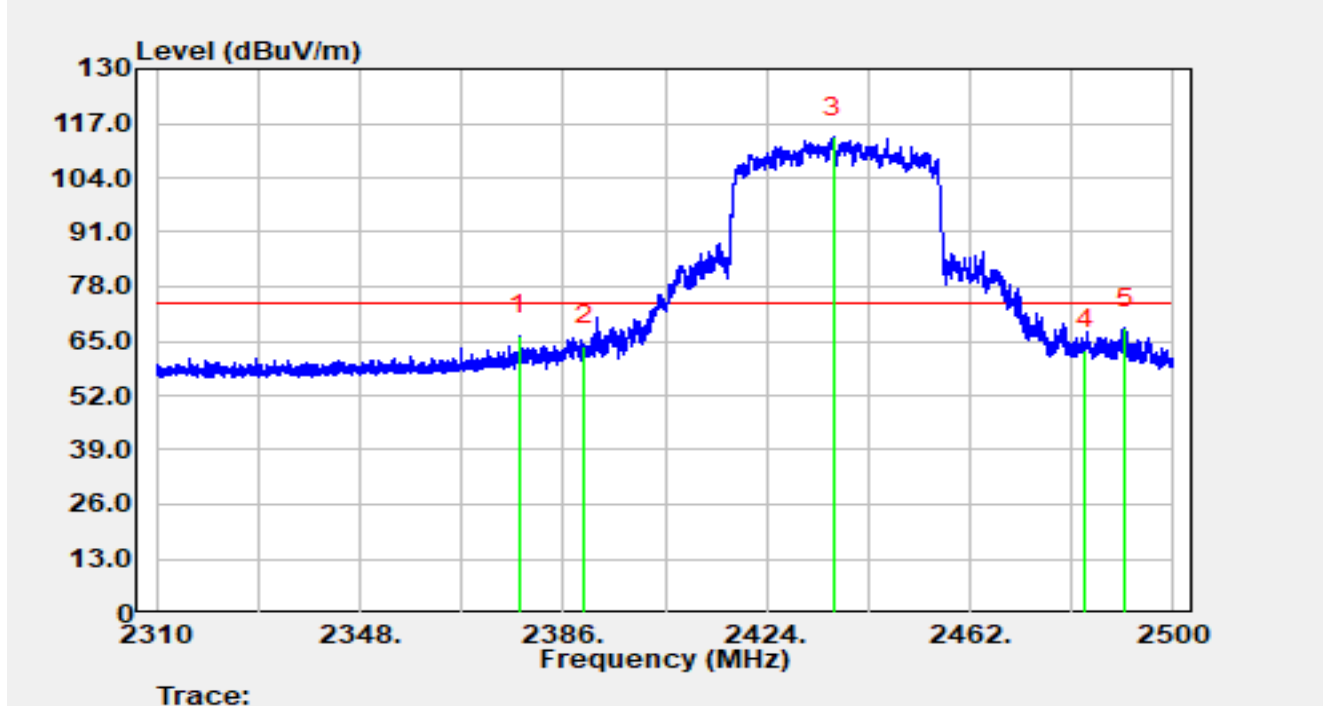


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2377.77         | 36.90          | 29.56      | 66.47                | -7.53       | 74.00          | Peak     |
| 2  |      | 2390.00         | 34.42          | 29.59      | 64.01                | -9.99       | 74.00          | Peak     |
| 3  |      | 2436.46         | 84.07          | 29.67      | 113.75               | N/A         | N/A            | Peak     |
| 4  |      | 2483.50         | 33.03          | 29.76      | 62.79                | -11.21      | 74.00          | Peak     |
| 5  | *    | 2490.96         | 38.24          | 29.79      | 68.03                | -5.97       | 74.00          | Peak     |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-15     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11be-EHT40 at 2437 MHz          |               |                |

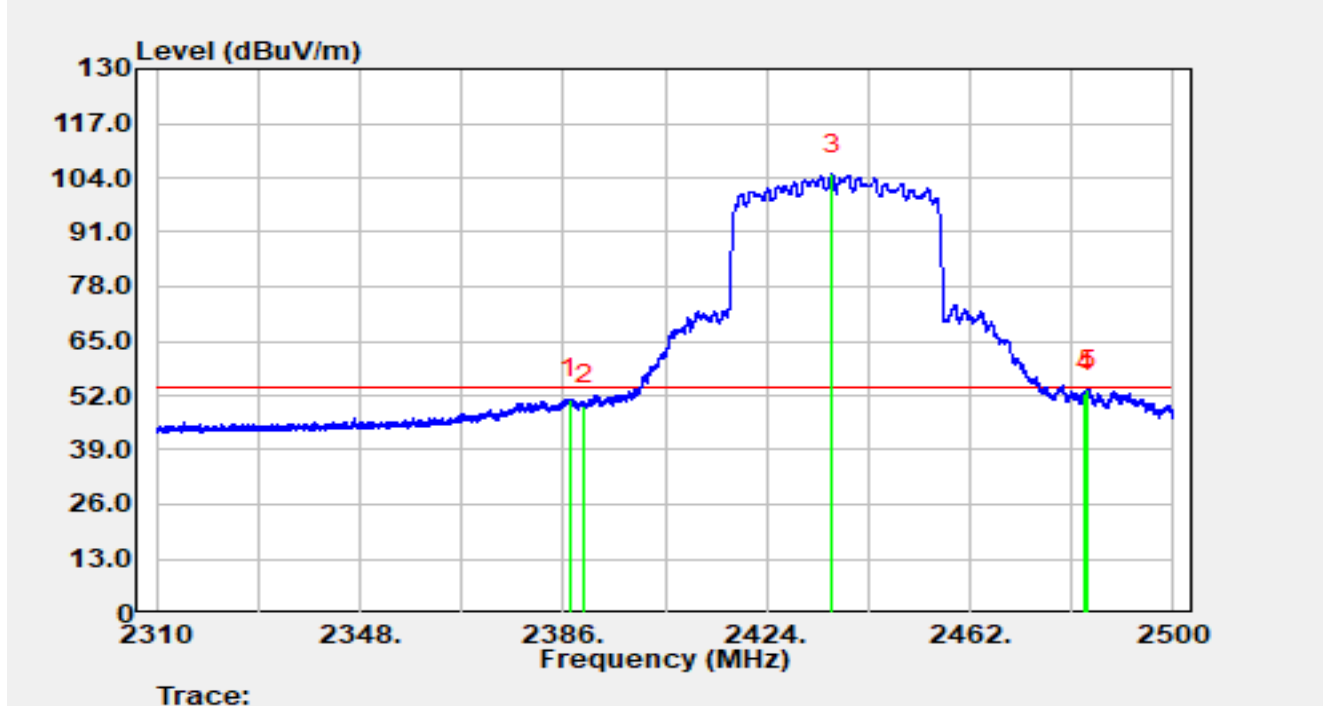


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2387.14         | 21.56          | 29.58      | 51.14                | -2.86       | 54.00          | Average  |
| 2  |      | 2390.00         | 19.96          | 29.59      | 49.55                | -4.45       | 54.00          | Average  |
| 3  |      | 2436.18         | 75.20          | 29.67      | 104.87               | N/A         | N/A            | Average  |
| 4  |      | 2483.50         | 22.93          | 29.76      | 52.70                | -1.30       | 54.00          | Average  |
| 5  | *    | 2484.06         | 23.54          | 29.77      | 53.31                | -0.69       | 54.00          | Average  |

#### Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-15     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11be-EHT40 at 2452 MHz          |               |                |

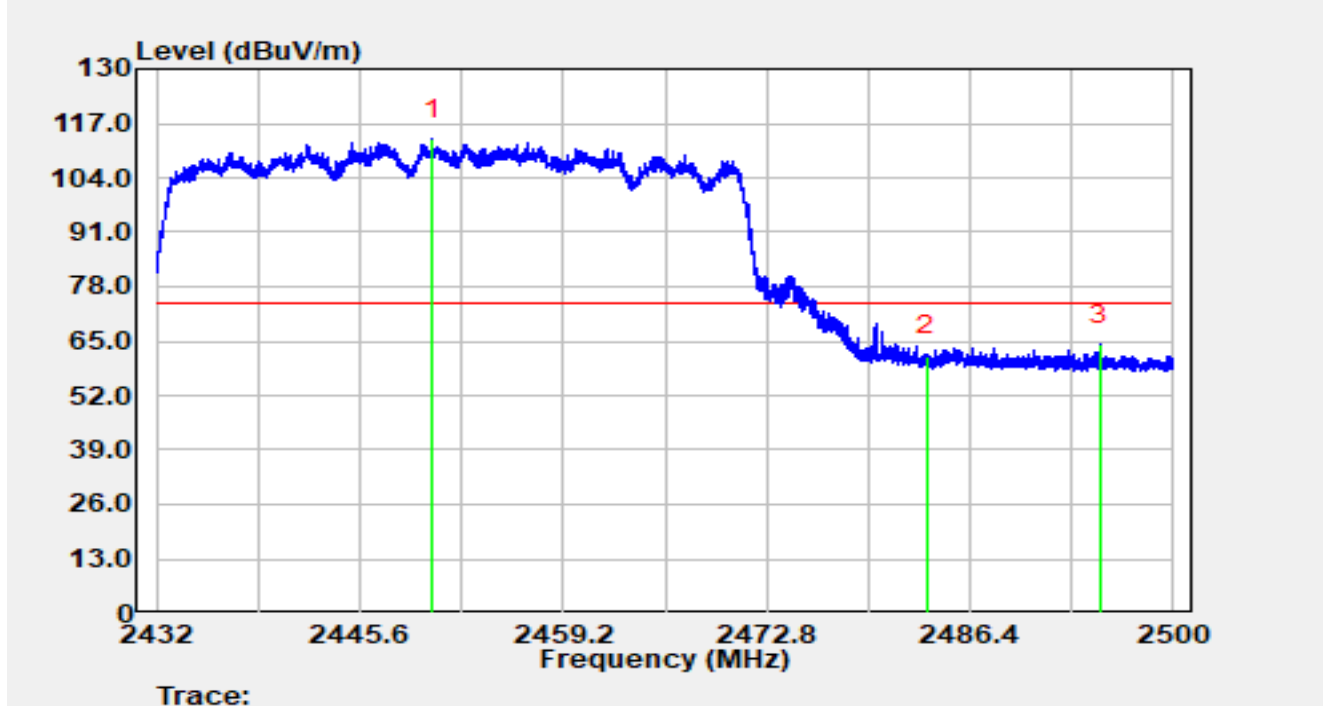


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2450.44         | 83.48          | 29.69      | 113.18               | N/A         | N/A            | Peak     |
| 2  |      | 2483.50         | 31.63          | 29.76      | 61.40                | -12.60      | 74.00          | Peak     |
| 3  | *    | 2495.11         | 34.41          | 29.79      | 64.20                | -9.80       | 74.00          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-15     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Horizontal     |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11be-EHT40 at 2452 MHz          |               |                |

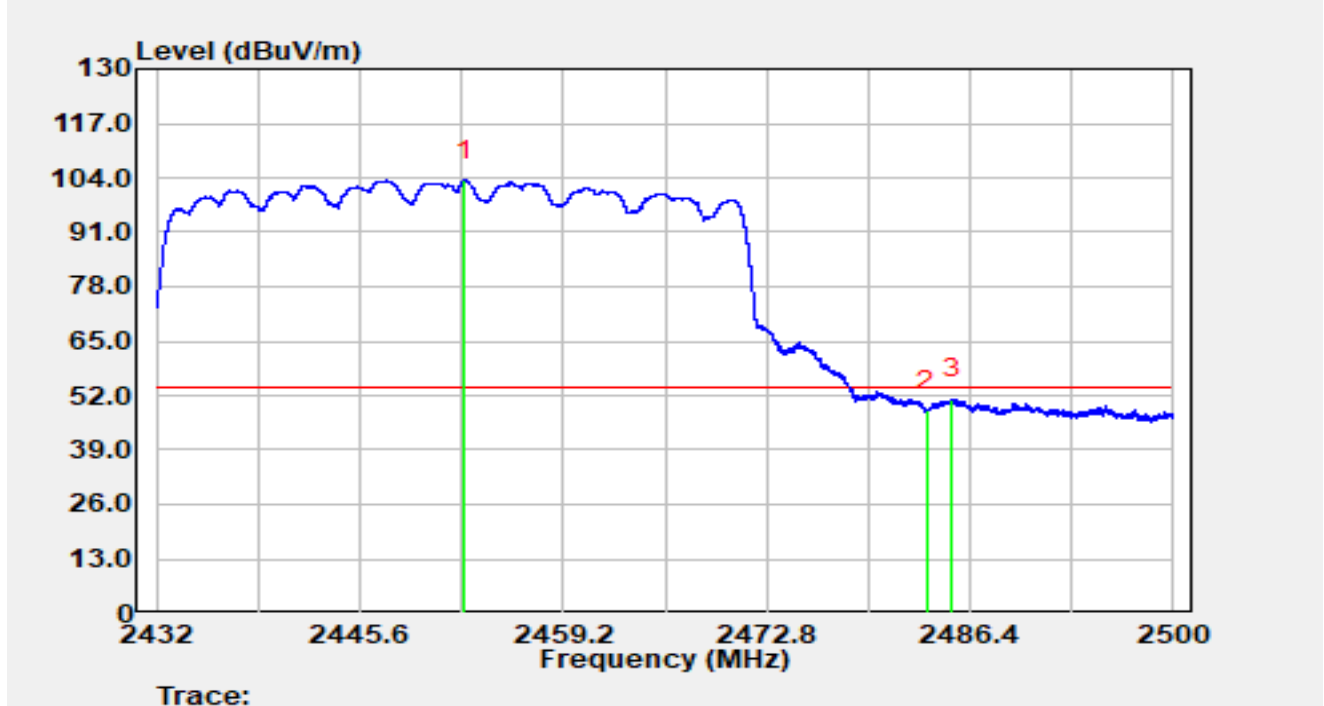


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2452.64         | 73.75          | 29.70      | 103.45               | N/A         | N/A            | Average  |
| 2  |      | 2483.50         | 18.64          | 29.76      | 48.41                | -5.59       | 54.00          | Average  |
| 3  | *    | 2485.21         | 21.26          | 29.77      | 51.03                | -2.97       | 54.00          | Average  |

Notes:

1. “\*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-15     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11be-EHT40 at 2452 MHz          |               |                |

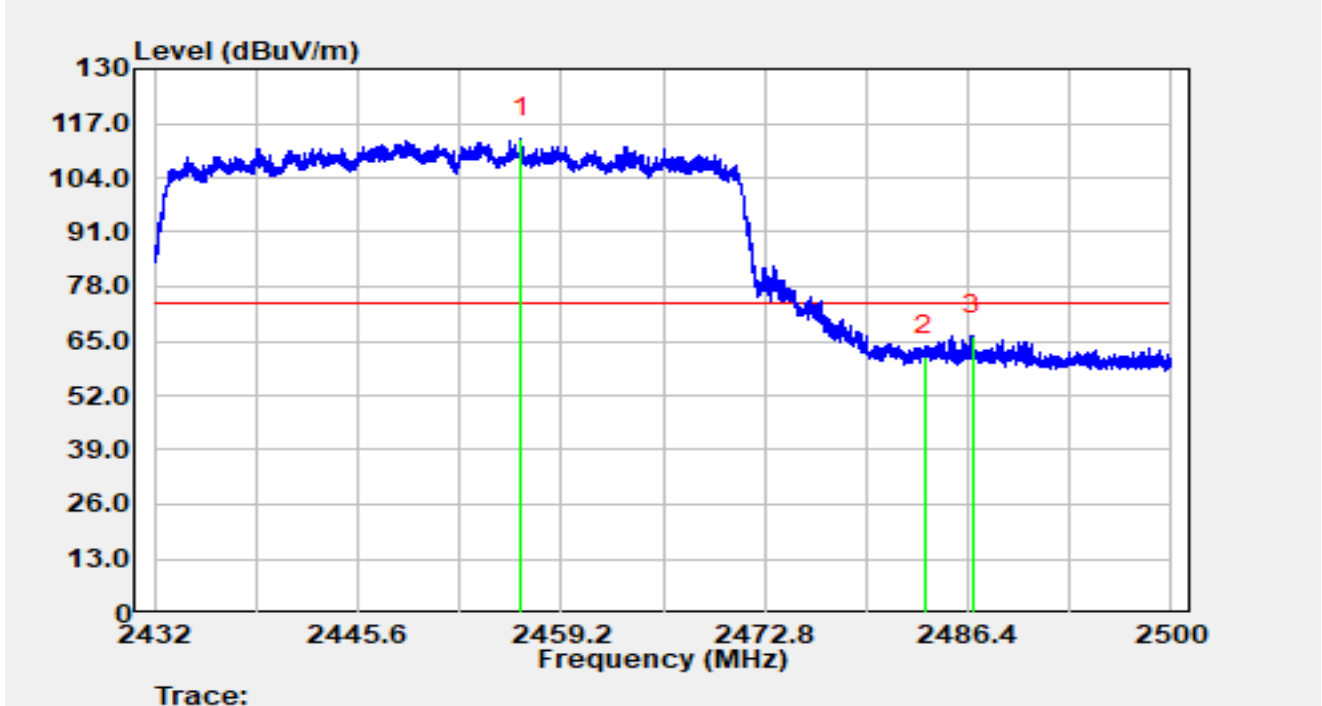


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2456.51         | 83.70          | 29.70      | 113.40               | N/A         | N/A            | Peak     |
| 2  |      | 2483.50         | 31.72          | 29.76      | 61.48                | -12.52      | 74.00          | Peak     |
| 3  | *    | 2486.67         | 36.51          | 29.78      | 66.29                | -7.71       | 74.00          | Peak     |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBUV/m) = Reading (dBμV) + C.F (dB/m).

|             |                                                 |               |                |
|-------------|-------------------------------------------------|---------------|----------------|
| Site        | WJ-AC2                                          | Test Date     | 2025-08-15     |
| Temperature | 27.0 °C                                         | Humidity      | 60.9%          |
| Limit       | FCC_Part 15_Band Edge (3 m)                     | Test Engineer | Bob Zhang      |
| Factor      | DRH18-E_07105                                   | Polarity      | Vertical       |
| EUT         | Dual-Band Wireless BE7200 2.5G Ethernet Gateway | Test Voltage  | AC 120 V/60 Hz |
| Test Mode   | Transmit by 802.11be-EHT40 at 2452 MHz          |               |                |

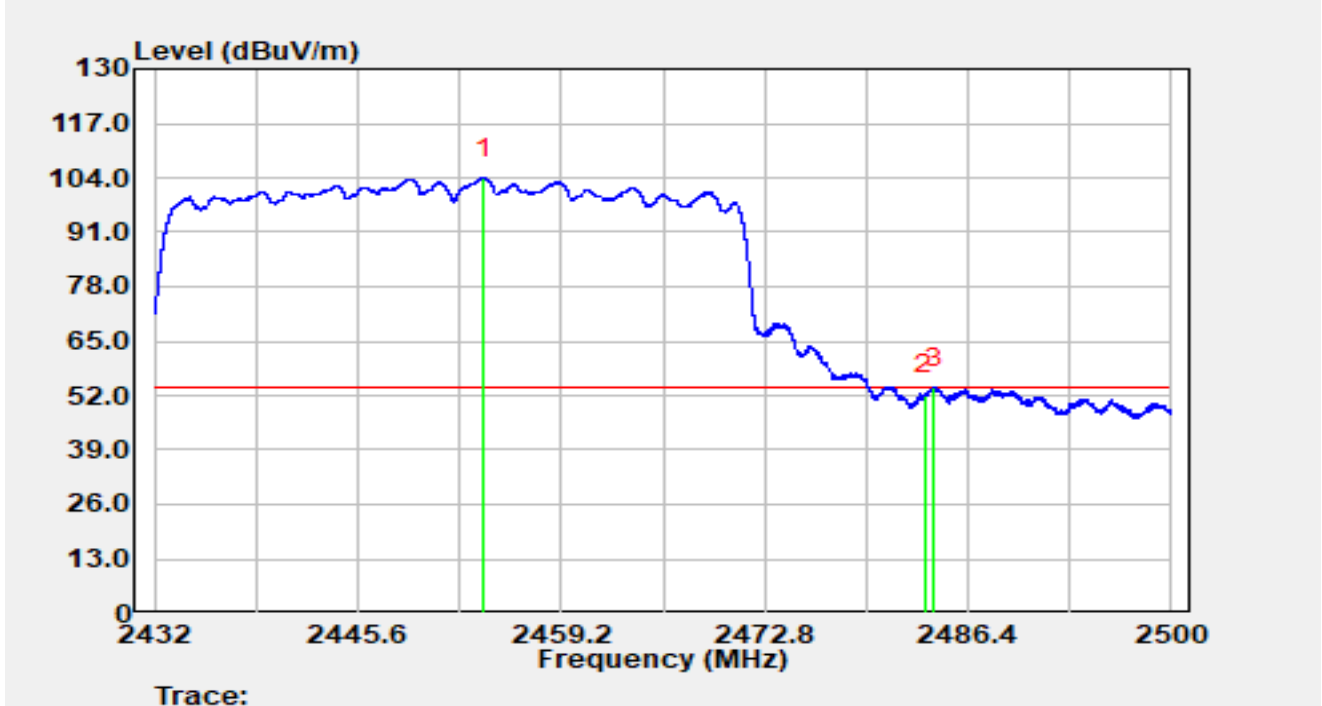


| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB/m) | Measurement (dBμV/m) | Margin (dB) | Limit (dBμV/m) | Detector |
|----|------|-----------------|----------------|------------|----------------------|-------------|----------------|----------|
| 1  |      | 2454.02         | 74.27          | 29.70      | 103.97               | N/A         | N/A            | Average  |
| 2  |      | 2483.50         | 22.33          | 29.76      | 52.09                | -1.91       | 54.00          | Average  |
| 3  | *    | 2484.14         | 24.09          | 29.77      | 53.86                | -0.14       | 54.00          | Average  |

Notes:

1. “ \* ” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

### A.8 AC Conducted Emissions Test Result

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WJ-SR5                          | Test Date     | 2025-09-05 |
| Temperature  | 29.7 °C                         | Humidity      | 48.0%      |
| Limit        | FCC Part 15.207_CE              | Test Engineer | Carl Jiang |
| Test Voltage | 120 V/60 Hz                     | Polarity      | Line       |
| Test Mode    | Transmit by 802.11b at 2437 MHz |               |            |

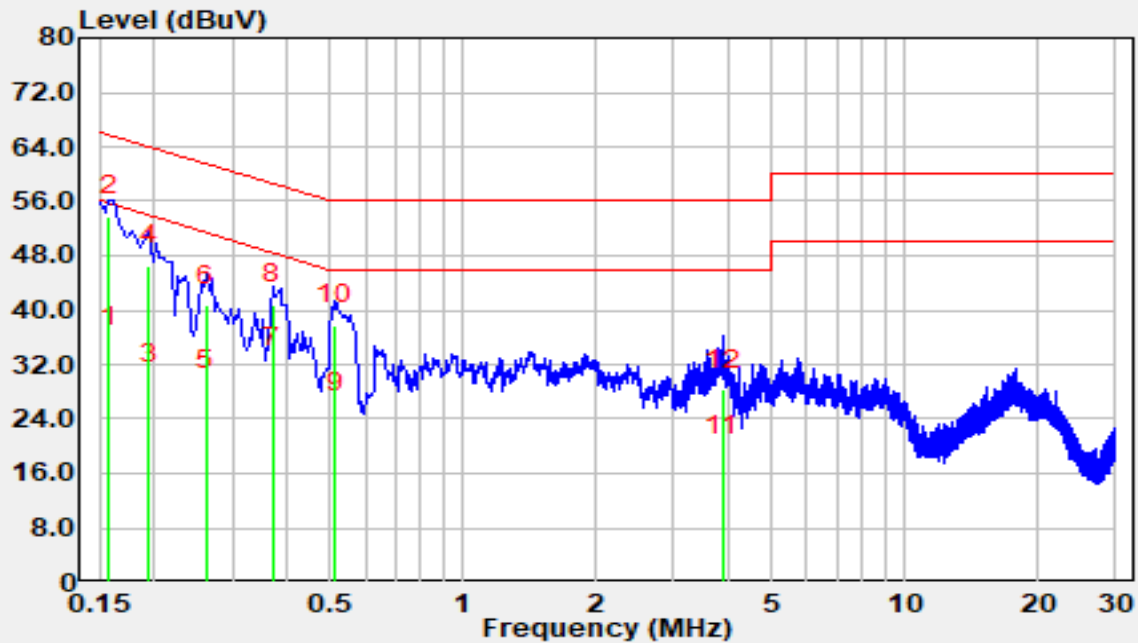


Trace:

| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB) | Measurement (dBμV) | Margin (dB) | Limit (dBμV) | Detector |
|----|------|-----------------|----------------|----------|--------------------|-------------|--------------|----------|
| 1  |      | 0.16            | 24.60          | 9.91     | 34.51              | -21.06      | 55.57        | Average  |
| 2  | *    | 0.16            | 43.90          | 9.91     | 53.81              | -11.76      | 65.57        | QP       |
| 3  |      | 0.19            | 19.10          | 9.91     | 29.01              | -24.85      | 53.86        | Average  |
| 4  |      | 0.19            | 36.70          | 9.91     | 46.61              | -17.25      | 63.86        | QP       |
| 5  |      | 0.26            | 18.30          | 9.93     | 28.23              | -23.14      | 51.37        | Average  |
| 6  |      | 0.26            | 30.70          | 9.93     | 40.63              | -20.74      | 61.37        | QP       |
| 7  |      | 0.37            | 21.50          | 9.95     | 31.45              | -17.05      | 48.50        | Average  |
| 8  |      | 0.37            | 30.90          | 9.95     | 40.85              | -17.65      | 58.50        | QP       |
| 9  |      | 0.51            | 14.90          | 10.00    | 24.90              | -21.10      | 46.00        | Average  |
| 10 |      | 0.51            | 27.80          | 10.00    | 37.80              | -18.20      | 56.00        | QP       |
| 11 |      | 3.87            | 8.20           | 10.33    | 18.53              | -27.47      | 46.00        | Average  |
| 12 |      | 3.87            | 18.00          | 10.33    | 28.33              | -27.67      | 56.00        | QP       |

#### Notes:

- "\*" indicates the worst-case emission level observed during the measurement.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
- Measurement (dBμV) = Reading (dBμV) + C.F (dB).

|              |                                 |               |            |
|--------------|---------------------------------|---------------|------------|
| Site         | WJ-SR5                          | Test Date     | 2025-09-05 |
| Temperature  | 29.7 °C                         | Humidity      | 48.0%      |
| Limit        | FCC Part 15.207_CE              | Test Engineer | Carl Jiang |
| Test Voltage | 120 V/60 Hz                     | Polarity      | Neutral    |
| Test Mode    | Transmit by 802.11b at 2437 MHz |               |            |

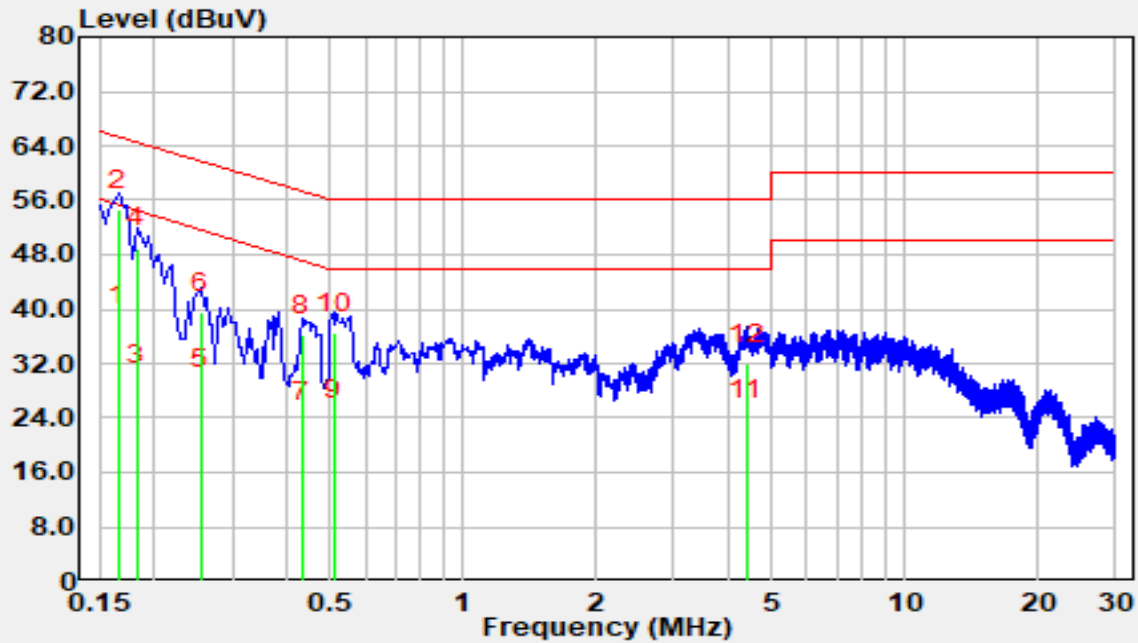

Trace:

| No | Mark | Frequency (MHz) | Reading (dBμV) | C.F (dB) | Measurement (dBμV) | Margin (dB) | Limit (dBμV) | Detector |
|----|------|-----------------|----------------|----------|--------------------|-------------|--------------|----------|
| 1  |      | 0.17            | 27.60          | 9.87     | 37.47              | -17.69      | 55.16        | Average  |
| 2  | *    | 0.17            | 44.70          | 9.87     | 54.57              | -10.59      | 65.16        | QP       |
| 3  |      | 0.18            | 19.10          | 9.88     | 28.98              | -25.42      | 54.39        | Average  |
| 4  |      | 0.18            | 39.10          | 9.88     | 48.98              | -15.42      | 64.39        | QP       |
| 5  |      | 0.25            | 18.40          | 9.90     | 28.30              | -23.32      | 51.63        | Average  |
| 6  |      | 0.25            | 29.50          | 9.90     | 39.40              | -22.22      | 61.63        | QP       |
| 7  |      | 0.43            | 13.50          | 9.98     | 23.48              | -23.78      | 47.25        | Average  |
| 8  |      | 0.43            | 26.10          | 9.98     | 36.08              | -21.18      | 57.25        | QP       |
| 9  |      | 0.51            | 13.80          | 10.01    | 23.81              | -22.19      | 46.00        | Average  |
| 10 |      | 0.51            | 26.40          | 10.01    | 36.41              | -19.59      | 56.00        | QP       |
| 11 |      | 4.39            | 13.20          | 10.43    | 23.63              | -22.37      | 46.00        | Average  |
| 12 |      | 4.39            | 21.50          | 10.43    | 31.93              | -24.07      | 56.00        | QP       |

Notes:

- "\*" indicates the worst-case emission level observed during the measurement.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
- Measurement (dBμV) = Reading (dBμV) + C.F (dB).

## **Appendix B - Test Setup Photograph**

Refer to “R25S1006089-UT” file.

## Appendix C - EUT Photograph

Refer to "R25S1006089-UE" file.

\_\_\_\_\_ The End \_\_\_\_\_