



BW: 320 MHz / Frequency: 6260 MHz

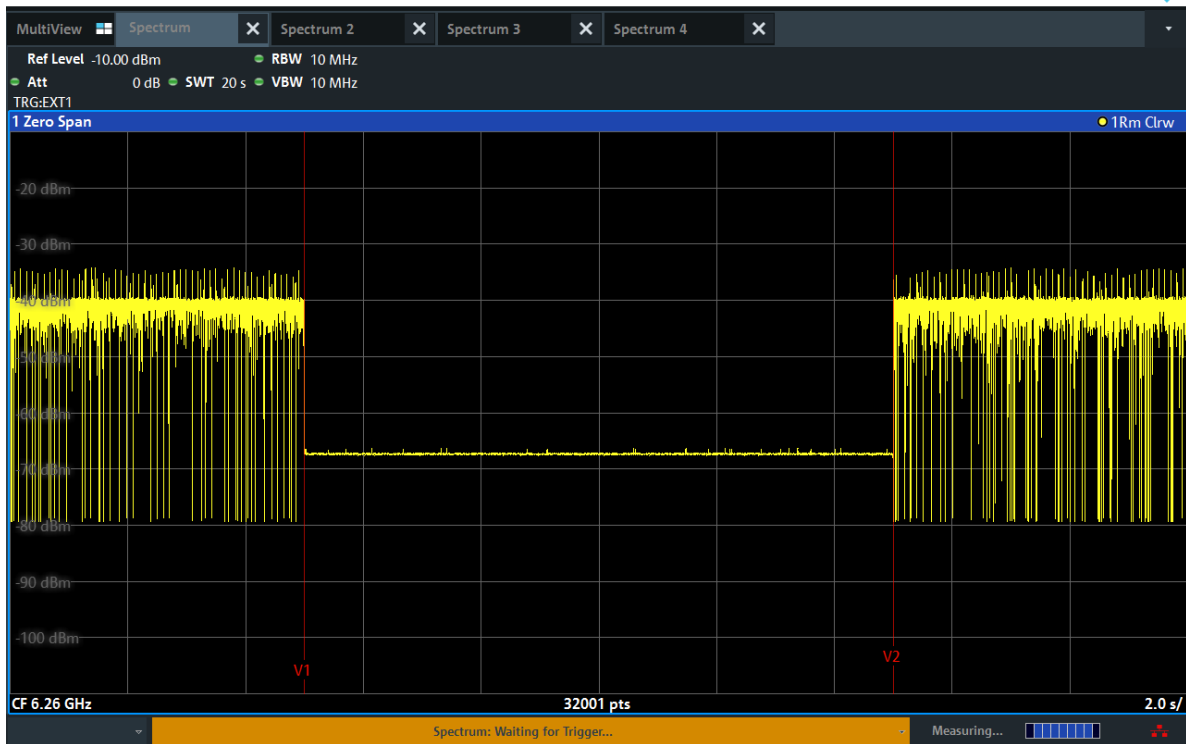


BW: 320 MHz / Frequency: 6270 MHz

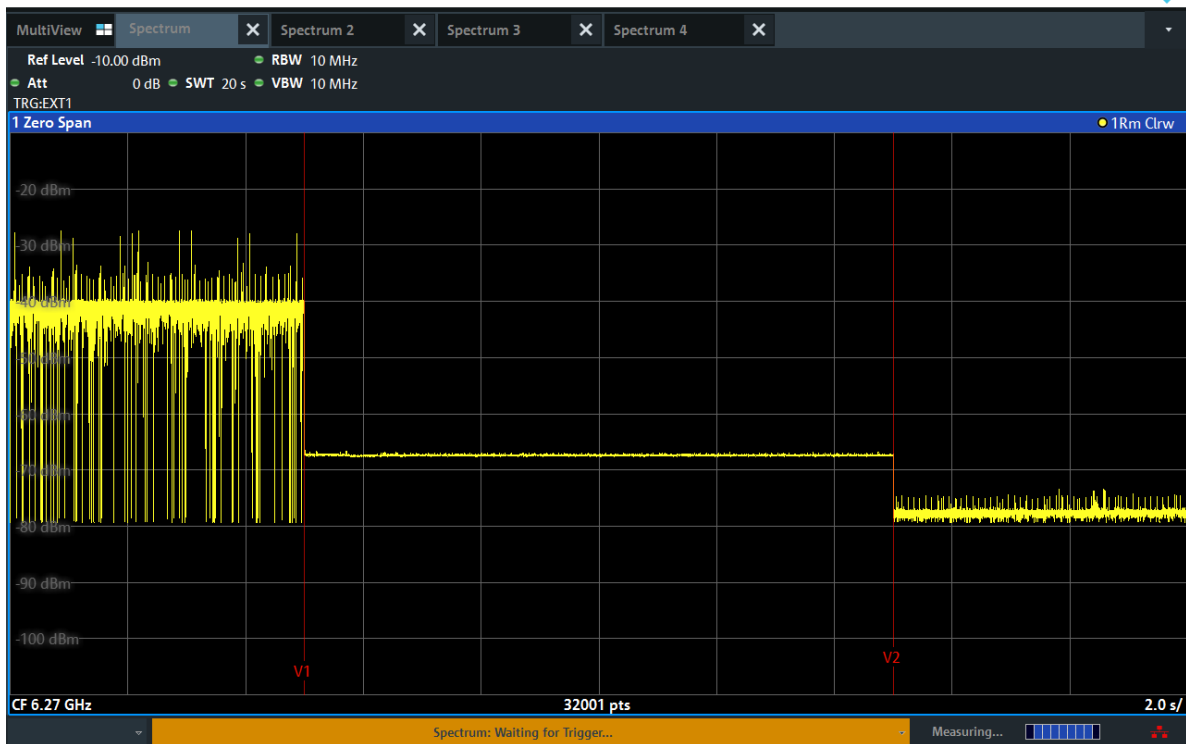

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

BW: 320 MHz / Frequency: 6430 MHz

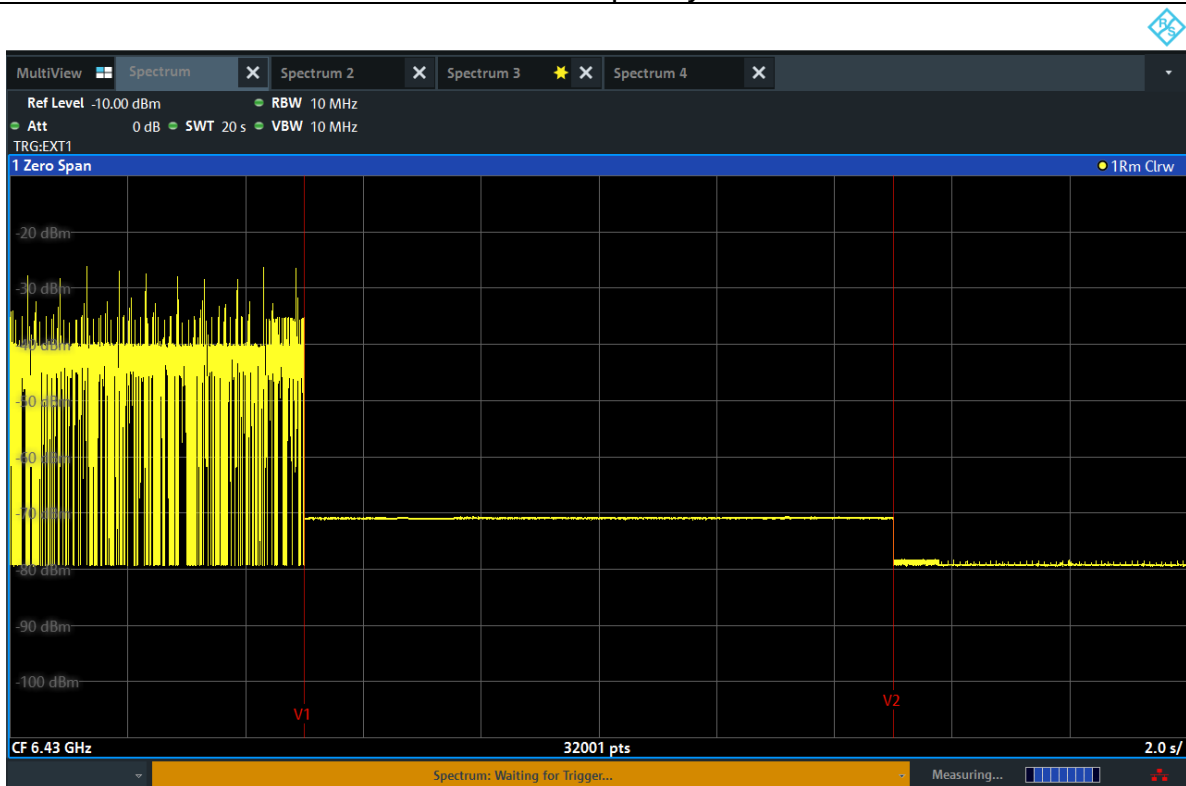


BW: 320 MHz / Frequency: 6580 MHz




Note: T1: AWGN signal is injected, T2: AWGN signal is removed.


BW: 320 MHz / Frequency: 6750 MHz

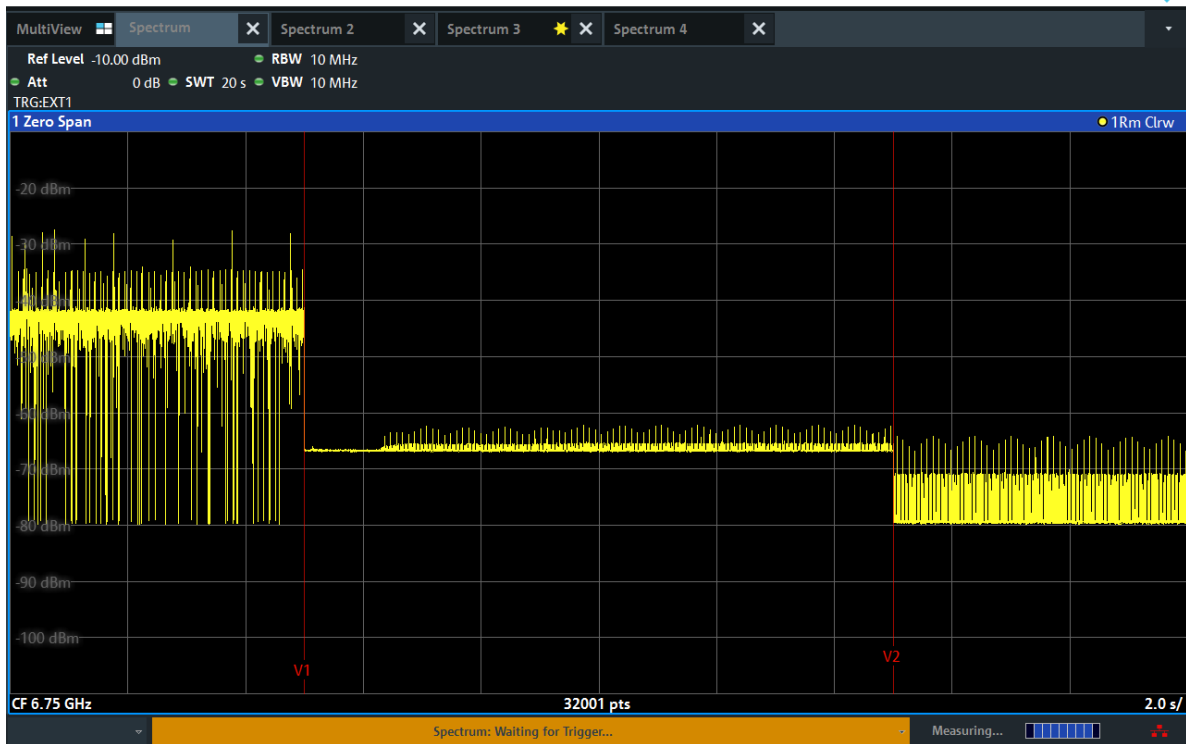

BW: 320 MHz / Frequency: 6910 MHz

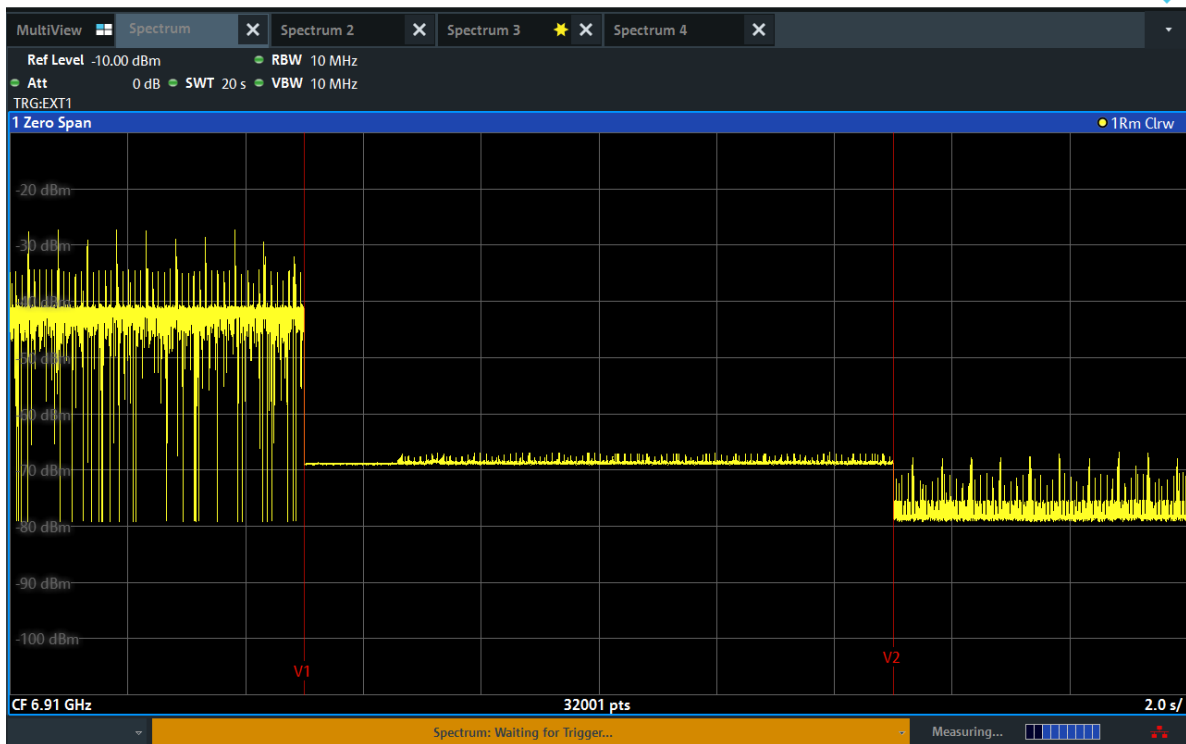

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.

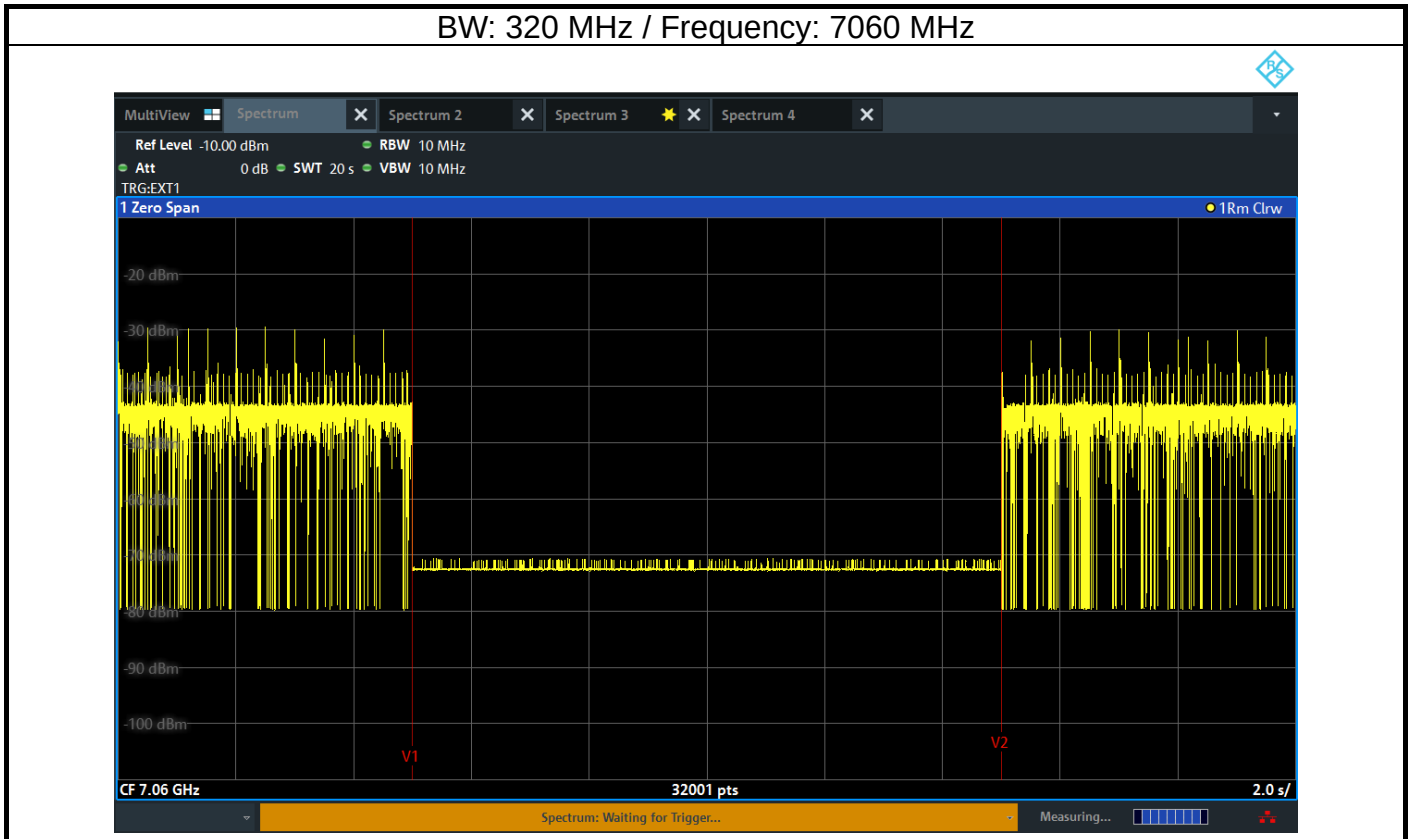

Note: T1: AWGN signal is injected, T2: AWGN signal is removed.




Modulation Mode	be EHT320	Test Freq. (MHz)	6265
Power Phase	Line		

Test by : Joe Liao

Temperature: 26°C

Humidity: 64%

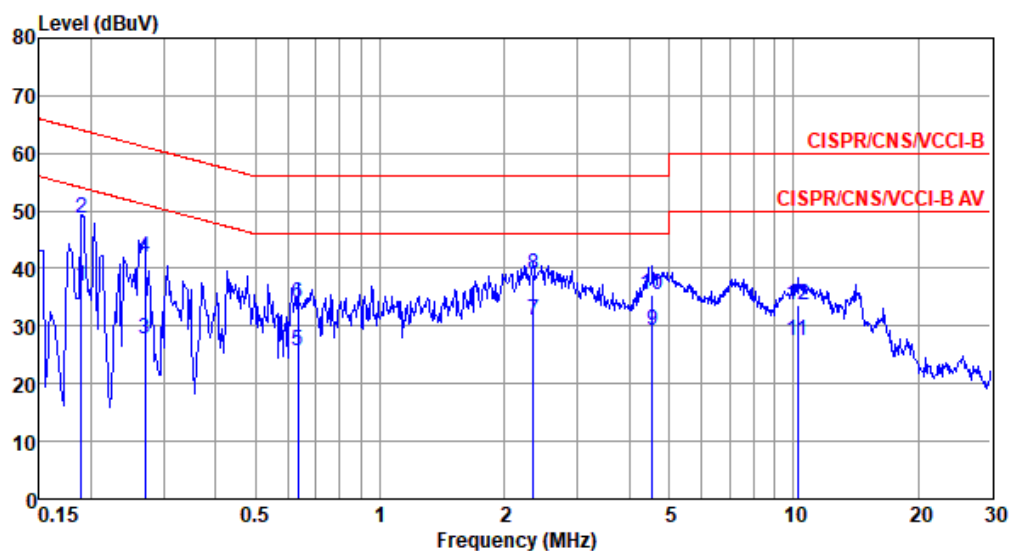

	Freq	Level	Limit	Over	Read	Factor	Cable	Aux	
	MHz	dBuV	Line	Limit	Level	dB	loss	dB	Remark
			dBuV	dB	dBuV				
1	0.189	36.95	54.06	-17.11	26.98	9.64	0.08	0.25	Average
2	0.189	48.58	64.06	-15.48	38.61	9.64	0.08	0.25	QP
3	0.270	27.70	51.12	-23.42	17.69	9.64	0.08	0.29	Average
4	0.270	42.06	61.12	-19.06	32.05	9.64	0.08	0.29	QP
5	0.634	25.81	46.00	-20.19	15.72	9.64	0.09	0.36	Average
6	0.634	34.06	56.00	-21.94	23.97	9.64	0.09	0.36	QP
7*	2.346	31.12	46.00	-14.88	20.85	9.65	0.18	0.44	Average
8	2.346	38.87	56.00	-17.13	28.60	9.65	0.18	0.44	QP
9	4.549	29.35	46.00	-16.65	18.96	9.68	0.23	0.48	Average
10	4.549	35.33	56.00	-20.67	24.94	9.68	0.23	0.48	QP
11	10.233	27.60	50.00	-22.40	17.07	9.72	0.31	0.50	Average
12	10.233	33.63	60.00	-26.37	23.10	9.72	0.31	0.50	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).




Modulation Mode	be EHT320	Test Freq. (MHz)	6265
Power Phase	Neutral		

Test by : Joe Liao

Temperature: 26°C

Humidity: 64%

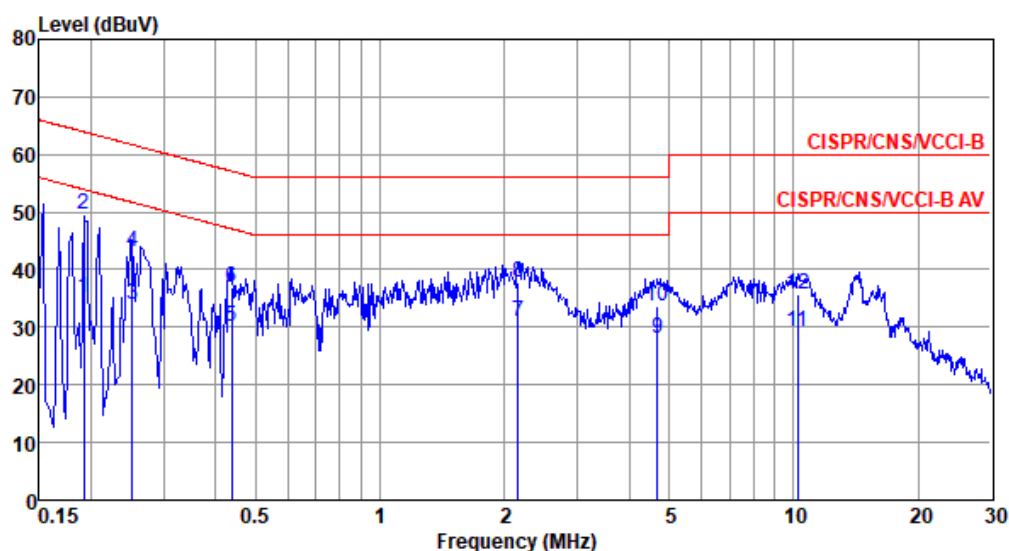

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.192	35.15	53.93	-18.78	25.24	9.64	0.08	0.19	Average
2*	0.192	49.46	63.93	-14.47	39.55	9.64	0.08	0.19	QP
3	0.252	33.94	51.69	-17.75	24.00	9.64	0.08	0.22	Average
4	0.252	43.03	61.69	-18.66	33.09	9.64	0.08	0.22	QP
5	0.437	30.04	47.11	-17.07	20.05	9.63	0.09	0.27	Average
6	0.437	37.02	57.11	-20.09	27.03	9.63	0.09	0.27	QP
7	2.155	30.91	46.00	-15.09	20.65	9.65	0.18	0.43	Average
8	2.155	37.78	56.00	-18.22	27.52	9.65	0.18	0.43	QP
9	4.696	28.17	46.00	-17.83	17.79	9.67	0.23	0.48	Average
10	4.696	33.64	56.00	-22.36	23.26	9.67	0.23	0.48	QP
11	10.233	29.35	50.00	-20.65	18.78	9.72	0.31	0.54	Average
12	10.233	35.69	60.00	-24.31	25.12	9.72	0.31	0.54	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).