

# FCC Part 95 Measurement and Test Report

For

**KIDDESIGNS INC.**

**1299 Main Street, Rahway, NJ 07065-0901, United States**

**FCC ID: IAJ210A**

**Test Standards:** FCC Part 95

**Product Description:** FRS 2-way Radios (Walkie Talkie)

**Tested Model:** CR210

**Report No.:** STR14128051I

**Tested Date:** 2014-12-08 to 2014-12-12

**Issued Date:** 2014-12-16

**Tested By:** Susan Su / Engineer

*Susan Su*

**Reviewed By:** Lahm Peng / EMC Manager

*Lahm peng*

**Approved & Authorized By:** Jandy so / PSQ Manager

*Jandyso*

**Prepared By:**

**Shenzhen SEM.Test Technology Co., Ltd.**

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,  
Bao'an District, Shenzhen, P.R.C (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

**TABLE OF CONTENTS**

|                                                             |           |
|-------------------------------------------------------------|-----------|
| <b>1. GENERAL INFORMATION.....</b>                          | <b>3</b>  |
| 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)..... | 3         |
| 1.2 TEST STANDARDS.....                                     | 4         |
| 1.3 TEST METHODOLOGY.....                                   | 4         |
| 1.4 TEST FACILITY.....                                      | 4         |
| 1.5 EUT SETUP AND TEST MODE.....                            | 5         |
| <b>2. SUMMARY OF TEST RESULTS .....</b>                     | <b>6</b>  |
| <b>3. RADIATED OUTPUT POWER (ERP).....</b>                  | <b>7</b>  |
| 3.1 STANDARD APPLICABLE.....                                | 7         |
| 3.2 TEST EQUIPMENT LIST AND DETAIL.....                     | 7         |
| 3.3 TEST PROCEDURE.....                                     | 7         |
| 3.4 ENVIRONMENTAL CONDITIONS .....                          | 7         |
| 3.5 TEST RESULT.....                                        | 8         |
| <b>4. OCCUPIED BANDWIDTH OF EMISSION .....</b>              | <b>9</b>  |
| 4.1 STANDARD APPLICABLE.....                                | 9         |
| 4.2 TEST EQUIPMENT LIST AND DETAILS .....                   | 9         |
| 4.3 TEST PROCEDURE.....                                     | 9         |
| 4.4 ENVIRONMENTAL CONDITIONS .....                          | 9         |
| 4.5 TEST RESULTS/MASKS .....                                | 10        |
| <b>5. UNWANTED RADIATED EMISSION .....</b>                  | <b>11</b> |
| 5.1 MEASUREMENT UNCERTAINTY .....                           | 11        |
| 5.2 STANDARD APPLICABLE.....                                | 11        |
| 5.3 TEST EQUIPMENT LIST AND DETAILS .....                   | 11        |
| 5.4 TEST PROCEDURE.....                                     | 11        |
| 5.5 ENVIRONMENTAL CONDITIONS .....                          | 12        |
| 5.6 SUMMARY OF TEST RESULTS/PLOTS .....                     | 12        |
| <b>6. FREQUENCY STABILITY .....</b>                         | <b>13</b> |
| 6.1 STANDARD APPLICABLE.....                                | 13        |
| 6.2 TEST EQUIPMENT LIST AND DETAILS .....                   | 13        |
| 6.3 TEST PROCEDURE.....                                     | 13        |
| 6.4 TEST RESULT.....                                        | 14        |
| <b>7. MODULATION CHARACTERISTICS .....</b>                  | <b>15</b> |
| 7.1 STANDARD APPLICABLE.....                                | 15        |
| 7.2 TEST EQUIPMENT LIST AND DETAILS .....                   | 15        |
| 7.3 TEST PROCEDURE.....                                     | 15        |
| 7.4 ENVIRONMENTAL CONDITIONS .....                          | 16        |
| 7.5 TEST RESULTS/PLOTS.....                                 | 16        |

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: KIDDESIGNS INC.  
Address of applicant: 1299 Main Street, Rahway, NJ 07065-0901, United States  
Manufacturer: Derek (ShaoGuan) Limited  
Address of manufacturer: Gaojiling, Taiping Town, Shixing County, Shao Guan City, China

| General Description of EUT                                                                                                                                                                                                                                                                |                                                                                                                                                                                           |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Product Name:                                                                                                                                                                                                                                                                             | FRS 2-way Radios (Walkie Talkie)                                                                                                                                                          |
| Trade Name:                                                                                                                                                                                                                                                                               | Disney, Skylanders, Barbie, Marvel                                                                                                                                                        |
| Model No.:                                                                                                                                                                                                                                                                                | CR210                                                                                                                                                                                     |
| Adding Models:                                                                                                                                                                                                                                                                            | MM-220, MK-220, JN-210, PL-210, SK-210, ST-210, MU-210, GD-210, SM-210, TD-210, BE-210, GG-210, FR-210, TF-210, IN-210, SW-210, TB-210, DP210(V1), AV-210, BH-210, JW-210, SM-210, MS-210 |
| Rated Voltage:                                                                                                                                                                                                                                                                            | DC 6.0V by 4*AAA Battery                                                                                                                                                                  |
| <i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model CR210, but the circuit and the electronic construction do not change, declared by the manufacturer.</i> |                                                                                                                                                                                           |

| Technical Characteristics of EUT |                         |
|----------------------------------|-------------------------|
| Frequency Range:                 | 462.5625MHz~462.7125MHz |
| RF Output Power:                 | 18.50 dBm (ERP)         |
| Modulation:                      | FM                      |
| Bandwidth:                       | 12.5kHz                 |
| Quantity of Channels:            | 7                       |
| Antenna Type:                    | Integral Antenna        |
| Device Category:                 | Portable Device         |

## 1.2 Test Standards

The following report is prepared on behalf of the KIDDESIGNS INC. in accordance with FCC Part 95, Subpart A, Subpart E, and FCC Part 2 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 95, Subpart A, Subpart E, and FCC Part 2 of the Federal Communication Commissions rules.

***Maintenance of compliance*** is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with TIA-603-D Land Mobile FM or PM Communications Equipment Measurement and Performance Standards and Performance Standards and ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

## 1.4 Test Facility

### **FCC – Registration No.: 934118**

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

### 1.5 EUT Setup and Test Mode

The EUT was operated in continuous transmitting mode that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

| Test Mode List |              |             |
|----------------|--------------|-------------|
| Test Mode      | Description  | Remark      |
| TM1            | Transmitting | 462.6625MHz |

| EUT Cable List and Details |            |                     |                        |
|----------------------------|------------|---------------------|------------------------|
| Cable Description          | Length (m) | Shielded/Unshielded | With / Without Ferrite |
| /                          | /          | /                   | /                      |

| Special Cable List and Details |            |                     |                        |
|--------------------------------|------------|---------------------|------------------------|
| Cable Description              | Length (m) | Shielded/Unshielded | With / Without Ferrite |
| /                              | /          | /                   | /                      |

| Auxiliary Equipment List and Details |              |       |               |
|--------------------------------------|--------------|-------|---------------|
| Description                          | Manufacturer | Model | Serial Number |
| /                                    | /            | /     | /             |

## 2. SUMMARY OF TEST RESULTS

| FCC Rules        | Description of Test Item    | Result    |
|------------------|-----------------------------|-----------|
| § 95.639         | Radiated Output Power (ERP) | Compliant |
| § 95.633         | Occupied Bandwidth Emission | Compliant |
| § 95.635         | Radiated Spurious Emissions | Compliant |
| § 95.621, 95.627 | Frequency Stability         | Compliant |
| § 95.637         | Modulation Characteristics  | Compliant |

### 3. RADIATED OUTPUT POWER (ERP)

#### 3.1 Standard Applicable

According to FCC Part 95.639

(a), 1) No GMRS transmitter, under and condition of modulation, shall exceed: (1) 50W Carrier power (average TP during one unmodulated RF cycle) when transmitting emission type A1, F1D, G1D, A3E, F3E or G3E.

(d) No FRS unit, under any condition of modulation, shall exceed 0.500 W effective radiated power (ERP).

#### 3.2 Test Equipment List and Detail

| Description              | Manufacturer         | Model    | Serial Number | Cal. Date  | Due. Date  |
|--------------------------|----------------------|----------|---------------|------------|------------|
| Spectrum Analyzer        | R&S                  | FSP      | 836079/035    | 2014-05-28 | 2015-05-27 |
| Pre-amplifier            | Agilent              | 8447F    | 3113A06717    | 2014-05-28 | 2015-05-27 |
| Pre-amplifier            | Compliance Direction | PAP-0118 | 24002         | 2014-05-28 | 2015-05-27 |
| Trilog Broadband Antenna | SCHWARZBECK          | VULB9163 | 9163-333      | 2014-05-24 | 2015-05-23 |
| Horn Antenna             | ETS                  | 3117     | 00086197      | 2014-05-24 | 2015-05-23 |
| Signal Generator         | Rohde & Schwarz      | SMR20    | 100047        | 2014-05-28 | 2015-05-27 |

#### 3.3 Test Procedure

According to the TIA/EIA-603-D, the following method of measurement shall be used:

1. The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the ERP were measured by the substitution.
4. Absolute level = substituted level + Antenna gain – Cable Loss

#### 3.4 Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 22 °C     |
| Relative Humidity: | 51%       |
| ATM Pressure:      | 1012 mbar |

**3.5 Test Result**

| Frequency | Substitute<br>SG | Height | Table  | Polar | Cable loss | Antenna<br>Gain | Corrected<br>Ampl. | FCC Part 95<br>Limit |
|-----------|------------------|--------|--------|-------|------------|-----------------|--------------------|----------------------|
| MHz       | dBm              | Meter  | Degree | H / V | dB         | dB              | dBm                | dBm                  |
| 462.6625  | 13.52            | 1.5    | 0      | H     | 2          | 0               | 11.52              | 27                   |
| 462.6625  | 20.50            | 1.5    | 0      | V     | 2          | 0               | 18.50              | 27                   |

## 4. OCCUPIED BANDWIDTH OF EMISSION

### 4.1 Standard Applicable

According to FCC Part 95.633 (a), The authorized bandwidth for emission type F1D, G1D, F3E or G3E is 20 kHz.  
(c) The authorized bandwidth for emission type F3E or F2D transmitted by a FRS unit is 12.5 kHz.

Per FCC §95.635 (b)(1), at least 25 dB (decibels) on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth.

Per FCC §95.635 (b)(3), At least 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth.


Per FCC §95.635 (b)(7), At least  $43 + 10 \log_{10}(T)$  dB on any frequency removed from the center of the authorized bandwidth by more than 250%.

### 4.2 Test Equipment List and Details

| Description       | Manufacturer | Model       | Serial Number | Cal. Date  | Due. Date  |
|-------------------|--------------|-------------|---------------|------------|------------|
| Spectrum Analyzer | Agilent      | E4402B      | US41192821    | 2014-05-28 | 2015-05-27 |
| Attenuator        | ATTEN        | ATS100-4-20 | /             | 2014-05-28 | 2015-05-27 |

### 4.3 Test Procedure

According to Standard TIA-603-D, the method of measurement for occupied bandwidth of emission as follows:



- The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.
- Turn on the transmitter, and set it to transmit the pulse train continuously.
- The bandwidth of the carrier with audio modulation signal was measured and recorded.

### 4.4 Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 26 °C     |
| Relative Humidity: | 60 %      |
| ATM Pressure:      | 1012 mbar |

#### 4.5 Test Results/Masks

The occupied Bandwidth Emission of all fall in the Mask, full fit the requirements of the standards.

Necessary Bandwidth For FRS Channel Separation 12.5 kHz:

$$K = 1$$


$$M = 3 \text{ kHz}$$

$$D = 2.5 \text{ kHz}$$

$$B_n = 2M + 2DK = 2*3 + 2*2.5*1 = 11 \text{ kHz}$$

Emission Designation=11K0F3E

Please refer to the following test plots:

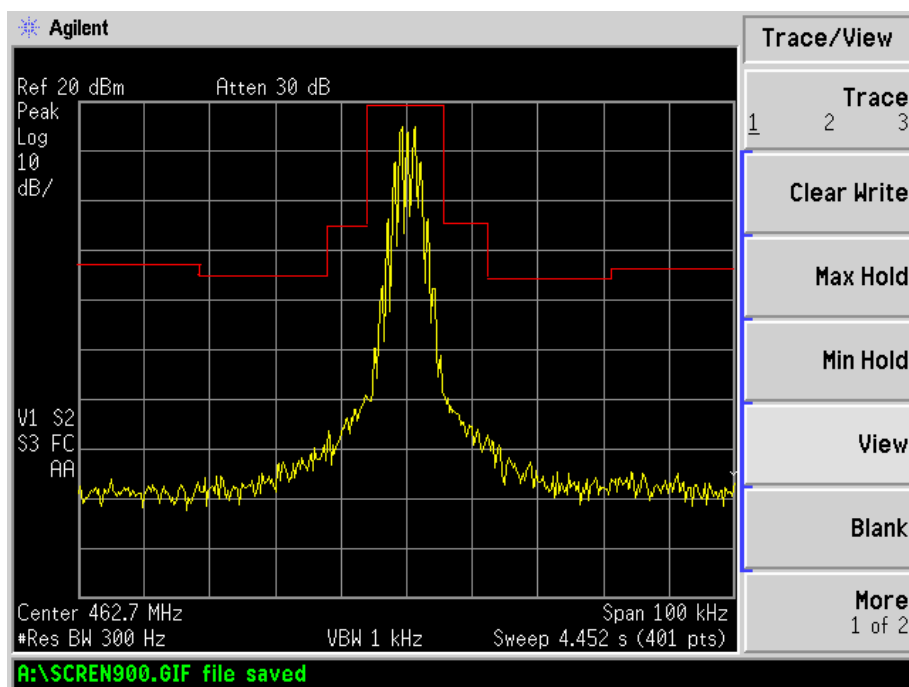

## 5. UNWANTED RADIATED EMISSION

### 5.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is  $\pm 5.1$  dB.

### 5.2 Standard Applicable

Per FCC §95.635 (b)(1), at least 25 dB (decibels) on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth.

Per FCC §95.635 (b)(3), At least 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth.

Per FCC §95.635 (b)(7), At least  $43 + 10 \log_{10}(T)$  dB on any frequency removed from the center of the authorized bandwidth by more than 250%.

### 5.3 Test Equipment List and Details

| Description              | Manufacturer         | Model     | Serial Number | Cal. Date  | Due. Date  |
|--------------------------|----------------------|-----------|---------------|------------|------------|
| Spectrum Analyzer        | R&S                  | FSP       | 836079/035    | 2014-05-28 | 2015-05-27 |
| Pre-amplifier            | Agilent              | 8447F     | 3113A06717    | 2014-05-28 | 2015-05-27 |
| Pre-amplifier            | Compliance Direction | PAP-0118  | 24002         | 2014-05-28 | 2015-05-27 |
| Trilog Broadband Antenna | SCHWARZBECK          | VULB9163  | 9163-333      | 2014-05-24 | 2015-05-23 |
| Horn Antenna             | ETS                  | 3117      | 00086197      | 2014-05-24 | 2015-05-23 |
| Loop Antenna             | SCHWARZECK           | HFRA 5165 | 9365          | 2014-05-24 | 2015-05-23 |

### 5.4 Test Procedure

1. The setup of EUT is according with per TIA-603-D measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious attenuation limit in dB =  $43 + 10 \log_{10}(\text{power out in Watts})$

## 5.5 Environmental Conditions

|                    |           |
|--------------------|-----------|
| Temperature:       | 18° C     |
| Relative Humidity: | 53%       |
| ATM Pressure:      | 1011 mbar |

## 5.6 Summary of Test Results/Plots

According to the data below, the FCC Part 95 standards, and had the worst margin of:

**Note:** this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Plots of the spurious emission for below 1GHz:

Test Mode: Transmitting

| No. | Frequency<br>(MHz) | Result<br>(dBm) | Fundamental<br>(dBm) | Att.<br>(dBc) | Limit<br>(dBc) | Margin<br>(dB) | Remark |
|-----|--------------------|-----------------|----------------------|---------------|----------------|----------------|--------|
| 1   | 249.6514           | -50.03          | 18.50                | -68.53        | -31.50         | -37.03         | ERP    |
| 2   | 925.0562           | -47.23          | 18.50                | -65.73        | -31.50         | -34.23         | ERP    |

Plots of the spurious emission for above 1GHz:

| No. | Frequency<br>(MHz) | Result<br>(dBm) | Fundamental<br>(dBm) | Att.<br>(dBc) | Limit<br>(dBc) | Margin<br>(dB) | Remark |
|-----|--------------------|-----------------|----------------------|---------------|----------------|----------------|--------|
| 3   | 2314.838           | -24.93          | 18.50                | -43.43        | -31.50         | -11.93         | ERP    |
| 4   | 2777.939           | -15.81          | 18.50                | -34.31        | -31.50         | -2.81          | ERP    |

*Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 4<sup>th</sup> Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.*

*The measurements greater than 20dB below the limit from 9kHz to 30MHz.*

## 6. FREQUENCY STABILITY

### 6.1 Standard Applicable

According to FCC Part 2.1055(a)(1), the frequency stability shall be measure with variation of ambient temperature from –30°C to +50°C, and according to FCC 2.1055(d)(2), the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point which is specified by the manufacturer.


According to FCC Part 95.621(b), Each GMRS transmitter for mobile station, small base station and control operation must be maintained within a frequency tolerance of 0.0005%. FCC Part 95.626(b) (b) Each FRS unit must be maintained within a frequency tolerance of 0.00025%.

### 6.2 Test Equipment List and Details

| Description       | Manufacturer | Model       | Serial Number | Cal. Date  | Due. Date  |
|-------------------|--------------|-------------|---------------|------------|------------|
| Spectrum Analyzer | Agilent      | E4402B      | US41192821    | 2014-05-28 | 2015-05-27 |
| Attenuator        | ATTEN        | ATS100-4-20 | /             | 2014-05-28 | 2015-05-27 |

### 6.3 Test Procedure

According to Standard TIA-603-D, the method of measurement for frequency stability as follows:



- Connect the equipment as illustrated.
- Operate the equipment in standby conditions for 15 minutes before proceeding.
- Record the carrier frequency of the transmitter as MCFMHz .
- Calculate the percent frequency error by the following:

$$\% \text{ error} = \left( \frac{MCF_{MHz}}{ACF_{MHz}} - 1 \right) * 100$$

where

MCFMHz is the Measured Carrier Frequency in MHz

ACFMHz is the Assigned Carrier Frequency in MHz

- The value recorded in step d) is the carrier frequency stability.

## 6.4 Test Result

| Reference Frequency: 462.6625 MHz, Limit: +/-0.00025% |                      |                                     |          |
|-------------------------------------------------------|----------------------|-------------------------------------|----------|
| Environment Temperature (°C)                          | Power Supplied (VDC) | Frequency Measure with Time Elapsed |          |
|                                                       |                      | MCF (MHz)                           | Error %  |
| 50                                                    | 6.0                  | 462.66348                           | 0.00021  |
| 40                                                    | 6.0                  | 462.66324                           | 0.00016  |
| 30                                                    | 6.0                  | 462.66225                           | -0.00005 |
| 20                                                    | 6.0                  | 462.66215                           | -0.00008 |
| 10                                                    | 6.0                  | 462.66230                           | -0.00004 |
| 0                                                     | 6.0                  | 462.66203                           | -0.00010 |
| -10                                                   | 6.0                  | 462.66156                           | -0.00020 |
| -20                                                   | 6.0                  | 462.66173                           | -0.00017 |
| -30                                                   | 6.0                  | 462.66164                           | -0.00019 |

So, Frequency Stability Versus Input Voltage is:

| Reference Frequency: 462.6625 MHz, Limit: +/-0.00025% |                                     |          |
|-------------------------------------------------------|-------------------------------------|----------|
| Power Supplied (VDC)                                  | Frequency Measure with Time Elapsed |          |
|                                                       | Frequency (MHz)                     | Error %  |
| 4.5                                                   | 462.66225                           | -0.00005 |

## 7. MODULATION CHARACTERISTICS

### 7.1 Standard Applicable

According to FCC Part 95.637:

- (a) A GMRS transmitter that transmits emission types F1D, G1D, or G3E must not exceed a peak frequency deviation of plus or minus 5 kHz. A GMRS transmitter that transmits emission type F3E must not exceed a peak frequency deviation of plus or minus 5 kHz. A FRS unit that transmits emission type F3E must not exceed a peak frequency deviation of plus or minus 2.5 kHz, and the audio frequency response must not exceed 3.125 kHz .

According to FCC Part 2.1047


- (a) Equipment which utilizes voice modulated communication shall show the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz. for equipment which is required to have a low pass filter, the frequency response of the filter, or all of the circuitry installed between the modulation limited and the modulated stage shall be supplied.
- (b) Equipment which employs modulation limiting, a curve showing the percentage of modulation versus the modulation input voltage shall be supplied.

### 7.2 Test Equipment List and Details

| Description        | Manufacturer | Model       | Serial Number | Cal. Date  | Due. Date  |
|--------------------|--------------|-------------|---------------|------------|------------|
| Cell Site Test Set | HP           | 8921A       | 3524A02414    | 2014-05-28 | 2015-05-27 |
| Attenuator         | ATTEN        | ATS100-4-20 | /             | 2014-05-28 | 2015-05-27 |
| Audio Generator    | Good Will    | GAG-809     | A620083       | 2014-05-28 | 2015-05-27 |

### 7.3 Test Procedure

According to Standard TIA-603-D, the method of measurement for modulation limiting as follows:

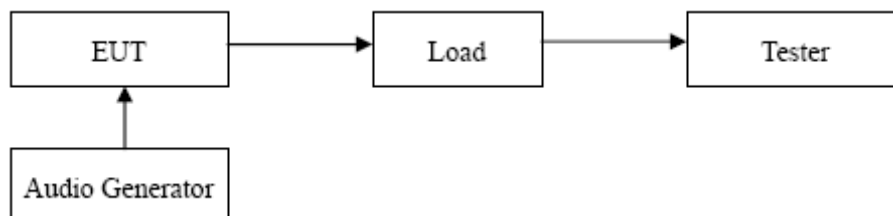

- a) Connect the equipment as illustrated.
- b) Adjust the transmitter per the manufacturer's procedure for full rated system deviation.

- c) Set the test receiver to measure peak positive deviation. Set the audio bandwidth for  $\leq 0.25$  Hz to  $\geq 15,000$  Hz. Turn the de-emphasis function off.
- d) Apply a 1000 Hz modulating signal to the transmitter from the audio frequency generator, and adjust the level to obtain 60% of full rated system deviation.
- e) Increase the level from the audio frequency generator by 20 dB in one step.
- f) Measure both the instantaneous and steady-state deviation at and after the time of increasing the audio input level.
- g) With the level from the audio frequency generator held constant at the level obtained in step e), slowly vary the audio frequency from 100 Hz to 5000 Hz and observe the steady-state deviation. Record the maximum deviation.
- h) Set the test receiver to measure peak negative deviation and repeat steps d) through g).
- i) The values recorded in steps g) and h) are the modulation limiting.


#### 7.4 Environmental Conditions

|                    |          |
|--------------------|----------|
| Temperature:       | 25 °C    |
| Relative Humidity: | 55%      |
| ATM Pressure:      | 1015mbar |

#### 7.5 Test Results/Plots

| Audio Frequency (Hz) | Deviation (kHz) | Limit (kHz) |
|----------------------|-----------------|-------------|
| 100                  | 0.038           | 2.5         |
| 300                  | 0.080           | 2.5         |
| 500                  | 0.113           | 2.5         |
| 1000                 | 0.192           | 2.5         |
| 3000                 | 0.036           | 2.5         |
| 5000                 | 0.047           | 2.5         |

Audio Low Pass Filter Characteristic Curve

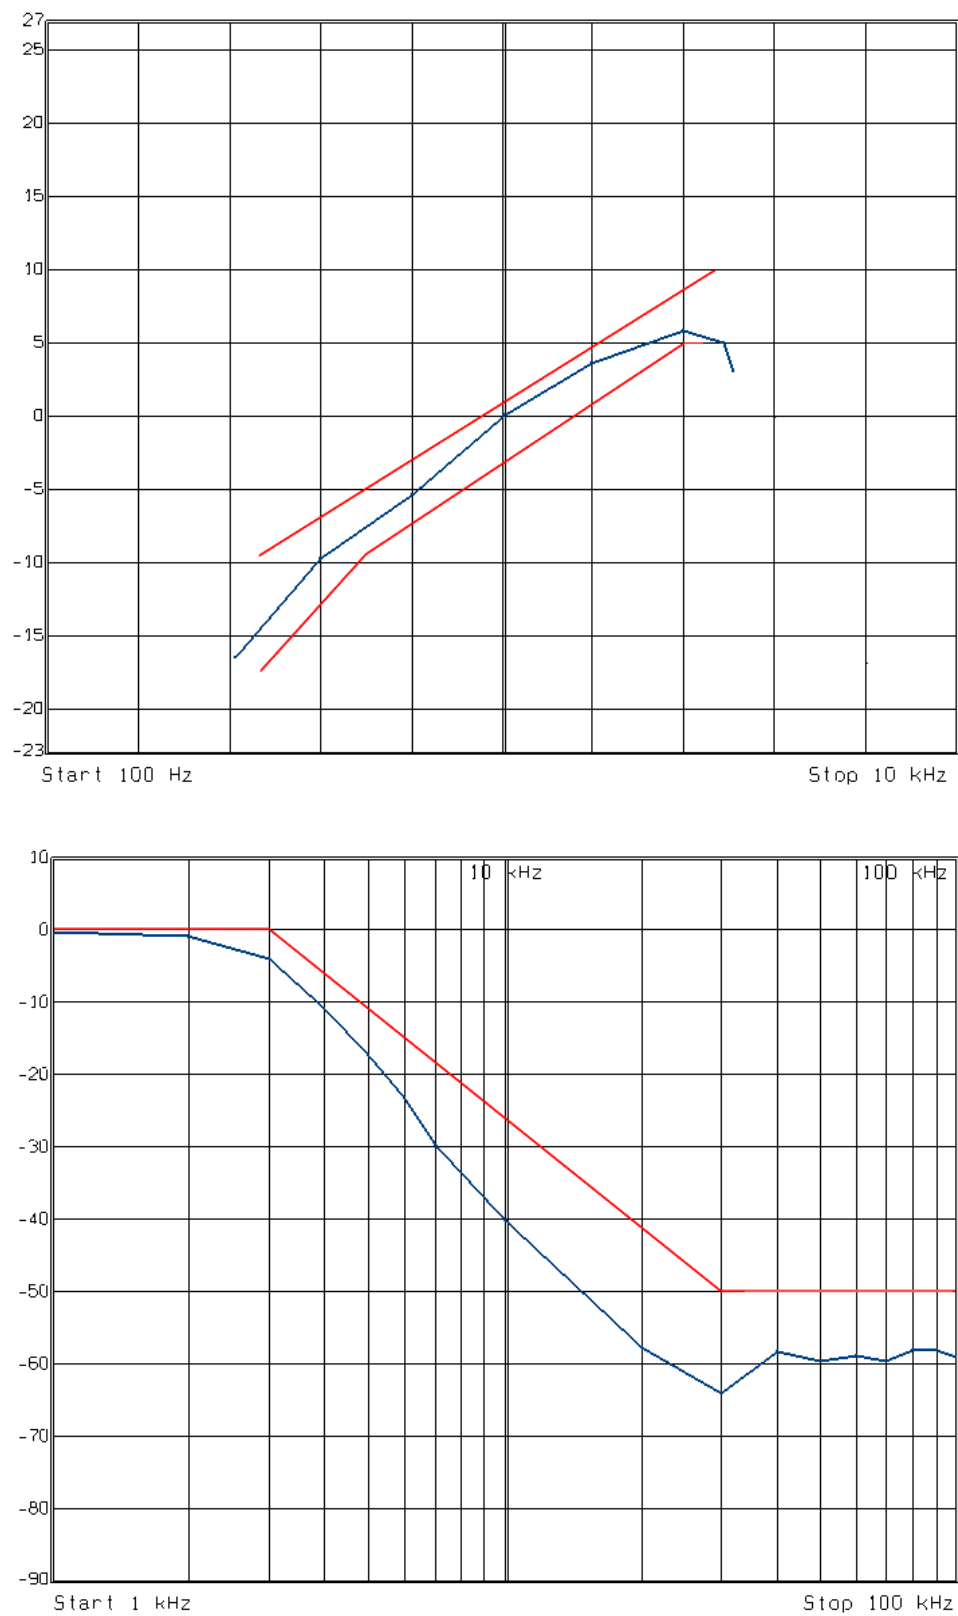

\*\*\*\*\* END OF REPORT \*\*\*\*\*