

FCC Part 95

Measurement and Test Report

For

KIDDESIGNS INC.

1299 Main Street, Rahway, NJ 07065, USA

FCC ID: IAJ210A1

Test Standards:	<u>FCC Part 95</u>
Product Description:	<u>FRS 2-way Radios (Walkie Talkie)</u>
Tested Model:	<u>CR210</u>
Report No.:	<u>STR16048054I</u>
Tested Date:	<u>2016-04-09 to 2016-04-14</u>
Issued Date:	<u>2015-04-15</u>
Tested By:	<u>Irving Liu / Engineer</u> <i>Irving Liu</i>
Reviewed By:	<u>Silin Chen / EMC Manager</u> <i>Silin Chen</i>
Approved & Authorized By:	<u>Jandy so / PSQ Manager</u> <i>Jandyso</i>
Prepared By:	

Shenzhen SEM.Test Technology Co., Ltd.
1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,
Bao'an District, Shenzhen, P.R.C (518101)
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
1.2 TEST STANDARDS	4
1.3 TEST METHODOLOGY	4
1.4 TEST FACILITY	4
1.5 EUT SETUP AND TEST MODE	5
1.6 MEASUREMENT UNCERTAINTY	5
1.7 TEST EQUIPMENT LIST AND DETAILS	6
2. SUMMARY OF TEST RESULTS	7
3. RADIATED OUTPUT POWER (ERP)	8
3.1 STANDARD APPLICABLE	8
3.2 TEST PROCEDURE	8
3.3 ENVIRONMENTAL CONDITIONS	8
3.4 TEST RESULT	8
4. OCCUPIED BANDWIDTH OF EMISSION	9
4.1 STANDARD APPLICABLE	9
4.2 TEST PROCEDURE	9
4.3 ENVIRONMENTAL CONDITIONS	9
4.4 TEST RESULTS/MASKS	10
5. UNWANTED RADIATED EMISSION	11
5.1 MEASUREMENT UNCERTAINTY	11
5.2 STANDARD APPLICABLE	11
5.3 TEST PROCEDURE	11
5.4 ENVIRONMENTAL CONDITIONS	11
5.5 SUMMARY OF TEST RESULTS/PLOTS	11
6. FREQUENCY STABILITY	13
6.1 STANDARD APPLICABLE	13
6.2 TEST PROCEDURE	13
6.3 TEST RESULT	14
7. MODULATION CHARACTERISTICS	15
7.1 STANDARD APPLICABLE	15
7.2 TEST PROCEDURE	15
7.3 ENVIRONMENTAL CONDITIONS	16
7.4 TEST RESULTS/PLOTS	16

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Client Information

Applicant: KIDDESIGNS INC.
Address of applicant: 1299 Main Street, Rahway, NJ 07065, USA

Manufacturer: Derek (ShaoGuan) Limited
Address of manufacturer: Gaojiling, Taiping Town, Shixing County, Shao Guan City, China

General Description of EUT	
Product Name:	FRS 2-way Radios (Walkie Talkie)
Trade Name:	Disney, Skylanders, Barbie, Marvel
Model No.:	CR210
Adding Models:	MM-220, MK-220, JN-210, PL-210, SK-210, ST-210, MU-210, GD-210, SM-210, TD-210, BE-210, GG-210, FR-210, TF-210, IN-210, SW-210, TB-210, DP210(V1), AV-210, BH-210, JW-210, SM-210, MS-210, CA-210CW, CR-210, HY-210, MK-210, MM-210, DP-210, YK-210, PC-210, PR-210MV, SF-210, SM-210H, SW-210E7, TL-210
Rated Voltage:	DC 6.0V by 4*AAA Battery
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model CR210, but the circuit and the electronic construction do not change, declared by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	462.5625MHz~462.7125MHz
RF Output Power:	17.76 dBm (ERP)
Modulation:	FM
Bandwidth:	12.5kHz
Quantity of Channels:	7
Antenna Type:	Integral Antenna
Device Category:	Portable Device

1.2 Test Standards

The following report is prepared on behalf of the KIDDESIGNS INC. in accordance with FCC Part 95, Subpart B, Subpart E, and FCC Part 2 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 95, Subpart B, Subpart E, and FCC Part 2 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission, should be checked to ensure compliance has been maintained.

1.3 Test Methodology

All measurements contained in this report were conducted with TIA-603-D Land Mobile FM or PM Communications Equipment Measurement and Performance Standards and Performance Standards and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

1.4 Test Facility

FCC – Registration No.: 934118

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

CNAS Registration No.: L4062

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C (518101).

1.5 EUT Setup and Test Mode

The EUT was operated in continuous transmitting mode that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Transmitting	462.6625MHz

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
Frequency Stability	2.3%	$\pm 5\%$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	$\pm 2.88\text{dB}$
Transmitter Spurious Emissions	Radiated	$\pm 5.2\text{dB}$

1.7 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2015-06-17	2016-06-16
Spectrum Analyzer	Agilent	E4407B	MY41440400	2015-06-17	2016-06-16
Attenuator	ATTEN	ATS100-4-20	/	2015-06-17	2016-06-16
Pre-amplifier	Agilent	8447F	3113A06717	2015-06-17	2016-06-16
Pre-amplifier	Compliance Direction	PAP-0118	24002	2015-06-17	2016-06-16
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2015-06-17	2016-06-16
Horn Antenna	ETS	3117	00086197	2015-06-17	2016-06-16
Loop Antenna	Schwarz beck	FMZB 1516	9773	2015-06-17	2016-06-16
Signal Generator	Rohde & Schwarz	SMR20	100047	2015-06-17	2016-06-16
Cell Site Test Set	HP	8921A	3524A02414	2015-06-17	2016-06-16
Audio Generator	Good Will	GAG-809	A620083	2015-06-17	2016-06-16

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 95.639	Radiated Output Power (ERP)	Compliant
§ 95.633	Occupied Bandwidth Emission	Compliant
§ 95.635	Radiated Spurious Emissions	Compliant
§ 95.621, 95.627	Frequency Stability	Compliant
§ 95.637	Modulation Characteristics	Compliant

3. RADIATED OUTPUT POWER (ERP)

3.1 Standard Applicable

According to FCC Part 95.639

(a), 1) No GMRS transmitter, under and condition of modulation, shall exceed: (1) 50W Carrier power (average TP during one unmodulated RF cycle) when transmitting emission type A1, F1D, G1D, A3E, F3E or G3E.

(d) No FRS unit, under any condition of modulation, shall exceed 0.500 W effective radiated power (ERP).

3.2 Test Procedure

According to the TIA/EIA-603-D, the following method of measurement shall be used:

1. The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the ERP were measured by the substitution.
4. Absolute level = substituted level + Antenna gain – Cable Loss

3.3 Environmental Conditions

Temperature:	22 °C
Relative Humidity:	51%
ATM Pressure:	1012 mbar

3.4 Test Result

Frequency	Substitute SG	Height	Table	Polar	Cable loss	Antenna Gain	Corrected Ampl.	FCC Part 95 Limit
MHz	dBm	Meter	Degree	H / V	dB	dB	dBm	dBm
462.6625	15.68	1.5	0	H	2	0	13.68	27
462.6625	19.76	1.5	0	V	2	0	17.76	27

4. OCCUPIED BANDWIDTH OF EMISSION

4.1 Standard Applicable

According to FCC Part 95.633 (a), The authorized bandwidth for emission type F1D, G1D, F3E or G3E is 20 kHz.
(c) The authorized bandwidth for emission type F3E or F2D transmitted by a FRS unit is 12.5 kHz.


Per FCC §95.635 (b)(1), at least 25 dB (decibels) on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth.

Per FCC §95.635 (b)(3), At least 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth.

Per FCC §95.635 (b)(7), At least $43 + 10 \log_{10}(T)$ dB on any frequency removed from the center of the authorized bandwidth by more than 250%.

4.2 Test Procedure

According to Standard TIA-603-D, the method of measurement for occupied bandwidth of emission as follows:



- The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.
- Turn on the transmitter, and set it to transmit the pulse train continuously.
- The bandwidth of the carrier with audio modulation signal was measured and recorded.

4.3 Environmental Conditions

Temperature:	26 °C
Relative Humidity:	60 %
ATM Pressure:	1012 mbar

4.4 Test Results/Masks

The occupied Bandwidth Emission of all fall in the Mask, full fit the requirements of the standards.

Necessary Bandwidth For FRS Channel Separation 12.5 kHz:

$$K = 1$$


$$M = 3 \text{ kHz}$$

$$D = 2.5 \text{ kHz}$$

$$B_n = 2M + 2DK = 2*3 + 2*2.5*1 = 11 \text{ kHz}$$

Emission Designation=11K0F3E

Please refer to the following test plots:

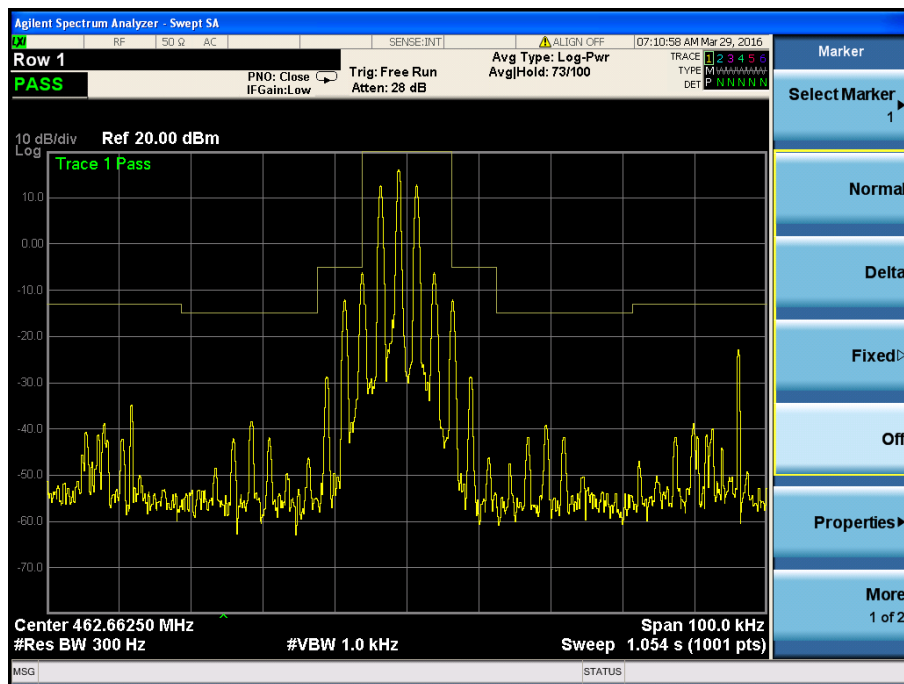

5. UNWANTED RADIATED EMISSION

5.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is ± 5.1 dB.

5.2 Standard Applicable

Per FCC §95.635 (b)(1), at least 25 dB (decibels) on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth.

Per FCC §95.635 (b)(3), At least 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth.

Per FCC §95.635 (b)(7), At least $43 + 10 \log_{10}(T)$ dB on any frequency removed from the center of the authorized bandwidth by more than 250%.

5.3 Test Procedure

1. The setup of EUT is according with per TIA-603-D measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

$$\text{Spurious attenuation limit in dB} = 43 + 10 \log_{10}(\text{power out in Watts})$$

5.4 Environmental Conditions

Temperature:	18° C
Relative Humidity:	53%
ATM Pressure:	1011 mbar

5.5 Summary of Test Results/Plots

According to the data below, the FCC Part 95 standards, and had the worst margin of:

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Plots of the spurious emission for below 1GHz:

Test Mode: Transmitting

No.	Frequency	Result	Fundamental	Att.	Limit	Margin	Remark
	(MHz)	(dBm)	(dBm)	(dBc)	(dBc)	(dB)	
1	168.6530	-41.36	17.76	-59.12	-30.76	-28.46	ERP
2	933.3863	-29.65	17.76	-47.41	-30.76	-16.65	ERP

Plots of the spurious emission for above 1GHz:

No.	Frequency	Result	Fundamental	Att.	Limit	Margin	Remark
	(MHz)	(dBm)	(dBm)	(dBc)	(dBc)	(dB)	
3	1400.158	-31.67	17.76	-49.43	-30.76	-18.67	ERP
4	1866.912	-40.38	17.76	-58.14	-30.76	-27.38	ERP

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 3th Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

The measurements greater than 20dB below the limit from 9kHz to 30MHz.

6. FREQUENCY STABILITY


6.1 Standard Applicable

According to FCC Part 2.1055(a)(1), the frequency stability shall be measure with variation of ambient temperature from –30°C to +50°C, and according to FCC 2.1055(d)(2), the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point which is specified by the manufacturer.

According to FCC Part 95.621(b), Each GMRS transmitter for mobile station, small base station and control operation must be maintained within a frequency tolerance of 0.0005%. FCC Part 95.626(b) (b) Each FRS unit must be maintained within a frequency tolerance of 0.00025%.

6.2 Test Procedure

According to Standard TIA-603-D, the method of measurement for frequency stability as follows:



- Connect the equipment as illustrated.
- Operate the equipment in standby conditions for 15 minutes before proceeding.
- Record the carrier frequency of the transmitter as MCFMHz .
- Calculate the percent frequency error by the following:

$$\% \text{ error} = \left(\frac{MCF_{MHz}}{ACF_{MHz}} - 1 \right) * 100$$

where

MCFMHz is the Measured Carrier Frequency in MHz

ACFMHz is the Assigned Carrier Frequency in MHz

- The value recorded in step d) is the carrier frequency stability.

6.3 Test Result

Reference Frequency: 462.6625 MHz, Limit: +/-0.00025%				
Environment Temperature (°C)	Power Supplied (VDC)	Current (A)	Frequency Measure with Time Elapsed	
			MCF (MHz)	Error %
50	6.0	0.242	462.66316	0.00014
40	6.0	0.243	462.66281	0.00007
30	6.0	0.245	462.66325	0.00016
20	6.0	0.242	462.66279	0.00006
10	6.0	0.242	462.66189	-0.00013
0	6.0	0.243	462.66193	-0.00012
-10	6.0	0.245	462.66166	-0.00018
-20	6.0	0.245	462.66173	-0.00017
-30	6.0	0.245	462.66174	-0.00016
End Point			DC 4.5V/0.233A	

So, Frequency Stability Versus Input Voltage is:

Reference Frequency: 462.6625 MHz, Limit: +/-0.00025%		
Power Supplied (VDC)	Frequency Measure with Time Elapsed	
	Frequency (MHz)	Error %
4.5	462.66225	-0.00011

7. MODULATION CHARACTERISTICS

7.1 Standard Applicable

According to FCC Part 95.637:


- (a) A GMRS transmitter that transmits emission types F1D, G1D, or G3E must not exceed a peak frequency deviation of plus or minus 5 kHz. A GMRS transmitter that transmits emission type F3E must not exceed a peak frequency deviation of plus or minus 5 kHz. A FRS unit that transmits emission type F3E must not exceed a peak frequency deviation of plus or minus 2.5 kHz, and the audio frequency response must not exceed 3.125 kHz .

According to FCC Part 2.1047

- (a) Equipment which utilizes voice modulated communication shall show the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz. for equipment which is required to have a low pass filter, the frequency response of the filter, or all of the circuitry installed between the modulation limited and the modulated stage shall be supplied.
- (b) Equipment which employs modulation limiting, a curve showing the percentage of modulation versus the modulation input voltage shall be supplied.

7.2 Test Procedure

According to Standard TIA-603-D, the method of measurement for modulation limiting as follows:

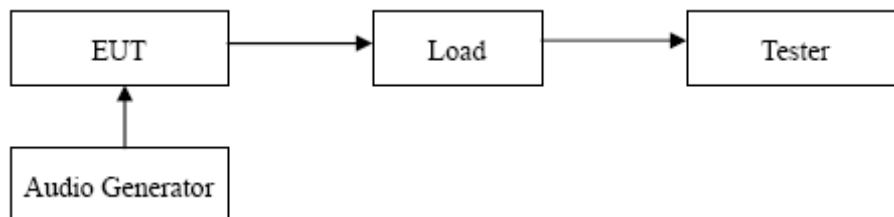

- a) Connect the equipment as illustrated.
- b) Adjust the transmitter per the manufacturer's procedure for full rated system deviation.
- c) Set the test receiver to measure peak positive deviation. Set the audio bandwidth for ≤ 0.25 Hz to $\geq 15,000$ Hz. Turn the de-emphasis function off.
- d) Apply a 1000 Hz modulating signal to the transmitter from the audio frequency generator, and adjust the level to obtain 60% of full rated system deviation.
- e) Increase the level from the audio frequency generator by 20 dB in one step.



- f) Measure both the instantaneous and steady-state deviation at and after the time of increasing the audio input level.
- g) With the level from the audio frequency generator held constant at the level obtained in step e), slowly vary the audio frequency from 100 Hz to 5000 Hz and observe the steady-state deviation. Record the maximum deviation.
- h) Set the test receiver to measure peak negative deviation and repeat steps d) through g).
- i) The values recorded in steps g) and h) are the modulation limiting.

7.3 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	55%
ATM Pressure:	1015mbar

7.4 Test Results/Plots

Audio Frequency (Hz)	Deviation (kHz)	Limit (kHz)
100	0.168	2.5
300	0.381	2.5
500	0.346	2.5
1000	0.361	2.5
3000	0.293	2.5
5000	0.138	2.5

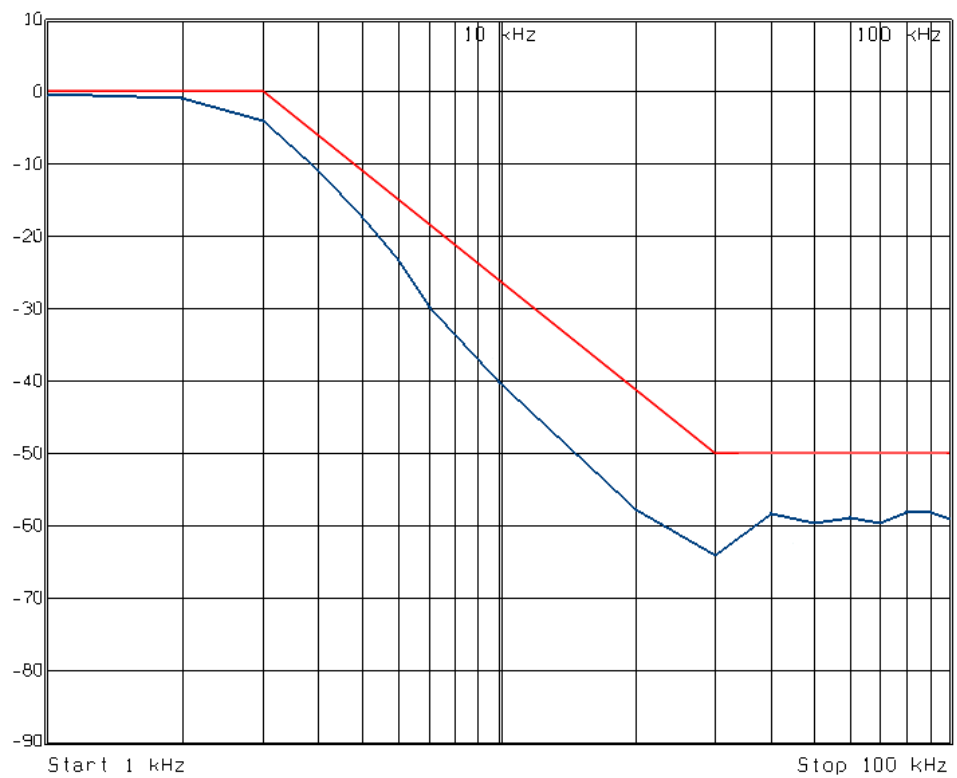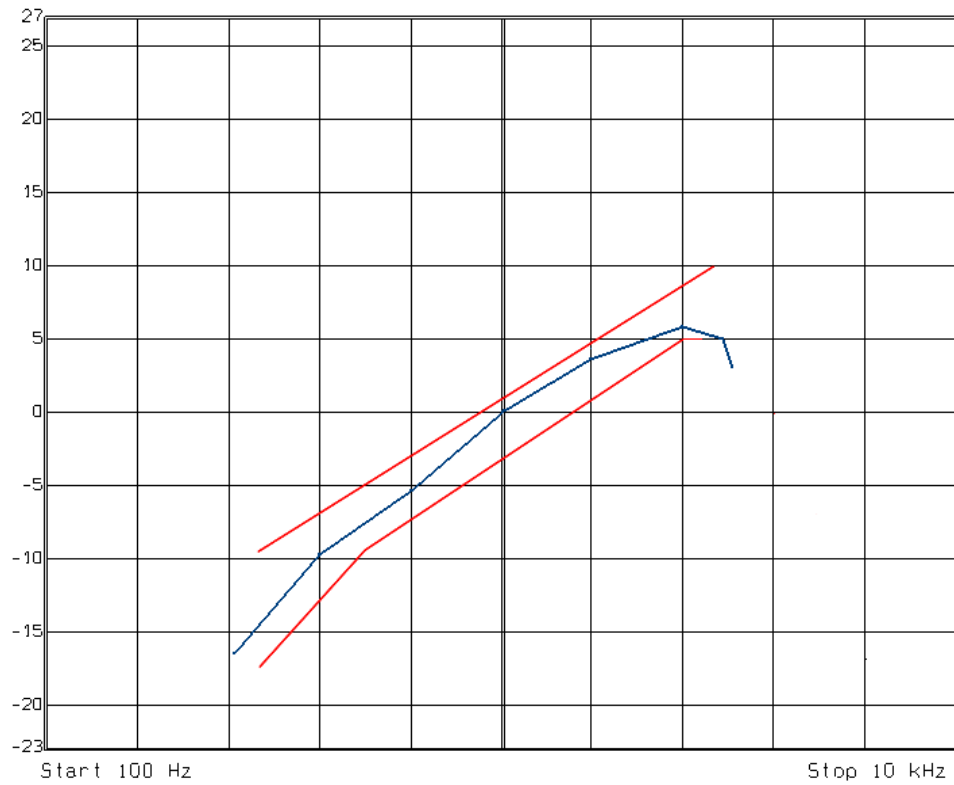Audio Low Pass Filter Characteristic Curve

***** END OF REPORT *****