

TEST REPORT

Applicant Name: Kiddesigns Inc
Address: 1299 Main Street, Rahway New Jersey United States
07065-0901
Report Number: 2601Q23112E-RF-00
FCC ID: IAJ210C10A

Test Standard (s)

FCC PART 95

Sample Description

Product Type: walkie talkie
Model No.: PK-210Pi.EXv0
Multiple Model(s) No.: N/A
Trade Mark: eKids
Date Received: 2026/02/06
Issue Date: 2026/04/09

Test Result:	Pass▲
--------------	-------

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Bruce Lin

Bruce Lin
RF Engineer

Approved By:

Nancy Wang

Nancy Wang
RF Supervisor

Note: The information marked * is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China
Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	3
GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	8
TEST EQUIPMENT LIST	9
§2.1093 - RF EXPOSURE INFORMATION	10
MEASUREMENT RESULT	12
FCC §2.1046 & §95.567 - RF OUTPUT POWER	13
APPLICABLE STANDARD	13
TEST PROCEDURE	13
TEST DATA	13
FCC §2.1047 & §95.575 - MODULATION CHARACTERISTIC	14
APPLICABLE STANDARD	14
TEST BLOCK DIAGRAM	14
TEST PROCEDURE	14
TEST DATA	15
FCC §2.1049 & §95.573 & §95.579 - AUTHORIZED BANDWIDTH AND EMISSION MASK	20
APPLICABLE STANDARD	20
TEST BLOCK DIAGRAM	20
TEST PROCEDURE	20
TEST DATA	21
FCC §2.1053 & §95.579 - RADIATED SPURIOUS EMISSION	23
APPLICABLE STANDARD	23
TEST PROCEDURE	23
TEST DATA	24
FCC §2.1055 (D) & §95.565 - FREQUENCY STABILITY	25
APPLICABLE STANDARD	25
TEST PROCEDURE	25
TEST DATA	26
§95.587 - FRS ADDITIONAL REQUIREMENTS	27
APPLICABLE STANDARD	27
RESULT	27
EUT PHOTOGRAPHS	28
TEST SETUP PHOTOGRAPHS	29

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2601Q23112E-RF-00	Original Report	2026/04/09

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Frequency Range	467.6125MHz
Transmit Power (ERP)	467.6125MHz: 4.42dBm
Modulation Technique	FM
Antenna Specification [#]	-4.01dBi (It is provided by the applicant)
Voltage Range	DC 3V from battery
Sample serial number	3H3V-2 for Radiated Emissions Test 3H3V-1 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Normal/Extreme Condition [#]	L.V.: Low Voltage 2.7V _{DC} N.V.: Normal Voltage 3V _{DC} H.V.: High Voltage 3.3V _{DC} (provided by the applicant)
Adapter Information	N/A

Objective

This test report is in accordance with Part 2 and Part 95, Subpart A & Subpart B of the Federal Communication Commissions rules.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2-Subpart J as well as the following parts:

Part 95 Subpart B - Personal Radio Services

ANSI C63.26-2015: American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

TIA-603-E: Land Mobile FM or PM-Communications Equipment-Measurement and Performance Standards

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		52.29kHz(k=1.96, 95% level of confidence)
RF Frequency		81.235Hz(k=1.96, 95% level of confidence)
Audio Frequency Response		0.1dB(k=2, 95% level of confidence)
Low Pass Filter Response		1.2dB(k=2, 95% level of confidence)
Modulation Limiting		1%(k=2, 95% level of confidence)
Radiated Emissions	30MHz~1000MHz (Horizontal)	5.10dB(k=2, 95% level of confidence)
	30MHz~1000MHz (Vertical)	6.28dB(k=2, 95% level of confidence)
	1GHz - 6GHz	6.18dB(k=2, 95% level of confidence)
	6GHz - 18GHz	6.62dB(k=2, 95% level of confidence)
Temperature		$\pm 0.4^{\circ}\text{C}$
Humidity		$\pm 2\%$
Supply voltages		DC $\pm 0.4\%$; AC $\pm 1\%$

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, test firm registration No.: 715558, the FCC Designation No. : CN5045.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user).

The EUT only supports 467.6125MHz.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable


Cable Description	Length (m)	From Port	To
/	/	/	/

Block Diagram of Test Setup

For Radiated Emissions below 1GHz:

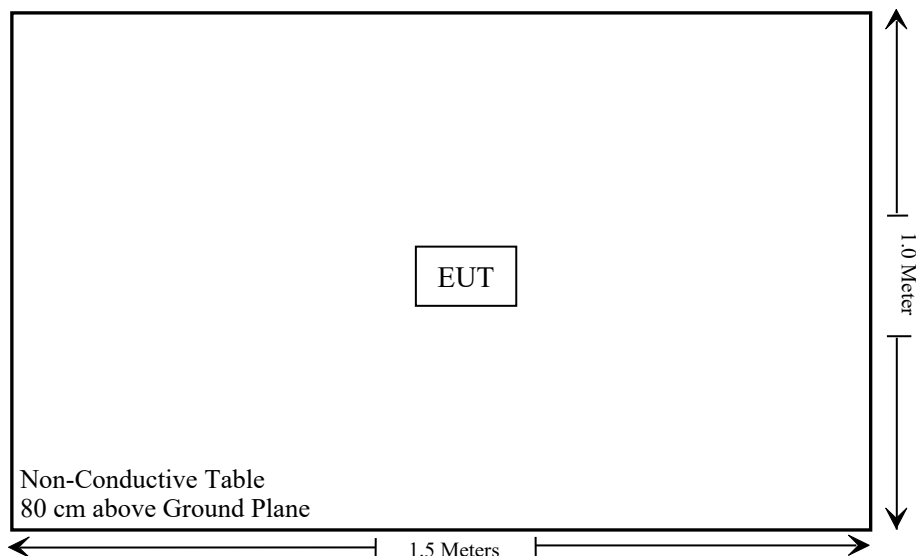

For Radiated Emissions above 1GHz:

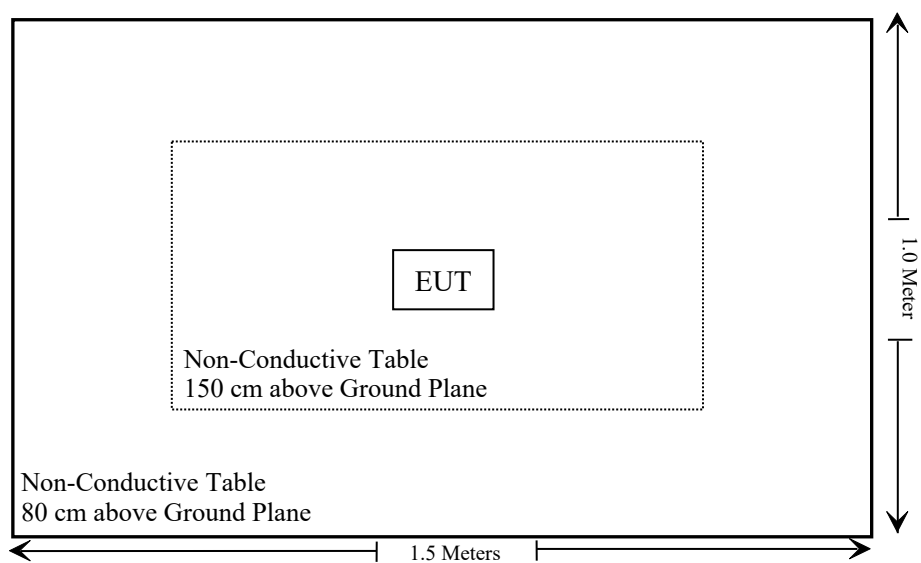

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§1.1307(b), §2.1093	RF Exposure Evaluation	Compliant
§2.1046, §95.567	RF Output Power	Compliant
§2.1047, §95.575	Modulation Characteristic	Compliant
§2.1049, §95.573, §95.579	Authorized Bandwidth & Emission Mask	Compliant
§2.1053, §95.579	Radiated Spurious Emission	Compliant
§2.1055(d), §95.565	Frequency Stability	Compliant
§95.587	FRS additional requirements	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2025/09/01	2026/08/31
Sonoma instrument	Pre-amplifier	310 N	186238	2025/09/08	2026/09/07
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Chamber A Cable	Cable A1	Cable A1	2025/09/08	2026/09/07
Unknown	Chamber A Cable	Cable A2	Cable A2	2025/09/08	2026/09/07
TDK	Chamber	Chamber A	2#	2023/07/12	2026/07/11
Agilent	Signal Generator	N5183A	MY50140588	2025/09/18	2026/09/17
COM-POWER	Dipole Antenna	3121C	9209-860	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2025/09/01	2026/08/31
A.H.System	Preamplifier	PAM-0118P	489	2025/09/08	2026/09/07
Schwarzbeck	Horn Antenna	BBHA9120D (1201)	1143	2023/07/26	2026/07/25
The Electro-Mechanics Co.	Horn Antenna	3115	9107-3694	2024/06/06	2027/06/05
Unknown	Chamber B Cable	Cable B1	Cable B1	2025/09/08	2026/09/07
Unknown	Chamber B Cable	Cable B2	Cable B2	2025/09/08	2026/09/07
Unknown	Chamber B Cable	Cable B3	Cable B3	2025/09/08	2026/09/07
JD	Filter Switch Unit	DT7220FSU	DS79906	2025/08/12	2026/08/11
JD	Multiplex Switch Test Control Set	DT7220SCU	DS79903	2025/08/12	2026/08/11
TDK	Chamber	Chamber B	1#	2023/07/14	2026/07/13
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV40	101942	2025/09/01	2026/08/31
BACL	Temp&Humi Test Chamber	BTH-150-40	30145	2025/09/11	2026/09/10
HP	RF Communication test set	8920B	US36141849	2025/09/18	2026/09/17
Agilent	Signal Generator	N5183A	MY50140588	2025/09/18	2026/09/17
instek	DC Power Supply	GPS-3030DD	EM832096	NCR	NCR
Fluke	Digital Multimeter	287	19000011	2025/04/29	2026/04/28
Unknown	10dB Attenuator	Unknown	F-03-EM190	2025/06/26	2026/06/25

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

§2.1093 - RF EXPOSURE INFORMATION

Applicable Standard

According to FCC §2.1093 and §1.1307(b)(3)(i)(B)

According to KDB 447498 D04 Interim General RF Exposure Guidance v01

This exemption is applicable to the frequency range between 300 MHz and 6 GHz, with test separation distances between 0.5 cm and 40 cm, and for all RF sources in fixed, mobile, and portable device exposure conditions.

Accordingly, a RF source is considered an RF exempt device if its available maximum time averaged (matched conducted) power or its effective radiated power (ERP), whichever is greater, are below a specified threshold. This exemption threshold was derived based on general population 1-g SAR requirements and is detailed in Appendix C.

Either SAR-based or MPE-based exemption may be considered for test exemption for fixed, mobile, or portable device exposure conditions; therefore, the contributions from each exemption in conjunction with the measured SAR (Evaluated term) shall be used to determine exemption for simultaneous transmission according to Formula (C.1) [repeated from § 1.1307(b)(3)(ii)(B)].

SAR-based thresholds are derived based on frequency, power, and separation distance of the RF source. The formula defines the thresholds in general for either available maximum time averaged power or maximum time-averaged ERP, whichever is greater.

If the ERP of a device is not easily determined, such as for a portable device with a small form factor, the applicant may use the available maximum time-averaged power exclusively if the device antenna or radiating structure does not exceed an electrical length of $\lambda/4$.

As for devices with antennas of length greater than $\lambda/4$ where the gain is not well defined, but always less than that of a half-wave dipole (length $\lambda/2$), the available maximum time-averaged power generated by the device may be used in place of the maximum time-averaged ERP, where that value is not known.

The separation distance is the smallest distance from any part of the antenna or radiating structure for all persons, during operation at the applicable ERP. In the case of mobile or portable devices, the separation distance is from the outer housing of the device where it is closest to the antenna.

The SAR-based exemption formula of § 1.1307(b)(3)(i)(B), repeated here as Formula (B.2), applies for single fixed, mobile, and portable RF sources with available maximum time-averaged power or effective radiated power (ERP), whichever is greater, of less than or equal to the threshold P_{th} (mW).

This method shall only be used at separation distances from 0.5 cm to 40 cm and at frequencies from 0.3 GHz to 6 GHz (inclusive). P_{th} is given by Formula (B.2).

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases} \quad (\text{B.2})$$

where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right)$$

and f is in GHz, d is the separation distance (cm), and $ERP_{20 \text{ cm}}$ is per Formula (B.1).
The example values shown in Table B.2 are for illustration only.

Table B.2—Example Power Thresholds (mW)

Frequency (MHz)	Distance (mm)									
	5	10	15	20	25	30	35	40	45	50
300	39	65	88	110	129	148	166	184	201	217
450	22	44	67	89	112	135	158	180	203	226
835	9	25	44	66	90	116	145	175	207	240
1900	3	12	26	44	66	92	122	157	195	236
2450	3	10	22	38	59	83	111	143	179	219
3600	2	8	18	32	49	71	96	125	158	195
5800	1	6	14	25	40	58	80	106	136	169

$$P_{th} \text{ (mW)} = ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases} \quad (\text{B.1})$$

$$\sum_{i=1}^a \frac{P_i}{P_{th,i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}} + \sum_{k=1}^c \frac{Evaluated_k}{Exposure Limit_k} \leq 1 \quad (\text{C.1})$$

- a number of fixed, mobile, or portable RF sources claiming exemption using the § 1.1307(b)(3)(i)(B) formula for P_{th} , including existing exempt transmitters and those being added.
- b number of fixed, mobile, or portable RF sources claiming exemption using the applicable § 1.1307(b)(3)(i)(C) Table 1 formula for Threshold ERP, including existing exempt transmitters and those being added.
- c number of existing fixed, mobile, or portable RF sources with known evaluation for the specified minimum distance.
- P_i the available maximum time-averaged power or the ERP, whichever is greater, for fixed, mobile, or portable RF source i at a distance between 0.5 cm and 40 cm (inclusive).
- $P_{th,i}$ the exemption threshold power (P_{th}) according to the § 1.1307(b)(3)(i)(B) formula for fixed, mobile, or portable RF source i .
- ERP_j the available maximum time-averaged power or the ERP, whichever is greater, of fixed, mobile, or portable RF source j .
- $ERP_{th,j}$ exemption threshold ERP for fixed, mobile, or portable RF source j , at a distance of at least $\lambda/2\pi$, according to the applicable § 1.1307(b)(3)(i)(C) Table 1 formula at the location in question.
- $Evaluated_k$ the maximum reported SAR or MPE of fixed, mobile, or portable RF source k either in the device or at the transmitter site from an existing evaluation.
- $Exposure Limit_k$ either the general population/uncontrolled maximum permissible exposure (MPE) or specific absorption rate (SAR) limit for each fixed, mobile, or portable sources, as applicable

The sum of the ratios of the applicable terms for SAR-based, MPE-based and measured SAR or MPE shall be less than 1, to determine simultaneous transmission exposure compliance.

Measurement Result**For worst case:**

Frequency (MHz)	Distance (mm)	P _{th} (mW)	Maximum Conducted Power including Tune-up Tolerance (dBm)	Antenna Gain (dBi)	The Greater of Conducted Power	
					dBm	mW
467.6125	5	20.86	11	-4.01	11	12.59

Note: Max tune-up conducted power[#] and antenna gain[#] was declared and provided by the applicant

Note: Conducted Power = ERP + 2.15 – Antenna Gain

Result: Compliant

FCC §2.1046 & §95.567 - RF OUTPUT POWER

Applicable Standard

Per FCC §2.1046, and §95.567, Each FRS transmitter type must be designed such that the effective radiated power (ERP) on channels 8 through 14 does not exceed 0.5 Watts and the ERP on channels 1 through 7 and 15 through 22 does not exceed 2.0 Watts.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the emissions were measured by the substitution.

Test Data

Environmental Conditions

Temperature:	24.5 °C
Relative Humidity:	45 %
ATM Pressure:	100.9 kPa

The testing was performed by Nico Wu on 2026-03-20.

Test Mode: Transmitting

Test Result: Compliant.

Frequency (MHz)	Receiver Reading (dBμV)	Polar (H / V)	Substituted			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd)			
467.6125MHz								
467.6125	58.57	H	-15.2	1.08	0	-16.28	27	43.28
467.6125	74.47	V	5.5	1.08	0	4.42	27	22.58

Note:

Absolute Level = Substituted Level - Cable loss + Antenna Gain


Margin = Limit- Absolute Level

FCC §2.1047 & §95.575 - MODULATION CHARACTERISTIC

Applicable Standard

Per FCC §2.1047 and §95.575: Each FRS transmitter type must be designed such that the peak frequency deviation does not exceed 2.5 kHz, and the highest audio frequency contributing substantially to modulation must not exceed 3.125 kHz.

Test Block Diagram

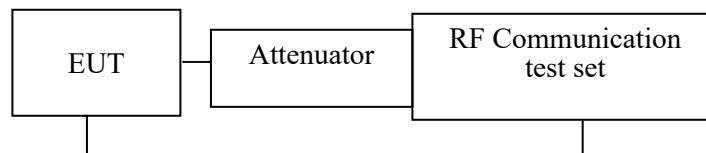

Test Procedure

ANSI C63.26-2015

5.3.2 Modulation limiting test methodology

Modulation limiting is the ability of a transmitter circuit to limit the transmitter from producing deviations in excess of a rated system deviation.

- Connect the equipment as illustrated in Figure 1.
- Adjust the transmitter per the manufacturer's procedure for full rated system deviation.
- Set the test receiver to measure peak positive deviation. Set the audio bandwidth for ≤ 0.25 Hz to $\geq 15\,000$ Hz. Turn the de-emphasis function off.
- Apply a 1000 Hz modulating signal to the transmitter from the audio frequency generator, and adjust the level to obtain 60% of full rated system deviation. This is the 0 dB reference level.
- Increase the level from the audio generator by 20 dB in 5 dB increments recording the deviation as measured from the test receiver in each step. Verify that the audio level used to make the OBW measurement is included in the sweep.
- Repeat for step e) at 300 Hz, 2500 Hz and 3000 Hz at a minimum using the 0 dB reference level obtained in step d).
- Set the test receiver to measure peak negative deviation and repeat step d) through step f).
- The values recorded in step f) and step g) are the modulation limiting.
- Plot the data set as a percentage of deviation relative to the 0 dB reference point versus input voltage.

5.3.3.2 Audio frequency response test methodology—Constant Input

- Connect the equipment as illustrated in Figure 3.
- Set the test receiver to measure peak positive deviation. Set the audio bandwidth for ≤ 50 Hz to $\geq 15\,000$ Hz. Turn the de-emphasis function off.
- Adjust the transmitter per the manufacturer's procedure for full rated system deviation.
- Apply a 1000 Hz tone and adjust the audio frequency generator to produce 20% of the rated system deviation.

- e) Set the test receiver to measure rms deviation and record the deviation reading as DEVREF.
f) Set the audio frequency generator to the desired test frequency between 300 Hz and 3000 Hz.
g) Record the test receiver deviation reading as DEVFREQ.
h) Calculate the audio frequency response at the present frequency as follows in Equation (4):

$$\text{audio frequency response} = 20 \log_{10} \left(\frac{\text{DEV}_{\text{FREQ}}}{\text{DEV}_{\text{REF}}} \right) \quad (4)$$

- i) Repeat step f) through step h) for all the desired test frequencies.

Test Data

Environmental Conditions

Temperature:	25.3 °C
Relative Humidity:	49 %
ATM Pressure:	100.5 kPa

The testing was performed by Cheeb Huang on 2026-03-04.

Test Mode: Transmitting


Please refer to the following tables and plots.

MODULATION LIMITING

Carrier Frequency: 467.6125MHz


Peak+ deviation

Audio input level (dB)	Deviation (Hz)				Limit (Hz)
	300Hz	1000Hz	2500Hz	3000Hz	
20	2051	2442	2121	1433	2500
15	1945	2430	2187	1446	2500
10	1234	2426	2143	1411	2500
5	712	2398	2199	1383	2500
0	416	1500	2132	1348	2500

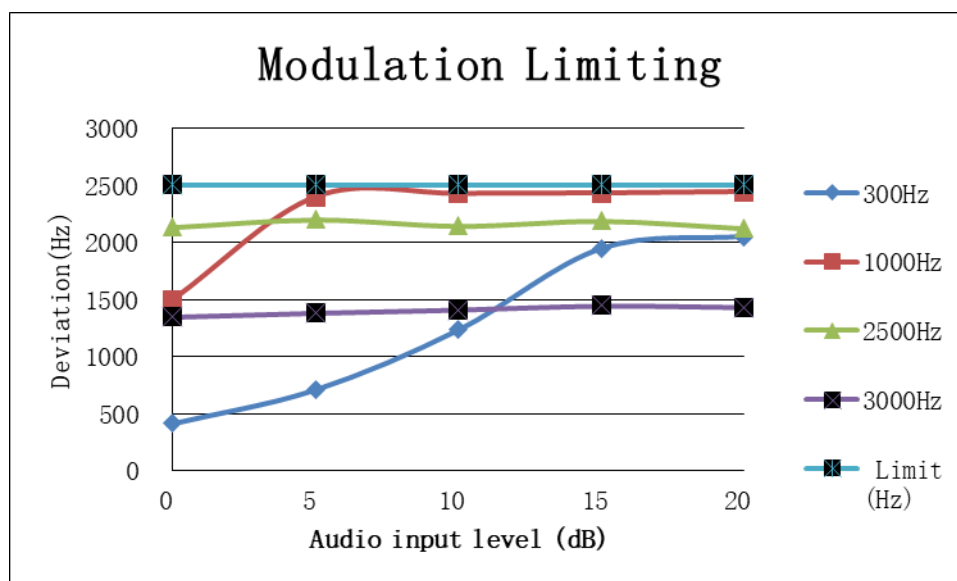

Peak- deviation


Audio input level (dB)	Deviation (Hz)				Limit (Hz)
	300Hz	1000Hz	2500Hz	3000Hz	
20	2057	2413	2256	1455	2500
15	1952	2414	2199	1483	2500
10	1234	2417	2211	1432	2500
5	711	2398	2229	1394	2500
0	410	1500	2202	1354	2500

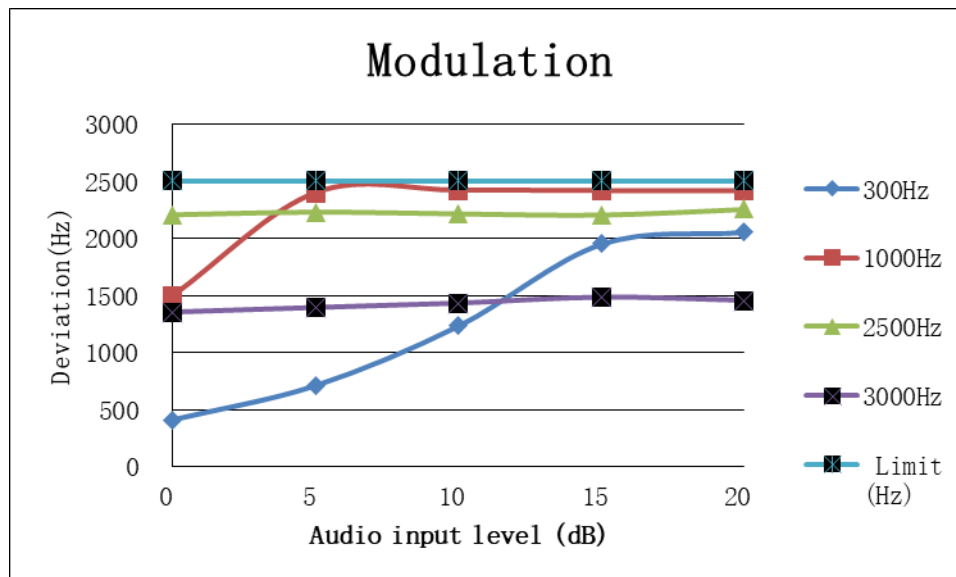

Audio Frequency Response

Carrier Frequency: 467.6125MHz

Audio Frequency (Hz)	Response Attenuation (dB)
300	-10.17
400	-7.54
500	-5.81
600	-4.44
700	-3.07
800	-1.79
900	-0.86
1000	0.00
1200	1.61
1400	2.76
1600	3.60
1800	4.27
2000	6.24
2200	6.79
2400	7.52
2600	7.94
2800	7.99
3000	8.41
3125	9.11

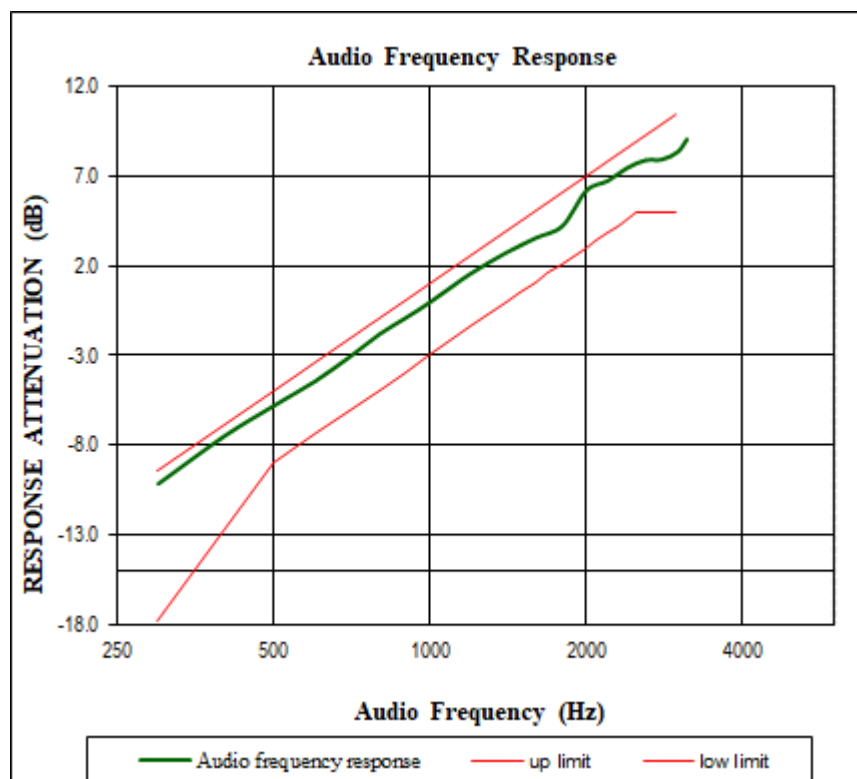

FCC §2.1049 & §95.573 & §95.579 - AUTHORIZED BANDWIDTH AND EMISSION MASK

Applicable Standard

According to §95.573. Each FRS transmitter type must be designed such that the occupied bandwidth does not exceed 12.5 kHz.

Each FRS transmitter type must be designed to satisfy the applicable unwanted emissions limits in this paragraph.

(a) Attenuation requirements. The power of unwanted emissions must be attenuated below the carrier power output in Watts (P) by at least:


(1) 25 dB (decibels) in the frequency band 6.25 kHz to 12.5 kHz removed from the channel center frequency.

(2) 35 dB in the frequency band 12.5 kHz to 31.25 kHz removed from the channel center frequency.

(3) $43 + 10 \log (P)$ dB in any frequency band removed from the channel center frequency by more than 31.25 kHz.

(b) Measurement bandwidths. The power of unwanted emissions in the frequency bands specified in paragraphs (a)(1) and (2) of this section is measured with a reference bandwidth of 300 Hz. The power of unwanted emissions in the frequency range specified in paragraph (a)(3) is measured with a reference bandwidth of at least 30 kHz.

Test Block Diagram

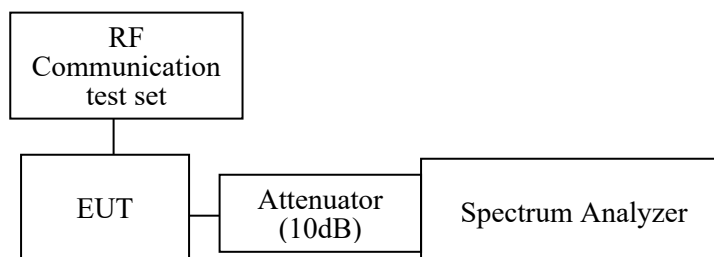

Test Procedure

ANSI C63.26-2015

5.4.4 Occupied bandwidth—Power bandwidth (99%) measurement procedure

The OBW is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring (99%) power bandwidth:

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of $1.5 \times \text{OBW}$ is sufficient).
- b) The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times \text{RBW}$.
- c) Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.

NOTE—Step a), step b), and step c) may require iteration to adjust within the specified tolerances.

- d) Set the detection mode to peak, and the trace mode to max-hold.
- e) If the instrument does not have a 99% OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5% of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5% of the total is reached and record that frequency as the upper OBW frequency. The 99% power OBW can be determined by computing the difference these two frequencies.
- f) The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).

Test Data

Environmental Conditions


Temperature:	25.3-25.8 °C
Relative Humidity:	49-55 %
ATM Pressure:	100.5-101.3 kPa

The testing was performed by Cheeb Huang from 2026-03-04 to 2026-04-08.

Test Mode: Transmitting


Test Frequency (MHz)	99% Occupied Bandwidth (kHz)	Limit (kHz)
467.6125	9.986	≤ 12.5

OBW, 467.6125 MHz

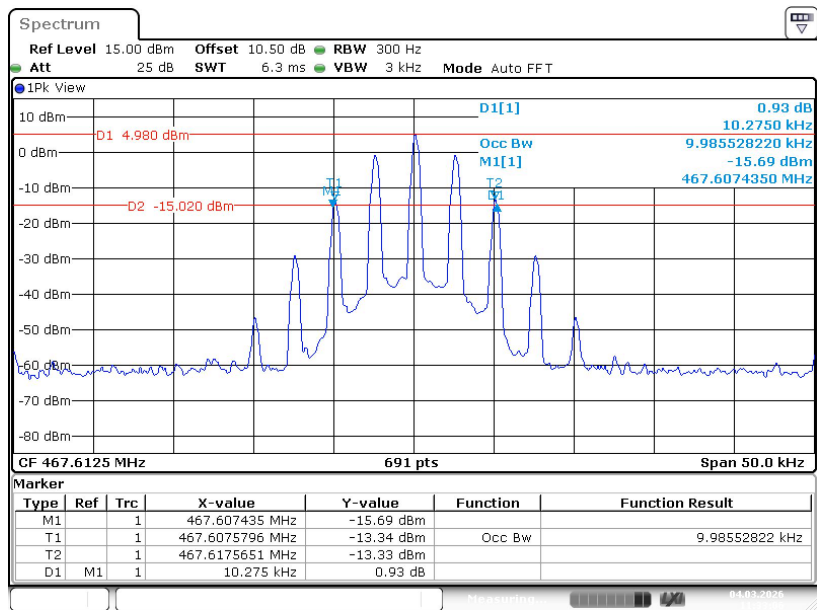

ProjectNo.:2601Q23112E-RF Tester:Cheeb Huang
Date: 4.MAR.2026 11:33:06

Emission Mask, 467.6125 MHz

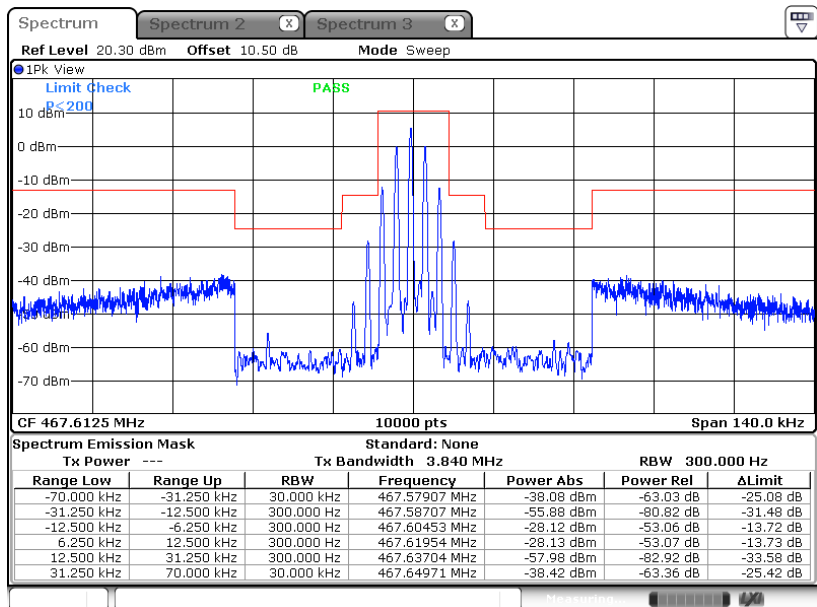

ProjectNo.:2601Q23112E-RF Tester:Cheeb Huang
Date: 8.APR.2026 18:21:51

FCC §2.1053 & §95.579 - RADIATED SPURIOUS EMISSION

Applicable Standard

FCC §2.1053 and §95.579. Each FRS transmitter type must be designed to satisfy the applicable unwanted emissions limits in this paragraph.

(a) *Attenuation requirements.* The power of unwanted emissions must be attenuated below the carrier power output in Watts (P) by at least:

- (1) 25 dB (decibels) in the frequency band 6.25 kHz to 12.5 kHz removed from the channel center frequency.
- (2) 35 dB in the frequency band 12.5 kHz to 31.25 kHz removed from the channel center frequency.
- (3) $43 + 10 \log (P)$ dB in any frequency band removed from the channel center frequency by more than 31.25 kHz.

(b) *Measurement bandwidths.* The power of unwanted emissions in the frequency bands specified in paragraphs (a)(1) and (2) of this section is measured with a reference bandwidth of 300 Hz. The power of unwanted emissions in the frequency range specified in paragraph (a)(3) is measured with a reference bandwidth of at least 30 kHz.

(c) *Measurement conditions.* The requirements in this section apply to each FRS transmitter type both with and without the connection of permitted attachments, such as an external speaker, microphone and/or power cord.

Test Procedure

The transmitter was placed on a wooden turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg (\text{TXpwr in Watts}/0.001)$ - the absolute level

Spurious attenuation limit in dB = $43 + 10 \log_{10} (\text{power out in Watts})$

Test Data**Environmental Conditions**

Temperature:	23.5~24.5 °C
Relative Humidity:	45~56 %
ATM Pressure:	100.9~101.3 kPa

The testing was performed by Nico Wu on 2026-03-20 for below 1GHz and Wing K Ji on 2026-02-27 for above 1GHz.

Test Mode: Transmitting

Frequency (MHz)	Receiver Reading (dBμV)	Polar (H/V)	Substituted Factor			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Cable Loss (dB)	Antenna Gain (dBi/dBd)			
467.6125MHz								
935.225	59.88	H	-36.5	1.33	0	-37.83	-13	24.83
935.225	60.37	V	-35.7	1.33	0	-37.03	-13	24.03
1402.8375	62.37	H	-51.9	0.90	7.80	-45.00	-13	32.00
1402.8375	68.08	V	-46.9	0.90	7.80	-40.00	-13	27.00
1870.4500	60.48	H	-53.9	1.20	9.40	-45.70	-13	32.70
1870.4500	61.25	V	-53.8	1.20	9.40	-45.60	-13	32.60
2338.0625	81.38	H	-32.9	1.50	9.60	-24.80	-13	11.80
2338.0625	76.51	V	-37.9	1.50	9.60	-29.80	-13	16.80
2805.6750	52.99	H	-60.9	1.70	9.30	-53.30	-13	40.30
2805.6750	52.43	V	-61.2	1.70	9.30	-53.60	-13	40.60
3273.2875	67.49	H	-46.0	1.70	9.60	-38.10	-13	25.10
3273.2875	60.86	V	-52.3	1.70	9.60	-44.40	-13	31.40
3740.9000	58.17	H	-54.6	2.10	9.70	-47.00	-13	34.00
3740.9000	55.69	V	-56.9	2.10	9.70	-49.30	-13	36.30
4208.5125	72.54	H	-39.9	1.80	9.60	-32.10	-13	19.10
4208.5125	62.60	V	-49.8	1.80	9.60	-42.00	-13	29.00
4676.1250	57.18	H	-55.4	2.10	10.40	-47.10	-13	34.10
4676.1250	53.58	V	-59.0	2.10	10.40	-50.70	-13	37.70

Note:

The unit of antenna gain is dBd for frequency below 1GHz and is dBi for frequency above 1GHz.

Absolute Level = Substituted Level - Cable loss + Antenna Gain

Margin = Limit- Absolute Level

FCC§2.1055 (d) & §95.565 - FREQUENCY STABILITY

Applicable Standard

According to FCC §2.1055(a) (2), the frequency stability shall be measured with variation of ambient temperature from -20°C to $+50^{\circ}\text{C}$, and according to FCC 2.1055(d) (2), the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point which is specified by the manufacturer.

According to FCC §95.565, Each FRS transmitter type must be designed such that the carrier frequencies remain within ± 2.5 parts-per-million of the channel center frequencies specified in §95.563 during normal operating conditions.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a Frequency Counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.


After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the Frequency Counter.

Frequency Stability vs. Voltage (item 1 or item 2 will be chosen according to different condition) :

☐1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

☒2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

The output frequency was recorded for each voltage.

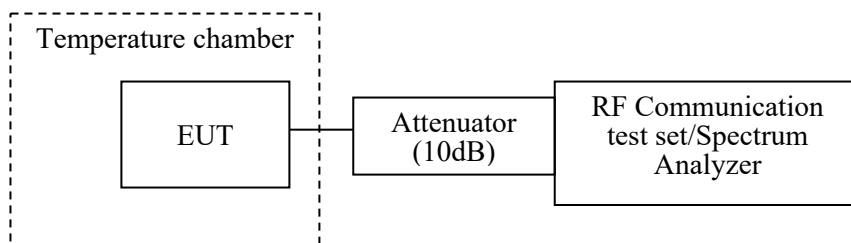

Test Data**Environmental Conditions**

Temperature:	25.3 °C
Relative Humidity:	49 %
ATM Pressure:	100.5 kPa

The testing was performed by Cheeb Huang on 2026-03-04.

Test Mode: Transmitting

Test Frequency (MHz)	Temperature (°C)	Voltage (V_{DC})	Measured Frequency (MHz)	Frequency Error (ppm)	Limit (ppm)
467.6125	-30	3	467.612571	0.1518	≤2.5
	-20	3	467.612632	0.2823	≤2.5
	-10	3	467.612727	0.4854	≤2.5
	0	3	467.612581	0.1732	≤2.5
	10	3	467.612707	0.4427	≤2.5
	20	3	467.612686	0.3978	≤2.5
	30	3	467.612579	0.1689	≤2.5
	40	3	467.61269	0.4063	≤2.5
	50	3	467.61258	0.1711	≤2.5
	20	2.7	467.612558	0.1240	≤2.5
	20	3.3	467.612584	0.1796	≤2.5

§95.587 - FRS ADDITIONAL REQUIREMENTS

Applicable Standard

According to FCC §95.587

Each FRS transmitter type must be designed to meet the following additional requirements.

(a) Transmit frequency capability. FRS transmitter types must not be capable of transmitting on any frequency or channel other than those listed in § 95.563.

(b) Antenna. The antenna of each FRS transmitter type must meet the following requirements.

- (1) The antenna must be a non-removable integral part of the FRS transmitter type.
- (2) The gain of the antenna must not exceed that of a half-wave dipole antenna.
- (3) The antenna must be designed such that the electric field of the emitted waves is vertically polarized when the unit is operated in the normal orientation.

(c) Digital data transmissions. FRS transmitter types having the capability to transmit digital data must be designed to meet the following requirements.

- (1) FRS units may transmit digital data containing location information, or requesting location information from one or more other FRS or GMRS units, or containing a brief text message to another specific FRS or GMRS unit or units.
- (2) Digital data transmissions may be initiated by a manual action or command of the operator or on an automatic or periodic basis, and FRS units may be designed to automatically respond with location data upon receiving an interrogation request from another
- (3) Digital data transmissions must not exceed one second in duration.
- (4) Digital data transmissions must not be sent more frequently than one digital data transmission within a thirty-second period, except that an FRS unit may automatically respond to more than one interrogation request received within a thirty-second period.

(d) Packet mode. FRS transmitter types must not be capable of transmitting data in the store-and-forward packet operation mode.

(e) Effective September 30, 2019, no person shall manufacture or import hand-held portable radio equipment capable of operating under this subpart (FRS) and other licensed or licensed-by-rule services in this chapter (part 15 unlicensed equipment authorizations are permitted if consistent with part 15 rules).

Result

- (a) Compliant, please refer to the channel list.
- (b) Compliant, EUT has an non-removable integral vertically polarized antenna arrangement and the antenna gain is -4.01dBi(-6.16dBd), fulfill the requirement of this section. Please refer to the EUT photos.
- (c) Not Applicant, EUT not support this function, please refer to user manual.
- (d) Not Applicant, EUT not support this function, please refer to user manual.
- (e) Compliant, EUT only with FRS function operating under FCC part 95B, not support other function, please refer to user manual.

EUT PHOTOGRAPHS

Please refer to the attachment 2601Q23112E-RF-EXP External photo and 2601Q23112E-RF-INP Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2601Q23112E-RF-TSP Test Setup photo.

******* END OF REPORT *******