

TEST REPORT

Applicant Name: Kiddesigns Inc
Address: 1299 Main Street, Rahway New Jersey 07065-0901, United States
Report Number: 2401Y40489E-RF-00
FCC ID: IAJ212C10A

Test Standard (s)

FCC PART 95 Subpart B

Sample Description

Product Type: XX-212 Walkie talkies
Model No.: SM-212.EXv22
Multiple Model(s) No.: N/A
Trade Mark: eKids
Date Received: 2024/10/11
Issue Date: 2025/01/09

Test Result:

Pass▲

▲ In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Bruce Lin

Bruce Lin
RF Engineer

Approved By:

Jimmy Xiao

Jimmy Xiao
EMC Manager

Note: The information marked # is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP or any agency of the U.S. Government.

This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "▼".

Bay Area Compliance Laboratories Corp. (Shenzhen)

5F(B-West), 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China

Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY	4
GENERAL INFORMATION.....	5
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	5
OBJECTIVE	5
TEST METHODOLOGY	5
MEASUREMENT UNCERTAINTY	6
TEST FACILITY	6
SYSTEM TEST CONFIGURATION	7
DESCRIPTION OF TEST CONFIGURATION	7
EQUIPMENT MODIFICATIONS	7
SUPPORT EQUIPMENT LIST AND DETAILS	7
EXTERNAL I/O CABLE.....	7
BLOCK DIAGRAM OF TEST SETUP	8
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
§2.1093 - RF EXPOSURE EVALUATION	11
APPLICABLE STANDARD	11
MEASUREMENT RESULT	11
FCC §2.1046 & §95.567 - RF OUTPUT POWER.....	12
APPLICABLE STANDARD	12
TEST PROCEDURE	12
TEST DATA	12
FCC §2.1047 & §95.575 - MODULATION CHARACTERISTIC	13
APPLICABLE STANDARD	13
TEST PROCEDURE	13
TEST DATA	13
FCC §2.1049 & §95.573 & §95.579 - AUTHOURIZED BANDWIDTH AND EMISSION MASK.....	18
APPLICABLE STANDARD	18
TEST PROCEDURE	18
TEST DATA	19
FCC §2.1053 & §95.579 - RADIATED SPURIOUS EMISSION	21
APPLICABLE STANDARD	21
TEST PROCEDURE	21
TEST DATA	22
FCC§2.1055 (D) & §95.565 - FREQUENCY STABILITY	23
APPLICABLE STANDARD	23
TEST PROCEDURE	23
TEST DATA	24
§95.587 - FRS ADDITIONAL REQUIREMENTS.....	25
APPLICABLE STANDARD	25
RESULT	25

EUT PHOTOGRAPHS.....26

TEST SETUP PHOTOGRAPHS27

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
0	2401Y40489E-RF-00	Original Report	2025/01/09

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	XX-212 Walkie talkies
Tested Model	SM-212.EXv22
Multiple Model(s)	N/A
Frequency Range	467.6125MHz
Transmit Power (ERP)	6.82dBm
Channel Spacing	12.5kHz
Modulation Technique	FM
Antenna Specification [#]	0dBi (It is provided by the applicant)
Voltage Range	DC 3*1.5V by battery
Sample serial number	2SIN-1 for Radiated Emissions Test 2SIN-2 for RF Conducted Test (Assigned by BACL, Shenzhen)
Sample/EUT Status	Good condition
Normal/Extreme Condition [#]	L.V.: Low Voltage 2.5V _{DC} N.V.: Normal Voltage 4.5V _{DC} H.V.: High Voltage 5V _{DC} (provided by the applicant)
Adapter Information	N/A

Objective

This test report is in accordance with Part 2 and Part 95, Subpart A & Subpart B of the Federal Communication Commissions rules.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2-Subpart J as well as the following parts:

Part 95 Subpart B - Family Radio Service (FRS)

ANSI C63.26-2015: American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

TIA-603-E: Land Mobile FM or PM-Communications Equipment-Measurement and Performance Standards

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		109.2kHz(k=2, 95% level of confidence)
RF Frequency		56.6Hz(k=2, 95% level of confidence)
Audio Frequency Response		0.1dB(k=2, 95% level of confidence)
Low Pass Filter Response		1.2dB(k=2, 95% level of confidence)
Modulation Limiting		1%(k=2, 95% level of confidence)
Radiated Emissions	30MHz~200MHz (Horizontal)	5.32dB(k=2, 95% level of confidence)
	30MHz~200MHz (Vertical)	5.43dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Horizontal)	5.77dB(k=2, 95% level of confidence)
	200MHz~1000MHz (Vertical)	5.73dB(k=2, 95% level of confidence)
	1GHz - 6GHz	5.34dB(k=2, 95% level of confidence)
	6GHz - 18GHz	5.40dB(k=2, 95% level of confidence)
Temperature		±1°C
Humidity		±1%
Supply voltages		±0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) , 6F, 7F, the 3rd Phase of Wan Li Industrial Building D, Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 715558, the FCC Designation No. : CN5045.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a typical fashion (as normally used by a typical user).

Equipment Modifications

No modification was made to the EUT tested.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
/	/	/	/

External I/O Cable

Cable Description	Length (m)	From Port	To
/	/	/	/

Block Diagram of Test Setup

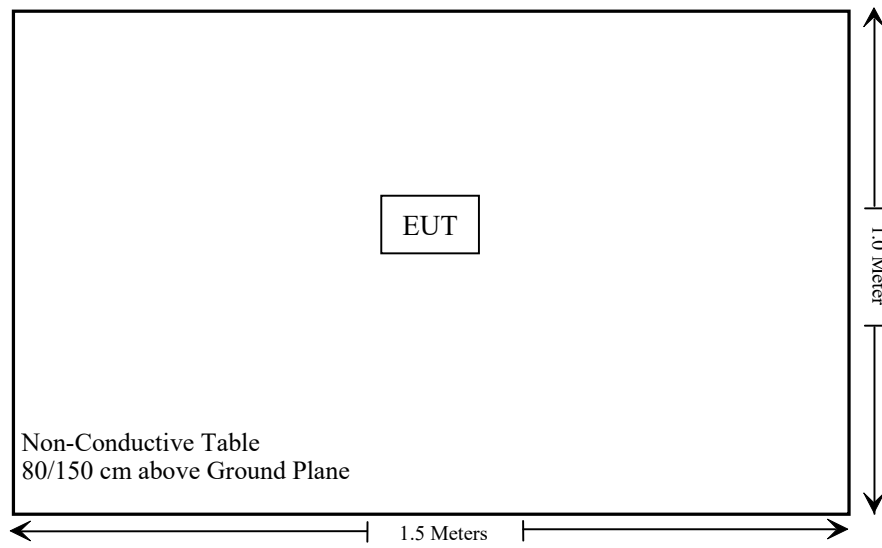

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§2.1093	RF Exposure	Compliant
§2.1046, §95.567	RF Output Power	Compliant
§2.1047, §95.575	Modulation Characteristic	Compliant
§2.1049, §95.573, §95.579	Authorized Bandwidth & Emission Mask	Compliant
§2.1053, §95.579	Radiated Spurious Emission	Compliant
§2.1055(d), §95.565	Frequency Stability	Compliant
§95.587	FRS additional requirements	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESR3	102455	2024/01/16	2025/01/15
Sonoma instrument	Pre-amplifier	310 N	186238	2024/05/21	2025/05/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2023/07/20	2026/07/19
Unknown	Cable	Chamber A Cable 1	N/A	2024/06/18	2025/06/17
Unknown	Cable	XH500C	J-10M-A	2024/06/18	2025/06/17
Agilent	Signal Generator	N5183A	MY50140588	2023/12/18	2024/12/17
COM-POWER	Dipole Antenna	AD-100	721027	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40	101605	2024/03/27	2025/03/26
COM-POWER	Pre-amplifier	PA-122	181919	2024/06/18	2025/06/17
Schwarzbeck	Horn Antenna	BBHA9120D(1201)	1143	2023/07/26	2026/07/25
The Electro-Mechanics Co.	Horn Antenna	3115	9107-3694	2024/06/06	2027/06/05
Unknown	RF Cable	KMSE	735	2024/06/18	2025/06/17
Unknown	RF Cable	UFA147	219661	2024/06/18	2025/06/17
Unknown	RF Cable	XH750A-N	J-10M	2024/06/18	2025/06/17
JD	Multiplex Switch Test Control Set	DT7220FSU	DQ77926	2024/06/18	2025/06/17
RF Conducted Test					
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200982	2023/12/18	2024/12/17
BACL	Temperature & Humidity Chamber	BTH-150-40	30144	2024/01/16	2025/01/15
HP	RF Communication test set	8920B	US36141849	2024/01/16	2025/01/15
instek	DC Power Supply	GPS-3030DD	EM832096	NCR	NCR
Fluke	Digital Multimeter	287	19000011	2024/05/21	2025/05/20
WEINSCHL	30dB Attenuator	58-30-33	PS509	2024/06/27	2025/06/26
Unknown	RF Cable	65475	01670515	2024/06/27	2025/06/26

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

§2.1093 - RF EXPOSURE EVALUATION

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance V06.

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$\left[\frac{\text{(max. power of channel, including tune-up tolerance, mW)}}{\text{(min. test separation distance, mm)}} \right] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$$

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Measurement Result

For worst case:

Mode	Frequency (MHz)	Max tune-up ERP [#] (dBm)	Max tune-up ERP [#] (mW)	Distance (mm)	Calculated value	Threshold (1-g SAR)	SAR Test Exclusion
FRS	467.6125	7.0	5.0	5	0.7	3	Yes

Result: Compliant

FCC §2.1046 & §95.567 - RF OUTPUT POWER

Applicable Standard

Per FCC §2.1046, and §95.567, Each FRS transmitter type must be designed such that the effective radiated power (ERP) on channels 8 through 14 does not exceed 0.5 Watts and the ERP on channels 1 through 7 and 15 through 22 does not exceed 2.0 Watts.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the emissions were measured by the substitution.

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	50 %
ATM Pressure:	101 kPa

The testing was performed by Anson Su on 2024-10-23.

Test Mode: Transmitting

Test Result: Compliant.

Frequency (MHz)	Receiver Reading (dBm)	Polar (H/V)	Substituted Factor			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Cable Loss (dB)	Antenna Gain (dBd)			
467.6125	61.34	H	-12.4	1.08	0.0	-13.48	27	40.48
467.6125	76.93	V	7.9	1.08	0.0	6.82	27	20.18


FCC §2.1047 & §95.575 - MODULATION CHARACTERISTIC

Applicable Standard

Per FCC §2.1047 and §95.575: Each FRS transmitter type must be designed such that the peak frequency deviation does not exceed 2.5 kHz, and the highest audio frequency contributing substantially to modulation must not exceed 3.125 kHz.

Test Procedure

Test Method: ANSI C63.26-2015 section 5.3



Test Data

Environmental Conditions

Temperature:	23.8~25.9 °C
Relative Humidity:	44.5~50.2 %
ATM Pressure:	101 kPa

The testing was performed by Allen Bai from 2024-10-28 to 2024-11-30.

Test Mode: Transmitting


Please refer to the following tables and plots.

MODULATION LIMITING

Carrier Frequency: 467.6125MHz


Peak+ deviation

Audio input level (dB)	Deviation (Hz)				Limit (Hz)
	300Hz	1000Hz	2500Hz	3000Hz	
20	2338	2496	2359	2313	2500
15	1611	2485	2310	2372	2500
10	962	2389	2395	2314	2500
5	618	2174	2351	2189	2500
0	487	1507	2298	2019	2500

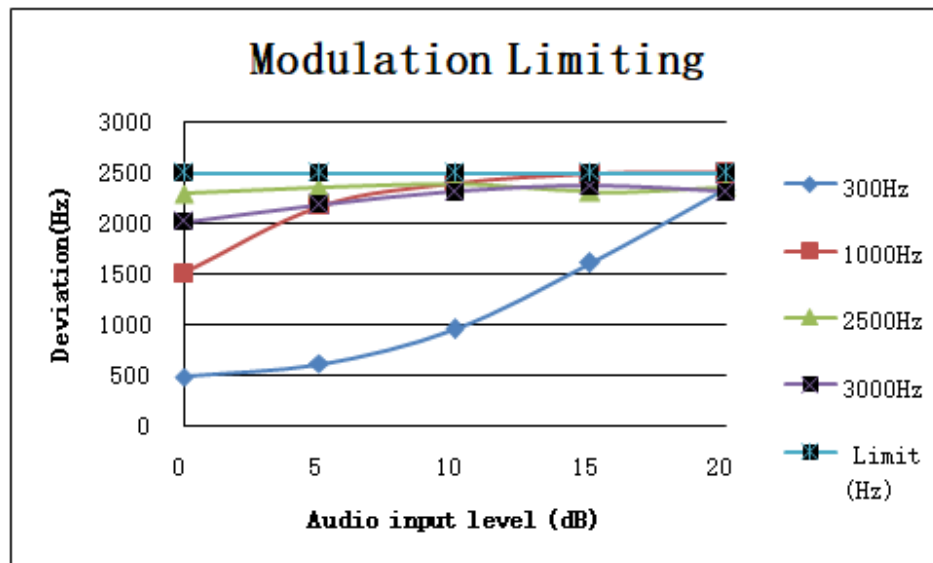

Peak- deviation


Audio input level (dB)	Deviation (Hz)				Limit (Hz)
	300Hz	1000Hz	2500Hz	3000Hz	
20	2196	2496	2224	1791	2500
15	1644	2462	2226	1782	2500
10	906	2394	2178	1775	2500
5	536	2154	2126	1691	2500
0	422	1503	2063	1449	2500

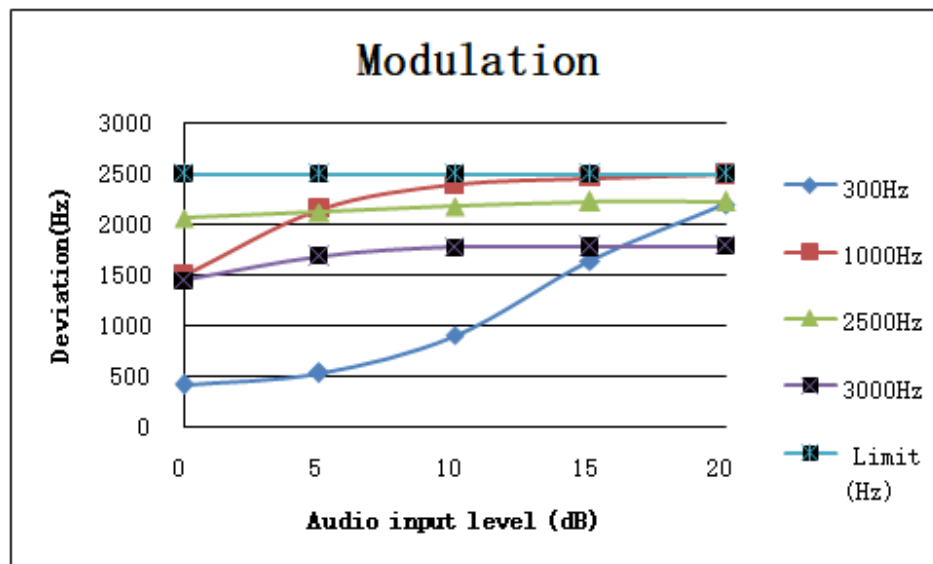

Audio Frequency Response

Carrier Frequency: 467.6125MHz

Audio Frequency (Hz)	Response Attenuation (dB)
300	-10.63
400	-8.09
500	-5.88
600	-4.26
700	-2.95
800	-2.00
900	-0.99
1000	0.00
1200	1.92
1400	3.01
1600	4.14
1800	5.37
2000	5.80
2200	6.49
2400	7.04
2600	6.75
2800	6.64
3000	6.90
3125	5.95

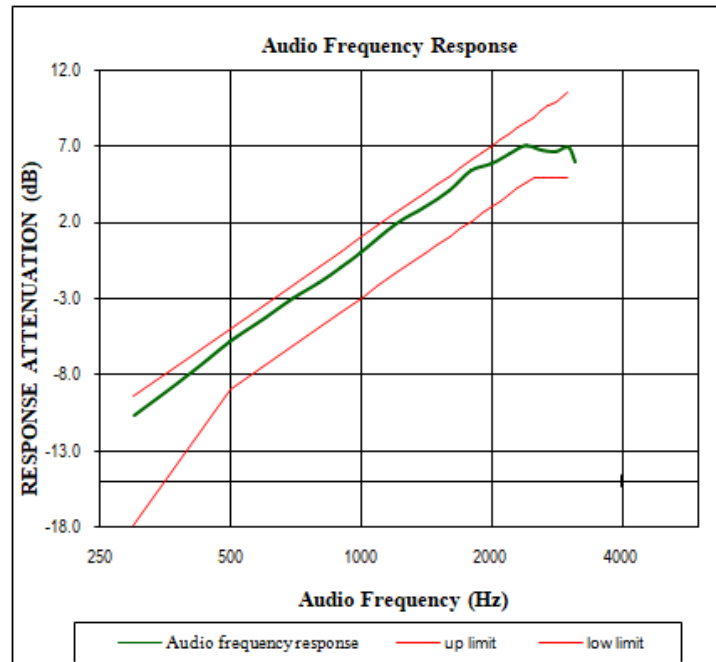

FCC §2.1049 & §95.573 & §95.579 - AUTHORIZED BANDWIDTH AND EMISSION MASK

Applicable Standard

According to §95.573. Each FRS transmitter type must be designed such that the occupied bandwidth does not exceed 12.5 kHz.

Each FRS transmitter type must be designed to satisfy the applicable unwanted emissions limits in this paragraph.

(a) Attenuation requirements. The power of unwanted emissions must be attenuated below the carrier power output in Watts (P) by at least:

(1) 25 dB (decibels) in the frequency band 6.25 kHz to 12.5 kHz removed from the channel center frequency.


(2) 35 dB in the frequency band 12.5 kHz to 31.25 kHz removed from the channel center frequency.

(3) $43 + 10 \log(P)$ dB in any frequency band removed from the channel center frequency by more than 31.25 kHz.

(b) Measurement bandwidths. The power of unwanted emissions in the frequency bands specified in paragraphs (a)(1) and (2) of this section is measured with a reference bandwidth of 300 Hz. The power of unwanted emissions in the frequency range specified in paragraph (a)(3) is measured with a reference bandwidth of at least 30 kHz.

Test Procedure

According to ANSI C63.26-2015 section 5.4.4.

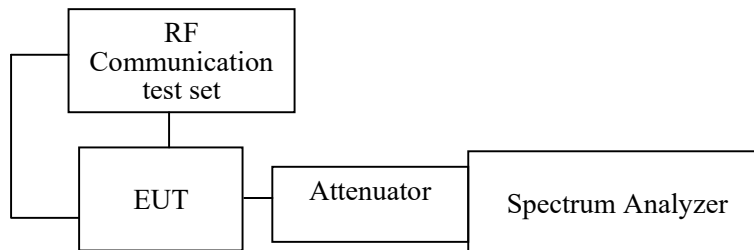

The OBW is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission.

The following procedure shall be used for measuring (99%) power bandwidth:

- The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be set wide enough to capture all modulation products including the emission skirts (typically a span of $1.5 \times \text{OBW}$ is sufficient).
 - The nominal IF filter 3 dB bandwidth (RBW) shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times \text{RBW}$.
 - Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.
- NOTE—Step a), step b), and step c) may require iteration to adjust within the specified tolerances.

- d) Set the detection mode to peak, and the trace mode to max-hold.
- e) If the instrument does not have a 99% OBW function, recover the trace data points and sum directly in linear power terms. Place the recovered amplitude data points, beginning at the lowest frequency, in a running sum until 0.5% of the total is reached. Record that frequency as the lower OBW frequency. Repeat the process until 99.5% of the total is reached and record that frequency as the upper OBW frequency. The 99% power OBW can be determined by computing the difference these two frequencies.
- f) The OBW shall be reported and plot(s) of the measuring instrument display shall be provided with the test report. The frequency and amplitude axis and scale shall be clearly labeled. Tabular data can be reported in addition to the plot(s).

Test Data

Environmental Conditions

Temperature:	23.8~25.9 °C
Relative Humidity:	44.5~50.2 %
ATM Pressure:	101 kPa

The testing was performed by Allen Bai and Cheeb Huang from 2024-11-29 to 2024-11-30.


Test Mode: Transmitting

Frequency (MHz)	99% Occupied Bandwidth (kHz)	Limit (kHz)
467.6125	9.96	12.5

Emission Designator Per CFR 47 §2.201& §2.202&, $B_n = 2M + 2D$:


Emission Designator 11K0F3E In this case, the maximum modulating frequency is 3.0 kHz with a 2.5 kHz deviation. $BW = 2(M+D) = 2*(3.0 \text{ kHz} + 2.5 \text{ kHz}) = 11 \text{ kHz} \rightarrow 11K0$
F3E portion of the designator represents an FM voice transmission Therefore, the entire designator for 12.5 kHz channel spacing FM mode is 11K0F3E.

OBW, 467.6125 MHz

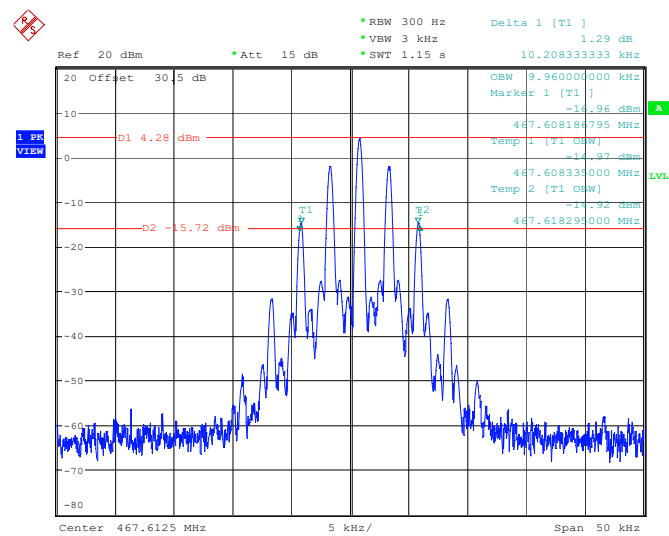

ProjectNo.:2401Y40489E-RF Tester:Allen Bai
Date: 30.NOV.2024 00:19:20

Emission Mask, 467.6125 MHz

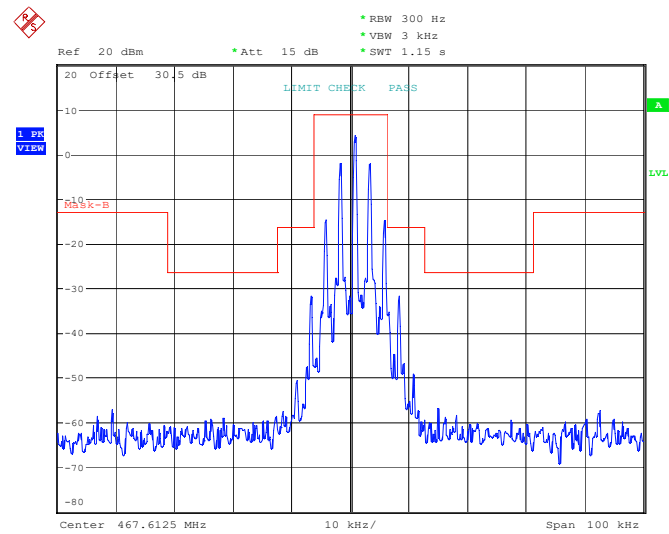

ProjectNo.:2401Y40489E-RF Tester:Allen Bai
Date: 29.NOV.2024 22:36:47

FCC §2.1053 & §95.579 - RADIATED SPURIOUS EMISSION

Applicable Standard

FCC §2.1053 and §95.579. Each FRS transmitter type must be designed to satisfy the applicable unwanted emissions limits in this paragraph.

(a) *Attenuation requirements.* The power of unwanted emissions must be attenuated below the carrier power output in Watts (P) by at least:

- (1) 25 dB (decibels) in the frequency band 6.25 kHz to 12.5 kHz removed from the channel center frequency.
- (2) 35 dB in the frequency band 12.5 kHz to 31.25 kHz removed from the channel center frequency.
- (3) $43 + 10 \log (P)$ dB in any frequency band removed from the channel center frequency by more than 31.25 kHz.

(b) *Measurement bandwidths.* The power of unwanted emissions in the frequency bands specified in paragraphs (a)(1) and (2) of this section is measured with a reference bandwidth of 300 Hz. The power of unwanted emissions in the frequency range specified in paragraph (a)(3) is measured with a reference bandwidth of at least 30 kHz.

(c) *Measurement conditions.* The requirements in this section apply to each FRS transmitter type both with and without the connection of permitted attachments, such as an external speaker, microphone and/or power cord.

Test Procedure

The transmitter was placed on a wooden turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg (\text{TXpwr in Watts}/0.001)$ - the absolute level

Spurious attenuation limit in dB = $43 + 10 \log_{10} (\text{power out in Watts})$

Test Data**Environmental Conditions**

Temperature:	25~25.6 °C
Relative Humidity:	50~52 %
ATM Pressure:	101 kPa

The testing was performed by Anson Su on 2024-10-23 for below 1GHz and Karl Xu on 2024-10-28 for above 1GHz.

Test Mode: Transmitting

Frequency (MHz)	Receiver Reading (dBm)	Polar (H/V)	Substituted Factor			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Cable Loss (dB)	Antenna Gain (dBi/dBd)			
935.225	28.86	H	-36.5	1.33	0.0	-37.83	-13	24.83
935.225	30.01	V	-35.1	1.33	0.0	-36.43	-13	23.43
1402.84	65.05	H	-42.7	0.80	7.90	-35.60	-13	22.60
1402.84	69.35	V	-39.1	0.80	7.90	-32.00	-13	19.00
1870.45	73.72	H	-33.7	1.00	8.00	-26.70	-13	13.70
1870.45	77.48	V	-30.5	1.00	8.00	-23.50	-13	10.50
2338.06	76.98	H	-30.7	1.10	9.40	-22.40	-13	9.40
2338.06	76.39	V	-32.0	1.10	9.40	-23.70	-13	10.70
2805.68	68.51	H	-38.9	1.20	9.20	-30.90	-13	17.90
2805.68	62.45	V	-45.6	1.20	9.20	-37.60	-13	24.60
3273.29	70.96	H	-36.7	1.30	8.80	-29.20	-13	16.20
3273.29	71.39	V	-37.0	1.30	8.80	-29.50	-13	16.50
3740.90	56.52	H	-50.9	1.30	11.00	-41.20	-13	28.20
3740.90	55.64	V	-52.4	1.30	11.00	-42.70	-13	29.70

Note:

Absolute Level = Reading Level + Substituted Factor

Substituted Factor contains: Substituted Level - Cable loss+ Antenna Gain

Margin = Limit - Absolute Level

FCC§2.1055 (d) & §95.565 - FREQUENCY STABILITY

Applicable Standard

According to FCC §2.1055(a) (2), the frequency stability shall be measured with variation of ambient temperature from -20°C to $+50^{\circ}\text{C}$, and according to FCC 2.1055(d) (2), the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point which is specified by the manufacturer.

According to FCC §95.565, Each FRS transmitter type must be designed such that the carrier frequencies remain within ± 2.5 parts-per-million of the channel center frequencies specified in §95.563 during normal operating conditions.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to a Frequency Counter via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.


After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the Frequency Counter.

Frequency Stability vs. Voltage (item 1 or item 2 will be chosen according to different condition) :

☐1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment.

☒2) For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

The output frequency was recorded for each voltage.

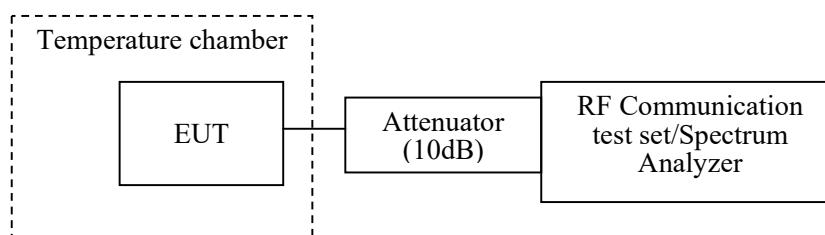

Test Data

Environmental Conditions

Temperature:	23.8~25.9 °C
Relative Humidity:	44.5~50.2 %
ATM Pressure:	101 kPa

The testing was performed by Allen Bai from 2024-10-28 to 2024-11-30.

Test Mode: Transmitting

Test Frequency (MHz)	Temperature (°C)	Voltage (V _{DC})	Measured Frequency (MHz)	Frequency Error (ppm)	Limit (ppm)
467.6125	-20	4.5	467.6127	0.4277	≤2.5
	-10	4.5	467.6130	1.0693	≤2.5
	0	4.5	467.6122	-0.6416	≤2.5
	10	4.5	467.6133	1.7108	≤2.5
	20	4.5	467.6133	1.7108	≤2.5
	30	4.5	467.6131	1.2831	≤2.5
	40	4.5	467.6124	-0.2139	≤2.5
	50	4.5	467.6122	-0.6416	≤2.5
	20	2.5	467.6128	0.6416	≤2.5
	20	5.0	467.6129	0.8554	≤2.5

§95.587 - FRS ADDITIONAL REQUIREMENTS

Applicable Standard

According to FCC §95.587

Each FRS transmitter type must be designed to meet the following additional requirements.

- (a) Transmit frequency capability. FRS transmitter types must not be capable of transmitting on any frequency or channel other than those listed in § 95.563.
- (b) Antenna. The antenna of each FRS transmitter type must meet the following requirements.
 - (1) The antenna must be a non-removable integral part of the FRS transmitter type.
 - (2) The gain of the antenna must not exceed that of a half-wave dipole antenna.
 - (3) The antenna must be designed such that the electric field of the emitted waves is vertically polarized when the unit is operated in the normal orientation.
- (c) Digital data transmissions. FRS transmitter types having the capability to transmit digital data must be designed to meet the following requirements.
 - (1) FRS units may transmit digital data containing location information, or requesting location information from one or more other FRS or GMRS units, or containing a brief text message to another specific FRS or GMRS unit or units.
 - (2) Digital data transmissions may be initiated by a manual action or command of the operator or on an automatic or periodic basis, and FRS units may be designed to automatically respond with location data upon receiving an interrogation request from another
 - (3) Digital data transmissions must not exceed one second in duration.
 - (4) Digital data transmissions must not be sent more frequently than one digital data transmission within a thirty-second period, except that an FRS unit may automatically respond to more than one interrogation request received within a thirty-second period.
- (d) Packet mode. FRS transmitter types must not be capable of transmitting data in the store-and-forward packet operation mode.
- (e) Effective September 30, 2019, no person shall manufacture or import hand-held portable radio equipment capable of operating under this subpart (FRS) and other licensed or licensed-by-rule services in this chapter (part 15 unlicensed equipment authorizations are permitted if consistent with part 15 rules).

Result

- (a) Compliant.
- (b) Compliant, EUT has an non-removable integral vertically polarized antenna arrangement and the antenna gain is 0dBi (-2.15dBd), fulfill the requirement of this section. Please refer to the EUT photos.
- (c) Not Applicable, EUT not support this function, please refer to user manual.
- (d) Not Applicable, EUT not support this function, please refer to user manual.
- (e) Compliant, EUT only with FRS function operating under FCC part 95B, not support other function, please refer to user manual.

EUT PHOTOGRAPHS

Please refer to the attachment 2401Y40489E-RF External photo and 2401Y40489E-RF Internal photo.

TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2401Y40489E-RF Test Setup photo.

******* END OF REPORT *******