



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

No. 1 Workshop, M-10, Middle section, Science & Technology Park,
Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053
Fax: +86 (0) 755 2671 0594
Email: ee.shenzhen@sgs.com

Report No.: SZEM170200069904
Page: 1 of 239

TEST REPORT

Application No.: SZEM1702000699CR
Applicant: Creative Labs Pte. Ltd.
Address of Applicant: 31 International Business Park #03-01 CREATIVE RESOURCE SINGAPORE 609921
Manufacturer: Creative Labs Pte. Ltd.
Address of Manufacturer: 31 International Business Park #03-01 CREATIVE RESOURCE SINGAPORE 609921
Equipment Under Test (EUT):
EUT Name: Creative X-Fi Sonic Carrier
Model No.: MF8235
Trade mark: CREATIVE
FCC ID: IBAMF8235
Standards: 47 CFR Part 15, Subpart C (2016)
Date of Receipt: 2017-02-07
Date of Test: 2017-02-16 to 2017-02-22
Date of Issue: 2017-03-28

Test Result :	Pass*
----------------------	--------------

* In the configuration tested, the EUT complied with the standards specified above.




Jack Zhang
EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Revision Record				
Version	Chapter	Date	Modifier	Remark
01		2017-03-29		Original

Authorized for issue by:			
Tested By			
		Benson Wang /Project Engineer	2017-03-22 Date
Checked By			
		Eric Fu /Reviewer	2017-03-28 Date



2 Test Summary

Radio Spectrum Technical Requirement				
Item	Standard	Method	Requirement	Result
Antenna Requirement	47 CFR Part 15, Subpart C 15.247	N/A	47 CFR Part 15, Subpart C 15.203 & 15.247(c)	Pass

Radio Spectrum Matter Part				
Item	Standard	Method	Requirement	Result
Conducted Disturbance at AC Power Line (150kHz-30MHz)	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.2	47 CFR Part 15, Subpart C 15.207	Pass
Conducted Peak Output Power	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.9.1.2	47 CFR Part 15, Subpart C 15.247(b)(3)	Pass
Minimum 6dB Bandwidth	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.8.1	47 CFR Part 15, Subpart C 15.247a(2)	Pass
Power Spectrum Density	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.10.2	47 CFR Part 15, Subpart C 15.247(e)	Pass
Conducted Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.11	47 CFR Part 15, Subpart C 15.247(d)	Pass
Radiated Spurious Emissions	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.4	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Radiated Emissions which fall in the restricted bands	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 6.10.5	47 CFR Part 15, Subpart C 15.209 & 15.247(d)	Pass
Conducted Band Edges Measurement	47 CFR Part 15, Subpart C 15.247	ANSI C63.10 (2013) Section 11.13.3.2	47 CFR Part 15, Subpart C 15.247(d)	Pass



3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	3
3 CONTENTS	4
4 GENERAL INFORMATION	6
4.1 DETAILS OF E.U.T.	6
4.2 DESCRIPTION OF SUPPORT UNITS	6
4.3 MEASUREMENT UNCERTAINTY	7
4.4 TEST LOCATION	8
4.5 TEST FACILITY	8
4.6 DEVIATION FROM STANDARDS	8
4.7 ABNORMALITIES FROM STANDARD CONDITIONS	8
5 EQUIPMENT LIST	9
6 RADIO SPECTRUM TECHNICAL REQUIREMENT	11
6.1 ANTENNA REQUIREMENT	11
6.1.1 Test Requirement:	11
6.1.2 Conclusion	11
7 RADIO SPECTRUM MATTER TEST RESULTS	12
7.1 CONDUCTED DISTURBANCE AT AC POWER LINE(150kHz-30MHz)	12
7.1.1 E.U.T. Operation	13
7.1.2 Test Setup Diagram	13
7.1.3 Measurement Data	13
7.2 CONDUCTED PEAK OUTPUT POWER	18
7.2.1 E.U.T. Operation	18
7.2.2 Test Setup Diagram	18
7.2.3 Measurement Data	18
7.3 MINIMUM 6dB BANDWIDTH	19
7.3.1 E.U.T. Operation	19
7.3.2 Test Setup Diagram	19
7.3.3 Measurement Data	19
7.4 POWER SPECTRUM DENSITY	20
7.4.1 E.U.T. Operation	20
7.4.2 Test Setup Diagram	20
7.4.3 Measurement Data	20
7.5 CONDUCTED SPURIOUS EMISSIONS	21
7.5.1 E.U.T. Operation	21
7.5.2 Test Setup Diagram	21
7.5.3 Measurement Data	21
7.6 RADIATED SPURIOUS EMISSIONS	22
7.6.1 E.U.T. Operation	23
7.6.2 Test Setup Diagram	23
7.6.3 Measurement Data	24
7.7 RADIATED EMISSIONS WHICH FALL IN THE RESTRICTED BANDS	55
7.7.1 E.U.T. Operation	55
7.7.2 Test Setup Diagram	56
7.7.3 Measurement Data	56



7.8	CONDUCTED BAND EDGES MEASUREMENT.....	89
7.8.1	<i>E.U.T. Operation</i>	89
7.8.2	<i>Test Setup Diagram</i>	89
7.8.3	<i>Measurement Data</i>	89
8	PHOTOGRAPHS	90
8.1	CONDUCTED DISTURBANCE AT AC POWER LINE(150kHz-30MHz) TEST SETUP.....	90
8.2	RADIATED SPURIOUS EMISSIONS TEST SETUP.....	91
8.3	EUT CONSTRUCTIONAL DETAILS	92
9	APPENDIX	93
9.1.1	<i>CDW-B18821A-00 15.247</i>	93
9.1.2	<i>LS9-AC11DBT 2.4 15.247</i>	167-239



4 General Information

4.1 Details of E.U.T.

Power supply:	AC 120V/60Hz
Cable:	AC cable for MF8235: 162cm unshielded with one ferrite core
Operation Frequency:	(CDW-B18821A-00 & LS9-AC11DBT-AC11DBT) IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(HT40): 2422MHz to 2452MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM, QPSK,BPSK)
Sample Type:	Fixed production
Antenna Type:	PIFA
Antenna Gain:	3.0dBi

4.2 Description of Support Units

The EUT has been tested as an independent unit.

4.3 Measurement Uncertainty

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.25 x 10 ⁻⁸
2	Timeout	2s
3	Duty cycle	0.37%
4	Occupied Bandwidth	3%
5	RF conducted power	0.75dB
6	RF power density	2.84dB
7	Conducted Spurious emissions	0.75dB
8	RF Radiated power	4.5dB (below 1GHz)
		4.8dB (above 1GHz)
9	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-18GHz)
10	Temperature test	1 °C
11	Humidity test	3%
12	Supply voltages	1.5%
13	Time	3%



4.4 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China.
518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.

4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **CNAS (No. CNAS L2929)**

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

- **A2LA (Certificate No. 3816.01)**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

- **VCCI**

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

- **FCC – Registration No.: 556682**

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

- **Industry Canada (IC)**

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

4.6 Deviation from Standards

None

4.7 Abnormalities from Standard Conditions

None



5 Equipment List

Conducted Disturbance at AC Power Line(150kHz-30MHz)					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2016-05-13	2017-05-13
LISN	Rohde & Schwarz	ENV216	SEM007-01	2016-10-09	2017-10-09
LISN	ETS-LINDGREN	3816/2	SEM007-02	2016-04-25	2017-04-25
8 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T8-02	EMC0120	2016-09-28	2017-09-28
4 Line ISN	Fischer Custom Communications Inc.	FCC-TLISN-T4-02	EMC0121	2016-09-28	2017-09-28
2 Line ISN	Fischer Custom	FCC-TLISN-T2-02	EMC0122	2016-09-28	2017-09-28

RF Conducted					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2016-10-09	2017-10-09
Spectrum Analyzer	Rohde & Schwarz	FSP	SEM004-06	2016-10-09	2017-10-09
Signal Generator	Rohde & Schwarz	SML03	SEM006-02	2016-04-25	2017-04-25
Power Meter	Rohde & Schwarz	NRVS	SEM014-02	2016-10-09	2017-10-09

RE in Chamber					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2016-05-13	2017-05-13
EXA Spectrum Analyzer	Agilent Technologies Inc	N9010A	SEM004-09	2016-07-19	2017-07-19
BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-02	2014-11-15	2017-11-15
Amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2016-10-09	2017-10-09
Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2015-06-14	2018-06-14
Horn Antenna (18-26GHz)	ETS-Lindgren	3160	SEM003-12	2014-11-24	2017-11-24
Horn Antenna(26GHz-40GHz)	A.H.Systems, inc.	SAS-573	SEM003-13	2015-02-12	2018-02-12
Low Noise Amplifier	Black Diamond Series	BDLNA-0118-352810	SEM005-05	2016-10-09	2017-10-09
Band filter	Amindeon	Asi 3314	SEM023-01	N/A	N/A



RE in Chamber					
Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. Date (yyyy-mm-dd)	Cal. Due date (yyyy-mm-dd)
10m Semi-Anechoic Chamber	SAEMC	FSAC1018	SEM001-03	2016-05-13	2017-05-13
EMI Test Receiver (9k-7GHz)	Rohde & Schwarz	ESR	SEM004-03	2016-04-25	2017-04-25
Trilog-Broadband Antenna(30M-1GHz)	Schwarzbeck	VULB9168	SEM003-18	2016-06-29	2019-06-29
Pre-amplifier	Sonoma Instrument Co	310N	SEM005-03	2016-07-06	2017-07-06
Loop Antenna	ETS-Lindgren	6502	SEM003-08	2015-08-14	2018-08-14

General used equipment					
Equipment	Manufacturer	Model No	Inventory No	Cal Date	Cal Due Date
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-03	2016-10-12	2017-10-12
Humidity/ Temperature Indicator	Shanghai Meteorological Industry Factory	ZJ1-2B	SEM002-04	2016-10-12	2017-10-12
Humidity/ Temperature Indicator	Mingle	N/A	SEM002-08	2016-10-12	2017-10-12
Barometer	Changchun Meteorological Industry Factory	DYM3	SEM002-01	2016-05-18	2017-05-18

6 Radio Spectrum Technical Requirement

6.1 Antenna Requirement

6.1.1 Test Requirement:

47 CFR Part 15, Subpart C 15.247

6.1.2 Conclusion


Standard Requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna(LS9-AC11DBT, CDW-B18821A-00)

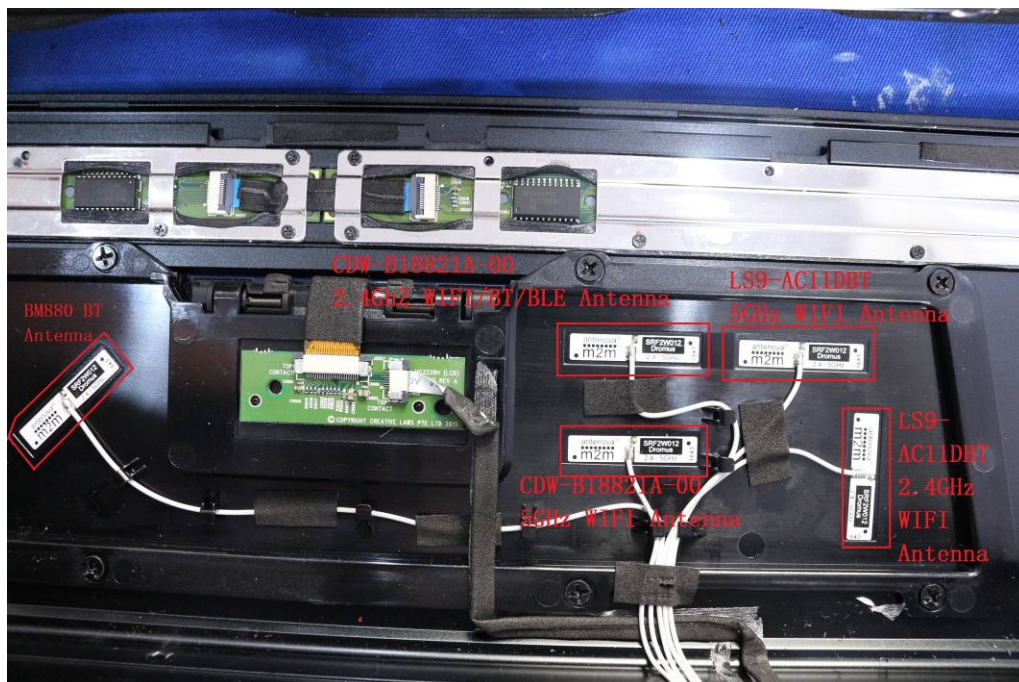

The antenna uses a unique coupling to the intentional radiator and no consideration of replacement. The best case gain of the antenna is 3dBi.



7 Radio Spectrum Matter Test Results

7.1 Conducted Disturbance at AC Power Line(150kHz-30MHz)

Test Requirement 47 CFR Part 15, Subpart C 15.207

Test Method: ANSI C63.10 (2013) Section 6.2

Limit:

Frequency of emission(MHz)	Conducted limit(dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50
*Decreases with the logarithm of the frequency.		

7.1.1 E.U.T. Operation

Operating Environment:

Temperature: 25.0 °C Humidity: 55 % RH Atmospheric Pressure: 1020 mbar

Pretest these mode to find the worst case:


b: WIFI 2.4G TX (LS9-AC11DBT): Keep the EUT transmitting .
e: WIFI 2.4G TX (CDW-B18821A-00) : Keep the EUT transmitting.

The worst case for final test:

b: WIFI 2.4G TX (LS9-AC11DBT): Keep the EUT transmitting .: Keep the EUT transmitting .
e: WIFI 2.4G TX (CDW-B18821A-00) : Keep the EUT transmitting . : Keep the EUT transmitting .

Through Pre-scan, find the 1Mbps of rate of 802.11b at lowest channel is the worst case.


7.1.2 Test Setup Diagram

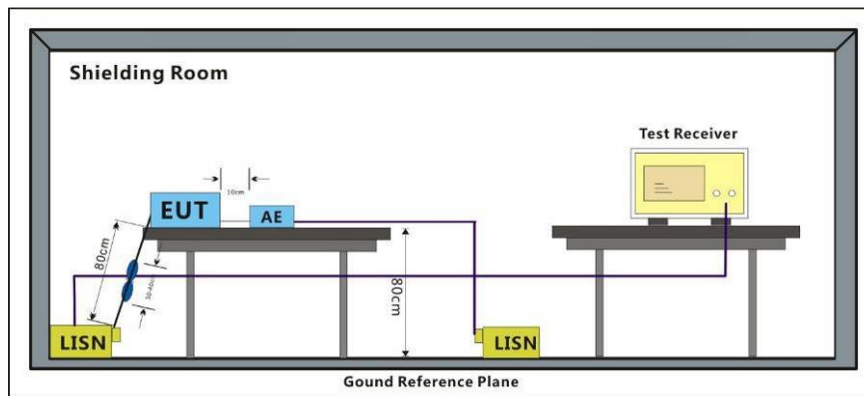

7.1.3 Measurement Data

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50ohm/50μH + 5ohm linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.


Mode:b; Line:Live Line

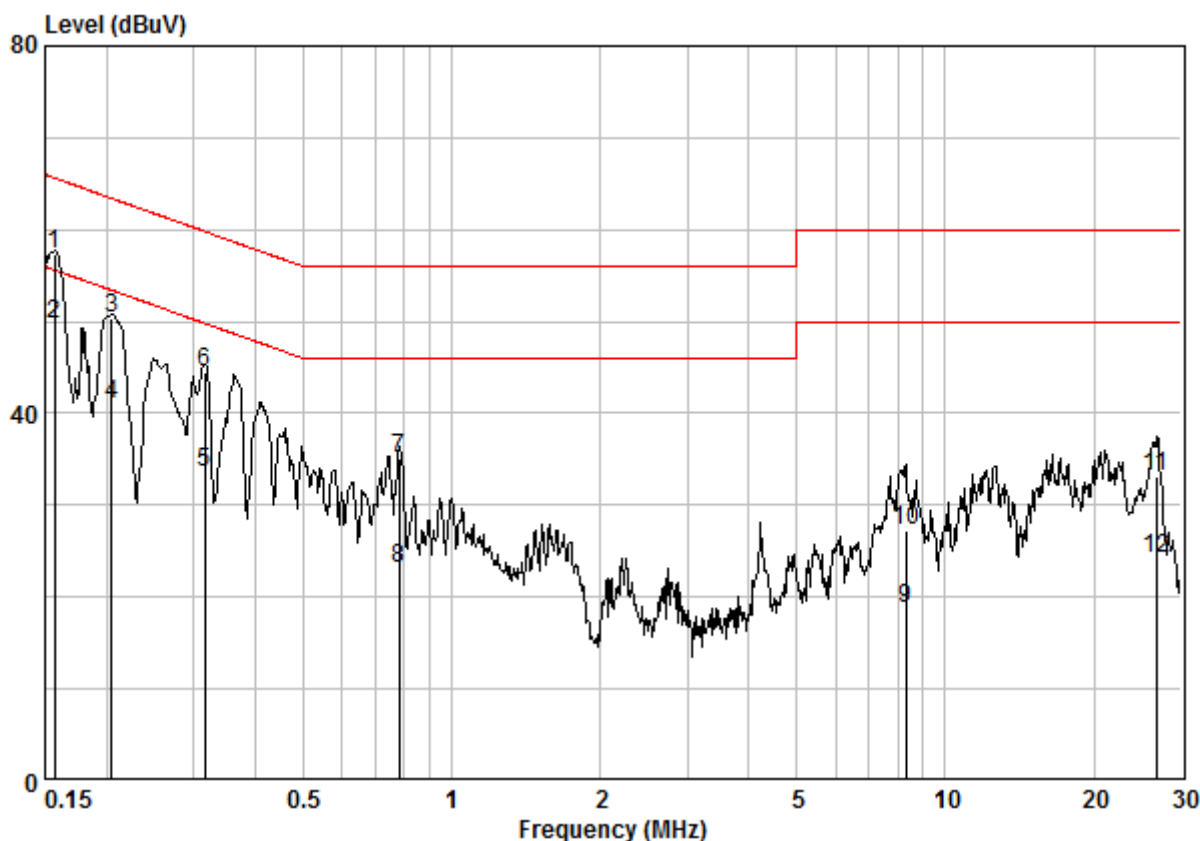

Site : Shielding Room
Condition : CE LINE
Job No. : 00699CR
Test Mode : b

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.15649	0.02	9.64	47.73	57.39	65.65	-8.25	QP
2	0.15649	0.02	9.64	40.01	49.67	55.65	-5.98	AVERAGE
3	0.20505	0.02	9.64	40.59	50.25	63.40	-13.15	QP
4	0.20505	0.02	9.64	31.34	41.00	53.40	-12.41	AVERAGE
5	0.31662	0.02	9.64	23.99	33.65	49.80	-16.15	AVERAGE
6	0.31662	0.02	9.64	34.90	44.56	59.80	-15.23	QP
7	0.78345	0.03	9.65	25.51	35.19	56.00	-20.81	QP
8	0.78345	0.03	9.65	13.47	23.14	46.00	-22.86	AVERAGE
9	8.323	0.11	9.82	8.89	18.82	50.00	-31.18	AVERAGE
10	8.323	0.11	9.82	17.22	27.15	60.00	-32.85	QP
11	26.699	0.16	10.39	22.70	33.24	60.00	-26.76	QP
12	26.699	0.16	10.39	13.56	24.10	50.00	-25.90	AVERAGE


Mode:b; Line:Neutral Line

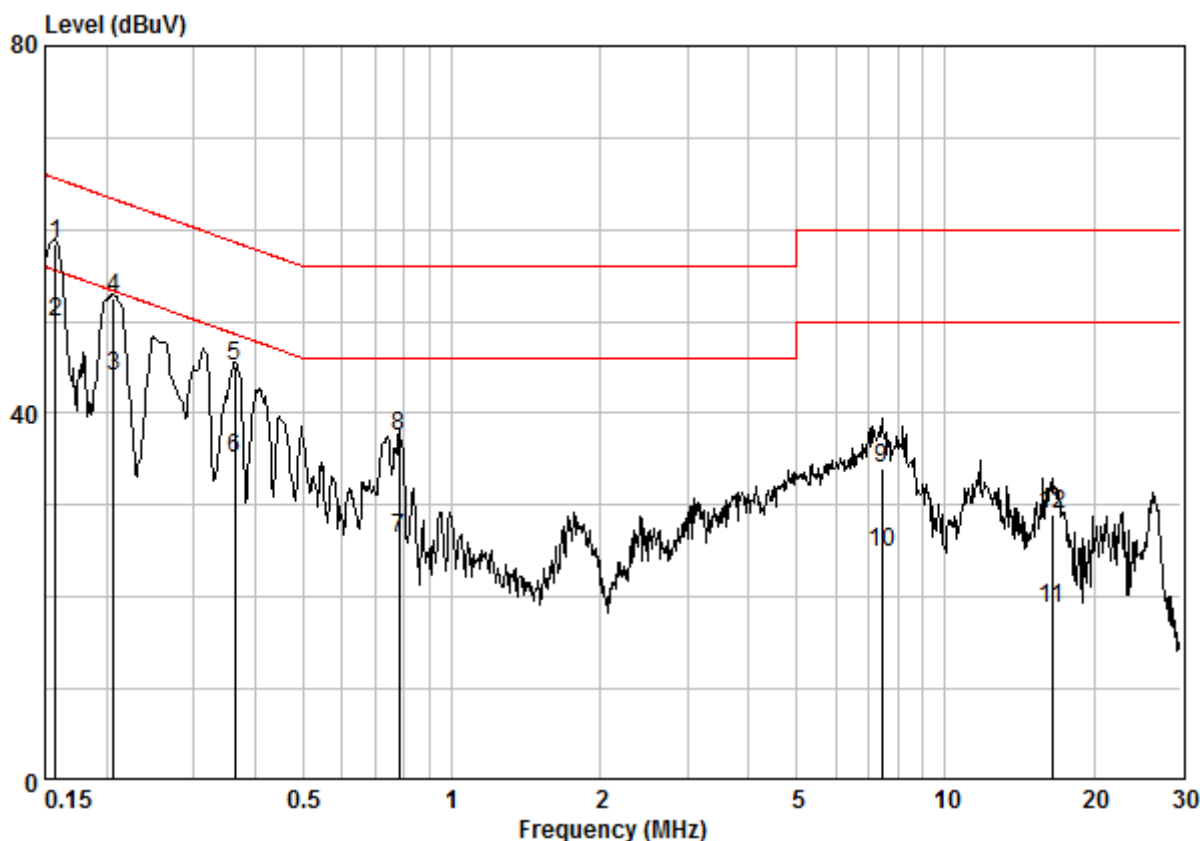

Site : Shielding Room
Condition : CE NEUTRAL
Job No. : 00699CR
Test Mode : b

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.15733	0.02	9.64	48.73	58.38	65.60	-7.22	QP
2	0.15733	0.02	9.64	40.31	49.97	55.60	-5.64	AVERAGE
3	0.20614	0.02	9.63	34.30	43.95	53.36	-9.41	AVERAGE
4	0.20614	0.02	9.63	42.98	52.63	63.36	-10.73	QP
5	0.36338	0.02	9.63	35.46	45.11	58.65	-13.54	QP
6	0.36338	0.02	9.63	25.36	35.01	48.65	-13.64	AVERAGE
7	0.78345	0.03	9.64	16.69	26.36	46.00	-19.64	AVERAGE
8	0.78345	0.03	9.64	27.87	37.54	56.00	-18.46	QP
9	7.446	0.09	9.78	24.03	33.90	60.00	-26.10	QP
10	7.446	0.09	9.78	14.89	24.76	50.00	-25.24	AVERAGE
11	16.486	0.16	10.04	8.65	18.85	50.00	-31.15	AVERAGE
12	16.486	0.16	10.04	18.75	28.95	60.00	-31.05	QP


Mode:e; Line:Live Line

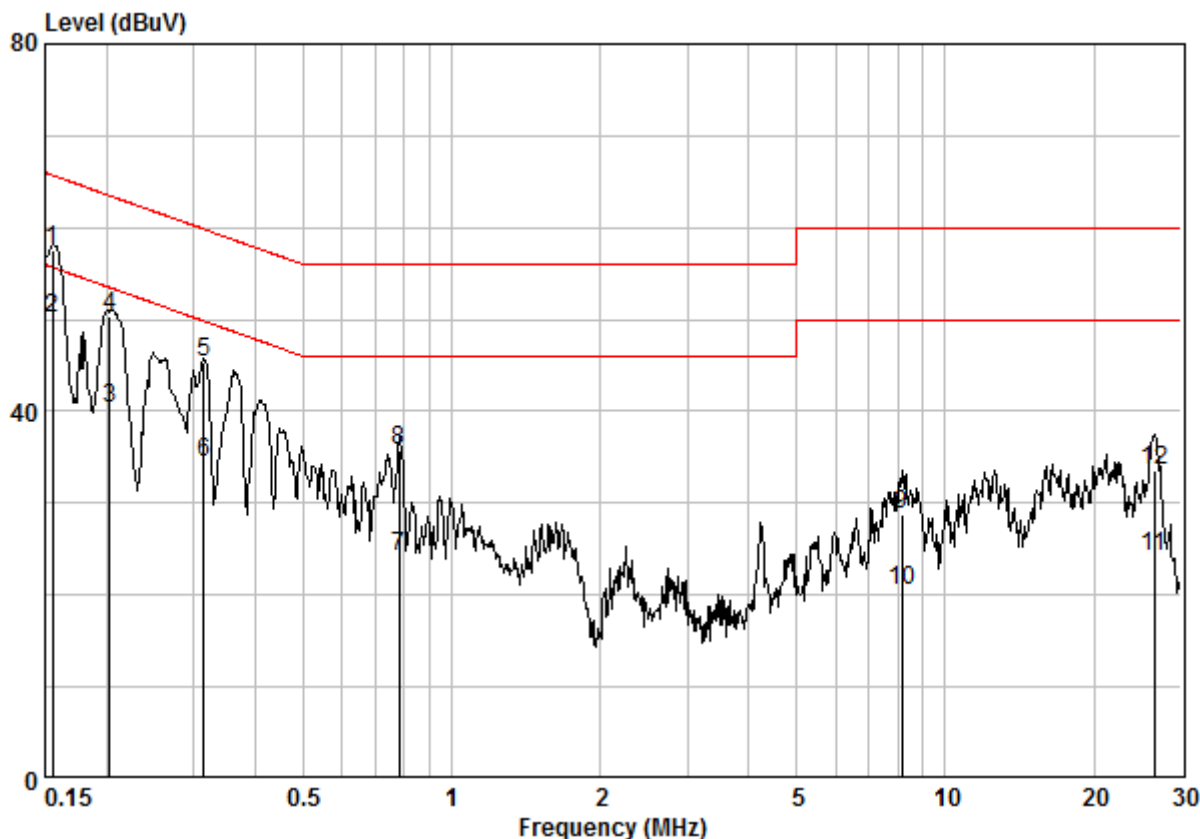

Site : Shielding Room
Condition : CE LINE
Job No. : 00699CR
Test Mode : e

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.15567	0.02	9.64	47.98	57.64	65.69	-8.06	QP
2	0.15567	0.02	9.64	40.49	50.15	55.69	-5.54	AVERAGE
3	0.20289	0.02	9.64	30.59	40.25	53.49	-13.24	AVERAGE
4	0.20289	0.02	9.64	40.77	50.43	63.49	-13.06	QP
5	0.31495	0.02	9.64	35.68	45.34	59.84	-14.50	QP
6	0.31495	0.02	9.64	24.86	34.52	49.84	-15.32	AVERAGE
7	0.78345	0.03	9.65	14.60	24.28	46.00	-21.72	AVERAGE
8	0.78345	0.03	9.65	26.11	35.78	56.00	-20.22	QP
9	8.148	0.10	9.81	18.87	28.79	60.00	-31.21	QP
10	8.148	0.10	9.81	10.55	20.47	50.00	-29.53	AVERAGE
11	26.558	0.16	10.38	13.58	24.11	50.00	-25.89	AVERAGE
12	26.558	0.16	10.38	23.01	33.55	60.00	-26.45	QP

Mode:e; Line:Neutral Line

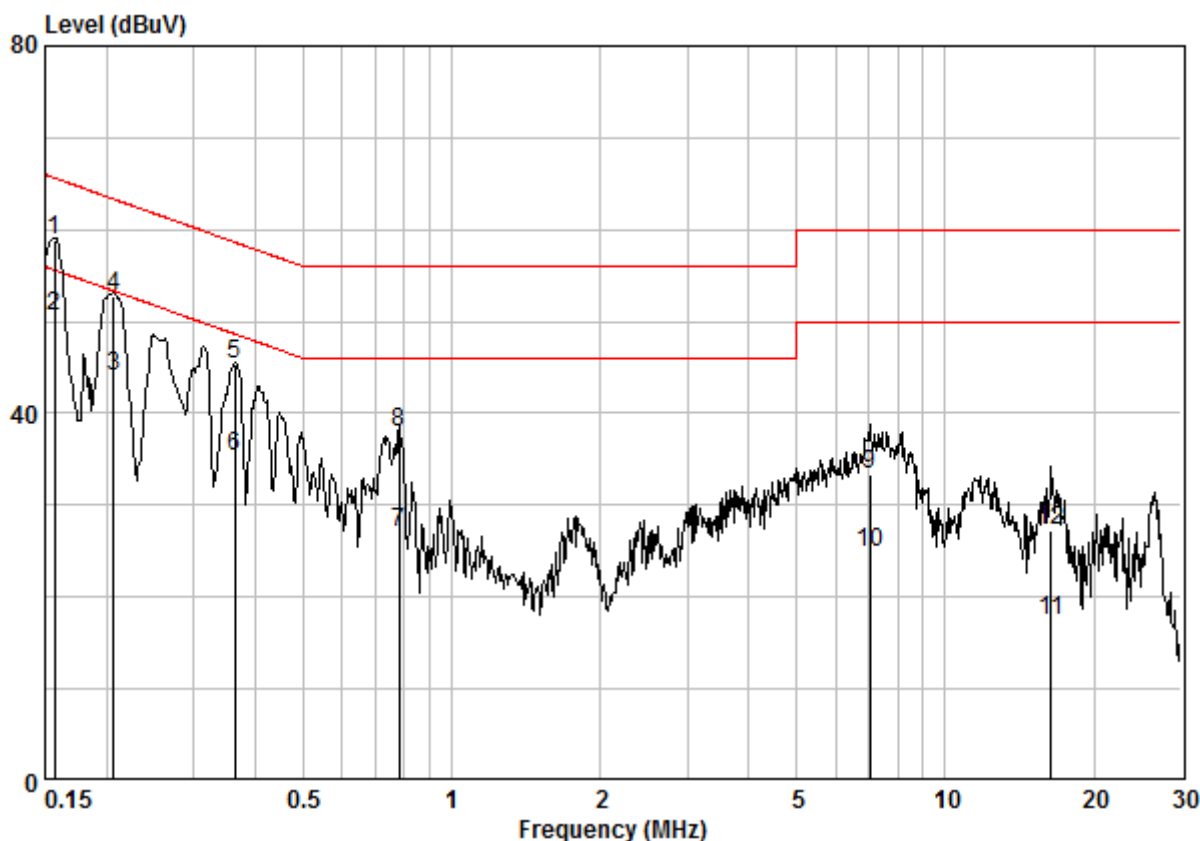

Site : Shielding Room
Condition : CE NEUTRAL
Job No. : 00699CR
Test Mode : e

	Freq	Cable Loss	LISN Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.15649	0.02	9.64	49.12	58.78	65.65	-6.87	QP
2	0.15649	0.02	9.64	40.96	50.61	55.65	-5.04	AVERAGE
3	0.20614	0.02	9.63	34.34	43.99	53.36	-9.37	AVERAGE
4	0.20614	0.02	9.63	43.17	52.82	63.36	-10.54	QP
5	0.36338	0.02	9.63	35.71	45.36	58.65	-13.29	QP
6	0.36338	0.02	9.63	25.64	35.29	48.65	-13.36	AVERAGE
7	0.78345	0.03	9.64	17.34	27.01	46.00	-18.99	AVERAGE
8	0.78345	0.03	9.64	28.30	37.97	56.00	-18.03	QP
9	7.025	0.08	9.77	23.52	33.37	60.00	-26.63	QP
10	7.025	0.08	9.77	14.90	24.75	50.00	-25.25	AVERAGE
11	16.398	0.16	10.04	7.31	17.52	50.00	-32.48	AVERAGE
12	16.398	0.16	10.04	16.97	27.17	60.00	-32.83	QP

7.2 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)
Test Method: ANSI C63.10 (2013) Section 11.9.1.2
Limit: 30dBm

7.2.1 E.U.T. Operation

Operating Environment:

Temperature: 23.0 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar

Pretest these mode to find the worst case:


b: WIFI 2.4G TX (LS9-AC11DBT): Keep the EUT transmitting .
e: WIFI 2.4G TX (CDW-B18821A-00) : Keep the EUT transmitting .

The worst case for final test:

b: WIFI 2.4G TX (LS9-AC11DBT): Keep the EUT transmitting .
e: WIFI 2.4G TX (CDW-B18821A-00) : Keep the EUT transmitting .

Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).

7.2.2 Test Setup Diagram

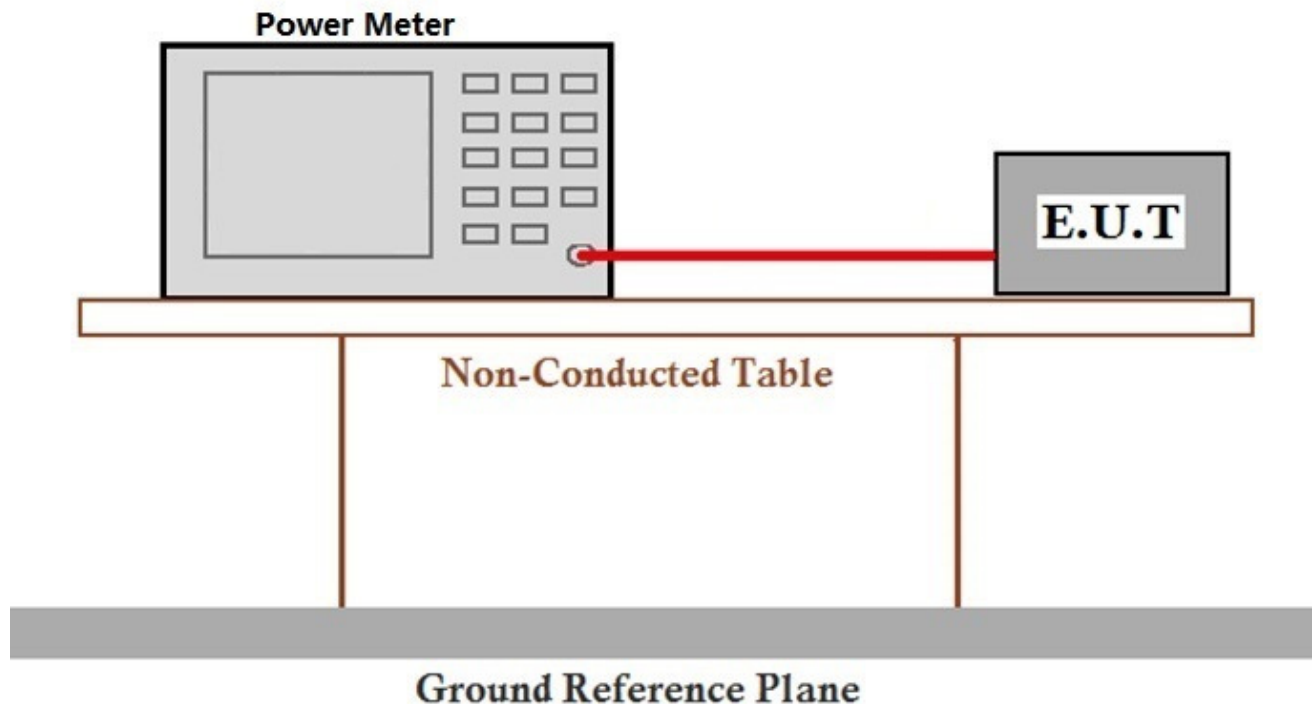

7.2.3 Measurement Data

The detailed test data see: Appendix 15.247

7.3 Minimum 6dB Bandwidth

Test Requirement: 47 CFR Part 15, Subpart C 15.247a(2)
Test Method: ANSI C63.10 (2013) Section 11.8.1
Limit: ≥ 500 kHz

7.3.1 E.U.T. Operation


Operating Environment:

Temperature: 25.0 °C Humidity: 52 % RH Atmospheric Pressure: 1015 mbar

Pretest these mode to find the worst case:
b: WIFI 2.4G TX (LS9-AC11DBT): Keep the EUT transmitting .
e: WIFI 2.4G TX (CDW-B18821A-00) : Keep the EUT transmitting .

The worst case for final test:
b: WIFI 2.4G TX (LS9-AC11DBT): Keep the EUT transmitting .
e: WIFI 2.4G TX (CDW-B18821A-00) : Keep the EUT transmitting .
Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)

7.3.2 Test Setup Diagram

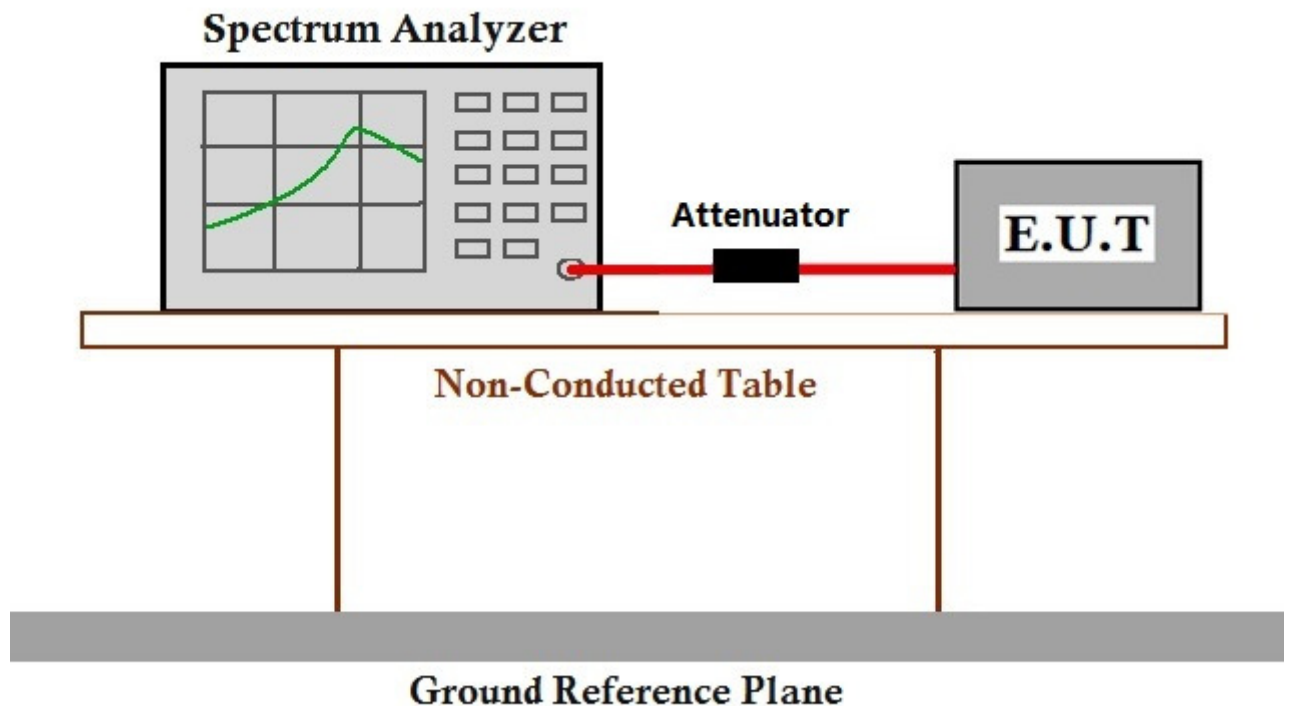

7.3.3 Measurement Data

The detailed test data see: Appendix 15.247

7.4 Power Spectrum Density

Test Requirement	47 CFR Part 15, Subpart C 15.247(e)
Test Method:	ANSI C63.10 (2013) Section 11.10.2
Limit:	$\leq 8\text{dBm}$ in any 3 kHz band during any time interval of continuous transmission

7.4.1 E.U.T. Operation

Operating Environment:


Temperature: 25.0 °C Humidity: 52 % RH Atmospheric Pressure: 1015 mbar

Pretest these mode to find the worst case:
b: WIFI 2.4G TX (LS9-AC11DBT): Keep the EUT transmitting .
e: WIFI 2.4G TX (CDW-B18821A-00) : Keep the EUT transmitting .

The worst case for final test:
b: WIFI 2.4G TX (LS9-AC11DBT): Keep the EUT transmitting .
e: WIFI 2.4G TX (CDW-B18821A-00) : Keep the EUT transmitting .

Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).

7.4.2 Test Setup Diagram

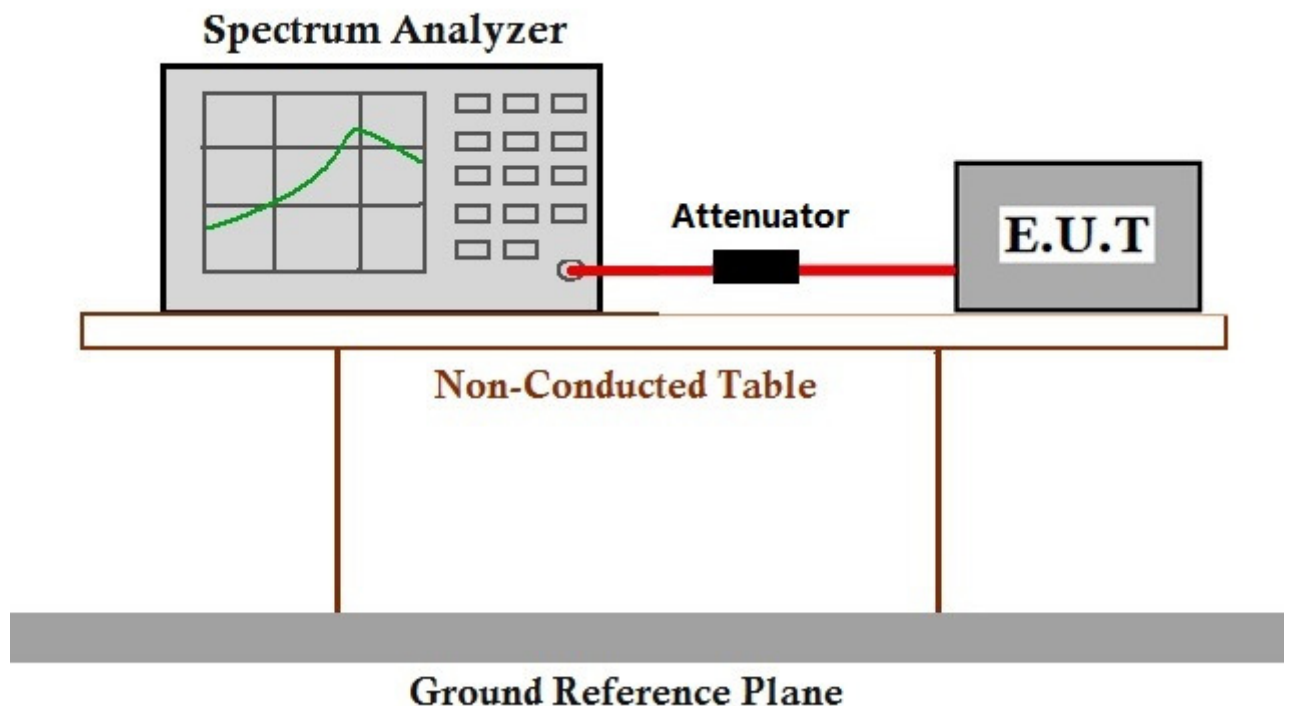

7.4.3 Measurement Data

The detailed test data see: Appendix 15.247

7.5 Conducted Spurious Emissions

Test Requirement	47 CFR Part 15, Subpart C 15.247(d)
Test Method:	ANSI C63.10 (2013) Section 11.11
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

7.5.1 E.U.T. Operation

Operating Environment:


Temperature: 23.0 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar

Pretest these mode to find the worst case:
 b: WIFI 2.4G TX (LS9-AC11DBT): Keep the EUT transmitting .
 e: WIFI 2.4G TX (CDW-B18821A-00) : Keep the EUT transmitting .

The worst case for final test:
 b: WIFI 2.4G TX (LS9-AC11DBT): Keep the EUT transmitting .
 e: WIFI 2.4G TX (CDW-B18821A-00) : Keep the EUT transmitting .

Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).

7.5.2 Test Setup Diagram

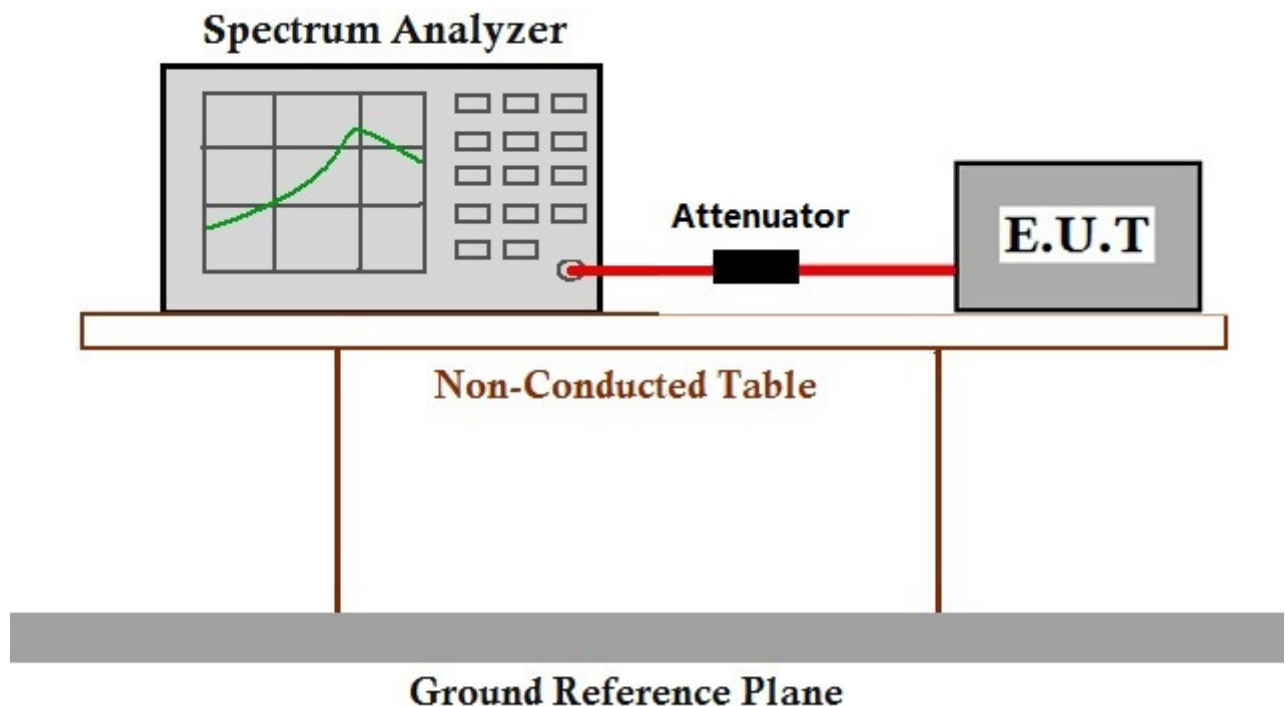

7.5.3 Measurement Data

The detailed test data see: Appendix 15.247



7.6 Radiated Spurious Emissions

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.247(d)

Test Method: ANSI C63.10 (2013) Section 6.10.4

Measurement Distance: 10m

Limit:

Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3
Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.				

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 24.0 °C Humidity: 54 % RH Atmospheric Pressure: 1020 mbar

Pretest these mode to find the worst case:

- b: WIFI 2.4G TX (LS9-AC11DBT): Keep the EUT transmitting .
- e: WIFI 2.4G TX (CDW-B18821A-00) : Keep the EUT transmitting .

The worst case for final test:




- b: WIFI 2.4G TX (LS9-AC11DBT): Keep the EUT transmitting .
- e: WIFI 2.4G TX (CDW-B18821A-00) : Keep the EUT transmitting .

Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).

For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.11b at lowest channel is the worst case.

Only the worst case is recorded in the report.

7.6.2 Test Setup Diagram

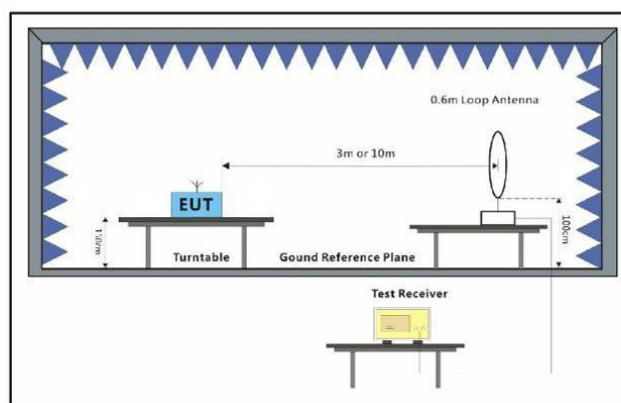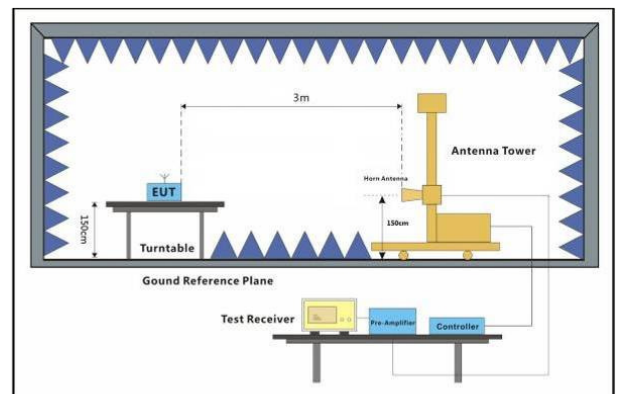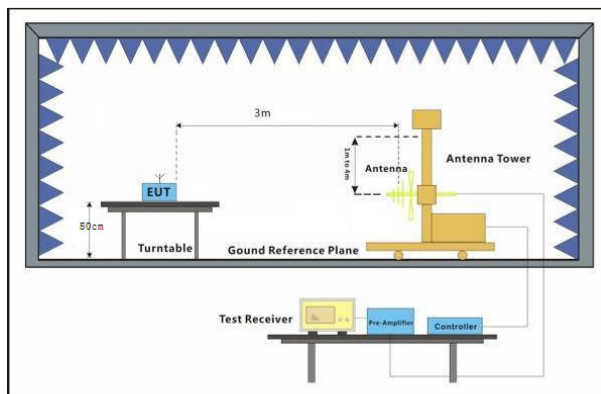



7.6.3 Measurement Data

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- h. Test the EUT in the lowest channel, the middle channel, the Highest channel.
- i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- j. Repeat above procedures until all frequencies measured was complete.



Radiated Emission below 1GHz:

The test was performed at a 10m test site. According to below formulate and the test data at 10m test distance,

$$L_3 / L_{10} = D_{10} / D_3$$

Note:

L₃: Level @ 3m distance. Unit: uV/m;

L₁₀: Level @ 10m distance. Unit: uV/m;

D₃: 3m distance. Unit: m

D₁₀: 10m distance. Unit: m

The level at 3m test distance is below:

Mode b:

Frequency (MHz)	Level @ 10m (dBuV/m)	Level @ 10m (uV/m)	Level @ 3m (uV/m)	Level @ 3m (dBuV/m)	Limit @ 3m (dBuV/m)	Margin (dB)	Ant. Polarization
41.13	24.81	17.40	57.99	35.27	40.00	-4.73	V
59.03	26.18	20.37	67.90	36.64	40.00	-3.36	V
147.40	23.05	14.21	47.36	33.51	43.50	-9.99	V
221.39	26.12	20.23	67.43	36.58	46.00	-9.42	V
270.37	31.82	38.99	129.98	42.28	46.00	-3.72	V
787.85	31.32	36.81	122.71	41.78	46.00	-4.22	V
34.28	23.03	14.17	47.25	33.49	40.00	-6.51	H
64.43	25.49	18.81	62.72	35.95	40.00	-4.05	H
76.78	24.94	17.66	58.87	35.40	40.00	-4.60	H
202.81	25.38	18.58	61.93	35.84	43.50	-7.66	H
270.37	29.29	29.14	97.14	39.75	46.00	-6.25	H
441.74	26.29	20.63	68.77	36.75	46.00	-9.25	H



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch


Report No.: SZEM170200069904

Page: 26 of 239

Mode e:

Frequency (MHz)	Level @ 10m (dBuV/m)	Level @ 10m (uV/m)	Level @ 3m (uV/m)	Level @ 3m (dBuV/m)	Limit @ 3m (dBuV/m)	Margin (dB)	Ant. Polarization
34.76	26.15	20.30	67.67	36.61	40.00	-3.39	V
41.42	25.81	19.52	65.07	36.27	40.00	-3.73	V
55.22	25.78	19.45	64.85	36.24	40.00	-3.76	V
295.15	30.88	34.99	116.65	41.34	46.00	-4.66	V
369.40	29.27	29.07	96.91	39.73	46.00	-6.27	V
631.69	27.43	23.52	78.41	37.89	46.00	-8.11	V
34.76	23.93	15.72	52.41	34.39	40.00	-5.61	H
76.78	23.00	14.13	47.08	33.46	40.00	-6.54	H
76.78	23.00	14.13	47.08	33.46	40.00	-6.54	H
202.81	27.66	24.15	80.52	38.12	43.50	-5.38	H
319.94	23.53	15.01	50.05	33.99	46.00	-12.01	H
451.14	26.08	20.14	67.12	36.54	46.00	-9.46	H

Radiated Emission below 1GHz		
30MHz~1GHz (QP)		
Test mode:	b	Vertical

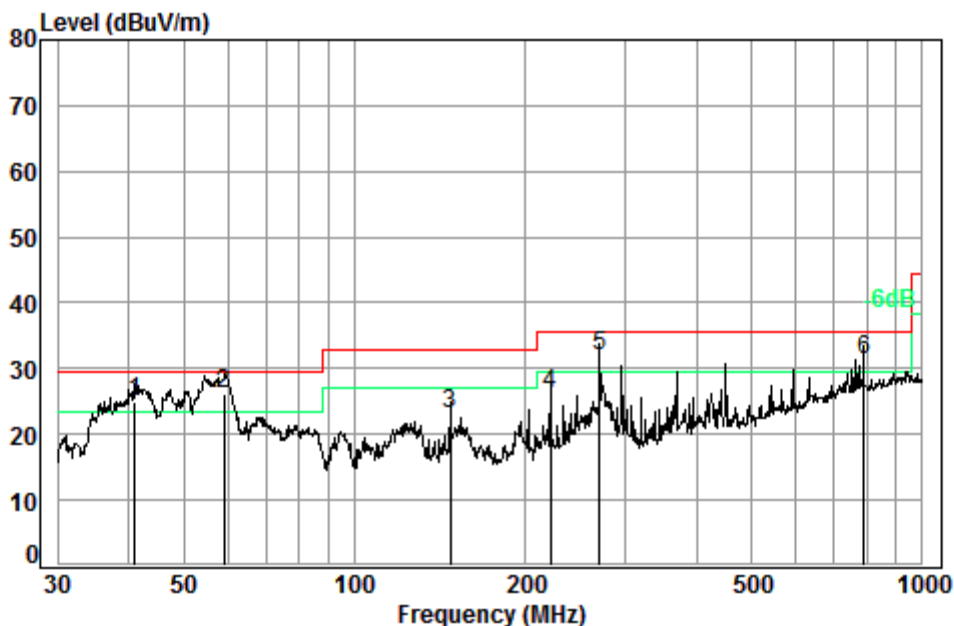

Condition: 10m VERTICAL


Job No. : 00699CR

Test Mode: b

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	41.13	6.80	13.22	32.99	37.78	24.81	29.50	-4.69
2 pp	59.03	7.00	12.07	32.95	40.06	26.18	29.50	-3.32
3	147.40	7.44	13.25	32.74	35.10	23.05	33.00	-9.95
4	221.39	7.71	10.25	32.67	40.83	26.12	35.60	-9.48
5	270.37	7.95	11.86	32.63	44.64	31.82	35.60	-3.78
6	787.85	9.27	21.15	32.60	33.50	31.32	35.60	-4.28



Test mode:	b	Horizontal
------------	---	------------

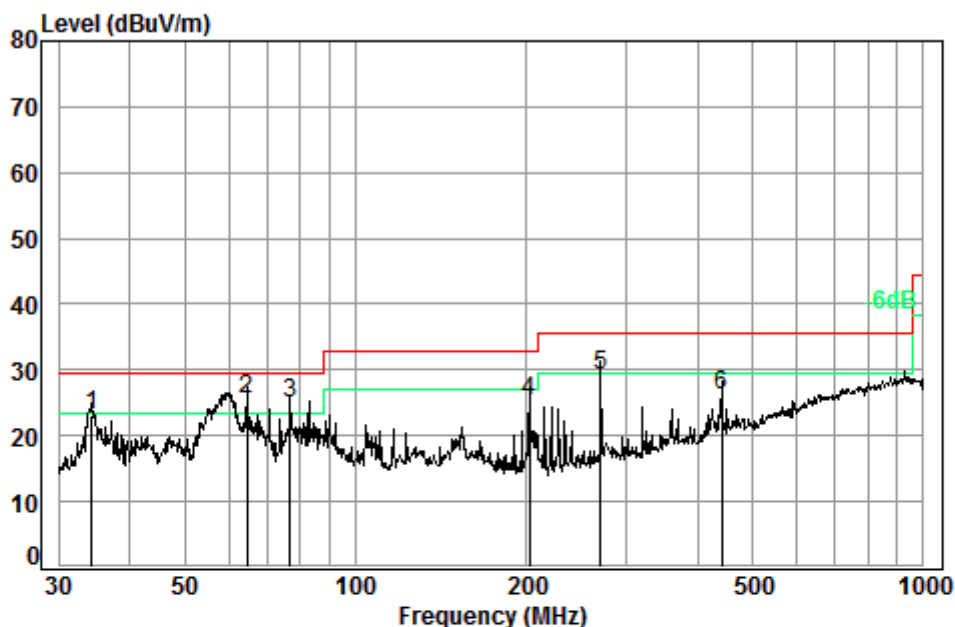

Condition: 10m HORIZONTAL


Job No. : 00699CR

Test Mode: b

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	34.28	6.70	12.62	32.98	36.69	23.03	29.50	-6.47
2 pp	64.43	7.00	11.11	32.93	40.31	25.49	29.50	-4.01
3	76.78	7.04	9.01	32.88	41.77	24.94	29.50	-4.56
4	202.81	7.61	9.36	32.70	41.11	25.38	33.00	-7.62
5	270.37	7.95	11.86	32.63	42.11	29.29	35.60	-6.31
6	441.74	8.40	15.98	32.60	34.51	26.29	35.60	-9.31



30MHz~1GHz (QP)		
Test mode:	e	Vertical

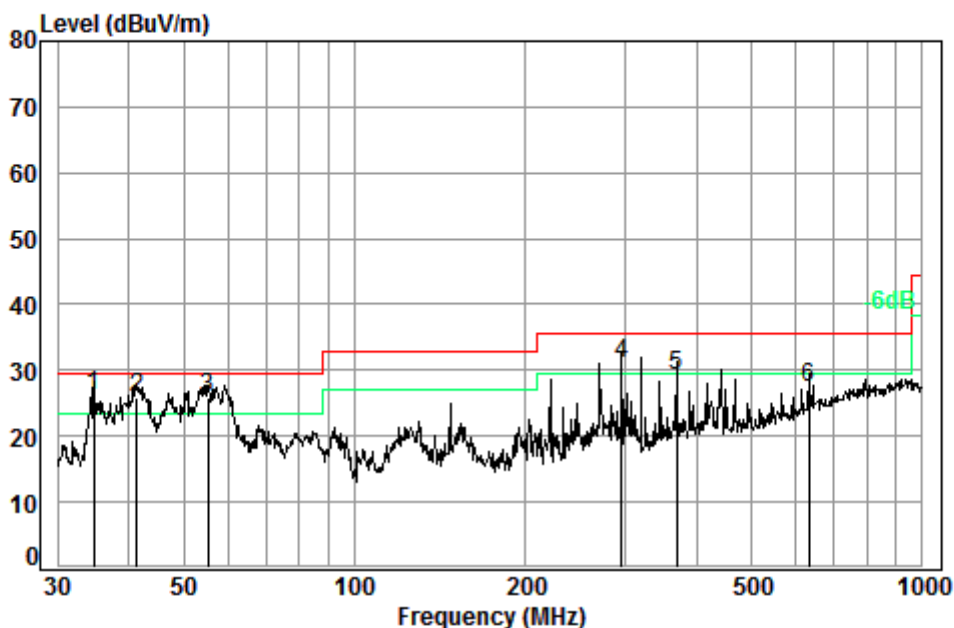


Condition: 10m VERTICAL

Job No. : 00699CR

Test Mode: e

		Cable	Ant	Preamp	Read		Limit	Over
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	34.76	6.70	12.63	32.98	39.80	26.15	29.50	-3.35
2	41.42	6.80	13.20	32.99	38.80	25.81	29.50	-3.69
3	55.22	7.00	12.36	32.97	39.39	25.78	29.50	-3.72
4	295.15	8.04	12.54	32.60	42.90	30.88	35.60	-4.72
5	369.40	8.30	14.27	32.60	39.30	29.27	35.60	-6.33
6	631.69	8.98	19.31	32.60	31.74	27.43	35.60	-8.17

Test mode:	e	Horizontal
------------	---	------------

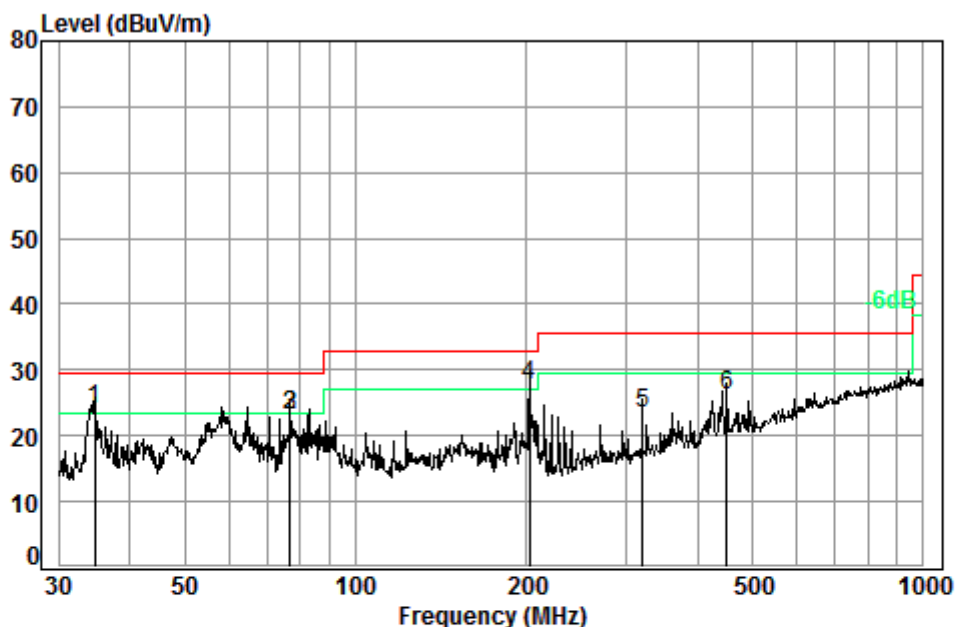

Condition: 10m HORIZONTAL

Job No. : 00699CR

Test Mode: e

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	34.76	6.70	12.63	32.98	37.58	23.93	29.50	-5.57
2	76.78	7.04	9.01	32.88	39.83	23.00	29.50	-6.50
3	76.78	7.04	9.01	32.88	39.83	23.00	29.50	-6.50
4 pp	202.81	7.61	9.36	32.70	43.39	27.66	33.00	-5.34
5	319.94	8.10	13.23	32.60	34.80	23.53	35.60	-12.07
6	451.14	8.43	16.19	32.60	34.06	26.08	35.60	-9.52



Radiated Emission above 1GHz

Mode:b; Polarization:Horizontal; Modulation Type:802.11b; bandwidth:20MHz; Channel:Low

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3610.398	32.53	7.67	38.52	45.51	47.19	74	-26.81
4824.000	34.19	8.90	39.04	46.14	50.19	74	-23.81
6104.642	34.79	10.42	38.93	45.48	51.76	74	-22.24
7236.000	36.40	10.69	38.15	43.79	52.73	74	-21.27
9648.000	37.53	12.52	36.97	40.04	53.12	74	-20.88
12226.070	38.74	14.37	38.53	38.44	53.02	74	-20.98

Mode:b; Polarization:Vertical; Modulation Type:802.11b; bandwidth:20MHz; Channel:Low

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3972.178	33.53	7.80	38.69	45.22	47.86	74	-26.14
4824.000	34.19	8.90	39.04	45.45	49.50	74	-24.50
5947.702	34.67	10.42	39.00	45.46	51.55	74	-22.45
7236.000	36.40	10.69	38.15	44.93	53.87	74	-20.13
9648.000	37.53	12.52	36.97	40.58	53.66	74	-20.34
12422.220	38.85	14.21	38.73	39.55	53.88	74	-20.12



Mode:b; Polarization:Horizontal; Modulation Type:802.11b; bandwidth:20MHz; Channel:middle

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3610.398	32.53	7.67	38.52	45.51	47.19	74	-26.81
4874.000	34.28	8.97	39.05	46.13	50.33	74	-23.67
6104.642	34.79	10.42	38.93	45.48	51.76	74	-22.24
7311.000	36.37	10.72	38.07	43.76	52.78	74	-21.22
9748.000	37.55	12.58	36.92	40.21	53.42	74	-20.58
12621.510	38.88	14.50	38.93	39.11	53.56	74	-20.44

Mode:b; Polarization:Vertical; Modulation Type:802.11b; bandwidth:20MHz; Channel:middle

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3881.276	33.28	7.77	38.65	44.01	46.41	74	-27.59
4874.000	34.28	8.97	39.05	45.59	49.79	74	-24.21
6078.201	34.76	10.46	38.95	45.43	51.70	74	-22.30
7311.000	36.37	10.72	38.07	43.35	52.37	74	-21.63
9748.000	37.55	12.58	36.92	39.69	52.90	74	-21.10
12621.510	38.88	14.50	38.93	39.37	53.82	74	-20.18



Mode:b; Polarization:Horizontal; Modulation Type:802.11b; bandwidth:20MHz; Channel:High

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3949.255	33.47	7.79	38.68	44.86	47.44	74	-26.56
4924.000	34.37	9.04	39.07	46.01	50.35	74	-23.65
6060.637	34.75	10.48	38.96	44.57	50.84	74	-23.16
7386.000	36.34	10.75	38.00	44.06	53.15	74	-20.85
9848.000	37.57	12.63	36.87	39.78	53.11	74	-20.89
12694.780	38.86	14.70	39.00	39.17	53.73	74	-20.27

Mode:b; Polarization:Vertical; Modulation Type:802.11b; bandwidth:20MHz; Channel:High

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3853.298	33.21	7.76	38.64	45.52	47.85	74	-26.15
4924.000	34.37	9.04	39.07	45.01	49.35	74	-24.65
5973.576	34.68	10.49	39.00	44.66	50.83	74	-23.17
7386.000	36.34	10.75	38.00	44.13	53.22	74	-20.78
9848.000	37.57	12.63	36.87	39.83	53.16	74	-20.84
12386.320	38.83	14.24	38.70	39.22	53.59	74	-20.41



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170200069904

Page: 34 of 239

Mode:b; Polarization:Horizontal; Modulation Type:802.11g; bandwidth:20MHz; Channel:Low

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3858.877	33.22	7.76	38.64	45.17	47.51	74	-26.49
4824.000	34.19	8.90	39.04	45.58	49.63	74	-24.37
6034.386	34.73	10.52	38.98	44.75	51.02	74	-22.98
7236.000	36.40	10.69	38.15	43.58	52.52	74	-21.48
9648.000	37.53	12.52	36.97	40.54	53.62	74	-20.38
12731.570	38.85	14.81	39.04	38.28	52.90	74	-21.10

Mode:b; Polarization:Vertical; Modulation Type:802.11g; bandwidth:20MHz; Channel:Low

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3759.672	32.95	7.73	38.59	44.39	46.48	74	-27.52
4824.000	34.19	8.90	39.04	45.42	49.47	74	-24.53
6060.637	34.75	10.48	38.96	44.46	50.73	74	-23.27
7236.000	36.40	10.69	38.15	42.68	51.62	74	-22.38
9648.000	37.53	12.52	36.97	39.89	52.97	74	-21.03
12243.770	38.75	14.36	38.55	38.97	53.53	74	-20.47



Mode:b; Polarization:Horizontal; Modulation Type:802.11g; bandwidth:20MHz; Channel:middle

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3836.607	33.16	7.75	38.63	43.89	46.17	74	-27.83
4874.000	34.28	8.97	39.05	46.19	50.39	74	-23.61
5956.314	34.67	10.44	39.00	45.04	51.15	74	-22.85
7311.000	36.37	10.72	38.07	44.00	53.02	74	-20.98
9748.000	37.55	12.58	36.92	40.55	53.76	74	-20.24
12243.770	38.75	14.36	38.55	39.00	53.56	74	-20.44

Mode:b; Polarization:Vertical; Modulation Type:802.11g; bandwidth:20MHz; Channel:middle

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3966.435	33.51	7.80	38.69	44.53	47.15	74	-26.85
4874.000	34.28	8.97	39.05	45.46	49.66	74	-24.34
5939.103	34.66	10.39	39.01	44.78	50.82	74	-23.18
7311.000	36.37	10.72	38.07	43.10	52.12	74	-21.88
9748.000	37.55	12.58	36.92	39.68	52.89	74	-21.11
12120.390	38.67	14.46	38.42	38.40	53.11	74	-20.89



Mode:b; Polarization:Horizontal; Modulation Type:802.11g; bandwidth:20MHz; Channel:High

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3847.726	33.19	7.76	38.63	44.30	46.62	74	-27.38
4924.000	34.37	9.04	39.07	44.79	49.13	74	-24.87
6157.871	34.83	10.36	38.90	44.61	50.90	74	-23.10
7386.000	36.34	10.75	38.00	43.42	52.51	74	-21.49
9848.000	37.57	12.63	36.87	39.85	53.18	74	-20.82
12386.320	38.83	14.24	38.70	38.54	52.91	74	-21.09

Mode:b; Polarization:Vertical; Modulation Type:802.11g; bandwidth:20MHz; Channel:High

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3842.163	33.18	7.76	38.63	44.75	47.06	74	-26.94
4924.000	34.37	9.04	39.07	45.14	49.48	74	-24.52
6034.386	34.73	10.52	38.98	44.68	50.95	74	-23.05
7386.000	36.34	10.75	38.00	42.88	51.97	74	-22.03
9848.000	37.57	12.63	36.87	39.13	52.46	74	-21.54
12350.530	38.81	14.27	38.66	39.13	53.55	74	-20.45



Mode:b; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:20MHz; Channel:Low

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3574.015	32.42	7.66	38.50	45.81	47.39	74	-26.61
4824.000	34.19	8.90	39.04	44.38	48.43	74	-25.57
5786.418	34.58	9.96	39.02	45.23	50.75	74	-23.25
7236.000	36.40	10.69	38.15	43.37	52.31	74	-21.69
9648.000	37.53	12.52	36.97	40.15	53.23	74	-20.77
12155.510	38.69	14.43	38.46	38.33	52.99	74	-21.01

Mode:b; Polarization:Vertical; Modulation Type:802.11n; bandwidth:20MHz; Channel:Low

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3960.700	33.50	7.80	38.68	44.18	46.80	74	-27.20
4824.000	34.19	8.90	39.04	44.50	48.55	74	-25.45
6184.658	34.85	10.32	38.88	44.61	50.90	74	-23.10
7236.000	36.40	10.69	38.15	43.33	52.27	74	-21.73
9648.000	37.53	12.52	36.97	39.05	52.13	74	-21.87
12494.320	38.90	14.15	38.80	38.55	52.80	74	-21.20



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170200069904

Page: 38 of 239

Mode:b; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:20MHz; Channel:middle

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3966.435	33.51	7.80	38.69	44.35	46.97	74	-27.03
4874.000	34.28	8.97	39.05	46.32	50.52	74	-23.48
5930.516	34.66	10.37	39.01	44.86	50.88	74	-23.12
7311.000	36.37	10.72	38.07	43.77	52.79	74	-21.21
9748.000	37.55	12.58	36.92	40.10	53.31	74	-20.69
12279.260	38.77	14.33	38.59	39.36	53.87	74	-20.13

Mode:b; Polarization:Vertical; Modulation Type:802.11n; bandwidth:20MHz; Channel:middle

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3954.973	33.48	7.79	38.68	45.03	47.62	74	-26.38
4874.000	34.28	8.97	39.05	45.67	49.87	74	-24.13
6113.481	34.79	10.41	38.93	45.28	51.55	74	-22.45
7311.000	36.37	10.72	38.07	43.79	52.81	74	-21.19
9748.000	37.55	12.58	36.92	40.02	53.23	74	-20.77
12173.120	38.71	14.42	38.48	38.77	53.42	74	-20.58



Mode:b; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:20MHz; Channel:High

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3825.521	33.13	7.75	38.62	45.33	47.59	74	-26.41
4924.000	34.37	9.04	39.07	46.17	50.51	74	-23.49
6069.413	34.76	10.47	38.96	46.00	52.27	74	-21.73
7386.000	36.34	10.75	38.00	44.17	53.26	74	-20.74
9848.000	37.57	12.63	36.87	40.08	53.41	74	-20.59
12458.220	38.88	14.18	38.77	38.50	52.79	74	-21.21

Mode:b; Polarization:Vertical; Modulation Type:802.11n; bandwidth:20MHz; Channel:High

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3831.060	33.15	7.75	38.62	45.43	47.71	74	-26.29
4924.000	34.37	9.04	39.07	45.80	50.14	74	-23.86
6104.642	34.79	10.42	38.93	44.98	51.26	74	-22.74
7386.000	36.34	10.75	38.00	44.17	53.26	74	-20.74
9848.000	37.57	12.63	36.87	39.96	53.29	74	-20.71
12512.420	38.90	14.19	38.82	39.32	53.59	74	-20.41



Mode:b; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:40MHz; Channel:Low

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3909.457	33.36	7.78	38.66	45.51	47.99	74	-26.01
4844.000	34.23	8.92	39.04	46.29	50.40	74	-23.60
6016.949	34.71	10.54	38.99	44.66	50.92	74	-23.08
7266.000	36.39	10.70	38.12	43.81	52.78	74	-21.22
9688.000	37.54	12.54	36.95	39.77	52.90	74	-21.10
12386.320	38.83	14.24	38.70	39.18	53.55	74	-20.45

Mode:b; Polarization:Vertical; Modulation Type:802.11n; bandwidth:40MHz; Channel:Low

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3836.607	33.16	7.75	38.63	45.96	48.24	74	-25.76
4844.000	34.23	8.92	39.04	46.16	50.27	74	-23.73
5947.702	34.67	10.42	39.00	45.42	51.51	74	-22.49
7266.000	36.39	10.70	38.12	44.72	53.69	74	-20.31
9688.000	37.54	12.54	36.95	40.75	53.88	74	-20.12
12676.420	38.86	14.65	38.99	39.36	53.88	74	-20.12



Mode:b; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:40MHz; Channel:middle

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3808.951	33.09	7.74	38.61	44.67	46.89	74	-27.11
4874.000	34.28	8.97	39.05	45.42	49.62	74	-24.38
6051.874	34.74	10.49	38.97	44.95	51.21	74	-22.79
7311.000	36.37	10.72	38.07	44.10	53.12	74	-20.88
9748.000	37.55	12.58	36.92	40.56	53.77	74	-20.23
12332.670	38.80	14.29	38.64	38.91	53.36	74	-20.64

Mode:b; Polarization:Vertical; Modulation Type:802.11n; bandwidth:40MHz; Channel:middle

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3836.607	33.16	7.75	38.63	45.96	48.24	74	-25.76
4874.000	34.28	8.97	39.05	46.25	50.45	74	-23.55
5947.702	34.67	10.42	39.00	45.42	51.51	74	-22.49
7311.000	36.37	10.72	38.07	44.09	53.11	74	-20.89
9748.000	37.55	12.58	36.92	39.74	52.95	74	-21.05
12676.420	38.86	14.65	38.99	39.36	53.88	74	-20.12



SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170200069904

Page: 42 of 239

Mode:b; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:40MHz; Channel:High

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3781.495	33.01	7.73	38.60	45.09	47.23	74	-26.77
4904.000	34.33	9.01	39.07	45.23	49.50	74	-24.50
5921.940	34.65	10.34	39.01	45.70	51.68	74	-22.32
7356.000	36.36	10.74	38.03	44.25	53.32	74	-20.68
9808.000	37.56	12.61	36.89	40.11	53.39	74	-20.61
12085.370	38.65	14.49	38.39	38.78	53.53	74	-20.47

Mode:b; Polarization:Vertical; Modulation Type:802.11n; bandwidth:40MHz; Channel:High

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3792.453	33.04	7.74	38.61	45.65	47.82	74	-26.18
4904.000	34.33	9.01	39.07	45.81	50.08	74	-23.92
5845.324	34.61	10.13	39.01	45.08	50.81	74	-23.19
7356.000	36.36	10.74	38.03	44.05	53.12	74	-20.88
9808.000	37.56	12.61	36.89	39.44	52.72	74	-21.28
12314.840	38.79	14.30	38.62	39.11	53.58	74	-20.42



Mode:e; Polarization:Horizontal; Modulation Type:802.11b; bandwidth:20MHz; Channel:Low

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3537.998	32.31	7.64	37.95	44.1	46.1	74	-27.9
4824.000	34.19	8.90	38.41	42.50	47.18	74	-26.82
5794.797	34.58	9.98	38.34	44.40	50.62	74	-23.38
7236.000	36.40	10.69	37.09	41.43	51.43	74	-22.57
9648.000	37.53	12.52	35.08	37.42	52.39	74	-21.61
12261.500	38.76	14.34	36.23	36.50	53.37	74	-20.63

Mode:e; Polarization:Vertical; Modulation Type:802.11b; bandwidth:20MHz; Channel:Low

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3732.570	32.87	7.72	37.97	45.09	47.71	74	-26.29
4824.000	34.19	8.90	38.41	42.71	47.39	74	-26.61
5769.698	34.57	9.91	38.35	44.73	50.86	74	-23.14
7236.000	36.40	10.69	37.09	41.45	51.45	74	-22.55
9648.000	37.53	12.52	35.08	37.90	52.87	74	-21.13
12208.390	38.73	14.39	36.10	36.70	53.72	74	-20.28



Mode:e; Polarization:Horizontal; Modulation Type:802.11b; bandwidth:20MHz; Channel:middle

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3983.689	33.56	7.80	38.00	44.49	47.85	74	-26.15
4874.000	34.28	8.97	38.44	42.45	47.26	74	-26.74
6025.661	34.72	10.53	38.27	43.97	50.95	74	-23.05
7311.000	36.37	10.72	37.02	40.95	51.02	74	-22.98
9748.000	37.55	12.58	35.03	37.19	52.29	74	-21.71
12102.870	38.66	14.47	35.85	36.13	53.41	74	-20.59

Mode:e; Polarization:Vertical; Modulation Type:802.11b; bandwidth:20MHz; Channel:middle

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3641.878	32.62	7.68	37.96	44.20	46.54	74	-27.46
4874.000	34.28	8.97	38.44	40.70	45.51	74	-28.49
6078.201	34.76	10.46	38.22	43.50	50.50	74	-23.50
7311.000	36.37	10.72	37.02	41.41	51.48	74	-22.52
9748.000	37.55	12.58	35.03	37.19	52.29	74	-21.71
12279.260	38.77	14.33	36.27	36.88	53.71	74	-20.29



Mode:e; Polarization:Horizontal; Modulation Type:802.11b; bandwidth:20MHz; Channel:High

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3847.726	33.19	7.76	37.98	44.56	47.53	74	-26.47
4924.000	34.37	9.04	38.46	43.54	48.49	74	-25.51
6008.249	34.71	10.55	38.29	43.25	50.22	74	-23.78
7386.000	36.34	10.75	36.95	41.38	51.52	74	-22.48
9848.000	37.57	12.63	34.98	36.83	52.05	74	-21.95
12243.770	38.75	14.36	36.19	36.36	53.28	74	-20.72

Mode:e; Polarization:Vertical; Modulation Type:802.11b; bandwidth:20MHz; Channel:High

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3949.255	33.47	7.79	37.99	46.26	49.53	74	-24.47
4924.000	34.37	9.04	38.46	44.08	49.03	74	-24.97
6051.874	34.74	10.49	38.25	43.82	50.80	74	-23.20
7386.000	36.34	10.75	36.95	41.14	51.28	74	-22.72
9848.000	37.57	12.63	34.98	37.75	52.97	74	-21.03
12243.770	38.75	14.36	36.19	37.02	53.94	74	-20.06



Mode:e; Polarization:Horizontal; Modulation Type:802.11g; bandwidth:20MHz; Channel:Low

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3786.970	33.03	7.74	37.98	44.22	47.01	74	-26.99
4824.000	34.19	8.90	38.41	41.72	46.40	74	-27.60
5956.314	34.67	10.44	38.31	43.85	50.65	74	-23.35
7236.000	36.40	10.69	37.09	41.27	51.27	74	-22.73
9648.000	37.53	12.52	35.08	37.89	52.86	74	-21.14
12243.770	38.75	14.36	36.19	36.10	53.02	74	-20.98

Mode:e; Polarization:Vertical; Modulation Type:802.11g; bandwidth:20MHz; Channel:Low

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3831.060	33.15	7.75	37.98	44.03	46.95	74	-27.05
4824.000	34.19	8.90	38.41	41.73	46.41	74	-27.59
5820.005	34.59	10.06	38.34	44.65	50.96	74	-23.04
7236.000	36.40	10.69	37.09	41.25	51.25	74	-22.75
9648.000	37.53	12.52	35.08	37.22	52.19	74	-21.81
12314.840	38.79	14.30	36.36	36.34	53.07	74	-20.93



Mode:e; Polarization:Horizontal; Modulation Type:802.11g; bandwidth:20MHz; Channel:middle

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3776.027	33.00	7.73	37.98	44.58	47.33	74	-26.67
4874.000	34.28	8.97	38.44	42.88	47.69	74	-26.31
5939.103	34.66	10.39	38.31	44.05	50.79	74	-23.21
7311.000	36.37	10.72	37.02	41.37	51.44	74	-22.56
9748.000	37.55	12.58	35.03	37.43	52.53	74	-21.47
12120.390	38.67	14.46	35.89	36.59	53.83	74	-20.17

Mode:e; Polarization:Vertical; Modulation Type:802.11g; bandwidth:20MHz; Channel:middle

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3836.607	33.16	7.75	37.98	44.29	47.22	74	-26.78
4874.000	34.28	8.97	38.44	42.73	47.54	74	-26.46
5820.005	34.59	10.06	38.34	44.15	50.46	74	-23.54
7311.000	36.37	10.72	37.02	41.75	51.82	74	-22.18
9764.000	37.55	12.58	35.02	37.10	52.21	74	-21.79
12279.260	38.77	14.33	36.27	37.10	53.93	74	-20.07



Mode:e; Polarization:Horizontal; Modulation Type:802.11g; bandwidth:20MHz; Channel:High

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3574.015	32.42	7.66	37.96	45.45	47.57	74	-26.43
4924.000	34.37	9.04	38.46	43.99	48.94	74	-25.06
6069.413	34.76	10.47	38.23	43.09	50.09	74	-23.91
7386.000	36.34	10.75	36.95	40.88	51.02	74	-22.98
9848.000	37.57	12.63	34.98	37.35	52.57	74	-21.43
12067.890	38.64	14.50	35.76	36.20	53.58	74	-20.42

Mode:e; Polarization:Vertical; Modulation Type:802.11g; bandwidth:20MHz; Channel:High

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3647.151	32.63	7.69	37.96	44.55	46.91	74	-27.09
4924.000	34.37	9.04	38.46	44.01	48.96	74	-25.04
6034.386	34.73	10.52	38.27	43.55	50.53	74	-23.47
7386.000	36.34	10.75	36.95	41.47	51.61	74	-22.39
9848.000	37.57	12.63	34.98	37.59	52.81	74	-21.19
12120.390	38.67	14.46	35.89	36.66	53.90	74	-20.10



Mode:e; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:20MHz; Channel:Low

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3803.444	33.07	7.74	37.98	44.05	46.88	74	-27.12
4824.000	34.19	8.90	38.41	42.16	46.84	74	-27.16
6078.201	34.76	10.46	38.22	43.52	50.52	74	-23.48
7236.000	36.40	10.69	37.09	41.58	51.58	74	-22.42
9648.000	37.53	12.52	35.08	37.74	52.71	74	-21.29
12137.940	38.68	14.45	35.93	36.13	53.33	74	-20.67

Mode:e; Polarization:Vertical; Modulation Type:802.11n; bandwidth:20MHz; Channel:Low

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3842.163	33.18	7.76	37.98	43.84	46.80	74	-27.20
4824.000	34.19	8.90	38.41	41.46	46.14	74	-27.86
6060.637	34.75	10.48	38.24	43.96	50.95	74	-23.05
7236.000	36.40	10.69	37.09	41.93	51.93	74	-22.07
9648.000	37.53	12.52	35.08	37.40	52.37	74	-21.63
12050.440	38.63	14.52	35.72	36.11	53.54	74	-20.46



Mode:e; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:20MHz; Channel:middle

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3847.726	33.19	7.76	37.98	43.57	46.54	74	-27.46
4874.000	34.28	8.97	38.44	40.86	45.67	74	-28.33
6060.637	34.75	10.48	38.24	43.35	50.34	74	-23.66
7311.000	36.37	10.72	37.02	41.36	51.43	74	-22.57
9748.000	37.55	12.58	35.03	36.91	52.01	74	-21.99
12279.260	38.77	14.33	36.27	36.95	53.78	74	-20.22

Mode:e; Polarization:Vertical; Modulation Type:802.11n; bandwidth:20MHz; Channel:middle

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3808.951	33.09	7.74	37.98	42.75	45.60	74	-28.40
4874.000	34.28	8.97	38.44	41.89	46.70	74	-27.30
6069.413	34.76	10.47	38.23	43.10	50.10	74	-23.90
7311.000	36.37	10.72	37.02	41.50	51.57	74	-22.43
9748.000	37.55	12.58	35.03	37.74	52.84	74	-21.16
12120.390	38.67	14.46	35.89	36.69	53.93	74	-20.07



Mode:e; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:20MHz; Channel:High

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3754.236	32.94	7.72	37.98	43.90	46.58	74	-27.42
4924.000	34.37	9.04	38.46	43.35	48.30	74	-25.70
6016.949	34.71	10.54	38.28	43.20	50.17	74	-23.83
7386.000	36.34	10.75	36.95	41.08	51.22	74	-22.78
9848.000	37.57	12.63	34.98	37.66	52.88	74	-21.12
12314.840	38.79	14.30	36.36	36.71	53.44	74	-20.56

Mode:e; Polarization:Vertical; Modulation Type:802.11n; bandwidth:20MHz; Channel:High

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3831.060	33.15	7.75	37.98	44.57	47.49	74	-26.51
4924.000	34.37	9.04	38.46	43.91	48.86	74	-25.14
6078.201	34.76	10.46	38.22	43.99	50.99	74	-23.01
7386.000	36.34	10.75	36.95	40.95	51.09	74	-22.91
9848.000	37.57	12.63	34.98	37.66	52.88	74	-21.12
12297.040	38.78	14.31	36.31	37.07	53.85	74	-20.15



Mode:e; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:40MHz; Channel:Low

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3776.027	33.00	7.73	37.98	43.80	46.55	74	-27.45
4844.000	34.23	8.92	38.42	42.25	46.98	74	-27.02
5811.590	34.59	10.03	38.34	43.80	50.08	74	-23.92
7266.000	36.39	10.70	37.06	40.99	51.02	74	-22.98
9688.000	37.54	12.54	35.06	37.94	52.96	74	-21.04
12120.390	38.67	14.46	35.89	36.56	53.80	74	-20.20

Mode:e; Polarization:Vertical; Modulation Type:802.11n; bandwidth:40MHz; Channel:Low

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3909.457	33.36	7.78	37.99	43.89	47.04	74	-26.96
4844.000	34.23	8.92	38.42	42.53	47.26	74	-26.74
6043.124	34.74	10.50	38.26	43.22	50.20	74	-23.80
7266.000	36.39	10.70	37.06	41.97	52.00	74	-22.00
9688.000	37.54	12.54	35.06	37.61	52.63	74	-21.37
12067.890	38.64	14.50	35.76	36.27	53.65	74	-20.35



Mode:e; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:40MHz; Channel:middle

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3532.883	32.30	7.64	37.95	43.47	45.46	74	-28.54
4874.000	34.28	8.97	38.44	40.88	45.69	74	-28.31
5820.005	34.59	10.06	38.34	42.67	48.98	74	-25.02
7311.000	36.37	10.72	37.02	40.42	50.49	74	-23.51
9748.000	37.55	12.58	35.03	37.24	52.34	74	-21.66
12067.890	38.64	14.50	35.76	36.48	53.86	74	-20.14

Mode:e; Polarization:Vertical; Modulation Type:802.11n; bandwidth:40MHz; Channel:middle

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3558.534	32.37	7.65	37.96	43.57	45.63	74	-28.37
4874.000	34.28	8.97	38.44	41.26	46.07	74	-27.93
5769.698	34.57	9.91	38.35	43.96	50.09	74	-23.91
7311.000	36.37	10.72	37.02	41.09	51.16	74	-22.84
9748.000	37.55	12.58	35.03	37.80	52.90	74	-21.10
12261.500	38.76	14.34	36.23	36.82	53.69	74	-20.31



Mode:e; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:40MHz; Channel:High

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3584.372	32.45	7.66	37.96	44.72	46.87	74	-27.13
4904.000	34.33	9.01	38.45	41.90	46.79	74	-27.21
5913.378	34.65	10.32	38.32	44.23	50.88	74	-23.12
7356.000	36.36	10.74	36.98	40.94	51.06	74	-22.94
9808.000	37.56	12.61	35.00	37.50	52.67	74	-21.33
12067.890	38.64	14.50	35.76	35.65	53.03	74	-20.97

Mode:e; Polarization:Vertical; Modulation Type:802.11n; bandwidth:40MHz; Channel:High

Frequency (MHz)	Antenna factors (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Reading Level (dBmV)	Level (dBmV/m)	Limit (dBmV/m)	Over limit (dB)
3786.970	33.03	7.74	37.98	43.95	46.74	74	-27.26
4904.000	34.33	9.01	38.45	41.79	46.68	74	-27.32
6193.614	34.86	10.31	38.11	43.81	50.87	74	-23.13
7356.000	36.36	10.74	36.98	41.29	51.41	74	-22.59
9808.000	37.56	12.61	35.00	36.92	52.09	74	-21.91
12190.740	38.72	14.40	36.06	36.86	53.92	74	-20.08

Remark:

1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor – Preamplifier Factor

2) Scan from 9kHz to 25GHz,The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported .

3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.



7.7 Radiated Emissions which fall in the restricted bands

Test Requirement 47 CFR Part 15, Subpart C 15.209 & 15.247(d)

Test Method: ANSI C63.10 (2013) Section 6.10.5

Measurement Distance: 3m

Limit:

Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.0	Quasi-peak Value
88MHz-216MHz	43.5	Quasi-peak Value
216MHz-960MHz	46.0	Quasi-peak Value
960MHz-1GHz	54.0	Quasi-peak Value
Above 1GHz	54.0	Average Value
	74.0	Peak Value

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 24.0 °C Humidity: 54 % RH Atmospheric Pressure: 1020 mbar

Pretest these mode to find the worst case:

b: WIFI 2.4G TX (LS9-AC11DBT): Keep the EUT transmitting .
e: WIFI 2.4G TX (CDW-B18821A-00) : Keep the EUT transmitting .

The worst case for final test:


b: WIFI 2.4G TX (LS9-AC11DBT): Keep the EUT transmitting .
e: WIFI 2.4G TX (CDW-B18821A-00) : Keep the EUT transmitting .

Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;

6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)

Only the worst case is recorded in the report.

7.7.2 Test Setup Diagram

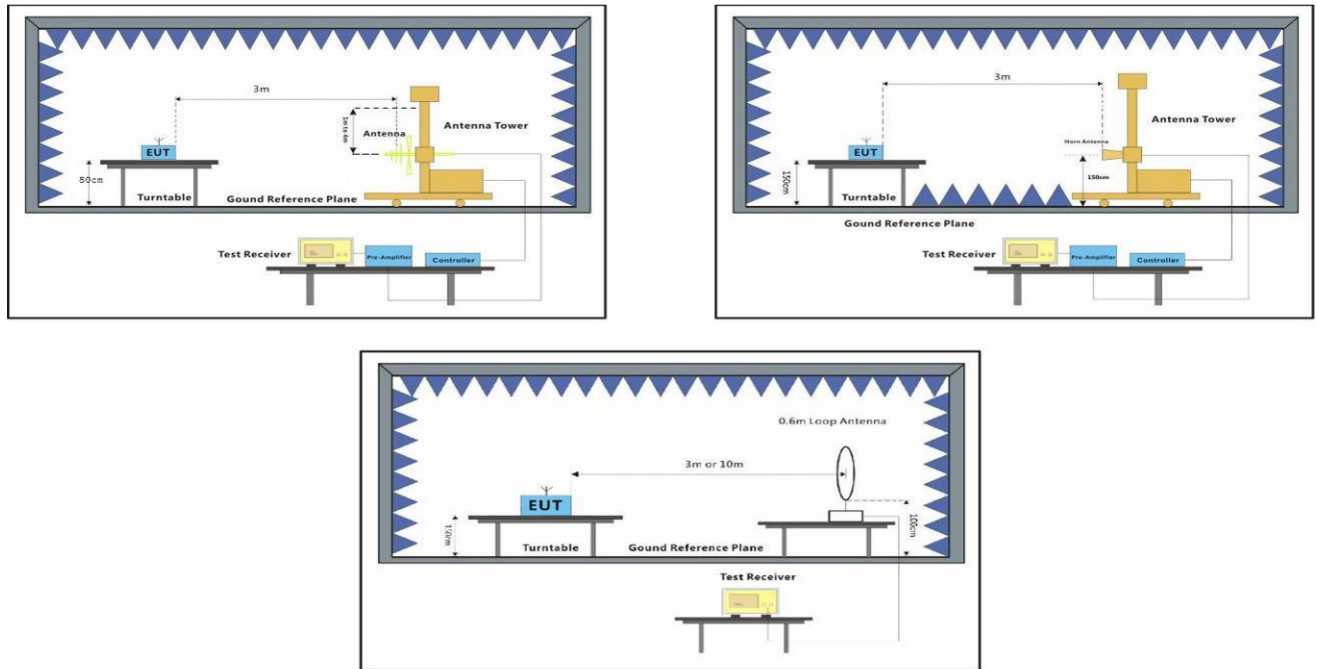

7.7.3 Measurement Data

- For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 or 10 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter fully-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- The EUT was set 3 or 10 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
- Test the EUT in the lowest channel, the middle channel, the highest channel.
- The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is the worst case.
- Repeat above procedures until all frequencies measured was complete.




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170200069904

Page: 57 of 239

Mode:b; Polarization:Horizontal; Modulation Type:802.11b; bandwidth:20MHz; Channel:Low

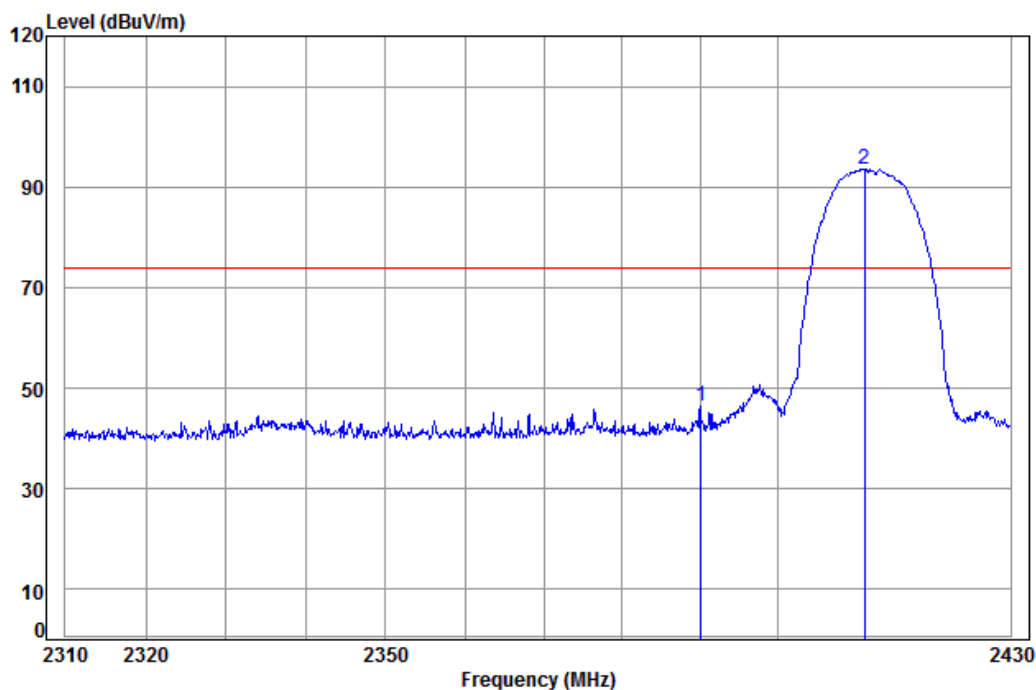

Condition: 3m HORIZONTAL

Job No: : LS9


Mode: : 2412 Bandedge

: WIFI-B

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	5.34	28.57	37.96	50.50	46.45	74.00	-27.55	
2 pp	2411.122	5.35	28.65	37.96	97.62	93.66	74.00	19.66	



Mode:b; Polarization:Vertical; Modulation Type:802.11b; bandwidth:20MHz; Channel:Low

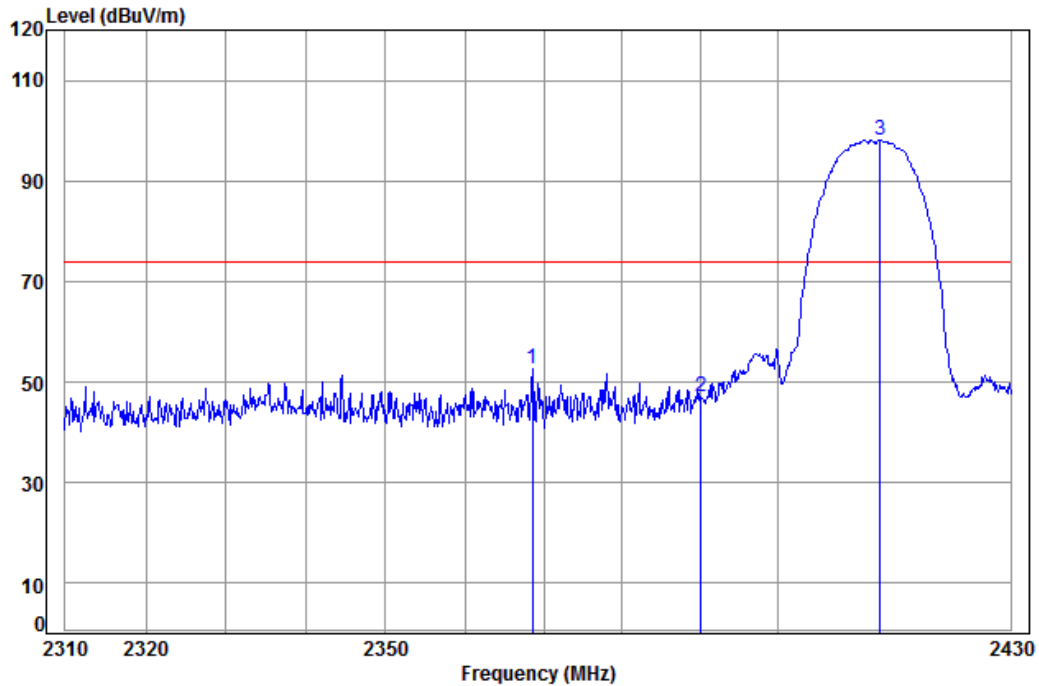


Condition: 3m VERTICAL
Job No: : LS9
Mode: : 2412 Bandedge
: WIFI-B

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2368.521	5.32	28.51	37.96	56.85	52.72	74.00	-21.28	
2	2390.000	5.34	28.57	37.96	51.17	47.12	74.00	-26.88	
3 pp	2413.076	5.35	28.66	37.96	102.17	98.22	74.00	24.22	



Mode:b; Polarization:Horizontal; Modulation Type:802.11b; bandwidth:20MHz; Channel:High

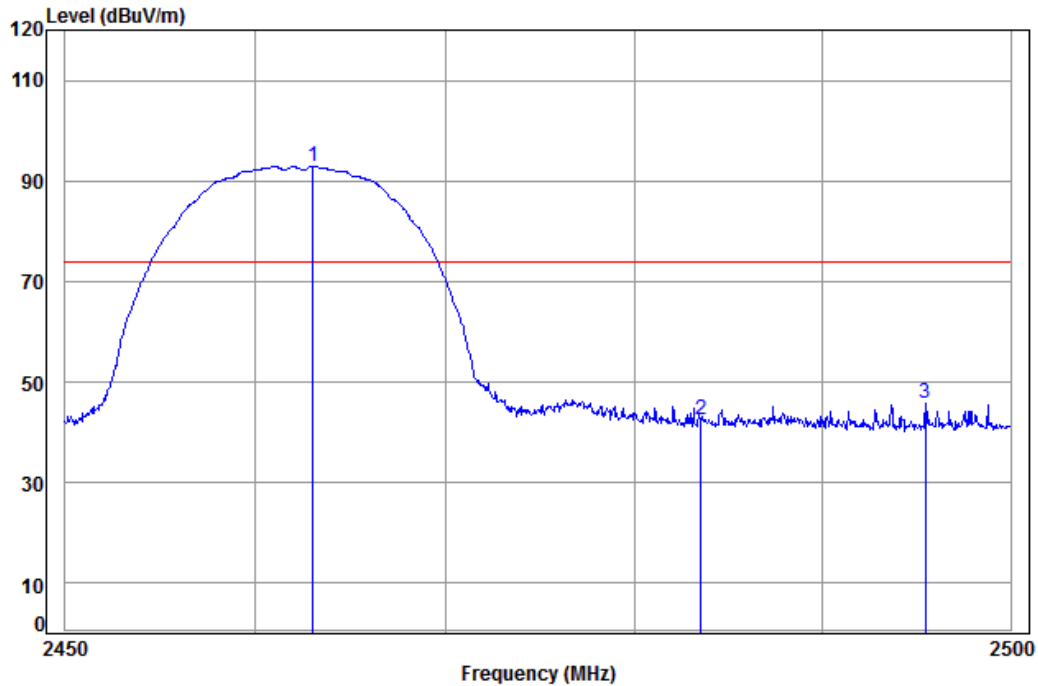

Condition: 3m HORIZONTAL

Job No: : LS9


Mode: : 2462 Bandedge

: WIFI-B

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2463.002	5.39	28.89	37.95	96.64	92.97	74.00	18.97	
2	2483.500	5.41	28.98	37.95	46.17	42.61	74.00	-31.39	
3	2495.458	5.42	29.04	37.95	49.36	45.87	74.00	-28.13	



Mode:b; Polarization:Vertical; Modulation Type:802.11b; bandwidth:20MHz; Channel:High

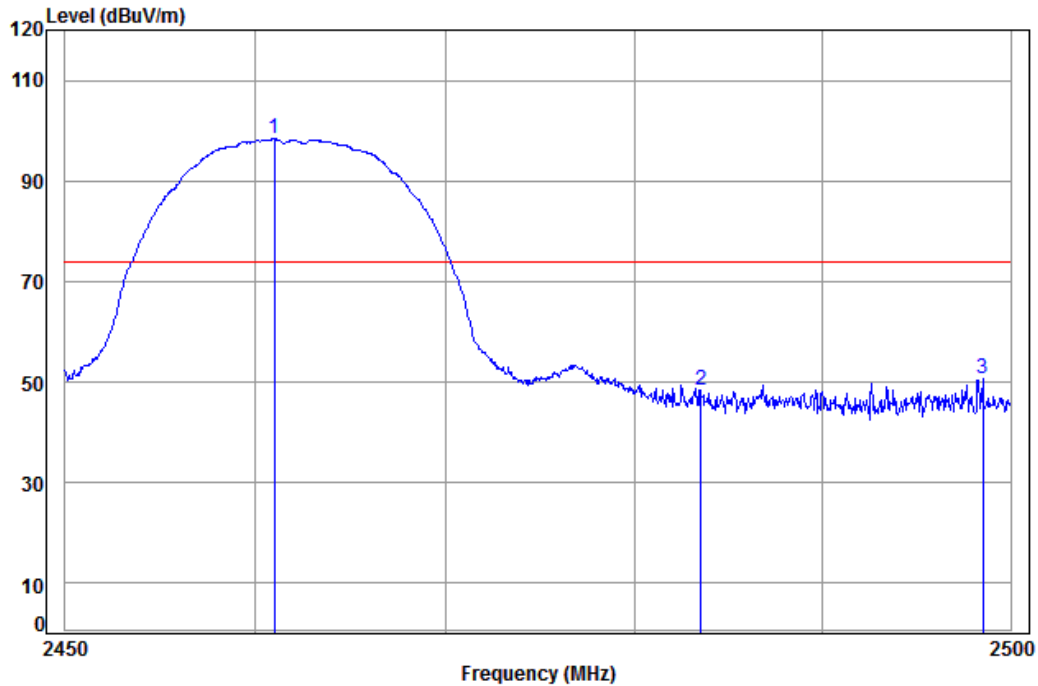


Condition: 3m VERTICAL
Job No: : LS9
Mode: : 2462 Bandedge
: WIFI-B

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2460.963	5.39	28.88	37.95	102.05	98.37	74.00	24.37
2	2483.500	5.41	28.98	37.95	52.07	48.51	74.00	-25.49
3	2498.536	5.42	29.05	37.95	54.00	50.52	74.00	-23.48



Mode:b; Polarization:Horizontal; Modulation Type:802.11g; bandwidth:20MHz; Channel:Low

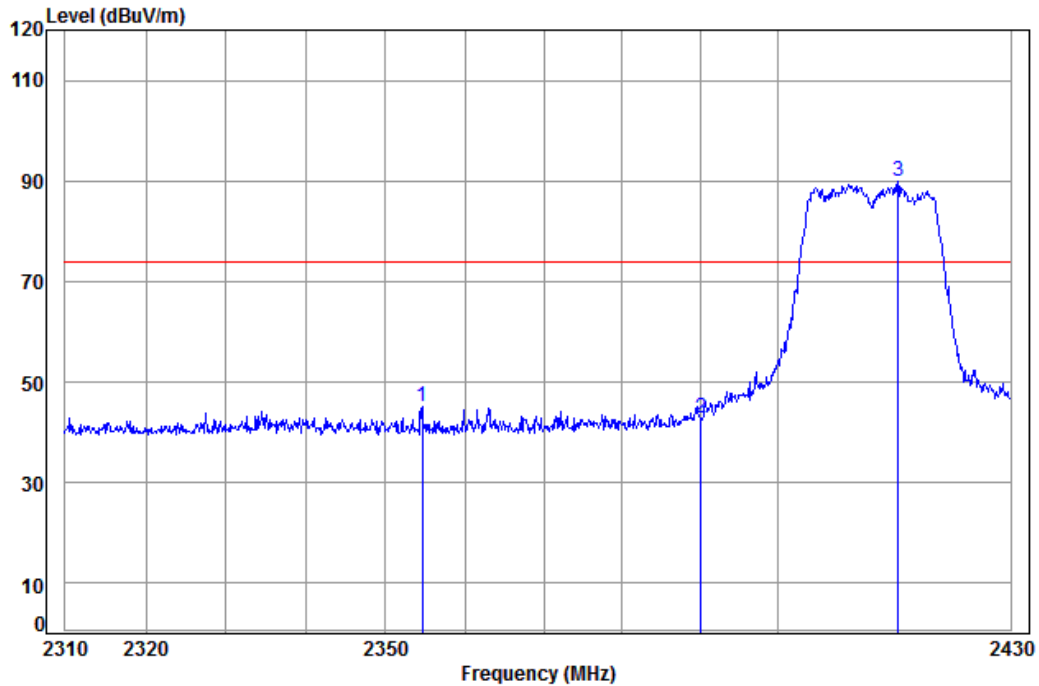

Condition: 3m HORIZONTAL

Job No: : LS9


Mode: : 2412 Bandedge

: WIFI-G

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2354.647	5.31	28.47	37.96	49.45	45.27	74.00	-28.73	
2	2390.000	5.34	28.57	37.96	46.82	42.77	74.00	-31.23	
3 pp	2415.399	5.36	28.67	37.96	93.72	89.79	74.00	15.79	



Mode:b; Polarization:Vertical; Modulation Type:802.11g; bandwidth:20MHz; Channel:Low

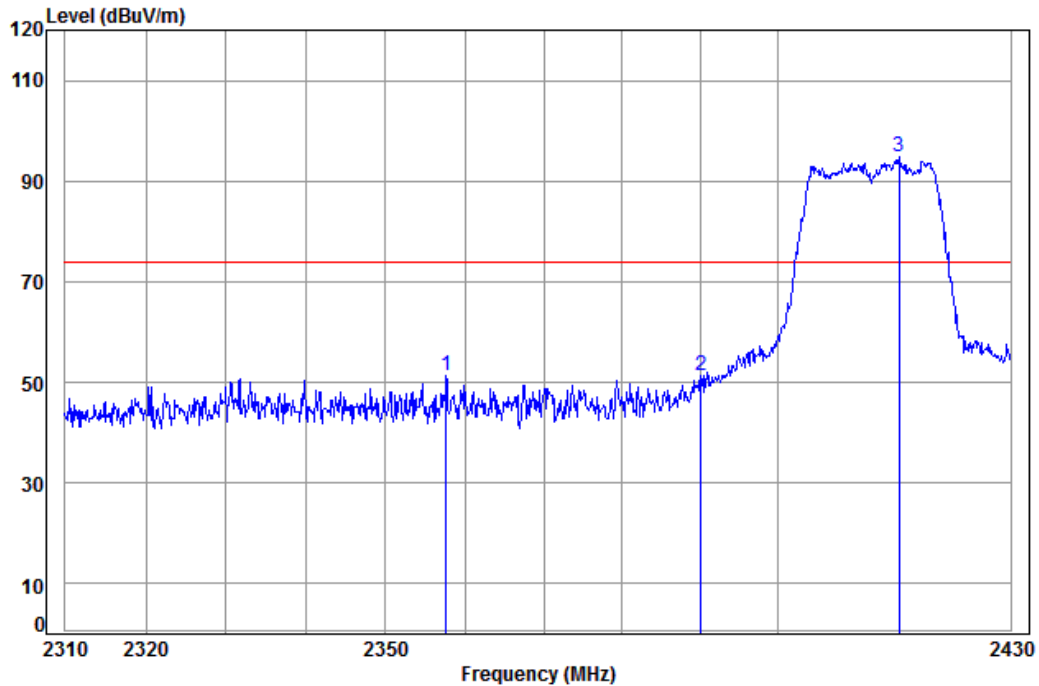


Condition: 3m VERTICAL
Job No: : LS9
Mode: : 2412 Bandedge
: WIFI-G

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2357.630	5.31	28.48	37.96	55.42	51.25	74.00	-22.75	
2	2390.000	5.34	28.57	37.96	55.35	51.30	74.00	-22.70	
3 pp	2415.522	5.36	28.67	37.96	98.92	94.99	74.00	20.99	



Mode:b; Polarization:Horizontal; Modulation Type:802.11g; bandwidth:20MHz; Channel:High

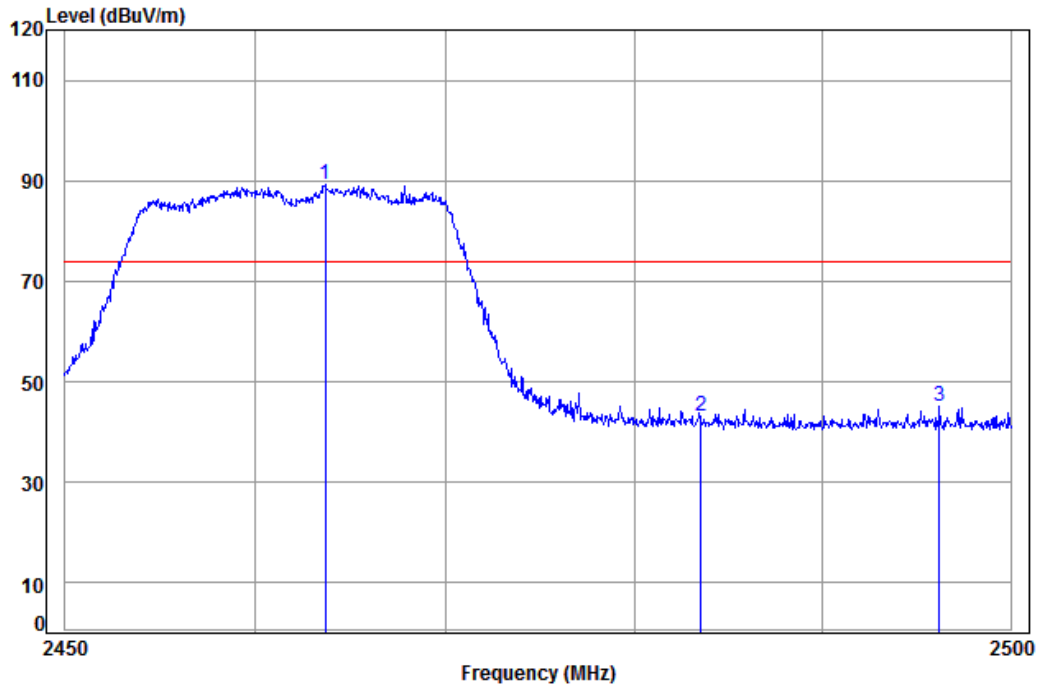

Condition: 3m HORIZONTAL

Job No: : LS9


Mode: : 2462 Bandedge

: WIFI-G

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2463.649	5.39	28.89	37.95	92.86	89.19	74.00	15.19
2	2483.500	5.41	28.98	37.95	46.58	43.02	74.00	-30.98
3	2496.215	5.42	29.04	37.95	48.65	45.16	74.00	-28.84



Mode:b; Polarization:Vertical; Modulation Type:802.11g; bandwidth:20MHz; Channel:High

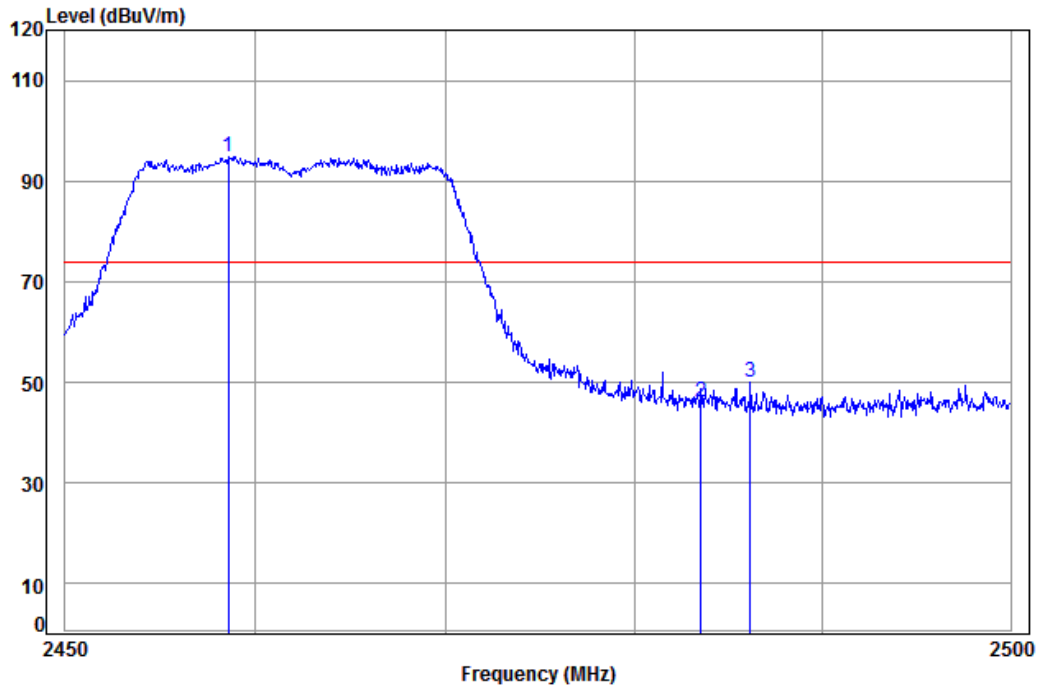


Condition: 3m VERTICAL
Job No: : LS9
Mode: : 2462 Bandedge
: WIFI-G

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2458.578	5.39	28.87	37.95	98.61	94.92	74.00	20.92
2	2483.500	5.41	28.98	37.95	49.81	46.25	74.00	-27.75
3	2486.149	5.41	29.00	37.95	53.64	50.10	74.00	-23.90



Mode:b; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:20MHz; Channel:Low

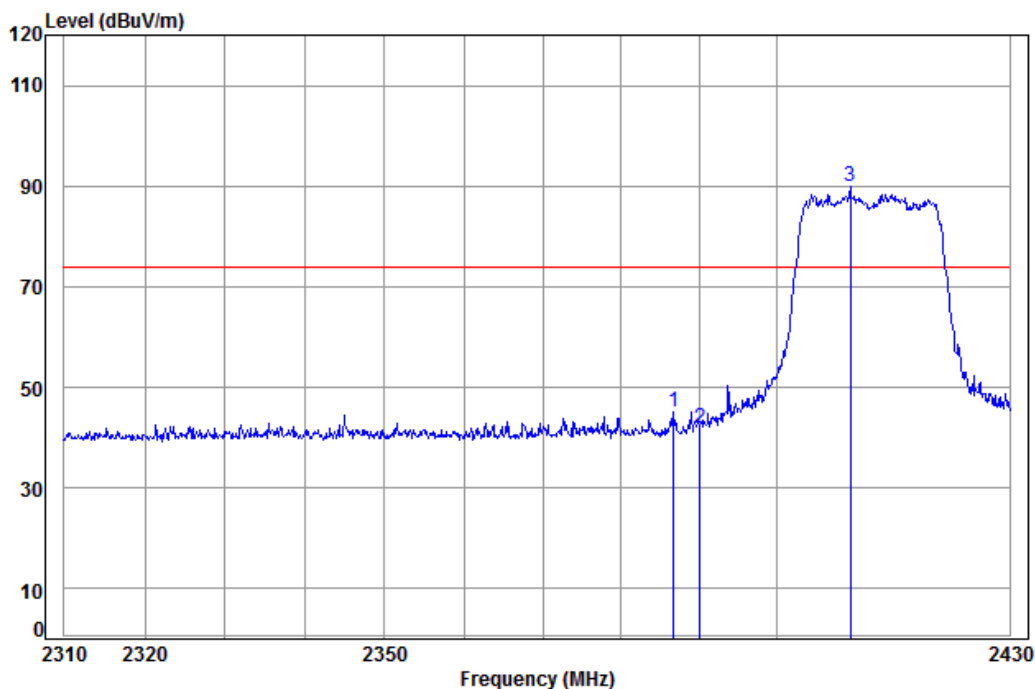

Condition: 3m HORIZONTAL

Job No: : LS9


Mode: : 2412 Bandedge

: WIFI-N20

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2386.703	5.33	28.56	37.96	49.23	45.16	74.00	-28.84	
2	2390.000	5.34	28.57	37.96	46.03	41.98	74.00	-32.02	
3 pp	2409.413	5.35	28.64	37.96	93.91	89.94	74.00	15.94	



Mode:b; Polarization:Vertical; Modulation Type:802.11n; bandwidth:20MHz; Channel:Low

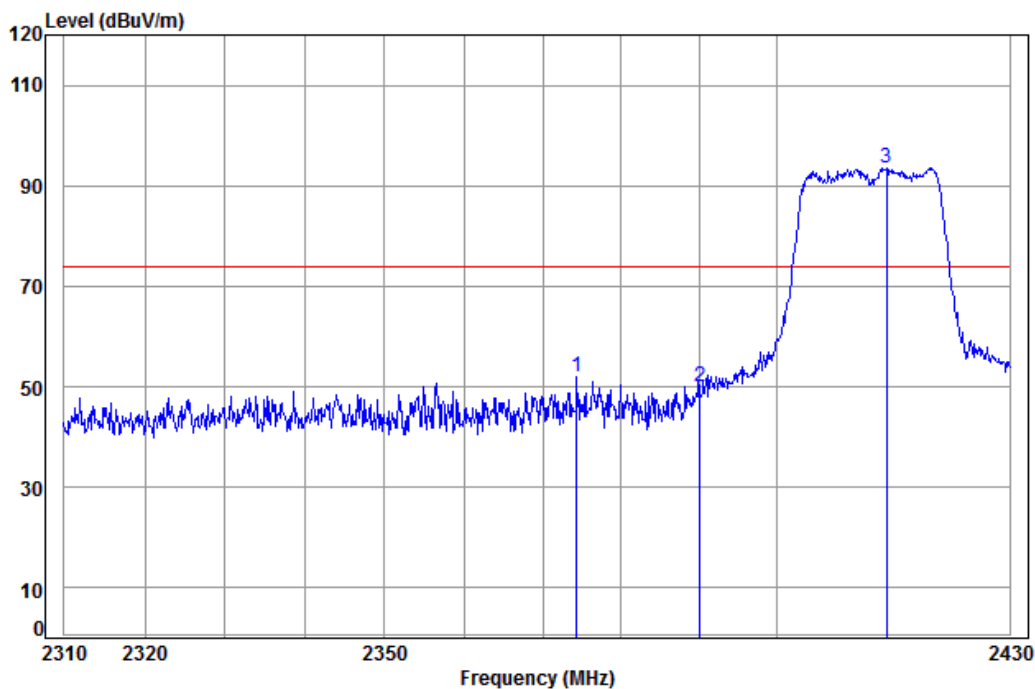


Condition: 3m VERTICAL
Job No: : LS9
Mode: : 2412 Bandedge
: WIFI-N20

	Freq	Cable Loss	Ant Factor	Preamplifier Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2374.285	5.33	28.53	37.96	56.06	51.96	74.00	-22.04	
2	2390.000	5.34	28.57	37.96	54.01	49.96	74.00	-24.04	
3	2414.054	5.36	28.67	37.96	97.45	93.52	74.00	19.52	



Mode:b; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:20MHz; Channel:High

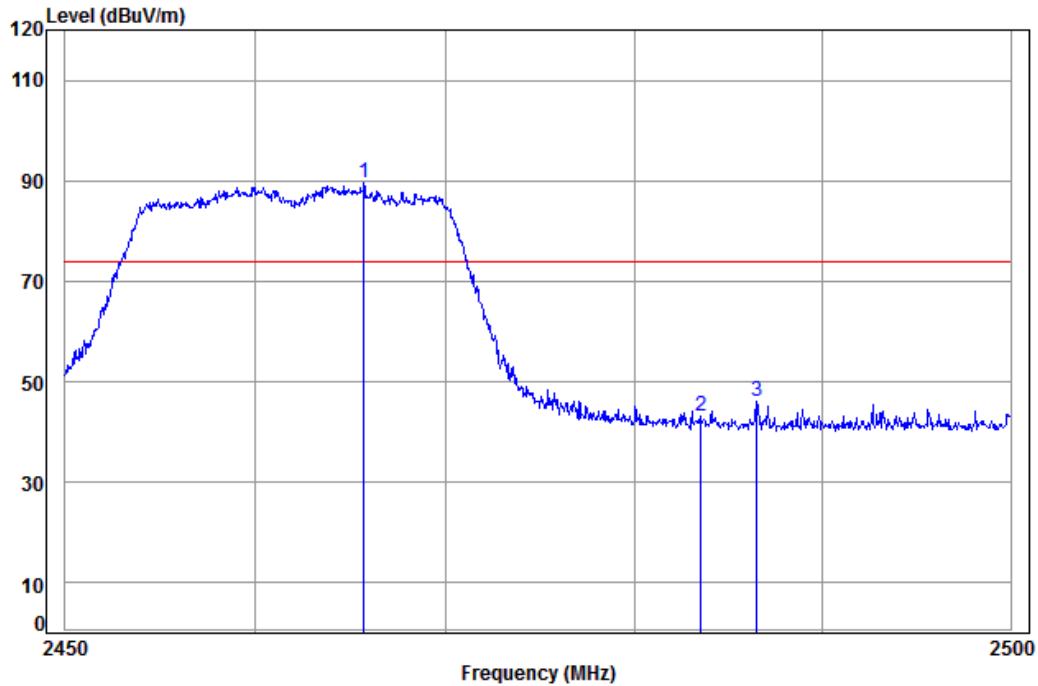

Condition: 3m HORIZONTAL

Job No: : LS9


Mode: : 2462 Bandedge

: WIFI-N20

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2465.691	5.39	28.90	37.95	93.17	89.51	74.00	15.51
2	2483.500	5.41	28.98	37.95	46.62	43.06	74.00	-30.94
3	2486.501	5.41	29.00	37.95	49.49	45.95	74.00	-28.05



Mode:b; Polarization:Vertical; Modulation Type:802.11n; bandwidth:20MHz; Channel:High

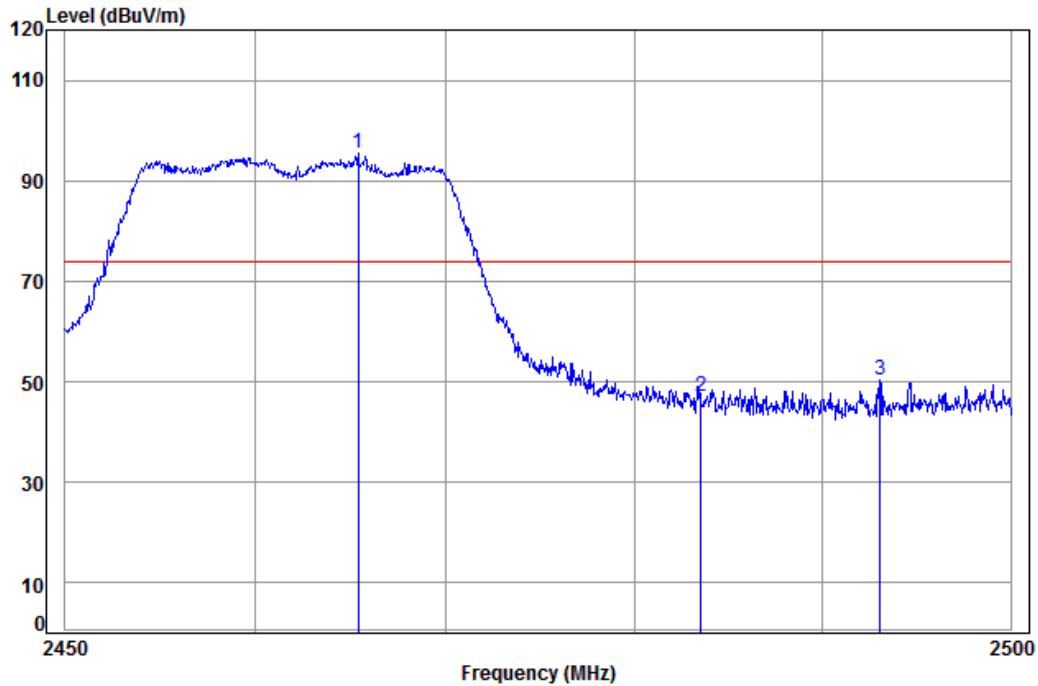


Condition: 3m VERTICAL
Job No: : LS9
Mode: : 2462 Bandedge
: WIFI-N20

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2465.392	5.39	28.90	37.95	99.17	95.51	74.00	21.51
2	2483.500	5.41	28.98	37.95	50.49	46.93	74.00	-27.07
3	2493.040	5.41	29.03	37.95	53.97	50.46	74.00	-23.54



Mode:b; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:40MHz; Channel:Low

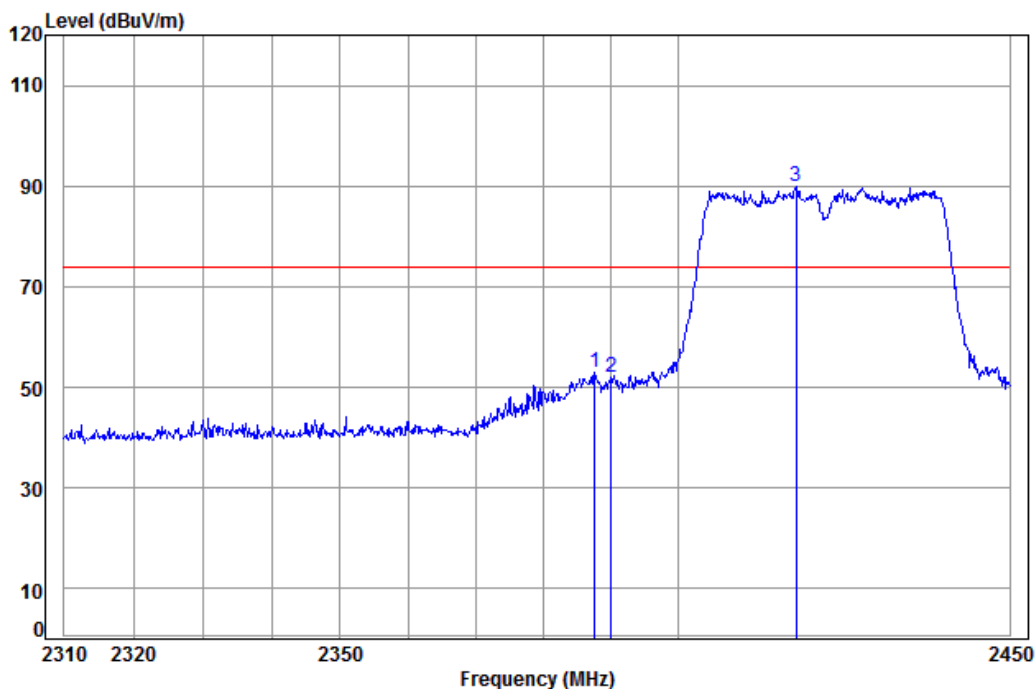

Condition: 3m HORIZONTAL

Job No: : LS9

Mode: : 2422 Bandedge

: WIFI-N40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2387.524	5.34	28.56	37.96	57.16	53.10	74.00	-20.90	
2	2390.000	5.34	28.57	37.96	56.12	52.07	74.00	-21.93	
3 pp	2417.636	5.36	28.68	37.96	93.73	89.81	74.00	15.81	




SGS-CSTC Standards Technical Services Co., Ltd.
Shenzhen Branch

Report No.: SZEM170200069904

Page: 70 of 239

Mode:b; Polarization:Vertical; Modulation Type:802.11n; bandwidth:40MHz; Channel:Low

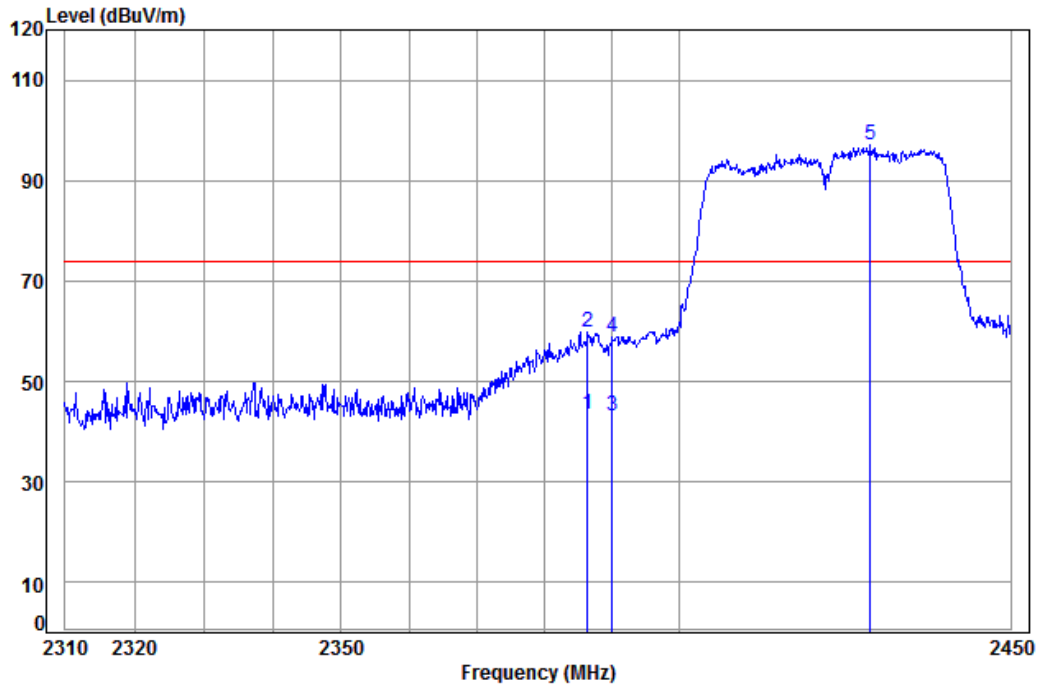

Condition: 3m VERTICAL

Job No: : LS9


Mode: : 2422 Bandedge

: WIFI-N40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 av	2386.401	5.33	28.56	37.96	47.59	43.52	54.00	-10.48 Average
2 pk	2386.401	5.33	28.56	37.96	64.01	59.94	74.00	-14.06 Peak
3	2390.000	5.34	28.57	37.96	47.37	43.32	54.00	-10.68 Average
4	2390.000	5.34	28.57	37.96	62.75	58.70	74.00	-15.30 Peak
5 pp	2428.757	5.37	28.73	37.96	101.01	97.15	74.00	23.15



Mode:b; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:40MHz; Channel:High

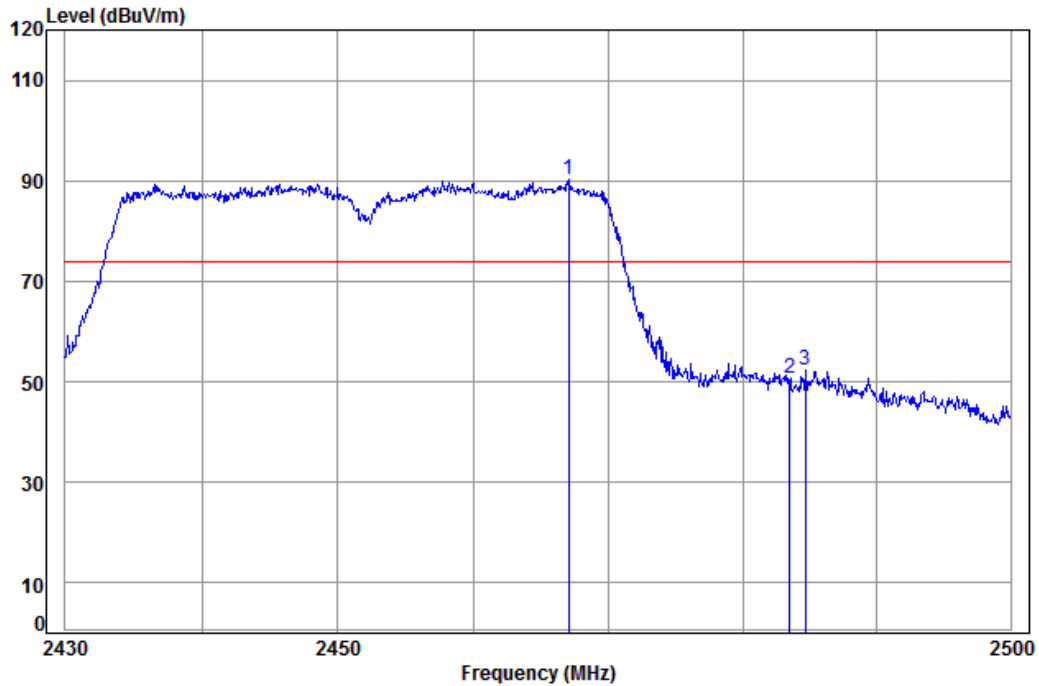


Condition: 3m HORIZONTAL
Job No: : LS9
Mode: : 2452 Bandedge
: WIFI-N40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2467.063	5.40	28.91	37.95	93.90	90.26	74.00	16.26
2	2483.500	5.41	28.98	37.95	54.14	50.58	74.00	-23.42
3	2484.641	5.41	28.99	37.95	55.79	52.24	74.00	-21.76



Mode:b; Polarization:Vertical; Modulation Type:802.11n; bandwidth:40MHz; Channel:High

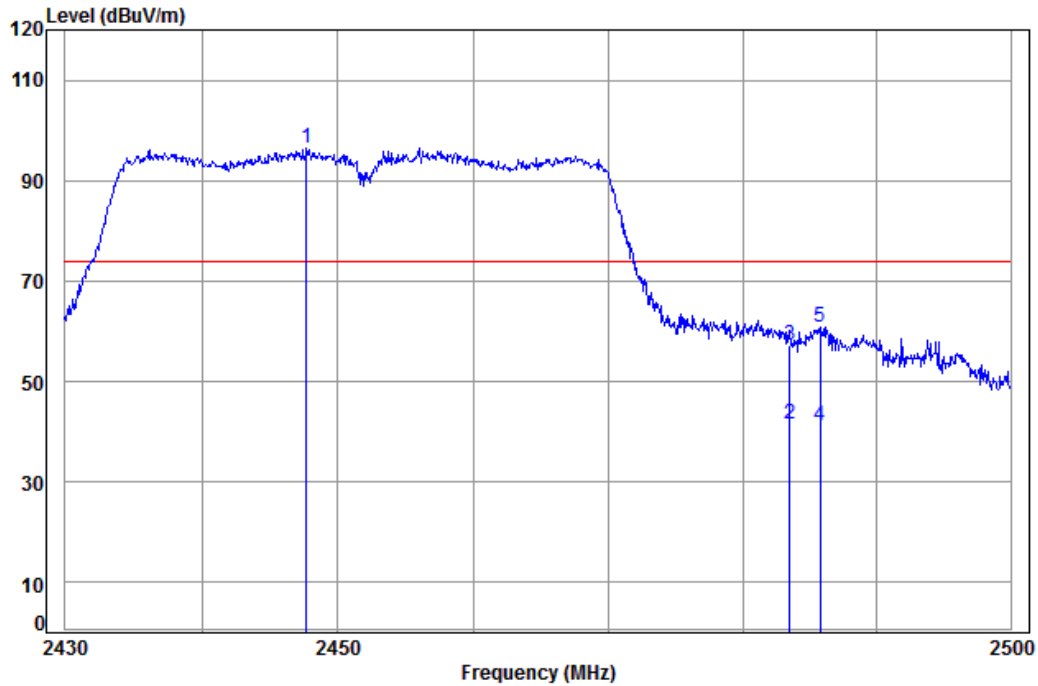


Condition: 3m VERTICAL
Job No: : LS9
Mode: : 2452 Bandedge
: WIFI-N40

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2447.662	5.38	28.82	37.96	100.18	96.42	74.00	22.42
2 av	2483.500	5.41	28.98	37.95	44.93	41.37	54.00	-12.63 Average
3	2483.500	5.41	28.98	37.95	60.88	57.32	74.00	-16.68 Peak
4	2485.770	5.41	28.99	37.95	44.67	41.12	54.00	-12.88 Average
5 pk	2485.770	5.41	28.99	37.95	64.42	60.87	74.00	-13.13 Peak



Mode:e; Polarization:Horizontal; Modulation Type:802.11b; bandwidth:20MHz; Channel:Low

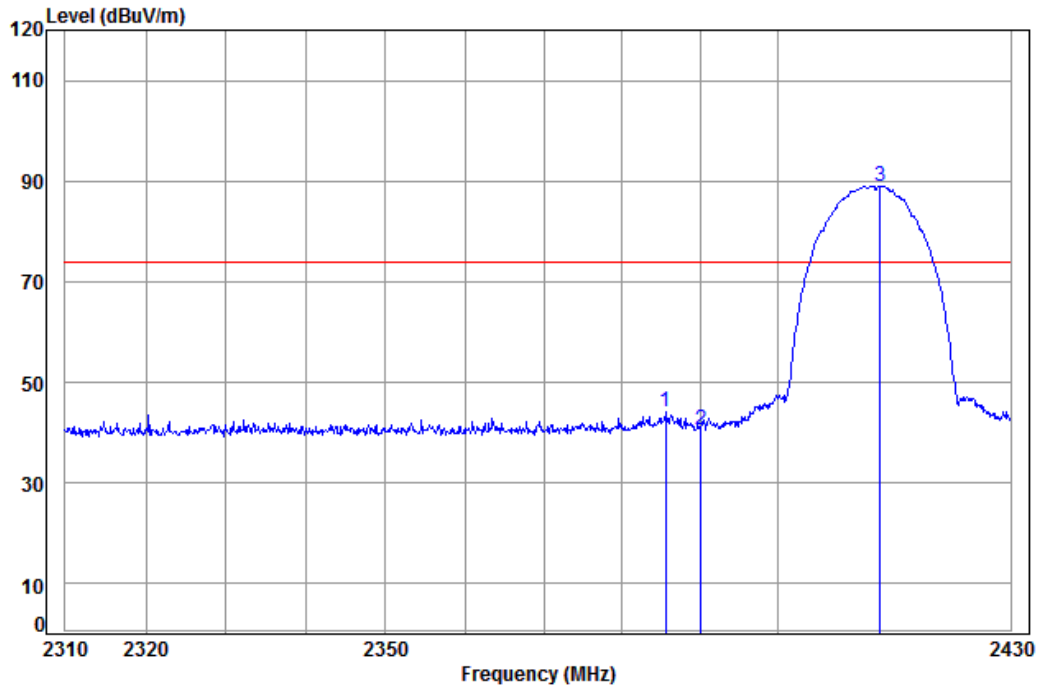

Condition: 3m HORIZONTAL

Job No: : RTL8821AU chipset


Mode: : 2412 Bandedge

: 2.4GWIFI-B

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2385.494	5.33	28.56	37.96	48.10	44.03	74.00	-29.97	
2	2390.000	5.34	28.57	37.96	44.62	40.57	74.00	-33.43	
3 pp	2413.076	5.35	28.66	37.96	93.03	89.08	74.00	15.08	



Mode:e; Polarization:Vertical; Modulation Type:802.11b; bandwidth:20MHz; Channel:Low

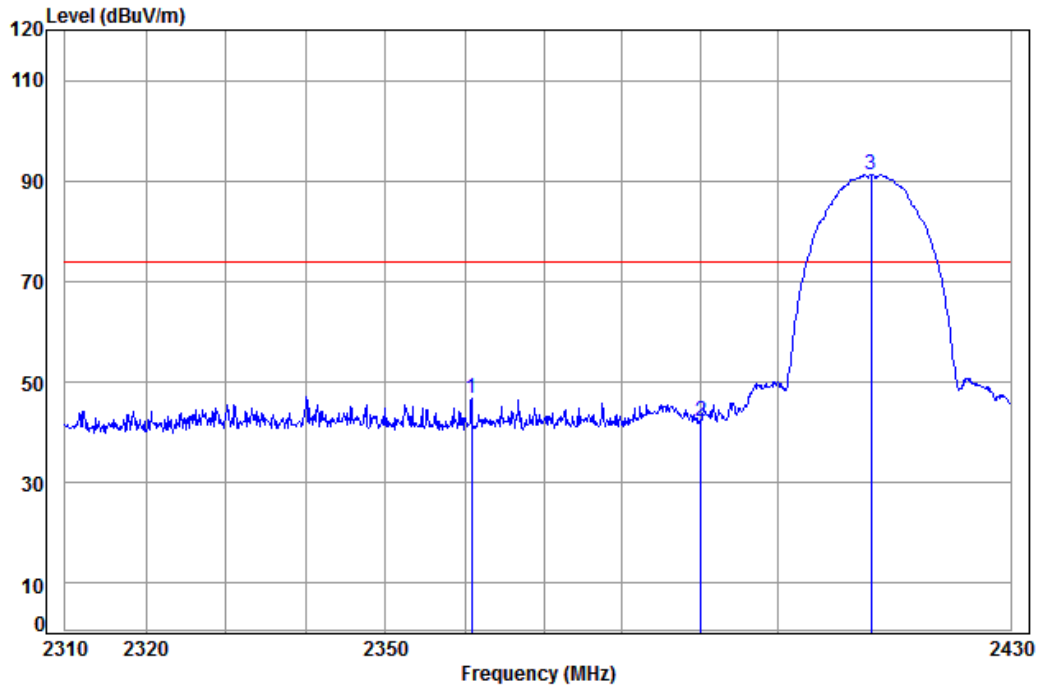


Condition: 3m VERTICAL
Job No: : RTL8821AU chipset
Mode: : 2412 Bandedge
: 2.4GWIFI-B

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2360.856	5.31	28.49	37.96	50.90	46.74	74.00	-27.26	
2	2390.000	5.34	28.57	37.96	46.27	42.22	74.00	-31.78	
3 pp	2411.977	5.35	28.66	37.96	95.26	91.31	74.00	17.31	



Mode:e; Polarization:Horizontal; Modulation Type:802.11b; bandwidth:20MHz; Channel:High

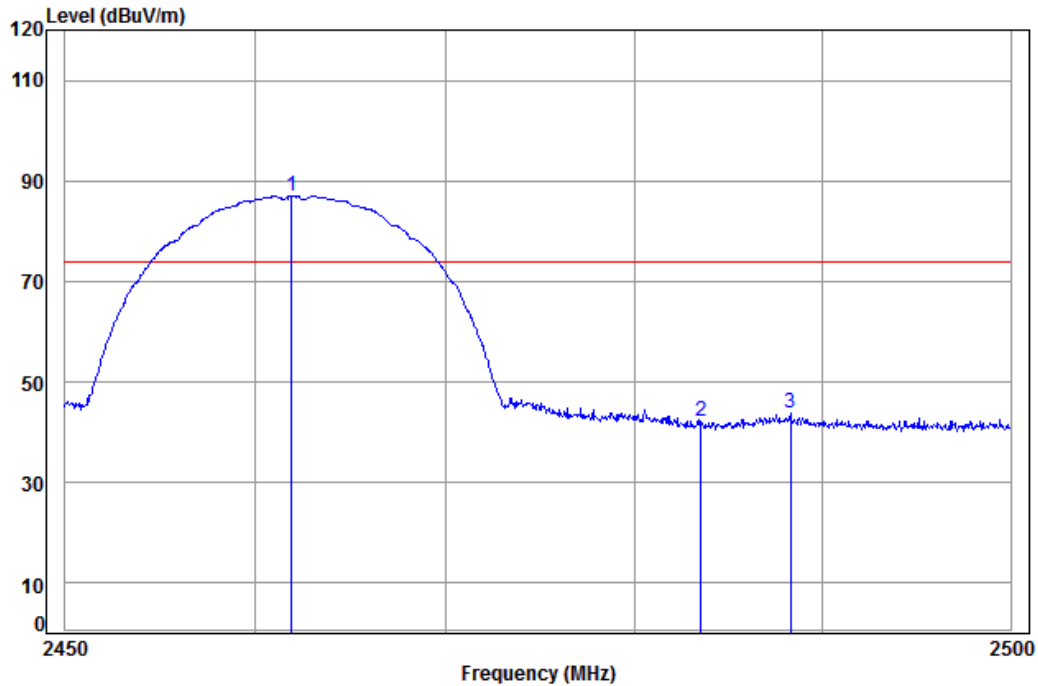


Condition: 3m HORIZONTAL
Job No: : RTL8821AU chipset
Mode: : 2462 Bandedge
: 2.4GWIFI-B

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2461.908	5.39	28.89	37.95	90.78	87.11	74.00	13.11	
2	2483.500	5.41	28.98	37.95	45.82	42.26	74.00	-31.74	
3	2488.260	5.41	29.01	37.95	47.32	43.79	74.00	-30.21	



Mode:e; Polarization:Vertical; Modulation Type:802.11b; bandwidth:20MHz; Channel:High

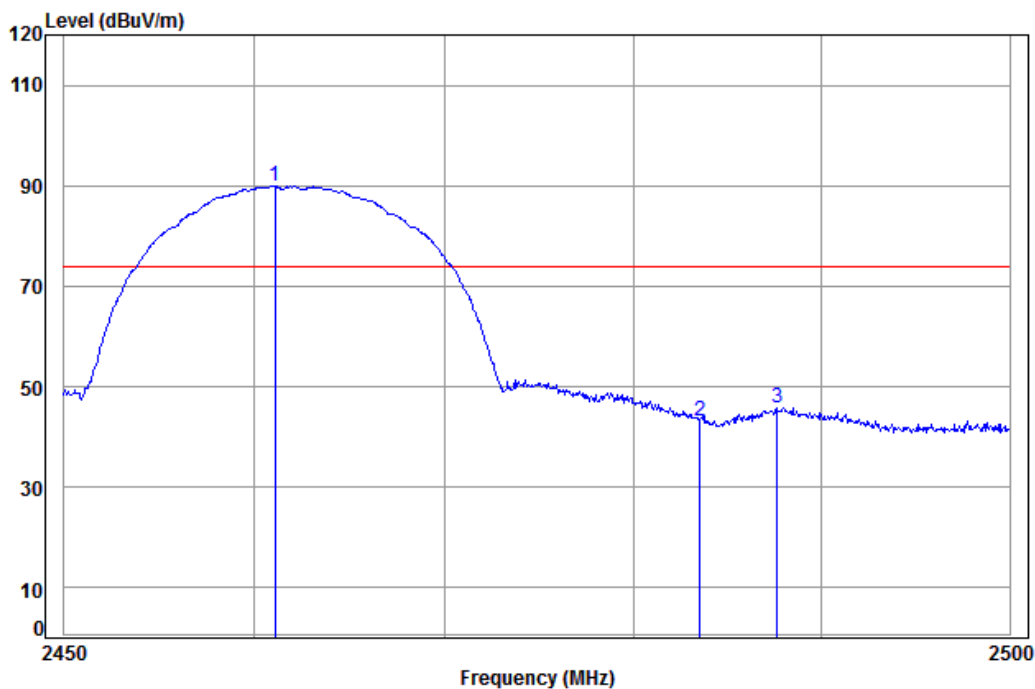


Condition: 3m HORIZONTAL
Job No: : RTL8821AU chipset
Mode: : 2462 Bandedge
: 2.4GWIFI-B

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2461.063	5.39	28.88	37.95	93.60	89.92	74.00	15.92
2	2483.500	5.41	28.98	37.95	46.84	43.28	74.00	-30.72
3	2487.606	5.41	29.00	37.95	49.47	45.93	74.00	-28.07



Mode:e; Polarization:Horizontal; Modulation Type:802.11g; bandwidth:20MHz; Channel:Low

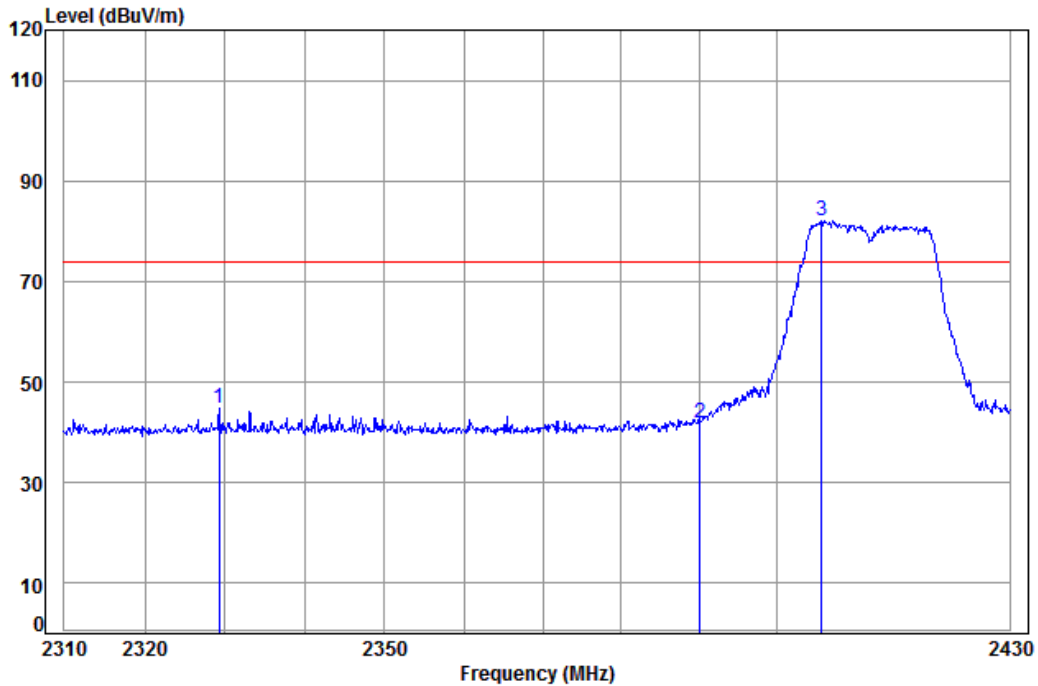


Condition: 3m HORIZONTAL
Job No: : RTL8821AU chipset
Mode: : 2412 Bandedge
: 2.4GWIFI-G

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2329.266	5.29	28.39	37.97	49.22	44.93	74.00	-29.07	
2	2390.000	5.34	28.57	37.96	46.01	41.96	74.00	-32.04	
3 pp	2405.633	5.35	28.63	37.96	86.07	82.09	74.00	8.09	



Mode:e; Polarization:Vertical; Modulation Type:802.11g; bandwidth:20MHz; Channel:Low

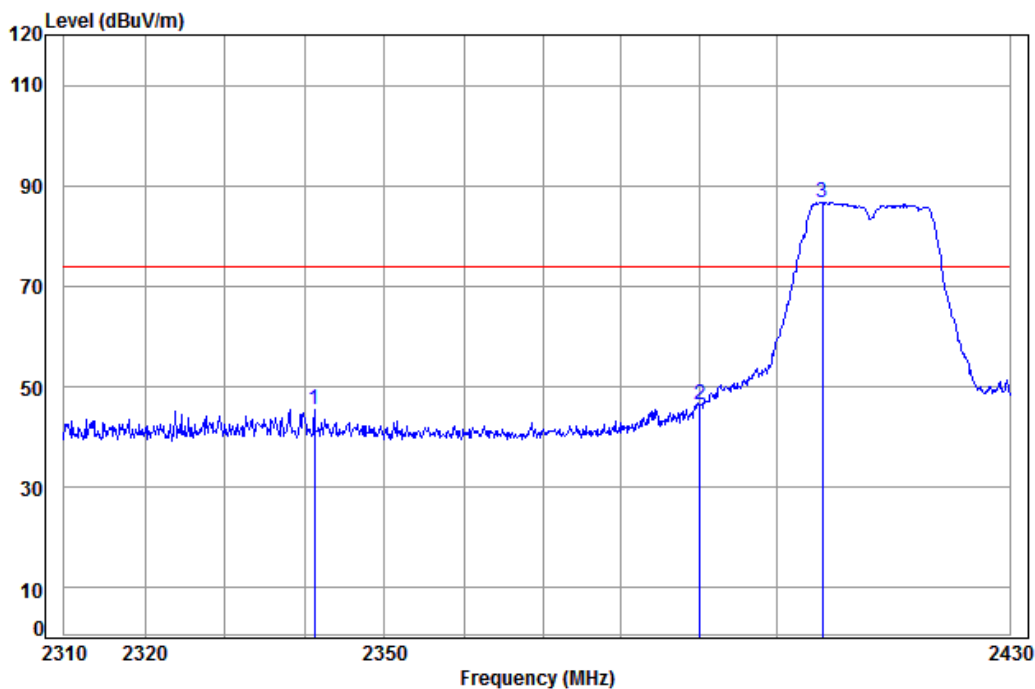


Condition: 3m VERTICAL
Job No: : RTL8821AU chipset
Mode: : 2412 Bandedge
: 2.4GWIFI-G

	Freq	Cable Loss	Ant Factor	Preamp Factor	Read Level	Level	Limit Line	Over Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2341.210	5.30	28.43	37.97	49.73	45.49	74.00	-28.51	
2	2390.000	5.34	28.57	37.96	50.48	46.43	74.00	-27.57	
3 pp	2405.755	5.35	28.63	37.96	90.65	86.67	74.00	12.67	



Mode:e; Polarization:Horizontal; Modulation Type:802.11g; bandwidth:20MHz; Channel:High

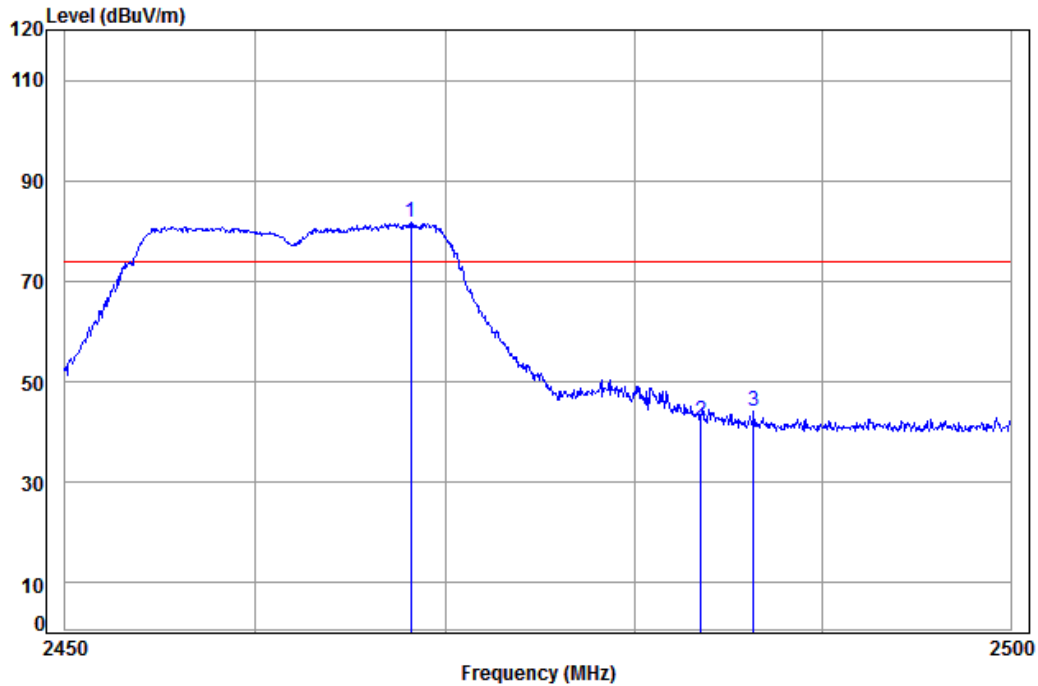

Condition: 3m HORIZONTAL

Job No: : RTL8821AU chipset


Mode: : 2462 Bandedge

: 2.4GWIFI-G

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2468.183	5.40	28.91	37.95	85.27	81.63	74.00	7.63
2	2483.500	5.41	28.98	37.95	45.60	42.04	74.00	-31.96
3	2486.300	5.41	29.00	37.95	47.78	44.24	74.00	-29.76



Mode:e; Polarization:Vertical; Modulation Type:802.11g; bandwidth:20MHz; Channel:High

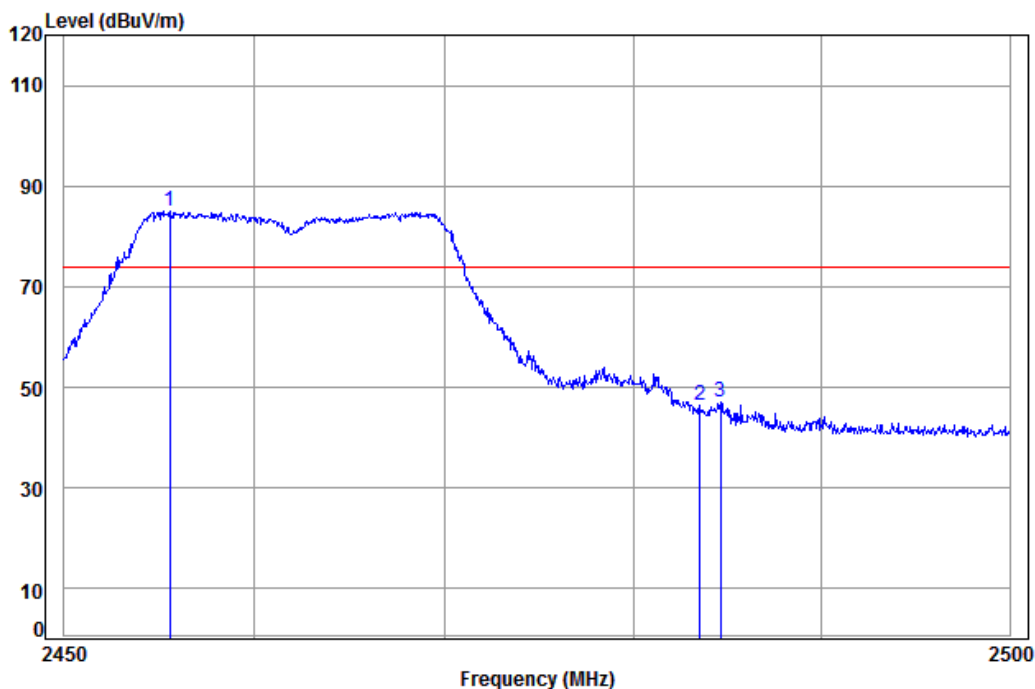

Condition: 3m HORIZONTAL

Job No: : RTL8821AU chipset


Mode: : 2462 Bandedge

: 2.4GWIFI-G

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2455.550	5.39	28.86	37.95	88.70	85.00	74.00	11.00
2	2483.500	5.41	28.98	37.95	50.08	46.52	74.00	-27.48
3	2484.593	5.41	28.99	37.95	50.64	47.09	74.00	-26.91



Mode:e; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:20MHz; Channel:Low

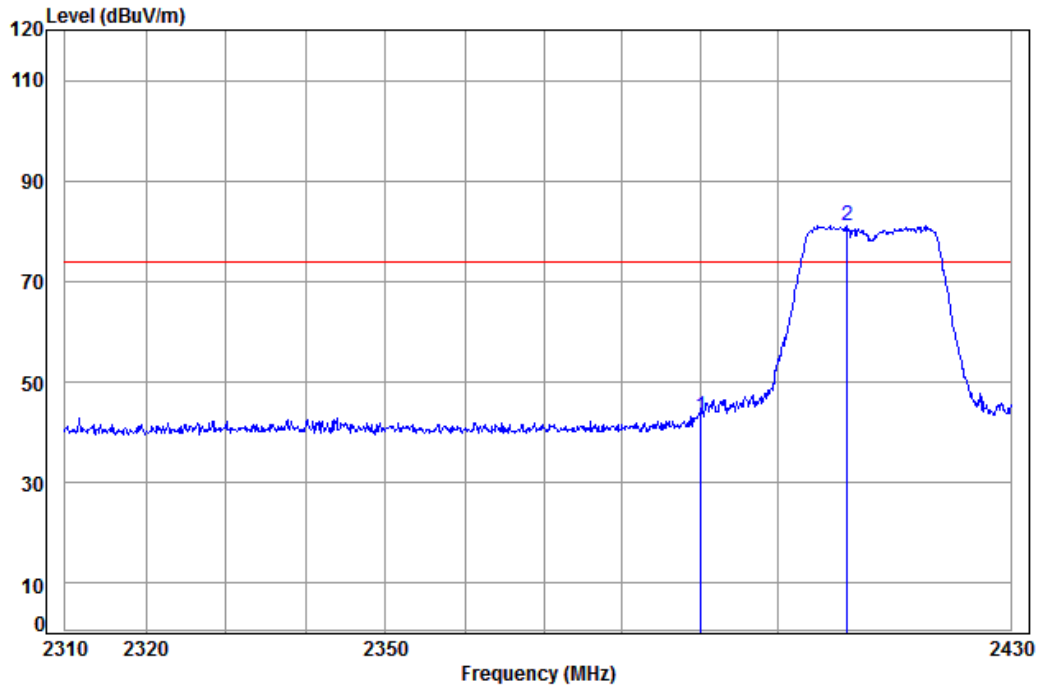


Condition: 3m HORIZONTAL
Job No: : RTL8821AU chipset
Mode: : 2412 Bandedge
: 2.4GWIFI-N20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	5.34	28.57	37.96	47.32	43.27	74.00	-30.73	
2	pp 2408.803	5.35	28.64	37.96	85.21	81.24	74.00	7.24	



Mode:e; Polarization:Vertical; Modulation Type:802.11n; bandwidth:20MHz; Channel:Low

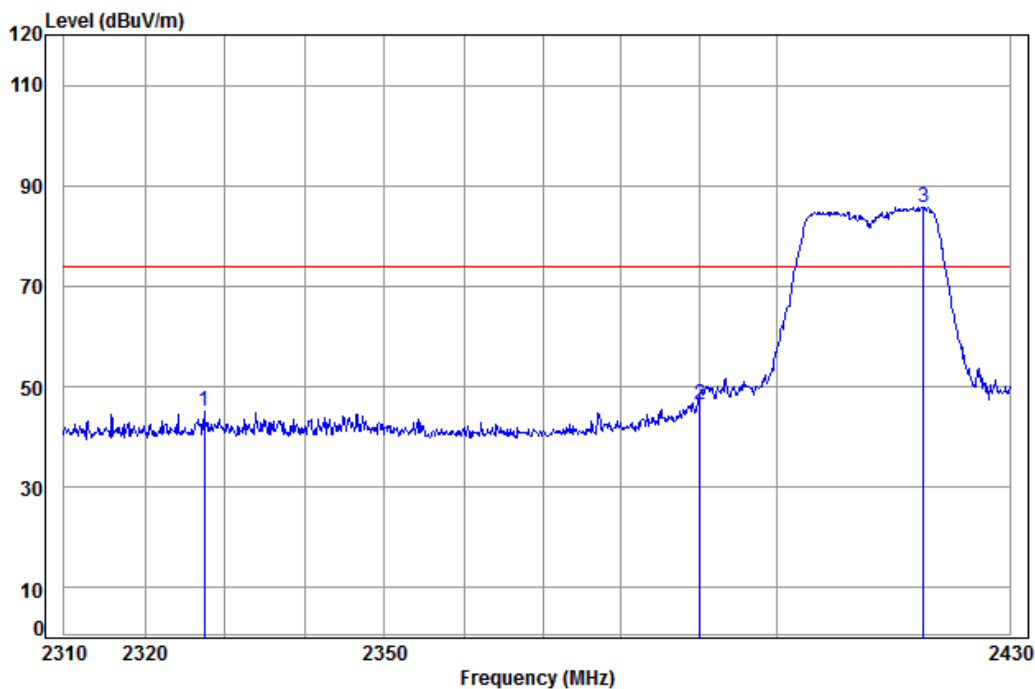

Condition: 3m VERTICAL

Job No: : RTL8821AU chipset


Mode: : 2412 Bandedge

: 2.4GWIFI-N20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2327.379	5.29	28.39	37.97	49.27	44.98	74.00	-29.02	
2	2390.000	5.34	28.57	37.96	50.38	46.33	74.00	-27.67	
3	pp 2418.827	5.36	28.69	37.96	89.51	85.60	74.00	11.60	



Mode:e; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:20MHz; Channel:High

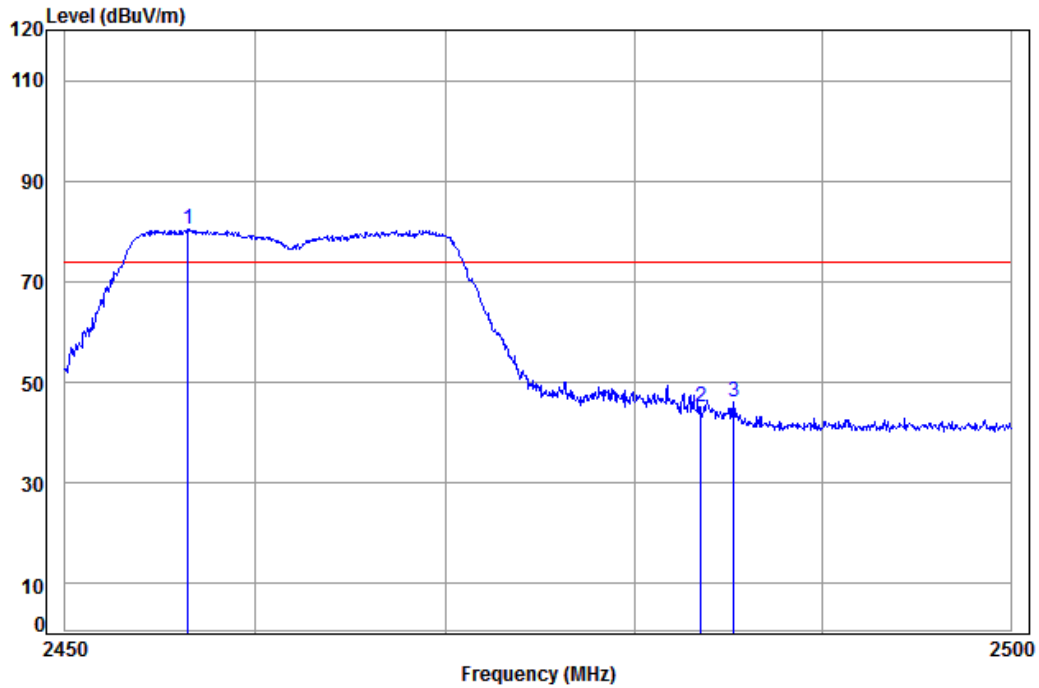

Condition: 3m HORIZONTAL

Job No: : RTL8821AU chipset


Mode: : 2462 Bandedge

: 2.4GWIFI-N20

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2456.443	5.39	28.86	37.95	84.11	80.41	74.00	6.41	
2	2483.500	5.41	28.98	37.95	48.69	45.13	74.00	-28.87	
3	2485.245	5.41	28.99	37.95	49.59	46.04	74.00	-27.96	



Mode:e; Polarization:Vertical; Modulation Type:802.11n; bandwidth:20MHz; Channel:High

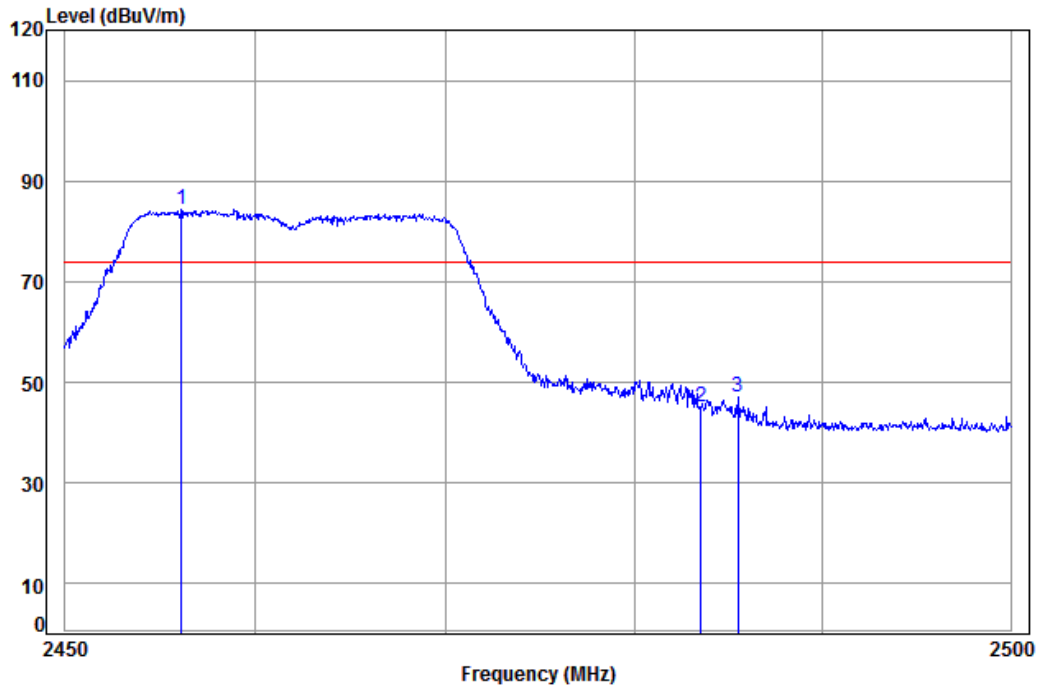

Condition: 3m VERTICAL

Job No: : RTL8821AU chipset


Mode: : 2462 Bandedge

: 2.4GWIFI-N20

		Cable	Ant	Preamp	Read	Limit	Over	
	Freq	Loss	Factor	Factor	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	2456.096	5.39	28.86	37.95	87.91	84.21	74.00	10.21
2	2483.500	5.41	28.98	37.95	48.61	45.05	74.00	-28.95
3	2485.496	5.41	28.99	37.95	50.73	47.18	74.00	-26.82



Mode:e; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:40MHz; Channel:Low

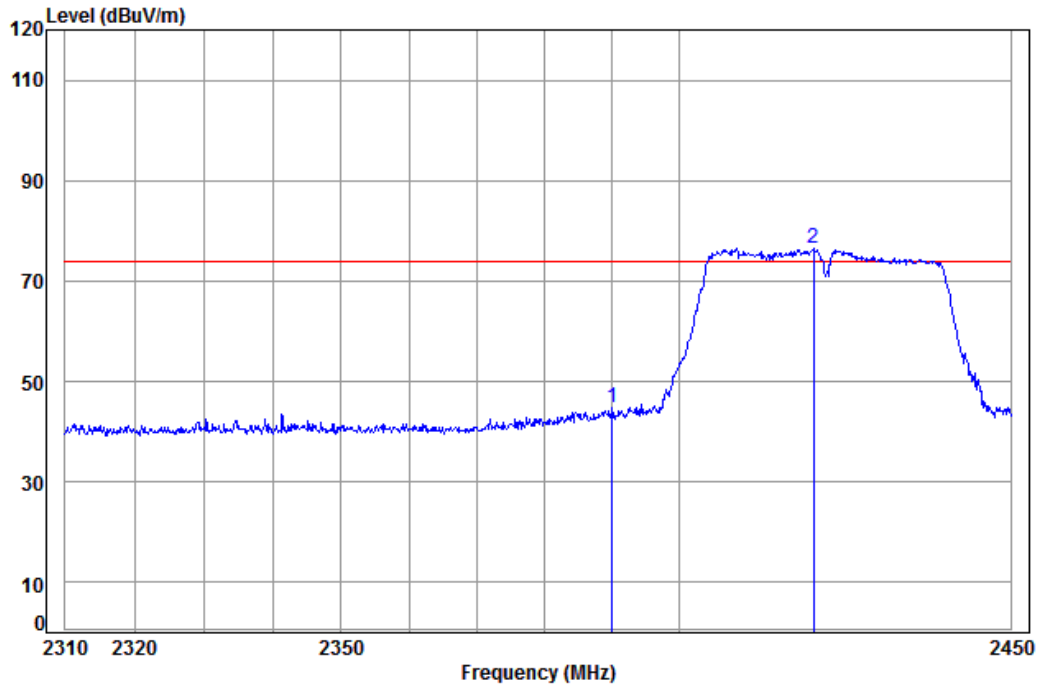

Condition: 3m HORIZONTAL

Job No: : RTL8821AU chipset


Mode: : 2422 Bandedge

: 2.4GWIFI-N40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	5.34	28.57	37.96	48.78	44.73	74.00	-29.27	
2	pp 2420.198	5.36	28.69	37.96	80.27	76.36	74.00	2.36	



Mode:e; Polarization:Vertical; Modulation Type:802.11n; bandwidth:40MHz; Channel:Low

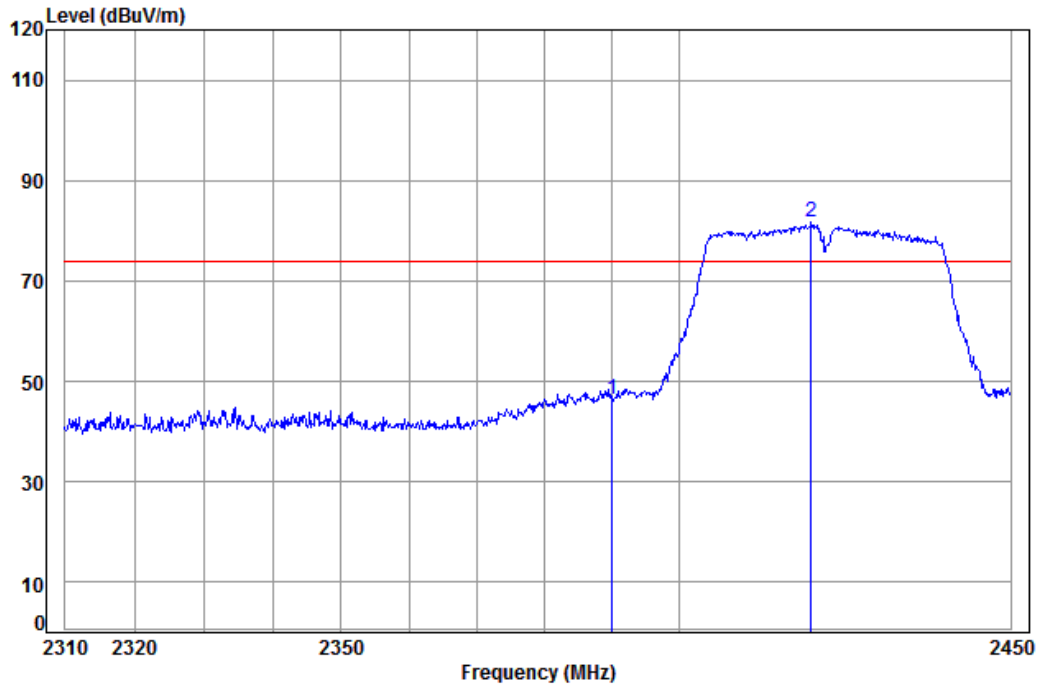

Condition: 3m VERTICAL

Job No: : RTL8821AU chipset


Mode: : 2422 Bandedge

: 2.4GWIFI-N40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	5.34	28.57	37.96	50.44	46.39	74.00	-27.61	
2	pp 2419.771	5.36	28.69	37.96	85.68	81.77	74.00	7.77	



Mode:e; Polarization:Horizontal; Modulation Type:802.11n; bandwidth:40MHz; Channel:High

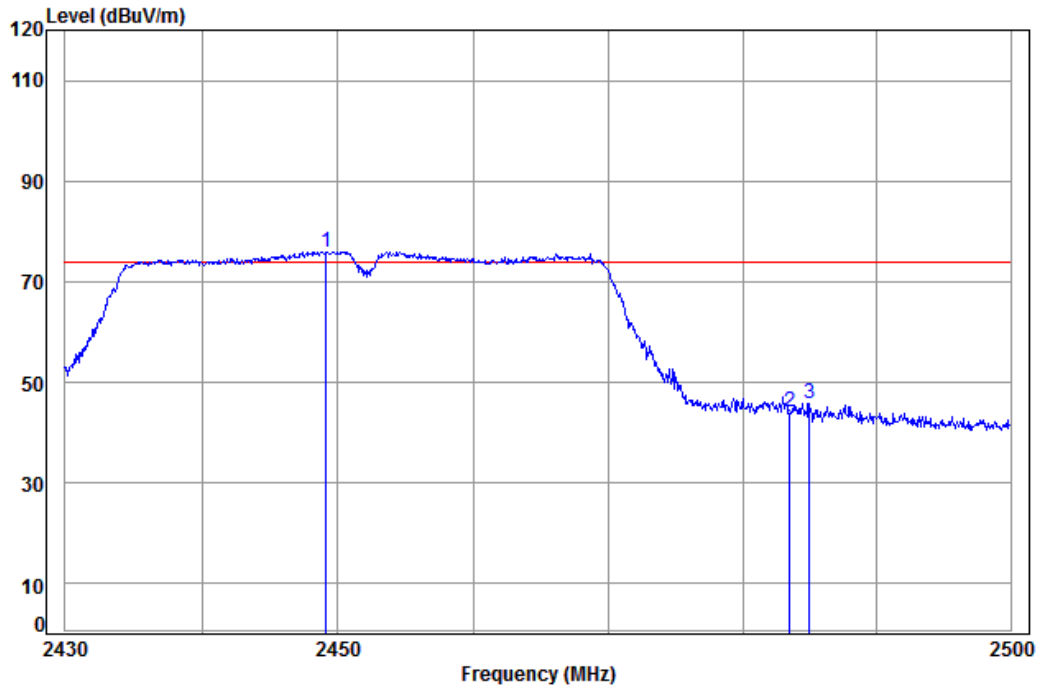

Condition: 3m HORIZONTAL

Job No: : RTL8821AU chipset


Mode: : 2452 Bandedge

: 2.4GWIFI-N40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2449.122	5.38	28.83	37.96	79.75	76.00	74.00	2.00	
2	2483.500	5.41	28.98	37.95	47.69	44.13	74.00	-29.87	
3	2484.923	5.41	28.99	37.95	49.46	45.91	74.00	-28.09	



Mode:e; Polarization:Vertical; Modulation Type:802.11n; bandwidth:40MHz; Channel:High

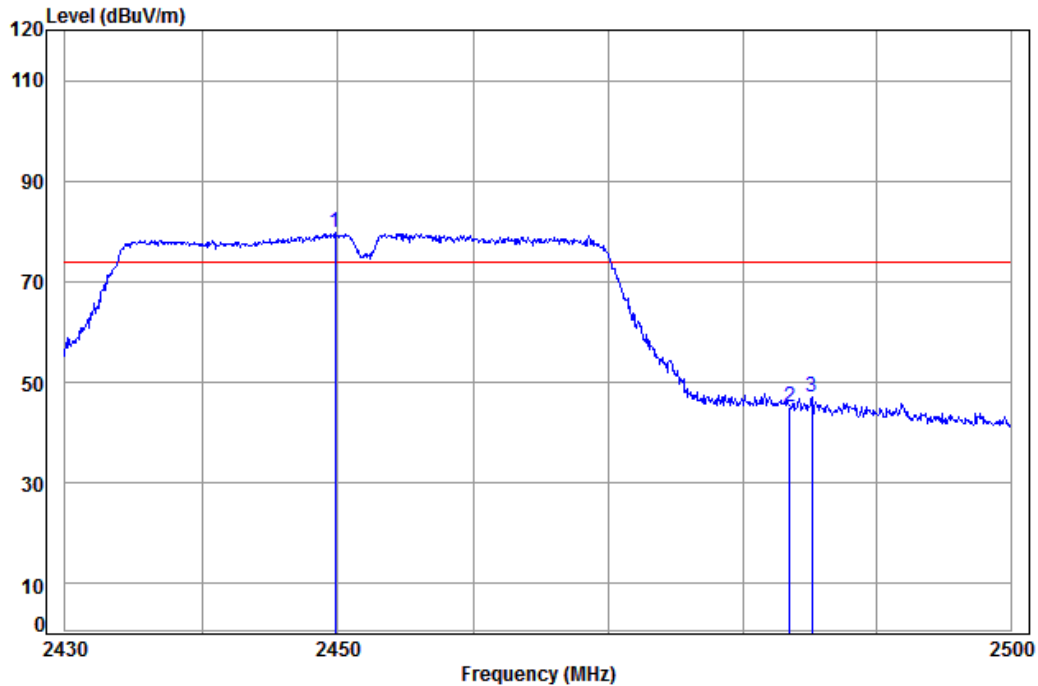

Condition: 3m VERTICAL

Job No: : RTL8821AU chipset

Mode: : 2452 Bandedge

: 2.4GWIFI-N40

		Cable	Ant	Preamp	Read		Limit	Over	
	Freq	Loss	Factor	Factor	Level	Level	Line	Limit	Remark
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp	2449.817	5.38	28.83	37.96	83.50	79.75	74.00	5.75	
2	2483.500	5.41	28.98	37.95	48.73	45.17	74.00	-28.83	
3	2485.135	5.41	28.99	37.95	50.78	47.23	74.00	-26.77	

7.8 Conducted Band Edges Measurement

Test Requirement	47 CFR Part 15, Subpart C 15.247(d)
Test Method:	ANSI C63.10 (2013) Section 11.13.3.2
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

7.8.1 E.U.T. Operation

Operating Environment:


Temperature: 23.0 °C Humidity: 56 % RH Atmospheric Pressure: 1020 mbar

Pretest these mode to find the worst case:
b: WIFI 2.4G TX (LS9-AC11DBT): Keep the EUT transmitting .
e: WIFI 2.4G TX (CDW-B18821A-00) : Keep the EUT transmitting .

The worst case for final test:
b: WIFI 2.4G TX (LS9-AC11DBT): Keep the EUT transmitting .
e: WIFI 2.4G TX (CDW-B18821A-00) : Keep the EUT transmitting .

Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40)

7.8.2 Test Setup Diagram

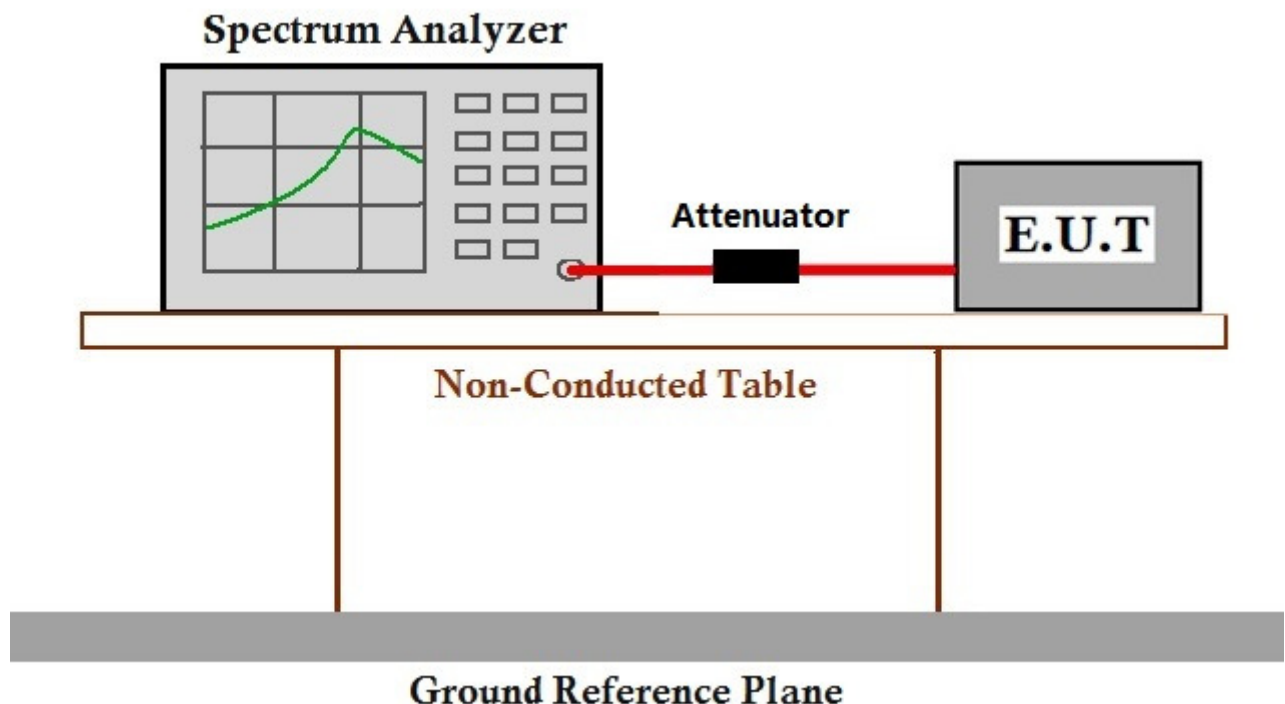

7.8.3 Measurement Data


The detailed test data see: Appendix 15.247

8 Photographs

8.1 Conducted Disturbance at AC Power Line(150kHz-30MHz) Test Setup



8.2 Radiated Spurious Emissions Test Setup

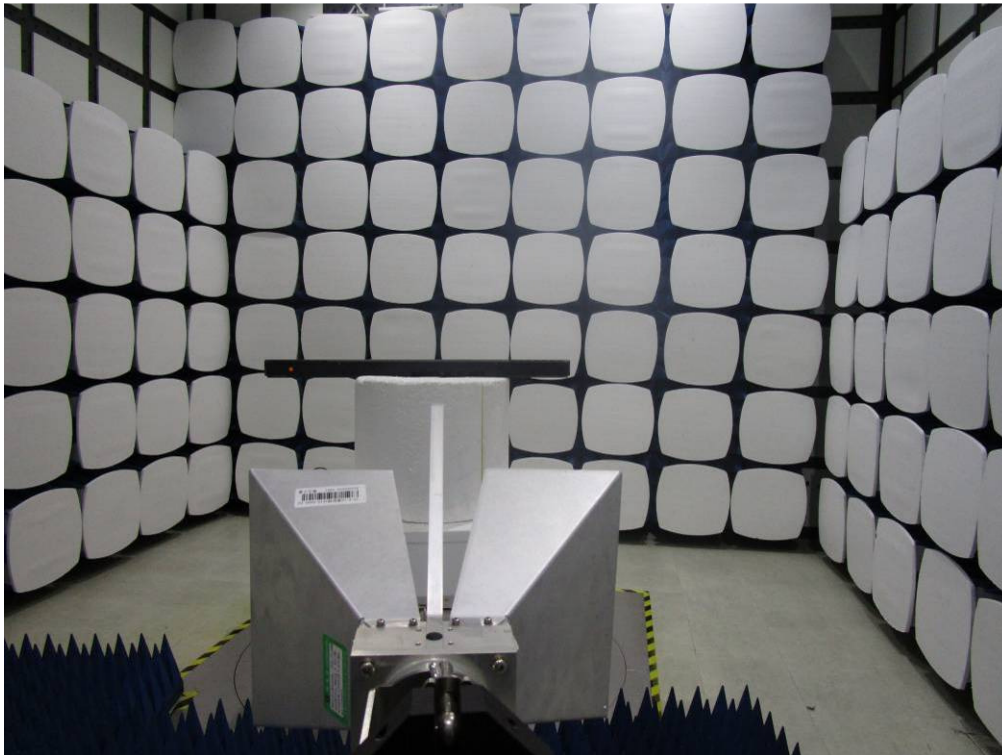



8.3 EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1702000699CR.





9 Appendix


9.1.1 CDW-B18821A-00 15.247


1.6dB Bandwidth


Test Mode	Test Channel	EBW[MHz]	Limit	Verdict
11B	2412	10.140	≥ 0.5	PASS
11B	2437	10.160	≥ 0.5	PASS
11B	2462	10.120	≥ 0.5	PASS
11G	2412	16.400	≥ 0.5	PASS
11G	2437	16.400	≥ 0.5	PASS
11G	2462	16.380	≥ 0.5	PASS
11N20SISO	2412	17.600	≥ 0.5	PASS
11N20SISO	2437	17.640	≥ 0.5	PASS
11N20SISO	2462	17.640	≥ 0.5	PASS
11N40SISO	2422	36.240	≥ 0.5	PASS
11N40SISO	2437	36.180	≥ 0.5	PASS
11N40SISO	2452	36.420	≥ 0.5	PASS

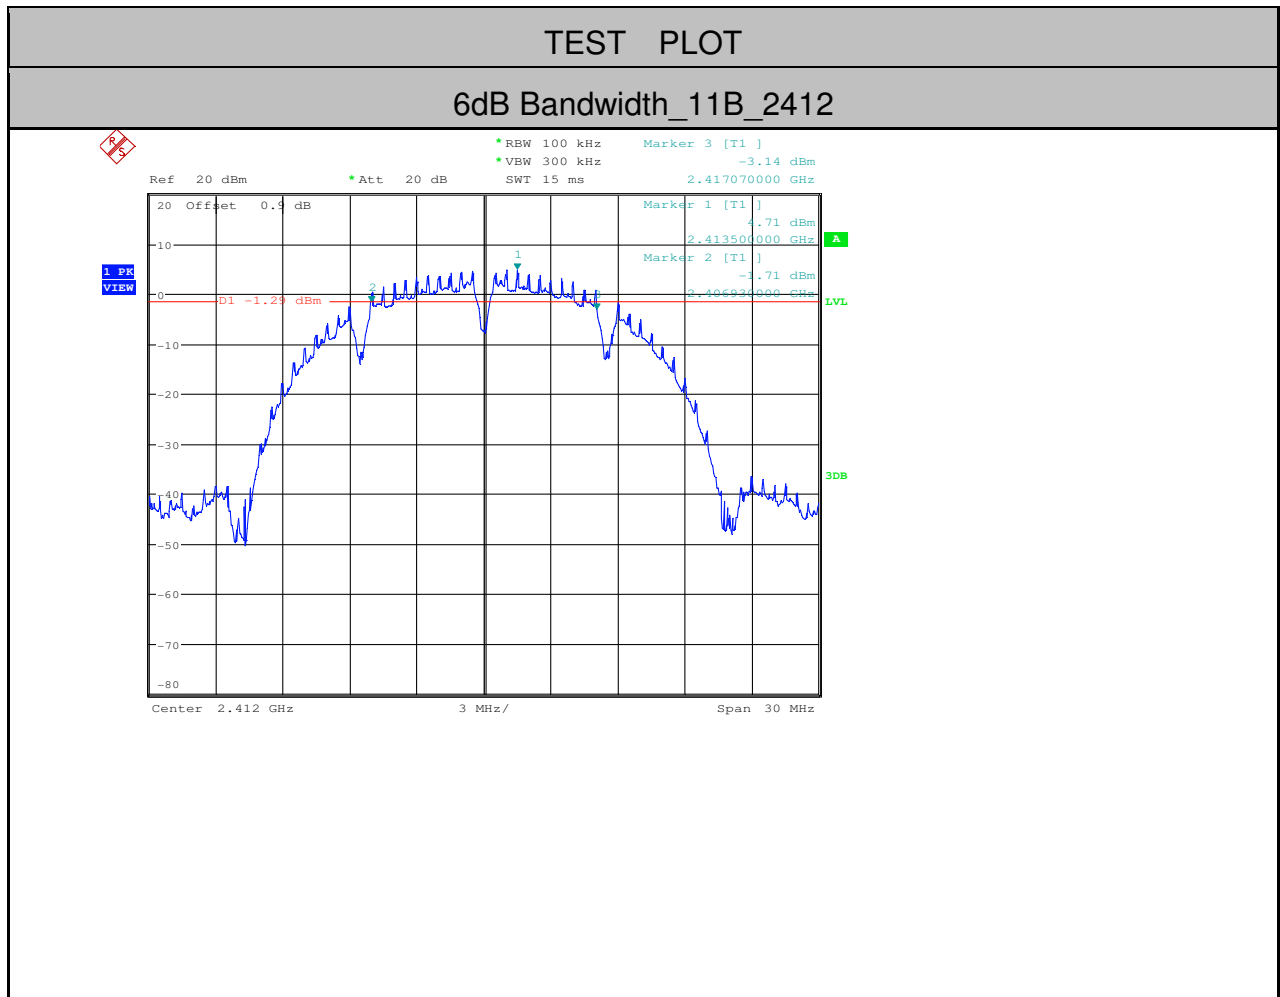


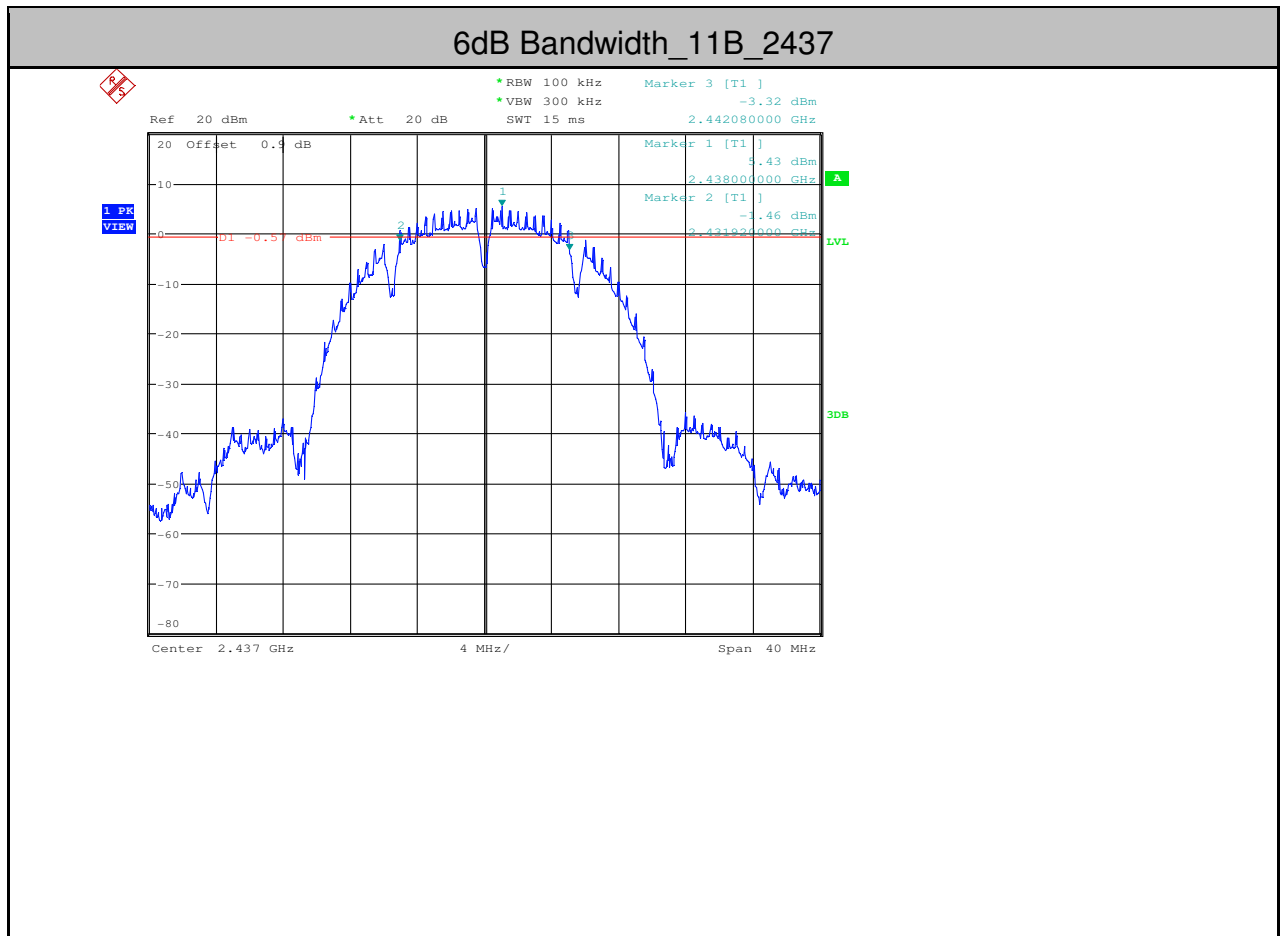


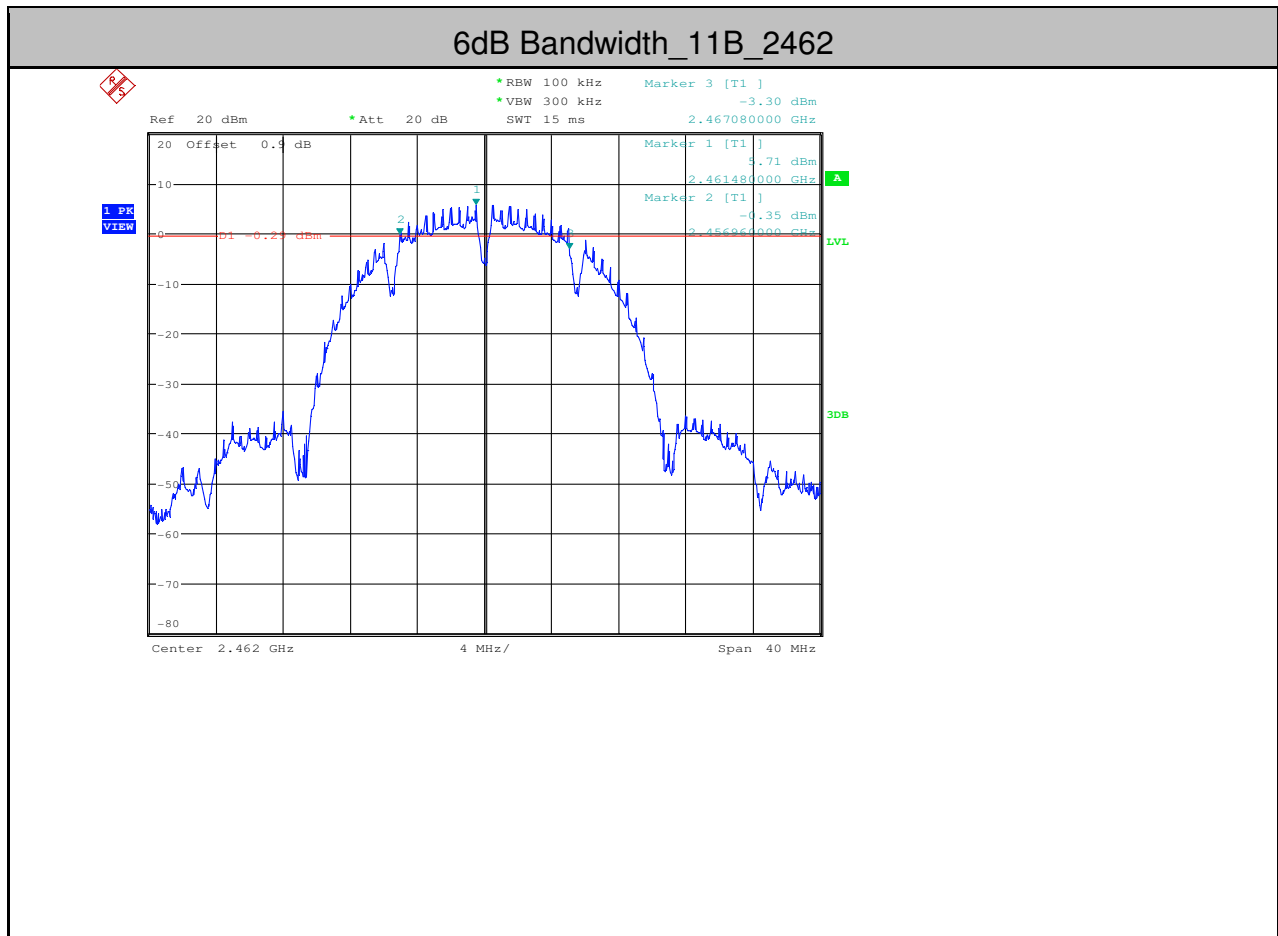


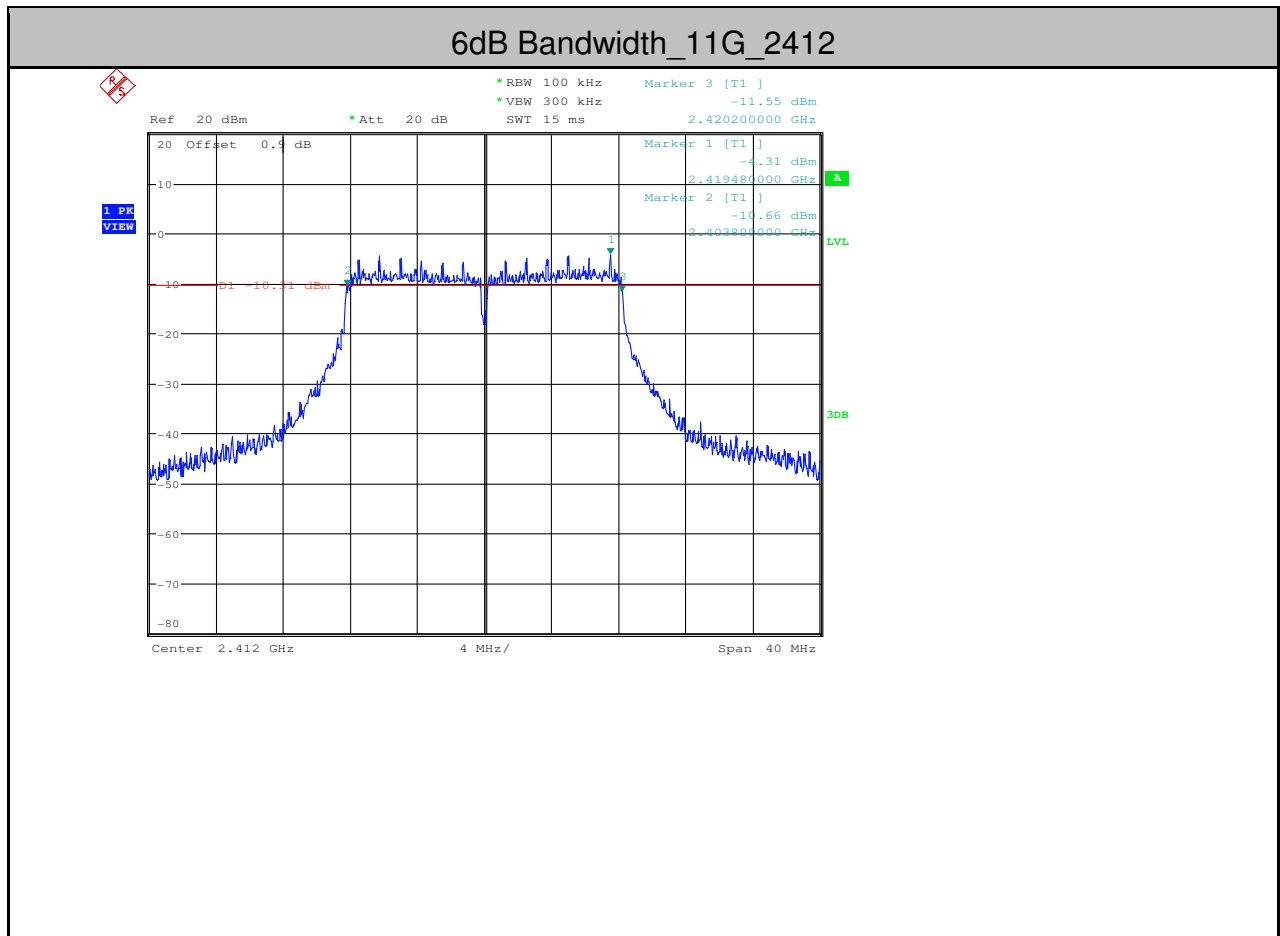


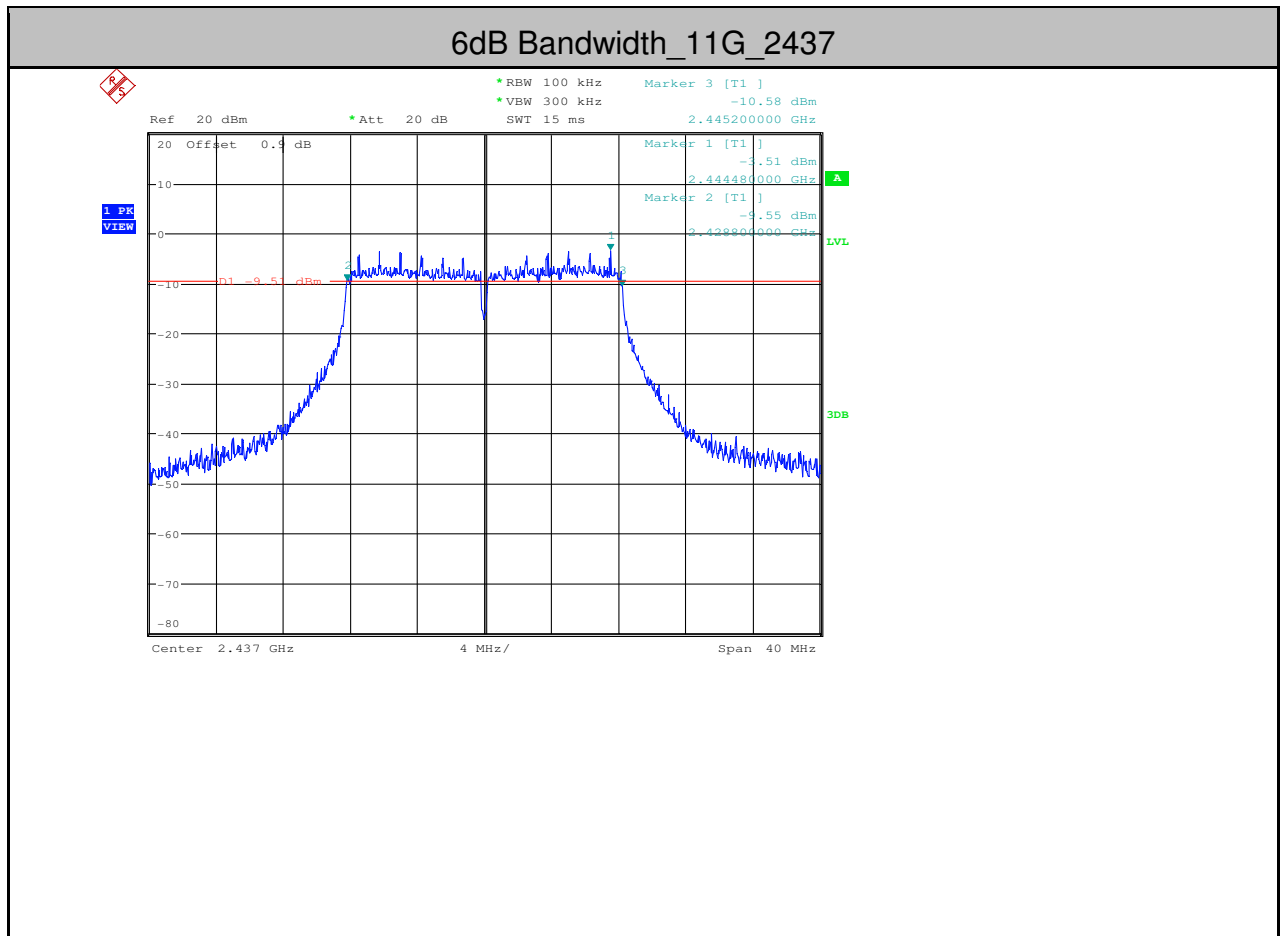


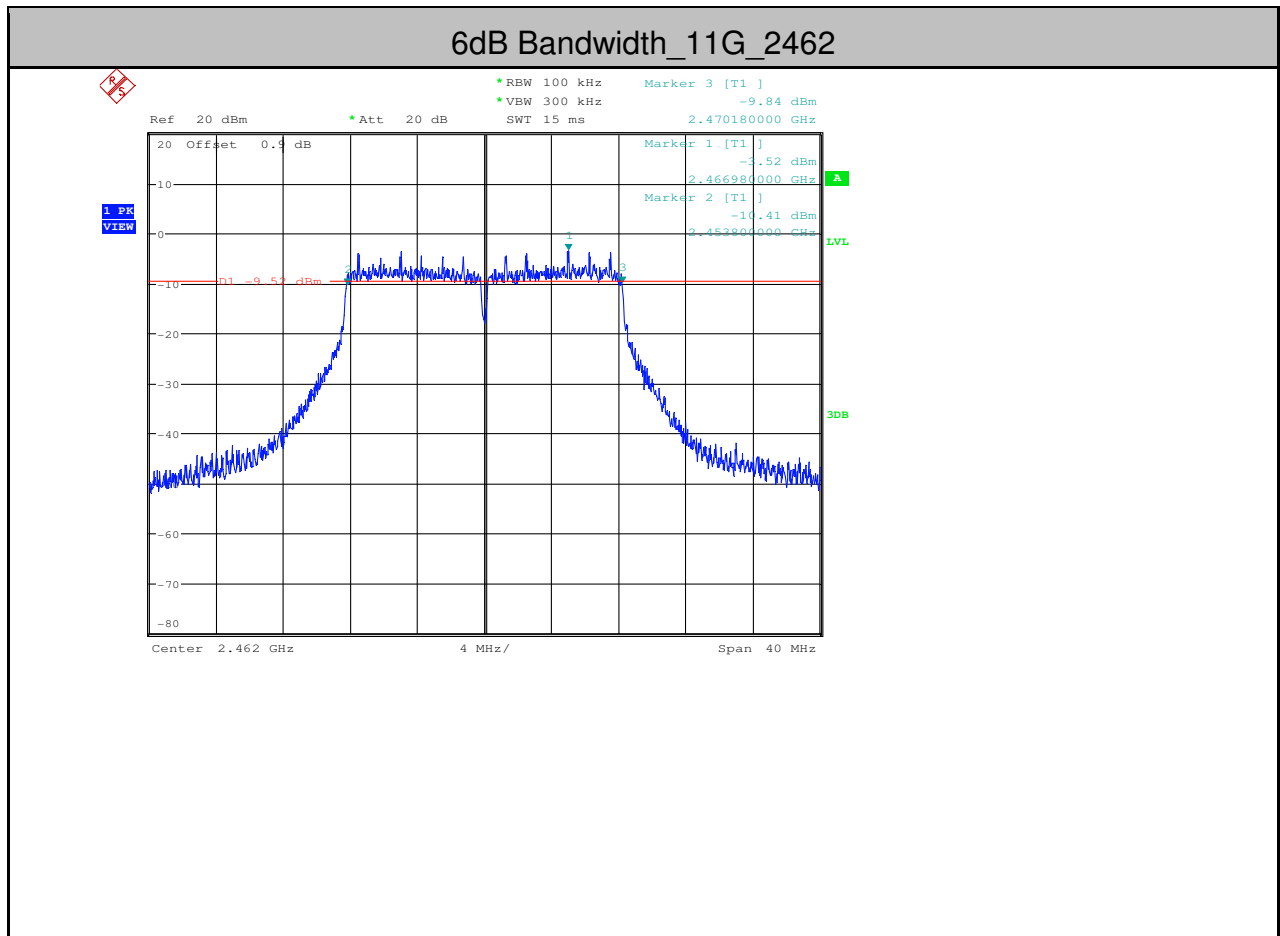


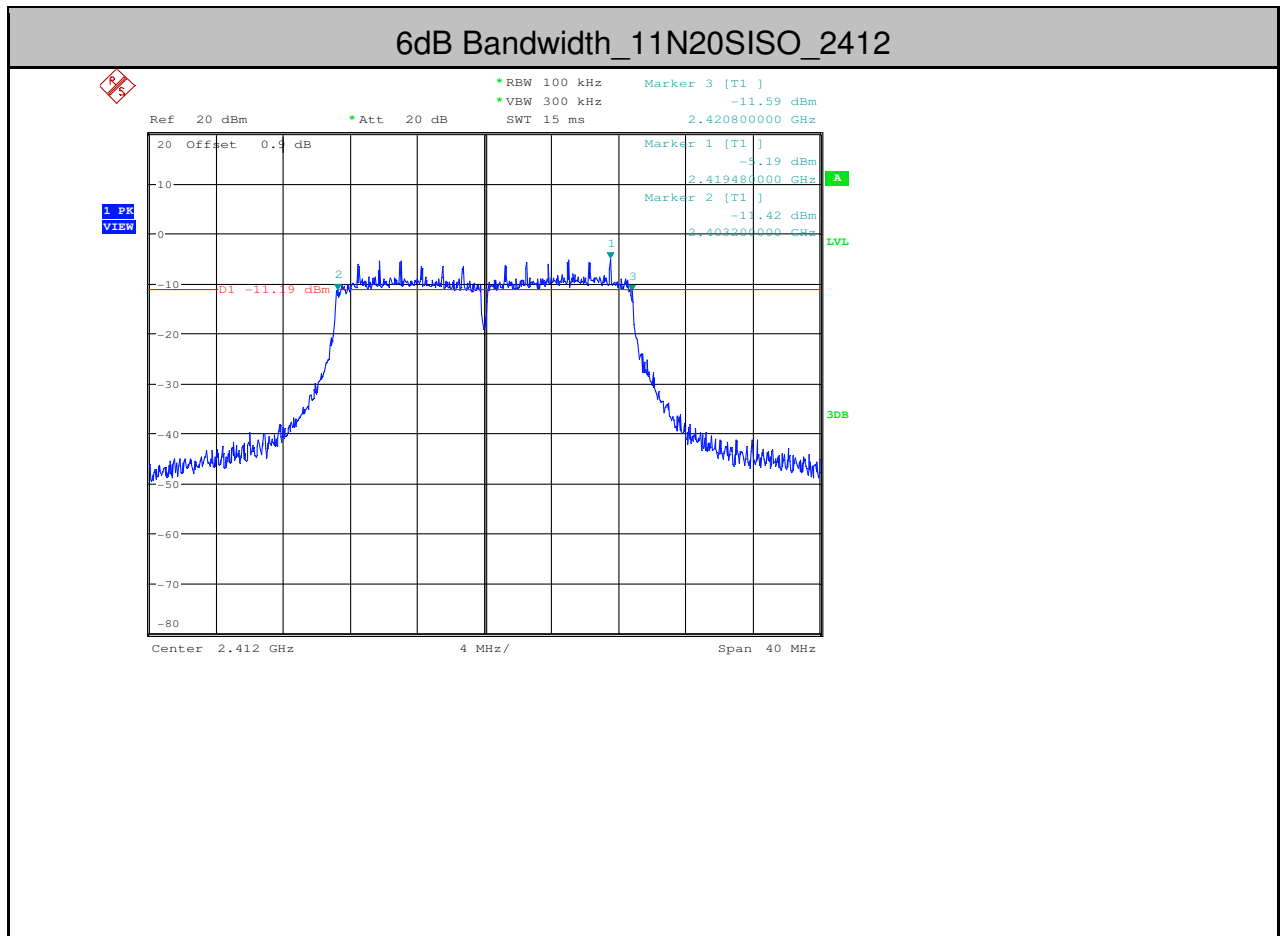


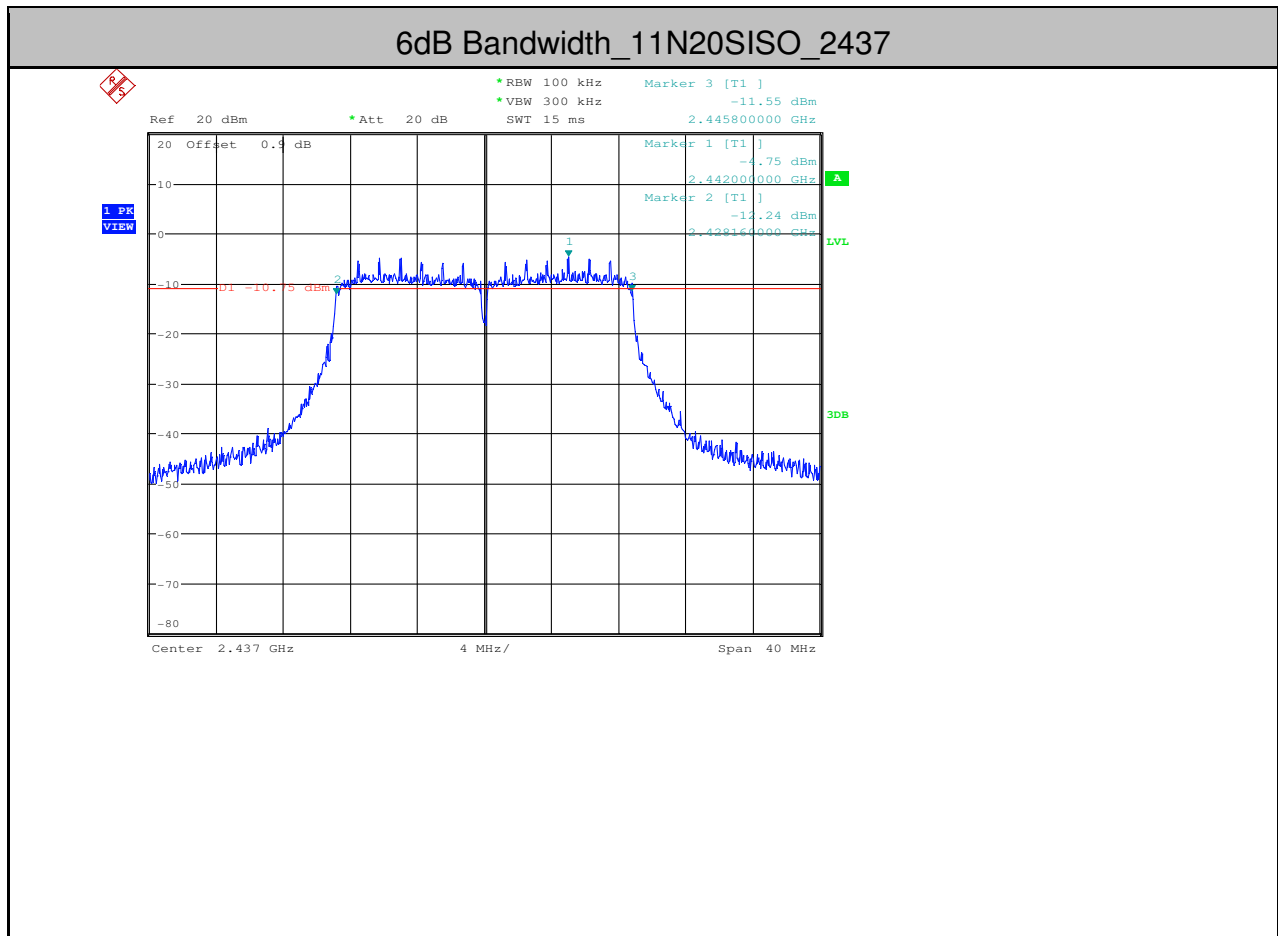

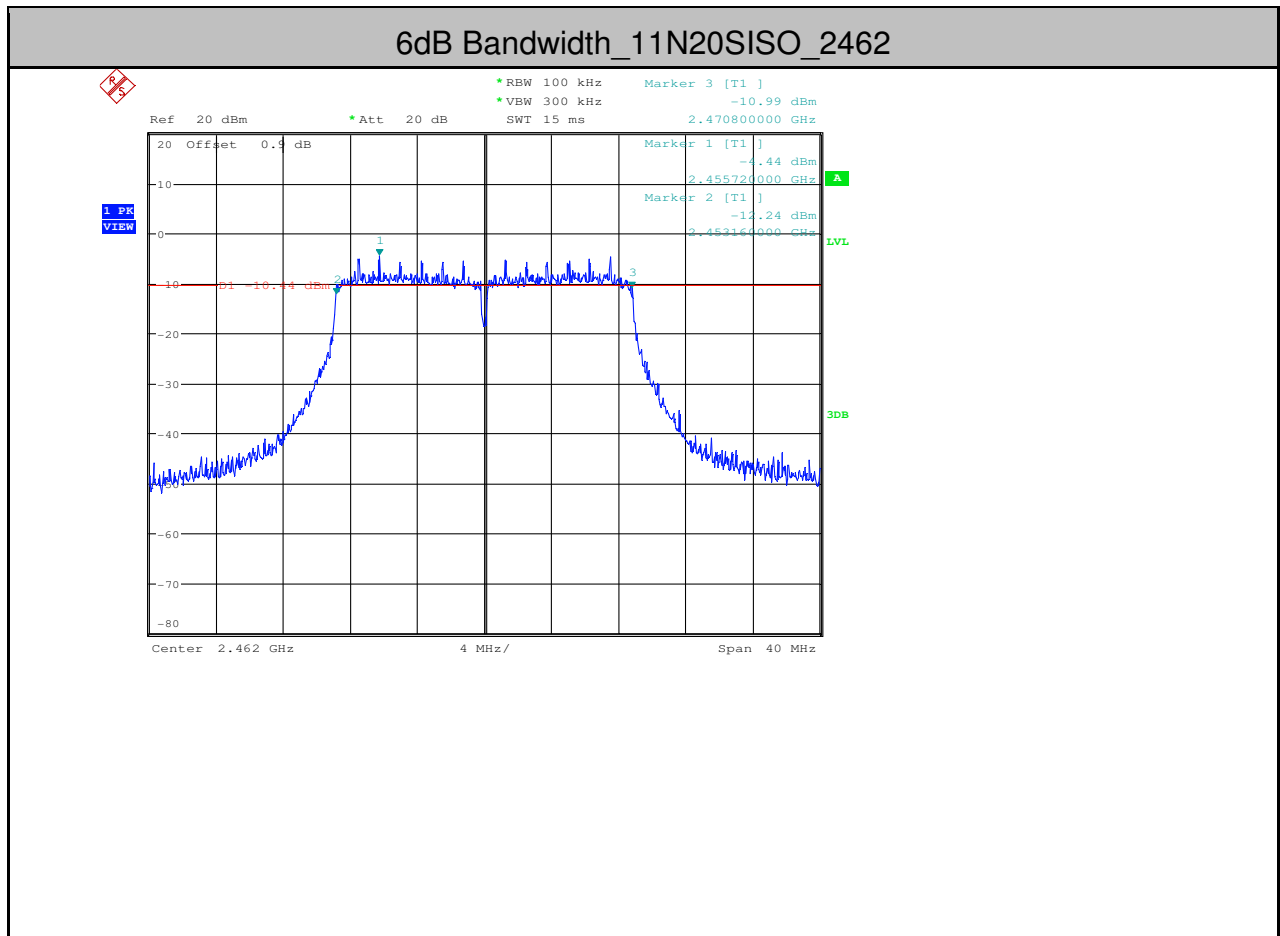

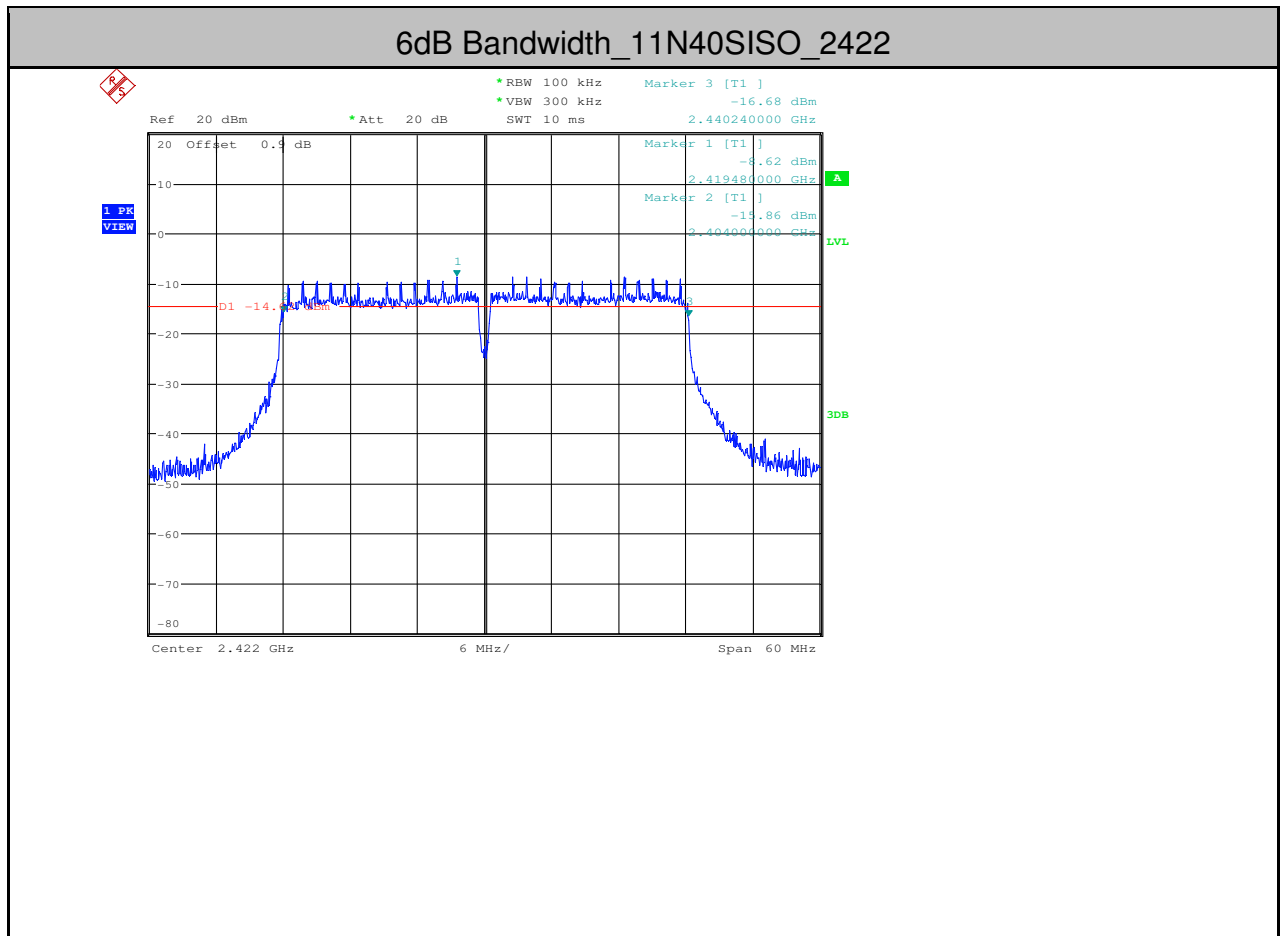

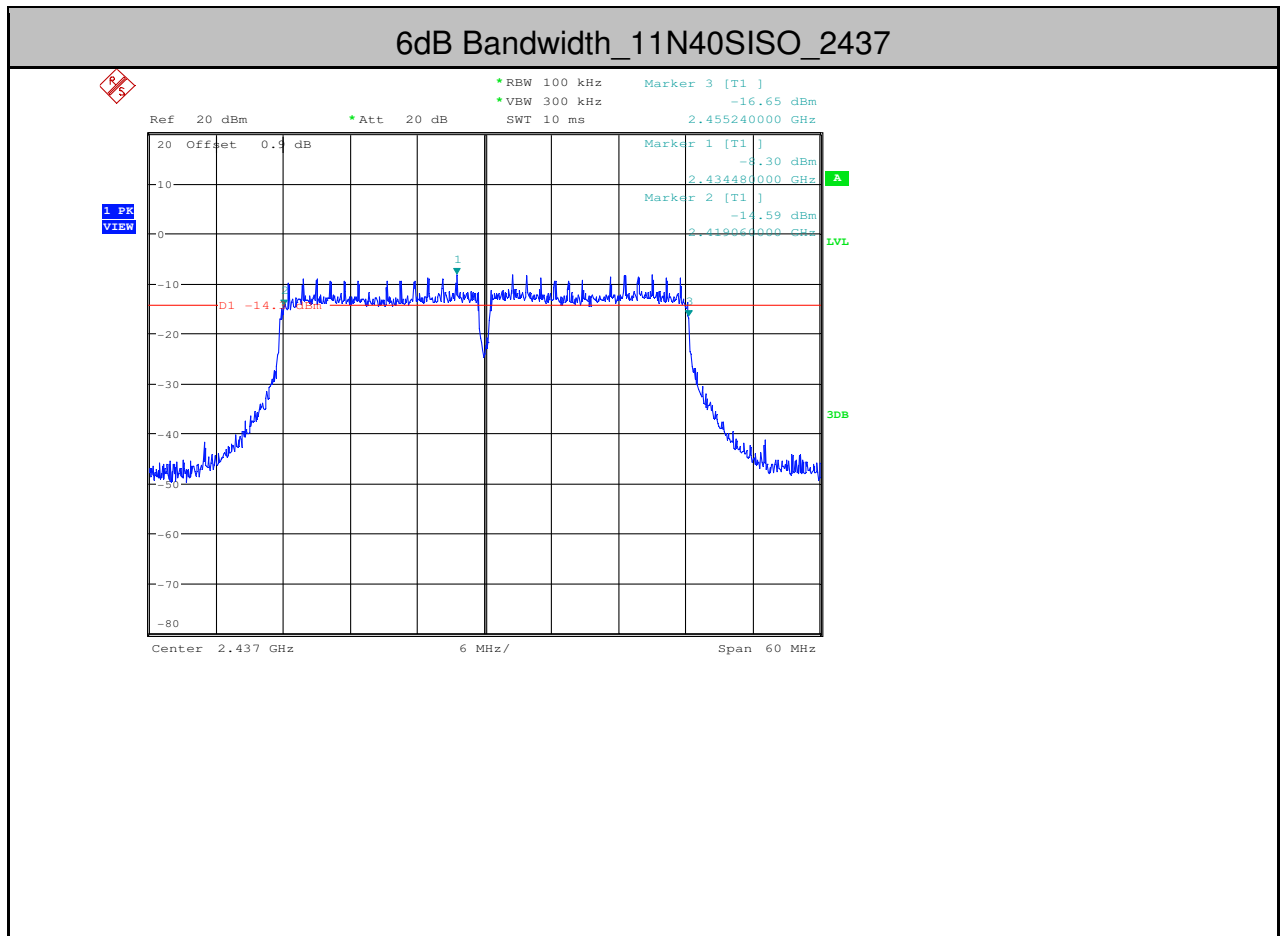

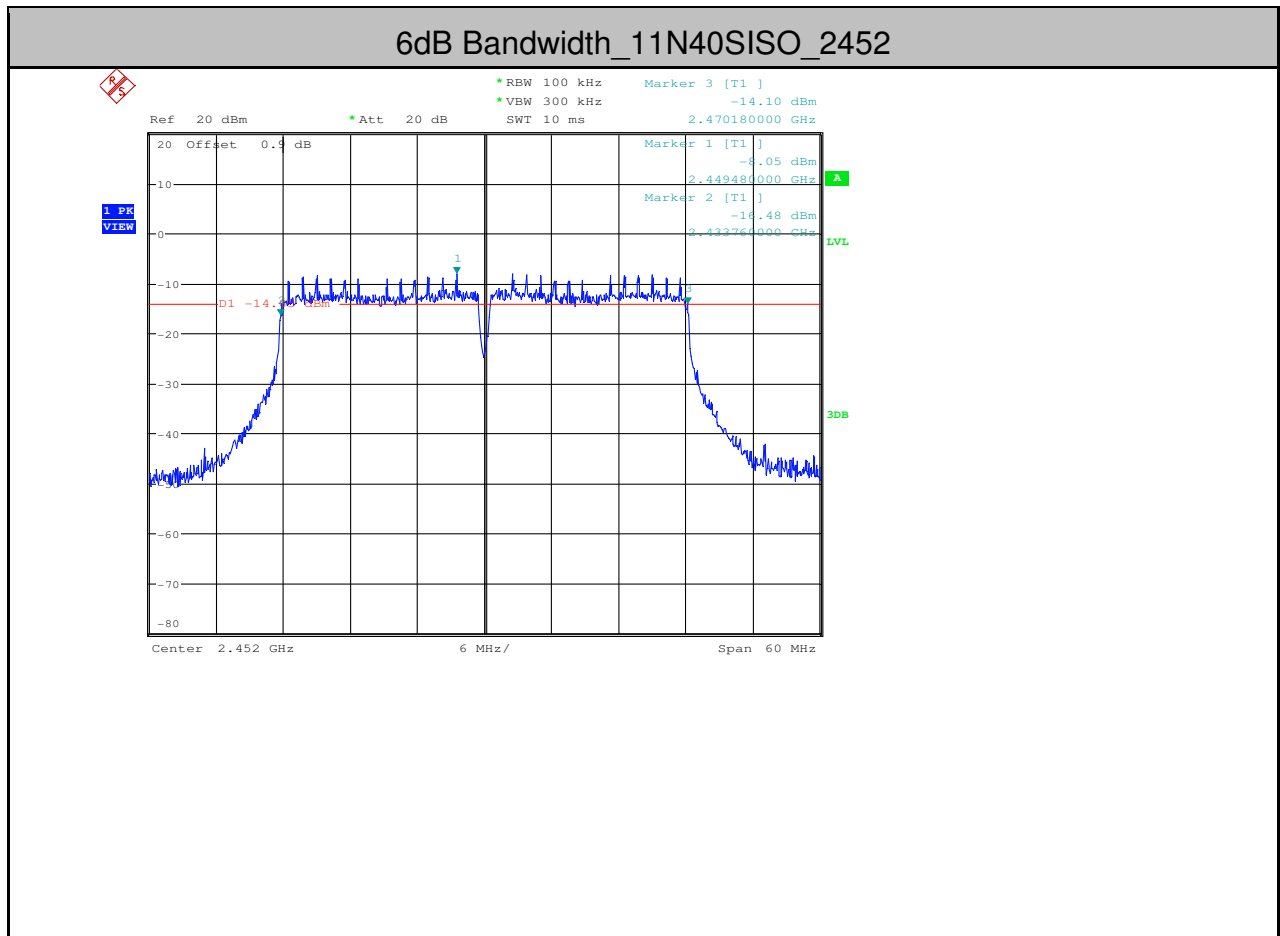




2.Maximum peak conducted output power

Test Mode	Test Channel	Power[dBm]	Limit[dBm]	Verdict
11B	2412	18.07	<30	PASS
11B	2437	18.58	<30	PASS
11B	2462	18.78	<30	PASS
11G	2412	15.85	<30	PASS
11G	2437	16.71	<30	PASS
11G	2462	16.84	<30	PASS
11N20SISO	2412	14.95	<30	PASS
11N20SISO	2437	15.52	<30	PASS
11N20SISO	2462	15.71	<30	PASS
11N40SISO	2422	14.69	<30	PASS
11N40SISO	2437	14.86	<30	PASS
11N40SISO	2452	15.06	<30	PASS




TEST PLOT

Maximum peak conducted output power_11B_2412

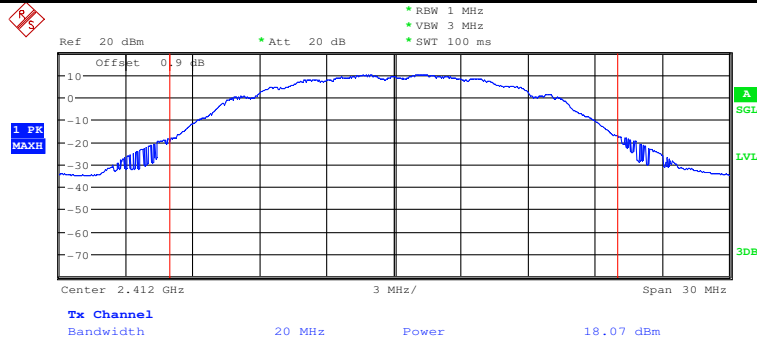




Maximum peak conducted output power_11B_2437

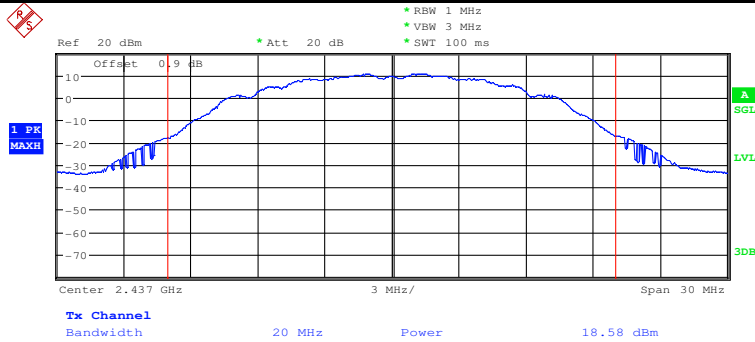




Maximum peak conducted output power_11B_2462

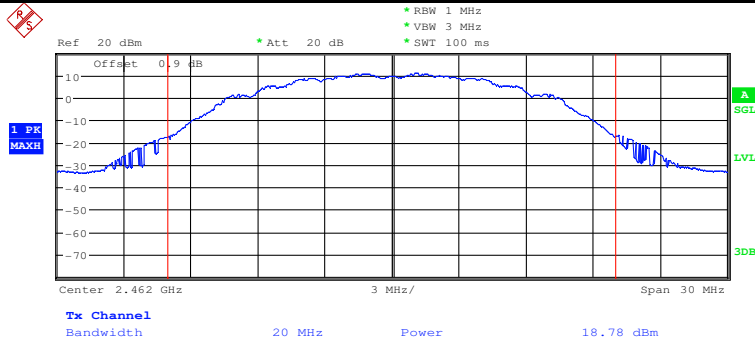




Maximum peak conducted output power_11G_2412

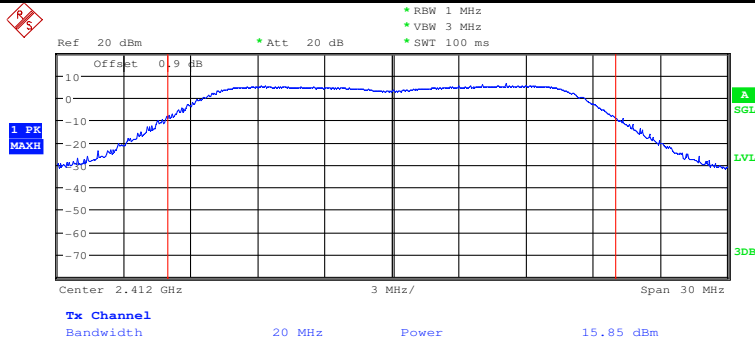




Maximum peak conducted output power_11G_2437

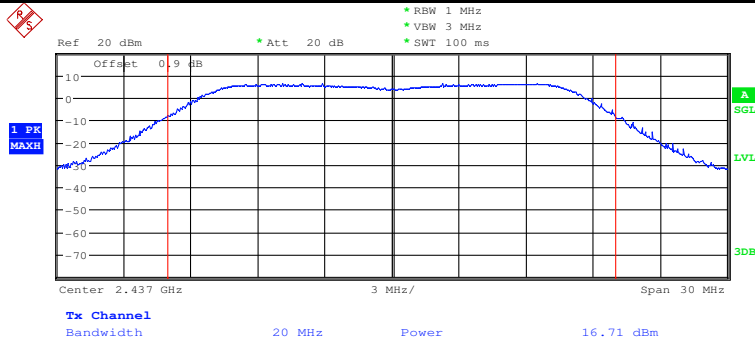




Maximum peak conducted output power_11G_2462

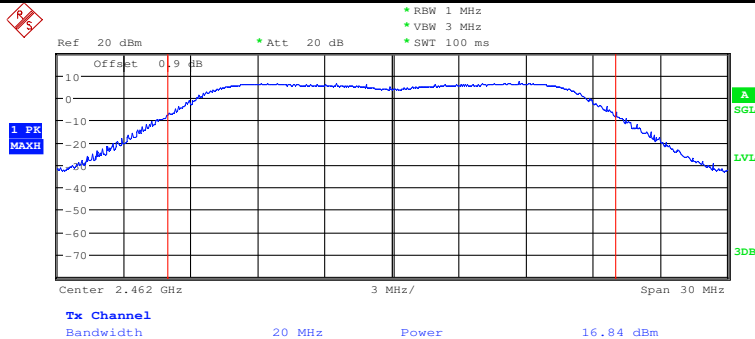




Maximum peak conducted output power_11N20SISO_2412

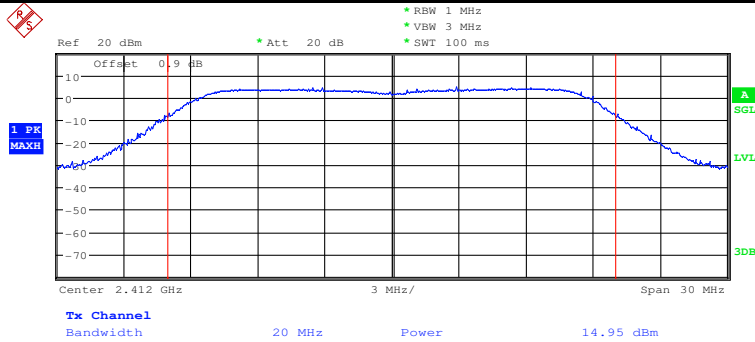


Maximum peak conducted output power_11N20ISO_2437

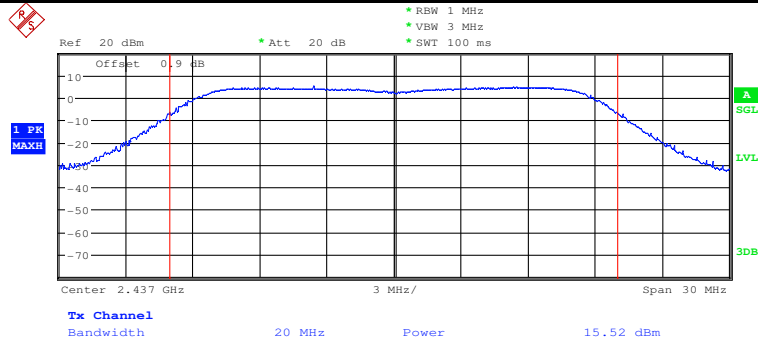




Maximum peak conducted output power_11N20SISO_2462

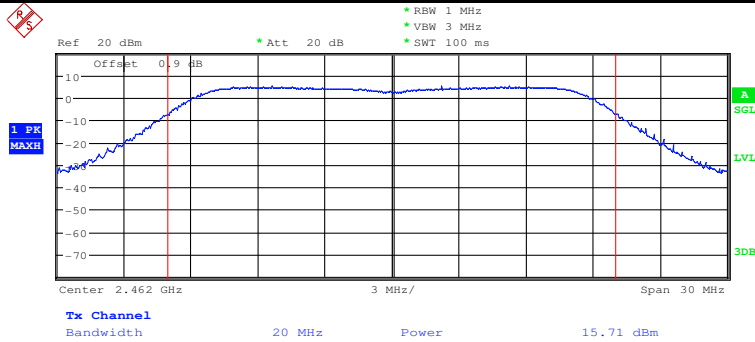




Maximum peak conducted output power_11N40SISO_2422

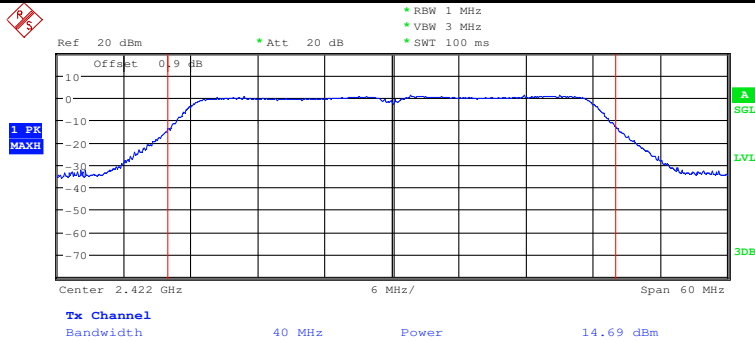




Maximum peak conducted output power_11N40SISO_2437

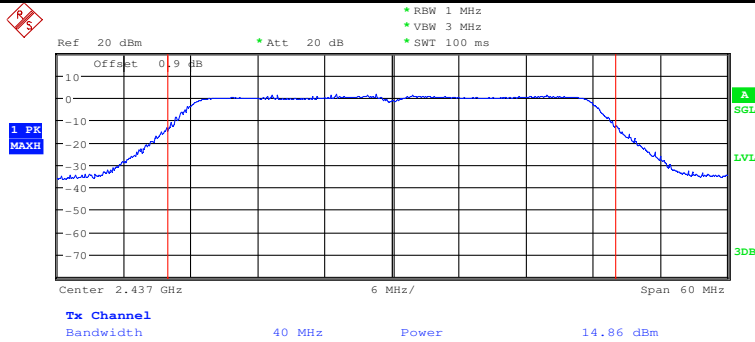



Maximum peak conducted output power_11N40SISO_2452

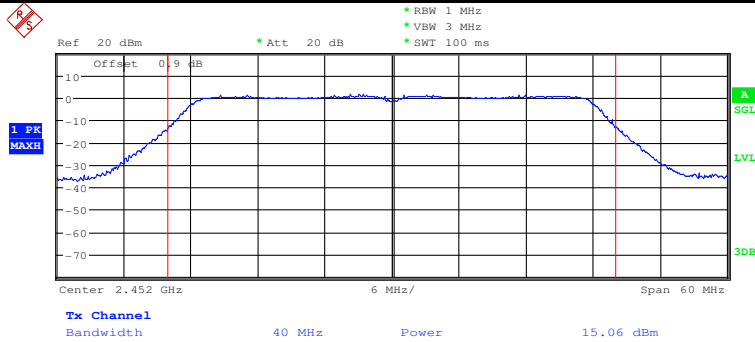




3.Maximum Peak power spectral density

Test Mode	Test Channel	PSD[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	2412	-9.27	<8.00	PASS
11B	2437	-8.09	<8.00	PASS
11B	2462	-8.11	<8.00	PASS
11G	2412	-18.06	<8.00	PASS
11G	2437	-17.1	<8.00	PASS
11G	2462	-16.57	<8.00	PASS
11N20SISO	2412	-18.71	<8.00	PASS
11N20SISO	2437	-17.37	<8.00	PASS
11N20SISO	2462	-19.23	<8.00	PASS
11N40SISO	2422	-21.29	<8.00	PASS
11N40SISO	2437	-22.43	<8.00	PASS
11N40SISO	2452	-22.19	<8.00	PASS




TEST PLOT

Maximum Peak power spectral density_11B_2412

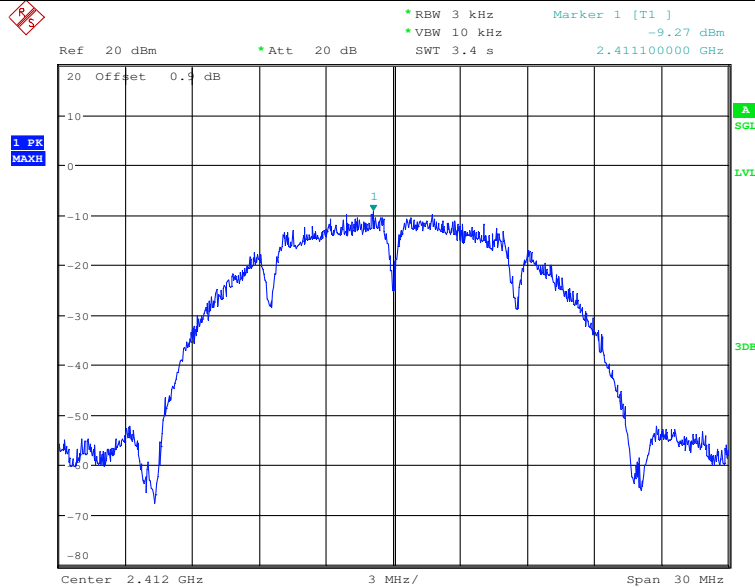




Maximum Peak power spectral density_11B_2437

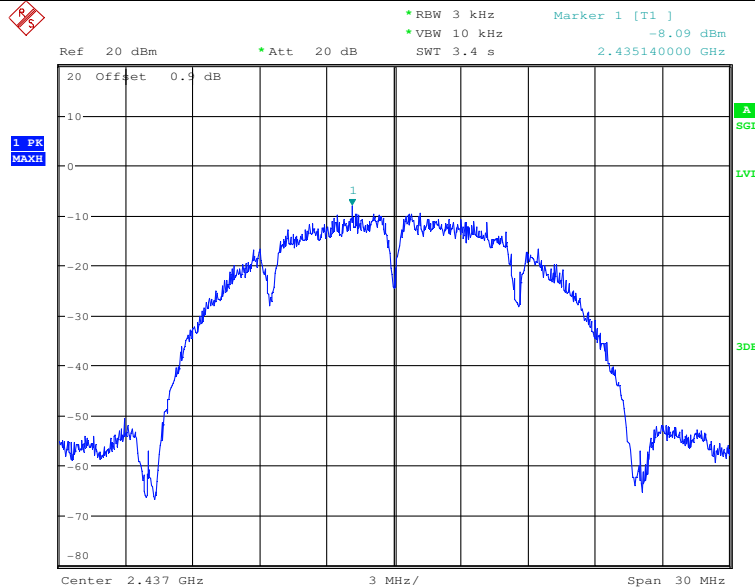




Maximum Peak power spectral density_11B_2462

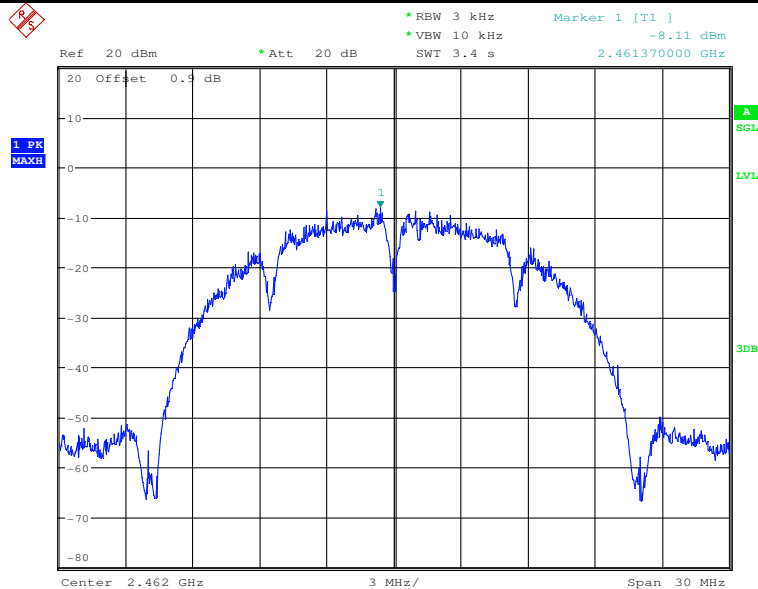




Maximum Peak power spectral density_11G_2412

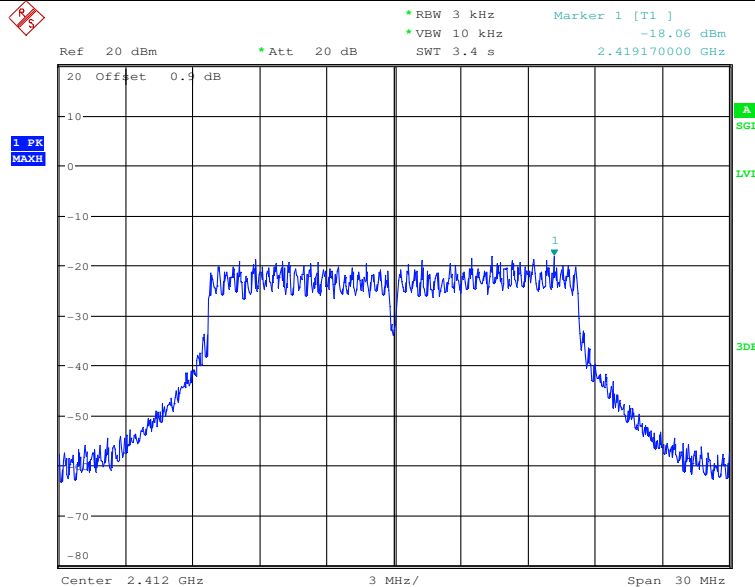




Maximum Peak power spectral density_11G_2437

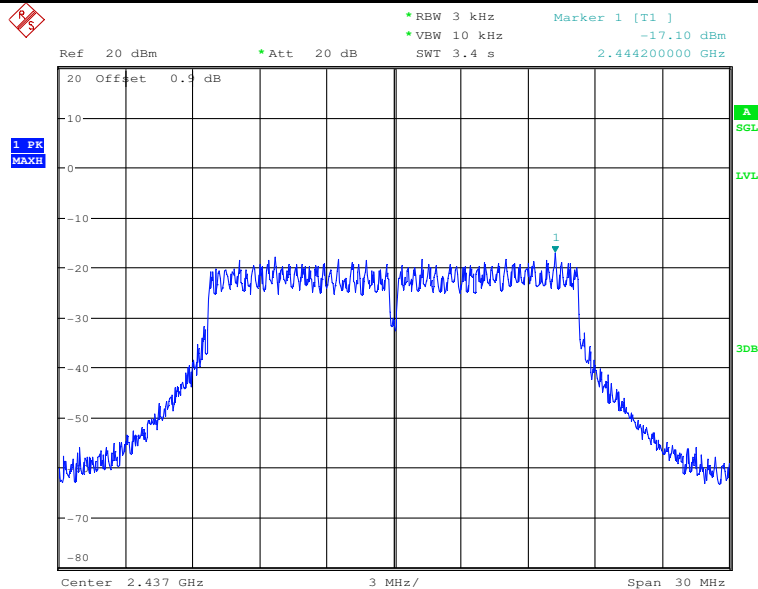




Maximum Peak power spectral density_11G_2462

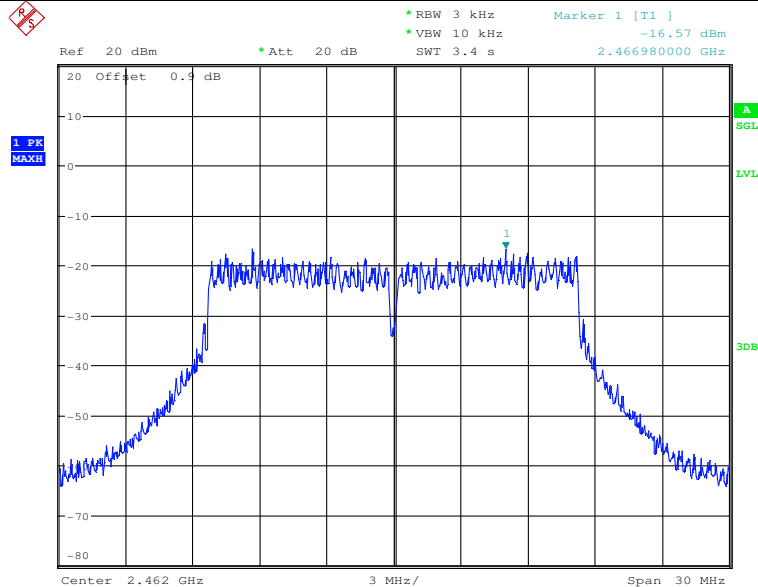




Maximum Peak power spectral density_11N20SISO_2412

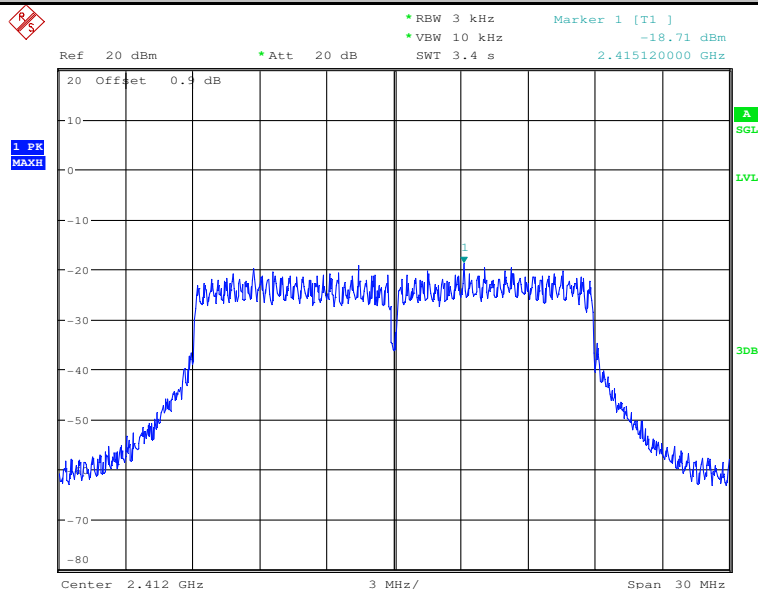




Maximum Peak power spectral density_11N20SISO_2437

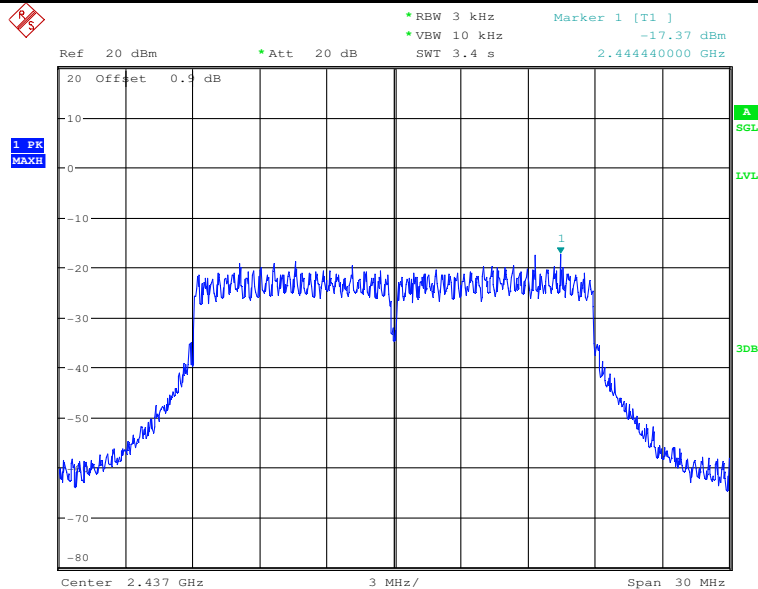




Maximum Peak power spectral density_11N20SISO_2462

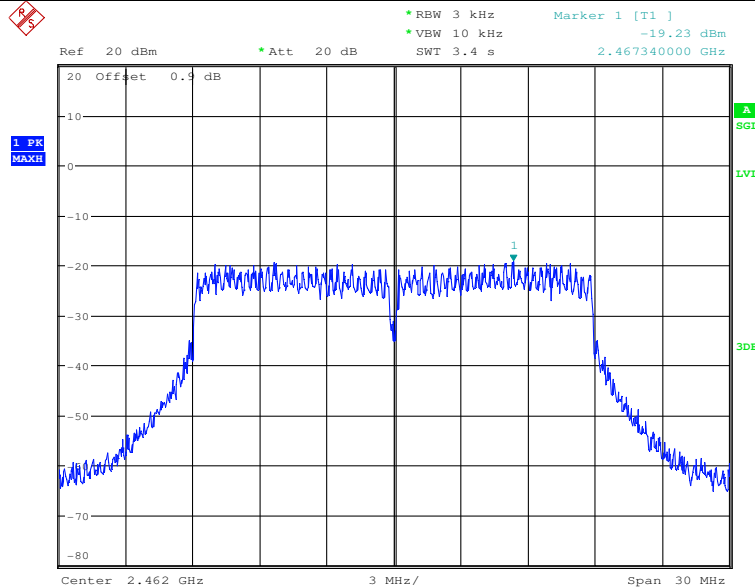




Maximum Peak power spectral density_11N40SISO_2422

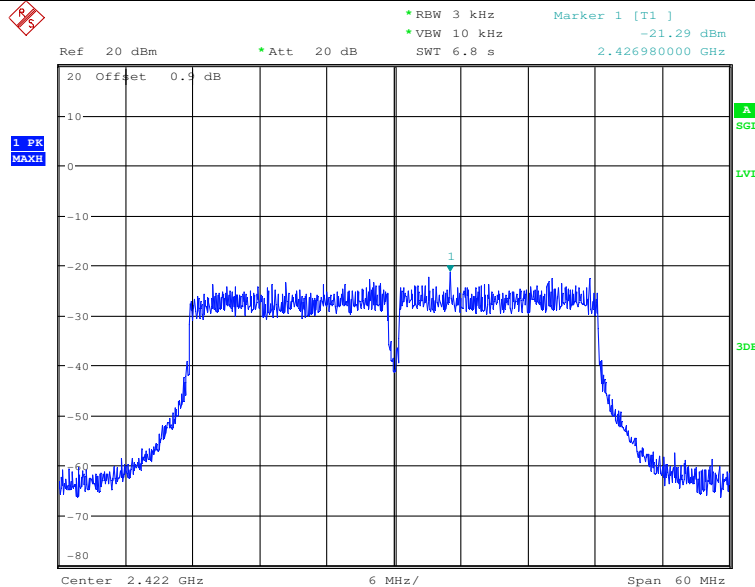




Maximum Peak power spectral density_11N40SISO_2437

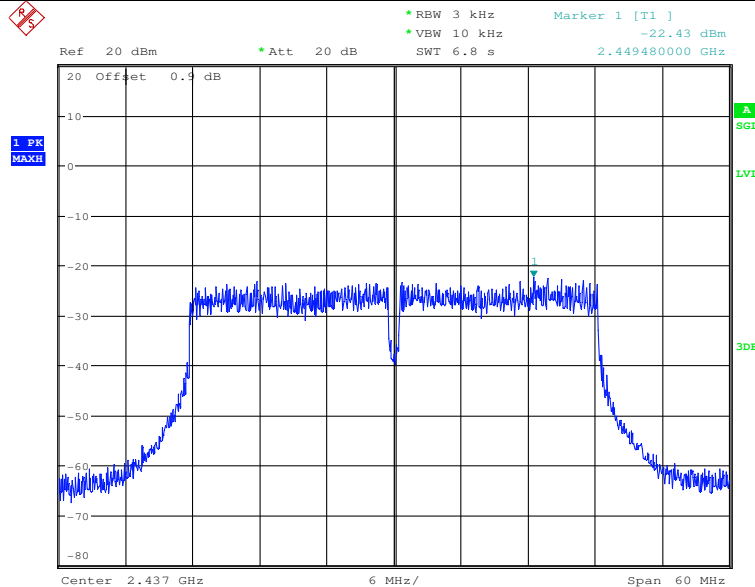




Maximum Peak power spectral density_11N40SISO_2452

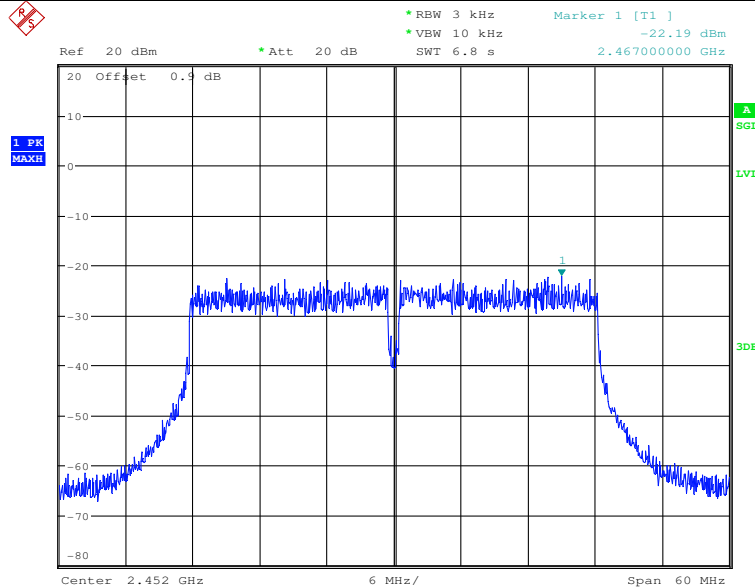




4. Band-edge for RF Conducted Emissions

Test Mode	Test Channel	Carrier Power[dBm]	Max. Spurious Level [dBm]	Limit [dBm]	Verdict
11B	2412	4.780	-47.128	<-15.22	PASS
11B	2462	5.680	-47.254	<-14.32	PASS
11G	2412	-4.420	-49.534	<-24.42	PASS
11G	2462	-3.520	-48.343	<-23.52	PASS
11N20SISO	2412	-5.500	-49.628	<-25.5	PASS
11N20SISO	2462	-4.580	-49.539	<-24.58	PASS
11N40SISO	2422	-8.620	-43.365	<-28.62	PASS
11N40SISO	2452	-8.130	-42.525	<-28.13	PASS

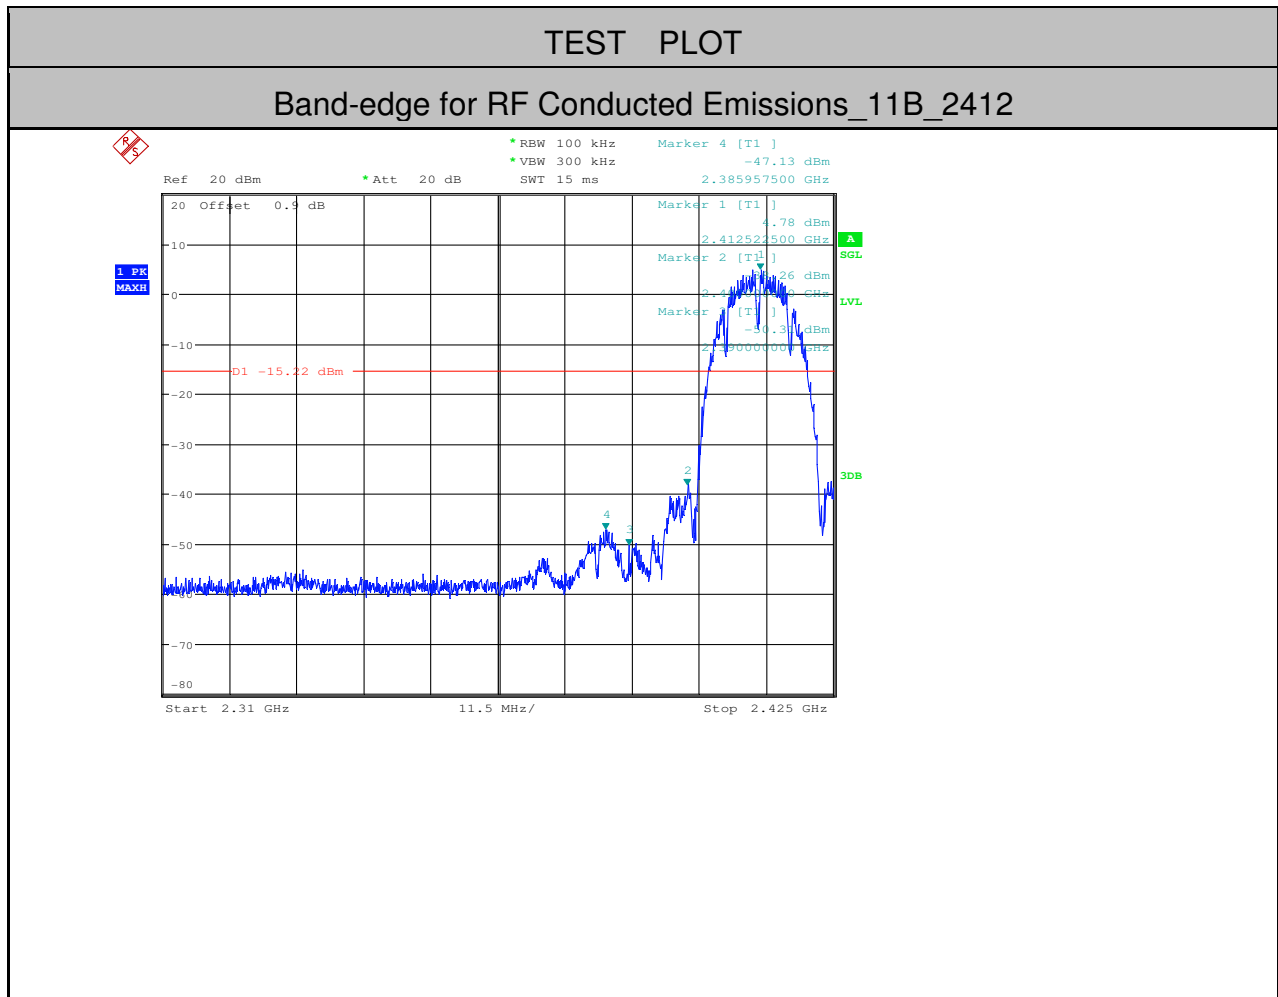




Band-edge for RF Conducted Emissions_11B_2462

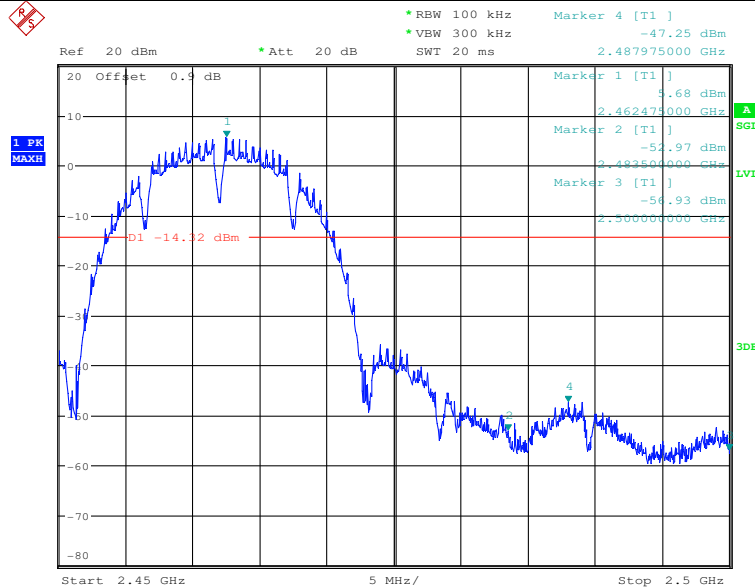




Band-edge for RF Conducted Emissions_11G_2412

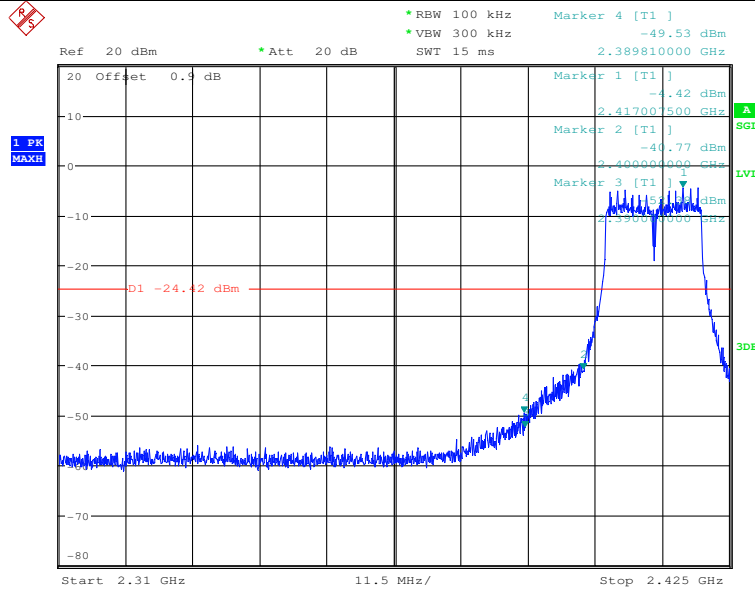




Band-edge for RF Conducted Emissions_11G_2462

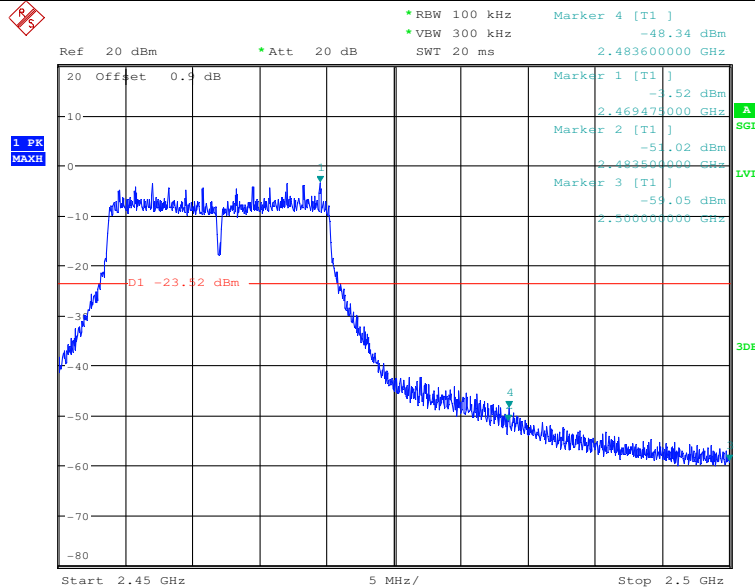




Band-edge for RF Conducted Emissions_11N20SISO_2412

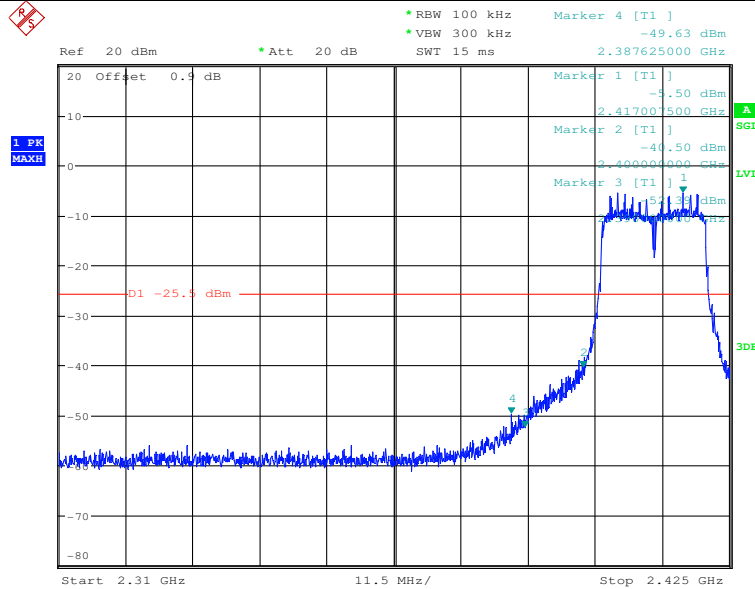




Band-edge for RF Conducted Emissions_11N20SISO_2462

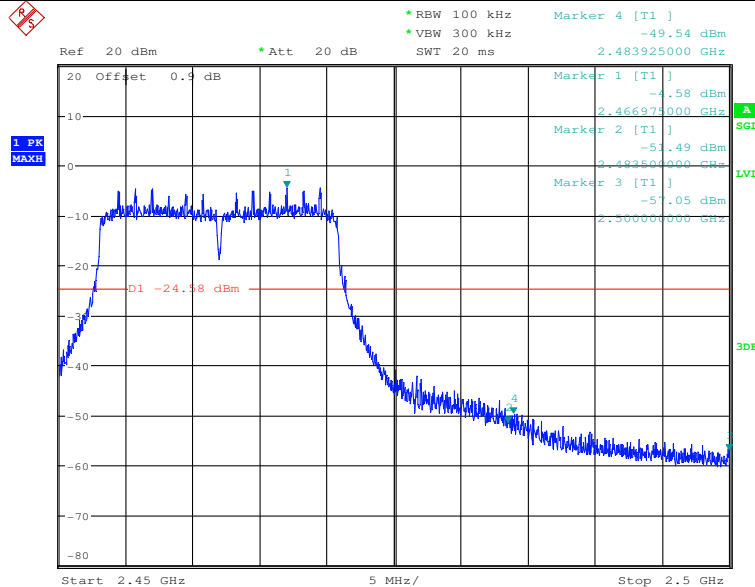




Band-edge for RF Conducted Emissions_11N40SISO_2422

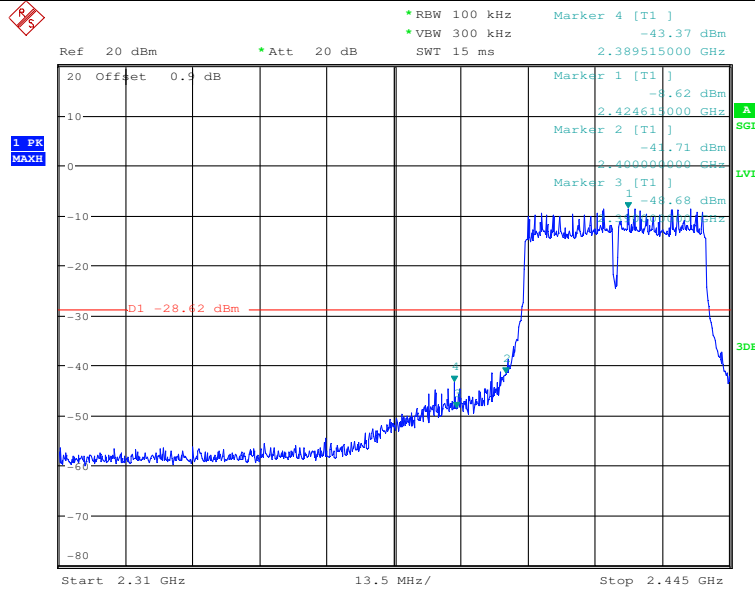



Band-edge for RF Conducted Emissions_11N40SISO_2452

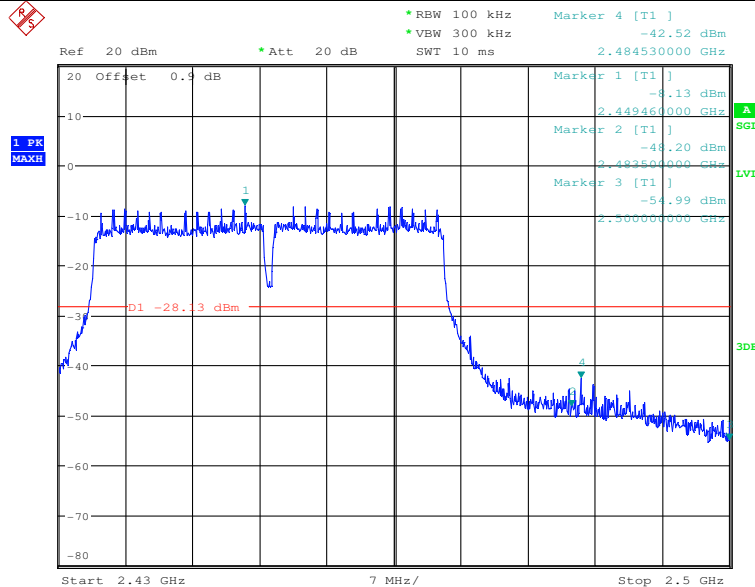



5.RF Conducted Spurious Emissions

Test Mode	Test Channel	StartFre [MHz]	StopFre [MHz]	RBW [kHz]	VBW [kHz]	Pref [dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
11B	2412	30	10000	1000	3000	5.03	-33.510	<-14.97	PASS
11B	2412	10000	25000	1000	3000	5.03	-55.400	<-14.97	PASS
11B	2437	30	10000	1000	3000	5.33	-32.880	<-14.67	PASS
11B	2437	10000	25000	1000	3000	5.33	-54.390	<-14.67	PASS
11B	2462	30	10000	1000	3000	5.44	-32.510	<-14.56	PASS
11B	2462	10000	25000	1000	3000	5.44	-55.160	<-14.56	PASS
11G	2412	30	10000	1000	3000	-4.49	-47.030	<-24.49	PASS
11G	2412	10000	25000	1000	3000	-4.49	-55.060	<-24.49	PASS
11G	2437	30	10000	1000	3000	-3.93	-44.480	<-23.93	PASS
11G	2437	10000	25000	1000	3000	-3.93	-54.970	<-23.93	PASS
11G	2462	30	10000	1000	3000	-3.52	-45.530	<-23.52	PASS
11G	2462	10000	25000	1000	3000	-3.52	-54.980	<-23.52	PASS
11N20SISO	2412	30	10000	1000	3000	-5.62	-48.430	<-25.62	PASS
11N20SISO	2412	10000	25000	1000	3000	-5.62	-55.210	<-25.62	PASS
11N20SISO	2437	30	10000	1000	3000	-4.97	-47.240	<-24.97	PASS
11N20SISO	2437	10000	25000	1000	3000	-4.97	-55.540	<-24.97	PASS
11N20SISO	2462	30	10000	1000	3000	-4.75	-45.950	<-24.75	PASS
11N20SISO	2462	10000	25000	1000	3000	-4.75	-54.570	<-24.75	PASS
11N40SISO	2422	30	10000	1000	3000	-8.74	-52.260	<-28.74	PASS
11N40SISO	2422	10000	25000	1000	3000	-8.74	-54.720	<-28.74	PASS
11N40SISO	2437	30	10000	1000	3000	-8.51	-51.650	<-28.51	PASS
11N40SISO	2437	10000	25000	1000	3000	-8.51	-54.940	<-28.51	PASS
11N40SISO	2452	30	10000	1000	3000	-8.3	-48.370	<-28.3	PASS
11N40SISO	2452	10000	25000	1000	3000	-8.3	-54.990	<-28.3	PASS




Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

TEST PLOT


RF Conducted Spurious Emissions_11B_2412

Pref

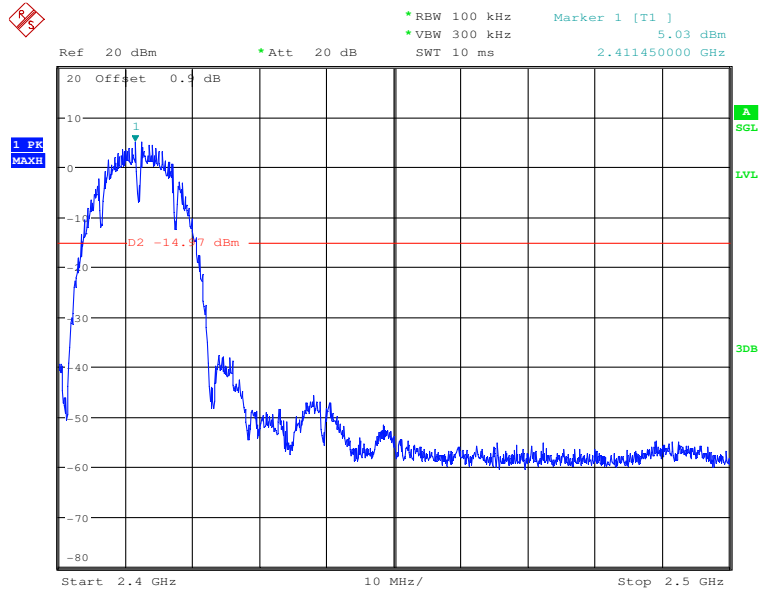




CSE_1

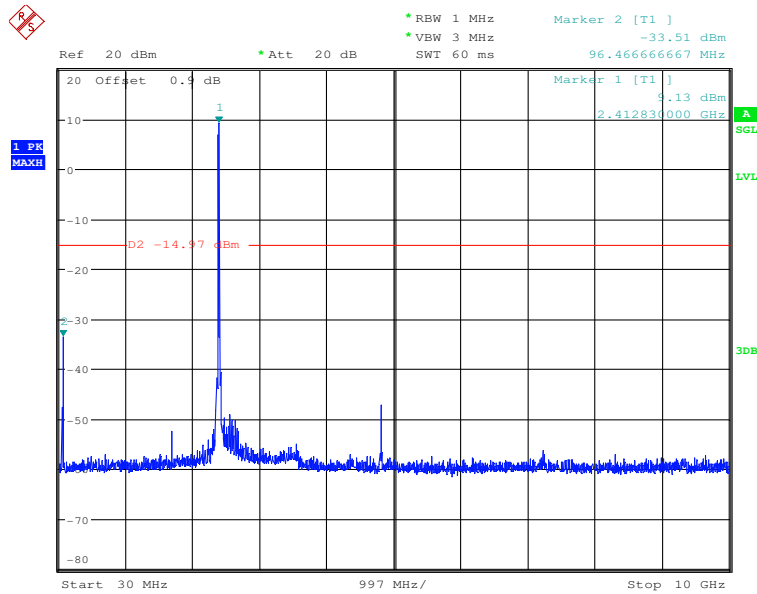


CSE_2

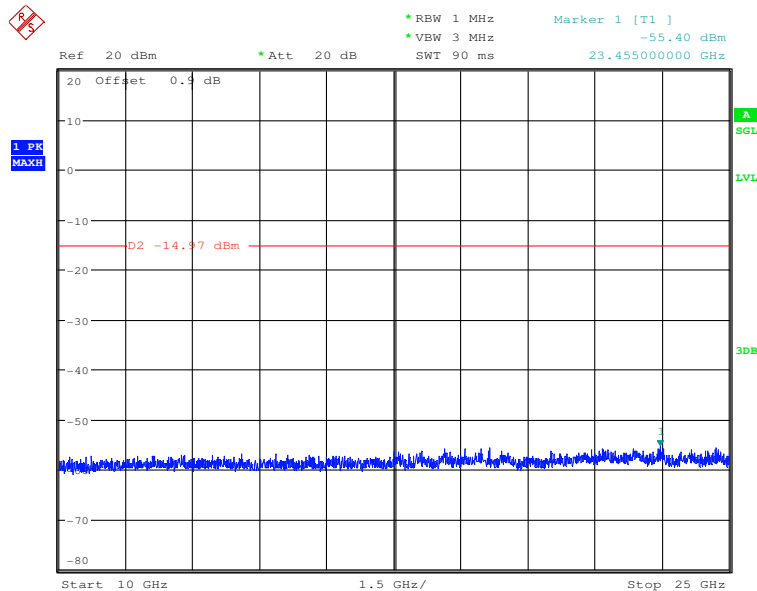




RF Conducted Spurious Emissions_11B_2437

Pref

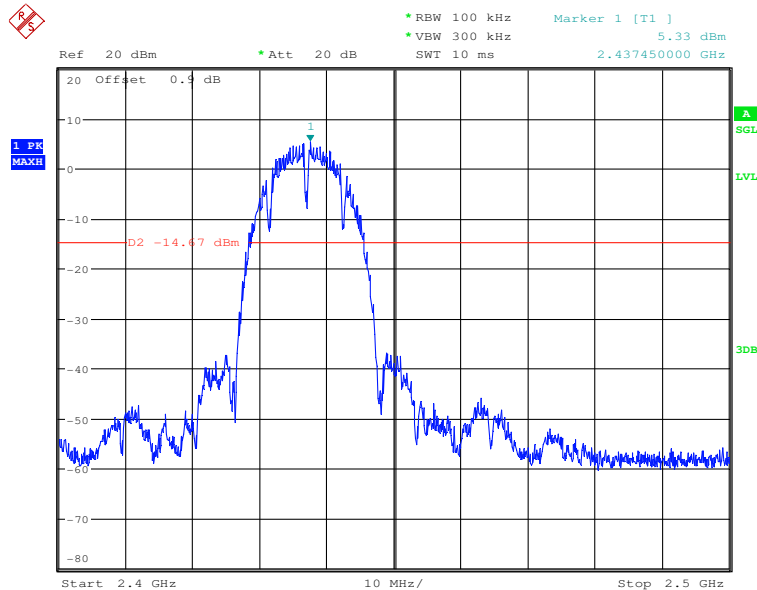




CSE_1

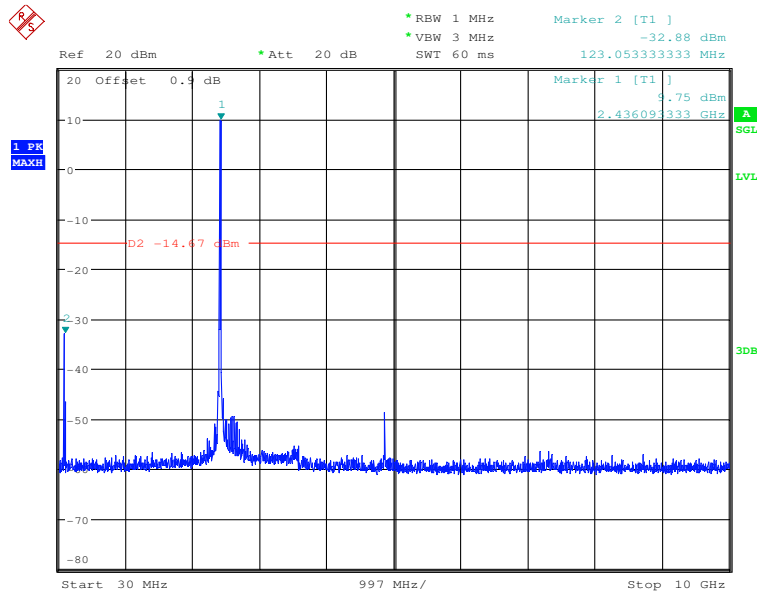


CSE_2

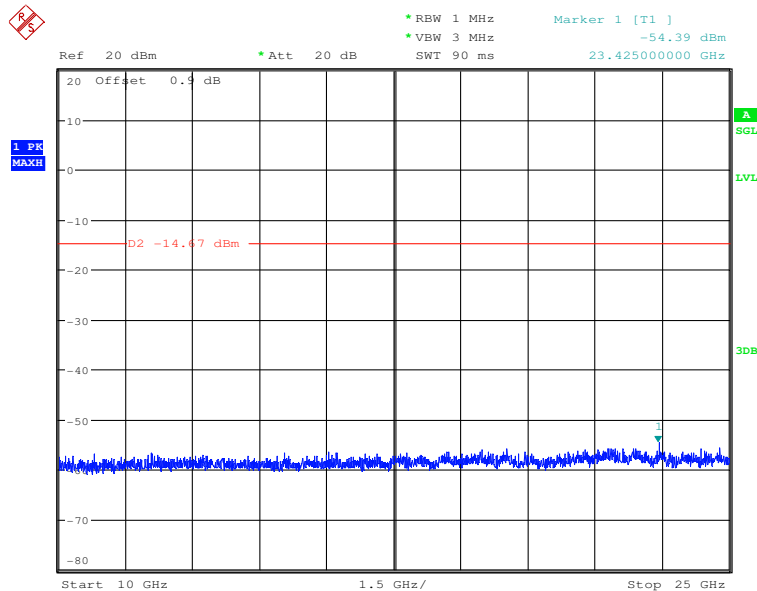




RF Conducted Spurious Emissions_11B_2462

Pref

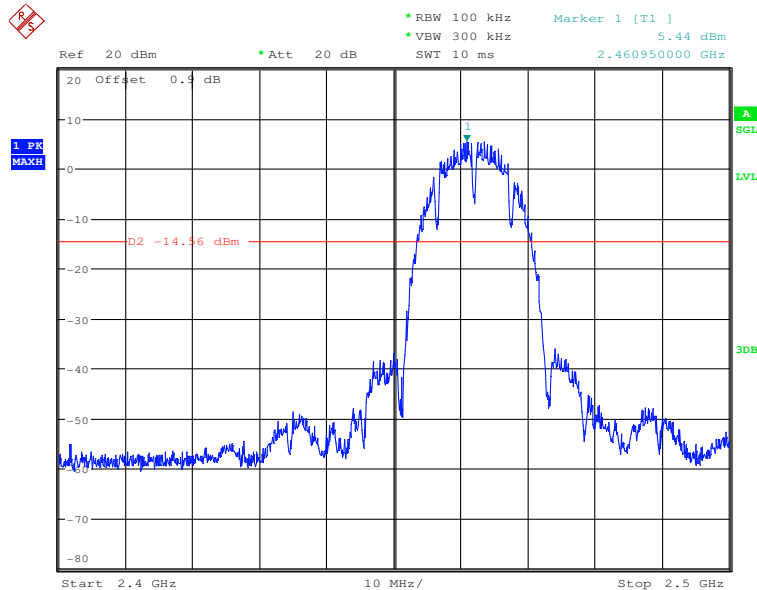




CSE_1

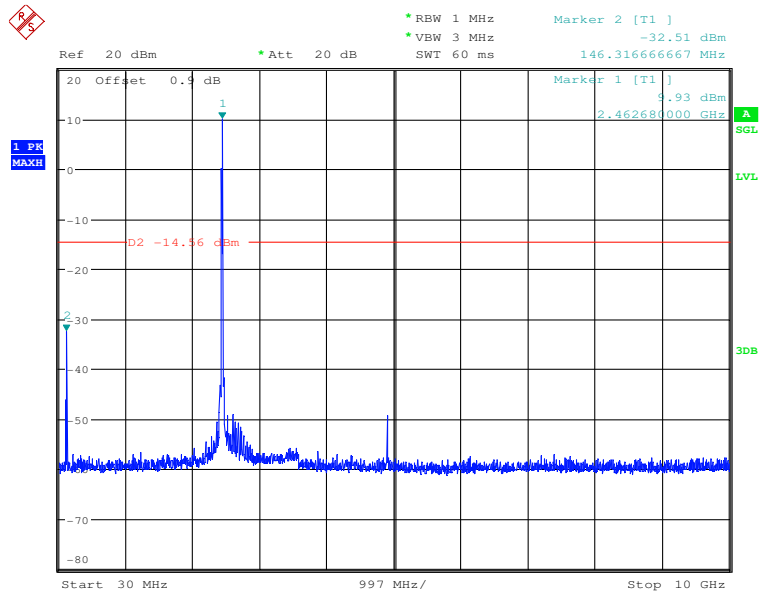


CSE_2

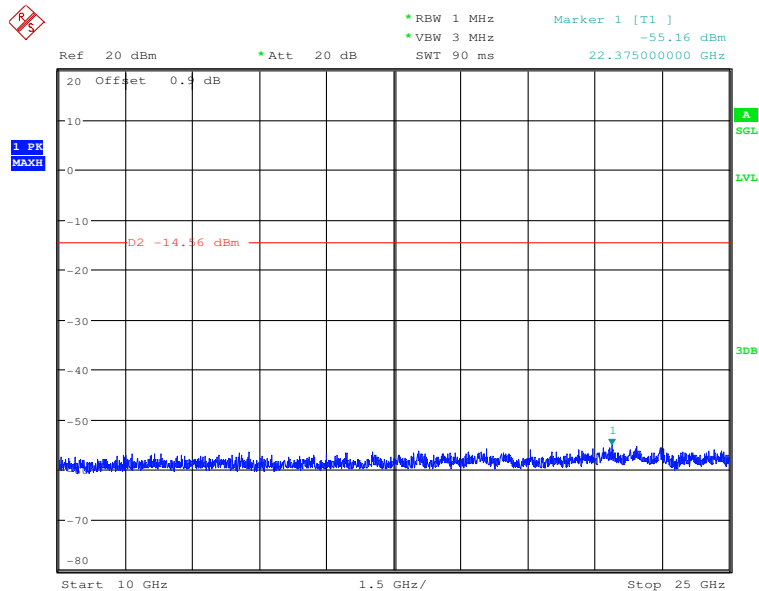


RF Conducted Spurious Emissions_11G_2412

Pref

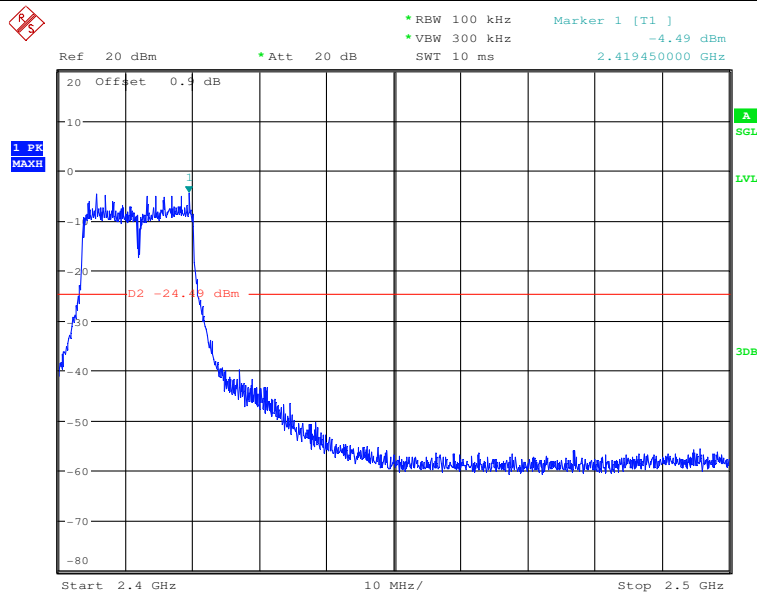




CSE_1

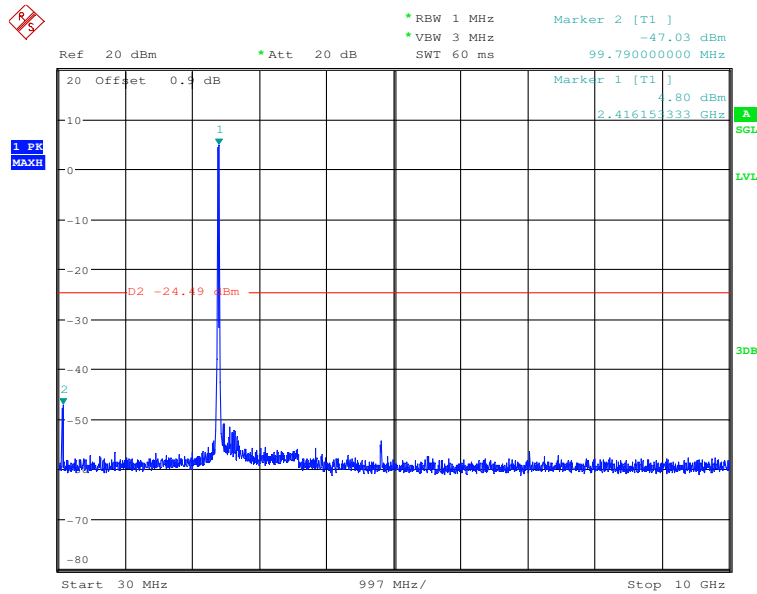


CSE_2

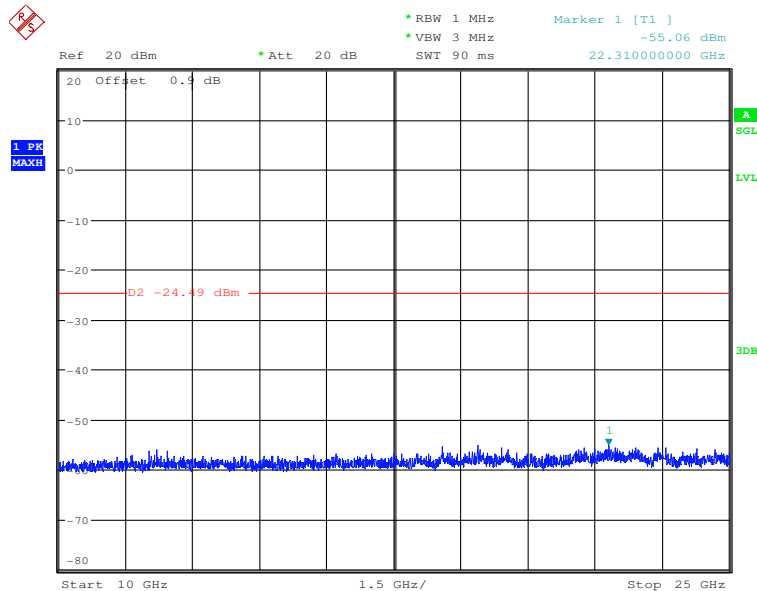




RF Conducted Spurious Emissions_11G_2437

Pref

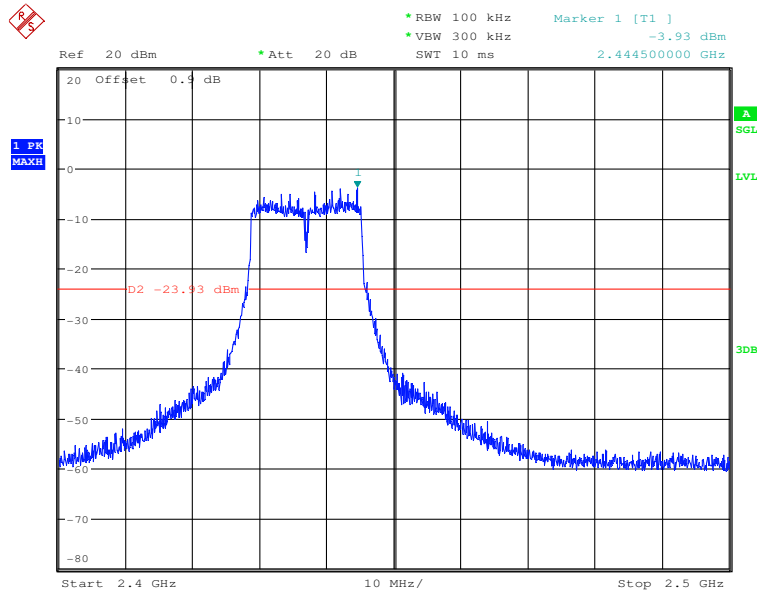




CSE_1

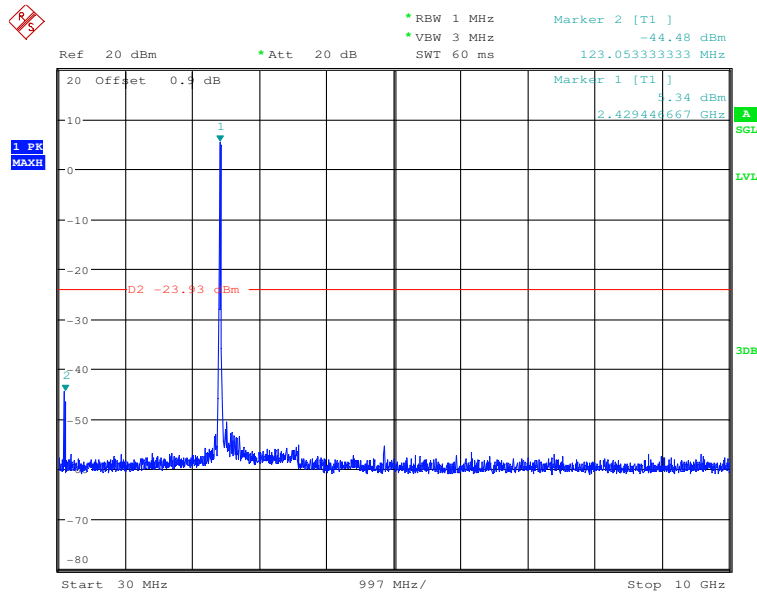


CSE_2

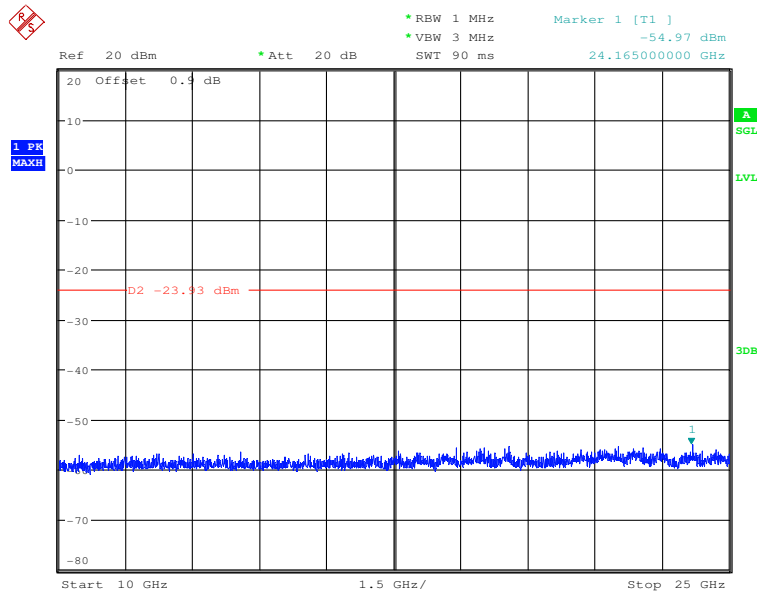




RF Conducted Spurious Emissions_11G_2462

Pref

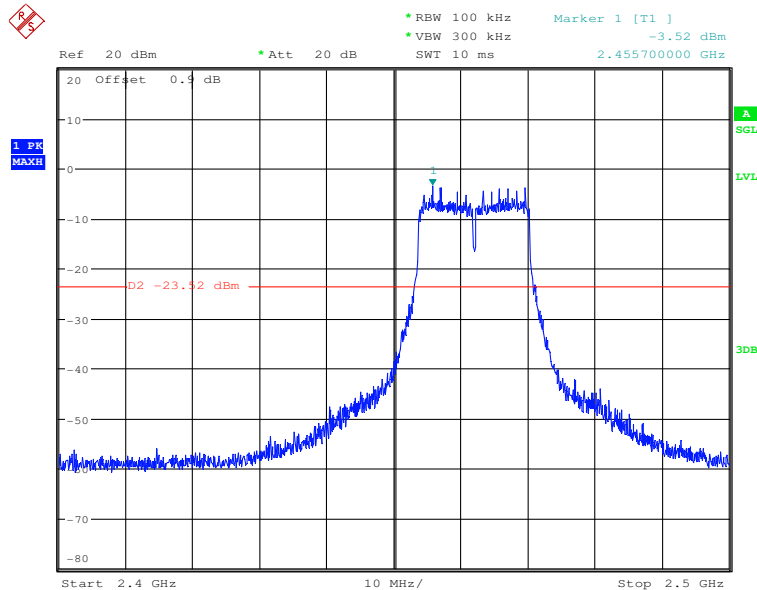




CSE_1

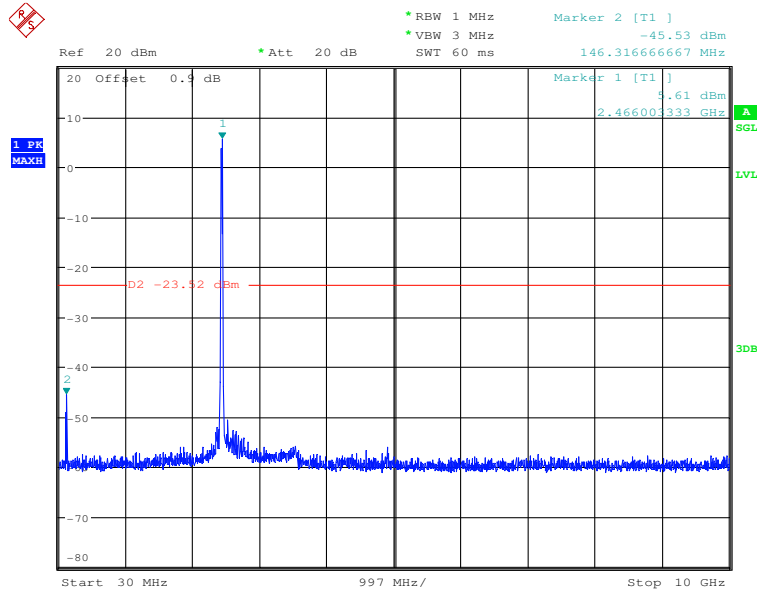


CSE_2

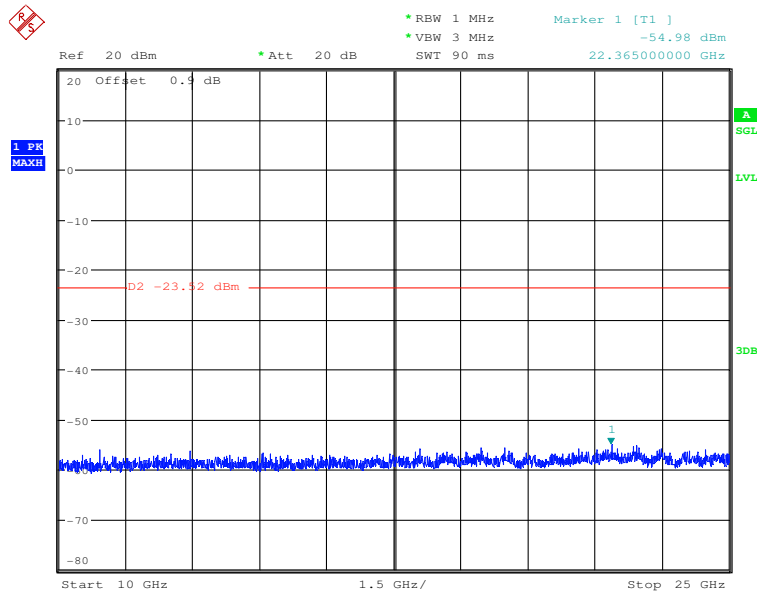




RF Conducted Spurious Emissions_11N20SISO_2412

Pref

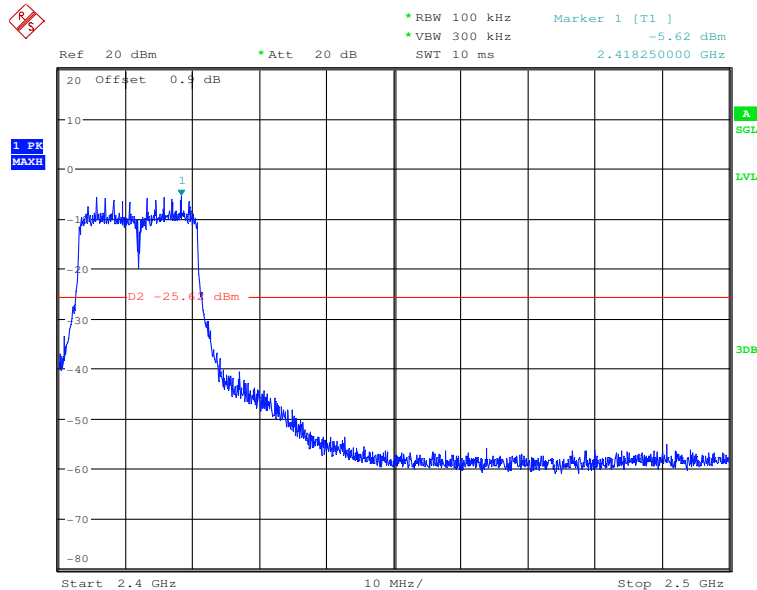




CSE_1

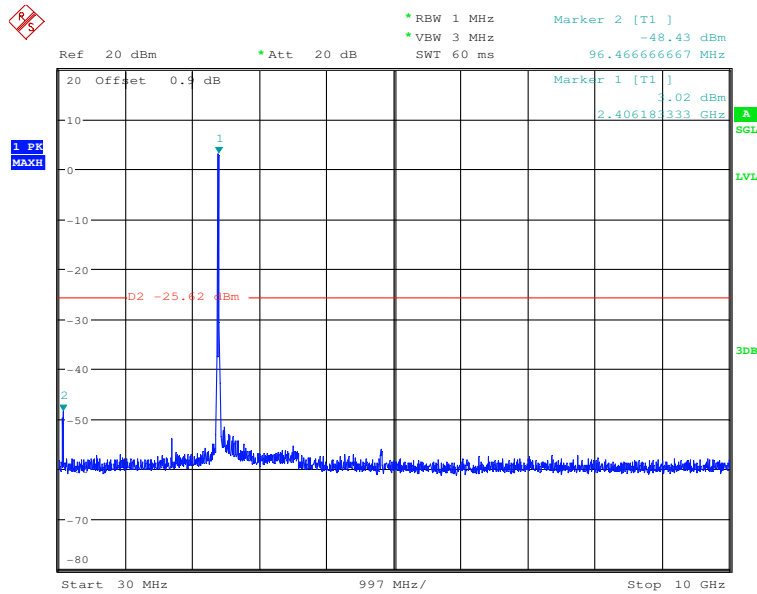


CSE_2

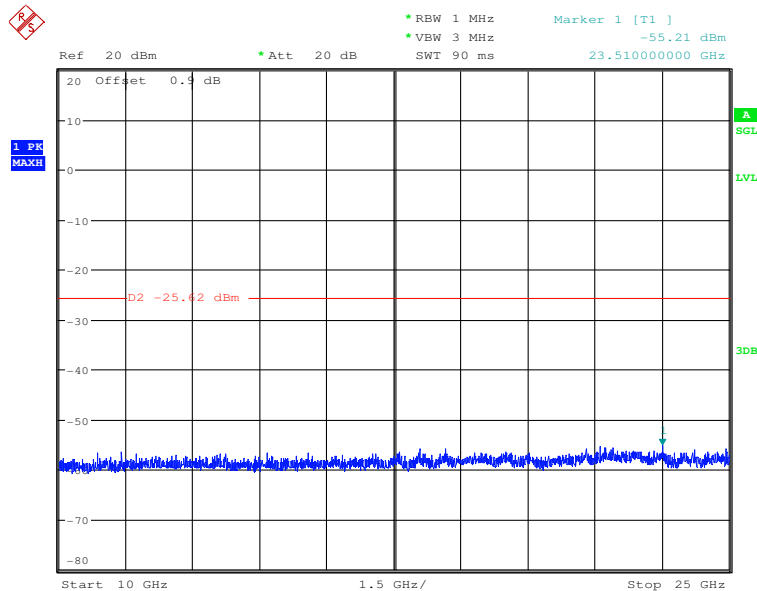




RF Conducted Spurious Emissions_11N20SISO_2437

Pref

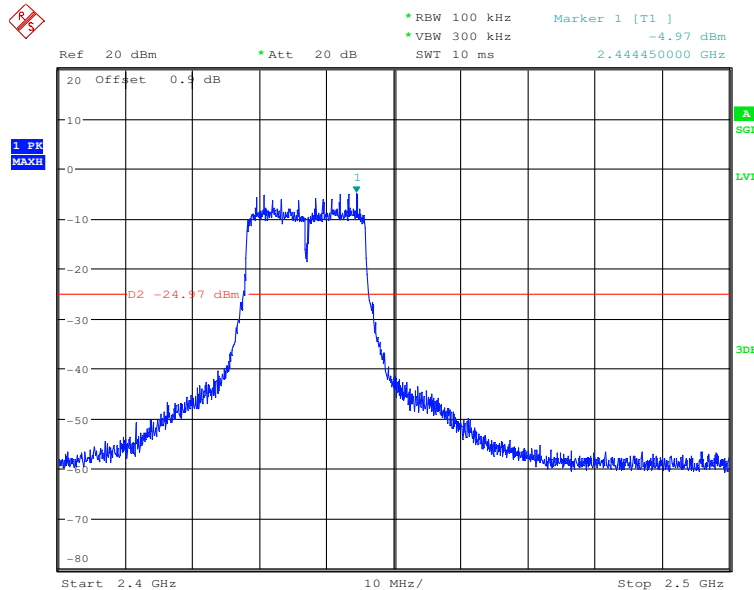




CSE_1

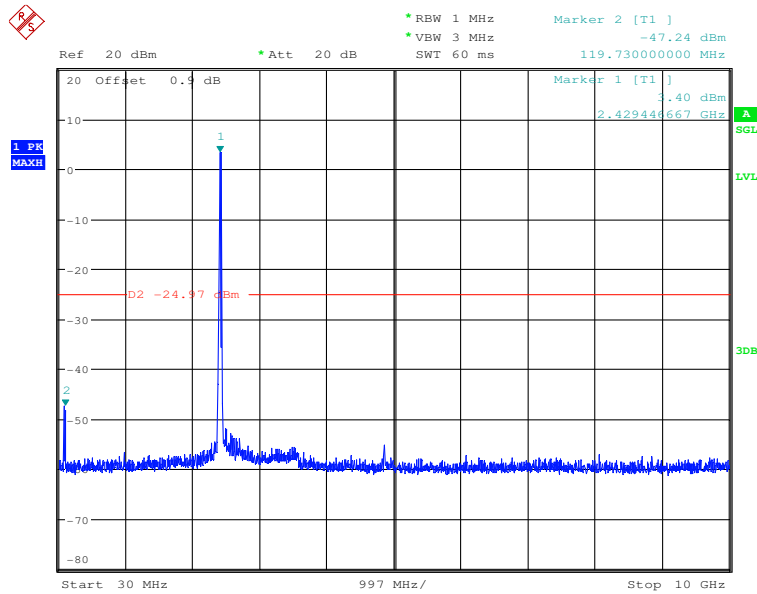


CSE_2

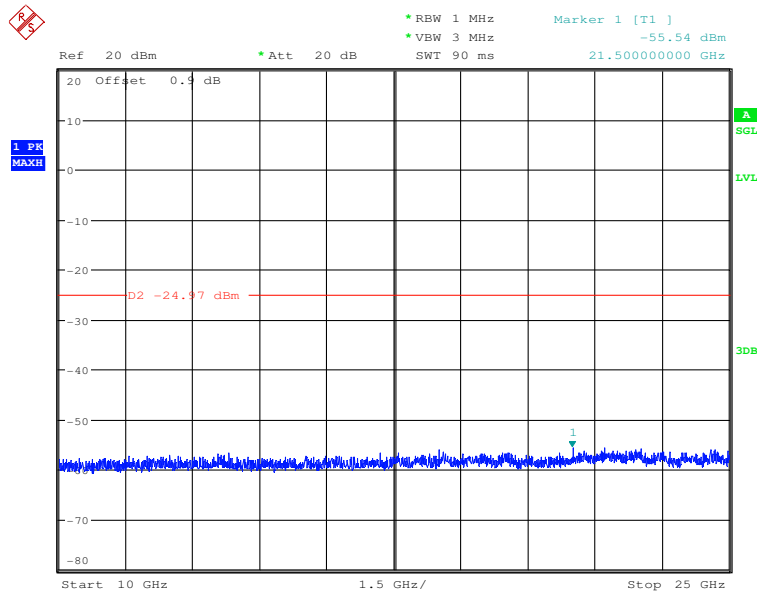




RF Conducted Spurious Emissions_11N20SISO_2462

Pref

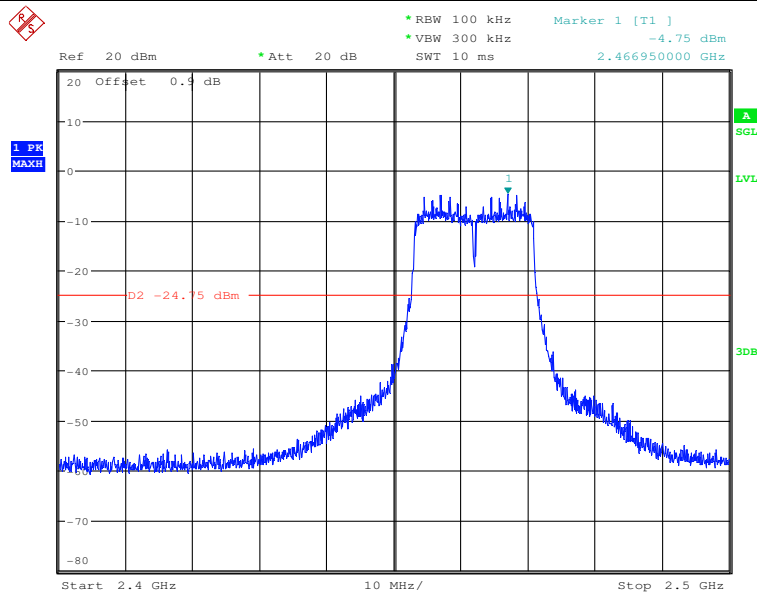




CSE_1

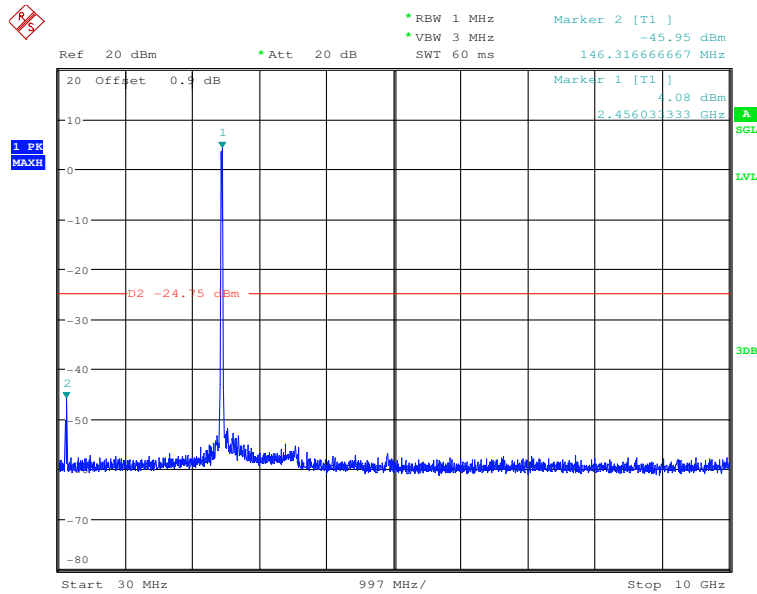


CSE_2

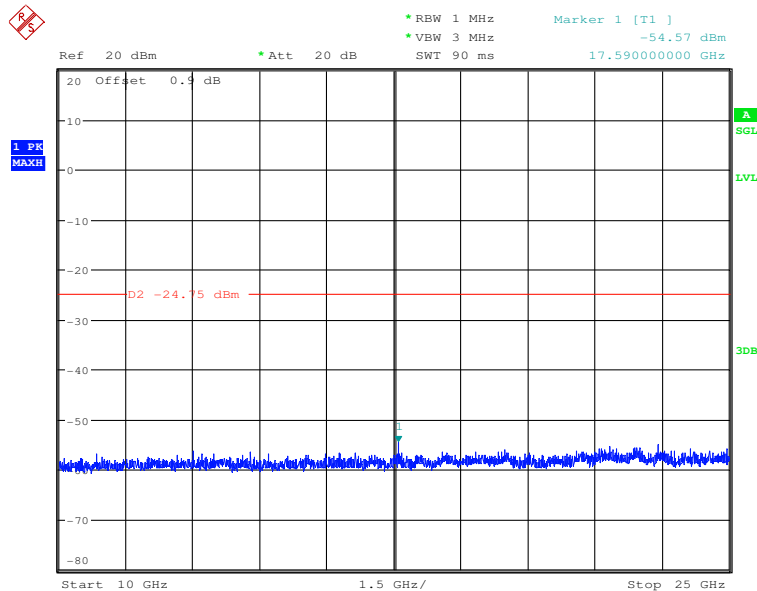




RF Conducted Spurious Emissions_11N40SISO_2422

Pref

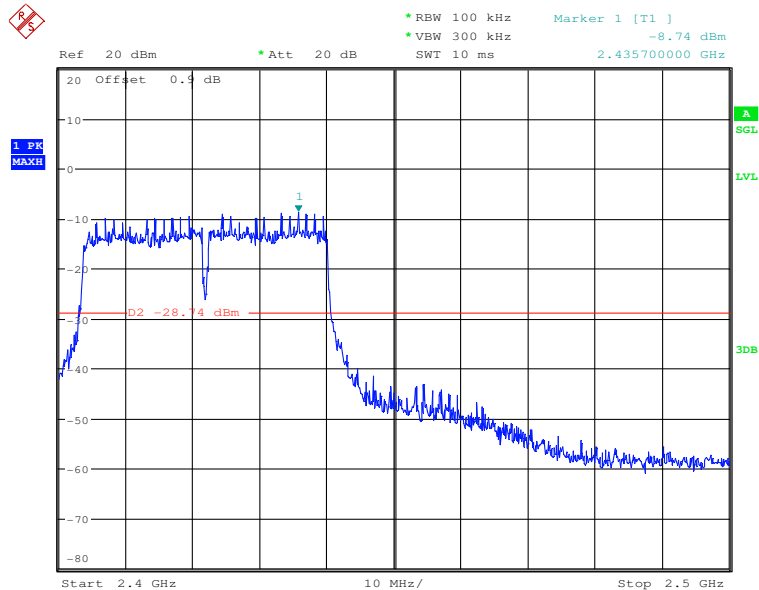




CSE_1

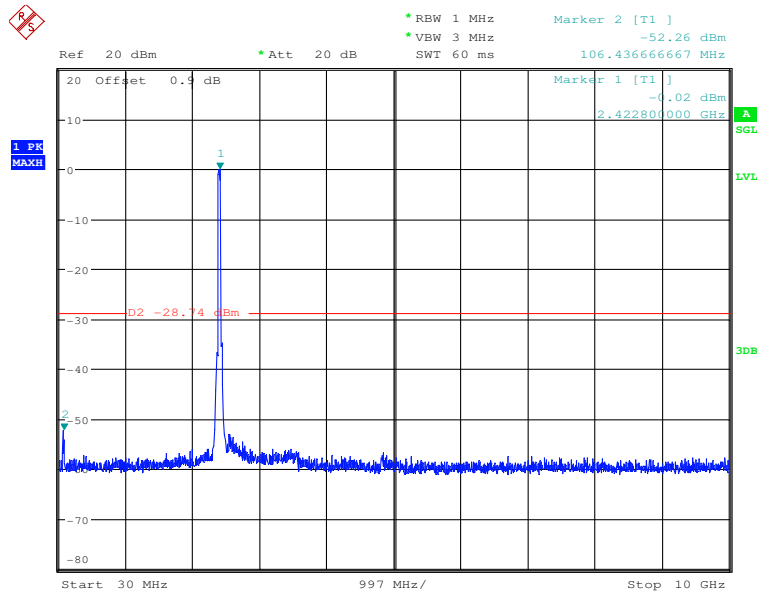


CSE_2

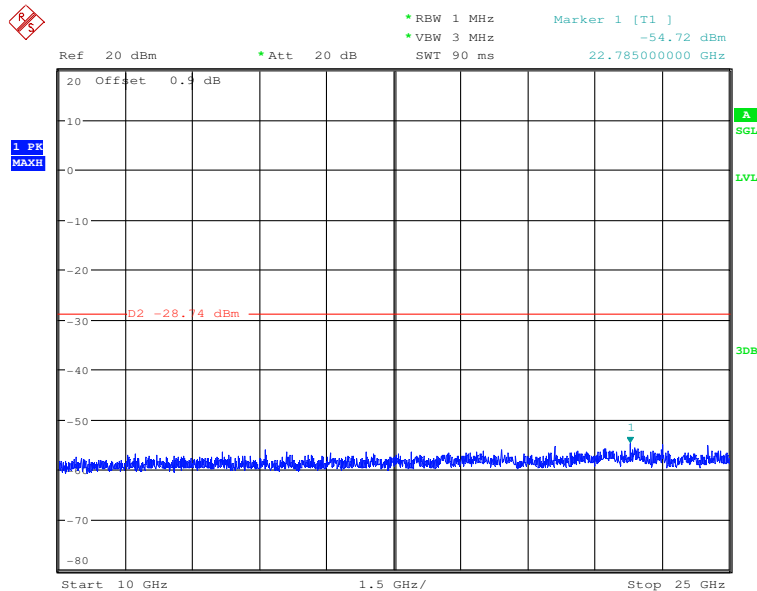




RF Conducted Spurious Emissions_11N40SISO_2437

Pref

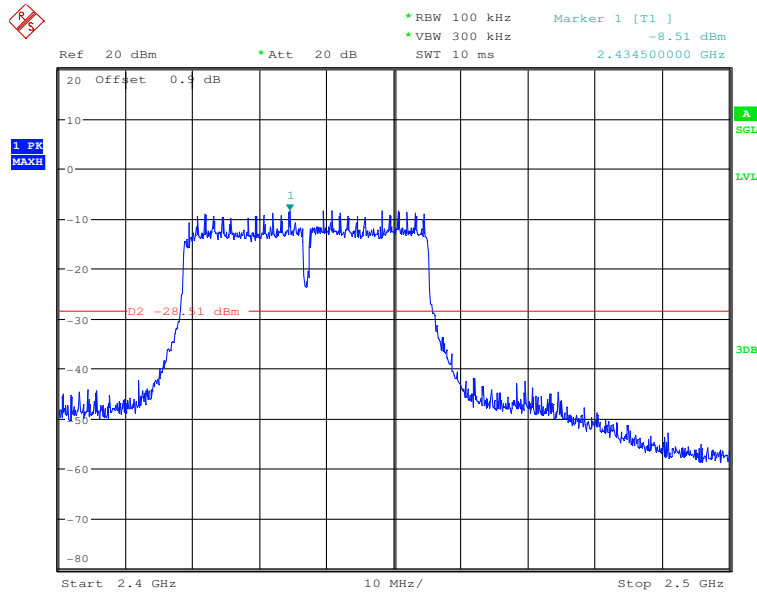




CSE_1

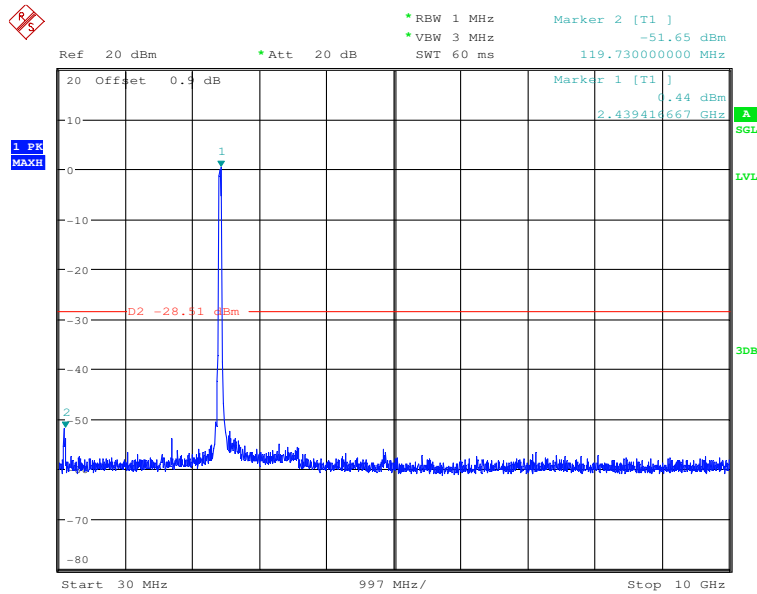


CSE_2

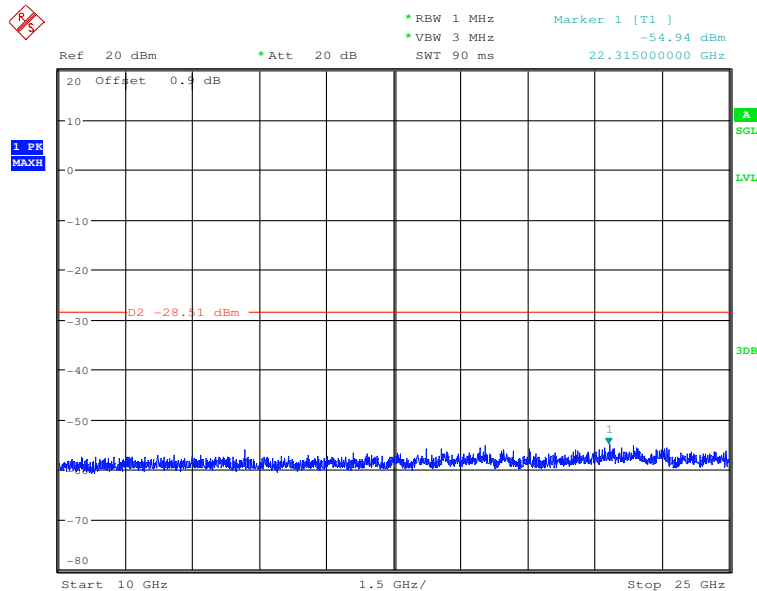




RF Conducted Spurious Emissions_11N40SISO_2452

Pref

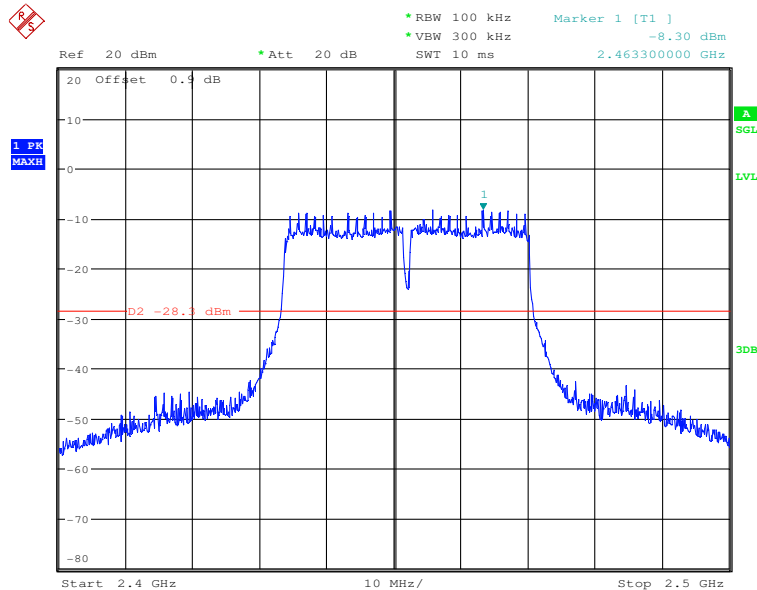




CSE_1

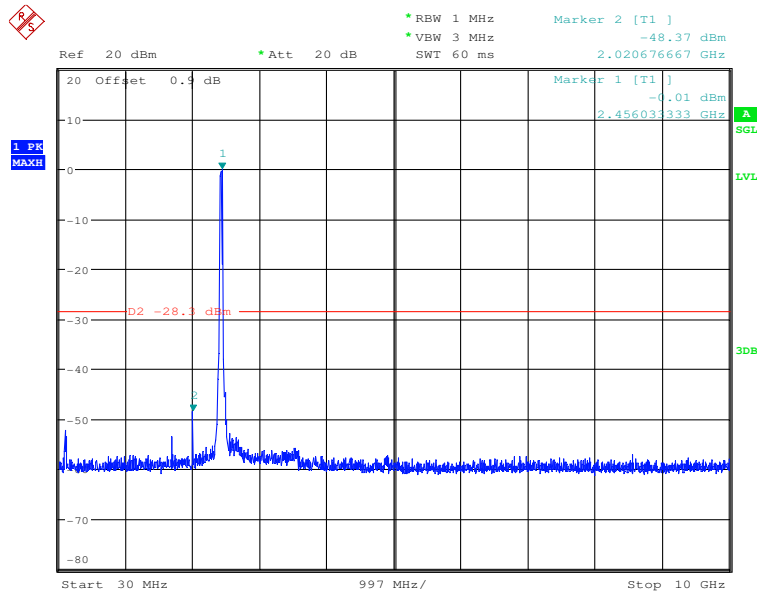

CSE_2

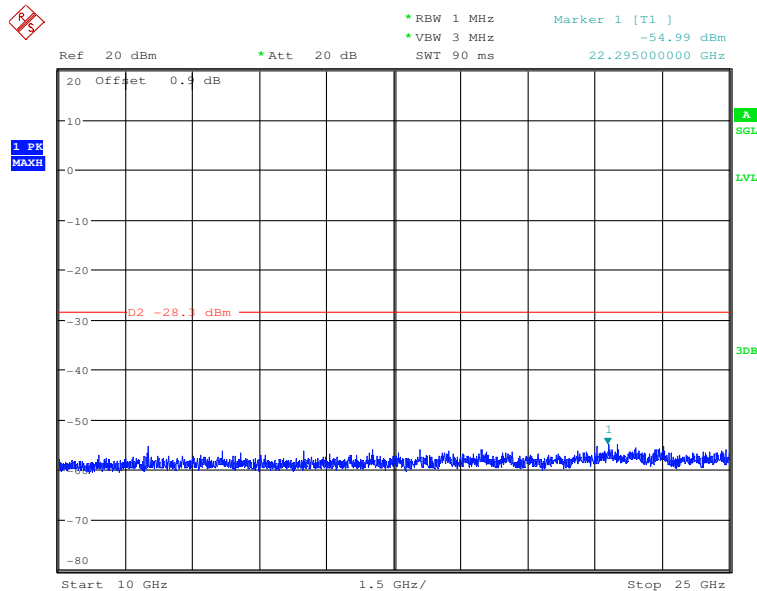






9.1.2 LS9-AC11DBT 2.4 15.247


1.6dB Bandwidth


Test Mode	Test Channel	EBW[MHz]	Limit	Verdict
11B	2412	10.140	≥ 0.5	PASS
11B	2437	10.120	≥ 0.5	PASS
11B	2462	10.120	≥ 0.5	PASS
11G	2412	16.520	≥ 0.5	PASS
11G	2437	16.480	≥ 0.5	PASS
11G	2462	16.460	≥ 0.5	PASS
11N20SISO	2412	17.720	≥ 0.5	PASS
11N20SISO	2437	17.760	≥ 0.5	PASS
11N20SISO	2462	17.720	≥ 0.5	PASS
11N40SISO	2422	36.480	≥ 0.5	PASS
11N40SISO	2437	35.880	≥ 0.5	PASS
11N40SISO	2452	36.060	≥ 0.5	PASS

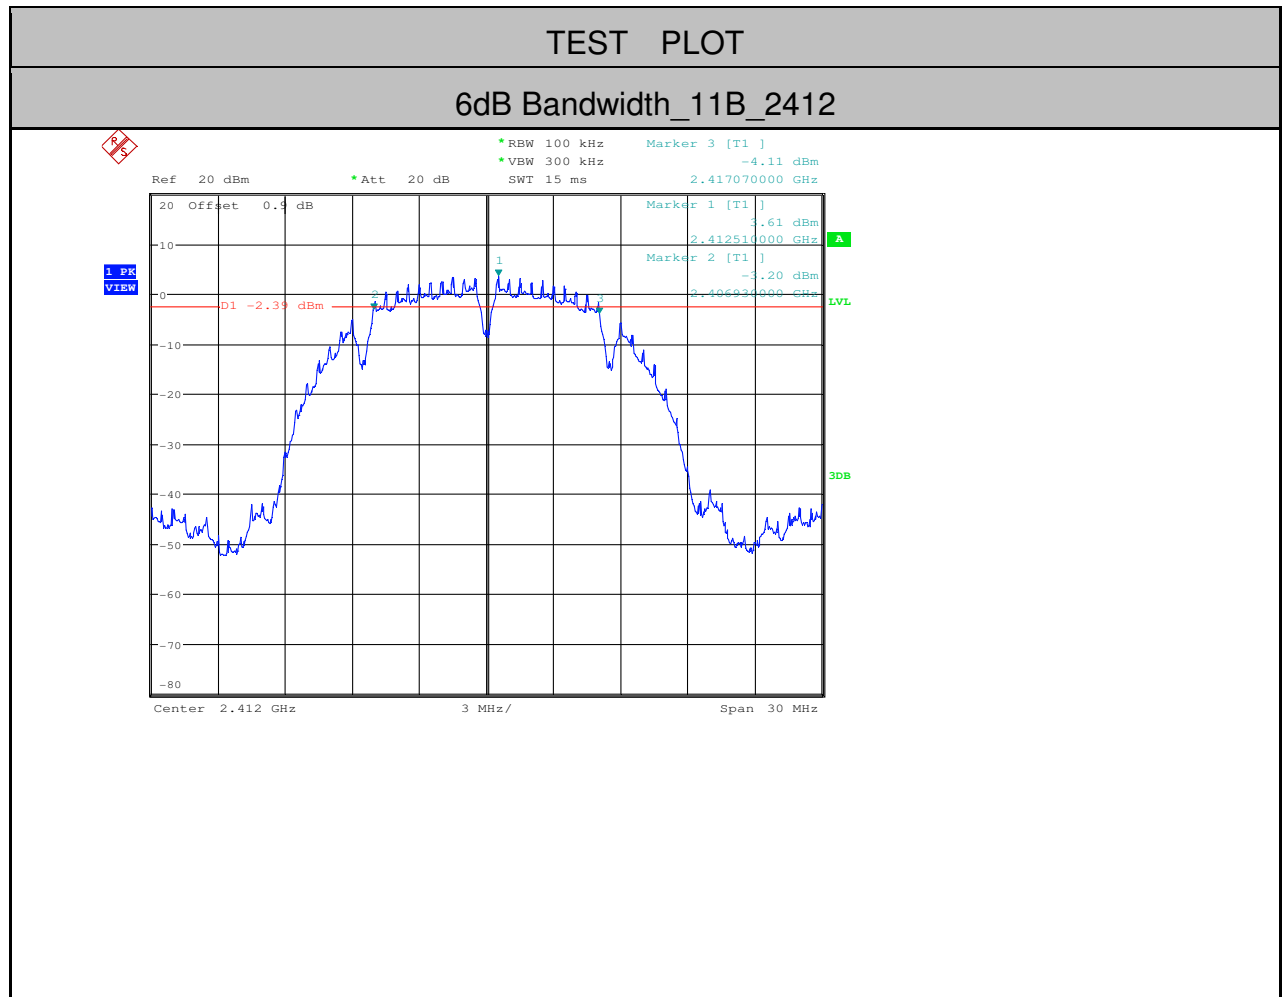


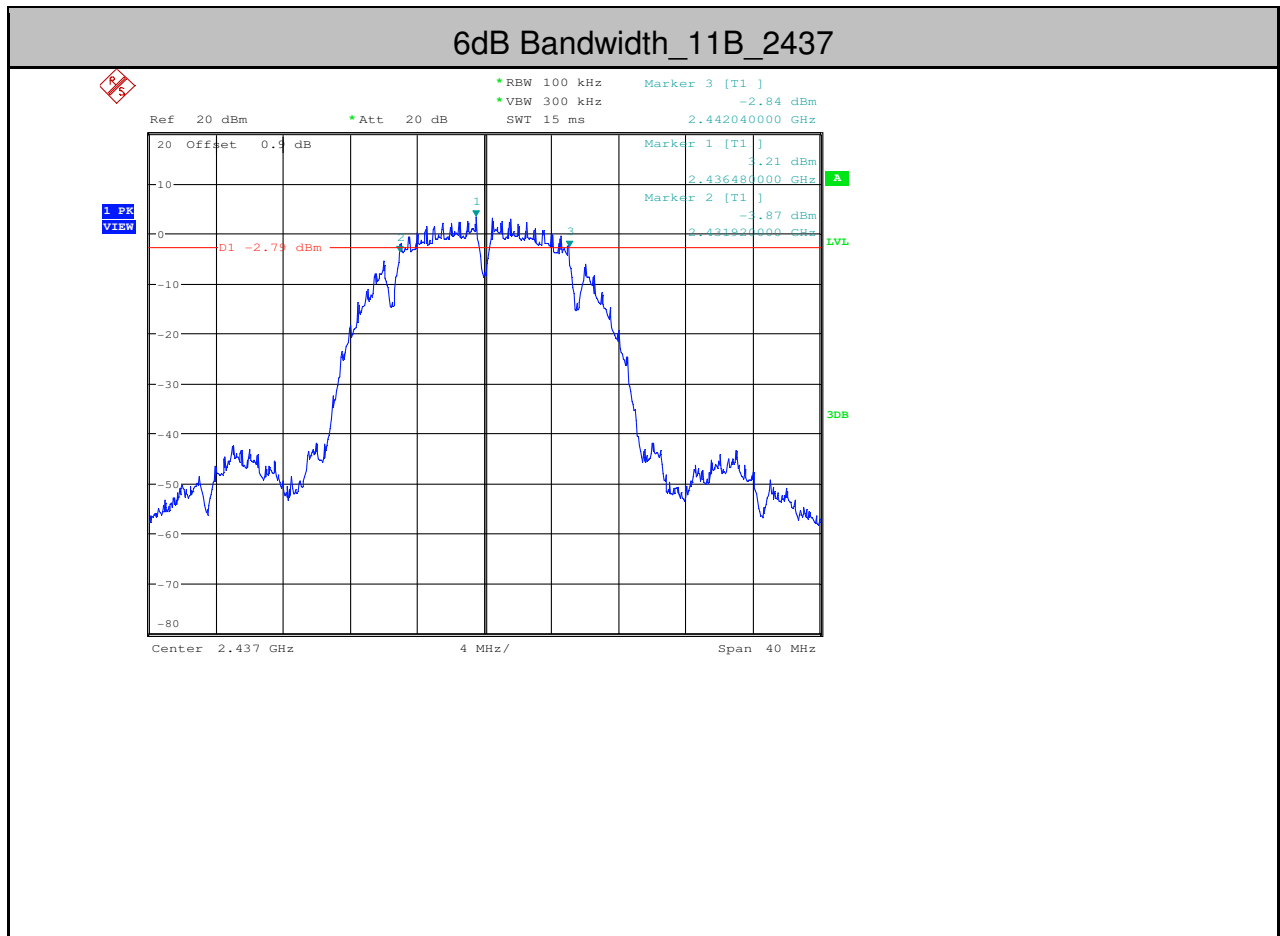


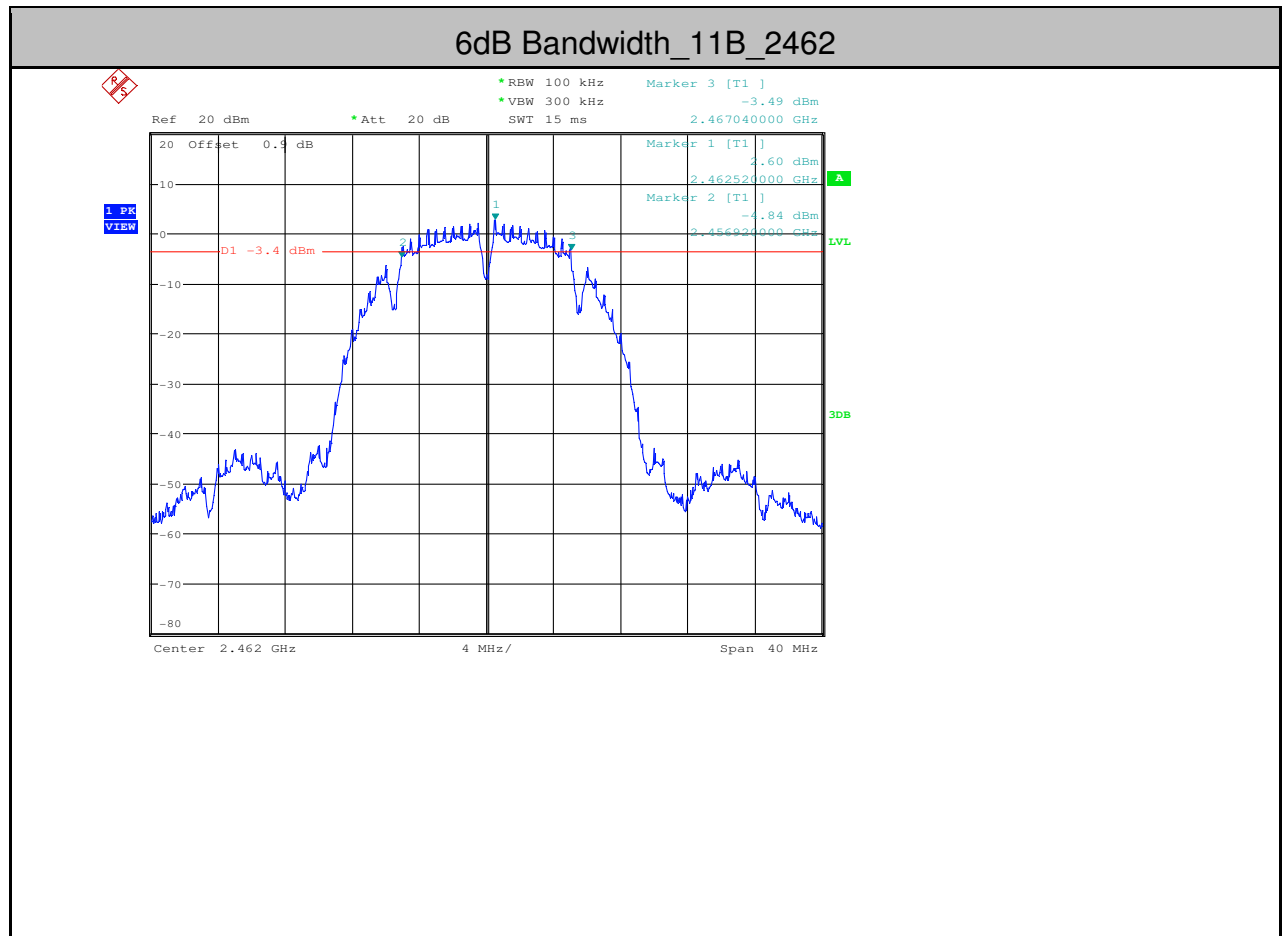


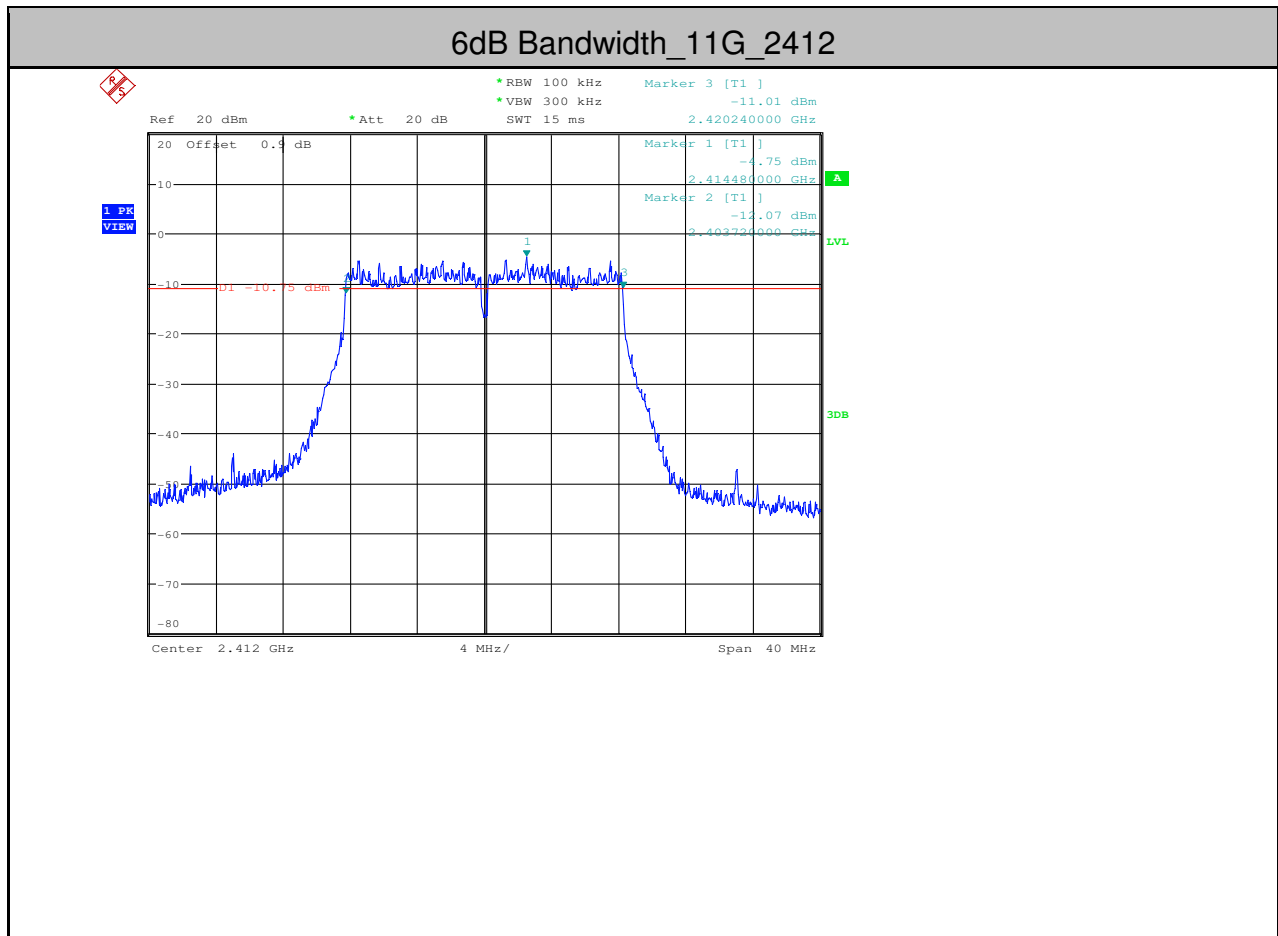


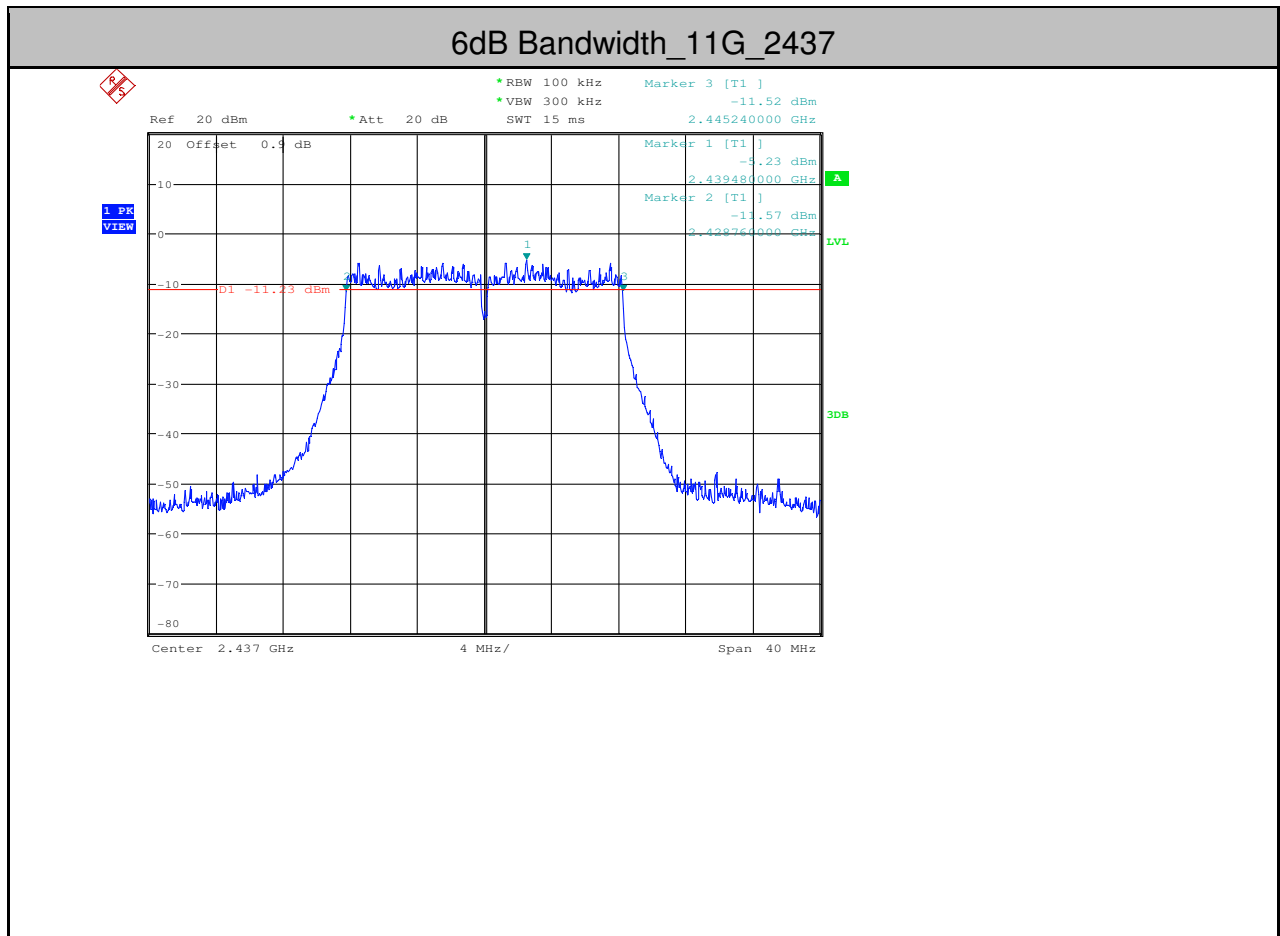


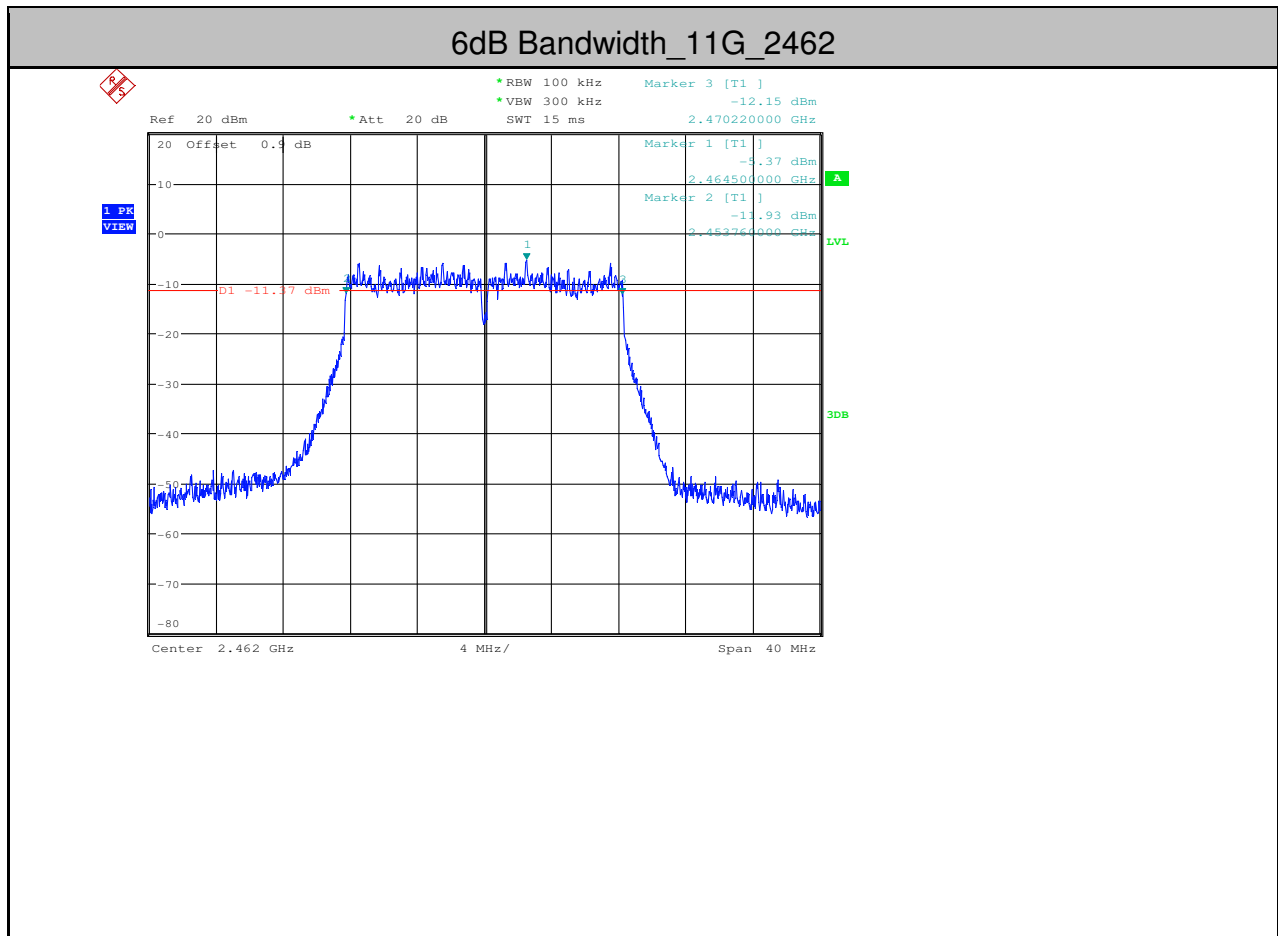


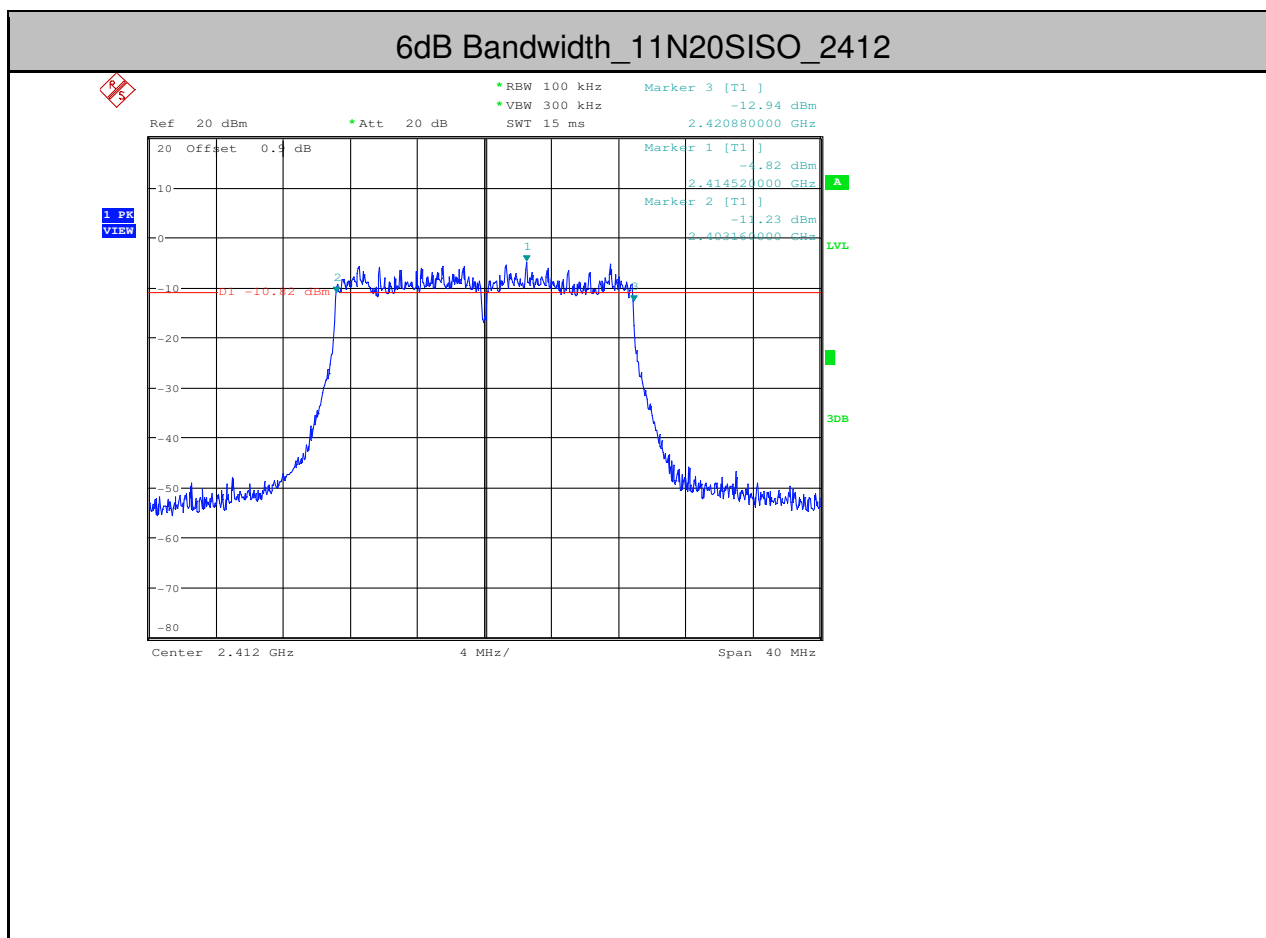

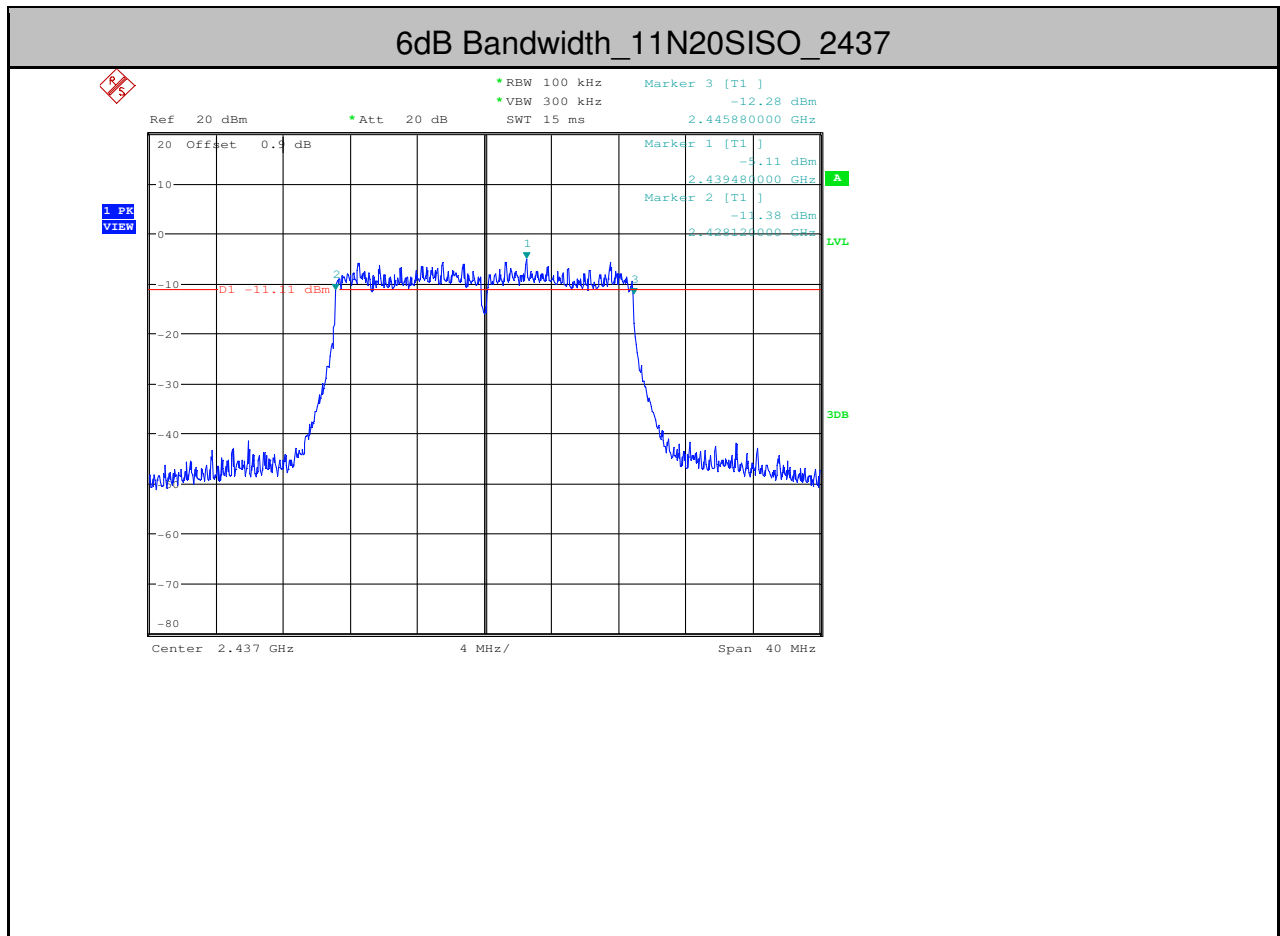

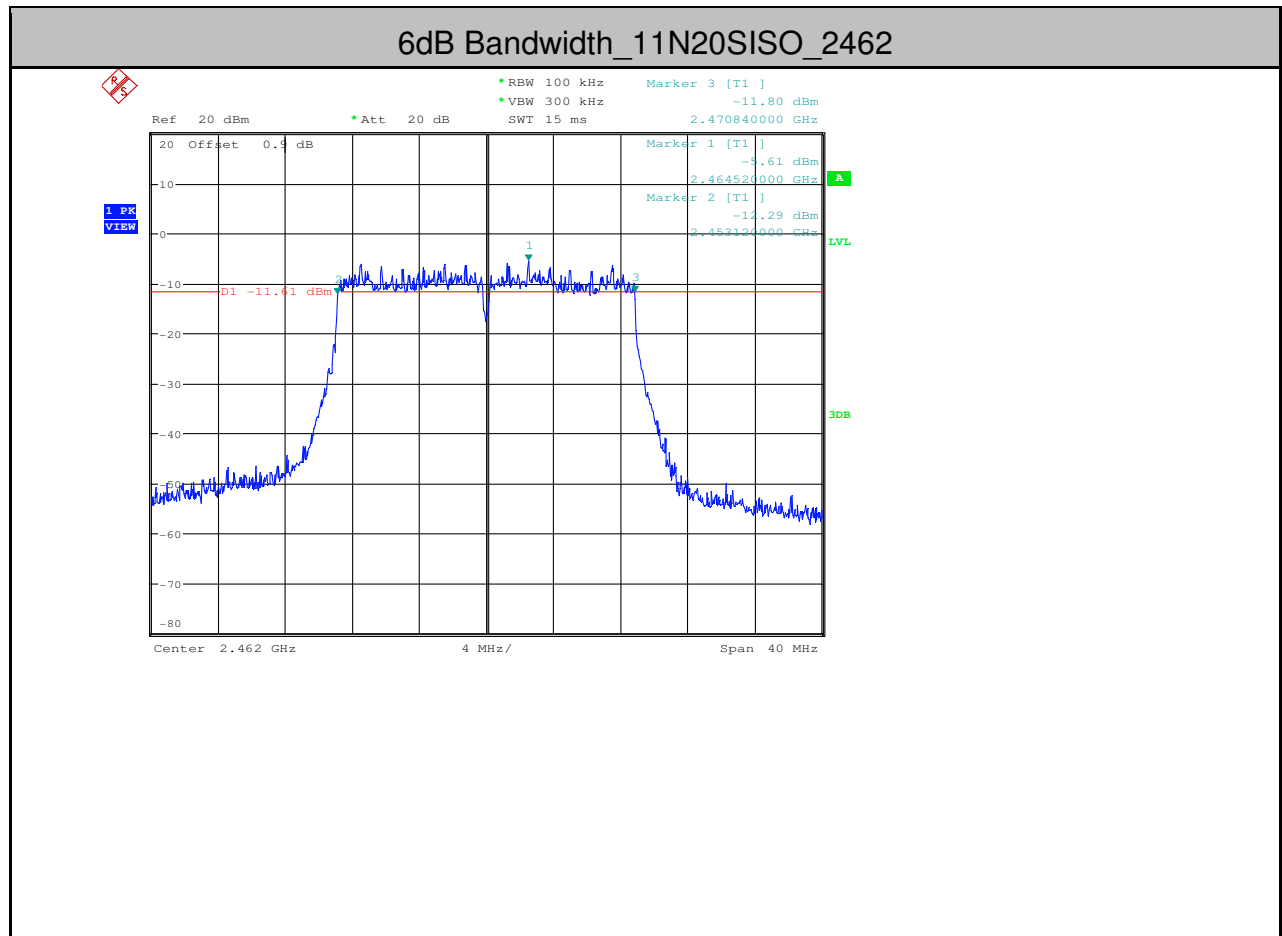

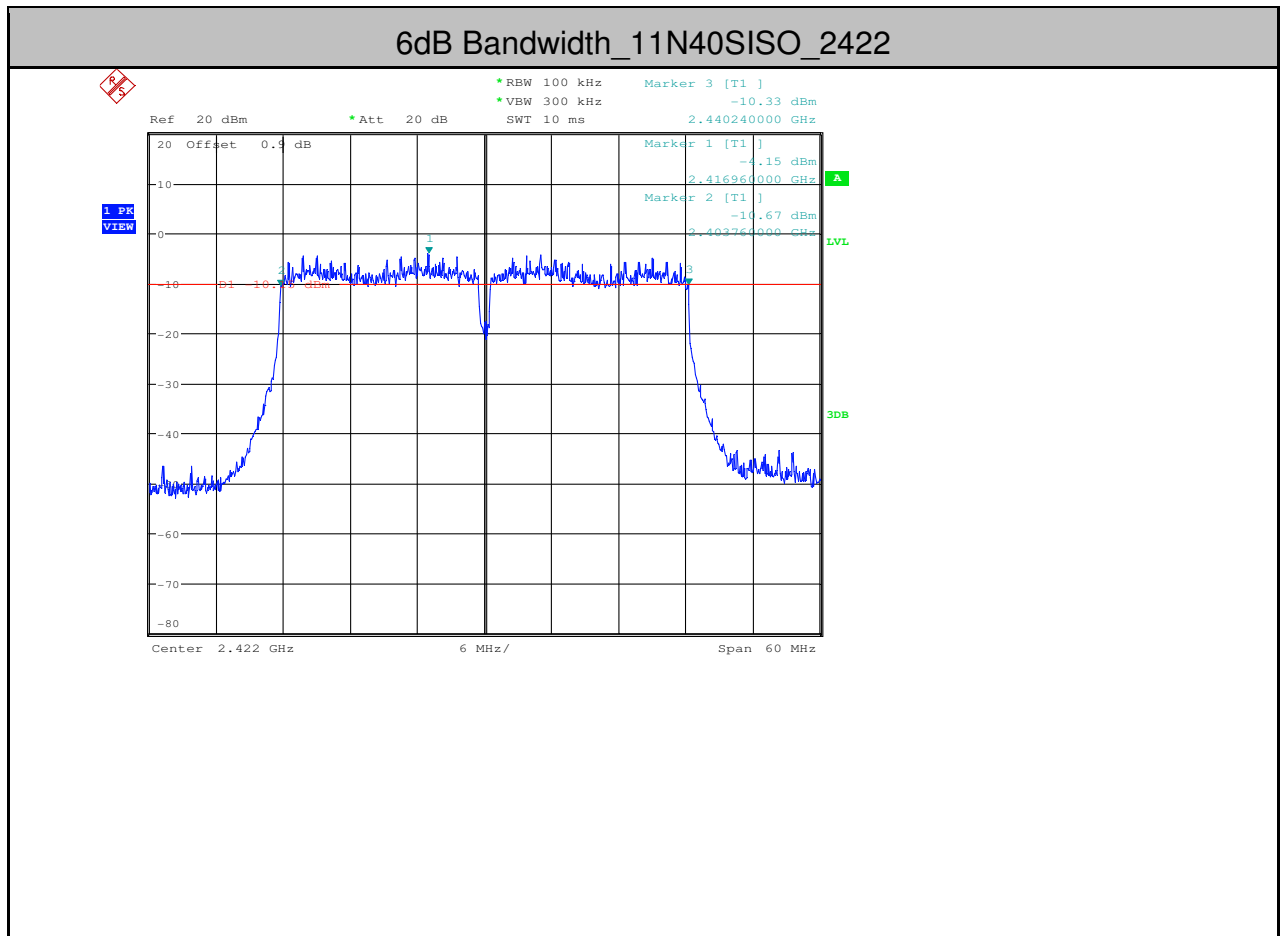

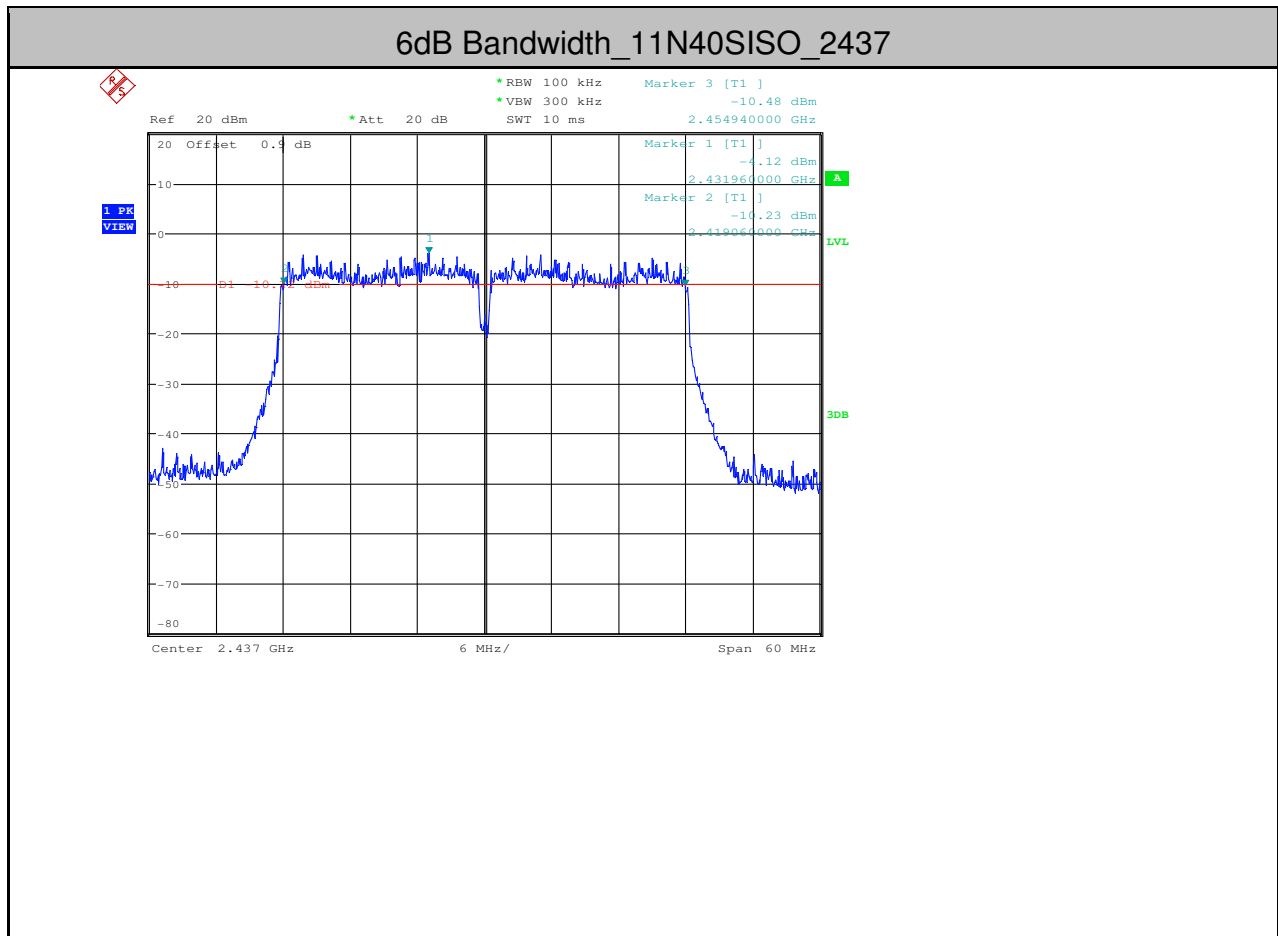




2. Maximum peak conducted output power

Test Mode	Test Channel	Power[dBm]	Limit[dBm]	Verdict
11B	2412	16.86	<30	PASS
11B	2437	16.40	<30	PASS
11B	2462	16.07	<30	PASS
11G	2412	15.56	<30	PASS
11G	2437	15.15	<30	PASS
11G	2462	14.97	<30	PASS
11N20SISO	2412	15.50	<30	PASS
11N20SISO	2437	15.44	<30	PASS
11N20SISO	2462	14.95	<30	PASS
11N40SISO	2422	19.55	<30	PASS
11N40SISO	2437	19.30	<30	PASS
11N40SISO	2452	19.30	<30	PASS




TEST PLOT

Maximum peak conducted output power_11B_2412

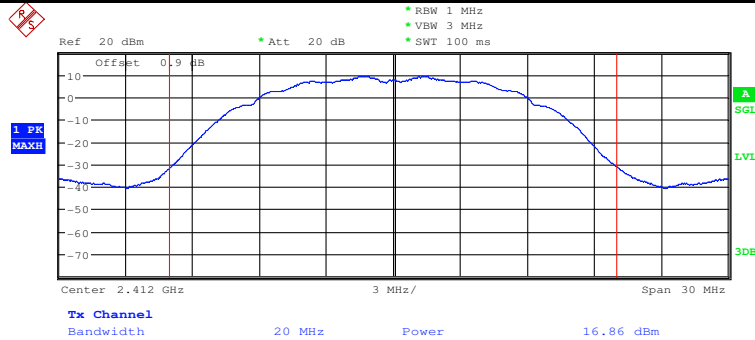




Maximum peak conducted output power_11B_2437

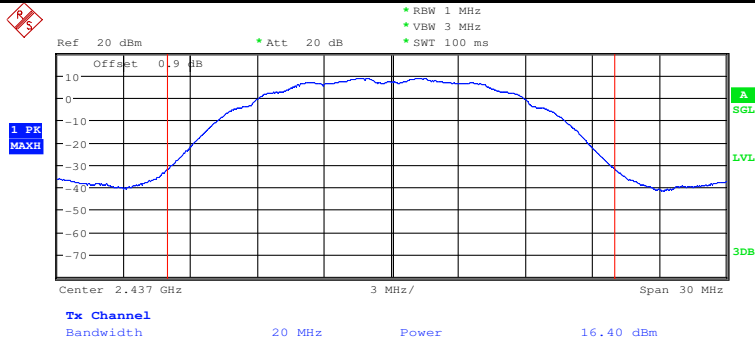




Maximum peak conducted output power_11B_2462

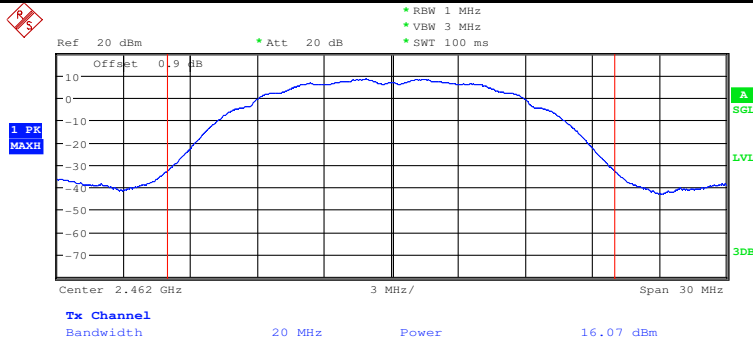




Maximum peak conducted output power_11G_2412

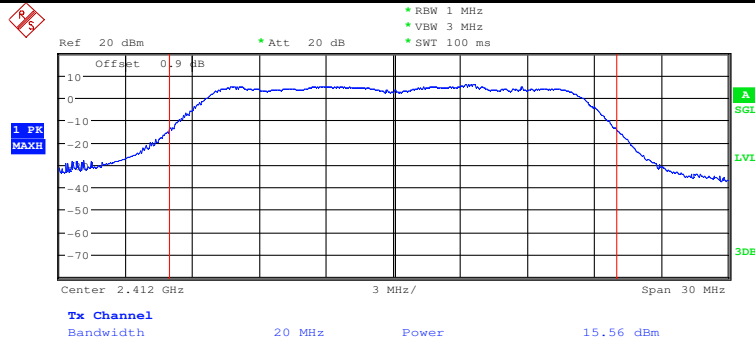




Maximum peak conducted output power_11G_2437

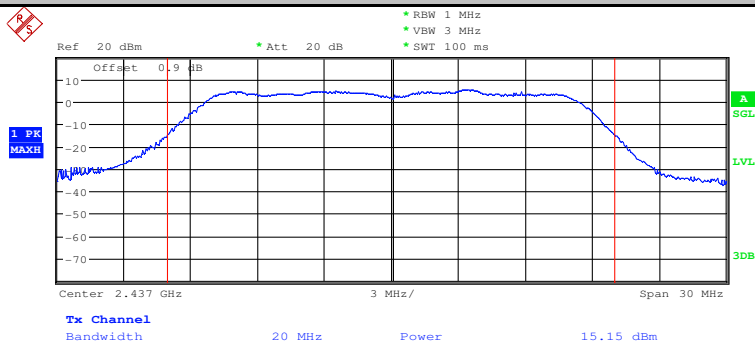




Maximum peak conducted output power_11G_2462

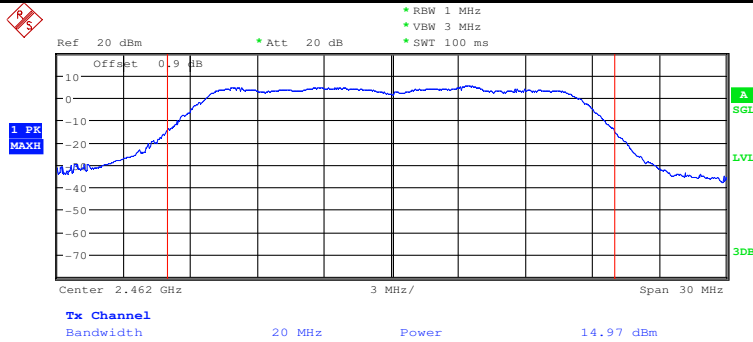




Maximum peak conducted output power_11N20SISO_2412

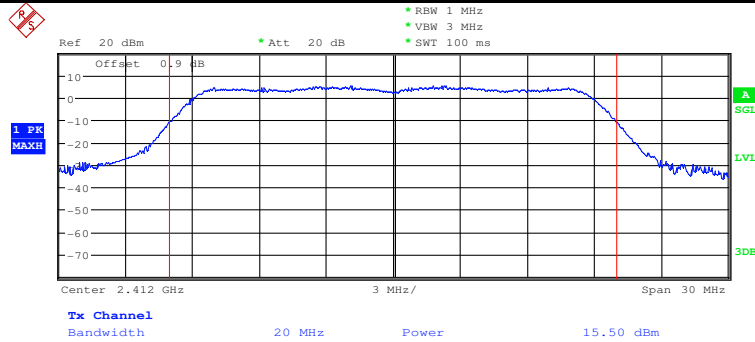




Maximum peak conducted output power_11N20SISO_2437

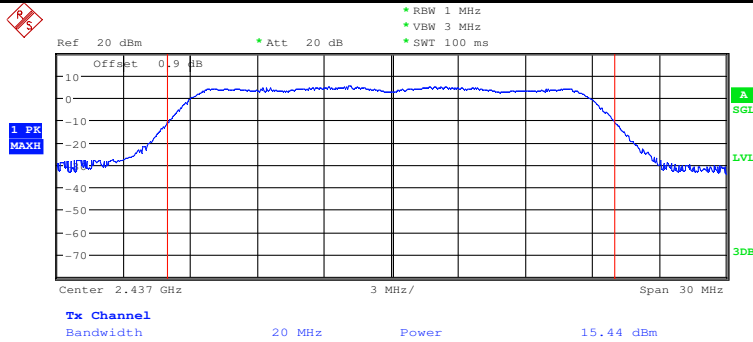


Maximum peak conducted output power_11N20ISO_2462

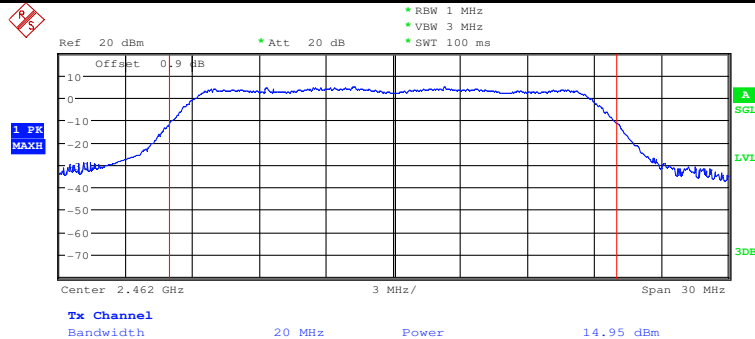




Maximum peak conducted output power_11N40SISO_2422

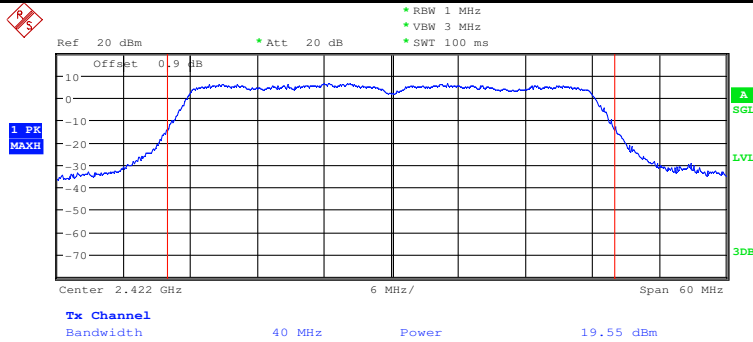




Maximum peak conducted output power_11N40SISO_2437

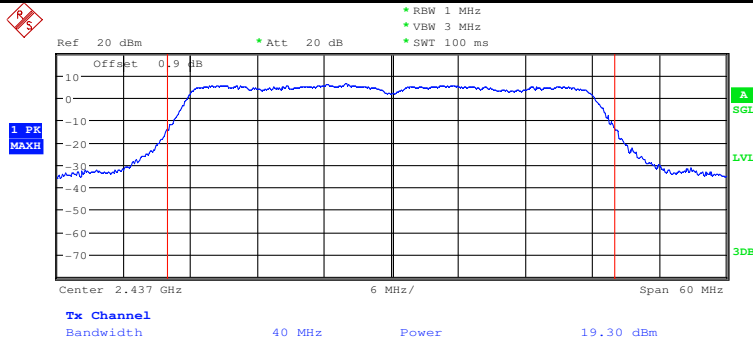



Maximum peak conducted output power_11N40SISO_2452

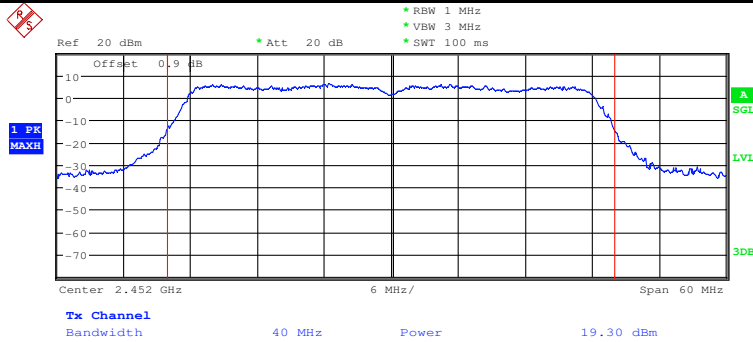




3.Maximum Peak power spectral density

Test Mode	Test Channel	PSD[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	2412	-10.85	<8.00	PASS
11B	2437	-11.6	<8.00	PASS
11B	2462	-11.84	<8.00	PASS
11G	2412	-18.57	<8.00	PASS
11G	2437	-19.9	<8.00	PASS
11G	2462	-20.5	<8.00	PASS
11N20SISO	2412	-19.58	<8.00	PASS
11N20SISO	2437	-19.2	<8.00	PASS
11N20SISO	2462	-20.8	<8.00	PASS
11N40SISO	2422	-18.94	<8.00	PASS
11N40SISO	2437	-18.59	<8.00	PASS
11N40SISO	2452	-18.49	<8.00	PASS




TEST PLOT

Maximum Peak power spectral density_11B_2412

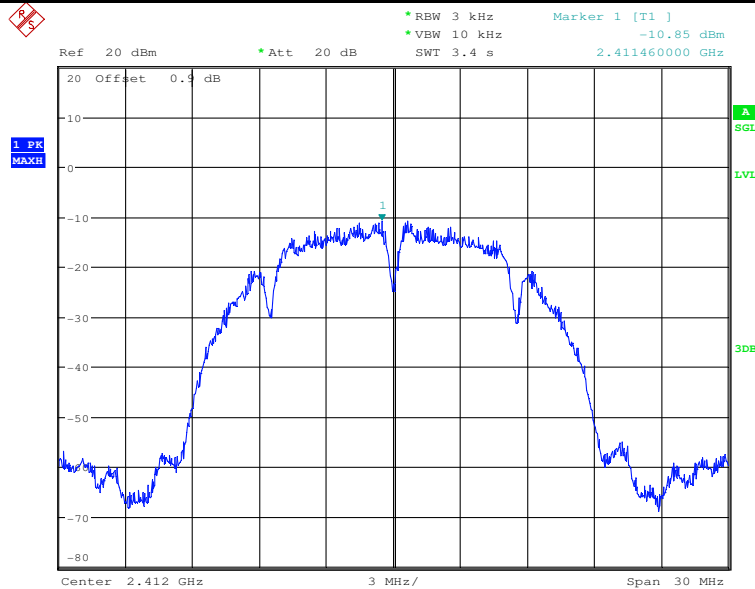




Maximum Peak power spectral density_11B_2437

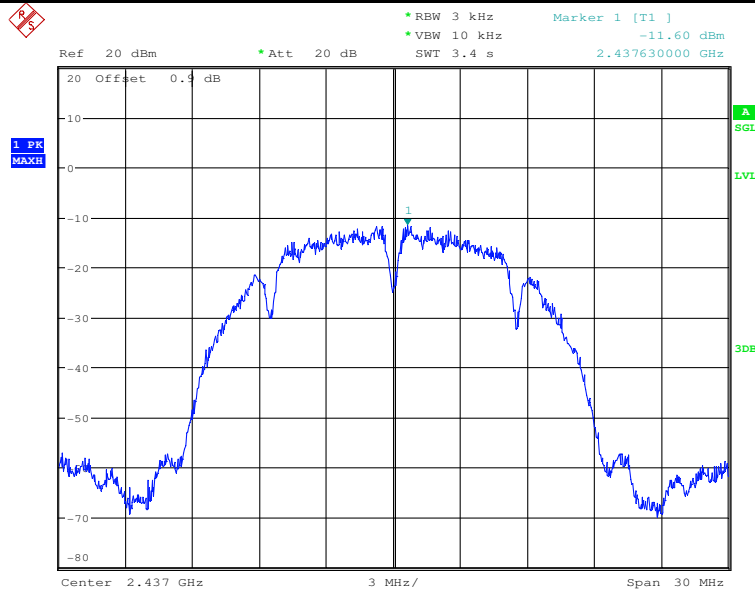




Maximum Peak power spectral density_11B_2462

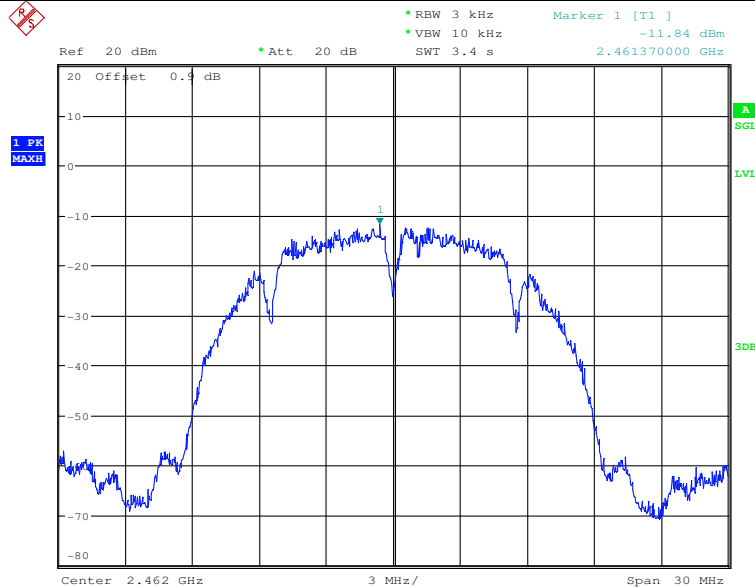




Maximum Peak power spectral density_11G_2412

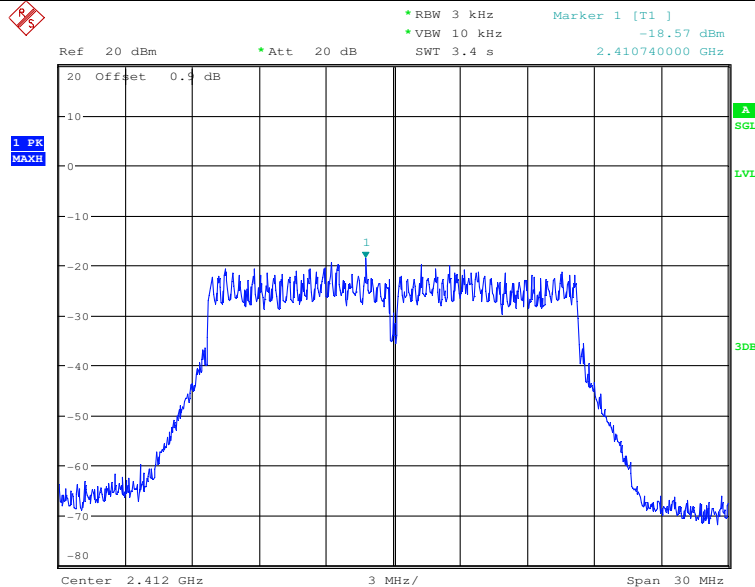




Maximum Peak power spectral density_11G_2437

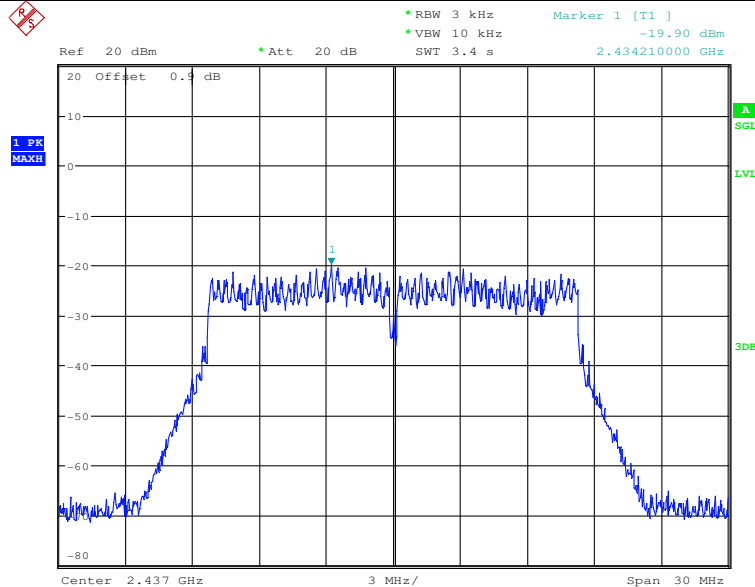




Maximum Peak power spectral density_11G_2462

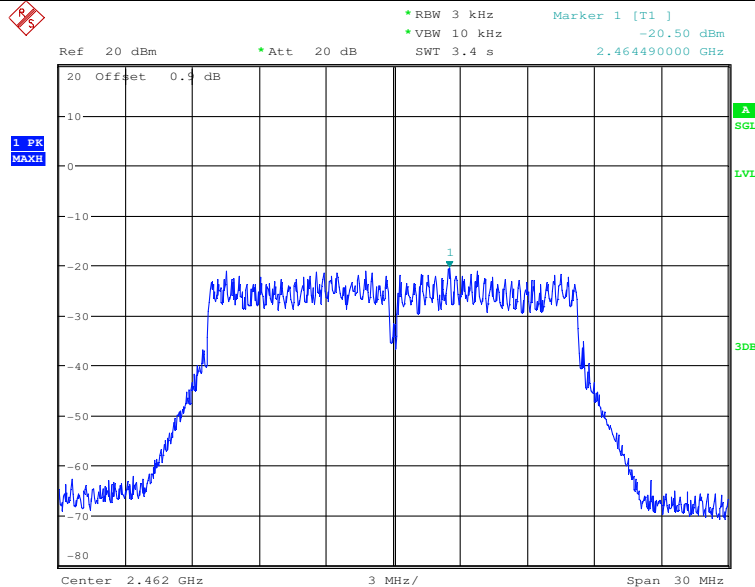




Maximum Peak power spectral density_11N20SISO_2412

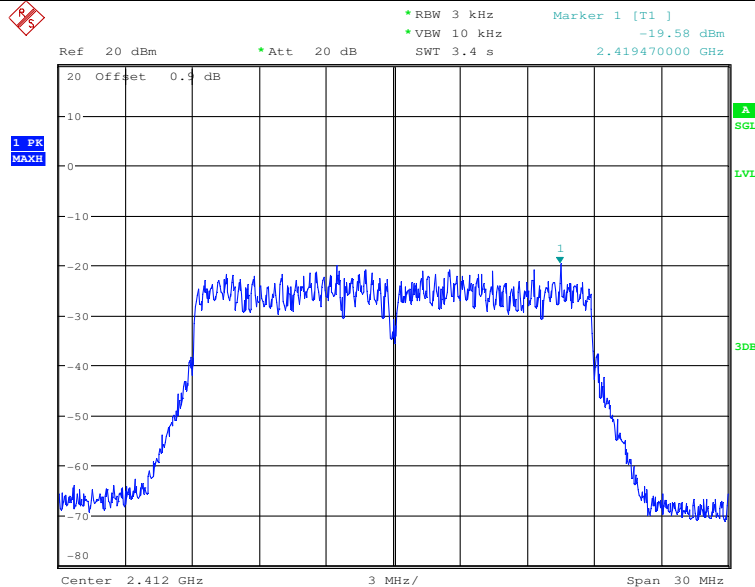




Maximum Peak power spectral density_11N20SISO_2437

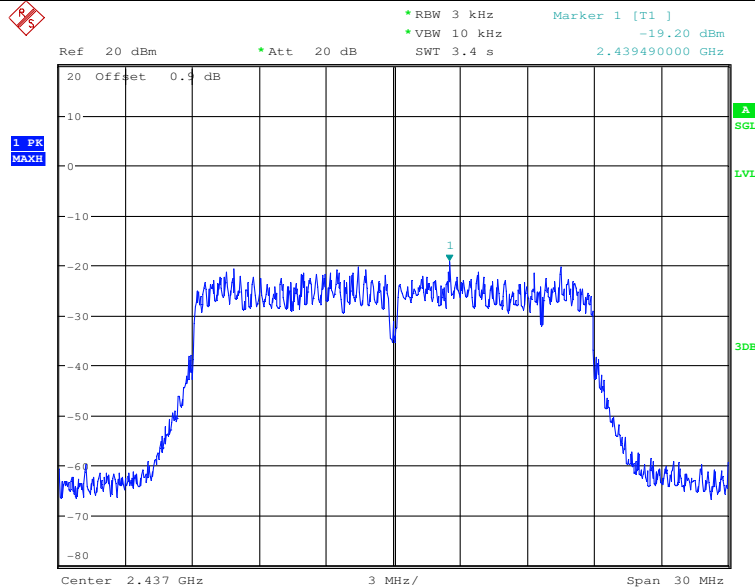




Maximum Peak power spectral density_11N20SISO_2462

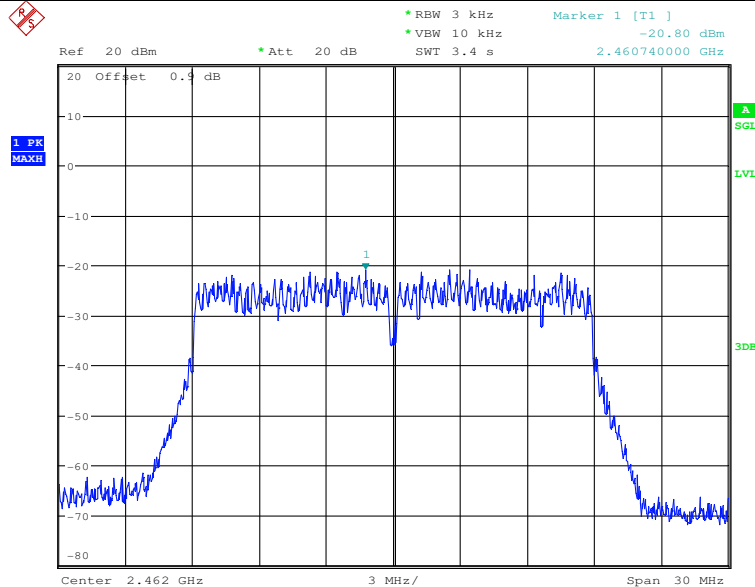




Maximum Peak power spectral density_11N40SISO_2422

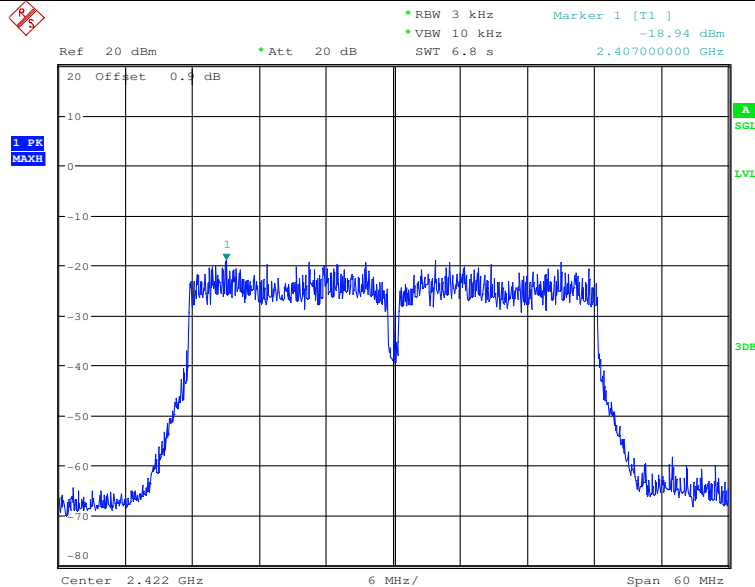




Maximum Peak power spectral density_11N40SISO_2437

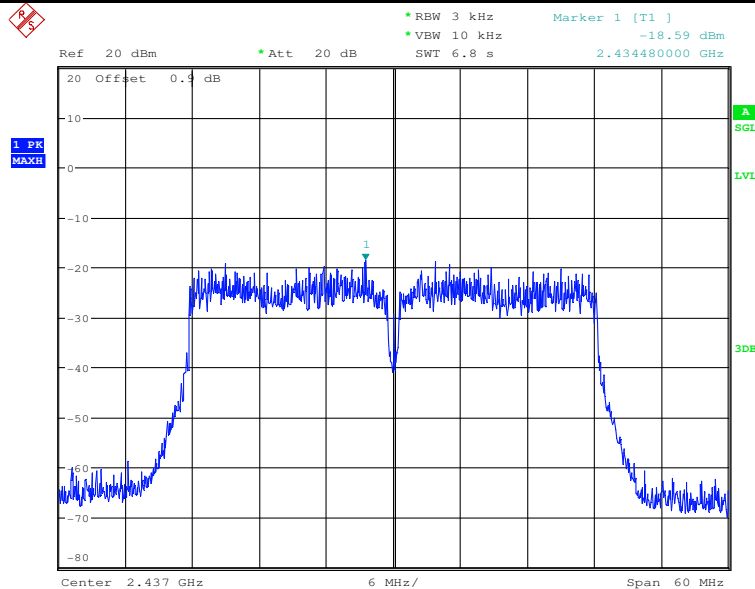




Maximum Peak power spectral density_11N40SISO_2452

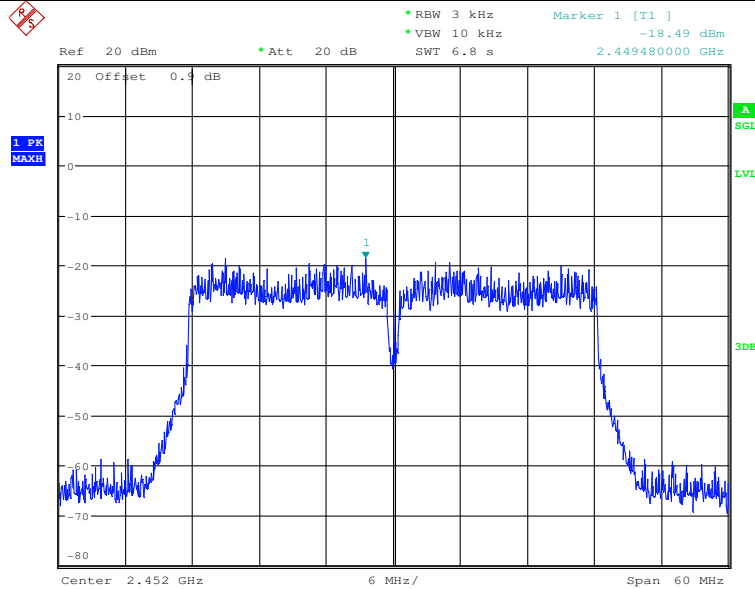




4.Band-edge for RF Conducted Emissions

Test Mode	Test Channel	Carrier Power[dBm]	Max. Spurious Level [dBm]	Limit [dBm]	Verdict
11B	2412	3.300	-52.053	<-16.7	PASS
11B	2462	2.560	-55.818	<-17.44	PASS
11G	2412	-4.900	-54.569	<-24.9	PASS
11G	2462	-5.400	-53.742	<-25.4	PASS
11N20SISO	2412	-5.290	-52.239	<-25.29	PASS
11N20SISO	2462	-5.410	-55.014	<-25.41	PASS
11N40SISO	2422	-3.930	-47.119	<-23.93	PASS
11N40SISO	2452	-3.760	-43.529	<-23.76	PASS

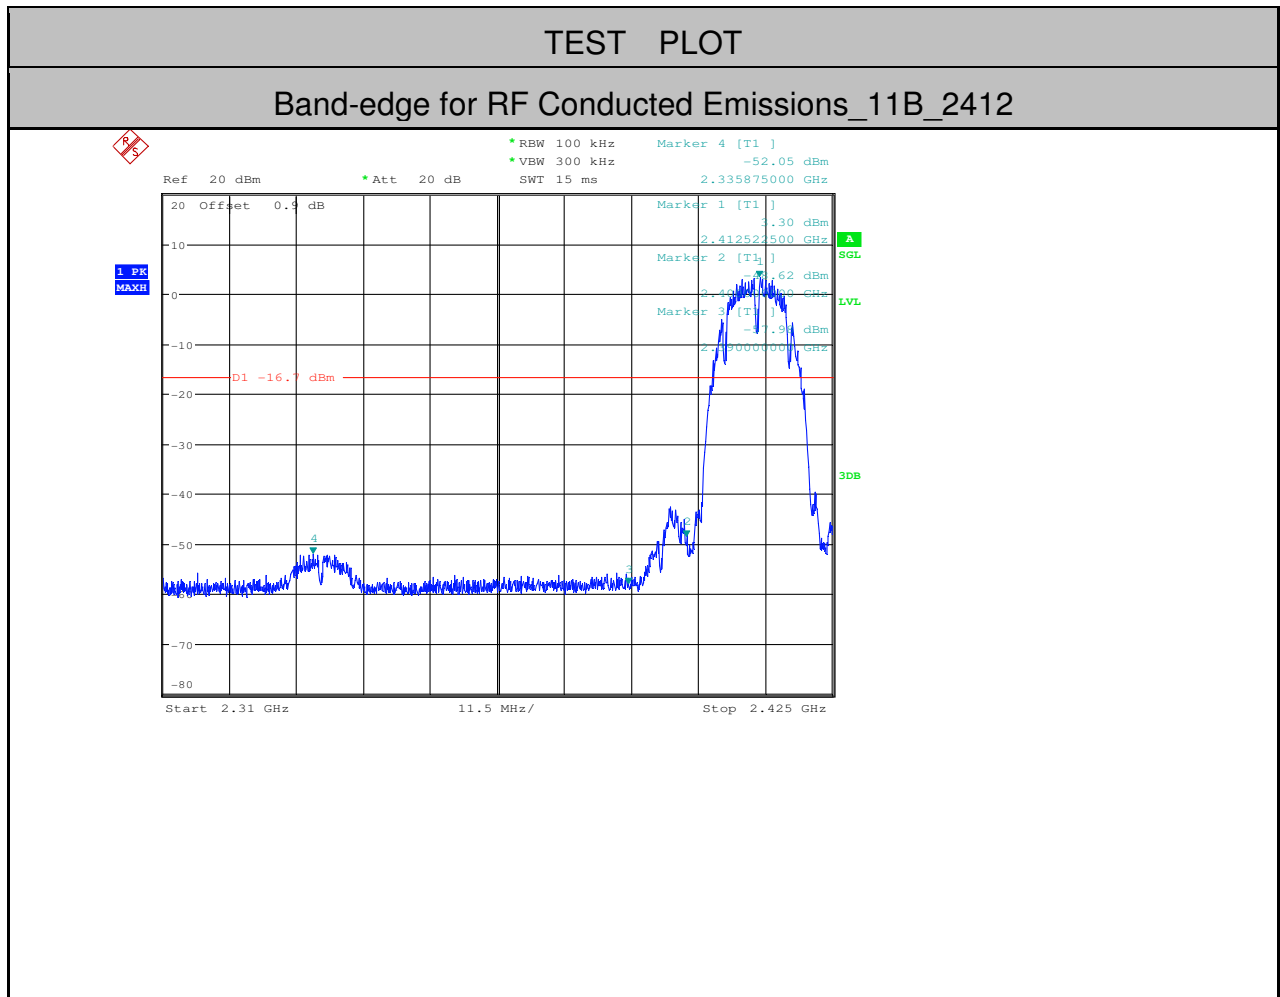




Band-edge for RF Conducted Emissions_11B_2462

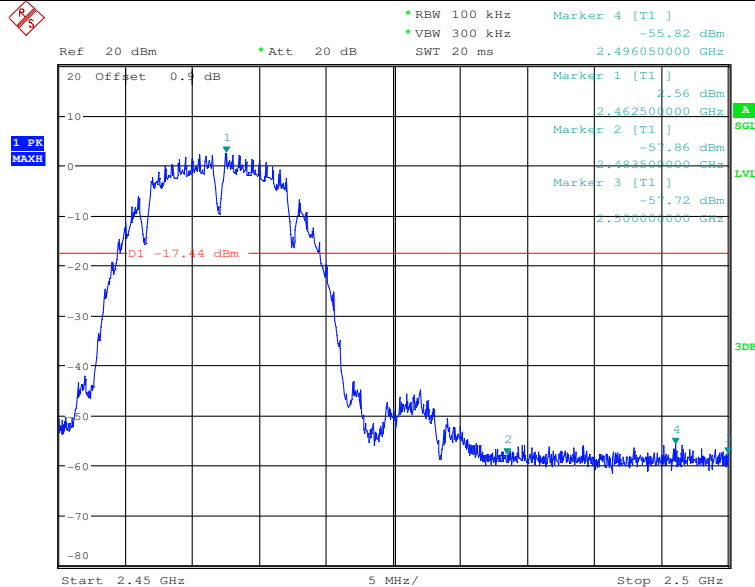




Band-edge for RF Conducted Emissions_11G_2412

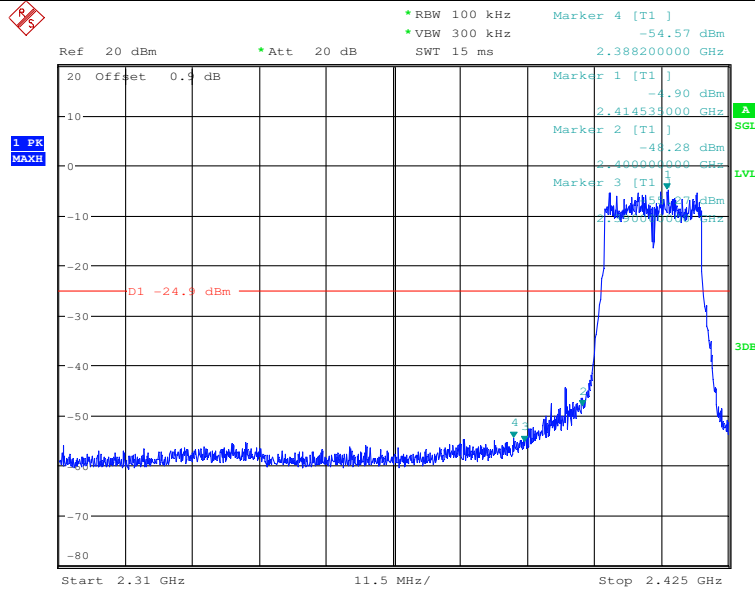




Band-edge for RF Conducted Emissions_11G_2462

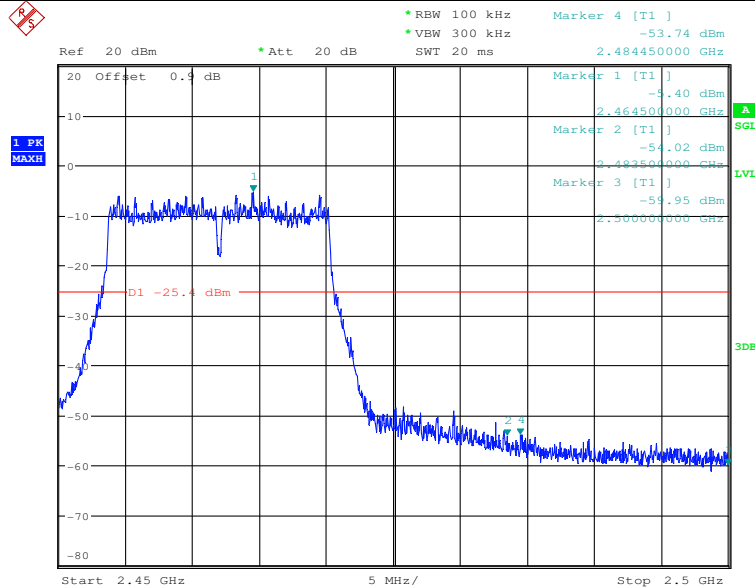




Band-edge for RF Conducted Emissions_11N20SISO_2412

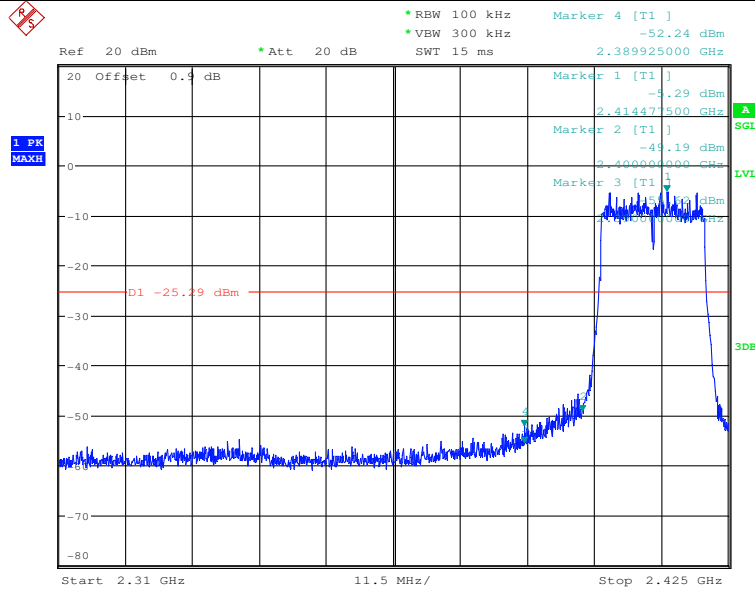




Band-edge for RF Conducted Emissions_11N20SISO_2462

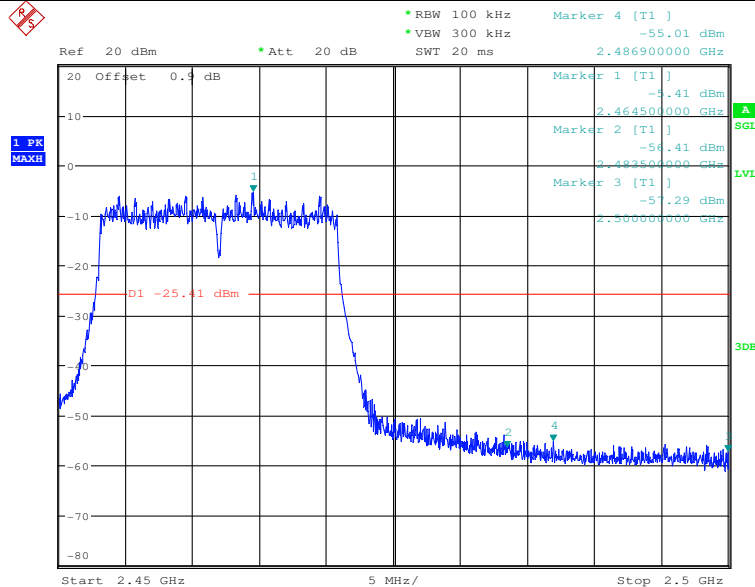




Band-edge for RF Conducted Emissions_11N40SISO_2422

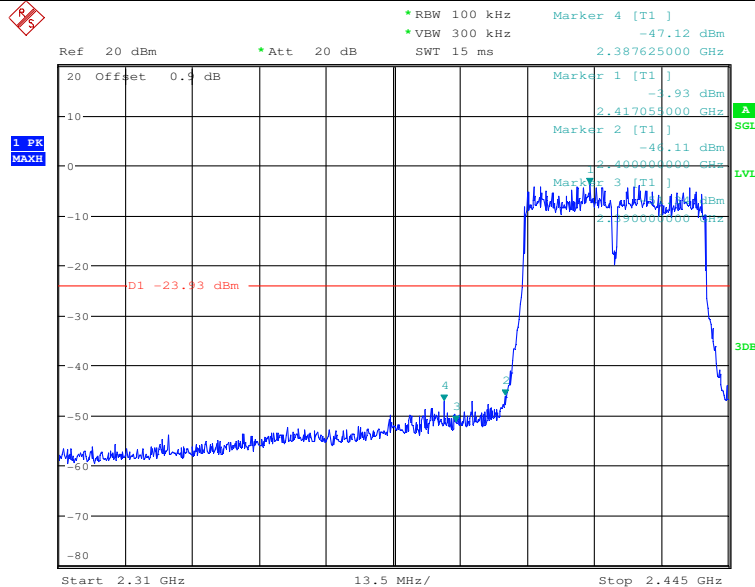



Band-edge for RF Conducted Emissions_11N40SISO_2452

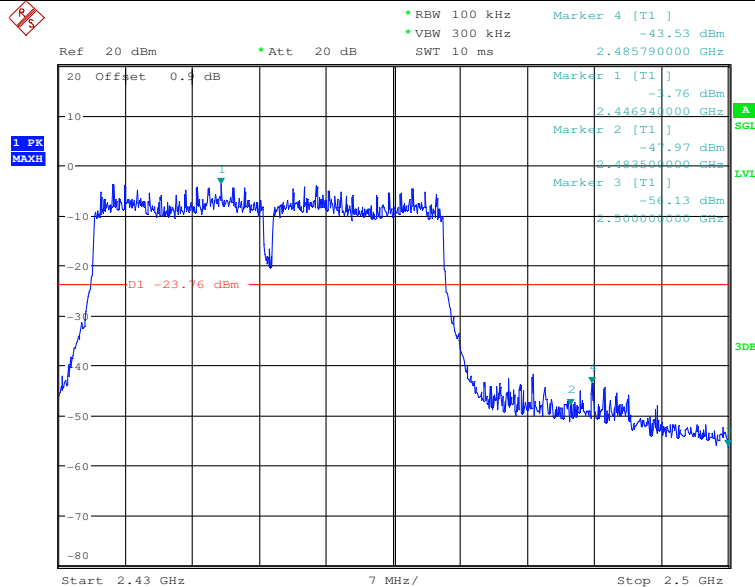




5.RF Conducted Spurious Emissions

Test Mode	Test Channel	StartFre [MHz]	StopFre [MHz]	RBW [kHz]	VBW [kHz]	Pref [dBm]	Max. Level [dBm]	Limit [dBm]	Verdict
11B	2412	30	10000	1000	3000	3.65	-35.620	<-16.35	PASS
11B	2412	10000	25000	1000	3000	3.65	-55.270	<-16.35	PASS
11B	2437	30	10000	1000	3000	3.19	-37.060	<-16.81	PASS
11B	2437	10000	25000	1000	3000	3.19	-55.290	<-16.81	PASS
11B	2462	30	10000	1000	3000	2.59	-37.080	<-17.41	PASS
11B	2462	10000	25000	1000	3000	2.59	-55.000	<-17.41	PASS
11G	2412	30	10000	1000	3000	-5.03	-48.350	<-25.03	PASS
11G	2412	10000	25000	1000	3000	-5.03	-54.960	<-25.03	PASS
11G	2437	30	10000	1000	3000	-5.48	-50.160	<-25.48	PASS
11G	2437	10000	25000	1000	3000	-5.48	-55.280	<-25.48	PASS
11G	2462	30	10000	1000	3000	-5.61	-50.130	<-25.61	PASS
11G	2462	10000	25000	1000	3000	-5.61	-55.040	<-25.61	PASS
11N20SISO	2412	30	10000	1000	3000	-5.01	-48.780	<-25.01	PASS
11N20SISO	2412	10000	25000	1000	3000	-5.01	-54.900	<-25.01	PASS
11N20SISO	2437	30	10000	1000	3000	-5.34	-48.960	<-25.34	PASS
11N20SISO	2437	10000	25000	1000	3000	-5.34	-54.570	<-25.34	PASS
11N20SISO	2462	30	10000	1000	3000	-5.68	-50.140	<-25.68	PASS
11N20SISO	2462	10000	25000	1000	3000	-5.68	-55.250	<-25.68	PASS
11N40SISO	2422	30	10000	1000	3000	-3.97	-43.330	<-23.97	PASS
11N40SISO	2422	10000	25000	1000	3000	-3.97	-54.710	<-23.97	PASS
11N40SISO	2437	30	10000	1000	3000	-4.26	-45.830	<-24.26	PASS
11N40SISO	2437	10000	25000	1000	3000	-4.26	-55.060	<-24.26	PASS
11N40SISO	2452	30	10000	1000	3000	-3.92	-44.730	<-23.92	PASS
11N40SISO	2452	10000	25000	1000	3000	-3.92	-54.900	<-23.92	PASS


Remark:

Pretest 9kHz to 25GHz, find the highest point when testing, so only the worst data were shown in the test report. Per FCC Part 15.33 (a) and 15.31 (o) ,The amplitude of spurious emissions from intentional radiators which are attenuated more than 20 dB below the permissible value need not be reported unless specifically required elsewhere in this part.

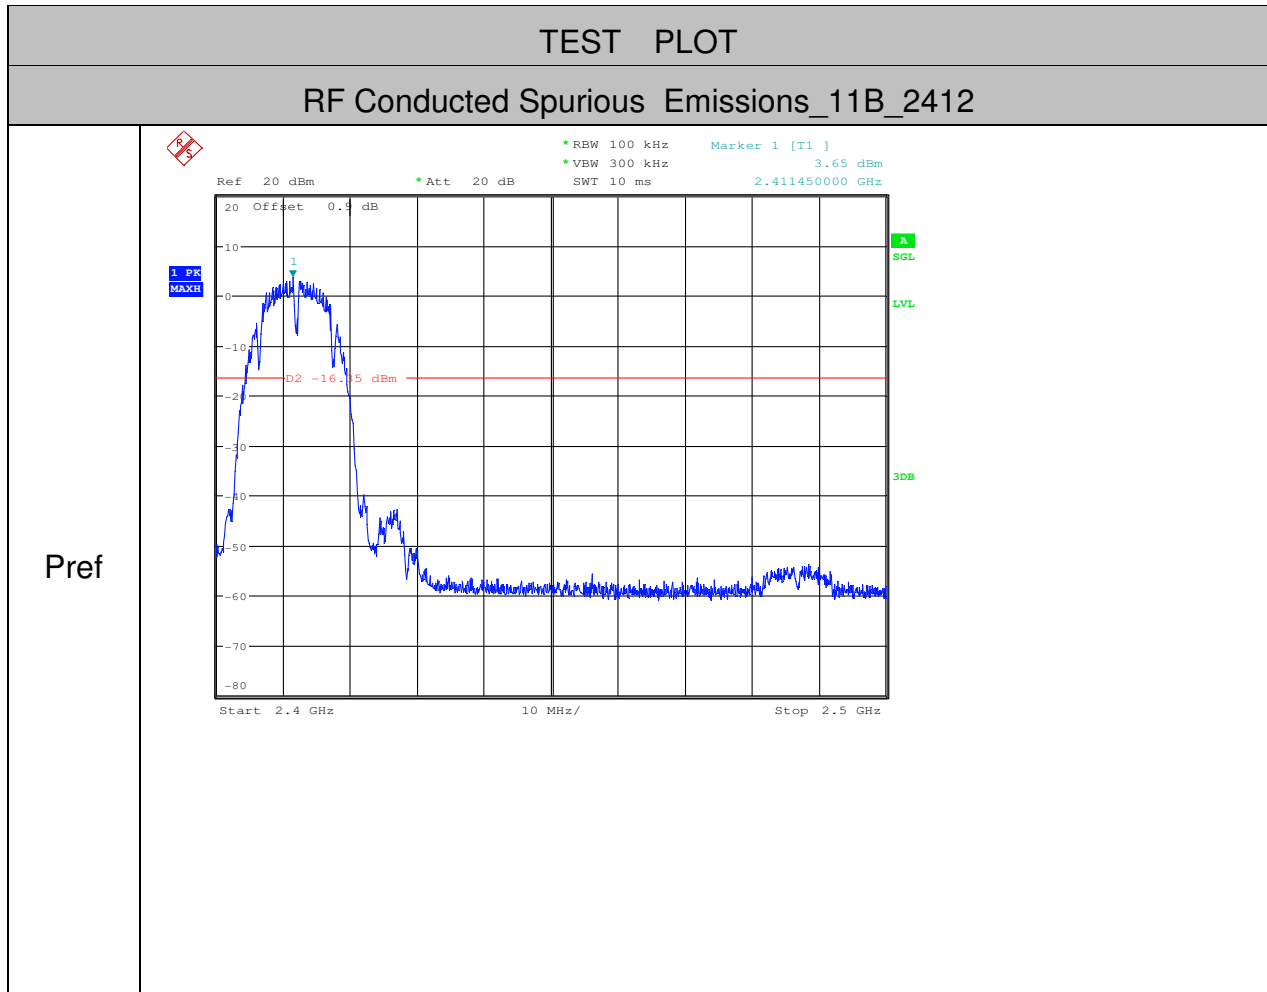




CSE_1

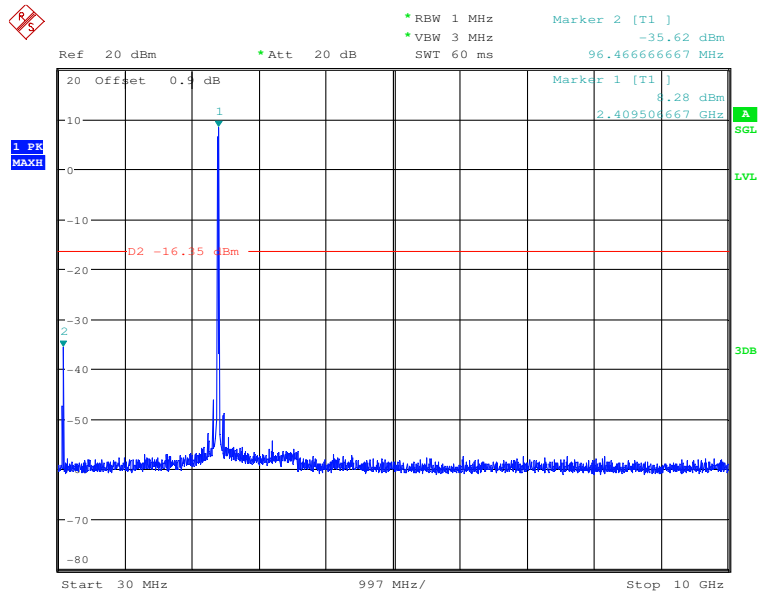


CSE_2

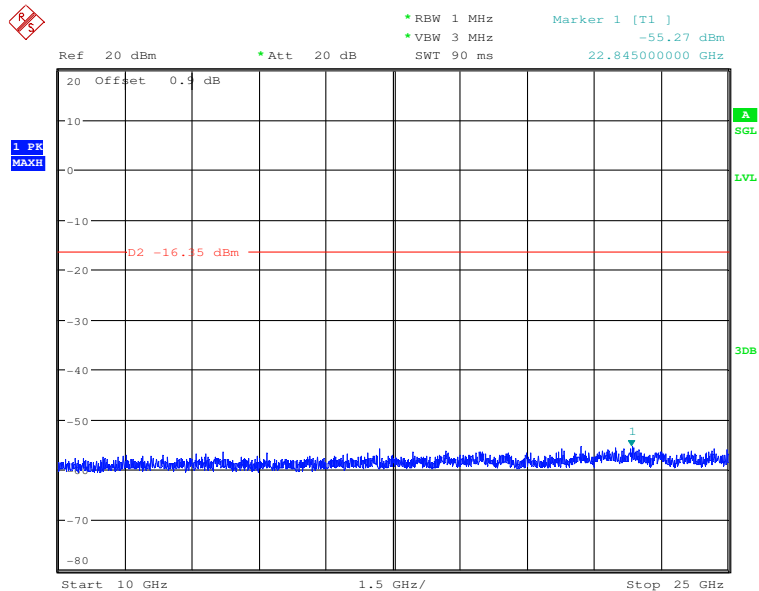




RF Conducted Spurious Emissions_11B_2437

Pref

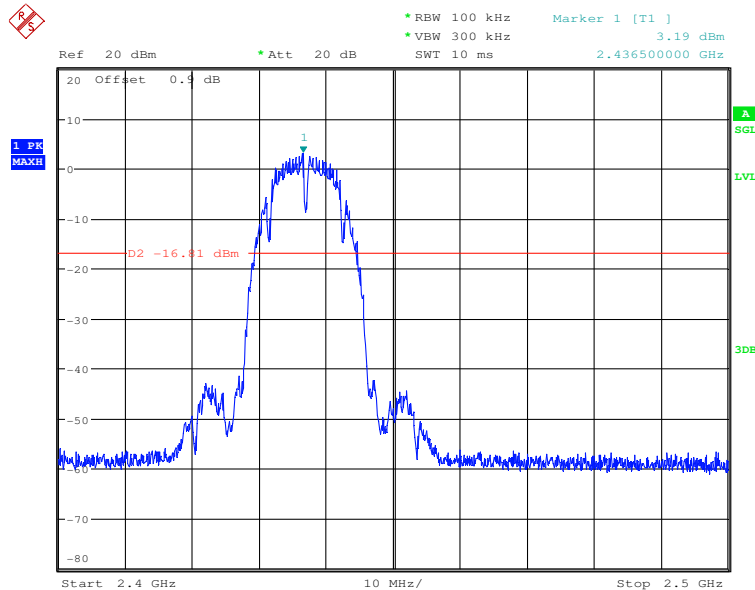





CSE_1

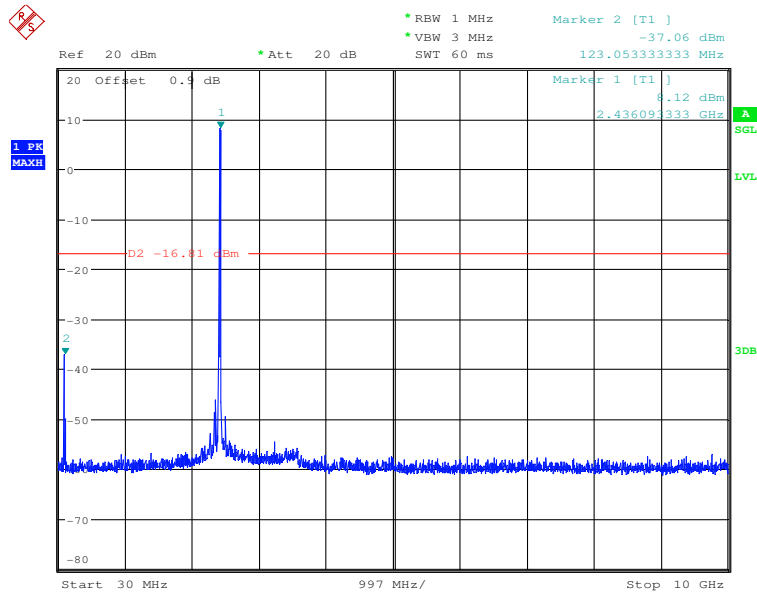


CSE_2

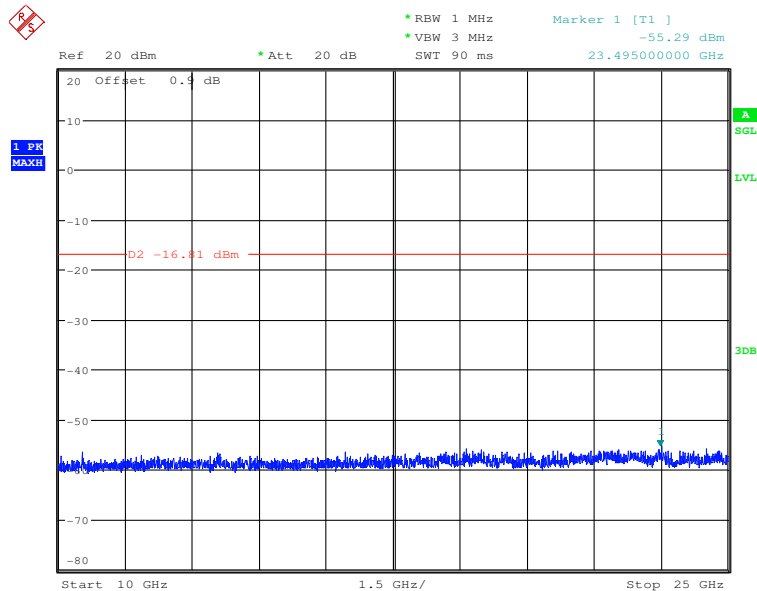

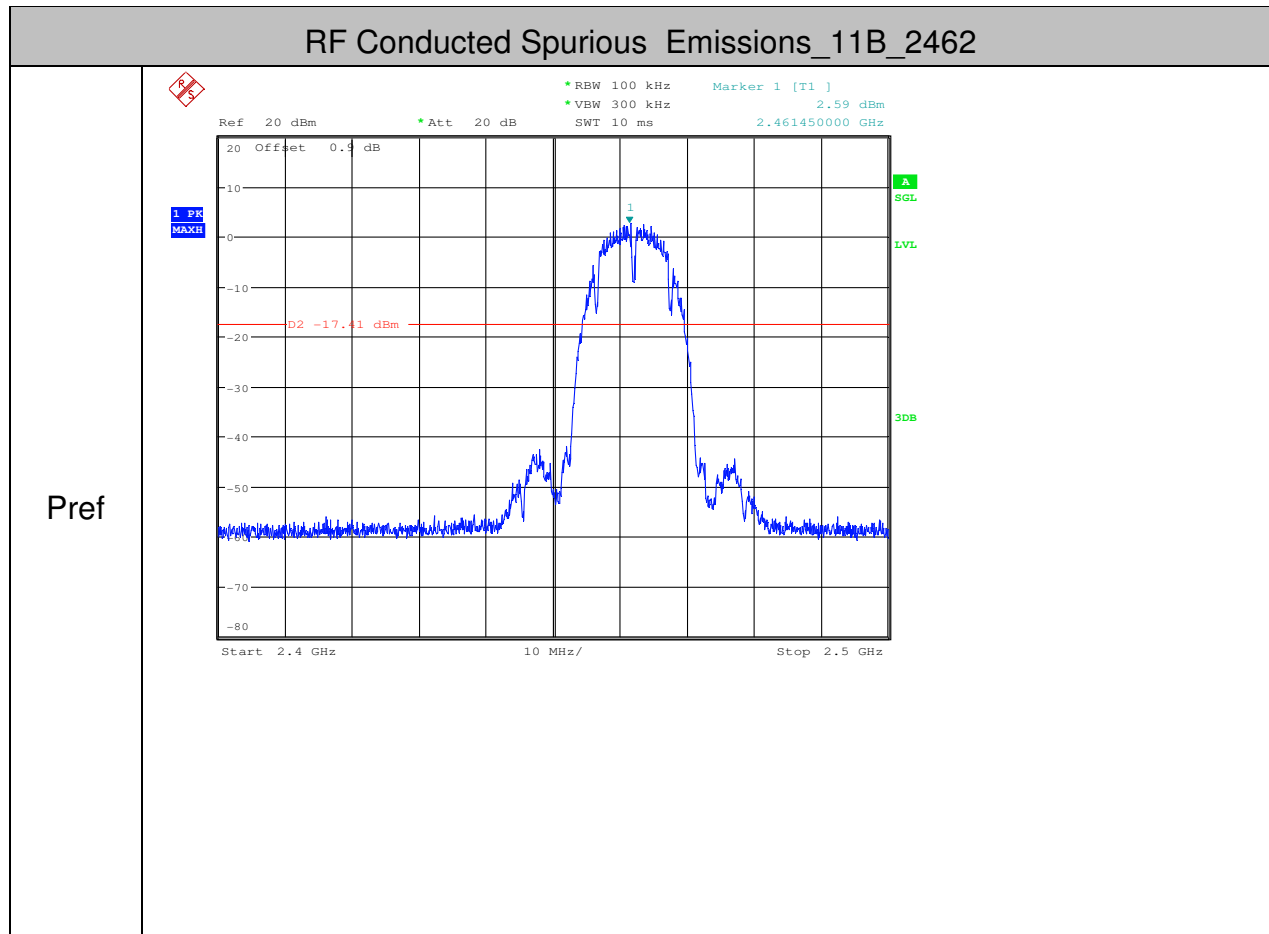




CSE_1

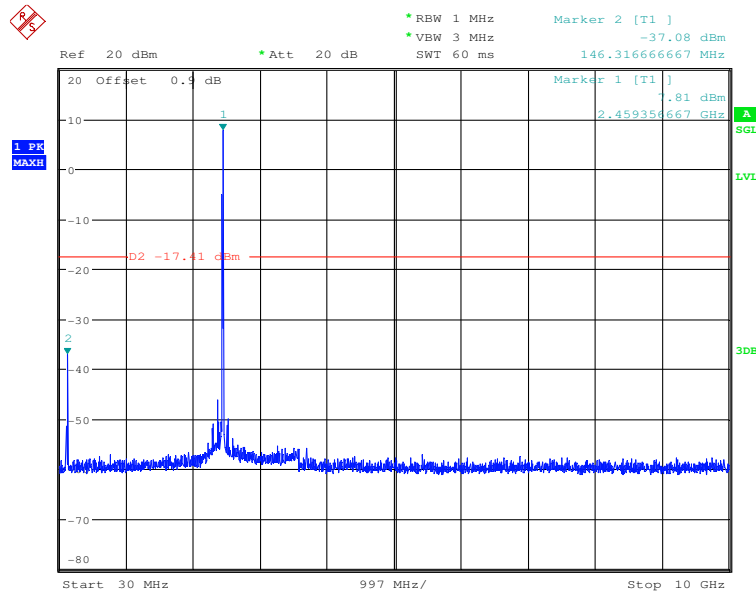


CSE_2

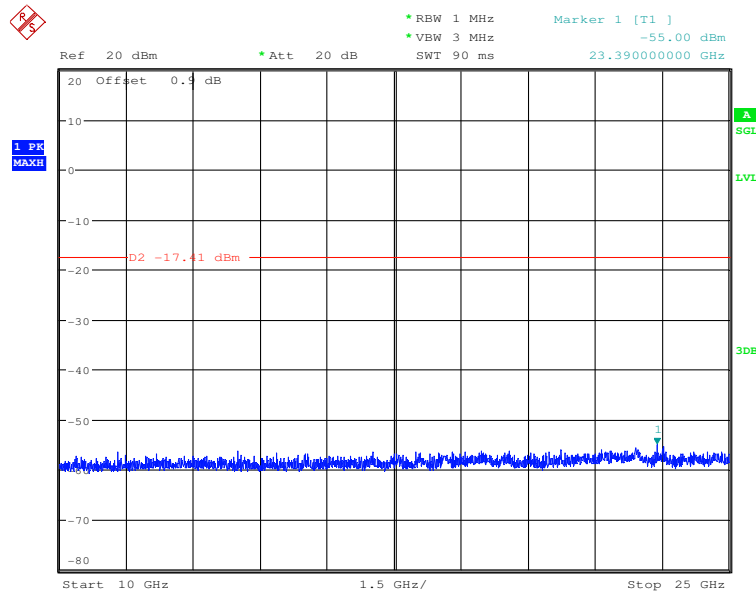




RF Conducted Spurious Emissions_11G_2412

Pref

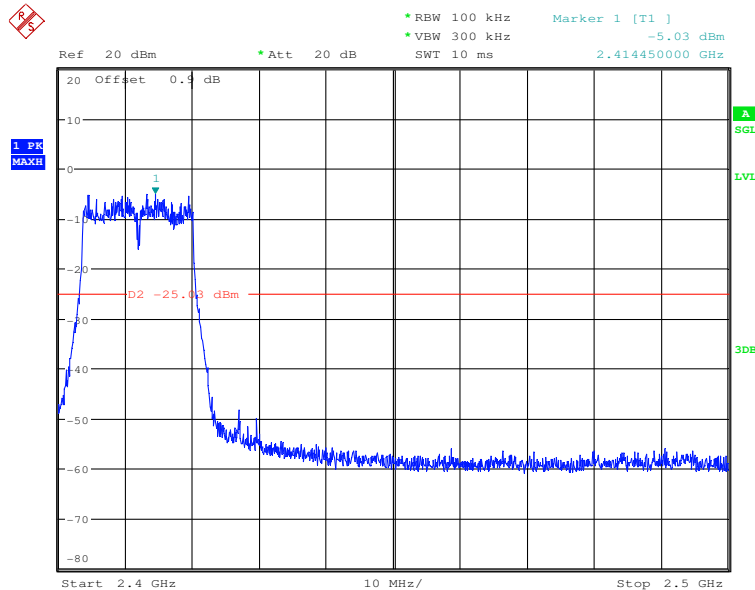




CSE_1

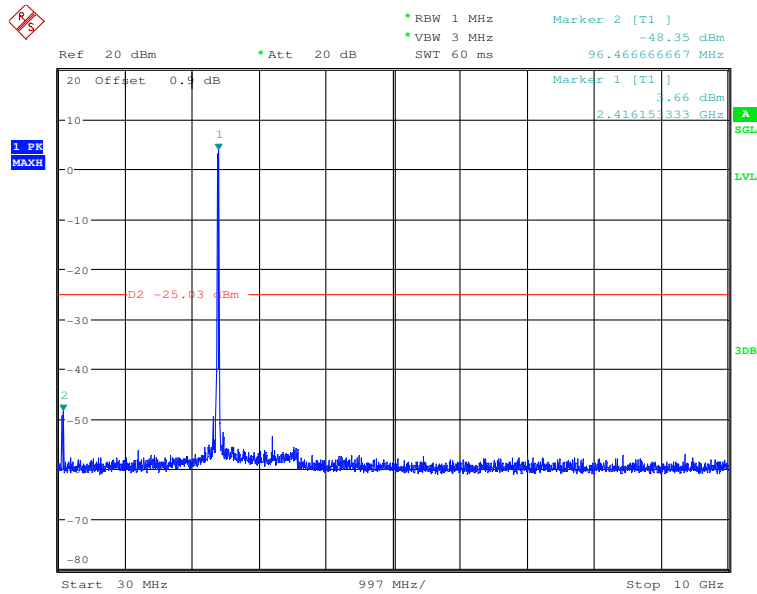


CSE_2

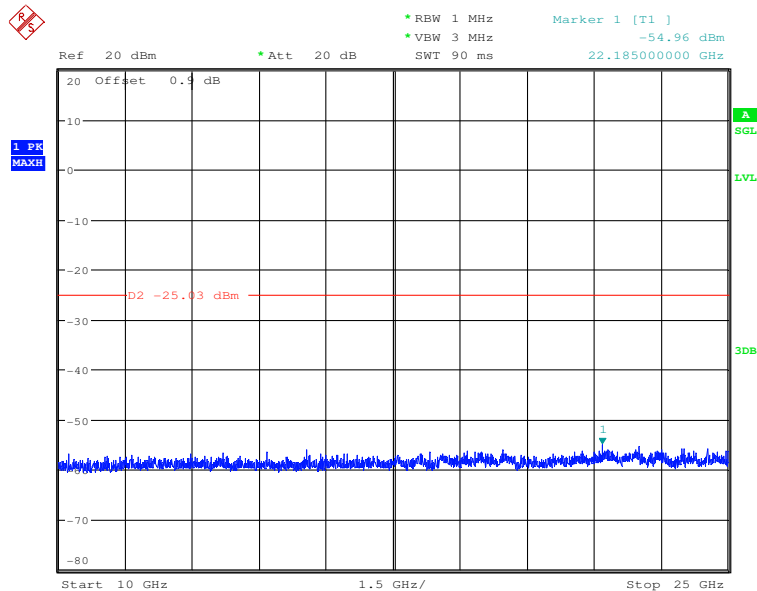




RF Conducted Spurious Emissions_11G_2437

Pref

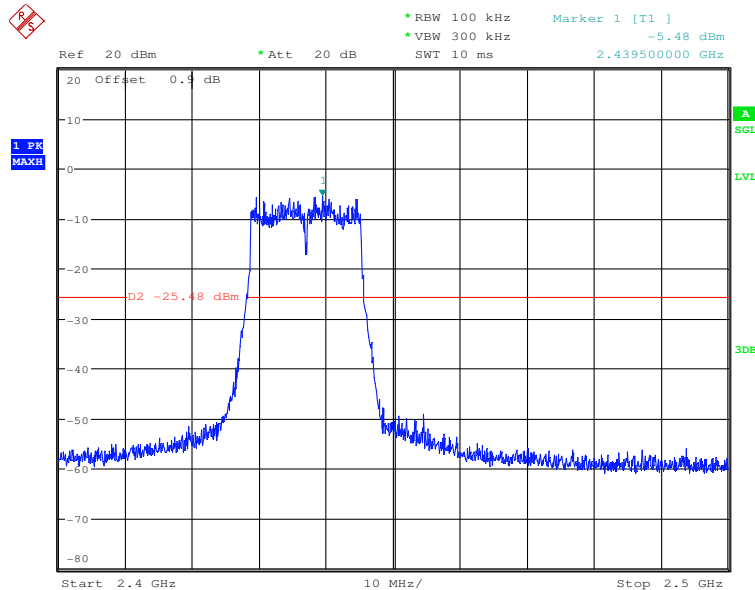




CSE_1

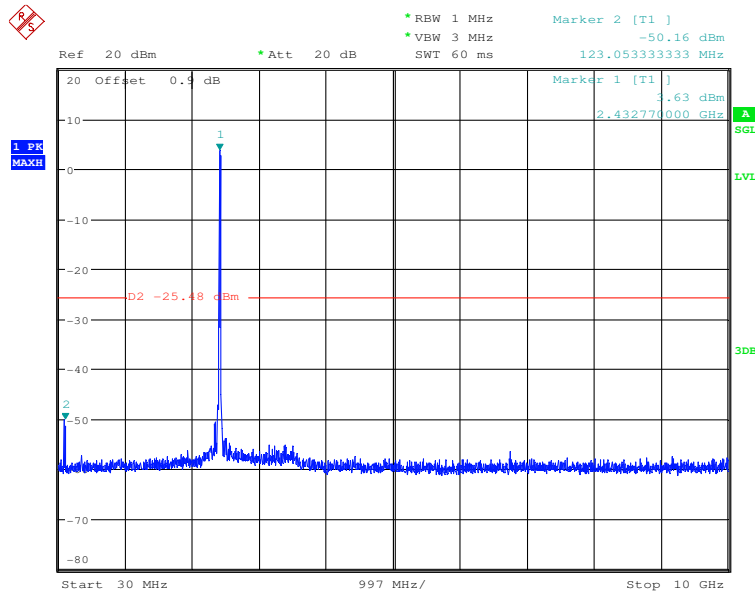


CSE_2

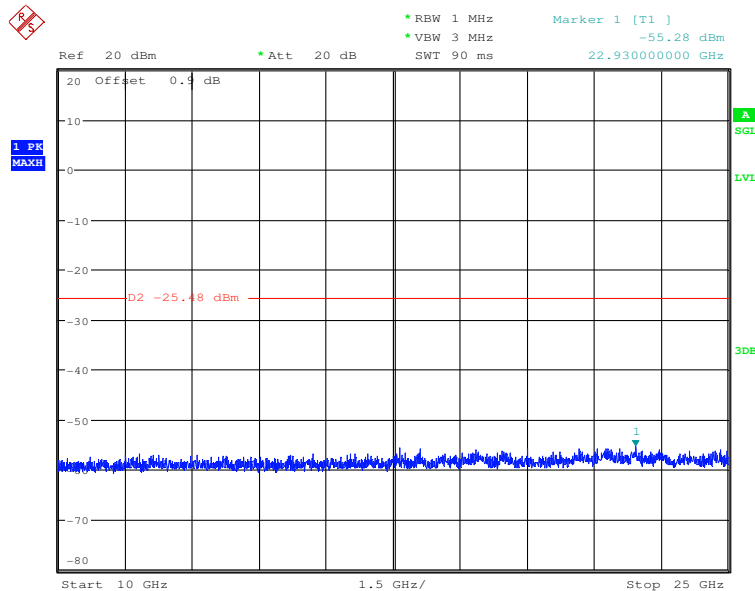




RF Conducted Spurious Emissions_11G_2462

Pref

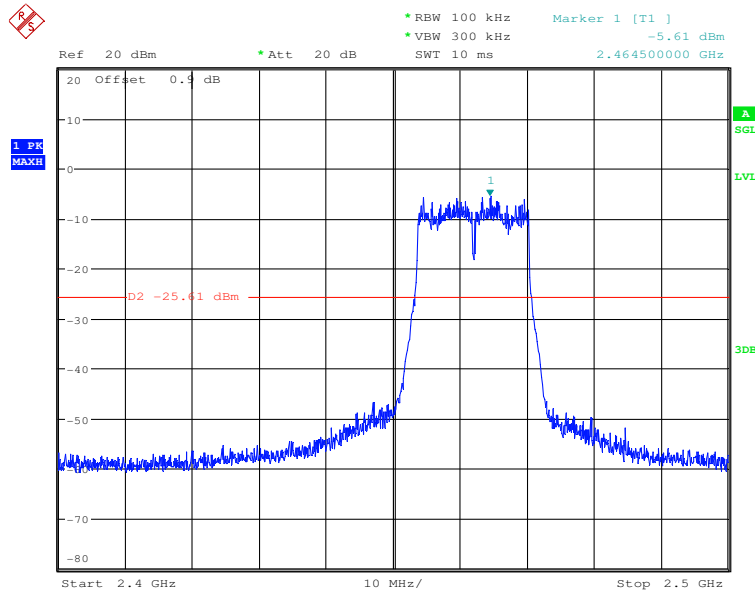


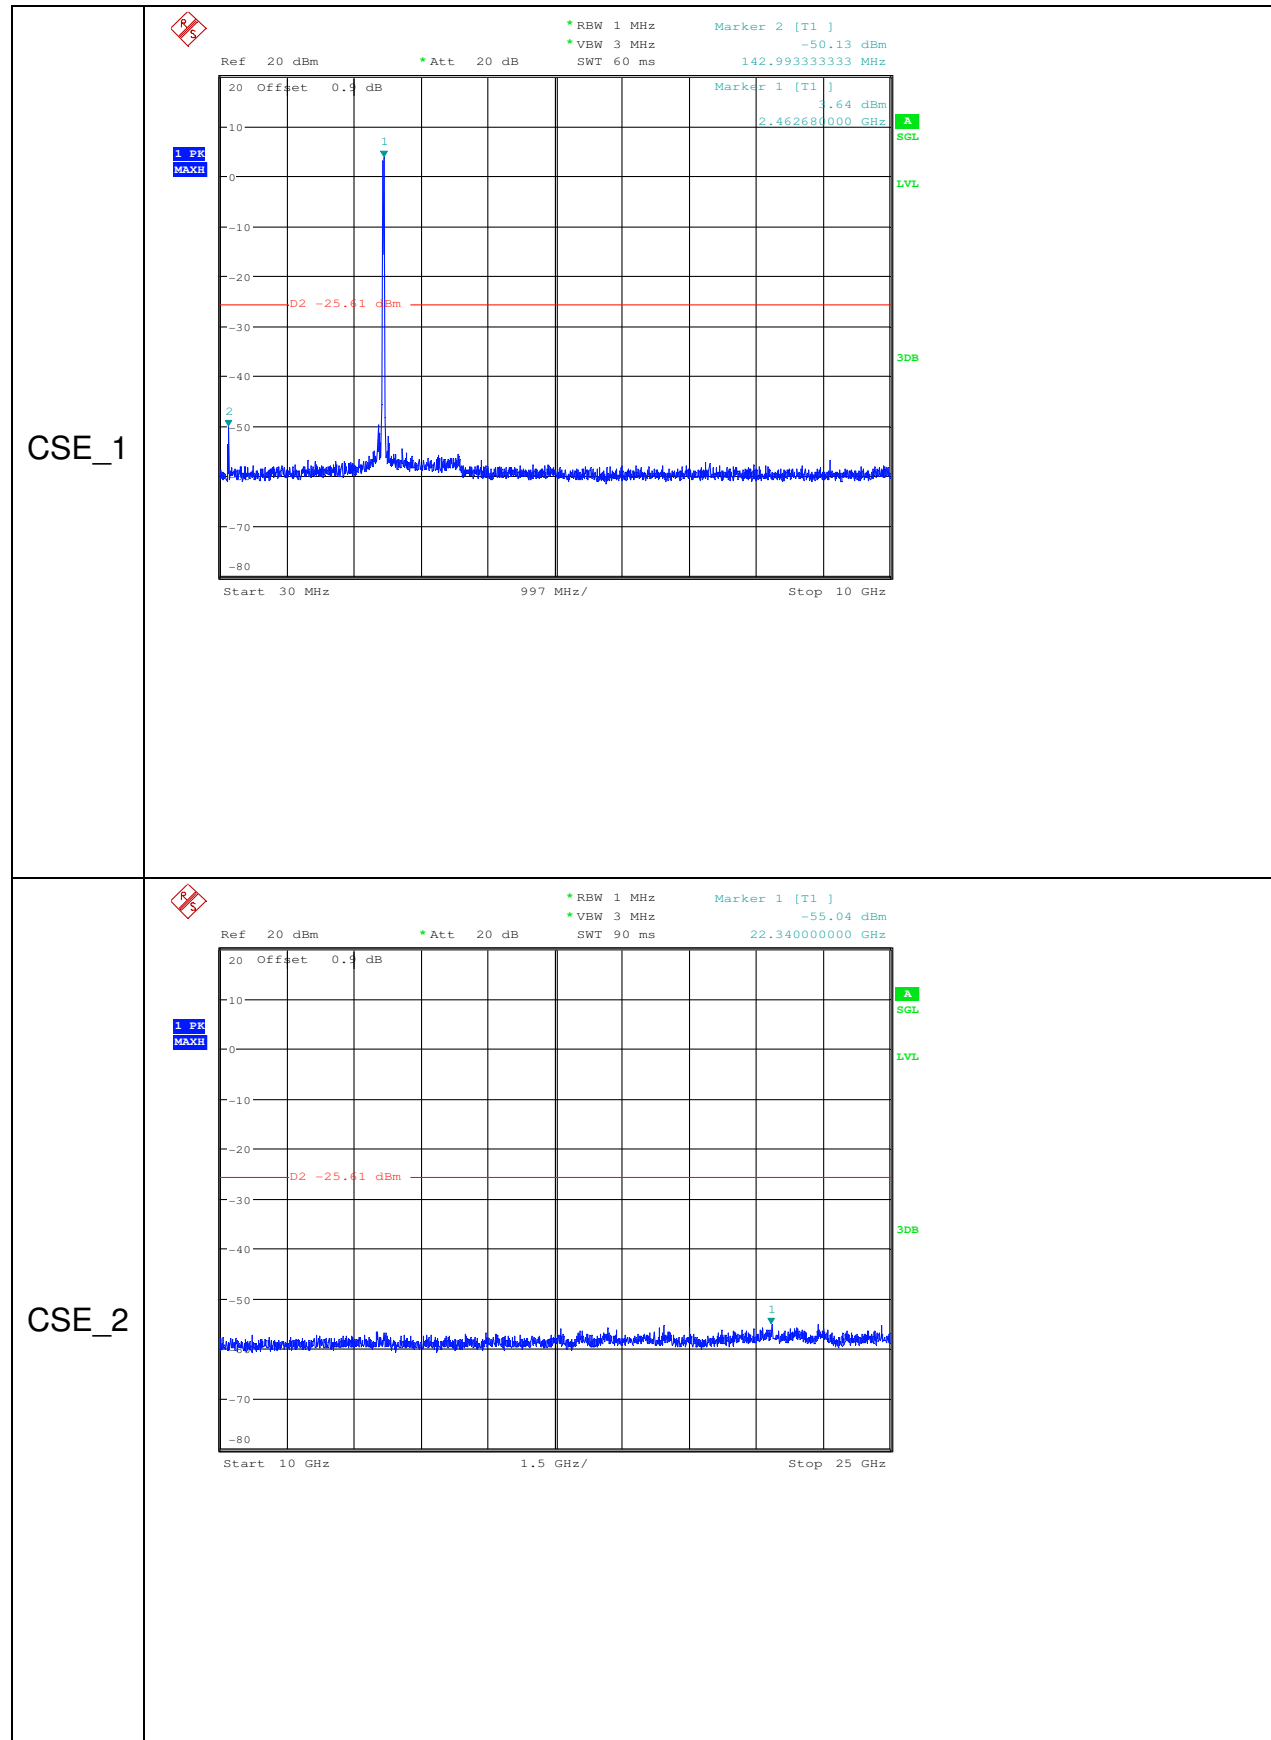




RF Conducted Spurious Emissions_11N20SISO_2412

Pref

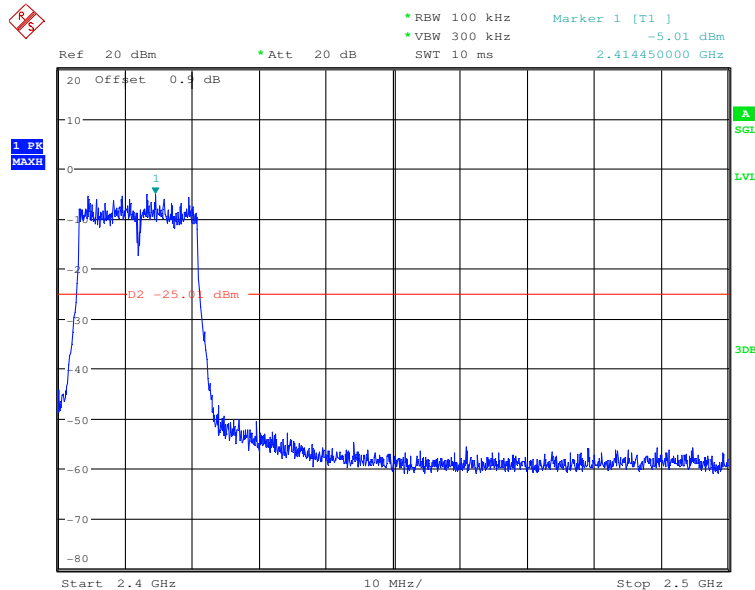




CSE_1

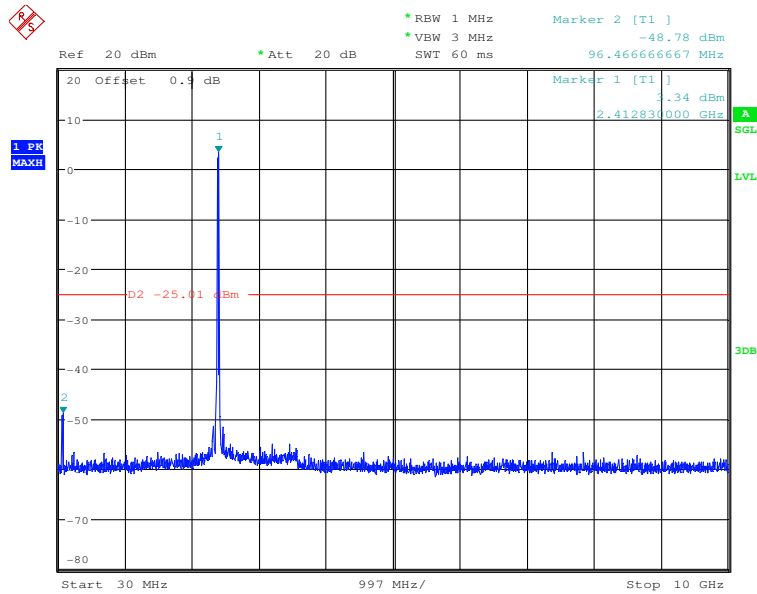


CSE_2

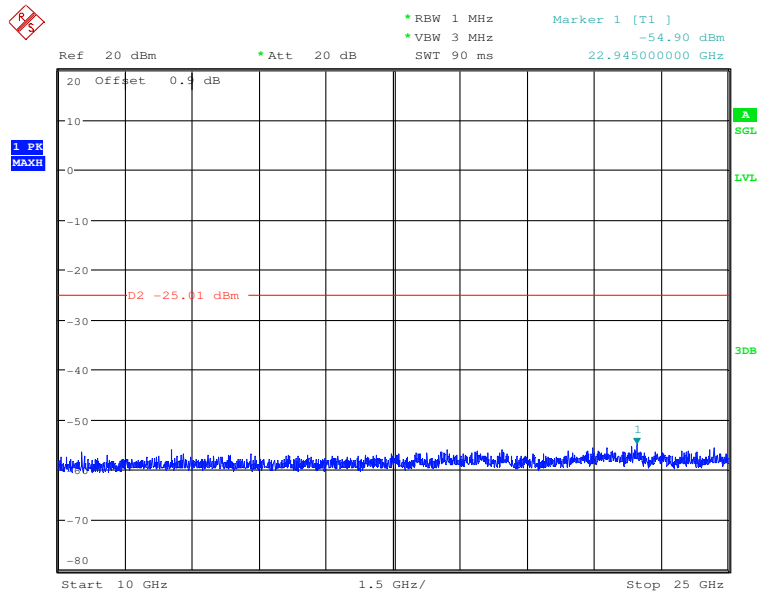




RF Conducted Spurious Emissions_11N20SISO_2437

Pref

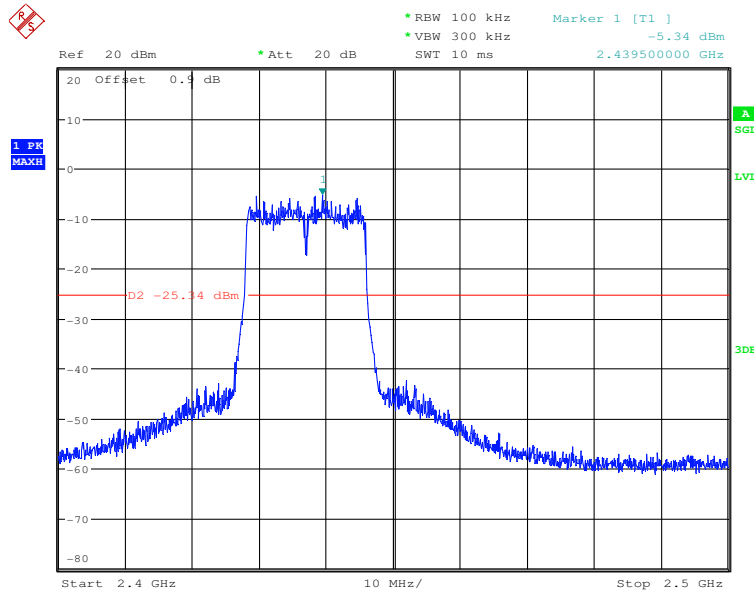




CSE_1

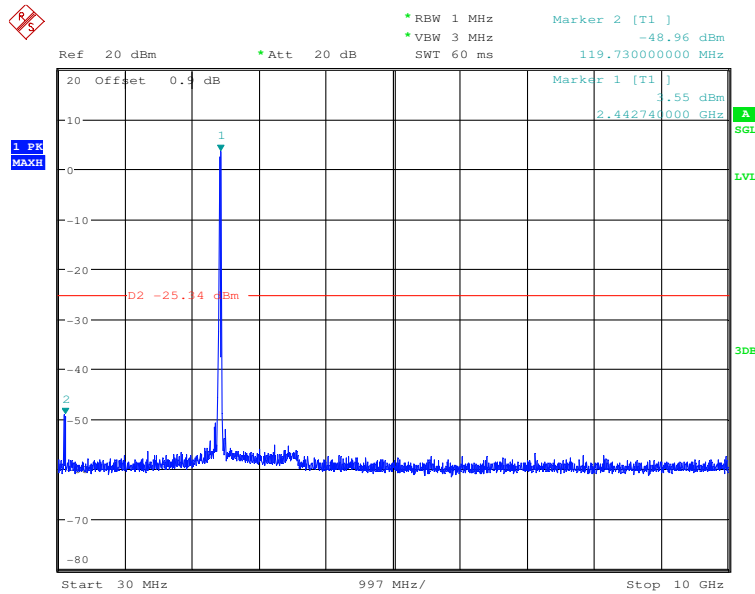


CSE_2

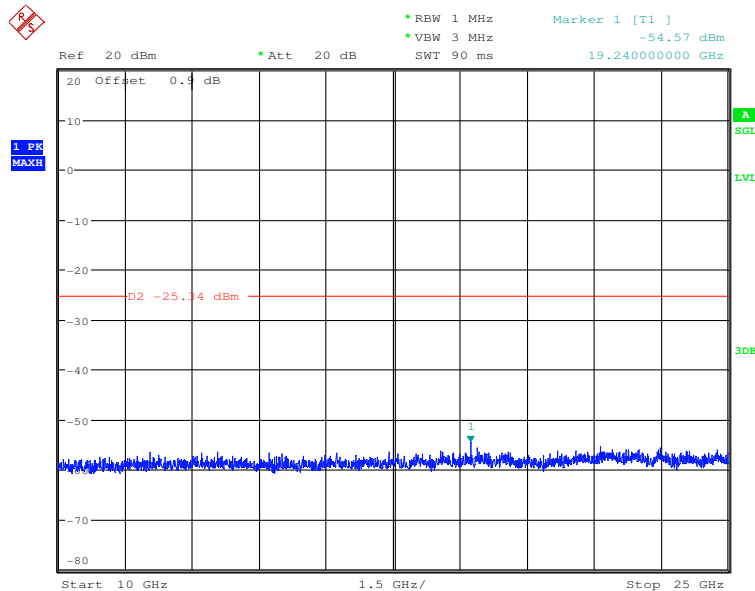




RF Conducted Spurious Emissions_11N20SISO_2462

Pref

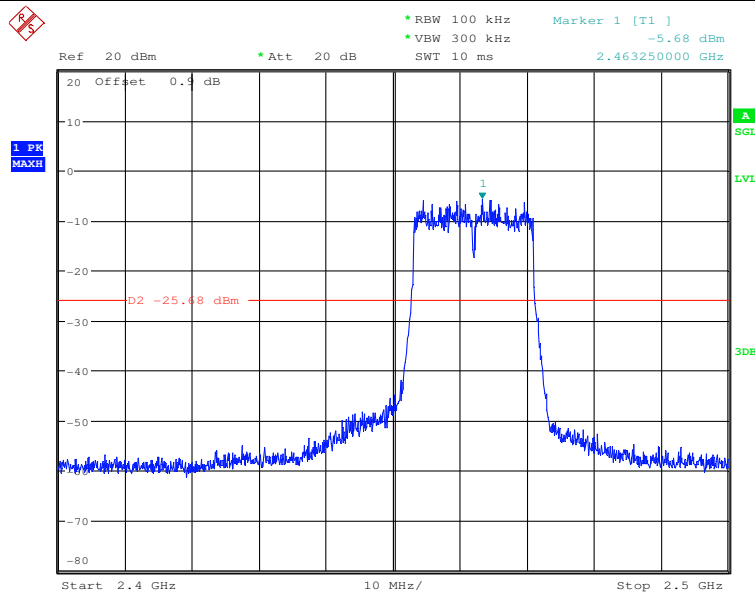




CSE_1

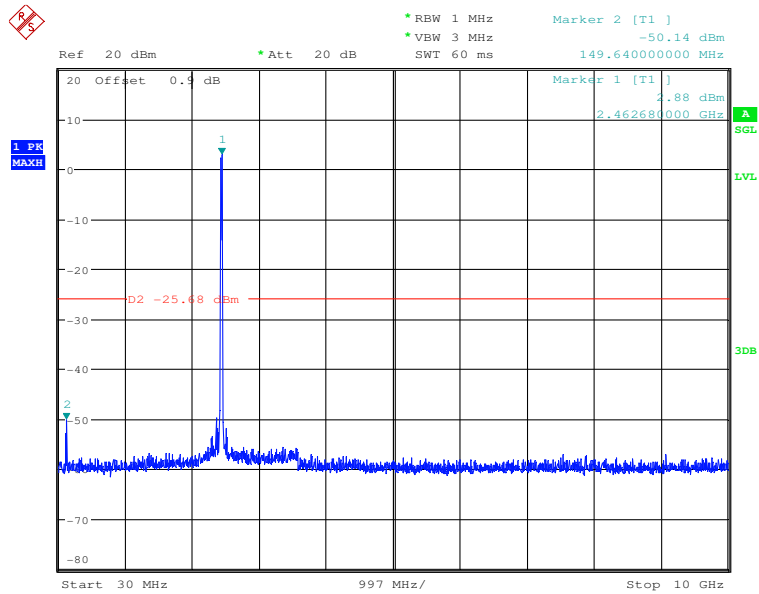


CSE_2

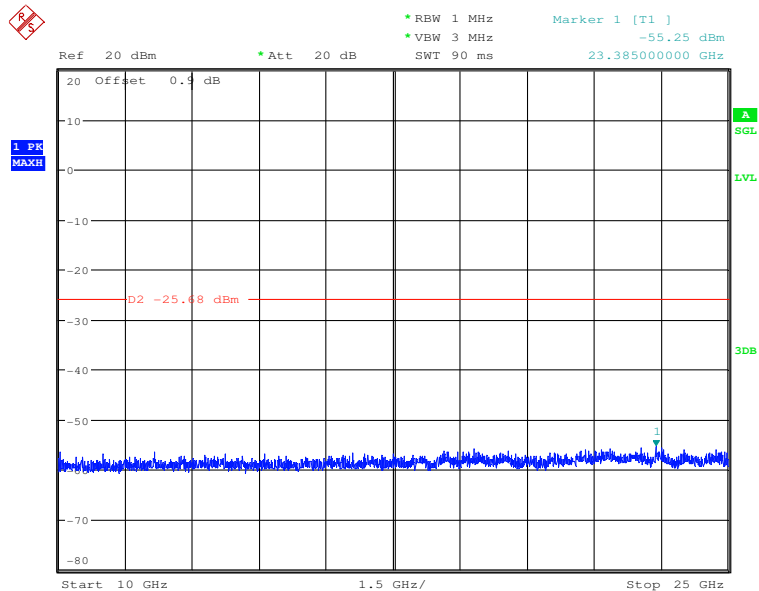




RF Conducted Spurious Emissions_11N40SISO_2422

Pref

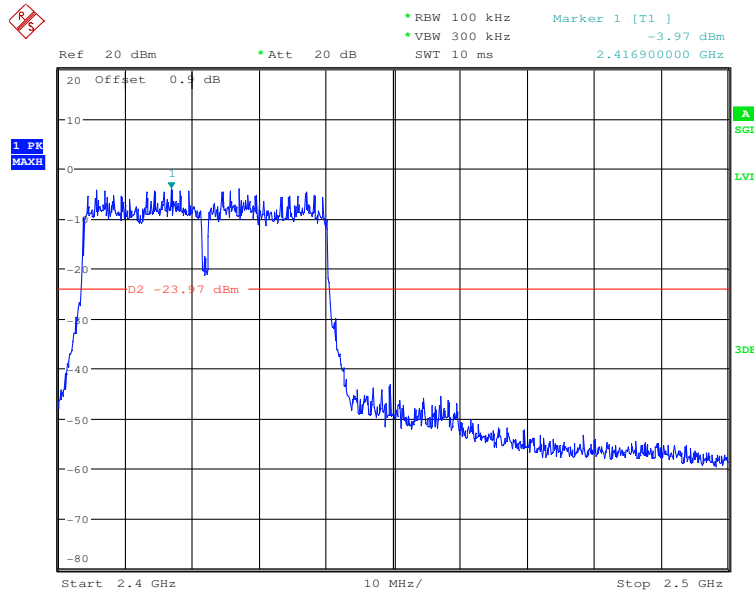




CSE_1

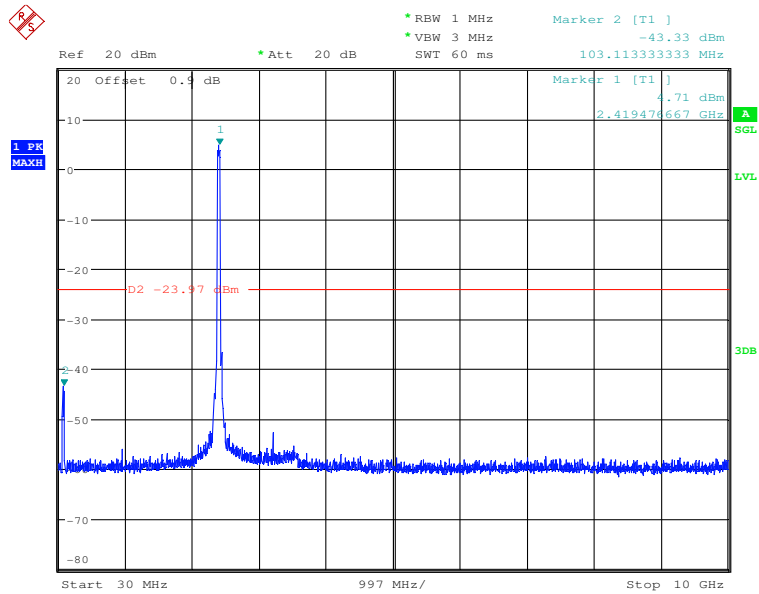


CSE_2

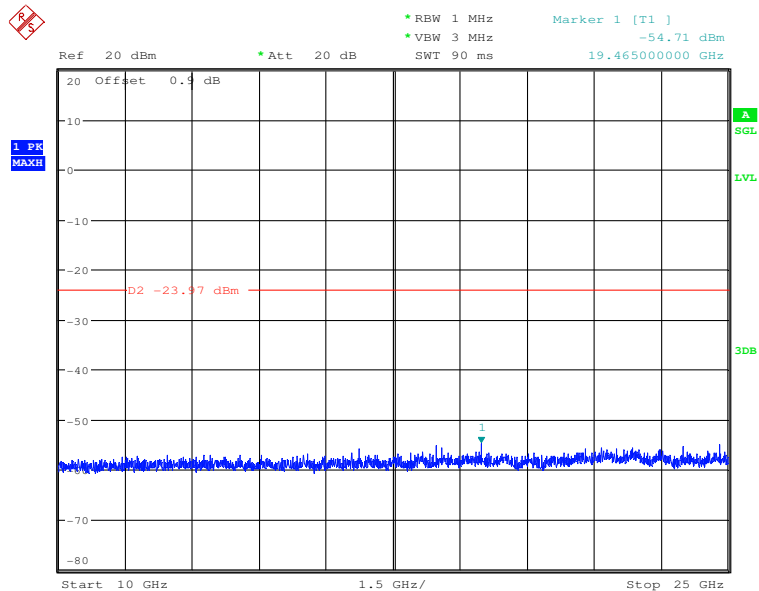




RF Conducted Spurious Emissions_11N40SISO_2437

Pref

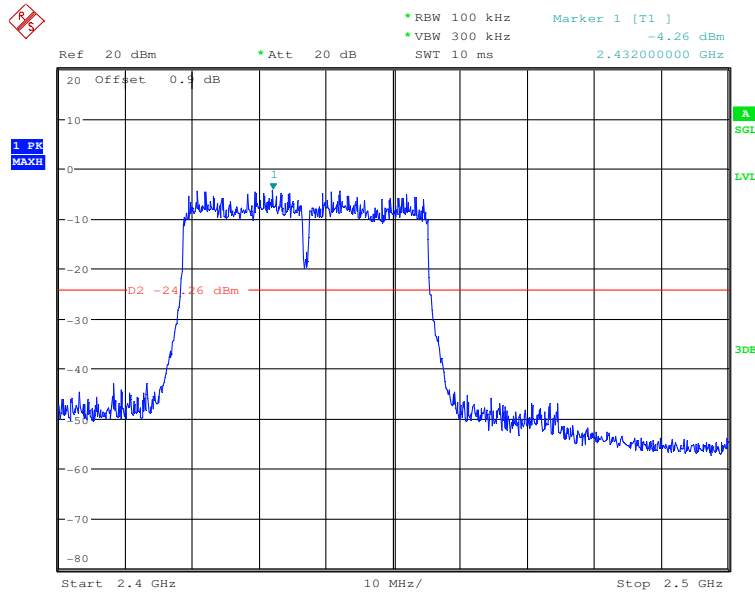




CSE_1

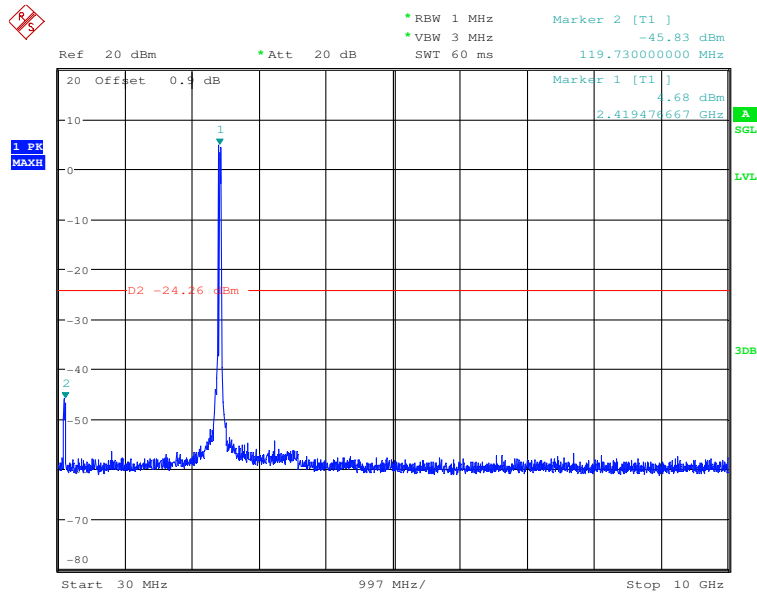


CSE_2

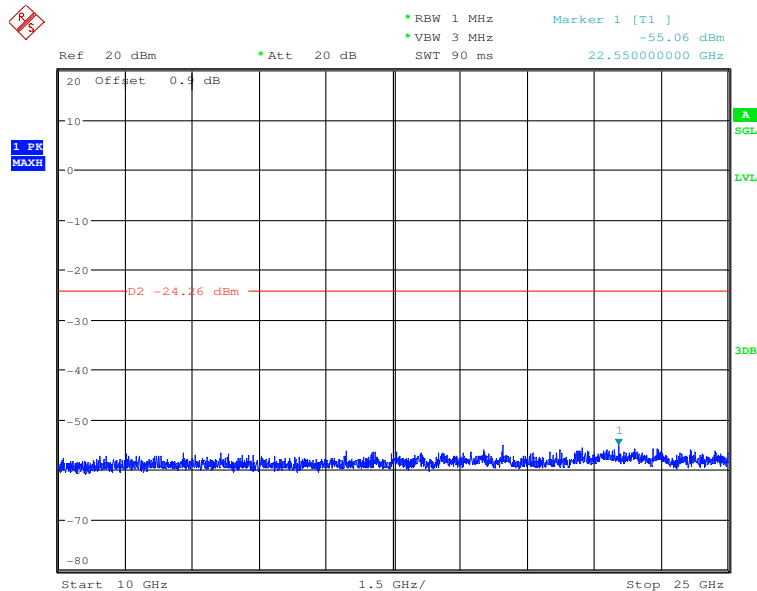




RF Conducted Spurious Emissions_11N40SISO_2452

Pref

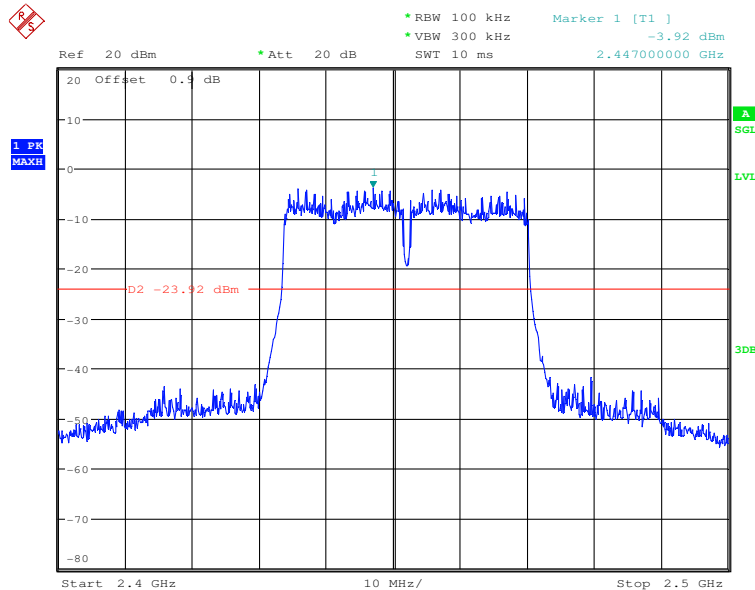



CSE_1

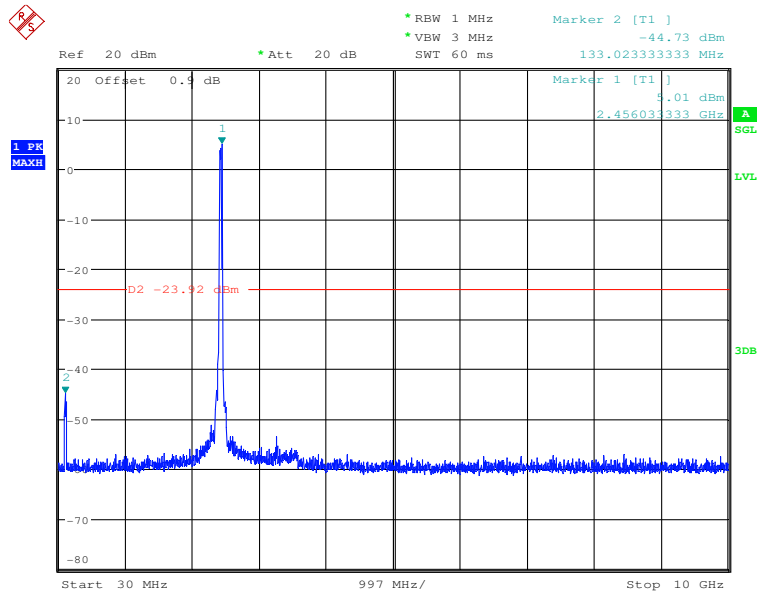

CSE_2

