

FCC TEST REPORT

for

PART 15, SUBPART B CLASS B

EQUIPMENT : CARDEXpert Rage IIC

MODEL NO. : 9806-20

F C C I D : ICUVGA-GW806D

FILING TYPE : Original Grant

APPLICANT : **GAINWARD CO., LTD.**

12F., No. 96, Hsin Tai Wu Rd., Sec. 1, Hsi-Chih,
Taipei Hsien, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without the written authorization of the test lab., the Test Report may not be copied.

SPORTON INTERNATIONAL INC.

6F, No. 106, Hsin Tai Wu Rd., Sec. 1, Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

TABLE OF CONTENT

SECTION TITLE	PAGE
CERTIFICATE OF COMPLIANCE	3
1. GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST	4
1.1. APPLICANT	4
1.2. MANUFACTURER	4
1.3. BASIC DESCRIPTION OF EQUIPMENT UNDER TEST	4
1.4. FEATURE OF EQUIPMENT UNDER TEST	4
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST	5
2.1. TEST MANNER	5
2.2. DESCRIPTION OF TEST SYSTEM	5
2.3. CONNECTION DIAGRAM OF TEST SYSTEM	7
3. TEST SOFTWARE	8
4. GENERAL INFORMATION OF TEST	9
4.1. TEST FACILITY	9
4.2. STANDARD FOR METHODS OF MEASUREMENT	9
4.3. TEST IN COMPLIANCE WITH	9
4.4. FREQUENCY RANGE INVESTIGATED	9
4.5. TEST DISTANCE	9
5. TEST OF CONDUCTED POWERLINE	10
5.1. MAJOR MEASURING INSTRUMENTS	10
5.2. TEST PROCEDURES	11
5.3. TYPICAL TEST SETUP LAYOUT OF CONDUCTED POWERLINE	12
5.4. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION	13
5.5. PHOTOGRAPHS OF CONDUCTED POWERLINE TEST CONFIGURATION	15
6. TEST OF RADIATED EMISSION	17
6.1. MAJOR MEASURING INSTRUMENTS	17
6.2. TEST PROCEDURES	18
6.3. TYPICAL TEST SETUP LAYOUT OF RADIATED EMISSION	19
6.4. TEST RESULT OF RADIATED EMISSION	20
6.5. PHOTOGRAPHS OF RADIATED EMISSION TEST CONFIGURATION	22
7. ANTENNA FACTOR AND CABLE LOSS	23
8. LIST OF MEASURING EQUIPMENT USED	24

CERTIFICATE OF COMPLIANCE

for

FCC PART 15, SUBPART B CLASS B

EQUIPMENT : CARDEXpert Rage IIC

MODEL NO. : 9806-20

F C C I D : ICUVGA-GW806D


APPLICANT : **GAINWARD CO., LTD.**

12F., No. 96, Hsin Tai Wu Rd., Sec. 1, Hsi-Chih,
Taipei Hsien, Taiwan, R.O.C.

I HEREBY CERTIFY THAT :

The measurement shown in this report were made in accordance with the procedures given in **ANSI C63.4 -1992** and the energy emitted by this equipment was **passed** both radiated and conducted emissions **Class B** limits.

Testing was carried out on **Aug 28, 1998** at **SPORTON International Inc.**


W. L. Huang
General Manager

SPORTON INTERNATIONAL INC.

6F, No. 106, Hsin Tai Wu Rd., Sec. 1, Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1. GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST

1.1. APPLICANT

GAINWARD CO., LTD.

12F., No. 96, Hsin Tai Wu Rd., Sec. 1, Hsi-Chih,
Taipei Hsien, Taiwan, R.O.C.

1.2. MANUFACTURER : Same as 1.1

1.3. BASIC DESCRIPTION OF EQUIPMENT UNDER TEST

EQUIPMENT : CARDEXpert Rage IIC

FCC ID: ICUVGA-GW806D

MODEL NO. : 9806-20

TRADE NAME : CARDEXpert

DATA CABLE : Shielded

POWER SUPPLY TYPE : N/A

POWER CORD : N/A

1.4. FEATURE OF EQUIPMENT UNDER TEST

- ⇒Using the ATI Rage IIC 2D/3D Graphics Accelerator
- ⇒Display Memory 2/4MB SGRAM/EDORAM
- ⇒Provides baseline AGP support.
- ⇒3D Setup Engine support Texture Mapping, Gouraud Shading, Alpha blending.fog and Z-buffering.
- ⇒Full support for Direct3D
- ⇒Maximum Resolution 1600x1200
- ⇒Maximum Refresh Rate 200Hz on 640x480 and 800x600 resolution
- ⇒Support VESA DDC and DPMS

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST

2.1. TEST MANNER

- a. The EUT has been associated with personal computer and peripherals pursuant to ANSI C63.4-1992 and configuration operated in a manner which tended to maximize its emission characteristics in a typical application.
- b. The DELL keyboard, HITACHI monitor, HP printer, ACEEX modem, GENIUS mouse and EUT were connected to the F.I.C P.C. for EMI test.
- c. The following display resolution were investigated during the compliance test:
 - 1. Horizontal frequency (640 x 480 to 1600 x 1200, 31.5KHz to 94KHz)
 - 2. Vertical frequency (60Hz to 85Hz)
- d. According to the above tests, we listed the following display modes as the worst cases:
 - 1. 1600 x 1200 (Non-interlanced 94KHz), refresh rate 75Hz.
 - 2. 1280x 1024 (Non-interlanced 91KHz), refresh rate 85Hz.
- e. Frequency range investigated: Conduction 450 KHz to 30 MHz, Radiation 30 MHz to 2000MHz.

2.2. DESCRIPTION OF TEST SYSTEM

Support Device 1. --- MONITOR (HITACHI)

FCC ID : M9U9705C97BMD
Model No. : CM803ET
Serial No. : SP1006
Data Cable : Shielded, 360 degree via metal backshells, 1.7m
Power Supply Type : Switching
Power Cord : Non-shielded

Support Device 2. --- KEYBOARD (DELL)

FCC ID : GYUM92SK
Model No. : AT101 (DE8M)
Serial No. : SP1009
Data Cable : Shielded, 360 degree via metal backshells, 1.9m

Support Device 3. -- MOUSE (GENIUS)

FCC ID : FSUGMZFC
Model No. : NETMOUSE
Serial No. : SP1013
Data Cable : Non-shielded, 1.75m

Support Device 4. --- PRINTER (HP)

FCC ID : DSI6XU2225
Model No. : 2225C
Serial No. : SP0036
Data Cable : Shielded, 360 degree via metal backshells, 2.0m
Power Supply Type : Linear, AC Adaptor
Power Card : Non-shielded

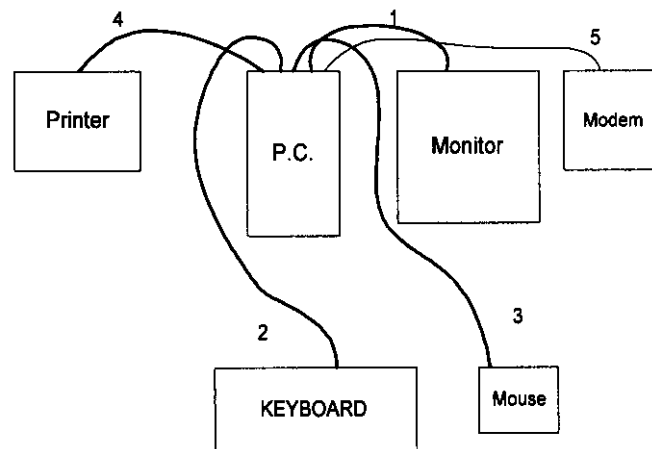
Support Device 5. -- MODEM (ACEEX)

FCC ID : IFAXDM1414
Model No. : DM1414
Power Supply Type : Linear, AC Adapter
Power Cord : Non-shielded
Serial No. : SP1019
Data Cable : Shielded, 360 degree via metal backshells, 1.15m

Support Device 6. --- P.C. (F.I.C)

FCC ID : N/A
Model No. : P2L97
Serial No. : SP1003
Data Cable : Shielded
Power Cord : Non-shielded
Power Supply Type : Switching

(Remark : This support device was tested to comply with FCC standards and
authorized under a declaration of conformity.)

2.3. CONNECTION DIAGRAM OF TEST SYSTEM

1. The I/O cable is connected from the EUT to the support device 1.
2. The I/O cable is connected from PC to the support device 2.
3. The I/O cable is connected from PC to the support device 3.
4. The I/O cable is connected from PC to the support device 4.
5. The I/O cable is connected from PC to the support device 5.

3. TEST SOFTWARE

An executive program, WINFCC.EXE under WIN 98, which generate a complete line of continuously repeating " H " pattern was used as the test software.

The program was executed as follows :

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the floppy disk drive and runs it.
- c. The PC sends " H " messages to the monitor, and the monitor displays " H " patterns on the screen.
- d. The PC sends " H " messages to the printer, then the printer prints them on the paper.
- e. The PC sends " H " messages to the modem.
- f. The PC sends " H " messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- g. Repeat the steps from b to f.

4. GENERAL INFORMATION OF TEST

4.1. TEST FACILITY

This test was carried out by SPORTON INTERNATIONAL INC. in an openarea test site.

Openarea Test Site Location : No. 3, Lane 238, Kang Lo Street, Nei Hwu District,
Taipei 11424, Taiwan, R.O.C.

TEL : 886-2-2631-4739

FAX : 886-2-2631-9740

4.2. STANDARD FOR METHODS OF MEASUREMENT

ANSI C63.4-1992

4.3 .TEST IN COMPLIANCE WITH

FCC PART 15, SUBPART B CLASS B

4.4. FREQUENCY RANGE INVESTIGATED

- a. Conduction : from 450 KHz to 30 MHz
- b. Radiation : from 30 MHz to 2000 MHz.

4.5. TEST DISTANCE

The test distance of radiated emission from antenna to EUT is 3M.

5. TEST OF CONDUCTED POWERLINE

Conducted Emissions were measured from 450 KHz to 30 MHz with a bandwidth of 9 KHz on the 115 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-1992 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in Figure 5-3. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

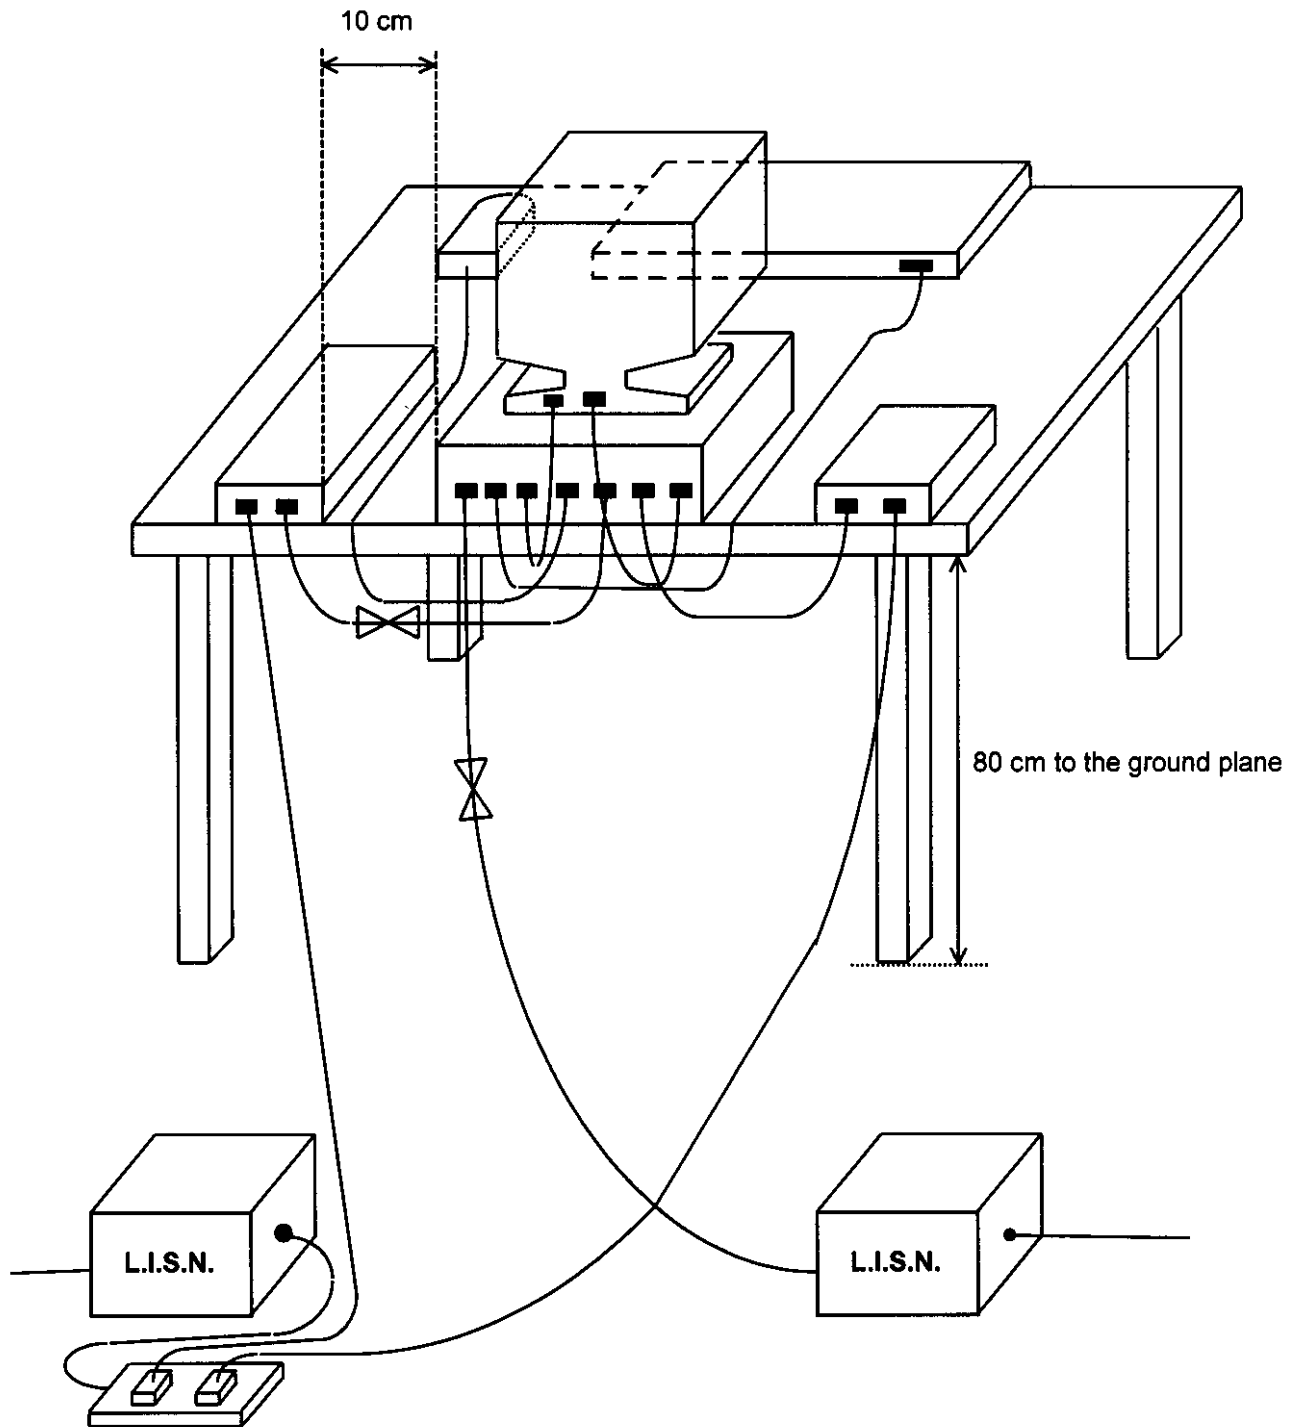
5.1. MAJOR MEASURING INSTRUMENTS

- Test Receiver (R&S ESH3)
 - Attenuation 0 dB
 - Start Frequency 0.45 MHz
 - Stop Frequency 30 MHz
 - Step MHz 0.007 MHz
 - IF Bandwidth 9 KHz

5.2. TEST PROCEDURES

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room and was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm , 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 450 KHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- i. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported otherwise the emissions which do not have 6 dB margin will be retested on by one using the quasi-peak method and reported.

5.3. TYPICAL TEST SETUP LAYOUT OF CONDUCTED POWERLINE



5.4. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION

- Frequency Range of Test : from 0.45 MHz to 30 MHz
- All emissions not reported here are more than 10 dB below the prescribed limit.
- Temperature : 30°C
- Relative Humidity : 53 % RH
- Test Mode : 1600 × 1200, 94k, 75Hz
- Test Date : Aug 28, 1998

The Conducted Emission test was passed at minimum margin

Line 19.27MHz / 37.70 dBuV.

Frequency (MHz)	Line / Neutral	Meter Reading		Limits		Margin (dB)
		(dBuV)	(uV)	(dBuV)	(uV)	
0.47	L	37.10	71.61	48.00	251.19	-10.90
0.98	L	35.80	61.66	48.00	251.19	-12.20
19.27	L	37.70	76.74	48.00	251.19	-10.30
0.47	N	36.90	69.98	48.00	251.19	-11.10
0.78	N	36.80	69.18	48.00	251.19	-11.20
19.54	N	36.80	69.18	48.00	251.19	-11.20

Test Engineer : Benson Tsai
BENSON TSAI

5.4.1. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION

- Frequency Range of Test : from 0.45 MHz to 30 MHz
- All emissions not reported here are more than 10 dB below the prescribed limit.
- Temperature : 30°C
- Relative Humidity : 53 % RH
- Test Mode : 1280x1024 , 91K/85Hz
- Test Date : Aug 28, 1998

The Conducted Emission test was passed at minimum margin.

Line 0.47 MHz / 37.20 dBuV.

Frequency (MHz)	Line / Neutral	Meter Reading		Limits		Margin
		(dBuV)	(uV)	(dBuV)	(uV)	(dB)
0.47	L	37.20	72.44	48.00	251.19	-10.80
0.98	L	36.20	64.57	48.00	251.19	-11.80
19.56	L	36.90	69.98	48.00	251.19	-11.10
0.46	N	36.80	69.18	48.00	251.19	-11.20
0.78	N	35.20	57.54	48.00	251.19	-12.80
19.54	N	37.10	71.61	48.00	251.19	-10.90

Test Engineer : Benson Tsai
BENSON TSAI

6. TEST OF RADIATED EMISSION

Radiated emissions from 30 MHz to 2000 MHz were measured with a bandwidth of 120 KHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in Figure 6-3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

6.1. MAJOR MEASURING INSTRUMENTS

- Amplifier (HP 87405A)
 - Attenuation 0 dB
 - RF Gain 25 dB
 - Signal Input 10 MHz to 3 GHz

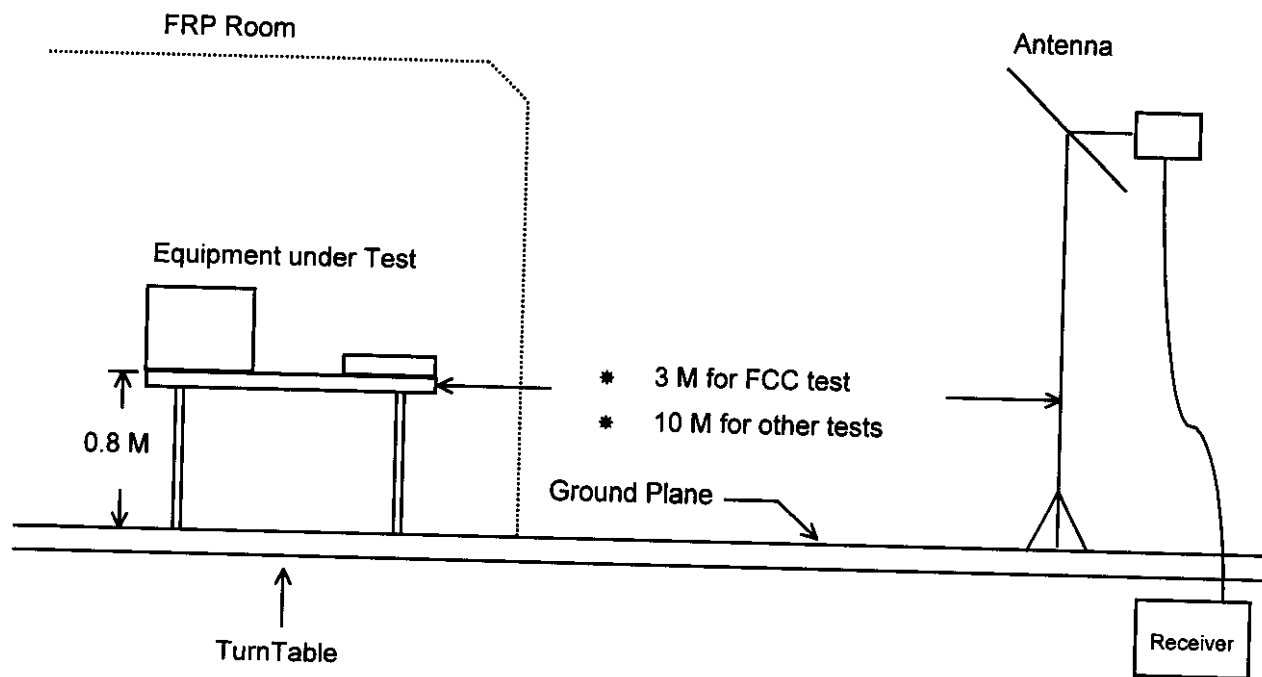
- Spectrum Analyzer (HP 8594A)
 - Attenuation 0 dB
 - Start Frequency 30 MHz
 - Stop Frequency 1000 MHz
 - Resolution Bandwidth 1 MHz
 - Video Bandwidth 1 MHz
 - Signal Input 9 KHz to 2.9 GHz

- Spectrum Analyzer (HP 8594A)
 - Resolution Bandwidth 120 KHz
 - Frequency Band 30 MHz to 1 GHz
 - Quasi-Peak Detector ON for Quasi-Peak Mode
OFF for Peak Mode

6.2. TEST PROCEDURES

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported otherwise the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.

6.3. TYPICAL TEST SETUP LAYOUT OF RADIATED EMISSION



6.4. TEST RESULT OF RADIATED EMISSION

- Equipment meets the technical specifications of 15.109
- Frequency Range of Test : from 30 MHz to 2000 MHz
- Test Distance : 3 M
- Temperature : 36°C
- Relative Humidity : 57% RH
- Test Mode : 1600 × 1200, 94k, 75Hz
- Test Date : Aug 28, 1998
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Sample Calculation at 200.06 MHz
Corrected Reading = 14.05 + 2.40 + 16.08 = 32.53 (dBuV/m)

The Radiated Emission test was passed at minimum margin

Horizontal 600.11 MHz / 42.85 dBuV

Antenna Height 1.0 Meter , Turntable Degree 75°.

Frequency	Antenna	Cable	Reading	Limits	Emission	Level	Margin		
Polarity	Factor	Loss							
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	
200.06	H	14.05	2.40	16.08	43.50	150	32.53	42.32	-10.97
202.14	H	14.16	2.41	16.08	43.50	150	32.65	42.90	-10.85
600.11	H	24.01	4.50	14.34	46.00	200	42.85	138.84	-3.15
400.16	V	21.19	3.50	15.59	46.00	200	40.28	103.28	-5.72
465.20	V	21.44	3.82	13.24	46.00	200	38.50	84.14	-7.50
600.11	V	24.01	4.50	13.94	46.00	200	42.45	132.59	-3.55

Test Engineer : Benson Tsai

BENSON TSAI

6.4.1. TEST RESULT OF RADIATED EMISSION

- Equipment meets the technical specifications of 15.109
- Frequency Range of Test : from 30 MHz to 2000 MHz
- Test Distance : 3 M
- Temperature : 36°C
- Relative Humidity : 57% RH
- Test Mode : 1280x1024, 91K/85Hz
- Test Date : Aug 28, 1998
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Sample Calculation at 433.08 MHz
Corrected Reading = 21.13 + 3.63 + 15.43 = 40.19 (dBuV/m)

The Radiated Emission test was passed at minimum margin

Vertical 404.17MHz / 42.90 dBuV

Antenna Height 1.0 Meter , Turntable Degree 0°.

Frequency	Antenna	Cable	Reading	Limits	Emission	Level	Margin		
Polarity	Factor	Loss							
(MHz)	(dB/m)	(dB)	(dBuV)	(dBuV/m)	(uV/m)	(dBuV/m)	(uV/m)	(dB)	
433.08	H	21.13	3.63	15.43	46.00	200	40.19	102.21	-5.81
600.11	H	24.01	4.50	13.94	46.00	200	42.45	132.59	-3.55
302.19	V	17.90	2.93	19.55	46.00	200	40.38	104.47	-5.62
404.17	V	21.18	3.52	18.20	46.00	200	42.90	139.64	-3.10
500.53	V	22.22	4.10	12.96	46.00	200	39.29	92.15	-6.71
600.11	V	24.01	4.50	13.54	46.00	200	42.05	126.62	-3.95

Test Engineer : Benson Tsai
BENSON TSAI

7. ANTENNA FACTOR AND CABLE LOSS

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30	-1.91	0.90
35	-0.50	0.92
40	0.61	1.04
45	1.40	1.28
50	2.39	1.10
55	3.54	1.11
60	4.40	1.30
65	4.84	1.40
70	5.59	1.37
75	6.21	1.24
80	7.60	1.51
85	7.73	1.60
90	8.22	1.60
95	8.90	1.70
100	9.36	1.70
110	10.01	1.70
120	10.41	1.90
130	10.84	1.90
140	11.42	1.91
150	11.91	2.01
160	12.25	2.11
170	12.72	2.21
180	13.02	2.30
190	13.50	2.30
200	14.05	2.40
220	15.11	2.50
240	16.81	2.60
260	17.51	2.71
280	17.70	2.90
300	17.89	2.91
320	18.00	3.10
340	18.33	3.20
360	19.44	3.30
380	20.31	3.40
400	21.19	3.50
450	21.10	3.70
500	22.21	4.10
550	23.42	4.30
600	24.01	4.50
650	25.11	4.70
700	26.00	4.90
750	26.41	5.11
800	27.10	5.50
850	27.51	5.60
900	27.90	5.80
950	28.01	5.90

8. LIST OF MEASURING EQUIPMENT USED

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Test Receiver	R&S	ESH3	893495/013	9 KHz - 30MHz	Apr. 13, 1998	Conduction
Test Receiver	R&S	ESVP	893610/003	20MHz - 1.3 GHz	Apr. 13, 1998	Conduction
LISN	EMCO	3825/2	9510-2484	50 ohm / 50 μ H	Nov. 29, 1997	Conduction
LISN	KYORITSU	KNW-407	8-1010-15	50 ohm / 50 μ H	Nov. 10, 1997	Conduction
EMI Filter	CORCOM	MRI-2030	N/A	480VAC / 30A	N/A	Conduction
Spectrum Monitor	R & S	EZM	894987/011	N/A	Apr. 13, 1998	Conduction
Amplifier (Site 1)	HP	87405A	3207A01437	10MHz ~3.0GHz	Jun. 26, 1998	Radiation
Spectrum Analyzer (site 1)	HP	8594A	3051A00172	9KHz ~2.9GHz	Apr. 17, 1998	Radiation
Bilog Antenna (1)	CHASE	CBL6112A	2302	30MHz - 2GHz	Jan. 27, 1998	Radiation
Half-wave dipole antenna (1)	EMCO	3121C	8912-496	20MHz - 1GHz	Aug. 12, 1998	Radiation
Turn Table	EMCO	1060-1.211	9507-1805	0 ~360 degree	N/A	Radiation
Antenna Mast	EMCO	1051-1.2	9502-1868	1 m - 4 m	N/A	Radiation

※ The column of Remark indicates that the instruments used for conduction ("C") or radiation ("R") test.



SPORTON LAB.

Certificate No: D700701

CERTIFICATE OF COMPLIANCE

Authorized under Declaration of Conformity
according to

47 CFR, Part 2 and Part 15 of the FCC Rules

Equipment Under Test : PERSONAL COMPUTER

Model No. : P2L97

Applicant : FIRST INTERNATIONAL COMPUTER INC.

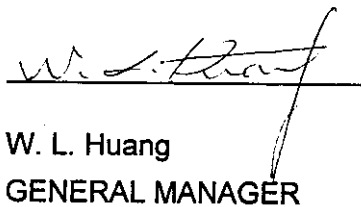
6F, Formosa Plastics Rear Building 201,
Tung Hwa N. Rd., Taipei, Taiwan, R.O.C.



I HEREBY

CERTIFY THAT:

THE MEASUREMENTS SHOWN IN THIS TEST REPORT WERE MADE IN ACCORDANCE WITH THE PROCEDURES GIVEN IN **ANSI C63.4-1992** AND THE ENERGY EMITTED BY THIS EQUIPMENT WAS **PASSED** BOTH RADIATED AND CONDUCTED EMISSIONS **CLASS B** LIMITS. THE TESTING WAS COMPLETED ON **SEP. 02, 1997** AT **SPORTON INTERNATIONAL INC. LAB IN NEI HWU.**


W. L. Huang
GENERAL MANAGER

CCT 04/97

EXHIBIT C

SPORTON INTERNATIONAL INC.NVLAP
National Voluntary
Laboratory Accreditation
Program
The National Institute of Standards and Technology
NIST
100-100000-01**FCC TEST REPORT****REPORT NO. : F890704**

FCC TEST REPORT

for

PART 15, SUBPART B CLASS B

EQUIPMENT : CARDEXpert GX3

MODEL NO. : 9809-11a

F C C I D : ICUVGA-GW809D

FILING TYPE : Original Grant

APPLICANT : **GAINWARD CO., LTD.**12F., No. 96, Hsin Tai Wu Rd., Sec. 1, Hsi-Chih,
Taipei Hsien, Taiwan, R.O.C.

- The test result refers exclusively to the test presented test model / sample.
- Without the written authorization of the test lab., the Test Report may not be copied.

SPORTON INTERNATIONAL INC.

6F, No. 106, Hsin Tai Wu Rd., Sec. 1, Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

TABLE OF CONTENT

SECTION TITLE	PAGE
CERTIFICATE OF COMPLIANCE	3
1. GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST	4
1.1. APPLICANT	4
1.2. MANUFACTURER : Same as 1.1	4
1.3. BASIC DESCRIPTION OF EQUIPMENT UNDER TEST	4
1.4. FEATURE OF EQUIPMENT UNDER TEST	4
2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST	5
2.1. TEST MANNER	5
2.2. DESCRIPTION OF TEST SYSTEM	5
2.3. CONNECTION DIAGRAM OF TEST SYSTEM.....	7
3. TEST SOFTWARE.....	8
4. GENERAL INFORMATION OF TEST	9
4.1. TEST FACILITY	9
4.2. STANDARD FOR METHODS OF MEASUREMENT	9
4.3. TEST IN COMPLIANCE WITH	9
4.4. FREQUENCY RANGE INVESTIGATED	9
4.5. TEST DISTANCE.....	9
5. TEST OF CONDUCTED POWERLINE.....	10
5.1. MAJOR MEASURING INSTRUMENTS.....	10
5.2. TEST PROCEDURES	11
5.3. TYPICAL TEST SETUP LAYOUT OF CONDUCTED POWERLINE.....	12
5.4. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION.....	13
5.5. PHOTOGRAPHS OF CONDUCTED POWERLINE TEST CONFIGURATION.....	15
6. TEST OF RADIATED EMISSION	19
6.1. MAJOR MEASURING INSTRUMENTS.....	19
6.2. TEST PROCEDURES	20
6.3. TYPICAL TEST SETUP LAYOUT OF RADIATED EMISSION.....	21
6.4. TEST RESULT OF RADIATED EMISSION	22
6.5. PHOTOGRAPHS OF RADIATED EMISSION TEST CONFIGURATION	24
7. ANTENNA FACTOR AND CABLE LOSS.....	26
8. LIST OF MEASURING EQUIPMENT USED	27

CERTIFICATE OF COMPLIANCE

for

FCC PART 15, SUBPART B CLASS B

EQUIPMENT : CARDEXpert GX3

MODEL NO. : 9809-11a

F C C I D : ICUVGA-GW809D

FILING TYPE : Original Grant

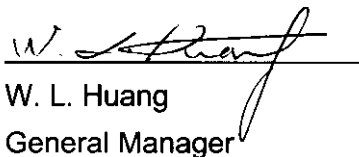
APPLICANT : **GAINWARD CO., LTD.**

12F., No. 96, Hsin Tai Wu Rd., Sec. 1, Hsi-Chih,
Taipei Hsien, Taiwan, R.O.C.

I HEREBY CERTIFY THAT :

The measurement shown in this report were made in accordance with the procedures given in **ANSI C63.4 -1992** and the energy emitted by this equipment was **passed** both radiated and conducted emissions **Class B** limits.

Testing was carried out on **Sep. 11, 1998** at **SPORTON International Inc.**

 Sep 24, 98
W. L. Huang
General Manager

SPORTON INTERNATIONAL INC.

6F, No. 106, Hsin Tai Wu Rd., Sec. 1, Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1. GENERAL DESCRIPTION OF EQUIPMENT UNDER TEST

1.1. APPLICANT

GAINWARD CO., LTD.

12F., No. 96, Hsin Tai Wu Rd., Sec. 1, Hsi-Chih,
Taipei Hsien, Taiwan, R.O.C.

1.2. MANUFACTURER : Same as 1.1

1.3. BASIC DESCRIPTION OF EQUIPMENT UNDER TEST

EQUIPMENT : CARDEXpert GX3

FCC ID: ICUVGA-GW809D

MODEL NO. : 9809-11a

TRADE NAME : CARDEXpert

DATA CABLE : Shielded

POWER SUPPLY TYPE : N/A

POWER CORD : N/A

1.4. FEATURE OF EQUIPMENT UNDER TEST

- ⇨New Single Cycle 3D Architecture
- ⇨128-bit Dual Rendering Pipeline
- ⇨Single Cycle Trilinear Filtering
- ⇨Highly Optimized 128 bit Graphics Engine
- ⇨64-bit Synchronous Memory Bus
- ⇨Flash ROM and 12 C Serial Communications Bus
- ⇨250MHz RAMDAC with Gamma Correction
- ⇨PCI Power Management
- ⇨DDC Monitor Communications

2. TEST CONFIGURATION OF EQUIPMENT UNDER TEST

2.1. TEST MANNER

- a. The EUT has been associated with personal computer and peripherals pursuant to ANSI C63.4-1992 and configuration operated in a manner which tended to maximize its emission characteristics in a typical application.
- b. The DELL keyboard, HITACHI monitor, HP printer, PANASONIC video monitor, ACEEX LOGITECH mouse, GENIUS mouse and EUT were connected to the F.I.C P.C. for EMI test.
- c. The V-video and S-video were tested in order to find the maximum emission. Since The V-video generates the worst case, the mode was used as the final data.
- d. The following display resolution were investigated during the compliance test:
 1. Horizontal frequency (640 x 480 to 1600 x 1200, 31KHz to 106KHz)
 2. Vertical frequency (60Hz to 85Hz)
- e. According to the above tests, we listed the following display modes as the worst cases:
 1. 1600 x 1200 (Non-interlanced 106KHz), refresh rate 85Hz.
 2. 640 x 480 (31KHz), refresh rate 60Hz. (TV MODE)
- f. Frequency range investigated: Conduction 450 KHz to 30 MHz, Radiation 30 MHz to 2000MHz.

2.2. DESCRIPTION OF TEST SYSTEM

Support Device 1. --- MONITOR (HITACHI)

FCC ID	: M9U9705C97BMD
Model No.	: CM803ET
Serial No.	: SP1006
Data Cable	: Shielded, 360 degree via metal backshells, 1.7m
Power Supply Type	: Switching
Power Cord	: Non-shielded

Support Device 2. --- KEYBOARD (DELL)

FCC ID	: GYUM92SK
Model No.	: AT101 (DE8M)
Serial No.	: SP1009
Data Cable	: Shielded, 360 degree via metal backshells, 1.9m

FCC TEST REPORT**REPORT NO. : F890704****Support Device 3. -- MOUSE (LOGITECH)**

FCC ID : DZL211029
Model No. : M-S34
Serial No. : SP1014
Data Cable : Non-shielded, 1.9m

Support Device 4. --- PRINTER (HP)

FCC ID : DSI6XU2225
Model No. : 2225C
Serial No. : SP0036
Data Cable : Shielded, 360 degree via metal backshells, 1.35m
Power Supply Type : Linear, AC Adapter
Power Card : Non-shielded

Support Device 5. -- MODEM (ACEEX)

FCC ID : IFAXDM1414
Model No. : DM1414
Power Supply Type : Linear, AC Adapter
Power Cord : Non-shielded
Serial No. : SP1019
Data Cable : Shielded, 360 degree via metal backshells, 1.15m

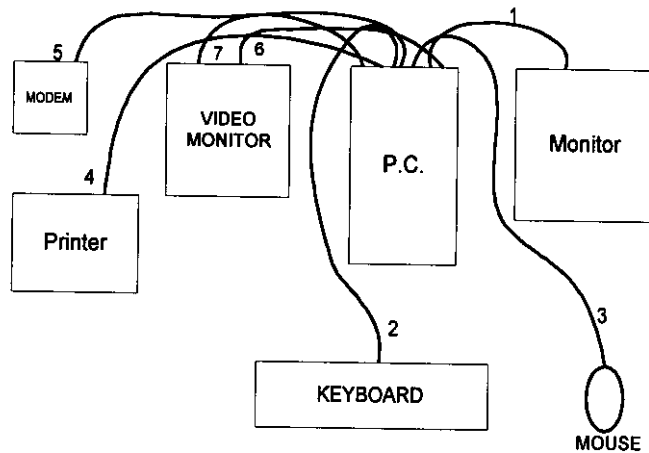
Support Device 6. --- P.C. (F.I.C)

FCC ID : N/A
Model No. : P2L97
Serial No. : SP1003
Data Cable : Shielded
Power Cord : Non-shielded
Power Supply Type : Switching

(Remark : This support device was tested to comply with FCC standards and
authorized under a declaration of conformity.)

Support Device 7. --- VIDEO MONITOR (PANASONIC)

FCC ID : N/A
Model No. : WV-CM1450
Serial No. : SP1005
Data Cable : Shielded
Power Cord : Non-shielded
Power Supply Type : Switching

2.3. CONNECTION DIAGRAM OF TEST SYSTEM

1. The I/O cable is connected from the EUT to the support device 1.
2. The I/O cable is connected from PC to the support device 2.
3. The I/O cable is connected from PC to the support device 3.
4. The I/O cable is connected from PC to the support device 4.
5. The I/O cable is connected from PC to the support device 5.
6. The S-video cable is connected from PC to the support device 6.
7. The V-video cable is connected from PC to the support device 6.

3. TEST SOFTWARE

An executive program, WINFCC.EXE under WIN 95, which generate a complete line of continuously repeating " H " pattern was used as the test software.

The program was executed as follows :

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the floppy disk drive and runs it.
- c. The PC sends " H " messages to the monitor, and the monitor displays " H " patterns on the screen.
- d. The PC sends " H " messages to the monitor and TV, and the monitor and TV displays " H " patterns on the screen.
- e. The PC sends " H " messages to the printer, then the printer prints them on the paper.
- f. The PC sends " H " messages to the modem.
- g. The PC sends " H " messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- h. Repeat the steps from b to f.

4. GENERAL INFORMATION OF TEST

4.1. TEST FACILITY

This test was carried out by SPORTON INTERNATIONAL INC.

Test Site Location : No. 30-1, Lin 6, Diing-Fwu Tsuen, Lin-Kou-Hsiang,
Taipei Hsien, Taiwan, R.O.C.
TEL : 886-2-2601-1640, FAX : 886-2-2601-1695

4.2. STANDARD FOR METHODS OF MEASUREMENT

ANSI C63.4-1992

4.3 .TEST IN COMPLIANCE WITH

FCC PART 15, SUBPART B CLASS B

4.4. FREQUENCY RANGE INVESTIGATED

- a. Conduction : from 450 KHz to 30 MHz
- b. Radiation : from 30 MHz to 2000 MHz.

4.5. TEST DISTANCE

The test distance of radiated emission from antenna to EUT is 3M.

5. TEST OF CONDUCTED POWERLINE

Conducted Emissions were measured from 450 KHz to 30 MHz with a bandwidth of 9 KHz on the 115 VAC power and return leads of the EUT according to the methods defined in ANSI C63.4-1992 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane as shown in Figure 5-3. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

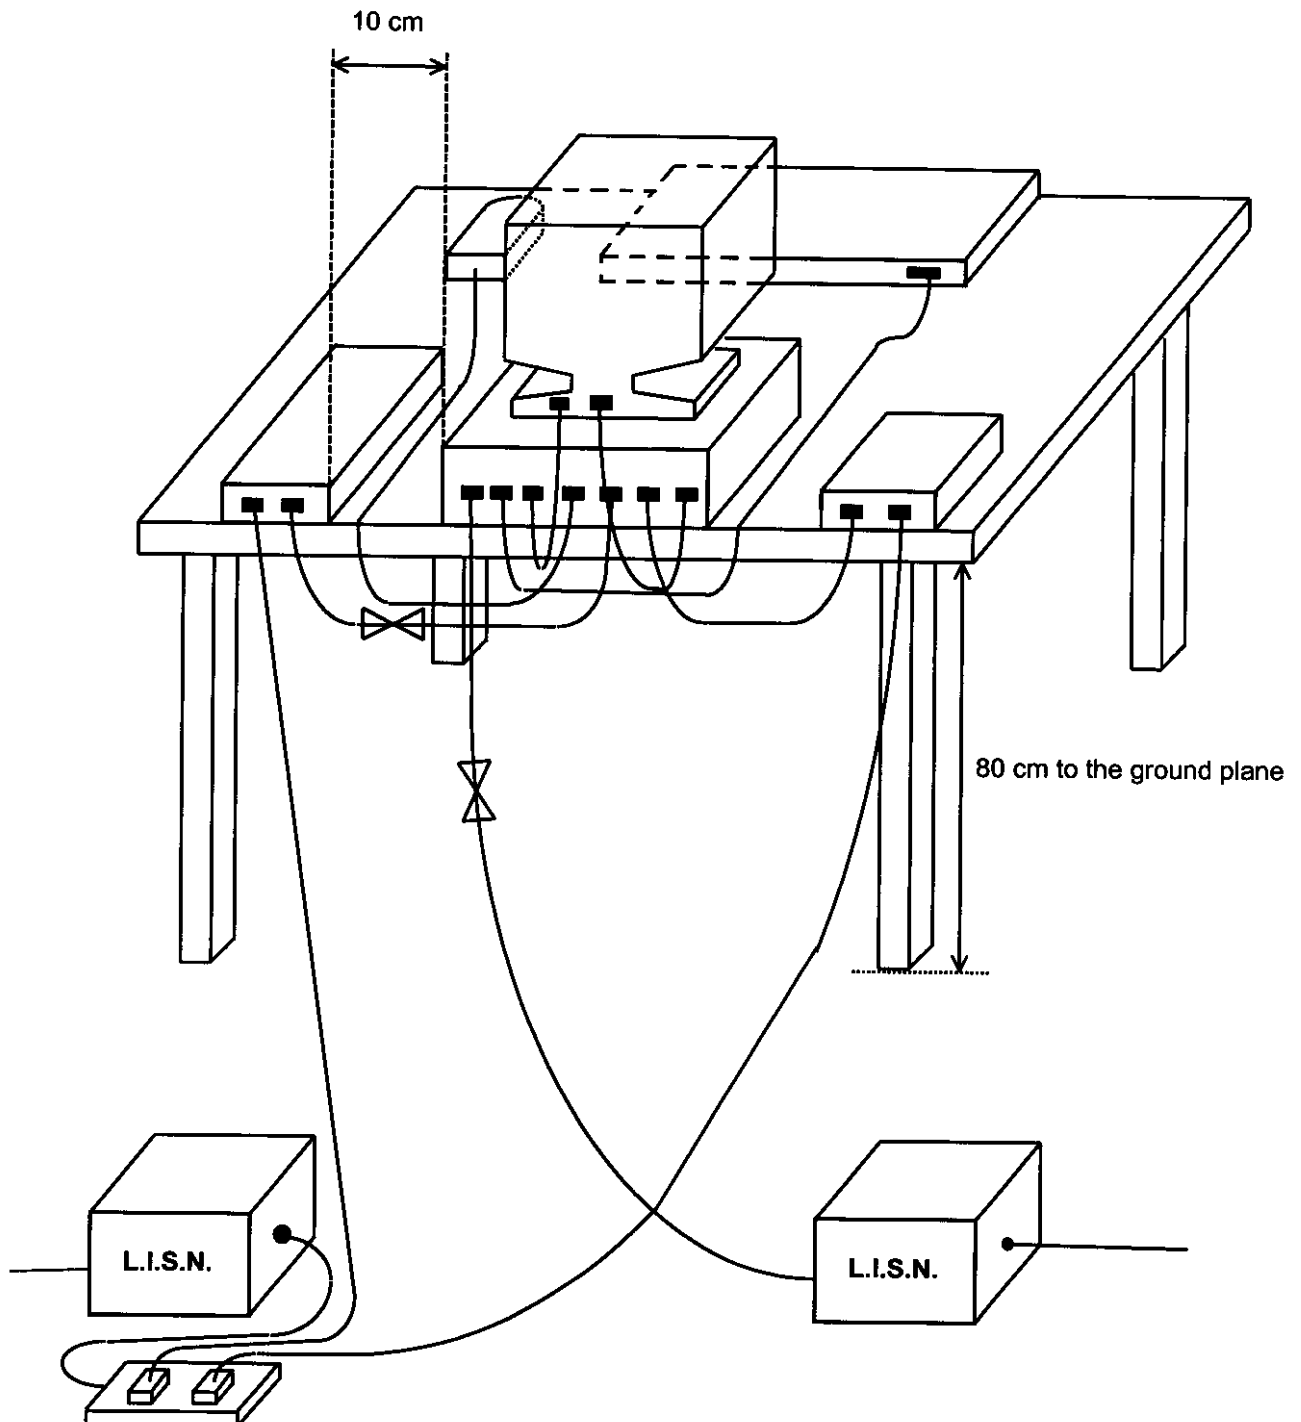
5.1. MAJOR MEASURING INSTRUMENTS

- Test Receiver (HP 8591EM)
 - Attenuation 0 dB
 - Start Frequency 0.45 MHz
 - Stop Frequency 30 MHz
 - Step MHz 0.007 MHz
 - IF Bandwidth 9 KHz

5.2. TEST PROCEDURES

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room and was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm , 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 450 KHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- i. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported otherwise the emissions which do not have 6 dB margin will be retested on by one using the quasi-peak method and reported.

5.3. TYPICAL TEST SETUP LAYOUT OF CONDUCTED POWERLINE



5.4. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION

- Frequency Range of Test : from 0.45 MHz to 30 MHz
- All emissions not reported here are more than 10 dB below the prescribed limit.
- Temperature : 25 °C
- Relative Humidity : 38 % RH
- Test Mode : 1600 × 1200, 106K, 85Hz
- Test Date : Sep. 11, 1998

The Conducted Emission test was passed at minimum margin

Neutral 14.00 MHz / 35.80 dBuV.

Frequency (MHz)	Line / Neutral	Meter Reading		Limits		Margin
		(dBuV)	(uV)	(dBuV)	(uV)	(dB)
0.50	L	28.60	26.92	48.00	251.19	-19.40
4.77	L	26.70	21.63	48.00	251.19	-21.30
25.73	L	34.60	53.70	48.00	251.19	-13.40
0.49	N	28.30	26.00	48.00	251.19	-19.70
14.00	N	35.80	61.66	48.00	251.19	-12.20
25.72	N	35.00	56.23	48.00	251.19	-13.00

Test Engineer :

KENNY CHUANG

5.4.1. TEST RESULT OF AC POWERLINE CONDUCTED EMISSION

- Frequency Range of Test : from 0.45 MHz to 30 MHz
- All emissions not reported here are more than 10 dB below the prescribed limit.
- Temperature : 25 °C
- Relative Humidity : 38 % RH
- Test Mode : 640 x 480 , 31K/60Hz (TV MODE)
- Test Date : Sep. 11, 1998

The Conducted Emission test was passed at minimum margin_

Neutral 21.33 MHz / 45.70 dBuV.

Frequency (MHz)	Line / Neutral	Meter Reading		Limits		Margin
		(dBuV)	(uV)	(dBuV)	(uV)	(dB)
3.56	L	33.80	48.98	48.00	251.19	-14.20
10.67	L	42.50	133.35	48.00	251.19	-5.50
21.34	L	44.10	160.32	48.00	251.19	-3.90
3.56	N	33.70	48.42	48.00	251.19	-14.30
10.67	N	41.80	123.03	48.00	251.19	-6.20
21.33	N	45.70	192.75	48.00	251.19	-2.30

Test Engineer : 
KENNY CHUANG

6. TEST OF RADIATED EMISSION

Radiated emissions from 30 MHz to 2000 MHz were measured with a bandwidth of 120 KHz according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand in the open-field site, 0.8 meter above the ground plane, as shown in Figure 6-3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions.

6.1. MAJOR MEASURING INSTRUMENTS

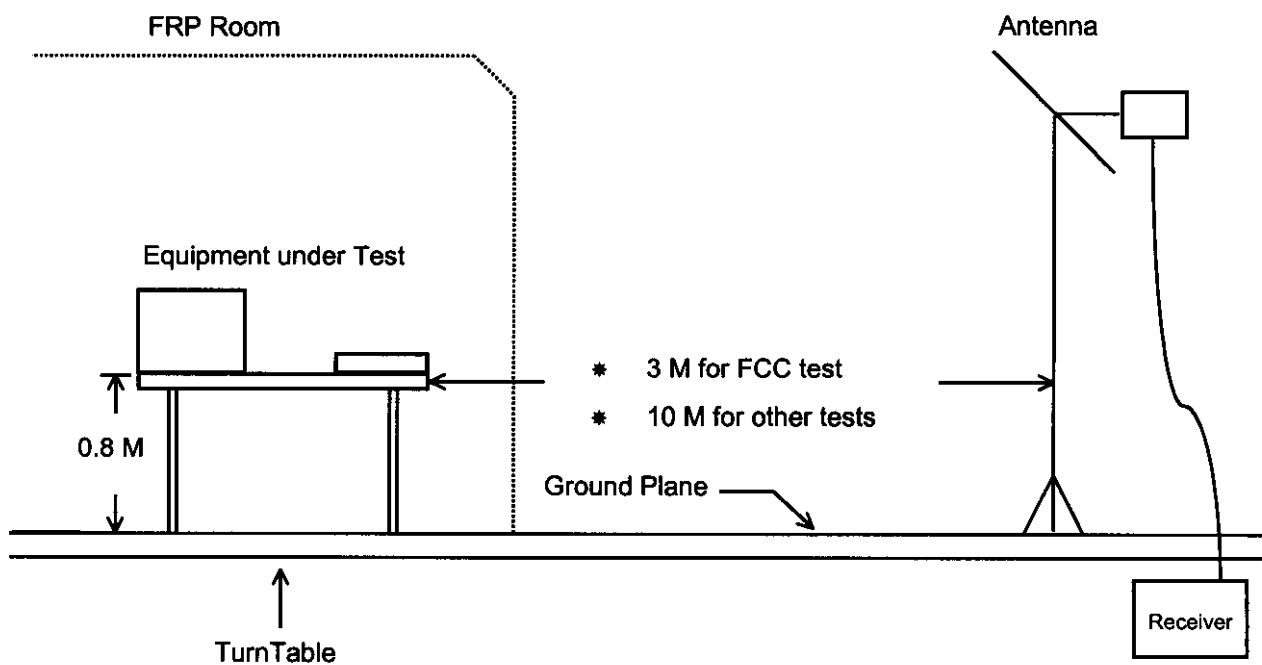
- Amplifier (HP 87405A)
 - Attenuation 0 dB
 - RF Gain 20 dB
 - Signal Input 0.1 MHz to 1.3 GHz

- Spectrum Analyzer (ADVANTEST R3261C)
 - Attenuation 0 dB
 - Start Frequency 30 MHz
 - Stop Frequency 2000 MHz
 - Resolution Bandwidth 1 MHz
 - Video Bandwidth 1 MHz
 - Signal Input 9 KHz to 2.6 GHz

- Quasi-Peak Adapter (ADVANTEST R3261C)
 - Resolution Bandwidth 120 KHz
 - Frequency Band 30 MHz to 1 GHz
 - Quasi-Peak Detector ON for Quasi-Peak Mode
OFF for Peak Mode

6.2. TEST PROCEDURES

- a. The EUT was placed on a rotatable table top 0.8 meter above ground.
- b. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
- c. The table was rotated 360 degrees to determine the position of the highest radiation.
- d. The antenna is a half wave dipole and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
- e. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
- f. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.
- g. If the emission level of the EUT in peak mode was 6 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported otherwise the emissions which do not have 6 dB margin will be repeated one by one using the quasi-peak method and reported.

6.3. TYPICAL TEST SETUP LAYOUT OF RADIATED EMISSION

6.4. TEST RESULT OF RADIATED EMISSION

- Equipment meets the technical specifications of 15.109
- Frequency Range of Test : from 30 MHz to 2000 MHz
- Test Distance : 3 M
- Temperature : 28°C
- Relative Humidity : 58 % RH
- Test Mode : 1600 × 1200, 106K, 85Hz
- Test Date : Sep. 10, 1998
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Sample Calculation at 209.38 MHz
Corrected Reading = 14.17 + 2.40 + 16.24 = 32.81 (dBuV/m)

The Radiated Emission test was passed at minimum margin

Vertical 299.44 MHz / 38.76 dBuV

Antenna Height 1.0 Meter , Turntable Degree 84° .

Frequency	Antenna	Cable	Reading	Limits	Emission	Level	Margin		
Polarity	Factor	Loss							
(MHz)	(dB)	(dB)	(dBuV)	(dBuV)	(uV)	(dBuV)	(uV)	(dB)	
199.71	H	14.03	2.40	13.68	43.50	150	30.11	32.03	-13.39
301.83	H	18.00	3.11	18.08	46.00	200	39.19	91.10	-6.81
742.57	V	26.43	5.48	10.60	46.00	200	42.51	133.51	-3.49
402.57	V	22.30	3.61	12.09	46.00	200	38.00	79.43	-8.00
465.21	V	22.37	3.89	14.92	46.00	200	41.18	114.55	-4.82
744.54	V	26.45	5.49	11.92	46.00	200	43.86	155.96	-2.14

Test Engineer : *Peter Wang*

PETER WANG

6.4.1. TEST RESULT OF RADIATED EMISSION

- Equipment meets the technical specifications of 15.109
- Frequency Range of Test : from 30 MHz to 2000 MHz
- Test Distance : 3 M
- Temperature : 28°C
- Relative Humidity : 58% RH
- Test Mode : 640 x480 , 31K/60Hz (TV MODE)
- Test Date : Sep. 10, 1998
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Sample Calculation at 199.71 MHz
Corrected Reading = $14.03 + 2.40 + 13.68 = 30.11$ (dBuV/m)

The Radiated Emission test was passed at minimum margin

Vertical 742.57 MHz / 42.51 dBuV

Antenna Height 1.0 Meter , Turntable Degree 120°.

Frequency	Antenna	Cable	Reading	Limits	Emission	Level	Margin
Polarity	Factor	Loss					
(MHz)	(dB)	(dB)	(dBuV)	(dBuV)	(uV)	(dBuV)	(uV)
209.38	H	14.17	2.40	16.24	43.50	150	32.81
226.11	H	14.55	2.43	17.07	46.00	200	34.06
210.97	V	14.19	2.40	16.56	43.50	150	33.15
226.91	V	14.59	2.43	13.60	46.00	200	30.62
299.44	V	17.98	3.10	17.69	46.00	200	38.76
465.21	V	22.37	3.89	11.52	46.00	200	37.78
							77.45
							-8.22

Test Engineer : Peter Wang
PETER WANG

7. ANTENNA FACTOR AND CABLE LOSS

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30	-1.91	0.90
35	-0.50	0.92
40	0.61	1.04
45	1.40	1.28
50	2.39	1.10
55	3.54	1.11
60	4.40	1.30
65	4.84	1.40
70	5.59	1.37
75	6.21	1.24
80	7.60	1.51
85	7.73	1.60
90	8.22	1.60
95	8.90	1.70
100	9.36	1.70
110	10.01	1.70
120	10.41	1.90
130	10.84	1.90
140	11.42	1.91
150	11.91	2.01
160	12.25	2.11
170	12.72	2.21
180	13.02	2.30
190	13.50	2.30
200	14.05	2.40
220	15.11	2.50
240	16.81	2.60
260	17.51	2.71
280	17.70	2.90
300	17.89	2.91
320	18.00	3.10
340	18.33	3.20
360	19.44	3.30
380	20.31	3.40
400	21.19	3.50
450	21.10	3.70
500	22.21	4.10
550	23.42	4.30
600	24.01	4.50
650	25.11	4.70
700	26.00	4.90
750	26.41	5.11
800	27.10	5.50
850	27.51	5.60
900	27.90	5.80
950	28.01	5.90
1000	28.50	5.80
2000	29.00	6.10

8. LIST OF MEASURING EQUIPMENT USED

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver (site 2)	HP	8591EM	3710A01187	9 KHz - 18 GHz	Sep. 29, 1997	Conduction
LISN (EUT) (site 2)	Telemeter	NNB-2/16Z	98009	50 ohm / 50 uH	Jan. 29, 1998	Conduction
LISN (Support Unit) (site 2)	EMCO	3810/2NM	9703-1839	50 ohm / 50 uH	Jul. 06, 1998	Conduction
Amplifier (Site 2)	HP	87405A	3207A01437	10MHz - 3.0GHz	Jun. 26, 1998	Radiation
Spectrum Analyzer (site 2)	ADVANTEST	R3261C	71720606	9KHz - 2.6GHz	Mar. 18, 1998	Radiation
Bilog Antenna (Site 2)	CHASE	CBL6112A	2322	30MHz - 2GHz	Jan. 21, 1998	Radiation
Half-wave dipole antenna (Site 2)	EMCO	3121C	9705-1285	28 M - 1GHz	May 19, 1998	Radiation
Turn Table (site 2)	EMCO	2080-1.23	9703-	0 ~ 360 degree	N/A	Radiation
Antenna Mast (site 2)	EMCO	2070-2	9703-2041	1 m- 4 m	N/A	Radiation

※ The column of Remark indicates that the instruments used for conduction ("C") or radiation ("R") test.



FCC/PTL/341

NOV 30 1998

D700701

SPORTON LAB.

Certificate No:

CERTIFICATE OF COMPLIANCE

Authorized under Declaration of Conformity
according to

47 CFR, Part 2 and Part 15 of the FCC Rules

Equipment Under Test : **PERSONAL COMPUTER**

Model No. : **P2L97**

Applicant : **FIRST INTERNATIONAL COMPUTER INC.**

6F, Formosa Plastics Rear Building 201,
Tung Hwa N. Rd., Taipei, Taiwan, R.O.C.



CERTIFY THAT:

THE MEASUREMENTS SHOWN IN THIS TEST REPORT WERE MADE IN
ACCORDANCE WITH THE PROCEDURES GIVEN IN **ANSI C63.4 - 1992**
AND THE ENERGY EMITTED BY THIS EQUIPMENT WAS **PASSED BOTH**
RADIATED AND CONDUCTED EMISSIONS CLASS B LIMITS. THE TESTING
WAS COMPLETED ON **SEP. 02, 1997** AT **SPORTON INTERNATIONAL**
INC. LAB. IN NEI HWU.

W. L. Huang OCT 02, 97

W. L. Huang

GENERAL MANAGER