



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313
33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372
3162 BELICK STREET • SANTA CLARA, CA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372
13301 MCCALLEN PASS • AUSTIN, TEXAS 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

March 17, 2015

Nielsen Audio
9705 Patuxent Woods Drive
Columbia MD 21046

Dear Allen Zimmerman,

Enclosed is the EMC Wireless test report for compliance testing of the Nielsen Audio, PPM 360 Meter as tested to the requirements of the FCC Certification rules under Title 47 of the CFR Part 22 Subpart H and RSS-132 Issue 3 January 2013 for Cellular Devices, and FCC Part 24 Subpart E and RSS-133 Issue 6 January 2013 for Broadband PCS Devices.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please contact me.

Sincerely yours,
MET LABORATORIES, INC.

Jennifer Warnell
Documentation Department

Reference: (\Nielsen Audio\EMC83511A-FCC22_24 Rev. 2)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc.



MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

13301 MCCALLEN PASS • AUSTIN, TEXAS 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

Electromagnetic Compatibility Criteria Test Report

for the

**Nielsen Audio
Model PPM 360 Meter**

**Tested under
FCC Certification Rules
Title 47 of the CFR,
Part 22 Subpart H and RSS-132 for Cellular Devices
&
Part 24 Subpart E and RSS-133 for Broadband PCS Devices**

MET Report: EMC83511A-FCC22_24 Rev. 2

March 17, 2015

Prepared For:

**Nielsen Audio
9705 Patuxent Woods Drive
Columbia MD 21046**

**Prepared By:
MET Laboratories, Inc.
914 W. Patapsco Ave
Baltimore, MD 21230**

**Electromagnetic Compatibility Criteria
Test Report**

for the

**Nielsen Audio
Model PPM 360 Meter**

**Tested Under
FCC Certification Rules
Title 47 of the CFR,
Part 22 Subpart H and RSS-132 for Cellular Devices
&
Part 24 Subpart E and RSS-133 for Broadband PCS Devices**



Benjamin Taylor
Project Engineer, Electromagnetic Compatibility Lab



Jennifer Warnell
Documentation Department

Engineering Statement: The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Part 22 Subpart H and Part 15 Subpart B of the FCC Rules and RSS-132 Issue 3 January 2013 and RSS-133 Issue 6 January 2013 for the Industry Canada Standards under normal use and maintenance.



Asad Bajwa,
Director, Electromagnetic Compatibility Lab

Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	January 28, 2015	Initial Issue
1	March 10, 2015	Revised to reflect engineer corrections.
2	March 17, 2015	Revised to reflect further engineer corrections.

Table of Contents

I.	Executive Summary	1
	A. Purpose of Test	2
	B. Executive Summary	2
II.	Equipment Configuration	3
	A. Overview.....	4
	B. References.....	5
	C. Test Site	5
	D. Description of Test Sample.....	5
	E. Mode of Operation.....	7
	F. Method of Monitoring EUT Operation	7
	G. Modifications	7
	Modifications to EUT	7
	Modifications to Test Standard	7
	H. Disposition of EUT	7
III.	Electromagnetic Compatibility Criteria for Intentional Radiators.....	8
	§ 2.1046 RF Power Output	9
	§ 2.1049 Occupied Bandwidth	17
	§ 2.1053 Radiated Spurious Emissions	24
	§ 2.1051 Spurious Emissions at Antenna Terminals	38
	§ 2.1055 Frequency Stability over Temperature and Voltage Variations.....	52
IV.	Test Equipment	54

List of Tables

Table 1. Executive Summary of EMC Compliance Testing	2
Table 2. RF Output Power, GPRS	10
Table 2. RF Output Power, EGPRS	10
Table 2. RF Output Power, WCDMA	10
Table 3. Frequency Stability, Test Results	52
Table 4. Test Equipment	55

List of Plots

Plot 1. RF Power, GPRS, 850 MHz Band, Low Channel	11
Plot 2. RF Power, GPRS, 850 MHz Band, Mid Channel	11
Plot 3. RF Power, GPRS, 850 MHz Band, High Channel	11
Plot 4. RF Power, GPRS, 1900 MHz Band, Low Channel	12
Plot 5. RF Power, GPRS, 1900 MHz Band, Mid Channel	12
Plot 6. RF Power, GPRS, 1900 MHz Band, High Channel	12
Plot 7. RF Power, EGPRS, 850 MHz Band, Low Channel	13
Plot 8. RF Power, EGPRS, 850 MHz Band, Mid Channel	13
Plot 9. RF Power, EGPRS, 850 MHz Band, High Channel	13
Plot 10. RF Power, EGPRS, 1900 MHz Band, Low Channel	14
Plot 11. RF Power, EGPRS, 1900 MHz Band, Mid Channel	14
Plot 12. RF Power, EGPRS, 1900 MHz Band, High Channel	14
Plot 13. RF Power, WCDMA, 850 MHz Band, Low Channel	15
Plot 14. RF Power, WCDMA, 850 MHz Band, Mid Channel	15
Plot 15. RF Power, WCDMA, 850 MHz Band, High Channel	15
Plot 16. RF Power, WCDMA, 1900 MHz Band, Low Channel	16
Plot 17. RF Power, WCDMA, 1900 MHz Band, Mid Channel	16
Plot 18. RF Power, WCDMA, 1900 MHz Band, High Channel	16
Plot 19. Occupied Bandwidth, GPRS, 850 MHz Band, Low Channel	18
Plot 20. Occupied Bandwidth, GPRS, 850 MHz Band, Mid Channel	18
Plot 21. Occupied Bandwidth, GPRS, 850 MHz Band, High Channel	18
Plot 22. Occupied Bandwidth, GPRS, 1900 MHz Band, Low Channel	19
Plot 23. Occupied Bandwidth, GPRS, 1900 MHz Band, Mid Channel	19
Plot 24. Occupied Bandwidth, GPRS, 1900 MHz Band, High Channel	19
Plot 25. Occupied Bandwidth, EGPRS, 850 MHz Band, Low Channel	20
Plot 26. Occupied Bandwidth, EGPRS, 850 MHz Band, Mid Channel	20
Plot 27. Occupied Bandwidth, EGPRS, 850 MHz Band, High Channel	20
Plot 28. Occupied Bandwidth, EGPRS, 1900 MHz Band, Low Channel	21
Plot 29. Occupied Bandwidth, EGPRS, 1900 MHz Band, Mid Channel	21
Plot 30. Occupied Bandwidth, EGPRS, 1900 MHz Band, High Channel	21
Plot 31. Occupied Bandwidth, WCDMA, 850 MHz Band, Low Channel	22
Plot 32. Occupied Bandwidth, WCDMA, 850 MHz Band, Mid Channel	22
Plot 33. Occupied Bandwidth, WCDMA, 850 MHz Band, High Channel	22
Plot 34. Occupied Bandwidth, WCDMA, 1900 MHz Band, Low Channel	23
Plot 35. Occupied Bandwidth, WCDMA, 1900 MHz Band, Mid Channel	23
Plot 36. Occupied Bandwidth, WCDMA, 1900 MHz Band, High Channel	23
Plot 37. Radiated Spurious Emissions, GPRS, 850 MHz Band, Low Channel, 30 MHz – 1 GHz	26
Plot 38. Radiated Spurious Emissions, GPRS, 850 MHz Band, Low Channel, 1 GHz – 18 GHz	26
Plot 39. Radiated Spurious Emissions, GPRS, 850 MHz Band, Mid Channel, 30 MHz – 1 GHz	26
Plot 40. Radiated Spurious Emissions, GPRS, 850 MHz Band, Mid Channel, 1 GHz – 18 GHz	27
Plot 41. Radiated Spurious Emissions, GPRS, 850 MHz Band, High Channel, 30 MHz – 1 GHz	27

Plot 42. Radiated Spurious Emissions, GPRS, 850 MHz Band, High Channel, 1 GHz – 18 GHz	27
Plot 43. Radiated Spurious Emissions, GPRS, 1900 MHz Band, Low Channel, 30 MHz – 1 GHz	28
Plot 44. Radiated Spurious Emissions, GPRS, 1900 MHz Band, Low Channel, 1 GHz – 18 GHz	28
Plot 45. Radiated Spurious Emissions, GPRS, 1900 MHz Band, Mid Channel, 30 MHz – 1 GHz	28
Plot 46. Radiated Spurious Emissions, GPRS, 1900 MHz Band, Mid Channel, 1 GHz – 18 GHz.....	29
Plot 47. Radiated Spurious Emissions, GPRS, 1900 MHz Band, High Channel, 30 MHz – 1 GHz.....	29
Plot 48. Radiated Spurious Emissions, GPRS, 1900 MHz Band, High Channel, 1 GHz – 18 GHz	29
Plot 49. Radiated Spurious Emissions, EGPRS, 850 MHz Band, Low Channel, 30 MHz – 1 GHz.....	30
Plot 50. Radiated Spurious Emissions, EGPRS, 850 MHz Band, Low Channel, 1 GHz – 18 GHz.....	30
Plot 51. Radiated Spurious Emissions, EGPRS, 850 MHz Band, Mid Channel, 30 MHz – 1 GHz.....	30
Plot 52. Radiated Spurious Emissions, EGPRS, 850 MHz Band, Mid Channel, 1 GHz – 18 GHz	31
Plot 53. Radiated Spurious Emissions, EGPRS, 850 MHz Band, High Channel, 30 MHz – 1 GHz	31
Plot 54. Radiated Spurious Emissions, EGPRS, 850 MHz Band, High Channel, 1 GHz – 18 GHz.....	31
Plot 55. Radiated Spurious Emissions, EGPRS, 1900 MHz Band, Low Channel, 30 MHz – 1 GHz.....	32
Plot 56. Radiated Spurious Emissions, EGPRS, 1900 MHz Band, Low Channel, 1 GHz – 18 GHz.....	32
Plot 57. Radiated Spurious Emissions, EGPRS, 1900 MHz Band, Mid Channel, 30 MHz – 1 GHz.....	32
Plot 58. Radiated Spurious Emissions, EGPRS, 1900 MHz Band, Mid Channel, 1 GHz – 18 GHz	33
Plot 59. Radiated Spurious Emissions, EGPRS, 1900 MHz Band, High Channel, 30 MHz – 1 GHz	33
Plot 60. Radiated Spurious Emissions, EGPRS, 1900 MHz Band, High Channel, 1 GHz – 18 GHz.....	33
Plot 61. Radiated Spurious Emissions, WCDMA, 850 MHz Band, Low Channel, 30 MHz – 1 GHz.....	34
Plot 62. Radiated Spurious Emissions, WCDMA, 850 MHz Band, Low Channel, 1 GHz – 18 GHz	34
Plot 63. Radiated Spurious Emissions, WCDMA, 850 MHz Band, Mid Channel, 30 MHz – 1 GHz	34
Plot 64. Radiated Spurious Emissions, WCDMA, 850 MHz Band, Mid Channel, 1 GHz – 18 GHz	35
Plot 65. Radiated Spurious Emissions, WCDMA, 850 MHz Band, High Channel, 30 MHz – 1 GHz	35
Plot 66. Radiated Spurious Emissions, WCDMA, 850 MHz Band, High Channel, 1 GHz – 18 GHz.....	35
Plot 67. Radiated Spurious Emissions, WCDMA, 1900 MHz Band, Low Channel, 30 MHz – 1 GHz.....	36
Plot 68. Radiated Spurious Emissions, WCDMA, 1900 MHz Band, Low Channel, 1 GHz – 18 GHz	36
Plot 69. Radiated Spurious Emissions, WCDMA, 1900 MHz Band, Mid Channel, 30 MHz – 1 GHz	36
Plot 70. Radiated Spurious Emissions, WCDMA, 1900 MHz Band, Mid Channel, 1 GHz – 18 GHz.....	37
Plot 71. Radiated Spurious Emissions, WCDMA, 1900 MHz Band, High Channel, 30 MHz – 1 GHz.....	37
Plot 72. Radiated Spurious Emissions, WCDMA, 1900 MHz Band, High Channel, 1 GHz – 18 GHz.....	37
Plot 73. Conducted Spurious Emissions, GPRS, 850 MHz Band, Low Channel, 30 MHz – 10 GHz	40
Plot 74. Conducted Spurious Emissions, GPRS, 850 MHz Band, Mid Channel, 30 MHz – 10 GHz	40
Plot 75. Conducted Spurious Emissions, GPRS, 850 MHz Band, High Channel, 30 MHz – 10 GHz.....	40
Plot 76. Conducted Spurious Emissions, GPRS, 1900 MHz Band, Low Channel, 30 MHz – 18 GHz	41
Plot 77. Conducted Spurious Emissions, GPRS, 1900 MHz Band, Mid Channel, 30 MHz – 18 GHz	41
Plot 78. Conducted Spurious Emissions, GPRS, 1900 MHz Band, High Channel, 30 MHz – 18 GHz.....	41
Plot 79. Conducted Spurious Emissions, EGPRS, 850 MHz Band, Low Channel, 30 MHz – 10 GHz.....	42
Plot 80. Conducted Spurious Emissions, EGPRS, 850 MHz Band, Mid Channel, 30 MHz – 10 GHz.....	42
Plot 81. Conducted Spurious Emissions, EGPRS, 850 MHz Band, High Channel, 30 MHz – 10 GHz	42
Plot 82. Conducted Spurious Emissions, EGPRS, 1900 MHz Band, Low Channel, 30 MHz – 18 GHz.....	43
Plot 83. Conducted Spurious Emissions, EGPRS, 1900 MHz Band, Mid Channel, 30 MHz – 18 GHz.....	43
Plot 84. Conducted Spurious Emissions, EGPRS, 1900 MHz Band, High Channel, 30 MHz – 18 GHz	43
Plot 85. Conducted Spurious Emissions, WCDMA, 850 MHz Band, Low Channel, 30 MHz – 10 GHz.....	44
Plot 86. Conducted Spurious Emissions, WCDMA, 850 MHz Band, Mid Channel, 30 MHz – 10 GHz	44
Plot 87. Conducted Spurious Emissions, WCDMA, 850 MHz Band, High Channel, 30 MHz – 10 GHz	44
Plot 88. Conducted Spurious Emissions, WCDMA, 1900 MHz Band, Low Channel, 30 MHz – 18 GHz.....	45
Plot 89. Conducted Spurious Emissions, WCDMA, 1900 MHz Band, Mid Channel, 30 MHz – 18 GHz	45
Plot 90. Conducted Spurious Emissions, WCDMA, 1900 MHz Band, High Channel, 30 MHz – 18 GHz.....	45
Plot 91. Band Edge Emissions, GPRS, 850 MHz Band, Low Channel.....	46
Plot 92. Band Edge Emissions, GPRS, 850 MHz Band, High Channel	46
Plot 93. Band Edge Emissions, GPRS, 1900 MHz Band, Low Channel.....	47
Plot 94. Band Edge Emissions, GPRS, 1900 MHz Band, High Channel	47
Plot 95. Band Edge Emissions, EGPRS, 850 MHz Band, Low Channel	48

Plot 96. Band Edge Emissions, EGPRS, 850 MHz Band, High Channel.....	48
Plot 97. Band Edge Emissions, EGPRS, 1900 MHz Band, Low Channel	49
Plot 98. Band Edge Emissions, EGPRS, 1900 MHz Band, High Channel	49
Plot 99. Band Edge Emissions, WCDMA, 850 MHz Band, Low Channel	50
Plot 100. Band Edge Emissions, WCDMA, 850 MHz Band, High Channel	50
Plot 101. Band Edge Emissions, WCDMA, 1900 MHz Band, Low Channel	51
Plot 102. Band Edge Emissions, WCDMA, 1900 MHz Band, High Channel	51

List of Photographs

Photograph 1. PPM 360 Meter	6
Photograph 2. Frequency Stability, Test Setup	53



List of Terms and Abbreviations

AC	Alternating Current
ACF	Antenna Correction Factor
Cal	Calibration
<i>d</i>	Measurement Distance
dB	Decibels
dB μ A	Decibels above one microamp
dB μ V	Decibels above one microvolt
dB μ A/m	Decibels above one microamp per meter
dB μ V/m	Decibels above one microvolt per meter
DC	Direct Current
E	Electric Field
DSL	Digital Subscriber Line
ESD	Electrostatic Discharge
EUT	Equipment Under Test
<i>f</i>	Frequency
FCC	Federal Communications Commission
GRP	Ground Reference Plane
H	Magnetic Field
HCP	Horizontal Coupling Plane
Hz	Hertz
IEC	International Electrotechnical Commission
kHz	kilohertz
kPa	kilopascal
kV	kilovolt
LISN	Line Impedance Stabilization Network
MHz	Megahertz
μ H	microhenry
μ	microfarad
μ s	microseconds
NEBS	Network Equipment-Building System
PRF	Pulse Repetition Frequency
RF	Radio Frequency
RMS	Root-Mean-Square
TWT	Traveling Wave Tube
V/m	Volts per meter
VCP	Vertical Coupling Plane

I. Executive Summary

A. Purpose of Test

An EMC evaluation was performed to determine compliance of the Nielsen Audio PPM 360 Meter, with the requirements of Part 22 Subpart H and Part 24 Subpart E. All references are to the most current version of Title 47 of the Code of Federal Regulations in effect. In accordance with §2.1033, the following data is presented in support of the Certification of the PPM 360 Meter. Nielsen Audio should retain a copy of this document which should be kept on file for at least two years after the manufacturing of the PPM 360 Meter, has been **permanently** discontinued.

B. Executive Summary

The following tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 22 Subpart H and Part 24 Subpart E, in accordance with Nielsen Audio, purchase order number 3000192678.

FCC Reference	IC Reference	Description	Compliance
Part 22 Subpart H §2.1046; §22.913 Part 24 Subpart E §2.1046; §24.232	RSS-132, Section 5.4 RSS-133, Section 6.4	RF Power Output (ERP/EIRP)	Compliant
Part 22 Subpart H §2.1049; §22.905; §22.917 Part 24 Subpart E §2.1049; §24.238	RSS-GEN Issued 3 December 2010	Occupied Bandwidth	Compliant
Part 22 Subpart H §2.1051 Part 24 Subpart E §2.1051; §24.238	RSS-132, Section 5.5 RSS-133, Section 6.5	Conducted Spurious Emissions at Antenna Terminals	Compliant
Part 22 Subpart H §2.1053; §22.917 Part 24 Subpart E §2.1053; §24.238	RSS-132, Section 5.5 RSS-133, Section 6.5	Radiated Spurious Emissions from the Cabinet	Compliant
Part 22 Subpart H §2.1055; §22.355 Part 24 Subpart E §2.1055; §24.235	RSS-132, Section 5.3 RSS-133, Section 6.3	Frequency stability	Compliant

Table 1. Executive Summary of EMC Compliance Testing

II. Equipment Configuration

A. Overview

MET Laboratories, Inc. was contracted by Nielsen Audio to perform testing on the PPM 360 Meter, under Nielsen Audio's purchase order number 3000192678.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Nielsen Audio, PPM 360 Meter.

The results obtained relate only to the item(s) tested.

Model(s) Tested:	PPM 360 Meter (model DA118)	
Model(s) Covered:	PPM 360 Meter (model DA118)	
Filing Status:	Class II Permissive Change/Reassessment	
EUT Specifications:	Primary Power: 3.7 Li-ion battery Secondary Power: 120 VAC, 60 Hz (external charger)	
	FCC ID: IGKDA118 IC: 4213A-DA118	
	Type of Modulations:	GPRS EGPRS WCDMA
	Equipment Code:	PCT
	RF Conducted Power Output	GPRS 850: 31.22 dBm GPRS 1900: 28.92 dBm EGPRS 850: 28.85dBm EGPRS 1900: 27.52dBm WCDMA 850: 25.32dBm WCDMA 1900: 25.62dBm
	EUT Frequency Ranges:	GSM850: 824.228 - 848.800 MHz PCS1900: 1850.2 - 1909.8 MHz
Analysis:	The results obtained relate only to the item(s) tested.	
Environmental Test Conditions:	Temperature: 15-35° C	
	Relative Humidity: 30-60%	
	Barometric Pressure: 860-1060 mbar	
Evaluated by:	Benjamin Taylor	
Date(s):	March 17, 2015	

B. References

CFR 47, Part 22, Subpart H	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 22: Rules and Regulations for Cellular Devices.
CFR 47, Part 24, Subpart E	Federal Communication Commission, Code of Federal Regulations, Title 47, Part 24: Rules and Regulations for Personal Communications Services
RSS-132 Issue 3 January 2013	Cellular Telephone Systems Operating in the Bands 824-849 MHz and 869-894 MHz
RSS-133 Issue 6 January 2013	2 GHz Personal Communications Services
RSS-GEN Issue 3 December 2010	General Requirements and Information for the Certification of Radio Apparatus
ANSI C63.4:2003	Methods and Measurements of Radio-Noise Emissions from Low-Voltage Electrical And Electronic Equipment in the Range of 9 kHz to 40 GHz
ISO/IEC 17025:2005	General Requirements for the Competence of Testing and Calibration Laboratories
EIA/TIA-603-A-2001	Land Mobile FM or PM Communication Equipment Measurement and Performance Standards

C. Test Site

All testing was performed at MET Laboratories, Inc., 914 W. Patapsco Ave, Baltimore, MD 21230. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a 3 meter semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

D. Description of Test Sample

The Nielsen Audio PPM 360 Meter, Equipment Under Test (EUT), is carried by panelists and detects the media codes embedded into program material that panelists are exposed to throughout the day. The meter logs this information along with a time stamp when the media codes are detected. At predetermined times the PPM G2V2 Meter connects to the collection servers. After establishing this connection the PPM G2V2 Meter then transmits the panelist data logs to the collection servers. After the data logs are transmitted the PPM G2V2 Meter then disconnects from the collection servers until the next programmed time.



Photograph 1. PPM 360 Meter

E. Mode of Operation

The PPM G2V2 Meter uses the same wireless provider that one may use with a standard cell phone. Three important differences exist between the PPM G2V2 Meter and a cell phone. The PPM G2V2 Meter does not have GPS location detection; the PPM G2V2 Meter does not have SMS messaging capability; and the PPM G2V2 Meter does not have voice capability.

F. Method of Monitoring EUT Operation

1. Messages formerly displayed on the base/recharger of the first generation PPM G2V2 Meter are now displayed on the PPM G2V2 Meter's LCD.
2. The green motion LED on the PPM G2V2 Meter operates on the same principles as the generation 1 meter. The LED is included for compliance purposes and has 3 unique states (on, flash/warn, and off).

G. Modifications

a) Modifications to EUT

No modifications were made to the EUT.

b) Modifications to Test Standard

No modifications were made to the test standard.

H. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Nielsen Audio. upon completion of testing.



III. Electromagnetic Compatibility Criteria for Intentional Radiators



Electromagnetic Compatibility Criteria for Intentional Radiators

§ 2.1046 RF Power Output

Test Requirements: § 2.1046 Measurements required: RF power output:

§ 2.1046 (a) For transmitters other than single sideband, independent sideband and controlled carrier radiotelephone, power output shall be measured at the RF output terminals when the transmitter is adjusted in accordance with the tune-up procedure to give the values of current and voltage on the circuit elements specified in § 2.1033(c)(8). The electrical characteristics of the radio frequency load attached to the output terminals when this test is made shall be stated.

§ 22.913 (b) The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

§ 24.232 Power and antenna height limits.

§ 24.232 (b): Mobile/portable stations are limited to 2 watts e.i.r.p. peak power and the equipment must employ means to limit the power to the minimum necessary for successful communications.

Test Procedures: As required by 47 CFR 2.1046, RF power output measurements were made at the RF output terminals using an attenuator and spectrum analyzer. The spectrum analyzer was set to settings as dictated by the licensed measurement guidance procedures. Measurements were taken at the low, mid, and high channels.

Test Results: The EUT complies with the requirements of this section.

Test Engineer(s): Benjamin Taylor

Test Date(s): 12/23/14



GPRS850				
Channel (MHz)	Conducted Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)
824.2	31.22	-1.9775	29.2425	0.840
836.6	30.87	-1.9775	28.8925	0.775
848.8	30.52	-1.9775	28.5425	0.715
GPRS1900				
Channel (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)
1850.2	28.69	1.8324	30.5224	1.128
1880	28.92	1.8324	30.7524	1.189
1909.8	28.74	1.8324	30.5724	1.141


Table 2. RF Output Power, GPRS

EGPRS850				
Channel (MHz)	Conducted Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)
824.2	28.84	-1.9775	26.8625	0.486
836.6	28.85	-1.9775	26.8725	0.487
848.8	28.83	-1.9775	26.8525	0.484
EGPRS1900				
Channel (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)
1850.2	27.29	1.8324	29.1224	0.817
1880	27.52	1.8324	29.3524	0.861
1909.8	27.39	1.8324	29.2224	0.836


Table 3. RF Output Power, EGPRS

WCDMA850				
Channel (MHz)	Conducted Power (dBm)	Antenna Gain (dBd)	ERP (dBm)	ERP (W)
826.4	25.32	-1.9775	23.3425	0.216
836.2	24.88	-1.9775	22.9025	0.195
846.6	25.04	-1.9775	23.0625	0.202
WCDMA1900				
Channel (MHz)	Conducted Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP (W)
1852.4	25.62	1.8324	27.4524	0.556
1880	25.47	1.8324	27.3024	0.537
1907.6	25.58	1.8324	27.4214	0.551


Table 4. RF Output Power, WCDMA

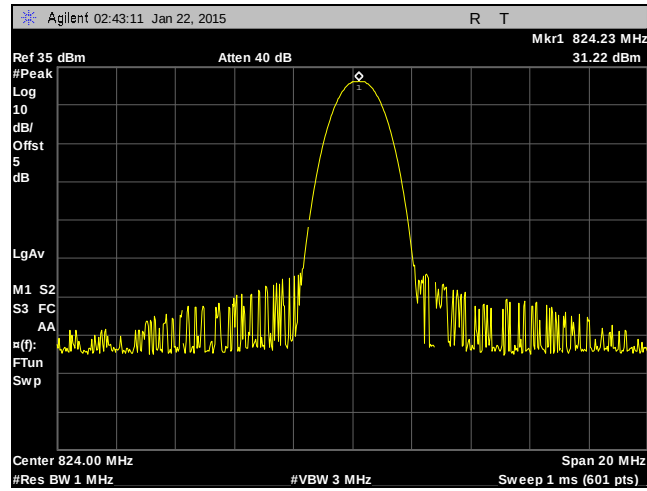


Plot 1. RF Power, GPRS, 850 MHz Band, Low Channel

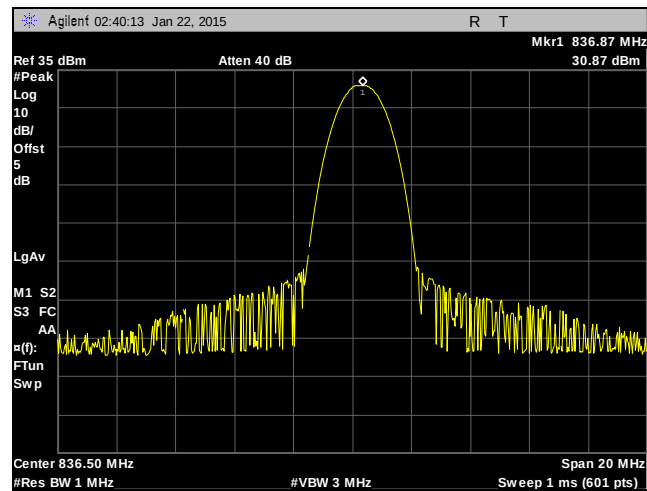


Plot 2. RF Power, GPRS, 850 MHz Band, Mid Channel

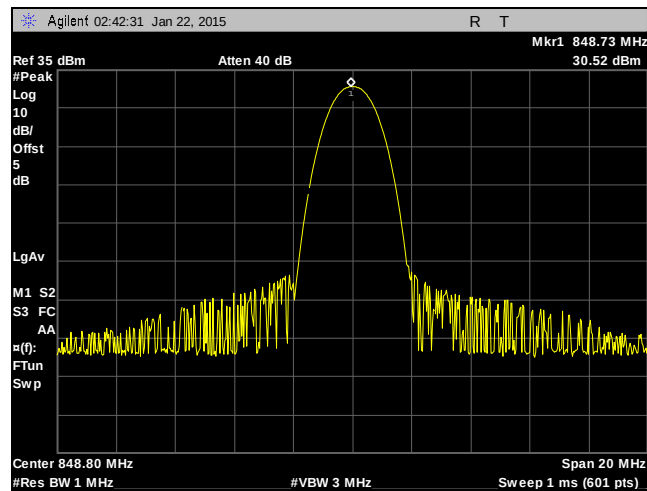


Plot 3. RF Power, GPRS, 850 MHz Band, High Channel

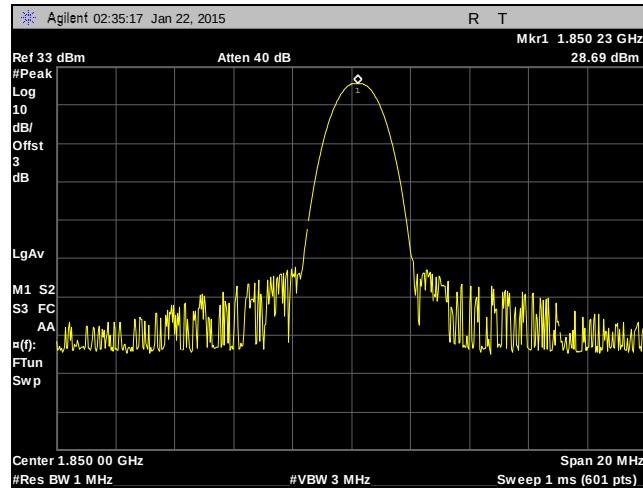


Plot 4. RF Power, GPRS, 1900 MHz Band, Low Channel

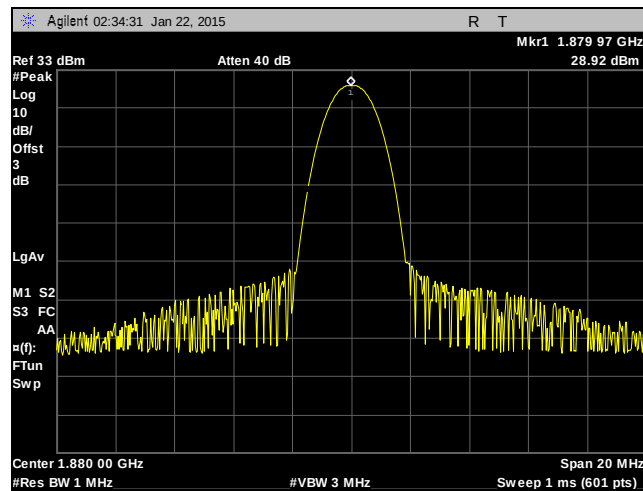


Plot 5. RF Power, GPRS, 1900 MHz Band, Mid Channel

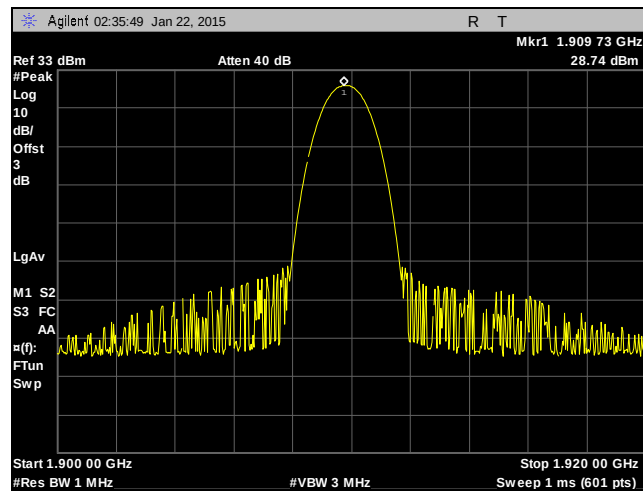


Plot 6. RF Power, GPRS, 1900 MHz Band, High Channel

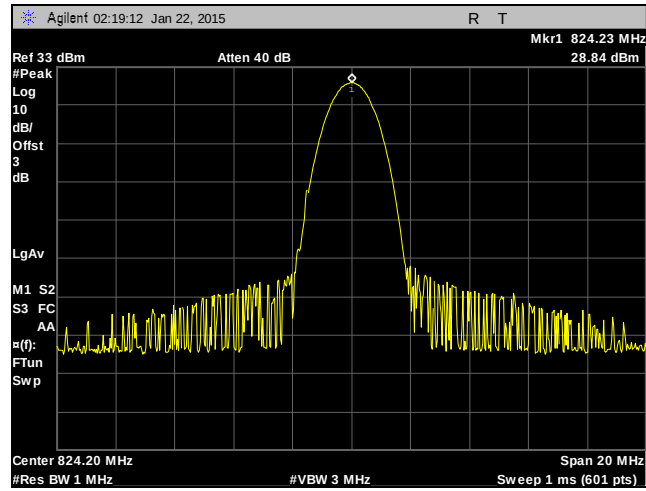


Plot 7. RF Power, EGPRS, 850 MHz Band, Low Channel

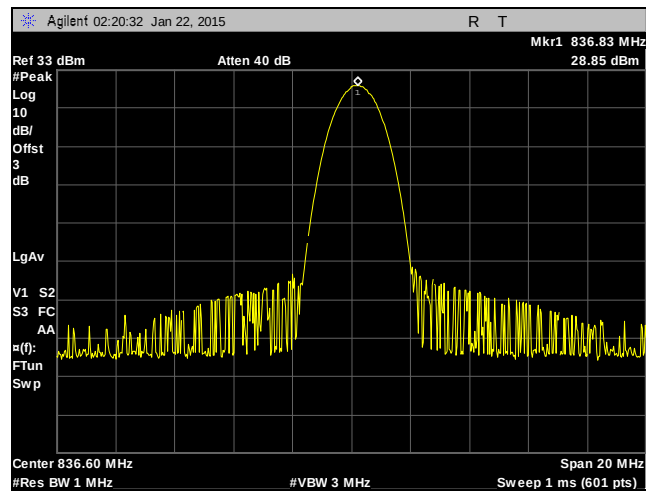


Plot 8. RF Power, EGPRS, 850 MHz Band, Mid Channel

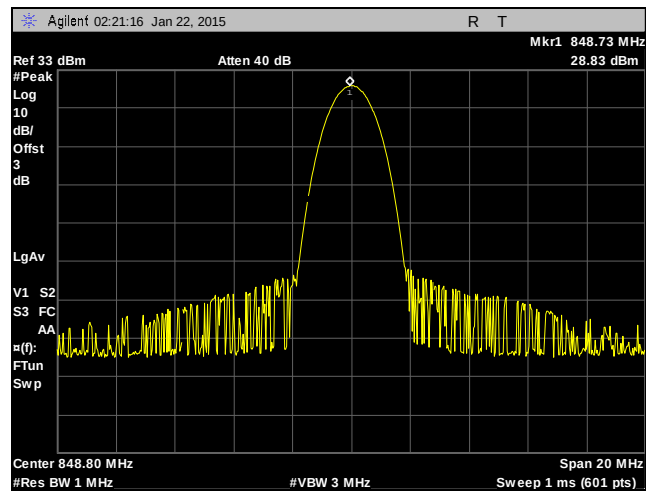


Plot 9. RF Power, EGPRS, 850 MHz Band, High Channel

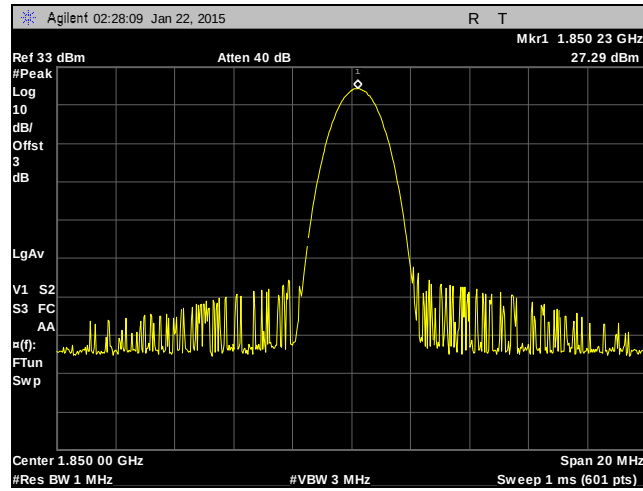


Plot 10. RF Power, EGPRS, 1900 MHz Band, Low Channel

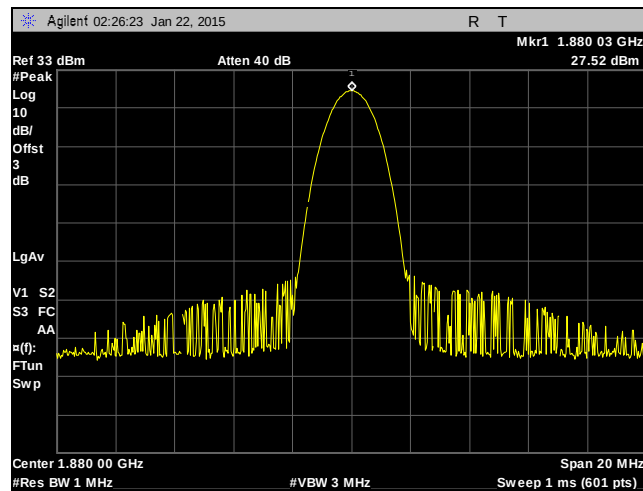


Plot 11. RF Power, EGPRS, 1900 MHz Band, Mid Channel

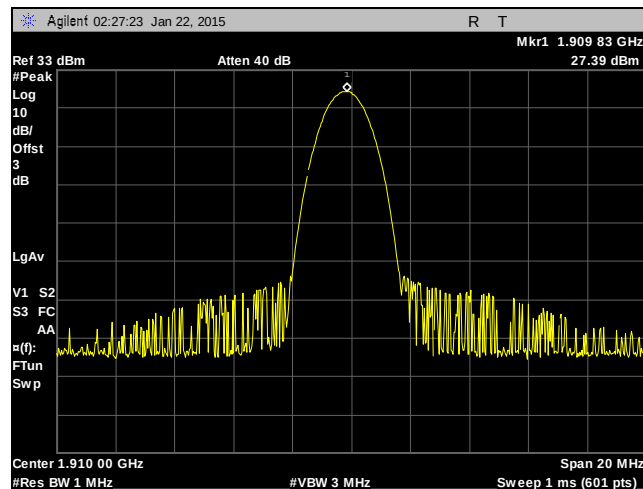


Plot 12. RF Power, EGPRS, 1900 MHz Band, High Channel

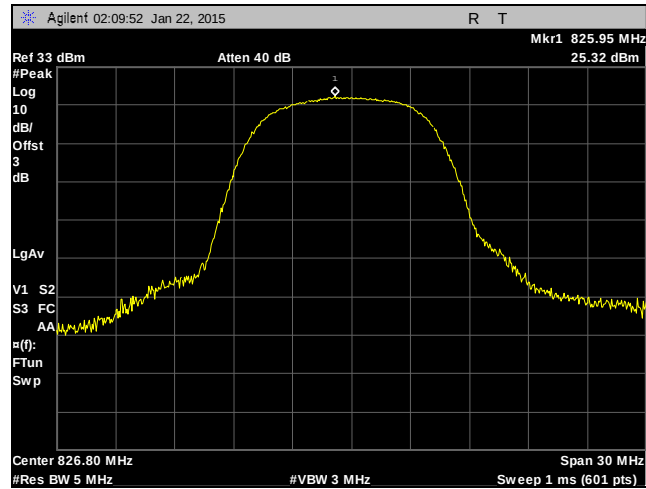


Plot 13. RF Power, WCDMA, 850 MHz Band, Low Channel

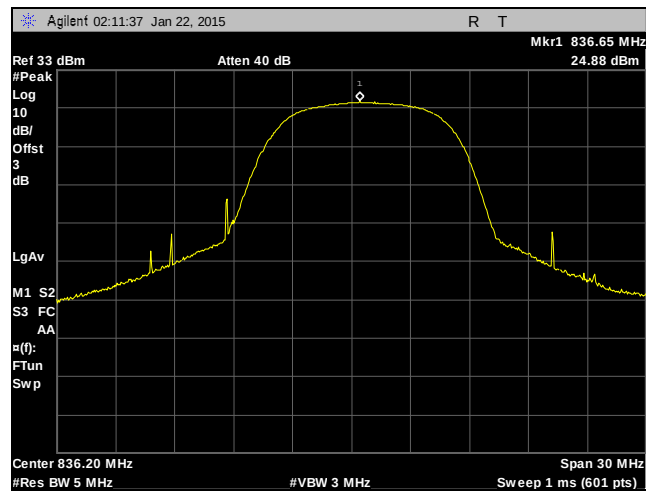


Plot 14. RF Power, WCDMA, 850 MHz Band, Mid Channel

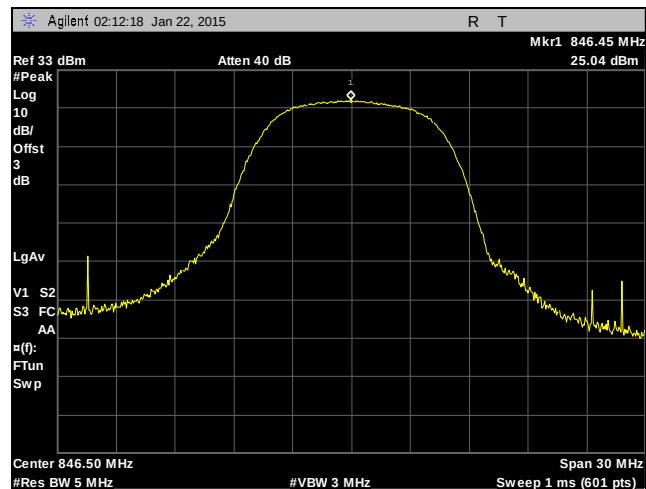


Plot 15. RF Power, WCDMA, 850 MHz Band, High Channel

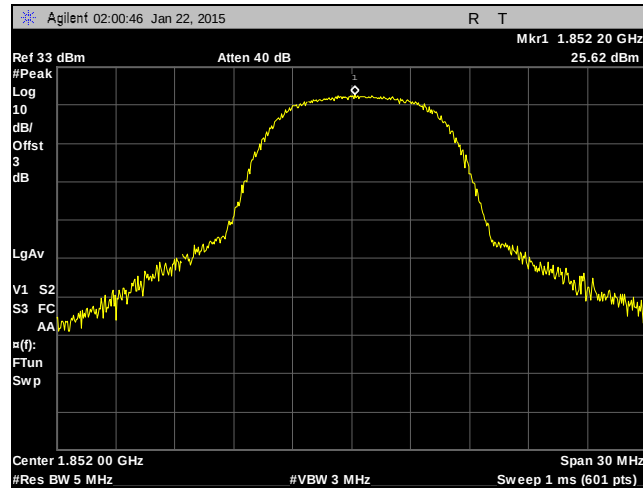

Plot 16. RF Power, WCDMA, 1900 MHz Band, Low Channel

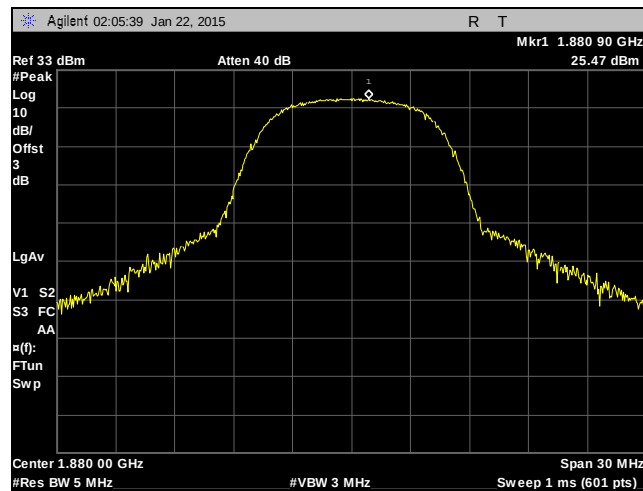

Plot 17. RF Power, WCDMA, 1900 MHz Band, Mid Channel

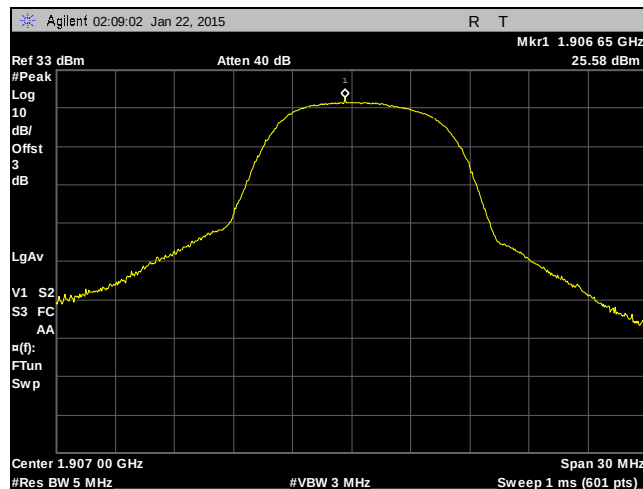

Plot 18. RF Power, WCDMA, 1900 MHz Band, High Channel

§ 2.1049 Occupied Bandwidth

Test Requirement(s): **§ 2.1049 Measurements required: Occupied bandwidth:** The occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured under the specified conditions of § 2.1049 (a) through (i) as applicable.

Test Procedures: As required by 47 CFR 2.1049, *occupied bandwidth measurements* were made at the RF output terminals using a Spectrum Analyzer.

A laptop was connected to EUT to control the RF frequency channel. The EUT was connected to a Spectrum Analyzer via attenuator. The RBW of the Spectrum Analyzer was set within accordance of the licensed measurement guidance. Measurements were carried out at the low, mid, and high channels of the TX band.

Test Results: Equipment complies with FCC requirements.

Test Engineer(s): Benjamin Taylor

Test Date(s): 10/30/14







Figure 1. Occupied Bandwidth Test Setup

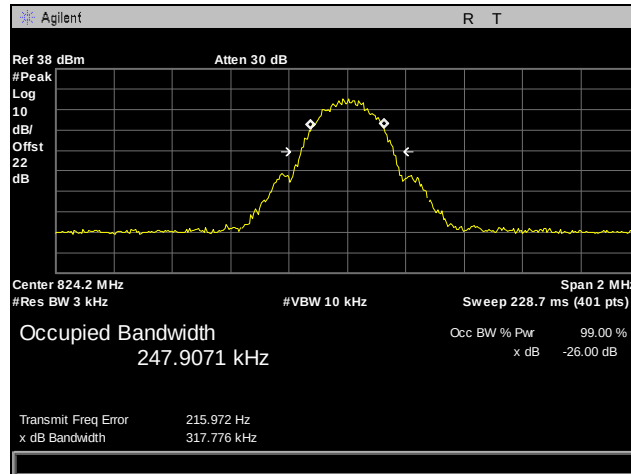


Plot 19. Occupied Bandwidth, GPRS, 850 MHz Band, Low Channel

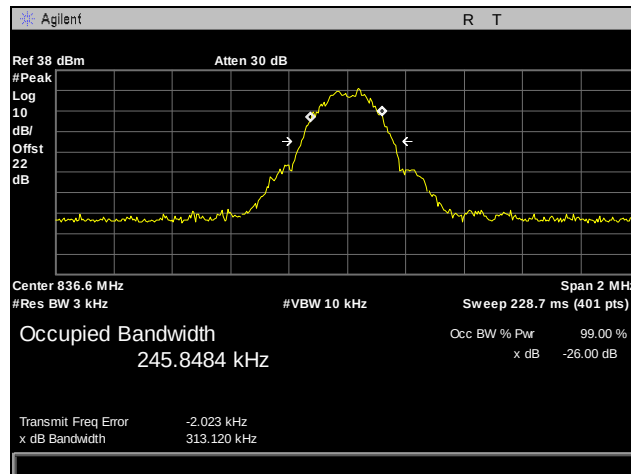


Plot 20. Occupied Bandwidth, GPRS, 850 MHz Band, Mid Channel

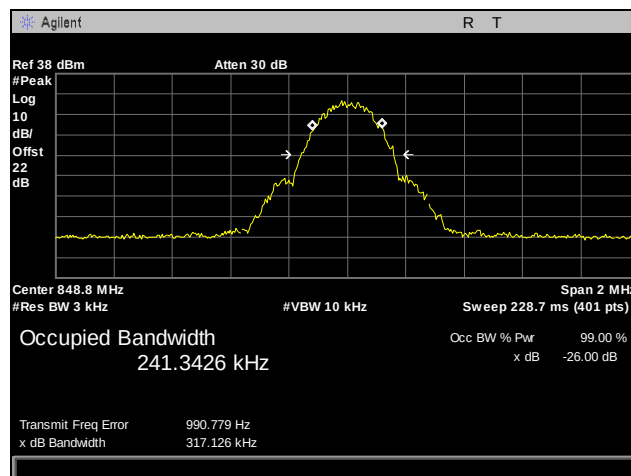


Plot 21. Occupied Bandwidth, GPRS, 850 MHz Band, High Channel

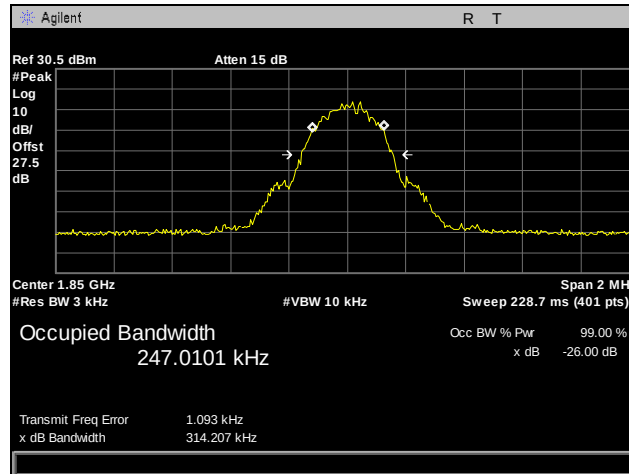


Plot 22. Occupied Bandwidth, GPRS, 1900 MHz Band, Low Channel

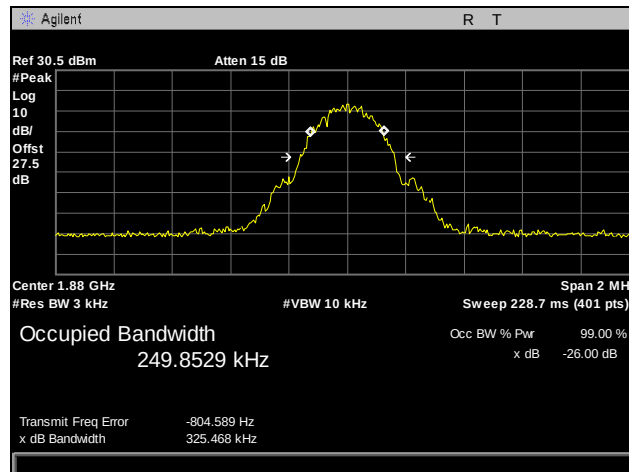


Plot 23. Occupied Bandwidth, GPRS, 1900 MHz Band, Mid Channel

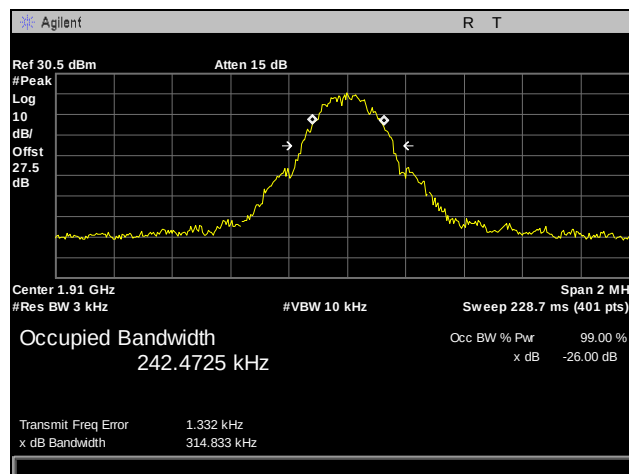


Plot 24. Occupied Bandwidth, GPRS, 1900 MHz Band, High Channel

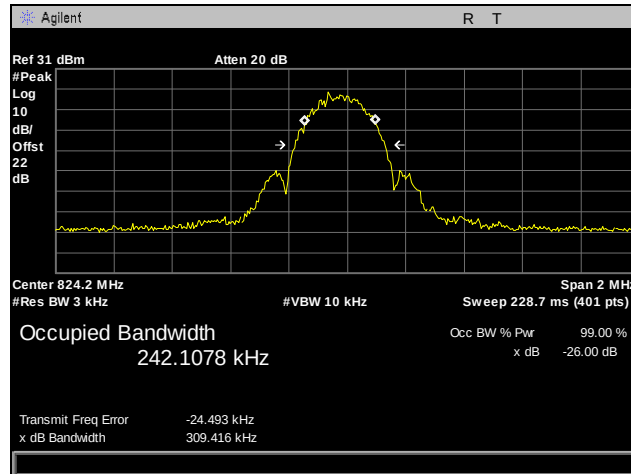


Plot 25. Occupied Bandwidth, EGPRS, 850 MHz Band, Low Channel

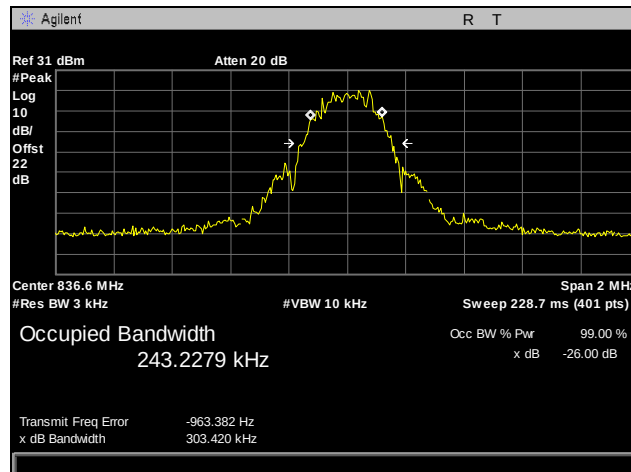


Plot 26. Occupied Bandwidth, EGPRS, 850 MHz Band, Mid Channel

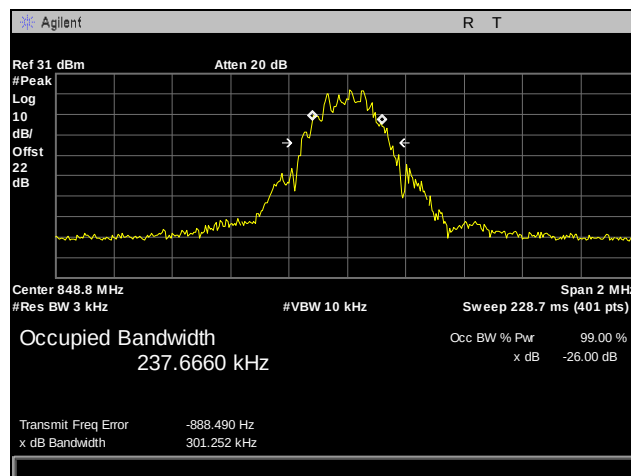


Plot 27. Occupied Bandwidth, EGPRS, 850 MHz Band, High Channel

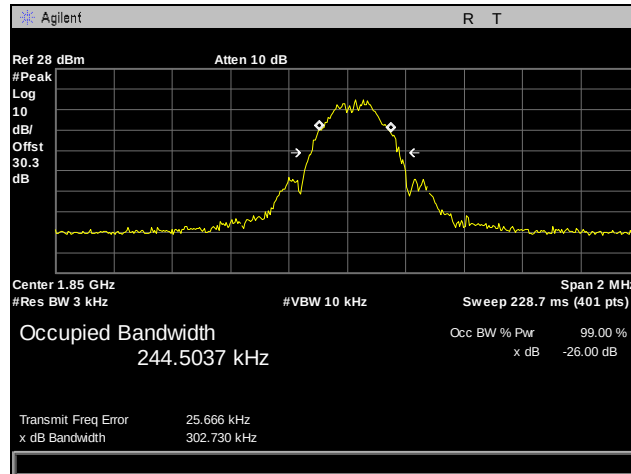


Plot 28. Occupied Bandwidth, EGPRS, 1900 MHz Band, Low Channel

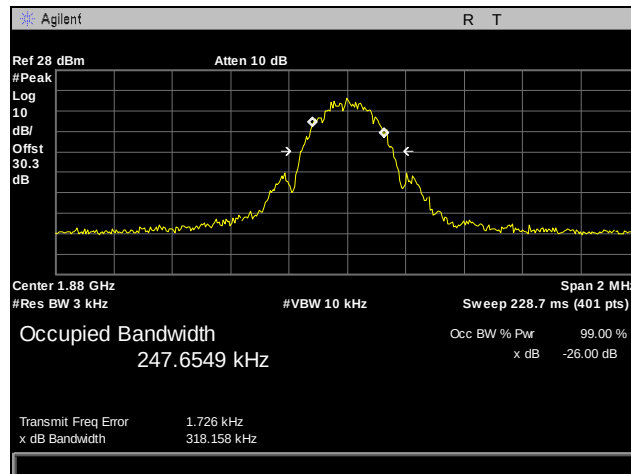


Plot 29. Occupied Bandwidth, EGPRS, 1900 MHz Band, Mid Channel

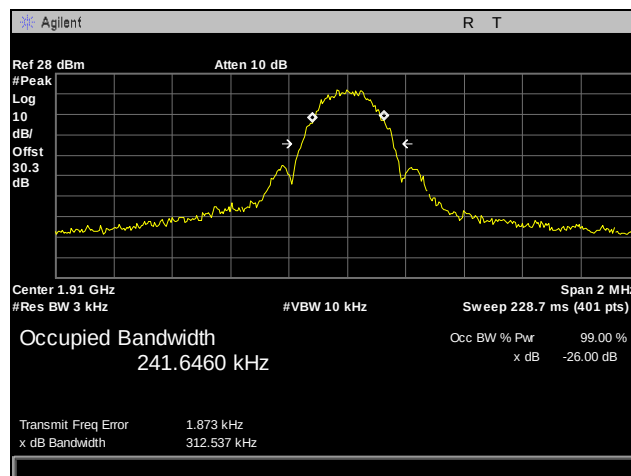


Plot 30. Occupied Bandwidth, EGPRS, 1900 MHz Band, High Channel

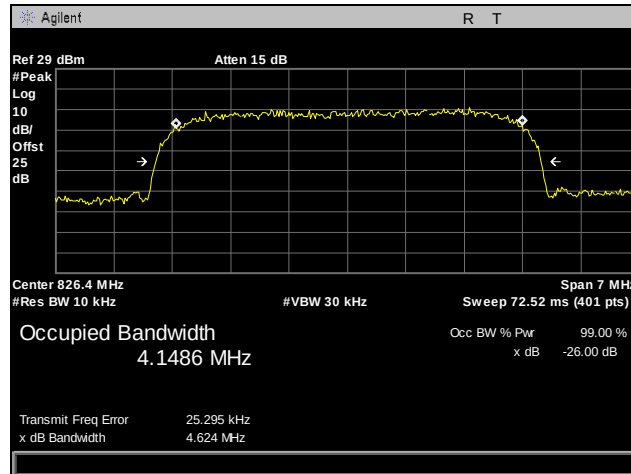


Plot 31. Occupied Bandwidth, WCDMA, 850 MHz Band, Low Channel

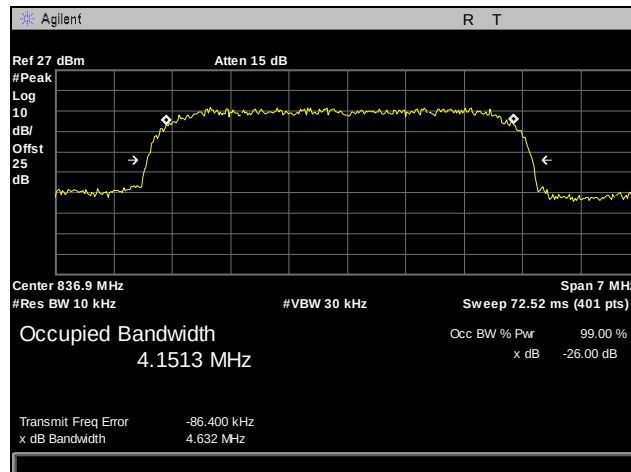


Plot 32. Occupied Bandwidth, WCDMA, 850 MHz Band, Mid Channel

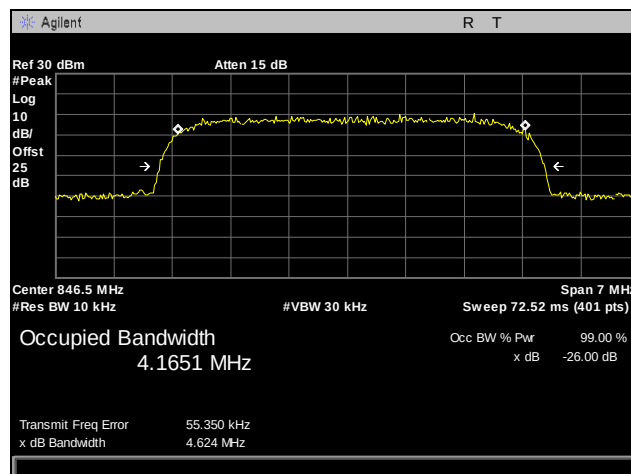


Plot 33. Occupied Bandwidth, WCDMA, 850 MHz Band, High Channel

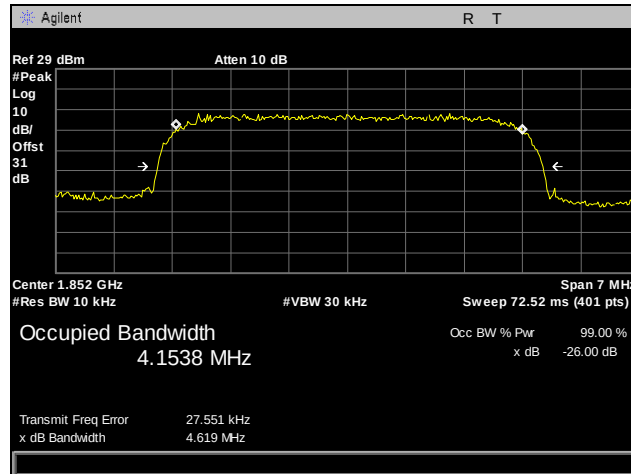

Plot 34. Occupied Bandwidth, WCDMA, 1900 MHz Band, Low Channel

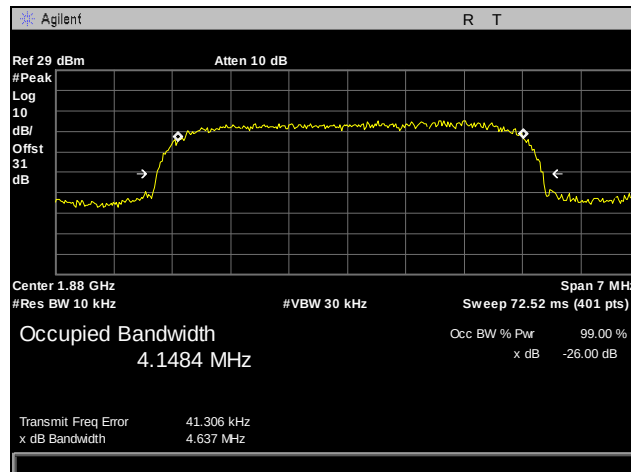

Plot 35. Occupied Bandwidth, WCDMA, 1900 MHz Band, Mid Channel

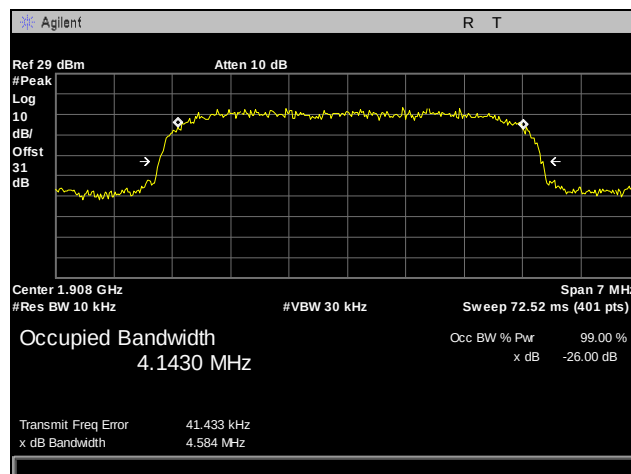

Plot 36. Occupied Bandwidth, WCDMA, 1900 MHz Band, High Channel

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 2.1053 Radiated Spurious Emissions

Test Requirement(s): § 2.1053 Measurements required: Field strength of spurious radiation.

§ 2.1053 (a) Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of § 2.1049, as appropriate. For equipment operating on frequencies below 890 MHz, an open field test is normally required with the measuring instrument antenna located in the far-field at all test frequencies. In the event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurements will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from half-wave dipole antennas.

§ 2.1053 (b): The measurements specified in paragraph (a) of this section shall be made for the following equipment:

- (1) Those in which the spurious emissions are required to be 60 dB or more below the mean power of the transmitter.
- (2) All equipment operating on frequencies higher than 25 MHz.
- (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
- (4) Other types of equipment as required, when deemed necessary by the Commission.

§ 22.917 (a): Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$.

§ 24.238 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB



Test Procedures: As required by 47 CFR 2.1053, *field strength of radiated spurious measurements* was made in accordance with the procedures of TIA/EIA-603-A-2001 "Land Mobile FM or PM Communications Equipment Measurement and Performance Standards".

Radiated emission measurements were performed inside a 3 meter semi-anechoic chamber. The EUT's RF port was terminated (as normal) to its internal antenna. The EUT was tested using at the low, mid, and high channels of each applicable band. The EUT was rotated 360° and the receiving antenna scanned from 1-4m in order to capture the maximum emission. The plots are corrected for cable loss, antenna correction factor, and distance correction. The field strength was mathematically corrected to an E.I.R.P. Harmonic emissions up to the 10th or 40GHz, whichever was the lesser, were investigated. Only noise floor was observed above 10 GHz.


The spectrum analyzer was set to 1MHz RBW and 3MHz VBW above 1 GHz and 100kHz and 300kHz below 1 GHz. The spectrum was investigated from 30MHz to the 10th harmonic of the carrier; only noise floor was observed above 18 GHz.

Test Results: The EUT complies with the requirements of this section.


Test Engineer: Benjamin Taylor

Test Date(s): 10/30/14


Radiated Spurious Emissions

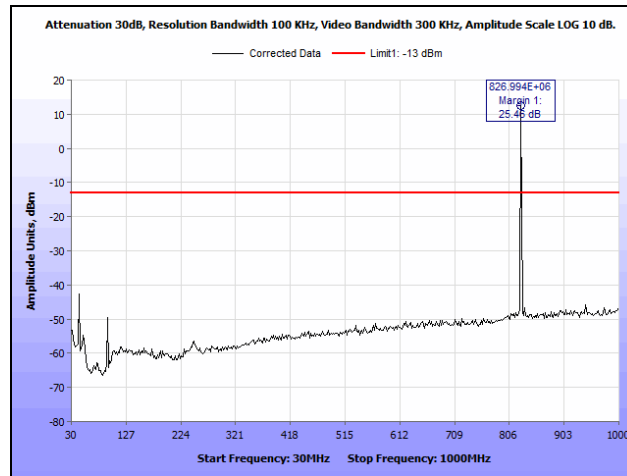


Plot 37. Radiated Spurious Emissions, GPRS, 850 MHz Band, Low Channel, 30 MHz – 1 GHz

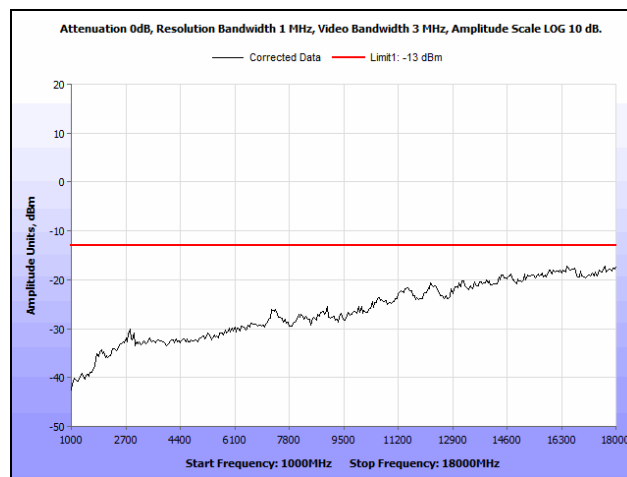


Plot 38. Radiated Spurious Emissions, GPRS, 850 MHz Band, Low Channel, 1 GHz – 18 GHz

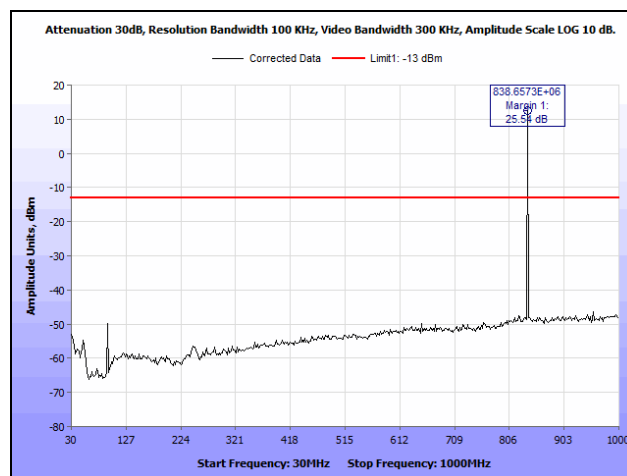


Plot 39. Radiated Spurious Emissions, GPRS, 850 MHz Band, Mid Channel, 30 MHz – 1 GHz

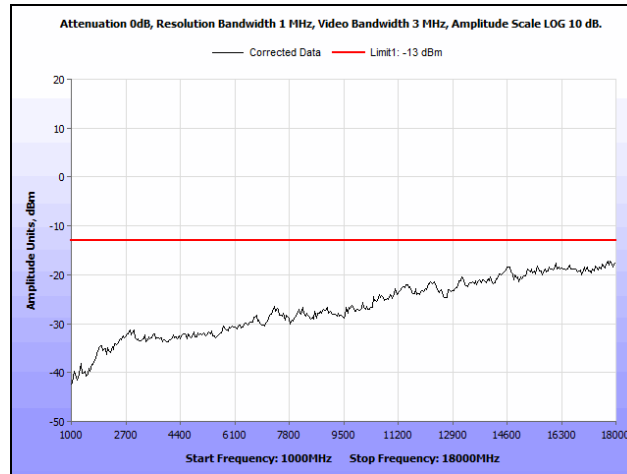


Plot 40. Radiated Spurious Emissions, GPRS, 850 MHz Band, Mid Channel, 1 GHz – 18 GHz

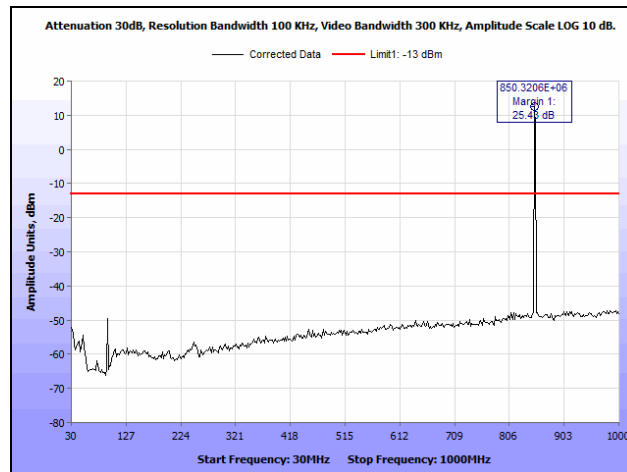


Plot 41. Radiated Spurious Emissions, GPRS, 850 MHz Band, High Channel, 30 MHz – 1 GHz

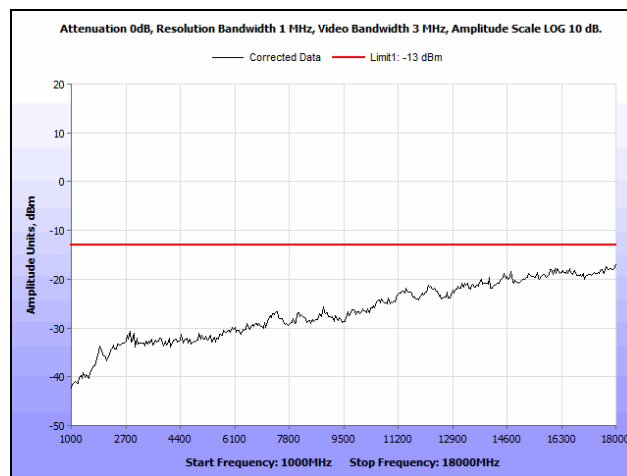


Plot 42. Radiated Spurious Emissions, GPRS, 850 MHz Band, High Channel, 1 GHz – 18 GHz

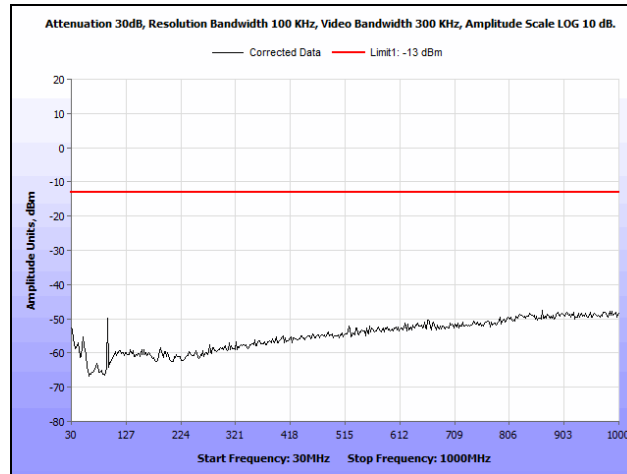


Plot 43. Radiated Spurious Emissions, GPRS, 1900 MHz Band, Low Channel, 30 MHz – 1 GHz

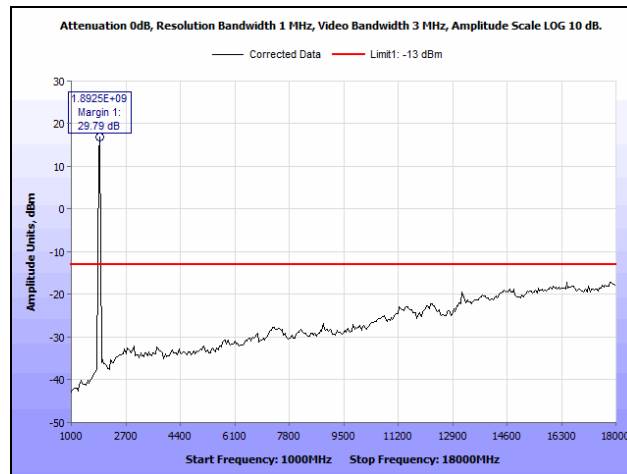


Plot 44. Radiated Spurious Emissions, GPRS, 1900 MHz Band, Low Channel, 1 GHz – 18 GHz

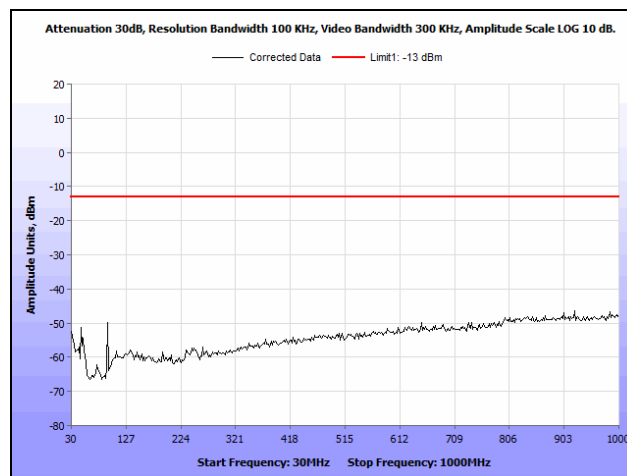


Plot 45. Radiated Spurious Emissions, GPRS, 1900 MHz Band, Mid Channel, 30 MHz – 1 GHz

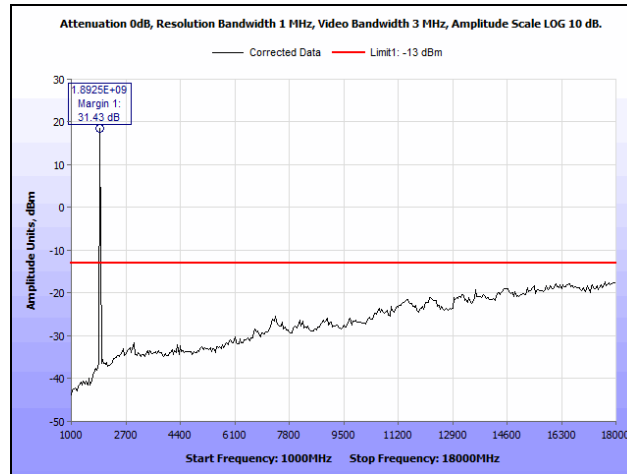


Plot 46. Radiated Spurious Emissions, GPRS, 1900 MHz Band, Mid Channel, 1 GHz – 18 GHz

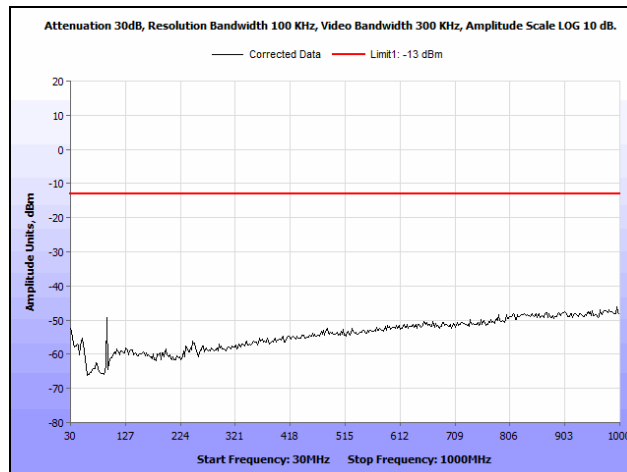


Plot 47. Radiated Spurious Emissions, GPRS, 1900 MHz Band, High Channel, 30 MHz – 1 GHz

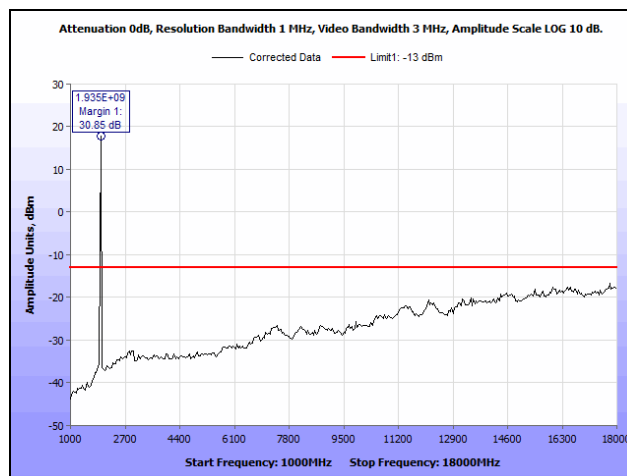


Plot 48. Radiated Spurious Emissions, GPRS, 1900 MHz Band, High Channel, 1 GHz – 18 GHz

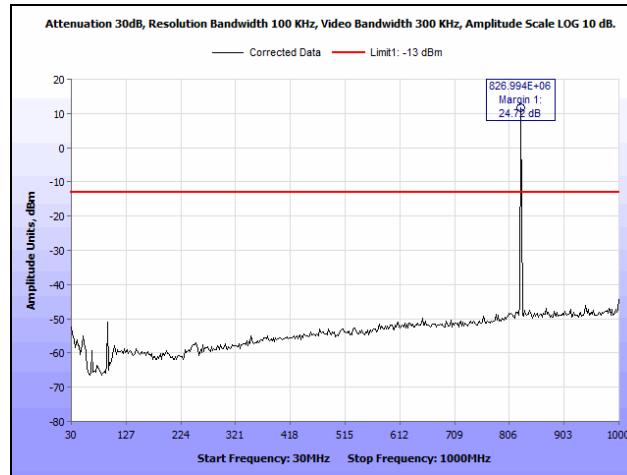


Plot 49. Radiated Spurious Emissions, EGPRS, 850 MHz Band, Low Channel, 30 MHz – 1 GHz

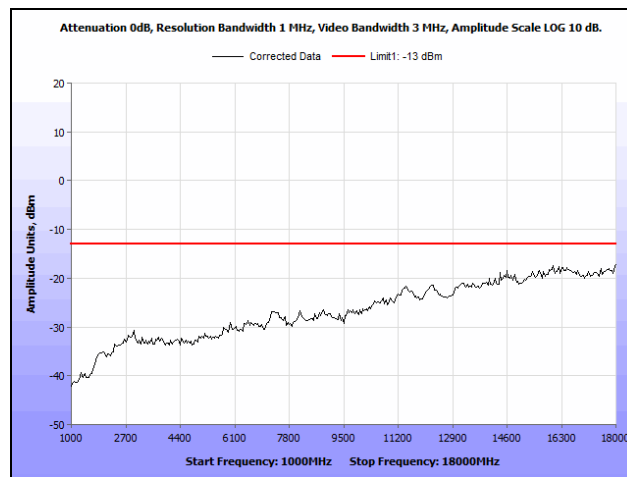


Plot 50. Radiated Spurious Emissions, EGPRS, 850 MHz Band, Low Channel, 1 GHz – 18 GHz

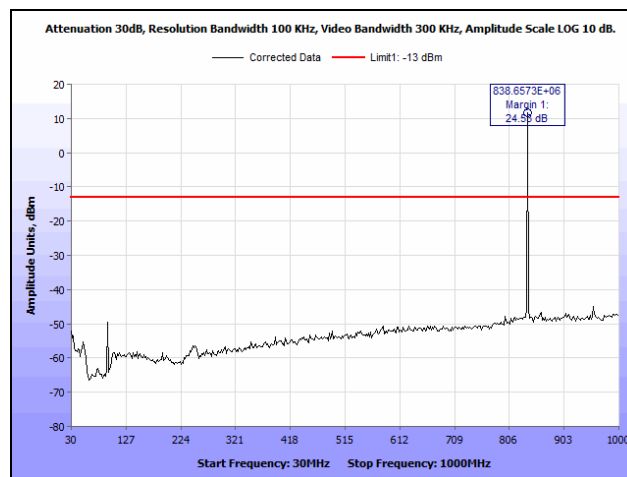


Plot 51. Radiated Spurious Emissions, EGPRS, 850 MHz Band, Mid Channel, 30 MHz – 1 GHz

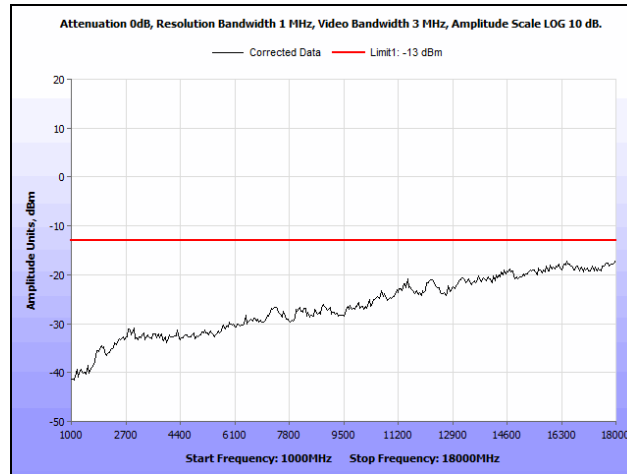


Plot 52. Radiated Spurious Emissions, EGPRS, 850 MHz Band, Mid Channel, 1 GHz – 18 GHz

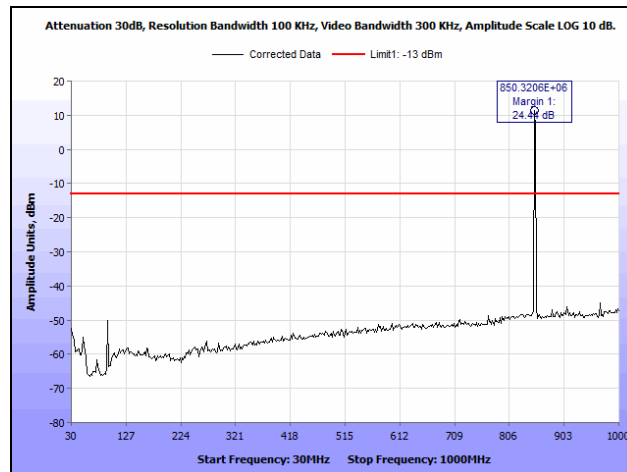


Plot 53. Radiated Spurious Emissions, EGPRS, 850 MHz Band, High Channel, 30 MHz – 1 GHz

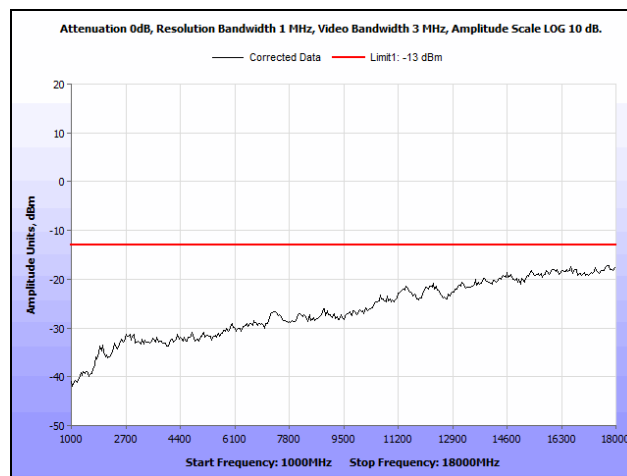


Plot 54. Radiated Spurious Emissions, EGPRS, 850 MHz Band, High Channel, 1 GHz – 18 GHz

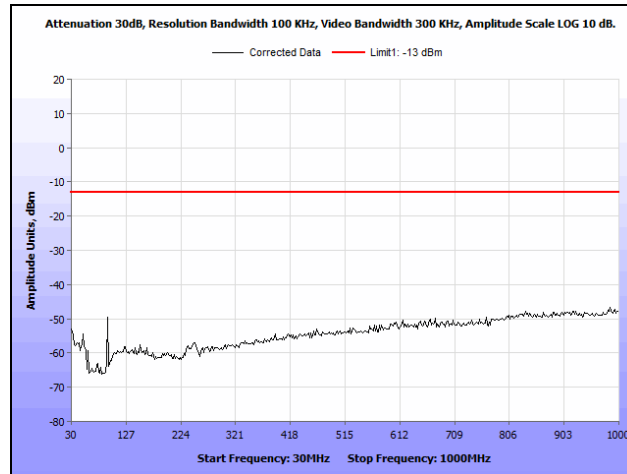


Plot 55. Radiated Spurious Emissions, EGPRS, 1900 MHz Band, Low Channel, 30 MHz – 1 GHz

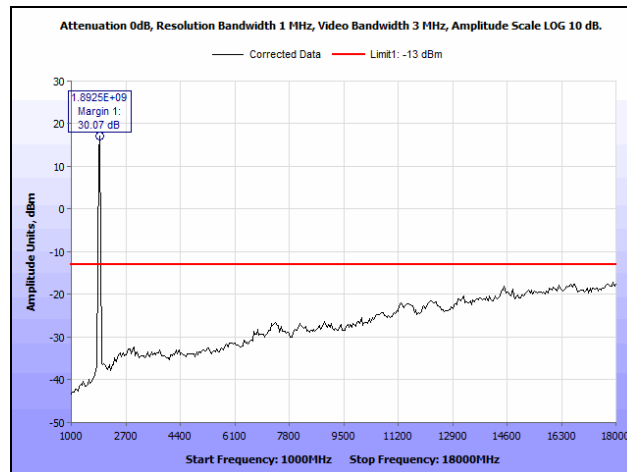


Plot 56. Radiated Spurious Emissions, EGPRS, 1900 MHz Band, Low Channel, 1 GHz – 18 GHz

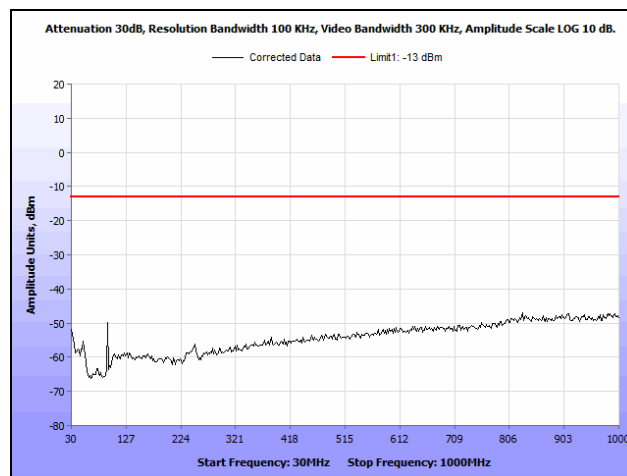


Plot 57. Radiated Spurious Emissions, EGPRS, 1900 MHz Band, Mid Channel, 30 MHz – 1 GHz

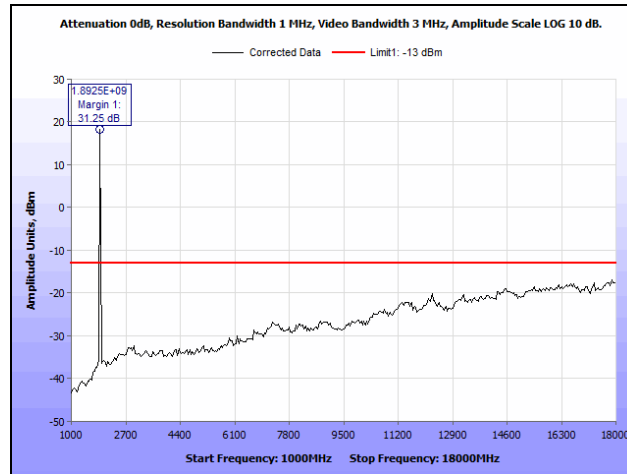


Plot 58. Radiated Spurious Emissions, EGPRS, 1900 MHz Band, Mid Channel, 1 GHz – 18 GHz

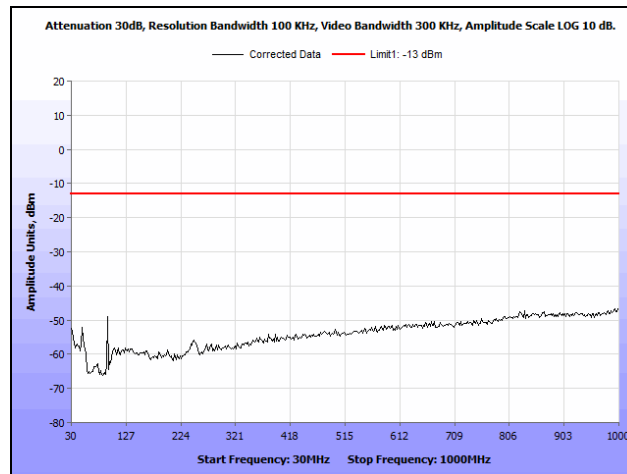


Plot 59. Radiated Spurious Emissions, EGPRS, 1900 MHz Band, High Channel, 30 MHz – 1 GHz

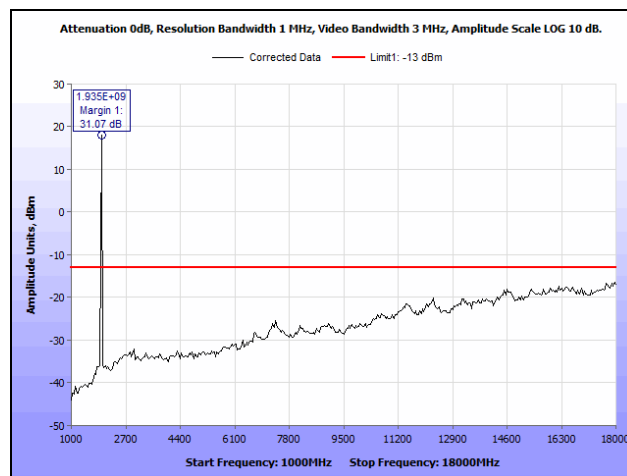


Plot 60. Radiated Spurious Emissions, EGPRS, 1900 MHz Band, High Channel, 1 GHz – 18 GHz

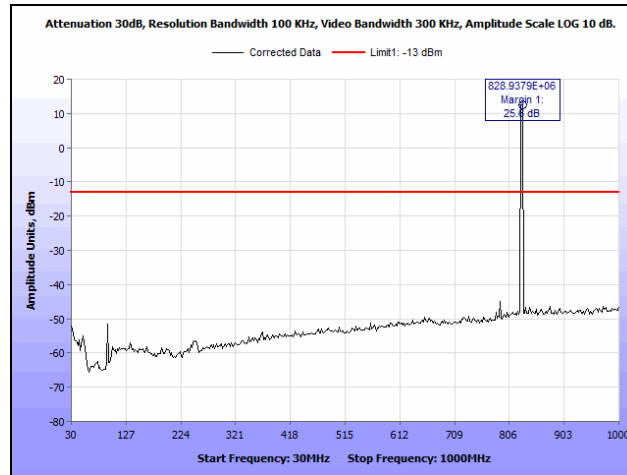


Plot 61. Radiated Spurious Emissions, WCDMA, 850 MHz Band, Low Channel, 30 MHz – 1 GHz

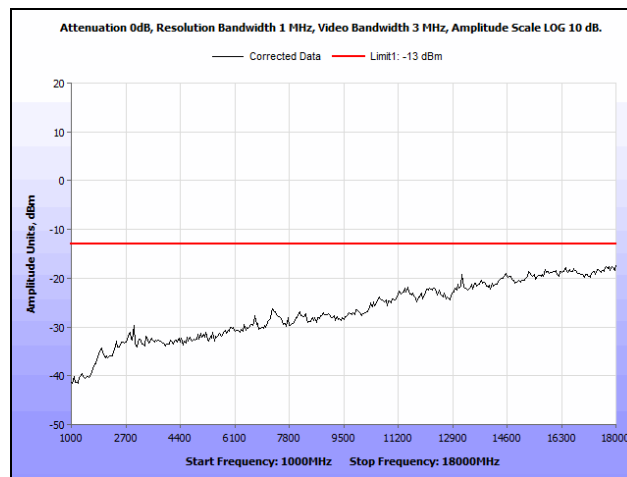


Plot 62. Radiated Spurious Emissions, WCDMA, 850 MHz Band, Low Channel, 1 GHz – 18 GHz

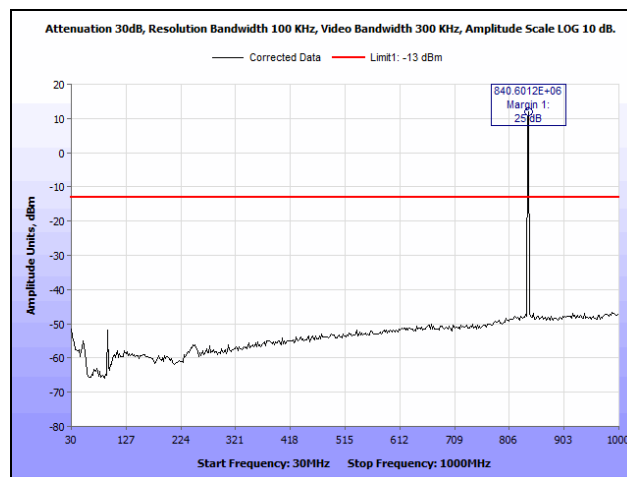


Plot 63. Radiated Spurious Emissions, WCDMA, 850 MHz Band, Mid Channel, 30 MHz – 1 GHz

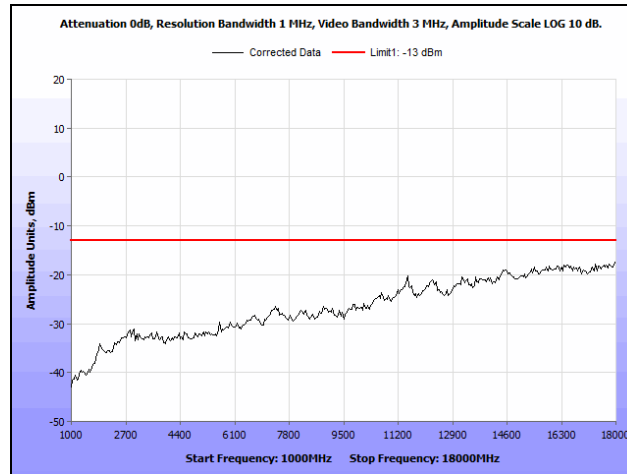


Plot 64. Radiated Spurious Emissions, WCDMA, 850 MHz Band, Mid Channel, 1 GHz – 18 GHz

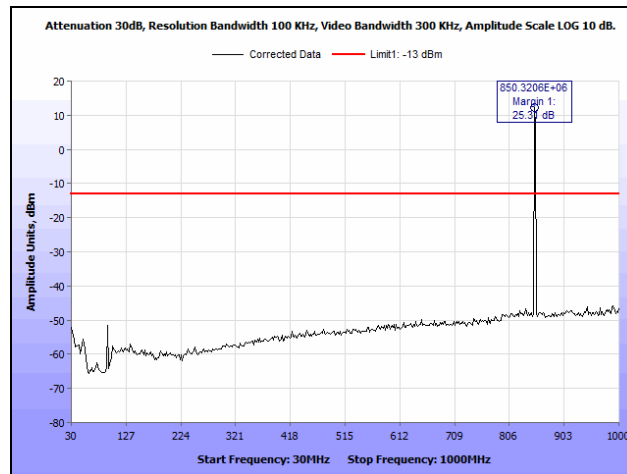


Plot 65. Radiated Spurious Emissions, WCDMA, 850 MHz Band, High Channel, 30 MHz – 1 GHz

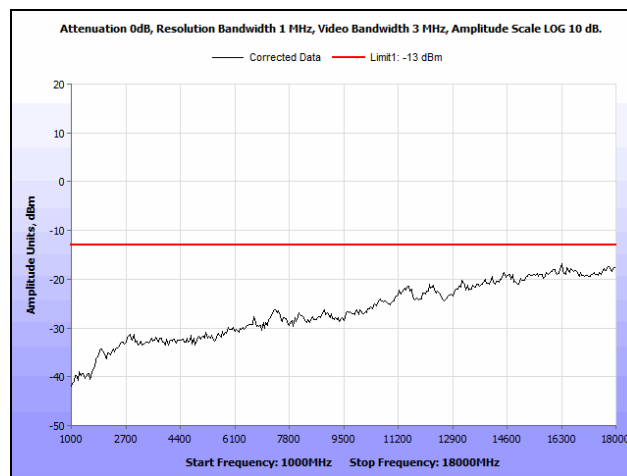


Plot 66. Radiated Spurious Emissions, WCDMA, 850 MHz Band, High Channel, 1 GHz – 18 GHz

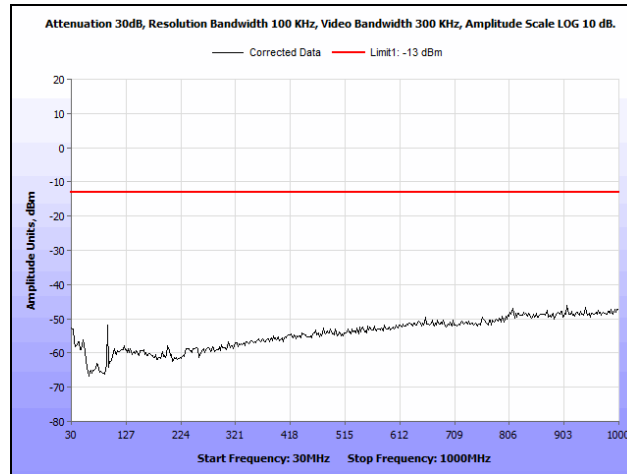


Plot 67. Radiated Spurious Emissions, WCDMA, 1900 MHz Band, Low Channel, 30 MHz – 1 GHz

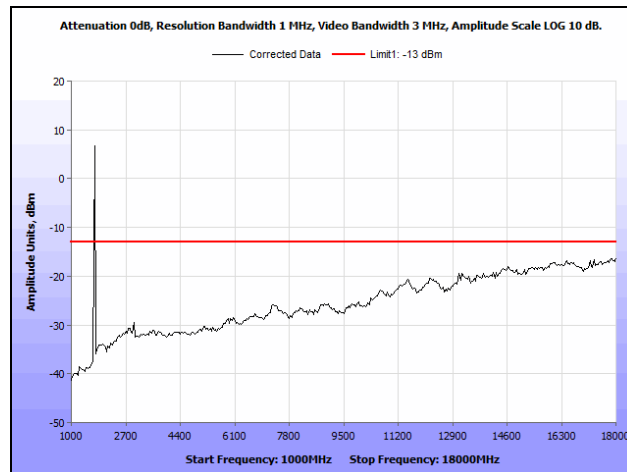


Plot 68. Radiated Spurious Emissions, WCDMA, 1900 MHz Band, Low Channel, 1 GHz – 18 GHz

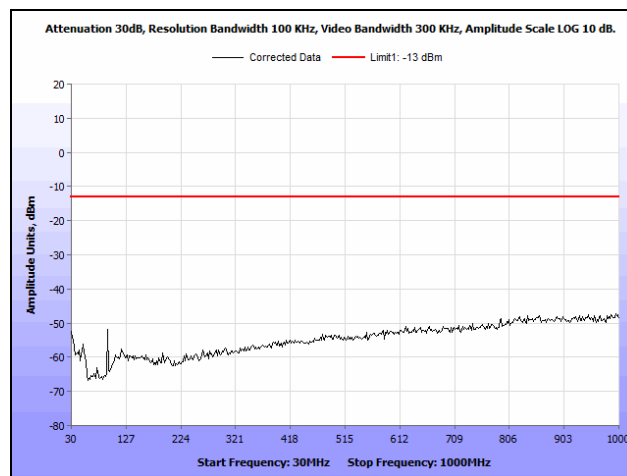


Plot 69. Radiated Spurious Emissions, WCDMA, 1900 MHz Band, Mid Channel, 30 MHz – 1 GHz

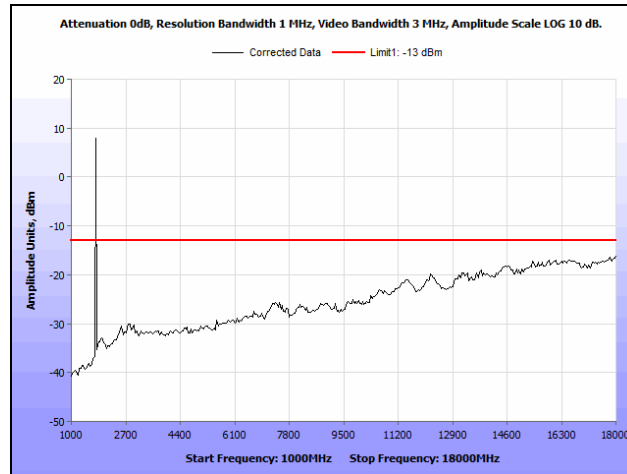

Plot 70. Radiated Spurious Emissions, WCDMA, 1900 MHz Band, Mid Channel, 1 GHz – 18 GHz

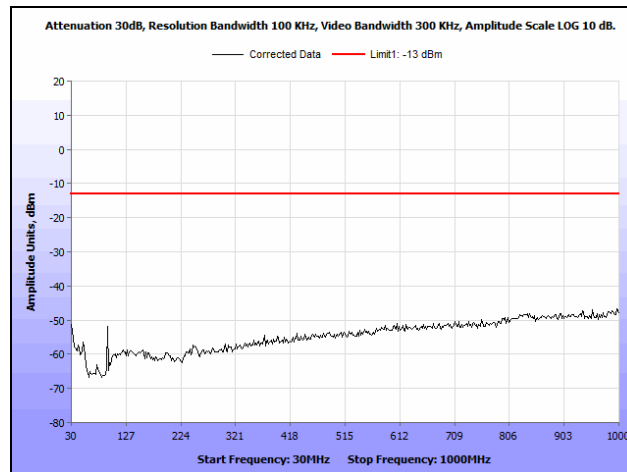

Plot 71. Radiated Spurious Emissions, WCDMA, 1900 MHz Band, High Channel, 30 MHz – 1 GHz

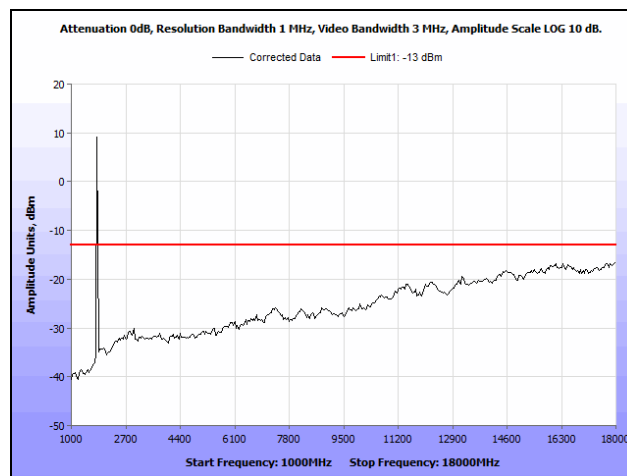

Plot 72. Radiated Spurious Emissions, WCDMA, 1900 MHz Band, High Channel, 1 GHz – 18 GHz

Electromagnetic Compatibility Criteria for Intentional Radiators

§ 2.1051 Spurious Emissions at Antenna Terminals

Test Requirement(s): **§ 2.1051 Measurements required: Spurious emissions at antenna terminals:** The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in § 2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.

§ 22.917 The rules in this section govern the spectral characteristics of emissions in the Cellular Radiotelephone Service.

§ 22.917 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

§ 22.917 (b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 30 kHz or more. In the 60 kHz bands immediately outside and adjacent to the authorized frequency range or channel, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy approved the measured power is integrated over the full required measurement bandwidth (i.e., 30 kHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

§24.238 Emission limitations for Broadband PCS equipment: The rules in this section govern the spectral characteristics of emissions in the Broadband Personal Communications Service.

§ 24.238 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

§ 24.238 (b) Measurement procedure. Compliance with these rules is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or greater. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed. A narrower resolution bandwidth is permitted in all cases to improve measurement accuracy provided the measured power is integrated over the full required measurement bandwidth (i.e., 1 MHz or 1 percent of emission bandwidth, as specified). The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

Test Procedures: As required by 47 CFR §2.1051, *spurious emissions at antenna terminal measurements* were made at the RF output terminals using a Spectrum Analyzer.

A communications test set was communicating with the EUT to control the RF power output and frequency channel. The EUT was connected to a Spectrum Analyzer through an attenuator. The Spectrum Analyzer was set to sweep 30 MHz and up to 10th harmonic of the fundamental or 40 GHz whichever is the lesser. Measurements were made in all applicable frequency bands.

Test Results: Equipment complies with these requirements.

Test Engineer(s): Benjamin Taylor

Test Date(s): 10/30/14







Figure 2. Spurious Emissions at Antenna Terminals Test Setup

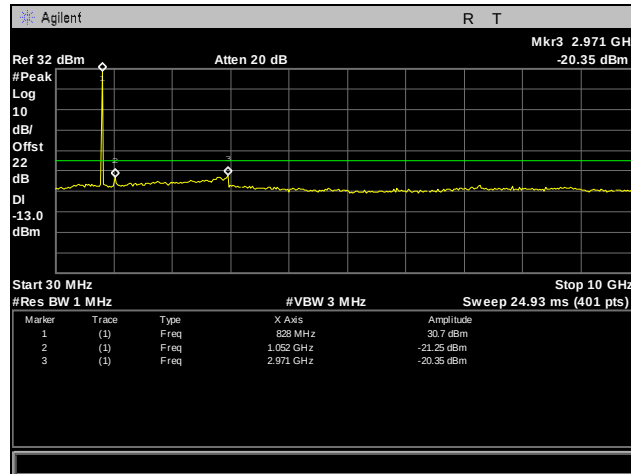


Plot 73. Conducted Spurious Emissions, GPRS, 850 MHz Band, Low Channel, 30 MHz – 10 GHz

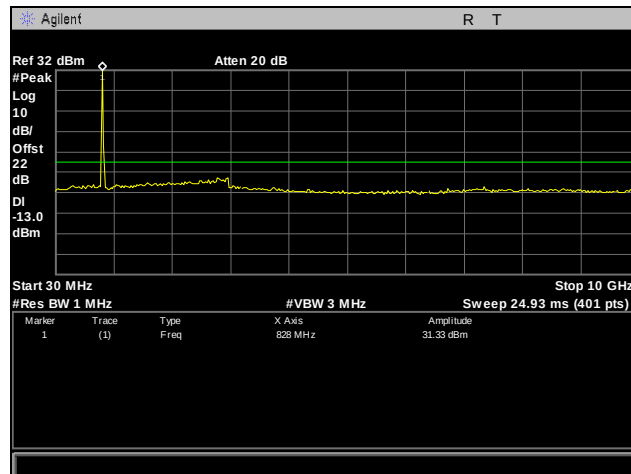


Plot 74. Conducted Spurious Emissions, GPRS, 850 MHz Band, Mid Channel, 30 MHz – 10 GHz

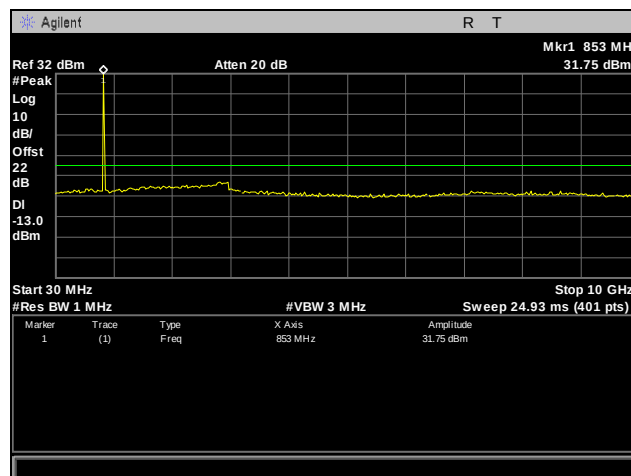


Plot 75. Conducted Spurious Emissions, GPRS, 850 MHz Band, High Channel, 30 MHz – 10 GHz

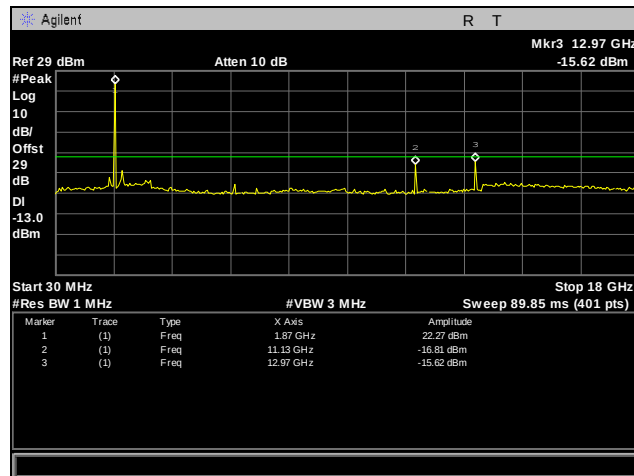


Plot 76. Conducted Spurious Emissions, GPRS, 1900 MHz Band, Low Channel, 30 MHz – 18 GHz

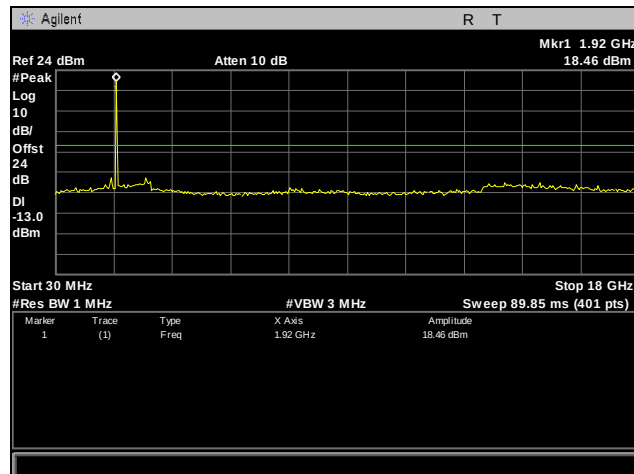


Plot 77. Conducted Spurious Emissions, GPRS, 1900 MHz Band, Mid Channel, 30 MHz – 18 GHz

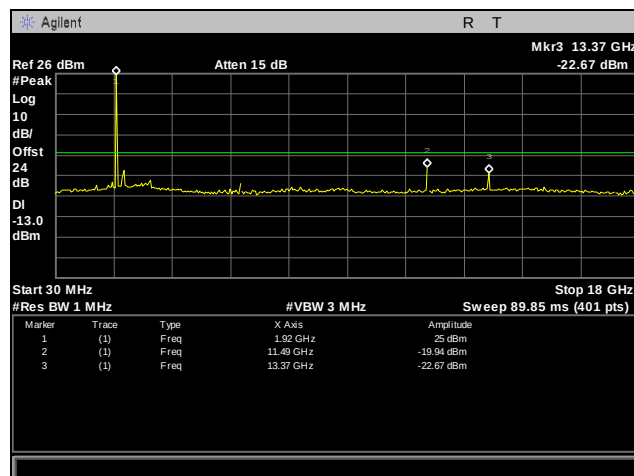


Plot 78. Conducted Spurious Emissions, GPRS, 1900 MHz Band, High Channel, 30 MHz – 18 GHz

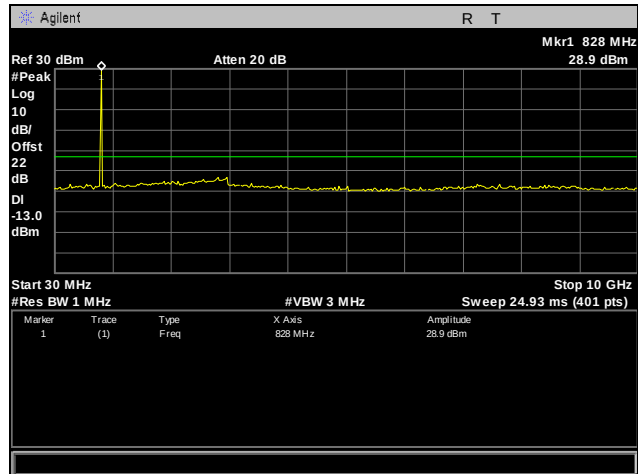


Plot 79. Conducted Spurious Emissions, EGPRS, 850 MHz Band, Low Channel, 30 MHz – 10 GHz

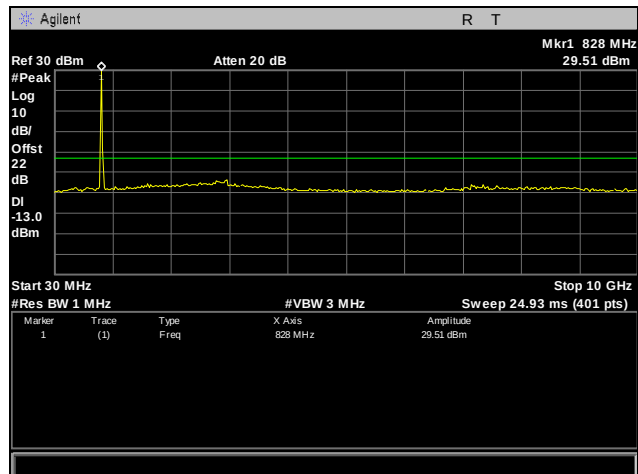


Plot 80. Conducted Spurious Emissions, EGPRS, 850 MHz Band, Mid Channel, 30 MHz – 10 GHz

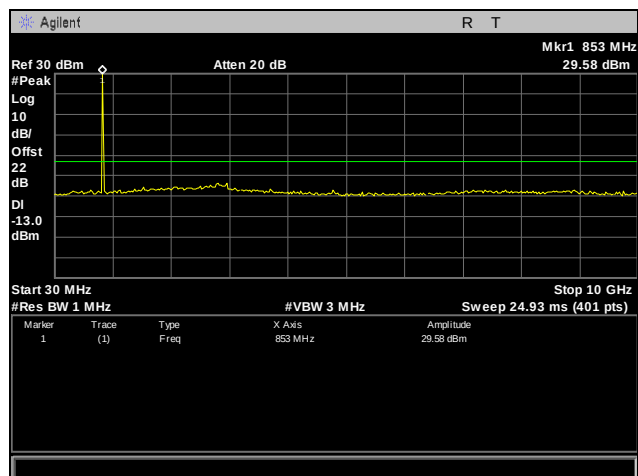


Plot 81. Conducted Spurious Emissions, EGPRS, 850 MHz Band, High Channel, 30 MHz – 10 GHz

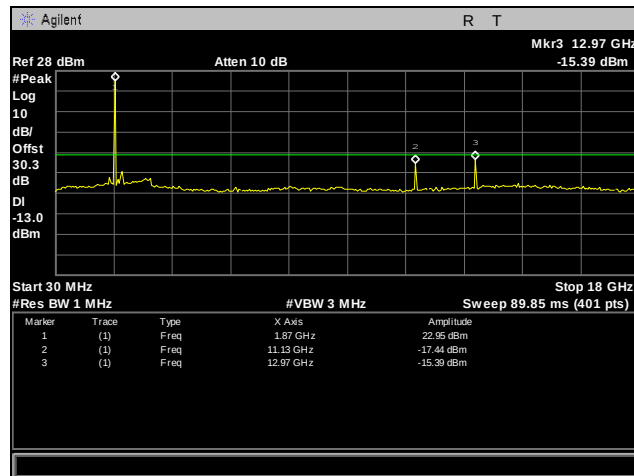


Plot 82. Conducted Spurious Emissions, EGPRS, 1900 MHz Band, Low Channel, 30 MHz – 18 GHz

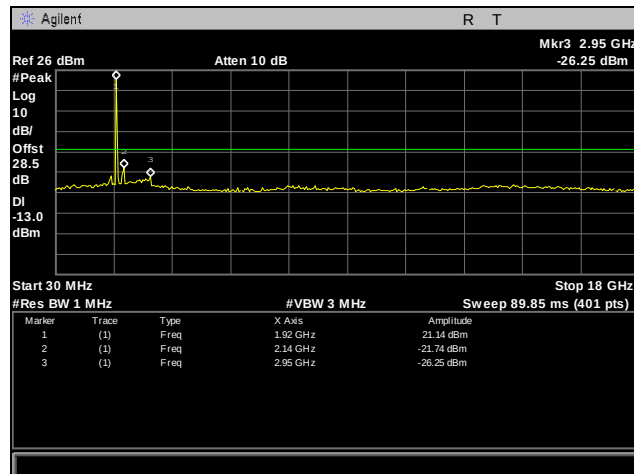


Plot 83. Conducted Spurious Emissions, EGPRS, 1900 MHz Band, Mid Channel, 30 MHz – 18 GHz

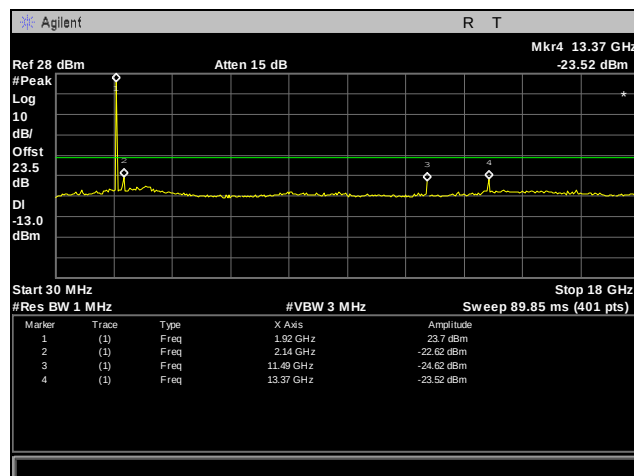


Plot 84. Conducted Spurious Emissions, EGPRS, 1900 MHz Band, High Channel, 30 MHz – 18 GHz

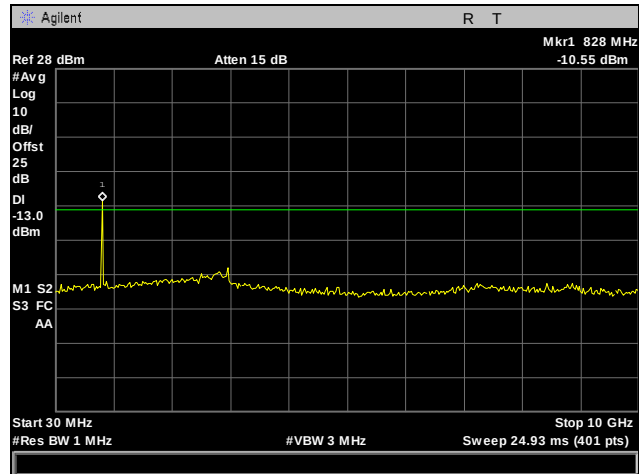


Plot 85. Conducted Spurious Emissions, WCDMA, 850 MHz Band, Low Channel, 30 MHz – 10 GHz

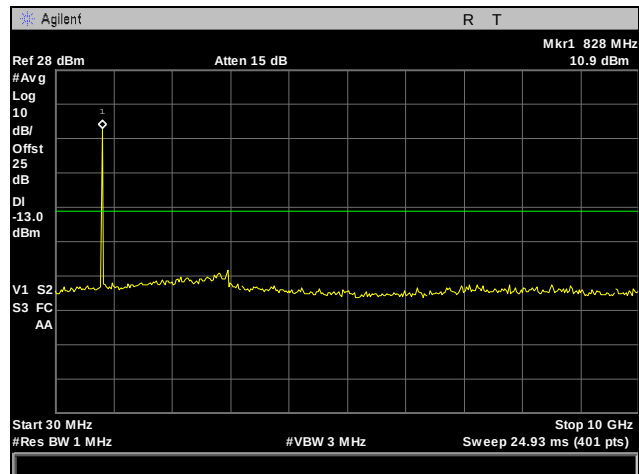


Plot 86. Conducted Spurious Emissions, WCDMA, 850 MHz Band, Mid Channel, 30 MHz – 10 GHz

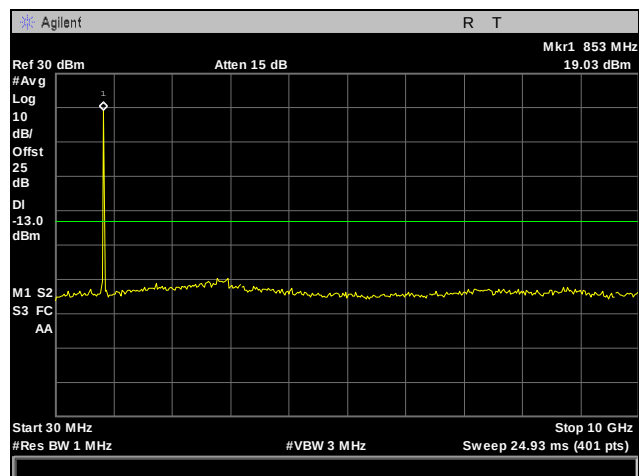


Plot 87. Conducted Spurious Emissions, WCDMA, 850 MHz Band, High Channel, 30 MHz – 10 GHz

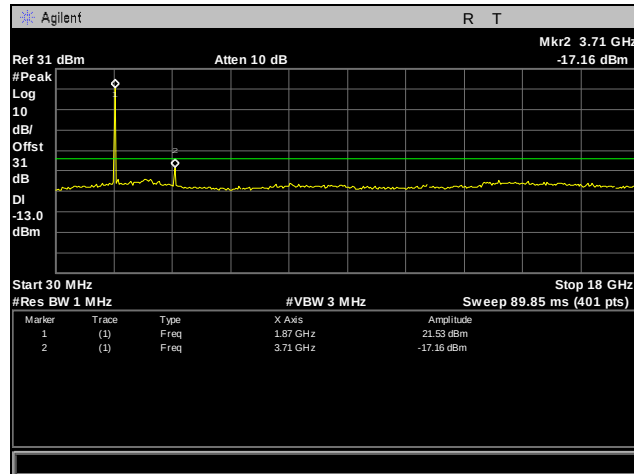


Plot 88. Conducted Spurious Emissions, WCDMA, 1900 MHz Band, Low Channel, 30 MHz – 18 GHz

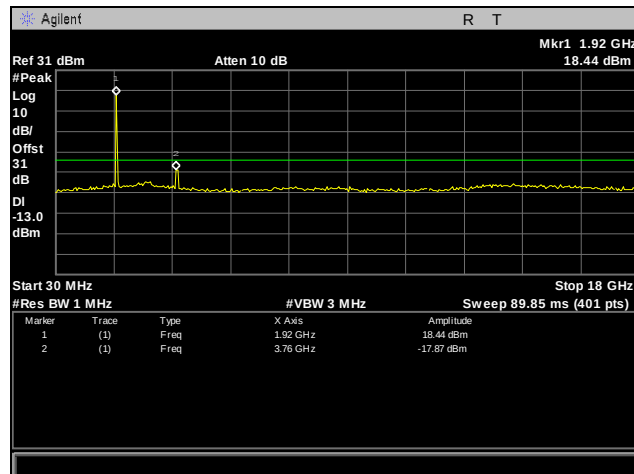


Plot 89. Conducted Spurious Emissions, WCDMA, 1900 MHz Band, Mid Channel, 30 MHz – 18 GHz

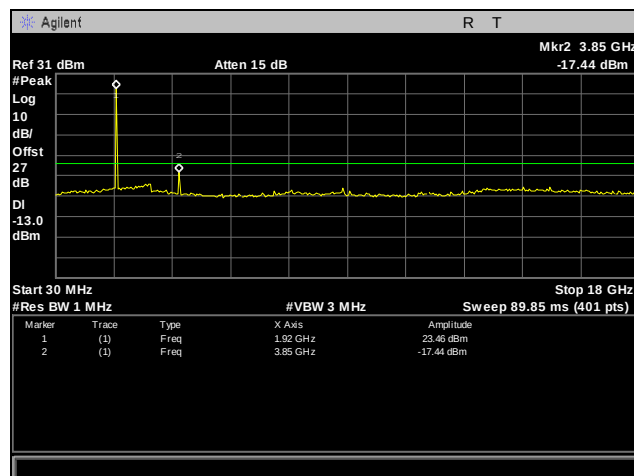


Plot 90. Conducted Spurious Emissions, WCDMA, 1900 MHz Band, High Channel, 30 MHz – 18 GHz

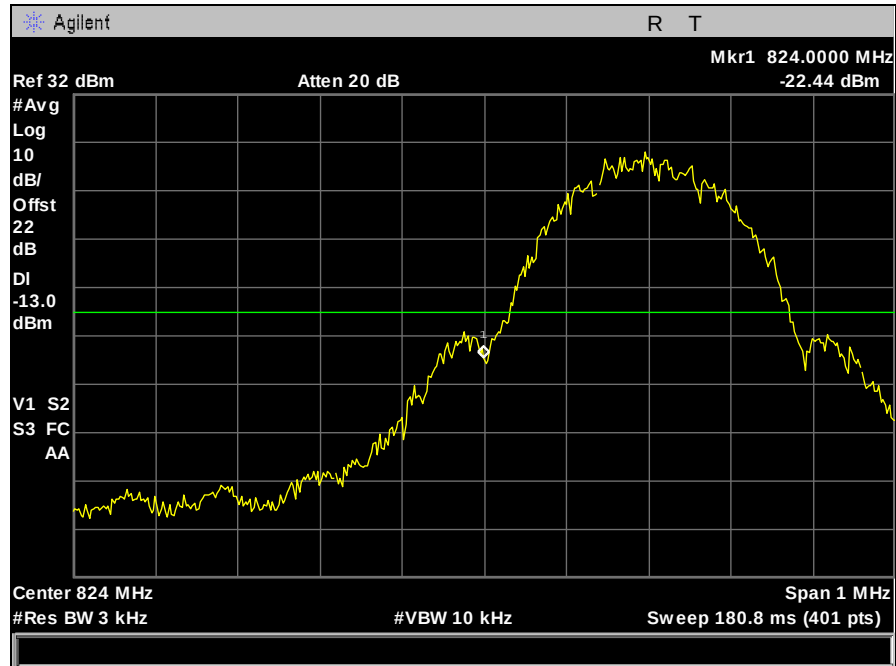


Plot 91. Band Edge Emissions, GPRS, 850 MHz Band, Low Channel

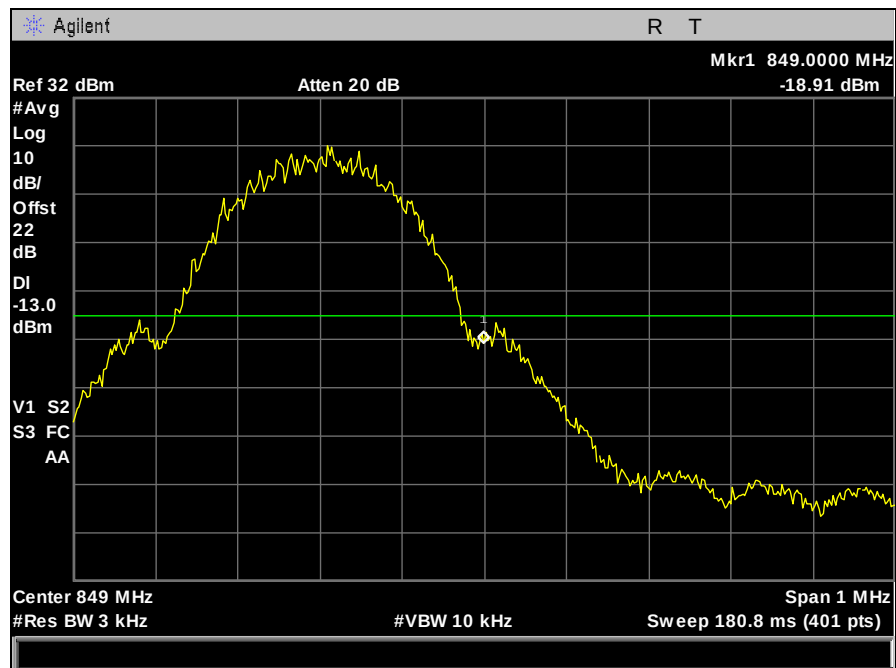


Plot 92. Band Edge Emissions, GPRS, 850 MHz Band, High Channel

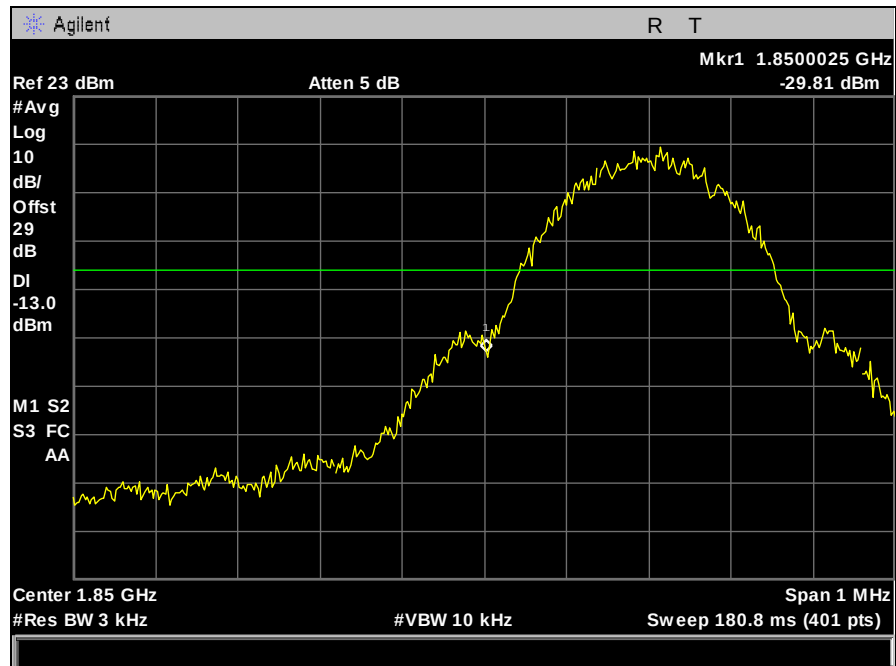


Plot 93. Band Edge Emissions, GPRS, 1900 MHz Band, Low Channel

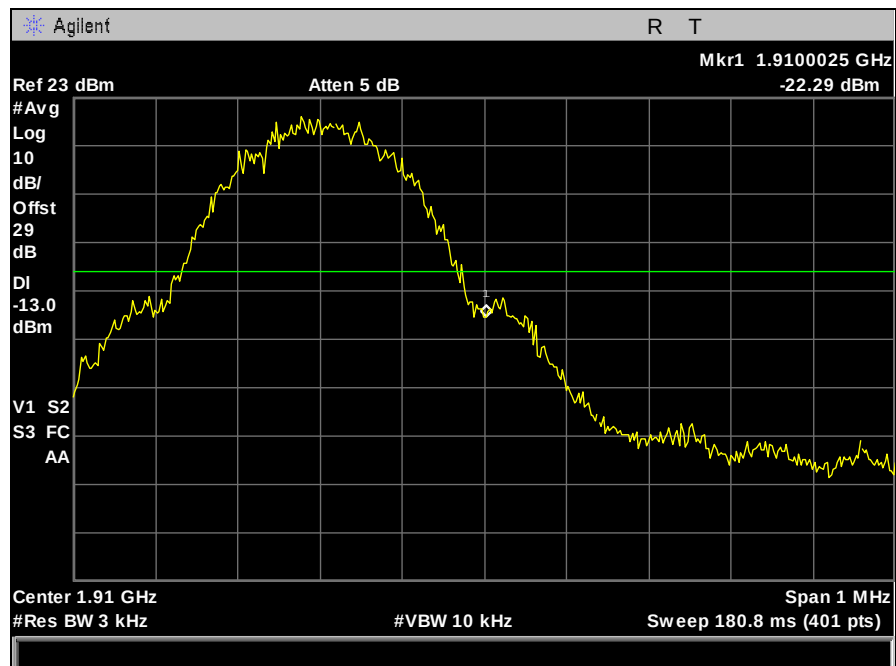


Plot 94. Band Edge Emissions, GPRS, 1900 MHz Band, High Channel

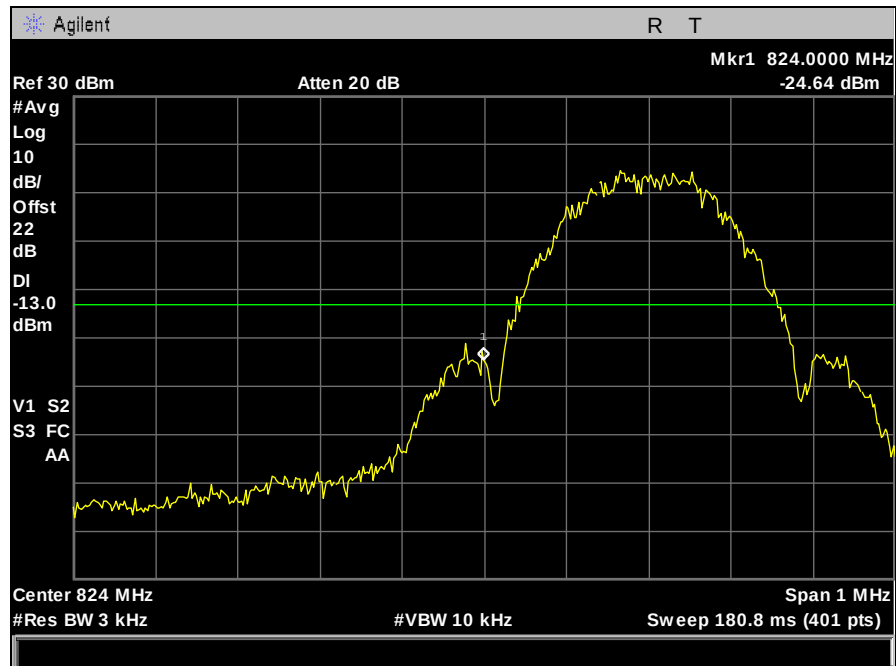


Plot 95. Band Edge Emissions, EGPRS, 850 MHz Band, Low Channel

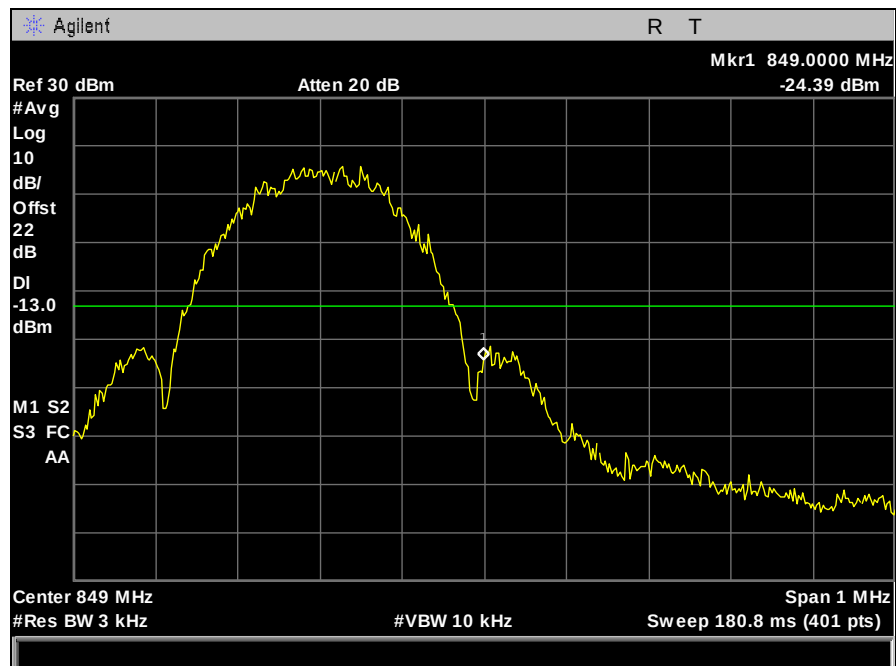


Plot 96. Band Edge Emissions, EGPRS, 850 MHz Band, High Channel

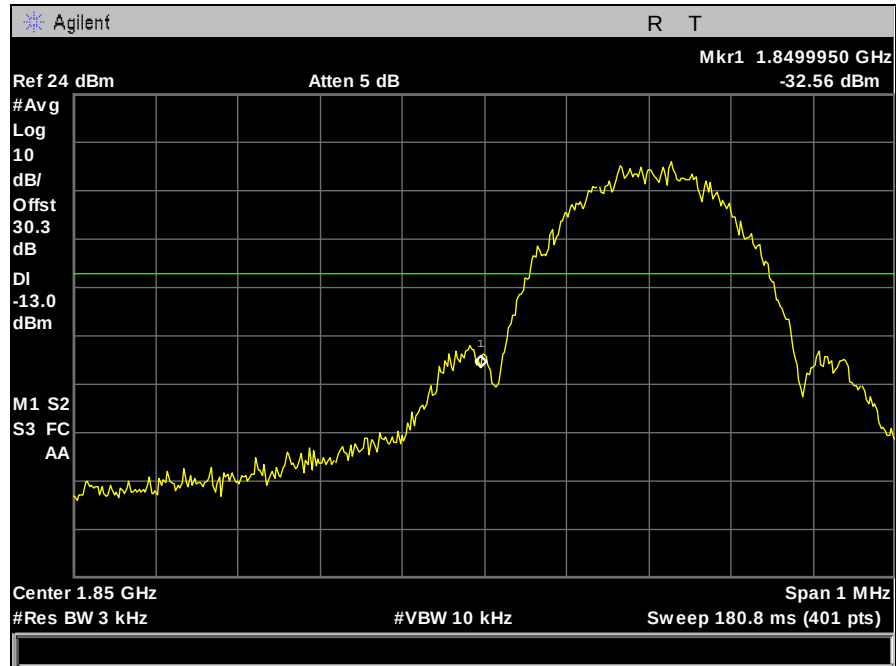


Plot 97. Band Edge Emissions, EGPRS, 1900 MHz Band, Low Channel

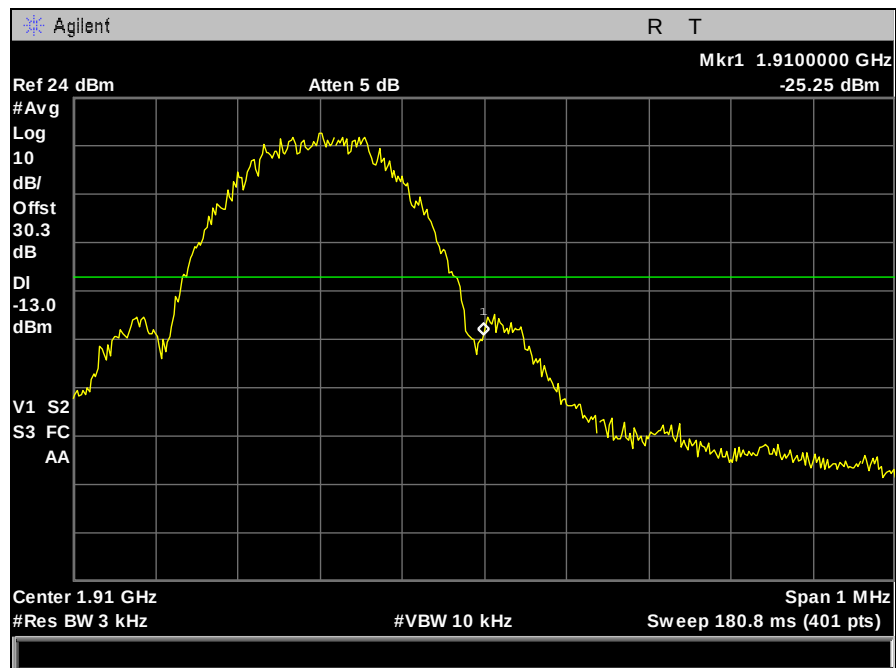


Plot 98. Band Edge Emissions, EGPRS, 1900 MHz Band, High Channel

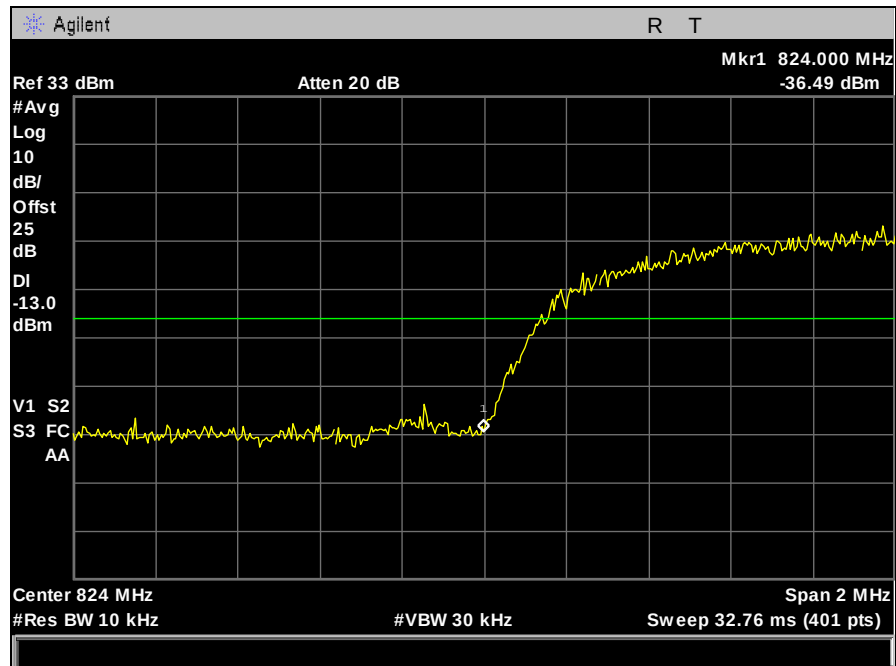


Plot 99. Band Edge Emissions, WCDMA, 850 MHz Band, Low Channel

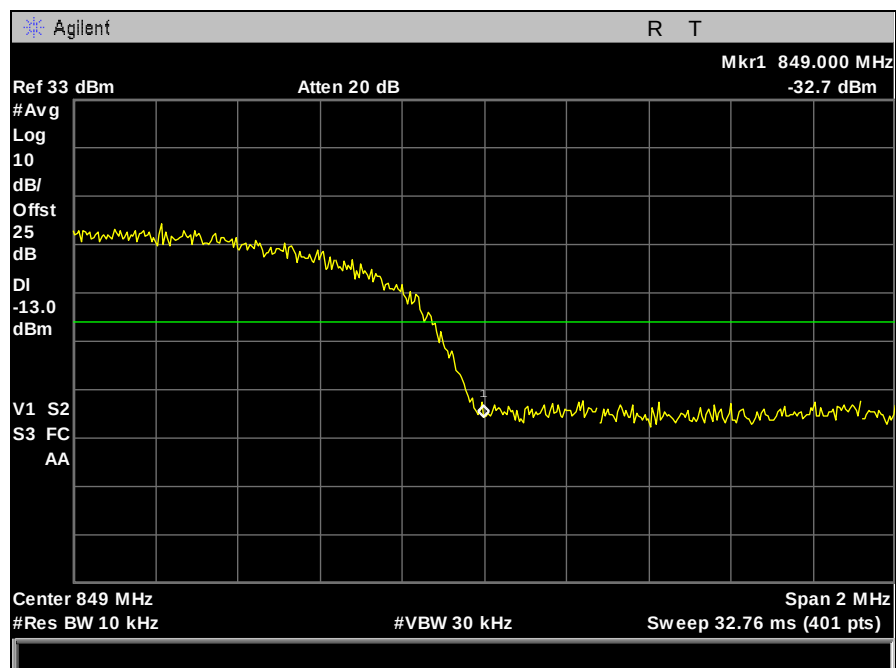

Plot 100. Band Edge Emissions, WCDMA, 850 MHz Band, High Channel

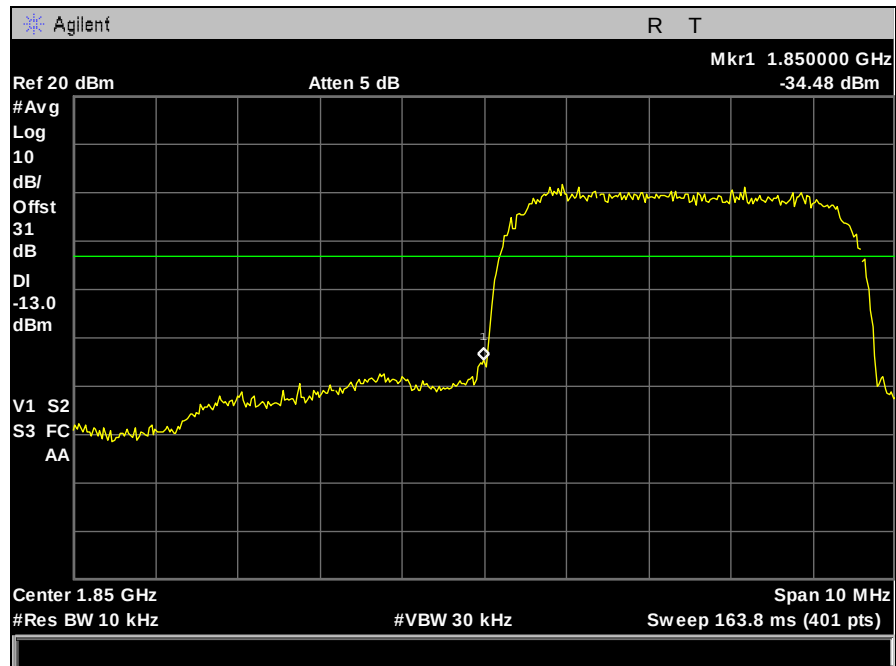

Plot 101. Band Edge Emissions, WCDMA, 1900 MHz Band, Low Channel

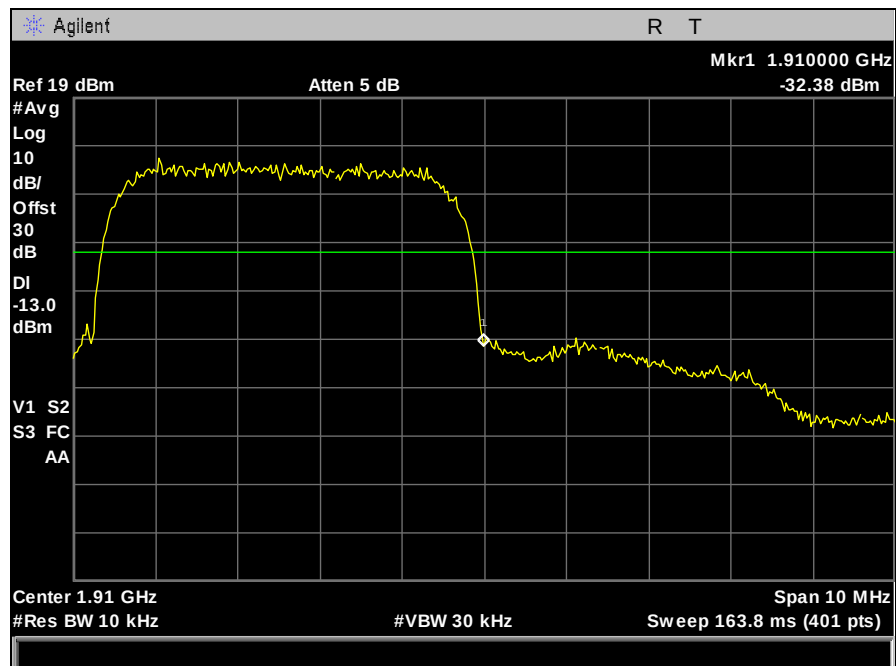

Plot 102. Band Edge Emissions, WCDMA, 1900 MHz Band, High Channel



Electromagnetic Compatibility Criteria for Intentional Radiators

§2.1055 Frequency Stability over Temperature and Voltage Variations

Test Requirement(s): §2.1055(a)(1); §22.355; §24.235

Test Procedures: As required by 47 CFR 2.1055, *Frequency Stability measurements* were made at the RF output terminals using a Spectrum Analyzer and Power Meter.

The EUT was placed in the Environmental Chamber and support equipment outside the chamber on a table. The frequency counter option on the Spectrum Analyzer was used to measure frequency deviations. The frequency drift was investigated for every 10^{°C} increment until the unit is stabilized then recorded the reading in tabular format with the temperature range of -20 to 50^{°C}.

Voltage supplied to EUT is 120 VAC reference temperature was done at 20^{°C}. The voltage was varied by $\pm 15\%$ of nominal.


Test Results: Equipment was compliant with Section 2.1055, 22.355 and 24.235.

Test Engineer(s): Benjamin Taylor

Test Date(s): 12/23/14

824.2MHz Channel			
Temperature (°C)	Frequency (MHz)	Drift (ppm)	Limit PPM
-20	824.01352	-1.84220	2.5
-10	824.013840000	-1.45386	2.5
0	824.014370000	-0.81066	2.5
10	824.016210000	1.42230	2.5
20	824.015038000	ref	
30	824.014700000	-0.41019	2.5
40	824.015539000	0.60800	2.5
50	824.015989000	1.15411	2.5
1710.2MHz Channel			
Temperature (°C)	Frequency (MHz)	Drift (ppm)	Limit PPM
-20	1710.391481	-1.26638	1
-10	1710.394873000	0.71679	1
0	1710.394591000	0.55192	1
10	1710.394238900	0.34606	1
20	1710.393647000	ref	
30	1710.394742000	0.64020	1
40	1710.392869000	-0.45487	1
50	1710.394983000	0.78111	1

Table 5. Frequency Stability, Test Results

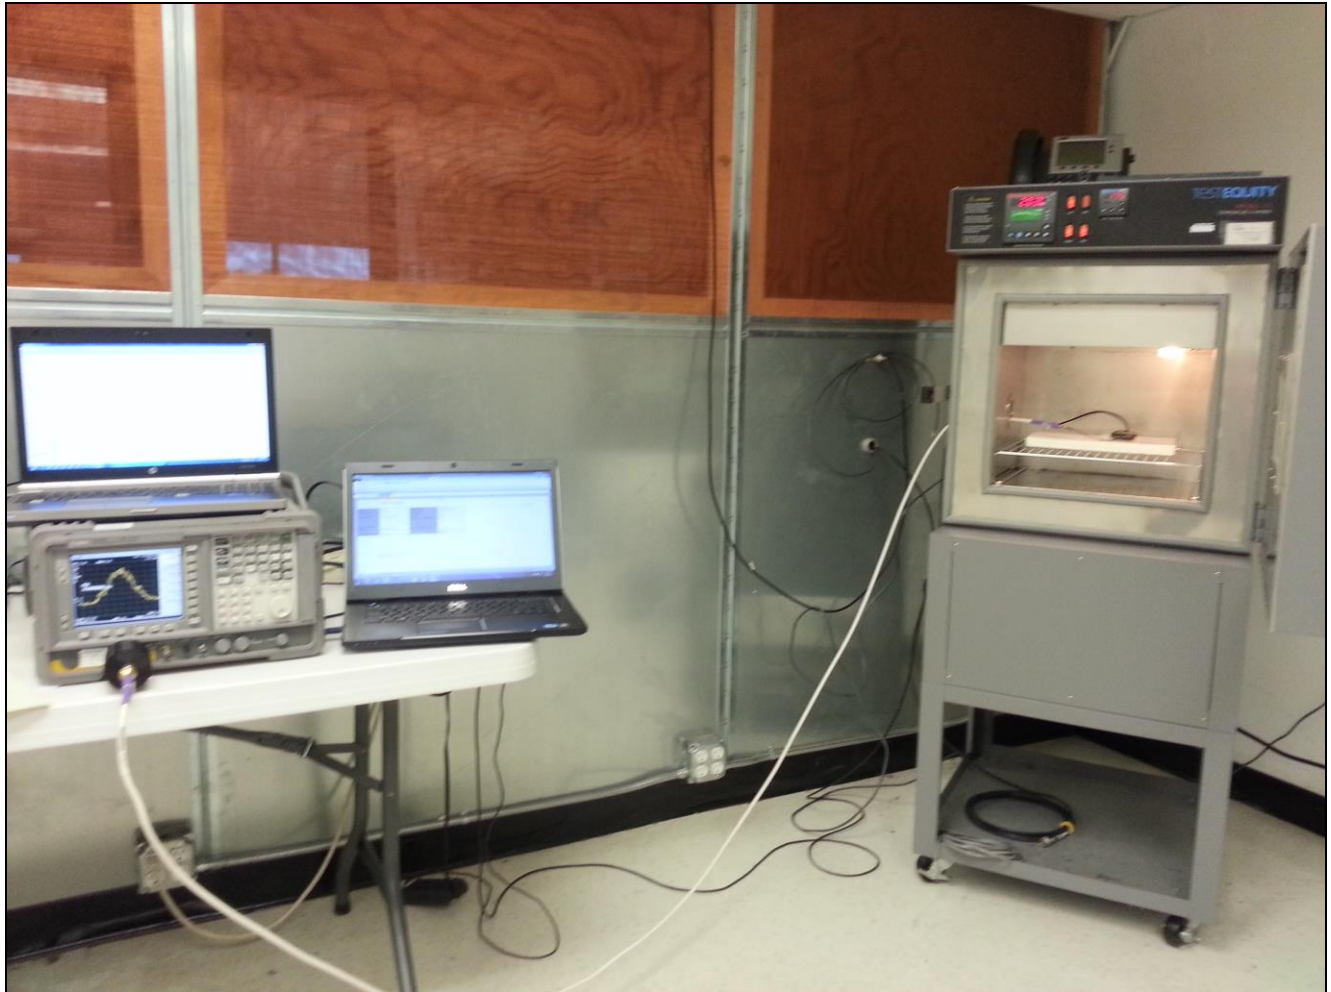

Photograph 2. Frequency Stability, Test Setup



IV. Test Equipment



Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2005.

MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1T4300	SEMI-ANECHOIC CHAMBER # 1 (NSA)	EMC TEST SYSTEMS	NONE	07/24/2012	07/24/2015
1T4409	EMI RECEIVER	ROHDE & SCHWARZ	ESIB7	07/18/2014	07/18/2016
1T4751	ANTENNA - BILOG	SUNOL SCIENCES	JB6	07/29/2014	01/29/2016
1T4771	PSA SPECTRUM ANALYZER	AGILENT TECHNOLOGIES	E4446A	11/25/2014	11/25/2015
1T4483	ANTENNA; HORN	ETS-LINDGREN	3117	02/28/2014	08/28/2015
1T4505	TEMPERATURE CHAMBER	TEST EQUITY	115	01/05/2014	01/05/2015
1T4612	SPECTRUM ANALYZER	AGILENT TECHNOLOGIES	E4407B	07/25/2014	01/25/2016
1T4818	COMB GENERATOR	COM-POWER	CGO-520	SEE NOTE	
1T4149	HIGH-FREQUENCY ANECHOIC CHAMBER	RAY-PROOF	81	NOT REQUIRED	
1T4442	PRE-AMPLIFIER, MICROWAVE	MITEQ	AFS42-01001800-30-10P	SEE NOTE	
1T4858	DIGITAL BAROMETER, HYGROMETER, THERMOMETER	CONTROL COMPANY	15-078-198, FB70423, 245CD	12/19/2013	12/19/2015
N/A	WIRELESS COMMUNICATIONS TEST SET	AGILENT	8960 SERIES 10 E5515C	NOT REQUIRED	

Table 6. Test Equipment

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.



Nielsen Audio
PPM 360 Meter

Electromagnetic Compatibility
End of Report
FCC Part 22H & 24E; RSS-132 & RSS-133

End of Report