



TESTING LABORATORY
CERTIFICATE #4820.01



FCC PART 22H, PART 24E MEASUREMENT AND TEST REPORT

For

Nielsen Audio Inc

7000 Columbia Gateway Drive, Suite 200, Columbia Maryland, 21046, United States

FCC ID: IGKDA118B

Report Type: Original Report	Product Type: PPM 360 Meter
Report Number: RBJ190215050-00B	
Report Date: 2019-03-16	
Reviewed By:	Jerry Zhang EMC Manager
Test Laboratory:	Bay Area Compliance Laboratories Corp. (Dongguan) No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Dongguan). This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. * This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “*”.

TABLE OF CONTENTS

GENERAL INFORMATION.....	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
RELATED SUBMITTAL(S)/GRANT(S).....	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY.....	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION.....	6
JUSTIFICATION	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
CONFIGURATION OF TEST SETUP	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS.....	8
FCC §1.1310 & §2.1093- RF EXPOSURE	9
APPLICABLE STANDARD	9
TEST RESULT	9
FCC §2.1047 - MODULATION CHARACTERISTIC	10
FCC § 2.1046, § 22.913 (A) & § 24.232 (C) - RF OUTPUT POWER.....	11
APPLICABLE STANDARD	11
TEST PROCEDURE	11
TEST EQUIPMENT LIST AND DETAILS.....	15
TEST DATA	15
FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH	18
APPLICABLE STANDARD	18
TEST PROCEDURE	18
TEST EQUIPMENT LIST AND DETAILS.....	18
TEST DATA	19
FCC §2.1051, §22.917(A) & §24.238(A) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS	24
APPLICABLE STANDARD	24
TEST PROCEDURE	24
TEST EQUIPMENT LIST AND DETAILS.....	24
TEST DATA	25
FCC §2.1053, §22.917 & §24.238 - SPURIOUS RADIATED EMISSIONS	30
APPLICABLE STANDARD	30
TEST PROCEDURE	30
TEST EQUIPMENT LIST AND DETAILS.....	31
TEST DATA	31
FCC §22.917(A) & §24.238(A)- BAND EDGES.....	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST EQUIPMENT LIST AND DETAILS.....	34
TEST DATA	35
FCC §2.1055, §22.355 & §24.235 - FREQUENCY STABILITY	44

APPLICABLE STANDARD44

TEST PROCEDURE44

TEST EQUIPMENT LIST AND DETAILS.....45

TEST DATA45

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

EUT Name:		PPM 360 Meter
EUT Model:		DA118B
Operation modes:		GPRS/EDGE Data WCDMA(R99/HSDPA Data)
Operation Frequency:		GSM 850: 824-849 MHz(TX); 869-894 MHz(RX) PCS 1900: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 5: 824-849 MHz(TX); 869-894 MHz(RX)
Output Power(Conducted):		GSM 850 : 31.33 dBm; PCS 1900: 27.86 dBm WCDMA Band 2: 20.62 dBm; WCDMA Band 5: 22.14 dBm
Modulation Type:		GMSK, 8PSK, QPSK, 16QAM
Rated Input Voltage:		DC3.7V from Li-ion Battery or DC5V from adapter
Adapter Information	Model Name:	TS21-500500S
	Input:	100-240V 50/60Hz 0.15A
	Output:	5.0V, 500mA
External Dimension:		80mm(L)*1mm(W)*27mm(H)
Serial Number:		190215050
EUT Received Date:		2019-02-18

Objective

This report is prepared on behalf of *Nielsen Audio Inc* in accordance with: Part 2-Subpart J, Part 22-Subpart H, and Part 24-Subpart E of the Federal Communications Commission's rules.

The objective is to determine compliance with FCC Rules for output power, modulation characteristic, occupied bandwidth, spurious emissions at antenna terminal, spurious radiated emission, frequency stability and band edge.

Related Submittal(s)/Grant(s)

FCC Part 15C DSS submissions with FCC ID: IGTKDA118B.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services
Part 24 Subpart E - Personal Communication Services

Applicable Standards: TIA/EIA 603-D-2010.

All radiated and conducted emissions measurements were performed at Bay Area Compliance Laboratories Corp.(Dongguan).

Measurement Uncertainty

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Unwanted Emissions, radiated	30MHz ~ 1GHz: 5.85 dB 1G~26.5GHz: 5.23 dB
Unwanted Emissions, conducted	±1.5 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%

Test Facility

The test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.69 Pulongcun, Puxinhu Industry Area, Tangxia, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

SYSTEM TEST CONFIGURATION

Justification

The EUT was configured for testing according to TIA/EIA-603-D 2010.


Equipment Modifications

No modification was made to the EUT.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
R&S	Universal Radio Communication Tester	CMU200	109038
Un-known	ANTENNA	/	/

Configuration of Test Setup

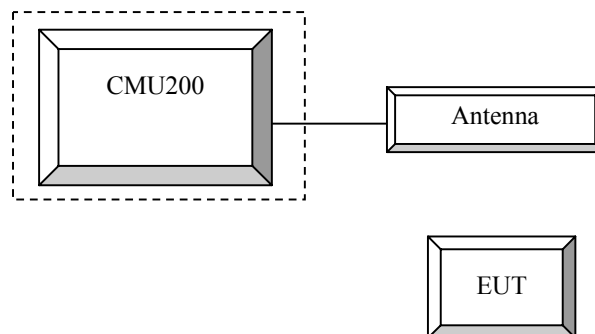

Block Diagram of Test Setup

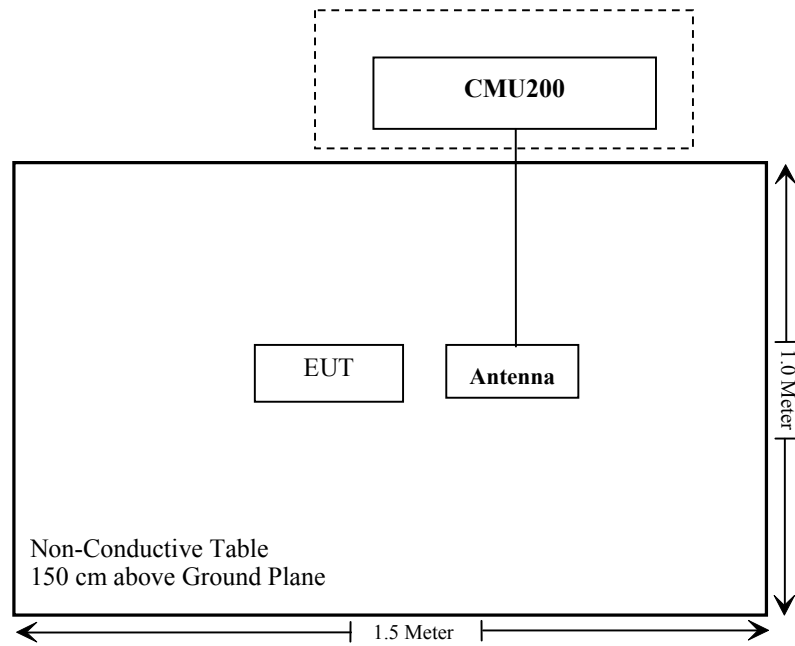

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1310, §2.1093	RF Exposure	Compliance
§2.1046; § 22.913 (a); § 24.232 (c);	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905 § 22.917; § 24.238	Occupied Bandwidth	Compliance
§ 2.1051, § 22.917 (a); § 24.238 (a)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053 § 22.917 (a); § 24.238 (a)	Spurious Radiation Emissions	Compliance
§ 22.917 (a); § 24.238 (a)	Out of band emission, Band Edge	Compliance
§ 2.1055 § 22.355; § 24.235	Frequency stability vs. temperature Frequency stability vs. voltage	Compliance

FCC §1.1310 & §2.1093- RF EXPOSURE

Applicable Standard

FCC§1.1310 and §2.1093.

Test Result

Compliance, please refer to the SAR report: RBJ190215050-20.

FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC § 2.1047(d), Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

FCC § 2.1046, § 22.913 (a) & § 24.232 (c) - RF OUTPUT POWER

Applicable Standard

According to FCC §2.1046 and §22.913 (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC §2.1046 and §24.232 (C), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §24.232 (d) Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

Test Procedure

GSM/GPRS/EGPRS

Function: Menu select > GSM Mobile Station > GSM 850/1900

Press Connection control to choose the different menus

Press RESET > choose all the reset all settings

Connection Press Signal Off to turn off the signal and change settings

Network Support > GSM + GPRS or GSM + EGSM

Main Service > Packet Data

Service selection > Test Mode A – Auto Slot Config. off

MS Signal Press Slot Config Bottom on the right twice to select and change the number of time slots and power setting

> Slot configuration > Uplink/Gamma

> 33 dBm for GPRS 850

> 30 dBm for GPRS 1900

> 27 dBm for EGPRS 850

> 26 dBm for EGPRS 1900

BS Signal Enter the same channel number for TCH channel (test channel) and BCCH channel

Frequency Offset > + 0 Hz

Mode > BCCH and TCH

BCCH Level > -85 dBm (May need to adjust if link is not stable)

BCCH Channel > choose desire test channel [Enter the same channel number for TCH channel (test channel) and BCCH channel]

Channel Type > Off

P0 > 4 dB

Slot Config > Unchanged (if already set under MS signal)

TCH > choose desired test channel

Hopping > Off

Main Timeslot > 3

Network Coding Scheme > CS4 (GPRS) and MCS5 (EGPRS)

Bit Stream > 2E9-1 PSR Bit Stream

AF/RF Enter appropriate offsets for Ext. Att. Output and Ext. Att. Input

Connection Press Signal on to turn on the signal and change settings

WCDMA-Release 99

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification. The EUT has a nominal maximum output power of 24dBm (+1.7/-3.7).

WCDMA General Settings	Loopback Mode	Test Mode 1
	Rel99 RMC	12.2kbps RMC
	Power Control Algorithm	Algorithm2
	β_c / β_d	8/15

WCDMA HSDPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode Subset	HSDPA 1	HSDPA 2	HSDPA 3	HSDPA 4
WCDMA General Settings	Loopback Mode	Test Mode 1			
	Rel99 RMC	12.2kbps RMC			
	HSDPA FRC	H-Set1			
	Power Control Algorithm	Algorithm2			
	β_c	2/15	12/15	15/15	15/15
	β_d	15/15	15/15	8/15	4/15
	β_d (SF)	64			
	β_c / β_d	2/15	12/15	15/8	15/4
	β_{hs}	4/15	24/15	30/15	30/15
	MPR(dB)	0	0	0.5	0.5
HSDPA Specific Settings	DACK	8			
	DNAK	8			
	DCQI	8			
	Ack-Nack repetition factor	3			
	CQI Feedback	4ms			
	CQI Repetition Factor	2			
	$A_{hs} = \beta_{hs} / \beta_c$	30/15			

WCDMA HSUPA

The following tests were conducted according to the test requirements outlines in section 5.2 of the 3GPP TS34.121-1 specification.

	Mode	HSUPA	HSUPA	HSUPA	HSUPA	HSUPA
	Subset	1	2	3	4	5
WCDMA General Settings	Loopback Mode	Test Mode 1				
	Rel99 RMC	12.2kbps RMC				
	HSDPA FRC	H-Set1				
	HSUPA Test	HSUPA Loopback				
	Power Control Algorithm	Algorithm2				
	β_c	11/15	6/15	15/15	2/15	15/15
	β_d	15/15	15/15	9/15	15/15	0
	β_{ec}	209/225	12/15	30/15	2/15	5/15
	β_c/β_d	11/15	6/15	15/9	2/15	-
	β_{hs}	22/15	12/15	30/15	4/15	5/15
	CM(dB)	1.0	3.0	2.0	3.0	1.0
	MPR(dB)	0	2	1	2	0
HSDPA Specific Settings	DACK	8				
	DNAK	8				
	DCQI	8				
	Ack-Nack repetition factor	3				
	CQI Feedback	4ms				
	CQI Repetition Factor	2				
	$A_{hs}=\beta_{hs}/\beta_c$	30/15				
HSUPA Specific Settings	DE-DPCCH	6	8	8	5	7
	DHARQ	0	0	0	0	0
	AG Index	20	12	15	17	21
	ETFCI	75	67	92	71	81
	Associated Max UL Data Rate kbps	242.1	174.9	482.8	205.8	308.9
	Reference E_FCI	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E-TFCI PO4 E-TFCI 92 E-TFCI PO 18	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27	E-TFCI 11 E E-TFCI PO 4 E-TFCI 67 E-TFCI PO 18 E-TFCI 71 E-TFCI PO23 E-TFCI 75 E-TFCI PO26 E-TFCI 81 E-TFCI PO 27

HSPA+

The following tests were conducted according to the test requirements in Table C.11.1.4 of 3GPP TS 34.121-1

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0). Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default. Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value. Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signalled to use the extrapolation algorithm.											

DC-HSDPA

The following tests were conducted according to the test requirements in Table C.8.1.12 of 3GPP TS 34.121-1

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100035	2018-08-03	2019-08-03
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2018-05-06	2019-05-06
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2018-09-05	2019-09-05
Agilent	Signal Generator	E8247C	MY43321350	2018-12-10	2019-12-10
Agilent	Spectrum Analyzer	E4440A	SG43360054	2019-01-04	2020-01-04
TDK RF	Horn Antenna	HRN-0118	130 084	2018-10-12	2021-10-12
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2018-09-05	2019-09-05
R&S	Universal Radio Communication Tester	CMU200	106 891	2018-12-14	2019-12-14
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24~24.5 °C
Relative Humidity:	53~67 %
ATM Pressure:	100.4 kPa

* The testing was performed by Blake Yang, Tyler Pan, Neil Liao on 2019-02-21.

Test Result: Compliance

Conducted Output Power**Cellular Band & PCS Band**

Band	Channel No.	Conducted Peak Output Power (dBm)							
		GPRS 1 TX Slot	GPRS 2 TX Slot	GPRS 3 TX Slot	GPRS 4 TX Slot	EGPRS 1 TX Slot	EGPRS 2 TX Slot	EGPRS 3 TX Slot	EGPRS 4 TX Slot
Cellular	128	31.33	31.21	31.13	30.19	25.57	25.08	24.98	24.44
	190	31.26	31.18	31.07	30.16	25.52	25.02	24.92	24.40
	251	31.15	31.04	30.96	30.07	25.36	24.87	24.79	24.30
PCS	512	26.73	26.69	26.53	25.72	23.32	22.91	22.84	22.41
	661	27.36	27.29	27.19	26.23	23.92	23.54	23.40	23.01
	810	27.86	27.79	27.66	26.69	24.49	23.96	23.85	23.48

WCDMA Band II

Mode	3GPP Sub Test	Low Channel		Middle Channel		High Channel	
		Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)
Rel 99	1	20.62	3.27	20.36	3.33	20.46	3.21
HSDPA	1	20.41	5.06	20.26	4.13	20.33	4.06
	2	20.37	5.05	20.27	4.17	20.33	4.06
	3	20.45	5.03	20.25	4.17	20.29	4.02
	4	20.41	5.06	20.25	4.15	20.36	4.02

WCDMA Band V

Mode	3GPP Sub Test	Low Channel		Middle Channel		High Channel	
		Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)	Ave. Power (dBm)	PAR (dB)
Rel 99	1	22.14	3.08	21.66	3.11	21.87	3.17
HSDPA	1	21.95	3.17	21.59	4.07	21.64	3.94
	2	21.95	3.20	21.62	4.04	21.62	3.97
	3	21.96	3.20	21.57	4.09	21.65	3.97
	4	21.95	3.16	21.61	4.07	21.60	3.98

ERP & EIRP

Part 22H

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GPRS 850 Middle Channel								
836.60	H	93.29	18.37	0.00	0.97	17.40	38.45	21.05
836.60	V	99.64	27.85	0.00	0.97	26.88	38.45	11.57
EGPRS 850 Middle Channel								
836.60	H	89.71	14.79	0.00	0.97	13.82	38.45	24.63
836.60	V	96.57	24.78	0.00	0.97	23.81	38.45	14.64
WCDMA Band V Middle Channel								
836.60	H	90.77	15.85	0.00	0.97	14.88	38.45	23.57
836.60	V	94.45	22.66	0.00	0.97	21.69	38.45	16.76

Part 24E

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GPRS 1900 Middle Channel								
1880.00	H	92.10	19.49	11.66	2.66	28.49	33.00	4.51
1880.00	V	92.45	19.98	11.66	2.66	28.98	33.00	4.02
EGPRS 1900 Middle Channel								
1880.00	H	89.52	16.91	11.66	2.66	25.91	33.00	7.09
1880.00	V	89.62	17.15	11.66	2.66	26.15	33.00	6.85
WCDMA Band II Middle Channel								
1880.00	H	85.16	12.55	11.66	2.66	21.55	33.00	11.45
1880.00	V	85.48	13.01	11.66	2.66	22.01	33.00	10.99

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level


FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH**Applicable Standard**

FCC §2.1049, §22.917, §22.905, §24.238

Test Procedure

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The 26 dB & 99% bandwidth was recorded.

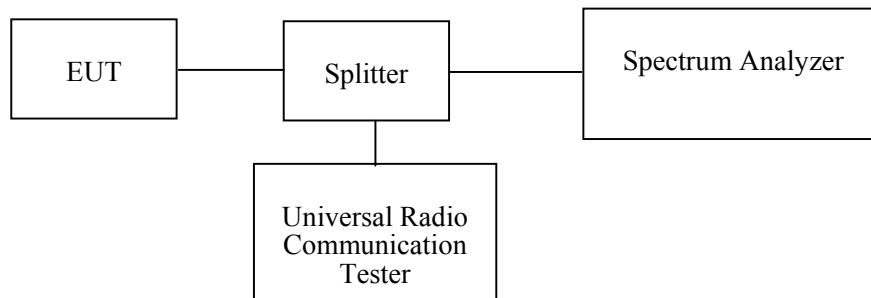**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-01-04	2020-01-04
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005012	Each time	N/A
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
E-Microwave	Two-way Splitter	ODP-1-6-2S	OE0120142	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24.5 °C
Relative Humidity:	67 %
ATM Pressure:	100.4 kPa


* The testing was performed by Blake Yang on 2019-02-21.

Test Mode: Transmitting

Test Result: Compliance. Please refer to the following table and plots.


Band	Test Channel	Mode	99% Occupied Bandwidth (MHz)	26 dB Occupied Bandwidth (MHz)
Cellular	Middle	GPRS	0.244	0.317
		EGPRS	0.240	0.313
PCS		GPRS	0.245	0.314
		EGPRS	0.244	0.322
WCDMA Band 2		Rel 99	4.151	4.679
		HSDPA	4.167	4.712
WCDMA Band 5		Rel 99	4.167	4.696
		HSDPA	4.167	4.697

GPRS 850 Cellular Band

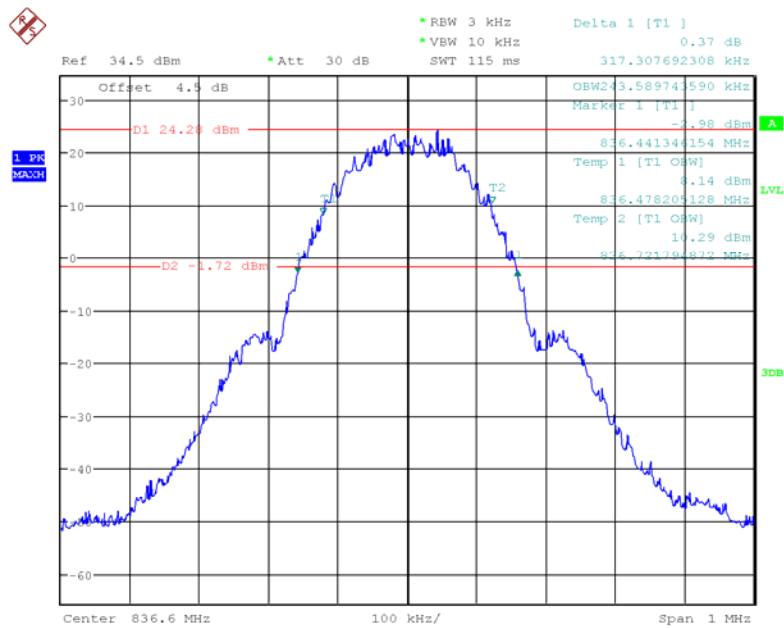


Date: 21.FEB.2019 21:38:49


GPRS 1900 Cellular Band

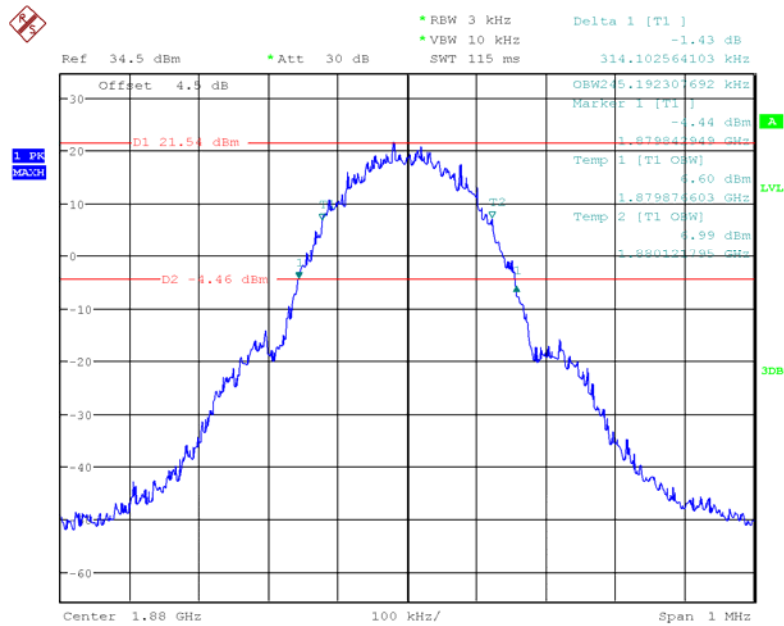


Date: 21.FEB.2019 21:46:31

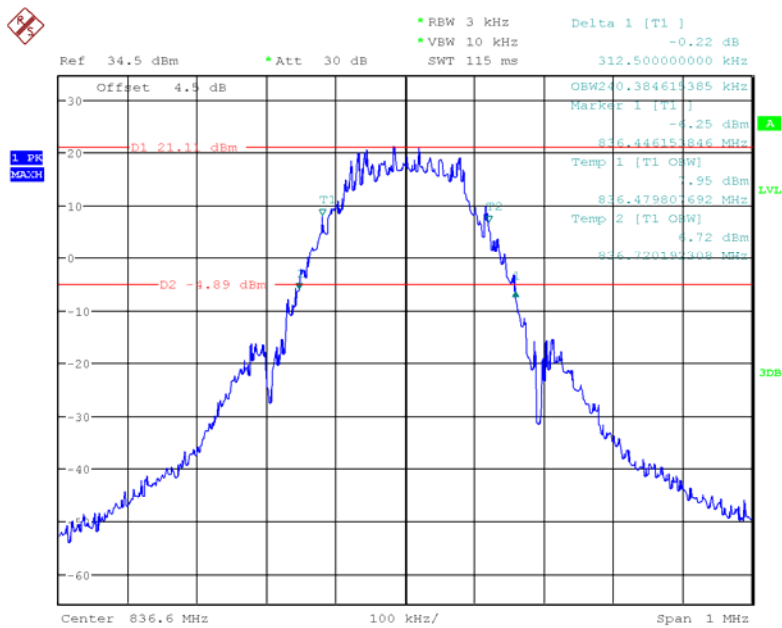EDGE 850 Cellular Band


Date: 21.FEB.2019 22:02:34

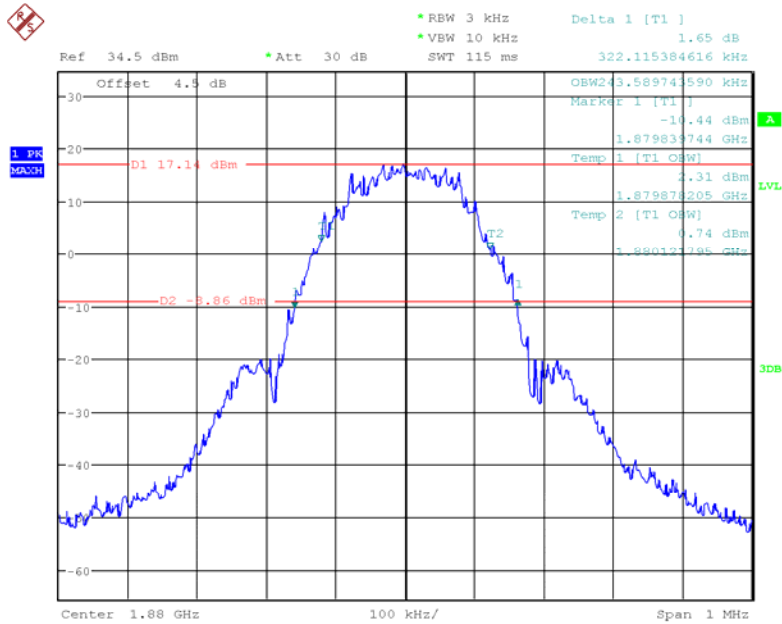EDGE 1900 Cellular Band

Date: 21.FEB.2019 21:56:12

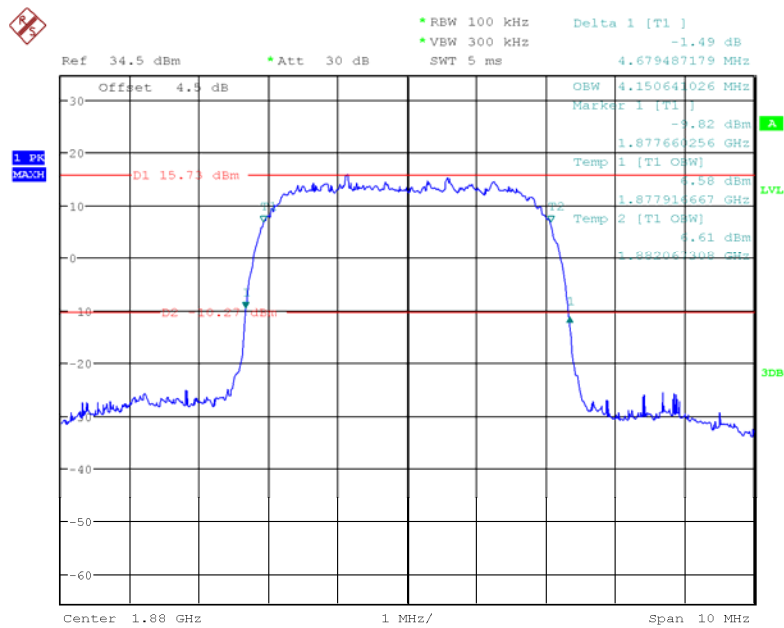
REL99 Band II

Date: 21.FEB.2019 20:45:46

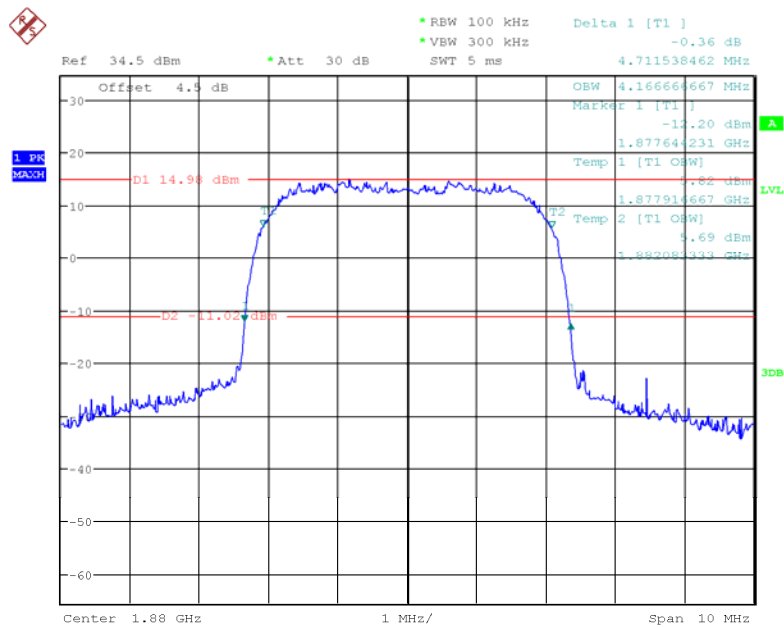HSDPA Band II


Date: 21.FEB.2019 20:47:04

REL99 Band V

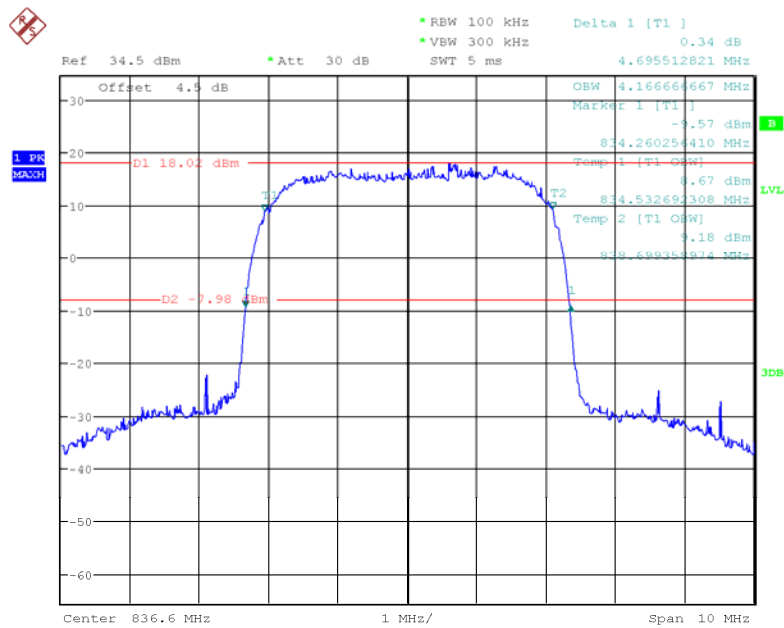

Date: 21.FEB.2019 20:26:05

HSDPA Band V

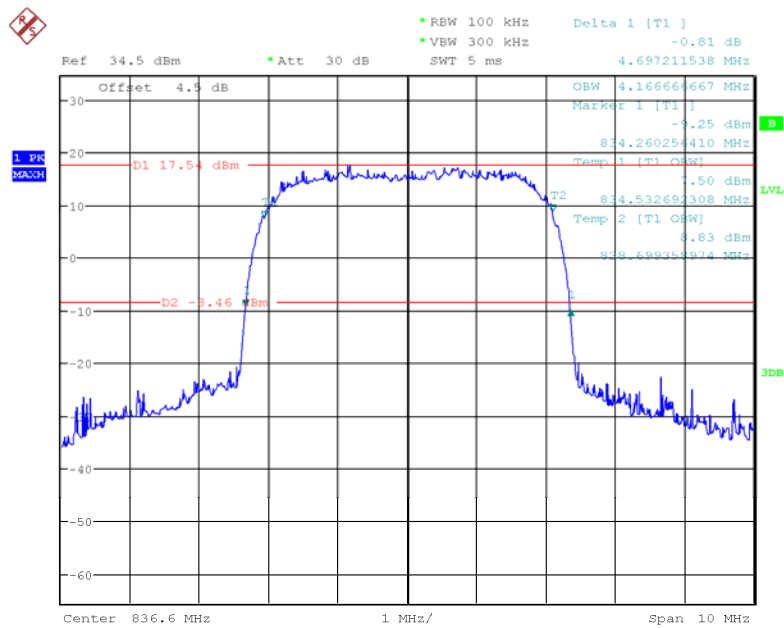

Date: 21.FEB.2019 20:27:46

FCC §2.1051, §22.917(a) & §24.238(a) - SPURIOUS EMISSIONS AT ANTENNA TERMINALS


Applicable Standard

FCC §2.1051, §22.917(a) , §24.238(a).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

Test Procedure

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. Sufficient scans were taken to show any out of band emissions up to 10th harmonic.

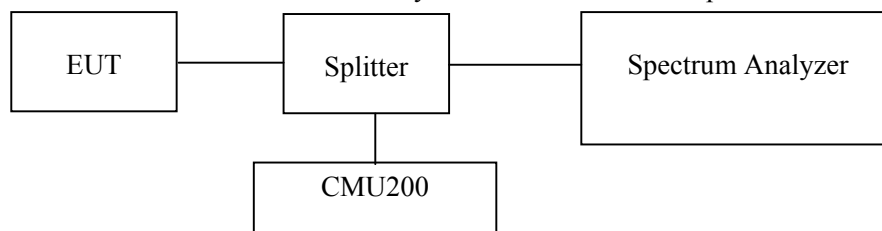

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-01-04	2020-01-04
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005012	Each time	N/A
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
E-Microwave	Two-way Splitter	ODP-1-6-2S	OE0120142	Each time	N/A


* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24.5 °C
Relative Humidity:	67 %
ATM Pressure:	100.4 kPa

* The testing was performed by Blake Yang on 2019-02-21.

Test Result: Compliance. Please refer to the following plots.

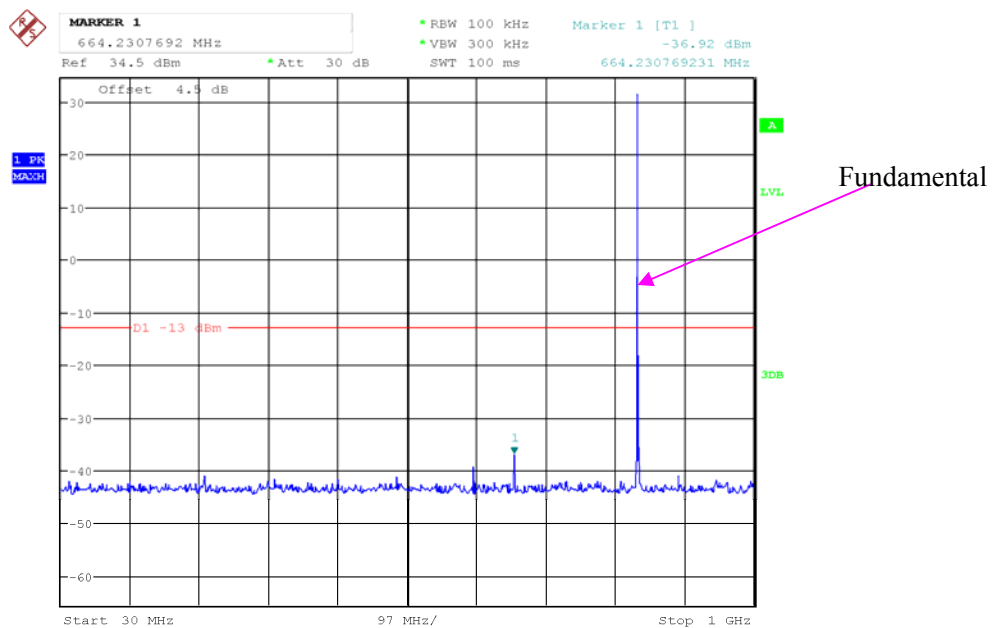GPRS 850_Middle Channel

Date: 21.FEB.2019 21:39:34



MARKER 1
872.5320513 MHz

Ref 34.5 dBm * Att 30 dB

* RBW 100 kHz
* VBW 300 kHz
SWT 100 ms

Marker 1 [T1]
-41.21 dBm
872.532051282 MHz

Offset 4.5 dB


1.00
MHz

D1 -13 dBm

1


Start 30 MHz 97 MHz/ Stop 1 GHz

Date: 21.FEB.2019 21:42:15

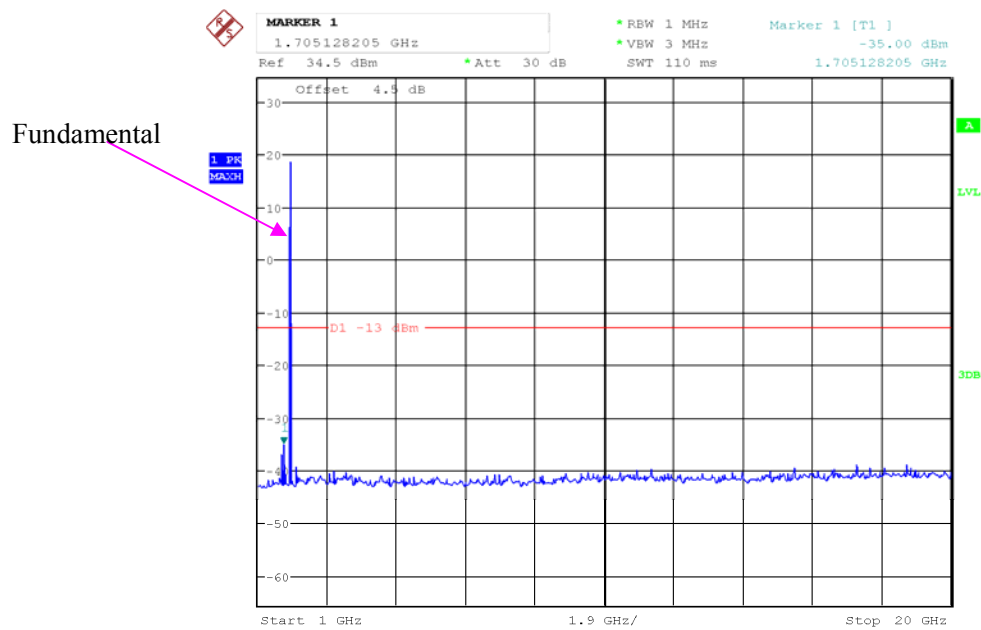


Date: 21.FEB.2019 21:41:47

REL99 Band II_Middle Channel

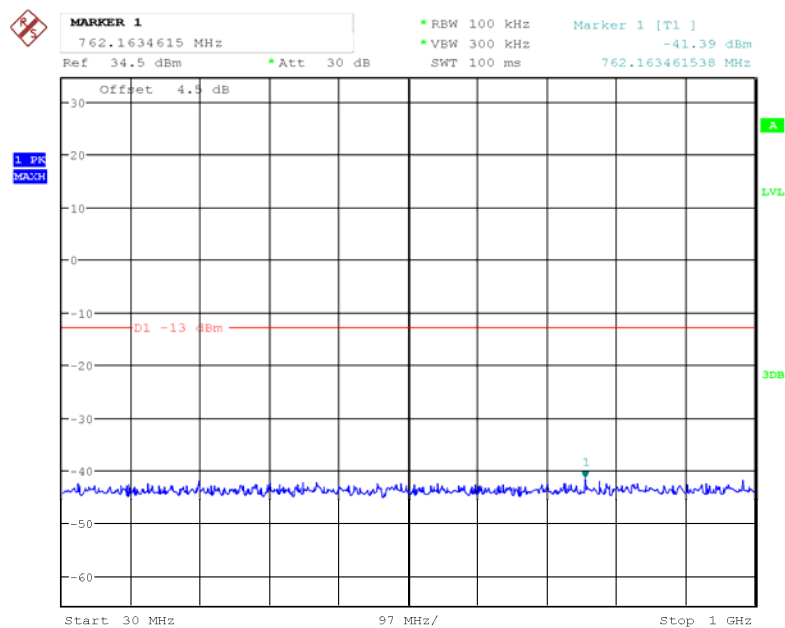


Date: 21.FEB.2019 21:11:38

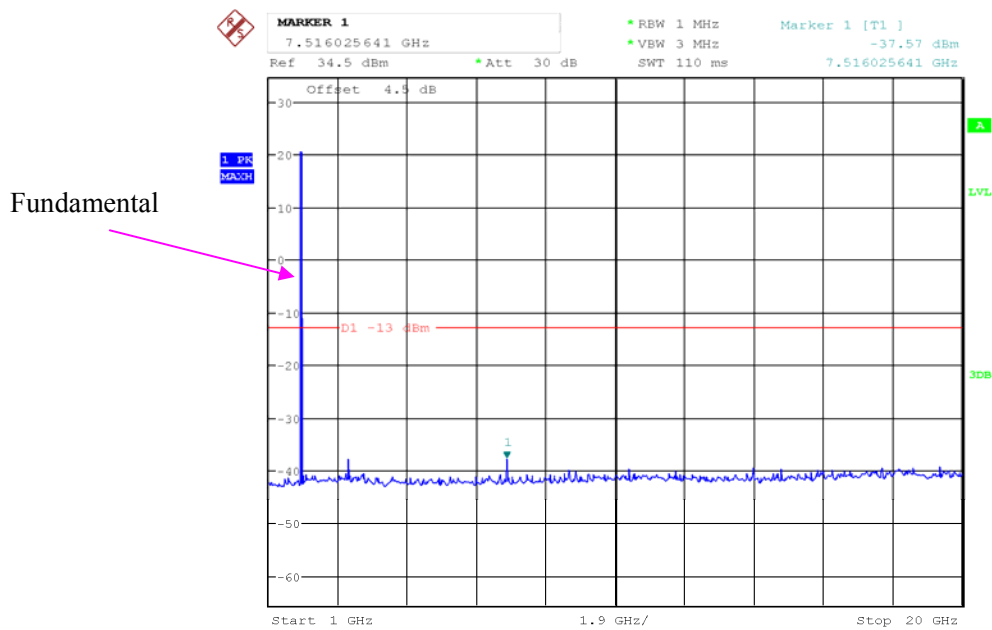


Date: 21.FEB.2019 21:12:07

REL99 Band V_Middle Channel

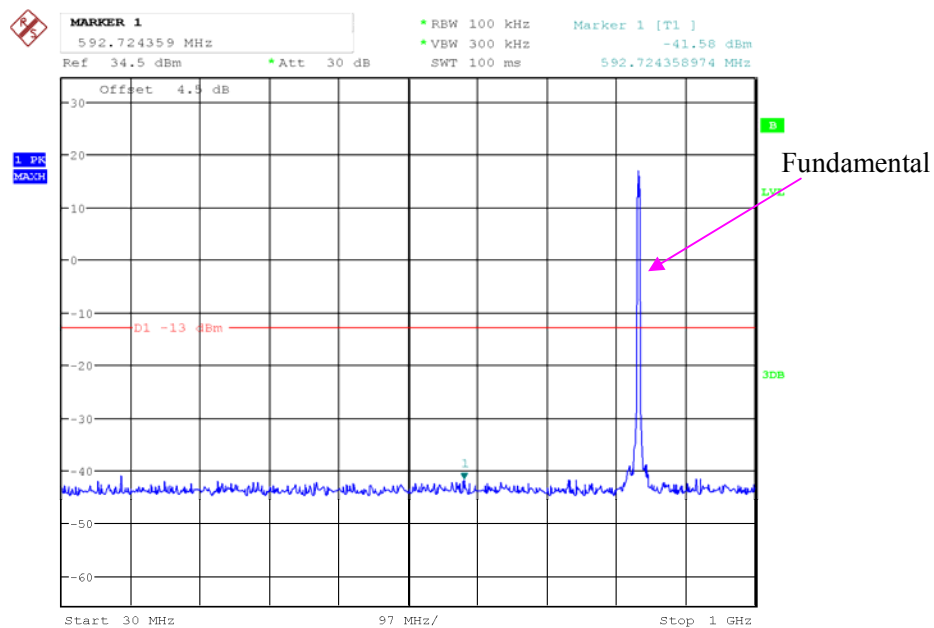

Date: 21.FEB.2019 20:32:38

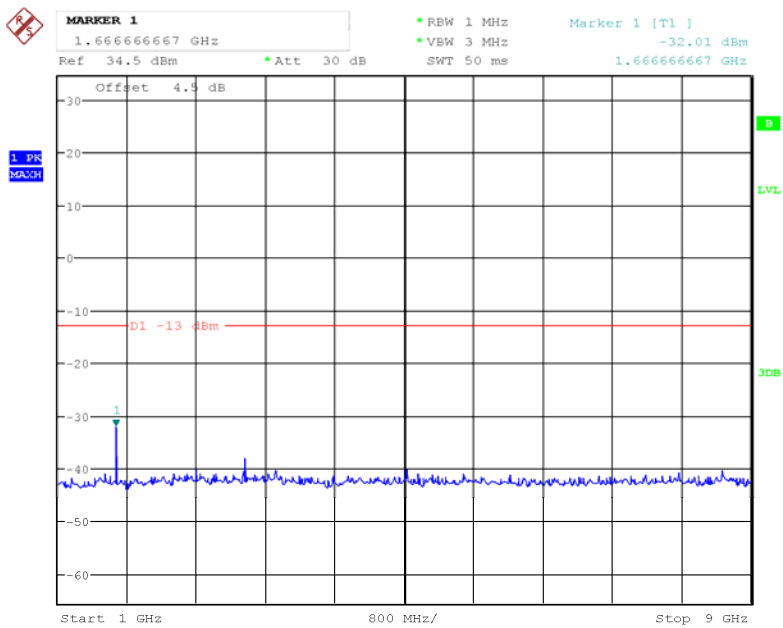

Date: 21.FEB.2019 20:33:22

FCC §2.1053, §22.917 & §24.238 - SPURIOUS RADIATED EMISSIONS

Applicable Standard

FCC § 2.1053, §22.917, § 24.238.

Test Procedure

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB = $10 \lg (\text{TXpwr in Watts}/0.001)$ – the absolute level

Spurious attenuation limit in dB = $43 + 10 \text{Log}_{10} (\text{power out in Watts})$

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	EMI Test Receiver	ESCI	100224	2018-12-10	2019-12-10
Sunol Sciences	Antenna	JB3	A060611-1	2017-11-10	2020-11-10
EMCO	Adjustable Dipole Antenna	3121C	9109-753	N/A	N/A
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0075-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-1400-01	2018-05-06	2019-05-06
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2018-09-05	2019-09-05
HP	Amplifier	8447D	2727A05902	2018-09-05	2019-09-05
Sinoscite	Band-stop filter	BSF824-862MS-1438-001	1438001	2018-06-16	2019-06-16
Agilent	Signal Generator	E8247C	MY43321350	2018-12-10	2019-12-10
Agilent	Spectrum Analyzer	E4440A	SG43360054	2019-01-04	2020-01-04
TDK RF	Horn Antenna	HRN-0118	130 084	2018-10-12	2021-10-12
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-01 1304	2016-11-18	2019-11-18
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-02 1304	2016-11-18	2019-11-18
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2018-09-05	2019-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0200-02	2018-09-05	2019-09-05
MITEQ	Amplifier	AFS42-00101800-25-S-42	2001271	2018-09-05	2019-09-05
Sinoscite	Band-stop filter	BSF1850-1910MS-0935V2	0935V2	2018-06-16	2019-06-16

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24~24.3 °C
Relative Humidity:	53~54 %
ATM Pressure:	100.4 kPa

* The testing was performed by Neil Liao and Tyler Pan on 2019-02-21.

Test Result: Compliance.

EUT Operation Mode: Transmitting

Cellular Band (PART 22H)**30 MHz-10 GHz:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GPRS 850, Frequency:836.600 MHz								
1673.200	H	46.38	-67.83	10.6	0.73	-58.0	-13.0	45.0
1673.200	V	47.58	-67.23	10.6	0.73	-57.4	-13.0	44.4
2509.800	H	45.05	-67.97	13.1	1.25	-56.1	-13.0	43.1
2509.800	V	44.62	-68.43	13.1	1.25	-56.6	-13.0	43.6
3346.400	H	45.39	-65.27	13.8	1.61	-53.1	-13.0	40.1
3346.400	V	45.62	-65.09	13.8	1.61	-52.9	-13.0	39.9
37.760	H	46.03	-45.11	-25.3	0.22	-70.7	-13.0	57.7
606.180	V	44.45	-60.85	0.0	0.77	-61.6	-13.0	48.6
WCDMA Band V R99, Frequency:836.600 MHz								
1673.200	H	63.07	-51.14	10.6	0.73	-41.3	-13.0	28.3
1673.200	V	61.25	-53.56	10.6	0.73	-43.7	-13.0	30.7
2509.800	H	45.75	-67.27	13.1	1.25	-55.4	-13.0	42.4
2509.800	V	45.25	-67.8	13.1	1.25	-55.9	-13.0	42.9
3346.400	H	44.69	-65.97	13.8	1.61	-53.8	-13.0	40.8
3346.400	V	45.28	-65.43	13.8	1.61	-53.2	-13.0	40.2
225.940	H	39.00	-69.95	0.0	0.5	-70.5	-13.0	57.5
225.940	V	42.26	-69.35	0.0	0.5	-69.9	-13.0	56.9

PCS Band (PART 24E)**30 MHz-20 GHz:**

Frequency (MHz)	Polar (H/V)	Receiver Reading (dBμV)	Substituted Method			Absolute Level (dBm)	Limit (dBm)	Margin (dB)
			Substituted Level (dBm)	Antenna Gain (dBd/dBi)	Cable Loss (dB)			
GPRS1900, Frequency:1880.000 MHz								
3760.000	H	48.31	-60.49	13.8	1.63	-48.4	-13.0	35.4
3760.000	V	49.83	-58.84	13.8	1.63	-46.7	-13.0	33.7
5640.000	H	53.01	-53.02	14.0	1.31	-40.3	-13.0	27.3
5640.000	V	52.33	-53.58	14.0	1.31	-40.9	-13.0	27.9
132.820	H	40.16	-64.84	0.0	0.34	-65.2	-13.0	52.2
664.380	V	42.39	-62.04	0.0	0.88	-62.9	-13.0	49.9
WCDMA Band II, R99, Frequency:1880.000 MHz								
3760.000	H	49.64	-59.16	13.8	1.63	-47.0	-13.0	34.0
3760.000	V	48.16	-60.51	13.8	1.63	-48.4	-13.0	35.4
5640.000	H	51.83	-54.2	14.0	1.31	-41.5	-13.0	28.5
5640.000	V	51.01	-54.9	14.0	1.31	-42.2	-13.0	29.2
701.240	H	45.25	-56.15	0.0	0.94	-57.1	-13.0	44.1
701.240	V	45.35	-58.53	0.0	0.94	-59.5	-13.0	46.5

Note:

- 1) The unit of Antenna Gain is dBd for frequency below 1GHz, and the unit of Antenna Gain is dBi for frequency above 1GHz.
- 2) Absolute Level = Substituted Level - Cable loss + Antenna Gain
- 3) Margin = Limit-Absolute Level


FCC §22.917(a) & §24.238(a)- BAND EDGES**Applicable Standard**

FCC § 2.1053, §22.917, § 24.238.

Test Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency.

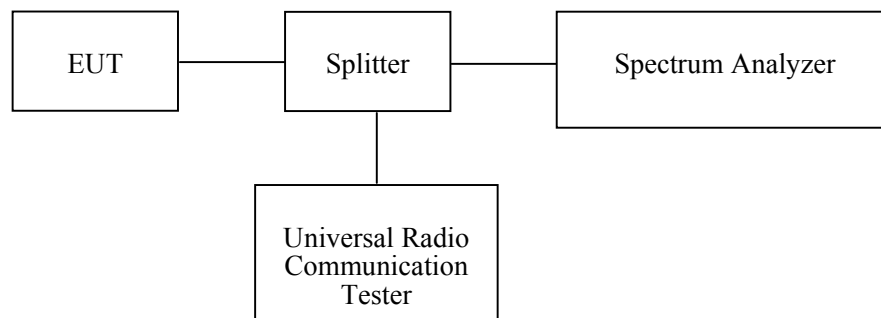**Test Equipment List and Details**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU 26	200256	2019-1-4	2020-1-4
yzjingcheng	Coaxial Cable	KTRFBU-141-50	41005012	Each time	N/A
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
E-Microwave	Two-way Splitter	ODP-1-6-2S	OE0120142	Each time	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data

Environmental Conditions


Temperature:	24.5 °C
Relative Humidity:	67 %
ATM Pressure:	100.4 kPa

* The testing was performed by Blake Yang on 2019-02-21.

Test Mode: Transmitting


Test Result: Compliance. Please refer to the following plots.

GPRS 850, Left Band Edge

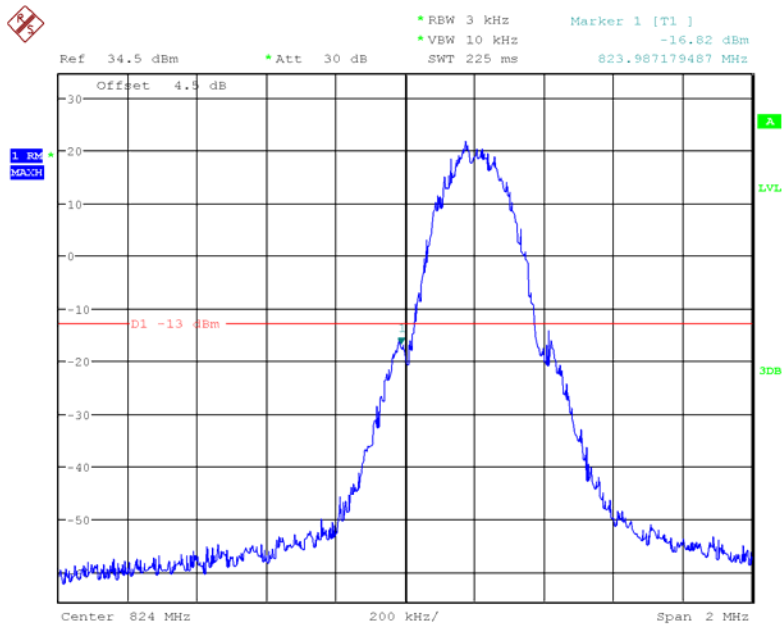


Date: 21.FEB.2019 21:36:20

GPRS 850, Right Band Edge

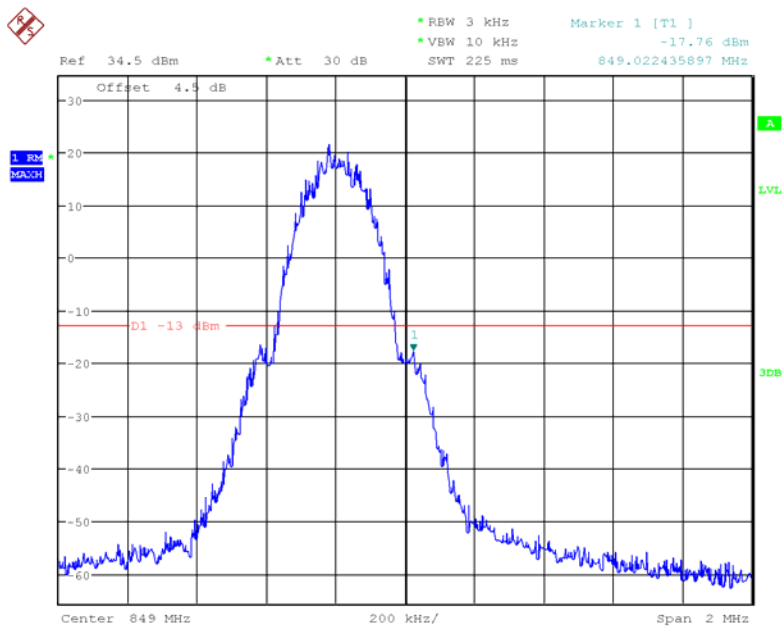

Date: 21.FEB.2019 21:37:02

GPRS 1900, Left Band Edge

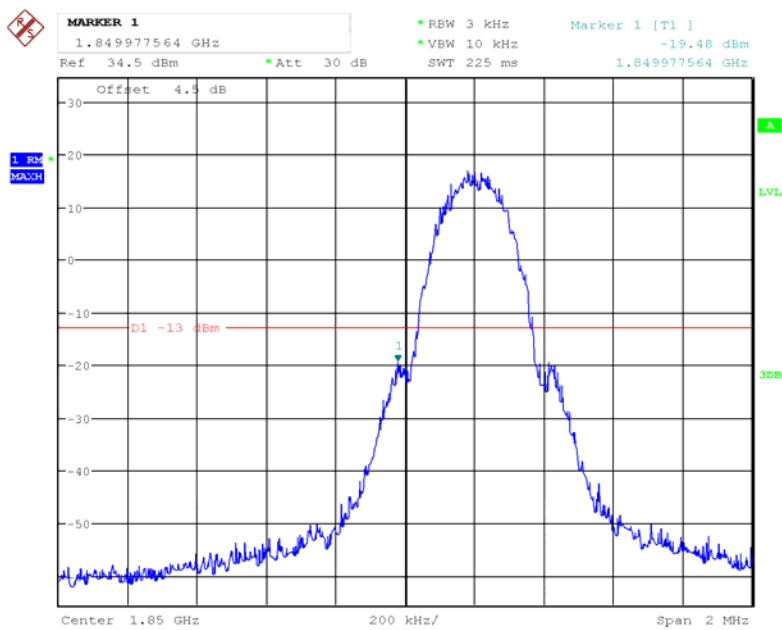

Date: 21.FEB.2019 21:48:26

MARKER 1
1.910025641 GHz

Ref 34.5 dBm * Att 30 dB

* RBW 3 kHz
* VBW 10 kHz
SWT 225 ms

Marker 1 [T1]
-18.15 dBm
1.910025641 GHz

Offset 4.5 dB


1.91 GHz
MAGN

D1 -13 dBm

1


Center 1.91 GHz 200 kHz/ Span 2 MHz

EDGE 850, Left Band Edge

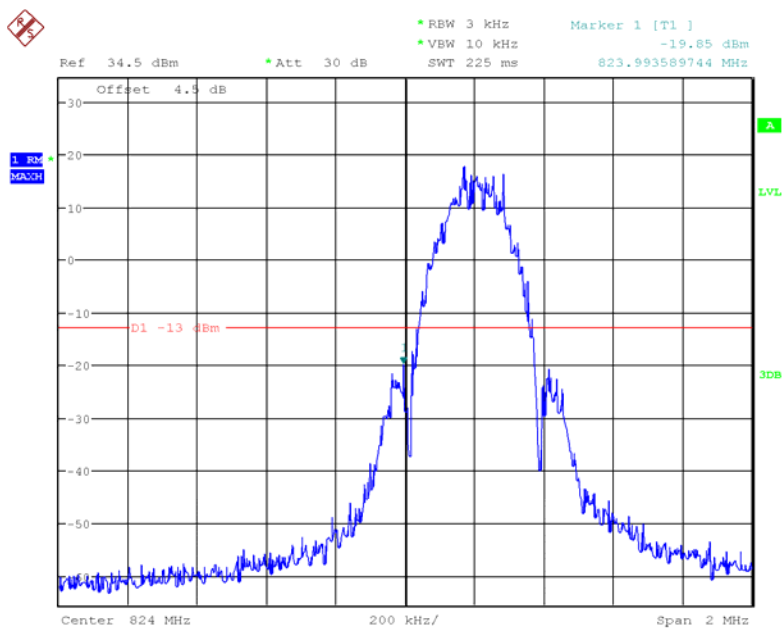


Page 37 of 48

EDGE 850, Right Band Edge

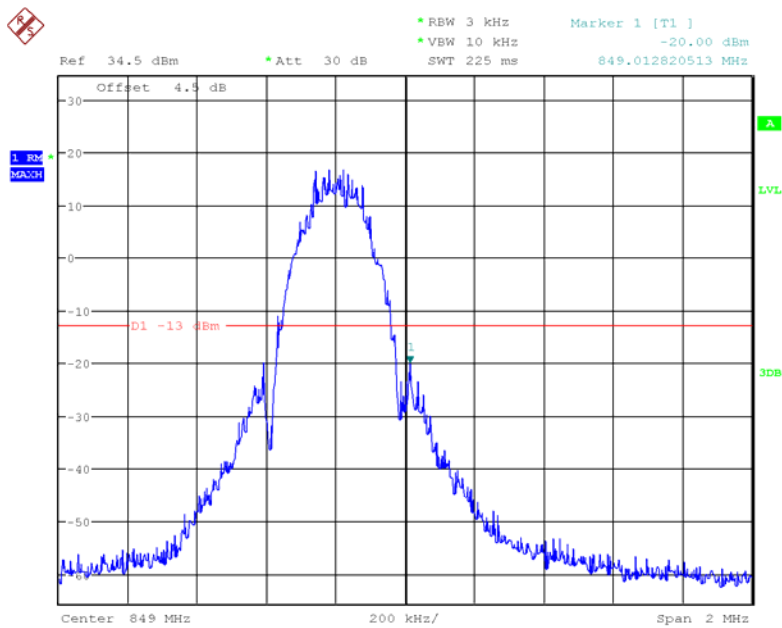


Date: 21.FEB.2019 22:06:08

EDGE 1900, Left Band Edge

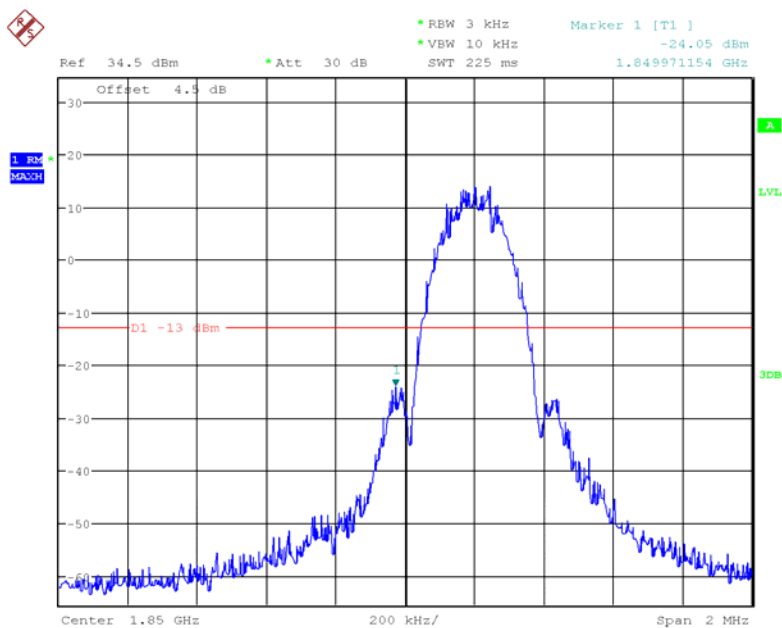

Date: 21.FEB.2019 21:53:50


EDGE 1900, Right Band Edge

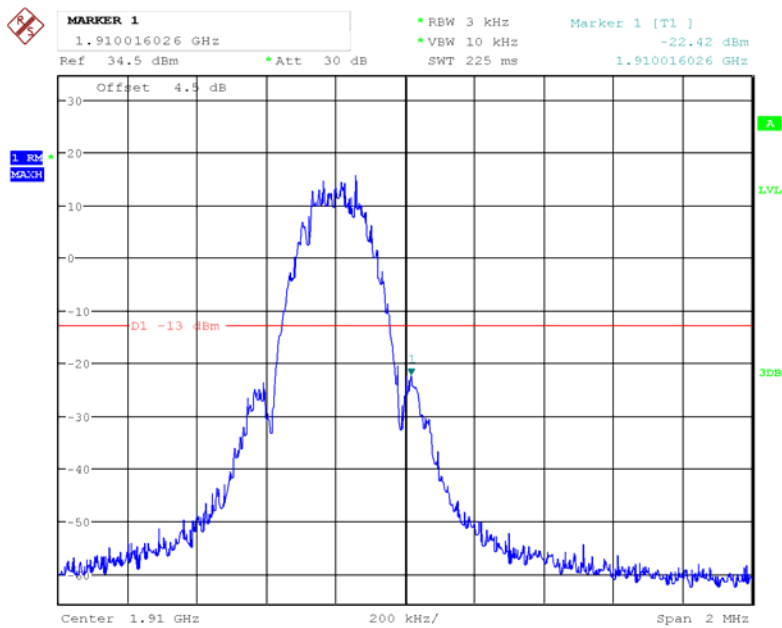

Date: 21.FEB.2019 21:53:09


WCDMA Band II:

REL99 Band II, Left Band Edge

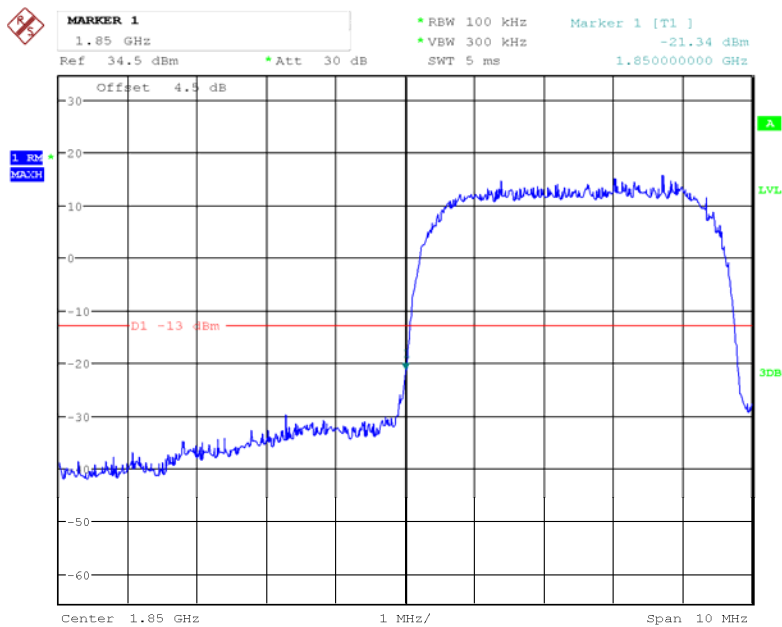


Date: 21.FEB.2019 21:09:19

REL99 Band II, Right Band Edge

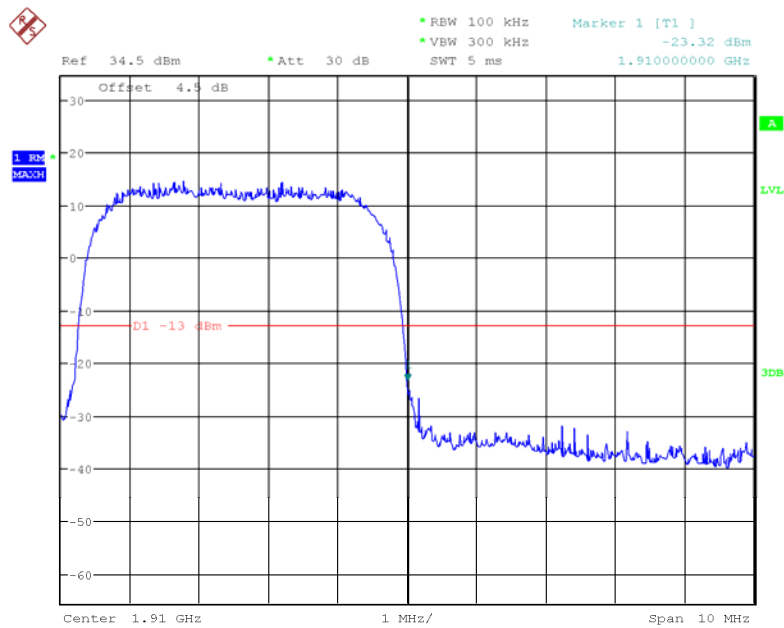


Date: 21.FEB.2019 21:08:40


HSDPA Band II, Left Band Edge

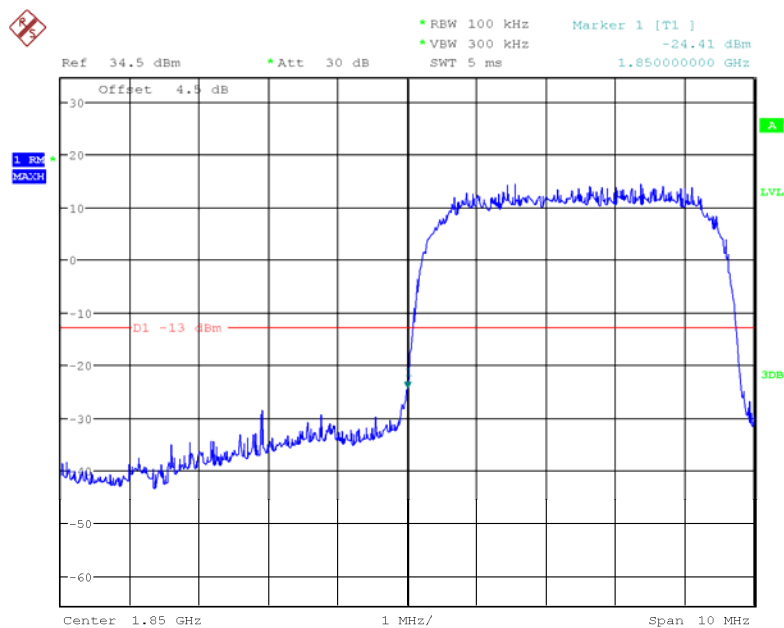

Date: 21.FEB.2019 21:14:00

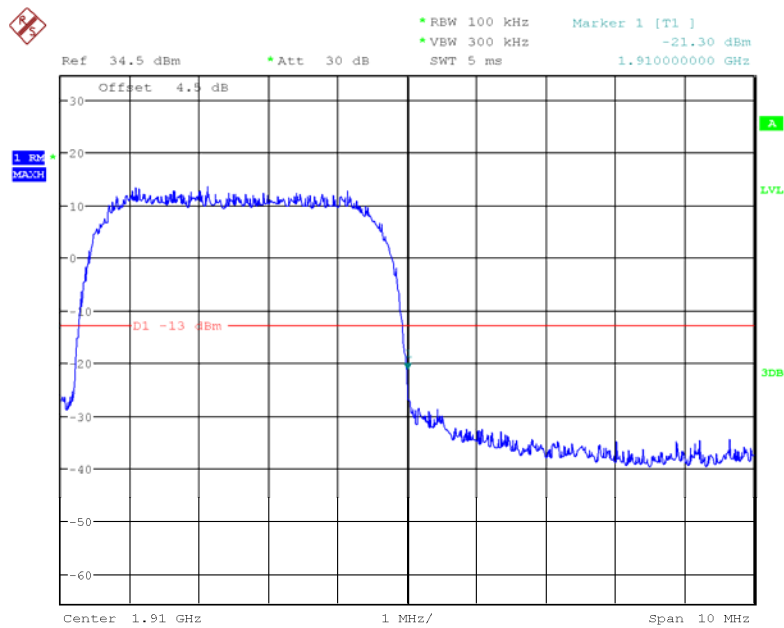
HSDPA Band II, Right Band Edge

Date: 21.FEB.2019 21:21:23

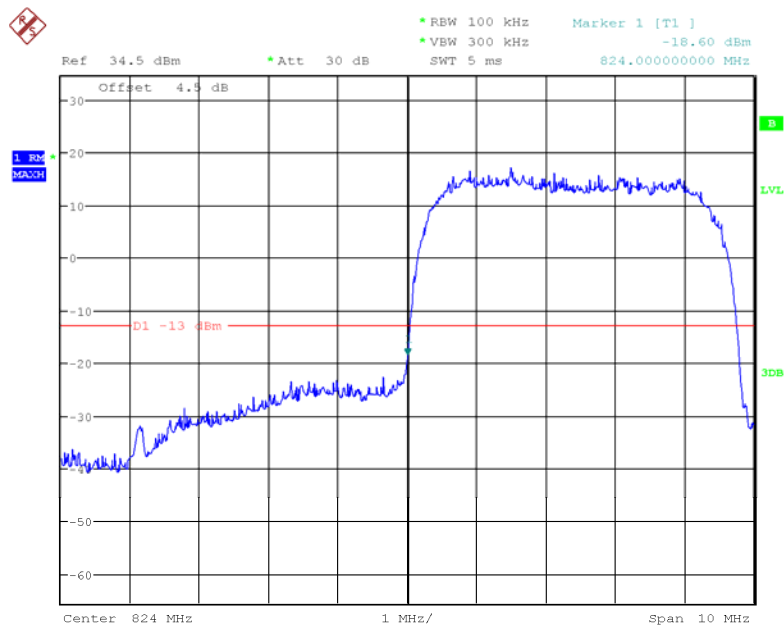WCDMA Band V**REL99 Band V, Left Band Edge**


Date: 21.FEB.2019 20:31:31

REL99 Band V, Right Band Edge

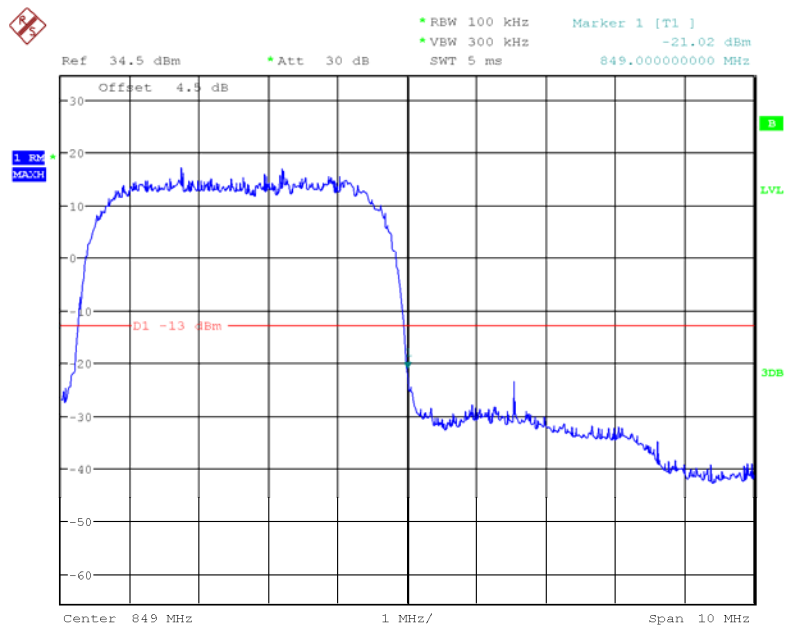


Date: 21.FEB.2019 20:31:02

HSDPA Band V, Left Band Edge

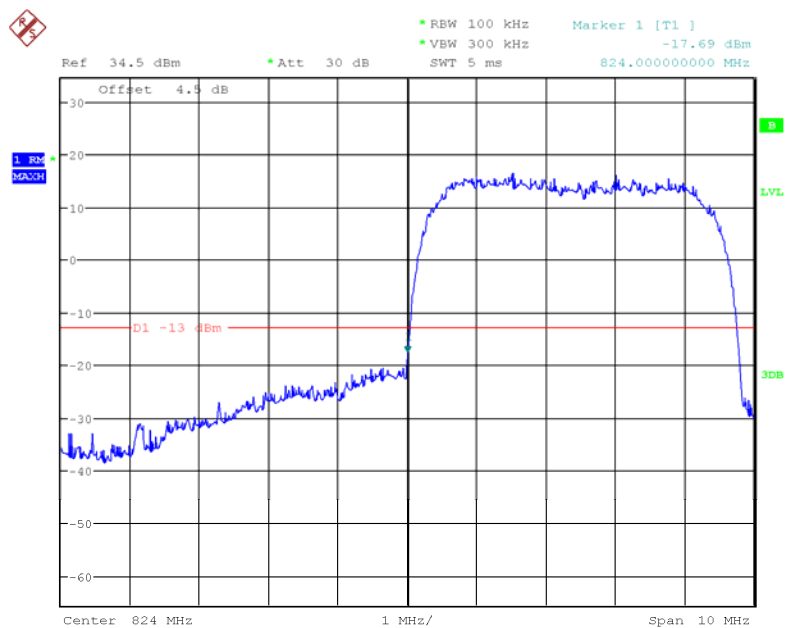

Date: 21.FEB.2019 20:29:59

HSDPA Band V, Right Band Edge

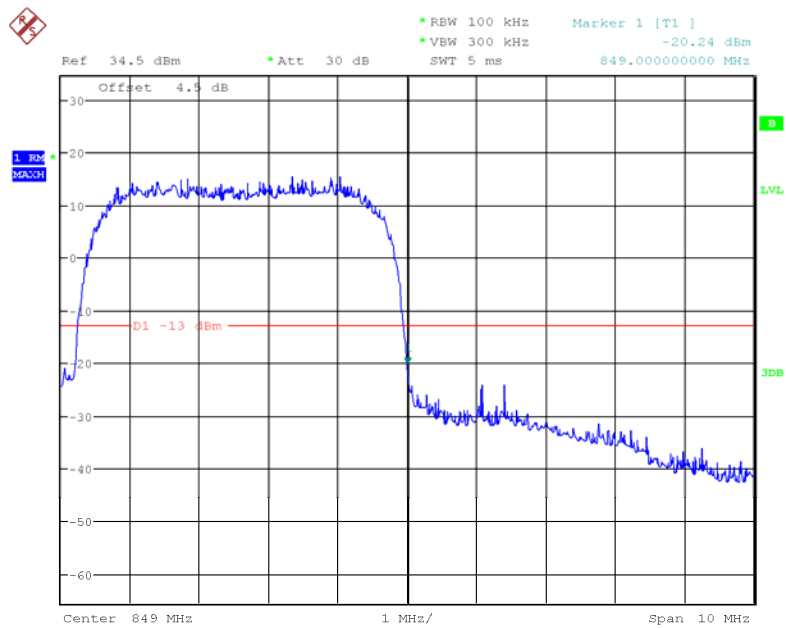

Date: 21.FEB.2019 20:30:21

FCC §2.1055, §22.355 & §24.235 - FREQUENCY STABILITY**Applicable Standard**

FCC § 2.1055 (a), § 2.1055 (d), §22.355, §24.235

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tolerance for Transmitters in the Public Mobile Services

Frequency Range (MHz)	Base, fixed (ppm)	Mobile > 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

Test Procedure

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: An external variable DC power supply was connected to the battery terminals of the equipment under test. The voltage was set from 85% to 115% of the nominal value and was then decreased until the transmitter light no longer illuminated; i.e., the battery end point. The output frequency was recorded for each battery voltage.

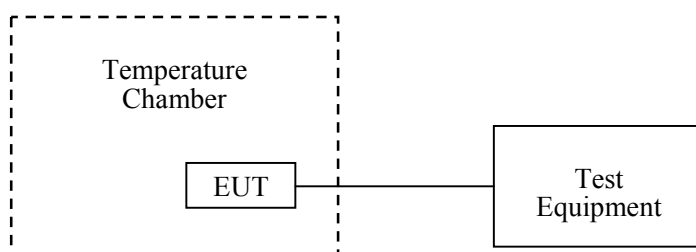

Test Equipment List and Details

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Universal Radio Communication Tester	CMU200	106 891	2018-12-14	2019-12-14
BACL	Humidity tester	BTH-800	30018	2019-01-05	2020-01-05
Unknown	Coaxial Cable	C-SJ00-0010	C0010/01	Each time	N/A
UNI-T	Multimeter	UT39A	M130199938	2018-07-24	2019-07-24
Pro instrument	DC Power Supply	pps3300	3300012	Not Required	N/A

* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data**Environmental Conditions**

Temperature:	24.5 °C
Relative Humidity:	67 %
ATM Pressure:	100.4 kPa

* The testing was performed by Blake Yang on 2019-02-21.

Test Result: Compliance.

Cellular Band

GPRS, Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{DC}	Hz	ppm	ppm
-30	3.7	6	0.00717	2.5
-20		5	0.00598	
-10		4	0.00478	
0		7	0.00837	
10		2	0.00239	
20		8	0.00956	
30		3	0.00359	
40		4	0.00478	
50		6	0.00717	
20	3.5	5	0.00598	
20	4.2	7	0.00837	

EDGE, Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{DC}	Hz	ppm	ppm
-30	3.7	-2	-0.00239	2.5
-20		-5	-0.00598	
-10		-6	-0.00717	
0		-4	-0.00478	
10		-2	-0.00239	
20		-1	-0.00120	
30		-4	-0.00478	
40		-3	-0.00359	
50		-5	-0.00598	
20	3.5	-7	-0.00837	
20	4.2	-2	-0.00239	

PCS Band

GPRS, Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Results
°C	V _{DC}	Hz	ppm	
-30	3.7	-6	-0.00319	Pass
-20		-5	-0.00266	
-10		-4	-0.00213	
0		-3	-0.00160	
10		-2	-0.00106	
20		-4	-0.00213	
30		-6	-0.00319	
40		-7	-0.00372	
50		-6	-0.00319	
20	3.5	-2	-0.00106	
20	4.2	-2	-0.00106	

EDGE, Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Results
°C	V _{DC}	Hz	ppm	
-30	3.7	4	0.00213	Pass
-20		2	0.00106	
-10		1	0.00053	
0		5	0.00266	
10		3	0.00160	
20		6	0.00319	
30		5	0.00266	
40		-1	-0.00053	
50		5	0.00266	
20	3.5	4	0.00213	
20	4.2	2	0.00106	

WCDMA Band II: R99

Middle Channel, $f_c = 1880.0$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Results
°C	V _{DC}	Hz	ppm	
-30	3.7	-10	-0.00532	Pass
-20		-7	-0.00372	
-10		-8	-0.00426	
0		-11	-0.00585	
10		-12	-0.00638	
20		-6	-0.00319	
30		-5	-0.00266	
40		-7	-0.00372	
50		-6	-0.00319	
20	3.5	-9	-0.00479	
20	4.2	-10	-0.00532	

WCDMA Band V: R99

Middle Channel, $f_c = 836.6$ MHz				
Temperature	Voltage	Frequency Error	Frequency Error	Limit
°C	V _{DC}	Hz	ppm	ppm
-30	3.7	-6	-0.00717	2.5
-20		-3	-0.00359	
-10		-5	-0.00598	
0		-4	-0.00478	
10		-6	-0.00717	
20		-7	-0.00837	
30		-12	-0.01434	
40		-10	-0.01195	
50		-5	-0.00598	
20	3.5	-6	-0.00717	
20	4.2	-1	-0.00120	

Note: The fundamental emissions stay within the authorized bands of operation based on the frequency deviation measured is small, the extreme voltage was declared by applicant.

***** END OF REPORT *****