

FCC SAR Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2201-4
FCC ID : IHDT56AB3
STANDARD : FCC 47 CFR Part 2 (2.1093)

We, Sporton International (Kunshan) Inc., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (Kunshan) Inc., the test report shall not be reproduced except in full.

Tony Zhang

Reviewed by: Tony Zhang / Supervisor

Kat Yin

Approved by: Kat Yin / Manager



Sporton International (Kunshan) Inc.

***No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China***

Table of Contents

1. Statement of Compliance	4
2. Administration Data	6
3. Guidance Applied	6
4. Equipment Under Test (EUT) Information	7
4.1 General Information.....	7
4.2 General LTE SAR Test and Reporting Considerations	9
4.3 General 5G NR SAR Test and Reporting Considerations	11
5. Smart Transmit feature for RF Exposure compliance.....	13
6. Proximity Sensor Triggering Test.....	15
7. RF Exposure Limits.....	17
7.1 Uncontrolled Environment.....	17
7.2 Controlled Environment.....	17
8. Specific Absorption Rate (SAR)	18
8.1 Introduction	18
8.2 SAR Definition	18
9. System Description and Setup.....	19
9.1 E-Field Probe	20
9.2 Data Acquisition Electronics (DAE)	20
9.3 Phantom.....	21
9.4 Device Holder.....	22
10. Measurement Procedures.....	23
10.1 Spatial Peak SAR Evaluation	23
10.2 Power Reference Measurement.....	24
10.3 Area Scan.....	24
10.4 Zoom Scan.....	25
10.5 Volume Scan Procedures.....	25
10.6 Power Drift Monitoring	25
11. Test Equipment List	26
12. System Verification	27
12.1 Tissue Simulating Liquids.....	27
12.2 Tissue Verification	28
12.3 System Performance Check Results.....	29
13. RF Exposure Positions	31
13.1 Ear and handset reference point	31
13.2 Definition of the cheek position	32
13.3 Definition of the tilt position	33
13.4 Body Worn Accessory	34
13.5 Product Specific 10g SAR Exposure	35
13.6 Wireless Router.....	35
14. Conducted RF Output Power (Unit: dBm).....	36
15. Antenna Location	53
16. SAR Test Results	54
16.1 Head SAR	58
16.2 Hotspot SAR	67
16.3 Body Worn Accessory SAR	76
16.4 Product specific 10g SAR.....	84
16.5 Repeated SAR Measurement	91
16.6 5GNR FR1 n77/n78 Linearity Data Analysis	93
17. Simultaneous Transmission Analysis	95
17.1 5G NR + LTE + WLAN + BT Sim-Tx analysis.....	96
17.2 Head Exposure Conditions.....	97
17.3 Hotspot Exposure Conditions.....	101
17.4 Body-Worn Accessory Exposure Conditions	105
17.5 Product specific 10g SAR Exposure Conditions.....	107
18. Supplemental tuner tests results.....	111
18.1 Supplemental Tuner Head & Body SAR Results	111
19. Uncertainty Assessment.....	112
20. References.....	113
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	



Appendix D. Test Setup Photos

Appendix E. Conducted RF Output Power Table

Appendix F. Supplemental Tuner SAR Results

Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA192317-02	Rev. 01	Initial issue of report.	Jan. 17. 2022

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Motorola Mobility LLC, Mobile Cellular Phone, XT2201-4**, are as follows.

Highest 1g SAR Summary						
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 5mm)	Body-worn (Separation 5mm)	Highest Simultaneous Transmission
			1g SAR (W/kg)			1g SAR (W/kg)
Licensed	GSM	GSM850	1.35	1.01	1.16	1.59
		GSM1900	<0.10	0.94	1.23	
	WCDMA	Band II	<0.10	0.93	1.24	
		Band V	1.25	0.96	1.25	
	LTE	Band 2	1.24	1.02	1.24	
		Band 5	1.21	0.94	1.23	
		Band 7	1.24	0.94	1.24	
		Band 12	1.10	1.02	1.02	
		Band 13	1.15	0.86	0.86	
		Band 66/ 4	1.25	0.94	1.24	
		Band 48	0.95	0.79	1.25	
		5G NR	n2	1.25	0.94	
	n5		1.20	1.03	1.16	
	n66		1.25	0.92	1.25	
n77/n78	1.31		0.86	0.74		
DTS	WLAN	2.4GHz WLAN	1.26	0.44	0.93	1.55
NII		5GHz WLAN	1.20	0.28	1.12	1.59
DSS	Bluetooth	2.4GHz Bluetooth	0.29	0.29	0.24	1.59
Highest 10g SAR Summary						
Equipment Class	Frequency Band		Product Specific 10g SAR (W/kg) (Separation 0mm)			Highest Simultaneous Transmission 10g SAR (W/kg)
Licensed	GSM	GSM850	1.51			3.89
		GSM1900	3.04			
	WCDMA	Band II	3.11			
		Band V	1.24			
	LTE	Band 2	3.13			
		Band 7	3.08			
		Band 66/ 4	3.14			
		Band 48	3.03			
	5G NR	n2	3.15			
		n66	3.09			
n77/n78		3.00				
NII	WLAN	5GHz WLAN	1.55			3.89
Date of Testing:			2021/11/16 ~ 2021/12/10			
Remark:						
1. This device supports LTE B4 and B66. Since the supported frequency span for LTE B4 falls completely within the supports frequency span for LTE B66, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B66.						
2. This device supports 5GNR n77 and 5GNR n78. Since the supported frequency span for 5GNR n78 falls completely within the supports frequency span for 5GNR n77, both 5GNR bands have the same target power, and both 5GNR bands share the same transmission path; therefore, SAR was only assessed for 5GNR n77.						

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

2. Administration Data

Sporton International (Kunshan) Inc. is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Testing Laboratory			
Test Firm	Sporton International (Kunshan) Inc.		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	SAR07-KS	CN1257	314309

Applicant	
Company Name	Motorola Mobility LLC
Address	222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

Manufacturer	
Company Name	Motorola Mobility LLC
Address	222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2201-4
FCC ID	IHDT56AB3
IMEI Code	357193870008333
Wireless Technology and Frequency Range	GSM850: 824 MHz ~ 849 MHz GSM1900: 1850 MHz ~ 1910 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz 5G NR n2: 1850 MHz ~ 1910 MHz 5G NR n5: 824 MHz ~ 849 MHz 5G NR n66: 1710 MHz ~ 1780 MHz 5G NR n77: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3980 MHz 5G NR n78: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3800 MHz 5G NR n260 : 37 GHz~40 GHz 5G NR n261 : 27.5 GHz~28.35 GHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz WLAN 6E U-NII-5: 5925 MHz ~ 6425 MHz WLAN 6E U-NII-6: 6425 MHz ~ 6525 MHz WLAN 6E U-NII-7: 6525 MHz ~ 6875 MHz WLAN 6E U-NII-8: 6875 MHz ~ 7125 MHz Bluetooth: 2402 MHz ~ 2480 MHz WPC: 110 kHz ~ 148 kHz NFC: 13.56 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+(16QAM uplink is not supported) LTE: QPSK, 16QAM, 64QAM, 256QAM 5G NR : CP-OFDM / DFT-s-OFDM, PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM WLAN 2.4GHz 802.11b/g/n HT20/HT40 WLAN 2.4GHz 802.11ax HE20/HE40 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac/ax VHT20/VHT40/VHT80/VHT160/HE20/HE40/HE80/HE160 WLAN 6GHz 802.11a WLAN 6GHz 802.11ax HE20/HE40/HE80/HE160 Bluetooth BR/EDR/LE WPC: ASK NFC: ASK
HW Version	DVT2
SW Version	S1SH32.10
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
Remark:	
1. This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE	

- operation.
2. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
 3. This device 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only). WIFI 6E has no hotspot function.
 4. The 2.4GHz/5GHz/6GHz WLAN can transmit in MIMO antenna mode only and it has no SISO antenna mode.
 5. This device does not support DTM operation and supports GPRS/EGPRS mode up to multi-slot class 12.
 6. The device implements the power management and proximity sensor /receiver detection/hotspot mode for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity) and the Qualcomm smart transmit will manage to ensure the power level not exceeding the associated power table. Details about the power management decision and sensor detection are provided in the operational description. And the device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to power table at appendix E.
 7. For WLAN when transmit simultaneous with WWAN, power reduction will be activated to head and Handheld. For WLAN when transmit simultaneous with WWAN and Proximity sensors trigger, power reduction will be activated to body-worn and Handheld.
 8. For some WWAN bands, sensor on reduced power level is higher than hotspot reduced power level, so front/back sensor on SAR can represent hotspot conservatively.
 9. This device implements antenna tuning techniques for several WWAN (cellular) operating modes and frequencies for the purpose of improving antenna efficiency over a broad range of frequencies. Specifically, these techniques are employed in the WCDMA, LTE and 5G NR modes. In this report SAR was measured according to the normally required SAR configurations with the tuner active and worst tune state (auto tune) was used for SAR testing. The detail descriptions of the antenna tuner and supplemental data for additional information can be referred to section 18 and appendix F.
 10. 5G NR n77 supports HPUE, HPUE power and SAR testing performed separately.
 11. 5G NR n77 HUPE with higher power, 5G NR n77 HUPE SAR can represent power class 3 level SAR.
 12. 5G NR n77/n78 supports MIMO mode at Antenna 2 and Antenna 7.
 13. For 5G NR n77 HUPE, duty cycle is 50% considered in SAR testing. For 5G NR test, using FTM (Factory Test Mode) to perform SAR with default 100% transmission.
 14. NSA and SA mode should perform SAR separately. For the maximum power of NSA mode is the same as SA total power level, so SA SAR can represent NSA mode SAR.
 15. 5G NR NSA mode, the power level is the same as 5G NR SA mode, so 5G NR NSA mode and SA mode power table only show one time.
 16. 5G NR supports CP-OFDM and DFT-s-OFDM modulation, for DFT-s-OFDM power is higher than CP-OFDM, so only show DFT-s-OFDM power table and chose DFT-s-OFDM to perform SAR testing.
 17. For DFT-s-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for the CP-OFDM mode will not higher than DFT-s-OFDM mode, therefore, CP-OFDM measurement is unnecessary.
 18. This device supports 5G NR FR1 bands as following table, including NSA mode and SA mode. NSA and SA mode performed SAR separately.
 19. SAR Power density test report for WIFI 6E U-NII-5/6/7/8 will be separately submitted. About co-located SAR with WWAN/Bluetooth, always chose higher SAR of WLAN5G U-NII-1/2A/2C/3 and U-NII-5/6/7/8.
 20. RF exposure report for WPC (Wireless power charging) will be separately submitted.
 21. The device support DBS (Dual Band Simultaneous) function, when the device 2.4GHz and 5GHz or 6GHz transmit at the same time the module will limit different output power for simultaneous transmission compliance.

<5G NR>

Mode	Band	Duplex	SCS(KHz)	Bandwidths(BW)
NSA	n2	FDD	15	5, 10, 15, 20
	n5	FDD	15	5, 10, 15, 20
	n66	FDD	15	5, 10, 15, 20, 30, 40
	n77	TDD	30	20, 30, 40, 50, 60, 70, 80, 90, 100
	n78	TDD	30	20, 30, 40, 50, 60, 70, 80, 90, 100
SA	n2	FDD	15	5, 10, 15, 20
	n5	FDD	15	5, 10, 15, 20
	n66	FDD	15	5, 10, 15, 20, 30, 40
	n77	TDD	30	20, 30, 40, 50, 60, 70, 80, 90, 100
	n78	TDD	30	20, 30, 40, 50, 60, 70, 80, 90, 100

4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05								
FCC ID	IHDT56AB3							
Equipment Name	Mobile Cellular Phone							
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 48: 3550 MHz ~ 3700 MHz LTE Band 66: 1710 MHz ~ 1780 MHz							
Channel Bandwidth	LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 12:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 13: 5MHz, 10MHz LTE Band 48: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz							
uplink modulations used	QPSK / 16QAM / 64QAM /256QAM							
LTE Voice / Data requirements	Voice and Data							
LTE Release Version	R16, Cat18							
CA Support	Supported, Uplink and Downlink							
LTE MPR permanently built-in by design	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3							
	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)
		1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
	256 QAM	≥ 1						≤ 5
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)							
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.							
Power reduction applied to satisfy SAR compliance	Yes, when operating in Proximity sensors/receiver/hotspot detect mechanism, head/body-worn /hotspot/extremity will trigger reduced power for some bands applied to satisfy SAR compliance, the detail please referred to section 14.							
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations and the detail power verification please referred to section 14.							
LTE Carrier Aggregation Additional Information	1. This device supports LTE Carrier Aggregation (CA) in the uplink for intra-band and inter-band with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per FCC Guidance. 2. This device supports maximum of 7 carriers in the downlink and 2 carriers in the uplink.							

Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829				
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5				
H	20643	848.3	20635	847.5	20625	846.5	20600	844				
LTE Band 7												
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510				
M	21100	2535	21100	2535	21100	2535	21100	2535				
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560				
LTE Band 12												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz					
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	23017	699.7	23025	700.5	23035	701.5	23060	704				
M	23095	707.5	23095	707.5	23095	707.5	23095	707.5				
H	23173	715.3	23165	714.5	23155	713.5	23130	711				
LTE Band 13												
	Bandwidth 5 MHz				Bandwidth 10 MHz							
	Channel #		Freq.(MHz)		Channel #		Freq.(MHz)					
L	23205		779.5		23230		782					
M	23230		782									
H	23255		784.5									

LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq.(MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770

LTE Band 48								
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	55265	3552.5	55290	3555	55315	3557.5	55340	3560
LM	55810	3607	55815	3607.5	55820	3608	55830	3609
MH	56170	3643	56165	3642.5	56160	3642	56150	3641
H	56715	3697.5	56690	3695	56665	3692.5	56640	3690

4.3 General 5G NR SAR Test and Reporting Considerations

5G NR Information	
Operating Frequency Range of each 5G NR transmission band	5G NR n2: 1850 MHz ~ 1910 MHz 5G NR n5: 824 MHz ~ 849 MHz 5G NR n66: 1710 MHz ~ 1780 MHz 5G NR n77: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3980 MHz 5G NR n78: 3450 MHz ~ 3550 MHz, 3700 MHz ~ 3800 MHz
Channel Bandwidth	5G NR n2: 5MHz, 10MHz, 15MHz, 20MHz 5G NR n5: 5MHz, 10MHz, 15MHz, 20MHz 5G NR n66: 5MHz, 10MHz, 15MHz, 20MHz, 30MHz, 40MHz 5G NR n77: 20MHz, 30MHz, 40MHz, 50MHz, 60MHz, 70MHz, 80MHz, 90MHz, 100MHz 5G NR n78: 20MHz, 30MHz, 40MHz, 50MHz, 60MHz, 70MHz, 80MHz, 90MHz, 100MHz
SCS	FDD: SCS15KHz, TDD: SCS30KHz
uplink modulations used	DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM
A-MPR (Additional MPR) disabled for SAR Testing?	Yes
LTE Anchor Bands for n2	LTE B5/13/66
LTE Anchor Bands for n5	LTE B2/48/66
LTE Anchor Bands for n66	LTE B2/5/13
LTE Anchor Bands for n77	LTE B5/7
LTE Anchor Bands for n78	LTE B5/7

Transmission (H, M, L) channel numbers and frequencies in each 5G NR band								
NR Band 2								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	370500	1852.5	371000	1855	371500	1857.5	372000	1860
M	376000	1880	376000	1880	376000	1880	376000	1880
H	381500	1907.5	381000	1905	380500	1902.5	380000	1900
Transmission (H, M, L) channel numbers and frequencies in each 5G NR band								
NR Band 5								
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	165300	826.5	165800	829	166300	831.5	166800	834
M	167300	836.5	167300	836.5	167300	836.5	167300	836.5
H	169300	846.5	168800	844	168300	841.5	167800	839

NR Band 66												
	Bandwidth 5MHz		Bandwidth 10MHz		Bandwidth 15MHz		Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	342500	1712.5	343000	1715	343500	1717.5	344000	1720	345000	1725	346000	1730
M	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745	349000	1745
H	355500	1777.5	355000	1775	354500	1772.5	354000	1770	353000	1765	352000	1760



NR Band 77																	
Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz	
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L 647334	3710.01	647668	3715.02	648000	3720	648334	3725.01	648668	3730.02	649000	3735	649334	3740.01	649668	3745.02	650000	3750
M 656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840	656000	3840
H 664668	3970.02	664334	3965.01	664000	3960	663668	3955.02	663334	3950.01	663000	3945	662668	3940.02	662334	3935.01	662000	3930

NR Band 78																	
Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz	
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L 647334	3710.01	647668	3715.02	648000	3720	648334	3725.01	648668	3730.02	649000	3735	649334	3740.01	649668	3745.02		
M 650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750	650000	3750
H 652668	3790.02	652334	3785.01	652000	3780	651668	3775.02	651334	3770.01	651000	3765	650668	3760.02	650334	3755.01		

For <3450 MHz ~ 3550 MHz >

NR Band 77																	
Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz	
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L 630668	3460.02	631000	3465	631334	3470.01	631668	3475.02	632000	3480	632334	3485.01	632668	3490.02	633000	3495		
M 633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01
H 636000	3540	635666	3534.99	635332	3529.98	635000	3525	634666	3519.99	634332	3514.98	634000	3510	633666	3504.99		

NR Band 78																	
Bandwidth 20MHz		Bandwidth 30MHz		Bandwidth 40MHz		Bandwidth 50MHz		Bandwidth 60MHz		Bandwidth 70MHz		Bandwidth 80MHz		Bandwidth 90MHz		Bandwidth 100MHz	
Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L 630668	3460.02	631000	3465	631334	3470.01	631668	3475.02	632000	3480	632334	3485.01	632668	3490.02	633000	3495		
M 633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01	633334	3500.01
H 636000	3540	635666	3534.99	635332	3529.98	635000	3525	634666	3519.99	634332	3514.98	634000	3510	633666	3504.99		

5. Smart Transmit feature for RF Exposure compliance

The RF exposure limit is defined based on time-averaged RF exposure. The product implements Qualcomm Smart Transmit feature which controls the instantaneous transmitting power for WWAN transmitter to ensure the product in compliance with RF exposure limit over a defined time window, for SAR (transmit frequency ≤ 6 GHz). To control and manage transmitting power in real time and to ensure at all times the time-averaged RF exposure is compliant to the regulation requirement.

This report describes the procedures for the SAR char generation, and the parameters obtained from SAR characterization (referred to as SAR char, respectively) will be used as input for Smart Transmit. SAR char will be entered via the Embedded File System (EFS) to enable the Smart Transmit Feature.

<Terminologies in this report>

P_{limit}	The time-averaged RF power which corresponds to SAR_design_target.
P_{max}	Maximum target power level
SAR_design_target:	The design target for SAR compliance. It should be less than regulatory SAR limit to account for all device design related uncertainty.
SAR char	P_{limit} for all the technologies/bands for all applicable DSI

<SAR Characterization>

SAR char must be generated to cover all radio configurations and usage scenarios that the wireless device supports for operating at 6 GHz or below. It will then be used as input for Smart Transmit to control and manage RF exposure for $f < 6$ GHz.

<SAR design target and uncertainty>

	Uncertainty dB (k=2)
Total uncertainty	1.5

To account for total uncertainty, SAR_design_target should be determined as:

$$SAR_{design_target} < SAR_{regulatory_limit} \times 10^{\frac{-total\ uncertainty}{10}}$$

The Smart Transmit algorithm maintains the time-averaged transmit power, in turn, time-averaged RF exposure of SAR_design_target, below the predefined time-averaged power limit, for each characterized technology and band.

Smart Transmit allows the device to transmit at higher power instantaneously, as high as P_{max}, when needed, but enforces power limiting to maintain time-averaged transmit power to P_{limit}. Below table shows P_{limit} EFS settings and maximum tune up output power P_{max} configured for this EUT for various transmit conditions (Device State Index DSI).

<P_{limit} for supported technologies and bands (P_{limit} in EFS file)>

Band	Antenna	Head DSI 2 Standalone	Head DSI 2 Simultaneous	Body Worn DSI 3 Standalone	Body Worn & Hotspot DSI 3 Simultaneous	Extremely DSI6 Standalone	Extremely DSI6 Simultaneous	Sensor Off DSI4	P _{max} *
GSM850	Ant 0	32.0	-	23.1	21.8	28.3	-	24.2	24.2
GSM850	Ant 1	22.7	21.4	25.0	22.4	27.4	-	24.2	24.2
GSM1900	Ant 0	38.8	-	17.8	15.0	21.3	19.8	21.2	21.2
WCDMA II	Ant 0	37.5	-	17.7	13.7	21.4	19.9	24.0	24.0
WCDMA V	Ant 0	31.7	-	22.5	21.2	28.0	-	24.0	24.0
WCDMA V	Ant 1	22.2	20.9	24.8	23.5	23.5	-	23.5	23.5
LTE Band 2	Ant 0	36.3	-	18.1	14.7	20.1	18.6	23.0	23.0
LTE Band 2	Ant 1	16.9	15.6	20.5	17.1	19.6	18.1	22.0	22.0
LTE Band 5	Ant 0	30.6	-	22.5	21.2	27.0	-	23.0	23.0
LTE Band 5	Ant 1	22.5	21.2	24.5	22.1	23.0	-	23.0	23.0
LTE Band 7	Ant 0	33.7	-	19.2	14.0	22.5	21.0	23.0	23.0
LTE Band 7	Ant 1	17.5	16.2	19.9	16.6	20.6	19.1	23.0	23.0
LTE Band 12	Ant 0	30.8	-	24.3	23.0	23.0	-	23.0	23.0
LTE Band 12	Ant 1	24.5	23.2	27.9	26.6	24.0	-	24.0	24.0
LTE Band 13	Ant 0	31.4	-	24.6	23.3	23.0	-	23.0	23.0
LTE Band 13	Ant 1	24.3	23.0	27.9	25.5	24.0	-	24.0	24.0
LTE Band 48	Ant 2	22.3	-	15.5	14.2	21.2	19.7	21.0	21.0
LTE Band 66/4	Ant 0	34.1	-	18.2	15.0	22.0	20.5	23.0	23.0
LTE Band 66/4	Ant 1	17.1	15.8	18.5	16.7	20.5	19.0	23.0	23.0
FR1 n2	Ant 0	37.7	-	18.7	14.7	21.1	19.6	23.0	23.0
FR1 n2	Ant 1	16.8	15.5	19.5	16.9	20.6	19.1	23.0	23.0
FR1 n5	Ant 0	31.9	-	23.8	22.5	23.0	-	23.0	23.0
FR1 n5	Ant 1	22.5	21.2	24.3	23.0	23.0	-	23.0	23.0
FR1 n66	Ant 0	36.0	-	18.6	15.7	21.1	19.6	23.0	23.0
FR1 n66	Ant 1	16.5	15.2	19.0	15.7	20.9	19.4	23.0	23.0
FR1 n77-PC2	Ant 2	19.6	18.3	14.7	13.4	19.1	17.6	23.0	23.0
FR1 n77-PC2	Ant 7	26.5	-	17.2	15.9	21.9	20.4	23.0	23.0
FR1 n77-PC2	Ant 3	35.7	-	23.3	22.0	23.0	-	23.0	23.0
FR1 n77-PC2	Ant 8	25.7	-	17.2	15.9	23.0	-	23.0	23.0
FR1 n77-PC3	Ant 2	19.6	18.3	14.7	13.4	19.1	17.6	23.0	23.0
FR1 n77-PC3	Ant 7	26.5	-	17.2	15.9	21.9	20.4	23.0	23.0
FR1 n77-PC3	Ant 3	35.7	-	23.3	22.0	23.0	-	23.0	23.0
FR1 n77-PC3	Ant 8	25.7	-	17.2	15.9	23.0	-	23.0	23.0
FR1 n78-PC3	Ant 2	19.6	-	14.7	-	19.1	-	23.0	23.0
FR1 n78-PC3	Ant 7	26.5	-	17.2	-	21.9	-	23.0	23.0
FR1 n78-PC3	Ant 3	35.7	-	23.3	-	23.0	-	23.0	23.0
FR1 n78-PC3	Ant 8	25.7	-	17.2	-	23.0	-	23.0	23.0

Note: 1) *P_{max} is used for RF tune up procedure. The maximum allowed output power is equal to P_{max} + 1.0 dB uncertainty.

2) All P_{limit} power levels entered in the Table correspond to average power levels after accounting for duty cycle in the case TDD modulation schemes (for e.g., GSM & LTE TDD).

3) The max allowed output power is the P_{limit} + 1.0 dB device uncertainty, and if P_{limit} is higher than P_{max}, the device output power will be P_{max} instead.


4) 5G NR n78 ant 3, and ant 8 support SRS (Sounding Reference Signal) functionality.

5) 5G NR n77 PC2 Maximum Duty Cycle is 50%, 5G NR n77/n78 PC3 Maximum Duty Cycle is 100% (Declared by Manufacturer).

6. Proximity Sensor Triggering Test

<Proximity Sensor Triggering Distance>:

1. Proximity sensor triggering distance testing was performed according and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (5850MHz) and lowest (835MHz) frequency was used for proximity sensor triggering testing.
2. Capacitive proximity sensors placed coincident with antenna elements at the top and bottom ends of the phone are utilized to determine when the device comes in proximity of the user's body at the front or back of the device.
3. The output power will reduce to body worn power level when top and bottom sensor pad be detected.
4. The sensors used to detect the proximity of the user's body at the front or back surface of the device use a detection threshold distance. The data shown in the sections below shows the distance(s). When front or back body worn condition is detected reduced power will be active.
5. The device employs proximity sensors also can detect the presence of the user's a finger or hand when handheld state at the front/back/top/bottom/left/right sides of the device. When front/back/top/bottom/left/right sides of handheld condition is detected reduced power will be active.
6. For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance -1mm was performed:

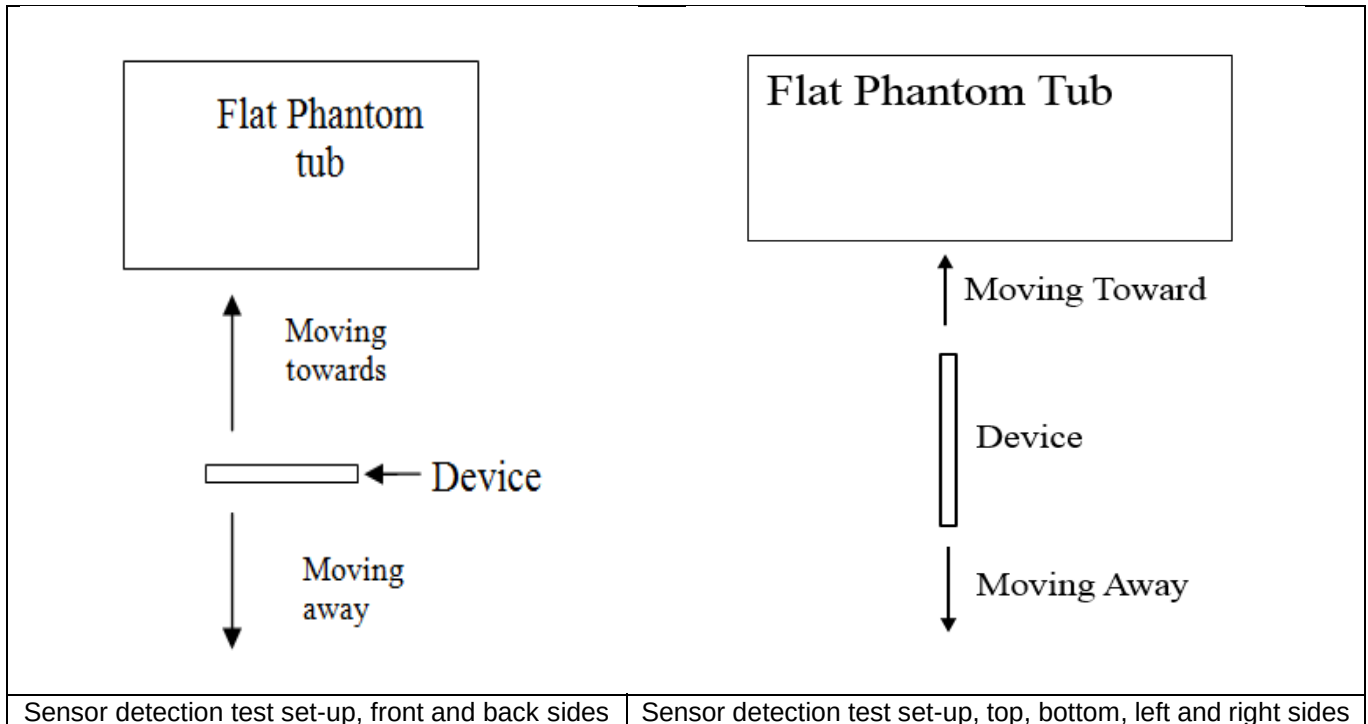

<P-Sensor>

Proximity Sensor Triggering Distance (mm)				
Position	Front		Back	
	Moving towards	Moving away	Moving towards	Moving away
Minimum	19	21	22	23

<Handheld for ANT0>

Position	Front		Back		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	10	13	13	15	15	17

<Handheld for ANT1>

Proximity Sensor Triggering Distance (mm)								
Position	Front		Back		Right Side		Top Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	10	12	13	15	7	8	14	15

<Handheld for ANT2/7>

Proximity Sensor Triggering Distance (mm)								
Position	Front		Back		Left Side		Top Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	6	7	19	23	21	24	4	5

<Handheld for ANT5>

Proximity Sensor Triggering Distance (mm)				
Position	Back			
	Moving towards		Moving away	
Minimum	8		9	

<Handheld for ANT6>

Proximity Sensor Triggering Distance (mm)				
Position	Back			
	Moving towards		Moving away	
Minimum	5		7	

7. RF Exposure Limits

7.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

7.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

8. Specific Absorption Rate (SAR)

8.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

8.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

9. System Description and Setup

The DASY5 system used for performing compliance tests consists of the following items:

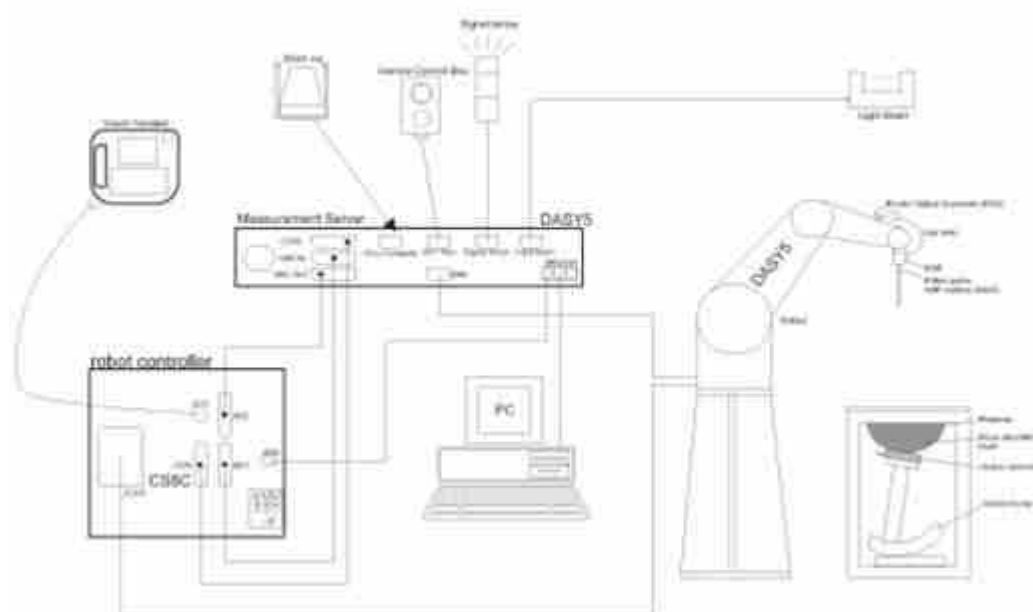

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win10 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

9.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

9.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE

9.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

9.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

10. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

10.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

10.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

10.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

10.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm *	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

10.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

10.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.



11. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1087	2019/3/27	2022/3/24
SPEAG	835MHz System Validation Kit	D835V2	4d258	2020/5/7	2023/5/6
SPEAG	1750MHz System Validation Kit	D1750V2	1090	2019/3/27	2022/3/25
SPEAG	1900MHz System Validation Kit	D1900V2	5d170	2019/3/26	2022/3/24
SPEAG	2450MHz System Validation Kit	D2450V2	908	2019/3/25	2022/3/23
SPEAG	2600MHz System Validation Kit	D2600V2	1061	2020/11/26	2023/11/25
SPEAG	3500MHz System Validation Kit	D3500V2	1037	2020/11/25	2023/11/24
SPEAG	3700MHz System Validation Kit	D3700V2	1008	2020/11/25	2023/11/24
SPEAG	3900MHz System Validation Kit	D3900V2	1048	2020/5/14	2023/5/13
SPEAG	5000MHz System Validation Kit	D5GHzV2	1113	2019/9/24	2022/9/22
SPEAG	Data Acquisition Electronics	DAE4	1649	2021/2/3	2022/2/2
SPEAG	Data Acquisition Electronics	DAE4	1279	2021/9/21	2022/9/20
SPEAG	Dosimetric E-Field Probe	EX3DV4	7627	2021/2/10	2022/2/9
SPEAG	Dosimetric E-Field Probe	EX3DV4	3935	2021/4/29	2022/4/28
SPEAG	SAM Twin Phantom	SAM Twin	TP-2024	NCR	NCR
SPEAG	SAM Twin Phantom	SAM Twin	TP-1644	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio Communication Analyzer	MT8821C	6201432831	2021/4/13	2022/4/12
Agilent	ENA Series Network Analyzer	E5071C	MY46106933	2021/7/31	2022/7/30
SPEAG	Dielectric Probe Kit	DAK-3.5	1138	2021/6/9	2022/6/8
Anritsu	Vector Signal Generator	MG3710A	6201682672	2021/1/7	2022/1/6
Rohde & Schwarz	Power Meter	NRVD	102081	2021/8/12	2022/8/11
Rohde & Schwarz	Power Sensor	NRV-Z5	100538	2021/8/12	2022/8/11
Rohde & Schwarz	Power Sensor	NRV-Z5	100539	2021/8/12	2022/8/11
R&S	CBT BLUETOOTH TESTER	CBT	101246	2021/4/12	2022/4/11
EXA	Spectrum Analyzer	FSV7	101632	2021/1/7	2022/1/6
FLUKE	DIGITAC THERMOMETER	51II	97240029	2021/8/13	2022/8/12
Testo	Thermo-Hygrometer	608-H1	1241332126	2021/1/7	2022/1/6
ARRA	Power Divider	A3200-2	N/A	Note 1	
MCL	Attenuation1	BW-S10W5+	N/A	Note 1	
MCL	Attenuation2	BW-S10W5+	N/A	Note 1	
MCL	Attenuation3	BW-S10W5+	N/A	Note 1	
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	Note 1	
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	Note 1	
Agilent	Dual Directional Coupler	778D	20500	Note 1	
Agilent	Dual Directional Coupler	11691D	MY48151020	Note 1	

Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check.
2. Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

12. System Verification

12.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 11.2.



Fig 11.1 Photo of Liquid Height for Head SAR

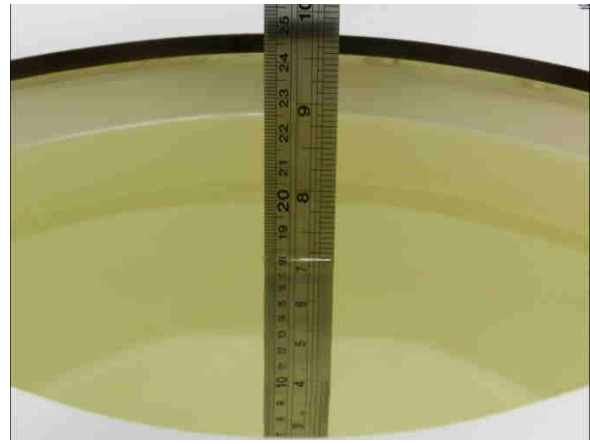


Fig 11.2 Photo of Liquid Height for Body SAR

12.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
750	Head	22.7	0.915	43.396	0.89	41.90	2.81	3.57	±5	2021/11/16
835	Head	22.8	0.929	40.921	0.90	41.50	3.22	-1.40	±5	2021/11/16
1750	Head	22.6	1.401	40.510	1.37	40.10	2.26	1.02	±5	2021/11/16
1900	Head	22.7	1.422	39.228	1.40	40.00	1.57	-1.93	±5	2021/11/16
2450	Head	22.6	1.867	40.818	1.80	39.20	3.72	4.13	±5	2021/11/18
2600	Head	22.8	2.013	40.642	1.96	39.00	2.70	4.21	±5	2021/11/16
3500	Head	22.9	2.807	38.989	2.91	37.90	-3.54	2.87	±5	2021/11/20
3700	Head	22.6	2.993	38.672	3.12	37.70	-4.07	2.58	±5	2021/11/16
3900	Head	22.7	3.192	38.388	3.32	37.50	-3.86	2.37	±5	2021/11/22
5250	Head	22.8	4.579	36.302	4.71	35.90	-2.78	1.12	±5	2021/11/24
5600	Head	22.9	4.947	35.742	5.07	35.50	-2.43	0.68	±5	2021/11/26
5750	Head	22.8	5.128	35.554	5.22	35.40	-1.76	0.44	±5	2021/11/28
750	Head	22.6	0.913	41.775	0.89	41.90	2.58	-0.30	±5	2021/11/29
835	Head	22.8	0.934	41.163	0.90	41.50	3.78	-0.81	±5	2021/11/30
1750	Head	22.7	1.409	40.669	1.37	40.10	2.85	1.42	±5	2021/12/1
1900	Head	22.7	1.431	38.637	1.40	40.00	2.21	-3.41	±5	2021/12/2
2450	Head	22.8	1.809	38.523	1.80	39.20	0.50	-1.73	±5	2021/12/3
2600	Head	22.6	1.926	38.230	1.96	39.00	-1.73	-1.97	±5	2021/12/4
3500	Head	22.9	2.834	39.051	2.91	37.90	-2.61	3.04	±5	2021/12/5
3700	Head	22.6	3.024	38.720	3.12	37.70	-3.08	2.71	±5	2021/12/6
3900	Head	22.7	3.228	38.420	3.32	37.50	-2.77	2.45	±5	2021/12/7
5250	Head	22.6	4.566	35.977	4.71	35.90	-3.06	0.21	±5	2021/12/8
5600	Head	22.8	4.965	35.441	5.07	35.50	-2.07	-0.17	±5	2021/12/9
5750	Head	22.9	5.130	35.252	5.22	35.40	-1.72	-0.42	±5	2021/12/10



12.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<1g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2021/11/16	750	Head	50	1087	7627	1649	0.416	8.36	8.32	-0.48
2021/11/16	835	Head	50	4d258	7627	1649	0.503	9.44	10.06	6.57
2021/11/16	1750	Head	50	1090	7627	1649	1.910	36.40	38.2	4.95
2021/11/16	1900	Head	50	5d170	7627	1649	1.980	39.00	39.6	1.54
2021/11/18	2450	Head	50	908	7627	1649	2.510	52.80	50.2	-4.92
2021/11/16	2600	Head	50	1061	7627	1649	2.610	56.60	52.2	-7.77
2021/11/20	3500	Head	50	1037	7627	1649	3.210	68.00	64.2	-5.59
2021/11/16	3700	Head	50	1008	7627	1649	3.170	67.60	63.4	-6.21
2021/11/22	3900	Head	50	1048	3935	1279	3.260	70.20	65.2	-7.12
2021/11/24	5250	Head	50	1113	7627	1649	3.750	80.50	75	-6.83
2021/11/26	5600	Head	50	1113	7627	1649	3.950	83.40	79	-5.28
2021/11/28	5750	Head	50	1113	7627	1649	3.970	80.00	79.4	-0.75
2021/11/29	750	Head	50	1087	7627	1649	0.413	8.36	8.26	-1.20
2021/11/30	835	Head	50	4d258	7627	1649	0.506	9.44	10.12	7.20
2021/12/1	1750	Head	50	1090	7627	1649	1.920	36.40	38.4	5.49
2021/12/2	1900	Head	50	5d170	7627	1649	2.060	39.00	41.2	5.64
2021/12/3	2450	Head	50	908	7627	1649	2.520	52.80	50.4	-4.55
2021/12/4	2600	Head	50	1061	7627	1649	2.620	56.60	52.4	-7.42
2021/12/5	3500	Head	50	1037	7627	1649	3.200	68.00	64	-5.88
2021/12/6	3700	Head	50	1008	7627	1649	3.190	67.60	63.8	-5.62
2021/12/7	3900	Head	50	1048	3935	1279	3.290	70.20	65.8	-6.27
2021/12/8	5250	Head	50	1113	7627	1649	3.790	80.50	75.8	-5.84
2021/12/9	5600	Head	50	1113	7627	1649	3.880	83.40	77.6	-6.95
2021/12/10	5750	Head	50	1113	7627	1649	3.980	80.00	79.6	-0.50

<10g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2021/11/16	750	Head	50	1087	7627	1649	0.274	5.65	5.48	-3.01
2021/11/16	835	Head	50	4d258	7627	1649	0.328	6.13	6.56	7.01
2021/11/16	1750	Head	50	1090	7627	1649	1.020	19.20	20.4	6.25
2021/11/16	1900	Head	50	5d170	7627	1649	1.020	20.30	20.4	0.49
2021/11/18	2450	Head	50	908	7627	1649	1.170	24.20	23.4	-3.31
2021/11/16	2600	Head	50	1061	7627	1649	1.170	25.10	23.4	-6.77
2021/11/20	3500	Head	50	1037	7627	1649	1.180	25.40	23.6	-7.09
2021/11/16	3700	Head	50	1008	7627	1649	1.180	24.40	23.6	-3.28
2021/11/22	3900	Head	50	1048	3935	1279	1.190	24.40	23.8	-2.46
2021/11/24	5250	Head	50	1113	7627	1649	1.090	23.10	21.8	-5.63
2021/11/26	5600	Head	50	1113	7627	1649	1.190	23.80	23.8	0.00
2021/11/28	5750	Head	50	1113	7627	1649	1.121	22.80	22.42	-1.67
2021/11/29	750	Head	50	1087	7627	1649	0.271	5.65	5.42	-4.07
2021/11/30	835	Head	50	4d258	7627	1649	0.331	6.13	6.62	7.99
2021/12/1	1750	Head	50	1090	7627	1649	1.020	19.20	20.4	6.25
2021/12/2	1900	Head	50	5d170	7627	1649	1.060	20.30	21.2	4.43
2021/12/3	2450	Head	50	908	7627	1649	1.140	24.20	22.8	-5.79
2021/12/4	2600	Head	50	1061	7627	1649	1.190	25.10	23.8	-5.18
2021/12/5	3500	Head	50	1037	7627	1649	1.210	25.40	24.2	-4.72
2021/12/6	3700	Head	50	1008	7627	1649	1.190	24.40	23.8	-2.46
2021/12/7	3900	Head	50	1048	3935	1279	1.160	24.40	23.2	-4.92
2021/12/8	5250	Head	50	1113	7627	1649	1.190	23.10	23.8	3.03
2021/12/9	5600	Head	50	1113	7627	1649	1.170	23.80	23.4	-1.68
2021/12/10	5750	Head	50	1113	7627	1649	1.149	22.80	22.98	0.79

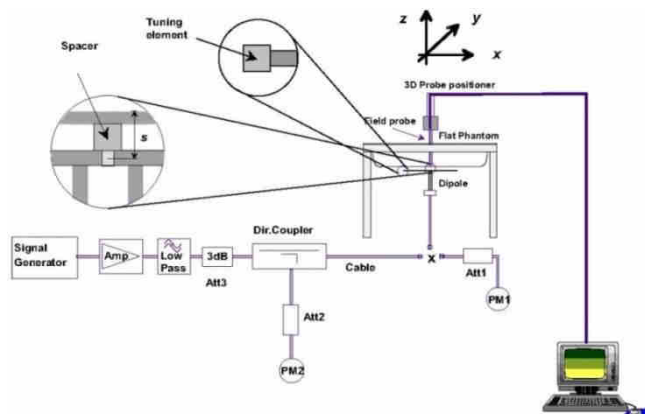


Fig 11.3.1 System Performance Check Setup



Fig 11.3.2 Setup Photo

13. RF Exposure Positions

13.1 Ear and handset reference point

Figure 12.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 12.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 12.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 12.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

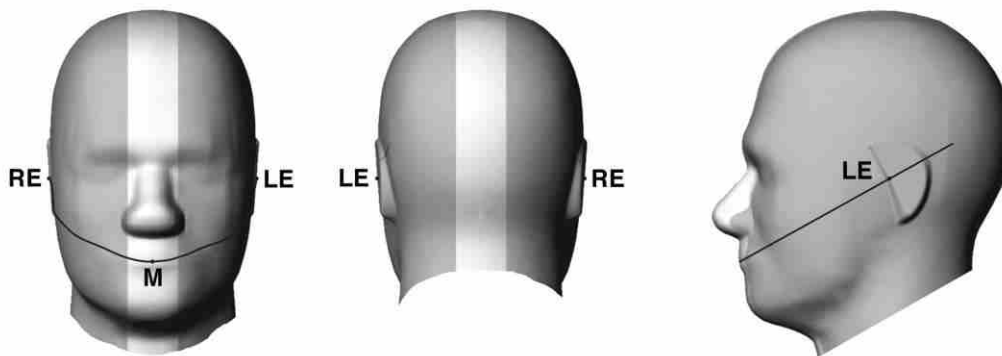


Fig 12.1.1 Front, back, and side views of SAM twin phantom

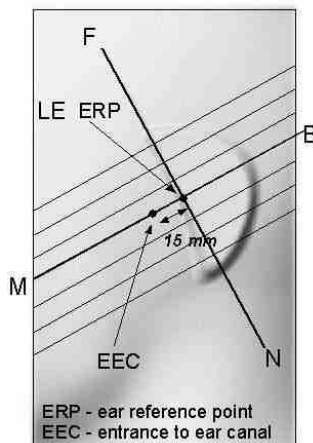


Fig 12.1.2 Close-up side view of phantom showing the ear region.

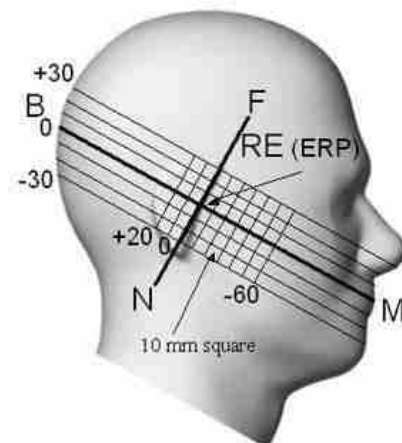


Fig 12.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

13.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 12.2.1 and Figure 12.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 12.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the handset. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 12.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 12.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 12.2.3. The actual rotation angles should be documented in the test report.

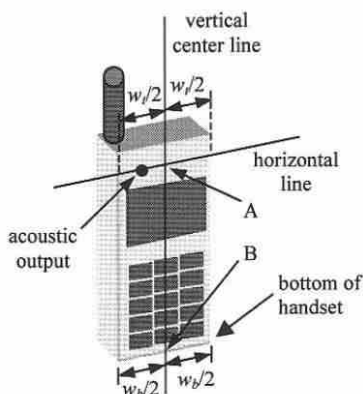


Fig 12.2.1 Handset vertical and horizontal reference lines—“fixed case”

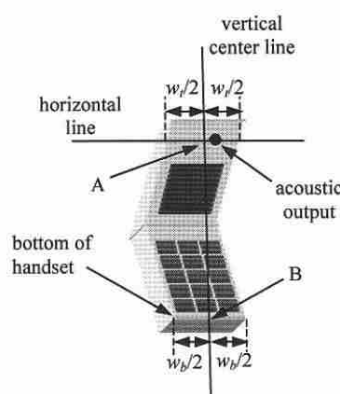


Fig 12.2.2 Handset vertical and horizontal reference lines—“clam-shell case”

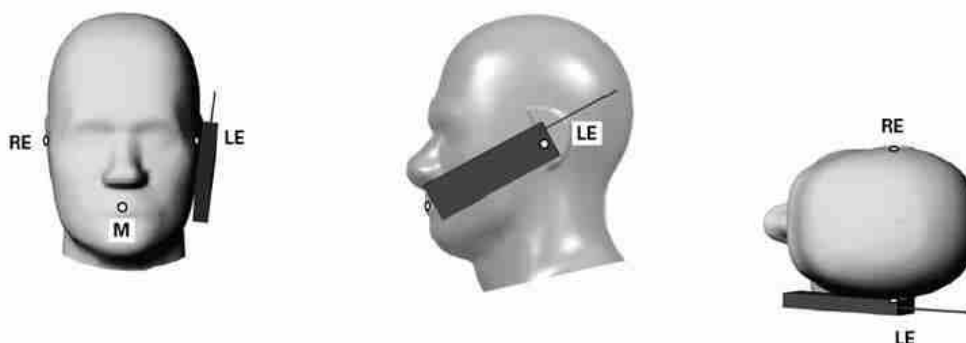


Fig 12.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

13.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 12.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

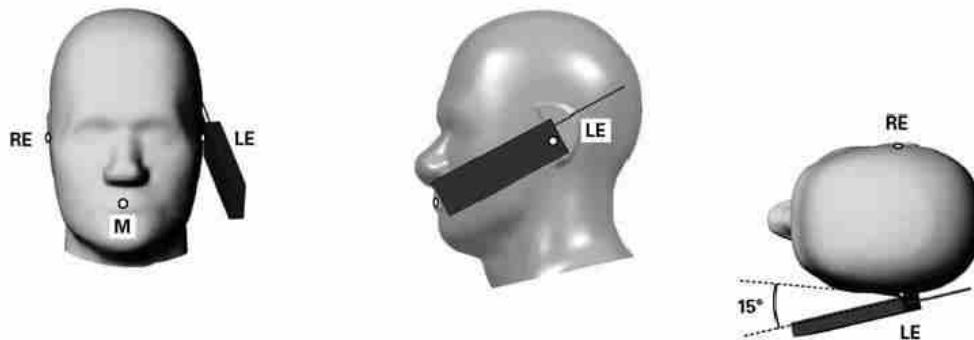


Fig 12.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

13.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 12.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

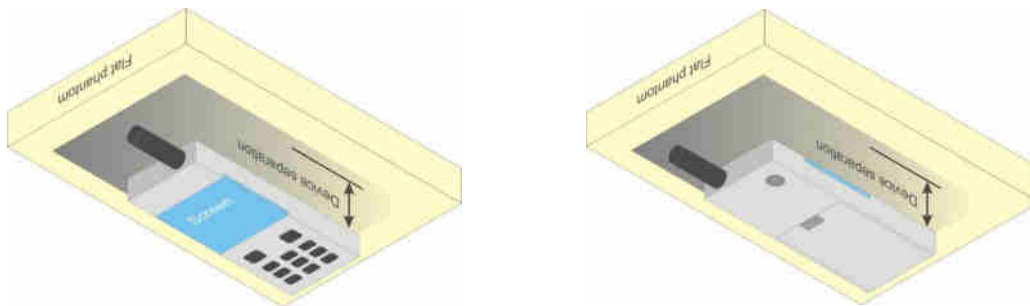


Fig 12.4 Body Worn Position

13.5 Product Specific 10g SAR Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm that provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets that support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.⁶ The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

13.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9$ cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

14. Conducted RF Output Power (Unit: dBm)

The detailed conducted power table can refer to Appendix E.

<GSM Conducted Power>

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_o/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$. Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$. Note 3: CM = 1 for $\beta_o/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases. Note 4: For subtest 2 the β_o/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.							

Setup Configuration

HSUPA Setup Configuration:

- The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting * :
 - Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - Set Cell Power = -86 dBm
 - Set Channel Type = 12.2k + HSPA
 - Set UE Target Power
 - Power Ctrl Mode= Alternating bits
 - Set and observe the E-TFCI
 - Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{EC}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CDI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CDI} = 5/15$ with $\beta_{HS} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF0) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

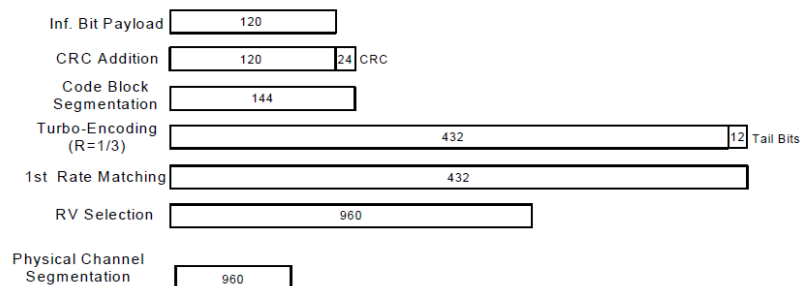


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration

<WCDMA Conducted Power>**General Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA

<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B12 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE B4 SAR test was covered by B66; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.



64QAM



16QAM

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

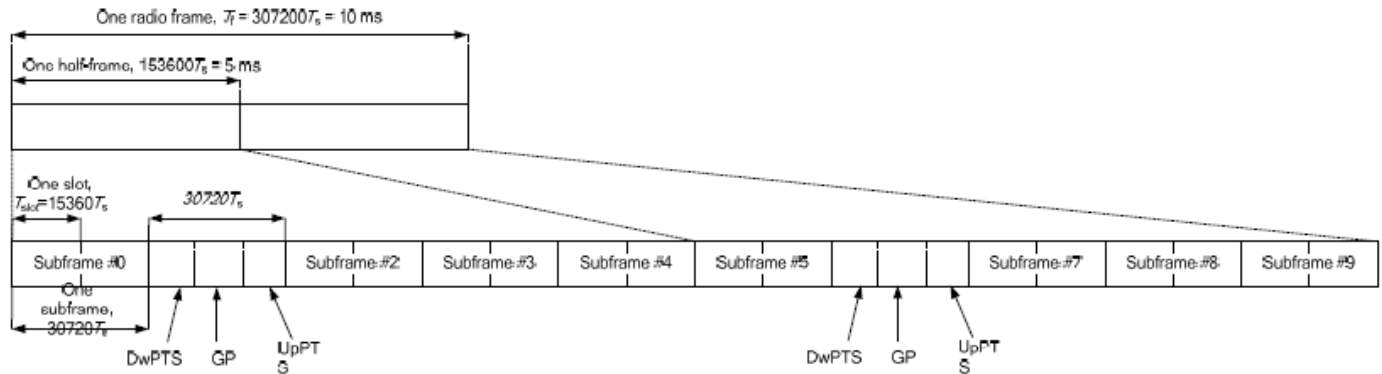


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$	-	-
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-	-	-

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

<LTE Carrier Aggregation>
General Note:

1. This device supports Carrier Aggregation on downlink for inter and intra band. For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.
2. In applying the existing power measurement procedures of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of frequency bands and CCs in each row need combination, and for this device that all the configurations were choose to power measurement.
3. All permutations exist. No restrictions on Pcell & Scell combinations. Only LTE Band 46A and 48A are limited to Scell.
4. The gray color table is covered by other combinations and no need to verify power.

2CC Downlink Carrier Aggregation		3CC Downlink Carrier Aggregation				4CC Downlink Carrier Aggregation			
Number	Combination	Number	Combination	Number	Combination	Number	Combination	Number	Combination
1	CA_2A-2A	1	CA_2A-2A-4A	41	CA_5A-66A-66A	1	CA_2A-2A-4A-4A	41	CA_4A-46A-46C
2	CA_2A-4A	2	CA_2A-2A-5A	42	CA_13A-46C	2	CA_2A-2A-4A-5A	42	CA_5B-66B
3	CA_2A-5A	3	CA_2A-2A-13A	43	CA_13A-46A-66A	3	CA_2A-2A-5B	43	CA_5B-66C
4	CA_2A-13A	4	CA_2A-2A-46A	44	CA_13A-48C	4	CA_2A-2A-5A-66A	44	CA_5B-66A-66A
5	CA_2A-46A	5	CA_2A-2A-66A	45	CA_13A-48A-48A	5	CA_2A-2A-13A-66A	45	CA_5A-5A-66B
6	CA_2A-48A	6	CA_2A-4A-4A	46	CA_13A-48A-66A	6	CA_2A-2A-66B	46	CA_5A-5A-66C
7	CA_2A-66A	7	CA_2A-4A-5A	47	CA_13A-66B	7	CA_2A-2A-66C	47	CA_5A-5A-66A-66A
8	CA_4A-4A	8	CA_2A-4A-13A	48	CA_13A-66C	8	CA_2A-2A-66A-66A	48	CA_5A-48D
9	CA_4A-5A	9	CA_2A-5B	49	CA_13A-66A-66A	9	CA_2A-4A-4A-5A	49	CA_5A-48C-66A
10	CA_4A-13A	10	CA_2A-5A-46A	50	CA_46C-66A	10	CA_2A-4A-5B	50	CA_5B-46C
11	CA_4A-46A	11	CA_2A-5A-48A	51	CA_46A-46A-66A	11	CA_2A-5B-66A	51	CA_5A-46D
12	CA_4A-48A	12	CA_2A-5A-66A	52	CA_46A-48A-66A	12	CA_2A-5A-48C	52	CA_5A-46C-66A
13	CA_5B	13	CA_2A-13A-46A	53	CA_46A-66A-66A	13	CA_2A-5A-48A-66A	53	CA_13A-48D
14	CA_5A-5A	14	CA_2A-13A-48A	54	CA_48D	14	CA_2A-5A-66B	54	CA_13A-48A-48C
15	CA_5A-46A	15	CA_2A-13A-66A	55	CA_48A-48C	15	CA_2A-5A-66C	55	CA_13A-48C-66A
16	CA_5A-48A	16	CA_2A-46C	56	CA_48C-66A	16	CA_2A-5A-66A-66A	56	CA_13A-48A-48A-66A
17	CA_5A-66A	17	CA_2A-46A-46A	57	CA_48A-48A-66A	17	CA_2A-13A-48C	57	CA_13A-48A-66B
18	CA_13A-46A	18	CA_2A-46A-48A	58	CA_48A-66B	18	CA_2A-13A-48A-48A	58	CA_13A-48A-66C
19	CA_13A-48A	19	CA_2A-46A-66A	59	CA_48A-66C	19	CA_2A-13A-48A-66A	59	CA_13A-66A-66B
20	CA_13A-66A	20	CA_2A-48C	60	CA_48A-66A-66A	20	CA_2A-13A-66B	60	CA_13A-46D
21	CA_46A-66A	21	CA_2A-48A-48A	61	CA_66A-66B	21	CA_2A-13A-66C	61	CA_13A-46C-66A
22	CA_48C	22	CA_2A-48A-66A	62	CA_66A-66C	22	CA_2A-13A-66A-66A	62	CA_48C-48C
23	CA_48A-48A	23	CA_2A-66B	63	CA_66A-66A-66A	23	CA_2A-48D	63	CA_48E
24	CA_48A-66A	24	CA_2A-66C			24	CA_2A-48A-48C	64	CA_48A-48D
25	CA_66B	25	CA_2A-66A-66A			25	CA_2A-48C-66A	65	CA_48D-66A
26	CA_66C	26	CA_4A-4A-5A			26	CA_2A-48A-48A-66A	66	CA_48A-48C-66A
27	CA_66A-66A	27	CA_4A-4A-13A			27	CA_2A-66A-66B	67	CA_48C-66B
		28	CA_4A-5B			28	CA_2A-66A-66A-66A	68	CA_48C-66C
		29	CA_4A-46C			29	CA_2A-2A-46C	69	CA_48C-66A-66A
		30	CA_4A-46A-46A			30	CA_2A-5A-46C	70	CA_48A-48A-66B
		31	CA_4A-48C			31	CA_2A-13A-46C	71	CA_48A-48A-66C
		32	CA_5B-46A			32	CA_2A-46D	72	CA_48A-48A-66A-66A
		33	CA_5B-66A			33	CA_2A-46A-46C	73	CA_46D-66A
		34	CA_5A-5A-66A			34	CA_2A-46C-48A	74	CA_46A-46C-66A
		35	CA_5A-46C			35	CA_2A-46C-66A	75	CA_46C-48A-66A
		36	CA_5A-46A-66A			36	CA_2A-46A-48C	76	CA_46C-66A-66A
		37	CA_5A-48C			37	CA_2A-46A-48A-66A	77	CA_46A-48C-66A
		38	CA_5A-48A-66A			38	CA_4A-4A-5B		
		39	CA_5A-66B			39	CA_4A-48D		
		40	CA_5A-66C			40	CA_4A-46D		



5CC Downlink Carrier Aggregation				6CC Downlink Carrier Aggregation		7CC Downlink Carrier Aggregation	
Number	Combination	Number	Combination	Number	Combination	Number	Combination
1	CA_2A-2A-5A-66B	30	CA_4A-48E	1	CA_2A-46E-48A	1	CA_2A-46E-48C
2	CA_2A-2A-5A-66C	31	CA_4A-46A-46D	2	CA_2A-46E-66A	2	CA_2A-46E-48A-66A
3	CA_2A-2A-5A-66A-66A	32	CA_5A-48D-66A	3	CA_2A-46D-48C	3	CA_2A-46E-66A-66A
4	CA_2A-2A-13A-66A-66A	33	CA_5B-46D	4	CA_2A-46D-48A-66A	4	CA_2A-46D-48C-66A
5	CA_2A-5B-66B	34	CA_5A-46E	5	CA_2A-46D-66A-66A	5	CA_2A-46C-48E
6	CA_2A-5B-66C	35	CA_5A-46D-66A	6	CA_2A-46C-48D	6	CA_2A-46C-48D-66A
7	CA_2A-5B-66A-66A	36	CA_13A-48C-48C	7	CA_2A-46C-48C-66A	7	CA_46C-48E-66A
8	CA_2A-5A-48C-66A	37	CA_13A-48E	8	CA_2A-46A-48E		
9	CA_2A-5A-48D	38	CA_13A-48A-48D	9	CA_2A-46A-48D-66A		
10	CA_2A-13A-48D	39	CA_13A-48D-66A	10	CA_2A-48E-66A		
11	CA_2A-13A-48A-48C	40	CA_13A-48A-48C-66A	11	CA_46E-48A-66A		
12	CA_2A-13A-48C-66A	41	CA_13A-46E	12	CA_46E-66A-66A		
13	CA_2A-13A-48A-48A-66A	42	CA_13A-46D-66A	13	CA_46C-48D-66A		
14	CA_2A-13A-66A-66B	43	CA_46E-66A				
15	CA_2A-48E	44	CA_46A-46D-66A				
16	CA_2A-48A-48D	45	CA_46D-48A-66A				
17	CA_2A-48D-66A	46	CA_46D-66A-66A				
18	CA_2A-48A-48C-66A	47	CA_46C-48C-66A				
19	CA_2A-2A-46D	48	CA_46A-48D-66A				
20	CA_2A-5A-46D	49	CA_48C-48D				
21	CA_2A-13A-46D	50	CA_48C-48C-66A				
22	CA_2A-46E	51	CA_48E-66A				
23	CA_2A-46A-46D	52	CA_48A-48D-66A				
24	CA_2A-46D-48A	53	CA_48A-48C-66B				
25	CA_2A-46D-66A	54	CA_48A-48C-66C				
26	CA_2A-46C-48C	55	CA_4A-48E				
27	CA_2A-46C-48A-66A						
28	CA_2A-46A-48D						
29	CA_2A-46A-48C-66A						

LTE Carrier Aggregation Conducted Power (Downlink)

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink seven carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For inter-band CA, the SCC selected highest bandwidth and near the middle of its transmission band. For SCC DL RB size and offset will base on the PCC corresponding RB allocation.
- vi. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vii. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

LTE 4x4 MIMO (Downlink)

This device supports downlink 4x4 MIMO operations for LTE Bands 2/4/48/66 only. Uplink transmission is limited to a single output stream. Power measurements were performed with downlink 4x4 MIMO active for the configuration with highest measured maximum conducted power with 4x4 downlink MIMO inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band.

Per FCC Guidance, SAR for downlink 4x4 MIMO was not needed since the maximum average output power in 4x4 downlink MIMO mode was not > 0.25 dB higher than the maximum output power with downlink 4x4 MIMO inactive. When carrier aggregation is applicable, power measurements were performed with the downlink carrier aggregation and 4x4 DL MIMO active for the configuration with highest measured maximum conducted power with downlink carrier aggregation inactive measured among the channel bandwidth, modulation, and RB combinations in each frequency band.

4X4 MIMO	Band
	LTE Band 2/4/48/66

LTE Carrier Aggregation Conducted Power (Uplink)

2CC Uplink Carrier Aggregation		
Number	Combination	Ant No.
1	5B	ANT0/1
2	48C	ANT2
3	66B	ANT0/1
4	66C	ANT0/1

<Intra-band>
General Note:

- i. The device supports intra-band uplink carrier aggregation for LTE B5/B48/B66 with a maximum of two uplink component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre 3GPP requirement.
- ii. The device supports uplink carrier aggregation with a maximum of two uplink component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre the 3GPP requirement.
- iii. According TCB workshop, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.
- iv. Additional SAR measurement for LTE UL CA with other DL CA combinations active were not required since the maximum output power for this configuration was not > 0.25dB higher than the maximum output power for UL CA active.
- v. LTE CA_66B test was covered by CA_66C; therefore, SAR was only assessed for CA_66C.

<Inter-band uplink carrier aggregation consideration>

LTE Uplink CA Combination	2CC Uplink Carrier Aggregation	
	Band&Ant No.	Band&Ant No.
CA_2A-4A	LTE B2:ANT0/1	LTE B4:ANT1/0
CA_2A-5A	LTE B2:ANT0/1	LTE B5: ANT1/0
CA_2A-13A	LTE B2:ANT0/1	LTE B13: ANT1/0
CA_2A-66A	LTE B2:ANT0/1	LTE B66: ANT1/0
CA_4A-5A	LTE B4:ANT0/1	LTE B5: ANT1/0
CA_4A-13A	LTE B4: ANT0/1	LTE B13: ANT1/0
CA_5A-66A	LTE B5: ANT0/1	LTE B66: ANT1/0
CA_13A-66A	LTE B13: ANT0/1	LTE B66: ANT1/0

General Note:

1. The single carrier of inter band CA uplink power level is the same as Non-CA standalone LTE power level.
2. The product implements Qualcomm Smart Transmit feature which controls the instantaneous transmitting power for WWAN transmitter to ensure the product in compliance with FCC RF exposure limit over a defined time window, for SAR (transmit frequency $\leq 6\text{GHz}$). To control and manage transmitting power in real time and to ensure at all times the time-averaged RF exposure is compliant to the regulation requirement.
3. For LTE inter band CA mode, Qualcomm Smart Transmit algorithm in WWAN adds directly the time-averaged RF exposure between two LTE bands. Smart Transmit algorithm controls the total RF exposure base on LTE inter CA bands to not exceed FCC limit. In Part 1 Report, simultaneous transmission compliance was evaluated with other Radios (WLAN or BT) using standalone LTE SAR mode.

5G NR Output Power (Unit: dBm)

General Note:

1. 5G NR n2 / n5 / n66 / n77 / n78 is NSA and SA mode.
2. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
 - a. For DFT-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class2 and 3, the CP-OFDM mode will not higher than DFT-OFDM mode, therefore, similar FCC KDB 941225 D05 procedure for other modulation output power for each RB allocation configuration is > not ½ dB higher than the same configuration in DFT-QPSK and the reported SAR for the DFT-QPSK configuration is ≤ 1.45 W/kg; CP-OFDM testing is not required.
 - b. For DFT-OFDM output power measurement reduction, according to 38.101 maximum power reduction for power class2 and 3, for 16QAM/64QAM/256QAM and smaller bandwidth output power will spot check largest channel bandwidth worst RB configuration to ensure the 16QAM/64QAM/256QAM and smaller bandwidth output power will not ½ dB higher than the same configuration in the largest supported bandwidth.
 - c. SAR testing start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel
 - d. 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure
 - e. QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested
 - f. PI/2 BPSK/16QAM/64QAM/256QAM output powers according to 3GPP MPR will not ½ dB higher than the same configuration in QPSK, also reported SAR for the QPSK configuration is less than 1.45 W/kg, PI/2 BPSK /16QAM/64QAM/256QAM SAR testing are not required.
 - g. Smaller bandwidth output power for each RB allocation configuration for this device will not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
3. 5G NR n77 supports HPUE, HPUE power and SAR testing performed separately.
4. 5G NR n77 HUPE with higher power, 5G NR n77 HUPE SAR can represent power class 3 level SAR.
5. For 5G NR n77 HUPE, 50% duty cycle is considered during SAR testing. For 5G NR other bands test, using FTM (Factory Test Mode) with default 100% duty cycle transmission to perform SAR testing.
6. 5G NR n77/n78 supports MIMO mode at Antenna 2 and Antenna 7.
7. NSA and SA mode should perform SAR separately. For the maximum power of NSA mode is the same as SA total power level, so SA SAR can represent NSA mode SAR.
8. 5G NR NSA mode, the power level is the same as 5G NR SA mode, so 5G NR NSA mode and SA mode power table only show one time.
9. 5G NR supports CP-OFDM and DFT-s-OFDM modulation, for DFT-s-OFDM power is higher than CP-OFDM, so only show DFT-s-OFDM power table and chose DFT-s-OFDM to perform SAR testing.
10. For DFT-s-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for the CP-OFDM mode will not higher than DFT-s-OFDM mode, therefore, CP-OFDM measurement is unnecessary.

<3GPP 38.101 MPR for EN-DC>

Table 6.2.2-1 Maximum power reduction (MPR) for power class 3

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	$\leq 3.5^1$	$\leq 1.2^1$	$\leq 0.2^1$
		$\leq 0.5^2$	$\leq 0.5^2$	0 ²
	QPSK	≤ 1		0
	16 QAM	≤ 2		≤ 1
	64 QAM	≤ 2.5		
CP-OFDM	256 QAM	≤ 4.5		
	QPSK	≤ 3		≤ 1.5
	16 QAM	≤ 3		≤ 2
	64 QAM	≤ 3.5		
	256 QAM	≤ 6.5		

NOTE 1: Applicable for UE operating in TDD mode with Pi/2 BPSK modulation and UE indicates support for UE capability *powerBoosting-pi2BPSK* and if the IE *powerBoostPi2BPSK* is set to 1 and 40 % or less slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79. The reference power of 0 dB MPR is 26 dBm.

NOTE 2: Applicable for UE operating in FDD mode, or in TDD mode in bands other than n40, n41, n77, n78 and n79 with Pi/2 BPSK modulation and if the IE *powerBoostPi2BPSK* is set to 0 and if more than 40 % of slots in radio frame are used for UL transmission for bands n40, n41, n77, n78 and n79.

Table 6.2.2-2 Maximum power reduction (MPR) for power class 2

Modulation		MPR (dB)		
		Edge RB allocations	Outer RB allocations	Inner RB allocations
DFT-s-OFDM	Pi/2 BPSK	≤ 3.5	≤ 0.5	0
	QPSK	≤ 3.5	≤ 1	0
	16 QAM	≤ 3.5	≤ 2	≤ 1
	64 QAM	≤ 3.5	≤ 2.5	
	256 QAM	≤ 4.5		
CP-OFDM	QPSK	≤ 3.5	≤ 3	≤ 1.5
	16 QAM	≤ 3.5	≤ 3	≤ 2
	64 QAM	≤ 3.5		
	256 QAM	≤ 6.5		

FR 1	ENDC	4G UL	5G-NR UL
n2	DC_5A_n2A	Ant0/1	Ant1/0
	DC_13A_n2A	Ant0/1	Ant1/0
	DC_66A_n2A	Ant0/1	Ant1/0
n5	DC_2A_n5A	Ant1/0	Ant0/1
	DC_66A_n5A	Ant1/0	Ant0/1
	DC_48A_n5A	Ant2	Ant0/1
n66	DC_2A_n66A	Ant0/1	Ant1/0
	DC_5A_n66A	Ant0/1	Ant1/0
	DC_13A_n66A	Ant0/1	Ant1/0
n77	DC_5A_n77A	Ant0/1	Ant2
	DC_7A_n77A	Ant0/1	Ant2
n78	DC_5A_n78A	Ant0/1	Ant2
	DC_7A_n78A	Ant0/1	Ant2

<WLAN Conducted Power>



General Note:

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. 802.11ax supports full tone size and partial tone size, after verification for the partial tone size mode power level will not higher than full tone size power level, so chose full tone power to be measured in this report.
6. The 2.4GHz/5GHz/6GHz WLAN can transmit in MIMO antenna mode only and it has no SISO antenna mode.

<2.4GHz Bluetooth>

General Note:

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle are 76.79 % for ANT4, and 76.82 % for ANT6 as following figure, according to 2016 Oct. TCB workshop for Bluetooth SAR scaling need further consideration and the maximum duty cycle is 100%, therefore the actual duty cycle will be scaled up to 100% for Bluetooth reported SAR calculation

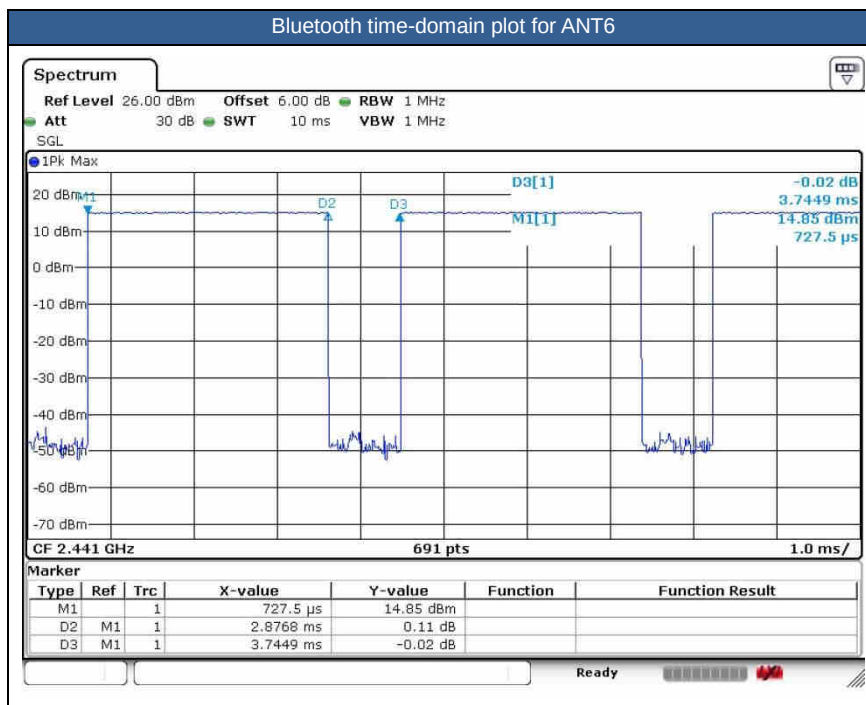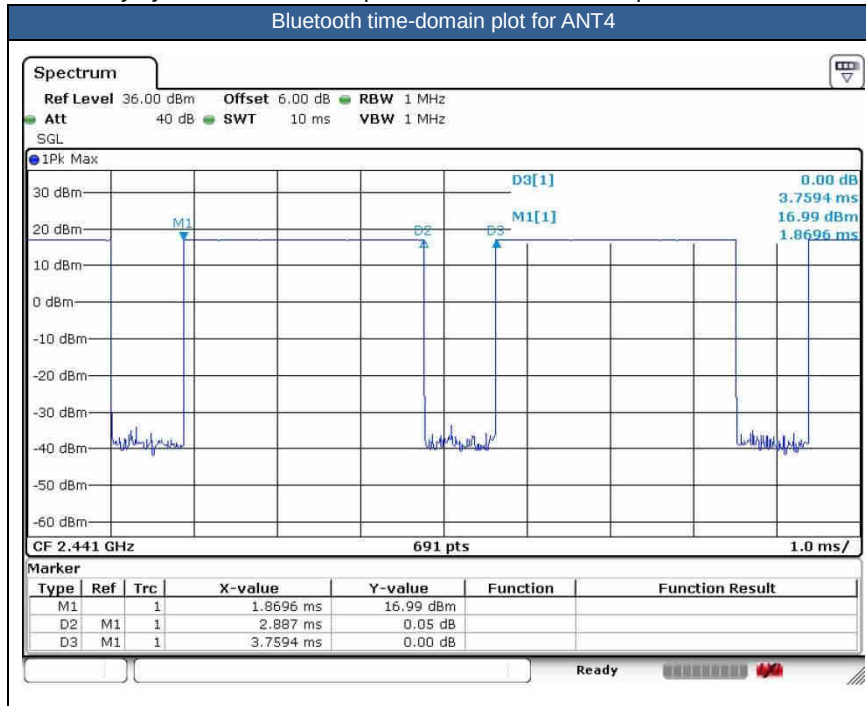



15. Antenna Location

The detailed antenna location information can refer to SAR Test Setup Photos.

16. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of BT/WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For BT/WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - e. For TDD LTE SAR measurement of power class 3, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result. The reported TDD LTE SAR (W/kg) = Measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The device implements the power management and proximity sensor /receiver detection/hotspot mode for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity) and the Qualcomm smart transmit will manage to ensure the power level not exceeding the associated power table. Details about the power management decision and sensor detection are provided in the operational description. And the device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to power table at appendix E.
5. For WLAN when transmit simultaneous with WWAN, power reduction will be activated to head and Handheld. For WLAN when transmit simultaneous with WWAN and Proximity sensors trigger, power reduction will be activated to body-worn and Handheld.
6. For some WWAN bands, sensor on reduced power level is higher than hotspot reduced power level, so front/back sensor on SAR can represent hotspot conservatively.
7. This device implements antenna tuning techniques for several WWAN (cellular) operating modes and frequencies for the purpose of improving antenna efficiency over a broad range of frequencies. Specifically, these techniques are employed in the WCDMA, LTE and 5GNR modes. In this report SAR was measured according to the normally required SAR configurations with the tuner active and worst tune state (auto tune) was used for SAR testing. The detail descriptions of the antenna tuner and supplemental data for additional information can be referred to section 18 and appendix F.
8. 5G NR n77 supports HPUE, HPUE power and SAR testing performed separately.
9. 5G NR n77 HUPE with higher power, 5G NR n77 HUPE SAR can represent power class 3 level SAR.
10. 5G NR n77/n78 supports MIMO mode at Antenna 2 and Antenna 7.
11. For 5G NR n77 HUPE, 50% duty cycle is considered during SAR testing. For 5G NR other bands test, using FTM (Factory Test Mode) with default 100% duty cycle transmission to perform SAR testing.
12. NSA and SA mode should perform SAR separately. For the maximum power of NSA mode is the same as SA total power level, so SA SAR can represent NSA mode SAR.
13. 5GNR NSA mode, the power level is the same as 5GNR SA mode, so 5GNR NSA mode and SA mode power table only show one time.
14. 5G NR supports CP-OFDM and DFT-s-OFDM modulation, for DFT-s-OFDM power is higher than CP-OFDM, so only show DFT-s-OFDM power table and chose DFT-s-OFDM to perform SAR testing.
15. For DFT-s-OFDM and CP-OFDM output power measurement reduction, according to 38.101 maximum power reduction for the CP-OFDM mode will not higher than DFT-s-OFDM mode, therefore, CP-OFDM measurement is unnecessary.
16. This device supports 5GNR FR1 bands, including NSA mode and SA mode. NSA and SA mode performed SAR separately.

17. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.
 - a. For this device SAR for WWAN/WLAN transmitter scaled to maximum output power mode for product specific 10g SAR is higher than 1.2W/kg of GSM850/1900, WCDMA Band II/V, LTE Band 2/4/7/66/48, 5GNR n2/n66/n77, therefore product specific 10g SAR is necessary.
 - b. WLAN 5.3/5.5/6GHz tested the product specific 10g SAR since it has no hotspot mode.
 - c. When 10-g product specific 10g SAR is considered, SAR thresholds is specified in the procedures for SAR test reduction and exclusion should be multiplied by 2.5.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

WCDMA Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4 / B5 / B12 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE B4 SAR test was covered by LTE B66; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is $\leq$ the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band

5G NR Note:

1. For 5G NR test procedure was following step similar FCC KDB 941225 D05:
 - a. SAR testing start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
 - b. 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure
 - c. QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
 - d. $\pi/2$ BPSK/16QAM/64QAM/256QAM output powers according to 3GPP MPR will not $\frac{1}{2}$ dB higher than the same configuration in QPSK, also reported SAR for the QPSK configuration is less than 1.45 W/kg, $\pi/2$ BPSK /16QAM/64QAM/256QAM SAR testing are not required.
 - e. Smaller bandwidth output power for each RB allocation configuration for this device will not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg, smaller bandwidth SAR testing is not required for this device
 - f. For 5G FR1 n5/n66/n77 the maximum bandwidth does not support three non-overlapping channels, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

WLAN/Bluetooth Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.
6. 802.11ax supports full tone size and partial tone size, after verification for the partial tone size mode power level will not higher than full tone size power level, so chose full tone power to be measured in this report.
7. The 2.4GHz/5GHz/6GHz WLAN can transmit in MIMO antenna mode only and it has no SISO antenna mode.

SRS (Sounding Reference Signal) description:

If one or more receive antennas are used as SRS as dedicated antennas, i.e., the antenna(s) is used for receive and Sound Reference Signal transmission (SRS) only (not traffic transmission), then the SAR measurement at Plimit for SAR as dedicated antenna(s) can be performed using FTM mode with CW modulation (as SRS could operate at very low duty cycle in online mode). Reported SAR for SRS dedicated antenna can be calculated by scaling the measured SAR at Plimit to a Tx power corresponding to worst-case SRS duty cycle * Pmax, then reported SAR for SRS = measured SAR @ Plimit * $10^{[(P_{max_dBm} + 10 \cdot \log_{10}(\text{duty_cycle}) - P_{limit_dBm})/10]}$. The worst-case SRS duty cycle is 10% (Declared by Manufacturer).

DSI status description:

The device has the following DSI state which used at different exposure condition.

This WWAN bands enabled with Qualcomm Smart Transmit feature which located at chapter 5. The default power is Pmax power, When Plimit power higher than Pmax power, the output power will be limited at Pmax, and so the SAR will use Pmax power to do the testing.

Exposure Condition	DSI
Head SAR-Standalone	DSI 2
Head SAR-Simultaneous	DSI 2
Body worn Mode SAR-Standalone	DSI 3
Body worn Mode SAR- Simultaneous	DSI 3
Hotspot Mode SAR	DSI 3
Extremity(Handheld) SAR-Standalone	DSI 6
Extremity(Handheld) SAR- Simultaneous	DSI 6
Sensor off SAR	DSI 4



16.1 Head SAR

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
750MHz																		
	LTE Band 12	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 2	23095	707.5	22.76	24	1.330	-0.03	0.157	0.209
	LTE Band 12	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 0	DSI 2	23095	707.5	22.75	24	1.334	0.06	0.124	0.165
	LTE Band 12	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	DSI 2	23095	707.5	22.76	24	1.330	0.07	0.091	0.121
	LTE Band 12	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 0	DSI 2	23095	707.5	22.75	24	1.334	-0.15	0.073	0.097
	LTE Band 12	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	23095	707.5	22.76	24	1.330	-0.08	0.106	0.141
	LTE Band 12	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 0	DSI 2	23095	707.5	22.75	24	1.334	0.06	0.082	0.109
	LTE Band 12	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	DSI 2	23095	707.5	22.76	24	1.330	-0.09	0.075	0.100
	LTE Band 12	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 0	DSI 2	23095	707.5	22.75	24	1.334	0.05	0.059	0.079
	LTE Band 12	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	23095	707.5	24.38	25	1.153	0.09	0.487	0.562
	LTE Band 12	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 1	DSI 2	23095	707.5	23.41	24	1.146	0.08	0.388	0.444
	LTE Band 12	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 2	23095	707.5	24.38	25	1.153	-0.01	0.509	0.587
	LTE Band 12	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 1	DSI 2	23095	707.5	23.41	24	1.146	0.08	0.329	0.377
01	LTE Band 12	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	23095	707.5	24.38	25	1.153	-0.02	0.952	1.098
	LTE Band 12	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	23060	704	24.29	25	1.178	-0.02	0.931	1.096
	LTE Band 12	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	23130	711	24.34	25	1.164	-0.02	0.928	1.080
	LTE Band 12	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 1	DSI 2	23095	707.5	23.41	24	1.146	0.09	0.724	0.829
	LTE Band 12	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 1	DSI 2	23060	704	23.31	24	1.172	0.01	0.731	0.857
	LTE Band 12	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 1	DSI 2	23130	711	23.34	24	1.164	0.03	0.716	0.834
	LTE Band 12	10M	QPSK	50	0	-	Left Cheek	0mm	Ant 1	DSI 2	23095	707.5	23.37	24	1.156	-0.03	0.693	0.801
	LTE Band 12	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 2	23095	707.5	24.38	25	1.153	0.18	0.679	0.783
	LTE Band 12	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 1	DSI 2	23095	707.5	23.41	24	1.146	0.18	0.494	0.566
	LTE Band 12	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2 Simultaneous	23095	707.5	23.42	24.20	1.197	-0.02	0.707	0.846
	LTE Band 13	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 2	23230	782	22.97	24	1.268	-0.04	0.141	0.179
	LTE Band 13	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 0	DSI 2	23230	782	22.81	24	1.315	0.09	0.111	0.146
	LTE Band 13	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	DSI 2	23230	782	22.97	24	1.268	0.16	0.083	0.105
	LTE Band 13	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 0	DSI 2	23230	782	22.81	24	1.315	-0.13	0.066	0.087
	LTE Band 13	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	23230	782	22.97	24	1.268	-0.11	0.099	0.125
	LTE Band 13	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 0	DSI 2	23230	782	22.81	24	1.315	0.02	0.077	0.101
	LTE Band 13	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	DSI 2	23230	782	22.97	24	1.268	0.05	0.062	0.079
	LTE Band 13	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 0	DSI 2	23230	782	22.81	24	1.315	-0.16	0.051	0.067
	LTE Band 13	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	23230	782	24.33	25	1.167	0.14	0.555	0.648
	LTE Band 13	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 1	DSI 2	23230	782	23.41	24	1.146	0.06	0.485	0.556
	LTE Band 13	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 2	23230	782	24.33	25	1.167	-0.09	0.558	0.651
	LTE Band 13	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 1	DSI 2	23230	782	23.41	24	1.146	0.05	0.501	0.574
02	LTE Band 13	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	23230	782	24.33	25	1.167	0.03	0.988	1.153
	LTE Band 13	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 1	DSI 2	23230	782	23.41	24	1.146	0.01	0.850	0.974
	LTE Band 13	10M	QPSK	50	0	-	Left Cheek	0mm	Ant 1	DSI 2	23230	782	23.27	24	1.183	0.07	0.868	1.027
	LTE Band 13	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 2	23230	782	24.33	25	1.167	-0.1	0.872	1.017
	LTE Band 13	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 1	DSI 2	23230	782	23.41	24	1.146	0.05	0.675	0.773
	LTE Band 13	10M	QPSK	50	0	-	Left Tilted	0mm	Ant 1	DSI 2	23230	782	23.27	24	1.183	0.02	0.643	0.761
	LTE Band 13	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2 Simultaneous	23230	782	23.45	24.00	1.135	0.03	0.692	0.785



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
835MHz																		
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Right Cheek	0mm	Ant 0	DSI 2	189	836.4	28.5	29.5	1.259	-0.14	0.165	0.208
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Right Tilted	0mm	Ant 0	DSI 2	189	836.4	28.5	29.5	1.259	0.04	0.119	0.150
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Left Cheek	0mm	Ant 0	DSI 2	189	836.4	28.5	29.5	1.259	-0.18	0.125	0.157
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Right Cheek	0mm	Ant 1	DSI 2	189	836.4	25.53	26.7	1.309	-0.16	0.690	0.903
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Right Cheek	0mm	Ant 1	DSI 2	128	824.2	25.47	26.7	1.327	-0.11	0.626	0.831
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Right Cheek	0mm	Ant 1	DSI 2	251	848.8	25.47	26.7	1.327	-0.03	0.659	0.875
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Right Tilted	0mm	Ant 1	DSI 2	189	836.4	25.53	26.7	1.309	0.05	0.633	0.829
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Right Tilted	0mm	Ant 1	DSI 2	128	824.2	25.47	26.7	1.327	0.05	0.547	0.726
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Right Tilted	0mm	Ant 1	DSI 2	251	848.8	25.47	26.7	1.327	0.1	0.685	0.909
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Left Cheek	0mm	Ant 1	DSI 2	189	836.4	25.53	26.7	1.309	0.06	0.981	1.284
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Left Cheek	0mm	Ant 1	DSI 2	128	824.2	25.47	26.7	1.327	-0.01	0.792	1.051
03	GSM850	-	-	-	-	GPRS (4 Tx slots)	Left Cheek	0mm	Ant 1	DSI 2	251	848.8	25.47	26.7	1.327	-0.08	1.020	1.354
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Left Tilted	0mm	Ant 1	DSI 2	189	836.4	25.53	26.7	1.309	-0.13	0.902	1.181
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Left Tilted	0mm	Ant 1	DSI 2	128	824.2	25.47	26.7	1.327	-0.04	0.707	0.938
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Left Tilted	0mm	Ant 1	DSI 2	251	848.8	25.47	26.7	1.327	0.18	0.949	1.260
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Left Cheek	0mm	Ant 1	DSI2 Simultaneous	251	848.8	24.75	25.40	1.161	-0.01	0.737	0.856
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Left Tilted	0mm	Ant 0	DSI 2	189	836.4	28.5	29.5	1.259	-0.17	0.099	0.125
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	DSI 2	4182	836.4	24.52	25	1.117	0.14	0.189	0.211
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 0	DSI 2	4182	836.4	24.52	25	1.117	0.03	0.123	0.137
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 0	DSI 2	4182	836.4	24.52	25	1.117	0.04	0.136	0.152
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 0	DSI 2	4182	836.4	24.52	25	1.117	0.05	0.115	0.128
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 1	DSI 2	4182	836.4	22.65	23.2	1.135	0.19	0.413	0.469
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 1	DSI 2	4182	836.4	22.65	23.2	1.135	0.01	0.454	0.515
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 1	DSI 2	4182	836.4	22.65	23.2	1.135	0.05	1.030	1.169
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 1	DSI 2	4132	826.4	22.36	23.2	1.213	-0.08	0.953	1.156
04	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 1	DSI 2	4233	846.6	22.47	23.2	1.183	-0.06	1.060	1.254
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 1	DSI 2	4182	836.4	22.65	23.2	1.135	0.03	0.687	0.780
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 1	DSI2 Simultaneous	4233	846.6	21.31	21.9	1.146	0.02	0.679	0.778
	LTE Band 5	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 2	20525	836.5	22.91	24	1.285	-0.01	0.168	0.216
	LTE_CA_5B	10M	QPSK	1	49	-	Right Cheek	0mm	Ant 0	DSI 2	20525+20597	836.5+843.7	22.83	24	1.309	-0.01	0.159	0.208
	LTE Band 5	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 0	DSI 2	20525	836.5	22.89	24	1.291	0.09	0.133	0.172
	LTE Band 5	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	DSI 2	20525	836.5	22.91	24	1.285	0.11	0.102	0.131
	LTE Band 5	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 0	DSI 2	20525	836.5	22.89	24	1.291	0.06	0.081	0.105
	LTE Band 5	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	20525	836.5	22.91	24	1.285	-0.12	0.115	0.148
	LTE Band 5	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 0	DSI 2	20525	836.5	22.89	24	1.291	-0.01	0.089	0.115
	LTE Band 5	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	DSI 2	20525	836.5	22.91	24	1.285	0.03	0.090	0.116
	LTE Band 5	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 0	DSI 2	20525	836.5	22.89	24	1.291	0.04	0.070	0.090
	LTE Band 5	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	20525	836.5	22.66	23.5	1.213	0.05	0.643	0.780
	LTE Band 5	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 1	DSI 2	20525	836.5	22.58	23.5	1.236	-0.08	0.508	0.628
	LTE Band 5	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 2	20525	836.5	22.66	23.5	1.213	0.03	0.614	0.745
	LTE Band 5	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 1	DSI 2	20525	836.5	22.58	23.5	1.236	0.08	0.462	0.571
05	LTE Band 5	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	20525	836.5	22.66	23.5	1.213	-0.02	0.994	1.206
	LTE_CA_5B	10M	QPSK	1	49	-	Left Cheek	0mm	Ant 1	DSI 2	20525+20597	836.5+843.7	22.47	23.50	1.268	0.05	0.945	1.198
	LTE Band 5	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	20450	829	22.48	23.5	1.265	-0.02	0.913	1.155
	LTE Band 5	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	20600	844	22.55	23.5	1.245	-0.02	0.921	1.146
	LTE Band 5	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 1	DSI 2	20525	836.5	22.58	23.5	1.236	0.04	0.785	0.970
	LTE Band 5	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 1	DSI 2	20450	829	22.41	23.5	1.285	0.12	0.693	0.891
	LTE Band 5	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 1	DSI 2	20600	844	22.54	23.5	1.247	0.04	0.721	0.899
	LTE Band 5	10M	QPSK	50	0	-	Left Cheek	0mm	Ant 1	DSI 2	20525	836.5	22.53	23.5	1.250	-0.13	0.737	0.921
	LTE Band 5	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 2	20525	836.5	22.66	23.5	1.213	-0.04	0.855	1.037
	LTE Band 5	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 2	20450	829	22.48	23.5	1.265	-0.04	0.843	1.066



FCC SAR Test Report

Report No. : FA192317-02

	LTE Band 5	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 2	20600	844	22.55	23.5	1.245	-0.04	0.826	1.028
	LTE Band 5	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 1	DSI 2	20525	836.5	22.58	23.5	1.236	0.18	0.682	0.843
	LTE Band 5	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 1	DSI 2	20450	829	22.41	23.5	1.285	0.03	0.649	0.834
	LTE Band 5	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 1	DSI 2	20600	844	22.54	23.5	1.247	0.05	0.651	0.812
	LTE Band 5	10M	QPSK	50	0	-	Left Tilted	0mm	Ant 1	DSI 2	20525	836.5	22.53	23.5	1.250	0.06	0.693	0.866
	LTE Band 5	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI2 Simultaneous	20525	836.5	21.53	22.20	1.167	0.15	0.735	0.858
	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Right Cheek	0mm	Ant 0	DSI 2	167300	836.5	22.75	24	1.334	-0.13	0.106	0.141
	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Right Cheek	0mm	Ant 0	DSI 2	167300	836.5	22.65	24	1.365	0.05	0.118	0.161
	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Right Tilted	0mm	Ant 0	DSI 2	167300	836.5	22.75	24	1.334	0.17	0.065	0.087
	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Right Tilted	0mm	Ant 0	DSI 2	167300	836.5	22.65	24	1.365	0.17	0.071	0.097
	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Left Cheek	0mm	Ant 0	DSI 2	167300	836.5	22.75	24	1.334	0.06	0.076	0.101
	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Left Cheek	0mm	Ant 0	DSI 2	167300	836.5	22.65	24	1.365	-0.03	0.080	0.109
	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Left Tilted	0mm	Ant 0	DSI 2	167300	836.5	22.75	24	1.334	-0.13	0.057	0.076
	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Left Tilted	0mm	Ant 0	DSI 2	167300	836.5	22.65	24	1.365	0.08	0.064	0.087
	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Right Cheek	0mm	Ant 1	DSI 2	167300	836.5	22.55	23.5	1.245	0.15	0.649	0.808
	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Right Cheek	0mm	Ant 1	DSI 2	167300	836.5	22.33	23.5	1.309	0.05	0.609	0.797
	FR1 n5	20M	QPSK	100	0	DFT-SCS-15KHz	Right Cheek	0mm	Ant 1	DSI 2	167300	836.5	22.29	23.5	1.321	-0.1	0.619	0.818
	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Right Tilted	0mm	Ant 1	DSI 2	167300	836.5	22.55	23.5	1.245	-0.18	0.630	0.784
	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Right Tilted	0mm	Ant 1	DSI 2	167300	836.5	22.33	23.5	1.309	0.01	0.594	0.778
06	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Left Cheek	0mm	Ant 1	DSI 2	167300	836.5	22.55	23.5	1.245	-0.06	0.967	1.203
	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Left Cheek	0mm	Ant 1	DSI 2	167300	836.5	22.33	23.5	1.309	0.11	0.891	1.166
	FR1 n5	20M	QPSK	100	0	DFT-SCS-15KHz	Left Cheek	0mm	Ant 1	DSI 2	167300	836.5	22.29	23.5	1.321	0.02	0.901	1.190
	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Left Tilted	0mm	Ant 1	DSI 2	167300	836.5	22.55	23.5	1.245	-0.14	0.868	1.080
	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Left Tilted	0mm	Ant 1	DSI 2	167300	836.5	22.33	23.5	1.309	0.16	0.813	1.064
	FR1 n5	20M	QPSK	100	0	DFT-SCS-15KHz	Left Tilted	0mm	Ant 1	DSI 2	167300	836.5	22.29	23.5	1.321	0.05	0.783	1.035
	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Left Cheek	0mm	Ant 1	DSI2 Simultaneous	167300	836.5	21.34	22.2	1.219	0.04	0.698	0.851



FCC SAR Test Report

Report No. : FA192317-02

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
1750MHz																		
	LTE Band 66	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 2	132322	1745	23.16	24	1.213	-0.13	0.074	0.090
	LTE Band 66	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 0	DSI 2	132322	1745	23.09	24	1.233	0.04	0.057	0.070
	LTE Band 66	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	DSI 2	132322	1745	23.16	24	1.213	0.08	0.054	0.066
	LTE Band 66	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 0	DSI 2	132322	1745	23.09	24	1.233	0.02	0.045	0.055
	LTE Band 66	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	132322	1745	23.16	24	1.213	0.06	0.080	0.097
	LTE_CA_66C	20M	QPSK	1	99	-	Left Cheek	0mm	Ant 0	DSI 2	132322+132520	1745+1764.8	23.11	24	1.227	0.05	0.075	0.092
	LTE Band 66	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 0	DSI 2	132322	1745	23.09	24	1.233	0.02	0.073	0.090
	LTE Band 66	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	DSI 2	132322	1745	23.16	24	1.213	-0.16	0.064	0.078
	LTE Band 66	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 0	DSI 2	132322	1745	23.09	24	1.233	-0.15	0.048	0.059
	LTE Band 66	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	132322	1745	17.53	18.1	1.140	0.02	0.519	0.592
	LTE Band 66	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	DSI 2	132322	1745	17.51	18.1	1.146	-0.16	0.399	0.457
	LTE Band 66	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 2	132322	1745	17.53	18.1	1.140	0.09	0.561	0.640
	LTE Band 66	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 1	DSI 2	132322	1745	17.51	18.1	1.146	0.02	0.446	0.511
	LTE Band 66	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	132322	1745	17.53	18.1	1.140	-0.18	0.839	0.957
	LTE Band 66	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	132072	1720	17.29	18.1	1.205	0.01	0.791	0.953
	LTE Band 66	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	132572	1770	17.19	18.1	1.233	0.09	0.875	1.079
	LTE Band 66	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 1	DSI 2	132322	1745	17.51	18.1	1.146	0.03	0.647	0.741
	LTE Band 66	20M	QPSK	100	0	-	Left Cheek	0mm	Ant 1	DSI 2	132322	1745	17.35	18.1	1.189	-0.16	0.674	0.801
	LTE Band 66	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 2	132322	1745	17.53	18.1	1.140	-0.14	0.895	1.021
	LTE Band 66	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 2	132072	1720	17.29	18.1	1.205	0.16	0.902	1.087
07	LTE Band 66	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 2	132572	1770	17.19	18.1	1.233	-0.02	1.010	1.245
	LTE_CA_66C	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 2	132572+132374	1770+1750.2	16.34	18.10	1.500	0.03	0.794	1.191
	LTE Band 66	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 1	DSI 2	132322	1745	17.51	18.1	1.146	0.08	0.713	0.817
	LTE Band 66	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 1	DSI 2	132072	1720	17.19	18.1	1.233	0.09	0.685	0.845
	LTE Band 66	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 1	DSI 2	132572	1770	17.44	18.1	1.164	0.03	0.731	0.851
	LTE Band 66	20M	QPSK	100	0	-	Left Tilted	0mm	Ant 1	DSI 2	132322	1745	17.35	18.1	1.189	0.06	0.726	0.863
	LTE Band 66	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI2 Simultaneous	132572	1770	15.69	16.80	1.291	-0.08	0.761	0.983
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Right Cheek	0mm	Ant 0	DSI 2	349000	1745	22.63	24	1.371	-0.19	0.036	0.049
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Right Cheek	0mm	Ant 0	DSI 2	349000	1745	22.49	24	1.416	0.02	0.038	0.054
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Right Tilted	0mm	Ant 0	DSI 2	349000	1745	22.63	24	1.371	0.05	0.023	0.032
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Right Tilted	0mm	Ant 0	DSI 2	349000	1745	22.49	24	1.416	0.01	0.036	0.051
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Left Cheek	0mm	Ant 0	DSI 2	349000	1745	22.63	24	1.371	0.08	0.042	0.058
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Left Cheek	0mm	Ant 0	DSI 2	349000	1745	22.49	24	1.416	0.08	0.044	0.062
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Left Tilted	0mm	Ant 0	DSI 2	349000	1745	22.63	24	1.371	0.09	0.016	0.022
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Left Tilted	0mm	Ant 0	DSI 2	349000	1745	22.49	24	1.416	0.03	0.029	0.041
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Right Cheek	0mm	Ant 1	DSI 2	349000	1745	16.53	17.5	1.250	0.03	0.452	0.565
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Right Cheek	0mm	Ant 1	DSI 2	349000	1745	16.35	17.5	1.303	0.06	0.452	0.589
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Right Tilted	0mm	Ant 1	DSI 2	349000	1745	16.53	17.5	1.250	-0.16	0.579	0.724
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Right Tilted	0mm	Ant 1	DSI 2	349000	1745	16.35	17.5	1.303	-0.14	0.557	0.726
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Left Cheek	0mm	Ant 1	DSI 2	349000	1745	16.53	17.5	1.250	-0.02	0.850	1.063
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Left Cheek	0mm	Ant 1	DSI 2	349000	1745	16.35	17.5	1.303	0.08	0.889	1.159
	FR1 n66	40M	QPSK	216	0	DFT-SCS-15KHz	Left Cheek	0mm	Ant 1	DSI 2	349000	1745	16.29	17.5	1.321	0.09	0.861	1.138
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Left Tilted	0mm	Ant 1	DSI 2	349000	1745	16.53	17.5	1.250	0.16	0.897	1.121
08	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Left Tilted	0mm	Ant 1	DSI 2	349000	1745	16.35	17.5	1.303	0.05	0.955	1.245
	FR1 n66	40M	QPSK	216	0	DFT-SCS-15KHz	Left Tilted	0mm	Ant 1	DSI 2	349000	1745	16.29	17.5	1.321	0.02	0.915	1.209
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Left Tilted	0mm	Ant 1	DSI2 Simultaneous	349000	1745	14.94	16.20	1.337	-0.04	0.690	0.922

Sporton International (Kunshan) Inc.

TEL : 86-512-57900158 / FAX : 86-512-57900958

FCC ID : IHD756AB3

Page 61 of 113

Issued Date : Jan. 17. 2022

Form version. : 200414



FCC SAR Test Report

Report No. : FA192317-02

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
1900MHz																		
	GSM1900	-	-	-	-	GPRS (3 Tx slots)	Right Cheek	0mm	Ant 0	DSI 2	661	1880	25.17	26.5	1.358	0.03	0.009	0.012
	GSM1900	-	-	-	-	GPRS (3 Tx slots)	Right Tilted	0mm	Ant 0	DSI 2	661	1880	25.17	26.5	1.358	0.09	0.003	0.004
09	GSM1900	-	-	-	-	GPRS (3 Tx slots)	Left Cheek	0mm	Ant 0	DSI 2	661	1880	25.17	26.5	1.358	-0.04	0.016	0.022
	GSM1900	-	-	-	-	GPRS (3 Tx slots)	Left Tilted	0mm	Ant 0	DSI 2	661	1880	25.17	26.5	1.358	-0.01	0.002	0.003
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	DSI 2	9400	1880	24.41	25	1.146	-0.18	0.034	0.039
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 0	DSI 2	9400	1880	24.41	25	1.146	0.07	0.002	0.002
10	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 0	DSI 2	9400	1880	24.41	25	1.146	0.04	0.049	0.056
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 0	DSI 2	9400	1880	24.41	25	1.146	-0.15	0.033	0.038
	LTE Band 2	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI 2	18900	1880	23.15	24	1.216	0.04	0.032	0.039
	LTE Band 2	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 0	DSI 2	18900	1880	22.83	24	1.309	0.01	0.002	0.003
	LTE Band 2	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	DSI 2	18900	1880	23.15	24	1.216	0.08	0.003	0.004
	LTE Band 2	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 0	DSI 2	18900	1880	22.83	24	1.309	0.09	0.001	0.001
	LTE Band 2	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI 2	18900	1880	23.15	24	1.216	-0.02	0.048	0.059
	LTE Band 2	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 0	DSI 2	18900	1880	22.83	24	1.309	0.01	0.036	0.047
	LTE Band 2	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	DSI 2	18900	1880	23.15	24	1.216	0.05	0.032	0.039
	LTE Band 2	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 0	DSI 2	18900	1880	22.83	24	1.309	0.03	0.030	0.039
	LTE Band 2	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI 2	18900	1880	17.04	17.9	1.219	-0.02	0.386	0.471
	LTE Band 2	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	DSI 2	18900	1880	17	17.9	1.230	0.16	0.326	0.401
	LTE Band 2	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI 2	18900	1880	17.04	17.9	1.219	0.04	0.492	0.600
	LTE Band 2	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 1	DSI 2	18900	1880	17	17.9	1.230	-0.08	0.405	0.498
	LTE Band 2	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	18900	1880	17.04	17.9	1.219	0.05	0.765	0.933
	LTE Band 2	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	18700	1860	16.85	17.9	1.274	0.02	0.863	1.099
	LTE Band 2	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI 2	19100	1900	16.85	17.9	1.274	-0.12	0.643	0.819
	LTE Band 2	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 1	DSI 2	18900	1880	17	17.9	1.230	0.04	0.601	0.739
	LTE Band 2	20M	QPSK	100	0	-	Left Cheek	0mm	Ant 1	DSI 2	18900	1880	16.97	17.9	1.239	0.04	0.598	0.741
	LTE Band 2	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 2	18900	1880	17.04	17.9	1.219	0.01	0.839	1.023
11	LTE Band 2	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 2	18700	1860	16.85	17.9	1.274	-0.06	0.974	1.240
	LTE Band 2	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI 2	19100	1900	16.85	17.9	1.274	0.05	0.834	1.062
	LTE Band 2	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 1	DSI 2	18900	1880	17	17.9	1.230	0.02	0.664	0.817
	LTE Band 2	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 1	DSI 2	18700	1860	16.86	17.9	1.271	0.03	0.653	0.830
	LTE Band 2	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 1	DSI 2	19100	1900	16.98	17.9	1.236	0.04	0.689	0.852
	LTE Band 2	20M	QPSK	100	0	-	Left Tilted	0mm	Ant 1	DSI 2	18900	1880	16.97	17.9	1.239	0.01	0.672	0.832
	LTE Band 2	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI2 Simultaneous	18700	1860	16.09	16.60	1.125	0.08	0.660	0.742
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Right Cheek	0mm	Ant 0	DSI 2	376000	1880	22.55	24	1.396	0.13	0.020	0.028
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Right Cheek	0mm	Ant 0	DSI 2	376000	1880	22.41	24	1.442	0.16	0.019	0.027
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Right Tilted	0mm	Ant 0	DSI 2	376000	1880	22.55	24	1.396	-0.12	0.023	0.032
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Right Tilted	0mm	Ant 0	DSI 2	376000	1880	22.41	24	1.442	0.04	0.016	0.023
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Left Cheek	0mm	Ant 0	DSI 2	376000	1880	22.55	24	1.396	0.01	0.030	0.042
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Left Cheek	0mm	Ant 0	DSI 2	376000	1880	22.41	24	1.442	0.08	0.027	0.039
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Left Tilted	0mm	Ant 0	DSI 2	376000	1880	22.55	24	1.396	-0.08	0.026	0.036
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Left Tilted	0mm	Ant 0	DSI 2	376000	1880	22.41	24	1.442	0.16	0.024	0.035
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Right Cheek	0mm	Ant 1	DSI 2	376000	1880	16.37	17.8	1.390	0.04	0.349	0.485
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Right Cheek	0mm	Ant 1	DSI 2	376000	1880	16.31	17.8	1.409	-0.08	0.317	0.447
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Right Tilted	0mm	Ant 1	DSI 2	376000	1880	16.37	17.8	1.390	0.05	0.451	0.627
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Right Tilted	0mm	Ant 1	DSI 2	376000	1880	16.31	17.8	1.409	0.04	0.383	0.540
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Left Cheek	0mm	Ant 1	DSI 2	376000	1880	16.37	17.8	1.390	-0.06	0.673	0.935
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Left Cheek	0mm	Ant 1	DSI 2	372000	1860	16.29	17.8	1.416	0.03	0.654	0.926
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Left Cheek	0mm	Ant 1	DSI 2	380000	1900	16.31	17.8	1.409	0.01	0.632	0.891
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Left Cheek	0mm	Ant 1	DSI 2	376000	1880	16.31	17.8	1.409	-0.12	0.614	0.865
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Left Cheek	0mm	Ant 1	DSI 2	372000	1860	16.22	17.8	1.439	0.02	0.608	0.875
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Left Cheek	0mm	Ant 1	DSI 2	380000	1900	16.24	17.8	1.432	0.09	0.622	0.891
	FR1 n2	20M	QPSK	100	0	DFT-SCS-15KHz	Left Cheek	0mm	Ant 1	DSI 2	376000	1880	16.25	17.8	1.429	0.03	0.584	0.834
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Left Tilted	0mm	Ant 1	DSI 2	376000	1880	16.37	17.8	1.390	0.05	0.723	1.005

Sporton International (Kunshan) Inc.

TEL : 86-512-57900158 / FAX : 86-512-57900958

FCC ID : IHD756AB3

Page 62 of 113

Issued Date : Jan. 17. 2022

Form version. : 200414



FCC SAR Test Report

Report No. : FA192317-02

12	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Left Tilted	0mm	Ant 1	DSI 2	372000	1860	16.29	17.8	1.416	0.09	0.886	1.254
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Left Tilted	0mm	Ant 1	DSI 2	380000	1900	16.31	17.8	1.409	-0.08	0.684	0.964
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Left Tilted	0mm	Ant 1	DSI 2	376000	1880	16.31	17.8	1.409	-0.02	0.689	0.971
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Left Tilted	0mm	Ant 1	DSI 2	372000	1860	16.22	17.8	1.439	0.01	0.862	1.240
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Left Tilted	0mm	Ant 1	DSI 2	380000	1900	16.24	17.8	1.432	0.05	0.723	1.035
	FR1 n2	20M	QPSK	100	0	DFT-SCS-15KHz	Left Tilted	0mm	Ant 1	DSI 2	376000	1880	16.25	17.8	1.429	0.05	0.727	1.039
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Left Tilted	0mm	Ant 1	DSI2 Simultaneous	372000	1860	15.37	16.50	1.297	0.02	0.695	0.902

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
2600MHz																	
	LTE Band 7	20M	QPSK	1	0	Right Cheek	0mm	Ant 0	DSI 2	21100	2535	23.53	24	1.114	0.1	0.096	0.107
	LTE Band 7	20M	QPSK	50	0	Right Cheek	0mm	Ant 0	DSI 2	21100	2535	23.47	24	1.130	0.08	0.075	0.085
	LTE Band 7	20M	QPSK	1	0	Right Tilted	0mm	Ant 0	DSI 2	21100	2535	23.53	24	1.114	0.05	0.037	0.041
	LTE Band 7	20M	QPSK	50	0	Right Tilted	0mm	Ant 0	DSI 2	21100	2535	23.47	24	1.130	0.09	0.045	0.051
	LTE Band 7	20M	QPSK	1	0	Left Cheek	0mm	Ant 0	DSI 2	21100	2535	23.53	24	1.114	-0.08	0.057	0.064
	LTE Band 7	20M	QPSK	50	0	Left Cheek	0mm	Ant 0	DSI 2	21100	2535	23.47	24	1.130	-0.02	0.044	0.050
	LTE Band 7	20M	QPSK	1	0	Left Tilted	0mm	Ant 0	DSI 2	21100	2535	23.53	24	1.114	0.01	0.063	0.070
	LTE Band 7	20M	QPSK	50	0	Left Tilted	0mm	Ant 0	DSI 2	21100	2535	23.47	24	1.130	0.06	0.038	0.043
	LTE Band 7	20M	QPSK	1	0	Right Cheek	0mm	Ant 1	DSI 2	21100	2535	17.55	18.5	1.245	-0.06	0.516	0.642
	LTE Band 7	20M	QPSK	50	0	Right Cheek	0mm	Ant 1	DSI 2	21100	2535	17.51	18.5	1.256	-0.17	0.424	0.533
	LTE Band 7	20M	QPSK	1	0	Right Tilted	0mm	Ant 1	DSI 2	21100	2535	17.55	18.5	1.245	-0.06	0.615	0.765
	LTE Band 7	20M	QPSK	50	0	Right Tilted	0mm	Ant 1	DSI 2	21100	2535	17.51	18.5	1.256	0.05	0.504	0.633
	LTE Band 7	20M	QPSK	1	0	Left Cheek	0mm	Ant 1	DSI 2	21100	2535	17.55	18.5	1.245	0.04	0.726	0.904
	LTE Band 7	20M	QPSK	1	0	Left Cheek	0mm	Ant 1	DSI 2	20850	2510	17.43	18.5	1.279	0.02	0.688	0.880
	LTE Band 7	20M	QPSK	1	0	Left Cheek	0mm	Ant 1	DSI 2	21350	2560	17.38	18.5	1.294	0.01	0.781	1.011
	LTE Band 7	20M	QPSK	50	0	Left Cheek	0mm	Ant 1	DSI 2	21100	2535	17.51	18.5	1.256	-0.18	0.587	0.737
	LTE Band 7	20M	QPSK	100	0	Left Cheek	0mm	Ant 1	DSI 2	21100	2535	17.49	18.5	1.262	0.03	0.583	0.736
	LTE Band 7	20M	QPSK	1	0	Left Tilted	0mm	Ant 1	DSI 2	21100	2535	17.55	18.5	1.245	-0.08	0.893	1.111
	LTE Band 7	20M	QPSK	1	0	Left Tilted	0mm	Ant 1	DSI 2	20850	2510	17.43	18.5	1.279	-0.14	0.855	1.094
13	LTE Band 7	20M	QPSK	1	0	Left Tilted	0mm	Ant 1	DSI 2	21350	2560	17.38	18.5	1.294	0.11	0.956	1.237
	LTE Band 7	20M	QPSK	50	0	Left Tilted	0mm	Ant 1	DSI 2	21100	2535	17.51	18.5	1.256	0.06	0.716	0.899
	LTE Band 7	20M	QPSK	50	0	Left Tilted	0mm	Ant 1	DSI 2	20850	2510	17.38	18.5	1.294	-0.12	0.694	0.898
	LTE Band 7	20M	QPSK	50	0	Left Tilted	0mm	Ant 1	DSI 2	21350	2560	17.44	18.5	1.276	0.13	0.772	0.985
	LTE Band 7	20M	QPSK	100	0	Left Tilted	0mm	Ant 1	DSI 2	21100	2535	17.49	18.5	1.262	-0.06	0.712	0.898
	LTE Band 7	20M	QPSK	1	0	Left Tilted	0mm	Ant 1	DSI2 Simultaneous	21350	2560	16.24	17.20	1.247	0.05	0.680	0.848

Sporton International (Kunshan) Inc.

TEL : 86-512-57900158 / FAX : 86-512-57900958

FCC ID : IHD756AB3

Page 63 of 113

Issued Date : Jan. 17. 2022

Form version. : 200414



FCC SAR Test Report

Report No. : FA192317-02

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
3500-3900MHz																				
14	LTE Band 48	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 2	DSI 2	56150	3641	22.54	24	1.400	62.9	1.006	0.01	0.672	0.946
	LTE Band 48	20M	QPSK	1	99	-	Right Cheek	0mm	Ant 2	DSI 2	56150+56348	3641+3660.8	22.33	24	1.469	62.9	1.006	0.05	0.633	0.935
	LTE Band 48	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 2	DSI 2	55340	3560	22.42	24	1.439	62.9	1.006	0.05	0.611	0.884
	LTE Band 48	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 2	DSI 2	55830	3609	22.44	24	1.432	62.9	1.006	0.02	0.628	0.905
	LTE Band 48	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 2	DSI 2	56640	3690	22.47	24	1.422	62.9	1.006	-0.14	0.540	0.773
	LTE Band 48	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 2	DSI 2	56150	3641	21.55	23	1.396	62.9	1.006	-0.07	0.420	0.590
	LTE Band 48	20M	QPSK	100	0	-	Right Cheek	0mm	Ant 2	DSI 2	56150	3641	21.53	23	1.403	62.9	1.006	0.04	0.465	0.656
	LTE Band 48	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 2	DSI 2	56150	3641	22.54	24	1.400	62.9	1.006	0.02	0.319	0.449
	LTE Band 48	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 2	DSI 2	56150	3641	21.55	23	1.396	62.9	1.006	0.01	0.266	0.374
	LTE Band 48	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 2	DSI 2	56150	3641	22.54	24	1.400	62.9	1.006	-0.18	0.181	0.255
	LTE Band 48	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 2	DSI 2	56150	3641	21.55	23	1.396	62.9	1.006	-0.12	0.143	0.201
	LTE Band 48	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 2	DSI 2	56150	3641	22.54	24	1.400	62.9	1.006	0.13	0.127	0.179
	LTE Band 48	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 2	DSI 2	56150	3641	21.55	23	1.396	62.9	1.006	0.02	0.107	0.150
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Right Cheek	0mm	Ant 2	DSI 2	656000	3840	19.78	20.60	1.208	-	-	0.03	0.978	1.181
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 2	DSI 2	656000	3840	19.73	20.60	1.222	-	-	0.05	0.958	1.170
	FR1 n77 Part27O	100M	QPSK	270	0	DFT-SCS-30KHz	Right Cheek	0mm	Ant 2	DSI 2	656000	3840	19.69	20.60	1.233	-	-	0.07	0.946	1.167
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Right Tilted	0mm	Ant 2	DSI 2	656000	3840	19.78	20.60	1.208	-	-	0.02	0.784	0.947
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Right Tilted	0mm	Ant 2	DSI 2	656000	3840	19.73	20.60	1.222	-	-	-0.03	0.738	0.902
	FR1 n77 Part27O	100M	QPSK	270	0	DFT-SCS-30KHz	Right Tilted	0mm	Ant 2	DSI 2	656000	3840	19.69	20.60	1.233	-	-	0.01	0.712	0.878
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Left Cheek	0mm	Ant 2	DSI 2	656000	3840	19.78	20.60	1.208	-	-	-0.04	0.281	0.339
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 2	DSI 2	656000	3840	19.73	20.60	1.222	-	-	0.02	0.276	0.337
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Left Tilted	0mm	Ant 2	DSI 2	656000	3840	19.78	20.60	1.208	-	-	-0.09	0.261	0.315
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 2	DSI 2	656000	3840	19.73	20.60	1.222	-	-	0.06	0.254	0.310
	FR1 n77 Part27O HPUE	100M	QPSK	1	1	DFT-SCS-30KHz	Right Cheek	0mm	Ant 2	DSI2 Simultaneous	656000	3840	21.82	22.30	1.117	50	1.000	-0.01	0.660	0.737
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Right Cheek	0mm	Ant 2	DSI2 Simultaneous	656000	3840	18.67	19.30	1.156	-	-	0.05	0.658	0.761
	FR1 n77 Part27O HPUE	100M	QPSK	1	1	DFT-SCS-30KHz	Right Cheek	0mm	Ant 2	DSI 2	656000	3840	23.09	23.60	1.125	50	1.000	0.02	0.998	1.122
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Right Cheek	0mm	Ant 2	DSI 2	633334	3500.01	20.21	20.60	1.094	-	-	0.07	1.063	1.163
15	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 2	DSI 2	633334	3500.01	19.97	20.60	1.156	-	-	0.02	1.084	1.253
	FR1 n77 Part27Q	100M	QPSK	270	0	DFT-SCS-30KHz	Right Cheek	0mm	Ant 2	DSI 2	633334	3500.01	19.87	20.60	1.183	-	-	0.02	1.056	1.249
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Right Tilted	0mm	Ant 2	DSI 2	633334	3500.01	20.21	20.60	1.094	-	-	-0.03	0.374	0.409
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Right Tilted	0mm	Ant 2	DSI 2	633334	3500.01	19.97	20.60	1.156	-	-	0.01	0.368	0.425
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Left Cheek	0mm	Ant 2	DSI 2	633334	3500.01	20.21	20.60	1.094	-	-	-0.04	0.185	0.202
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 2	DSI 2	633334	3500.01	19.97	20.60	1.156	-	-	0.06	0.182	0.210
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Left Tilted	0mm	Ant 2	DSI 2	633334	3500.01	20.21	20.60	1.094	-	-	-0.04	0.164	0.179
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 2	DSI 2	633334	3500.01	19.97	20.60	1.156	-	-	0.02	0.159	0.184
	FR1 n77 Part27Q HPUE	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 2	DSI2 Simultaneous	633334	3500.01	21.39	22.30	1.233	50	1.000	0.06	0.722	0.890
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 2	DSI2 Simultaneous	633334	3500.01	18.36	19.30	1.242	-	-	0.01	0.698	0.867
	FR1 n77 Part27Q HPUE	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 2	DSI 2	633334	3500.01	23.04	23.60	1.138	50	1.000	0.08	1.090	1.240
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Right Cheek	0mm	Ant 7	DSI 2	656000	3840	22.74	24.00	1.337	-	-	-0.03	0.111	0.148
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 7	DSI 2	656000	3840	22.48	24.00	1.419	-	-	0.01	0.105	0.149
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Right Tilted	0mm	Ant 7	DSI 2	656000	3840	22.74	24.00	1.337	-	-	-0.08	0.145	0.194
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Right Tilted	0mm	Ant 7	DSI 2	656000	3840	22.48	24.00	1.419	-	-	0.02	0.131	0.186
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Left Cheek	0mm	Ant 7	DSI 2	656000	3840	22.74	24.00	1.337	-	-	-0.09	0.055	0.074
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 7	DSI 2	656000	3840	22.48	24.00	1.419	-	-	0.09	0.054	0.077
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Left Tilted	0mm	Ant 7	DSI 2	656000	3840	22.74	24.00	1.337	-	-	0.04	0.066	0.088
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 7	DSI 2	656000	3840	22.48	24.00	1.419	-	-	0.02	0.058	0.082
	FR1 n77 Part27O HPUE	100M	QPSK	1	1	DFT-SCS-30KHz	Right Tilted	0mm	Ant 7	DSI 2	656000	3840	25.68	27.00	1.355	50	1.000	-0.04	0.148	0.201
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Right Cheek	0mm	Ant 7	DSI 2	633334	3500.01	22.67	24.00	1.358	-	-	-0.03	0.448	0.609
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 7	DSI 2	633334	3500.01	22.43	24.00	1.435	-	-	0.09	0.435	0.624
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Right Tilted	0mm	Ant 7	DSI 2	633334	3500.01	22.67	24.00	1.358	-	-	0.03	0.422	0.573
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Right Tilted	0mm	Ant 7	DSI 2	633334	3500.01	22.43	24.00	1.435	-	-	0.04	0.416	0.597
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Left Cheek	0mm	Ant 7	DSI 2	633334	3500.01	22.67	24.00	1.358	-	-	0.08	0.331	0.450

Sporton International (Kunshan) Inc.

TEL : 86-512-57900158 / FAX : 86-512-57900958

FCC ID : IHD756AB3

Issued Date : Jan. 17. 2022

Form version. : 200414



FCC SAR Test Report

Report No. : FA192317-02

FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 7	DSI 2	633334	3500.01	22.43	24.00	1.435	-	-	0.02	0.328	0.471
FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Left Tilted	0mm	Ant 7	DSI 2	633334	3500.01	22.67	24.00	1.358	-	-	-0.01	0.338	0.459
FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 7	DSI 2	633334	3500.01	22.43	24.00	1.435	-	-	0.03	0.336	0.482
FR1 n77 Part27Q HPUE	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 7	DSI 2	633334	3500.01	25.26	27.00	1.493	50	1.000	-0.05	0.423	0.631

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Pmax (dBm)	Duty Cycle %	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
3500-3900MHz for SRS Ant																		
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Right Cheek	0mm	Ant 3	DSI 2	656000	3840	23.04	23.00	10	0.02	0.014	0.003
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 3	DSI 2	656000	3840	22.70	23.00	10	0.02	0.012	0.003
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Right Tilted	0mm	Ant 3	DSI 2	656000	3840	23.04	23.00	10	0.09	0.010	0.002
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Right Tilted	0mm	Ant 3	DSI 2	656000	3840	22.70	23.00	10	-0.03	0.009	0.002
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Left Cheek	0mm	Ant 3	DSI 2	656000	3840	23.04	23.00	10	0.07	0.006	0.001
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 3	DSI 2	656000	3840	22.70	23.00	10	0.04	0.003	0.001
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Left Tilted	0mm	Ant 3	DSI 2	656000	3840	23.04	23.00	10	0.05	0.005	0.001
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 3	DSI 2	656000	3840	22.70	23.00	10	-0.03	0.002	0.000
	FR1 n77 Part27Q HPUE	100M	QPSK	1	1	DFT-SCS-30KHz	Right Cheek	0mm	Ant 3	DSI 2	656000	3840	26.00	23.00	10	0.01	0.015	0.002
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Right Cheek	0mm	Ant 3	DSI 2	633334	3500.01	23.02	23.00	10	0.09	0.011	0.002
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 3	DSI 2	633334	3500.01	22.65	23.00	10	0.03	0.009	0.002
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Right Tilted	0mm	Ant 3	DSI 2	633334	3500.01	23.02	23.00	10	0.04	0.007	0.001
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Right Tilted	0mm	Ant 3	DSI 2	633334	3500.01	22.65	23.00	10	0.08	0.006	0.001
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Left Cheek	0mm	Ant 3	DSI 2	633334	3500.01	23.02	23.00	10	0.02	0.008	0.002
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 3	DSI 2	633334	3500.01	22.65	23.00	10	0.06	0.005	0.001
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Left Tilted	0mm	Ant 3	DSI 2	633334	3500.01	23.02	23.00	10	-0.02	0.004	0.001
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 3	DSI 2	633334	3500.01	22.65	23.00	10	0.04	0.002	0.000
	FR1 n77 Part27Q HPUE	100M	QPSK	1	1	DFT-SCS-30KHz	Right Cheek	0mm	Ant 3	DSI 2	633334	3500.01	25.91	23.00	10	0.09	0.012	0.001
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Right Cheek	0mm	Ant 8	DSI 2	656000	3840	23.09	23.00	10	0.04	0.003	0.001
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 8	DSI 2	656000	3840	22.88	23.00	10	0.05	0.001	0.000
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Right Tilted	0mm	Ant 8	DSI 2	656000	3840	23.09	23.00	10	-0.03	0.003	0.001
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Right Tilted	0mm	Ant 8	DSI 2	656000	3840	22.88	23.00	10	0.08	0.002	0.000
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Left Cheek	0mm	Ant 8	DSI 2	656000	3840	23.09	23.00	10	0.02	0.002	0.000
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 8	DSI 2	656000	3840	22.88	23.00	10	0.06	0.001	0.000
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Left Tilted	0mm	Ant 8	DSI 2	656000	3840	23.09	23.00	10	0.09	0.003	0.001
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 8	DSI 2	656000	3840	22.88	23.00	10	0.04	0.002	0.000
	FR1 n77 Part27Q HPUE	100M	QPSK	1	1	DFT-SCS-30KHz	Right Tilted	0mm	Ant 8	DSI 2	656000	3840	26.32	23.00	10	-0.03	0.003	0.000
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Right Cheek	0mm	Ant 8	DSI 2	633334	3500.01	22.99	23.00	10	-0.04	0.003	0.001
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Right Cheek	0mm	Ant 8	DSI 2	633334	3500.01	22.82	23.00	10	0.05	0.002	0.000
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Right Tilted	0mm	Ant 8	DSI 2	633334	3500.01	22.99	23.00	10	-0.08	0.003	0.001
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Right Tilted	0mm	Ant 8	DSI 2	633334	3500.01	22.82	23.00	10	-0.02	0.001	0.000
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Left Cheek	0mm	Ant 8	DSI 2	633334	3500.01	22.99	23.00	10	-0.08	0.003	0.001
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Left Cheek	0mm	Ant 8	DSI 2	633334	3500.01	22.82	23.00	10	0.03	0.002	0.000
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Left Tilted	0mm	Ant 8	DSI 2	633334	3500.01	22.99	23.00	10	-0.07	0.002	0.000
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Left Tilted	0mm	Ant 8	DSI 2	633334	3500.01	22.82	23.00	10	0.04	0.001	0.000
	FR1 n77 Part27Q HPUE	100M	QPSK	1	1	DFT-SCS-30KHz	Right Tilted	0mm	Ant 8	DSI 2	633334	3500.01	26.23	23.00	10	-0.08	0.004	0.000



Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
WLAN/Bluetooth																
16	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 4+6	Standalone	11	2462	21.05	22.00	1.245	97.87	1.022	0.07	0.988	1.257
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 4+6	Standalone	11	2462	21.05	22.00	1.245	97.87	1.022	0.03	0.901	1.146
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 4+6	Standalone	11	2462	21.05	22.00	1.245	97.87	1.022	0.06	0.471	0.599
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 4+6	Standalone	11	2462	21.05	22.00	1.245	97.87	1.022	0.04	0.484	0.616
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 4+6	Standalone	1	2412	20.89	21.50	1.151	97.87	1.022	-0.02	0.928	1.091
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 4+6	Standalone	1	2412	20.89	21.50	1.151	97.87	1.022	0.03	0.856	1.007
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 4+6	Simultaneous For DBS Only	11	2462	17.13	18.50	1.371	97.87	1.022	0.01	0.524	0.734
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 4+6	Simultaneous WWAN + Non-DBS	11	2462	17.55	19.00	1.396	97.87	1.022	-0.05	0.400	0.571
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 4+6	Simultaneous For WWAN+DBS	11	2462	14.88	16.00	1.294	97.87	1.022	0.04	0.218	0.288
17	Bluetooth	1Mbps	Right Cheek	0mm	Ant 4	Full	0	2402	13.53	14.00	1.115	76.79	1.302	0.03	0.196	0.285
	Bluetooth	1Mbps	Right Tilted	0mm	Ant 4	Full	0	2402	13.53	14.00	1.115	76.79	1.302	0.02	0.192	0.279
	Bluetooth	1Mbps	Left Cheek	0mm	Ant 4	Full	0	2402	13.53	14.00	1.115	76.79	1.302	0.06	0.110	0.160
	Bluetooth	1Mbps	Left Tilted	0mm	Ant 4	Full	0	2402	13.53	14.00	1.115	76.79	1.302	-0.04	0.102	0.148
	Bluetooth	1Mbps	Right Cheek	0mm	Ant 6	Full	78	2480	15.32	16.50	1.314	76.82	1.302	0.01	0.002	0.003
	Bluetooth	1Mbps	Right Tilted	0mm	Ant 6	Full	78	2480	15.32	16.50	1.314	76.82	1.302	0.06	0.000	0.000
	Bluetooth	1Mbps	Left Cheek	0mm	Ant 6	Full	78	2480	15.32	16.50	1.314	76.82	1.302	0.03	0.000	0.000
	Bluetooth	1Mbps	Left Tilted	0mm	Ant 6	Full	78	2480	15.32	16.50	1.314	76.82	1.302	0.04	0.000	0.000
	WLAN5.2GHz	802.11n-HT40 MCS0	Right Cheek	0mm	Ant 5+6	Standalone	38	5190	19.97	21.50	1.422	100	1.000	0.03	0.561	0.798
18	WLAN5.2GHz	802.11n-HT40 MCS0	Right Tilted	0mm	Ant 5+6	Standalone	38	5190	19.97	21.50	1.422	100	1.000	-0.08	0.687	0.977
	WLAN5.2GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 5+6	Standalone	38	5190	19.97	21.50	1.422	100	1.000	0.04	0.405	0.576
	WLAN5.2GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 5+6	Standalone	38	5190	19.97	21.50	1.422	100	1.000	0.09	0.521	0.741
	WLAN5.2GHz	802.11n-HT40 MCS0	Right Tilted	0mm	Ant 5+6	Standalone	46	5230	19.12	21.00	1.542	100	1.000	0.06	0.620	0.956
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 5+6	Simultaneous For DBS Only	42	5210	17.42	18.50	1.282	100	1.000	-0.02	0.499	0.640
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 5+6	Simultaneous For WWAN+DBS&WWAN+ Non-DBS	42	5210	14.87	16.00	1.297	100	1.000	0.09	0.200	0.259
	WLAN5.5GHz	802.11a 6Mbps	Right Cheek	0mm	Ant 5+6	Full	124	5620	21.07	22.50	1.389	100	1.000	0.06	0.785	1.090
19	WLAN5.5GHz	802.11a 6Mbps	Right Tilted	0mm	Ant 5+6	Full	124	5620	21.07	22.50	1.389	100	1.000	0.07	0.863	1.199
	WLAN5.5GHz	802.11a 6Mbps	Left Cheek	0mm	Ant 5+6	Full	124	5620	21.07	22.50	1.389	100	1.000	0.03	0.658	0.914
	WLAN5.5GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 5+6	Full	124	5620	21.07	22.50	1.389	100	1.000	-0.06	0.855	1.188
	WLAN5.5GHz	802.11a 6Mbps	Right Cheek	0mm	Ant 5+6	Full	116	5580	21.06	22.50	1.393	100	1.000	0.05	0.736	1.025
	WLAN5.5GHz	802.11a 6Mbps	Right Tilted	0mm	Ant 5+6	Full	116	5580	21.06	22.50	1.393	100	1.000	0.06	0.816	1.137
	WLAN5.5GHz	802.11a 6Mbps	Left Cheek	0mm	Ant 5+6	Full	116	5580	21.06	22.50	1.393	100	1.000	-0.03	0.611	0.851
	WLAN5.5GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 5+6	Full	116	5580	21.06	22.50	1.393	100	1.000	0.02	0.787	1.096
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 5+6	Simultaneous For DBS Only	106	5530	18.98	20.50	1.418	100	1.000	0.05	0.516	0.732
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 5+6	Simultaneous For WWAN+DBS&WWAN+ Non-DBS	106	5530	14.80	16.00	1.318	100	1.000	-0.01	0.199	0.262
20	WLAN5.8GHz	802.11a 6Mbps	Right Cheek	0mm	Ant 5+6	Standalone	165	5825	20.86	22.00	1.300	100	1.000	0.07	0.805	1.047
	WLAN5.8GHz	802.11a 6Mbps	Right Tilted	0mm	Ant 5+6	Standalone	165	5825	20.86	22.00	1.300	100	1.000	0.03	0.783	1.018
	WLAN5.8GHz	802.11a 6Mbps	Left Cheek	0mm	Ant 5+6	Standalone	165	5825	20.86	22.00	1.300	100	1.000	0.04	0.533	0.693
	WLAN5.8GHz	802.11a 6Mbps	Left Tilted	0mm	Ant 5+6	Standalone	165	5825	20.86	22.00	1.300	100	1.000	-0.02	0.605	0.787
	WLAN5.8GHz	802.11a 6Mbps	Right Cheek	0mm	Ant 5+6	Standalone	157	5785	20.58	22.00	1.387	100	1.000	0.06	0.701	0.972
	WLAN5.8GHz	802.11a 6Mbps	Right Tilted	0mm	Ant 5+6	Standalone	157	5785	20.58	22.00	1.387	100	1.000	0.02	0.731	1.014
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 5+6	Simultaneous For DBS Only	155	5775	18.31	19.50	1.315	100	1.000	0.01	0.524	0.689
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 5+6	Simultaneous For WWAN+DBS&WWAN+ Non-DBS	155	5775	14.20	15.50	1.349	100	1.000	0.08	0.202	0.272



16.2 Hotspot SAR

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
750MHz																	
21	LTE Band 12	10M	QPSK	1	0	Front	5mm	Ant 0	DSI 4	23095	707.5	22.76	24.00	1.330	0.03	0.388	0.516
	LTE Band 12	10M	QPSK	25	0	Front	5mm	Ant 0	DSI 4	23095	707.5	22.75	24.00	1.334	0.01	0.308	0.411
	LTE Band 12	10M	QPSK	1	0	Back	5mm	Ant 0	DSI 4	23095	707.5	22.76	24.00	1.330	-0.15	0.764	1.016
	LTE Band 12	10M	QPSK	25	0	Back	5mm	Ant 0	DSI 4	23095	707.5	22.75	24.00	1.334	0.06	0.707	0.943
	LTE Band 12	10M	QPSK	50	0	Back	5mm	Ant 0	DSI 4	23095	707.5	22.75	24.00	1.334	0.06	0.726	0.968
	LTE Band 12	10M	QPSK	1	0	Left Side	5mm	Ant 0	DSI 4	23095	707.5	22.76	24.00	1.330	0.08	0.161	0.214
	LTE Band 12	10M	QPSK	25	0	Left Side	5mm	Ant 0	DSI 4	23095	707.5	22.75	24.00	1.334	0.05	0.130	0.173
	LTE Band 12	10M	QPSK	1	0	Right Side	5mm	Ant 0	DSI 4	23095	707.5	22.76	24.00	1.330	0.03	0.311	0.414
	LTE Band 12	10M	QPSK	25	0	Right Side	5mm	Ant 0	DSI 4	23095	707.5	22.75	24.00	1.334	0.08	0.251	0.335
	LTE Band 12	10M	QPSK	1	0	Bottom Side	5mm	Ant 0	DSI 4	23095	707.5	22.76	24.00	1.330	0.04	0.483	0.643
	LTE Band 12	10M	QPSK	25	0	Bottom Side	5mm	Ant 0	DSI 4	23095	707.5	22.75	24.00	1.334	0.06	0.379	0.505
	LTE Band 12	10M	QPSK	1	0	Front	5mm	Ant 1	DSI 4	23095	707.5	24.38	25.00	1.153	0.03	0.217	0.250
	LTE Band 12	10M	QPSK	25	0	Front	5mm	Ant 1	DSI 4	23095	707.5	23.41	24.00	1.146	0.04	0.174	0.199
	LTE Band 12	10M	QPSK	1	0	Back	5mm	Ant 1	DSI 4	23095	707.5	24.38	25.00	1.153	-0.1	0.338	0.390
	LTE Band 12	10M	QPSK	25	0	Back	5mm	Ant 1	DSI 4	23095	707.5	23.41	24.00	1.146	-0.02	0.261	0.299
	LTE Band 12	10M	QPSK	1	0	Left Side	5mm	Ant 1	DSI 4	23095	707.5	24.38	25.00	1.153	0.08	0.109	0.126
	LTE Band 12	10M	QPSK	25	0	Left Side	5mm	Ant 1	DSI 4	23095	707.5	23.41	24.00	1.146	0.05	0.088	0.101
	LTE Band 12	10M	QPSK	1	0	Right Side	5mm	Ant 1	DSI 4	23095	707.5	24.38	25.00	1.153	0.03	0.204	0.235
	LTE Band 12	10M	QPSK	25	0	Right Side	5mm	Ant 1	DSI 4	23095	707.5	23.41	24.00	1.146	0.08	0.162	0.186
	LTE Band 12	10M	QPSK	1	0	Top Side	5mm	Ant 1	DSI 4	23095	707.5	24.38	25.00	1.153	0.04	0.446	0.514
	LTE Band 12	10M	QPSK	25	0	Top Side	5mm	Ant 1	DSI 4	23095	707.5	23.41	24.00	1.146	0.06	0.310	0.355
22	LTE Band 13	10M	QPSK	1	0	Front	5mm	Ant 0	DSI 4	23230	782	22.97	24.00	1.268	-0.01	0.388	0.492
	LTE Band 13	10M	QPSK	25	0	Front	5mm	Ant 0	DSI 4	23230	782	22.81	24.00	1.315	-0.03	0.305	0.401
	LTE Band 13	10M	QPSK	1	0	Back	5mm	Ant 0	DSI 4	23230	782	22.97	24.00	1.268	-0.02	0.678	0.859
	LTE Band 13	10M	QPSK	25	0	Back	5mm	Ant 0	DSI 4	23230	782	22.81	24.00	1.315	0.08	0.639	0.840
	LTE Band 13	10M	QPSK	50	0	Back	5mm	Ant 0	DSI 4	23230	782	22.78	24.00	1.324	-0.02	0.602	0.797
	LTE Band 13	10M	QPSK	1	0	Left Side	5mm	Ant 0	DSI 4	23230	782	22.97	24.00	1.268	0.05	0.107	0.136
	LTE Band 13	10M	QPSK	25	0	Left Side	5mm	Ant 0	DSI 4	23230	782	22.81	24.00	1.315	0.03	0.085	0.112
	LTE Band 13	10M	QPSK	1	0	Right Side	5mm	Ant 0	DSI 4	23230	782	22.97	24.00	1.268	0.08	0.189	0.240
	LTE Band 13	10M	QPSK	25	0	Right Side	5mm	Ant 0	DSI 4	23230	782	22.81	24.00	1.315	0.04	0.149	0.196
	LTE Band 13	10M	QPSK	1	0	Bottom Side	5mm	Ant 0	DSI 4	23230	782	22.97	24.00	1.268	0.04	0.485	0.615
	LTE Band 13	10M	QPSK	25	0	Bottom Side	5mm	Ant 0	DSI 4	23230	782	22.81	24.00	1.315	-0.03	0.405	0.533
	LTE Band 13	10M	QPSK	1	0	Front	5mm	Ant 1	DSI 4	23230	782	24.33	25.00	1.167	0.09	0.421	0.491
	LTE Band 13	10M	QPSK	25	0	Front	5mm	Ant 1	DSI 4	23230	782	23.41	25.00	1.442	0.04	0.343	0.495
	LTE Band 13	10M	QPSK	1	0	Back	5mm	Ant 1	DSI 4	23230	782	24.33	25.00	1.167	-0.12	0.430	0.502
	LTE Band 13	10M	QPSK	25	0	Back	5mm	Ant 1	DSI 4	23230	782	23.41	25.00	1.442	-0.03	0.378	0.545
	LTE Band 13	10M	QPSK	1	0	Left Side	5mm	Ant 1	DSI 4	23230	782	24.33	25.00	1.167	0.01	0.186	0.217
	LTE Band 13	10M	QPSK	25	0	Left Side	5mm	Ant 1	DSI 4	23230	782	23.41	25.00	1.442	0.05	0.162	0.234
	LTE Band 13	10M	QPSK	1	0	Right Side	5mm	Ant 1	DSI 4	23230	782	24.33	25.00	1.167	0.03	0.346	0.404
	LTE Band 13	10M	QPSK	25	0	Right Side	5mm	Ant 1	DSI 4	23230	782	23.41	25.00	1.442	0.04	0.300	0.433
	LTE Band 13	10M	QPSK	1	0	Top Side	5mm	Ant 1	DSI 4	23230	782	24.33	25.00	1.167	-0.08	0.568	0.663
	LTE Band 13	10M	QPSK	25	0	Top Side	5mm	Ant 1	DSI 4	23230	782	23.41	25.00	1.442	0.08	0.508	0.733



Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
835MHz																		
23	GSM850	-	-	-	-	GPRS (4 Tx slots)	Front	5mm	Ant 0	DSI 3 Simultaneous	189	836.4	24.75	25.80	1.274	0.03	0.501	0.638
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Back	5mm	Ant 0	DSI 3 Simultaneous	189	836.4	24.75	25.80	1.274	0.01	0.795	1.012
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Back	5mm	Ant 0	DSI 3 Simultaneous	128	824.2	24.62	25.80	1.312	-0.02	0.764	1.003
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Back	5mm	Ant 0	DSI 3 Simultaneous	251	848.8	24.36	25.80	1.393	0.08	0.710	0.989
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Left Side	5mm	Ant 0	DSI 3 Simultaneous	189	836.4	24.75	25.80	1.274	0.05	0.092	0.117
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Right Side	5mm	Ant 0	DSI 3 Simultaneous	189	836.4	24.75	25.80	1.274	0.03	0.210	0.267
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	189	836.4	24.75	25.80	1.274	0.04	0.421	0.536
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Front	5mm	Ant 1	DSI 3 Simultaneous	189	836.4	26.93	27.70	1.194	0.02	0.527	0.629
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Back	5mm	Ant 1	DSI 3 Simultaneous	189	836.4	26.93	27.70	1.194	-0.11	0.665	0.794
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Left Side	5mm	Ant 1	DSI 3 Simultaneous	189	836.4	26.93	27.70	1.194	0.04	0.163	0.195
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Right Side	5mm	Ant 1	DSI 3 Simultaneous	189	836.4	26.93	27.70	1.194	-0.03	0.287	0.343
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Top Side	5mm	Ant 1	DSI 3 Simultaneous	189	836.4	26.93	27.70	1.194	0.05	0.688	0.821
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Top Side	5mm	Ant 1	DSI 3 Simultaneous	128	824.2	26.86	27.70	1.213	0.03	0.741	0.899
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Top Side	5mm	Ant 1	DSI 3 Simultaneous	251	848.8	26.92	27.70	1.197	-0.13	0.785	0.939
24	LTE Band 5	10M	QPSK	1	0	-	Front	5mm	Ant 0	DSI 3 Simultaneous	20525	836.5	21.97	22.20	1.054	0.01	0.599	0.632
	LTE Band 5	10M	QPSK	25	0	-	Front	5mm	Ant 0	DSI 3 Simultaneous	20525	836.5	21.96	22.20	1.057	0.06	0.394	0.416
	LTE Band 5	10M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 3 Simultaneous	20525	836.5	21.97	22.20	1.054	-0.05	0.800	0.844
	LTE_CA_5B	10M	QPSK	1	49	-	Back	5mm	Ant 0	DSI 3 Simultaneous	20525+20597	836.5+843.7	21.20	22.20	1.259	-0.04	0.656	0.826
	LTE Band 5	10M	QPSK	25	0	-	Back	5mm	Ant 0	DSI 3 Simultaneous	20525	836.5	21.96	22.20	1.057	0.08	0.769	0.813
	LTE Band 5	10M	QPSK	50	0	-	Back	5mm	Ant 0	DSI 3 Simultaneous	20525	836.5	21.93	22.20	1.064	0.08	0.727	0.774
	LTE Band 5	10M	QPSK	1	0	-	Left Side	5mm	Ant 0	DSI 3 Simultaneous	20525	836.5	21.97	22.20	1.054	0.04	0.086	0.091
	LTE Band 5	10M	QPSK	25	0	-	Left Side	5mm	Ant 0	DSI 3 Simultaneous	20525	836.5	21.96	22.20	1.057	0.04	0.070	0.074
	LTE Band 5	10M	QPSK	1	0	-	Right Side	5mm	Ant 0	DSI 3 Simultaneous	20525	836.5	21.97	22.20	1.054	-0.03	0.146	0.154
	LTE Band 5	10M	QPSK	25	0	-	Right Side	5mm	Ant 0	DSI 3 Simultaneous	20525	836.5	21.96	22.20	1.057	0.05	0.126	0.133
	LTE Band 5	10M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	20525	836.5	21.97	22.20	1.054	0.06	0.542	0.571
	LTE Band 5	10M	QPSK	25	0	-	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	20525	836.5	21.96	22.20	1.057	0.03	0.420	0.444
	LTE Band 5	10M	QPSK	1	0	-	Front	5mm	Ant 1	DSI 3 Simultaneous	20525	836.5	22.66	23.10	1.107	0.02	0.482	0.533
	LTE Band 5	10M	QPSK	25	0	-	Front	5mm	Ant 1	DSI 3 Simultaneous	20525	836.5	22.58	23.10	1.127	0.06	0.428	0.482
	LTE Band 5	10M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 3 Simultaneous	20525	836.5	22.66	23.10	1.107	0.08	0.612	0.677
	LTE Band 5	10M	QPSK	25	0	-	Back	5mm	Ant 1	DSI 3 Simultaneous	20525	836.5	22.58	23.10	1.127	0.03	0.593	0.668
	LTE Band 5	10M	QPSK	1	0	-	Left Side	5mm	Ant 1	DSI 3 Simultaneous	20525	836.5	22.66	23.10	1.107	0.01	0.132	0.146
	LTE Band 5	10M	QPSK	25	0	-	Left Side	5mm	Ant 1	DSI 3 Simultaneous	20525	836.5	22.58	23.10	1.127	0.02	0.109	0.123
	LTE Band 5	10M	QPSK	1	0	-	Right Side	5mm	Ant 1	DSI 3 Simultaneous	20525	836.5	22.66	23.10	1.107	-0.03	0.281	0.311
	LTE Band 5	10M	QPSK	25	0	-	Right Side	5mm	Ant 1	DSI 3 Simultaneous	20525	836.5	22.58	23.10	1.127	0.05	0.219	0.247
	LTE Band 5	10M	QPSK	1	0	-	Top Side	5mm	Ant 1	DSI 3 Simultaneous	20525	836.5	22.66	23.10	1.107	0.03	0.847	0.937
	LTE_CA_5B	10M	QPSK	1	49	-	Top Side	5mm	Ant 1	DSI 3 Simultaneous	20525+20597	836.5+843.7	22.26	23.10	1.213	0.01	0.711	0.863
	LTE Band 5	10M	QPSK	25	0	-	Top Side	5mm	Ant 1	DSI 3 Simultaneous	20525	836.5	22.58	23.10	1.127	-0.13	0.775	0.874
	LTE Band 5	10M	QPSK	50	0	-	Top Side	5mm	Ant 1	DSI 3 Simultaneous	20525	836.5	22.53	23.10	1.140	0.02	0.748	0.853
25	WCDMA V	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	DSI 3 Simultaneous	4182	836.4	21.98	22.20	1.052	0.08	0.449	0.472
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 3 Simultaneous	4182	836.4	21.98	22.20	1.052	0.04	0.723	0.761
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Side	5mm	Ant 0	DSI 3 Simultaneous	4182	836.4	21.98	22.20	1.052	0.04	0.080	0.084
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Side	5mm	Ant 0	DSI 3 Simultaneous	4182	836.4	21.98	22.20	1.052	-0.03	0.124	0.130
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	4182	836.4	21.98	22.20	1.052	0.06	0.455	0.479
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 1	DSI 3 Simultaneous	4182	836.4	23.77	24.50	1.183	0.04	0.399	0.472
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 1	DSI 3 Simultaneous	4182	836.4	23.77	24.50	1.183	0.01	0.522	0.618
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Side	5mm	Ant 1	DSI 3 Simultaneous	4182	836.4	23.77	24.50	1.183	0.05	0.123	0.146
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Side	5mm	Ant 1	DSI 3 Simultaneous	4182	836.4	23.77	24.50	1.183	-0.13	0.258	0.305
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Top Side	5mm	Ant 1	DSI 3 Simultaneous	4182	836.4	23.77	24.50	1.183	0.02	0.751	0.888
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Top Side	5mm	Ant 1	DSI 3 Simultaneous	4132	826.4	23.51	24.50	1.256	0.04	0.730	0.917
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Top Side	5mm	Ant 1	DSI 3 Simultaneous	4233	846.6	23.58	24.50	1.236	-0.08	0.780	0.964
	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 0	DSI 3 Simultaneous	167300	836.5	22.07	23.50	1.390	0.06	0.368	0.512



FCC SAR Test Report

Report No. : FA192317-02

	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Front	5mm	Ant 0	DSI 3 Simultaneous	167300	836.5	21.95	23.50	1.429	0.04	0.359	0.513
	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 0	DSI 3 Simultaneous	167300	836.5	22.07	23.50	1.390	-0.03	0.644	0.895
	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Back	5mm	Ant 0	DSI 3 Simultaneous	167300	836.5	21.95	23.50	1.429	0.06	0.597	0.853
	FR1 n5	20M	QPSK	100	0	DFT-SCS-15KHz	Back	5mm	Ant 0	DSI 3 Simultaneous	167300	836.5	21.91	23.50	1.442	0.08	0.588	0.848
	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Left Side	5mm	Ant 0	DSI 3 Simultaneous	167300	836.5	22.07	23.50	1.390	0.03	0.074	0.103
	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Left Side	5mm	Ant 0	DSI 3 Simultaneous	167300	836.5	21.95	23.50	1.429	0.04	0.072	0.103
	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Right Side	5mm	Ant 0	DSI 3 Simultaneous	167300	836.5	22.07	23.50	1.390	0.01	0.145	0.202
	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Right Side	5mm	Ant 0	DSI 3 Simultaneous	167300	836.5	21.95	23.50	1.429	0.02	0.138	0.197
	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	167300	836.5	22.07	23.50	1.390	-0.03	0.312	0.434
	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	167300	836.5	21.95	23.50	1.429	0.05	0.306	0.437
	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 1	DSI 4	167300	836.5	22.55	24.00	1.396	0.02	0.377	0.526
	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Front	5mm	Ant 1	DSI 4	167300	836.5	22.33	24.00	1.469	-0.03	0.385	0.566
	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 1	DSI 4	167300	836.5	22.55	24.00	1.396	0.05	0.447	0.624
	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Back	5mm	Ant 1	DSI 4	167300	836.5	22.33	24.00	1.469	-0.13	0.489	0.718
	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Left Side	5mm	Ant 1	DSI 4	167300	836.5	22.55	24.00	1.396	0.02	0.159	0.222
	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Left Side	5mm	Ant 1	DSI 4	167300	836.5	22.33	24.00	1.469	0.04	0.158	0.232
	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Right Side	5mm	Ant 1	DSI 4	167300	836.5	22.55	24.00	1.396	0.02	0.393	0.549
	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Right Side	5mm	Ant 1	DSI 4	167300	836.5	22.33	24.00	1.469	-0.03	0.364	0.535
	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Top Side	5mm	Ant 1	DSI 4	167300	836.5	22.55	24.00	1.396	0.05	0.696	0.972
26	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Top Side	5mm	Ant 1	DSI 4	167300	836.5	22.33	24.00	1.469	0.03	0.701	1.030
	FR1 n5	20M	QPSK	100	0	DFT-SCS-15KHz	Top Side	5mm	Ant 1	DSI 4	167300	836.5	22.29	24.00	1.483	0.05	0.624	0.925

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
1750MHz																		
	LTE Band 66	20M	QPSK	1	0	-	Front	5mm	Ant 0	DSI 3 Simultaneous	132322	1745	15.45	16.00	1.135	0.02	0.505	0.573
	LTE Band 66	20M	QPSK	50	0	-	Front	5mm	Ant 0	DSI 3 Simultaneous	132322	1745	15.41	16.00	1.146	-0.13	0.393	0.450
	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 3 Simultaneous	132322	1745	15.45	16.00	1.135	0.02	0.584	0.663
	LTE Band 66	20M	QPSK	50	0	-	Back	5mm	Ant 0	DSI 3 Simultaneous	132322	1745	15.41	16.00	1.146	0.04	0.458	0.525
	LTE Band 66	20M	QPSK	1	0	-	Left Side	5mm	Ant 0	DSI 3 Simultaneous	132322	1745	15.45	16.00	1.135	-0.13	0.024	0.027
	LTE Band 66	20M	QPSK	50	0	-	Left Side	5mm	Ant 0	DSI 3 Simultaneous	132322	1745	15.41	16.00	1.146	0.02	0.019	0.022
	LTE Band 66	20M	QPSK	1	0	-	Right Side	5mm	Ant 0	DSI 3 Simultaneous	132322	1745	15.45	16.00	1.135	0.04	0.039	0.044
	LTE Band 66	20M	QPSK	50	0	-	Right Side	5mm	Ant 0	DSI 3 Simultaneous	132322	1745	15.41	16.00	1.146	0.02	0.031	0.036
	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	132322	1745	15.45	16.00	1.135	0.02	0.779	0.884
	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	132072	1720	15.28	16.00	1.180	0.04	0.785	0.927
	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	132572	1770	15.29	16.00	1.178	0.02	0.785	0.924
	LTE Band 66	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	132322	1745	15.41	16.00	1.146	0.04	0.781	0.895
	LTE Band 66	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	132072	1720	15.26	16.00	1.186	0.05	0.765	0.907
	LTE Band 66	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	132572	1770	15.40	16.00	1.148	-0.02	0.811	0.931
	LTE_CA_66C	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	132572+132374	1770+1750.2	15.01	16.20	1.315	-0.02	0.669	0.880
	LTE Band 66	20M	QPSK	100	0	-	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	132322	1745	15.38	16.00	1.153	0.07	0.774	0.893
	LTE Band 66	20M	QPSK	1	0	-	Front	5mm	Ant 1	DSI 3 Simultaneous	132322	1745	16.81	17.70	1.227	0.02	0.620	0.761
	LTE Band 66	20M	QPSK	50	0	-	Front	5mm	Ant 1	DSI 3 Simultaneous	132322	1745	16.76	17.70	1.242	0.02	0.496	0.616
	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 3 Simultaneous	132322	1745	16.81	17.70	1.227	0.07	0.696	0.854
	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 3 Simultaneous	132072	1720	16.53	17.70	1.309	-0.08	0.624	0.817
	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 3 Simultaneous	132572	1770	16.53	17.70	1.309	0.03	0.682	0.893
	LTE Band 66	20M	QPSK	50	0	-	Back	5mm	Ant 1	DSI 3 Simultaneous	132322	1745	16.76	17.70	1.242	0.02	0.631	0.783
	LTE Band 66	20M	QPSK	100	0	-	Back	5mm	Ant 1	DSI 3 Simultaneous	132322	1745	16.78	17.70	1.236	0.02	0.627	0.775
	LTE Band 66	20M	QPSK	1	0	-	Left Side	5mm	Ant 1	DSI 3 Simultaneous	132322	1745	16.81	17.70	1.227	0.05	0.018	0.022
	LTE Band 66	20M	QPSK	50	0	-	Left Side	5mm	Ant 1	DSI 3 Simultaneous	132322	1745	16.76	17.70	1.242	-0.02	0.015	0.019
	LTE Band 66	20M	QPSK	1	0	-	Right Side	5mm	Ant 1	DSI 3 Simultaneous	132322	1745	16.81	17.70	1.227	0.07	0.094	0.115
	LTE Band 66	20M	QPSK	50	0	-	Right Side	5mm	Ant 1	DSI 3 Simultaneous	132322	1745	16.76	17.70	1.242	0.03	0.093	0.115
	LTE Band 66	20M	QPSK	1	0	-	Top Side	5mm	Ant 1	DSI 3 Simultaneous	132322	1745	16.81	17.70	1.227	0.02	0.759	0.932
	LTE Band 66	20M	QPSK	1	0	-	Top Side	5mm	Ant 1	DSI 3 Simultaneous	132072	1720	16.53	17.70	1.309	0.04	0.704	0.922
	LTE Band 66	20M	QPSK	1	0	-	Top Side	5mm	Ant 1	DSI 3 Simultaneous	132572	1770	16.53	17.70	1.309	0.05	0.718	0.940
	LTE Band 66	20M	QPSK	50	0	-	Top Side	5mm	Ant 1	DSI 3 Simultaneous	132322	1745	16.76	17.70	1.242	0.02	0.739	0.918

Sporton International (Kunshan) Inc.

TEL : 86-512-57900158 / FAX : 86-512-57900958

FCC ID : IHD56AB3

Issued Date : Jan. 17. 2022

Form version. : 200414



FCC SAR Test Report

Report No. : FA192317-02

	LTE Band 66	20M	QPSK	50	0	-	Top Side	5mm	Ant 1	DSI 3 Simultaneous	132072	1720	16.43	17.70	1.340	0.05	0.698	0.935
	LTE Band 66	20M	QPSK	50	0	-	Top Side	5mm	Ant 1	DSI 3 Simultaneous	132572	1770	16.54	17.70	1.306	-0.02	0.715	0.934
27	LTE Band 66	20M	QPSK	100	0	-	Top Side	5mm	Ant 1	DSI 3 Simultaneous	132322	1745	16.78	17.70	1.236	-0.02	0.763	0.943
	LTE_CA_66C	20M	QPSK	1	99	-	Top Side	5mm	Ant 1	DSI 3 Simultaneous	132322+132520	1745+1764.8	16.31	17.70	1.377	-0.02	0.629	0.866
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 0	DSI 3 Simultaneous	349000	1745	15.49	16.70	1.321	0.02	0.338	0.447
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Front	5mm	Ant 0	DSI 3 Simultaneous	349000	1745	15.38	16.70	1.355	0.04	0.347	0.470
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 0	DSI 3 Simultaneous	349000	1745	15.49	16.70	1.321	-0.02	0.379	0.501
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Back	5mm	Ant 0	DSI 3 Simultaneous	349000	1745	15.38	16.70	1.355	0.07	0.434	0.588
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Left Side	5mm	Ant 0	DSI 3 Simultaneous	349000	1745	15.49	16.70	1.321	0.03	0.024	0.032
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Left Side	5mm	Ant 0	DSI 3 Simultaneous	349000	1745	15.38	16.70	1.355	-0.13	0.025	0.034
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Right Side	5mm	Ant 0	DSI 3 Simultaneous	349000	1745	15.49	16.70	1.321	0.02	0.032	0.042
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Right Side	5mm	Ant 0	DSI 3 Simultaneous	349000	1745	15.38	16.70	1.355	-0.02	0.033	0.045
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	349000	1745	15.49	16.70	1.321	0.02	0.623	0.823
28	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	349000	1745	15.38	16.70	1.355	0.02	0.678	0.919
	FR1 n66	40M	QPSK	216	0	DFT-SCS-15KHz	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	349000	1745	15.33	16.70	1.371	0.02	0.603	0.827
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 1	DSI 3 Simultaneous	349000	1745	16.02	16.70	1.169	-0.02	0.435	0.509
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Front	5mm	Ant 1	DSI 3 Simultaneous	349000	1745	15.94	16.70	1.191	0.02	0.484	0.577
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 1	DSI 3 Simultaneous	349000	1745	16.02	16.70	1.169	0.07	0.509	0.595
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Back	5mm	Ant 1	DSI 3 Simultaneous	349000	1745	15.94	16.70	1.191	-0.08	0.586	0.698
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Left Side	5mm	Ant 1	DSI 3 Simultaneous	349000	1745	16.02	16.70	1.169	0.05	0.012	0.014
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Left Side	5mm	Ant 1	DSI 3 Simultaneous	349000	1745	15.94	16.70	1.191	0.04	0.015	0.018
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Right Side	5mm	Ant 1	DSI 3 Simultaneous	349000	1745	16.02	16.70	1.169	0.05	0.104	0.122
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Right Side	5mm	Ant 1	DSI 3 Simultaneous	349000	1745	15.94	16.70	1.191	0.02	0.114	0.136
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Top Side	5mm	Ant 1	DSI 3 Simultaneous	349000	1745	16.02	16.70	1.169	0.05	0.788	0.922
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Top Side	5mm	Ant 1	DSI 3 Simultaneous	349000	1745	15.94	16.70	1.191	-0.02	0.777	0.926
	FR1 n66	40M	QPSK	216	0	DFT-SCS-15KHz	Top Side	5mm	Ant 1	DSI 3 Simultaneous	349000	1745	15.82	16.70	1.225	-0.02	0.754	0.923
1900MHz																		
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Front	5mm	Ant 0	DSI 3 Simultaneous	661	1880	17.77	19.00	1.327	-0.02	0.342	0.454
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Back	5mm	Ant 0	DSI 3 Simultaneous	661	1880	17.77	19.00	1.327	0.07	0.377	0.500
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Left Side	5mm	Ant 0	DSI 3 Simultaneous	661	1880	17.77	19.00	1.327	-0.02	0.021	0.028
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Right Side	5mm	Ant 0	DSI 3 Simultaneous	661	1880	17.77	19.00	1.327	-0.02	0.022	0.029
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Top Side	5mm	Ant 0	DSI 3 Simultaneous	661	1880	17.77	19.00	1.327	-0.02	0.000	0.000
29	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	661	1880	17.77	19.00	1.327	0.07	0.708	0.940
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	512	1850.2	17.67	19.00	1.358	0.02	0.651	0.884
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	810	1909.8	17.32	19.00	1.472	0.05	0.619	0.911
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	DSI 3 Simultaneous	9400	1880	14.18	14.70	1.127	0.05	0.357	0.402
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	DSI 3 Simultaneous	9400	1880	14.18	14.70	1.127	-0.02	0.408	0.460
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Side	5mm	Ant 0	DSI 3 Simultaneous	9400	1880	14.18	14.70	1.127	0.05	0.021	0.024
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Side	5mm	Ant 0	DSI 3 Simultaneous	9400	1880	14.18	14.70	1.127	-0.02	0.018	0.020
30	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	9400	1880	14.18	14.70	1.127	-0.02	0.822	0.927
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	9262	1852.4	14.13	14.70	1.140	0.05	0.782	0.892
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	9538	1907.6	14.12	14.70	1.143	-0.02	0.797	0.911
	LTE Band 2	20M	QPSK	1	0	-	Front	5mm	Ant 0	DSI 3 Simultaneous	18900	1880	14.80	15.70	1.230	0.07	0.341	0.420
	LTE Band 2	20M	QPSK	50	0	-	Front	5mm	Ant 0	DSI 3 Simultaneous	18900	1880	14.63	15.70	1.279	0.05	0.275	0.352
	LTE Band 2	20M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 3 Simultaneous	18900	1880	14.80	15.70	1.230	-0.02	0.371	0.456
	LTE Band 2	20M	QPSK	50	0	-	Back	5mm	Ant 0	DSI 3 Simultaneous	18900	1880	14.63	15.70	1.279	-0.02	0.324	0.415
	LTE Band 2	20M	QPSK	1	0	-	Left Side	5mm	Ant 0	DSI 3 Simultaneous	18900	1880	14.80	15.70	1.230	0.05	0.016	0.020
	LTE Band 2	20M	QPSK	50	0	-	Left Side	5mm	Ant 0	DSI 3 Simultaneous	18900	1880	14.63	15.70	1.279	-0.02	0.014	0.018
	LTE Band 2	20M	QPSK	1	0	-	Right Side	5mm	Ant 0	DSI 3 Simultaneous	18900	1880	14.80	15.70	1.230	-0.02	0.017	0.021
	LTE Band 2	20M	QPSK	50	0	-	Right Side	5mm	Ant 0	DSI 3 Simultaneous	18900	1880	14.63	15.70	1.279	0.05	0.013	0.017
	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	18900	1880	14.80	15.70	1.230	-0.02	0.720	0.886
	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	18700	1860	14.56	15.70	1.300	0.12	0.724	0.941
	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	19100	1900	14.44	15.70	1.337	-0.02	0.709	0.948
	LTE Band 2	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	18900	1880	14.63	15.70	1.279	-0.02	0.591	0.756
	LTE Band 2	20M	QPSK	100	0	-	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	18900	1880	14.55	15.70	1.303	0.05	0.587	0.765

Sporton International (Kunshan) Inc.

TEL : 86-512-57900158 / FAX : 86-512-57900958

FCC ID : IHD756AB3

Page 70 of 113

Issued Date : Jan. 17. 2022

Form version. : 200414



FCC SAR Test Report

Report No. : FA192317-02

	LTE Band 2	20M	QPSK	1	0	-	Front	5mm	Ant 1	DSI 3 Simultaneous	18900	1880	17.21	18.10	1.227	-0.02	0.372	0.457
	LTE Band 2	20M	QPSK	50	0	-	Front	5mm	Ant 1	DSI 3 Simultaneous	18900	1880	17.12	18.10	1.253	-0.02	0.306	0.383
	LTE Band 2	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 3 Simultaneous	18900	1880	17.21	18.10	1.227	0.05	0.520	0.638
	LTE Band 2	20M	QPSK	50	0	-	Back	5mm	Ant 1	DSI 3 Simultaneous	18900	1880	17.12	18.10	1.253	0.02	0.416	0.521
	LTE Band 2	20M	QPSK	1	0	-	Left Side	5mm	Ant 1	DSI 3 Simultaneous	18900	1880	17.21	18.10	1.227	-0.02	0.026	0.032
	LTE Band 2	20M	QPSK	50	0	-	Left Side	5mm	Ant 1	DSI 3 Simultaneous	18900	1880	17.12	18.10	1.253	-0.02	0.022	0.028
	LTE Band 2	20M	QPSK	1	0	-	Right Side	5mm	Ant 1	DSI 3 Simultaneous	18900	1880	17.21	18.10	1.227	0.07	0.081	0.099
	LTE Band 2	20M	QPSK	50	0	-	Right Side	5mm	Ant 1	DSI 3 Simultaneous	18900	1880	17.12	18.10	1.253	-0.02	0.064	0.080
	LTE Band 2	20M	QPSK	1	0	-	Top Side	5mm	Ant 1	DSI 3 Simultaneous	18900	1880	17.21	18.10	1.227	-0.02	0.787	0.966
31	LTE Band 2	20M	QPSK	1	0	-	Top Side	5mm	Ant 1	DSI 3 Simultaneous	18700	1860	17.04	18.10	1.276	0.02	0.797	1.017
	LTE Band 2	20M	QPSK	1	0	-	Top Side	5mm	Ant 1	DSI 3 Simultaneous	19100	1900	17.02	18.10	1.282	-0.02	0.736	0.944
	LTE Band 2	20M	QPSK	50	0	-	Top Side	5mm	Ant 1	DSI 3 Simultaneous	18900	1880	17.12	18.10	1.253	-0.02	0.658	0.825
	LTE Band 2	20M	QPSK	50	0	-	Top Side	5mm	Ant 1	DSI 3 Simultaneous	18900	1880	16.90	18.10	1.318	0.01	0.621	0.819
	LTE Band 2	20M	QPSK	50	0	-	Top Side	5mm	Ant 1	DSI 3 Simultaneous	18900	1880	17.10	18.10	1.259	0.03	0.653	0.822
	LTE Band 2	20M	QPSK	100	0	-	Top Side	5mm	Ant 1	DSI 3 Simultaneous	18900	1880	17.04	18.10	1.276	-0.02	0.656	0.837
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 0	DSI 3 Simultaneous	376000	1880	14.62	15.70	1.282	0.04	0.337	0.432
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Front	5mm	Ant 0	DSI 3 Simultaneous	376000	1880	14.43	15.70	1.340	0.07	0.343	0.460
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 0	DSI 3 Simultaneous	376000	1880	14.62	15.70	1.282	-0.02	0.425	0.545
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Back	5mm	Ant 0	DSI 3 Simultaneous	376000	1880	14.43	15.70	1.340	0.12	0.471	0.631
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Left Side	5mm	Ant 0	DSI 3 Simultaneous	376000	1880	14.62	15.70	1.282	0.02	0.023	0.029
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Left Side	5mm	Ant 0	DSI 3 Simultaneous	376000	1880	14.43	15.70	1.340	0.05	0.021	0.028
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Right Side	5mm	Ant 0	DSI 3 Simultaneous	376000	1880	14.62	15.70	1.282	-0.02	0.021	0.027
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Right Side	5mm	Ant 0	DSI 3 Simultaneous	376000	1880	14.43	15.70	1.340	-0.02	0.019	0.025
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	376000	1880	14.62	15.70	1.282	0.05	0.689	0.884
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	372000	1860	14.49	15.70	1.321	-0.02	0.597	0.789
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	380000	1900	14.56	15.70	1.300	0.12	0.687	0.893
32	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	376000	1880	14.43	15.70	1.340	0.04	0.699	0.936
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	372000	1860	14.36	15.70	1.361	-0.02	0.601	0.818
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	380000	1900	14.28	15.70	1.387	-0.02	0.669	0.928
	FR1 n2	20M	QPSK	100	0	DFT-SCS-15KHz	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	376000	1880	14.41	15.70	1.346	0.07	0.624	0.840
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 1	DSI 3 Simultaneous	376000	1880	17.04	17.90	1.219	0.02	0.391	0.477
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Front	5mm	Ant 1	DSI 3 Simultaneous	376000	1880	16.82	17.90	1.282	-0.02	0.364	0.467
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 1	DSI 3 Simultaneous	376000	1880	17.04	17.90	1.219	0.05	0.602	0.734
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Back	5mm	Ant 1	DSI 3 Simultaneous	376000	1880	16.82	17.90	1.282	-0.02	0.557	0.714
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Left Side	5mm	Ant 1	DSI 3 Simultaneous	376000	1880	17.04	17.90	1.219	-0.02	0.021	0.026
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Left Side	5mm	Ant 1	DSI 3 Simultaneous	376000	1880	16.82	17.90	1.282	-0.02	0.020	0.026
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Right Side	5mm	Ant 1	DSI 3 Simultaneous	376000	1880	17.04	17.90	1.219	0.02	0.056	0.068
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Right Side	5mm	Ant 1	DSI 3 Simultaneous	376000	1880	16.82	17.90	1.282	-0.02	0.049	0.063
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Top Side	5mm	Ant 1	DSI 3 Simultaneous	376000	1880	17.04	17.90	1.219	-0.02	0.682	0.831
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Top Side	5mm	Ant 1	DSI 3 Simultaneous	372000	1860	16.79	17.90	1.291	0.05	0.707	0.913
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Top Side	5mm	Ant 1	DSI 3 Simultaneous	380000	1900	16.76	17.90	1.300	-0.02	0.633	0.823
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Top Side	5mm	Ant 1	DSI 3 Simultaneous	376000	1880	16.82	17.90	1.282	0.06	0.684	0.877
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Top Side	5mm	Ant 1	DSI 3 Simultaneous	372000	1860	16.79	17.90	1.291	0.03	0.724	0.935
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Top Side	5mm	Ant 1	DSI 3 Simultaneous	380000	1900	16.59	17.90	1.352	0.01	0.673	0.910
	FR1 n2	20M	QPSK	100	0	DFT-SCS-15KHz	Top Side	5mm	Ant 1	DSI 3 Simultaneous	376000	1880	16.84	17.90	1.276	0.08	0.613	0.782



FCC SAR Test Report

Report No. : FA192317-02

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
2600MHz																				
	LTE Band 7	20M	QPSK	1	0	-	Front	5mm	Ant 0	DSI 3 Simultaneous	21100	2535	14.79	15.00	1.050	-	-	-0.02	0.287	0.301
	LTE Band 7	20M	QPSK	50	0	-	Front	5mm	Ant 0	DSI 3 Simultaneous	21100	2535	14.68	15.00	1.076	-	-	-0.02	0.230	0.248
	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 0	DSI 3 Simultaneous	21100	2535	14.79	15.00	1.050	-	-	0.08	0.343	0.360
	LTE Band 7	20M	QPSK	50	0	-	Back	5mm	Ant 0	DSI 3 Simultaneous	21100	2535	14.68	15.00	1.076	-	-	-0.02	0.280	0.301
	LTE Band 7	20M	QPSK	1	0	-	Left Side	5mm	Ant 0	DSI 3 Simultaneous	21100	2535	14.79	15.00	1.050	-	-	0.05	0.011	0.012
	LTE Band 7	20M	QPSK	50	0	-	Left Side	5mm	Ant 0	DSI 3 Simultaneous	21100	2535	14.68	15.00	1.076	-	-	-0.02	0.008	0.009
	LTE Band 7	20M	QPSK	1	0	-	Right Side	5mm	Ant 0	DSI 3 Simultaneous	21100	2535	14.79	15.00	1.050	-	-	-0.02	0.039	0.041
	LTE Band 7	20M	QPSK	50	0	-	Right Side	5mm	Ant 0	DSI 3 Simultaneous	21100	2535	14.68	15.00	1.076	-	-	0.05	0.031	0.033
	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	21100	2535	14.79	15.00	1.050	-	-	0.04	0.798	0.838
33	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	20850	2510	14.59	15.00	1.099	-	-	-0.04	0.851	0.935
	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	21350	2560	14.52	15.00	1.117	-	-	-0.02	0.831	0.928
	LTE Band 7	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	21100	2535	14.68	15.00	1.076	-	-	0.06	0.651	0.701
	LTE Band 7	20M	QPSK	100	0	-	Bottom Side	5mm	Ant 0	DSI 3 Simultaneous	21100	2535	14.49	15.00	1.125	-	-	0.08	0.644	0.724
	LTE Band 7	20M	QPSK	1	0	-	Front	5mm	Ant 1	DSI 3 Simultaneous	21100	2535	16.95	17.60	1.161	-	-	0.02	0.246	0.286
	LTE Band 7	20M	QPSK	50	0	-	Front	5mm	Ant 1	DSI 3 Simultaneous	21100	2535	16.83	17.60	1.194	-	-	0.05	0.200	0.239
	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 1	DSI 3 Simultaneous	21100	2535	16.95	17.60	1.161	-	-	-0.02	0.335	0.389
	LTE Band 7	20M	QPSK	50	0	-	Back	5mm	Ant 1	DSI 3 Simultaneous	21100	2535	16.83	17.60	1.194	-	-	0.01	0.275	0.328
	LTE Band 7	20M	QPSK	1	0	-	Left Side	5mm	Ant 1	DSI 3 Simultaneous	21100	2535	16.95	17.60	1.161	-	-	-0.02	0.013	0.015
	LTE Band 7	20M	QPSK	50	0	-	Left Side	5mm	Ant 1	DSI 3 Simultaneous	21100	2535	16.83	17.60	1.194	-	-	0.05	0.011	0.013
	LTE Band 7	20M	QPSK	1	0	-	Right Side	5mm	Ant 1	DSI 3 Simultaneous	21100	2535	16.95	17.60	1.161	-	-	-0.02	0.059	0.069
	LTE Band 7	20M	QPSK	50	0	-	Right Side	5mm	Ant 1	DSI 3 Simultaneous	21100	2535	16.83	17.60	1.194	-	-	0.08	0.048	0.057
	LTE Band 7	20M	QPSK	1	0	-	Top Side	5mm	Ant 1	DSI 3 Simultaneous	21100	2535	16.95	17.60	1.161	-	-	0.05	0.742	0.862
	LTE Band 7	20M	QPSK	1	0	-	Top Side	5mm	Ant 1	DSI 3 Simultaneous	20850	2510	16.69	17.60	1.233	-	-	-0.02	0.697	0.859
	LTE Band 7	20M	QPSK	1	0	-	Top Side	5mm	Ant 1	DSI 3 Simultaneous	21350	2560	16.68	17.60	1.236	-	-	-0.02	0.747	0.923
	LTE Band 7	20M	QPSK	50	0	-	Top Side	5mm	Ant 1	DSI 3 Simultaneous	21100	2535	16.83	17.60	1.194	-	-	0.05	0.541	0.646
	LTE Band 7	20M	QPSK	100	0	-	Top Side	5mm	Ant 1	DSI 3 Simultaneous	21100	2535	16.8	17.60	1.202	-	-	0.01	0.537	0.646
3700MHz																				
	LTE Band 48	20M	QPSK	1	0	-	Front	5mm	Ant 2	DSI 3 Simultaneous	56150	3641	16.28	17.20	1.236	62.9	1.006	0.01	0.057	0.071
	LTE Band 48	20M	QPSK	50	0	-	Front	5mm	Ant 2	DSI 3 Simultaneous	56150	3641	16.27	17.20	1.239	62.9	1.006	0.08	0.047	0.059
34	LTE Band 48	20M	QPSK	1	0	-	Back	5mm	Ant 2	DSI 3 Simultaneous	56150	3641	16.28	17.20	1.236	62.9	1.006	0.05	0.631	0.785
	LTE_CA_48C	20M	QPSK	1	99		Back	5mm	Ant 2	DSI 3 Simultaneous	56150+56348	3641+3660.8	16.24	17.20	1.247	62.9	1.006	0.05	0.611	0.767
	LTE Band 48	20M	QPSK	50	0	-	Back	5mm	Ant 2	DSI 3 Simultaneous	56150	3641	16.27	17.20	1.239	62.9	1.006	-0.02	0.501	0.624
	LTE Band 48	20M	QPSK	1	0	-	Left Side	5mm	Ant 2	DSI 3 Simultaneous	56150	3641	16.28	17.20	1.236	62.9	1.006	0.08	0.207	0.257
	LTE Band 48	20M	QPSK	50	0	-	Left Side	5mm	Ant 2	DSI 3 Simultaneous	56150	3641	16.27	17.20	1.239	62.9	1.006	-0.02	0.172	0.214
	LTE Band 48	20M	QPSK	1	0	-	Right Side	5mm	Ant 2	DSI 3 Simultaneous	56150	3641	16.28	17.20	1.236	62.9	1.006	0.08	0.005	0.006
	LTE Band 48	20M	QPSK	50	0	-	Right Side	5mm	Ant 2	DSI 3 Simultaneous	56150	3641	16.27	17.20	1.239	62.9	1.006	-0.02	0.007	0.009
	LTE Band 48	20M	QPSK	1	0	-	Top Side	5mm	Ant 2	DSI 3 Simultaneous	56150	3641	16.28	17.20	1.236	62.9	1.006	-0.02	0.029	0.036
	LTE Band 48	20M	QPSK	50	0	-	Top Side	5mm	Ant 2	DSI 3 Simultaneous	56150	3641	16.27	17.20	1.239	62.9	1.006	0.05	0.025	0.031
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Front	5mm	Ant 2	DSI 3 Simultaneous	656000	3840	13.52	14.40	1.225	-	-	0.03	0.385	0.471
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 2	DSI 3 Simultaneous	656000	3840	13.49	14.40	1.233	-	-	0.04	0.382	0.471
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 2	DSI 3 Simultaneous	656000	3840	13.52	14.40	1.225	-	-	-0.08	0.648	0.794
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 2	DSI 3 Simultaneous	656000	3840	13.49	14.40	1.233	-	-	0.02	0.606	0.747
	FR1 n77 Part27O	100M	QPSK	270	0	DFT-SCS-30KHz	Back	5mm	Ant 2	DSI 3 Simultaneous	656000	3840	13.44	14.40	1.247	-	-	0.03	0.579	0.722
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Left Side	5mm	Ant 2	DSI 3 Simultaneous	656000	3840	13.52	14.40	1.225	-	-	0.01	0.197	0.241
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Left Side	5mm	Ant 2	DSI 3 Simultaneous	656000	3840	13.49	14.40	1.233	-	-	0.06	0.200	0.247
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Right Side	5mm	Ant 2	DSI 3 Simultaneous	656000	3840	13.52	14.40	1.225	-	-	0.04	0.005	0.006
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Right Side	5mm	Ant 2	DSI 3 Simultaneous	656000	3840	13.49	14.40	1.233	-	-	0.09	0.006	0.007
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Top Side	5mm	Ant 2	DSI 3 Simultaneous	656000	3840	13.52	14.40	1.225	-	-	0.02	0.032	0.039
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Top Side	5mm	Ant 2	DSI 3 Simultaneous	656000	3840	13.49	14.40	1.233	-	-	0.04	0.033	0.041
	FR1 n77 Part27O HPUE	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 2	DSI 3 Simultaneous	656000	3840	17.15	17.40	1.059	50	1.000	-0.09	0.693	0.734
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Front	5mm	Ant 2	DSI 3 Simultaneous	633334	3500.01	14.04	14.40	1.086	-	-	0.06	0.058	0.063
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 2	DSI 3 Simultaneous	633334	3500.01	13.97	14.40	1.104	-	-	0.04	0.046	0.051
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 2	DSI 3 Simultaneous	633334	3500.01	14.04	14.40	1.086	-	-	0.09	0.549	0.596

Sporton International (Kunshan) Inc.

TEL : 86-512-57900158 / FAX : 86-512-57900958

FCC ID : IHDT56AB3

Issued Date : Jan. 17. 2022

Form version. : 200414



FCC SAR Test Report

Report No. : FA192317-02

	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 2	DSI 3 Simultaneous	633334	3500.01	13.97	14.40	1.104	-	-	0.01	0.552	0.609
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Left Side	5mm	Ant 2	DSI 3 Simultaneous	633334	3500.01	14.04	14.40	1.086	-	-	0.04	0.183	0.199
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Left Side	5mm	Ant 2	DSI 3 Simultaneous	633334	3500.01	13.97	14.40	1.104	-	-	0.09	0.192	0.212
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Right Side	5mm	Ant 2	DSI 3 Simultaneous	633334	3500.01	14.04	14.40	1.086	-	-	-0.01	0.007	0.008
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Right Side	5mm	Ant 2	DSI 3 Simultaneous	633334	3500.01	13.97	14.40	1.104	-	-	0.06	0.009	0.010
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Top Side	5mm	Ant 2	DSI 3 Simultaneous	633334	3500.01	14.04	14.40	1.086	-	-	0.04	0.070	0.076
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Top Side	5mm	Ant 2	DSI 3 Simultaneous	633334	3500.01	13.97	14.40	1.104	-	-	0.09	0.065	0.072
	FR1 n77 Part27Q HPUE	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 2	DSI 3 Simultaneous	633334	3500.01	17.04	17.40	1.086	50	1.000	0.05	0.550	0.598
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Front	5mm	Ant 7	DSI 3 Simultaneous	656000	3840	16.22	16.90	1.169	-	-	-0.02	0.027	0.032
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 7	DSI 3 Simultaneous	656000	3840	16.20	16.90	1.175	-	-	0.08	0.024	0.028
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 7	DSI 3 Simultaneous	656000	3840	16.22	16.90	1.169	-	-	0.05	0.589	0.689
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 7	DSI 3 Simultaneous	656000	3840	16.20	16.90	1.175	-	-	-0.02	0.582	0.684
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Left Side	5mm	Ant 7	DSI 3 Simultaneous	656000	3840	16.22	16.90	1.169	-	-	0.05	0.048	0.056
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Left Side	5mm	Ant 7	DSI 3 Simultaneous	656000	3840	16.20	16.90	1.175	-	-	-0.02	0.036	0.042
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Right Side	5mm	Ant 7	DSI 3 Simultaneous	656000	3840	16.22	16.90	1.169	-	-	0.03	0.014	0.016
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Right Side	5mm	Ant 7	DSI 3 Simultaneous	656000	3840	16.20	16.90	1.175	-	-	0.08	0.010	0.012
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Top Side	5mm	Ant 7	DSI 3 Simultaneous	656000	3840	16.22	16.90	1.169	-	-	0.02	0.172	0.201
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Top Side	5mm	Ant 7	DSI 3 Simultaneous	656000	3840	16.20	16.90	1.175	-	-	0.01	0.158	0.186
	FR1 n77 Part27O HPUE	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 7	DSI 3 Simultaneous	656000	3840	19.29	19.90	1.151	50	1.000	0.03	0.602	0.693
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Front	5mm	Ant 7	DSI 3 Simultaneous	633334	3500.01	16.38	16.90	1.127	-	-	0.06	0.040	0.045
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 7	DSI 3 Simultaneous	633334	3500.01	16.34	16.90	1.138	-	-	0.01	0.038	0.043
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 7	DSI 3 Simultaneous	633334	3500.01	16.38	16.90	1.127	-	-	0.08	0.724	0.816
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 7	DSI 3 Simultaneous	633334	3500.01	16.34	16.90	1.138	-	-	0.09	0.716	0.815
	FR1 n77 Part27Q	100M	QPSK	270	0	DFT-SCS-30KHz	Back	5mm	Ant 7	DSI 3 Simultaneous	633334	3500.01	16.30	16.90	1.148	-	-	0.03	0.698	0.801
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Left Side	5mm	Ant 7	DSI 3 Simultaneous	633334	3500.01	16.38	16.90	1.127	-	-	-0.03	0.030	0.034
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Left Side	5mm	Ant 7	DSI 3 Simultaneous	633334	3500.01	16.34	16.90	1.138	-	-	0.01	0.042	0.048
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Right Side	5mm	Ant 7	DSI 3 Simultaneous	633334	3500.01	16.38	16.90	1.127	-	-	0.05	0.050	0.056
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Right Side	5mm	Ant 7	DSI 3 Simultaneous	633334	3500.01	16.34	16.90	1.138	-	-	0.09	0.018	0.020
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Top Side	5mm	Ant 7	DSI 3 Simultaneous	633334	3500.01	16.38	16.90	1.127	-	-	0.02	0.226	0.255
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Top Side	5mm	Ant 7	DSI 3 Simultaneous	633334	3500.01	16.34	16.90	1.138	-	-	0.04	0.218	0.248
35	FR1 n77 Part27Q HPUE	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 7	DSI 3 Simultaneous	633334	3500.01	19.37	19.90	1.130	50	1.000	-0.03	0.764	0.863



FCC SAR Test Report

Report No. : FA192317-02

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Pmax (dBm)	Duty Cycle %	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
3500-3900MHz for SRS Ant																		
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Front	5mm	Ant 3	DSI 4	656000	3840	23.04	23.00	10	0.09	0.449	0.089
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 3	DSI 4	656000	3840	22.70	23.00	10	-0.03	0.442	0.095
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 3	DSI 4	656000	3840	23.04	23.00	10	0.01	0.505	0.100
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 3	DSI 4	656000	3840	22.70	23.00	10	0.05	0.498	0.107
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Left Side	5mm	Ant 3	DSI 4	656000	3840	23.04	23.00	10	0.09	0.663	0.131
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Left Side	5mm	Ant 3	DSI 4	656000	3840	22.70	23.00	10	0.01	0.658	0.141
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Right Side	5mm	Ant 3	DSI 4	656000	3840	23.04	23.00	10	0.04	0.030	0.006
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Right Side	5mm	Ant 3	DSI 4	656000	3840	22.70	23.00	10	-0.03	0.028	0.006
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Bottom Side	5mm	Ant 3	DSI 4	656000	3840	23.04	23.00	10	0.05	0.382	0.076
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Bottom Side	5mm	Ant 3	DSI 4	656000	3840	22.70	23.00	10	0.09	0.385	0.083
	FR1 n77 Part27O HPUE	100M	QPSK	135	69	DFT-SCS-30KHz	Left Side	5mm	Ant 3	DSI 4	656000	3840	25.75	23.00	10	0.02	0.678	0.072
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Front	5mm	Ant 3	DSI 4	633334	3500.01	23.02	23.00	10	0.06	0.536	0.107
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 3	DSI 4	633334	3500.01	22.65	23.00	10	0.01	0.528	0.114
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 3	DSI 4	633334	3500.01	23.02	23.00	10	0.02	0.628	0.125
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 3	DSI 4	633334	3500.01	22.65	23.00	10	0.02	0.613	0.133
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Left Side	5mm	Ant 3	DSI 4	633334	3500.01	23.02	23.00	10	0.08	0.710	0.141
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Left Side	5mm	Ant 3	DSI 4	633334	3500.01	22.65	23.00	10	-0.03	0.700	0.152
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Right Side	5mm	Ant 3	DSI 4	633334	3500.01	23.02	23.00	10	0.04	0.023	0.005
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Right Side	5mm	Ant 3	DSI 4	633334	3500.01	22.65	23.00	10	0.06	0.019	0.004
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Bottom Side	5mm	Ant 3	DSI 4	633334	3500.01	23.02	23.00	10	0.09	0.022	0.004
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Bottom Side	5mm	Ant 3	DSI 4	633334	3500.01	22.65	23.00	10	0.04	0.028	0.006
	FR1 n77 Part27Q HPUE	100M	QPSK	135	69	DFT-SCS-30KHz	Left Side	5mm	Ant 3	DSI 4	633334	3500.01	25.64	23.00	10	0.04	0.723	0.079
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Front	5mm	Ant 8	DSI 4	656000	3840	23.09	23.00	10	0.08	0.107	0.021
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 8	DSI 4	656000	3840	22.88	23.00	10	0.05	0.110	0.023
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 8	DSI 4	656000	3840	23.09	23.00	10	-0.01	0.711	0.139
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 8	DSI 4	656000	3840	22.88	23.00	10	0.05	0.709	0.146
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Left Side	5mm	Ant 8	DSI 4	656000	3840	23.09	23.00	10	-0.02	0.027	0.005
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Left Side	5mm	Ant 8	DSI 4	656000	3840	22.88	23.00	10	0.03	0.031	0.006
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Right Side	5mm	Ant 8	DSI 4	656000	3840	23.09	23.00	10	0.08	0.046	0.009
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Right Side	5mm	Ant 8	DSI 4	656000	3840	22.88	23.00	10	0.06	0.050	0.010
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Bottom Side	5mm	Ant 8	DSI 4	656000	3840	23.09	23.00	10	0.01	0.244	0.048
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Bottom Side	5mm	Ant 8	DSI 4	656000	3840	22.88	23.00	10	0.09	0.256	0.053
	FR1 n77 Part27O HPUE	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 8	DSI 4	656000	3840	26.11	23.00	10	-0.02	0.721	0.070
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Front	5mm	Ant 8	DSI 4	633334	3500.01	22.99	23.00	10	0.04	0.068	0.014
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 8	DSI 4	633334	3500.01	22.82	23.00	10	-0.05	0.075	0.016
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 8	DSI 4	633334	3500.01	22.99	23.00	10	-0.01	0.703	0.141
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 8	DSI 4	633334	3500.01	22.82	23.00	10	-0.02	0.699	0.146
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Left Side	5mm	Ant 8	DSI 4	633334	3500.01	22.99	23.00	10	0.05	0.036	0.007
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Left Side	5mm	Ant 8	DSI 4	633334	3500.01	22.82	23.00	10	-0.02	0.031	0.006
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Right Side	5mm	Ant 8	DSI 4	633334	3500.01	22.99	23.00	10	0.03	0.047	0.009
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Right Side	5mm	Ant 8	DSI 4	633334	3500.01	22.82	23.00	10	0.08	0.045	0.009
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Bottom Side	5mm	Ant 8	DSI 4	633334	3500.01	22.99	23.00	10	0.06	0.012	0.002
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Bottom Side	5mm	Ant 8	DSI 4	633334	3500.01	22.82	23.00	10	0.01	0.015	0.003
	FR1 n77 Part27Q HPUE	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 8	DSI 4	633334	3500.01	26.02	23.00	10	-0.01	0.713	0.071



FCC SAR Test Report

Report No. : FA192317-02

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
WLAN/Bluetooth																
	WLAN2.4GHz	802.11b 1Mbps	Front	5mm	Ant 4+6	WWAN+WLAN	11	2462	20.69	22.00	1.352	97.87	1.022	-0.03	0.167	0.231
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 4+6	WWAN+WLAN	11	2462	20.69	22.00	1.352	97.87	1.022	-0.02	0.201	0.278
	WLAN2.4GHz	802.11b 1Mbps	Left Side	5mm	Ant 4+6	WWAN+WLAN	11	2462	20.69	22.00	1.352	97.87	1.022	0.03	0.053	0.073
	WLAN2.4GHz	802.11b 1Mbps	Right Side	5mm	Ant 4+6	WWAN+WLAN	11	2462	20.69	22.00	1.352	97.87	1.022	0.09	0.049	0.068
36	WLAN2.4GHz	802.11b 1Mbps	Top Side	5mm	Ant 4+6	WWAN+WLAN	11	2462	20.69	22.00	1.352	97.87	1.022	0.07	0.318	0.439
	WLAN2.4GHz	802.11b 1Mbps	Top Side	5mm	Ant 4+6	WWAN+DBS	11	2462	17.55	19.00	1.396	97.87	1.022	0.02	0.155	0.221
	Bluetooth	1Mbps	Front	5mm	Ant 4	Full	0	2402	13.53	14.00	1.115	76.79	1.302	0.03	0.136	0.197
	Bluetooth	1Mbps	Back	5mm	Ant 4	Full	0	2402	13.53	14.00	1.115	76.79	1.302	0.06	0.166	0.241
	Bluetooth	1Mbps	Left Side	5mm	Ant 4	Full	0	2402	13.53	14.00	1.115	76.79	1.302	0.01	0.051	0.074
	Bluetooth	1Mbps	Right Side	5mm	Ant 4	Full	0	2402	13.53	14.00	1.115	76.79	1.302	0.03	0.044	0.064
37	Bluetooth	1Mbps	Top Side	5mm	Ant 4	Full	0	2402	13.53	14.00	1.115	76.79	1.302	0.04	0.198	0.287
	Bluetooth	1Mbps	Front	5mm	Ant 6	Full	78	2480	15.32	16.50	1.314	76.82	1.302	0.05	0.017	0.029
	Bluetooth	1Mbps	Back	5mm	Ant 6	Full	78	2480	15.32	16.50	1.314	76.82	1.302	0.02	0.051	0.087
	Bluetooth	1Mbps	Left Side	5mm	Ant 6	Full	78	2480	15.32	16.50	1.314	76.82	1.302	0.04	0.021	0.036
	Bluetooth	1Mbps	Right Side	5mm	Ant 6	Full	78	2480	15.32	16.50	1.314	76.82	1.302	0.07	0.019	0.032
	Bluetooth	1Mbps	Top Side	5mm	Ant 6	Full	78	2480	15.32	16.50	1.314	76.82	1.302	0.02	0.005	0.009
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Front	5mm	Ant 5+6	WWAN+WLAN&WWAN+DBS	42	5210	14.87	16.00	1.297	100	1.000	0.06	0.123	0.160
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5+6	WWAN+WLAN&WWAN+DBS	42	5210	14.87	16.00	1.297	100	1.000	-0.01	0.189	0.245
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Left Side	5mm	Ant 5+6	WWAN+WLAN&WWAN+DBS	42	5210	14.87	16.00	1.297	100	1.000	0.03	0.089	0.115
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Right Side	5mm	Ant 5+6	WWAN+WLAN&WWAN+DBS	42	5210	14.87	16.00	1.297	100	1.000	0.04	0.064	0.083
38	WLAN5.2GHz	802.11ac-VHT80 MCS0	Top Side	5mm	Ant 5+6	WWAN+WLAN&WWAN+DBS	42	5210	14.87	16.00	1.297	100	1.000	-0.02	0.213	0.276
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Front	5mm	Ant 5+6	WWAN+WLAN&WWAN+DBS	155	5775	12.77	14.00	1.327	100	1.000	0.06	0.116	0.154
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5+6	WWAN+WLAN&WWAN+DBS	155	5775	12.77	14.00	1.327	100	1.000	0.01	0.167	0.222
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Side	5mm	Ant 5+6	WWAN+WLAN&WWAN+DBS	155	5775	12.77	14.00	1.327	100	1.000	0.09	0.064	0.085
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Side	5mm	Ant 5+6	WWAN+WLAN&WWAN+DBS	155	5775	12.77	14.00	1.327	100	1.000	0.01	0.055	0.073
39	WLAN5.8GHz	802.11ac-VHT80 MCS0	Top Side	5mm	Ant 5+6	WWAN+WLAN&WWAN+DBS	155	5775	12.77	14.00	1.327	100	1.000	-0.04	0.198	0.263



16.3 Body Worn Accessory SAR

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Headset	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
750MHz																			
	LTE Band 12	10M	QPSK	1	0	-	Front	5mm	Ant 0	-	DSI 4	23095	707.5	22.76	24.00	1.330	0.03	0.388	0.516
	LTE Band 12	10M	QPSK	25	0	-	Front	5mm	Ant 0	-	DSI 4	23095	707.5	22.75	24.00	1.334	0.01	0.308	0.411
40	LTE Band 12	10M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 4	23095	707.5	22.76	24.00	1.330	-0.09	0.764	1.016
	LTE Band 12	10M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 4	23060	704	22.63	24.00	1.371	0.01	0.729	0.999
	LTE Band 12	10M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 4	23130	711	22.61	24.00	1.377	0.03	0.731	1.007
	LTE Band 12	10M	QPSK	25	0	-	Back	5mm	Ant 0	-	DSI 4	23095	707.5	22.75	24.00	1.334	0.06	0.598	0.797
	LTE Band 12	10M	QPSK	50	0	-	Back	5mm	Ant 0	-	DSI 4	23095	707.5	22.75	24.00	1.334	0.06	0.606	0.808
	LTE Band 12	10M	QPSK	1	0	-	Front	5mm	Ant 1	-	DSI 4	23095	707.5	24.38	25.00	1.153	0.03	0.317	0.366
	LTE Band 12	10M	QPSK	25	0	-	Front	5mm	Ant 1	-	DSI 4	23095	707.5	23.41	24.00	1.146	0.01	0.234	0.268
	LTE Band 12	10M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 4	23095	707.5	24.38	25.00	1.153	-0.1	0.338	0.390
	LTE Band 12	10M	QPSK	25	0	-	Back	5mm	Ant 1	-	DSI 4	23095	707.5	23.41	24.00	1.146	0.04	0.281	0.322
	LTE Band 13	10M	QPSK	1	0	-	Front	5mm	Ant 0	-	DSI 4	23230	782	22.97	24.00	1.268	-0.01	0.388	0.492
	LTE Band 13	10M	QPSK	25	0	-	Front	5mm	Ant 0	-	DSI 4	23230	782	22.81	24.00	1.315	-0.03	0.305	0.401
41	LTE Band 13	10M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 4	23230	782	22.97	24.00	1.268	-0.02	0.678	0.859
	LTE Band 13	10M	QPSK	25	0	-	Back	5mm	Ant 0	-	DSI 4	23230	782	22.81	24.00	1.315	0.08	0.539	0.709
	LTE Band 13	10M	QPSK	50	0	-	Back	5mm	Ant 0	-	DSI 4	23230	782	22.78	24.00	1.324	0.06	0.550	0.728
	LTE Band 13	10M	QPSK	1	0	-	Front	5mm	Ant 1	-	DSI 4	23230	782	24.33	25.00	1.167	0.02	0.419	0.489
	LTE Band 13	10M	QPSK	25	0	-	Front	5mm	Ant 1	-	DSI 4	23230	782	23.41	24.00	1.146	0.03	0.341	0.391
	LTE Band 13	10M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 4	23230	782	24.33	25.00	1.167	-0.12	0.430	0.502
	LTE Band 13	10M	QPSK	25	0	-	Back	5mm	Ant 1	-	DSI 4	23230	782	23.41	24.00	1.146	0.05	0.376	0.431
835MHz																			
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Front	5mm	Ant 0	-	DSI 3	189	836.4	27.46	28.40	1.242	0.03	0.527	0.654
42	GSM850	-	-	-	-	GPRS (3 Tx slots)	Back	5mm	Ant 0	-	DSI 3	189	836.4	27.46	28.40	1.242	-0.09	0.934	1.160
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Back	5mm	Ant 0	-	DSI 3	128	824.2	27.31	28.40	1.285	-0.02	0.835	1.073
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Back	5mm	Ant 0	-	DSI 3	251	848.8	27.20	28.40	1.318	0.08	0.816	1.076
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Front	5mm	Ant 0	-	DSI 3 Simultaneous	189	836.4	24.75	25.80	1.274	0.03	0.501	0.638
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Back	5mm	Ant 0	-	DSI 3 Simultaneous	189	836.4	24.75	25.80	1.274	0.01	0.795	1.012
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Front	5mm	Ant 1	-	DSI 3	189	836.4	28.14	29.50	1.368	-0.11	0.605	0.827
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Front	5mm	Ant 1	-	DSI 3	128	824.2	28.08	29.50	1.387	0.03	0.589	0.817
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Front	5mm	Ant 1	-	DSI 3	251	848.8	28.08	29.50	1.387	0.04	0.578	0.802
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Back	5mm	Ant 1	-	DSI 3	189	836.4	28.14	29.50	1.368	0.03	0.765	1.046
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Back	5mm	Ant 1	-	DSI 3	128	824.2	28.08	29.50	1.387	0.02	0.741	1.028
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Back	5mm	Ant 1	-	DSI 3	251	848.8	28.08	29.50	1.387	-0.05	0.735	1.019
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Front	5mm	Ant 1	-	DSI 3 Simultaneous	189	836.4	26.93	27.70	1.194	0.02	0.527	0.629
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Back	5mm	Ant 1	-	DSI 3 Simultaneous	189	836.4	26.93	27.70	1.194	-0.11	0.665	0.794
	LTE Band 5	10M	QPSK	1	0	-	Front	5mm	Ant 0	-	DSI 3	20525	836.5	22.91	23.50	1.146	0.01	0.801	0.918
	LTE Band 5	10M	QPSK	25	0	-	Front	5mm	Ant 0	-	DSI 3	20525	836.5	22.89	23.50	1.151	0.06	0.527	0.606
	LTE Band 5	10M	QPSK	50	0	-	Front	5mm	Ant 0	-	DSI 3	20525	836.5	22.76	23.50	1.186	0.03	0.543	0.644
43	LTE Band 5	10M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3	20525	836.5	22.91	23.50	1.146	-0.05	1.070	1.226
	LTE_CA_5B	10M	QPSK	1	49	-	Back	5mm	Ant 0	-	DSI 3	20525+20597	836.5+843.7	22.83	24.00	1.309	0.03	0.908	1.189
	LTE Band 5	10M	QPSK	25	0	-	Back	5mm	Ant 0	-	DSI 3	20525	836.5	22.89	23.50	1.151	0.08	0.855	0.984
	LTE Band 5	10M	QPSK	50	0	-	Back	5mm	Ant 0	-	DSI 3	20525	836.5	22.76	23.50	1.186	0.08	0.839	0.995
	LTE Band 5	10M	QPSK	1	0	-	Back	5mm	Ant 0	Headset	DSI 3	20525	836.5	22.91	23.50	1.146	0.03	0.612	0.701
	LTE Band 5	10M	QPSK	1	0	-	Front	5mm	Ant 0	-	DSI 3 Simultaneous	20525	836.5	21.97	22.20	1.054	0.01	0.599	0.632
	LTE Band 5	10M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3 Simultaneous	20525	836.5	21.97	22.20	1.054	-0.05	0.800	0.844
	LTE Band 5	10M	QPSK	1	0	-	Front	5mm	Ant 1	-	DSI 3	20525	836.5	22.66	24.00	1.361	0.03	0.514	0.700
	LTE Band 5	10M	QPSK	25	0	-	Front	5mm	Ant 1	-	DSI 3	20525	836.5	22.58	24.00	1.387	0.01	0.456	0.632
	LTE Band 5	10M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3	20525	836.5	22.66	24.00	1.361	-0.04	0.652	0.888
	LTE_CA_5B	10M	QPSK	1	49	-	Back	5mm	Ant 1	-	DSI 3	20525+20597	836.5+843.7	22.96	24.00	1.271	0.03	0.621	0.789
	LTE Band 5	10M	QPSK	25	0	-	Back	5mm	Ant 1	-	DSI 3	20525	836.5	22.58	24.00	1.387	0.02	0.525	0.728



FCC SAR Test Report

Report No. : FA192317-02

	LTE Band 5	10M	QPSK	50	0	-	Back	5mm	Ant 1	-	DSI 3	20525	836.5	22.53	24.00	1.403	-0.06	0.505	0.708
	LTE Band 5	10M	QPSK	1	0	-	Front	5mm	Ant 1	-	DSI 3 Simultaneous	20525	836.5	22.66	23.10	1.107	0.02	0.482	0.533
	LTE Band 5	10M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3 Simultaneous	20525	836.5	22.66	23.10	1.107	0.08	0.612	0.677
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	-	DSI 3	4182	836.4	22.92	23.50	1.143	0.03	0.666	0.761
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 3	4182	836.4	22.92	23.50	1.143	0.09	1.070	1.223
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 3	4132	826.4	22.82	23.50	1.169	-0.02	1.040	1.216
44	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 3	4233	846.6	22.90	23.50	1.148	0.08	1.090	1.251
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	Headset	DSI 3	4233	846.6	22.90	23.50	1.148	0.05	0.602	0.691
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	-	DSI 3 Simultaneous	4182	836.4	21.98	22.20	1.052	0.08	0.449	0.472
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 3 Simultaneous	4233	846.6	21.93	22.20	1.064	0.05	0.735	0.782
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 1	-	DSI 3	4182	836.4	23.87	24.50	1.156	0.06	0.541	0.625
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 1	-	DSI 3	4182	836.4	23.87	24.50	1.156	0.02	0.709	0.820
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 1	-	DSI 3	4132	826.4	23.54	24.50	1.247	0.04	0.687	0.857
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 1	-	DSI 3	4233	846.6	23.77	24.50	1.183	-0.02	0.737	0.872
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 1	-	DSI 3 Simultaneous	4182	836.4	23.77	24.50	1.183	0.04	0.399	0.472
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 1	-	DSI 3 Simultaneous	4233	846.6	23.58	24.50	1.236	0.01	0.522	0.645
	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 0	-	DSI 3	167300	836.5	22.75	24.00	1.334	0.03	0.497	0.663
	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Front	5mm	Ant 0	-	DSI 3	167300	836.5	22.65	24.00	1.365	0.04	0.484	0.660
45	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 0	-	DSI 3	167300	836.5	22.75	24.00	1.334	0.01	0.869	1.159
	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Back	5mm	Ant 0	-	DSI 3	167300	836.5	22.65	24.00	1.365	0.05	0.806	1.100
	FR1 n5	20M	QPSK	100	0	DFT-SCS-15KHz	Back	5mm	Ant 0	-	DSI 3	167300	836.5	22.62	24.00	1.374	0.09	0.793	1.090
	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 0	-	DSI 3 Simultaneous	167300	836.5	22.07	23.50	1.390	0.06	0.368	0.512
	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 0	-	DSI 3 Simultaneous	167300	836.5	22.07	23.50	1.390	-0.03	0.644	0.895
	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 1	-	DSI 4	167300	836.5	22.55	24.00	1.396	0.03	0.377	0.526
	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Front	5mm	Ant 1	-	DSI 4	167300	836.5	22.33	24.00	1.469	0.05	0.385	0.566
	FR1 n5	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 1	-	DSI 4	167300	836.5	22.55	24.00	1.396	0.01	0.447	0.624
	FR1 n5	20M	QPSK	50	28	DFT-SCS-15KHz	Back	5mm	Ant 1	-	DSI 4	167300	836.5	22.33	24.00	1.469	-0.05	0.489	0.718
1750MHz																			
	LTE Band 66	20M	QPSK	1	0	-	Front	5mm	Ant 0	-	DSI 3	132322	1745	18.59	19.20	1.151	0.02	0.934	1.075
	LTE Band 66	20M	QPSK	1	0	-	Front	5mm	Ant 0	-	DSI 3	132072	1720	18.56	19.20	1.159	0.04	0.908	1.052
	LTE Band 66	20M	QPSK	1	0	-	Front	5mm	Ant 0	-	DSI 3	132572	1770	18.35	19.20	1.216	-0.02	0.881	1.071
	LTE Band 66	20M	QPSK	50	0	-	Front	5mm	Ant 0	-	DSI 3	132322	1745	18.57	19.20	1.156	0.02	0.726	0.839
	LTE Band 66	20M	QPSK	50	0	-	Front	5mm	Ant 0	-	DSI 3	132072	1720	18.42	19.20	1.197	0.04	0.745	0.892
	LTE Band 66	20M	QPSK	50	0	-	Front	5mm	Ant 0	-	DSI 3	132572	1770	18.37	19.20	1.211	0.06	0.734	0.889
	LTE Band 66	20M	QPSK	100	0	-	Front	5mm	Ant 0	-	DSI 3	132322	1745	18.51	19.20	1.172	0.04	0.726	0.851
46	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3	132322	1745	18.59	19.20	1.151	0.07	1.080	1.243
	LTE_CA_66C	20M	QPSK	1	99	-	Back	5mm	Ant 0	-	DSI 3	132322+132520	1745+1764.8	18.26	19.20	1.242	0.06	0.912	1.132
	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3	132072	1720	18.56	19.20	1.159	-0.05	1.060	1.228
	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3	132572	1770	18.35	19.20	1.216	0.03	1.000	1.216
	LTE Band 66	20M	QPSK	50	0	-	Back	5mm	Ant 0	-	DSI 3	132322	1745	18.57	19.20	1.156	0.04	0.847	0.979
	LTE Band 66	20M	QPSK	50	0	-	Back	5mm	Ant 0	-	DSI 3	132072	1720	18.42	19.20	1.197	0.05	0.861	1.030
	LTE Band 66	20M	QPSK	50	0	-	Back	5mm	Ant 0	-	DSI 3	132572	1770	18.37	19.20	1.211	0.09	0.838	1.014
	LTE Band 66	20M	QPSK	100	0	-	Back	5mm	Ant 0	-	DSI 3	132322	1745	18.51	19.20	1.172	0.04	0.838	0.982
	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 0	Headset	DSI 3	132322	1745	18.59	19.20	1.151	0.03	1.050	1.208
	LTE Band 66	20M	QPSK	1	0	-	Front	18mm	Ant 0	-	DSI 4	132322	1745	23.16	24.00	1.213	-0.05	0.449	0.545
	LTE Band 66	20M	QPSK	1	0	-	Back	21mm	Ant 0	-	DSI 4	132322	1745	23.16	24.00	1.213	0.08	0.374	0.454
	LTE Band 66	20M	QPSK	1	0	-	Front	5mm	Ant 0	-	DSI 3 Simultaneous	132322	1745	15.45	16.00	1.135	0.02	0.505	0.573
	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3 Simultaneous	132322	1745	15.45	16.00	1.135	0.02	0.584	0.663
	LTE Band 66	20M	QPSK	1	0	-	Front	5mm	Ant 1	-	DSI 3	132322	1745	18.97	19.50	1.130	0.09	0.849	0.959
	LTE Band 66	20M	QPSK	1	0	-	Front	5mm	Ant 1	-	DSI 3	132072	1720	18.67	19.50	1.211	0.04	0.841	1.018
	LTE Band 66	20M	QPSK	1	0	-	Front	5mm	Ant 1	-	DSI 3	132572	1770	18.73	19.50	1.194	0.03	0.844	1.008
	LTE Band 66	20M	QPSK	50	0	-	Front	5mm	Ant 1	-	DSI 3	132322	1745	18.95	19.50	1.135	0.01	0.679	0.771
	LTE Band 66	20M	QPSK	100	0	-	Front	5mm	Ant 1	-	DSI 3	132322	1745	18.81	19.50	1.172	0.03	0.671	0.787
	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3	132322	1745	18.97	19.50	1.130	0.02	1.090	1.231
	LTE_CA_66C	20M	QPSK	1	99	-	Back	5mm	Ant 1	-	DSI 3	132322+132520	1745+1764.8	18.15	19.50	1.365	0.03	0.874	1.193

Sporton International (Kunshan) Inc.

TEL : 86-512-57900158 / FAX : 86-512-57900958

FCC ID : IHD756AB3

Page 77 of 113

Issued Date : Jan. 17. 2022

Form version. : 200414



FCC SAR Test Report

Report No. : FA192317-02

	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3	132072	1720	18.67	19.50	1.211	0.03	0.991	1.200
	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3	132572	1770	18.73	19.50	1.194	0.04	0.989	1.181
	LTE Band 66	20M	QPSK	50	0	-	Back	5mm	Ant 1	-	DSI 3	132322	1745	18.95	19.50	1.135	-0.04	0.864	0.981
	LTE Band 66	20M	QPSK	50	0	-	Back	5mm	Ant 1	-	DSI 3	132072	1720	18.72	19.50	1.197	0.06	0.815	0.975
	LTE Band 66	20M	QPSK	50	0	-	Back	5mm	Ant 1	-	DSI 3	132572	1770	18.93	19.50	1.140	0.09	0.883	1.007
	LTE Band 66	20M	QPSK	100	0	-	Back	5mm	Ant 1	-	DSI 3	132322	1745	18.81	19.50	1.172	0.08	0.858	1.006
	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 1	Headset	DSI 3	132322	1745	18.97	19.50	1.130	0.04	1.050	1.186
	LTE Band 66	20M	QPSK	1	0	-	Front	18mm	Ant 1	-	DSI 4	132072	1720	22.52	24.00	1.406	0.04	0.346	0.486
	LTE Band 66	20M	QPSK	1	0	-	Back	21mm	Ant 1	-	DSI 4	132322	1745	22.69	24.00	1.352	0.06	0.343	0.464
	LTE Band 66	20M	QPSK	1	0	-	Front	5mm	Ant 1	-	DSI 3 Simultaneous	132072	1720	16.53	17.70	1.309	0.02	0.620	0.812
	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3 Simultaneous	132322	1745	16.81	17.70	1.227	0.07	0.696	0.854
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 0	-	DSI 3	349000	1745	18.68	19.60	1.236	0.06	0.763	0.943
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Front	5mm	Ant 0	-	DSI 3	349000	1745	18.60	19.60	1.259	0.04	0.783	0.986
	FR1 n66	40M	QPSK	216	0	DFT-SCS-15KHz	Front	5mm	Ant 0	-	DSI 3	349000	1745	18.53	19.60	1.279	-0.02	0.769	0.984
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 0	-	DSI 3	349000	1745	18.68	19.60	1.236	0.01	0.855	1.057
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Back	5mm	Ant 0	-	DSI 3	349000	1745	18.60	19.60	1.259	0.13	0.979	1.232
	FR1 n66	40M	QPSK	216	0	DFT-SCS-15KHz	Back	5mm	Ant 0	-	DSI 3	349000	1745	18.53	19.60	1.279	0.05	0.959	1.227
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Back	5mm	Ant 0	Headset	DSI 3	349000	1745	18.60	19.60	1.259	0.03	0.958	1.206
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Front	18mm	Ant 0	-	DSI 4	349000	1745	22.49	24.00	1.416	-0.07	0.294	0.416
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Back	21mm	Ant 0	-	DSI 4	349000	1745	22.49	24.00	1.416	0.03	0.253	0.358
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Front	5mm	Ant 0	-	DSI 3 Simultaneous	349000	1745	15.38	16.70	1.355	0.02	0.338	0.458
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Back	5mm	Ant 0	-	DSI 3 Simultaneous	349000	1745	15.38	16.70	1.355	-0.02	0.379	0.514
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 1	-	DSI 3	349000	1745	19.14	20.00	1.219	0.06	0.728	0.887
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Front	5mm	Ant 1	-	DSI 3	349000	1745	18.96	20.00	1.271	0.09	0.809	1.028
	FR1 n66	40M	QPSK	216	0	DFT-SCS-15KHz	Front	5mm	Ant 1	-	DSI 3	349000	1745	18.98	20.00	1.265	0.08	0.699	0.884
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 1	-	DSI 3	349000	1745	19.14	20.00	1.219	0.05	0.852	1.039
47	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Back	5mm	Ant 1	-	DSI 3	349000	1745	18.96	20.00	1.271	0.07	0.980	1.245
	FR1 n66	40M	QPSK	216	0	DFT-SCS-15KHz	Back	5mm	Ant 1	-	DSI 3	349000	1745	18.98	20.00	1.265	0.01	0.970	1.227
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Back	5mm	Ant 1	Headset	DSI 3	349000	1745	18.96	20.00	1.271	0.03	0.942	1.197
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Front	18mm	Ant 1	-	DSI 4	349000	1745	23.06	24.00	1.242	-0.01	0.300	0.372
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Back	21mm	Ant 1	-	DSI 4	349000	1745	23.06	24.00	1.242	0.02	0.312	0.387
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Front	5mm	Ant 1	-	DSI 3 Simultaneous	349000	1745	15.94	16.70	1.191	-0.02	0.435	0.518
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Back	5mm	Ant 1	-	DSI 3 Simultaneous	349000	1745	15.94	16.70	1.191	0.07	0.509	0.606



FCC SAR Test Report

Report No. : FA192317-02

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Headset	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
1900MHz																			
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Front	5mm	Ant 0	-	DSI 3	661	1880	21.15	21.80	1.161	0.03	0.704	0.818
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Front	5mm	Ant 0	-	DSI 3	512	1850.2	20.95	21.80	1.216	0.01	0.672	0.817
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Front	5mm	Ant 0	-	DSI 3	810	1909.8	21.07	21.80	1.183	0.06	0.940	1.112
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Back	5mm	Ant 0	-	DSI 3	661	1880	21.15	21.80	1.161	0.04	0.825	0.958
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Back	5mm	Ant 0	-	DSI 3	512	1850.2	20.95	21.80	1.216	-0.02	0.730	0.888
48	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Back	5mm	Ant 0	-	DSI 3	810	1909.8	21.07	21.80	1.183	0.03	1.040	1.230
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Back	5mm	Ant 0	Headset	DSI 3	810	1909.8	21.07	21.80	1.183	0.02	0.997	1.179
	GSM 1900	-	-	-	-	GPRS (3 Tx slots)	Front	18mm	Ant 0	-	DSI 4	810	1909.8	25.10	26.50	1.380	-0.08	0.195	0.269
	GSM 1900	-	-	-	-	GPRS (3 Tx slots)	Back	21mm	Ant 0	-	DSI 4	810	1909.8	25.10	26.50	1.380	0.07	0.160	0.221
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Front	5mm	Ant 0	-	DSI 3 Simultaneous	810	1909.8	17.32	19.00	1.472	-0.02	0.342	0.504
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Back	5mm	Ant 0	-	DSI 3 Simultaneous	810	1909.8	17.32	19.00	1.472	0.07	0.377	0.555
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	-	DSI 3	9400	1880	18.27	18.70	1.104	0.03	0.894	0.987
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	-	DSI 3	9262	1852.4	18.17	18.70	1.130	0.04	0.899	1.016
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	-	DSI 3	9538	1907.6	18.15	18.70	1.135	0.02	0.850	0.965
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 3	9400	1880	18.27	18.70	1.104	0.06	1.020	1.126
49	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 3	9262	1852.4	18.17	18.70	1.130	0.17	1.100	1.243
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 3	9538	1907.6	18.15	18.70	1.135	0.01	1.073	1.218
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	Headset	DSI 3	9262	1852.4	18.17	18.70	1.130	0.05	1.020	1.152
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	18mm	Ant 0	-	DSI 4	9262	1852.4	24.35	25.00	1.161	0.09	0.092	0.107
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	21mm	Ant 0	-	DSI 4	9262	1852.4	24.35	25.00	1.161	0.01	0.368	0.427
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	-	DSI 3 Simultaneous	9262	1852.4	14.13	14.70	1.140	0.05	0.357	0.407
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 3 Simultaneous	9262	1852.4	14.13	14.70	1.140	-0.02	0.408	0.465
	LTE Band 2	20M	QPSK	1	0	-	Front	5mm	Ant 0	-	DSI 3	18900	1880	18.78	19.10	1.076	0.02	0.908	0.977
	LTE Band 2	20M	QPSK	1	0	-	Front	5mm	Ant 0	-	DSI 3	18700	1860	18.57	19.10	1.130	0.06	0.931	1.052
	LTE Band 2	20M	QPSK	1	0	-	Front	5mm	Ant 0	-	DSI 3	19100	1900	18.62	19.10	1.117	0.17	0.842	0.940
	LTE Band 2	20M	QPSK	50	0	-	Front	5mm	Ant 0	-	DSI 3	18900	1880	18.71	19.10	1.094	0.01	0.731	0.800
	LTE Band 2	20M	QPSK	50	0	-	Front	5mm	Ant 0	-	DSI 3	18700	1860	18.59	19.10	1.125	0.03	0.743	0.836
	LTE Band 2	20M	QPSK	50	0	-	Front	5mm	Ant 0	-	DSI 3	19100	1900	18.66	19.10	1.107	0.01	0.698	0.772
	LTE Band 2	20M	QPSK	100	0	-	Front	5mm	Ant 0	-	DSI 3	18900	1880	18.70	19.10	1.096	-0.02	0.733	0.804
	LTE Band 2	20M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3	18900	1880	18.78	19.10	1.076	0.09	0.986	1.061
50	LTE Band 2	20M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3	18700	1860	18.57	19.10	1.130	0.06	1.100	1.243
	LTE Band 2	20M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3	19100	1900	18.62	19.10	1.117	0.01	0.981	1.096
	LTE Band 2	20M	QPSK	50	0	-	Back	5mm	Ant 0	-	DSI 3	18900	1880	18.71	19.10	1.094	0.06	0.862	0.943
	LTE Band 2	20M	QPSK	50	0	-	Back	5mm	Ant 0	-	DSI 3	18700	1860	18.59	19.10	1.125	0.04	0.875	0.984
	LTE Band 2	20M	QPSK	50	0	-	Back	5mm	Ant 0	-	DSI 3	19100	1900	18.66	19.10	1.107	-0.02	0.802	0.888
	LTE Band 2	20M	QPSK	100	0	-	Back	5mm	Ant 0	-	DSI 3	18900	1880	18.70	19.10	1.096	0.03	0.807	0.885
	LTE Band 2	20M	QPSK	1	0	-	Back	5mm	Ant 0	Headset	DSI 3	18700	1860	18.57	19.10	1.130	-0.06	1.010	1.141
	LTE Band 2	20M	QPSK	1	0	-	Front	18mm	Ant 0	-	DSI 4	18700	1860	22.78	24.00	1.324	-0.01	0.517	0.685
	LTE Band 2	20M	QPSK	1	0	-	Back	21mm	Ant 0	-	DSI 4	18700	1860	22.78	24.00	1.324	-0.08	0.424	0.562
	LTE Band 2	20M	QPSK	1	0	-	Front	5mm	Ant 0	-	DSI 3 Simultaneous	18700	1860	14.56	15.70	1.300	0.07	0.341	0.443
	LTE Band 2	20M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3 Simultaneous	18700	1860	14.56	15.70	1.300	-0.02	0.371	0.482
	LTE Band 2	20M	QPSK	1	0	-	Front	5mm	Ant 1	-	DSI 3	18900	1880	20.70	21.50	1.202	0.03	0.613	0.737
	LTE Band 2	20M	QPSK	50	0	-	Front	5mm	Ant 1	-	DSI 3	18900	1880	20.69	21.50	1.205	0.05	0.505	0.609
	LTE Band 2	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3	18900	1880	20.70	21.50	1.202	0.03	0.858	1.032
	LTE Band 2	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3	18700	1860	20.47	21.50	1.268	0.05	0.978	1.240
	LTE Band 2	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3	19100	1900	20.54	21.50	1.247	0.04	0.902	1.125
	LTE Band 2	20M	QPSK	50	0	-	Back	5mm	Ant 1	-	DSI 3	18900	1880	20.69	21.50	1.205	0.05	0.685	0.825
	LTE Band 2	20M	QPSK	50	0	-	Back	5mm	Ant 1	-	DSI 3	18700	1860	20.51	21.50	1.256	0.06	0.786	0.987
	LTE Band 2	20M	QPSK	50	0	-	Back	5mm	Ant 1	-	DSI 3	19100	1900	20.67	21.50	1.211	0.04	0.597	0.723
	LTE Band 2	20M	QPSK	100	0	-	Back	5mm	Ant 1	-	DSI 3	18900	1880	20.55	21.50	1.245	-0.02	0.681	0.848
	LTE Band 2	20M	QPSK	1	0	-	Back	5mm	Ant 1	Headset	DSI 3	18700	1860	20.47	21.50	1.268	0.03	0.914	1.159
	LTE Band 2	20M	QPSK	1	0	-	Front	18mm	Ant 1	-	DSI 4	18700	1860	21.96	23.00	1.271	-0.07	0.210	0.267
	LTE Band 2	20M	QPSK	1	0	-	Back	21mm	Ant 1	-	DSI 4	18700	1860	21.96	23.00	1.271	0.09	0.205	0.260

Sporton International (Kunshan) Inc.

TEL : 86-512-57900158 / FAX : 86-512-57900958

FCC ID : IHD756AB3

Page 79 of 113

Issued Date : Jan. 17. 2022

Form version. : 200414



FCC SAR Test Report

Report No. : FA192317-02

	LTE Band 2	20M	QPSK	1	0	-	Front	5mm	Ant 1	-	DSI 3 Simultaneous	18700	1860	17.04	18.10	1.276	-0.02	0.372	0.475
	LTE Band 2	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3 Simultaneous	18700	1860	17.04	18.10	1.276	0.05	0.520	0.664
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 0	-	DSI 3	376000	1880	18.67	19.70	1.268	0.03	0.665	0.843
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 0	-	DSI 3	372000	1860	18.61	19.70	1.285	0.01	0.619	0.796
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 0	-	DSI 3	380000	1900	18.58	19.70	1.294	-0.02	0.595	0.770
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Front	5mm	Ant 0	-	DSI 3	376000	1880	18.45	19.70	1.334	0.09	0.677	0.903
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Front	5mm	Ant 0	-	DSI 3	372000	1860	18.31	19.70	1.377	0.06	0.607	0.836
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Front	5mm	Ant 0	-	DSI 3	380000	1900	18.34	19.70	1.368	0.01	0.584	0.799
	FR1 n2	20M	QPSK	100	0	DFT-SCS-15KHz	Front	5mm	Ant 0	-	DSI 3	376000	1880	18.43	19.70	1.340	0.06	0.611	0.819
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 0	-	DSI 3	376000	1880	18.67	19.70	1.268	0.04	0.841	1.066
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 0	-	DSI 3	372000	1860	18.61	19.70	1.285	0.09	0.786	1.010
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 0	-	DSI 3	380000	1900	18.58	19.70	1.294	0.06	0.794	1.028
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Back	5mm	Ant 0	-	DSI 3	376000	1880	18.45	19.70	1.334	0.04	0.930	1.240
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Back	5mm	Ant 0	-	DSI 3	372000	1860	18.31	19.70	1.377	0.06	0.759	1.045
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Back	5mm	Ant 0	-	DSI 3	380000	1900	18.34	19.70	1.368	0.01	0.755	1.033
	FR1 n2	20M	QPSK	100	0	DFT-SCS-15KHz	Back	5mm	Ant 0	-	DSI 3	376000	1880	18.43	19.70	1.340	0.06	0.778	1.042
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Back	5mm	Ant 0	Headset	DSI 3	376000	1880	18.45	19.70	1.334	0.07	0.841	1.121
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Front	18mm	Ant 0	-	DSI 4	376000	1880	22.41	24.00	1.442	0.05	0.321	0.463
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Back	21mm	Ant 0	-	DSI 4	376000	1880	22.41	24.00	1.442	0.06	0.295	0.425
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Front	5mm	Ant 0	-	DSI 3 Simultaneous	376000	1880	14.43	15.70	1.340	0.04	0.337	0.451
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Back	5mm	Ant 0	-	DSI 3 Simultaneous	376000	1880	14.43	15.70	1.340	-0.02	0.425	0.569
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 1	-	DSI 3	376000	1880	19.55	20.50	1.245	0.03	0.617	0.768
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Front	5mm	Ant 1	-	DSI 3	376000	1880	19.33	20.50	1.309	-0.03	0.574	0.751
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 1	-	DSI 3	376000	1880	19.55	20.50	1.245	0.01	0.743	0.925
51	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 1	-	DSI 3	372000	1860	19.30	20.50	1.318	-0.15	0.950	1.252
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 1	-	DSI 3	380000	1900	19.27	20.50	1.327	0.06	0.686	0.911
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Back	5mm	Ant 1	-	DSI 3	376000	1880	19.33	20.50	1.309	-0.04	0.761	0.996
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Back	5mm	Ant 1	-	DSI 3	372000	1860	19.21	20.50	1.346	0.05	0.878	1.182
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Back	5mm	Ant 1	-	DSI 3	380000	1900	19.10	20.50	1.380	0.06	0.700	0.966
	FR1 n2	20M	QPSK	100	0	DFT-SCS-15KHz	Back	5mm	Ant 1	-	DSI 3	376000	1880	19.35	20.50	1.303	0.04	0.695	0.906
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 1	Headset	DSI 3	372000	1860	19.30	20.50	1.318	0.12	0.889	1.172
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Front	18mm	Ant 1	-	DSI 4	376000	1880	23.15	24.00	1.216	-0.04	0.181	0.220
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Back	21mm	Ant 1	-	DSI 4	372000	1860	22.90	24.00	1.288	-0.05	0.184	0.237
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Front	5mm	Ant 1	-	DSI 3 Simultaneous	376000	1880	17.04	17.90	1.219	0.02	0.391	0.477
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Back	5mm	Ant 1	-	DSI 3 Simultaneous	372000	1860	16.79	17.90	1.291	0.05	0.602	0.777



FCC SAR Test Report

Report No. : FA192317-02

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Headset	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
2600MHz																					
	LTE Band 7	20M	QPSK	1	0	-	Front	5mm	Ant 0	-	DSI 3	21100	2535	18.88	20.20	1.355	-	-	0.02	0.677	0.917
	LTE Band 7	20M	QPSK	1	0	-	Front	5mm	Ant 0	-	DSI 3	20850	2510	18.70	20.20	1.413	-	-	0.01	0.736	1.040
	LTE Band 7	20M	QPSK	1	0	-	Front	5mm	Ant 0	-	DSI 3	21350	2560	18.56	20.20	1.459	-	-	-0.15	0.650	0.948
	LTE Band 7	20M	QPSK	50	0	-	Front	5mm	Ant 0	-	DSI 3	21100	2535	18.73	20.20	1.403	-	-	0.06	0.543	0.762
	LTE Band 7	20M	QPSK	100	0	-	Front	5mm	Ant 0	-	DSI 3	21100	2535	18.69	20.20	1.416	-	-	0.06	0.534	0.756
	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3	21100	2535	18.88	20.20	1.355	-	-	0.04	0.808	1.095
	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3	20850	2510	18.70	20.20	1.413	-	-	-0.07	0.873	1.233
	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3	21350	2560	18.56	20.20	1.459	-	-	0.05	0.797	1.163
	LTE Band 7	20M	QPSK	50	0	-	Back	5mm	Ant 0	-	DSI 3	21100	2535	18.73	20.20	1.403	-	-	0.04	0.661	0.927
	LTE Band 7	20M	QPSK	50	0	-	Back	5mm	Ant 0	-	DSI 3	20850	2510	18.59	20.20	1.449	-	-	0.05	0.719	1.042
	LTE Band 7	20M	QPSK	50	0	-	Back	5mm	Ant 0	-	DSI 3	21350	2560	18.53	20.20	1.469	-	-	0.06	0.656	0.964
	LTE Band 7	20M	QPSK	100	0	-	Back	5mm	Ant 0	-	DSI 3	21100	2535	18.69	20.20	1.416	-	-	0.05	0.652	0.923
	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 0	Headset	DSI 3	20850	2510	18.70	20.20	1.413	-	-	0.04	0.597	0.843
	LTE Band 7	20M	QPSK	1	0	-	Front	18mm	Ant 0	-	DSI 4	20850	2510	23.37	24.00	1.156	-	-	0.08	0.521	0.602
	LTE Band 7	20M	QPSK	1	0	-	Back	21mm	Ant 0	-	DSI 4	20850	2510	23.37	24.00	1.156	-	-	0.06	0.512	0.592
	LTE Band 7	20M	QPSK	1	0	-	Front	5mm	Ant 0	-	DSI 3 Simultaneous	20850	2510	14.59	15.00	1.099	-	-	-0.02	0.287	0.315
	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3 Simultaneous	20850	2510	14.59	15.00	1.099	-	-	0.08	0.343	0.377
	LTE Band 7	20M	QPSK	1	0	-	Front	5mm	Ant 1	-	DSI 3	21100	2535	20.36	20.90	1.132	-	-	0.05	0.685	0.776
	LTE Band 7	20M	QPSK	50	0	-	Front	5mm	Ant 1	-	DSI 3	21100	2535	20.33	20.90	1.140	-	-	0.04	0.556	0.634
	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3	21100	2535	20.36	20.90	1.132	-	-	0.08	0.934	1.058
	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3	20850	2510	20.19	20.90	1.178	-	-	-0.03	0.985	1.160
52	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3	21350	2560	20.17	20.90	1.183	-	-	0.01	1.050	1.242
	LTE Band 7	20M	QPSK	50	0	-	Back	5mm	Ant 1	-	DSI 3	21100	2535	20.33	20.90	1.140	-	-	0.04	0.766	0.873
	LTE Band 7	20M	QPSK	50	0	-	Back	5mm	Ant 1	-	DSI 3	20850	2510	20.22	20.90	1.169	-	-	0.02	0.792	0.926
	LTE Band 7	20M	QPSK	50	0	-	Back	5mm	Ant 1	-	DSI 3	21350	2560	20.27	20.90	1.156	-	-	-0.06	0.843	0.975
	LTE Band 7	20M	QPSK	100	0	-	Back	5mm	Ant 1	-	DSI 3	21100	2535	20.29	20.90	1.151	-	-	0.09	0.766	0.882
	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 1	Headset	DSI 3	21350	2560	20.17	20.90	1.183	-	-	-0.04	0.927	1.097
	LTE Band 7	20M	QPSK	1	0	-	Front	18mm	Ant 1	-	DSI 4	21100	2535	22.89	24.00	1.291	-	-	0.03	0.232	0.300
	LTE Band 7	20M	QPSK	1	0	-	Back	21mm	Ant 1	-	DSI 4	21350	2560	22.69	24.00	1.352	-	-	0.04	0.347	0.469
	LTE Band 7	20M	QPSK	1	0	-	Front	5mm	Ant 1	-	DSI 3 Simultaneous	21100	2535	16.95	17.60	1.161	-	-	0.02	0.246	0.286
	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3 Simultaneous	21350	2560	16.68	17.60	1.236	-	-	-0.02	0.335	0.414
3700MHz																					
	LTE Band 48	20M	QPSK	1	0	-	Front	5mm	Ant 2	-	DSI 3	56150	3641	17.23	18.50	1.340	62.9	1.006	0.08	0.084	0.113
	LTE Band 48	20M	QPSK	50	0	-	Front	5mm	Ant 2	-	DSI 3	56150	3641	17.20	18.50	1.349	62.9	1.006	-0.03	0.069	0.094
53	LTE Band 48	20M	QPSK	1	0	-	Back	5mm	Ant 2	-	DSI 3	56150	3641	17.23	18.50	1.340	62.9	1.006	0.03	0.929	1.252
	LTE_CA_48C	20M	QPSK	1	99	-	Back	5mm	Ant 2	-	DSI 3	56150+56348	3641+3660.8	17.22	18.50	1.343	62.9	1.006	0.06	0.885	1.195
	LTE Band 48	20M	QPSK	1	0	-	Back	5mm	Ant 2	-	DSI 3	55340	3560	17.02	18.50	1.406	62.9	1.006	0.04	0.874	1.236
	LTE Band 48	20M	QPSK	1	0	-	Back	5mm	Ant 2	-	DSI 3	55830	3609	17.05	18.50	1.396	62.9	1.006	0.02	0.888	1.247
	LTE Band 48	20M	QPSK	1	0	-	Back	5mm	Ant 2	-	DSI 3	56640	3690	17.12	18.50	1.374	62.9	1.006	-0.06	0.899	1.243
	LTE Band 48	20M	QPSK	50	0	-	Back	5mm	Ant 2	-	DSI 3	56150	3641	17.20	18.50	1.349	62.9	1.006	0.03	0.738	1.002
	LTE Band 48	20M	QPSK	50	0	-	Back	5mm	Ant 2	-	DSI 3	55340	3560	17.08	18.50	1.387	62.9	1.006	0.04	0.705	0.984
	LTE Band 48	20M	QPSK	50	0	-	Back	5mm	Ant 2	-	DSI 3	55830	3609	17.14	18.50	1.368	62.9	1.006	-0.02	0.726	0.999
	LTE Band 48	20M	QPSK	50	0	-	Back	5mm	Ant 2	-	DSI 3	56640	3690	17.11	18.50	1.377	62.9	1.006	0.04	0.710	0.984
	LTE Band 48	20M	QPSK	100	0	-	Back	5mm	Ant 2	-	DSI 3	56150	3641	17.16	18.50	1.361	62.9	1.006	0.01	0.634	0.868
	LTE Band 48	20M	QPSK	1	0	-	Back	5mm	Ant 2	Headset	DSI 3	56150	3641	17.23	18.50	1.340	62.9	1.006	0.09	0.821	1.106
	LTE Band 48	20M	QPSK	1	0	-	Front	18mm	Ant 2	-	DSI 4	56150	3641	22.54	24.00	1.400	62.9	1.006	0.01	0.168	0.237
	LTE Band 48	20M	QPSK	1	0	-	Back	21mm	Ant 2	-	DSI 4	56150	3641	22.54	24.00	1.400	62.9	1.006	0.01	0.309	0.435
	LTE Band 48	20M	QPSK	1	0	-	Front	5mm	Ant 2	-	DSI 3 Simultaneous	56150	3641	16.28	17.20	1.236	62.9	1.006	0.01	0.057	0.071
	LTE Band 48	20M	QPSK	1	0	-	Back	5mm	Ant 2	-	DSI 3 Simultaneous	56150	3641	16.28	17.20	1.236	62.9	1.006	0.05	0.631	0.785
	FR1 n77 Part270	100M	QPSK	1	1	DFT-SCS-30KHz	Front	5mm	Ant 2	-	DSI 3	656000	3840	15.02	15.70	1.169	-	-	0.03	0.085	0.099
	FR1 n77 Part270	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 2	-	DSI 3	656000	3840	14.86	15.70	1.213	-	-	0.04	0.082	0.099
	FR1 n77 Part270	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 2	-	DSI 3	656000	3840	15.02	15.70	1.169	-	-	-0.08	0.569	0.665
	FR1 n77 Part270	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 2	-	DSI 3	656000	3840	14.86	15.70	1.213	-	-	0.02	0.540	0.655
	FR1 n77 Part270 HPUE	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 2	-	DSI 3	656000	3840	17.89	18.70	1.205	50	1.000	-0.08	0.551	0.664
	FR1 n77 Part270	100M	QPSK	1	1	DFT-SCS-30KHz	Front	18mm	Ant 2	-	DSI 4	656000	3840	23.24	24.00	1.191	-	-	0.03	0.089	0.106

Sporton International (Kunshan) Inc.

TEL : 86-512-57900158 / FAX : 86-512-57900958

FCC ID : IHD56AB3

Issued Date : Jan. 17. 2022

Form version. : 200414



FCC SAR Test Report

Report No. : FA192317-02

	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Back	21mm	Ant 2	-	DSI 4	656000	3840	23.24	24.00	1.191	-	-	0.04	0.157	0.187
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Front	5mm	Ant 2	-	DSI 3 Simultaneous	656000	3840	13.52	14.40	1.225	-	-	0.03	0.051	0.062
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 2	-	DSI 3 Simultaneous	656000	3840	13.52	14.40	1.225	-	-	-0.08	0.252	0.309
	FR1 n77 Part27O HPUE	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 2	-	DSI 3 Simultaneous	656000	3840	17.15	17.40	1.059	50	1.000	-0.08	0.249	0.264
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Front	5mm	Ant 2	-	DSI 3	633334	3500.01	15.16	15.70	1.132	-	-	0.06	0.058	0.066
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 2	-	DSI 3	633334	3500.01	15.01	15.70	1.172	-	-	0.04	0.046	0.054
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 2	-	DSI 3	633334	3500.01	15.16	15.70	1.132	-	-	0.09	0.549	0.622
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 2	-	DSI 3	633334	3500.01	15.01	15.70	1.172	-	-	0.01	0.552	0.647
	FR1 n77 Part27Q HPUE	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 2	-	DSI 3	633334	3500.01	18.04	18.70	1.164	50	1.000	0.02	0.555	0.646
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Front	18mm	Ant 2	-	DSI 4	633334	3500.01	23.21	24.00	1.199	-	-	0.06	0.095	0.114
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Back	21mm	Ant 2	-	DSI 4	633334	3500.01	22.97	24.00	1.268	-	-	0.01	0.169	0.214
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Front	5mm	Ant 2	-	DSI 3 Simultaneous	633334	3500.01	14.04	14.40	1.086	-	-	0.06	0.029	0.032
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 2	-	DSI 3 Simultaneous	633334	3500.01	13.97	14.40	1.104	-	-	0.01	0.287	0.317
	FR1 n77 Part27Q HPUE	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 2	-	DSI 3 Simultaneous	633334	3500.01	17.04	17.40	1.086	50	1.000	0.02	0.285	0.310
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Front	5mm	Ant 7	-	DSI 3	656000	3840	17.28	18.20	1.236	-	-	-0.02	0.027	0.033
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 7	-	DSI 3	656000	3840	17.17	18.20	1.268	-	-	0.08	0.024	0.030
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 7	-	DSI 3	656000	3840	17.28	18.20	1.236	-	-	0.05	0.596	0.737
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 7	-	DSI 3	656000	3840	17.17	18.20	1.268	-	-	-0.02	0.580	0.735
54	FR1 n77 Part27O HPUE	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 7	-	DSI 3	656000	3840	20.27	21.20	1.239	50	1.000	0.05	0.596	0.738
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Front	18mm	Ant 7	-	DSI 4	656000	3840	22.74	24.00	1.337	-	-	0.09	0.077	0.103
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Back	21mm	Ant 7	-	DSI 4	656000	3840	22.74	24.00	1.337	-	-	0.04	0.201	0.269
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Front	5mm	Ant 7	-	DSI 3 Simultaneous	656000	3840	16.22	16.90	1.169	-	-	-0.02	0.011	0.013
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 7	-	DSI 3 Simultaneous	656000	3840	16.20	16.90	1.175	-	-	0.01	0.246	0.289
	FR1 n77 Part27O HPUE	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 7	-	DSI 3 Simultaneous	656000	3840	19.29	19.90	1.151	50	1.000	0.05	0.243	0.280
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Front	5mm	Ant 7	-	DSI 3	633334	3500.01	17.32	18.20	1.225	-	-	0.06	0.029	0.036
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 7	-	DSI 3	633334	3500.01	17.22	18.20	1.253	-	-	0.01	0.034	0.043
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 7	-	DSI 3	633334	3500.01	17.32	18.20	1.225	-	-	0.08	0.588	0.720
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 7	-	DSI 3	633334	3500.01	17.22	18.20	1.253	-	-	0.09	0.546	0.684
	FR1 n77 Part27Q HPUE	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 7	-	DSI 3	633334	3500.01	20.20	21.20	1.259	50	1.000	-0.05	0.570	0.718
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Front	18mm	Ant 7	-	DSI 4	633334	3500.01	22.46	24.00	1.426	-	-	0.03	0.086	0.123
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	21mm	Ant 7	-	DSI 4	633334	3500.01	22.67	24.00	1.358	-	-	0.04	0.189	0.257
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 7	-	DSI 3 Simultaneous	633334	3500.01	16.34	16.90	1.138	-	-	0.01	0.013	0.015
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 7	-	DSI 3 Simultaneous	633334	3500.01	16.38	16.90	1.127	-	-	0.08	0.226	0.255
	FR1 n77 Part27Q HPUE	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 7	-	DSI 3 Simultaneous	633334	3500.01	19.37	19.90	1.130	50	1.000	-0.05	0.221	0.250

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Pmax (dBm)	Duty Cycle %	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
3500-3900MHz for SRS Ant																		
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Front	5mm	Ant 3	DSI 4	656000	3840	23.04	23.00	10	0.09	0.449	0.089
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 3	DSI 4	656000	3840	22.70	23.00	10	-0.03	0.442	0.095
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 3	DSI 4	656000	3840	23.04	23.00	10	0.01	0.505	0.100
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 3	DSI 4	656000	3840	22.70	23.00	10	0.05	0.498	0.107
	FR1 n77 Part27O HPUE	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 3	DSI 4	656000	3840	25.75	23.00	10	0.03	0.612	0.065
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Front	5mm	Ant 3	DSI 4	633334	3500.01	23.02	23.00	10	0.06	0.416	0.083
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 3	DSI 4	633334	3500.01	22.65	23.00	10	0.01	0.440	0.095
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 3	DSI 4	633334	3500.01	23.02	23.00	10	0.02	0.700	0.139
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 3	DSI 4	633334	3500.01	22.65	23.00	10	0.02	0.624	0.135
	FR1 n77 Part27Q HPUE	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 3	DSI 4	633334	3500.01	25.91	23.00	10	0.02	0.893	0.091
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Front	5mm	Ant 8	DSI 3	656000	3840	18.11	23.00	10	0.08	0.089	0.055
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 8	DSI 3	656000	3840	17.96	23.00	10	0.05	0.091	0.058
	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 8	DSI 3	656000	3840	18.11	23.00	10	-0.02	0.593	0.366
	FR1 n77 Part27O	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 8	DSI 3	656000	3840	17.96	23.00	10	0.05	0.461	0.294
	FR1 n77 Part27O HPUE	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 8	DSI 3	656000	3840	20.52	23.00	10	0.06	0.687	0.243
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Front	5mm	Ant 8	DSI 3	633334	3500.01	17.85	23.00	10	0.04	0.069	0.045
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Front	5mm	Ant 8	DSI 3	633334	3500.01	17.76	23.00	10	-0.05	0.056	0.037
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 8	DSI 3	633334	3500.01	17.85	23.00	10	-0.01	0.687	0.450
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Back	5mm	Ant 8	DSI 3	633334	3500.01	17.76	23.00	10	-0.02	0.615	0.411
	FR1 n77 Part27Q HPUE	100M	QPSK	1	1	DFT-SCS-30KHz	Back	5mm	Ant 8	DSI 3	633334	3500.01	20.14	23.00	10	-0.01	0.713	0.275

Sporton International (Kunshan) Inc.

TEL : 86-512-57900158 / FAX : 86-512-57900958

FCC ID : IHD5T56AB3

Page 82 of 113

Issued Date : Jan. 17. 2022

Form version. : 200414



FCC SAR Test Report

Report No. : FA192317-02

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Headset	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
WLAN/Bluetooth																	
	WLAN2.4GHz	802.11b 1Mbps	Front	5mm	Ant 4+6	-	Full	11	2462	22.11	23.50	1.377	97.87	1.022	-0.03	0.454	0.639
55	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 4+6	-	Full	11	2462	22.11	23.50	1.377	97.87	1.022	-0.02	0.664	0.934
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 4+6	-	Full	1	2412	22.10	23.50	1.381	97.87	1.022	0.06	0.629	0.888
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 4+6	-	Simultaneous For DBS Only	11	2462	21.05	22.00	1.245	97.87	1.022	0.01	0.521	0.663
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 4+6	-	Simultaneous WWAN + non-DBS	11	2462	20.16	21.50	1.361	97.87	1.022	0.02	0.366	0.509
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 4+6	-	Simultaneous For WWAN+DBS	11	2462	16.94	18.00	1.276	97.87	1.022	0.06	0.187	0.244
	Bluetooth	1Mbps	Front	5mm	Ant 4	-	Full	0	2402	13.53	14.00	1.115	76.79	1.302	0.03	0.136	0.197
56	Bluetooth	1Mbps	Back	5mm	Ant 4	-	Full	0	2402	13.53	14.00	1.115	76.79	1.302	0.06	0.166	0.241
	Bluetooth	1Mbps	Front	5mm	Ant 6	-	Full	78	2480	15.32	16.50	1.314	76.82	1.302	0.05	0.017	0.029
	Bluetooth	1Mbps	Back	5mm	Ant 6	-	Full	78	2480	15.32	16.50	1.314	76.82	1.302	0.02	0.051	0.087
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Front	5mm	Ant 5+6	-	Standalone	42	5210	17.42	18.50	1.282	100	1.000	0.06	0.509	0.653
57	WLAN5.2GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5+6	-	Standalone	42	5210	17.42	18.50	1.282	100	1.000	-0.01	0.810	1.039
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5+6	-	Simultaneous For DBS Only	42	5210	15.89	17.00	1.291	100	1.000	0.06	0.486	0.628
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5+6	-	Simultaneous For WWAN+DBS&WWAN+WLAN	42	5210	11.68	13.00	1.355	100	1.000	0.04	0.198	0.268
	WLAN5.2GHz	802.11a 6Mbps	Front	18mm	Ant 5+6	-	Full	48	5240	20.94	22.50	1.432	100	1.000	0.06	0.089	0.127
	WLAN5.2GHz	802.11a 6Mbps	Back	21mm	Ant 5+6	-	Full	48	5240	20.94	22.50	1.432	100	1.000	0.01	0.168	0.241
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Front	5mm	Ant 5+6	-	Standalone	58	5290	16.57	18.00	1.390	100	1.000	0.04	0.385	0.535
58	WLAN5.3GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5+6	-	Standalone	58	5290	16.57	18.00	1.390	100	1.000	0.09	0.796	1.106
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5+6	-	Simultaneous For DBS Only	58	5290	15.72	17.00	1.343	100	1.000	-0.03	0.511	0.686
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5+6	-	Simultaneous For WWAN+DBS&WWAN+WLAN	58	5290	11.79	13.00	1.321	100	1.000	0.01	0.185	0.244
	WLAN5.3GHz	802.11a 6Mbps	Front	18mm	Ant 5+6	-	Full	64	5320	19.61	21.00	1.377	100	1.000	0.09	0.076	0.105
	WLAN5.3GHz	802.11a 6Mbps	Back	21mm	Ant 5+6	-	Full	64	5320	19.61	21.00	1.377	100	1.000	0.06	0.154	0.212
	WLAN5.5GHz	802.11a 6Mbps	Front	5mm	Ant 5+6	-	Full	124	5620	21.07	22.50	1.389	100	1.000	0.06	0.468	0.650
59	WLAN5.5GHz	802.11a 6Mbps	Back	5mm	Ant 5+6	-	Full	124	5620	21.07	22.50	1.389	100	1.000	0.05	0.807	1.121
	WLAN5.5GHz	802.11a 6Mbps	Back	5mm	Ant 5+6	-	Full	116	5580	21.06	22.50	1.393	100	1.000	0.01	0.770	1.073
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5+6	-	Simultaneous For DBS Only	106	5530	18.98	20.50	1.418	100	1.000	0.02	0.513	0.728
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5+6	-	Simultaneous For WWAN+DBS&WWAN+WLAN	106	5530	14.80	16.00	1.318	100	1.000	-0.03	0.216	0.285
	WLAN5.8GHz	802.11a 6Mbps	Front	5mm	Ant 5+6	-	Full	165	5825	21.31	22.50	1.315	100	1.000	0.06	0.349	0.459
	WLAN5.8GHz	802.11a 6Mbps	Back	5mm	Ant 5+6	-	Full	165	5825	21.31	22.50	1.315	100	1.000	0.01	0.617	0.811
60	WLAN5.8GHz	802.11a 6Mbps	Back	5mm	Ant 5+6	-	Full	157	5785	21.06	22.50	1.393	100	1.000	-0.06	0.743	1.035
	WLAN5.8GHz	802.11n-VHT40 MCS0	Back	5mm	Ant 5+6	-	Simultaneous For DBS Only	159	5795	19.90	21.50	1.447	100	1.000	0.05	0.503	0.728
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5+6	-	Simultaneous For WWAN+DBS&WWAN+WLAN	155	5775	15.96	17.00	1.271	100	1.000	0.09	0.209	0.266



16.4 Product specific 10g SAR

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
835MHz																		
61	GSM850	-	-	-	-	GPRS (3 Tx slots)	Top Side	0mm	Ant 1	DSI 6	189	836.4	28.14	29.50	1.368	0.1	1.100	1.505
	GSM850	-	-	-	-	GPRS (3 Tx slots)	Top Side	13mm	Ant 1	DSI 4	189	836.4	28.14	29.50	1.368	-0.04	0.290	0.397
62	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 0	DSI 6	4182	836.4	24.52	25.00	1.117	0.01	1.110	1.240
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	12mm	Ant 0	DSI 4	4182	836.4	24.52	25.00	1.117	0.02	0.525	0.586
1750MHz																		
	LTE Band 66	20M	QPSK	1	0	-	Front	0mm	Ant 0	DSI 6	132322	1745	21.84	23.00	1.306	0.03	2.360	3.083
	LTE Band 66	20M	QPSK	1	0	-	Front	0mm	Ant 0	DSI 6	132072	1720	21.67	23.00	1.358	0.03	2.300	3.124
	LTE Band 66	20M	QPSK	1	0	-	Front	0mm	Ant 0	DSI 6	132572	1770	21.46	23.00	1.426	-0.13	2.050	2.922
	LTE Band 66	20M	QPSK	50	0	-	Front	0mm	Ant 0	DSI 6	132322	1745	21.71	23.00	1.346	0.02	1.820	2.449
	LTE Band 66	20M	QPSK	50	0	-	Front	0mm	Ant 0	DSI 6	132072	1720	21.52	23.00	1.406	0.04	1.820	2.559
	LTE Band 66	20M	QPSK	50	0	-	Front	0mm	Ant 0	DSI 6	132572	1770	21.69	23.00	1.352	0.02	1.780	2.407
	LTE Band 66	20M	QPSK	100	0	-	Front	0mm	Ant 0	DSI 6	132322	1745	21.66	23.00	1.361	0.02	1.820	2.478
	LTE Band 66	20M	QPSK	1	0	-	Back	0mm	Ant 0	DSI 6	132322	1745	21.84	23.00	1.306	0.02	2.170	2.834
	LTE Band 66	20M	QPSK	1	0	-	Back	0mm	Ant 0	DSI 6	132072	1720	21.67	23.00	1.358	0.04	2.120	2.880
	LTE Band 66	20M	QPSK	1	0	-	Back	0mm	Ant 0	DSI 6	132572	1770	21.46	23.00	1.426	0.05	2.050	2.922
	LTE Band 66	20M	QPSK	50	0	-	Back	0mm	Ant 0	DSI 6	132322	1745	21.71	23.00	1.346	-0.02	1.705	2.295
	LTE Band 66	20M	QPSK	50	0	-	Back	0mm	Ant 0	DSI 6	132072	1720	21.52	23.00	1.406	0.07	1.710	2.404
	LTE Band 66	20M	QPSK	50	0	-	Back	0mm	Ant 0	DSI 6	132572	1770	21.69	23.00	1.352	-0.08	1.660	2.244
	LTE Band 66	20M	QPSK	100	0	-	Back	0mm	Ant 0	DSI 6	132322	1745	21.66	23.00	1.361	0.03	1.700	2.314
	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6	132322	1745	21.84	23.00	1.306	-0.13	2.400	3.135
	LTE_CA_66C	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6	132322+132415	1745+1754.3	21.09	23.00	1.552	0.06	1.980	3.074
	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6	132072	1720	21.67	23.00	1.358	0.02	2.060	2.798
	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6	132572	1770	21.46	23.00	1.426	-0.02	2.000	2.851
	LTE Band 66	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 0	DSI 6	132322	1745	21.71	23.00	1.346	0.07	2.010	2.705
	LTE Band 66	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 0	DSI 6	132072	1720	21.52	23.00	1.406	-0.08	1.990	2.798
	LTE Band 66	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 0	DSI 6	132572	1770	21.69	23.00	1.352	0.03	2.010	2.718
	LTE Band 66	20M	QPSK	100	0	-	Bottom Side	0mm	Ant 0	DSI 6	132322	1745	21.66	23.00	1.361	0.01	2.000	2.723
	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6 Simultaneous	132322	1745	20.28	21.50	1.324	-0.07	1.690	2.238
	LTE Band 66	20M	QPSK	1	0	-	Front	9mm	Ant 0	DSI 4	132072	1720	23.06	24.00	1.242	-0.03	0.825	1.024
	LTE Band 66	20M	QPSK	1	0	-	Back	12mm	Ant 0	DSI 4	132572	1770	22.98	24.00	1.265	0.05	0.611	0.773
	LTE Band 66	20M	QPSK	1	0	-	Bottom Side	14mm	Ant 0	DSI 4	132322	1745	23.16	24.00	1.213	0.06	0.678	0.823
	LTE Band 66	20M	QPSK	1	0	-	Front	0mm	Ant 1	DSI 6	132322	1745	20.11	21.50	1.377	-0.02	1.810	2.493
	LTE Band 66	20M	QPSK	1	0	-	Front	0mm	Ant 1	DSI 6	132072	1720	20.06	21.50	1.393	0.07	1.740	2.424
	LTE Band 66	20M	QPSK	1	0	-	Front	0mm	Ant 1	DSI 6	132572	1770	19.94	21.50	1.432	-0.08	1.690	2.420
	LTE Band 66	20M	QPSK	50	0	-	Front	0mm	Ant 1	DSI 6	132322	1745	19.90	21.50	1.445	0.03	1.780	2.573
	LTE Band 66	20M	QPSK	50	0	-	Front	0mm	Ant 1	DSI 6	132072	1720	20.01	21.50	1.409	0.02	1.720	2.424
	LTE Band 66	20M	QPSK	50	0	-	Front	0mm	Ant 1	DSI 6	132572	1770	19.82	21.50	1.472	0.04	1.710	2.518
	LTE Band 66	20M	QPSK	100	0	-	Front	0mm	Ant 1	DSI 6	132322	1745	19.91	21.50	1.442	0.05	1.760	2.538
	LTE Band 66	20M	QPSK	1	0	-	Back	0mm	Ant 1	DSI 6	132322	1745	20.11	21.50	1.377	0.04	1.720	2.369
	LTE Band 66	20M	QPSK	1	0	-	Back	0mm	Ant 1	DSI 6	132072	1720	20.06	21.50	1.393	0.05	1.730	2.410
	LTE Band 66	20M	QPSK	1	0	-	Back	0mm	Ant 1	DSI 6	132572	1770	19.94	21.50	1.432	0.02	1.700	2.435
	LTE Band 66	20M	QPSK	50	0	-	Back	0mm	Ant 1	DSI 6	132322	1745	19.90	21.50	1.445	0.05	1.410	2.038
	LTE Band 66	20M	QPSK	50	0	-	Back	0mm	Ant 1	DSI 6	132072	1720	20.01	21.50	1.409	-0.02	1.360	1.917
	LTE Band 66	20M	QPSK	50	0	-	Back	0mm	Ant 1	DSI 6	132572	1770	19.82	21.50	1.472	-0.02	1.370	2.017
	LTE Band 66	20M	QPSK	100	0	-	Back	0mm	Ant 1	DSI 6	132322	1745	19.91	21.50	1.442	-0.02	1.400	2.019
	LTE Band 66	20M	QPSK	1	0	-	Top Side	0mm	Ant 1	DSI 6	132322	1745	20.11	21.50	1.377	0.07	2.160	2.975
	LTE Band 66	20M	QPSK	1	0	-	Top Side	0mm	Ant 1	DSI 6	132072	1720	20.06	21.50	1.393	-0.08	2.210	3.079
	LTE Band 66	20M	QPSK	1	0	-	Top Side	0mm	Ant 1	DSI 6	132572	1770	19.94	21.50	1.432	-0.02	1.660	2.377
	LTE Band 66	20M	QPSK	50	0	-	Top Side	0mm	Ant 1	DSI 6	132322	1745	19.90	21.50	1.445	-0.02	2.060	2.978
63	LTE Band 66	20M	QPSK	50	0	-	Top Side	0mm	Ant 1	DSI 6	132072	1720	20.01	21.50	1.409	0.05	2.230	3.143



FCC SAR Test Report

Report No. : FA192317-02

	LTE_CA_66C	20M	QPSK	1	99	-	Top Side	0mm	Ant 1	DSI 6	132072+ 132270	1720+ 1739.8	21.15	21.50	1.084	0.01	2.130	2.309
	LTE Band 66	20M	QPSK	50	0	-	Top Side	0mm	Ant 1	DSI 6	132572	1770	19.82	21.50	1.472	0.05	1.700	2.503
	LTE Band 66	20M	QPSK	100	0	-	Top Side	0mm	Ant 1	DSI 6	132322	1745	19.91	21.50	1.442	0.03	2.140	3.086
	LTE Band 66	20M	QPSK	50	0	-	Top Side	0mm	Ant 1	DSI 6 Simultaneous	132072	1720	18.53	20.00	1.403	0.04	1.680	2.357
	LTE Band 66	20M	QPSK	1	0	-	Front	9mm	Ant 1	DSI 4	132322	1745	22.69	24.00	1.352	-0.06	0.687	0.929
	LTE Band 66	20M	QPSK	1	0	-	Back	12mm	Ant 1	DSI 4	132322	1745	22.69	24.00	1.352	-0.07	0.522	0.706
	LTE Band 66	20M	QPSK	1	0	-	Top Side	13mm	Ant 1	DSI 4	132322	1745	22.69	24.00	1.352	0.05	0.510	0.690
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Front	0mm	Ant 0	DSI 6	349000	1745	21.08	22.10	1.265	0.05	1.210	1.530
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Front	0mm	Ant 0	DSI 6	349000	1745	20.97	22.10	1.297	-0.02	1.400	1.816
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Back	0mm	Ant 0	DSI 6	349000	1745	21.08	22.10	1.265	-0.08	1.650	2.087
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Back	0mm	Ant 0	DSI 6	349000	1745	20.97	22.10	1.297	0.03	1.700	2.205
	FR1 n66	40M	QPSK	216	0	DFT-SCS-15KHz	Back	0mm	Ant 0	DSI 6	349000	1745	20.85	22.10	1.334	0.02	1.700	2.267
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Bottom Side	0mm	Ant 0	DSI 6	349000	1745	21.08	22.10	1.265	0.04	2.440	3.086
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Bottom Side	0mm	Ant 0	DSI 6	349000	1745	20.97	22.10	1.297	-0.02	2.300	2.984
	FR1 n66	40M	QPSK	216	0	DFT-SCS-15KHz	Bottom Side	0mm	Ant 0	DSI 6	349000	1745	20.85	22.10	1.334	0.07	2.200	2.934
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Bottom Side	0mm	Ant 0	DSI 6 Simultaneous	349000	1745	19.55	20.60	1.274	-0.08	1.750	2.229
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Front	9mm	Ant 0	DSI 4	349000	1745	22.49	24.00	1.416	-0.09	1.120	1.586
	FR1 n66	40M	QPSK	216	0	DFT-SCS-15KHz	Back	12mm	Ant 0	DSI 4	349000	1745	22.26	24.00	1.493	0.07	0.798	1.191
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Bottom Side	14mm	Ant 0	DSI 4	349000	1745	22.63	24.00	1.371	0.05	0.810	1.110
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Front	0mm	Ant 1	DSI 6	349000	1745	21.05	21.90	1.216	-0.02	1.670	2.031
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Front	0mm	Ant 1	DSI 6	349000	1745	20.98	21.90	1.236	0.07	1.660	2.052
	FR1 n66	40M	QPSK	216	0	DFT-SCS-15KHz	Front	0mm	Ant 1	DSI 6	349000	1745	20.89	21.90	1.262	-0.02	1.620	2.044
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Back	0mm	Ant 1	DSI 6	349000	1745	21.05	21.90	1.216	0.07	1.270	1.545
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Back	0mm	Ant 1	DSI 6	349000	1745	20.98	21.90	1.236	-0.08	1.130	1.397
64	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Top Side	0mm	Ant 1	DSI 6	349000	1745	21.05	21.90	1.216	0.02	2.540	3.089
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Top Side	0mm	Ant 1	DSI 6	349000	1745	20.98	21.90	1.236	0.05	2.140	2.645
	FR1 n66	40M	QPSK	216	0	DFT-SCS-15KHz	Top Side	0mm	Ant 1	DSI 6	349000	1745	20.89	21.90	1.262	-0.02	2.430	3.066
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Top Side	0mm	Ant 1	DSI 6 Simultaneous	349000	1745	19.56	20.40	1.213	-0.02	1.800	2.184
	FR1 n66	40M	QPSK	108	54	DFT-SCS-15KHz	Front	9mm	Ant 1	DSI 4	349000	1745	23.06	24.00	1.242	0.01	0.798	0.991
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Back	12mm	Ant 1	DSI 4	349000	1745	23.36	24.00	1.159	-0.03	0.627	0.727
	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Top Side	13mm	Ant 1	DSI 4	349000	1745	23.36	24.00	1.159	0.07	0.935	1.083



FCC SAR Test Report

Report No. : FA192317-02

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
1900MHz																		
	GSM1900	-	-	-	-	GPRS (3 Tx slots)	Front	0mm	Ant 0	DSI 6	661	1880	25.17	26.50	1.358	-0.02	2.060	2.798
	GSM1900	-	-	-	-	GPRS (3 Tx slots)	Front	0mm	Ant 0	DSI 6	512	1850.2	25.14	26.50	1.368	-0.02	2.050	2.804
	GSM1900	-	-	-	-	GPRS (3 Tx slots)	Front	0mm	Ant 0	DSI 6	810	1909.8	25.10	26.50	1.380	0.05	1.950	2.692
	GSM1900	-	-	-	-	GPRS (3 Tx slots)	Back	0mm	Ant 0	DSI 6	661	1880	25.17	26.50	1.358	0.05	2.040	2.771
	GSM1900	-	-	-	-	GPRS (3 Tx slots)	Back	0mm	Ant 0	DSI 6	512	1850.2	25.14	26.50	1.368	0.03	2.110	2.886
	GSM1900	-	-	-	-	GPRS (3 Tx slots)	Back	0mm	Ant 0	DSI 6	810	1909.8	25.10	26.50	1.380	0.04	2.050	2.830
	GSM1900	-	-	-	-	GPRS (3 Tx slots)	Bottom Side	0mm	Ant 0	DSI 6	661	1880	25.17	26.50	1.358	-0.02	2.120	2.880
	GSM1900	-	-	-	-	GPRS (3 Tx slots)	Bottom Side	0mm	Ant 0	DSI 6	512	1850.2	25.14	26.50	1.368	-0.02	2.190	2.995
65	GSM1900	-	-	-	-	GPRS (3 Tx slots)	Bottom Side	0mm	Ant 0	DSI 6	810	1909.8	25.10	26.50	1.380	0.07	2.200	3.037
	GSM1900	-	-	-	-	GPRS (3 Tx slots)	Bottom Side	0mm	Ant 0	DSI 6 Simultaneous	810	1909.8	24.71	26.50	1.510	0.02	1.930	2.914
	GSM 1900	-	-	-	-	GPRS (3 Tx slots)	Front	9mm	Ant 0	DSI 4	661	1880	25.17	26.50	1.358	-0.01	0.401	0.545
	GSM 1900	-	-	-	-	GPRS (3 Tx slots)	Back	12mm	Ant 0	DSI 4	661	1880	25.17	26.50	1.358	0.09	0.212	0.288
	GSM 1900	-	-	-	-	GPRS (3 Tx slots)	Bottom Side	14mm	Ant 0	DSI 4	661	1880	25.17	26.50	1.358	0.07	0.366	0.497
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	0mm	Ant 0	DSI 6	9400	1880	21.66	22.40	1.186	0.07	1.980	2.348
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	0mm	Ant 0	DSI 6	9262	1852.4	21.56	22.40	1.213	0.02	2.020	2.451
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	0mm	Ant 0	DSI 6	9538	1907.6	21.59	22.40	1.205	0.05	1.840	2.217
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 0	DSI 6	9400	1880	21.66	22.40	1.186	0.05	1.680	1.992
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 0	DSI 6	9262	1852.4	21.56	22.40	1.213	-0.02	1.870	2.269
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 0	DSI 6	9538	1907.6	21.59	22.40	1.205	-0.02	2.530	3.049
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DSI 6	9400	1880	21.66	22.40	1.186	0.05	2.330	2.763
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DSI 6	9262	1852.4	21.56	22.40	1.213	-0.02	2.540	3.082
66	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DSI 6	9538	1907.6	21.59	22.40	1.205	0.07	2.580	3.109
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DSI 6 Simultaneous	9538	1907.6	20.58	20.90	1.076	-0.07	1.870	2.013
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	9mm	Ant 0	DSI 4	9400	1880	24.41	25.00	1.146	-0.09	0.333	0.381
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	12mm	Ant 0	DSI 4	9400	1880	24.41	25.00	1.146	0.06	0.199	0.228
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	14mm	Ant 0	DSI 4	9400	1880	24.41	25.00	1.146	-0.03	1.190	1.363
	LTE Band 2	20M	QPSK	1	0	-	Front	0mm	Ant 0	DSI 6	18900	1880	20.36	21.10	1.186	-0.02	1.820	2.158
	LTE Band 2	20M	QPSK	1	0	-	Front	0mm	Ant 0	DSI 6	18700	1860	20.11	21.10	1.256	-0.02	1.880	2.361
	LTE Band 2	20M	QPSK	1	0	-	Front	0mm	Ant 0	DSI 6	19100	1900	20.09	21.10	1.262	0.05	1.690	2.132
	LTE Band 2	20M	QPSK	50	0	-	Front	0mm	Ant 0	DSI 6	18900	1880	20.22	21.10	1.225	-0.02	1.440	1.763
	LTE Band 2	20M	QPSK	100	0	-	Front	0mm	Ant 0	DSI 6	18900	1880	20.20	21.10	1.230	-0.02	1.450	1.784
	LTE Band 2	20M	QPSK	1	0	-	Back	0mm	Ant 0	DSI 6	18900	1880	20.36	21.10	1.186	-0.02	1.600	1.897
	LTE Band 2	20M	QPSK	50	0	-	Back	0mm	Ant 0	DSI 6	18900	1880	20.22	21.10	1.225	0.05	1.300	1.592
	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6	18900	1880	20.36	21.10	1.186	-0.02	2.350	2.787
	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6	18700	1860	20.11	21.10	1.256	0.02	2.490	3.128
	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6	19100	1900	20.09	21.10	1.262	-0.02	2.410	3.041
	LTE Band 2	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 0	DSI 6	18900	1880	20.22	21.10	1.225	0.07	1.910	2.339
	LTE Band 2	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 0	DSI 6	18700	1860	20.12	21.10	1.253	0.02	2.010	2.519
	LTE Band 2	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 0	DSI 6	19100	1900	20.05	21.10	1.274	0.05	1.960	2.496
	LTE Band 2	20M	QPSK	100	0	-	Bottom Side	0mm	Ant 0	DSI 6	18900	1880	20.20	21.10	1.230	-0.02	1.920	2.362
	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6 Simultaneous	18700	1860	18.65	19.60	1.245	-0.06	1.760	2.190
	LTE Band 2	20M	QPSK	1	0	-	Front	9mm	Ant 0	DSI 4	18700	1860	22.78	24.00	1.324	-0.09	0.700	0.927
	LTE Band 2	20M	QPSK	1	0	-	Back	12mm	Ant 0	DSI 4	18900	1880	23.15	24.00	1.216	0.08	0.616	0.749
	LTE Band 2	20M	QPSK	1	0	-	Bottom Side	14mm	Ant 0	DSI 4	18700	1860	22.78	24.00	1.324	0.05	1.120	1.483
	LTE Band 2	20M	QPSK	1	0	-	Front	0mm	Ant 1	DSI 6	18900	1880	20.08	20.60	1.127	0.12	1.410	1.589
	LTE Band 2	20M	QPSK	50	0	-	Front	0mm	Ant 1	DSI 6	18900	1880	20.04	20.60	1.138	0.07	1.160	1.320
	LTE Band 2	20M	QPSK	1	0	-	Back	0mm	Ant 1	DSI 6	18900	1880	20.08	20.60	1.127	-0.02	1.190	1.341
	LTE Band 2	20M	QPSK	50	0	-	Back	0mm	Ant 1	DSI 6	18900	1880	20.04	20.60	1.138	0.02	0.952	1.083
	LTE Band 2	20M	QPSK	1	0	-	Top Side	0mm	Ant 1	DSI 6	18900	1880	20.08	20.60	1.127	0.07	2.640	2.976
	LTE Band 2	20M	QPSK	1	0	-	Top Side	0mm	Ant 1	DSI 6	18700	1860	20.02	20.60	1.143	-0.02	2.640	3.017
67	LTE Band 2	20M	QPSK	1	0	-	Top Side	0mm	Ant 1	DSI 6	19100	1900	20.07	20.60	1.130	-0.02	2.770	3.130
	LTE Band 2	20M	QPSK	50	0	-	Top Side	0mm	Ant 1	DSI 6	18900	1880	20.04	20.60	1.138	0.02	2.250	2.560
	LTE Band 2	20M	QPSK	50	0	-	Top Side	0mm	Ant 1	DSI 6	18700	1860	20.03	20.60	1.140	0.06	2.260	2.577

Sporton International (Kunshan) Inc.

TEL : 86-512-57900158 / FAX : 86-512-57900958

FCC ID : IHD56AB3

Page 86 of 113

Issued Date : Jan. 17. 2022

Form version. : 200414



FCC SAR Test Report

Report No. : FA192317-02

	LTE Band 2	20M	QPSK	50	0	-	Top Side	0mm	Ant 1	DSI 6	19100	1900	19.94	20.60	1.164	0.05	2.230	2.596
	LTE Band 2	20M	QPSK	100	0	-	Top Side	0mm	Ant 1	DSI 6	18900	1880	19.97	20.60	1.156	-0.02	2.240	2.590
	LTE Band 2	20M	QPSK	1	0	-	Top Side	0mm	Ant 1	DSI 6 Simultaneous	19100	1900	17.98	19.10	1.294	-0.02	1.990	2.575
	LTE Band 2	20M	QPSK	1	0	-	Front	9mm	Ant 1	DSI 4	18900	1880	21.97	23.00	1.268	-0.08	0.451	0.572
	LTE Band 2	20M	QPSK	1	0	-	Back	12mm	Ant 1	DSI 4	18900	1880	21.97	23.00	1.268	0.05	0.365	0.463
	LTE Band 2	20M	QPSK	1	0	-	Top Side	13mm	Ant 1	DSI 4	19100	1900	21.74	23.00	1.337	0.06	0.548	0.732
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Front	0mm	Ant 0	DSI 6	376000	1880	21.05	22.10	1.274	0.02	1.470	1.872
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Front	0mm	Ant 0	DSI 6	376000	1880	20.91	22.10	1.315	-0.02	1.630	2.144
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Front	0mm	Ant 0	DSI 6	372000	1860	20.80	22.10	1.349	0.07	1.430	1.929
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Front	0mm	Ant 0	DSI 6	380000	1900	20.81	22.10	1.346	0.02	1.330	1.790
	FR1 n2	20M	QPSK	100	0	DFT-SCS-15KHz	Front	0mm	Ant 0	DSI 6	376000	1880	20.88	22.10	1.324	0.05	1.470	1.947
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Back	0mm	Ant 0	DSI 6	376000	1880	21.05	22.10	1.274	-0.02	1.910	2.432
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Back	0mm	Ant 0	DSI 6	372000	1860	20.98	22.10	1.294	-0.02	1.910	2.472
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Back	0mm	Ant 0	DSI 6	380000	1900	20.97	22.10	1.297	0.02	1.670	2.166
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Back	0mm	Ant 0	DSI 6	376000	1880	20.91	22.10	1.315	0.05	1.670	2.196
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Back	0mm	Ant 0	DSI 6	372000	1860	20.80	22.10	1.349	-0.02	1.730	2.334
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Back	0mm	Ant 0	DSI 6	380000	1900	20.81	22.10	1.346	-0.02	1.610	2.167
	FR1 n2	20M	QPSK	100	0	DFT-SCS-15KHz	Back	0mm	Ant 0	DSI 6	376000	1880	20.88	22.10	1.324	0.05	1.590	2.106
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Bottom Side	0mm	Ant 0	DSI 6	376000	1880	21.05	22.10	1.274	-0.02	2.160	2.751
68	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Bottom Side	0mm	Ant 0	DSI 6	372000	1860	20.98	22.10	1.294	-0.02	2.430	3.145
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Bottom Side	0mm	Ant 0	DSI 6	380000	1900	20.97	22.10	1.297	-0.02	2.190	2.841
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Bottom Side	0mm	Ant 0	DSI 6	376000	1880	20.91	22.10	1.315	0.07	2.100	2.762
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Bottom Side	0mm	Ant 0	DSI 6	372000	1860	20.80	22.10	1.349	0.05	2.310	3.116
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Bottom Side	0mm	Ant 0	DSI 6	380000	1900	20.81	22.10	1.346	-0.02	2.130	2.867
	FR1 n2	20M	QPSK	100	0	DFT-SCS-15KHz	Bottom Side	0mm	Ant 0	DSI 6	376000	1880	20.88	22.10	1.324	0.07	2.090	2.768
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Bottom Side	0mm	Ant 0	DSI 6 Simultaneous	372000	1860	19.50	20.60	1.288	0.02	1.810	2.332
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Front	9mm	Ant 0	DSI 4	376000	1880	22.41	24.00	1.442	0.02	0.518	0.747
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Back	12mm	Ant 0	DSI 4	372000	1860	22.53	24.00	1.403	0.04	0.388	0.544
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Bottom Side	14mm	Ant 0	DSI 4	372000	1860	22.53	24.00	1.403	0.05	0.676	0.948
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Front	0mm	Ant 1	DSI 6	376000	1880	20.86	21.60	1.186	0.05	1.420	1.684
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Front	0mm	Ant 1	DSI 6	376000	1880	20.76	21.60	1.213	0.05	1.440	1.747
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Back	0mm	Ant 1	DSI 6	376000	1880	20.86	21.60	1.186	0.05	1.250	1.482
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Back	0mm	Ant 1	DSI 6	376000	1880	20.76	21.60	1.213	-0.02	1.180	1.432
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Top Side	0mm	Ant 1	DSI 6	376000	1880	20.86	21.60	1.186	0.05	2.480	2.941
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Top Side	0mm	Ant 1	DSI 6	372000	1860	20.79	21.60	1.205	0.05	2.410	2.904
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Top Side	0mm	Ant 1	DSI 6	380000	1900	20.75	21.60	1.216	-0.02	2.570	3.126
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Top Side	0mm	Ant 1	DSI 6	376000	1880	20.76	21.60	1.213	0.07	2.450	2.973
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Top Side	0mm	Ant 1	DSI 6	372000	1860	20.64	21.60	1.247	0.01	2.390	2.981
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Top Side	0mm	Ant 1	DSI 6	380000	1900	20.68	21.60	1.236	-0.02	2.520	3.115
	FR1 n2	20M	QPSK	100	0	DFT-SCS-15KHz	Top Side	0mm	Ant 1	DSI 6	376000	1880	20.73	21.60	1.222	0.07	2.290	2.798
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Top Side	0mm	Ant 1	DSI 6 Simultaneous	380000	1900	19.20	20.10	1.230	0.02	1.730	2.128
	FR1 n2	20M	QPSK	50	28	DFT-SCS-15KHz	Front	9mm	Ant 1	DSI 4	376000	1880	22.98	24.00	1.265	0.08	0.468	0.592
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Back	12mm	Ant 1	DSI 4	376000	1880	23.15	24.00	1.216	0.06	0.367	0.446
	FR1 n2	20M	QPSK	1	1	DFT-SCS-15KHz	Top Side	13mm	Ant 1	DSI 4	380000	1900	22.87	24.00	1.297	0.04	0.521	0.676



FCC SAR Test Report

Report No. : FA192317-02

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
2600MHz																	
	LTE Band 7	20M	QPSK	1	0	Front	0mm	Ant 0	DSI 6	21100	2535	22.83	23.50	1.167	0.05	1.840	2.147
	LTE Band 7	20M	QPSK	1	0	Front	0mm	Ant 0	DSI 6	20850	2510	22.71	23.50	1.199	-0.02	1.790	2.147
	LTE Band 7	20M	QPSK	1	0	Front	0mm	Ant 0	DSI 6	21350	2560	22.54	23.50	1.247	-0.02	1.680	2.096
	LTE Band 7	20M	QPSK	50	0	Front	0mm	Ant 0	DSI 6	21100	2535	22.72	23.50	1.197	0.08	1.700	2.034
	LTE Band 7	20M	QPSK	50	0	Front	0mm	Ant 0	DSI 6	20850	2510	22.60	23.50	1.230	0.05	1.630	2.005
	LTE Band 7	20M	QPSK	50	0	Front	0mm	Ant 0	DSI 6	21350	2560	22.54	23.50	1.247	-0.02	1.760	2.195
	LTE Band 7	20M	QPSK	100	0	Front	0mm	Ant 0	DSI 6	21100	2535	22.67	23.50	1.211	-0.02	1.520	1.840
	LTE Band 7	20M	QPSK	1	0	Back	0mm	Ant 0	DSI 6	21100	2535	22.83	23.50	1.167	-0.02	1.970	2.299
	LTE Band 7	20M	QPSK	1	0	Back	0mm	Ant 0	DSI 6	20850	2510	22.71	23.50	1.199	0.02	2.230	2.675
	LTE Band 7	20M	QPSK	1	0	Back	0mm	Ant 0	DSI 6	21350	2560	22.54	23.50	1.247	-0.02	1.860	2.320
	LTE Band 7	20M	QPSK	50	0	Back	0mm	Ant 0	DSI 6	21100	2535	22.72	23.50	1.197	-0.02	1.760	2.106
	LTE Band 7	20M	QPSK	50	0	Back	0mm	Ant 0	DSI 6	20850	2510	22.60	23.50	1.230	0.05	1.710	2.104
	LTE Band 7	20M	QPSK	50	0	Back	0mm	Ant 0	DSI 6	21350	2560	22.54	23.50	1.247	-0.02	1.720	2.145
	LTE Band 7	20M	QPSK	100	0	Back	0mm	Ant 0	DSI 6	21100	2535	22.67	23.50	1.211	0.06	1.640	1.985
	LTE Band 7	20M	QPSK	1	0	Bottom Side	0mm	Ant 0	DSI 6	21100	2535	22.83	23.50	1.167	0.03	2.460	2.870
	LTE Band 7	20M	QPSK	1	0	Bottom Side	0mm	Ant 0	DSI 6	20850	2510	22.71	23.50	1.199	0.01	2.480	2.975
	LTE Band 7	20M	QPSK	1	0	Bottom Side	0mm	Ant 0	DSI 6	21350	2560	22.54	23.50	1.247	0.08	2.170	2.707
	LTE Band 7	20M	QPSK	50	0	Bottom Side	0mm	Ant 0	DSI 6	21100	2535	22.72	23.50	1.197	0.05	1.790	2.142
	LTE Band 7	20M	QPSK	50	0	Bottom Side	0mm	Ant 0	DSI 6	20850	2510	22.60	23.50	1.230	-0.02	1.870	2.301
	LTE Band 7	20M	QPSK	50	0	Bottom Side	0mm	Ant 0	DSI 6	21350	2560	22.54	23.50	1.247	-0.02	1.720	2.145
	LTE Band 7	20M	QPSK	100	0	Bottom Side	0mm	Ant 0	DSI 6	21100	2535	22.67	23.50	1.211	0.05	1.800	2.179
	LTE Band 7	20M	QPSK	1	0	Bottom Side	0mm	Ant 0	DSI 6 Simultaneous	20850	2510	20.72	22.00	1.343	0.01	1.740	2.336
	LTE Band 7	20M	QPSK	1	0	Front	9mm	Ant 0	DSI 4	21350	2560	23.46	24.00	1.132	-0.09	0.875	0.991
	LTE Band 7	20M	QPSK	1	0	Back	12mm	Ant 0	DSI 4	20850	2510	23.37	24.00	1.156	0.06	0.668	0.772
	LTE Band 7	20M	QPSK	1	0	Bottom Side	14mm	Ant 0	DSI 4	20850	2510	23.37	24.00	1.156	0.04	1.010	1.168
	LTE Band 7	20M	QPSK	1	0	Front	0mm	Ant 1	DSI 6	21100	2535	20.29	21.60	1.352	0.08	0.953	1.289
	LTE Band 7	20M	QPSK	50	0	Front	0mm	Ant 1	DSI 6	21100	2535	20.07	21.60	1.422	-0.02	0.802	1.141
	LTE Band 7	20M	QPSK	1	0	Back	0mm	Ant 1	DSI 6	21100	2535	20.29	21.60	1.352	-0.02	1.060	1.433
	LTE Band 7	20M	QPSK	50	0	Back	0mm	Ant 1	DSI 6	21100	2535	20.07	21.60	1.422	0.08	0.864	1.229
69	LTE Band 7	20M	QPSK	1	0	Top Side	0mm	Ant 1	DSI 6	21100	2535	20.29	21.60	1.352	0.05	2.280	3.083
	LTE Band 7	20M	QPSK	1	0	Top Side	0mm	Ant 1	DSI 6	20850	2510	19.97	21.60	1.455	0.05	2.040	2.969
	LTE Band 7	20M	QPSK	1	0	Top Side	0mm	Ant 1	DSI 6	21350	2560	20.02	21.60	1.439	-0.02	2.060	2.964
	LTE Band 7	20M	QPSK	50	0	Top Side	0mm	Ant 1	DSI 6	21100	2535	20.07	21.60	1.422	-0.02	1.800	2.560
	LTE Band 7	20M	QPSK	50	0	Top Side	0mm	Ant 1	DSI 6	20850	2510	19.99	21.60	1.449	0.05	1.570	2.275
	LTE Band 7	20M	QPSK	50	0	Top Side	0mm	Ant 1	DSI 6	21350	2560	20.04	21.60	1.432	0.04	1.780	2.549
	LTE Band 7	20M	QPSK	100	0	Top Side	0mm	Ant 1	DSI 6	21100	2535	20.07	21.60	1.422	0.06	1.800	2.560
	LTE Band 7	20M	QPSK	1	0	Top Side	0mm	Ant 1	DSI 6 Simultaneous	21100	2535	18.50	20.10	1.445	0.05	1.620	2.342
	LTE Band 7	20M	QPSK	1	0	Front	9mm	Ant 1	DSI 4	21100	2535	22.89	24.00	1.291	0.06	0.425	0.549
	LTE Band 7	20M	QPSK	1	0	Back	12mm	Ant 1	DSI 4	21100	2535	22.89	24.00	1.291	0.04	0.376	0.485
	LTE Band 7	20M	QPSK	1	0	Top Side	13mm	Ant 1	DSI 4	21100	2535	22.89	24.00	1.291	0.05	0.544	0.702



FCC SAR Test Report

Report No. : FA192317-02

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
3700MHz																				
	LTE Band 48	20M	QPSK	1	0	-	Back	0mm	Ant 2	DSI 6	56150	3641	22.54	24.00	1.400	62.9	1.006	-0.02	1.930	2.717
70	LTE Band 48	20M	QPSK	1	0	-	Back	0mm	Ant 2	DSI 6	55340	3560	22.42	24.00	1.439	62.9	1.006	0.08	2.090	3.025
	LTE_CA_48C	20M	QPSK	1	99		Back	0mm	Ant 2	DSI 6	55340+55538	3560+3579.8	22.28	24.00	1.486	62.9	1.006	0.05	1.880	2.810
	LTE Band 48	20M	QPSK	1	0	-	Back	0mm	Ant 2	DSI 6	55830	3609	22.44	24.00	1.432	62.9	1.006	0.05	1.900	2.737
	LTE Band 48	20M	QPSK	1	0	-	Back	0mm	Ant 2	DSI 6	56640	3690	22.47	24.00	1.422	62.9	1.006	-0.02	2.060	2.948
	LTE Band 48	20M	QPSK	50	0	-	Back	0mm	Ant 2	DSI 6	56150	3641	21.55	23.00	1.396	62.9	1.006	0.05	1.560	2.191
	LTE Band 48	20M	QPSK	50	0	-	Back	0mm	Ant 2	DSI 6	55340	3560	21.44	23.00	1.432	62.9	1.006	-0.02	1.630	2.348
	LTE Band 48	20M	QPSK	50	0	-	Back	0mm	Ant 2	DSI 6	55830	3609	21.41	23.00	1.442	62.9	1.006	0.08	1.520	2.205
	LTE Band 48	20M	QPSK	50	0	-	Back	0mm	Ant 2	DSI 6	56640	3690	21.45	23.00	1.429	62.9	1.006	0.05	1.670	2.401
	LTE Band 48	20M	QPSK	100	0	-	Back	0mm	Ant 2	DSI 6	56150	3641	21.41	23.00	1.442	62.9	1.006	-0.02	1.600	2.321
	LTE Band 48	20M	QPSK	1	0	-	Back	0mm	Ant 2	DSI 6 Simultaneous	55340	3560	21.12	22.70	1.439	62.9	1.006	0.08	1.485	2.149
	LTE Band 48	20M	QPSK	1	0	-	Left Side	0mm	Ant 2	DSI 6	56150	3641	22.54	24.00	1.400	62.9	1.006	0.05	0.692	0.974
	LTE Band 48	20M	QPSK	50	0	-	Left Side	0mm	Ant 2	DSI 6	56150	3641	21.55	23.00	1.396	62.9	1.006	-0.02	0.559	0.785
	LTE Band 48	20M	QPSK	1	0	-	Back	18mm	Ant 2	DSI 4	56150	3641	22.54	24.00	1.400	62.9	1.006	0.03	0.178	0.251
	LTE Band 48	20M	QPSK	1	0	-	Left Side	20mm	Ant 2	DSI 4	56150	3641	22.54	24.00	1.400	62.9	1.006	0.08	0.133	0.187
	FR1 n77 Part270	100M	QPSK	1	1	DFT-SCS-30KHz	Back	0mm	Ant 2	DSI 6	656000	3840	19.27	20.10	1.211		1.000	0.02	2.400	2.905
	FR1 n77 Part270	100M	QPSK	135	69	DFT-SCS-30KHz	Back	0mm	Ant 2	DSI 6	656000	3840	19.03	20.10	1.279		1.000	0.03	2.280	2.917
	FR1 n77 Part270	100M	QPSK	270	0	DFT-SCS-30KHz	Back	0mm	Ant 2	DSI 6	656000	3840	18.88	20.10	1.324		1.000	0.06	2.160	2.861
	FR1 n77 Part270	100M	QPSK	1	1	DFT-SCS-30KHz	Left Side	0mm	Ant 2	DSI 6	656000	3840	19.27	20.10	1.211		1.000	0.04	0.795	0.962
	FR1 n77 Part270	100M	QPSK	135	69	DFT-SCS-30KHz	Left Side	0mm	Ant 2	DSI 6	656000	3840	19.03	20.10	1.279		1.000	0.09	0.784	1.003
	FR1 n77 Part270	100M	QPSK	1	1	DFT-SCS-30KHz	Back	0mm	Ant 2	DSI 6 Simultaneous	656000	3840	17.77	18.60	1.211		1.000	-0.01	1.710	2.070
71	FR1 n77 Part270 HPUE	100M	QPSK	1	1	DFT-SCS-30KHz	Back	0mm	Ant 2	DSI 6	656000	3840	22.26	23.10	1.213	50	1.000	0.02	2.470	2.997
	FR1 n77 Part270 HPUE	100M	QPSK	1	1	DFT-SCS-30KHz	Back	0mm	Ant 2	DSI 6 Simultaneous	656000	3840	20.82	21.60	1.197	50	1.000	-0.01	1.780	2.130
	FR1 n77 Part270	100M	QPSK	1	1	DFT-SCS-30KHz	Back	18mm	Ant 2	DSI 4	656000	3840	23.24	24.00	1.191		1.000	0.03	0.048	0.057
	FR1 n77 Part270	100M	QPSK	1	1	DFT-SCS-30KHz	Left Side	20mm	Ant 2	DSI 4	656000	3840	23.24	24.00	1.191		1.000	0.04	0.132	0.157
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	0mm	Ant 2	DSI 6	633334	3500.01	19.21	20.10	1.227		1.000	0.03	1.650	2.025
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Back	0mm	Ant 2	DSI 6	633334	3500.01	19.00	20.10	1.288		1.000	0.04	1.562	2.012
	FR1 n77 Part27Q	100M	QPSK	270	0	DFT-SCS-30KHz	Back	0mm	Ant 2	DSI 6	633334	3500.01	18.87	20.10	1.327		1.000	0.08	1.510	2.004
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	0mm	Ant 2	DSI 6 Simultaneous	633334	3500.01	17.73	18.60	1.222		1.000	0.03	1.012	1.236
	FR1 n77 Part27Q HPUE	100M	QPSK	1	1	DFT-SCS-30KHz	Back	0mm	Ant 2	DSI 6	633334	3500.01	22.18	23.10	1.236	50	1.000	0.03	1.640	2.027
	FR1 n77 Part27Q HPUE	100M	QPSK	1	1	DFT-SCS-30KHz	Back	0mm	Ant 2	DSI 6	633334	3500.01	22.18	23.10	1.236	50	1.000	0.03	1.590	1.965
	FR1 n77 Part27Q HPUE	100M	QPSK	1	1	DFT-SCS-30KHz	Back	0mm	Ant 2	DSI 6 Simultaneous	633334	3500.01	21.05	21.60	1.135	50	1.000	0.03	1.011	1.147
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	18mm	Ant 2	DSI 4	633334	3500.01	23.21	24.00	1.199		1.000	0.06	0.148	0.178
	FR1 n77 Part270	100M	QPSK	1	1	DFT-SCS-30KHz	Back	0mm	Ant 7	DSI 6	656000	3840	22.74	22.90	1.038		1.000	0.06	1.890	1.961
	FR1 n77 Part270	100M	QPSK	135	69	DFT-SCS-30KHz	Back	0mm	Ant 7	DSI 6	656000	3840	22.53	22.90	1.089		1.000	0.09	1.789	1.948
	FR1 n77 Part270	100M	QPSK	1	1	DFT-SCS-30KHz	Back	0mm	Ant 7	DSI 6 Simultaneous	656000	3840	21.26	21.40	1.033		1.000	0.06	1.012	1.045
	FR1 n77 Part270 HPUE	100M	QPSK	1	1	DFT-SCS-30KHz	Back	0mm	Ant 7	DSI 6	656000	3840	25.68	25.90	1.052	50	1.000	0.06	1.830	1.925
	FR1 n77 Part270 HPUE	100M	QPSK	1	1	DFT-SCS-30KHz	Back	0mm	Ant 7	DSI 6 Simultaneous	656000	3840	24.14	24.40	1.062	50	1.000	0.06	1.005	1.067
	FR1 n77 Part270	100M	QPSK	1	1	DFT-SCS-30KHz	Back	18mm	Ant 7	DSI 4	656000	3840	22.74	24.00	1.337		1.000	0.01	0.152	0.203
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	0mm	Ant 7	DSI 6	633334	3500.01	21.67	22.90	1.327		1.000	0.01	2.230	2.960
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Back	0mm	Ant 7	DSI 6	633334	3500.01	21.46	22.90	1.393		1.000	0.03	2.030	2.828
	FR1 n77 Part27Q	100M	QPSK	270	0	DFT-SCS-30KHz	Back	0mm	Ant 7	DSI 6	633334	3500.01	21.35	22.90	1.429		1.000	0.01	2.010	2.872
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Top Side	0mm	Ant 7	DSI 6	633334	3500.01	21.67	22.90	1.327		1.000	0.04	1.070	1.420
	FR1 n77 Part27Q	100M	QPSK	135	69	DFT-SCS-30KHz	Top Side	0mm	Ant 7	DSI 6	633334	3500.01	21.46	22.90	1.393		1.000	0.02	1.070	1.491
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	0mm	Ant 7	DSI 6 Simultaneous	633334	3500.01	21.17	21.40	1.054		1.000	-0.06	1.788	1.885
	FR1 n77 Part27Q HPUE	100M	QPSK	1	1	DFT-SCS-30KHz	Back	0mm	Ant 7	DSI 6	633334	3500.01	24.76	25.90	1.300	50	1.000	0.01	2.181	2.836
	FR1 n77 Part27Q HPUE	100M	QPSK	1	1	DFT-SCS-30KHz	Back	0mm	Ant 7	DSI 6 Simultaneous	633334	3500.01	23.48	24.40	1.236	50	1.000	-0.06	1.830	2.262
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	18mm	Ant 7	DSI 4	633334	3500.01	22.67	24.00	1.358		1.000	0.04	0.172	0.234
	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Top Side	13mm	Ant 7	DSI 4	633334	3500.01	22.67	24.00	1.358		1.000	-0.02	0.266	0.361

Sporton International (Kunshan) Inc.

TEL : 86-512-57900158 / FAX : 86-512-57900958

FCC ID : IHDT56AB3

Page 89 of 113

Issued Date : Jan. 17. 2022

Form version. : 200414



Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
WLAN/Bluetooth																
	WLAN5.3GHz	802.11a 6Mbps	Front	0mm	Ant 5+6	Full	64	5320	19.61	21.00	1.377	100	1.000	0.06	0.297	0.409
	WLAN5.3GHz	802.11a 6Mbps	Back	0mm	Ant 5+6	Full	64	5320	19.61	21.00	1.377	100	1.000	0.03	0.638	0.879
	WLAN5.3GHz	802.11a 6Mbps	Left Side	0mm	Ant 5+6	Full	64	5320	19.61	21.00	1.377	100	1.000	0.09	0.185	0.255
	WLAN5.3GHz	802.11a 6Mbps	Right Side	0mm	Ant 5+6	Full	64	5320	19.61	21.00	1.377	100	1.000	0.04	0.179	0.247
72	WLAN5.3GHz	802.11a 6Mbps	Top Side	0mm	Ant 5+6	Full	64	5320	19.61	21.00	1.377	100	1.000	-0.06	0.829	1.142
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 5+6	WWAN+WLAN&WWAN+DBS	58	5290	16.64	18.00	1.368	100	1.000	0.06	0.468	0.640
	WLAN5.5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 5+6	Standalone&DBS only	110	5550	20.20	21.50	1.349	100	1.000	0.04	0.414	0.558
	WLAN5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 5+6	Standalone&DBS only	110	5550	20.20	21.50	1.349	100	1.000	-0.03	0.628	0.847
	WLAN5.5GHz	802.11n-HT40 MCS0	Left Side	0mm	Ant 5+6	Standalone&DBS only	110	5550	20.20	21.50	1.349	100	1.000	0.05	0.247	0.333
	WLAN5GHz	802.11n-HT40 MCS0	Right Side	0mm	Ant 5+6	Standalone&DBS only	110	5550	20.20	21.50	1.349	100	1.000	0.07	0.118	0.159
73	WLAN5.5GHz	802.11n-HT40 MCS0	Top Side	0mm	Ant 5+6	Standalone&DBS only	110	5550	20.20	21.50	1.349	100	1.000	0.04	1.150	1.551
	WLAN5GHz	802.11n-HT40 MCS0	Top Side	0mm	Ant 5+6	Standalone&DBS only	102	5510	20.08	21.50	1.387	100	1.000	-0.01	1.090	1.512
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 5+6	WWAN+WLAN&WWAN+DBS	106	5530	16.31	17.50	1.315	100	1.000	0.08	0.487	0.640



16.5 Repeated SAR Measurement

<1g>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Headset	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	LTE Band 13	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	-	DSI 2	23230	782	24.33	25	1.167	-	-	0.03	0.988	1	1.153
2nd	LTE Band 13	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	-	DSI 2	23230	782	24.33	25	1.167	-	-	0.05	0.975	1.013	1.138
1st	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 1	-	DSI 2	4233	846.6	22.47	23.2	1.183	-	-	-0.06	1.060	1	1.254
2nd	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 1	-	DSI 2	4233	846.6	22.47	23.2	1.183	-	-	0.01	0.994	1.066	1.176
1st	LTE Band 66	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	-	DSI 2	132572	1770	17.19	18.1	1.233	-	-	-0.02	1.010	1	1.245
2nd	LTE Band 66	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	-	DSI 2	132572	1770	17.19	18.1	1.233	-	-	0.06	0.985	1.025	1.215
1st	FR1 n77 Part27O	100M	QPSK	1	1	-	Right Cheek	0mm	Ant 2	-	DSI 2	656000	3840	19.78	20.60	1.208	-	-	0.03	0.978	1	1.181
2nd	FR1 n77 Part27O	100M	QPSK	1	1	-	Right Cheek	0mm	Ant 2	-	DSI 2	656000	3840	19.78	20.60	1.208	-	-	0.07	0.962	1.017	1.162
1st	FR1 n77 Part27Q	100M	QPSK	135	69	-	Right Cheek	0mm	Ant 2	-	DSI 2	633334	3500.01	19.97	20.60	1.156	-	-	0.02	1.084	1	1.253
2nd	FR1 n77 Part27Q	100M	QPSK	135	69	-	Right Cheek	0mm	Ant 2	-	DSI 2	633334	3500.01	19.97	20.60	1.156	-	-	0.01	0.998	1.086	1.154
1st	WLAN2.4GHz	-	-	-	-	802.11b 1Mbps	Right Cheek	0mm	Ant 4+6	-	DSI 2	11	2462	21.05	22.00	1.245	97.87	1.022	0.07	0.988	1	1.257
2nd	WLAN2.4GHz	-	-	-	-	802.11b 1Mbps	Right Cheek	0mm	Ant 4+6	-	DSI 2	11	2462	21.05	22.00	1.245	97.87	1.022	0.02	0.971	1.018	1.235
1st	WLAN5.5GHz	-	-	-	-	802.11a 6Mbps	Right Tilted	0mm	Ant 5+6	-	DSI 2	124	5620	21.07	22.50	1.389	100	1.000	0.07	0.863	1	1.199
2nd	WLAN5.5GHz	-	-	-	-	802.11a 6Mbps	Right Tilted	0mm	Ant 5+6	-	DSI 2	124	5620	21.07	22.50	1.389	100	1.000	0.01	0.842	1.025	1.170
1st	WLAN5.8GHz	-	-	-	-	802.11a 6Mbps	Right Cheek	0mm	Ant 5+6	-	DSI 2	165	5825	20.86	22.00	1.300	100	1.000	0.07	0.805	1	1.047
2nd	WLAN5.8GHz	-	-	-	-	802.11a 6Mbps	Right Cheek	0mm	Ant 5+6	-	DSI 2	165	5825	20.86	22.00	1.300	100	1.000	0.05	0.794	1.014	1.032
1st	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 3	4233	846.6	22.90	23.50	1.148	-	1.000	0.08	1.090	1	1.251
2nd	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 3	4233	846.6	22.90	23.50	1.148	-	1.000	0.05	1.020	1.069	1.171
1st	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3	132322	1745	18.59	19.20	1.151	-	1.000	0.07	1.080	1	1.243
2nd	LTE Band 66	20M	QPSK	1	0	-	Back	5mm	Ant 0	-	DSI 3	132322	1745	18.59	19.20	1.151	-	1.000	0.03	0.998	1.082	1.148
1st	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 3	9262	1852.4	18.17	18.70	1.130	-	1.000	0.17	1.100	1	1.243
2nd	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	DSI 3	9262	1852.4	18.17	18.70	1.130	-	1.000	0.17	1.050	1.048	1.186
1st	LTE Band 2	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3	18700	1860	20.47	21.50	1.268	-	1.000	0.05	0.978	1	1.240
2nd	LTE Band 2	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3	18700	1860	20.47	21.50	1.268	-	1.000	0.02	0.957	1.022	1.213
1st	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3	21350	2560	20.17	20.90	1.183	-	1.000	0.01	1.050	1	1.242
2nd	LTE Band 7	20M	QPSK	1	0	-	Back	5mm	Ant 1	-	DSI 3	21350	2560	20.17	20.90	1.183	-	1.000	0.03	0.989	1.062	1.170
1st	LTE Band 48	20M	QPSK	1	0	-	Back	5mm	Ant 2	-	DSI 3	56150	3641	17.23	18.50	1.340	62.9	1.006	0.03	0.929	1	1.252
2nd	LTE Band 48	20M	QPSK	1	0	-	Back	5mm	Ant 2	-	DSI 3	56150	3641	17.23	18.50	1.340	62.9	1.006	0.01	0.910	1.021	1.226
1st	WLAN5.2GHz	-	-	-	-	802.11ac-VHT80 MCS0	Back	5mm	Ant 5+6	-	DSI 3	42	5210	17.42	18.50	1.282	100	1.000	-0.01	0.810	1	1.039
2nd	WLAN5.2GHz	-	-	-	-	802.11ac-VHT80 MCS0	Back	5mm	Ant 5+6	-	DSI 3	42	5210	17.42	18.50	1.282	100	1.000	0.06	0.794	1.020	1.018
1st	WLAN5.5GHz	-	-	-	-	802.11a 6Mbps	Back	5mm	Ant 5+6	-	DSI 3	124	5620	21.07	22.50	1.389	100	1.000	0.05	0.807	1	1.121
2nd	WLAN5.5GHz	-	-	-	-	802.11a 6Mbps	Back	5mm	Ant 5+6	-	DSI 3	124	5620	21.07	22.50	1.389	100	1.000	0.02	0.798	1.011	1.109



<10g>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB Offset	Mode	Test Position	Gap (mm)	Antenna	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Ratio	Reported 10g SAR (W/kg)
1st	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Bottom Side	0mm	Ant 0	DSI 6	349000	1745	21.08	22.10	1.265	-	-	0.04	2.440	1	3.086
2nd	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Bottom Side	0mm	Ant 0	DSI 6	349000	1745	21.08	22.10	1.265	-	-	0.05	2.350	1.038	2.972
1st	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Top Side	0mm	Ant 1	DSI 6	349000	1745	21.05	21.90	1.216	-	-	0.02	2.540	1	3.089
2nd	FR1 n66	40M	QPSK	1	1	DFT-SCS-15KHz	Top Side	0mm	Ant 1	DSI 6	349000	1745	21.05	21.90	1.216	-	-	0.03	2.390	1.063	2.907
1st	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DSI 6	9538	1907.6	21.59	22.40	1.205	-	-	0.07	2.580	1	3.109
2nd	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	DSI 6	9538	1907.6	21.59	22.40	1.205	-	-	0.06	2.410	1.071	2.904
1st	LTE Band 2	20M	QPSK	1	0	-	Top Side	0mm	Ant 1	DSI 6	19100	1900	20.07	20.60	1.130	-	-	-0.02	2.770	1	3.130
2nd	LTE Band 2	20M	QPSK	1	0	-	Top Side	0mm	Ant 1	DSI 6	19100	1900	20.07	20.60	1.127	-	-	0.01	2.650	1.045	2.994
1st	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6	20850	2510	22.71	23.50	1.199	-	-	0.01	2.480	1	2.975
2nd	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	0mm	Ant 0	DSI 6	20850	2510	22.71	23.50	1.199	-	-	0.09	2.400	1.033	2.879
1st	LTE Band 7	20M	QPSK	1	0	-	Top Side	0mm	Ant 1	DSI 6	21100	2535	20.29	21.60	1.352	-	-	0.05	2.280	1	3.083
2nd	LTE Band 7	20M	QPSK	1	0	-	Top Side	0mm	Ant 1	DSI 6	21100	2535	20.29	21.60	1.352	-	-	0.02	2.120	1.075	2.866
1st	LTE Band 48	20M	QPSK	1	0	-	Back	0mm	Ant 2	DSI 6	55340	3560	22.42	24.00	1.439	62.9	1.006	0.08	2.090	1	3.025
2nd	LTE Band 48	20M	QPSK	1	0	-	Back	0mm	Ant 2	DSI 6	55340	3560	22.42	24.00	1.439	62.9	1.006	0.05	1.990	1.050	2.880
1st	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Back	0mm	Ant 2	DSI 6	656000	3840	19.27	20.10	1.211	-	-	0.02	2.400	1	2.905
2nd	FR1 n77 Part27O	100M	QPSK	1	1	DFT-SCS-30KHz	Back	0mm	Ant 2	DSI 6	656000	3840	19.27	20.10	1.211	-	-	0.03	2.360	1.017	2.857
1st	FR1 n77 Part27Q HPUE	100M	QPSK	1	1	DFT-SCS-30KHz	Back	0mm	Ant 2	DSI 6	633334	3500.01	22.18	23.10	1.236	50	1.000	0.03	1.640	1	2.027
2nd	FR1 n77 Part27Q HPUE	100M	QPSK	1	1	DFT-SCS-30KHz	Back	0mm	Ant 2	DSI 6	633334	3500.01	22.18	23.10	1.236	50	1.000	0.03	1.590	1.031	1.965
1st	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	0mm	Ant 7	DSI 6	633334	3500.01	21.67	22.90	1.327	-	-	0.01	2.230	1	2.960
2nd	FR1 n77 Part27Q	100M	QPSK	1	1	DFT-SCS-30KHz	Back	0mm	Ant 7	DSI 6	633334	3500.01	21.67	22.90	1.327	-	-	-0.02	2.110	1.057	2.801

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/kg}$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45\text{W/kg}$, only one repeated measurement is required.
3. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The ratio is the difference in percentage between original and repeated *measured SAR*.
5. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

16.6 5G NR FR1 n77/n78 Linearity Data Analysis

General Note:

This device support Power Class 2 and Power Class 3 operations for 5G NR FR1 n77/n78. The highest available duty cycle for Power Class 2 operation is 50% using UL-DL configuration 1. Per FCC Guidance based on the device behavior, all SAR tests were performed using Power Class 3. Power Class 2 is tested using the highest SAR test configuration in Power Class 3 for each LTE configuration and exposure condition combination, according to the highest time averaged power for all applicable uplink-downlink configurations in Power Class 2. When the reported SAR vs. output power is linearly scaled with < 10% discrepancy between power classes and all reported SAR are < 1.4 W/kg, Separate SAR testing for Power Class 2 is not required

FR1 N77O(HPUE) Ant 2-Linearity Data for Head			FR1 N77Q(HPUE) Ant 2-Linearity Data for Head		
	FR1 N77 (Power Class 3)	FR1 N77 (Power Class 2)		FR1 N77 (Power Class 3)	FR1 N77 (Power Class 2)
Maximum Tune up Power (dBm)	20.60	23.60	Maximum Tune up Power (dBm)	20.60	23.60
Reported 1g SAR (W/kg)	1.18	1.12	Reported 1g SAR (W/kg)	1.25	1.24
Duty Cycle	100.00%	50.00%	Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	114.82	114.54	Frame Averaged (mW)	114.82	114.54
Linearity SAR (W/kg)	1.250		Linearity SAR (W/kg)	1.250	
% deviation from expected linearity		-0.80%	% deviation from expected linearity		-0.80%
FR1 N77O(HPUE) Ant 2-Linearity Data for Hotspot			FR1 N77Q(HPUE) Ant 2-Linearity Data for Hotspot		
	FR1 N77 (Power Class 3)	FR1 N77 (Power Class 2)		FR1 N77 (Power Class 3)	FR1 N77 (Power Class 2)
Maximum Tune up Power (dBm)	14.40	17.40	Maximum Tune up Power (dBm)	14.40	17.40
Reported 1g SAR (W/kg)	0.794	0.734	Reported 1g SAR (W/kg)	0.609	0.598
Duty Cycle	100.00%	50.00%	Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	31.62	34.59	Frame Averaged (mW)	27.54	27.48
Linearity SAR (W/kg)	0.997		Linearity SAR (W/kg)	0.608	
% deviation from expected linearity		-7.28%	% deviation from expected linearity		-3.38%
FR1 N77O(HPUE) Ant 2-Linearity Data for Body-worn			FR1 N77Q(HPUE) Ant 2-Linearity Data for Body-worn		
	FR1 N77 (Power Class 3)	FR1 N77 (Power Class 2)		FR1 N77 (Power Class 3)	FR1 N77 (Power Class 2)
Maximum Tune up Power (dBm)	15.70	18.70	Maximum Tune up Power (dBm)	15.70	18.70
Reported 1g SAR (W/kg)	0.665	0.664	Reported 1g SAR (W/kg)	0.647	0.646
Duty Cycle	100.00%	50.00%	Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	37.15	37.07	Frame Averaged (mW)	37.15	37.07
Linearity SAR (W/kg)	0.663		Linearity SAR (W/kg)	0.645	
% deviation from expected linearity		0.09%	% deviation from expected linearity		0.08%
FR1 N77O(HPUE) Ant 2-Linearity Data for Extremity SAR			FR1 N77Q(HPUE) Ant 2-Linearity Data for Extremity SAR		
	FR1 N77 (Power Class 3)	FR1 N77 (Power Class 2)		FR1 N77 (Power Class 3)	FR1 N77 (Power Class 2)
Maximum Tune up Power (dBm)	20.10	23.10	Maximum Tune up Power (dBm)	20.10	23.10
Reported 1g SAR (W/kg)	2.917	2.997	Reported 1g SAR (W/kg)	2.03	2.03
Duty Cycle	100.00%	50.00%	Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	102.33	102.09	Frame Averaged (mW)	102.33	102.09
Linearity SAR (W/kg)	2.898		Linearity SAR (W/kg)	2.020	
% deviation from expected linearity		3.41%	% deviation from expected linearity		0.34%

FR1 N77O(HPUE) Ant 7-Linearity Data for Head		
	FR1 N77 (Power Class 3)	FR1 N77 (Power Class 2)
Maximum Tune up Power (dBm)	24.00	27.00
Reported 1g SAR (W/kg)	0.19	0.21
Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	251.19	250.59
Linearity SAR (W/kg)	0.194	
% deviation from expected linearity		5.92%
FR1 N77O(HPUE) Ant 7-Linearity Data for Hotspot		
	FR1 N77 (Power Class 3)	FR1 N77 (Power Class 2)
Maximum Tune up Power (dBm)	16.90	19.90
Reported 1g SAR (W/kg)	0.69	0.69
Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	48.98	48.86
Linearity SAR (W/kg)	0.687	
% deviation from expected linearity		0.82%
FR1 N77O(HPUE) Ant 7-Linearity Data for Body-worn		
	FR1 N77 (Power Class 3)	FR1 N77 (Power Class 2)
Maximum Tune up Power (dBm)	18.20	21.20
Reported 1g SAR (W/kg)	0.737	0.738
Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	66.07	65.91
Linearity SAR (W/kg)	0.726	
% deviation from expected linearity		1.61%
FR1 N77O(HPUE) Ant 7-Linearity Data for Extremity SAR		
	FR1 N77 (Power Class 3)	FR1 N77 (Power Class 2)
Maximum Tune up Power (dBm)	22.90	25.90
Reported 1g SAR (W/kg)	1.961	1.925
Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	194.98	194.52
Linearity SAR (W/kg)	1.956	
% deviation from expected linearity		-1.60%

FR1 N77Q(HPUE) Ant 7-Linearity Data for Head		
	FR1 N77 (Power Class 3)	FR1 N77 (Power Class 2)
Maximum Tune up Power (dBm)	24.00	27.00
Reported 1g SAR (W/kg)	0.61	0.64
Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	251.19	250.59
Linearity SAR (W/kg)	0.608	
% deviation from expected linearity		5.01%
FR1 N77Q(HPUE) Ant 7-Linearity Data for Hotspot		
	FR1 N77 (Power Class 3)	FR1 N77 (Power Class 2)
Maximum Tune up Power (dBm)	16.90	19.90
Reported 1g SAR (W/kg)	0.81	0.86
Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	48.98	48.86
Linearity SAR (W/kg)	0.811	
% deviation from expected linearity		6.03%
FR1 N77Q(HPUE) Ant 7-Linearity Data for Body-worn		
	FR1 N77 (Power Class 3)	FR1 N77 (Power Class 2)
Maximum Tune up Power (dBm)	18.20	21.20
Reported 1g SAR (W/kg)	0.720	0.718
Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	66.07	65.91
Linearity SAR (W/kg)	0.718	
% deviation from expected linearity		-0.04%
FR1 N77Q(HPUE) Ant 7-Linearity Data for Extremity SAR		
	FR1 N77 (Power Class 3)	FR1 N77 (Power Class 2)
Maximum Tune up Power (dBm)	22.90	25.90
Reported 1g SAR (W/kg)	2.960	2.836
Duty Cycle	100.00%	50.00%
Frame Averaged (mW)	194.98	194.52
Linearity SAR (W/kg)	2.953	
% deviation from expected linearity		-3.96%

17. Simultaneous Transmission Analysis

No.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Body-worn	Hotspot	Product specific 10g SAR
1.	WWAN + WLAN2.4GHz	Yes	Yes	Yes	Yes
2.	WWAN + WLAN5GHz	Yes	Yes	Yes	Yes
3.	WWAN + WLAN6E	Yes	Yes		Yes
4.	WWAN + Bluetooth	Yes	Yes	Yes	Yes
5.	Bluetooth + WLAN5GHz	Yes	Yes	Yes	Yes
6.	Bluetooth + WLAN6E	Yes	Yes		Yes
7.	WWAN + Bluetooth + WLAN5GHz	Yes	Yes	Yes	Yes
8.	WWAN + Bluetooth + WLAN6E	Yes	Yes		Yes
9.	WLAN2.4GHz + WLAN5GHz	Yes	Yes	Yes	Yes
10.	WWAN + WLAN 2.4GHz + WLAN 5GHz	Yes	Yes	Yes	Yes
11.	WLAN2.4GHz + WLAN6E	Yes	Yes		Yes
12.	WWAN + WLAN 2.4GHz + WLAN6E	Yes	Yes		Yes

General Note:

- This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
- WWAN above includes 5G NR bands.
- EUT will choose each GSM, WCDMA, LTE and 5GNR according to the network signal condition; therefore, they will not operate simultaneously at any moment.
- For EN-DC mode, Qualcomm Smart Transmit algorithm in WWAN adds directly the time-averaged RF exposure from 4G(LTE) and time-averaged RF exposure from 5G NR. Smart Transmit algorithm controls the total RF exposure from both 4G and 5G NR to not exceed FCC limit. Therefore, simultaneous transmission compliance between 4G+5G NR operation is demonstrated in the Part 2 Report during algorithm validation. In Part 1 Report, simultaneous transmission compliance was evaluated individually with other Radios (WLAN or BT) using one of 4G or 5G NR.
- This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
- This device 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WLAN Direct (GC/GO), and 5.3GHz / 5.5GHz supports WLAN Direct (GC only).WIFI 6E has no hotspot function.
- The 2.4GHz/5GHz/6GHz WLAN can transmit in MIMO antenna mode only and it has no SISO antenna mode.
- The worst case 5 GHz WLAN SAR for each configuration was used for SAR summation.
- WLAN 2.4GHz and Bluetooth share the same antenna so can't transmit simultaneously.
- According to the EUT characteristic, WLAN 5GHz/6GHz and Bluetooth can transmit simultaneously.
- According to the EUT characteristic, WLAN 5GHz/6GHz and WLAN 2.4GHz can transmit simultaneously.
- According to the EUT characteristic, WLAN 5GHz and WLAN 6GHz can't transmit simultaneously.
- The maximum SAR summation is calculated based on the same configuration and test position.
- SAR Power density test report for WLAN6E U-NII-5/6/7/8 will be separately submitted. About co-located SAR with WWAN/Bluetooth, always chose higher SAR of WLAN5G U-NII-1/2A/2C/3 and U-NII-5/6/7/8.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - 1g Scalar SAR summation < 1.6W/kg and 10g Scalar SAR summation < 4.0W/kg.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{ separation distance, mm})$, and the peak separation distance is determined by the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$ for 1g SAR and $SPLSR \leq 0.10$ for 10g SAR , simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR < 1.6W/kg and 10g SAR < 4.0W/kg.

17.1 5G NR + LTE + WLAN + BT Sim-Tx analysis

In 5G NR + LTE + WLAN + BT simultaneous transmission, 5G NR and LTE transmission are managed and controlled by Qualcomm® Smart Transmit, while the RF exposure from WLAN and BT radios is managed using legacy approach, i.e., through a fixed power back-off if needed.

Since WLAN and BT do not employ time-averaging, 1gSAR and 10gSAR measurement for WLAN and BT need to be conducted at their corresponding rated power following current FCC test procedures to determine reported SAR values.

Smart Transmit current implementation assumes hotspots from 5G NR and LTE are collocated. Therefore, for a total of 100% exposure margin, if LTE uses x%, then the exposure margin left for 5G NR is capped to (100-x)%. Thus, the compliance equation for LTE + 5G NR is

$$x\% * A + (100-x)\% * B \leq 1.0,$$

Where, A is normalized reported time-averaged SAR exposure ratio from LTE, and $A \leq 1.0$; B is normalized reported time-averaged exposure ratio from 5G NR (i.e. SAR exposure for 5G FR1), and $B \leq 1.0$.

Let C = normalized reported SAR exposure ratio from WLAN+BT, then for compliance,

$$x\% * A + (100-x)\% * B + C \leq 1.0 \quad (1)$$

$$x\% * A + (100-x)\% * B \leq x\% * \max(A, B) + (100-x)\% * \max(A, B) \leq \max(A, B)$$

$$x\% * A + (100-x)\% * B + C \leq \max(A, B) + C \leq 1.0 \quad (2)$$

if $A + C \leq 1.0$ and $B + C \leq 1.0$ can be proven, then " $x\% * A + (100-x)\% * B + C \leq 1.0$ ". Therefore simultaneous transmission analysis for 5G NR + LTE + WLAN + BT can be performed in two steps

Step 1: Prove total exposure ratio (TER) of LTE + WLAN + BT < 1

Step 2: Prove total exposure ratio (TER) of 5G NR + WLAN + BT < 1

Above analysis is also apply to LTE inter band uplink, LTE1 + LTE2 + WLAN + BT simultaneous transmission, So inter band CA uplink no need to do additional simultaneously analysis again. Only required comply with total exposure ratio (TER) of LTE + WLAN + BT < 1.

Above analysis is also apply to NR band UL MIMO, NR1 + NR2 + WLAN + BT simultaneous transmission, So UL MIMO no need to do additional simultaneously analysis again. Only required comply with total exposure ratio (TER) of NR + WLAN + BT < 1.



17.2 Head Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	5	6	7	8	9	10	2+5 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4+7 Summed 1g SAR (W/kg)	1+4+10 Summed 1g SAR (W/kg)	1+6+8 Summed 1g SAR (W/kg)	1+6+9 Summed 1g SAR (W/kg)	1+8+10 Summed 1g SAR (W/kg)	1+9+10 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	WLAN 2.4GHz Ant 4+6 DBS Only 1g SAR (W/kg)	WLAN 2.4GHz Ant 4+6 WWAN+ WLAN 1g SAR (W/kg)	WLAN 2.4GHz Ant 4+6 WWAN+ DBS Only 1g SAR (W/kg)	WLAN 5GHz Ant 5+6 DBS Only 1g SAR (W/kg)	WLAN 5GHz Ant 5+6 WWAN+ WLAN 1g SAR (W/kg)	WLAN 5GHz Ant 5+6 WWAN+ DBS Only 1g SAR (W/kg)	Bluetooth Ant 4 1g SAR (W/kg)	Bluetooth Ant 6 1g SAR (W/kg)	WIFI 6E 1g SAR (W/kg)								
GSM850 Ant 0	Right Cheek	0.208	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.207	1.47	0.78	0.77	0.70	0.77	0.48	0.70	0.42
	Right Tilted	0.150	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.244	1.47	0.72	0.71	0.68	0.71	0.43	0.68	0.40
	Left Cheek	0.157	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.185	1.47	0.73	0.72	0.63	0.71	0.43	0.63	0.35
	Left Tilted	0.125	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	0.70	0.69	0.67	0.68	0.40	0.67	0.38
GSM850 Ant 1	Right Cheek	0.856	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.207	1.47	1.43	1.42	1.35	1.41	1.13	1.35	1.07
	Right Tilted	0.856	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.244	1.47	0.86	1.13	1.10	1.41	1.13	1.39	1.10
	Left Cheek	0.856	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.185	1.47	1.43	1.42	1.33	1.41	1.13	1.33	1.04
	Left Tilted	0.856	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	1.43	1.42	1.40	1.41	1.13	1.40	1.11
GSM1900 Ant 0	Right Cheek	0.012	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.207	1.47	0.58	0.57	0.51	0.57	0.29	0.50	0.22
	Right Tilted	0.004	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.244	1.47	0.58	0.56	0.54	0.56	0.28	0.53	0.25
	Left Cheek	0.022	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.185	1.47	0.59	0.58	0.50	0.58	0.30	0.49	0.21
	Left Tilted	0.003	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	0.57	0.56	0.55	0.56	0.28	0.54	0.26
WCDMA II Ant 0	Right Cheek	0.039	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.207	1.47	0.61	0.60	0.53	0.60	0.31	0.53	0.25
	Right Tilted	0.002	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.244	1.47	0.57	0.56	0.53	0.56	0.28	0.53	0.25
	Left Cheek	0.056	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.185	1.47	0.63	0.62	0.53	0.61	0.33	0.53	0.24
	Left Tilted	0.038	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	0.61	0.60	0.58	0.60	0.31	0.58	0.30
WCDMA V Ant 1	Right Cheek	0.778	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.207	1.47	1.35	1.34	1.27	1.34	1.05	1.27	0.99
	Right Tilted	0.778	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.244	1.47	1.35	1.34	1.31	1.34	1.05	1.31	1.03
	Left Cheek	0.778	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.185	1.47	1.35	1.34	1.25	1.34	1.05	1.25	0.97
	Left Tilted	0.778	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	1.35	1.34	1.32	1.34	1.05	1.32	1.04
WCDMA V Ant 0	Right Cheek	0.211	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.207	1.47	0.78	0.77	0.71	0.77	0.49	0.70	0.42
	Right Tilted	0.137	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.244	1.47	0.71	0.70	0.67	0.69	0.41	0.67	0.38
	Left Cheek	0.152	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.185	1.47	0.72	0.71	0.63	0.71	0.43	0.62	0.34
	Left Tilted	0.128	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	0.70	0.69	0.67	0.69	0.40	0.67	0.39
LTE Band 2 Ant 0	Right Cheek	0.039	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.207	1.47	0.61	0.60	0.53	0.60	0.31	0.53	0.25
	Right Tilted	0.004	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.244	1.47	0.58	0.56	0.54	0.56	0.28	0.53	0.25
	Left Cheek	0.059	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.185	1.47	0.63	0.62	0.53	0.62	0.33	0.53	0.25
	Left Tilted	0.039	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	0.61	0.60	0.58	0.60	0.31	0.58	0.30
LTE Band 2 Ant 1	Right Cheek	0.742	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.207	1.47	1.31	1.30	1.24	1.30	1.02	1.23	0.95
	Right Tilted	0.742	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.244	1.47	1.31	1.30	1.27	1.30	1.02	1.27	0.99
	Left Cheek	0.742	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.185	1.47	1.31	1.30	1.22	1.30	1.02	1.21	0.93
	Left Tilted	0.742	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	1.31	1.30	1.29	1.30	1.02	1.28	1.00
LTE Band 5 Ant 0	Right Cheek	0.216	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.207	1.47	0.79	0.78	0.71	0.77	0.49	0.71	0.43
	Right Tilted	0.131	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.244	1.47	0.70	0.69	0.66	0.69	0.41	0.66	0.38
	Left Cheek	0.148	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.185	1.47	0.72	0.71	0.62	0.71	0.42	0.62	0.34
	Left Tilted	0.116	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	0.69	0.68	0.66	0.67	0.39	0.66	0.37
LTE Band 5 Ant 1	Right Cheek	0.858	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.207	1.47	1.43	1.42	1.35	1.42	1.13	1.35	1.07
	Right Tilted	0.858	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.244	1.47	1.43	1.42	1.39	1.42	1.13	1.39	1.11
	Left Cheek	0.858	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.185	1.47	1.43	1.42	1.33	1.42	1.13	1.33	1.05
	Left Tilted	0.858	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	1.43	1.42	1.40	1.42	1.13	1.40	1.12
LTE Band 7 Ant 0	Right Cheek	0.107	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.207	1.47	0.68	0.67	0.60	0.66	0.38	0.60	0.32
	Right Tilted	0.051	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.244	1.47	0.62	0.61	0.58	0.61	0.33	0.58	0.30
	Left Cheek	0.064	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.185	1.47	0.64	0.62	0.54	0.62	0.34	0.53	0.25
	Left Tilted	0.070	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	0.64	0.63	0.61	0.63	0.35	0.61	0.33
LTE Band 7 Ant 1	Right Cheek	0.848	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.207	1.47	1.42	1.41	1.34	1.41	1.12	1.34	1.06
	Right Tilted	0.848	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.244	1.47	1.42	1.41	1.38	1.41	1.12	1.38	1.10
	Left Cheek	0.848	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.185	1.47	1.42	1.41	1.32	1.41	1.12	1.32	1.04
	Left Tilted	0.848	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	1.42	1.41	1.39	1.41	1.12	1.39	1.11



FCC SAR Test Report

Report No. : FA192317-02

LTE Band 12 Ant 0	Right Cheek	0.209	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.207	1.47	0.78	0.77	0.70	0.77	0.48	0.70	0.42
	Right Tilted	0.121	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.244	1.47	0.69	0.68	0.65	0.68	0.40	0.65	0.37
	Left Cheek	0.141	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.185	1.47	0.71	0.70	0.61	0.70	0.42	0.61	0.33
	Left Tilted	0.100	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	0.67	0.66	0.64	0.66	0.38	0.64	0.36
LTE Band 12 Ant 1	Right Cheek	0.846	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.207	1.47	1.42	1.41	1.34	1.40	1.12	1.34	1.06
	Right Tilted	0.846	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.244	1.47	1.42	1.41	1.38	1.40	1.12	1.38	1.09
	Left Cheek	0.846	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.185	1.47	1.42	1.41	1.32	1.40	1.12	1.32	1.03
	Left Tilted	0.846	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	1.42	1.41	1.39	1.40	1.12	1.39	1.10
LTE Band 13 Ant 0	Right Cheek	0.179	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.207	1.47	0.75	0.74	0.67	0.74	0.45	0.67	0.39
	Right Tilted	0.105	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.244	1.47	0.68	0.67	0.64	0.66	0.38	0.63	0.35
	Left Cheek	0.125	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.185	1.47	0.70	0.69	0.60	0.68	0.40	0.60	0.31
	Left Tilted	0.079	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	0.65	0.64	0.62	0.64	0.35	0.62	0.34
LTE Band 13 Ant 1	Right Cheek	0.785	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.207	1.47	1.36	1.35	1.28	1.34	1.06	1.28	1.00
	Right Tilted	0.785	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.244	1.47	1.36	1.35	1.32	1.34	1.06	1.31	1.03
	Left Cheek	0.785	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.185	1.47	1.36	1.35	1.26	1.34	1.06	1.26	0.97
	Left Tilted	0.785	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	1.36	1.35	1.33	1.34	1.06	1.33	1.04
LTE Band 66 Ant 0	Right Cheek	0.090	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.207	1.47	0.66	0.65	0.59	0.65	0.37	0.58	0.30
	Right Tilted	0.066	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.244	1.47	0.64	0.63	0.60	0.62	0.34	0.60	0.31
	Left Cheek	0.097	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.185	1.47	0.67	0.66	0.57	0.65	0.37	0.57	0.29
	Left Tilted	0.078	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	0.65	0.64	0.62	0.64	0.35	0.62	0.34
LTE Band 66 Ant 1	Right Cheek	0.983	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.207	1.47	1.55	1.54	1.48	1.54	1.26	1.48	1.19
	Right Tilted	0.983	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.244	1.47	1.55	1.54	1.52	1.54	1.26	1.51	1.23
	Left Cheek	0.983	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.185	1.47	1.55	1.54	1.46	1.54	1.26	1.45	1.17
	Left Tilted	0.983	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	1.55	1.54	1.53	1.54	1.26	1.52	1.24
LTE Band 48 Ant 2	Right Cheek	0.946	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.207	1.47	1.52	1.51	1.44	1.50	1.22	1.44	1.16
	Right Tilted	0.449	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.244	1.47	1.02	1.01	0.98	1.01	0.72	0.98	0.70
	Left Cheek	0.255	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.185	1.47	0.83	0.82	0.73	0.81	0.53	0.73	0.44
	Left Tilted	0.179	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	0.75	0.74	0.72	0.74	0.45	0.72	0.44



<5G NR Mode>

WWAN Band	Exposure Position	1	2	3	4	5	6	7	8	9	10	2+5 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4+7 Summed 1g SAR (W/kg)	1+4+10 Summed 1g SAR (W/kg)	1+6+8 Summed 1g SAR (W/kg)	1+6+9 Summed 1g SAR (W/kg)	1+8+10 Summed 1g SAR (W/kg)	1+9+10 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	WLAN 2.4GHz Ant 4+6 DBS Only 1g SAR (W/kg)	WLAN 2.4GHz Ant 4+6 WWAN+ WLAN 1g SAR (W/kg)	WLAN 2.4GHz Ant 4+6 WWAN+ DBS 1g SAR (W/kg)	WLAN 5GHz Ant 5+6 DBS Only 1g SAR (W/kg)	WLAN 5GHz Ant 5+6 WWAN+ WLAN 1g SAR (W/kg)	WLAN 5GHz Ant 5+6 WWAN+ DBS 1g SAR (W/kg)	Bluetooth Ant 4 1g SAR (W/kg)	Bluetooth Ant 6 1g SAR (W/kg)	WIFI 6E 1g SAR (W/kg)								
FR1 n2 Ant 0	Right Cheek	0.028	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.207	1.47	0.60	0.59	0.52	0.59	0.30	0.52	0.24
	Right Tilted	0.032	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.244	1.47	0.60	0.59	0.56	0.59	0.31	0.56	0.28
	Left Cheek	0.042	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.185	1.47	0.61	0.60	0.52	0.60	0.32	0.51	0.23
	Left Tilted	0.036	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	0.61	0.60	0.58	0.59	0.31	0.58	0.29
FR1 n2 Ant 1	Right Cheek	0.902	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.207	1.47	1.47	1.46	1.40	1.46	1.18	1.39	1.11
	Right Tilted	0.902	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.244	1.47	0.90	1.17	1.15	1.46	1.18	1.43	1.15
	Left Cheek	0.902	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.185	1.47	1.47	1.46	1.38	1.46	1.18	1.37	1.09
	Left Tilted	0.902	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	1.47	1.46	1.45	1.46	1.18	1.44	1.16
FR1 n5 Ant 0	Right Cheek	0.161	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.207	1.47	0.73	0.72	0.66	0.72	0.44	0.65	0.37
	Right Tilted	0.097	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.244	1.47	0.67	0.66	0.63	0.65	0.37	0.63	0.34
	Left Cheek	0.109	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.185	1.47	0.68	0.67	0.58	0.67	0.38	0.58	0.30
	Left Tilted	0.087	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	0.66	0.65	0.63	0.64	0.36	0.63	0.35
FR1 n5 Ant 1	Right Cheek	0.851	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.207	1.47	1.42	1.41	1.35	1.41	1.13	1.34	1.06
	Right Tilted	0.851	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.244	1.47	1.42	1.41	1.38	1.41	1.13	1.38	1.10
	Left Cheek	0.851	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.185	1.47	1.42	1.41	1.32	1.41	1.13	1.32	1.04
	Left Tilted	0.851	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	1.42	1.41	1.39	1.41	1.13	1.39	1.11
FR1 n66 Ant 0	Right Cheek	0.054	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.207	1.47	0.63	0.61	0.55	0.61	0.33	0.55	0.26
	Right Tilted	0.051	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.244	1.47	0.62	0.61	0.58	0.61	0.33	0.58	0.30
	Left Cheek	0.062	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.185	1.47	0.63	0.62	0.54	0.62	0.34	0.53	0.25
	Left Tilted	0.041	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	0.61	0.60	0.58	0.60	0.32	0.58	0.30
FR1 n66 Ant 1	Right Cheek	0.922	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.207	1.47	1.49	1.48	1.42	1.48	1.20	1.41	1.13
	Right Tilted	0.922	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.244	1.47	1.49	1.48	1.45	1.48	1.20	1.45	1.17
	Left Cheek	0.922	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.185	1.47	1.49	1.48	1.40	1.48	1.20	1.39	1.11
	Left Tilted	0.922	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	1.49	1.48	1.47	1.48	1.20	1.46	1.18
FR1 n77 Part 270 Ant 2	Right Cheek	0.761	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.207	1.47	1.33	1.32	1.26	1.32	1.04	1.25	0.97
	Right Tilted	0.761	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.244	1.47	1.33	1.32	1.29	1.32	1.04	1.29	1.01
	Left Cheek	0.761	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.185	1.47	1.33	1.32	1.23	1.32	1.04	1.23	0.95
	Left Tilted	0.761	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	1.33	1.32	1.30	1.32	1.04	1.30	1.02
FR1 n77 Part 270 Ant 7	Right Cheek	0.149	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.207	1.47	0.72	0.71	0.64	0.71	0.42	0.64	0.36
	Right Tilted	0.201	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.244	1.47	0.77	0.76	0.73	0.76	0.48	0.73	0.45
	Left Cheek	0.077	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.185	1.47	0.65	0.64	0.55	0.63	0.35	0.55	0.27
	Left Tilted	0.088	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	0.66	0.65	0.63	0.65	0.36	0.63	0.35
FR1 n77 Part 27Q Ant 2	Right Cheek	0.890	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.207	1.47	1.46	1.45	1.39	1.45	1.17	1.38	1.10
	Right Tilted	0.890	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.244	1.47	1.46	1.45	1.42	1.45	1.17	1.42	1.14
	Left Cheek	0.890	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.185	1.47	1.46	1.45	1.36	1.45	1.17	1.36	1.08
	Left Tilted	0.890	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	1.46	1.45	1.43	1.45	1.17	1.43	1.15
FR1 n77 Part 27Q Ant 7	Right Cheek	0.631	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.207	1.47	1.20	1.19	1.13	1.19	0.91	1.12	0.84
	Right Tilted	0.597	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.244	1.47	1.17	1.16	1.13	1.15	0.87	1.13	0.84
	Left Cheek	0.471	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.185	1.47	1.04	1.03	0.94	1.03	0.75	0.94	0.66
	Left Tilted	0.482	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	1.05	1.04	1.03	1.04	0.76	1.02	0.74



<SRS Mode>

WWAN Band	Exposure Position	1	2	3	4	5	6	7	8	9	10	2+5 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4+7 Summed 1g SAR (W/kg)	1+4+10 Summed 1g SAR (W/kg)	1+6+8 Summed 1g SAR (W/kg)	1+6+9 Summed 1g SAR (W/kg)	1+8+10 Summed 1g SAR (W/kg)	1+9+10 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	WLAN 2.4GHz Ant 4+6 DBS Only 1g SAR (W/kg)	WLAN 2.4GHz Ant 4+6 WWAN+ WLAN 1g SAR (W/kg)	WLAN 2.4GHz Ant 4+6 WWAN+ DBS 1g SAR (W/kg)	WLAN 5GHz Ant 5+6 DBS Only 1g SAR (W/kg)	WLAN 5GHz Ant 5+6 WWAN+ WLAN 1g SAR (W/kg)	WLAN 5GHz Ant 5+6 WWAN+ DBS 1g SAR (W/kg)	Bluetooth Ant 4 1g SAR (W/kg)	Bluetooth Ant 6 1g SAR (W/kg)	WIFI 6E 1g SAR (W/kg)								
FR1 n77 Part 27O Ant 3	Right Cheek	0.003	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	0.57	0.56	0.55	0.56	0.28	0.54	0.26
	Right Tilted	0.002	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	0.57	0.56	0.55	0.56	0.28	0.54	0.26
	Left Cheek	0.001	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	0.57	0.56	0.54	0.56	0.28	0.54	0.26
	Left Tilted	0.001	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	0.57	0.56	0.54	0.56	0.28	0.54	0.26
FR1 n77 Part 27O Ant 8	Right Cheek	0.001	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	0.57	0.56	0.54	0.56	0.28	0.54	0.26
	Right Tilted	0.001	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	0.57	0.56	0.54	0.56	0.28	0.54	0.26
	Left Cheek		0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	0.57	0.56	0.54	0.56	0.28	0.54	0.26
	Left Tilted	0.001	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	0.57	0.56	0.54	0.56	0.28	0.54	0.26
FR1 n77 Part 27Q Ant 3	Right Cheek	0.002	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	0.57	0.56	0.55	0.56	0.28	0.54	0.26
	Right Tilted	0.001	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	0.57	0.56	0.54	0.56	0.28	0.54	0.26
	Left Cheek	0.002	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	0.57	0.56	0.55	0.56	0.28	0.54	0.26
	Left Tilted	0.001	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	0.57	0.56	0.54	0.56	0.28	0.54	0.26
FR1 n77 Part 27Q Ant 8	Right Cheek	0.001	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	0.57	0.56	0.54	0.56	0.28	0.54	0.26
	Right Tilted	0.001	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	0.57	0.56	0.54	0.56	0.28	0.54	0.26
	Left Cheek	0.001	0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	0.57	0.56	0.54	0.56	0.28	0.54	0.26
	Left Tilted		0.734	0.571	0.288	0.732	0.272	0.272	0.285	0.003	0.255	1.47	0.57	0.56	0.54	0.56	0.28	0.54	0.26



17.3 Hotspot Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	5	6	7	1+2 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)	1+4+6 Summed 1g SAR (W/kg)	1+4+7 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	WLAN2.4GHz Ant 4+6 WWAN+WLAN 1g SAR (W/kg)	WLAN2.4GHz Ant 4+6 WWAN+DBS 1g SAR (W/kg)	WLAN5GHz Ant 5+6 WWAN+WLAN 1g SAR (W/kg)	WLAN5GHz Ant 5+6 WWAN+DBS 1g SAR (W/kg)	Bluetooth Ant 4 1g SAR (W/kg)	Bluetooth Ant 6 1g SAR (W/kg)				
GSM850 Ant 0	Front	0.638	0.231	0.221	0.160	0.160	0.197	0.029	0.870	1.020	1.000	0.830
	Back	1.012	0.278	0.221	0.245	0.245	0.241	0.087	1.290	1.480	1.500	1.340
	Left side	0.117	0.073	0.221	0.115	0.115	0.074	0.036	0.190	0.450	0.310	0.270
	Right side	0.267	0.068	0.221	0.083	0.083	0.064	0.032	0.340	0.570	0.410	0.380
	Top side		0.439	0.221	0.276	0.276	0.287	0.009	0.440	0.500	0.560	0.290
	Bottom side	0.536							0.540	0.540	0.540	0.540
GSM850 Ant 1	Front	0.629	0.231	0.221	0.160	0.160	0.197	0.029	0.860	1.010	0.990	0.820
	Back	0.794	0.278	0.221	0.245	0.245	0.241	0.087	1.070	1.260	1.280	1.130
	Left side	0.195	0.073	0.221	0.115	0.115	0.074	0.036	0.270	0.530	0.380	0.350
	Right side	0.343	0.068	0.221	0.083	0.083	0.064	0.032	0.410	0.650	0.490	0.460
	Top side	0.939	0.439	0.221	0.276	0.276	0.287	0.009	1.380	1.440	1.500	1.220
	Bottom side								0.000	0.000	0.000	0.000
GSM1900 Ant 0	Front	0.454	0.231	0.221	0.160	0.160	0.197	0.029	0.690	0.840	0.810	0.640
	Back	0.500	0.278	0.221	0.245	0.245	0.241	0.087	0.780	0.970	0.990	0.830
	Left side	0.028	0.073	0.221	0.115	0.115	0.074	0.036	0.100	0.360	0.220	0.180
	Right side	0.029	0.068	0.221	0.083	0.083	0.064	0.032	0.100	0.330	0.180	0.140
	Top side		0.439	0.221	0.276	0.276	0.287	0.009	0.440	0.500	0.560	0.290
	Bottom side	0.940							0.940	0.940	0.940	0.940
WCDMA II Ant 0	Front	0.402	0.231	0.221	0.160	0.160	0.197	0.029	0.630	0.780	0.760	0.590
	Back	0.460	0.278	0.221	0.245	0.245	0.241	0.087	0.740	0.930	0.950	0.790
	Left side	0.024	0.073	0.221	0.115	0.115	0.074	0.036	0.100	0.360	0.210	0.180
	Right side	0.020	0.068	0.221	0.083	0.083	0.064	0.032	0.090	0.320	0.170	0.140
	Top side		0.439	0.221	0.276	0.276	0.287	0.009	0.440	0.500	0.560	0.290
	Bottom side	0.927							0.930	0.930	0.930	0.930
WCDMA V Ant 0	Front	0.472	0.231	0.221	0.160	0.160	0.197	0.029	0.700	0.850	0.830	0.660
	Back	0.761	0.278	0.221	0.245	0.245	0.241	0.087	1.040	1.230	1.250	1.090
	Left side	0.084	0.073	0.221	0.115	0.115	0.074	0.036	0.160	0.420	0.270	0.240
	Right side	0.130	0.068	0.221	0.083	0.083	0.064	0.032	0.200	0.430	0.280	0.250
	Top side		0.439	0.221	0.276	0.276	0.287	0.009	0.440	0.500	0.570	0.290
	Bottom side	0.479							0.480	0.480	0.480	0.480
WCDMA V Ant 1	Front	0.472	0.231	0.221	0.160	0.160	0.197	0.029	0.700	0.850	0.830	0.660
	Back	0.618	0.278	0.221	0.245	0.245	0.241	0.087	0.900	1.080	1.100	0.950
	Left side	0.146	0.073	0.221	0.115	0.115	0.074	0.036	0.220	0.480	0.340	0.300
	Right side	0.305	0.068	0.221	0.083	0.083	0.064	0.032	0.370	0.610	0.450	0.420
	Top side	0.964	0.439	0.221	0.276	0.276	0.287	0.009	1.400	1.460	1.530	1.250
	Bottom side								0.000	0.000	0.000	0.000
LTE Band 2 Ant 0	Front	0.420	0.231	0.221	0.160	0.160	0.197	0.029	0.650	0.800	0.780	0.610
	Back	0.456	0.278	0.221	0.245	0.245	0.241	0.087	0.730	0.920	0.940	0.790
	Left side	0.020	0.073	0.221	0.115	0.115	0.074	0.036	0.090	0.360	0.210	0.170
	Right side	0.021	0.068	0.221	0.083	0.083	0.064	0.032	0.090	0.330	0.170	0.140
	Top side		0.439	0.221	0.276	0.276	0.287	0.009	0.440	0.500	0.560	0.290
	Bottom side	0.948							0.950	0.950	0.950	0.950
LTE Band 2 Ant 1	Front	0.457	0.231	0.221	0.160	0.160	0.197	0.029	0.690	0.840	0.810	0.650
	Back	0.638	0.278	0.221	0.245	0.245	0.241	0.087	0.920	1.100	1.120	0.970
	Left side	0.032	0.073	0.221	0.115	0.115	0.074	0.036	0.110	0.370	0.220	0.180
	Right side	0.099	0.068	0.221	0.083	0.083	0.064	0.032	0.170	0.400	0.250	0.210
	Top side	1.017	0.439	0.221	0.276	0.276	0.287	0.009	1.460	1.510	1.580	1.300
	Bottom side								0.000	0.000	0.000	0.000
LTE Band 5 Ant 0	Front	0.632	0.231	0.221	0.160	0.160	0.197	0.029	0.860	1.010	0.990	0.820
	Back	0.844	0.278	0.221	0.245	0.245	0.241	0.087	1.120	1.310	1.330	1.180



FCC SAR Test Report

Report No. : FA192317-02

	Left side	0.091	0.073	0.221	0.115	0.115	0.074	0.036	0.160	0.430	0.280	0.240
	Right side	0.154	0.068	0.221	0.083	0.083	0.064	0.032	0.220	0.460	0.300	0.270
	Top side		0.439	0.221	0.276	0.276	0.287	0.009	0.440	0.500	0.560	0.290
	Bottom side	0.571							0.570	0.570	0.570	0.570
LTE Band 5 Ant 1	Front	0.533	0.231	0.221	0.160	0.160	0.197	0.029	0.760	0.910	0.890	0.720
	Back	0.677	0.278	0.221	0.245	0.245	0.241	0.087	0.960	1.140	1.160	1.010
	Left side	0.146	0.073	0.221	0.115	0.115	0.074	0.036	0.220	0.480	0.340	0.300
	Right side	0.311	0.068	0.221	0.083	0.083	0.064	0.032	0.380	0.620	0.460	0.430
	Top side	0.937	0.439	0.221	0.276	0.276	0.287	0.009	1.380	1.430	1.500	1.220
	Bottom side								0.000	0.000	0.000	0.000
LTE Band 7 Ant 0	Front	0.301	0.231	0.221	0.160	0.160	0.197	0.029	0.530	0.680	0.660	0.490
	Back	0.360	0.278	0.221	0.245	0.245	0.241	0.087	0.640	0.830	0.850	0.690
	Left side	0.012	0.073	0.221	0.115	0.115	0.074	0.036	0.090	0.350	0.200	0.160
	Right side	0.041	0.068	0.221	0.083	0.083	0.064	0.032	0.110	0.350	0.190	0.160
	Bottom side	0.935							0.940	0.940	0.940	0.940
LTE Band 7 Ant 1	Front	0.286	0.231	0.221	0.160	0.160	0.197	0.029	0.520	0.670	0.640	0.480
	Back	0.389	0.278	0.221	0.245	0.245	0.241	0.087	0.670	0.860	0.880	0.720
	Left side	0.015	0.073	0.221	0.115	0.115	0.074	0.036	0.090	0.350	0.200	0.170
	Right side	0.069	0.068	0.221	0.083	0.083	0.064	0.032	0.140	0.370	0.220	0.180
	Top side	0.923	0.439	0.221	0.276	0.276	0.287	0.009	1.360	1.420	1.490	1.210
	Bottom side								0.000	0.000	0.000	0.000
LTE Band 12 Ant 0	Front	0.516	0.231	0.221	0.160	0.160	0.197	0.029	0.750	0.900	0.870	0.710
	Back	1.016	0.278	0.221	0.245	0.245	0.241	0.087	1.290	1.480	1.500	1.350
	Left side	0.214	0.073	0.221	0.115	0.115	0.074	0.036	0.290	0.550	0.400	0.370
	Right side	0.414	0.068	0.221	0.083	0.083	0.064	0.032	0.480	0.720	0.560	0.530
	Bottom side	0.643							0.640	0.640	0.640	0.640
LTE Band 12 Ant 1	Front	0.250	0.231	0.221	0.160	0.160	0.197	0.029	0.480	0.630	0.610	0.440
	Back	0.390	0.278	0.221	0.245	0.245	0.241	0.087	0.670	0.860	0.880	0.720
	Left side	0.126	0.073	0.221	0.115	0.115	0.074	0.036	0.200	0.460	0.320	0.280
	Right side	0.235	0.068	0.221	0.083	0.083	0.064	0.032	0.300	0.540	0.380	0.350
	Top side	0.514	0.439	0.221	0.276	0.276	0.287	0.009	0.950	1.010	1.080	0.800
	Bottom side								0.000	0.000	0.000	0.000
LTE Band 13 Ant 0	Front	0.492	0.231	0.221	0.160	0.160	0.197	0.029	0.720	0.870	0.850	0.680
	Back	0.859	0.278	0.221	0.245	0.245	0.241	0.087	1.140	1.330	1.350	1.190
	Left side	0.136	0.073	0.221	0.115	0.115	0.074	0.036	0.210	0.470	0.330	0.290
	Right side	0.240	0.068	0.221	0.083	0.083	0.064	0.032	0.310	0.540	0.390	0.360
	Bottom side	0.615							0.620	0.620	0.620	0.620
LTE Band 13 Ant 1	Front	0.495	0.231	0.221	0.160	0.160	0.197	0.029	0.730	0.880	0.850	0.680
	Back	0.545	0.278	0.221	0.245	0.245	0.241	0.087	0.820	1.010	1.030	0.880
	Left side	0.234	0.073	0.221	0.115	0.115	0.074	0.036	0.310	0.570	0.420	0.390
	Right side	0.433	0.068	0.221	0.083	0.083	0.064	0.032	0.500	0.740	0.580	0.550
	Top side	0.733	0.439	0.221	0.276	0.276	0.287	0.009	1.170	1.230	1.300	1.020
	Bottom side								0.000	0.000	0.000	0.000
LTE Band 66 Ant 0	Front	0.573	0.231	0.221	0.160	0.160	0.197	0.029	0.800	0.950	0.930	0.760
	Back	0.663	0.278	0.221	0.245	0.245	0.241	0.087	0.940	1.130	1.150	1.000
	Left side	0.027	0.073	0.221	0.115	0.115	0.074	0.036	0.100	0.360	0.220	0.180
	Right side	0.044	0.068	0.221	0.083	0.083	0.064	0.032	0.110	0.350	0.190	0.160
	Top side		0.439	0.221	0.276	0.276	0.287	0.009	0.440	0.500	0.560	0.290
LTE Band 66 Ant 1	Bottom side	0.931							0.930	0.930	0.930	0.930
	Front	0.761	0.231	0.221	0.160	0.160	0.197	0.029	0.990	1.140	1.120	0.950
	Back	0.893	0.278	0.221	0.245	0.245	0.241	0.087	1.170	1.360	1.380	1.230
	Left side	0.022	0.073	0.221	0.115	0.115	0.074	0.036	0.100	0.360	0.210	0.170
	Right side	0.115	0.068	0.221	0.083	0.083	0.064	0.032	0.180	0.420	0.260	0.230
	Top side	0.943	0.439	0.221	0.276	0.276	0.287	0.009	1.380	1.440	1.510	1.230
LTE Band	Bottom side								0.000	0.000	0.000	0.000
	Front	0.071	0.231	0.221	0.160	0.160	0.197	0.029	0.300	0.450	0.430	0.260

Sporton International (Kunshan) Inc.

TEL : 86-512-57900158 / FAX : 86-512-57900958

FCC ID : IHD756AB3

Page 102 of 113

Issued Date : Jan. 17. 2022

Form version. : 200414



48 Ant 2	Back	0.785	0.278	0.221	0.245	0.245	0.241	0.087	1.060	1.250	1.270	1.120
	Left side	0.257	0.073	0.221	0.115	0.115	0.074	0.036	0.330	0.590	0.450	0.410
	Right side	0.009	0.068	0.221	0.083	0.083	0.064	0.032	0.080	0.310	0.160	0.120
	Top side	0.036	0.439	0.221	0.276	0.276	0.287	0.009	0.480	0.530	0.600	0.320
	Bottom side								0.000	0.000	0.000	0.000

<5G NR Mode>

WWAN Band	Exposure Position	1	2	3	4	5	6	7	1+2 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)	1+4+6 Summed 1g SAR (W/kg)	1+4+7 Summed 1g SAR (W/kg)
		WWAN	WLAN2.4GHz Ant 4+6 WWAN+WLAN	WLAN2.4GHz Ant 4+6 WWAN+DBS	WLAN5GHz Ant 5+6 WWAN+WLAN	WLAN5GHz Ant 5+6 WWAN+DBS	Bluetooth Ant 4	Bluetooth Ant 6				
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
FR1 n2 Ant 0	Front	0.460	0.213	0.221	0.160	0.160	0.197	0.029	0.670	0.840	0.820	0.650
	Back	0.631	0.278	0.221	0.245	0.245	0.241	0.087	0.910	1.100	1.120	0.960
	Left side	0.029	0.073	0.221	0.115	0.115	0.074	0.036	0.100	0.370	0.220	0.180
	Right side	0.027	0.068	0.221	0.083	0.083	0.064	0.032	0.100	0.330	0.170	0.140
	Bottom side	0.936							0.940	0.940	0.940	0.940
FR1 n2 Ant 1	Front	0.477	0.231	0.221	0.160	0.160	0.197	0.029	0.710	0.860	0.830	0.670
	Back	0.734	0.278	0.221	0.245	0.245	0.241	0.087	1.010	1.200	1.220	1.070
	Left side	0.026	0.073	0.221	0.115	0.115	0.074	0.036	0.100	0.360	0.220	0.180
	Right side	0.068	0.068	0.221	0.083	0.083	0.064	0.032	0.140	0.370	0.220	0.180
	Top side	0.935	0.439	0.221	0.276	0.276	0.287	0.009	1.370	1.430	1.500	1.220
FR1 n5 Ant 0	Front	0.513	0.231	0.221	0.160	0.160	0.197	0.029	0.740	0.890	0.870	0.700
	Back	0.895	0.278	0.221	0.245	0.245	0.241	0.087	1.170	1.360	1.380	1.230
	Left side	0.103	0.073	0.221	0.115	0.115	0.074	0.036	0.180	0.440	0.290	0.250
	Right side	0.202	0.068	0.221	0.083	0.083	0.064	0.032	0.270	0.510	0.350	0.320
	Bottom side	0.437							0.440	0.440	0.440	0.440
FR1 n5 Ant 1	Front	0.566	0.231	0.221	0.160	0.160	0.197	0.029	0.800	0.950	0.920	0.760
	Back	0.718	0.278	0.221	0.245	0.245	0.241	0.087	1.000	1.180	1.200	1.050
	Left side	0.232	0.073	0.221	0.115	0.115	0.074	0.036	0.310	0.570	0.420	0.380
	Right side	0.549	0.068	0.221	0.083	0.083	0.064	0.032	0.620	0.850	0.700	0.660
	Top side	1.030	0.439	0.221	0.276	0.276	0.287	0.009	1.470	1.530	1.590	1.320
FR1 n66 Ant 0	Front	0.470	0.231	0.221	0.160	0.160	0.197	0.029	0.700	0.850	0.830	0.660
	Back	0.588	0.278	0.221	0.245	0.245	0.241	0.087	0.870	1.050	1.070	0.920
	Left side	0.034	0.073	0.221	0.115	0.115	0.074	0.036	0.110	0.370	0.220	0.190
	Right side	0.045	0.068	0.221	0.083	0.083	0.064	0.032	0.110	0.350	0.190	0.160
	Bottom side	0.919							0.920	0.920	0.920	0.920
FR1 n66 Ant 1	Front	0.577	0.231	0.221	0.160	0.160	0.197	0.029	0.810	0.960	0.930	0.770
	Back	0.698	0.278	0.221	0.245	0.245	0.241	0.087	0.980	1.160	1.180	1.030
	Left side	0.018	0.073	0.221	0.115	0.115	0.074	0.036	0.090	0.350	0.210	0.170
	Right side	0.136	0.068	0.221	0.083	0.083	0.064	0.032	0.200	0.440	0.280	0.250
	Top side	0.926	0.439	0.221	0.276	0.276	0.287	0.009	1.370	1.420	1.490	1.210
FR1 n77 Part270 Ant 2	Front	0.471	0.231	0.221	0.160	0.160	0.197	0.029	0.700	0.850	0.830	0.660
	Back	0.794	0.278	0.221	0.245	0.245	0.241	0.087	1.070	1.260	1.280	1.130
	Left side	0.247	0.073	0.221	0.115	0.115	0.074	0.036	0.320	0.580	0.440	0.400
	Right side	0.007	0.068	0.221	0.083	0.083	0.064	0.032	0.080	0.310	0.150	0.120
	Top side	0.047	0.439	0.221	0.276	0.276	0.287	0.009	0.490	0.540	0.610	0.330
FR1 n77 Part27Q Ant 2	Front	0.063	0.231	0.221	0.160	0.160	0.197	0.029	0.290	0.440	0.420	0.250
	Back	0.609	0.278	0.221	0.245	0.245	0.241	0.087	0.890	1.080	1.100	0.940
	Left side	0.212	0.073	0.221	0.115	0.115	0.074	0.036	0.290	0.550	0.400	0.360
	Right side	0.010	0.068	0.221	0.083	0.083	0.064	0.032	0.080	0.310	0.160	0.130
	Top side	0.076	0.439	0.221	0.276	0.276	0.287	0.009	0.520	0.570	0.640	0.360
FR1 n77 Part270 Ant 7	Front	0.032	0.231	0.221	0.160	0.160	0.197	0.029	0.260	0.410	0.390	0.220
	Back	0.693	0.278	0.221	0.245	0.245	0.241	0.087	0.970	1.160	1.180	1.030
	Left side	0.056	0.073	0.221	0.115	0.115	0.074	0.036	0.130	0.390	0.250	0.210
	Right side	0.016	0.068	0.221	0.083	0.083	0.064	0.032	0.080	0.320	0.160	0.130
	Top side	0.201	0.439	0.221	0.276	0.276	0.287	0.009	0.640	0.700	0.760	0.490



FR1 n77 Part27Q Ant 7	Front	0.045	0.231	0.221	0.160	0.160	0.197	0.029	0.280	0.430	0.400	0.230
	Back	0.863	0.278	0.221	0.245	0.245	0.241	0.087	1.140	1.330	1.350	1.200
	Left side	0.048	0.073	0.221	0.115	0.115	0.074	0.036	0.120	0.380	0.240	0.200
	Right side	0.056	0.068	0.221	0.083	0.083	0.064	0.032	0.120	0.360	0.200	0.170
	Top side	0.255	0.439	0.221	0.276	0.276	0.287	0.009	0.690	0.750	0.820	0.540

<SRS Mode>

WWAN Band	Exposure Position	1	2	3	4	5	6	7	1+2 Summed 1g SAR (W/kg)	1+3+5 Summed 1g SAR (W/kg)	1+4+6 Summed 1g SAR (W/kg)	1+4+7 Summed 1g SAR (W/kg)
		WWAN	WLAN2.4GHz Ant 4+6 WWAN+WLAN	WLAN2.4GHz Ant 4+6 WWAN+DBS	WLAN5GHz Ant 5+6 WWAN+WLAN	WLAN5GHz Ant 5+6 WWAN+DBS	Bluetooth Ant 4	Bluetooth Ant 6				
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)				
FR1 n77 Part27Q Ant 3	Front	0.095	0.213	0.221	0.160	0.160	0.197	0.029	0.310	0.480	0.450	0.280
	Back	0.107	0.278	0.221	0.245	0.245	0.241	0.087	0.390	0.570	0.590	0.440
	Left side	0.141	0.073	0.221	0.115	0.115	0.074	0.036	0.210	0.480	0.330	0.290
	Right side	0.006	0.068	0.221	0.083	0.083	0.064	0.032	0.070	0.310	0.150	0.120
	Bottom side	0.083							0.080	0.080	0.080	0.080
FR1 n77 Part27Q Ant 3	Front	0.114	0.213	0.221	0.160	0.160	0.197	0.029	0.330	0.500	0.470	0.300
	Back	0.133	0.278	0.221	0.245	0.245	0.241	0.087	0.410	0.600	0.620	0.470
	Left side	0.152	0.073	0.221	0.115	0.115	0.074	0.036	0.230	0.490	0.340	0.300
	Right side	0.005	0.068	0.221	0.083	0.083	0.064	0.032	0.070	0.310	0.150	0.120
	Bottom side	0.006							0.010	0.010	0.010	0.010
FR1 n77 Part27Q Ant 8	Front	0.023	0.213	0.221	0.160	0.160	0.197	0.029	0.240	0.400	0.380	0.210
	Back	0.146	0.278	0.221	0.245	0.245	0.241	0.087	0.420	0.610	0.630	0.480
	Left side	0.006	0.073	0.221	0.115	0.115	0.074	0.036	0.080	0.340	0.200	0.160
	Right side	0.010	0.068	0.221	0.083	0.083	0.064	0.032	0.080	0.310	0.160	0.130
	Bottom side	0.053							0.050	0.050	0.050	0.050
FR1 n77 Part27Q Ant 8	Front	0.016	0.213	0.221	0.160	0.160	0.197	0.029	0.230	0.400	0.370	0.210
	Back	0.146	0.278	0.221	0.245	0.245	0.241	0.087	0.420	0.610	0.630	0.480
	Left side	0.007	0.073	0.221	0.115	0.115	0.074	0.036	0.080	0.340	0.200	0.160
	Right side	0.009	0.068	0.221	0.083	0.083	0.064	0.032	0.080	0.310	0.160	0.120
	Bottom side	0.003							0.000	0.000	0.000	0.000



17.4 Body-Worn Accessory Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	5	6	7	8	9	10	2+5 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4+7 Summed 1g SAR (W/kg)	1+4+10 Summed 1g SAR (W/kg)	1+6+8 Summed 1g SAR (W/kg)	1+6+9 Summed 1g SAR (W/kg)	1+8+10 Summed 1g SAR (W/kg)	1+9+10 Summed 1g SAR (W/kg)
		WWAN	WLAN 2.4GHz Ant 4+6 DBS Only	WLAN 2.4GHz Ant 4+6 WWAN+ WLAN	WLAN 2.4GHz Ant 4+6 WWAN+ DBS	WLAN 5GHz Ant 5+6 DBS Only	WLAN 5GHz Ant 5+6 WWAN+ WLAN	WLAN 5GHz Ant 5+6 WWAN+ DBS	Bluetooth Ant 4	Bluetooth Ant 6	WIFI 6E Ant 5+6								
GSM850 Ant 0	Front	0.638	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.118	1.39	1.15	1.17	1.00	1.16	1.01	1.00	0.84
	Back	1.012	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.239	1.39	1.52	1.54	1.50	1.54	1.38	1.49	1.34
GSM850 Ant 1	Front	0.629	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.118	1.39	1.14	1.16	0.99	1.16	1.00	0.99	0.83
	Back	0.794	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.239	1.39	1.30	1.32	1.28	1.32	1.17	1.27	1.12
GSM1900 Ant 0	Front	0.504	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.118	1.39	1.01	1.03	0.87	1.03	0.88	0.86	0.71
	Back	0.555	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.239	1.39	1.06	1.08	1.04	1.08	0.93	1.04	0.88
WCDMA II Ant 0	Front	0.407	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.118	1.39	0.92	0.94	0.77	0.93	0.78	0.77	0.61
	Back	0.465	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.239	1.39	0.97	0.99	0.95	0.99	0.84	0.95	0.79
WCDMA V Ant 0	Front	0.472	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.118	1.39	0.98	1.00	0.83	1.00	0.84	0.83	0.68
	Back	0.782	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.239	1.39	1.29	1.31	1.27	1.31	1.15	1.26	1.11
WCDMA V Ant 1	Front	0.472	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.118	1.39	0.98	1.00	0.83	1.00	0.84	0.83	0.68
	Back	0.645	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.239	1.39	1.15	1.17	1.13	1.17	1.02	1.13	0.97
LTE Band 2 Ant 0	Front	0.443	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.118	1.39	0.95	0.97	0.81	0.97	0.82	0.80	0.65
	Back	0.482	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.239	1.39	0.99	1.01	0.97	1.01	0.85	0.96	0.81
LTE Band 2 Ant 1	Front	0.475	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.118	1.39	0.98	1.00	0.84	1.00	0.85	0.83	0.68
	Back	0.664	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.239	1.39	1.17	1.19	1.15	1.19	1.04	1.14	0.99
LTE Band 5 Ant 0	Front	0.632	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.118	1.39	1.14	1.16	0.99	1.16	1.00	0.99	0.84
	Back	0.844	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.239	1.39	1.35	1.37	1.33	1.37	1.22	1.32	1.17
LTE Band 5 Ant 1	Front	0.533	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.118	1.39	1.04	1.06	0.90	1.06	0.91	0.89	0.74
	Back	0.677	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.239	1.39	1.19	1.21	1.16	1.20	1.05	1.16	1.00
LTE Band 7 Ant 0	Front	0.315	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.118	1.39	0.82	0.84	0.68	0.84	0.69	0.67	0.52
	Back	0.377	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.239	1.39	0.89	0.91	0.86	0.90	0.75	0.86	0.70
LTE Band 7 Ant 1	Front	0.286	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.118	1.39	0.80	0.82	0.65	0.81	0.66	0.65	0.49
	Back	0.414	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.239	1.39	0.92	0.94	0.90	0.94	0.79	0.89	0.74
LTE Band 12 Ant 0	Front	0.516	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.118	1.39	1.03	1.05	0.88	1.04	0.89	0.88	0.72
	Back	1.016	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.239	1.39	1.53	1.55	1.50	1.54	1.39	1.50	1.34
LTE Band 12 Ant 1	Front	0.366	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.118	1.39	0.88	0.90	0.73	0.89	0.74	0.73	0.57
	Back	0.390	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.239	1.39	0.90	0.92	0.87	0.92	0.76	0.87	0.72
LTE Band 13 Ant 0	Front	0.492	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.118	1.39	1.00	1.02	0.85	1.02	0.86	0.85	0.70
	Back	0.859	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.239	1.39	1.37	1.39	1.34	1.39	1.23	1.34	1.19
LTE Band 13 Ant 1	Front	0.489	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.118	1.39	1.00	1.02	0.85	1.02	0.86	0.85	0.69
	Back	0.502	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.239	1.39	1.01	1.03	0.99	1.03	0.87	0.98	0.83
LTE Band 66 Ant 0	Front	0.573	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.118	1.39	1.08	1.10	0.94	1.10	0.95	0.93	0.78
	Back	0.663	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.239	1.39	1.17	1.19	1.15	1.19	1.04	1.14	0.99
LTE Band 66 Ant 1	Front	0.812	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.118	1.39	1.32	1.34	1.17	1.34	1.18	1.17	1.02
	Back	0.854	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.239	1.39	1.36	1.38	1.34	1.38	1.23	1.33	1.18
LTE Band 48 Ant 2	Front	0.071	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.118	1.39	0.58	0.60	0.43	0.60	0.44	0.43	0.28
	Back	0.785	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.239	1.39	1.29	1.31	1.27	1.31	1.16	1.27	1.11



<5G NR Mode>

WWAN Band	Exposure Position	1	2	3	4	5	6	7	8	9	10	2+5 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4+7 Summed 1g SAR (W/kg)	1+4+10 Summed 1g SAR (W/kg)	1+6+8 Summed 1g SAR (W/kg)	1+6+9 Summed 1g SAR (W/kg)	1+8+10 Summed 1g SAR (W/kg)	1+9+10 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	WLAN 2.4GHz Ant 4+6 DBS Only 1g SAR (W/kg)	WLAN 2.4GHz Ant 4+6 WWAN+ WLAN 1g SAR (W/kg)	WLAN 2.4GHz Ant 4+6 WWAN+ DBS 1g SAR (W/kg)	WLAN 5GHz Ant 5+6 DBS Only 1g SAR (W/kg)	WLAN 5GHz Ant 5+6 WWAN+ WLAN 1g SAR (W/kg)	WLAN 5GHz Ant 5+6 WWAN+ DBS 1g SAR (W/kg)	Bluetooth Ant 4 1g SAR (W/kg)	Bluetooth Ant 6 1g SAR (W/kg)	WIFI 6E Ant 5+6 1g SAR (W/kg)								
FR1 n2 Ant 0	Front	0.451	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.118	1.39	0.96	0.98	0.81	0.98	0.82	0.81	0.66
	Back	0.569	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.239	1.39	1.08	1.10	1.05	1.10	0.94	1.05	0.90
FR1 n2 Ant 1	Front	0.477	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.118	1.39	0.99	1.01	0.84	1.00	0.85	0.84	0.68
	Back	0.777	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.239	1.39	1.29	1.31	1.26	1.30	1.15	1.26	1.10
FR1 n5 Ant 0	Front	0.512	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.118	1.39	1.02	1.04	0.87	1.04	0.88	0.87	0.72
	Back	0.895	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.239	1.39	1.40	1.42	1.38	1.42	1.27	1.38	1.22
FR1 n5 Ant 1	Front	0.566	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.118	1.39	1.08	1.10	0.93	1.09	0.94	0.93	0.77
	Back	0.718	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.239	1.39	1.23	1.25	1.20	1.24	1.09	1.20	1.04
FR1 n66 Ant 0	Front	0.458	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.118	1.39	0.97	0.99	0.82	0.98	0.83	0.82	0.66
	Back	0.514	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.239	1.39	1.02	1.04	1.00	1.04	0.89	0.99	0.84
FR1 n66 Ant 1	Front	0.518	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.118	1.39	1.03	1.05	0.88	1.04	0.89	0.88	0.72
	Back	0.606	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.239	1.39	1.12	1.14	1.09	1.13	0.98	1.09	0.93
FR1 n77 Part 270 Ant 2	Front	0.062	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.118	1.39	0.57	0.59	0.42	0.59	0.43	0.42	0.27
	Back	0.309	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.239	1.39	0.82	0.84	0.79	0.84	0.68	0.79	0.64
FR1 n77 Part 270 Ant 7	Front	0.013	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.118	1.39	0.52	0.54	0.38	0.54	0.39	0.37	0.22
	Back	0.289	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.239	1.39	0.80	0.82	0.77	0.82	0.66	0.77	0.62
FR1 n77 Part 27Q Ant 2	Front	0.032	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.118	1.390	0.540	0.560	0.390	0.560	0.400	0.390	0.240
	Back	0.317	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.239	1.390	0.830	0.850	0.800	0.840	0.690	0.800	0.640
FR1 n77 Part 27Q Ant 7	Front	0.015	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.118	1.390	0.520	0.540	0.380	0.540	0.390	0.370	0.220
	Back	0.255	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.239	1.390	0.760	0.780	0.740	0.780	0.630	0.740	0.580

<SRS Mode>

WWAN Band	Exposure Position	1	2	3	4	5	6	7	8	9	10	2+5 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)	1+4+7 Summed 1g SAR (W/kg)	1+4+10 Summed 1g SAR (W/kg)	1+6+8 Summed 1g SAR (W/kg)	1+6+9 Summed 1g SAR (W/kg)	1+8+10 Summed 1g SAR (W/kg)	1+9+10 Summed 1g SAR (W/kg)
		WWAN 1g SAR (W/kg)	WLAN 2.4GHz Ant 4+6 DBS Only 1g SAR (W/kg)	WLAN 2.4GHz Ant 4+6 WWAN+ WLAN 1g SAR (W/kg)	WLAN 2.4GHz Ant 4+6 WWAN+ DBS 1g SAR (W/kg)	WLAN 5GHz Ant 5+6 DBS Only 1g SAR (W/kg)	WLAN 5GHz Ant 5+6 WWAN+ WLAN 1g SAR (W/kg)	WLAN 5GHz Ant 5+6 WWAN+ DBS 1g SAR (W/kg)	Bluetooth Ant 4 1g SAR (W/kg)	Bluetooth Ant 6 1g SAR (W/kg)	WIFI 6E Ant 5+6 1g SAR (W/kg)								
FR1 n77 Part 270 Ant 3	Front	0.095	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.294	1.39	0.60	0.62	0.63	0.62	0.47	0.63	0.48
	Back	0.107	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.294	1.39	0.62	0.64	0.65	0.63	0.48	0.64	0.49
FR1 n77 Part 270 Ant 8	Front	0.058	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.294	1.39	0.57	0.59	0.60	0.58	0.43	0.59	0.44
	Back	0.366	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.294	1.39	0.88	0.90	0.90	0.89	0.74	0.90	0.75
FR1 n77 Part 27Q Ant 3	Front	0.095	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.294	1.39	0.60	0.62	0.63	0.62	0.47	0.63	0.48
	Back	0.139	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.294	1.39	0.65	0.67	0.68	0.67	0.51	0.67	0.52
FR1 n77 Part 27Q Ant 8	Front	0.045	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.294	1.39	0.55	0.57	0.58	0.57	0.42	0.58	0.43
	Back	0.450	0.663	0.509	0.244	0.728	0.285	0.285	0.241	0.087	0.294	1.39	0.96	0.98	0.99	0.98	0.82	0.99	0.83

<Sensor off>

WWAN Band	Exposure Position	1	2	3	1+2+3 Summed 1g SAR (W/kg)
		WWAN	WLAN2.4GHz Ant 4+6 DBS Only	WLAN5GHz Ant 5+6 DBS Only	
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	
WWAN All Bands	Front	0.685	0.141	0.168	0.990
	Back	0.592	0.163	0.374	1.130



17.5 Product specific 10g SAR Exposure Conditions

Remark:

1. For Bluetooth Product specific 10g stand-alone SAR is not required for a transmitter or antenna, due to 1g hotspot SAR is <1.2W/kg.

WWAN Band	Exposure Position	1	2	4	1+2 Summed 10g SAR (W/kg)	1+4 Summed 10g SAR (W/kg)
		WWAN	WLAN5GHz Ant 5+6 WWAN+WLAN&WWAN+DBS	WIFI 6E		
		10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)		
GSM850 Ant 1	Front		0.640	0.177	0.64	0.18
	Back		0.640	0.350	0.64	0.35
	Left side		0.640	0.098	0.64	0.10
	Right side		0.640	0.080	0.64	0.08
	Top side	1.505	0.640	0.349	2.15	1.85
	Bottom side				0.00	0.00
GSM1900 Ant 0	Front	2.914	0.640	0.177	3.55	3.09
	Back	2.914	0.640	0.350	3.55	3.26
	Left side	2.914	0.640	0.098	3.55	3.01
	Right side	2.914	0.640	0.080	3.55	2.99
	Top side	2.914	0.640	0.349	3.55	3.26
	Bottom side	2.914			2.91	2.91
WCDMA II Ant 0	Front	2.013	0.640	0.177	2.65	2.19
	Back	2.013	0.640	0.350	2.65	2.36
	Left side	2.013	0.640	0.098	2.65	2.11
	Right side	2.013	0.640	0.080	2.65	2.09
	Top side	2.013	0.640	0.349	2.65	2.36
	Bottom side	2.013			2.01	2.01
WCDMA V Ant 0	Front		0.640	0.177	0.64	0.18
	Back	1.240	0.640	0.350	1.88	1.59
	Left side		0.640	0.098	0.64	0.10
	Right side		0.640	0.080	0.64	0.08
	Top side		0.640	0.349	0.64	0.35
	Bottom side				0.00	0.00
LTE Band 2 Ant 0	Front	2.190	0.640	0.177	2.83	2.37
	Back	2.190	0.640	0.350	2.83	2.54
	Left side	2.190	0.640	0.098	2.83	2.29
	Right side	2.190	0.640	0.080	2.83	2.27
	Top side	2.190	0.640	0.349	2.83	2.54
	Bottom side	2.190			2.19	2.19
LTE Band 2 Ant 1	Front	2.575	0.640	0.177	3.22	2.75
	Back	2.575	0.640	0.350	3.22	2.93
	Left side	2.575	0.640	0.098	3.22	2.67
	Right side	2.575	0.640	0.080	3.22	2.66
	Top side	2.575	0.640	0.349	3.22	2.92
	Bottom side	2.575			2.58	2.58
LTE Band 7 Ant 0	Front	2.336	0.640	0.177	2.98	2.51
	Back	2.336	0.640	0.350	2.98	2.69
	Left side	2.336	0.640	0.098	2.98	2.43
	Right side	2.336	0.640	0.080	2.98	2.42
	Top side	2.336	0.640	0.349	2.98	2.69
	Bottom side	2.336			2.34	2.34
LTE Band 7 Ant 1	Front	2.342	0.640	0.177	2.98	2.52
	Back	2.342	0.640	0.350	2.98	2.69
	Left side	2.342	0.640	0.098	2.98	2.44
	Right side	2.342	0.640	0.080	2.98	2.42
	Top side	2.342	0.640	0.349	2.98	2.69
	Bottom side	2.342			2.34	2.34



FCC SAR Test Report

Report No. : FA192317-02

LTE Band 66 Ant 0	Front	2.238	0.640	0.177	2.88	2.42
	Back	2.238	0.640	0.350	2.88	2.59
	Left side	2.238	0.640	0.098	2.88	2.34
	Right side	2.238	0.640	0.080	2.88	2.32
	Top side	2.238	0.640	0.349	2.88	2.59
	Bottom side	2.238			2.24	2.24
LTE Band 66 Ant 1	Front	2.357	0.640	0.177	3.00	2.53
	Back	2.357	0.640	0.350	3.00	2.71
	Left side	2.357	0.640	0.098	3.00	2.46
	Right side	2.357	0.640	0.080	3.00	2.44
	Top side	2.357	0.640	0.349	3.00	2.71
	Bottom side	2.357			2.36	2.36
LTE Band 48 Ant 2	Front	2.149	0.640	0.177	2.79	2.33
	Back	2.149	0.640	0.350	2.79	2.50
	Left side	2.149	0.640	0.098	2.79	2.25
	Right side	2.149	0.247	0.080	2.40	2.23
	Top side	2.149	1.736	0.349	3.89	2.50
	Bottom side	2.149			2.15	2.15



<5G NR Mode>

WWAN Band	Exposure Position	1	2	4	1+2 Summed 10g SAR (W/kg)	1+4 Summed 10g SAR (W/kg)
		WWAN	WLAN5GHz Ant 5+6 WWAN+WLAN&WWAN+DBS	WIFI 6E		
		10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)		
FR1 n2 Ant 0	Front	2.332	0.640	0.177	2.970	2.510
	Back	2.332	0.640	0.350	2.970	2.680
	Left side	2.332	0.640	0.098	2.970	2.430
	Right side	2.332	0.640	0.080	2.970	2.410
	Top side	2.332	0.640	0.349	2.970	2.680
	Bottom side	2.332			2.330	2.330
FR1 n2 Ant 1	Front	2.128	0.640	0.177	2.770	2.310
	Back	2.128	0.640	0.350	2.770	2.480
	Left side	2.128	0.640	0.098	2.770	2.230
	Right side	2.128	0.640	0.080	2.770	2.210
	Top side	2.128	0.640	0.349	2.770	2.480
	Bottom side	2.128			2.130	2.130
FR1 n66 Ant 0	Front	2.229	0.640	0.177	2.870	2.410
	Back	2.229	0.640	0.350	2.870	2.580
	Left side	2.229	0.640	0.098	2.870	2.330
	Right side	2.229	0.640	0.080	2.870	2.310
	Top side	2.229	0.640	0.349	2.870	2.580
	Bottom side	2.229			2.230	2.230
FR1 n66 Ant 1	Front	2.184	0.640	0.177	2.820	2.360
	Back	2.184	0.640	0.350	2.820	2.530
	Left side	2.184	0.640	0.098	2.820	2.280
	Right side	2.184	0.640	0.080	2.820	2.260
	Top side	2.184	0.640	0.349	2.820	2.530
	Bottom side	2.184			2.180	2.180
LTE Band 5 Ant 0	Front	2.184	0.640	0.177	2.820	2.360
	Back	2.184	0.640	0.350	2.820	2.530
	Left side	2.184	0.640	0.098	2.820	2.280
	Right side	2.184	0.640	0.080	2.820	2.260
	Top side	2.184	0.640	0.349	2.820	2.530
	Bottom side	2.184			2.180	2.180
LTE Band 5 Ant 1	Front	2.184	0.640	0.177	2.820	2.360
	Back	2.184	0.640	0.350	2.820	2.530
	Left side	2.184	0.640	0.098	2.820	2.280
	Right side	2.184	0.640	0.080	2.820	2.260
	Top side	2.184	0.640	0.349	2.820	2.530
	Bottom side	2.184			2.180	2.180
FR1 n77 Part27O Ant 2	Front	2.184	0.640	0.177	2.820	2.360
	Back	2.130	0.640	0.350	2.770	2.480
	Left side	2.130	0.640	0.098	2.770	2.230
	Right side	2.130	0.640	0.080	2.770	2.210
	Top side	2.130	0.640	0.349	2.770	2.480
	Bottom side	2.130			2.130	2.130
FR1 n77 Part27Q Ant 2	Front		0.640	0.177	0.640	0.180
	Back	1.236	0.640	0.350	1.880	1.590
	Left side		0.640	0.098	0.640	0.100
	Right side		0.640	0.080	0.640	0.080
	Top side		0.640	0.349	0.640	0.350
	Bottom side				0.000	0.000
FR1 n77 Part27O Ant 7	Front		0.640	0.177	0.640	0.180
	Back	1.067	0.640	0.350	1.710	1.420
	Left side		0.640	0.098	0.640	0.100



FCC SAR Test Report

Report No. : FA192317-02

	Right side		0.640	0.080	0.640	0.080
	Top side		0.640	0.349	0.640	0.350
	Bottom side				0.000	0.000
FR1 n77 Part27Q Ant 7	Front	2.262	0.640	0.177	2.900	2.440
	Back	2.262	0.640	0.350	2.900	2.610
	Left side	2.262	0.640	0.098	2.900	2.360
	Right side	2.262	0.640	0.080	2.900	2.340
	Top side	2.262	0.640	0.349	2.900	2.610
	Bottom side	2.262			2.260	2.260

18. Supplemental tuner tests results

General Note:

1. This device impedance tuner (166 status) antenna tuning techniques in the WCDMA II/V, LTE Band 2/4/5/7/12/13/66, 5GNR n2/n5/n66 for ANT0.
2. This device impedance tuner (187 status) antenna tuning techniques in the WCDMA V, LTE Band 2/4/5/7/12/13/66, 5GNR n2/n5/n66 for ANT1.
3. LTE B4 SAR test was covered by LTE B66; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced.
4. SAR test proposal was measured according to the normally required SAR configurations with the tuner active and worst tune state (auto tune) was used for SAR testing and this design will provide the highest power at different user scenarios and would not influence to the antenna characteristics other than impedance matching.
5. The following test procedure was followed to demonstrate that the SAR results in this report represent the appropriate SAR test conditions. For bands with dynamic tuning implemented, SAR will be measured according to the required FCC SAR test procedures with the dynamic tuner active to allow the device to automatically tune to the antenna state for the respective RF exposure test configurations. Additional single point SAR time-sweep measurements will be evaluated for other tuner states to determine that the other tuner configurations would result in equivalent or lower SAR values.
6. To evaluate all of the tuner states, the 166 tuner states for ANT0 and the 187 tuner states for ANT1 are divided evenly among band, mode and exposure combinations so that at least one single point SAR measurement is measured in each configuration. Single point time-sweep measurements will be performed at the peak SAR location determined by the zoom scan of the configuration with the highest reported SAR for each combination. The tuner state will be established remotely so that the device is not moved for the entire series of single point SAR for the tuner states in each combination. The SAR probe will remain stationary at the same position throughout the entire series of single point measurements for each combination.
7. According to TCBC 201904 workshop, total number tuner states divided evenly among each supported band / air interface and exposure condition combination.
8. The tuner state was established remotely through Wi-Fi so that the device is not moved for the entire series of single point SAR for the tuner states in each combination (band, mode, exposure conditions).

18.1 Supplemental Tuner Head & Body SAR Results

Please refer to Appendix F.

Test Engineer : Bruce Li, Martin Li, Ricky Gu

19. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

20. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [6] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.
- [7] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [8] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [9] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [10] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015
- [11] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [12] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [13] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [14] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.

-----THE END-----



Appendix A. Plots of System Performance Check

The plots are shown as follows.

System Check_Head_750MHz

DUT: D750V3 - SN:1087

Communication System: UID 0, CW; Frequency: 750 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.915 \text{ S/m}$; $\epsilon_r = 43.396$; $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature : 23.3 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(10.47, 10.47, 10.47); Calibrated: 2021.2.10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2021.2.3
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-2024
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.562 W/kg

Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 25.78 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.634 W/kg
SAR(1 g) = 0.416 W/kg; SAR(10 g) = 0.274 W/kg
Maximum value of SAR (measured) = 0.559 W/kg

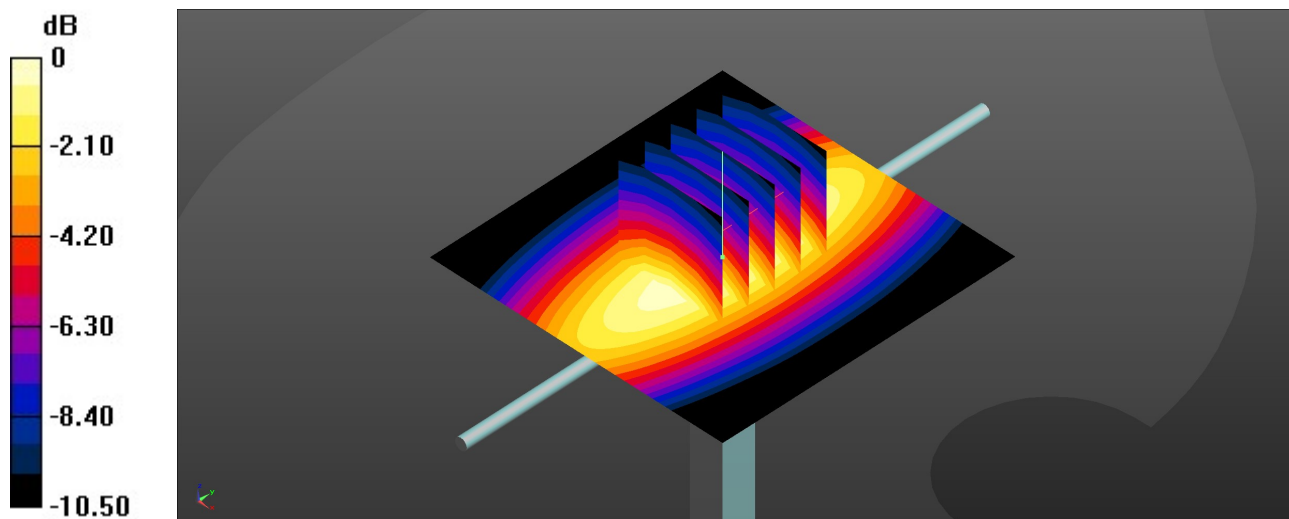

0 dB = 0.559 W/kg = -2.53 dBW/kg

System Check_Head_835MHz

DUT: D835V2 - SN:4d258

Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL_835 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.929 \text{ S/m}$; $\epsilon_r = 40.921$; $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature : 23.3 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(10.21, 10.21, 10.21); Calibrated: 2021.2.10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2021.2.3
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-2024
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.715 W/kg

Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 29.25 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.807 W/kg
SAR(1 g) = 0.503 W/kg; SAR(10 g) = 0.328 W/kg
Maximum value of SAR (measured) = 0.705 W/kg

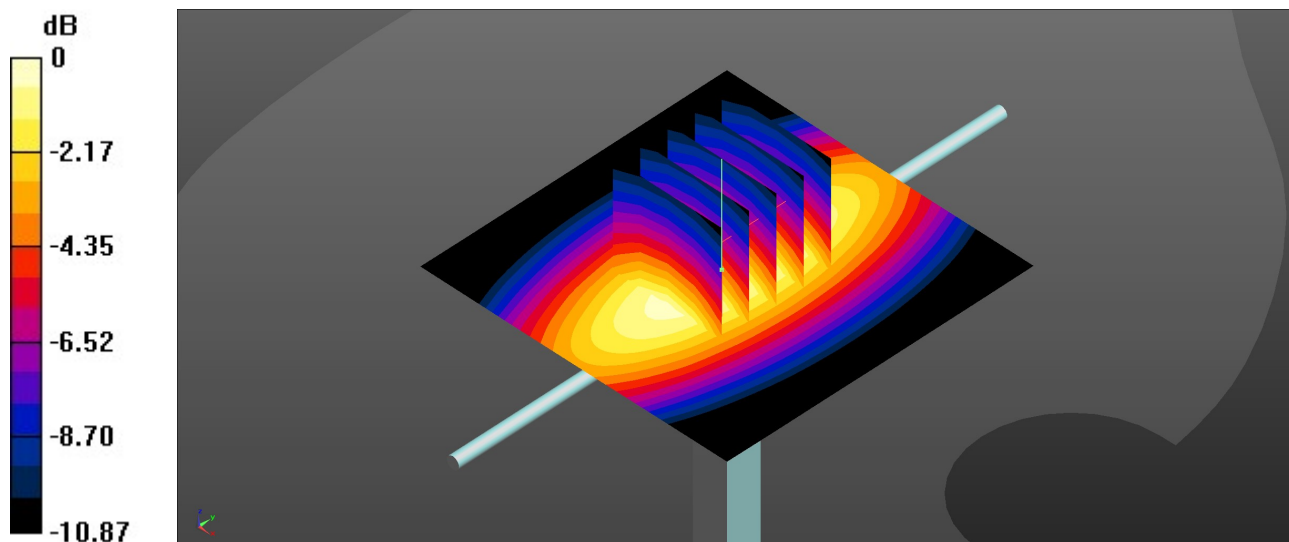

0 dB = 0.705 W/kg = -1.52 dBW/kg

System Check_Head_1750MHz**DUT: D1750V2 - SN:1090**

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium: HSL_1750 Medium parameters used: $f = 1750$ MHz; $\sigma = 1.401$ S/m; $\epsilon_r = 40.51$; $\rho = 1000$ kg/m³



Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.73, 8.73, 8.73); Calibrated: 2021.2.10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2021.2.3
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-2024
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 2.96 W/kg

Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 47.50 V/m; Power Drift = -0.13 dB
Peak SAR (extrapolated) = 3.50 W/kg
SAR(1 g) = 1.91 W/kg; SAR(10 g) = 1.02 W/kg
Maximum value of SAR (measured) = 2.95 W/kg

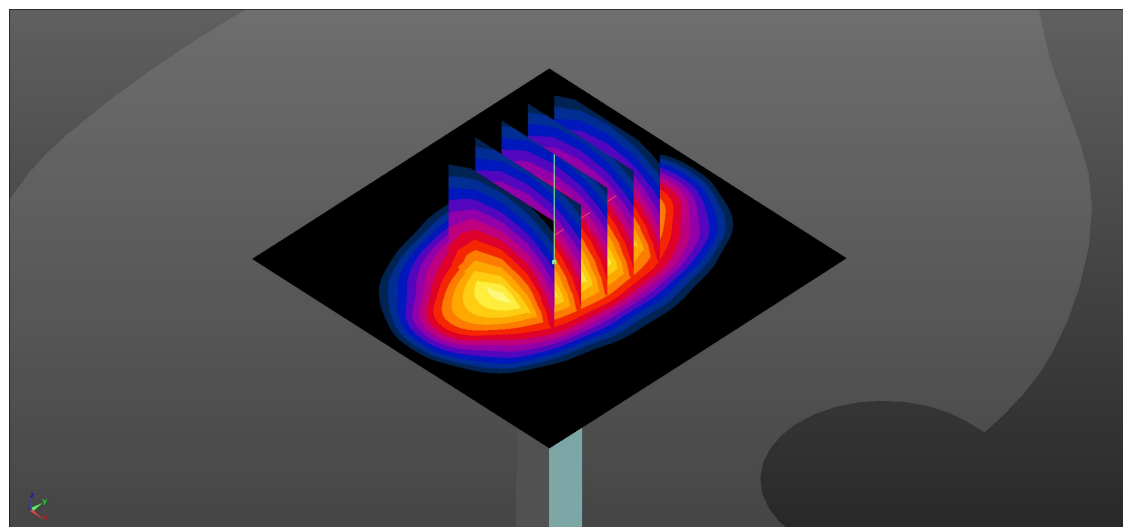

0 dB = 2.95 W/kg = 4.70 dBW/kg

System Check_Head_1900MHz**DUT: D1900V2 - SN:5d170**

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL_1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.422$ S/m; $\epsilon_r = 39.228$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.46, 8.46, 8.46); Calibrated: 2021.2.10
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2021.2.3
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-2024
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7483)

Pin=50mW/Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 3.14 W/kg



Pin=50mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 47.92 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 3.81 W/kg

SAR(1 g) = 1.98 W/kg; SAR(10 g) = 1.02 W/kg

Maximum value of SAR (measured) = 3.14 W/kg

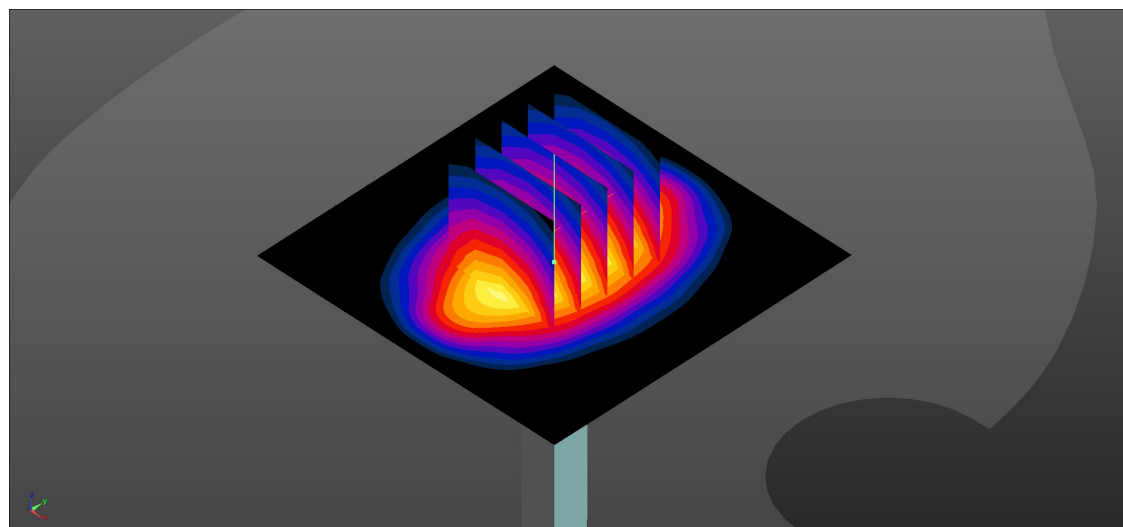

0 dB = 3.14 W/kg = 4.97 dBW/kg