

Calibration Certificate

Certificate number **40-21**

Page 2 of 2

Calibration is performed by using

Model	Model Description	Equipment ID	Cal Due Date	Certificate Number	Trace Value
M 523	Reference power meter	162	24 March 2022	1/111-172-20	RF Power
M 514	Reference power meter	165	24 March 2022	1/111-176-20	RF Power
RG4-14	Signal generator	22	12 October 2021	22-20	RF Power
02	Frequency multiplier	02	11 January 2023	05-21	RF Power
V7-34	Universal voltmeter	0067787	23 September 2021	2742-42	DC Voltage
RCH3-72	Frequency meter	931200	18 September 2021	2822-43	Frequency
P6-32	Measuring horn antenna	115671	23 September 2021	2369-43	Gain

Calibration conditions

Temperature: 23.8 °C.

Humidity: 43.2 %.

Pressure: 100.1 kPa.


Calibration results are given in the measurement report # 40-21

#	Parameter	Specifications required	Specifications tested and measured
1	Frequency range	140 – 220 GHz	Corresponds
2	Antenna Gain	22.5* dBi	Corresponds (Table 1)
3	Antenna Factor	52.5 dB/m	Corresponds (Table 1)

* – Expanded uncertainty of measurements 2.2 dB.

The uncertainty evaluation has been performed in accordance with ISO/IEC Guide 98-3:2008 (GUM). The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k such that the coverage probability corresponds to approximately 95 %. This probability corresponds to a coverage factor of k=2 for a normal distribution.

Signature of the person who has performed calibration

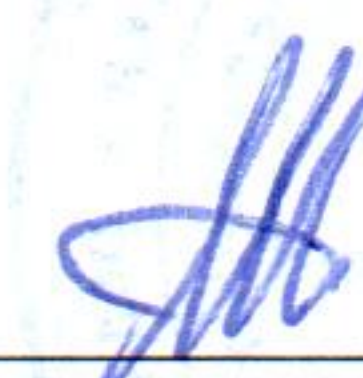

/ Engineer

**Calibration Laboratory of
Microwave Measuring Equipment**

Accreditation certificate

No. BY/112 5.0065

Address: 6, P. Brovki str., Minsk
220013, Belarus

Phone/Fax: +375 17 2938496



Technical Manager

July 6, 2021

MEASUREMENT REPORT # 40-21

July 6, 2021

Customer:	Sporton International Inc.
Item calibrated:	Antenna QWH-GPRR00 # QWH-GPRR00-01
Method of calibration:	GOST 20271.1, MK KL 8.2-16
Number of samples:	One
Delivery date of the sample:	21.06.2021
Date of calibration:	From 21.06.2021 to 06.07.2021

MEASUREMENT CONDITIONS

Temperature: 23.8 °C	Humidity: 43.2 %	Pressure: 100.1 kPa
----------------------	------------------	---------------------

MEASUREMENT EQUIPMENT

Model	Model Description	Equipment ID	Cal Due Date	Certificate Number	Trace Value
M 523	Reference power meter	162	24 March 2022	1/111-172-20	RF Power
M 514	Reference power meter	165	24 March 2022	1/111-176-20	RF Power
RG4-14	Signal generator	22	12 October 2021	22-20	RF Power
02	Frequency multiplier	02	11 January 2023	05-21	RF Power
V7-34	Universal voltmeter	0067787	23 September 2021	2742-42	DC Voltage
RCH3-72	Frequency meter	931200	18 September 2021	2822-43	Frequency
P6-32	Measuring horn antenna	115671	23 September 2021	2369-43	Gain

MEASUREMENT RESULTS

Distance between tested and generating antenna 1.0 m (140 GHz) and 0.5 m (180, 220 GHz).

Table 1

Frequency, GHz	140	180	220
Power density of electromagnetic field, W/m ²	0.311	1.04	1.53
Maximum level of measured power, dBm	-17.5	-13.6	-13.6
Gain, dBi	21.9	22.7	22.9
Expanded uncertainty, dB	2.2	2.2	2.2
Antenna Factor, dB/m	51.3	52.6	54.2

The uncertainty evaluation has been performed in accordance with ISO/IEC Guide 98-3:2008 (GUM). The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k such that the coverage probability corresponds to approximately 95 %. This probability corresponds to a coverage factor of $k=2$ for a normal distribution.

Engineer



This measurement report issued in duplicate and sent to:

1. Sporton International Inc.
2. Calibration Laboratory of Microwave Measuring Equipment

Duplication of Measurement report (complete or partial) must be authorized by the laboratory.