



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2205-3
FCC ID : IHDT56AE8
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Jun. 07, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (ShenZhen).

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	6
1.6 Specification of Accessory.....	6
1.7 Testing Location	6
1.8 Test Software.....	7
1.9 Applicable Standards.....	7
2 RE-USE OF MEASURED DATA	8
2.1 Introduction Section	8
2.2 Model Difference Information	8
2.3 Reference detail Section:	8
2.4 Spot Check Verification Data Section.....	9
3 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
3.1 Carrier Frequency and Channel	10
3.2 Test Mode.....	11
3.3 Connection Diagram of Test System.....	12
3.4 EUT Operation Test Setup	12
4 TEST RESULT	13
4.1 Output Power Measurement.....	13
4.2 Radiated Band Edges and Spurious Emission Measurement	14
4.3 Antenna Requirements.....	18
5 LIST OF MEASURING EQUIPMENT	19
6 UNCERTAINTY OF EVALUATION	21
APPENDIX A. RADIATED SPURIOUS EMISSION	
APPENDIX B. DUTY CYCLE PLOTS	
APPENDIX C. SETUP PHOTOGRAPHS	
APPENDIX D. REFERENCE REPORT	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR240834-01C	Rev. 01	Initial issue of report	Jun. 20, 2022

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
4.1	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
4.2	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.16 dB at 2389.950 MHz
4.3	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



1 General Description

1.1 Applicant

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2205-3
FCC ID	IHDT56AE8
IMEI Code	Radiation: 351397430011580
HW Version	DVT2
SW Version	S2ST32.37
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification			
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz		
Antenna Type / Gain	Ant.1: Loop Antenna type with gain -5.0 dBi Ant 2: ILA Antenna type with gain -7.0 dBi		
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n/ac/ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)		
Antenna Function Description		Ant. 1	Ant. 2
	802.11 b/g/n/ac/ax MIMO	V	V

1. For 802.11n HT20/HT40 & 802.11ac VHT20/VHT40 mode, the whole testing have assessed only 802.11n HT20/HT40 by referring to the higher output power.
2. 802.11ax support OFDMA full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) test output power/RSE, the full RU power > partial RU, there for the full RU perform full test and Partial RU verified power/RSE.
3. WIFI MIMO only support STBC by manufacturer declared.



4. Ant. 1/2 corresponds to ant. 2/9 in the EP report respectively.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Specification of Accessory

Specification of Accessory				
AC Adapter 1	Brand Name	Motorola(Salom)	Model Name	MC-301
AC Adapter 2	Brand Name	Motorola(Acbel)	Model Name	MC-301
Battery	Brand Name	Motorola(ATL)	Model Name	NF50
USB Cable 1	Brand Name	Motorola(Saibao)	Model Name	SC18D13215
USB Cable 2	Brand Name	Motorola(Cabletech)	Model Name	SC18D13216
USB Cable 3	Brand Name	Motorola(Luxshare)	Model Name	SC18D13217

1.7 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH05-KS 03CH07-KS 03CH08-KS	CN1257	314309



Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test data subcontracted: conducted test case in section 4.1 of this report

1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH05-KS	AUDIX	E3	6.2009-8-24al
2.	03CH07-KS	AUDIX	E3	6.2009-8-24al
3.	03CH08-KS	AUDIX	E3	6.2009-8-24

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Re-use of Measured Data

2.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: XT2205-3, FCC ID: IHDT56AE8) is electrically identical to the reference device (Model: XT2205-1, XT2205-2, FCC ID: IHDT56AE7) for the portions of the circuitry corresponding to the data being re-used. Based on their similarity, the FCC Part 15C (equipment class: DTS) reuse the original model's result and do spot-check, following the FCC KDB 484596 D01 v01.

The applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID: IHDT56AE8 .

2.2 Model Difference Information

The **main** difference between FCC ID: IHDT56AE7 and FCC ID: IHDT56AE8 is as below:

- Add mmWave function.
- Remove some band

Other differences and all the details of similarity and difference can be found in the confidential documents (XT2205-3_Operational Description of Product Equality Declaration).

The re-used RF data includes the following bands provided in Appendix D (Sporton RF Report No. FR240834C for the reference device Model: XT2205-1, XT2205-2, FCC ID: IHDT56AE7).

2.3 Reference detail Section:

Rule Part	Equipment Class	Frequency Band (MHz)	Reference FCC ID(Parent)	Type Grant/ Permissive Change	Reference Title	FCC ID Filling (Variant)	Report Title/Section
15C	DTS (WLAN)	2400~2483.5	IHDT56AE7	Original Grant	FR240834C	IHDT56AE8	All sections applicable except for RSE



2.4 Spot Check Verification Data Section

Conducted power test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model

Summary for power and RSE spot check for each rule entry and technology is listed as below:

Test Item	Mode	IHDT56AE7 Parent Worst Result	IHDT56AE8 Variant Check Result	Difference (dB)
Conducted Peak Power (dBm)	11b CH6	24.82	24.20	-0.62
	11g CH6	28.65	27.95	-0.70
	11n HT20 CH6	28.59	28.00	-0.59
	11n HT40 CH3	28.25	28.11	-0.14
	11ax20 CH6	28.62	28.01	-0.61
	11ax40 CH8	27.76	27.28	-0.48

Conclusion:

Based on the spot check test result, the test data from the original model is representative for the variant model. The power level spot check are shown within expected level compliant to limit line.

We confirm that the test data reuse policy of FCC KDB 484596 D01 Referencing Test Data v01 has been followed and the test data as referenced from the parent model report represents compliance with new FCC ID.

3 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases were recorded in this report.

3.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

3.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

MIMO Antenna

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0

RSE Co-location Mode:

WIFI 802. 11g _Ch01 + 5GNR n5 Link


Test Cases

Remark:

1. The RSE is tested with accessories from the worst case of Part 15B report.
2. RSE Co-location mode are combination from the worst WLAN TX mode and 5GNRLink mode.

3.3 Connection Diagram of Test System

Radiated Emission:

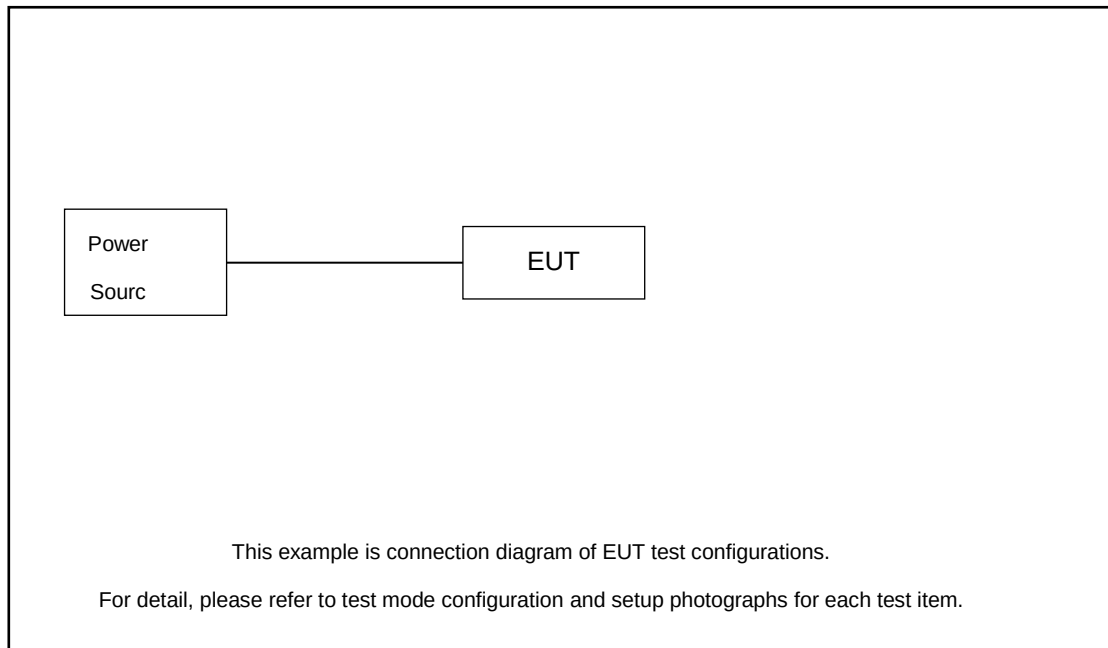

3.4 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

4 Test Result

4.1 Output Power Measurement

4.1.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna with directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


4.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

4.1.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

4.1.4 Test Setup

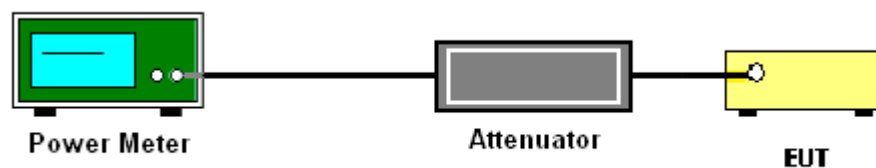

4.1.5 Test Result of Peak Output Power

Please refer to Spot Check Verification Data Section.

4.2 Radiated Band Edges and Spurious Emission Measurement

4.2.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

4.2.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

4.2.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW $\geq$ RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

4.2.4 Test Setup


For radiated emissions below 30MHz

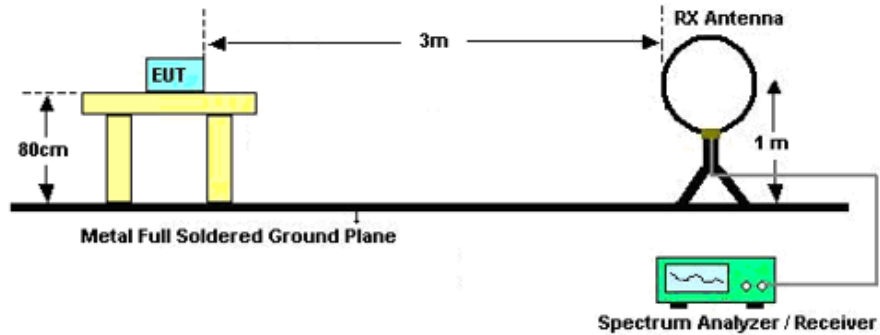

For radiated emissions from 30MHz to 1GHz

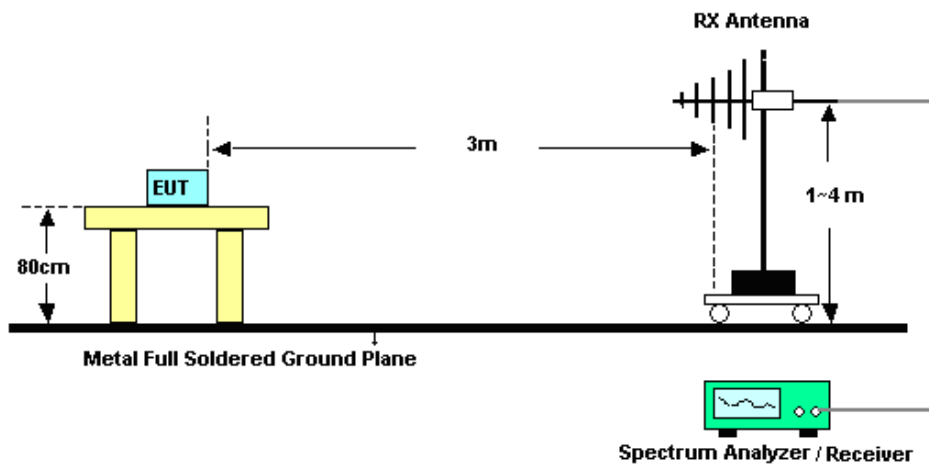

For radiated emissions above 1GHz

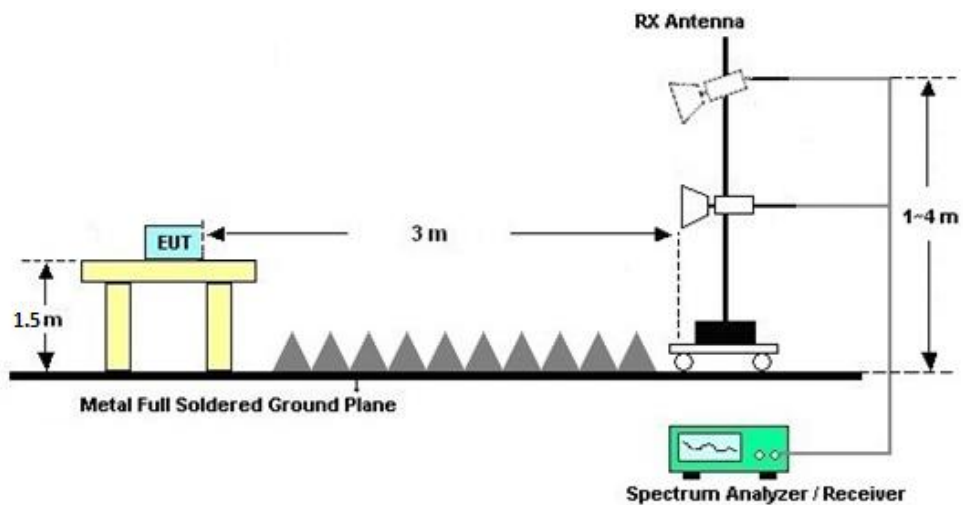



4.2.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

4.2.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix A.

4.2.7 Duty Cycle

Please refer to Appendix B.

4.2.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix A.



4.3 Antenna Requirements

4.3.1 Standard Applicable

If directional gain of transmitting Antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached Antenna or of an Antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

4.3.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

4.3.3 Antenna Gain

<STBC Modes>

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

Basic methodology with NANT transmit antennas, each with the same directional gain GANT dBi, being driven by NANT transmitter outputs of equal power, and If antenna gains are not equal and each transmit antenna can be driven by more than one spatial stream, directional gain may be calculated by either of the following two formulas:

Directional gain = GANT MAX + 10 log(NANT/Nss) dBi, where NANT=2, Nss =2.

<STBC Modes>						
			DG for Power (dBi)	DG for PSD (dBi)	Power Limit Reduction (dB)	PSD Limit Reduction (dB)
	Ant. 1 (dBi)	Ant. 2 (dBi)				
2.4 GHz	-5.00	-7.00	-5.00	-5.00	0.00	0.00

Power Limit Reduction = DG(Power) – 6dBi, (min = 0)

PSD Limit Reduction = DG(PSD) – 6dBi, (min = 0)



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 28, 2021	Jun. 07, 2022	Dec. 27, 2022	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1542004	50MHz Bandwidth	Dec. 28, 2021	Jun. 07, 2022	Dec. 27, 2022	Conducted (TH01-SZ)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 16, 2021	Jun. 07, 2022	Oct. 15, 2022	Radiation (03CH05-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471084	10Hz~44G,MAX 30dB	Jul. 12, 2021	Jun. 07, 2022	Jul. 11, 2022	Radiation (03CH05-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Nov. 08, 2021	Jun. 07, 2022	Nov. 07, 2022	Radiation (03CH05-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Jun. 07, 2022	Jan. 04, 2023	Radiation (03CH05-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2022	Jun. 07, 2022	Jan. 04, 2023	Radiation (03CH05-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2012228	1Ghz-18Ghz	Oct. 16, 2021	Jun. 07, 2022	Oct. 15, 2022	Radiation (03CH05-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct. 16, 2021	Jun. 07, 2022	Oct. 15, 2022	Radiation (03CH05-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Jun. 07, 2022	NCR	Radiation (03CH05-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jun. 07, 2022	NCR	Radiation (03CH05-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jun. 07, 2022	NCR	Radiation (03CH05-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Oct. 16, 2021	Jun. 07, 2022	Oct. 15, 2022	Radiation (03CH07-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz~44G,MAX 30dB	Oct. 16, 2021	Jun. 07, 2022	Oct. 15, 2022	Radiation (03CH07-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 30, 2021	Jun. 07, 2022	Oct. 29, 2022	Radiation (03CH07-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz~1GHz	Dec. 22, 2021	Jun. 07, 2022	Dec. 21, 2022	Radiation (03CH07-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 30, 2021	Jun. 07, 2022	Oct. 29, 2022	Radiation (03CH07-KS)
Amplifier	SONOMA	310N	413740	9KHz~1GHz	Jan. 05, 2022	Jun. 07, 2022	Jan. 04, 2023	Radiation (03CH07-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2025788	1Ghz-18Ghz	Jul. 30, 2021	Jun. 07, 2022	Jul. 29, 2023	Radiation (03CH07-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Jun. 07, 2022	Jan. 04, 2023	Radiation (03CH07-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct. 16, 2021	Jun. 07, 2022	Oct. 15, 2022	Radiation (03CH07-KS)
Amplifier	MITEQ	EM18G40GGA	060728	18~40GHz	Jan. 05, 2022	Jun. 07, 2022	Jan. 04, 2023	Radiation (03CH07-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Jun. 07, 2022	NCR	Radiation (03CH07-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Jun. 07, 2022	NCR	Radiation (03CH07-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Jun. 07, 2022	NCR	Radiation (03CH07-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Oct. 16, 2021	Jun. 07, 2022	Oct. 15, 2022	Radiation (03CH08-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471084	10Hz~44G,MAX 30dB	Jul. 12, 2021	Jun. 07, 2022	Jul. 11, 2022	Radiation (03CH08-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75959	1GHz~18GHz	Dec. 24, 2021	Jun. 07, 2022	Dec. 23, 2022	Radiation (03CH08-KS)
high gain Amplifier	MITEQ	AMF-7D-00101800-30-10P	2025788	1Ghz-18Ghz	Jul. 30, 2021	Jun. 07, 2022	Jul. 29, 2023	Radiation (03CH08-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Jun. 07, 2022	Jan. 04, 2023	Radiation (03CH08-KS)
Amplifier	Keysight	83017A	MY53270389	500MHz~26.5GHz	Jan. 05, 2022	Jun. 07, 2022	Jan. 04, 2023	Radiation (03CH08-KS)



Amplifier	MITEQ	EM18G40GG A	060728	18~40GHz	Jan. 05, 2022	Jun. 07, 2022	Jan. 04, 2023	Radiation (03CH08-KS)
AC Power Source	Chroma	61601	616010002 473	N/A	NCR	Jun. 07, 2022	NCR	Radiation (03CH08-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Jun. 07, 2022	NCR	Radiation (03CH08-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Jun. 07, 2022	NCR	Radiation (03CH08-KS)

NCR: No Calibration Required

6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	1.34 dB

For 03CH05-KS

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

For 03CH07-KS

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	-------



For 03CH08-KS

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	--------------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.0dB
---	--------------

----- THE END -----



Appendix A. Radiated Spurious Emission

Only the worst results are shown in the report

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
2+9		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 06 2437MHz		2365.9	50.4	-23.6	74	47.38	32.83	7.07	36.88	101	213	P	H
		2389.95	39.32	-14.68	54	36.2	32.88	7.1	36.86	101	213	A	H
	*	2436	110.26	-	-	107	32.92	7.19	36.85	101	213	P	H
	*	2436	106.93	-	-	103.67	32.92	7.19	36.85	101	213	A	H
		2495.74	50.99	-23.01	74	47.52	33	7.28	36.81	101	213	P	H
		2485.36	40.37	-13.63	54	36.96	32.98	7.25	36.82	101	213	A	H
		2354.59	50.43	-23.57	74	47.44	32.83	7.04	36.88	302	70	P	V
		2389.04	39.15	-14.85	54	36.03	32.88	7.1	36.86	302	70	A	V
	*	2436	102.88	-	-	99.62	32.92	7.19	36.85	302	70	P	V
	*	2436	99.67	-	-	96.41	32.92	7.19	36.85	302	70	A	V
		2498.86	50.39	-23.61	74	46.92	33	7.28	36.81	302	70	P	V
		2485.6	39.72	-14.28	54	36.31	32.98	7.25	36.82	302	70	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11b (Harmonic @ 3m)

WIFI Ant. 2+9	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11b CH 06 2437MHz		4875	48.66	-25.34	74	69.61	34.1	10.39	65.44	300	360	P	H
		4875	46.93	-7.07	54	67.88	34.1	10.39	65.44	119	5	A	H
		7305	47.16	-26.84	74	63.78	35.8	12.82	65.24	300	360	P	H
		4875	50.72	-23.28	74	71.67	34.1	10.39	65.44	300	0	P	V
		4875	50.47	-3.53	54	71.42	34.1	10.39	65.44	100	200	A	V
		7305	46.21	-27.79	74	62.83	35.8	12.82	65.24	300	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

WIFI Ant. 2+9	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2389.95	63.59	-10.41	74	58.16	30.38	7.89	32.84	305	360	P	H
		2389.95	50.84	-3.16	54	45.41	30.38	7.89	32.84	305	360	A	H
	*	2412	106.21	-	-	100.72	30.41	7.91	32.83	305	360	P	H
	*	2412	99.96	-	-	94.47	30.41	7.91	32.83	305	360	A	H
		2389.95	65.09	-8.91	74	59.66	30.38	7.89	32.84	380	76	P	V
		2389.95	50.6	-3.4	54	45.17	30.38	7.89	32.84	380	76	A	V
	*	2412	105.7	-	-	100.21	30.41	7.91	32.83	380	76	P	V
	*	2410	99.15	-	-	93.66	30.41	7.91	32.83	380	76	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**2.4GHz 2400~2483.5MHz****WIFI 802.11g (Harmonic @ 3m)**

WIFI Ant. 2+9	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g		4830	44.96	-29.04	74	65.98	34.1	10.31	65.43	100	360	P	H
CH 01 2412MHz		4830	46.24	-27.76	74	67.26	34.1	10.31	65.43	300	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Band Edge @ 3m)

WIFI Ant. 2+9	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 06 2437MHz		2337.82	55.93	-18.07	74	47.92	31.89	7.06	30.94	106	223	P	H
		2383.58	45.83	-8.17	54	37.66	31.96	7.11	30.9	106	223	A	H
		2484.94	60.34	-13.66	74	51.61	32.12	7.28	30.67	106	223	P	H
		2485	47.91	-6.09	54	39.18	32.12	7.28	30.67	106	223	A	H
	*	2440	102.48	-	-	93.99	32.08	7.22	30.81	106	223	P	H
	*	2440	95.17	-	-	86.68	32.08	7.22	30.81	106	223	A	H
		2339.9	55.9	-18.1	74	47.87	31.89	7.06	30.92	400	67	P	V
		2389.82	45.88	-8.12	54	37.63	32	7.13	30.88	400	67	A	V
		2486.02	58.86	-15.14	74	50.13	32.12	7.28	30.67	400	67	P	V
		2483.5	48.02	-5.98	54	39.29	32.12	7.28	30.67	400	67	A	V
	*	2446	101.98	-	-	93.42	32.08	7.22	30.74	400	67	P	V
	*	2446	94.38	-	-	85.82	32.08	7.22	30.74	400	67	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI Ant. 2+9	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n		4875	41.62	-32.38	74	62.57	34.1	10.39	65.44	300	0	P	H
HT40		7305	43.4	-30.6	74	60.02	35.8	12.82	65.24	300	0	P	H
CH 06		4875	43.91	-30.09	74	64.86	34.1	10.39	65.44	100	0	P	V
2437MHz		7305	42.71	-31.29	74	59.33	35.8	12.82	65.24	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11 ax HE20 Full (Band Edge @ 3m)

WIFI Ant. 2+9	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
8802.11ax HE20 Full CH 10 2457MHz		2484.16	64.09	-9.91	74	55.36	32.12	7.28	30.67	161	220	P	H
		2483.68	48.95	-5.05	54	40.22	32.12	7.28	30.67	161	220	A	H
	*	2458	107.59	-	-	98.98	32.1	7.25	30.74	161	220	P	H
	*	2454	98.24	-	-	89.63	32.1	7.25	30.74	161	220	A	H
		2484.4	60.19	-13.81	74	51.46	32.12	7.28	30.67	360	77	P	V
		2483.98	48.26	-5.74	54	39.53	32.12	7.28	30.67	360	77	A	V
	*	2454	105.87	-	-	97.26	32.1	7.25	30.74	360	77	P	V
	*	2456	96.81	-	-	88.2	32.1	7.25	30.74	360	77	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11 ax HE20 Full (Harmonic @ 3m)

WIFI Ant. 2+9	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax		4905	47.42	-26.58	74	68.32	34.1	10.44	65.44	300	0	P	H
HE20 Full		7365	42.23	-31.77	74	58.88	35.8	12.83	65.28	300	0	P	H
CH 10		4905	48.08	-25.92	74	68.98	34.1	10.44	65.44	100	0	P	V
2457MHz		7371	42.42	-31.58	74	59.07	35.8	12.84	65.29	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11ax HE20 Partial 106 (Band Edge @ 3m)

WIFI Ant. 2+9	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Partial 106/54 CH 11 2462MHz		2484.46	62.31	-11.69	74	58.9	32.98	7.25	36.82	100	212	P	H
		2483.62	45.09	-8.91	54	41.68	32.98	7.25	36.82	100	212	A	H
		2468	111.21	-	-	107.86	32.96	7.22	36.83	100	212	P	H
		2468	102.14	-	-	98.79	32.96	7.22	36.83	100	212	A	H
		2483.5	63.22	-10.78	74	59.81	32.98	7.25	36.82	337	72	P	V
		2483.5	44.68	-9.32	54	41.27	32.98	7.25	36.82	337	72	A	V
		2470	107.58	-	-	104.23	32.96	7.22	36.83	337	72	P	V
		2466	98.94	-	-	95.59	32.96	7.22	36.83	337	72	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11 ax HE40 Full (Band Edge @ 3m)

WIFI Ant. 2+9	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Full CH 06 2437MHz		2347.18	56.1	-17.9	74	48.07	31.89	7.06	30.92	106	218	P	H
		2388.13	46.1	-7.9	54	37.87	32	7.13	30.9	106	218	A	H
		2485.78	58.37	-15.63	74	49.64	32.12	7.28	30.67	106	218	P	H
		2483.68	48.34	-5.66	54	39.61	32.12	7.28	30.67	106	218	A	H
	*	2436	104.37	-	-	95.94	32.05	7.19	30.81	106	218	P	H
	*	2438	94.68	-	-	86.19	32.08	7.22	30.81	106	218	A	H
		2347.44	56.59	-17.41	74	48.56	31.89	7.06	30.92	400	64	P	V
		2375.39	46.13	-7.87	54	37.96	31.96	7.11	30.9	400	64	A	V
		2483.86	58.36	-15.64	74	49.63	32.12	7.28	30.67	400	64	P	V
		2484.28	47.84	-6.16	54	39.11	32.12	7.28	30.67	400	64	A	V
	*	2448	103.75	-	-	95.19	32.08	7.22	30.74	400	64	P	V
	*	2442	93.8	-	-	85.24	32.08	7.22	30.74	400	64	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**2.4GHz 2400~2483.5MHz****WIFI 802.11 ax HE40 Full (Harmonic @ 3m)**

WIFI Ant. 2+9	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax		4875	44.16	-29.84	74	65.11	34.1	10.39	65.44	100	360	P	H
HE40 Full		7305	43.54	-30.46	74	60.16	35.8	12.82	65.24	100	360	P	H
CH 06		4874	44.38	-29.62	74	65.33	34.1	10.39	65.44	300	360	P	V
2437MHz		7311	43.01	-30.99	74	59.63	35.8	12.82	65.24	300	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

WIFI 802.11ax HE40 Partial 242 (Band Edge @ 3m)

WIFI Ant. 2+9	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Partial 242/61 CH 03 2422MHz		2330.02	50.63	-23.37	74	47.73	32.79	7.01	36.9	271	215	P	H
		2384.36	39.93	-14.07	54	36.84	32.86	7.1	36.87	271	215	A	H
		2422	103.26	-	-	100.03	32.92	7.16	36.85	271	215	P	H
		2424	93.11	-	-	89.88	32.92	7.16	36.85	271	215	A	H
		2492.14	50.34	-23.66	74	46.87	33	7.28	36.81	271	215	P	H
		2495.98	40.33	-13.67	54	36.86	33	7.28	36.81	271	215	A	H
		2348.35	50.5	-23.5	74	47.54	32.81	7.04	36.89	400	63	P	V
		2387.61	39.86	-14.14	54	36.74	32.88	7.1	36.86	400	63	A	V
		2424	101.25	-	-	98.02	32.92	7.16	36.85	400	63	P	V
		2420	92.81	-	-	89.58	32.92	7.16	36.85	400	63	A	V
		2488.42	50.8	-23.2	74	47.36	33	7.25	36.81	400	63	P	V
		2494.84	40.16	-13.84	54	36.69	33	7.28	36.81	400	63	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz WIFI 802.11g (LF)

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2+9		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11g LF		48.43	24.2	-15.8	40	41.19	15	0.98	32.97	-	-	P	H
		87.23	25.01	-14.99	40	42.4	14	1.33	32.72	-	-	P	H
		129.91	22.69	-20.81	43.5	36.34	17.5	1.69	32.84	-	-	P	H
		226.91	23.73	-22.27	46	38.98	15.76	2.09	33.1	-	-	P	H
		473.29	24.05	-21.95	46	30.36	23.3	3.14	32.75	-	-	P	H
		742.95	30.04	-15.96	46	30.84	27.86	4.05	32.71	-	-	P	H
		30.97	33.29	-6.71	40	40.63	24.7	0.76	32.8	-	-	P	V
		86.26	30.48	-9.52	40	48.01	13.9	1.33	32.76	-	-	P	V
		110.51	28.16	-15.34	43.5	42.63	16.85	1.56	32.88	-	-	P	V
		127	26.92	-16.58	43.5	40.6	17.5	1.67	32.85	-	-	P	V
		214.3	25.32	-18.18	43.5	41.47	14.86	2.09	33.1	-	-	P	V
		654.68	25.49	-20.51	46	28.05	26.4	3.75	32.71	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Co-location Mode

2.4GHz 2400~2483.5MHz

WIFI 802.11g&Part22H_SA-NSA_n5 (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preampl Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11g CH 01 2412MHz		2389.95	63.76	-10.24	74	55.51	32	7.13	30.88	118	109	P	H
		2389.95	49.81	-4.19	54	41.56	32	7.13	30.88	118	109	A	H
	*	2410	107.96	-	-	99.65	32.03	7.16	30.88	118	109	P	H
	*	2410	101.03	-	-	92.72	32.03	7.16	30.88	118	109	A	H
		2389.82	61.39	-12.61	74	53.14	32	7.13	30.88	369	65	P	V
		2389.95	49.34	-4.66	54	41.09	32	7.13	30.88	369	65	A	V
	*	2413	108.06	-	-	99.75	32.03	7.16	30.88	369	65	P	V
	*	2413	100.97	-	-	92.66	32.03	7.16	30.88	369	65	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**2.4GHz 2400~2483.5MHz****WIFI 802.11g&Part22H_SA-NSA_n5 (Harmonic @ 3m)**

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		4830	37.33	-36.67	74	58.35	34.1	10.31	65.43	100	360	P	H
		4830	38.13	-35.87	74	59.15	34.1	10.31	65.43	300	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2+9		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)

2. Level(dBμV/m) =

Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 43.54(dBμV/m) – 54(dBμV/m)


= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix B. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	99.52	-	-	10Hz
802.11g	97.21	1.392	0.718	0.75KHz
802.11n HT20	96.65	1.298	0.770	0.82KHz
802.11n HT40	93.53	0.644	1.553	1.6KHz
802.11ax HE20	96.03	1.013	0.987	1.1KHz
802.11ax HE40	92.29	0.532	1.881	2KHz

802.11b

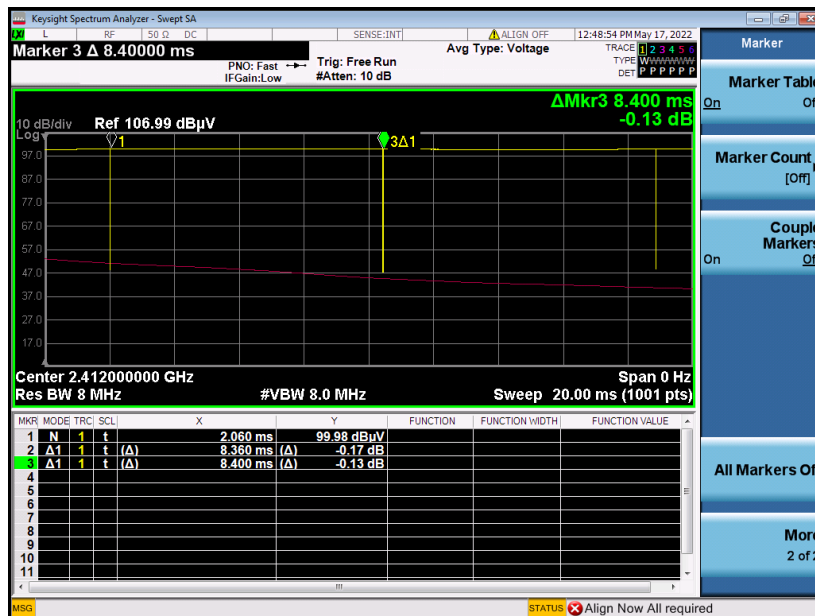




802.11g

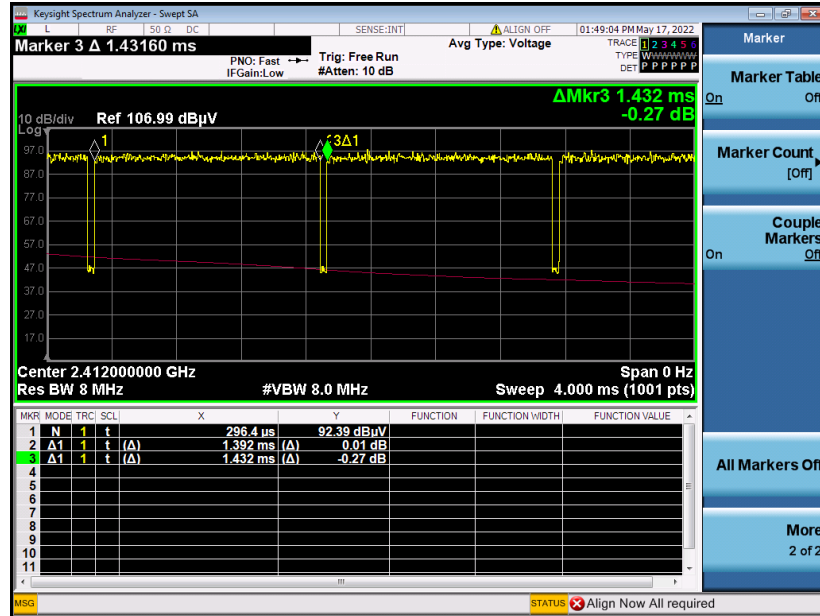


802.11n HT20

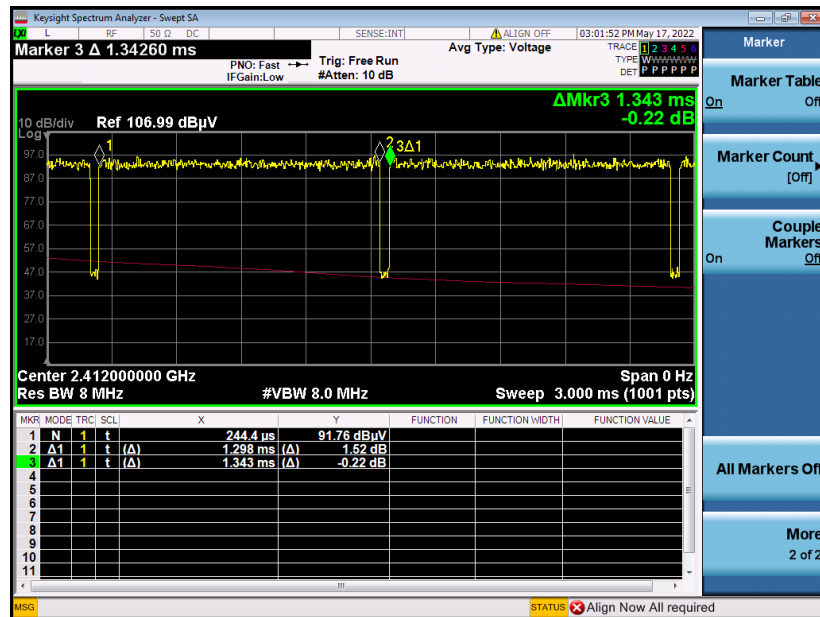




802.11n HT40

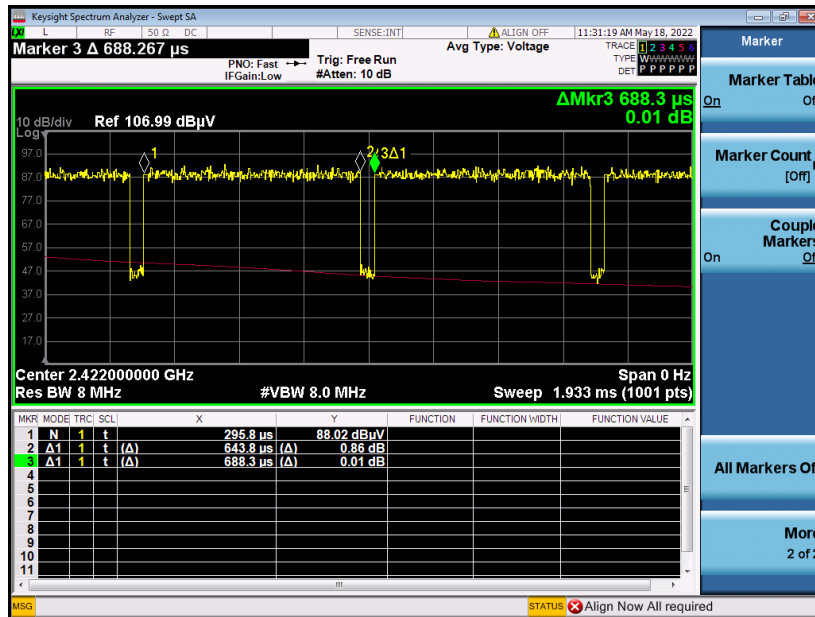


802.11ax HE20

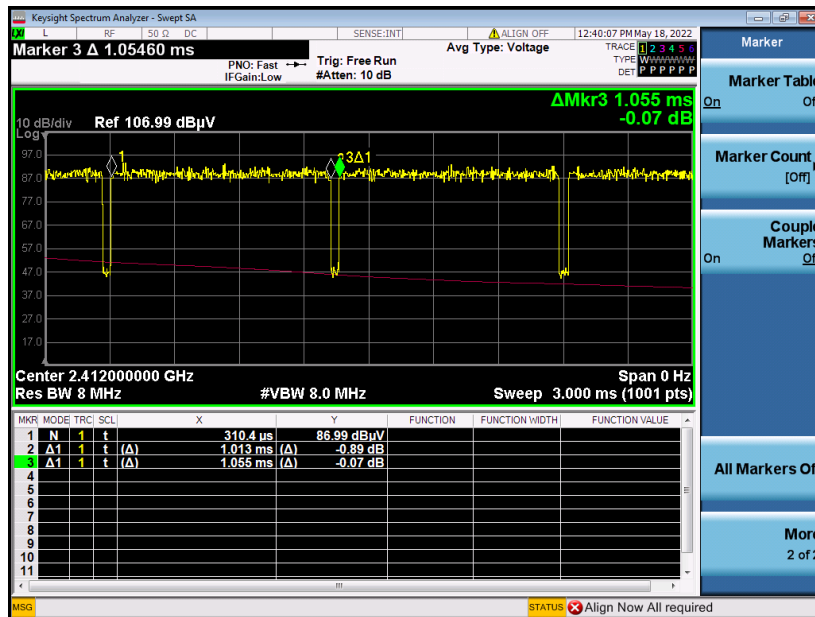



802.11ax HE40

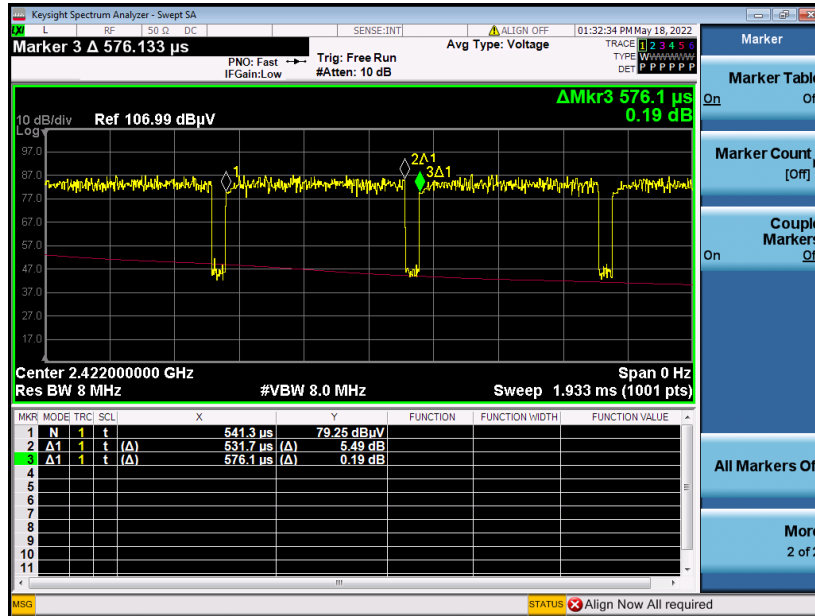



Appendix D. Reference Report

Please refer to Sporton report number FR240834C which is issued separately.