






2DH1_Ant1_2441_1000~26500

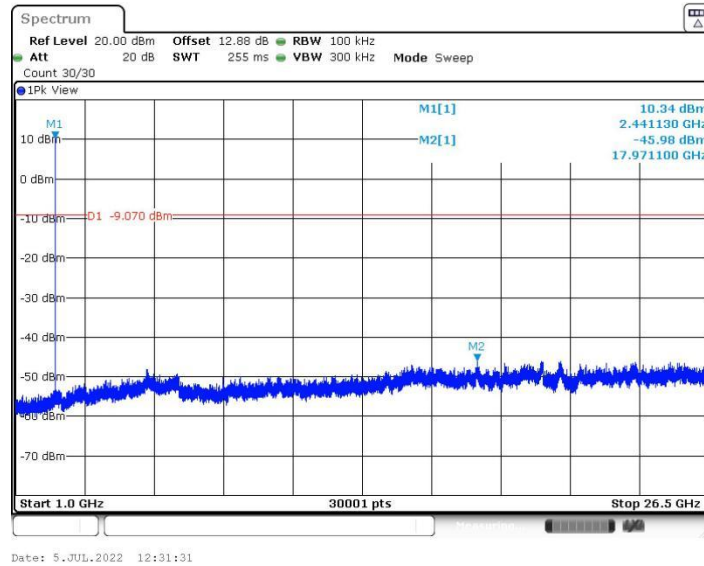


2DH1_Ant1_2480_0~Reference

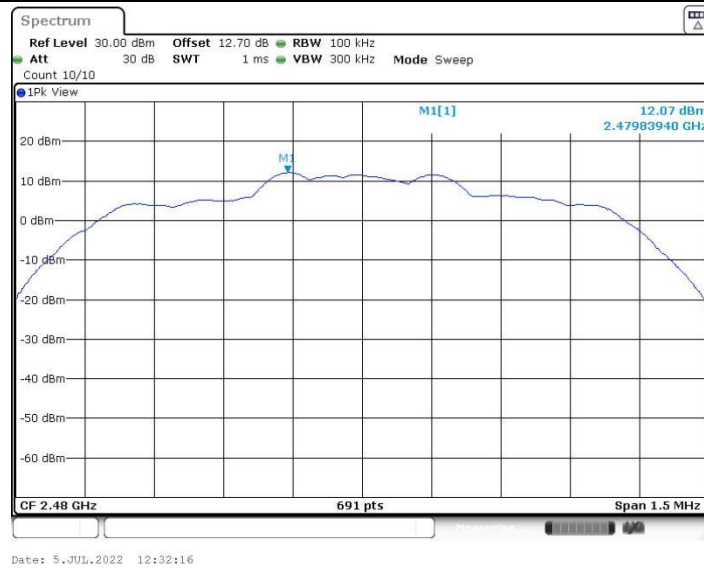

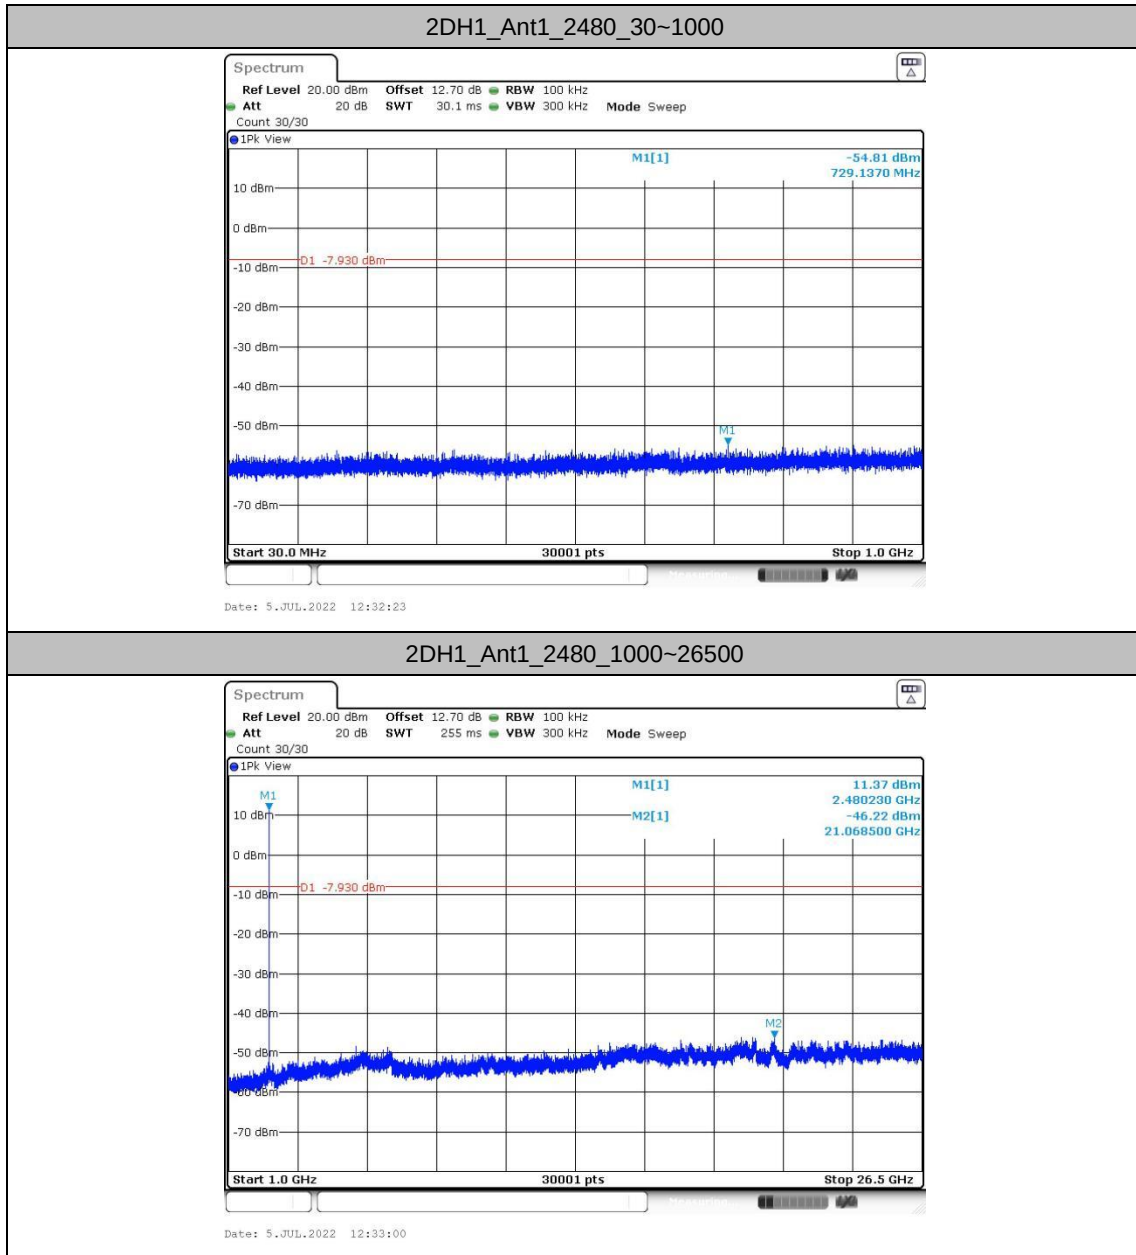




3DH1_Ant1_2402_0~Reference

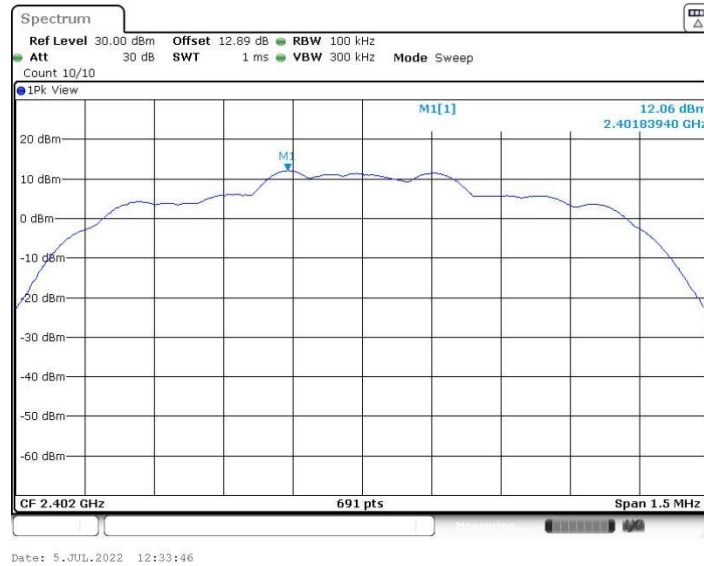


3DH1_Ant1_2402_30~1000

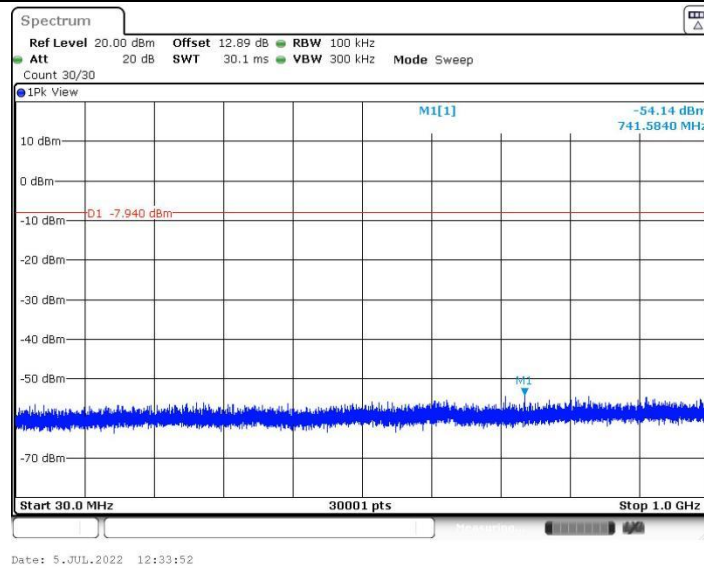




3DH1_Ant1_2402_1000~26500

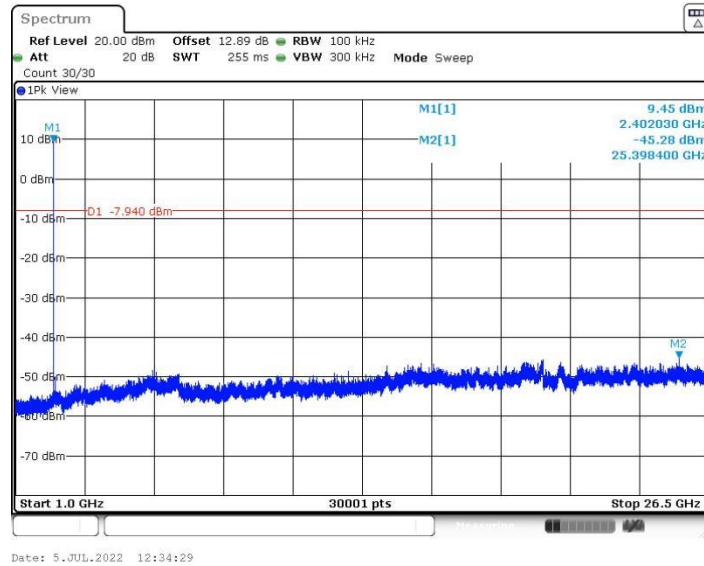


3DH1_Ant1_2441_0~Reference



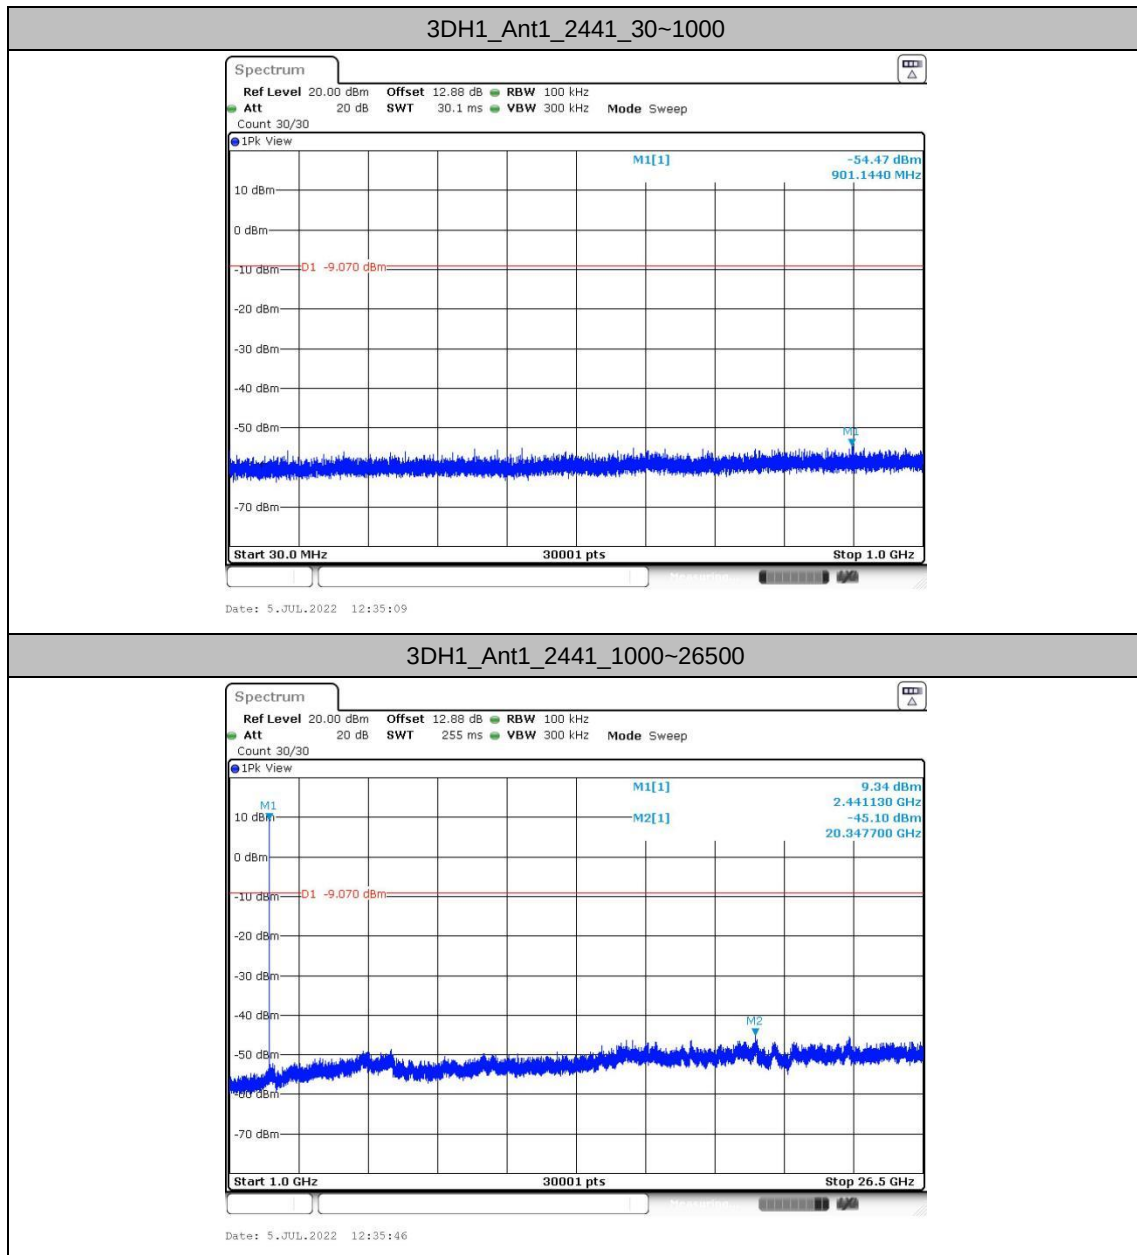





3DH1_Ant1_2480_0~Reference

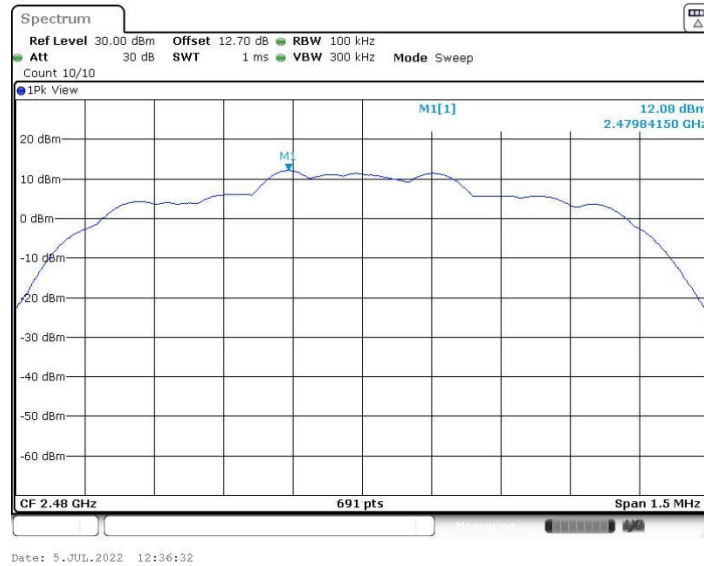

3DH1_Ant1_2480_30~1000

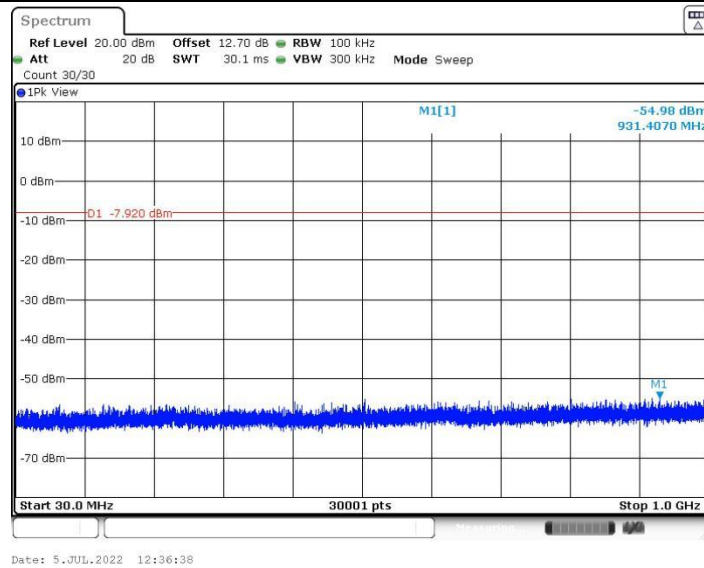

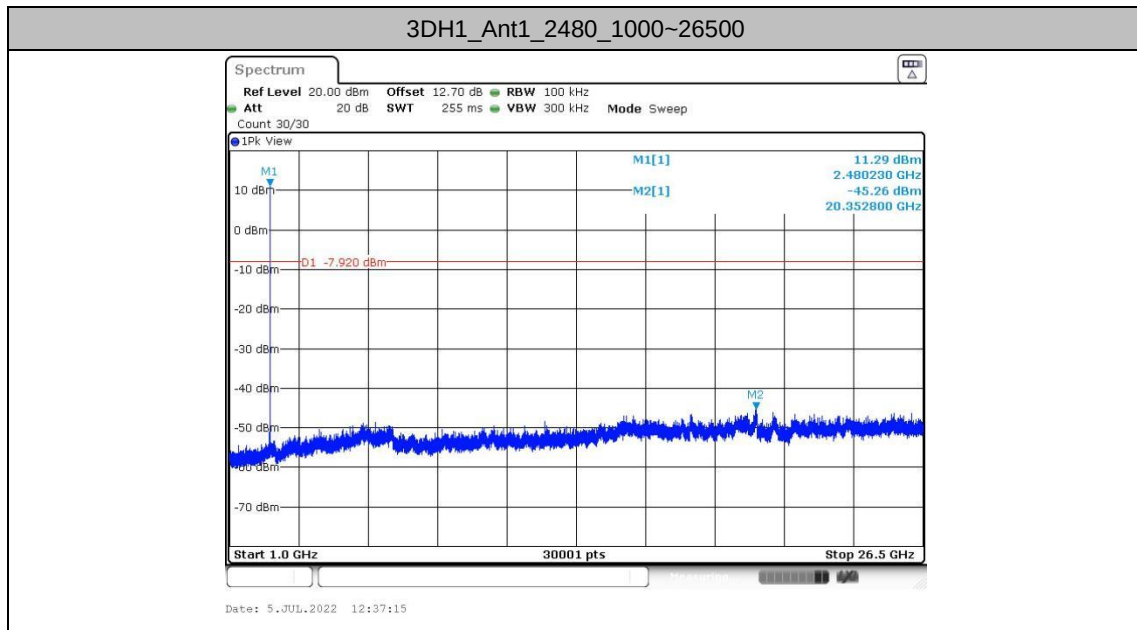

Dwell Time

Test Result


Mod.	Hopping Channel Number Rate	Hops Over Occupancy Time(hops)	Package Transfer Time (msec) (MHz)	Dwell Time (sec)	Limits (sec)	Pass/Fail
Nomal	79	106.67	2.87	0.31	0.4	Pass
AFH	20	53.33	2.87	0.15	0.4	Pass

Remark:

- In normal mode, hopping rate is 1600 hops/s with 6 slots (5 Transmit and 1 Receive slot) in 79 hopping channels.
With channel hopping rate $(1600 / 6 / 79)$ in Occupancy Time Limit (0.4×79) (s), Hops Over Occupancy Time comes to $(1600 / 6 / 79) \times (0.4 \times 79) = 106.67$ hops.
- In AFH mode, hopping rate is 800 hops/s with 6 slots in 20 hopping channels.
With channel hopping rate $(800 / 6 / 20)$ in Occupancy Time Limit (0.4×20) (s), Hops Over Occupancy Time comes to $(800 / 6 / 20) \times (0.4 \times 20) = 53.33$ hops.
- Dwell Time(s) = Hops Over Occupancy Time (hops) x Package Transfer Time.




Test Graphs

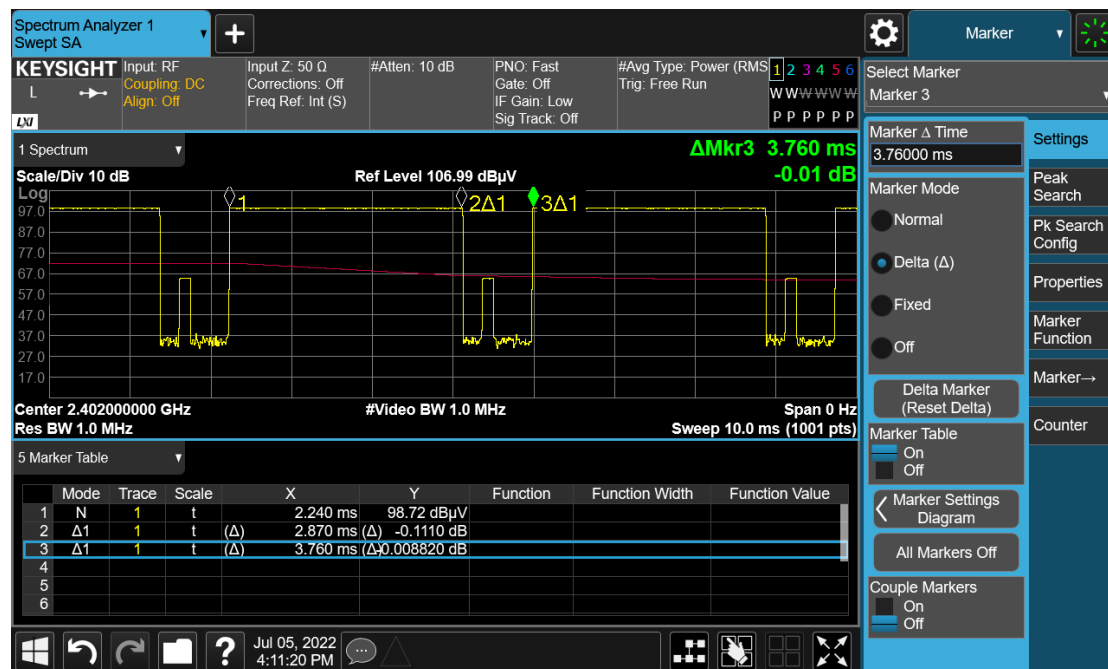




Appendix B. AC Conducted Emission Test Results

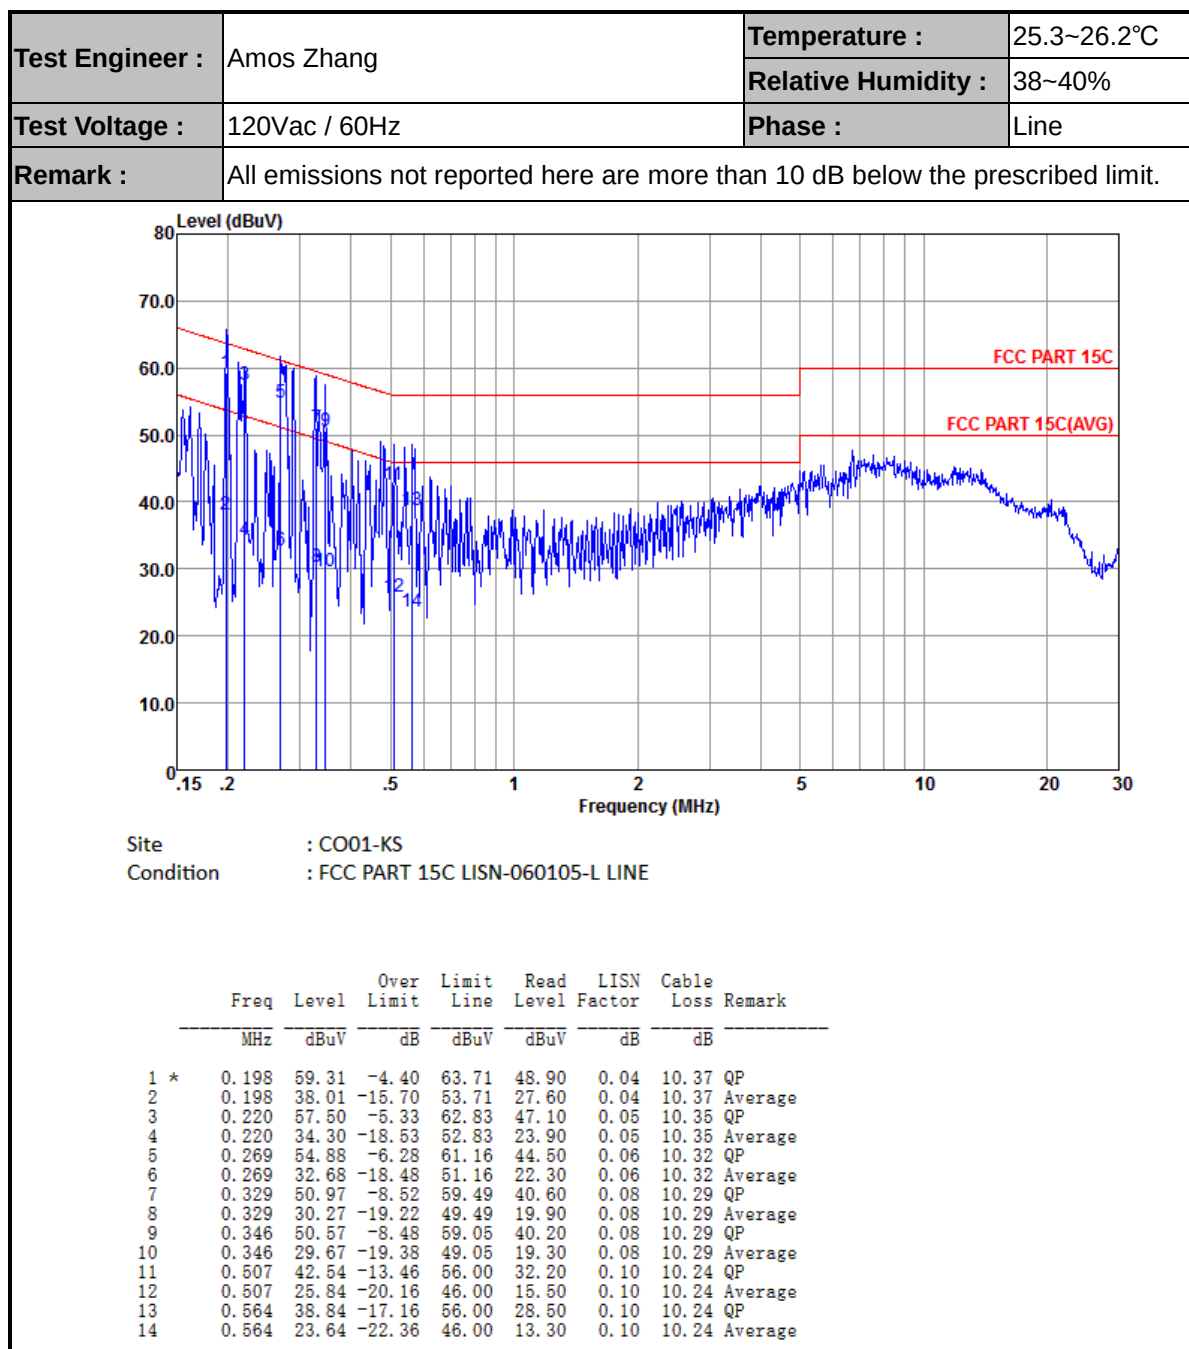



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

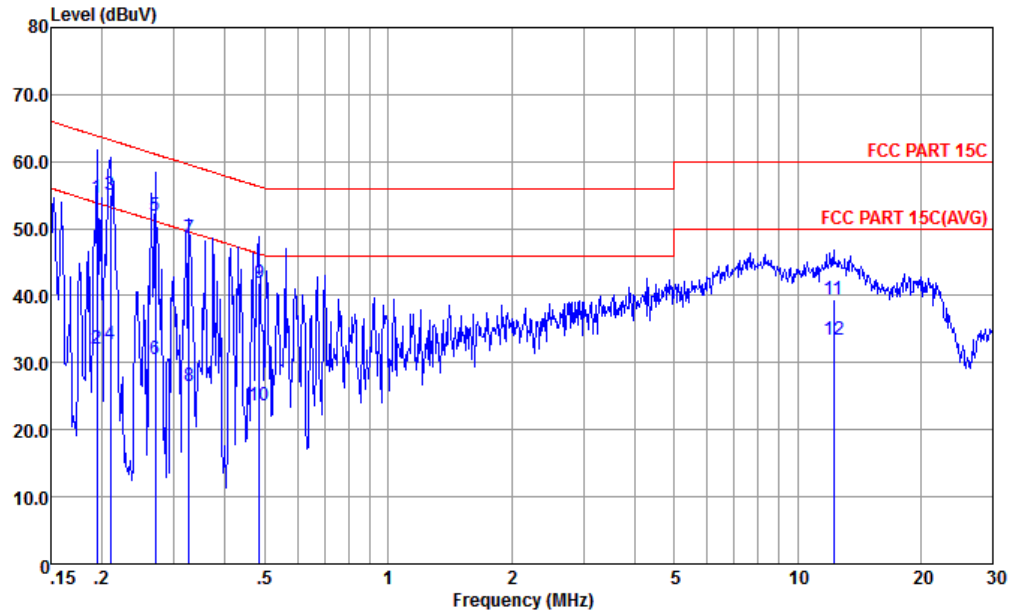

Site : CO01-KS
Condition : FCC PART 15C LISN-060105-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBμV	Limit	Line	Level	Factor	Loss	
			dB	dBμV	dBμV	dB	dB	
1	0.194	54.68	-9.16	63.84	44.21	0.10	10.37	QP
2	0.194	32.08	-21.76	53.84	21.61	0.10	10.37	Average
3 *	0.209	55.06	-8.17	63.23	44.60	0.10	10.36	QP
4	0.209	32.76	-20.47	53.23	22.30	0.10	10.36	Average
5	0.270	51.92	-9.20	61.12	41.50	0.10	10.32	QP
6	0.270	30.62	-20.50	51.12	20.20	0.10	10.32	Average
7	0.327	48.60	-10.93	59.53	38.21	0.10	10.29	QP
8	0.327	26.60	-22.93	49.53	16.21	0.10	10.29	Average
9	0.484	41.85	-14.42	56.27	31.50	0.11	10.24	QP
10	0.484	23.65	-22.62	46.27	13.30	0.11	10.24	Average
11	12.253	39.44	-20.56	60.00	28.80	0.27	10.37	QP
12	12.253	33.44	-16.56	50.00	22.80	0.27	10.37	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	Carry Xu	Temperature :	22~23°C
		Relative Humidity :	41~42%

Only the worst mode results are reported.

2.4GHz 2400~2483.5MHz

BT (Band Edge @ 3m)

BT	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH 78 2480MHz		2480	107.83	-	-	104.42	32.98	7.25	36.82	155	352	P	H
		2480	83.01	-	-	-	-	-	-	-	-	A	H
		2483.68	52.22	-21.78	74	48.81	32.98	7.25	36.82	155	352	P	H
		2483.68	27.40	-26.60	54	-	-	-	-	-	-	A	H
		2480	108.41	-	-	105	32.98	7.25	36.82	100	123	P	V
		2480	83.59	-	-	-	-	-	-	-	-	A	V
		2484.94	49.87	-24.13	74	46.46	32.98	7.25	36.82	100	123	P	V
		2484.94	25.05	-28.95	54	-	-	-	-	-	-	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

2.4GHz 2400~2483.5MHz

BT (Harmonic @ 3m)

BT	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH 78 2480MHz		4965	40.8	-33.2	74	61.58	34.28	10.41	65.47	300	0	P	H
		7440	41.62	-32.38	74	59.25	35.89	12.79	66.31	300	0	P	H
		4965	41.69	-32.31	74	62.47	34.28	10.41	65.47	100	0	P	V
		7440	42.74	-31.26	74	60.37	35.89	12.79	66.31	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Emission below 1GHz

2.4GHz BT (LF)

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz BT LF		95.96	27.48	-16.02	43.5	41.48	17.26	1.48	32.74	-	-	P	H
		156.1	25.73	-17.77	43.5	39.31	17.36	1.9	32.84	-	-	P	H
		209.45	24.88	-18.62	43.5	38.88	16.9	2.2	33.1	-	-	P	H
		444.19	21.48	-24.52	46	27.47	23.5	3.22	32.71	-	-	P	H
		627.52	26.06	-19.94	46	29.13	25.72	3.82	32.61	-	-	P	H
		889.42	33.02	-12.98	46	33.62	27.36	4.56	32.52	-	-	P	H
		94.02	31.28	-12.22	43.5	45.66	16.84	1.46	32.68	-	-	P	V
		156.1	30.62	-12.88	43.5	44.2	17.36	1.9	32.84	-	-	P	V
		208.48	26.65	-16.85	43.5	40.71	16.84	2.2	33.1	-	-	P	V
		429.64	21.01	-24.99	46	27.35	23.24	3.16	32.74	-	-	P	V
		696.39	26.56	-19.44	46	29.59	25.72	4.04	32.79	-	-	P	V
		834.13	28.85	-17.15	46	29.9	27.11	4.41	32.57	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												

**Note symbol**

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

BT	Note	Frequency	Level	Over	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
BT CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)

2. Level(dBμV/m) =

Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

3. Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)

= 55.45 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)

= 55.45(dBμV/m) – 74(dBμV/m)

= -18.55(dB)

For Average Limit @ 2390MHz:

1. Level(dBμV/m)

= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)

= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)

= 43.54 (dBμV/m)

2. Over Limit(dB)

= Level(dBμV/m) – Limit Line(dBμV/m)


= 43.54(dBμV/m) – 54(dBμV/m)

= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.

Appendix D. Duty Cycle Plots

3DH5 on time (One Pulse) Plot on Channel 39

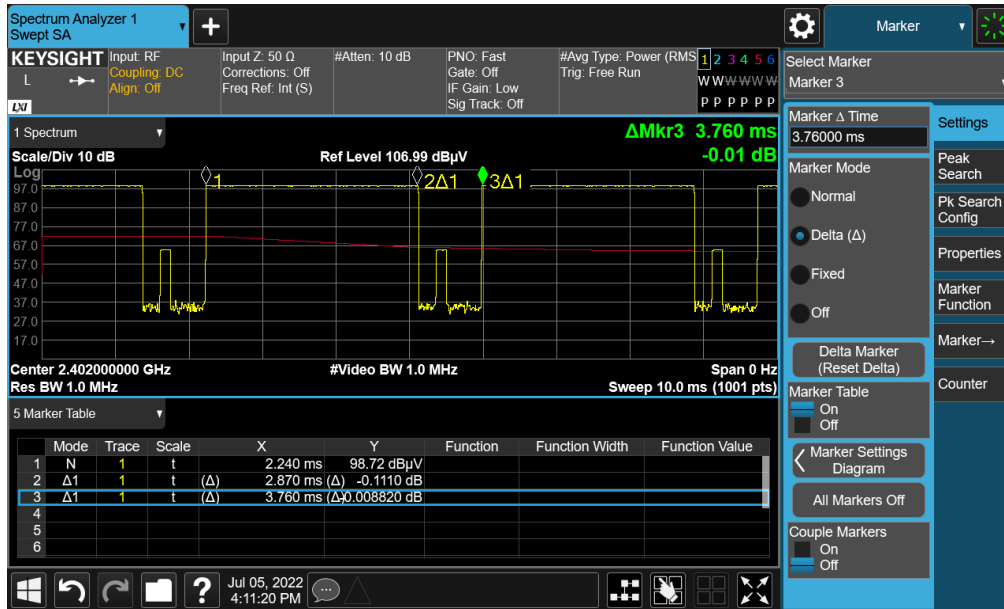

3DH5 on time (Count Pulses) Plot on Channel 39



Note:

1. Worst case Duty cycle = on time/100 milliseconds = $2 * 2.87 / 100 = 5.74 \%$
2. Worst case Duty cycle correction factor = $20 * \log(\text{Duty cycle}) = -24.82 \text{ dB}$
3. 3DH5 has the highest duty cycle worst case and is reported.