

131_WLAN5GHz_802.11n-HT40 MCS0_Front_0mm_Ch46

Communication System: WLAN 5GHz; Frequency: 5230.0

Medium: HSL. Medium parameters used: $f = 5230.0$ MHz; $\sigma = 4.64$ S/m; $\epsilon_r = 36.7$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7734; ConvF(5.76, 5.76, 5.76); Calibrated: 2022-06-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2022-12-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 2.99 W/kg; SAR (10g) = 1.01 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 2.6 mm x 2.6 mm x 1.2 mm

Power Drift = 0.02 dB

SAR (1g) = 2.77 W/kg; SAR (10g) = 0.936 W/kg;

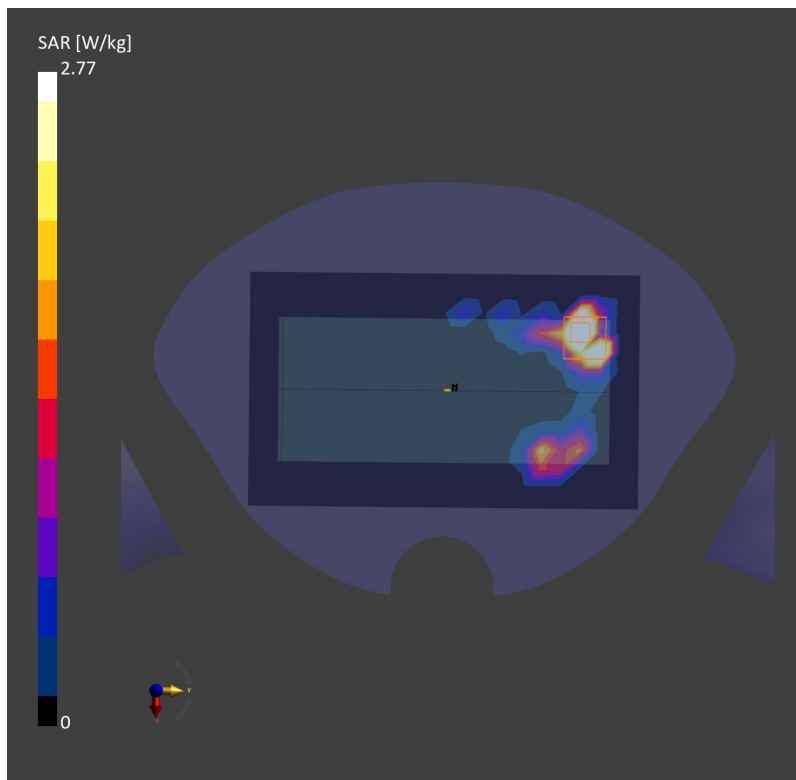

132_WLAN5GHz_802.11n-HT40 MCS0_Right Side_0mm_Ch54

Communication System: WLAN 5GHz; Frequency: 5270.0

Medium: HSL. Medium parameters used: $f = 5270.0$ MHz; $\sigma = 4.69$ S/m; $\epsilon_r = 36.6$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7734; ConvF(5.76, 5.76, 5.76); Calibrated: 2022-06-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2022-12-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (42.0 mm x 200.0 mm): Measurement Grid: 7.0 mm x 10.0 mm

SAR (1g) = 5.47 W/kg; SAR (10g) = 1.37 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.03 dB

SAR (1g) = 6.74 W/kg; SAR (10g) = 1.55 W/kg;

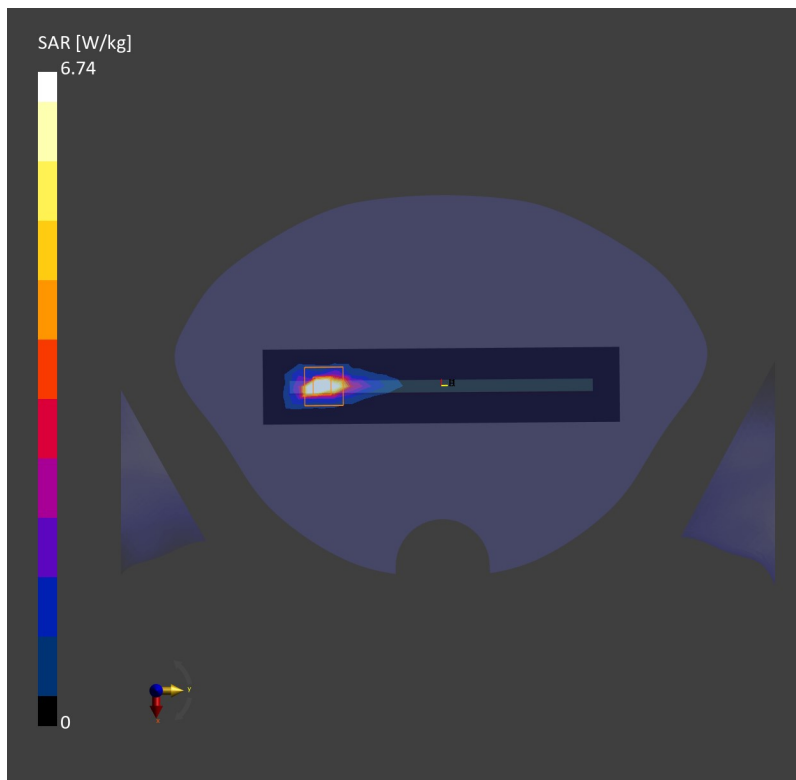

133_WLAN5GHz_802.11ac-VHT80 MCS0_Front_0mm_Ch138

Communication System: WLAN 5GHz; Frequency: 5690.0

Medium: HSL. Medium parameters used: $f = 5690.0$ MHz; $\sigma = 5.17$ S/m; $\epsilon_r = 35.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7734; ConvF(5.01, 5.01, 5.01); Calibrated: 2022-06-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2022-12-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926


Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 5.70 W/kg; SAR (10g) = 1.83 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 6.41 W/kg; SAR (10g) = 1.75 W/kg;

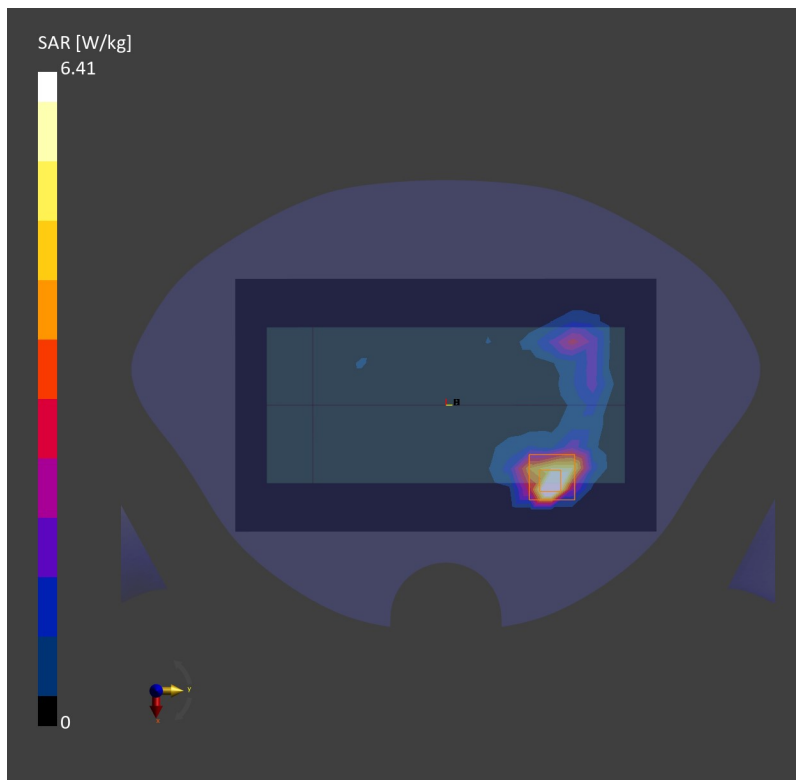

134_WLAN5GHz_802.11ac-VHT80 MCS0_Right Side_0mm_Ch155

Communication System: WLAN 5GHz; Frequency: 5775.0

Medium: HSL. Medium parameters used: $f = 5775.0$ MHz; $\sigma = 5.27$ S/m; $\epsilon_r = 35.7$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7734; ConvF(5.13, 5.13, 5.13); Calibrated: 2022-06-17
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2022-12-12
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024
- Measurement Software: cDASY6 V6.6.0.13926

Area Scan (48.0 mm x 220.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 9.35 W/kg; SAR (10g) = 2.22 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 2.2 mm x 2.2 mm x 1.2 mm

Power Drift = 0.04 dB

SAR (1g) = 8.85 W/kg; SAR (10g) = 2.05 W/kg;

