






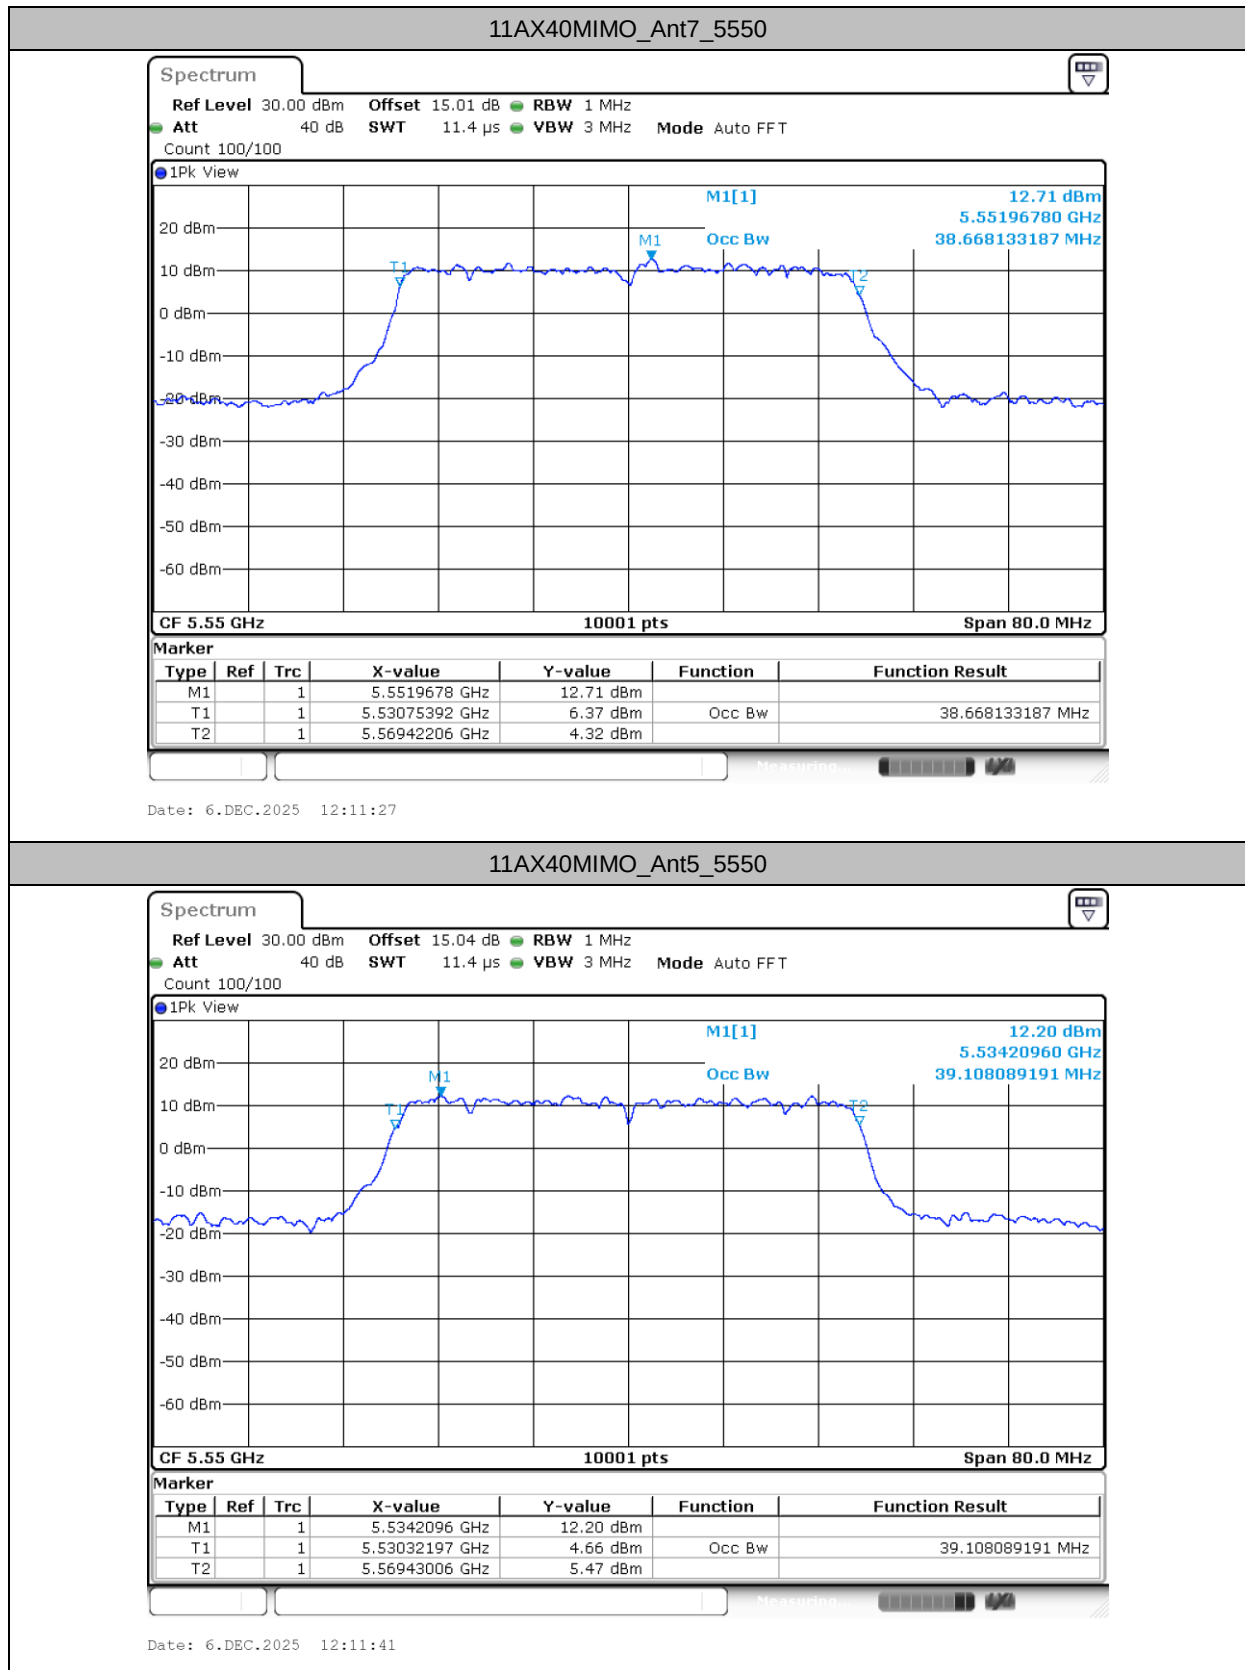


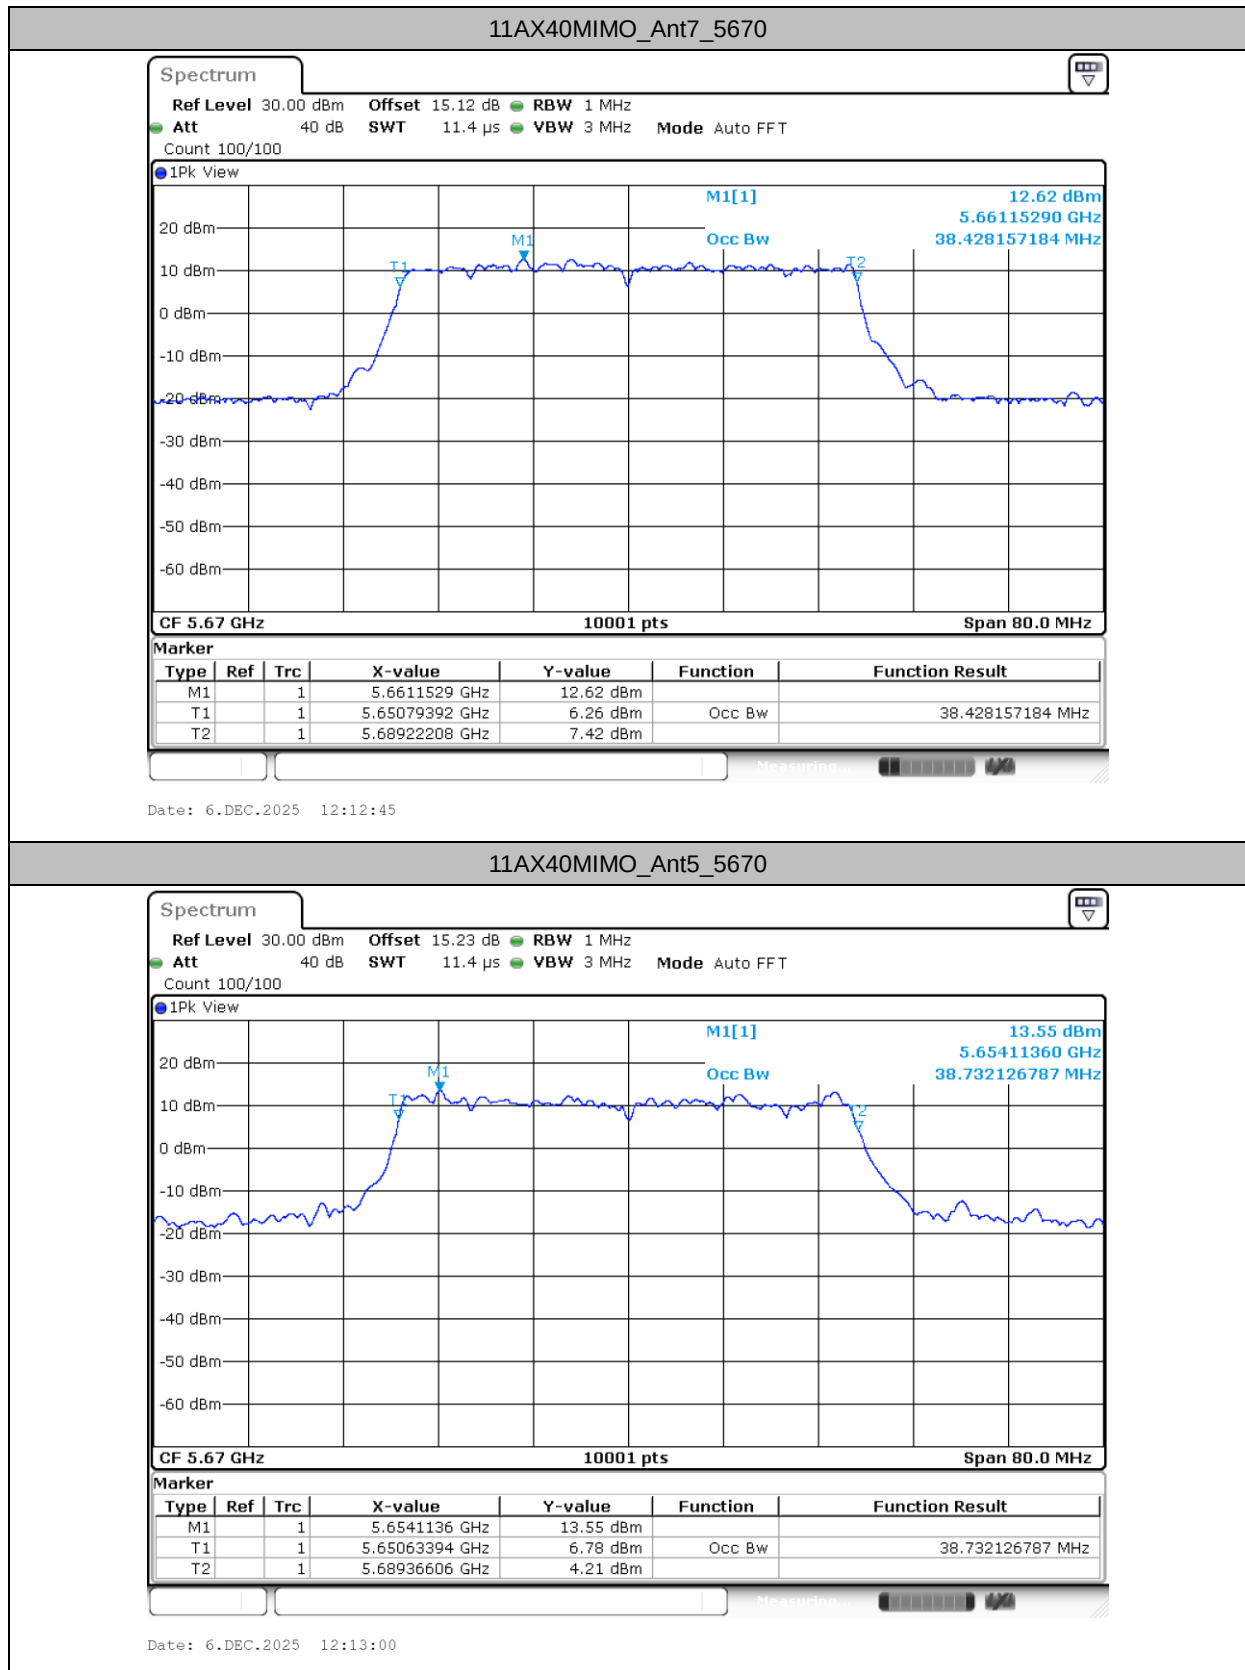


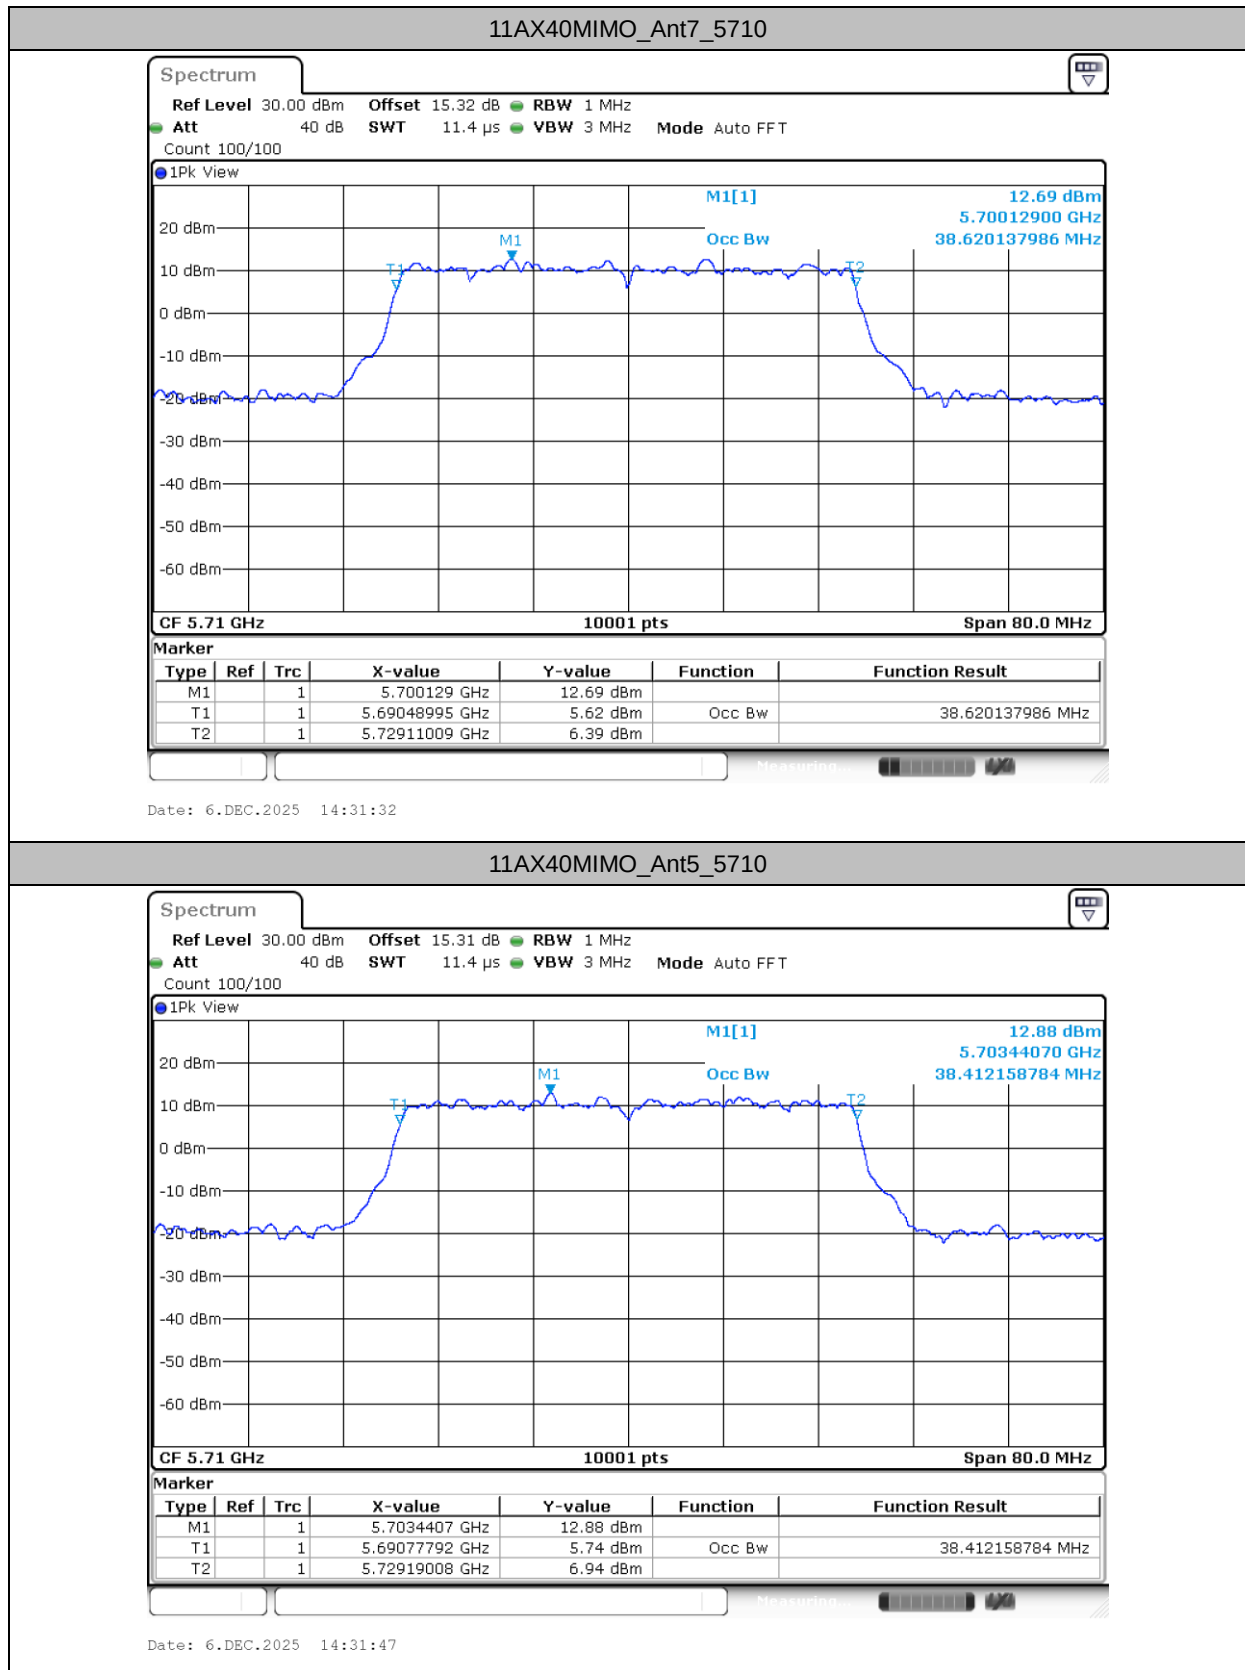


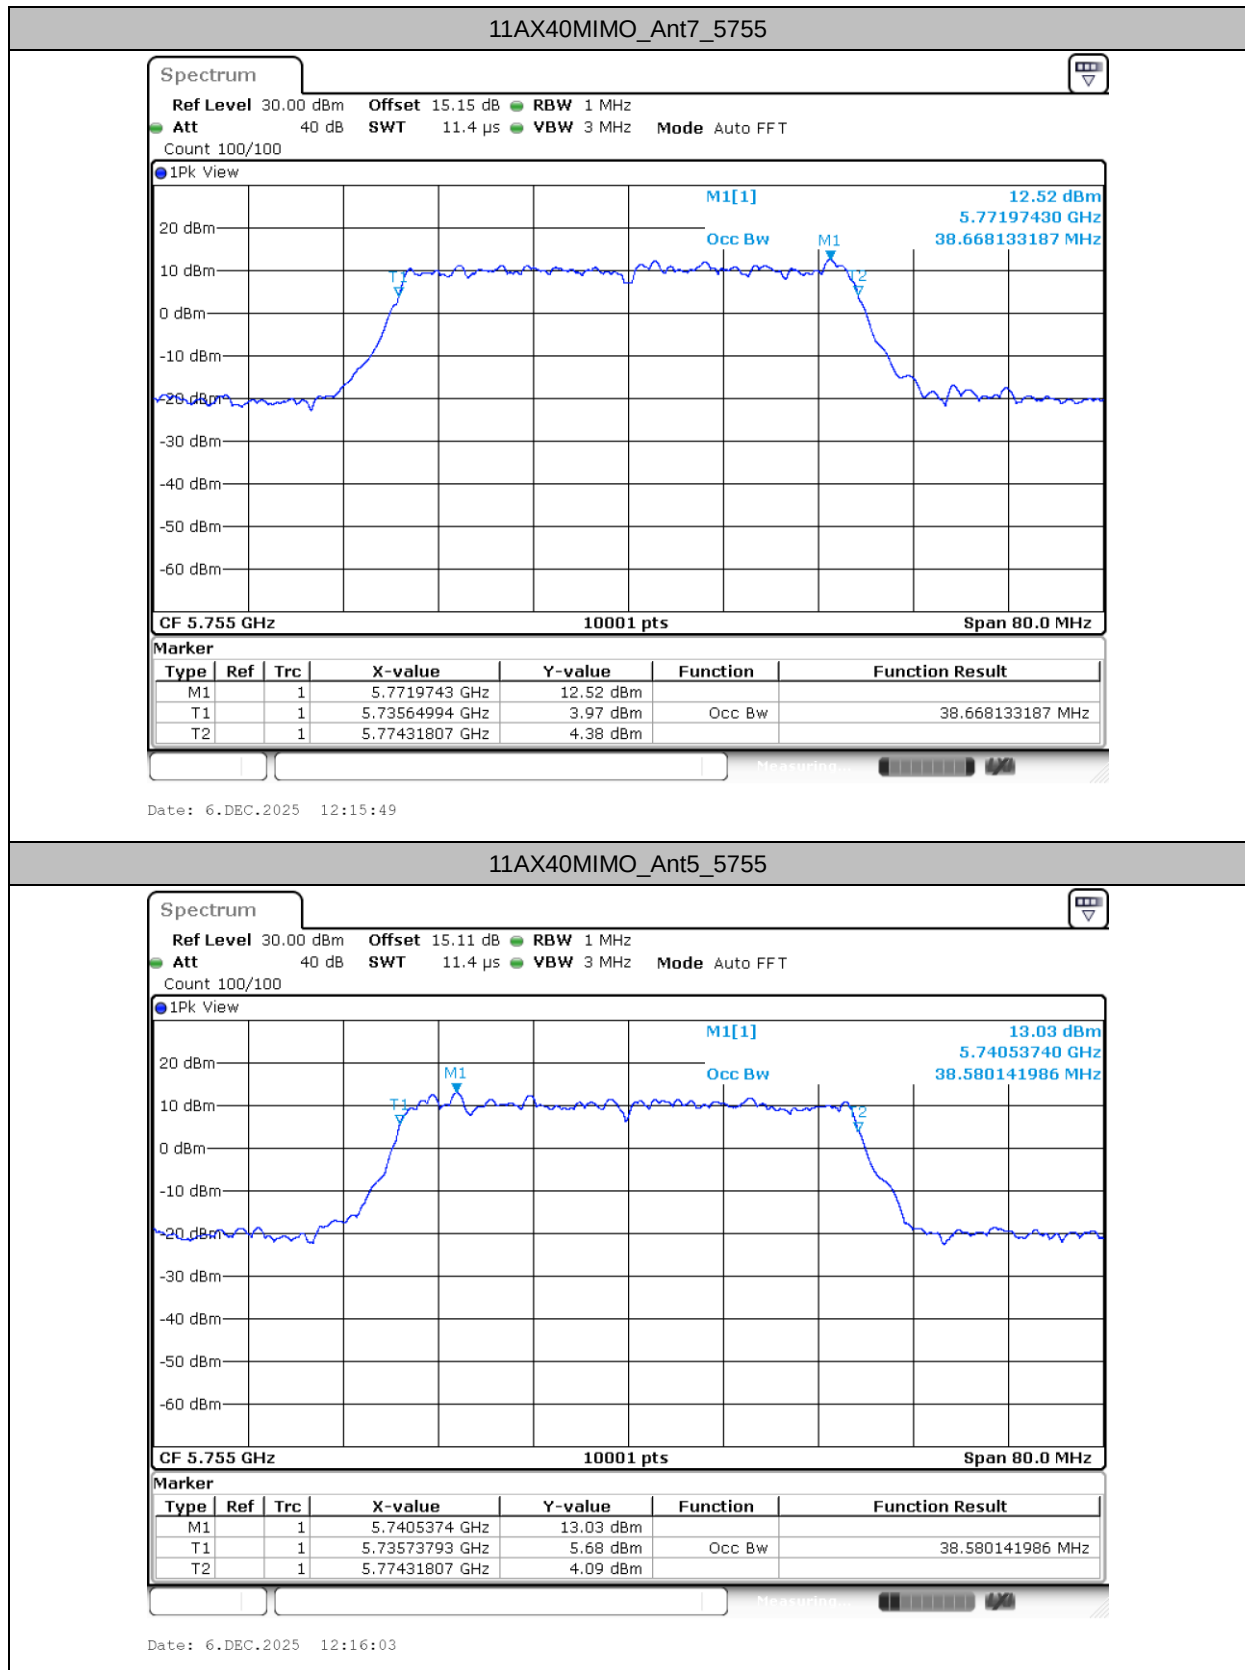


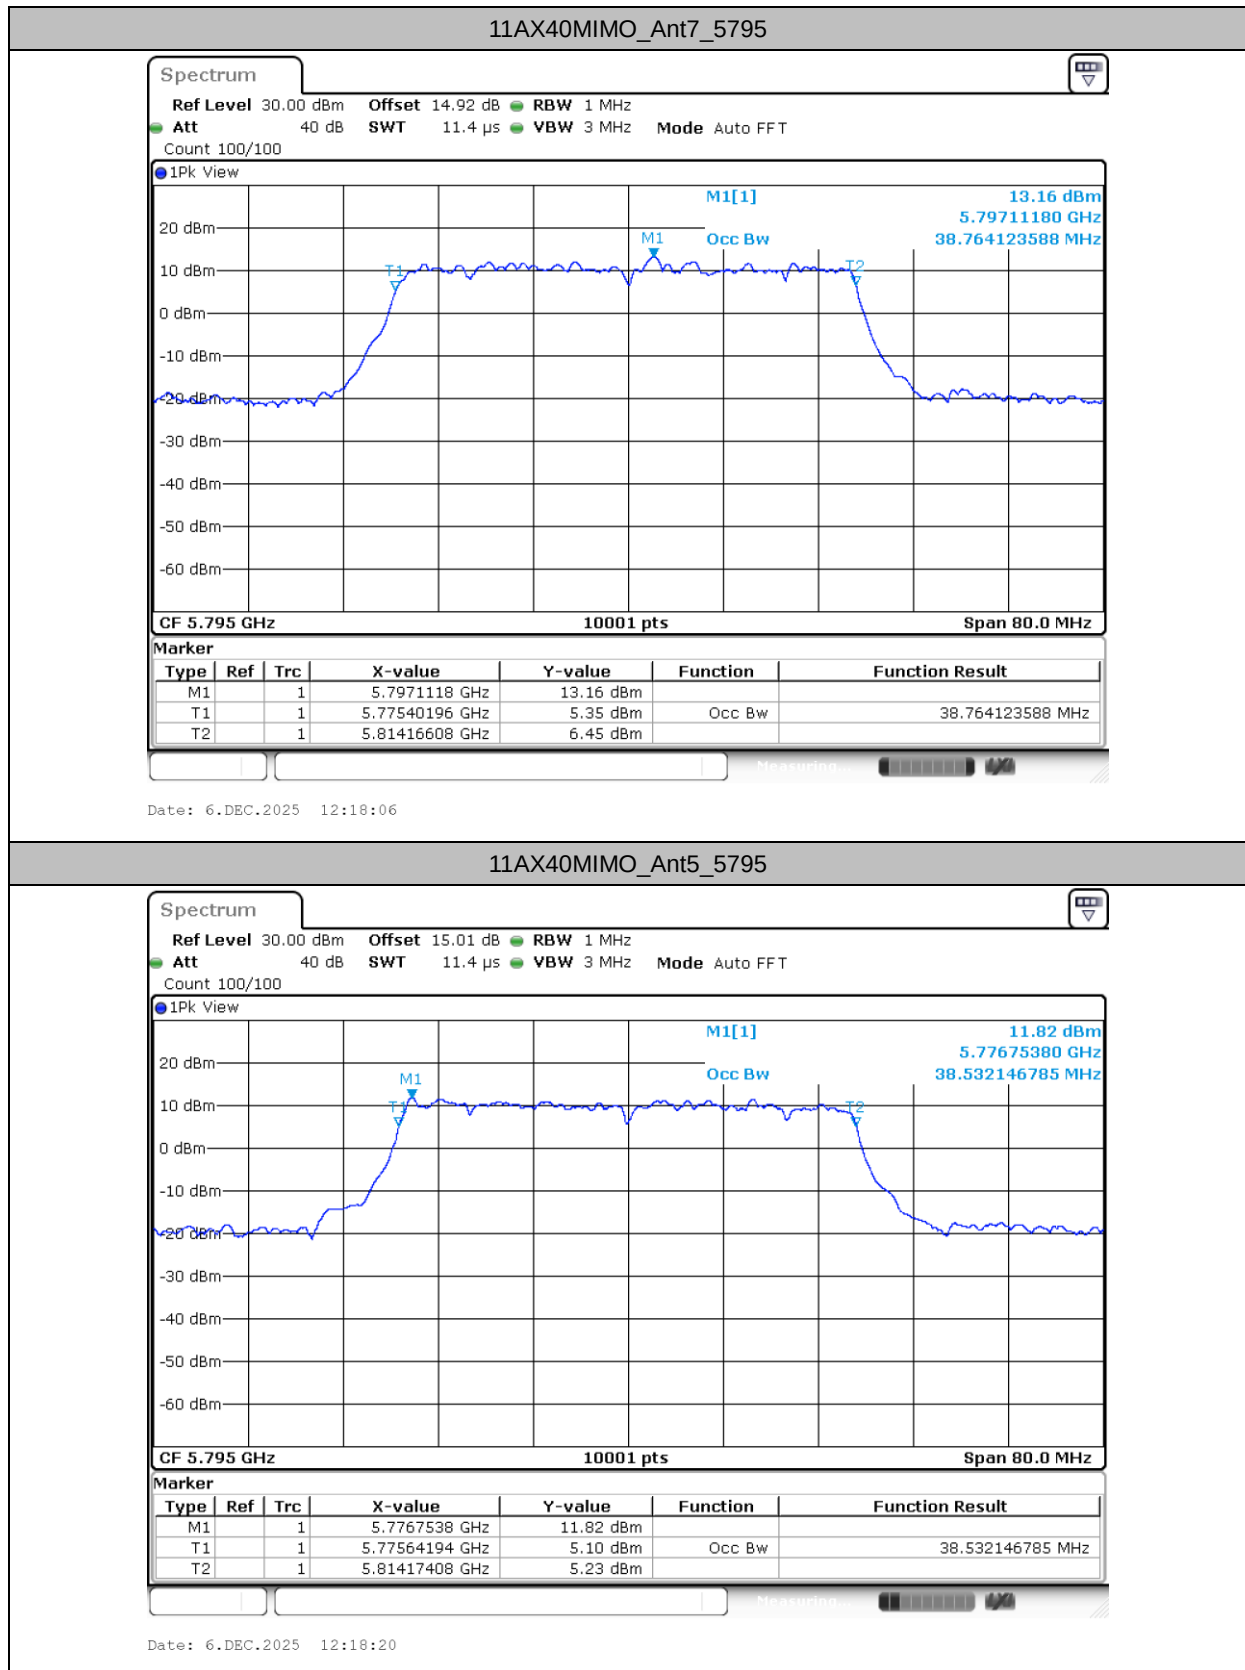


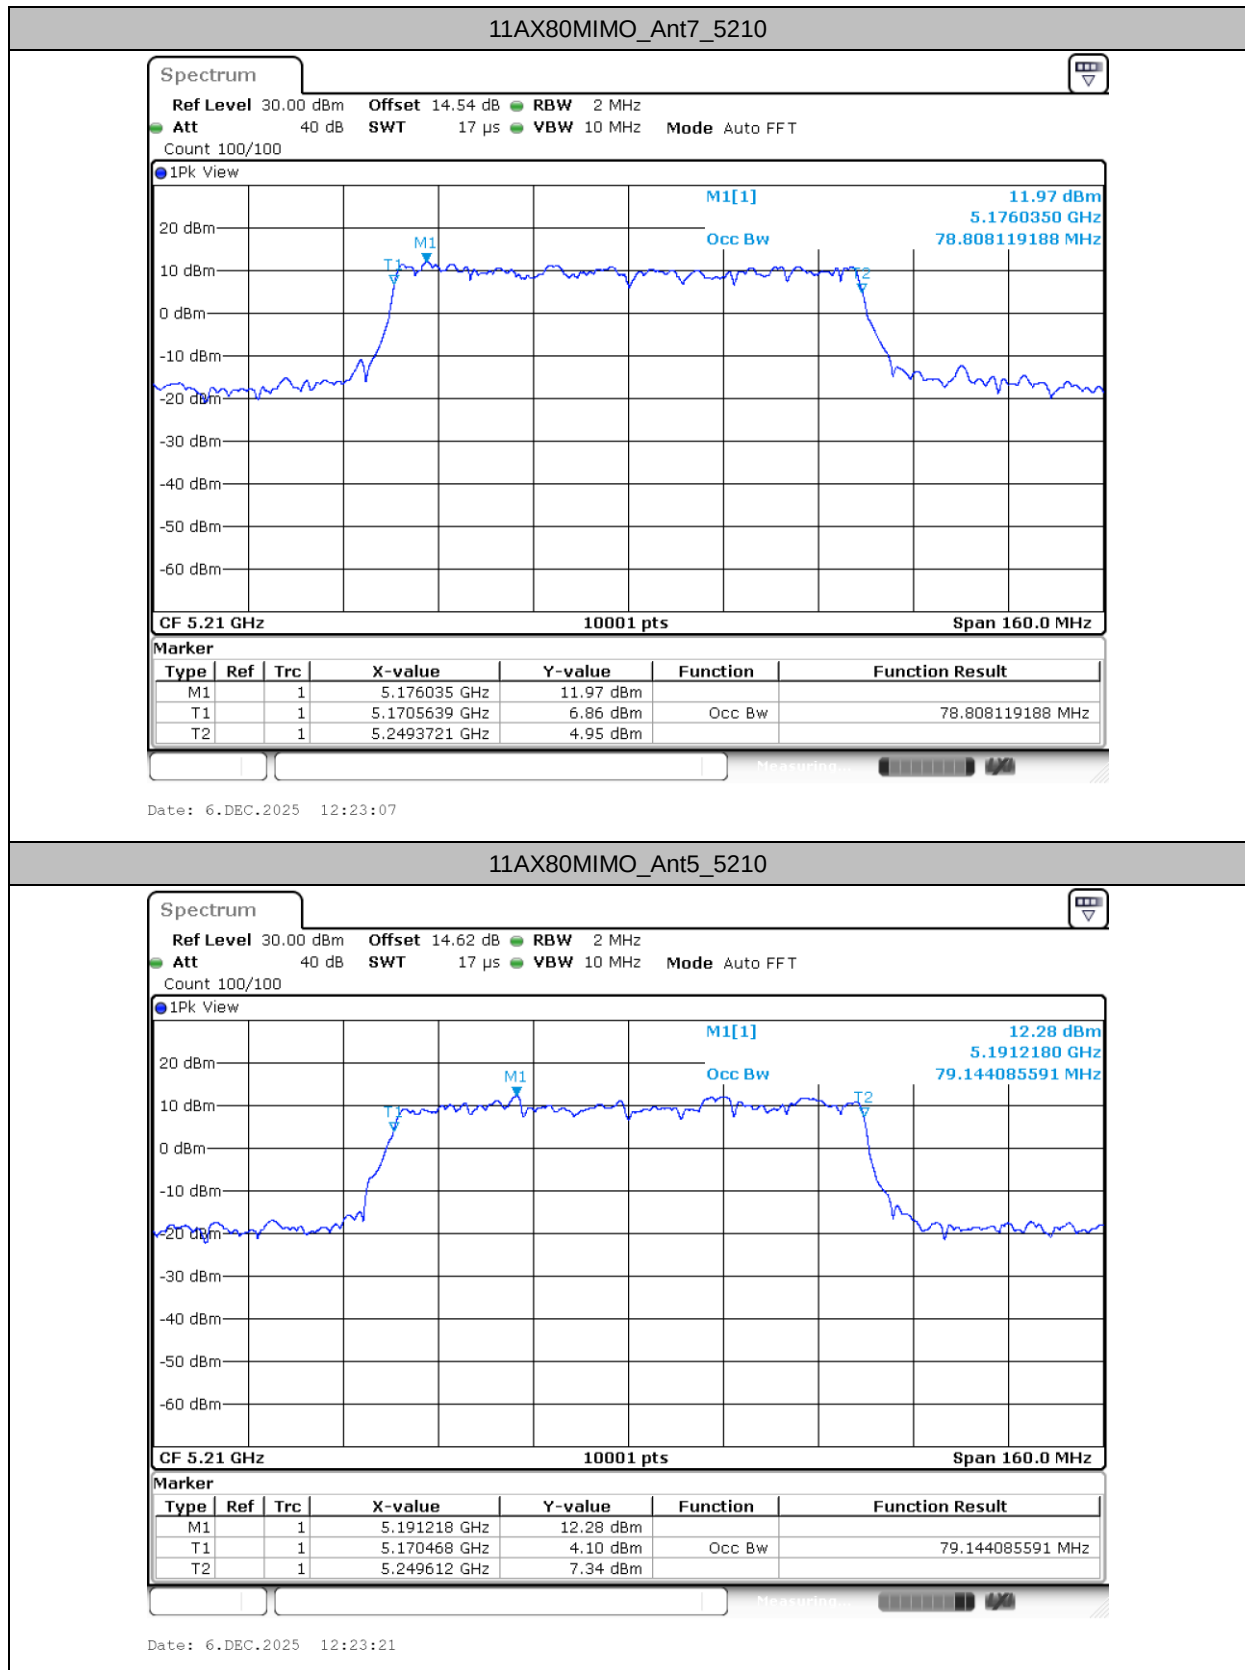


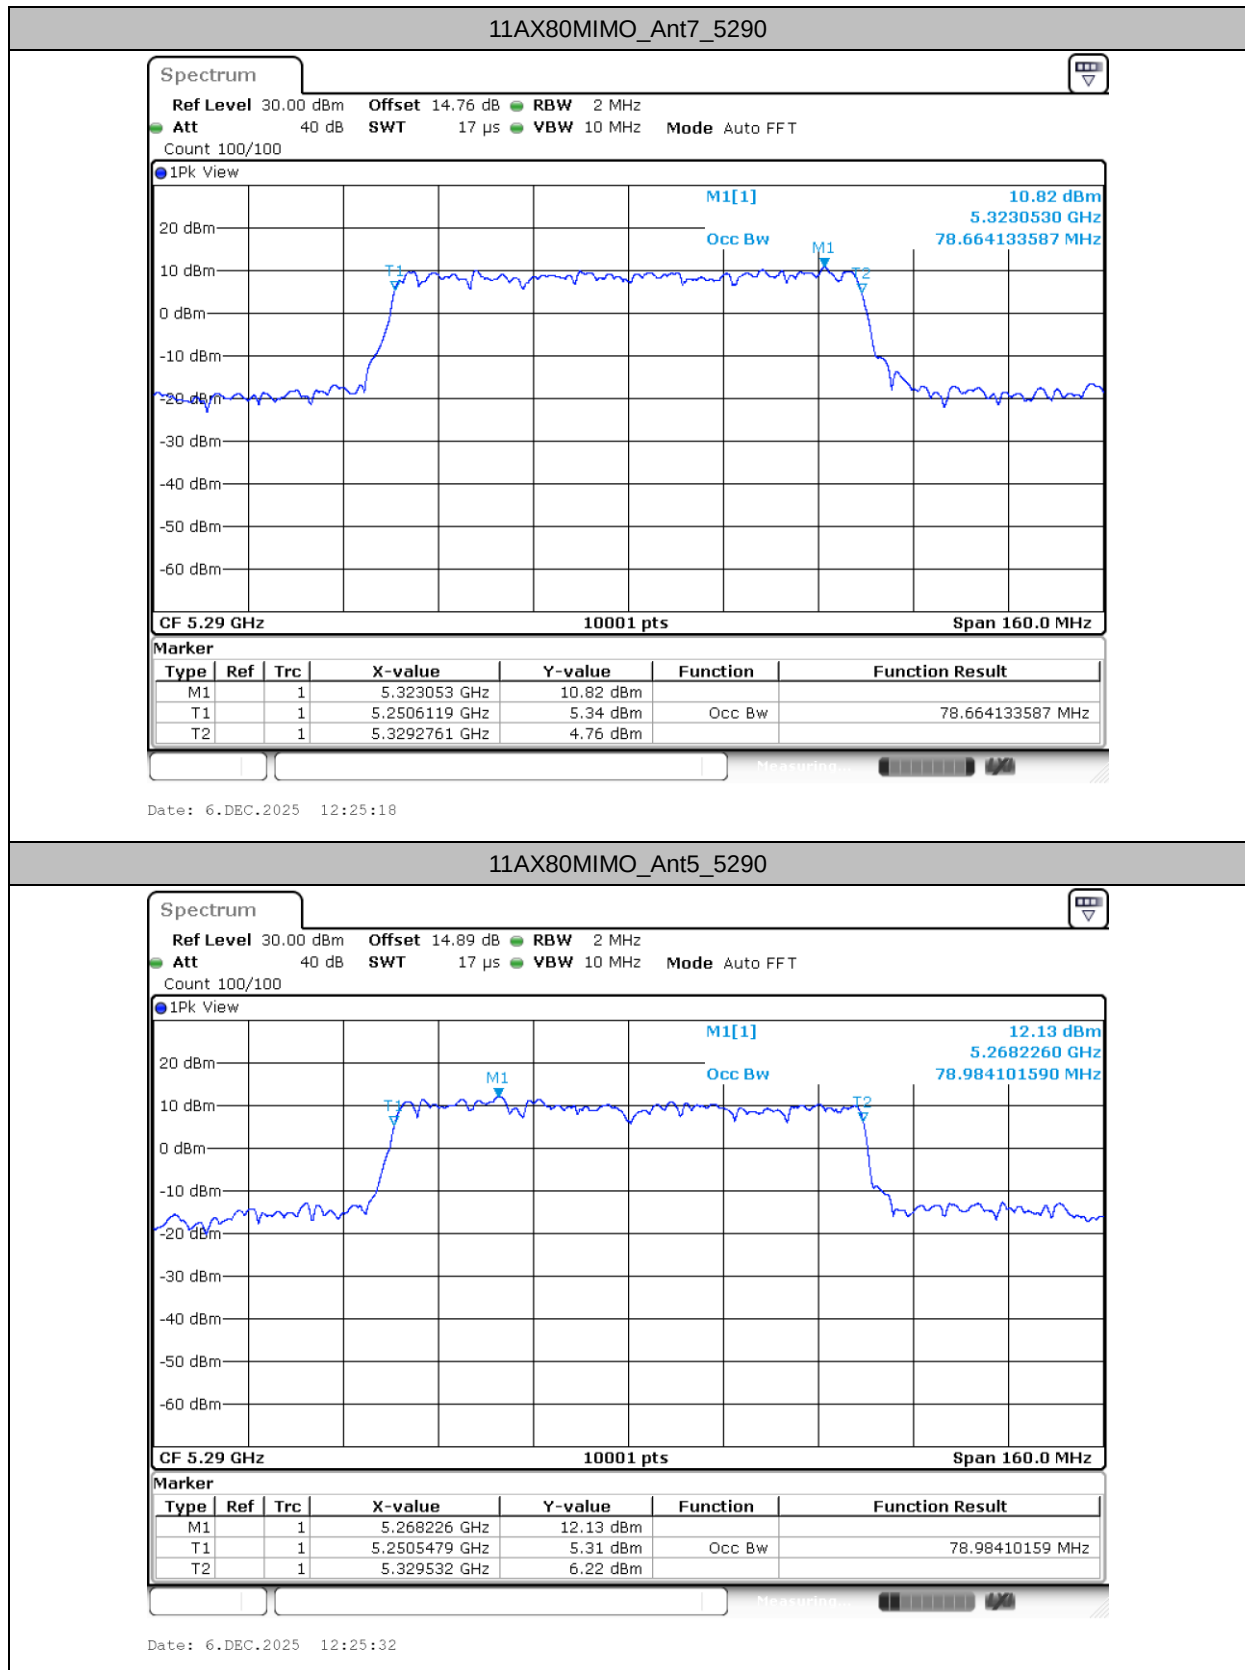


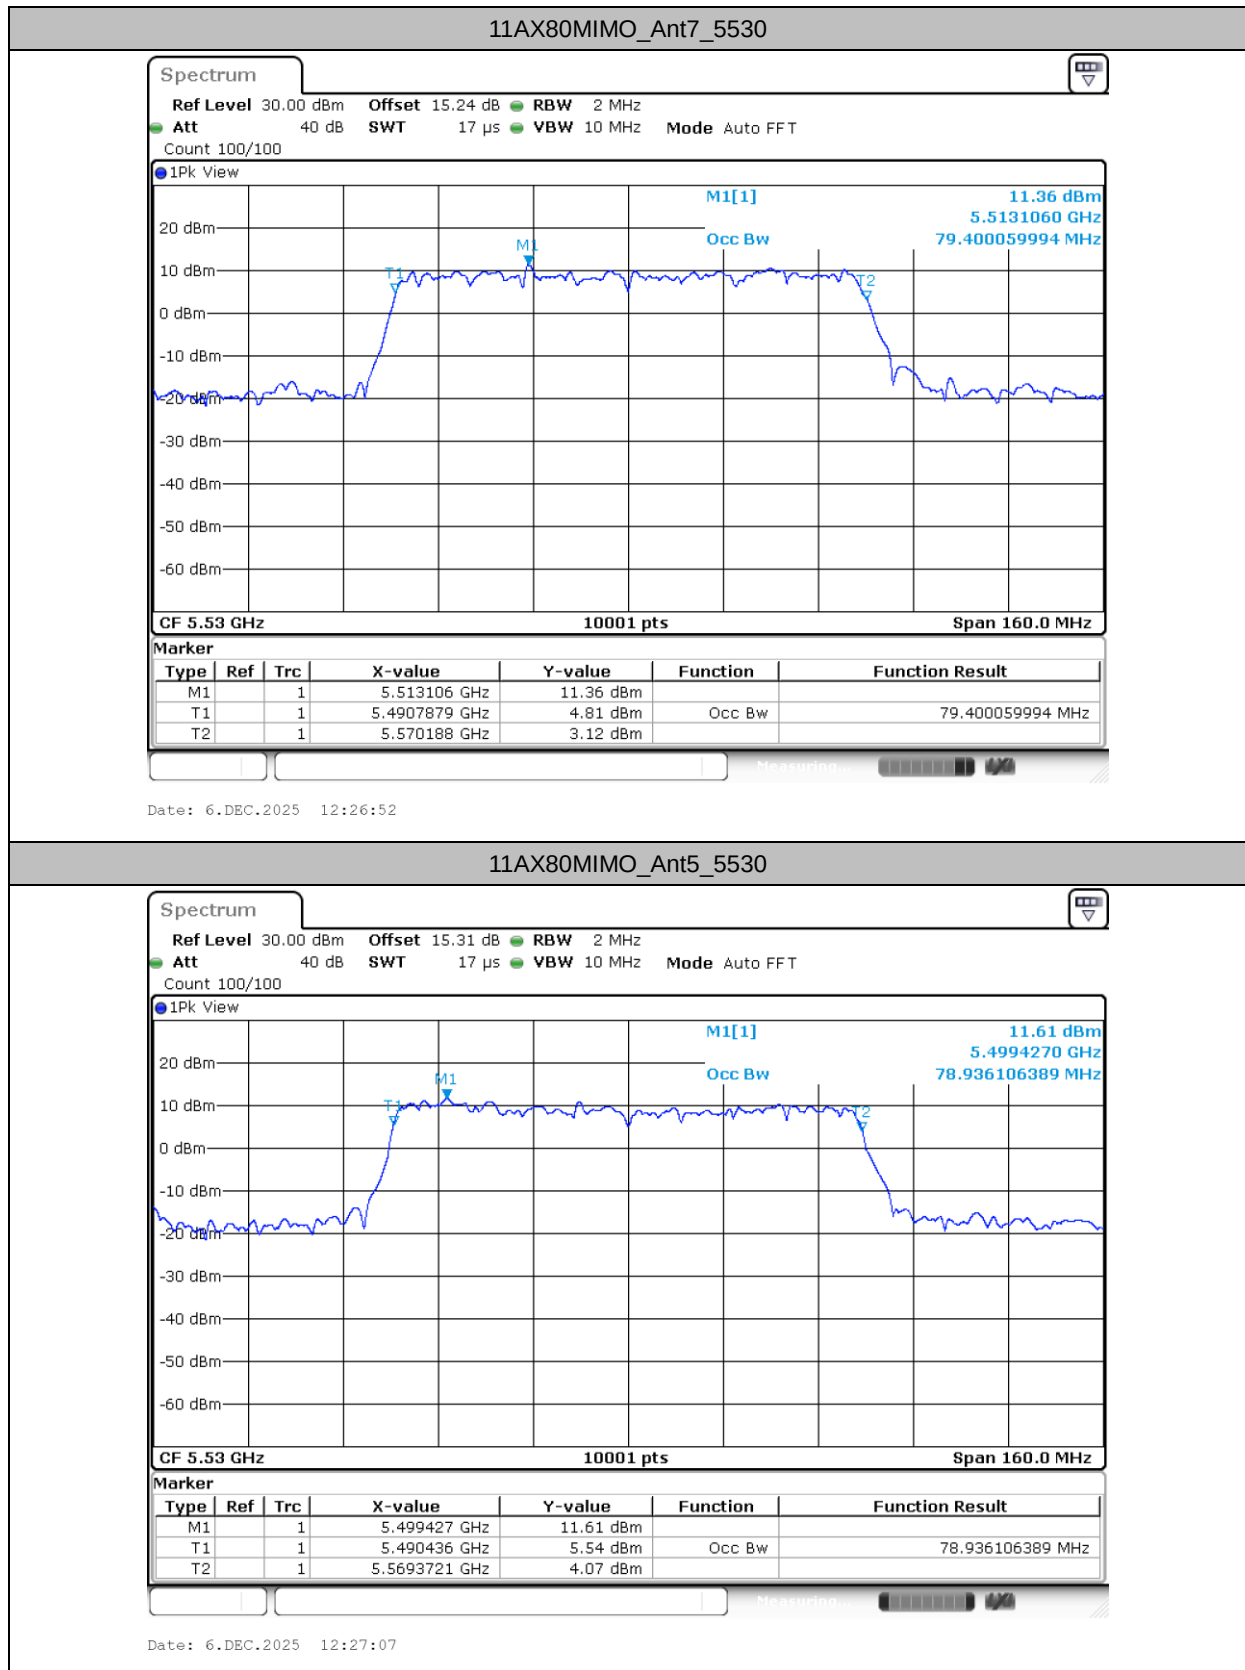


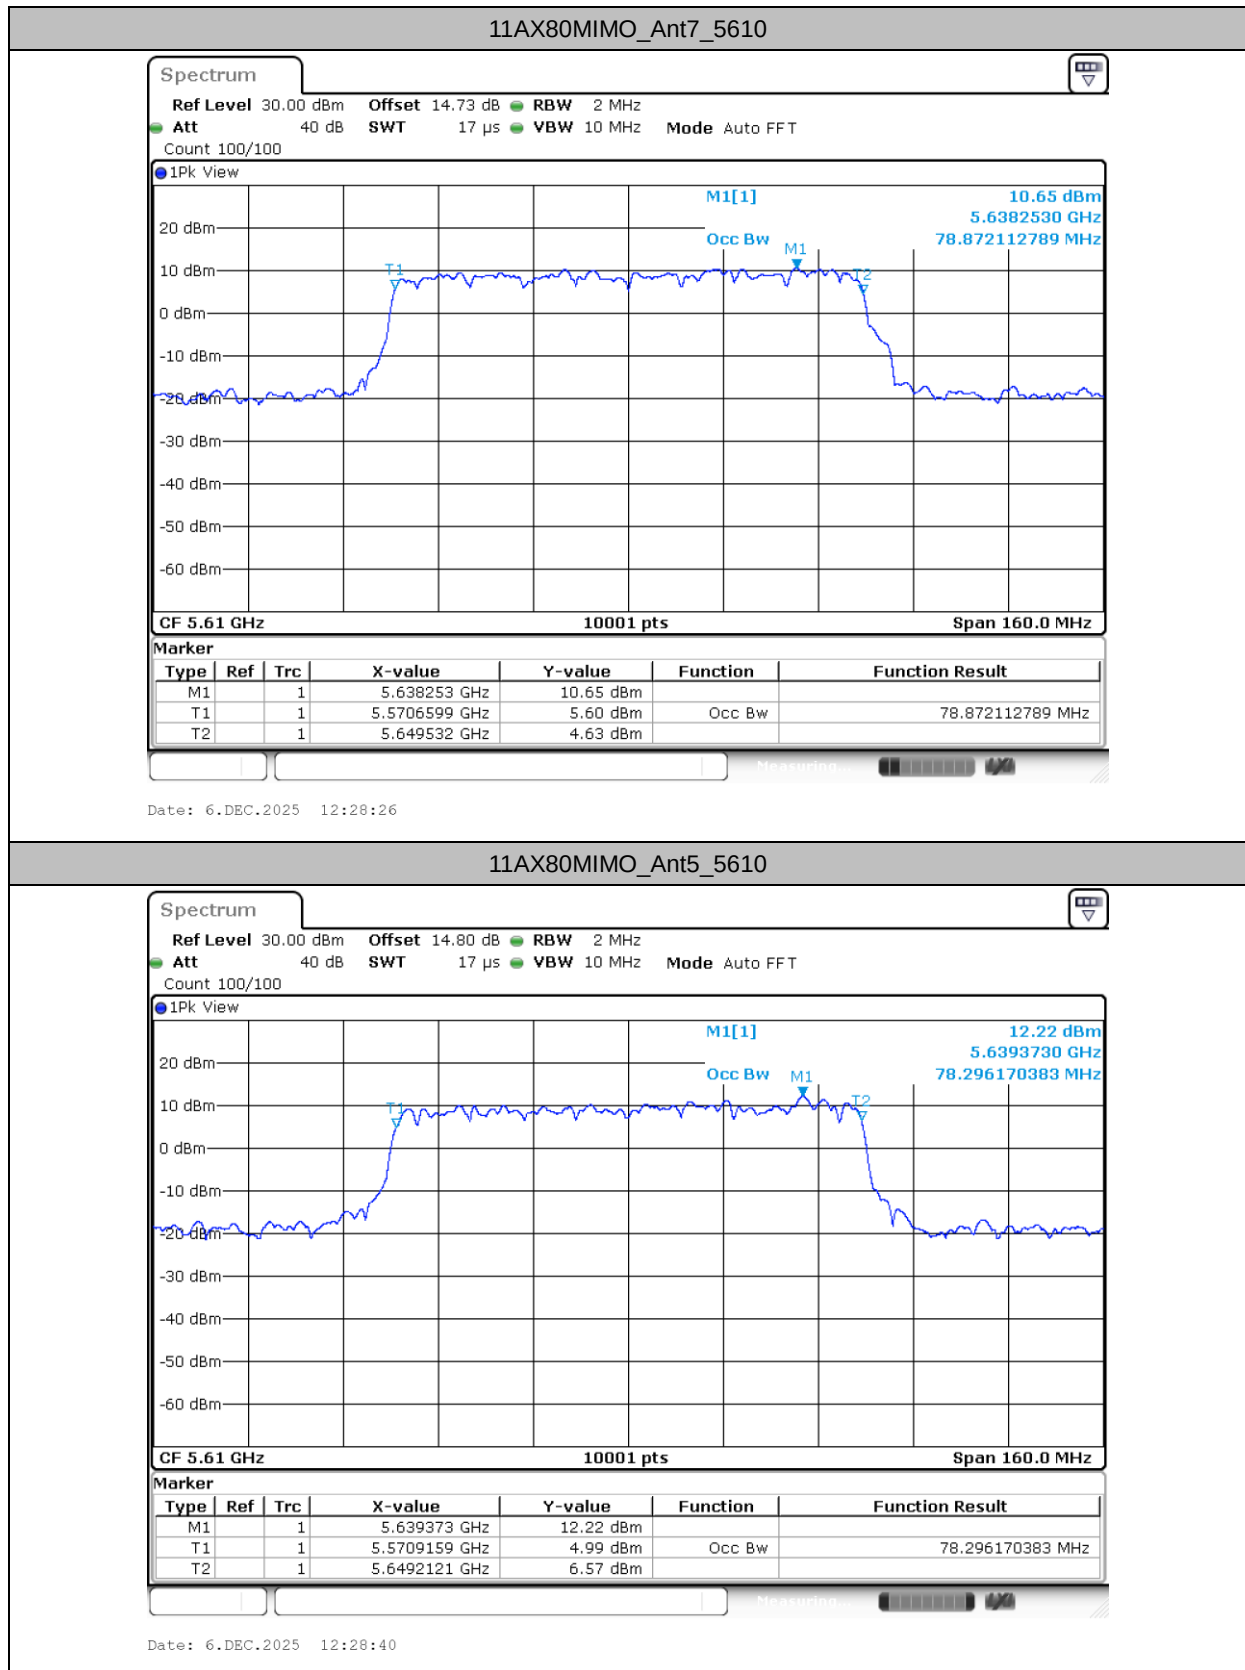


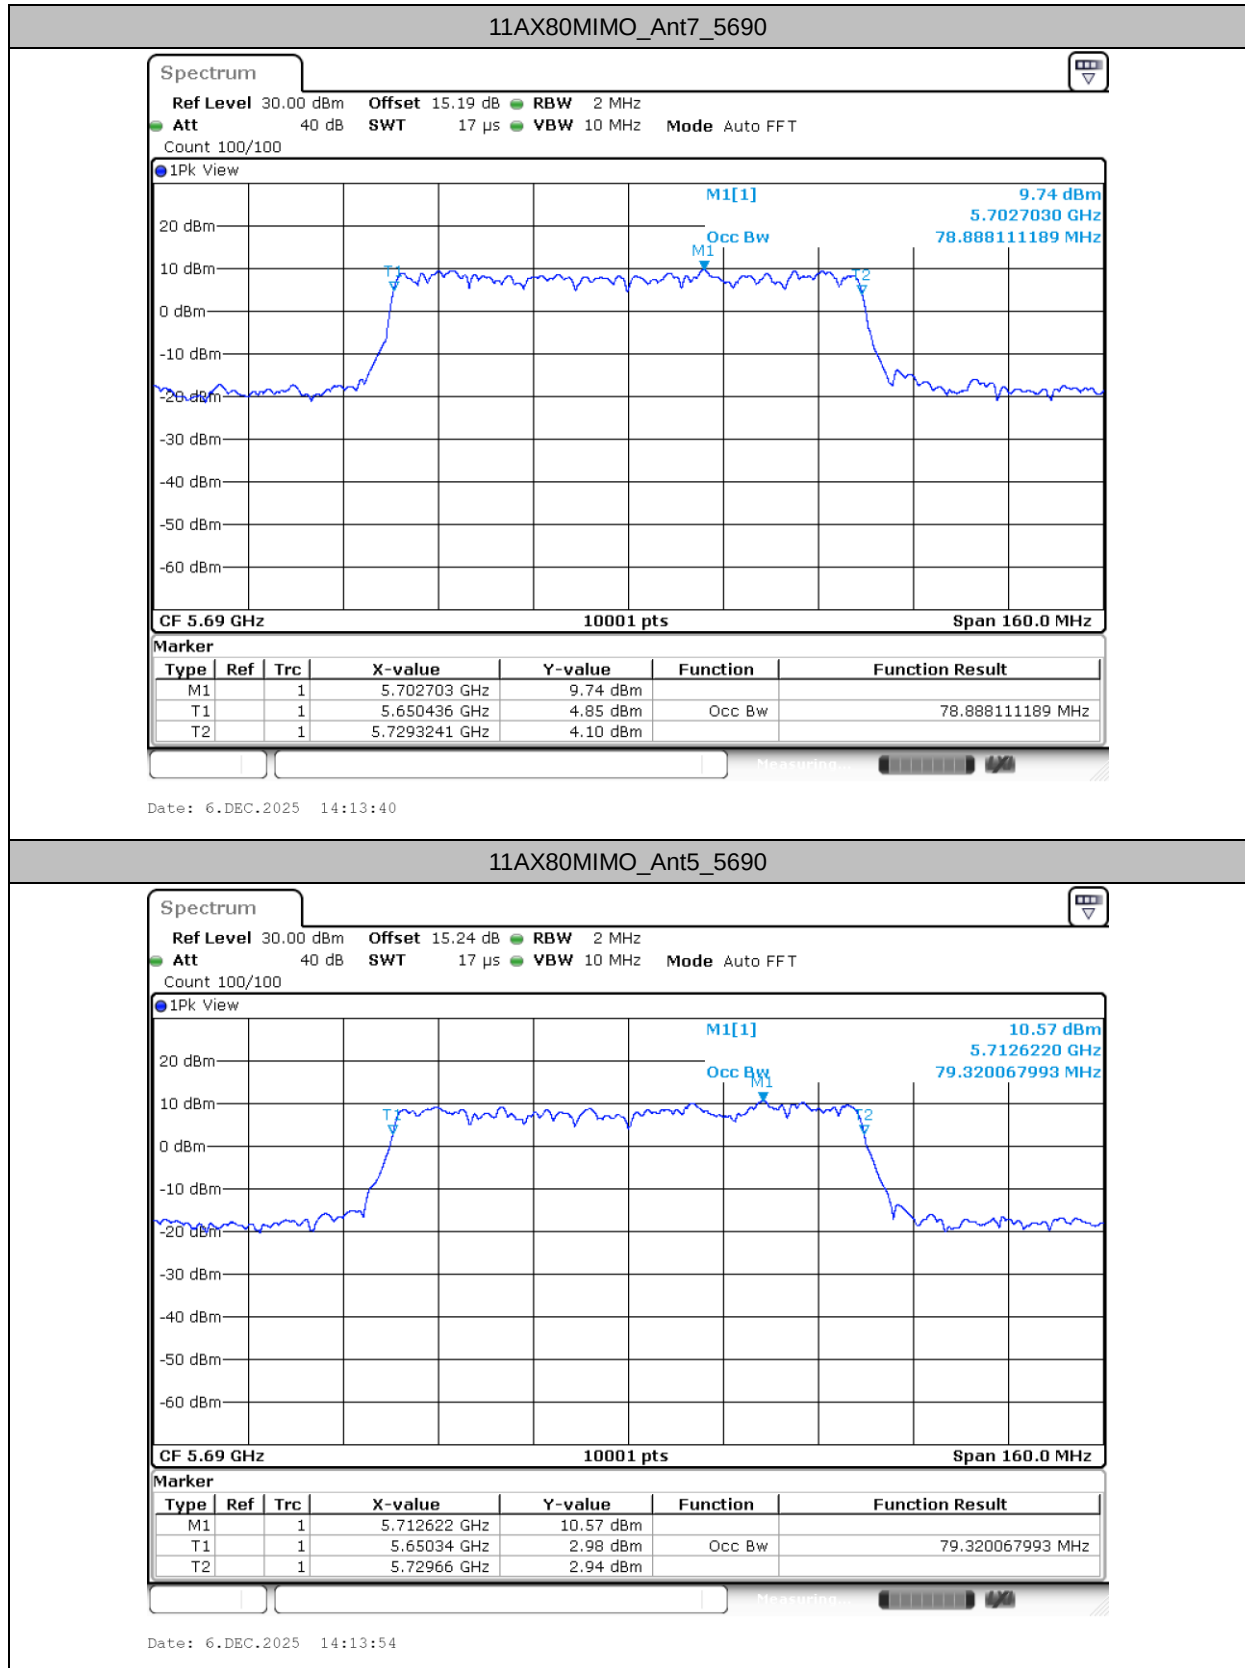



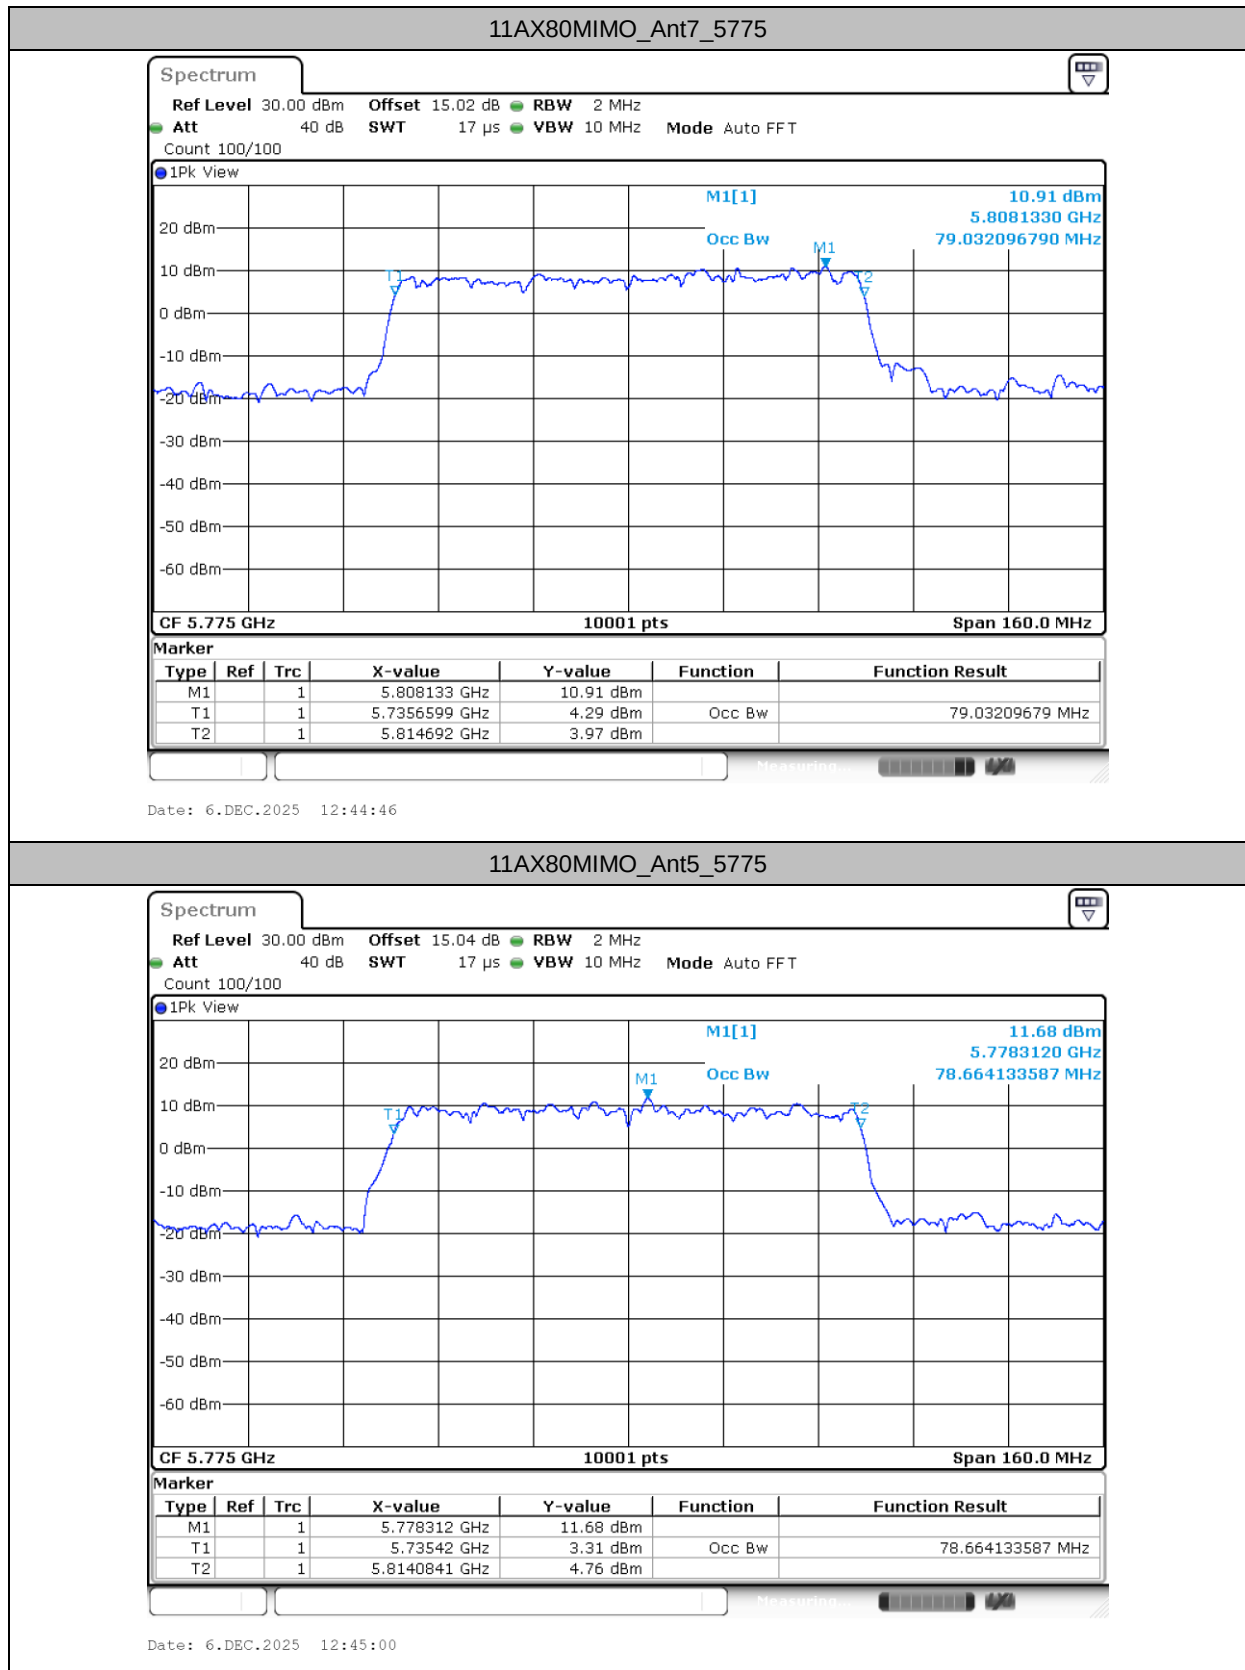


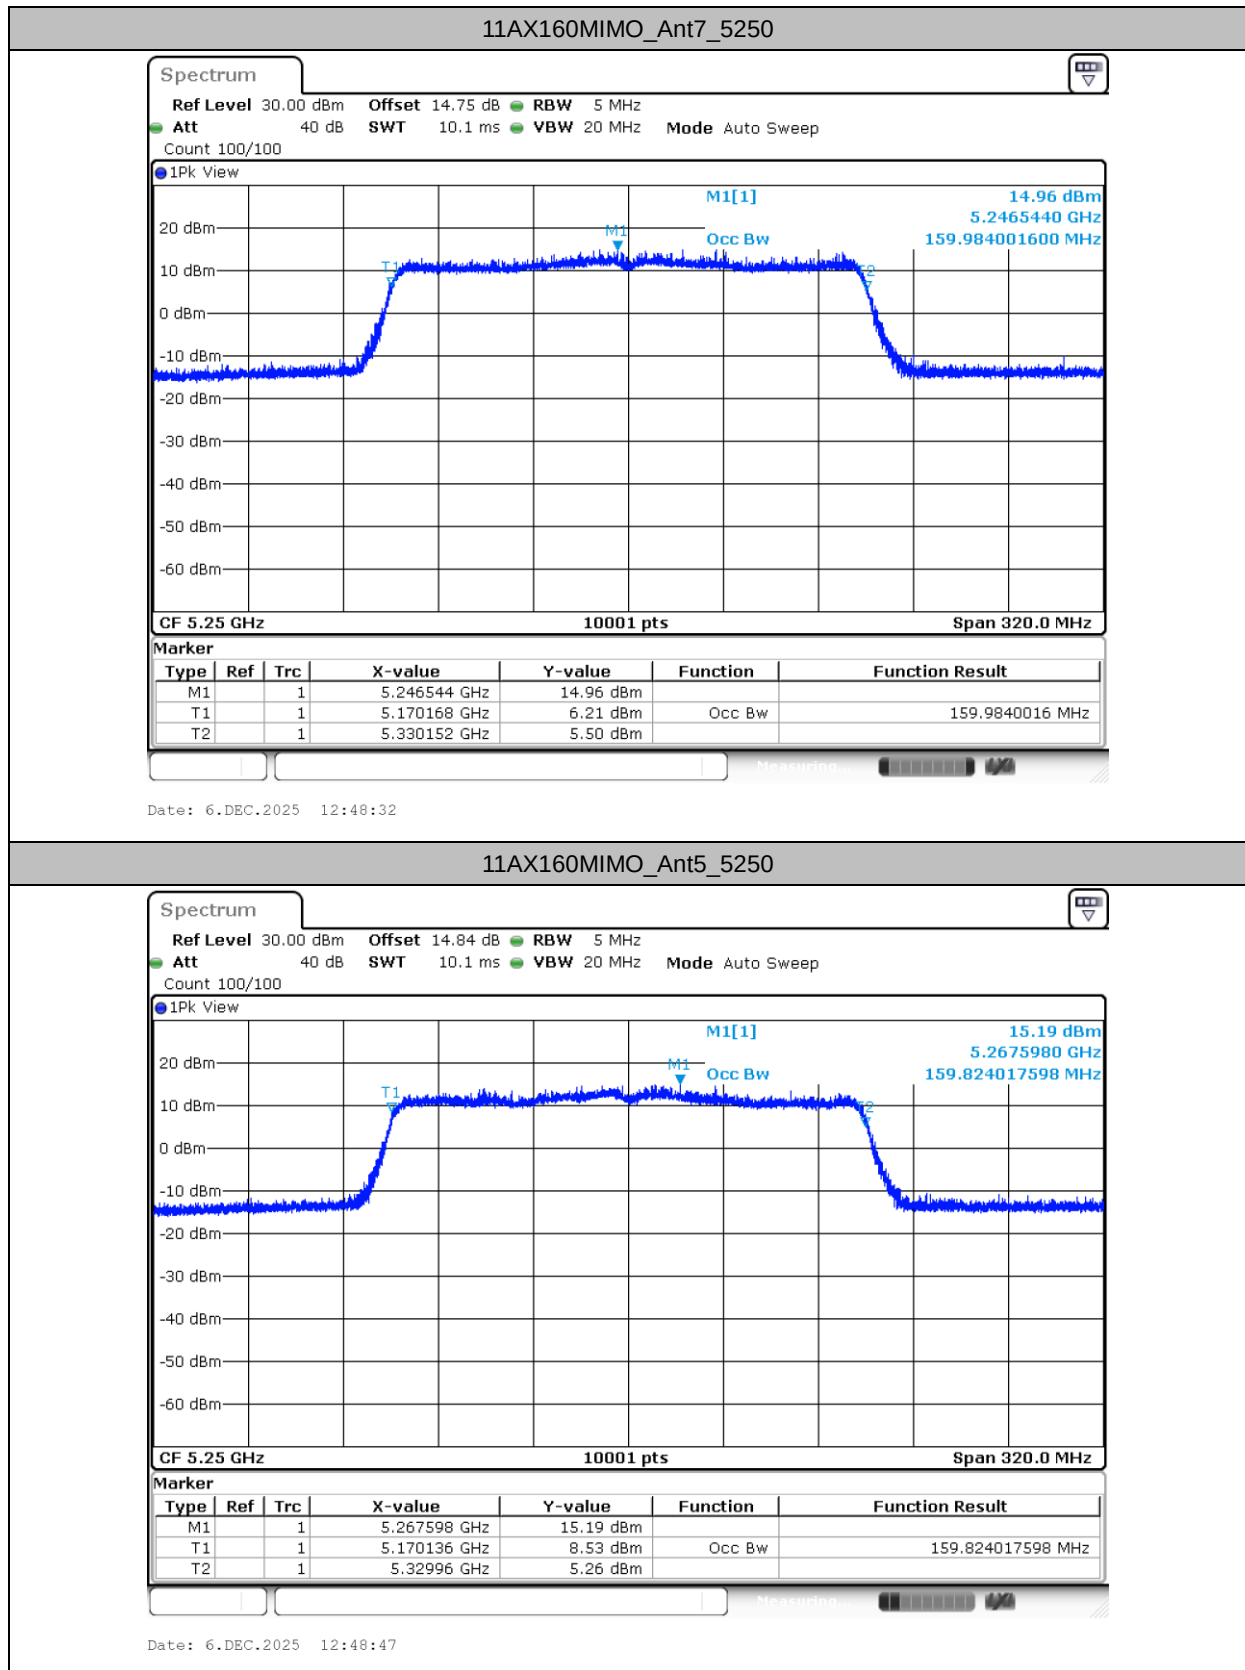



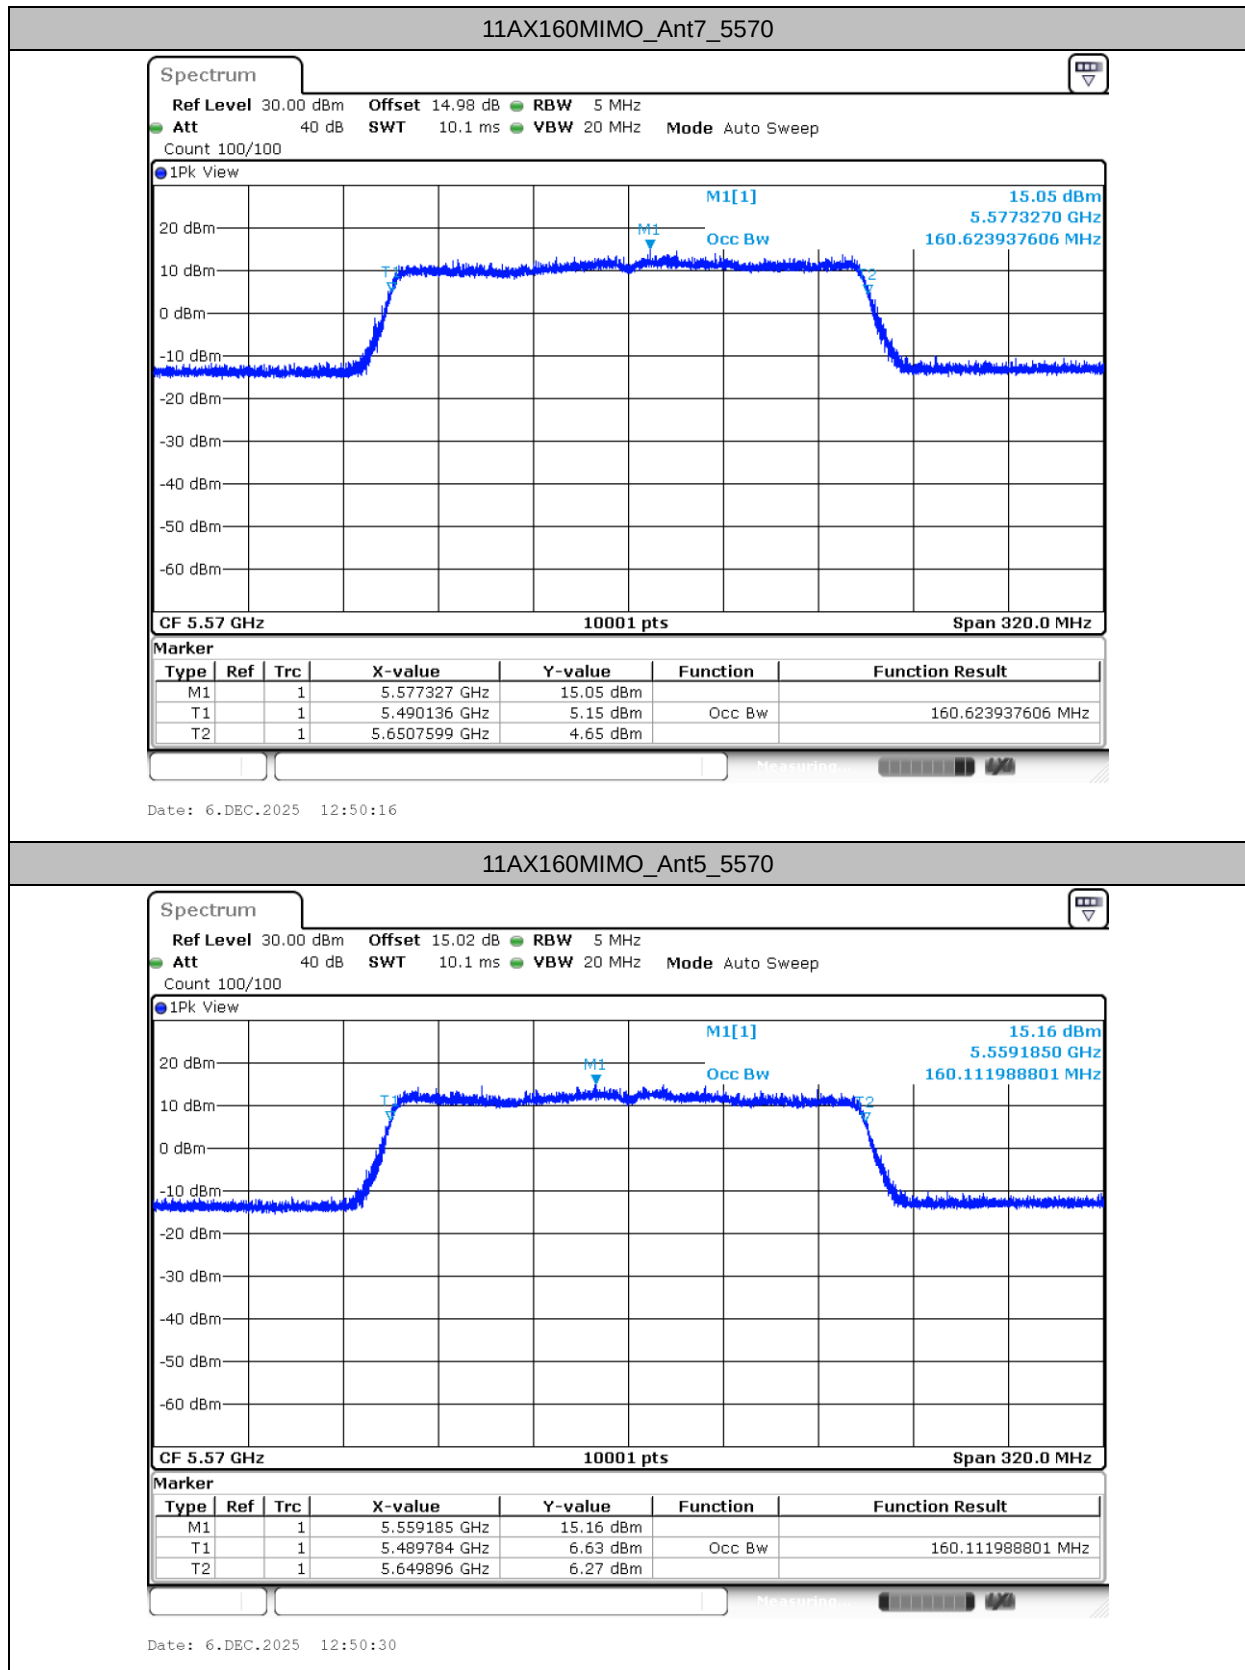


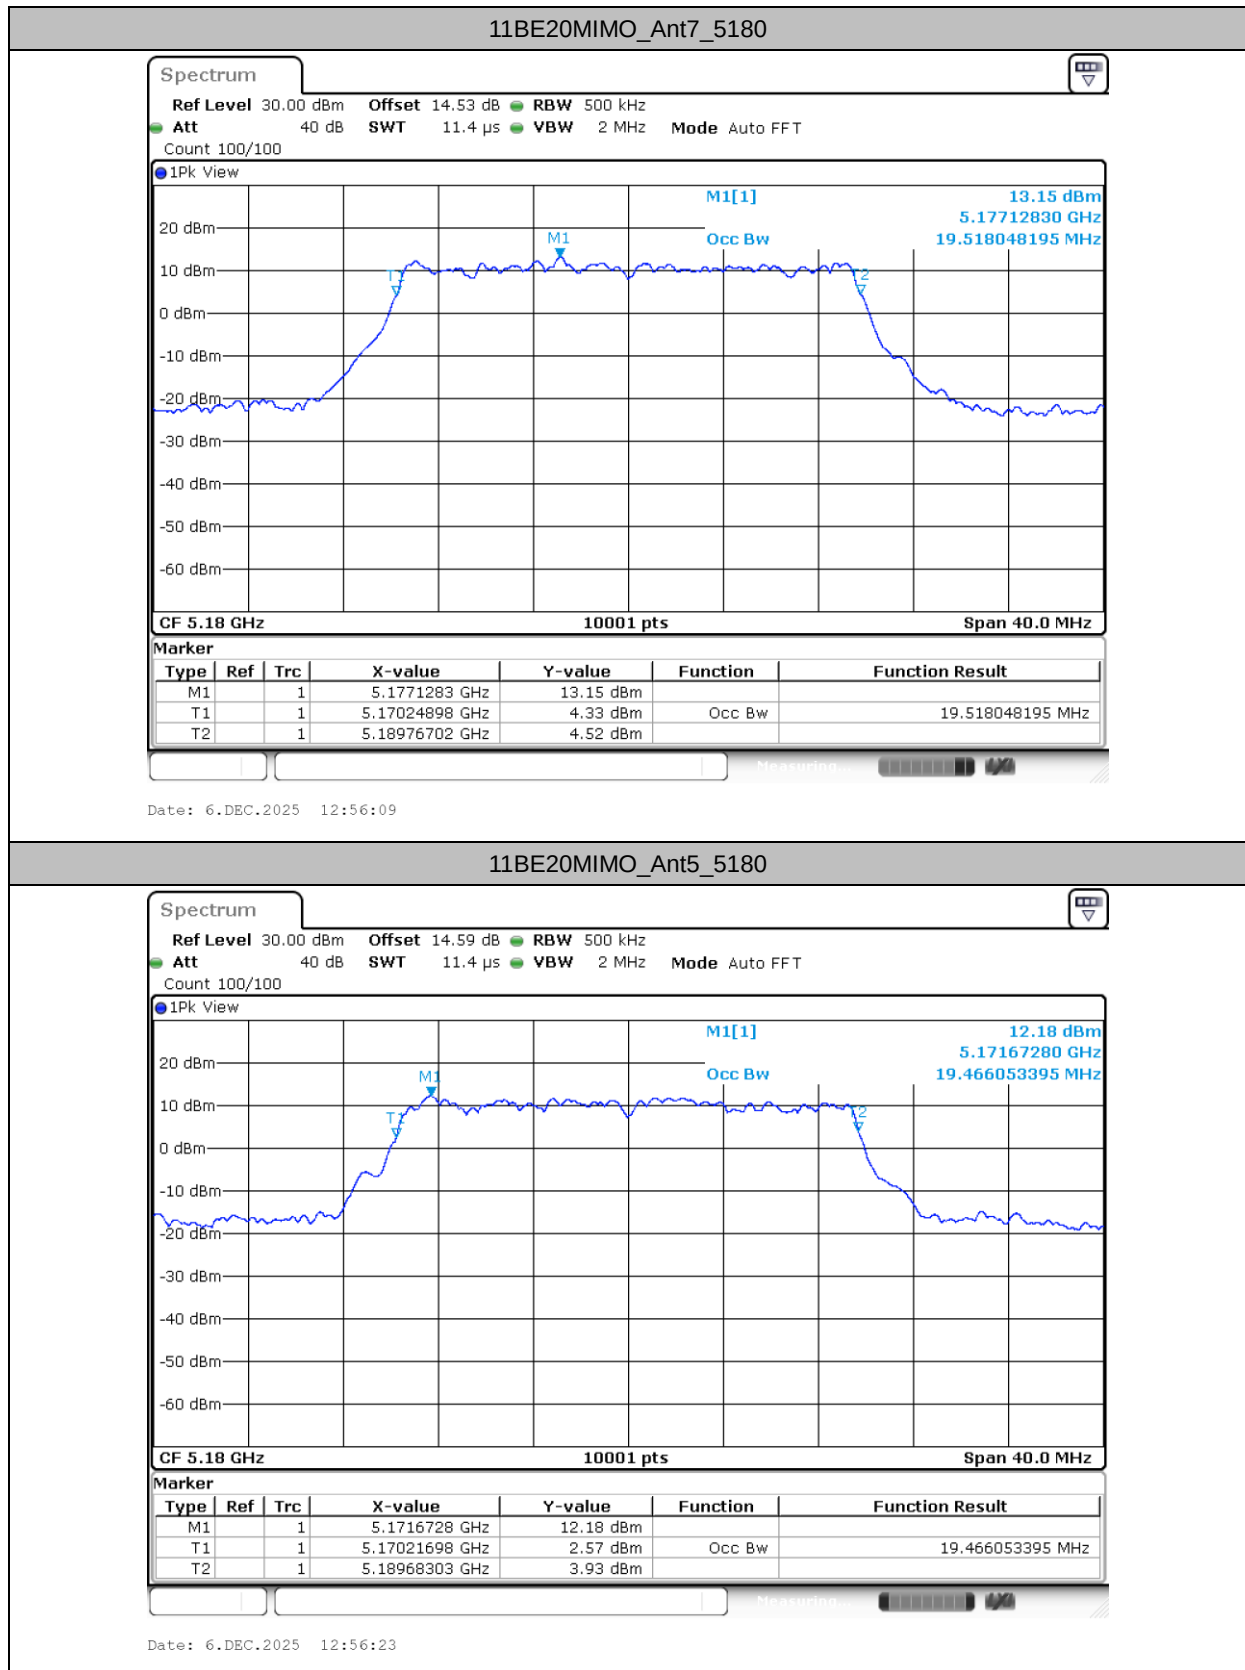


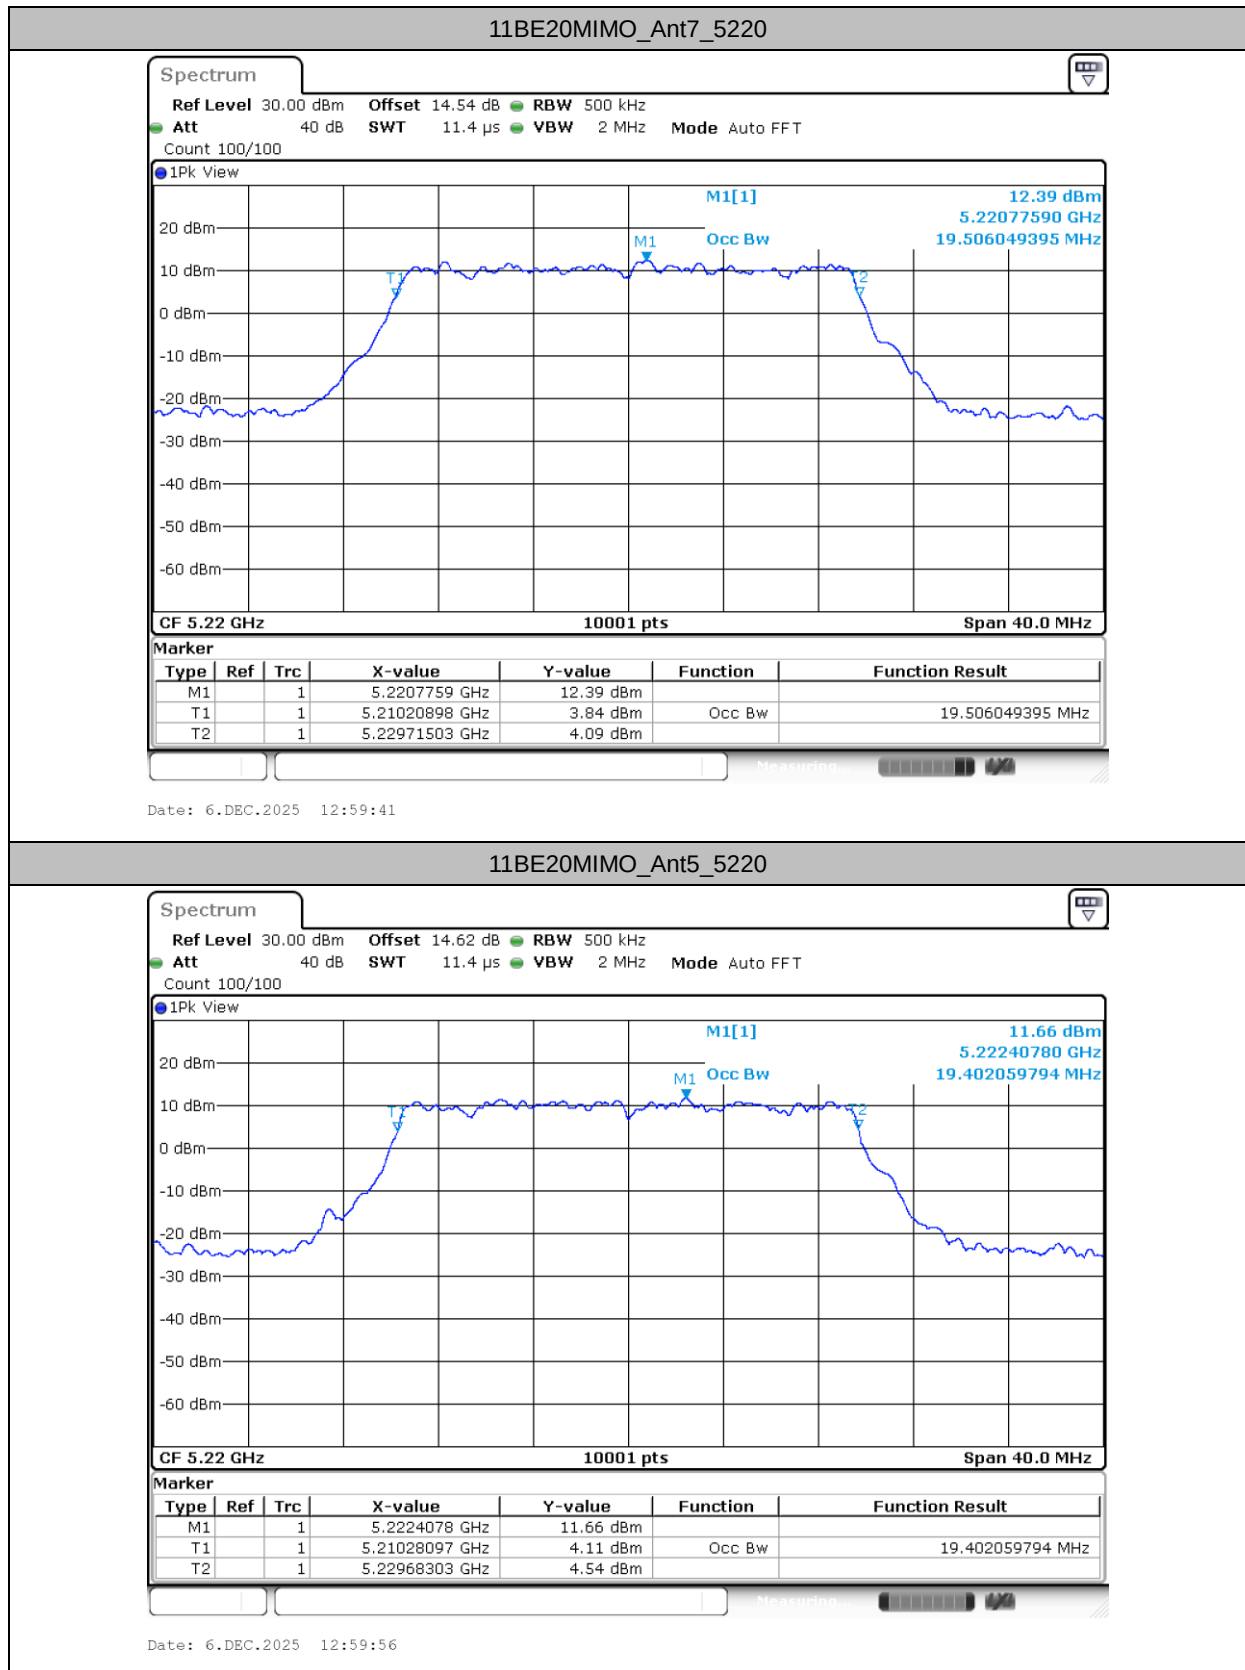


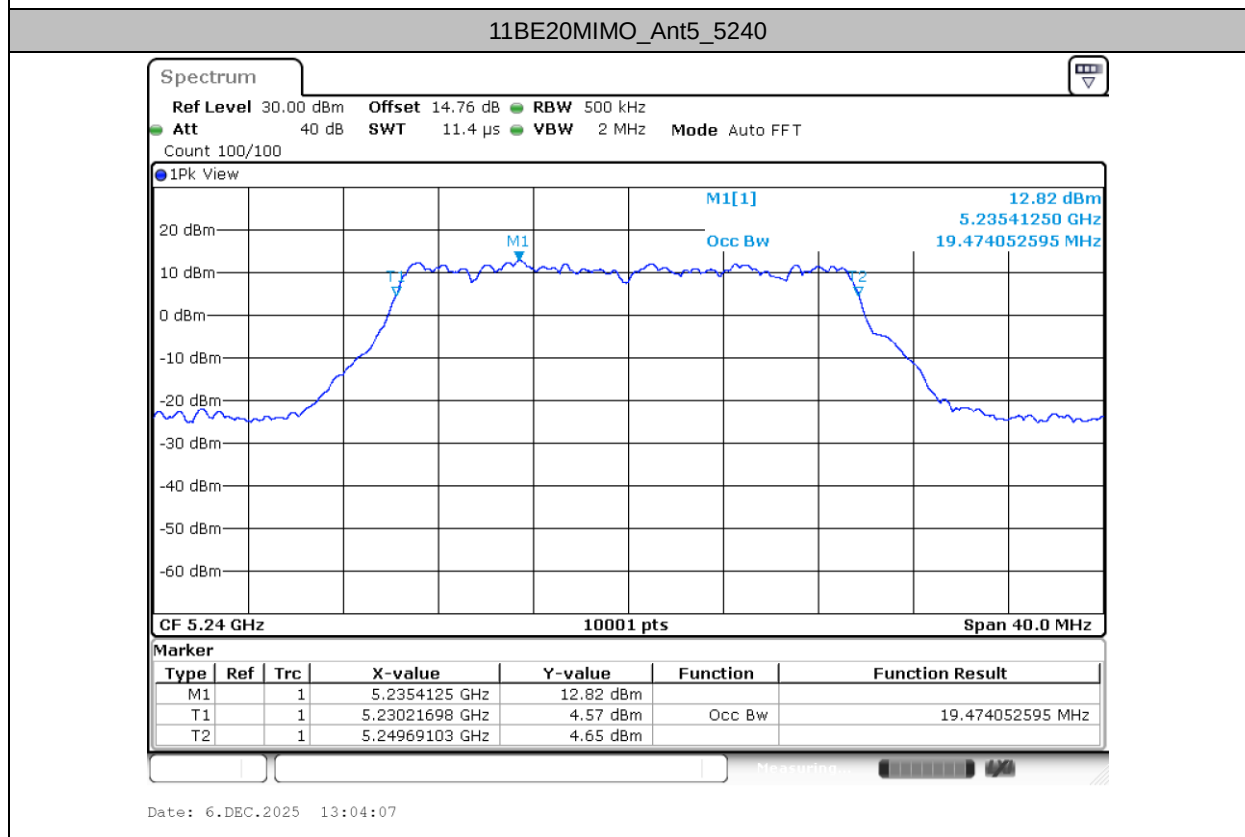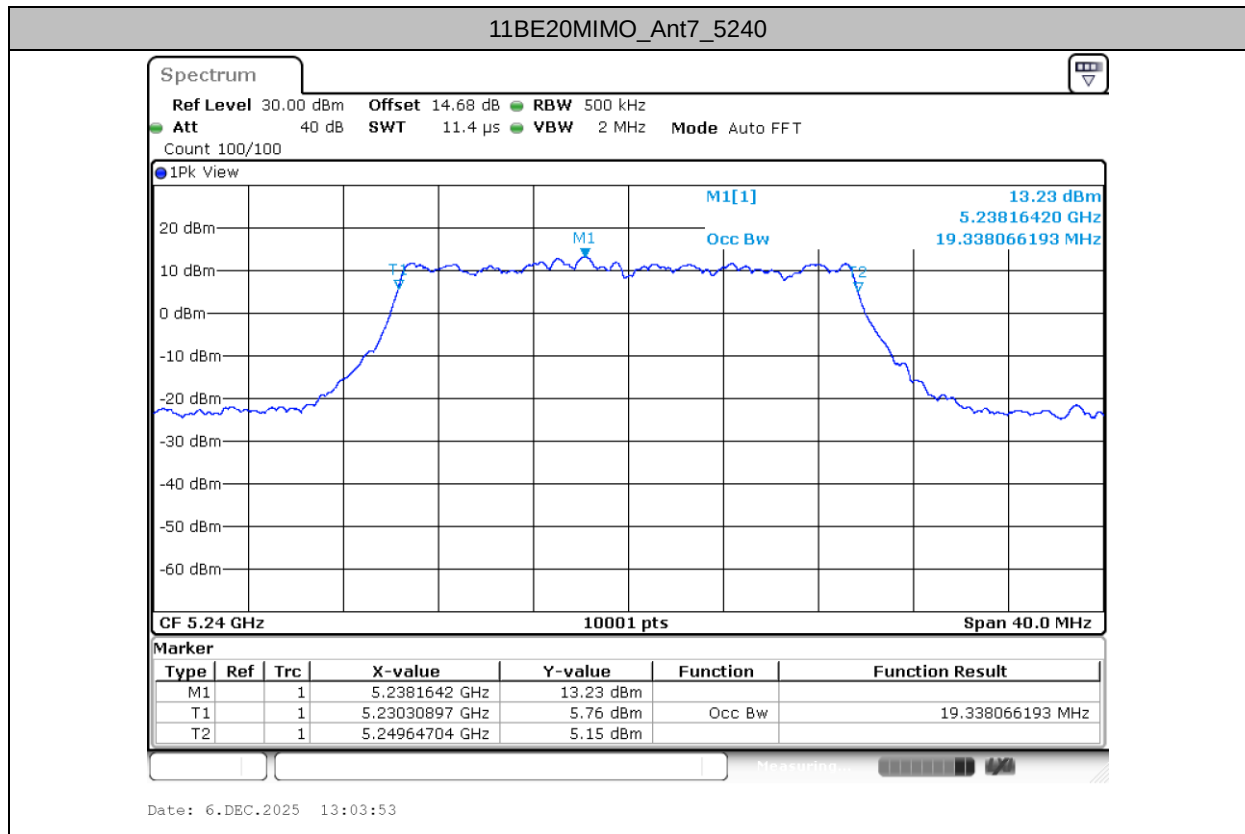


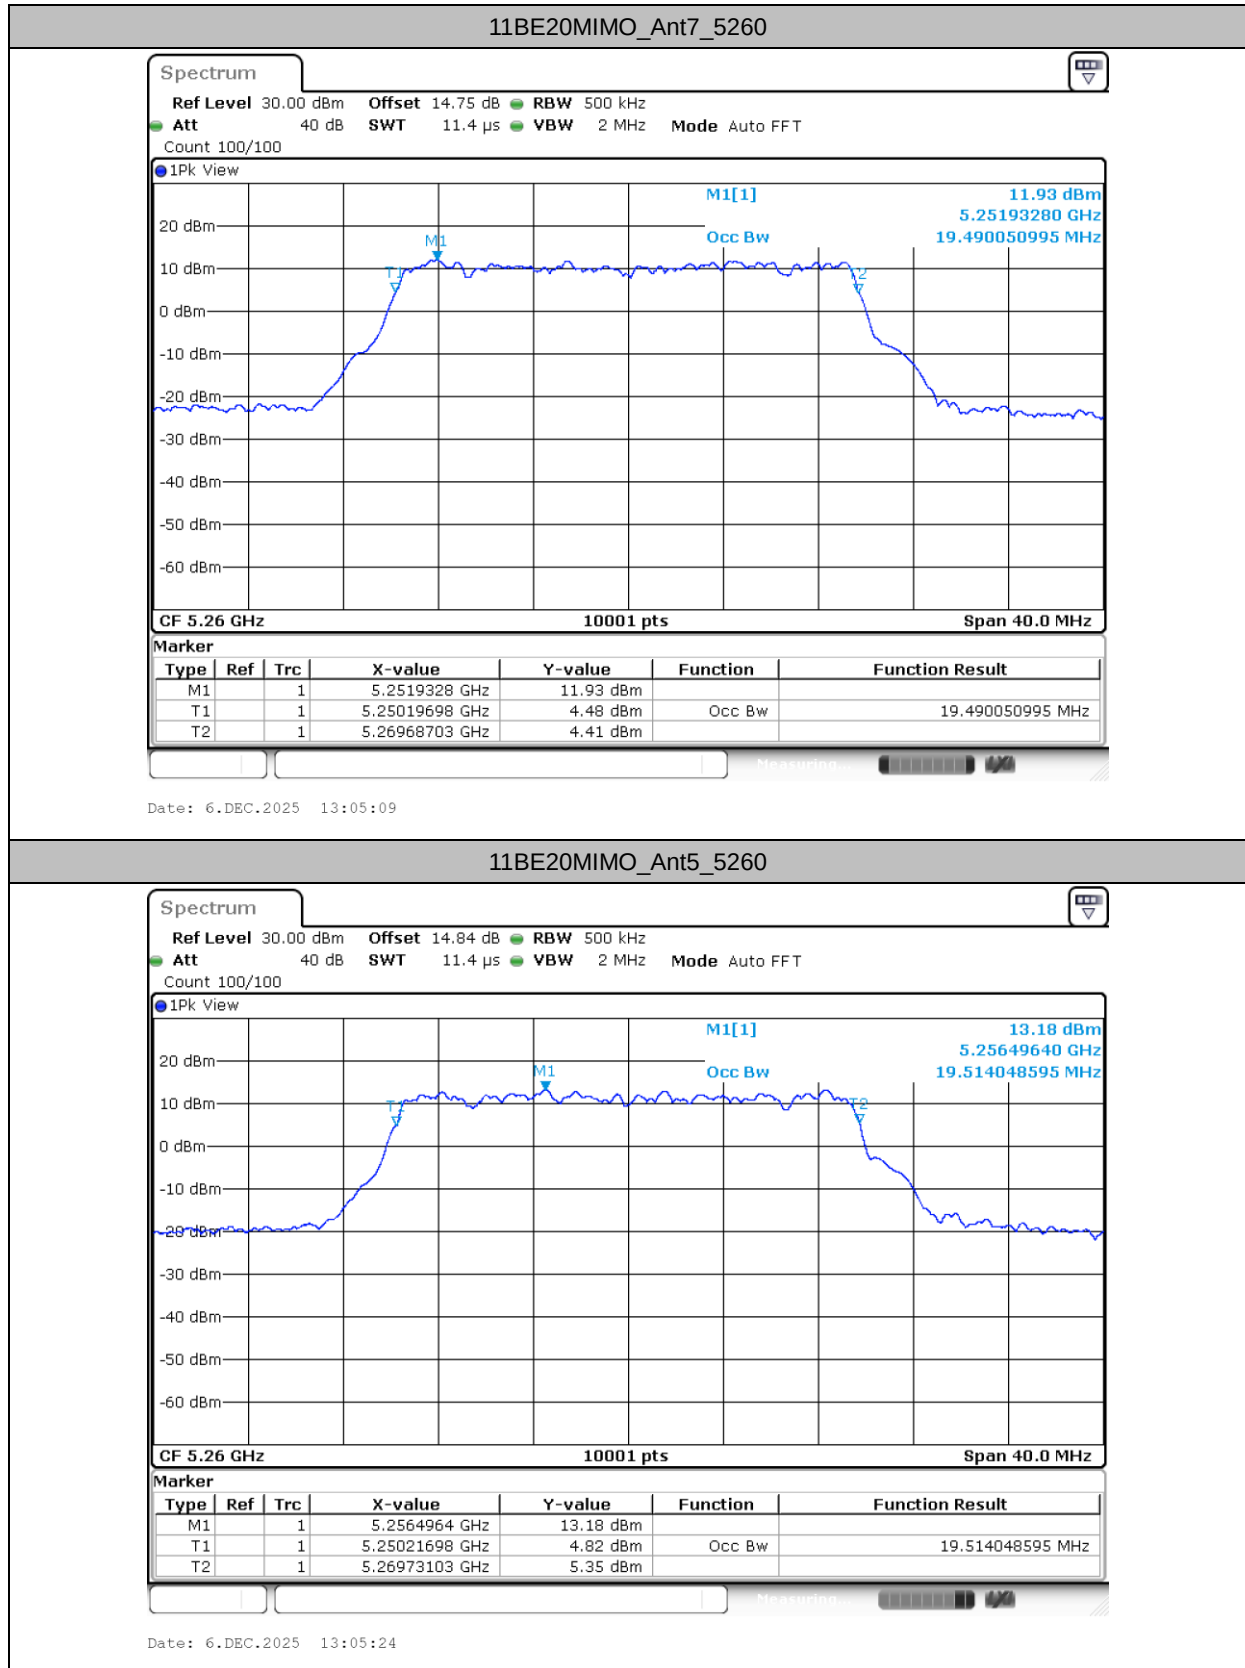


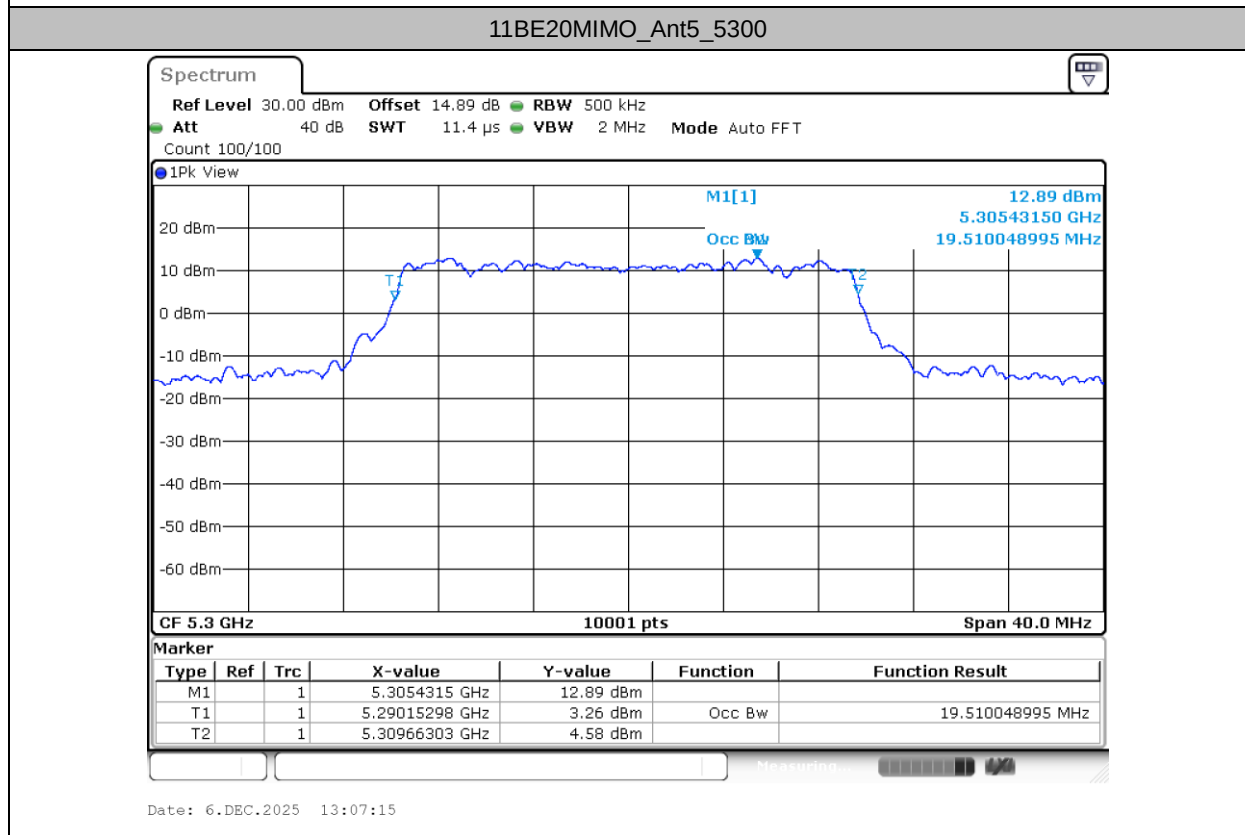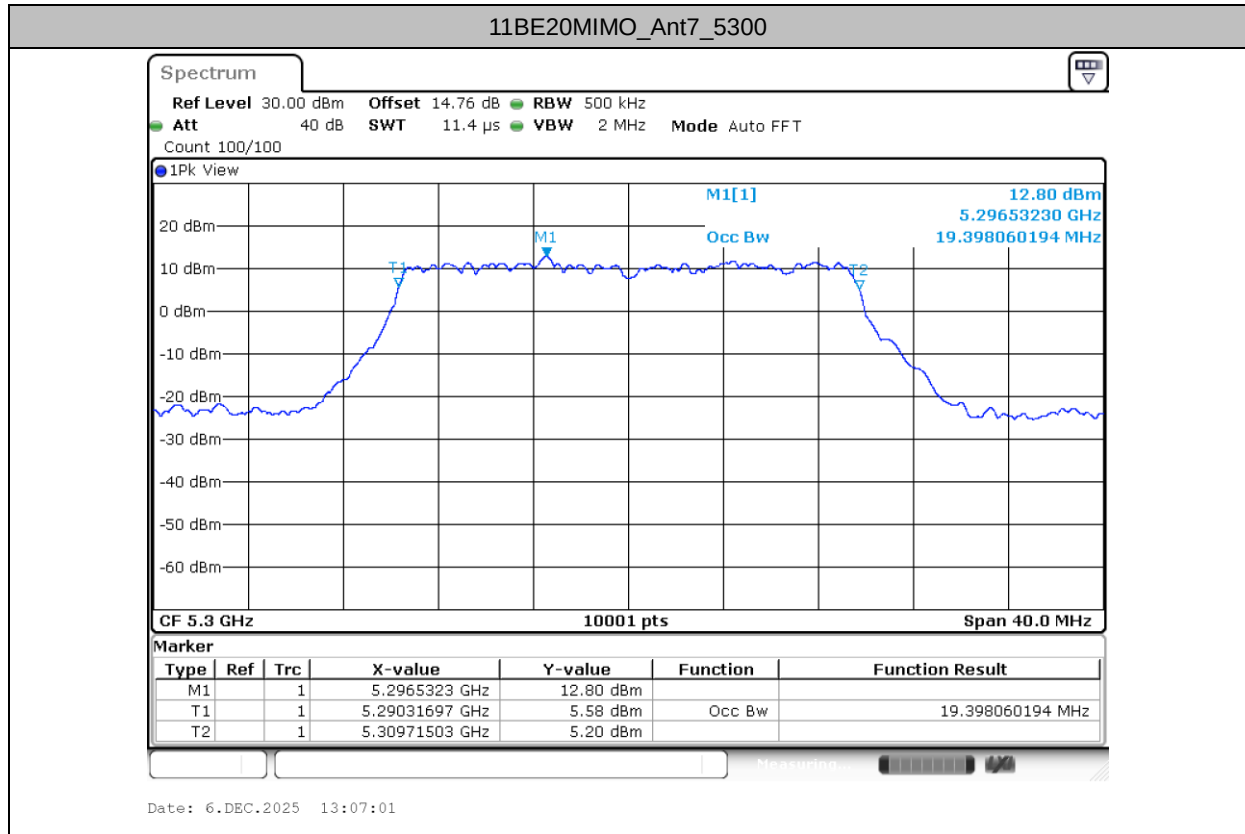


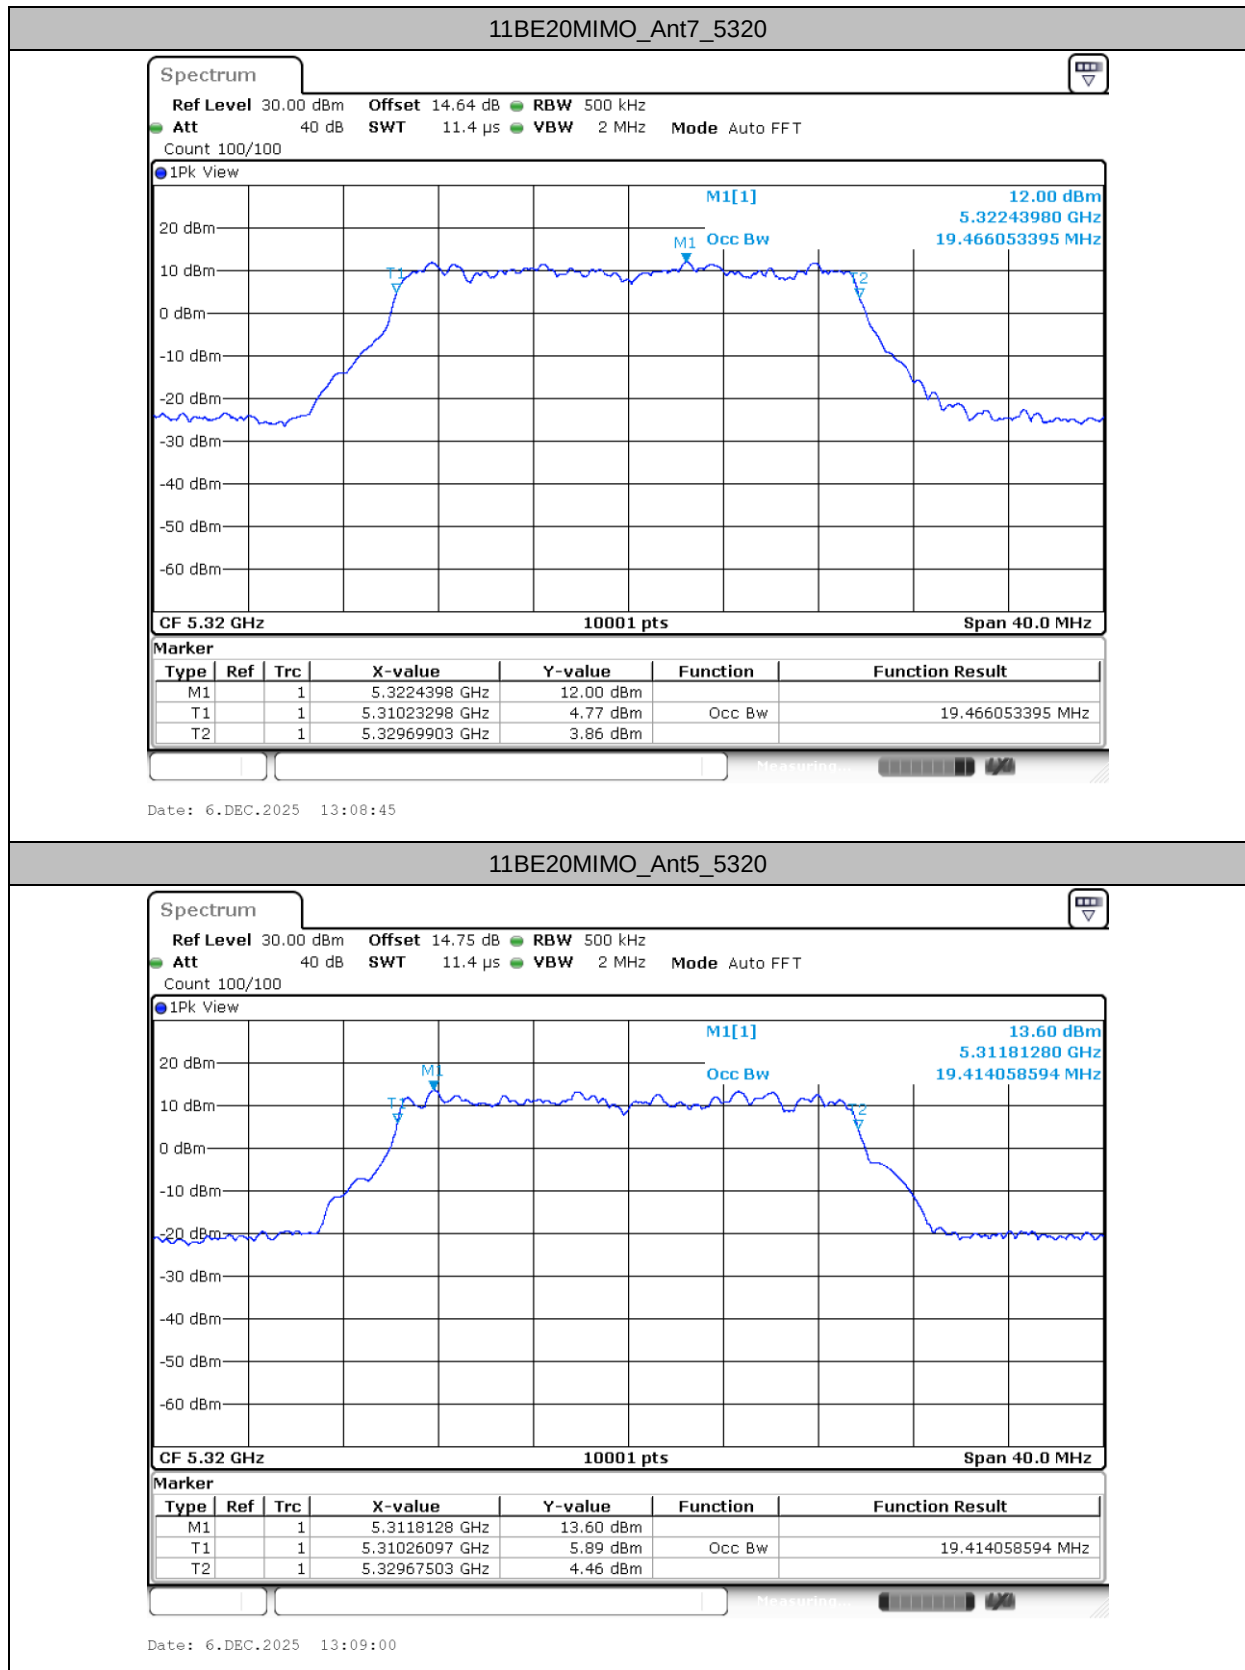


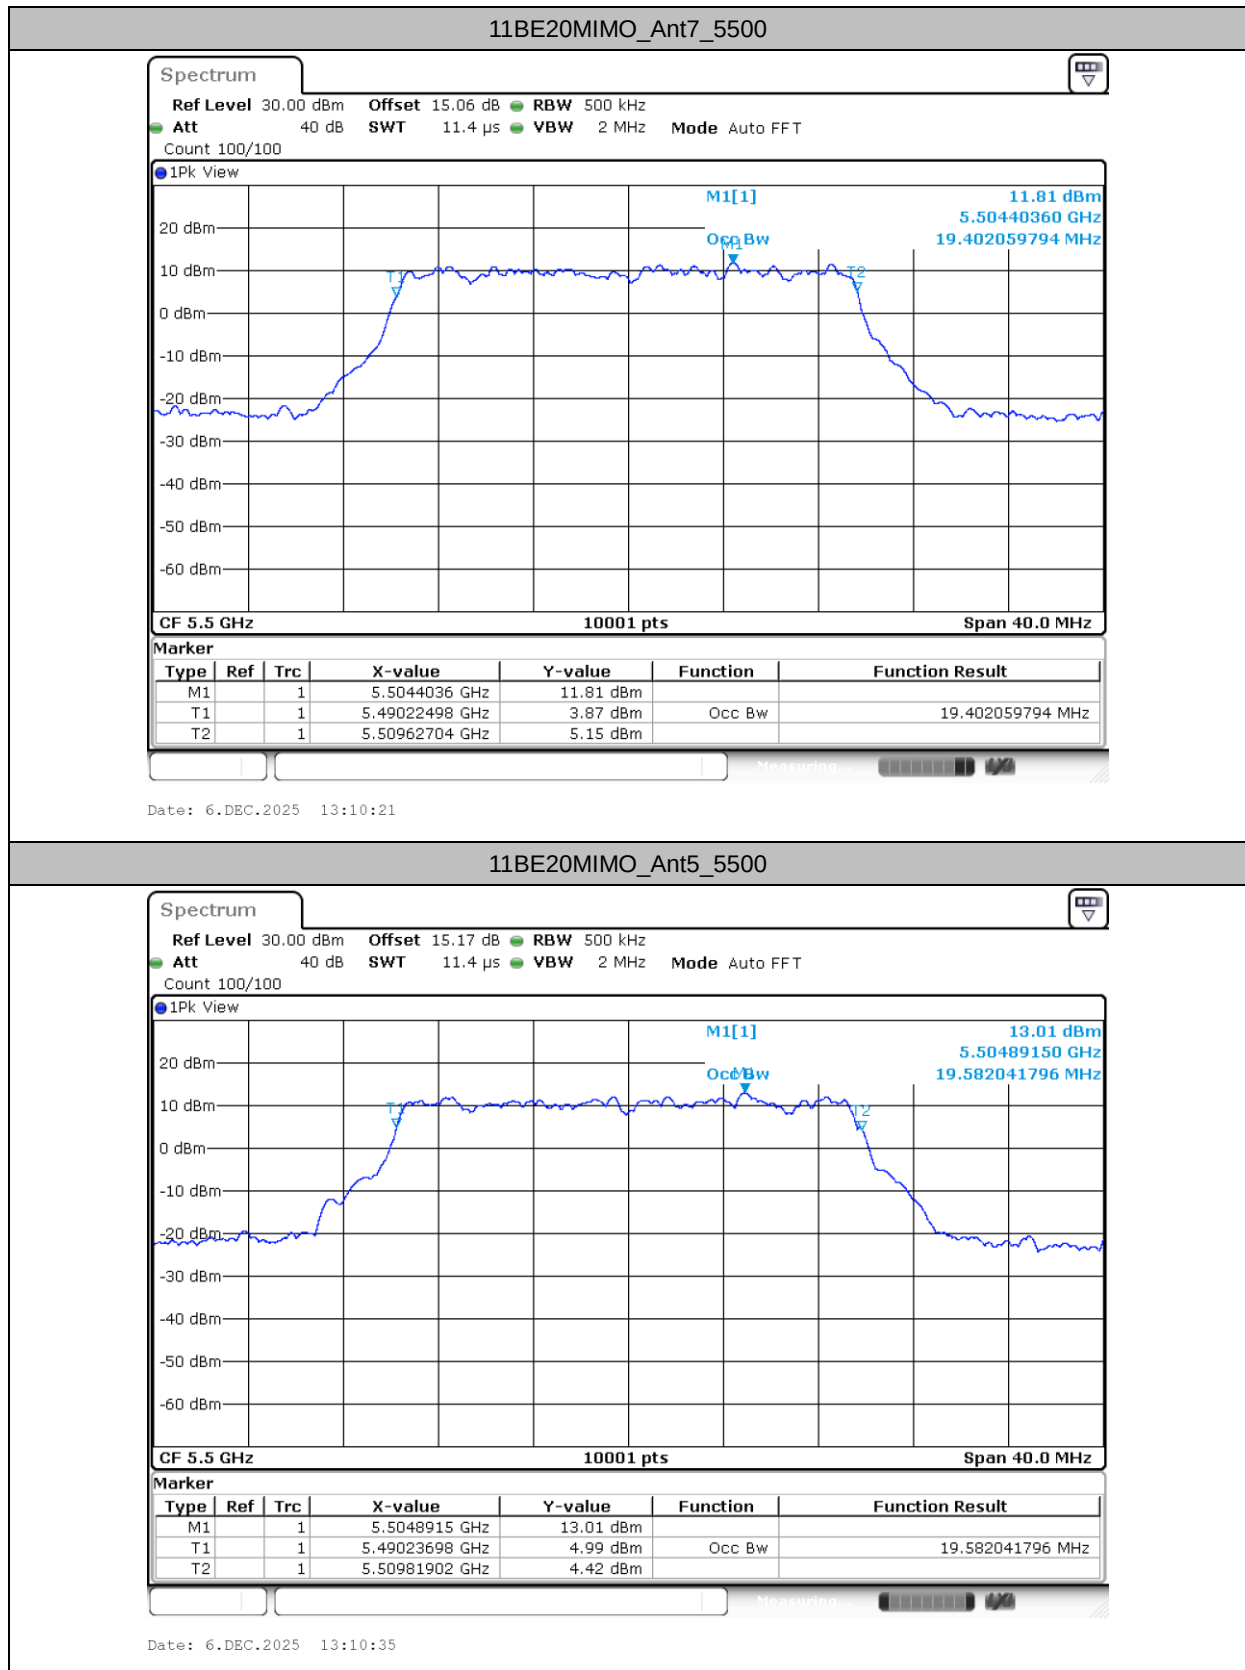


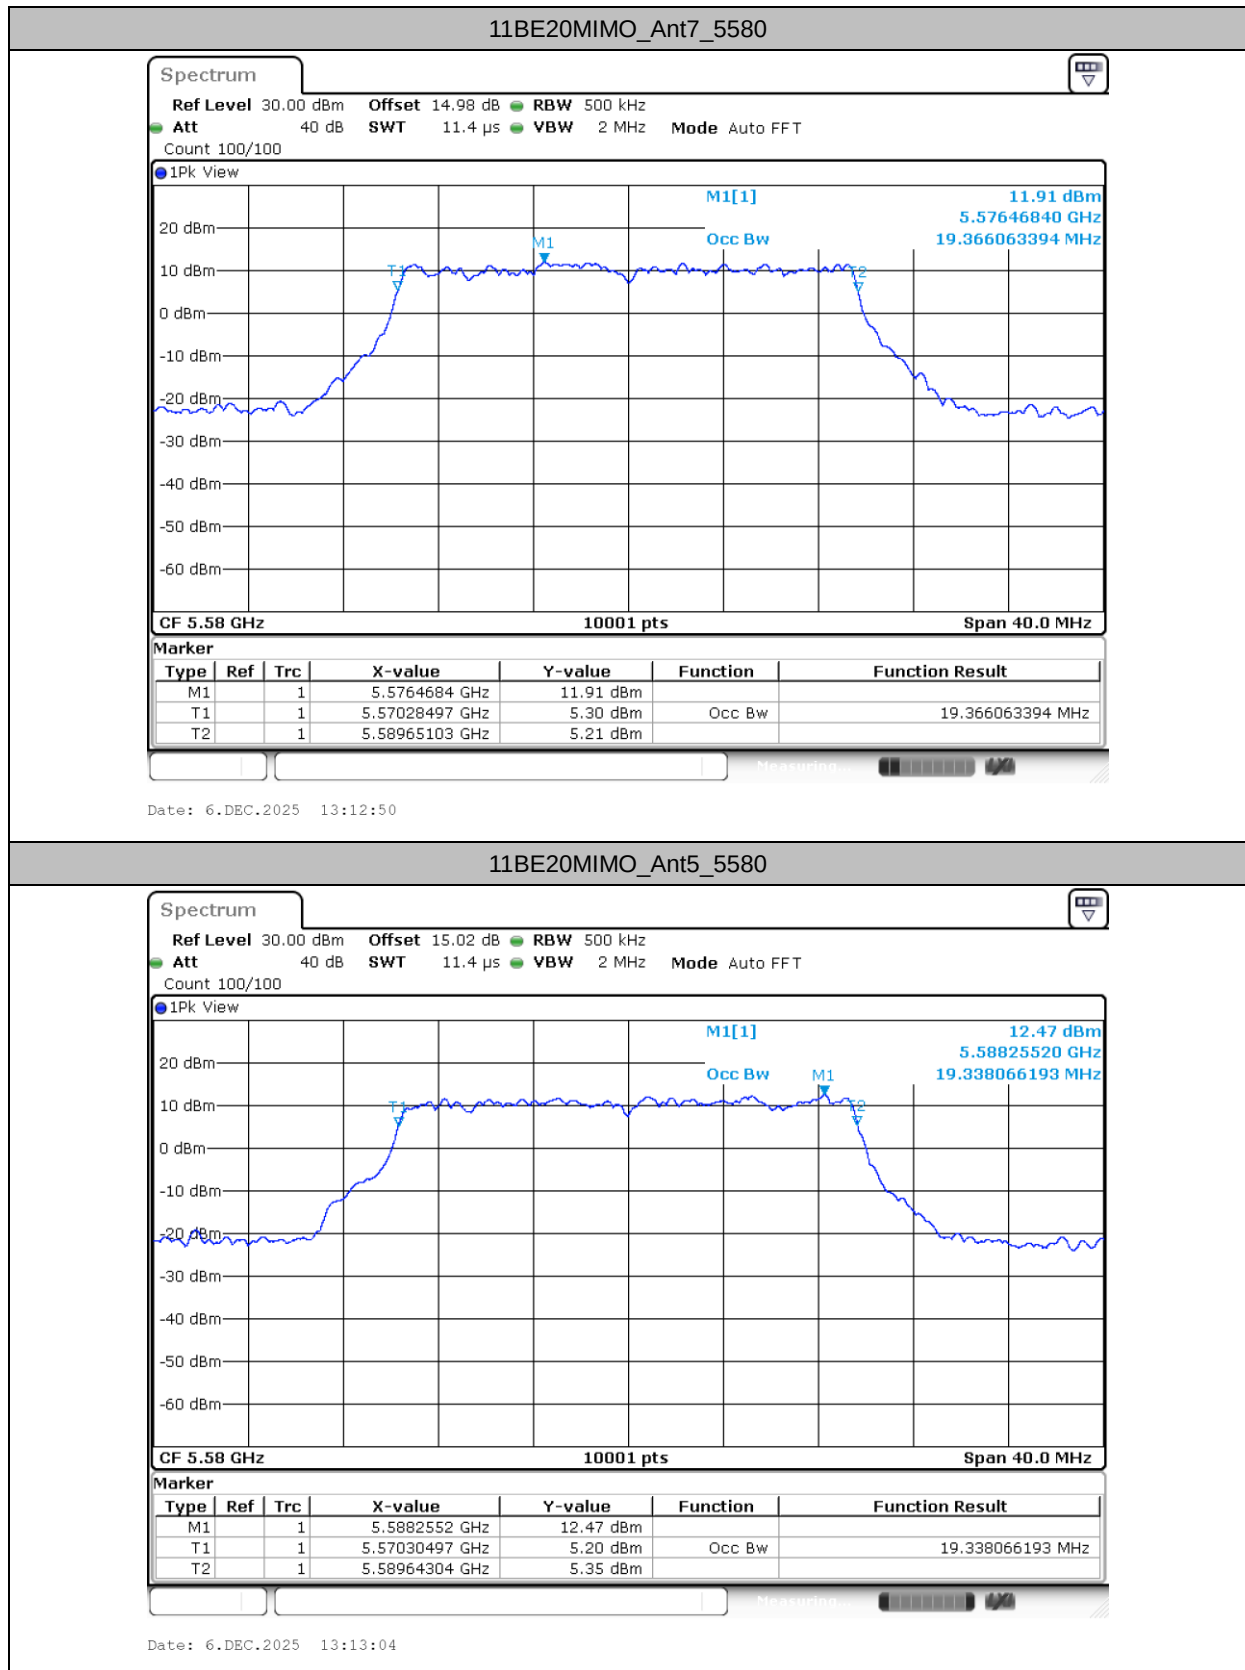


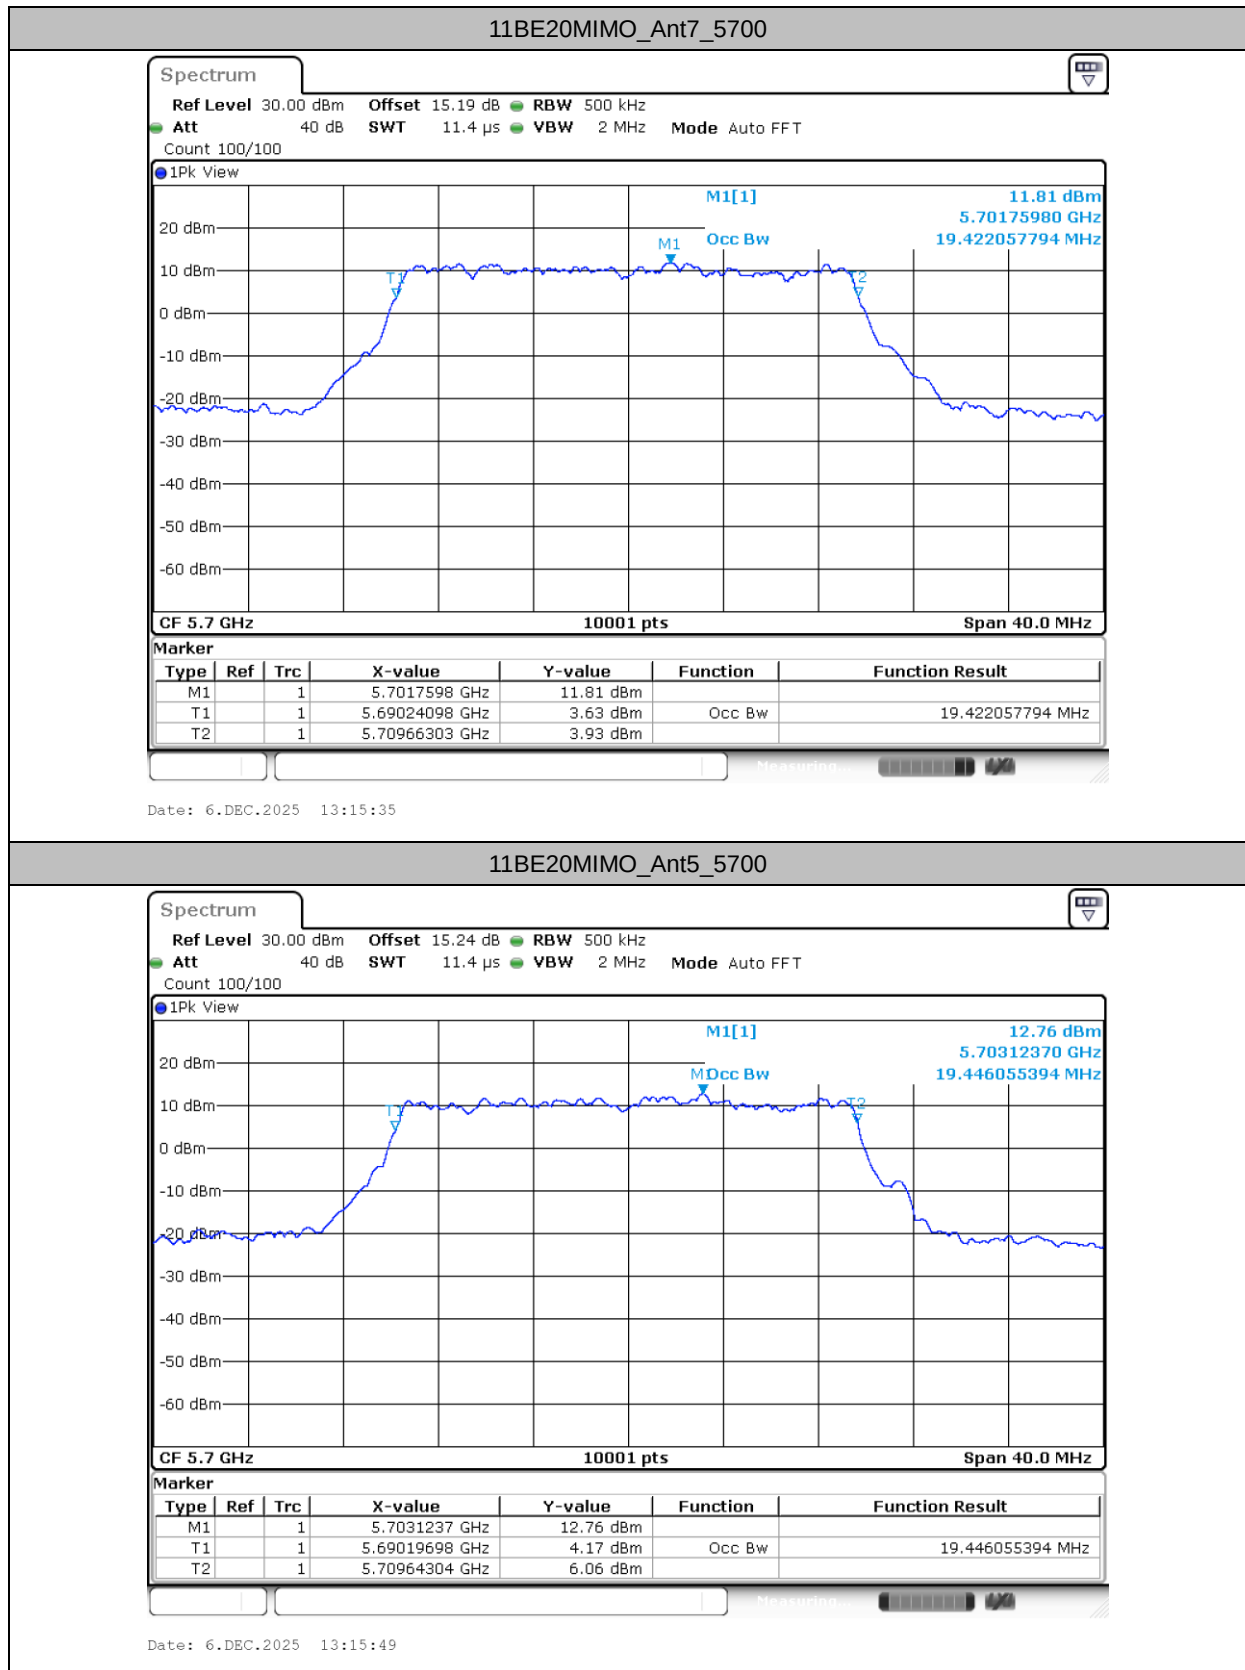


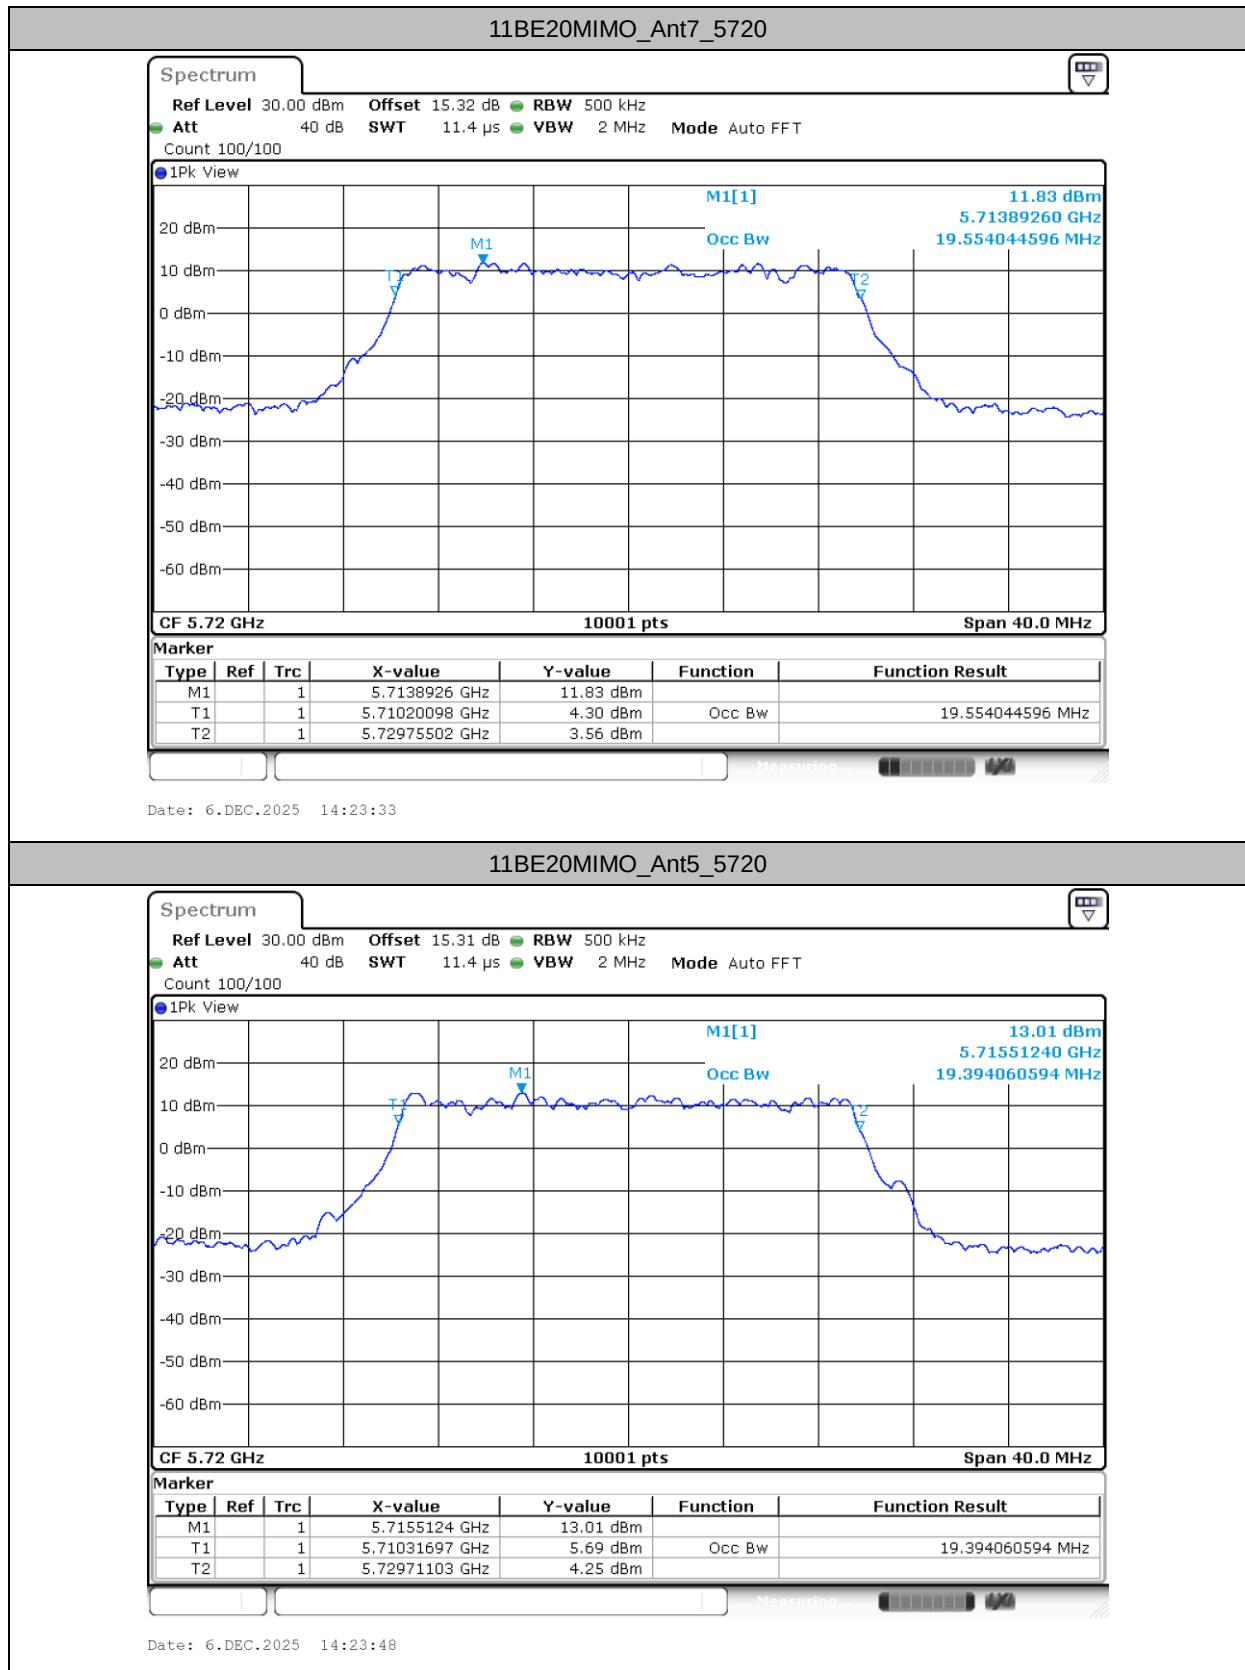


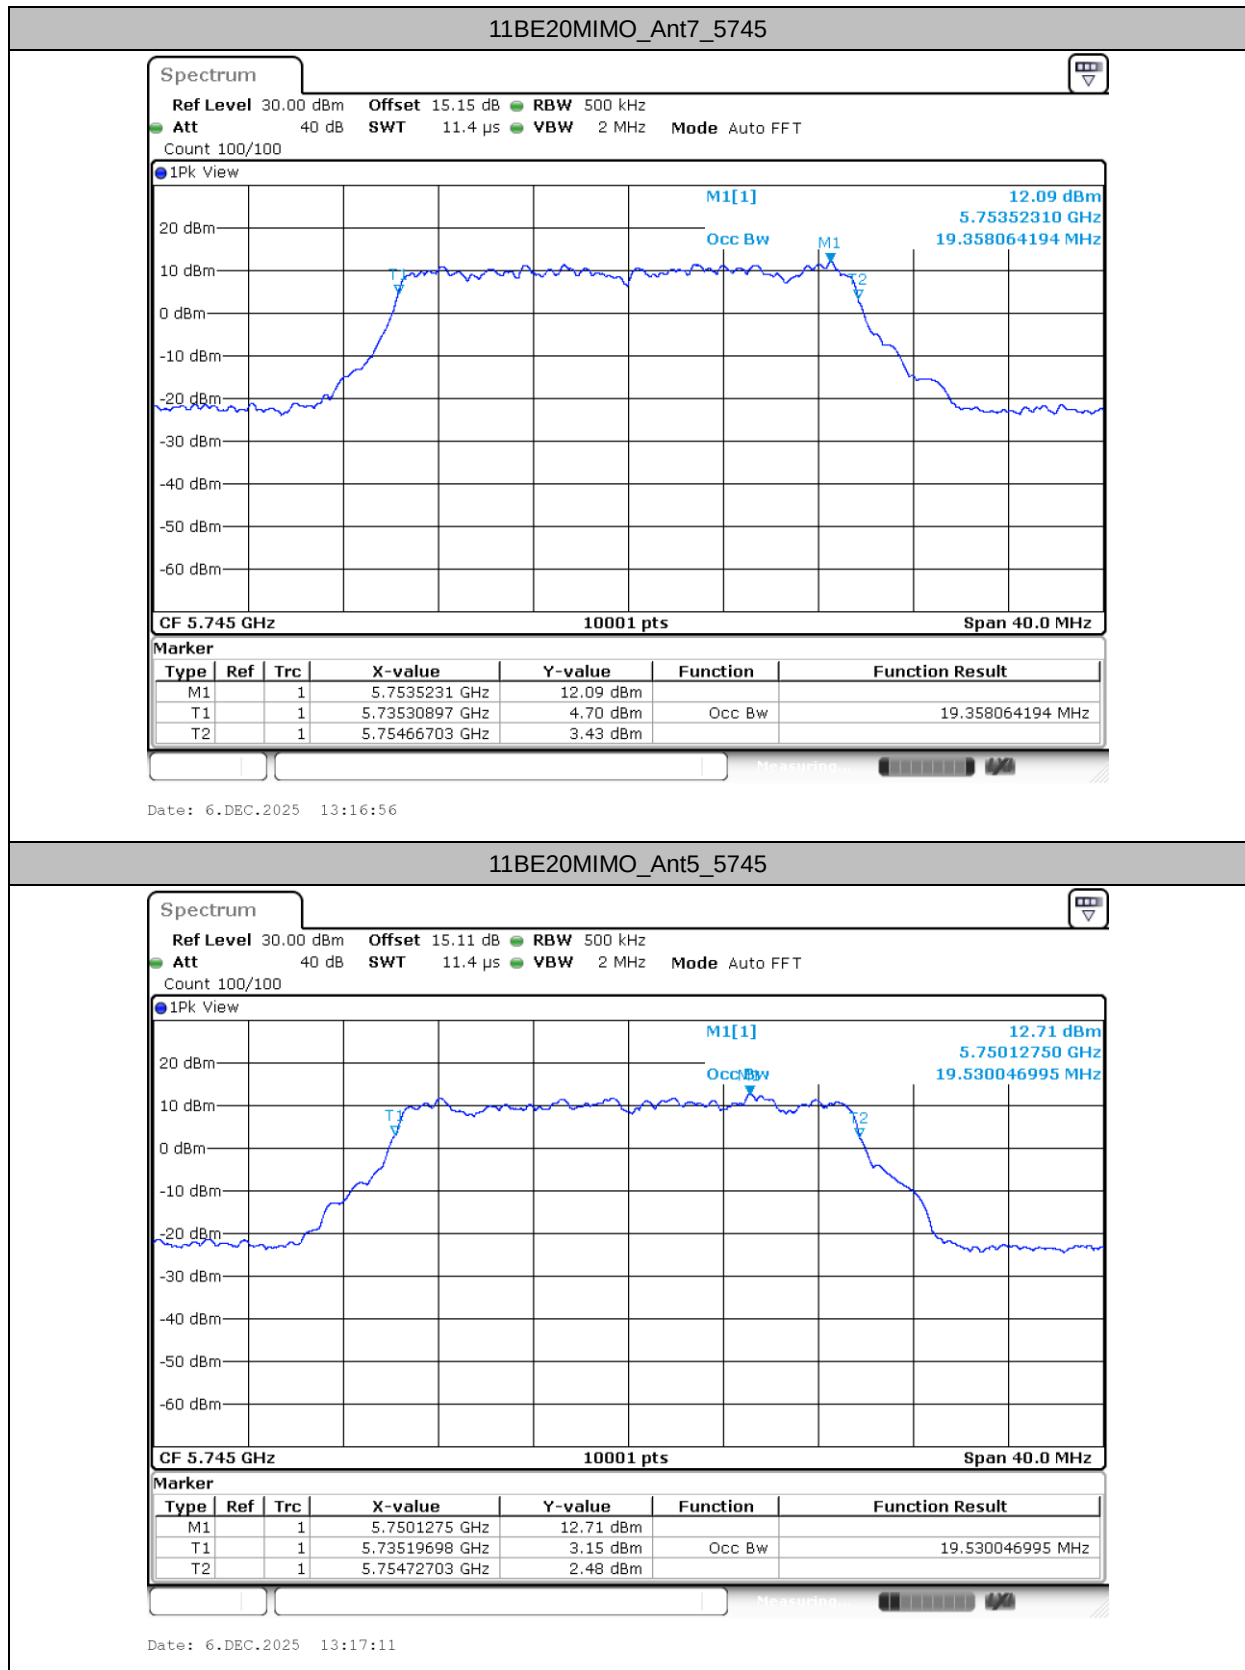



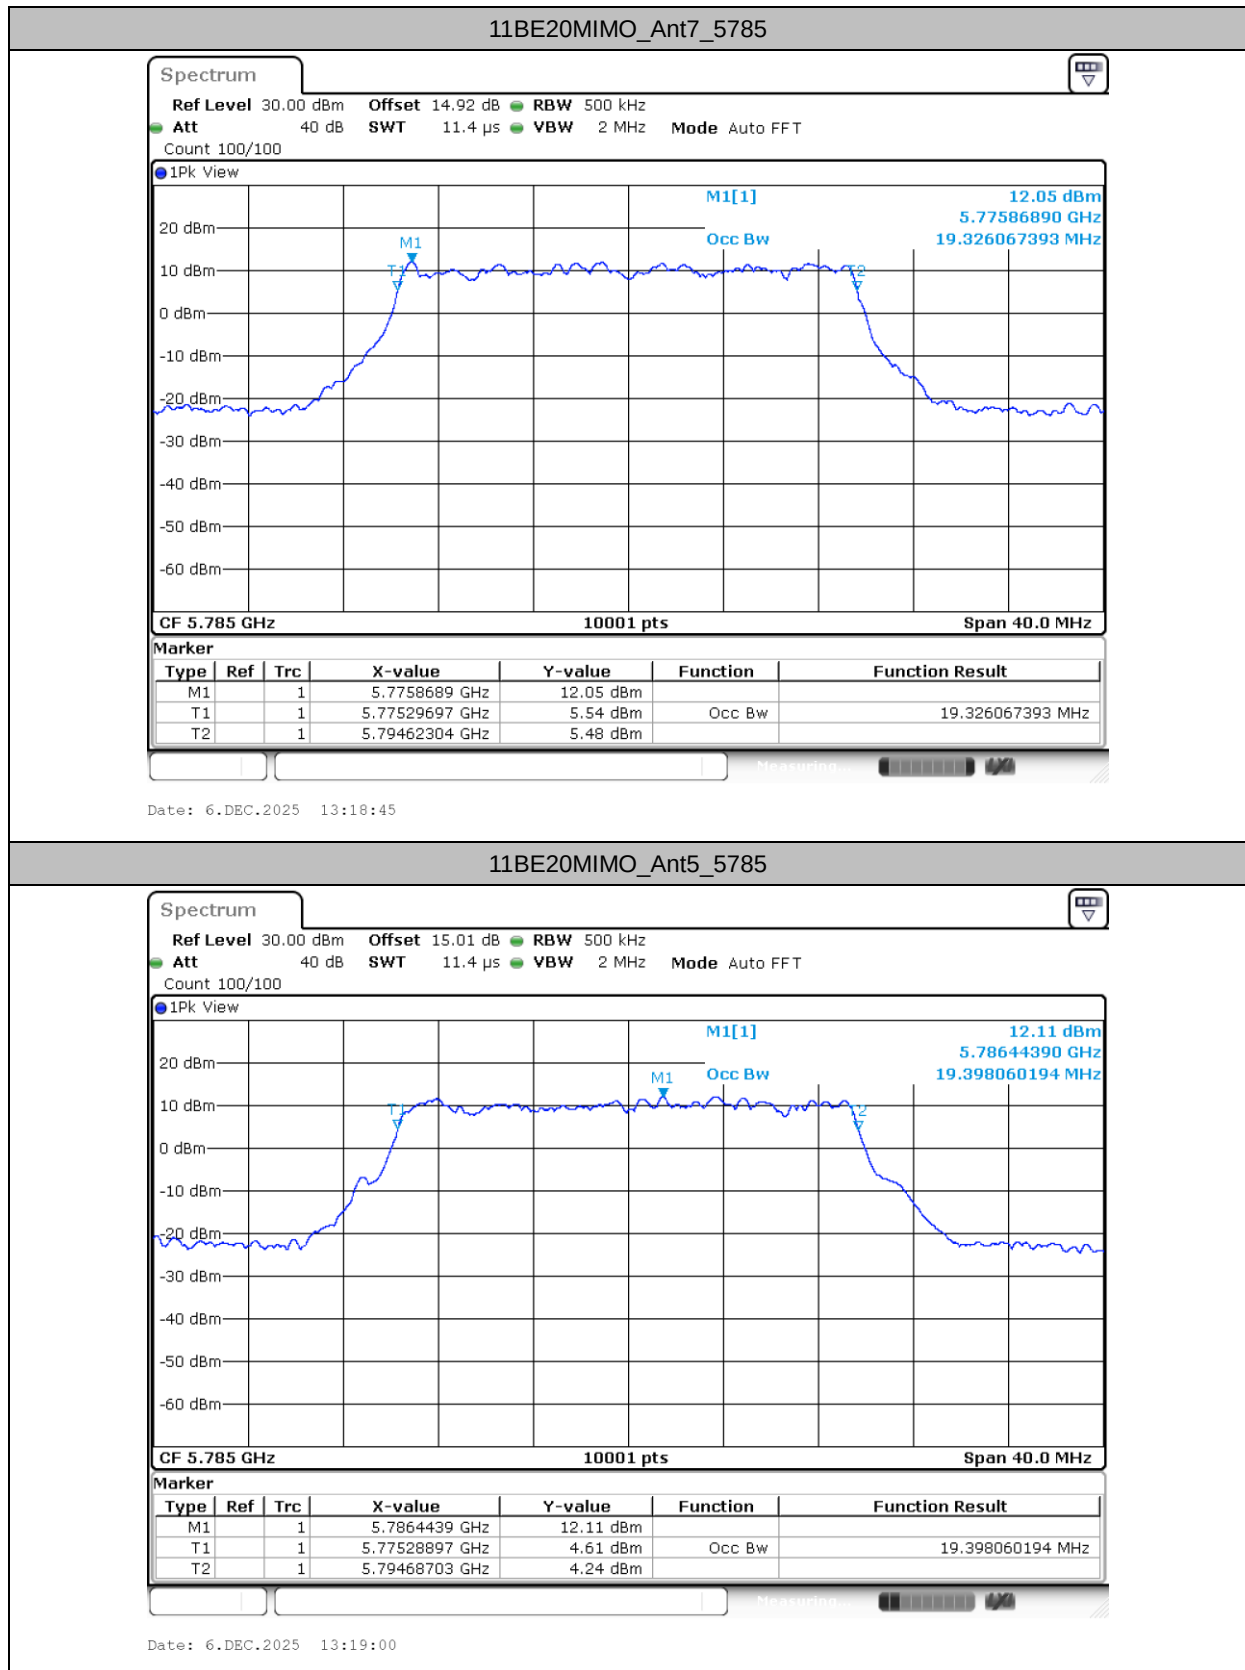


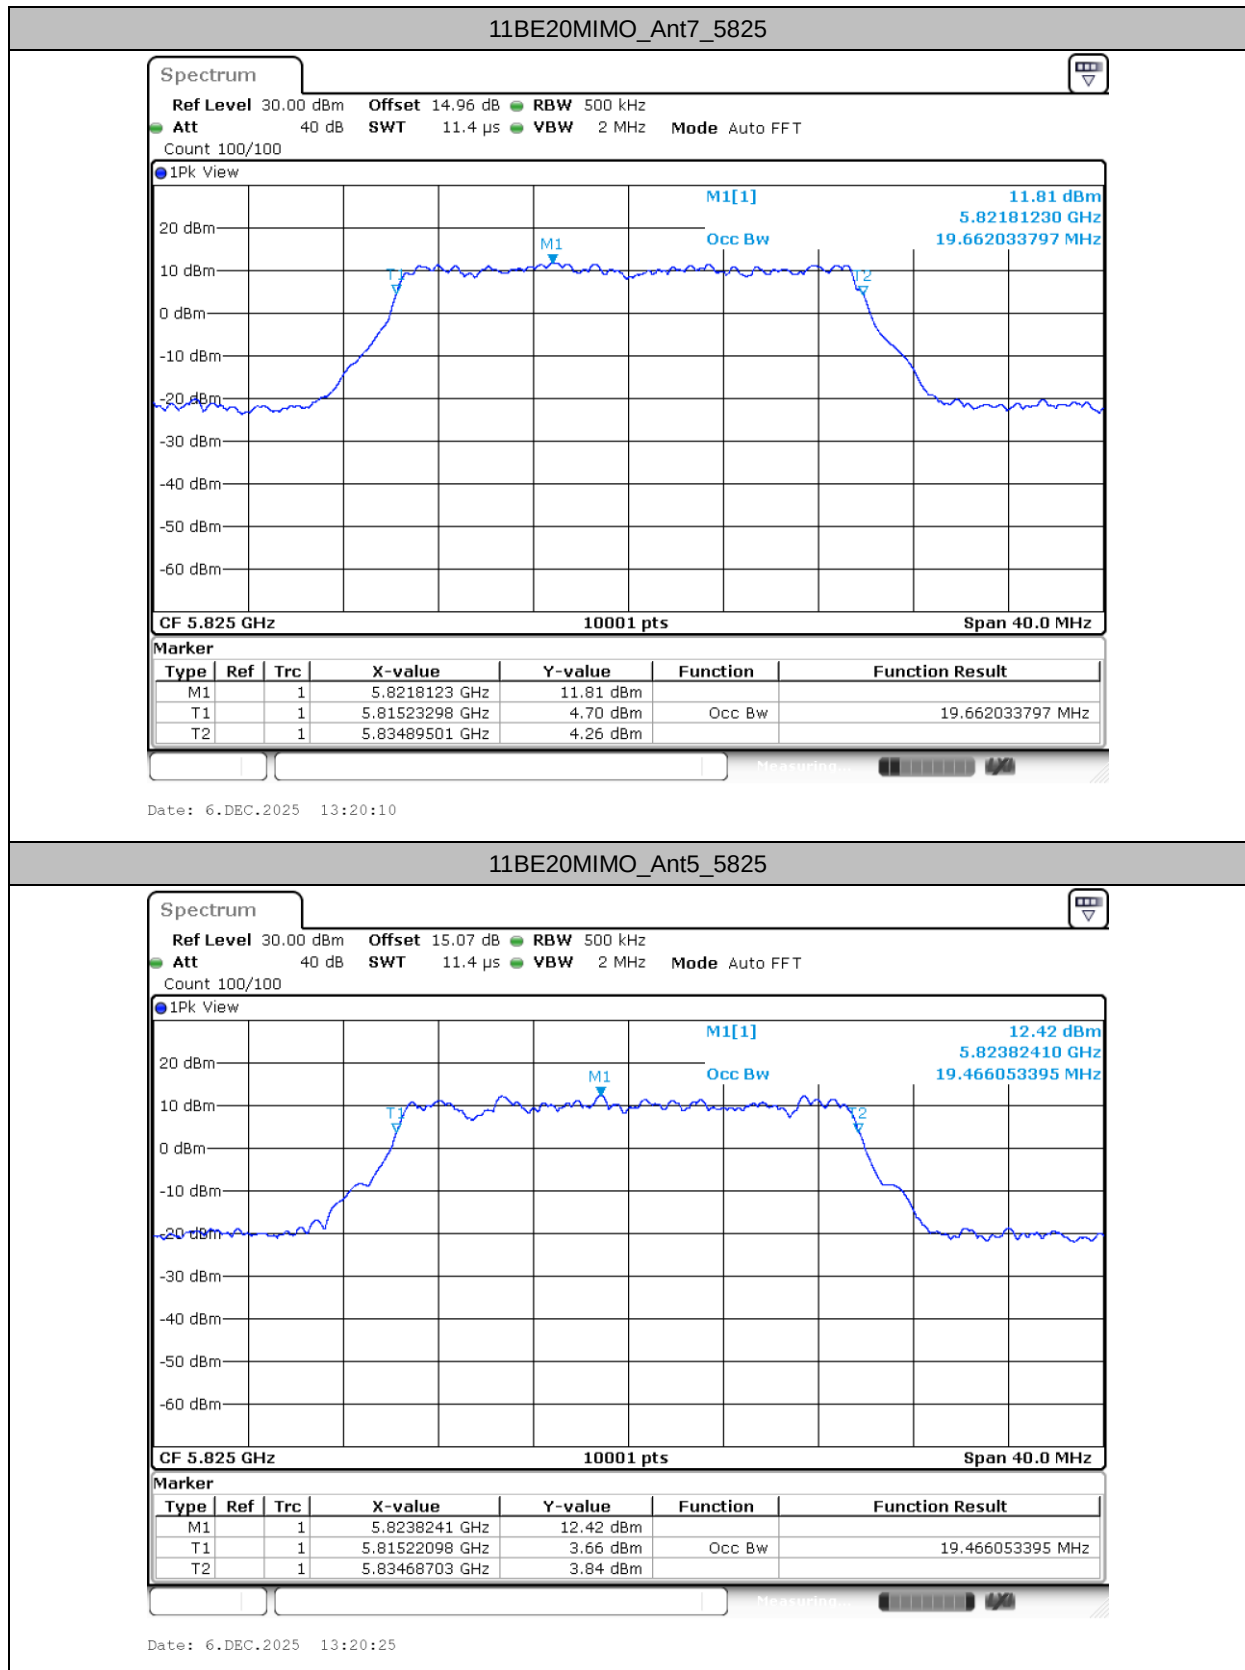


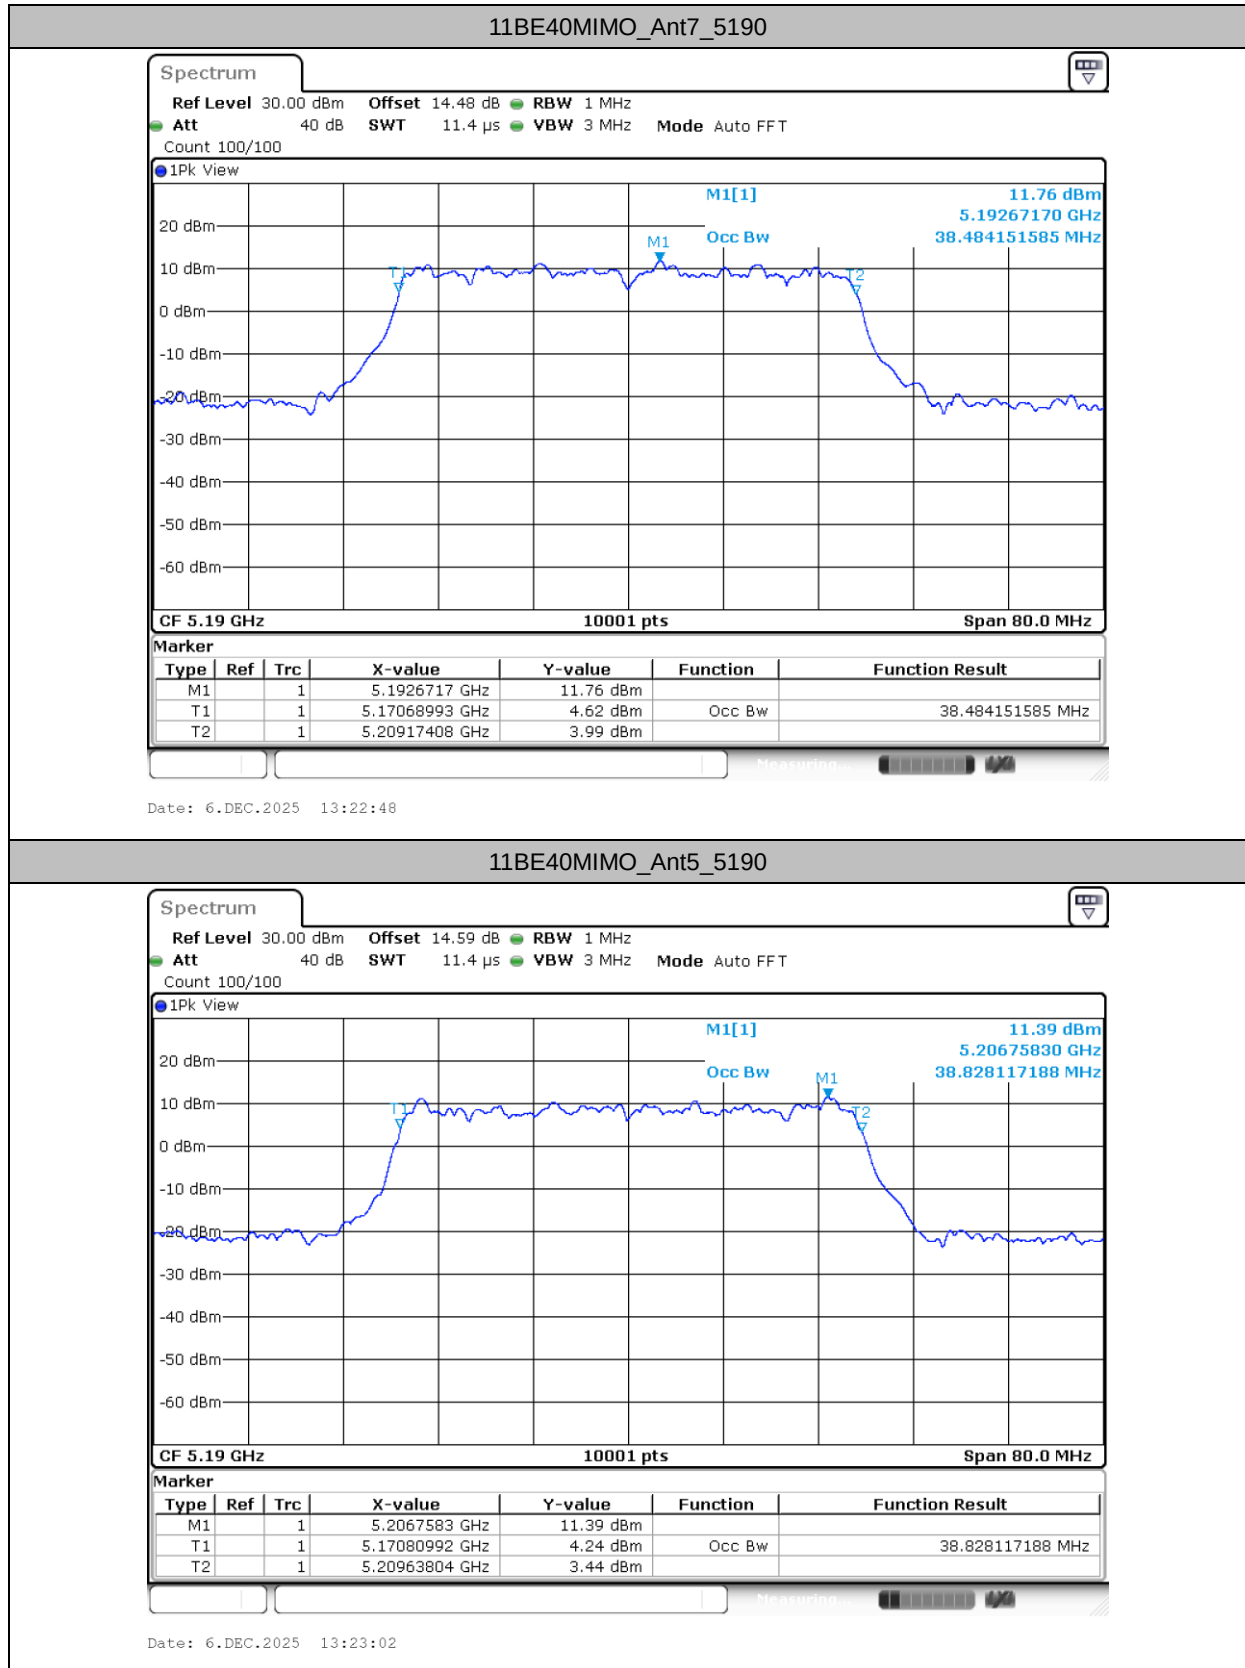


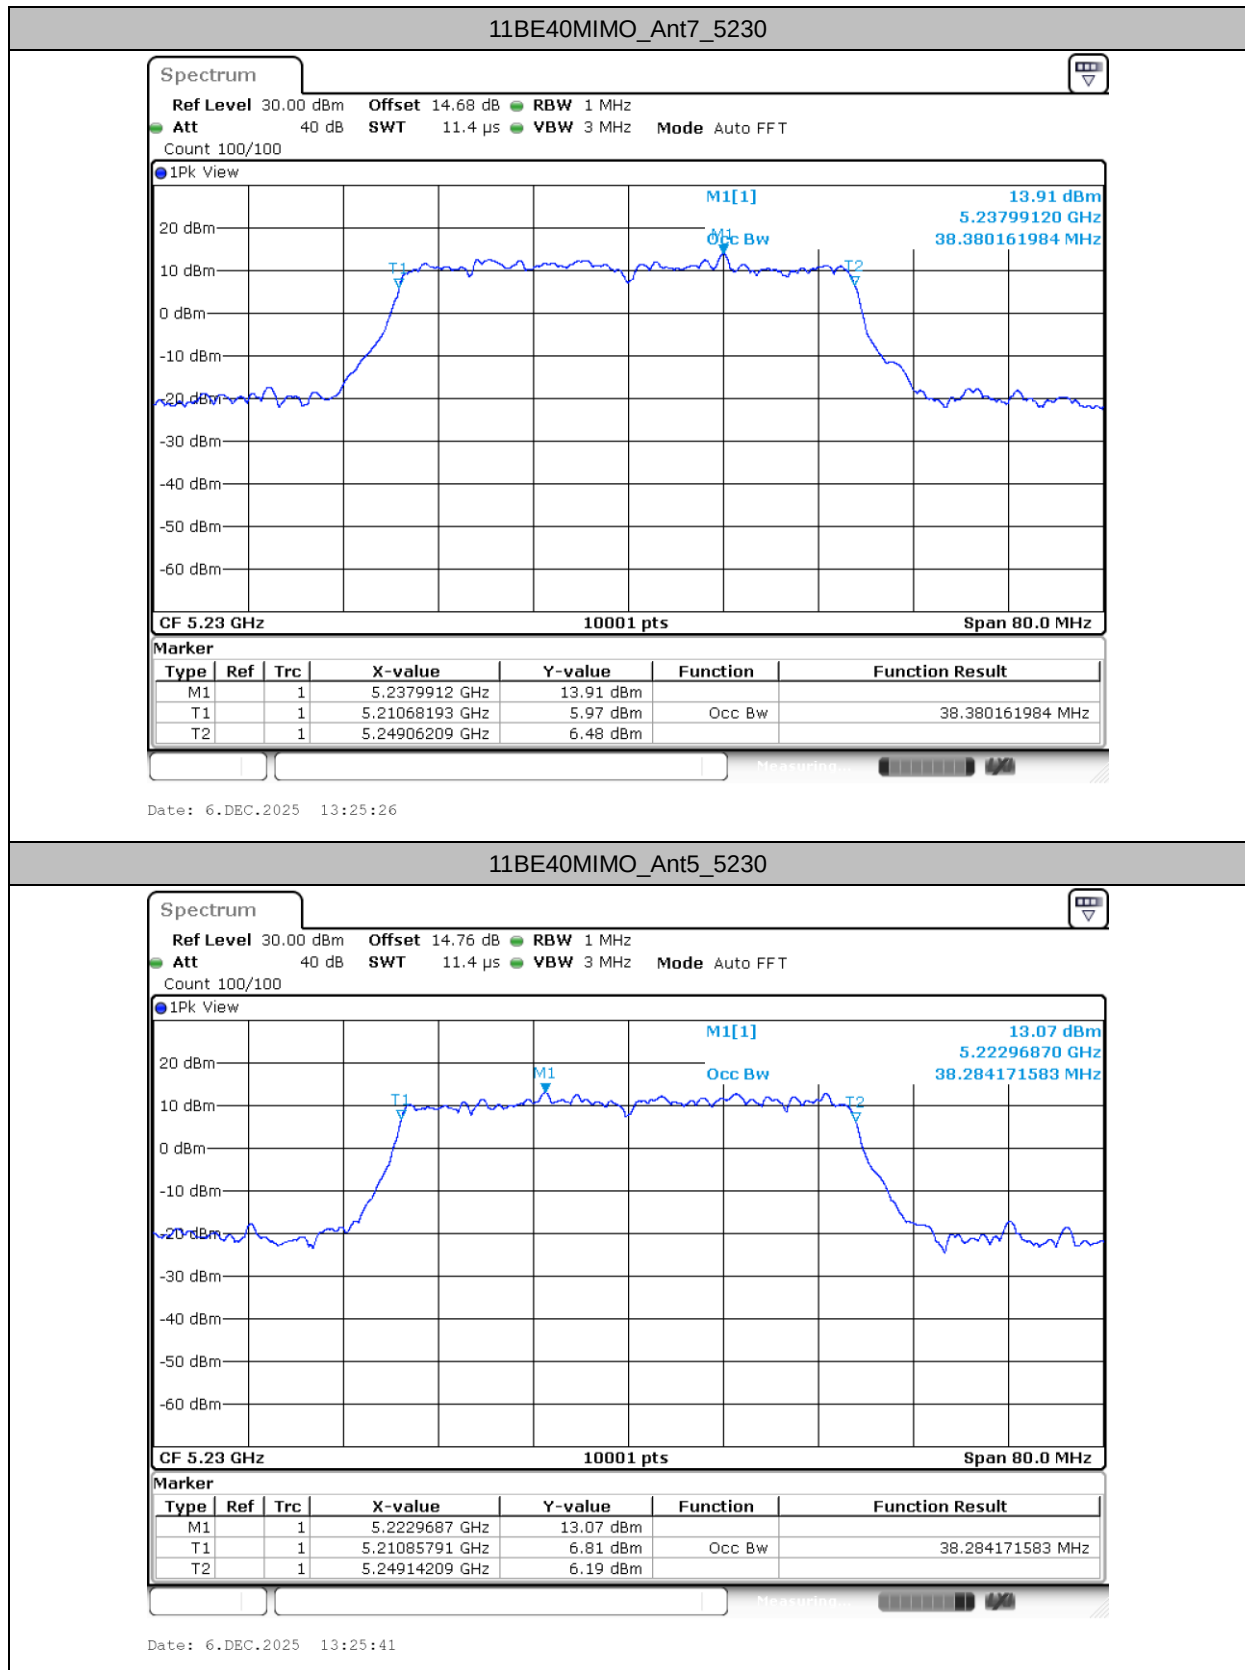


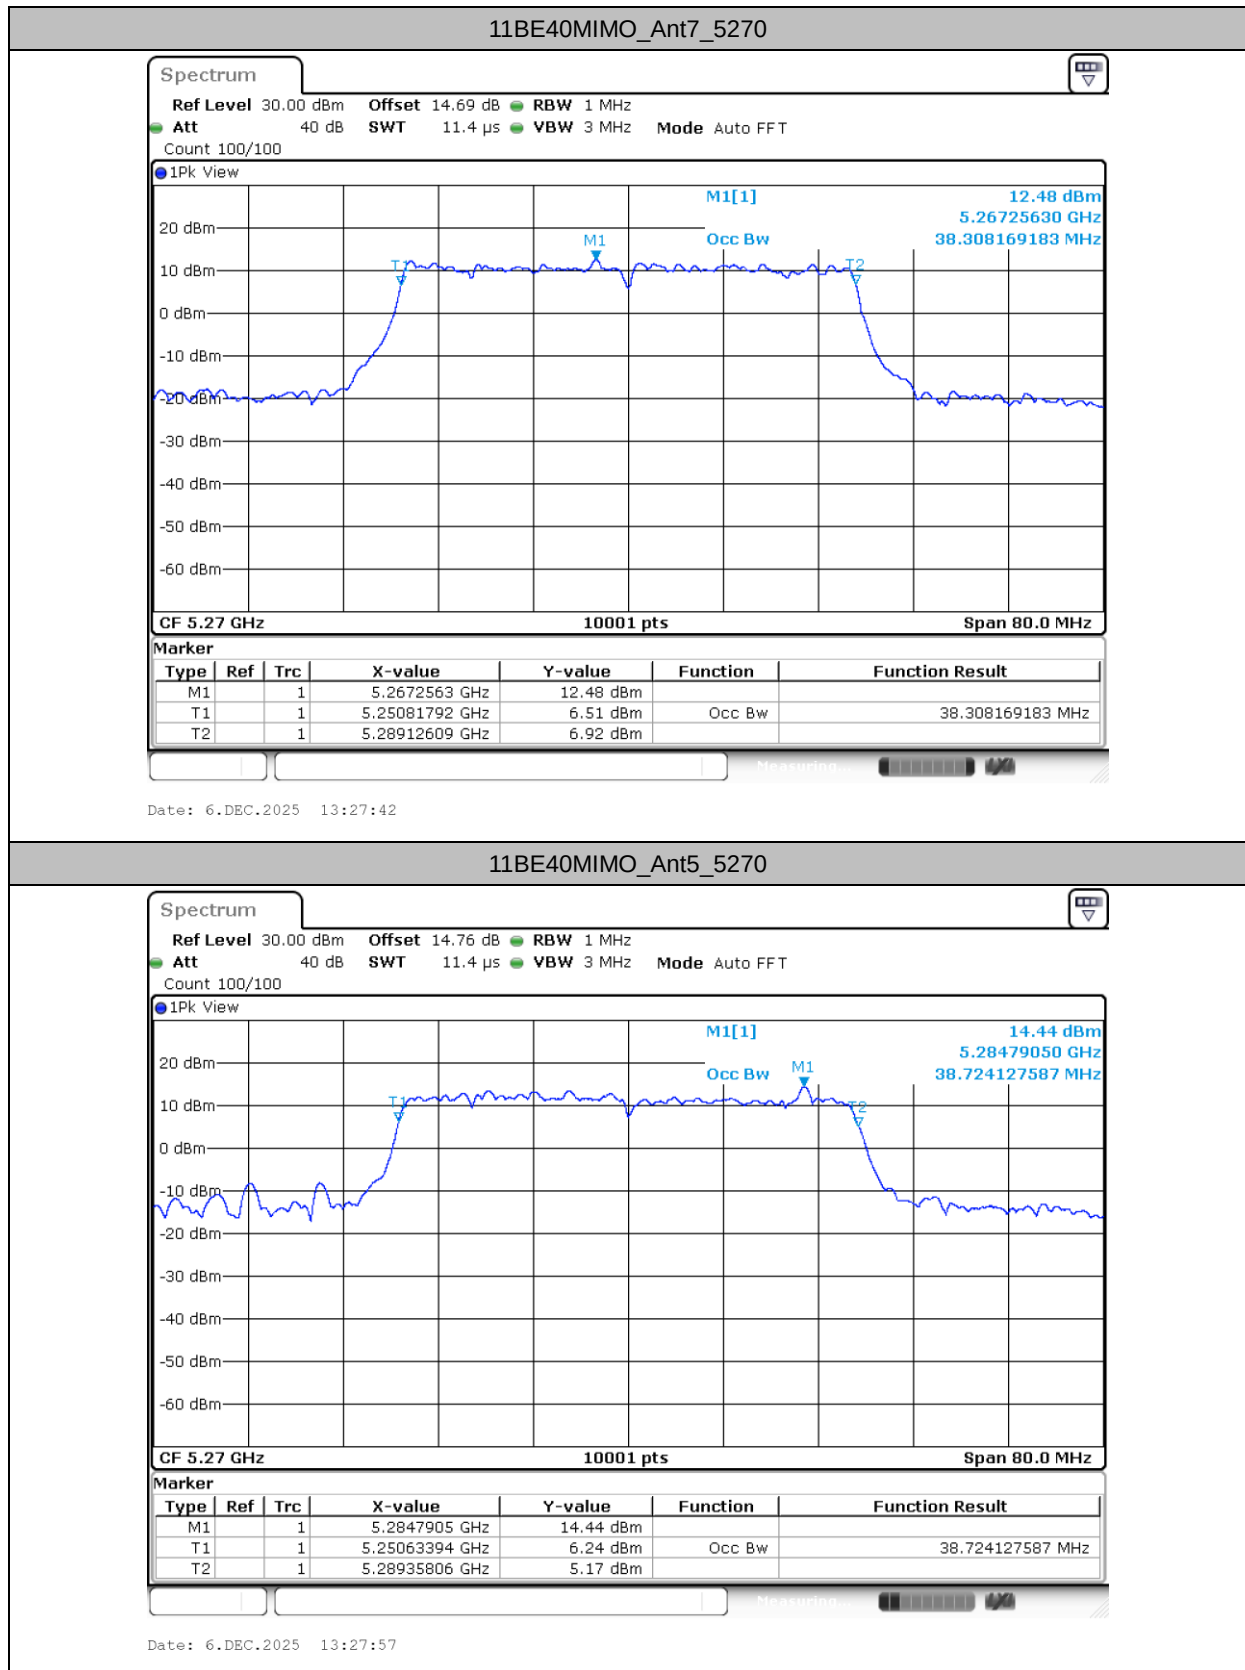


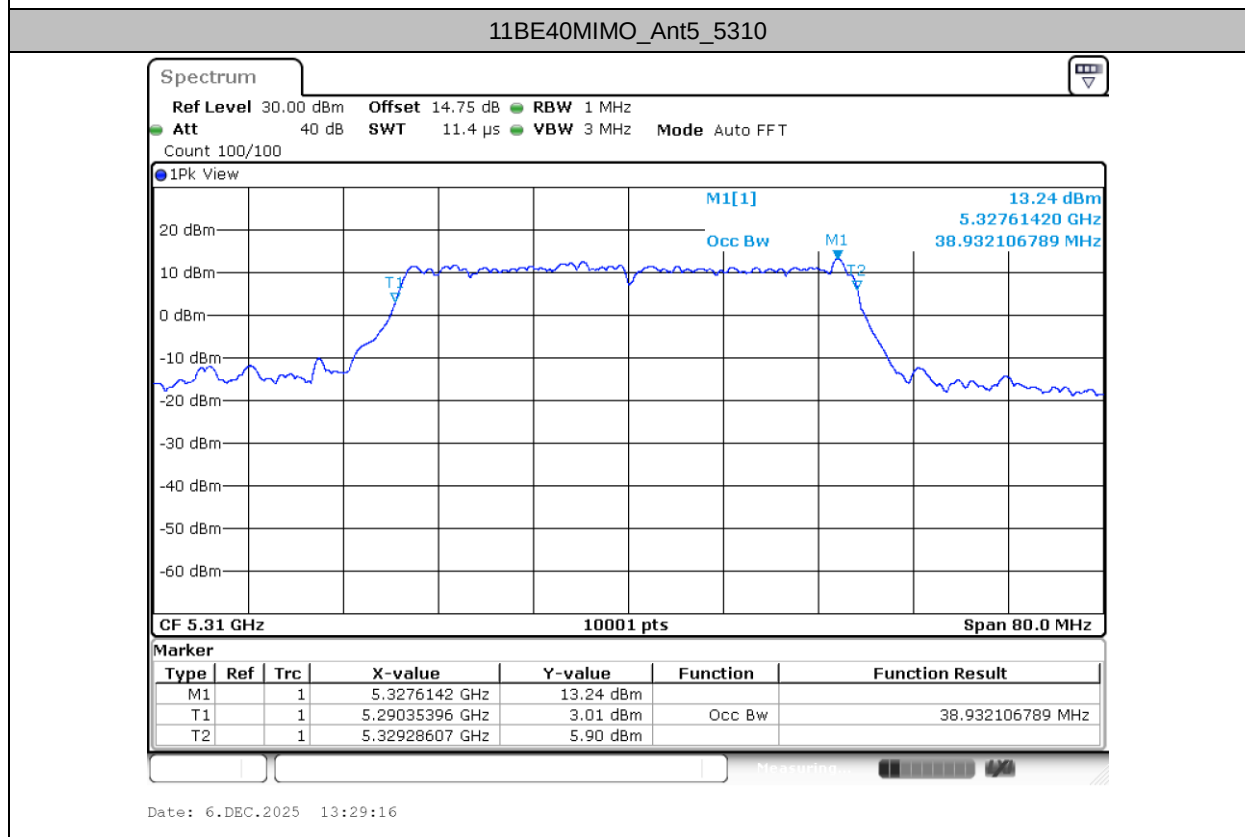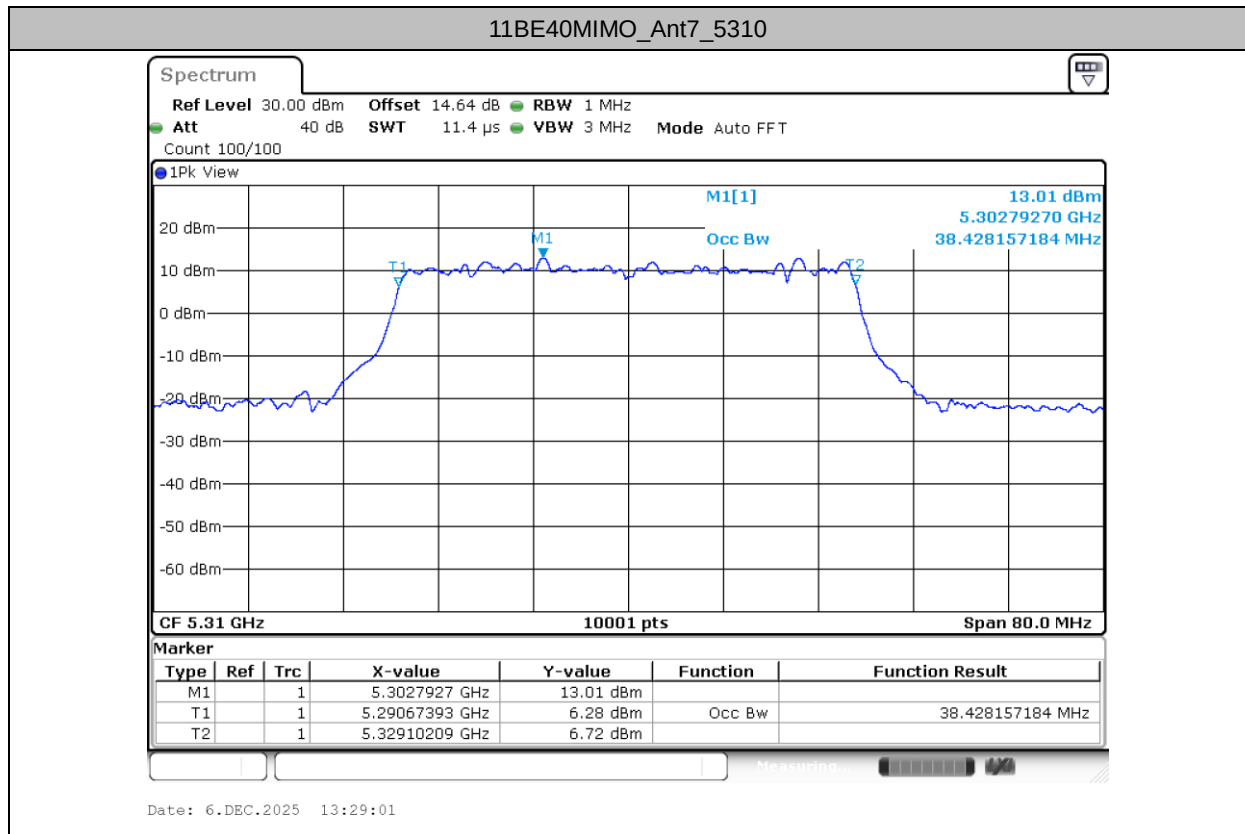


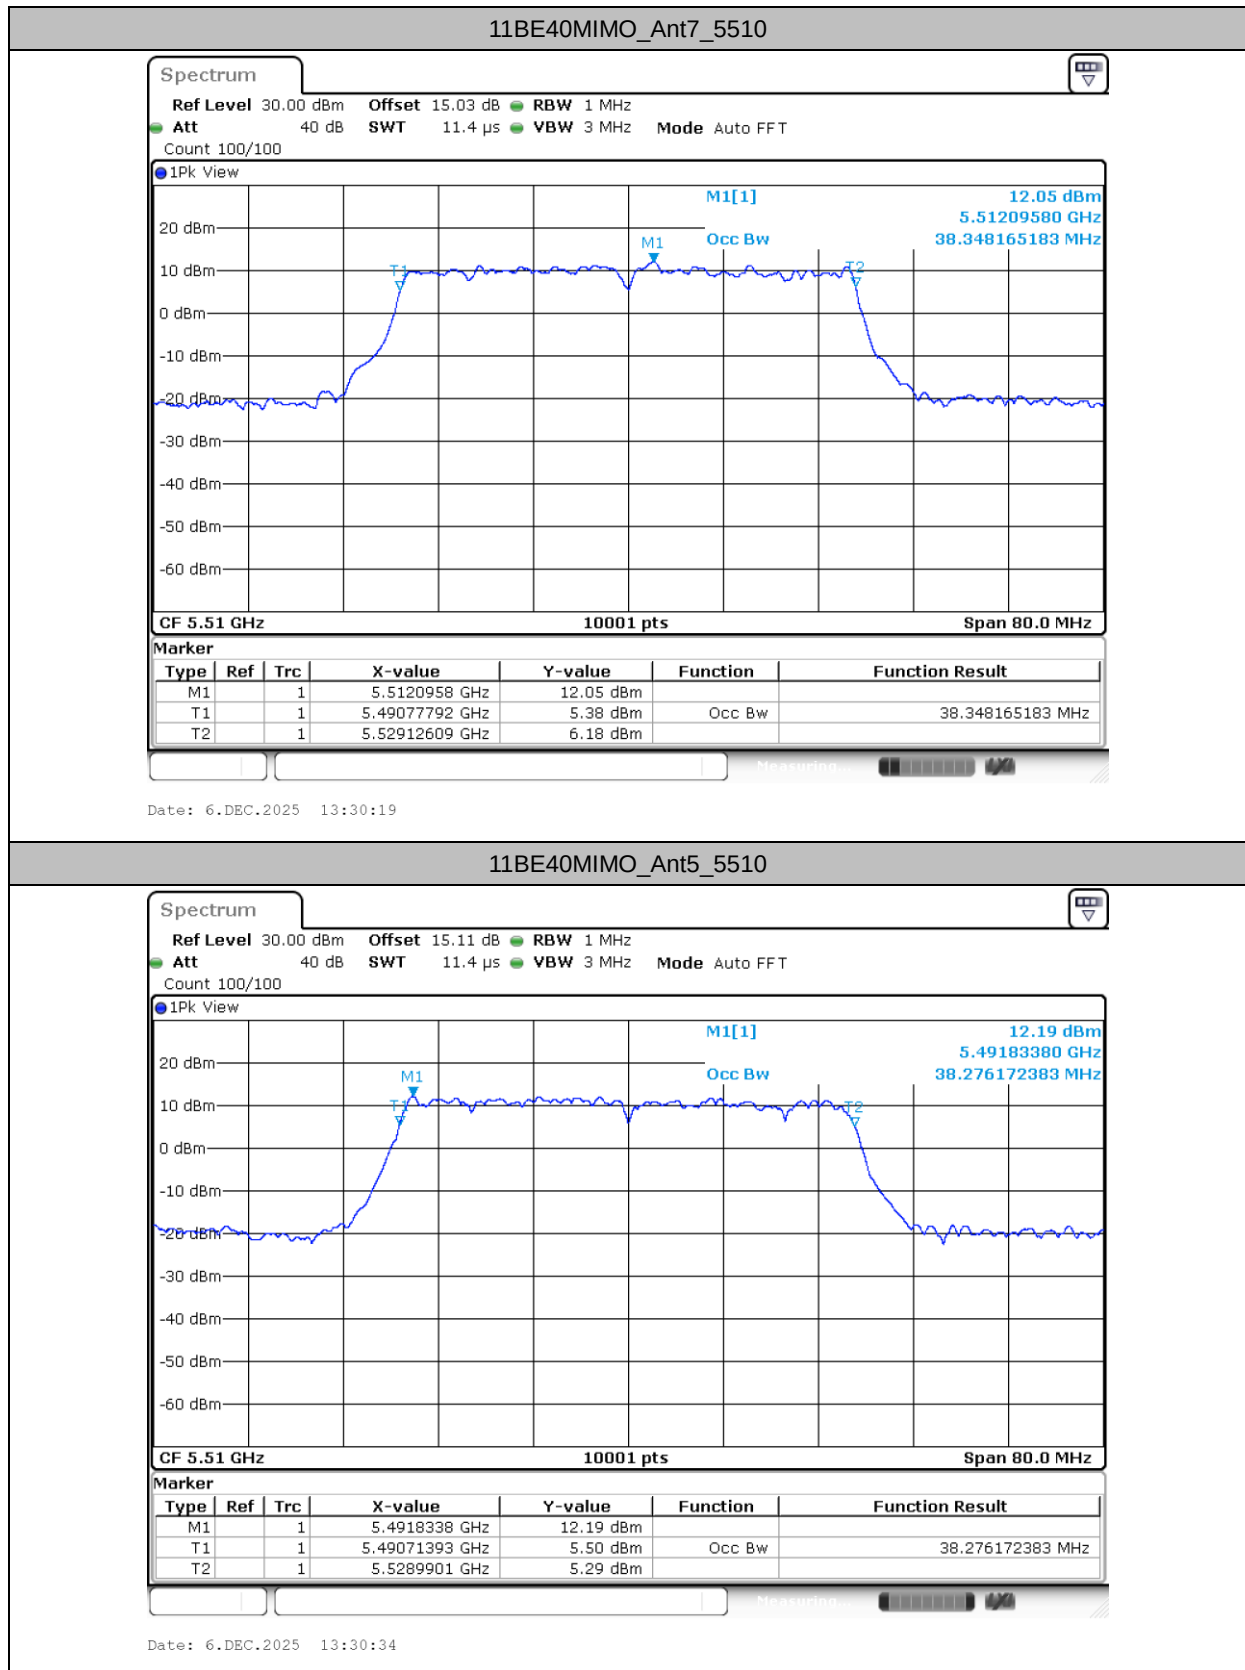



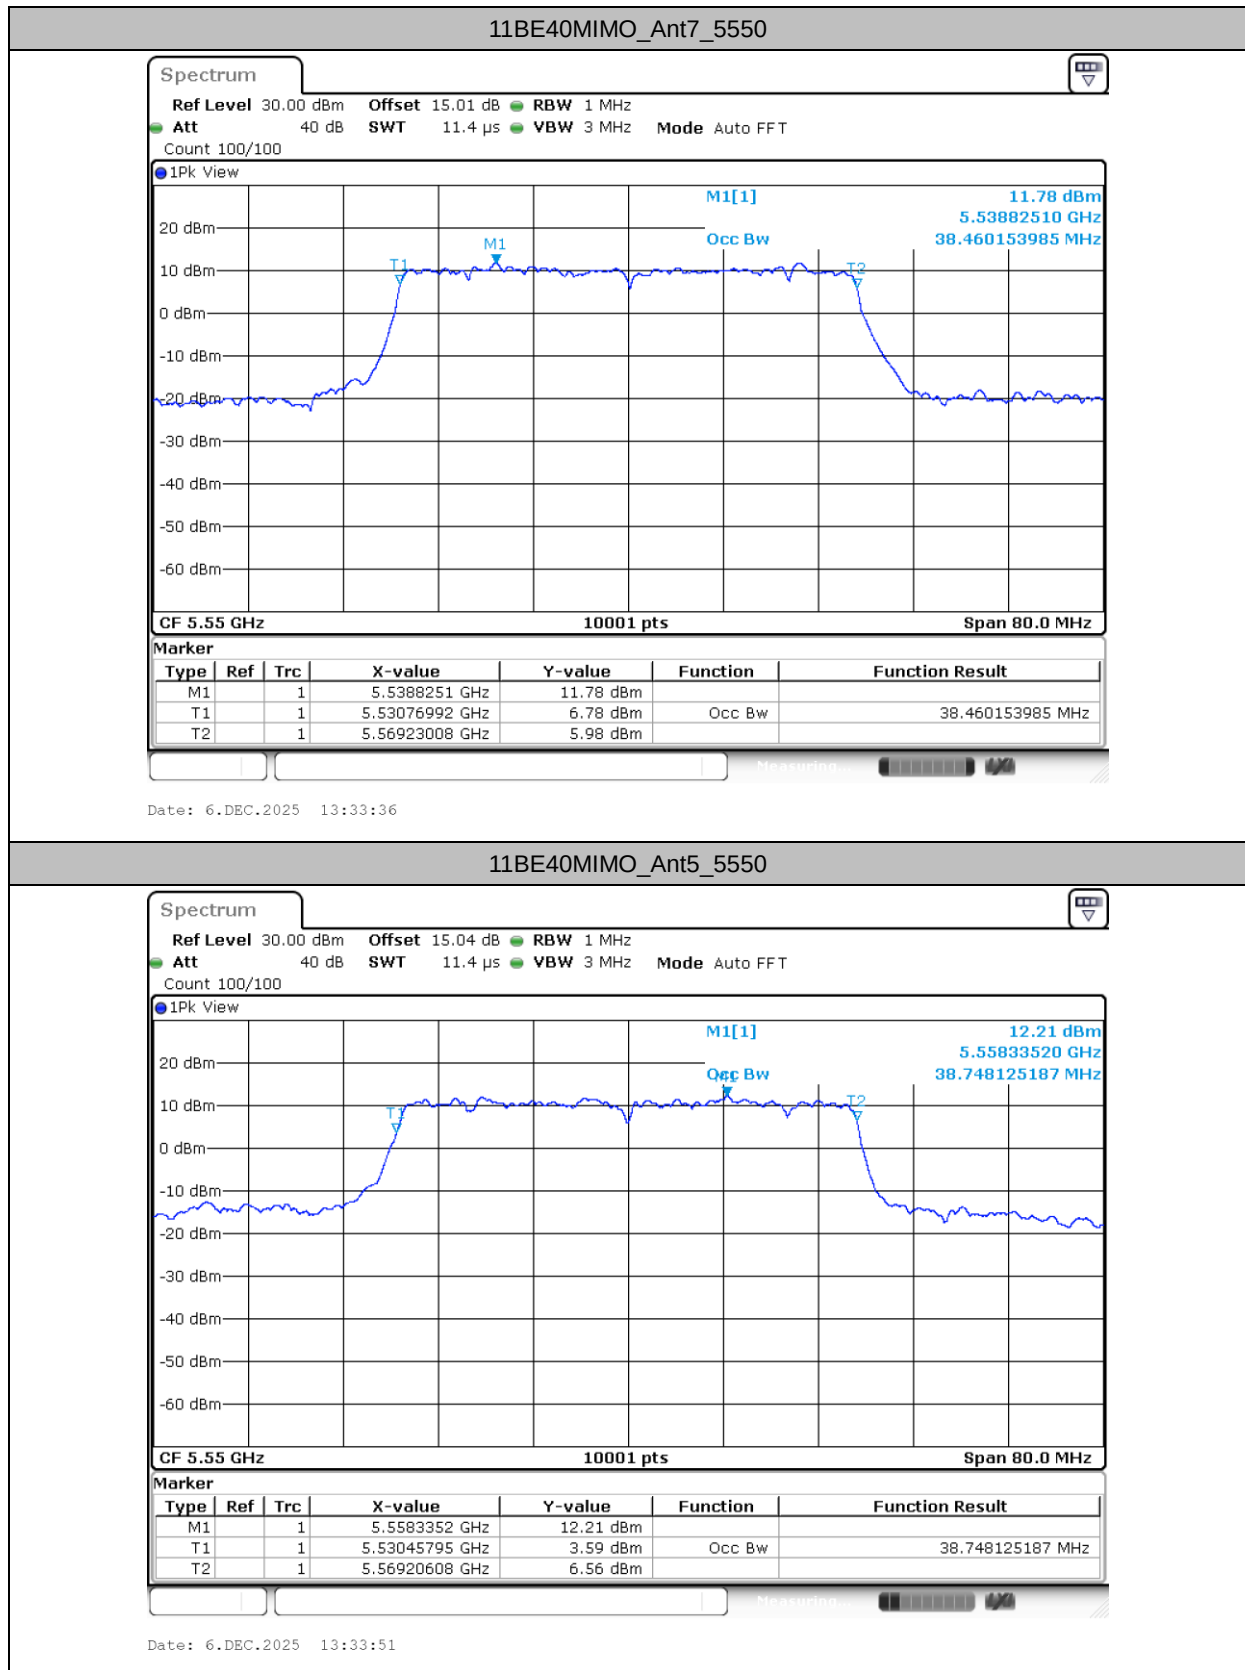


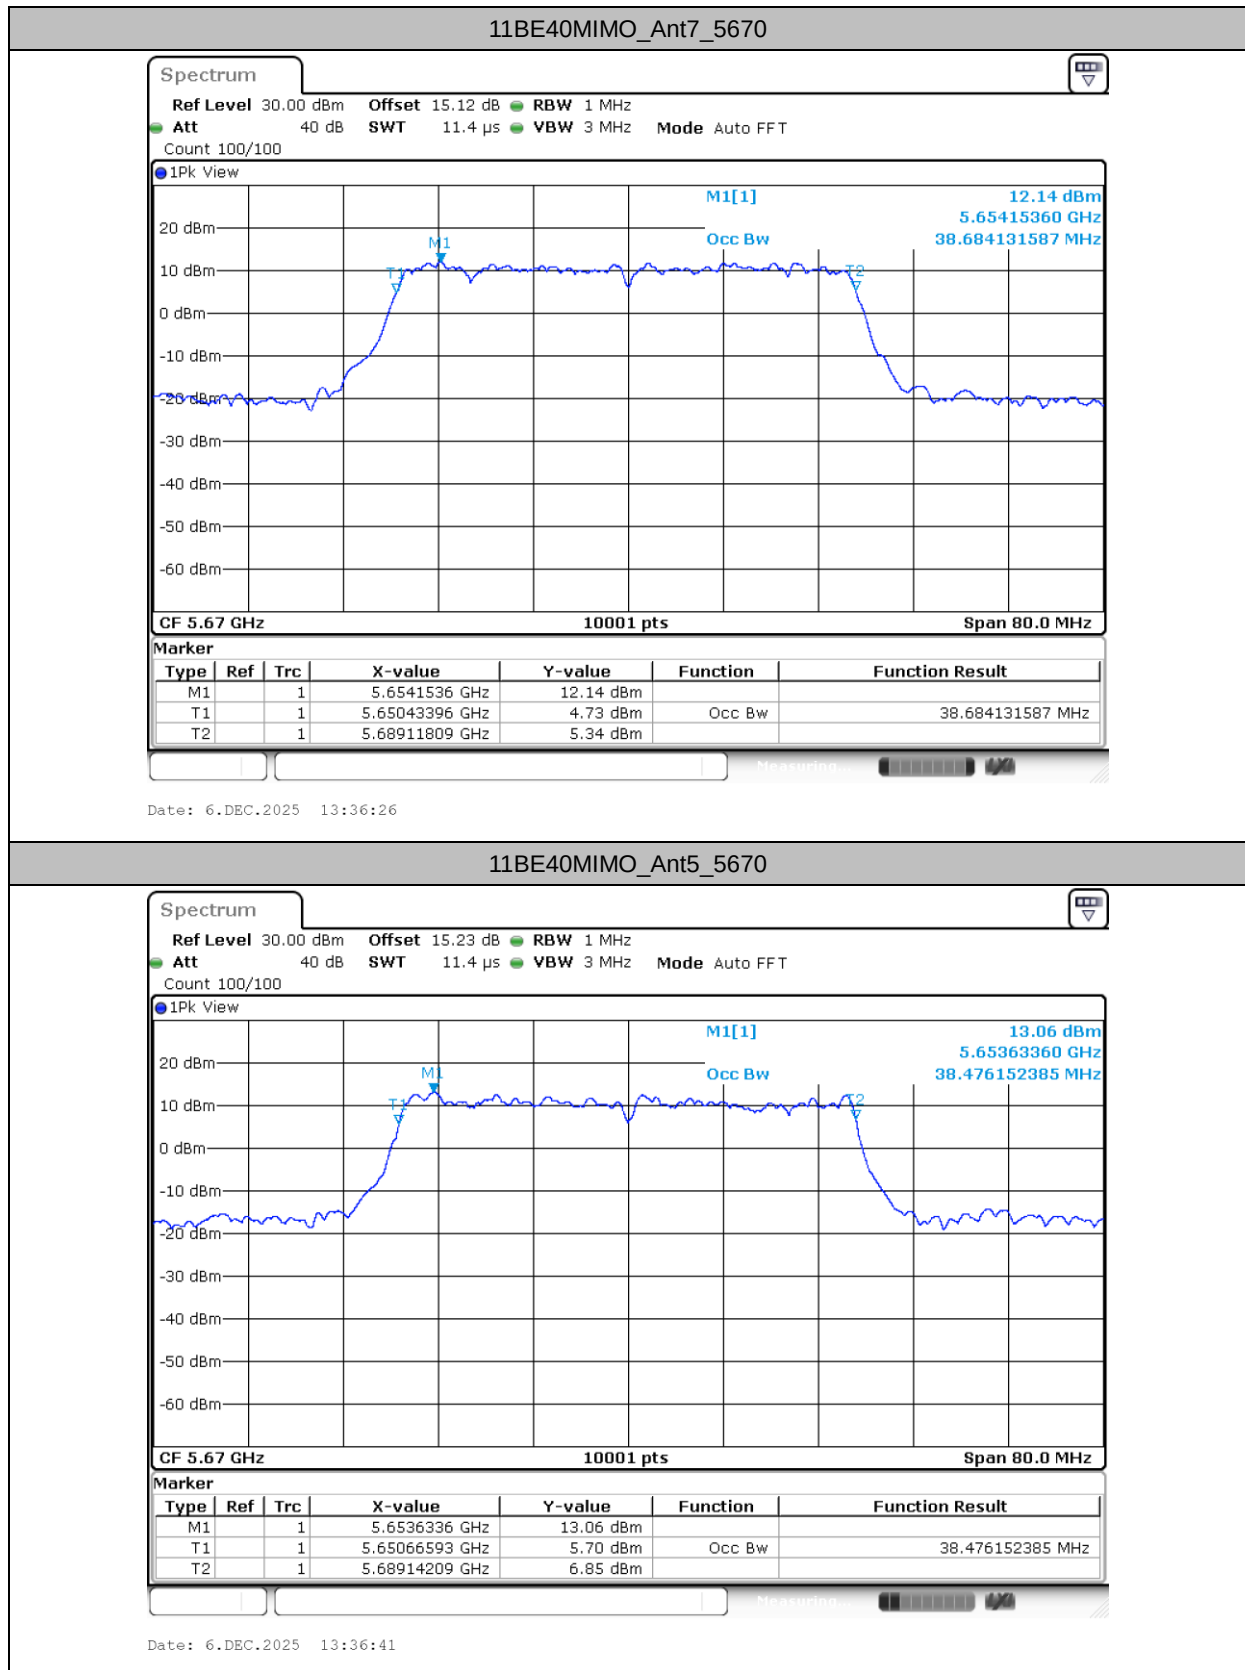


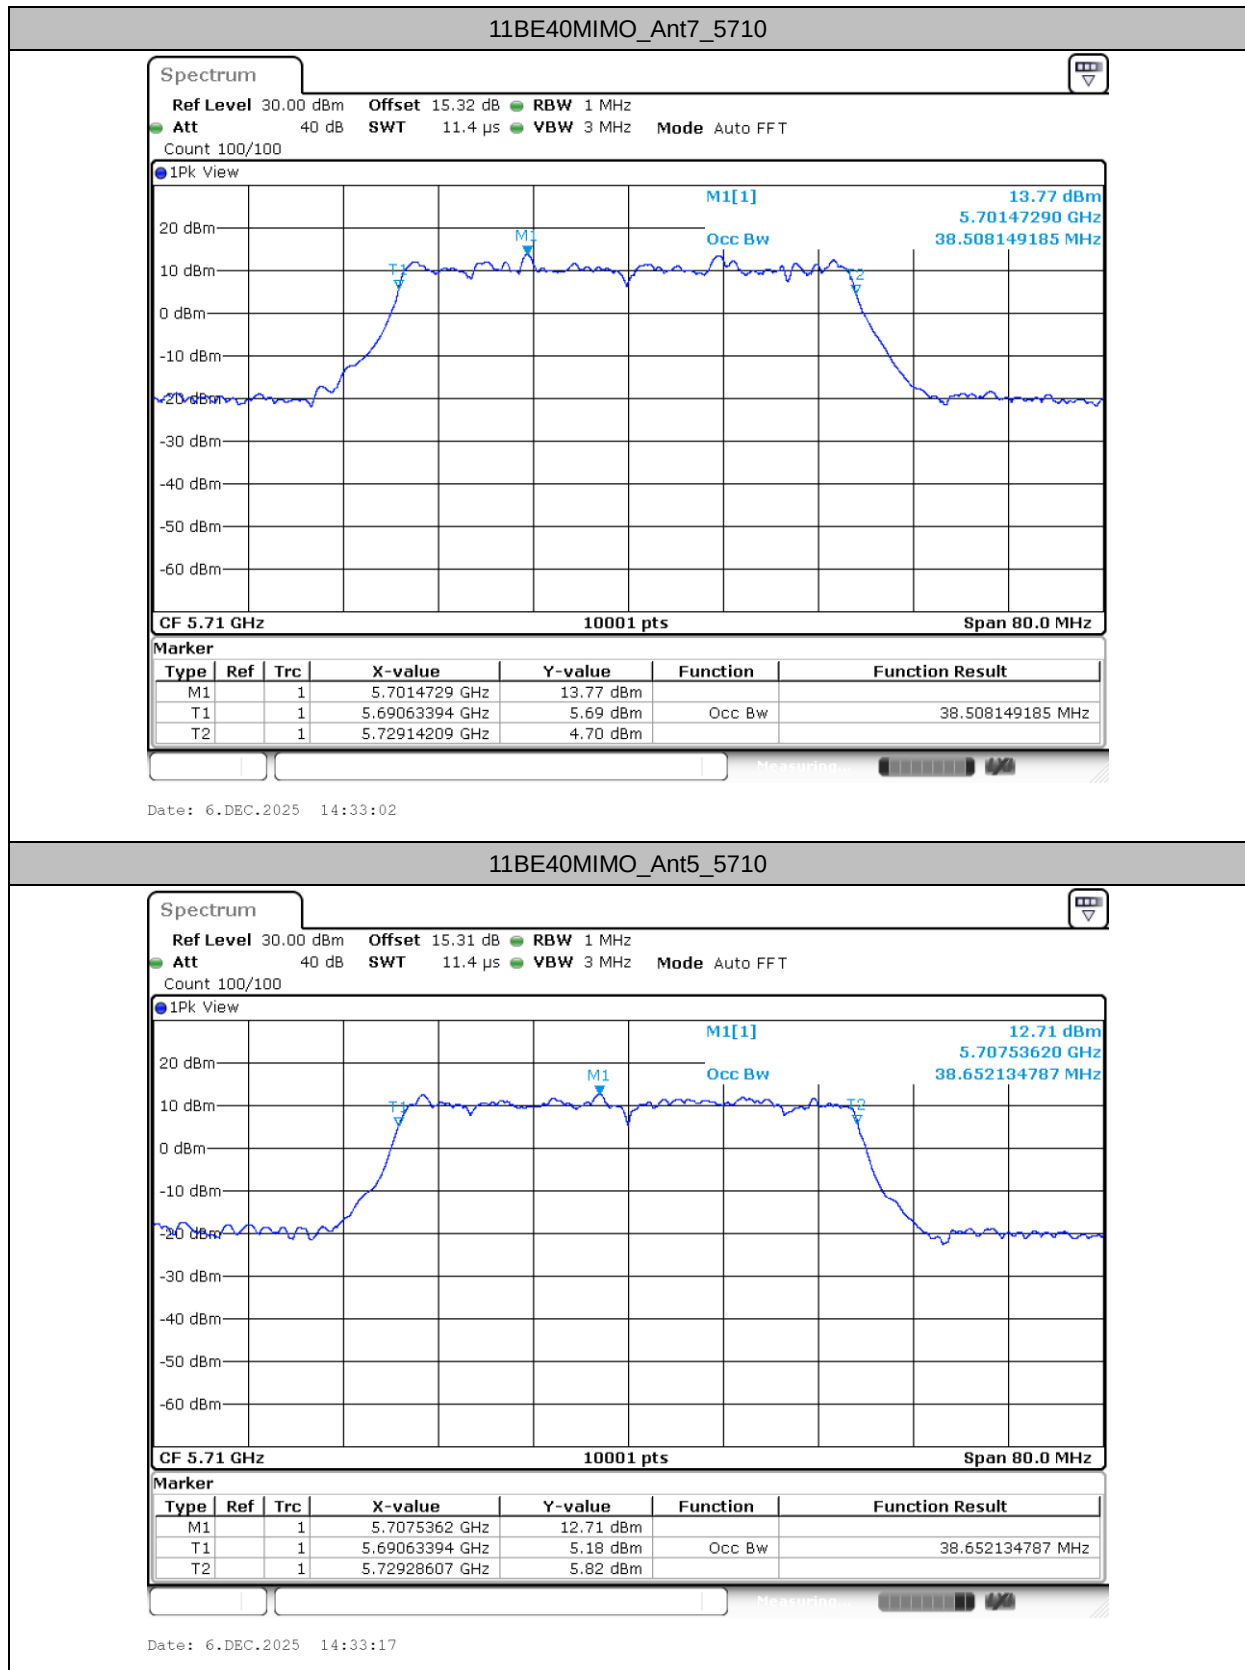


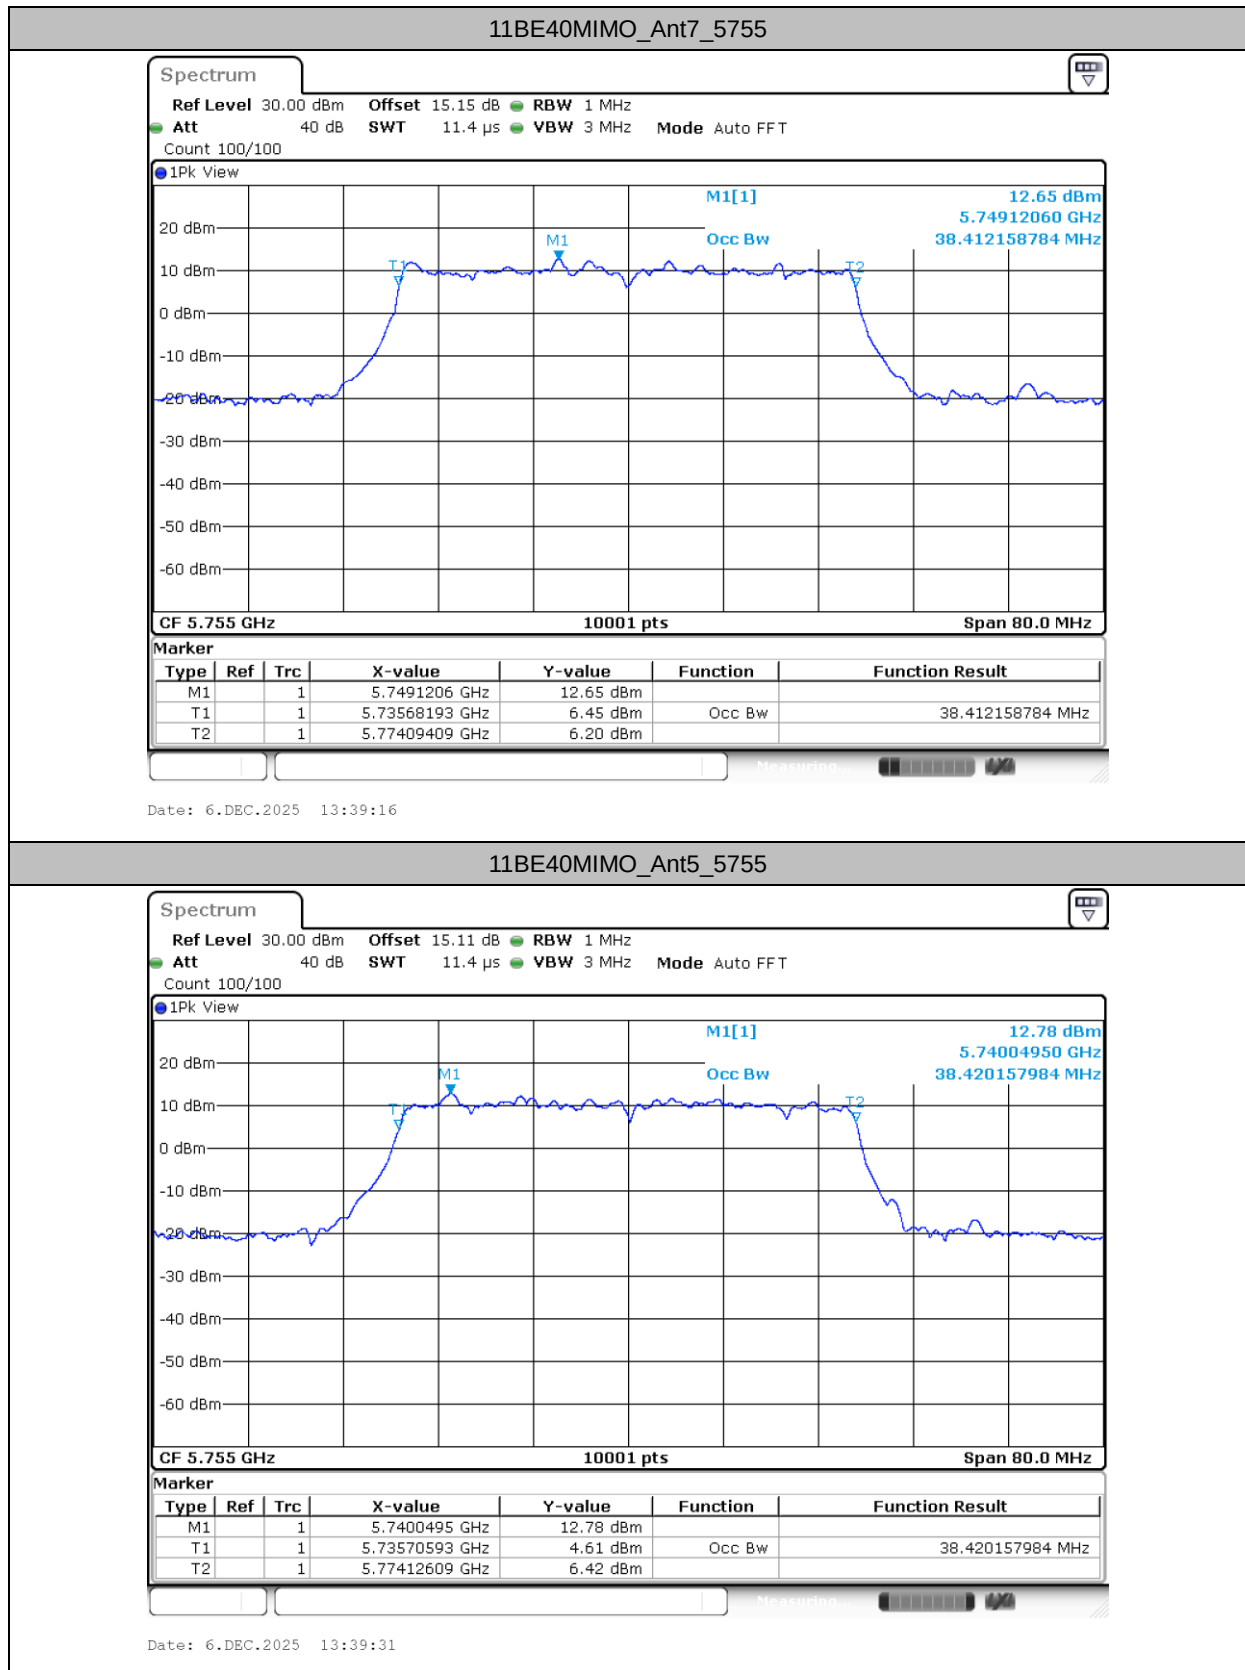


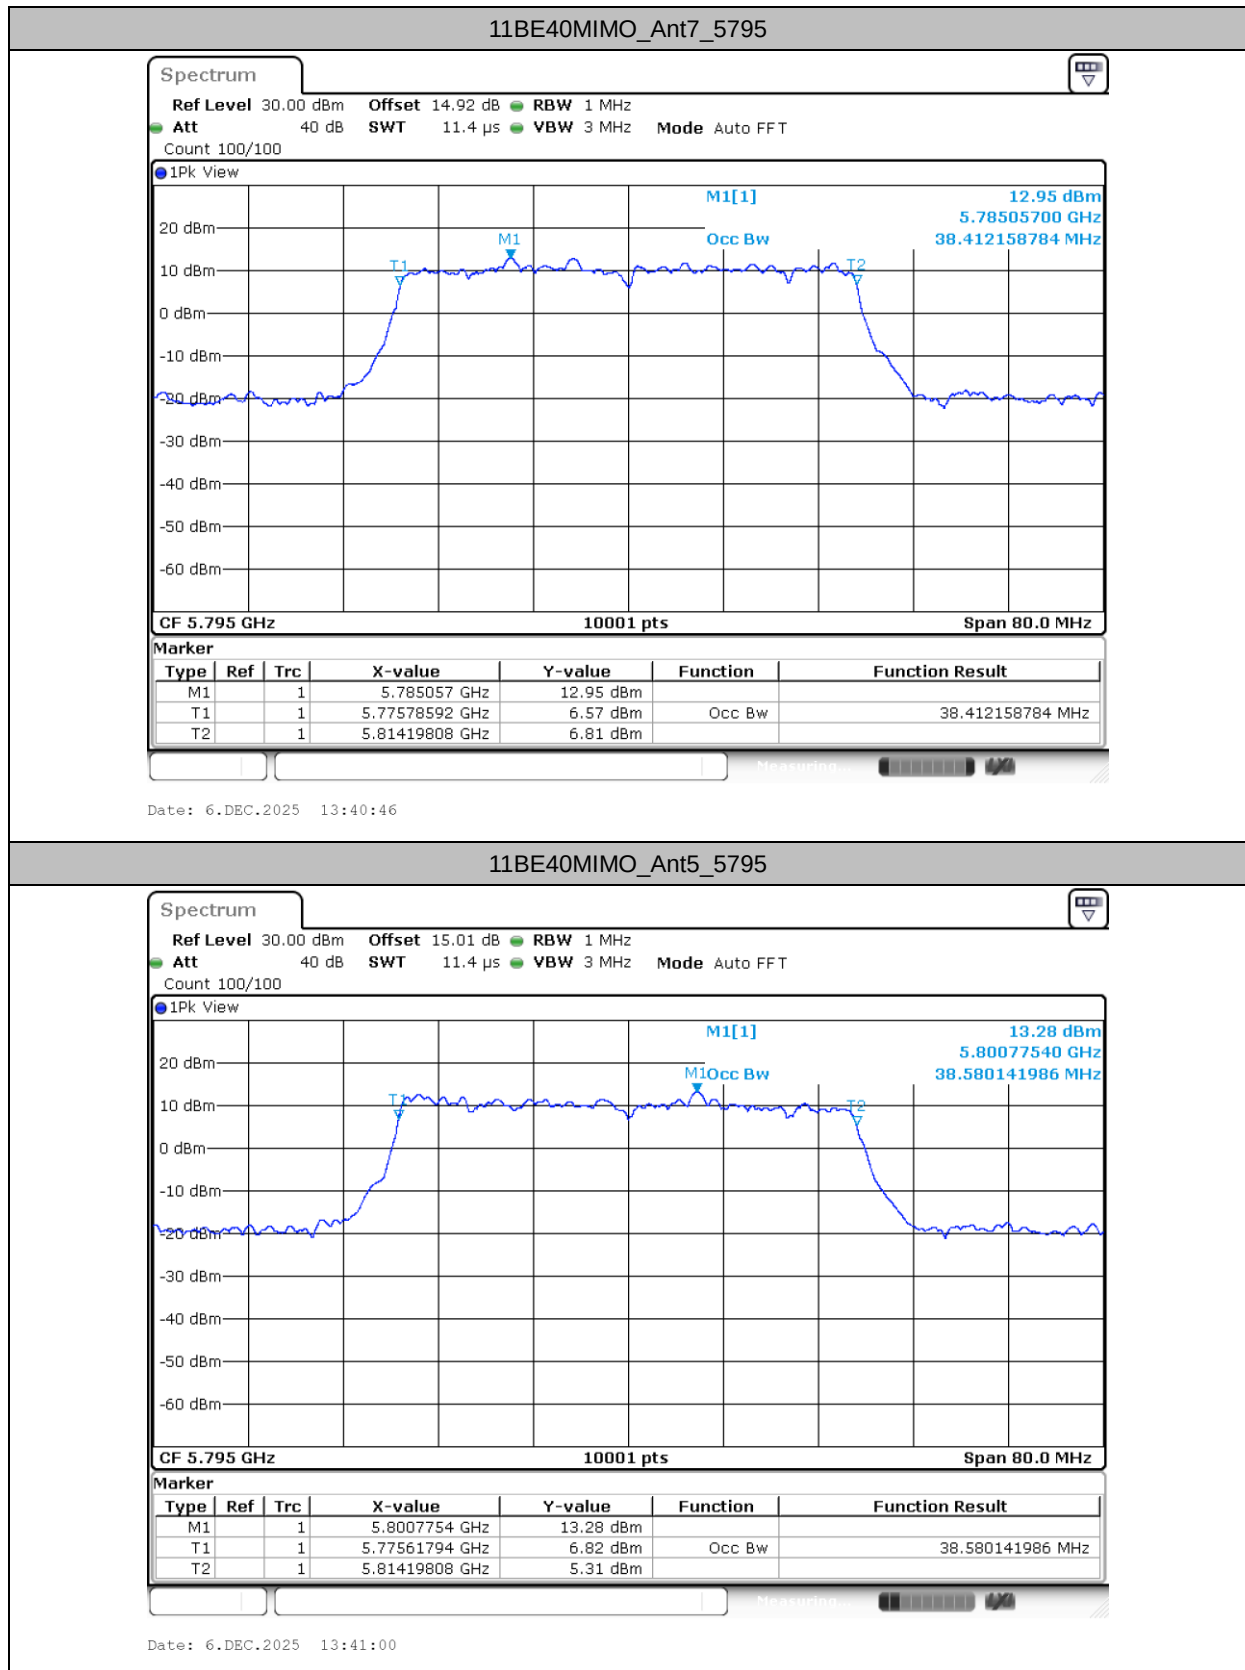


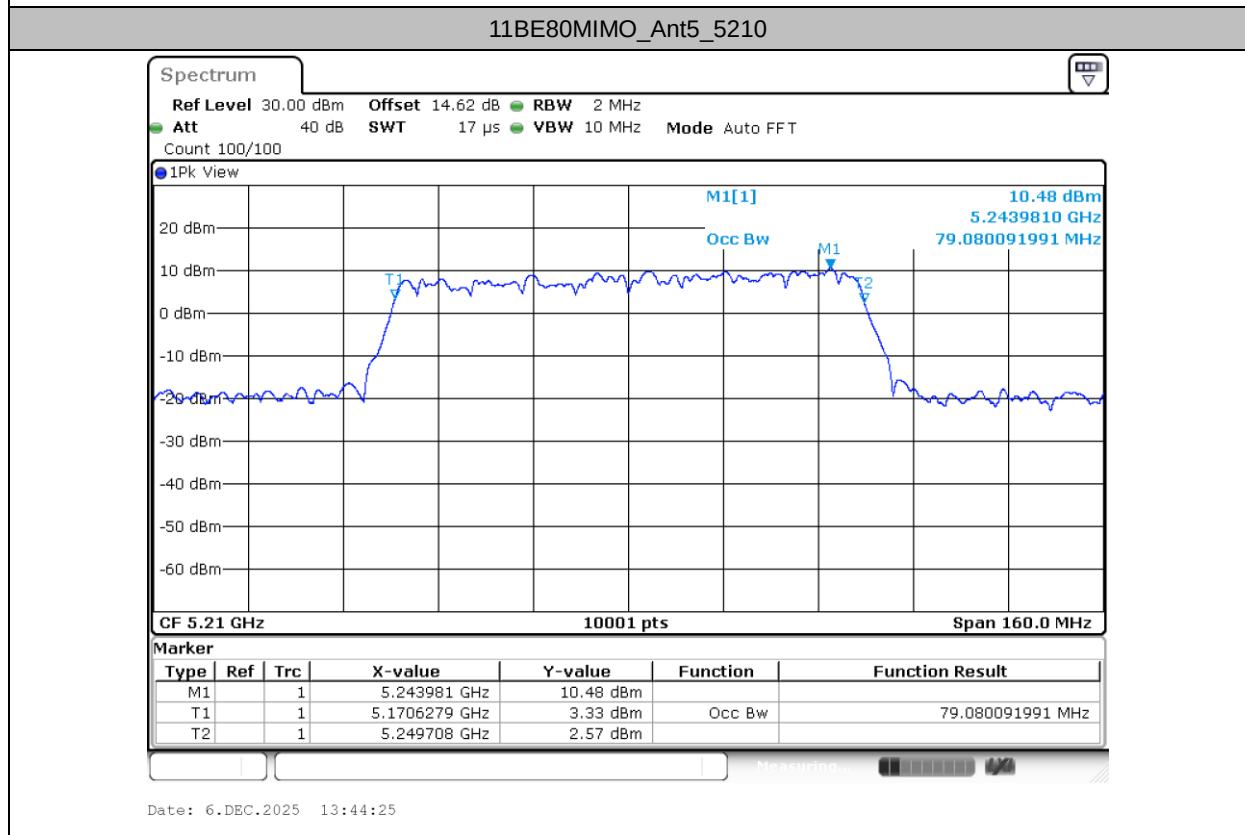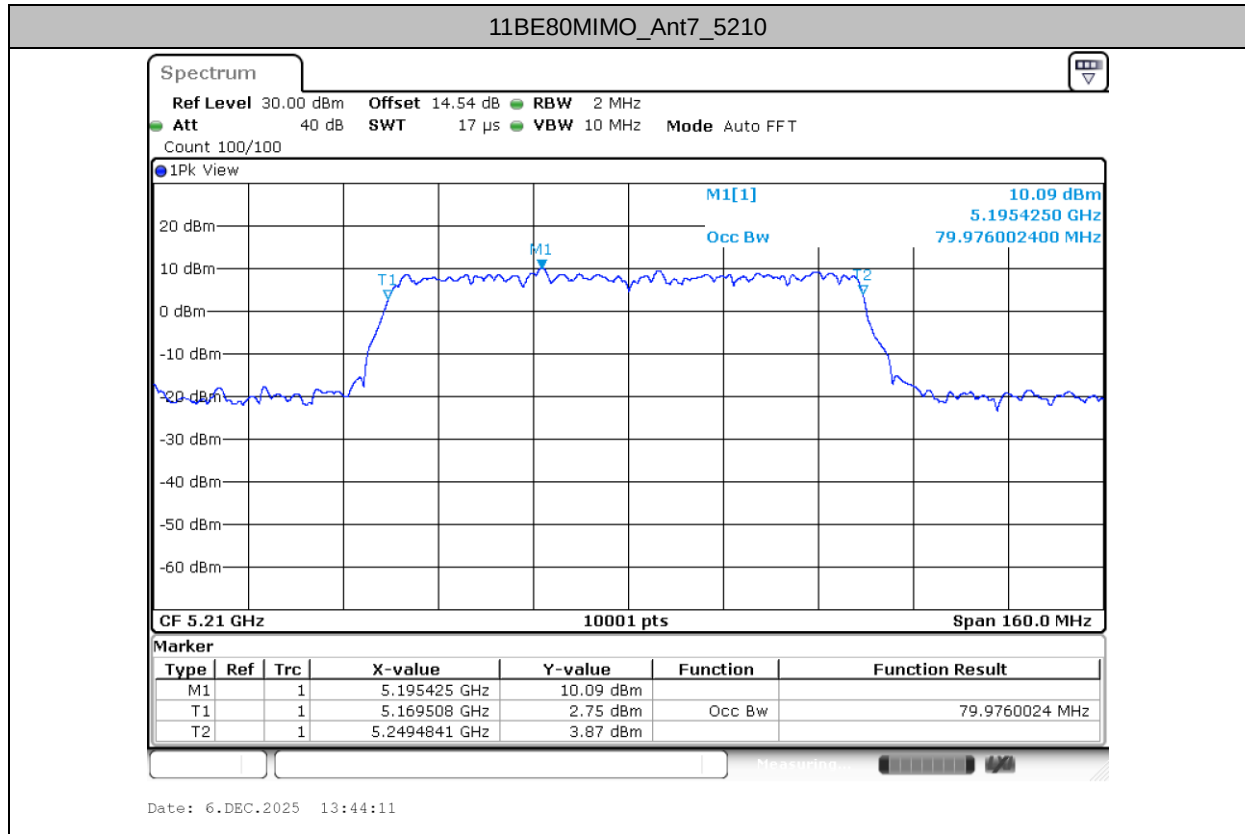


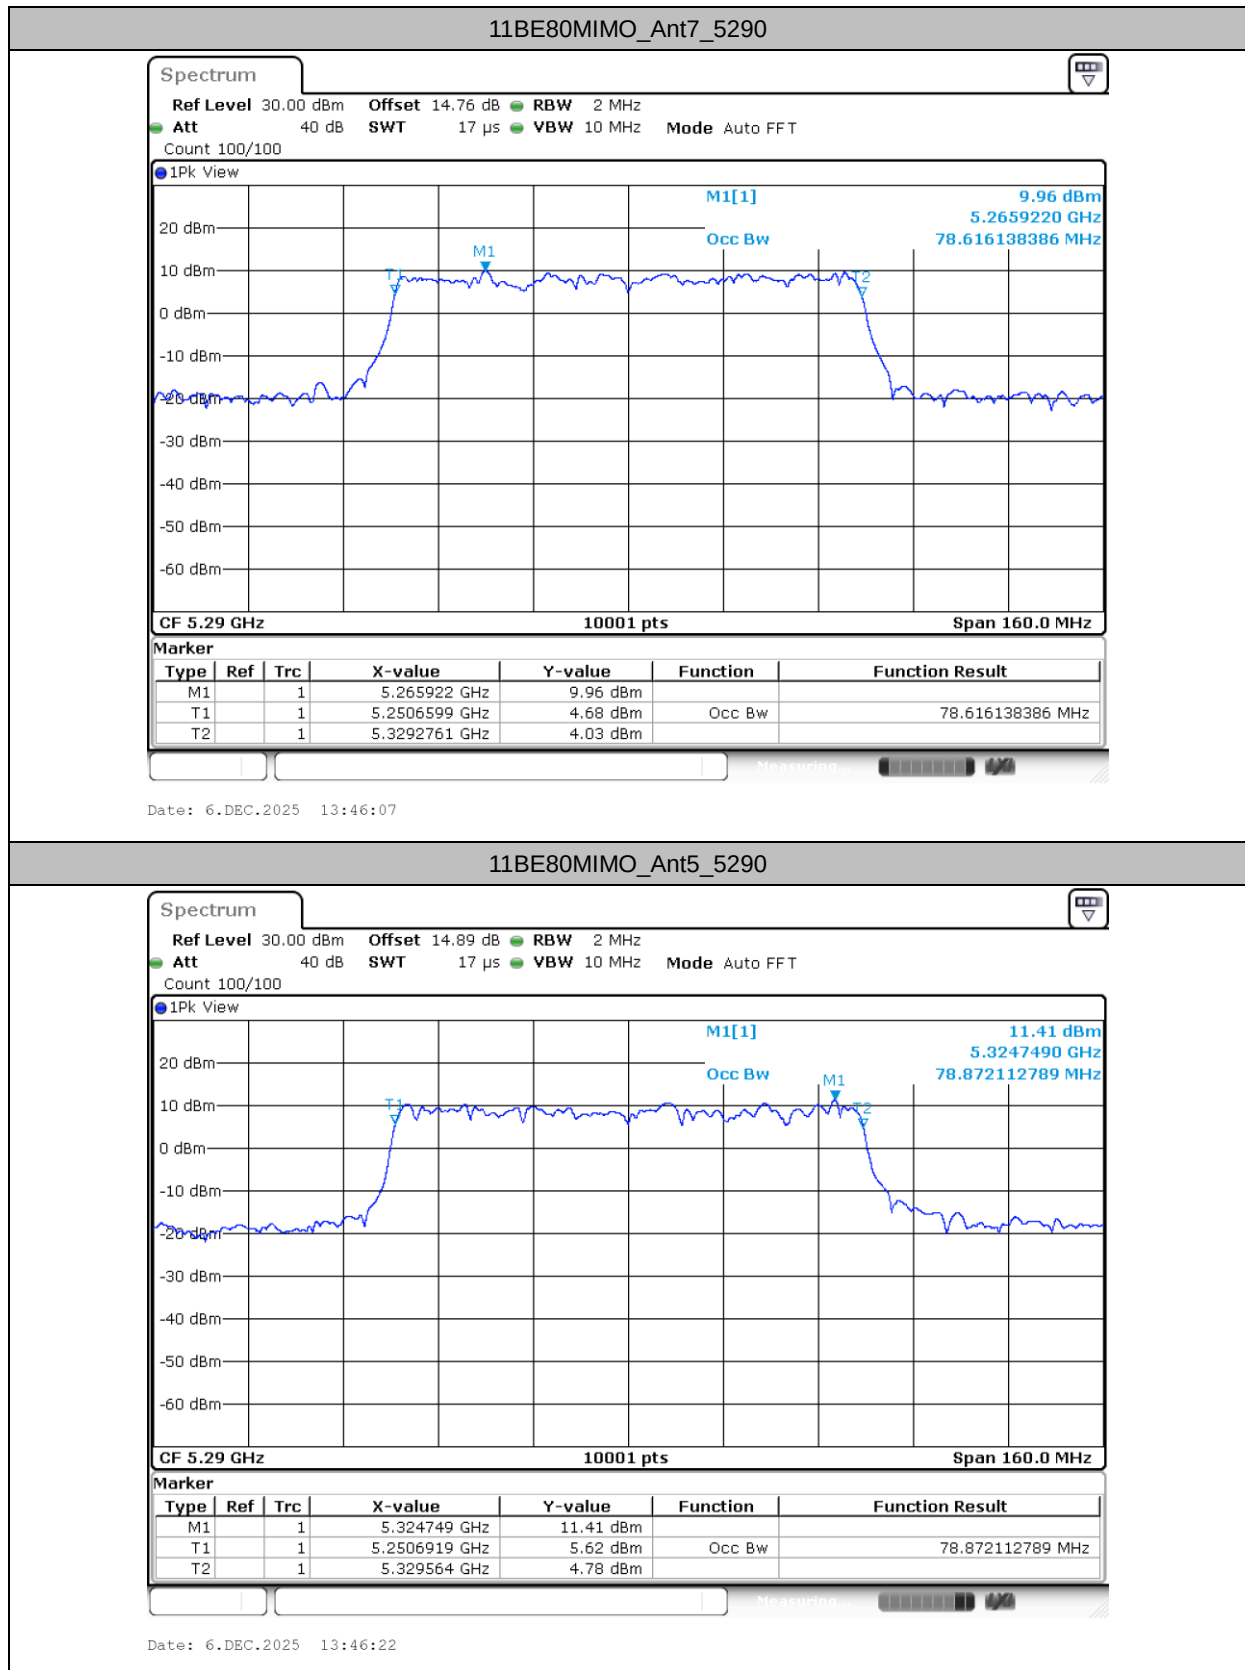


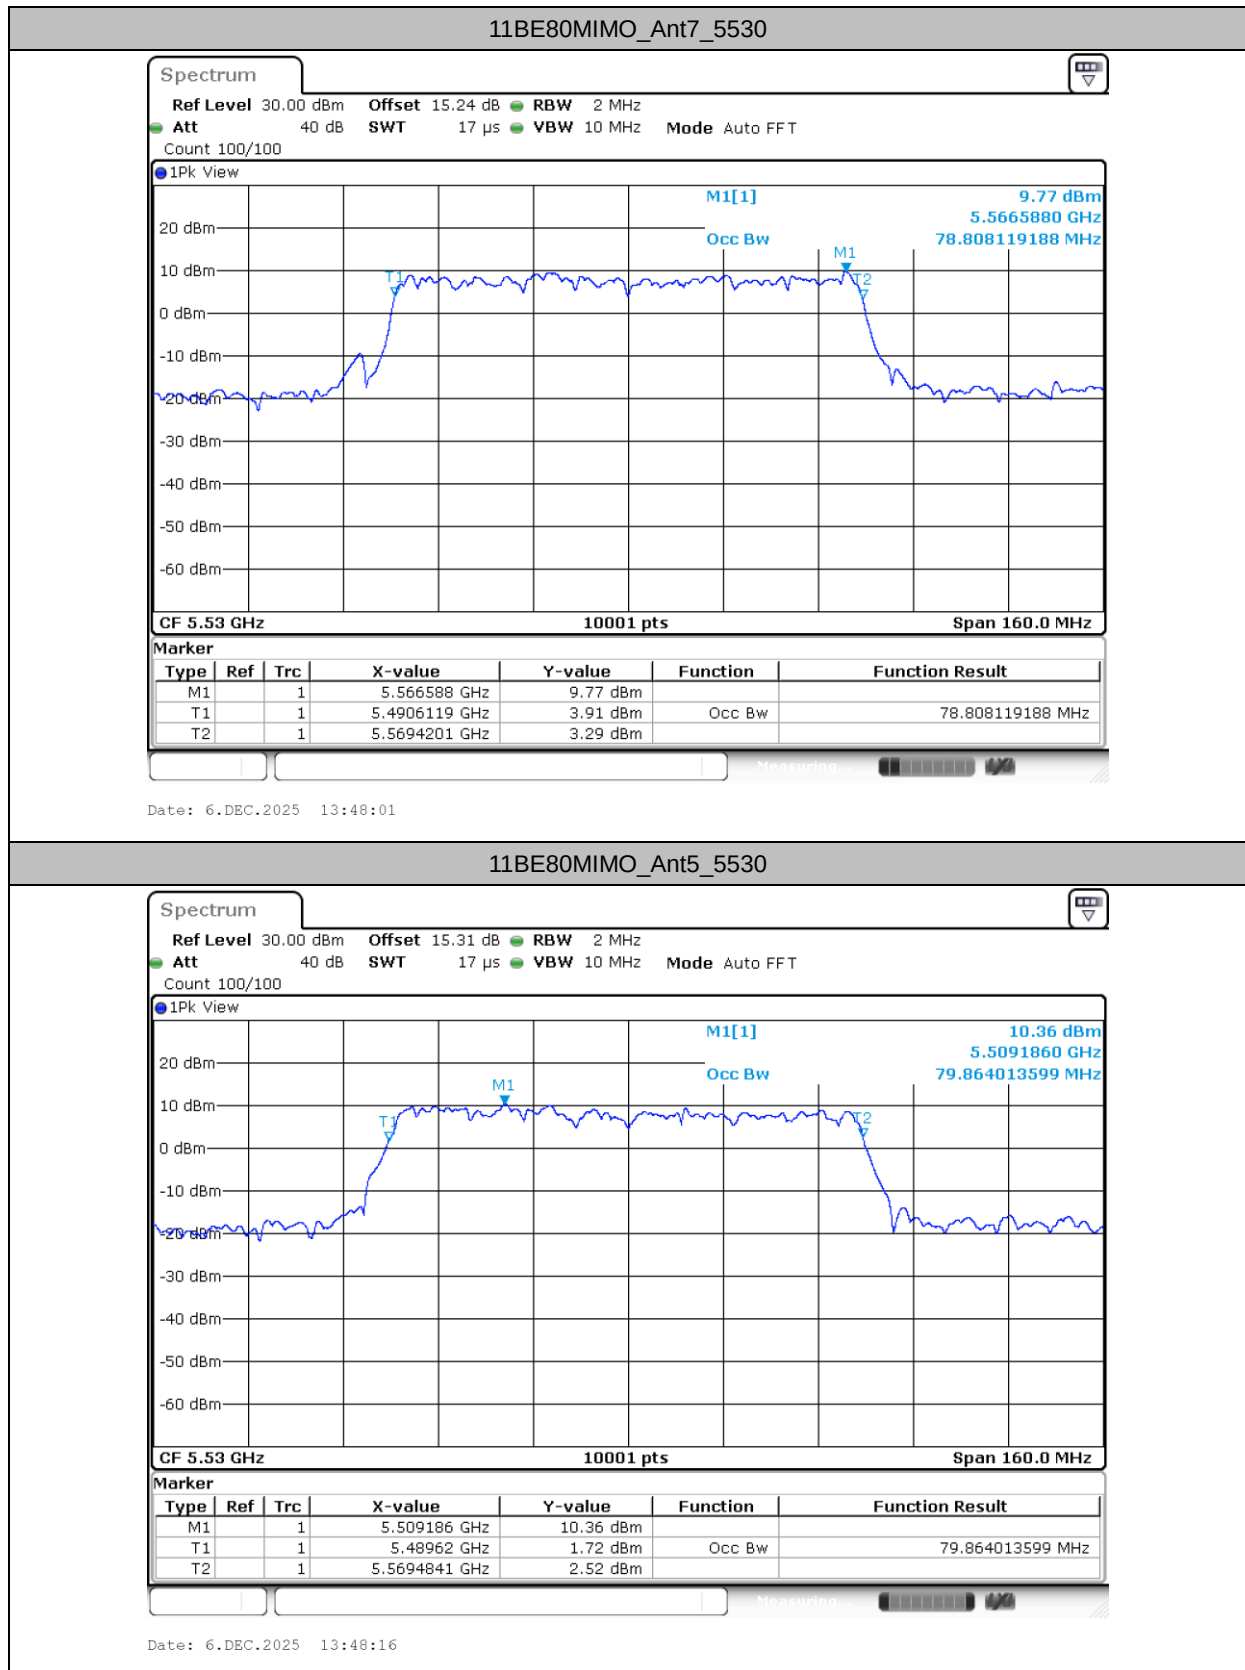


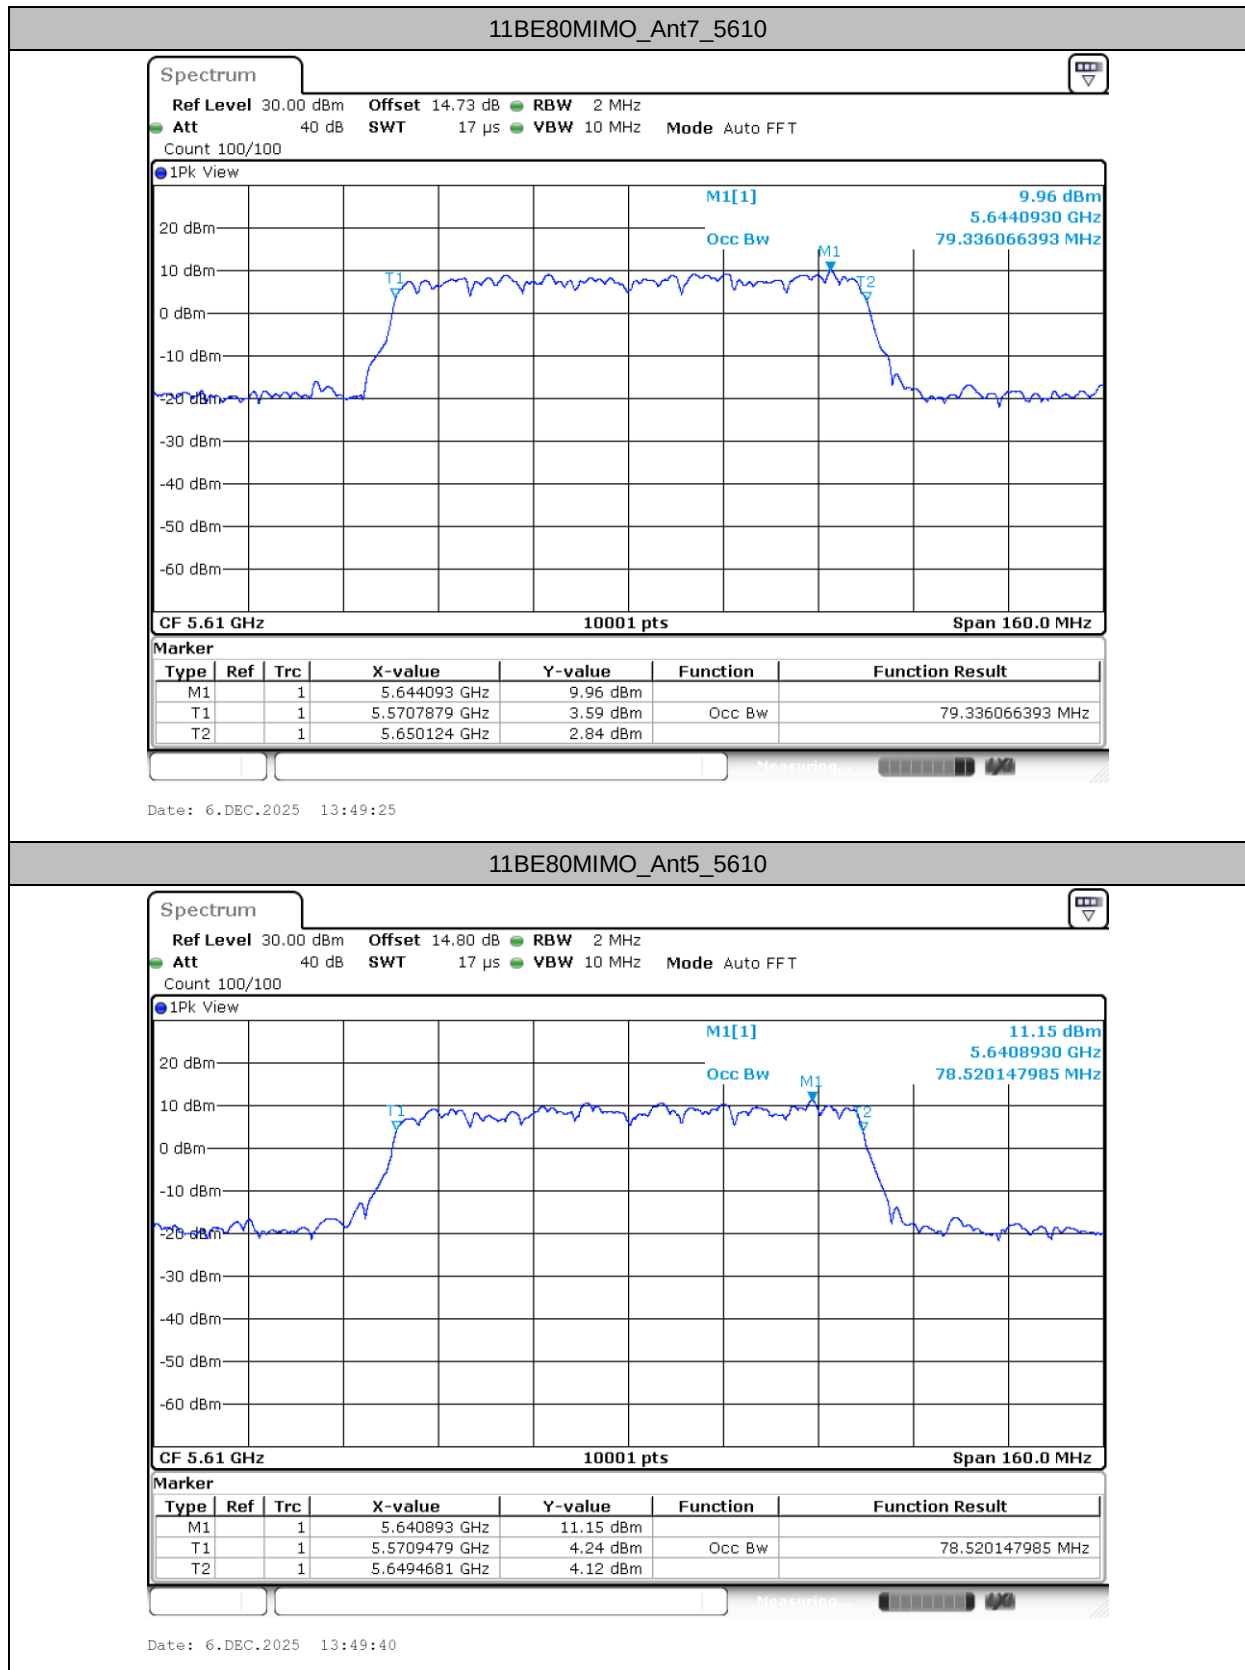

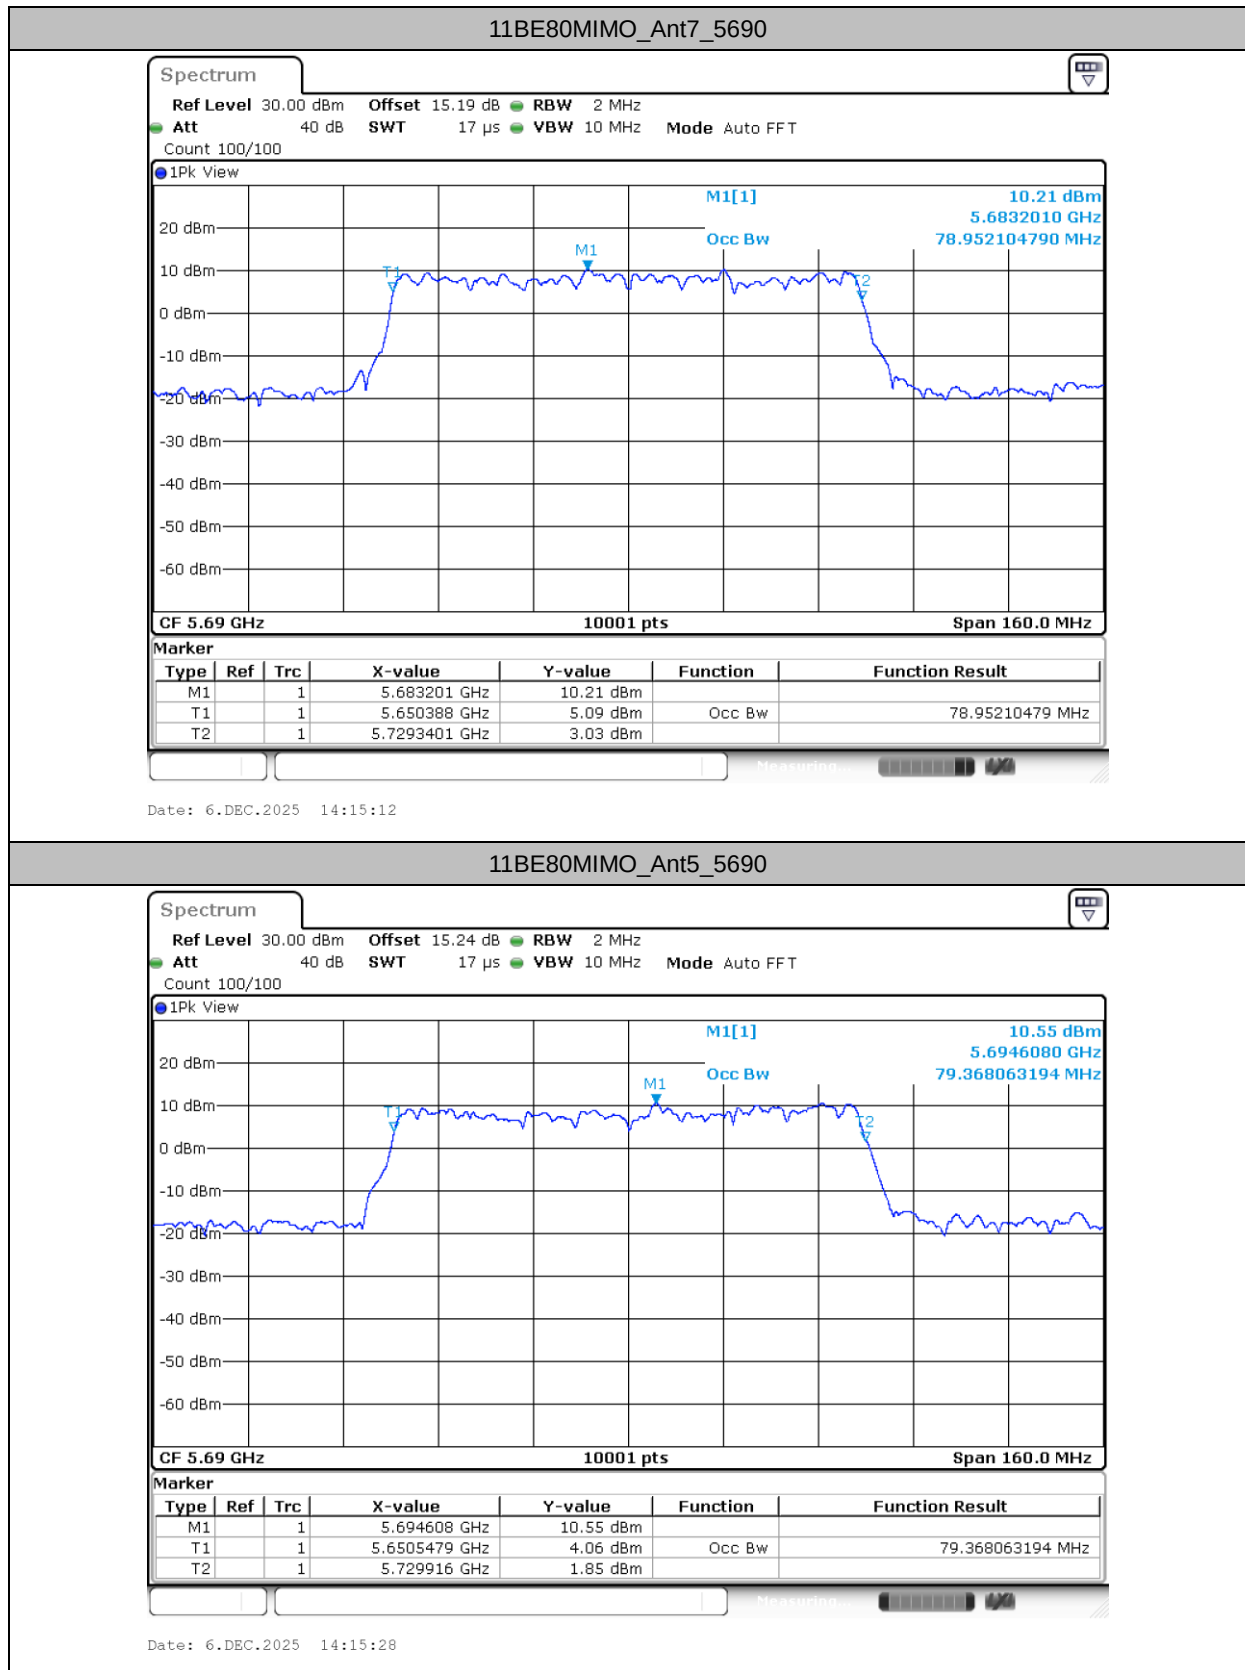

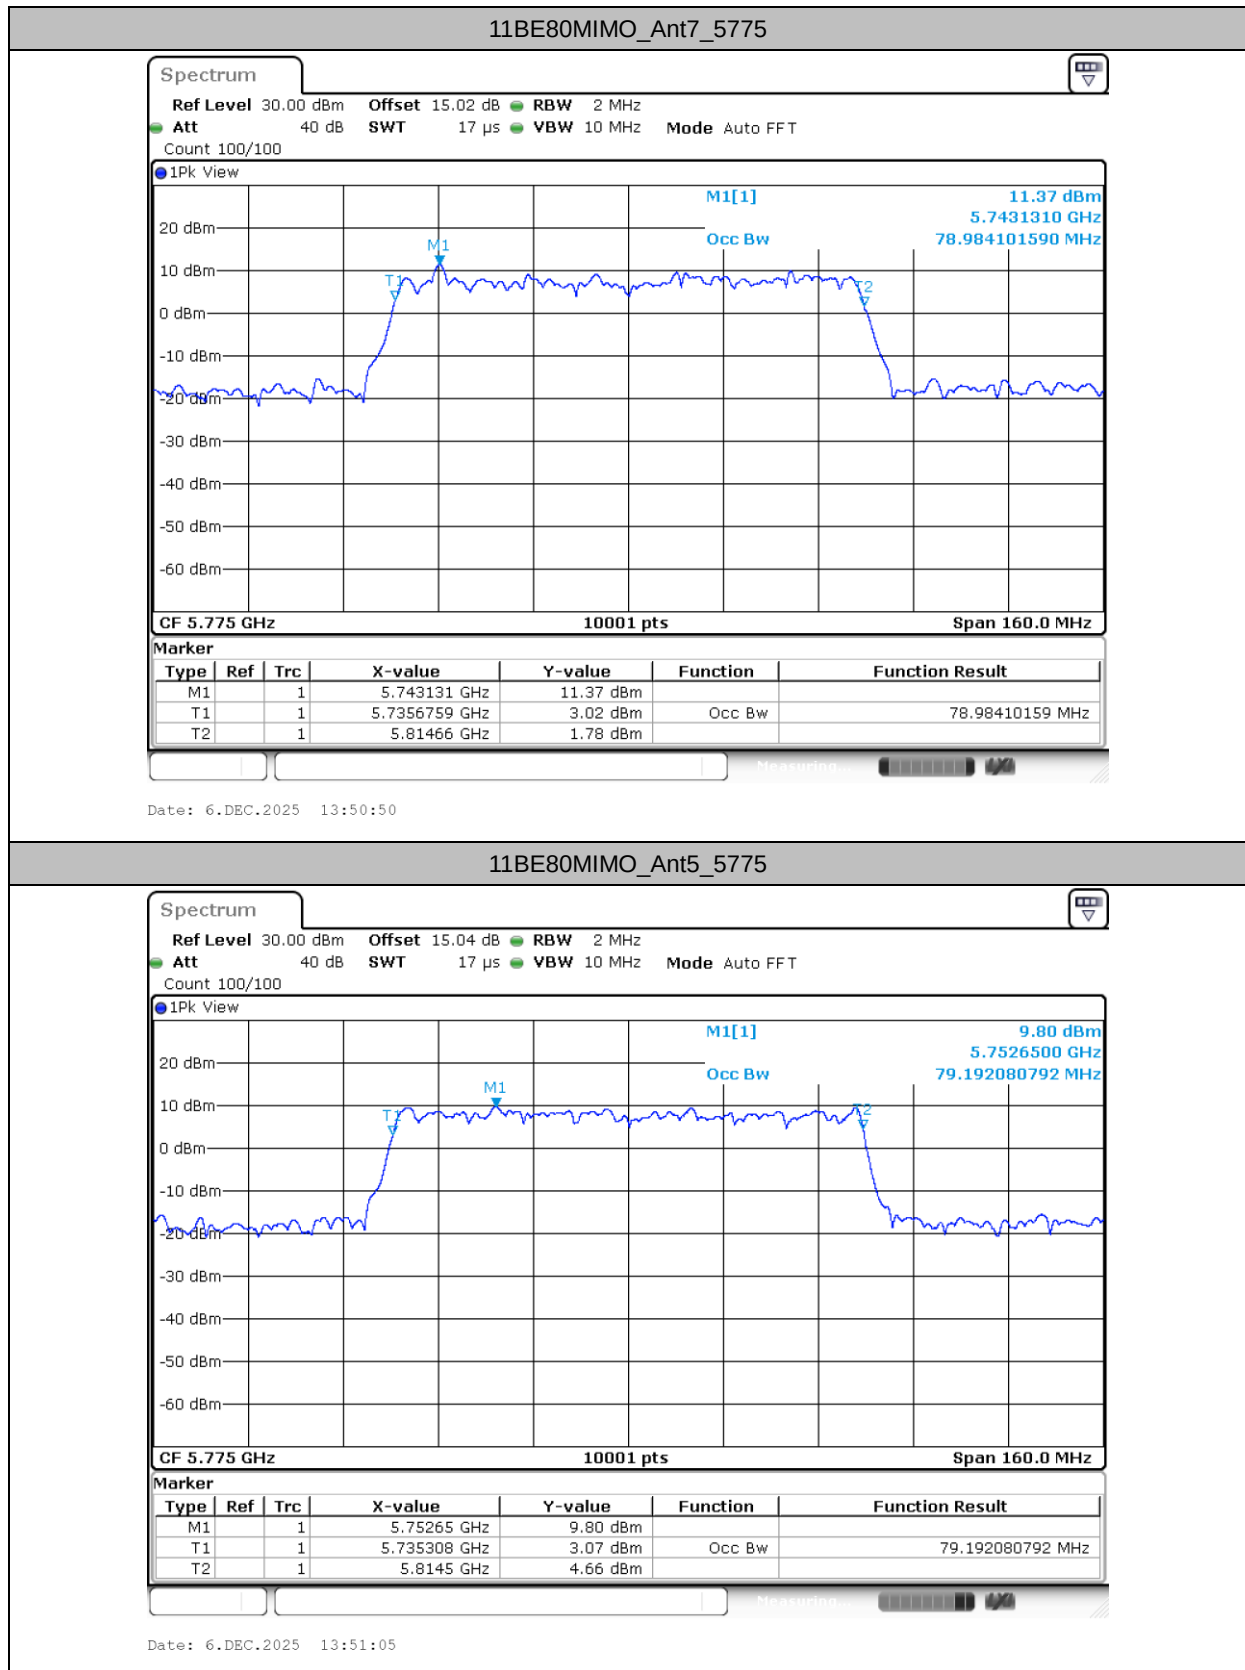

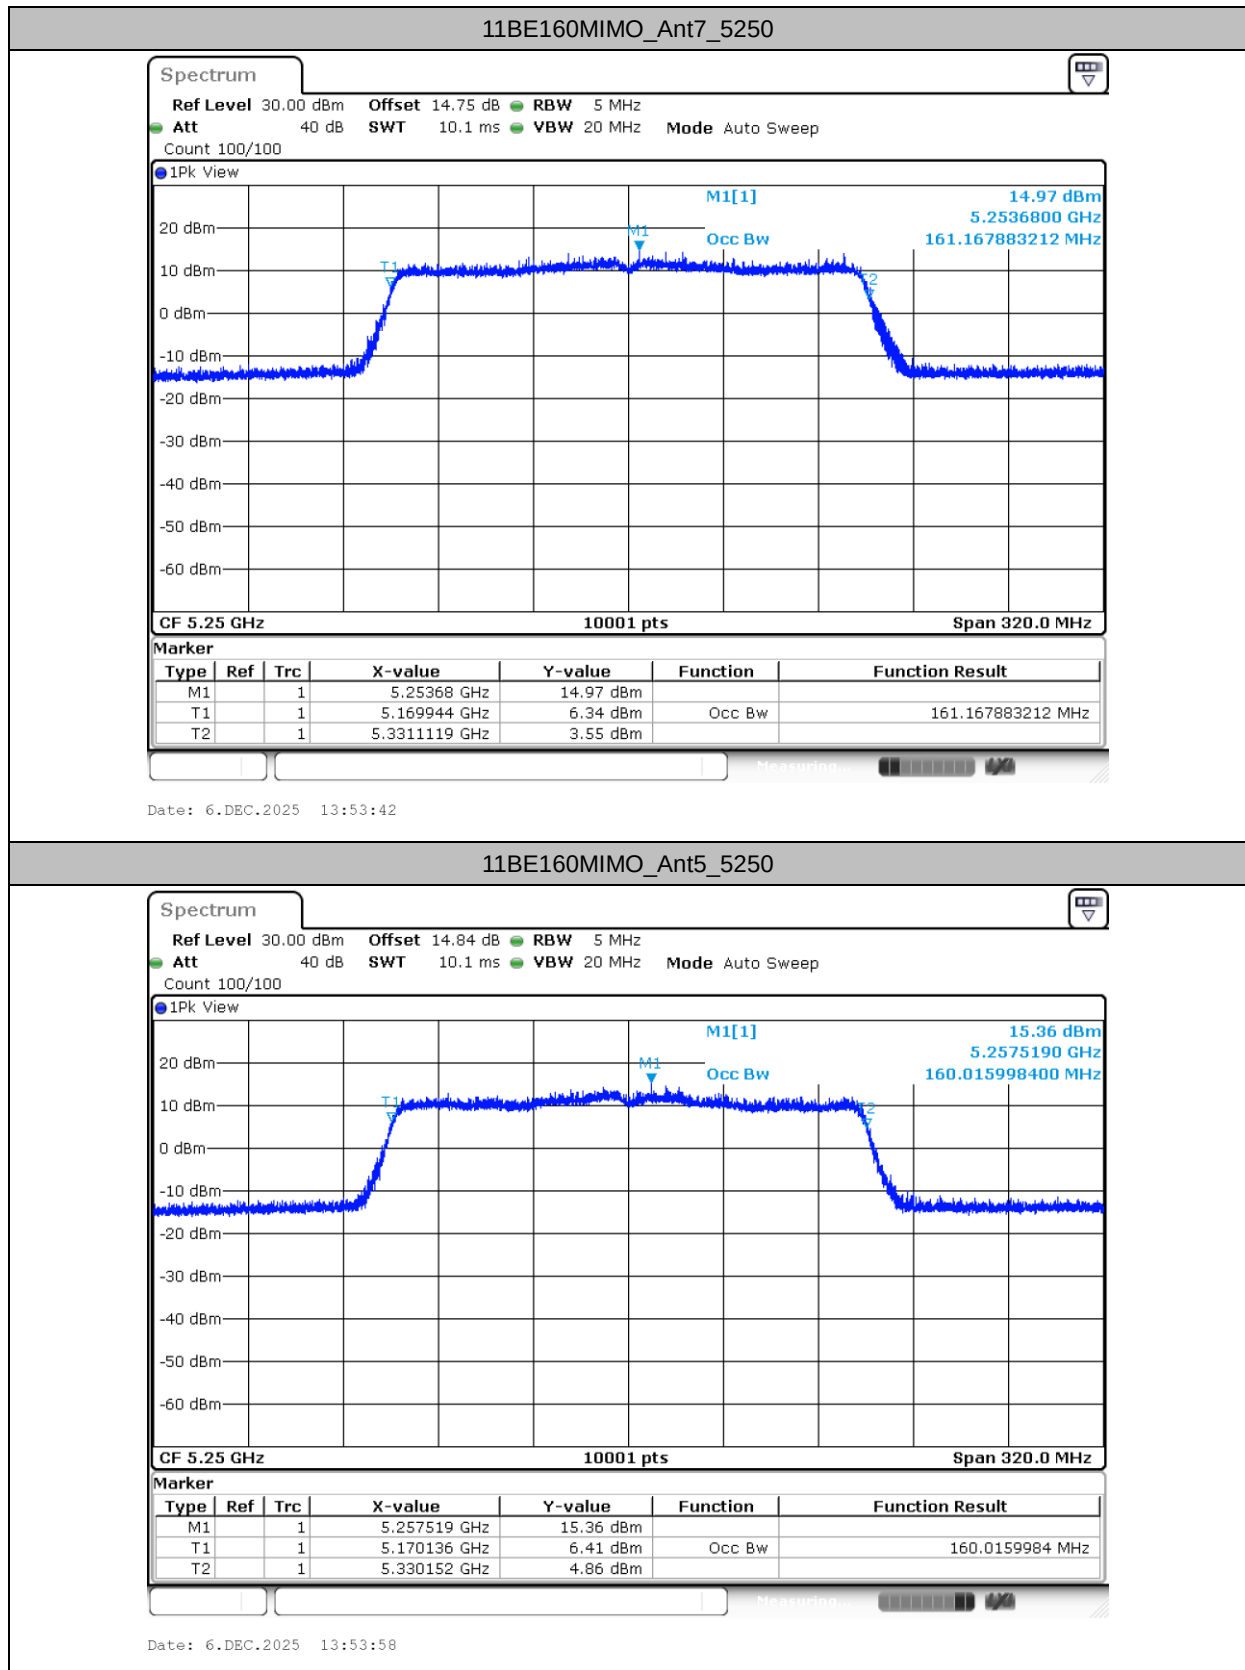


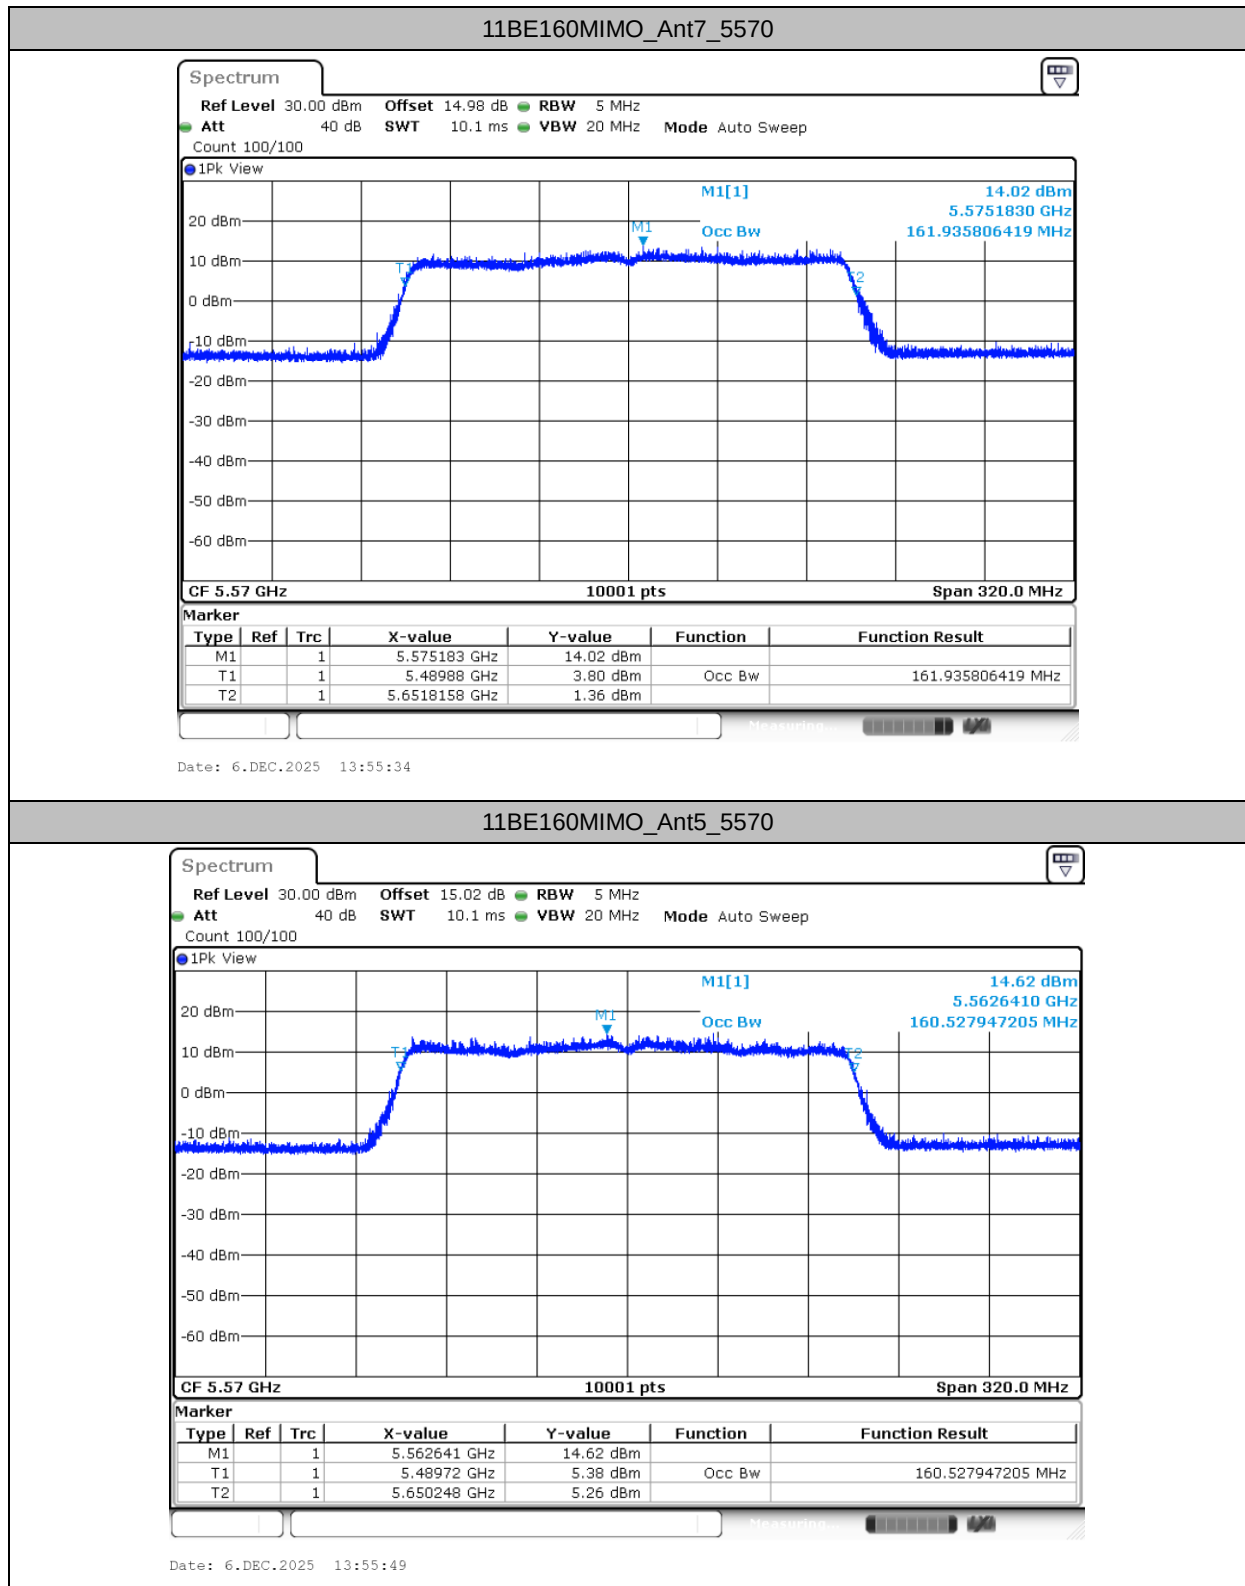



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Winter	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

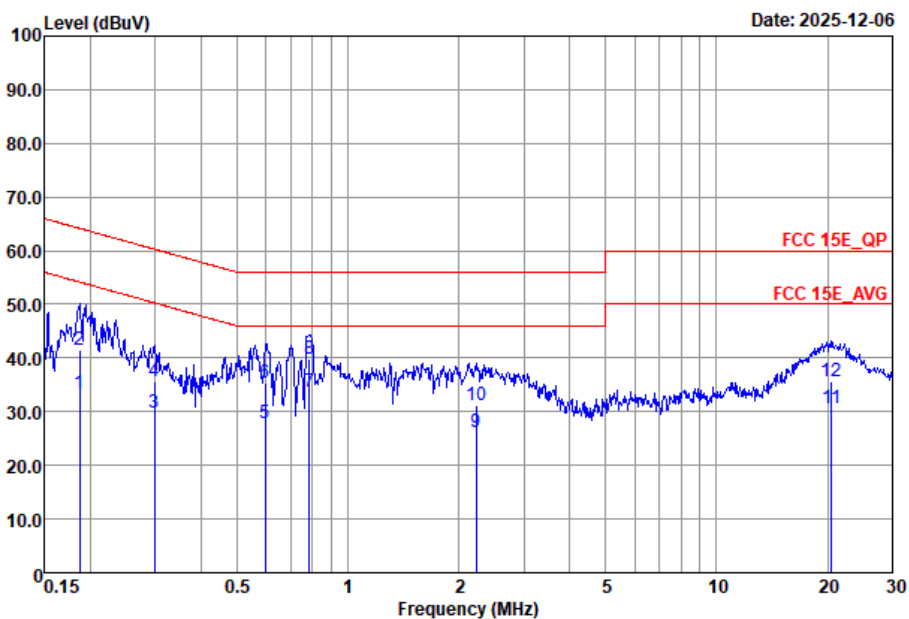


Site : C002-SZ
Condition : FCC 15E_QP LISN_2025-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.19	33.48	-20.67	54.15	13.60	9.70	10.18	Average
2	0.19	41.58	-22.57	64.15	21.70	9.70	10.18	QP
3	0.30	29.77	-20.51	50.28	9.80	9.76	10.21	Average
4	0.30	35.67	-24.61	60.28	15.70	9.76	10.21	QP
5	0.60	27.90	-18.10	46.00	8.00	9.66	10.24	Average
6	0.60	35.30	-20.70	56.00	15.40	9.66	10.24	QP
7	0.79	33.80	-12.20	46.00	13.91	9.66	10.23	Average
8 *	0.79	39.80	-16.20	56.00	19.91	9.66	10.23	QP
9	2.22	26.22	-19.78	46.00	6.30	9.66	10.26	Average
10	2.22	31.32	-24.68	56.00	11.40	9.66	10.26	QP
11	20.49	30.64	-19.36	50.00	10.45	9.71	10.48	Average
12	20.49	35.69	-24.31	60.00	15.50	9.71	10.48	QP



Test Engineer :	Winter	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

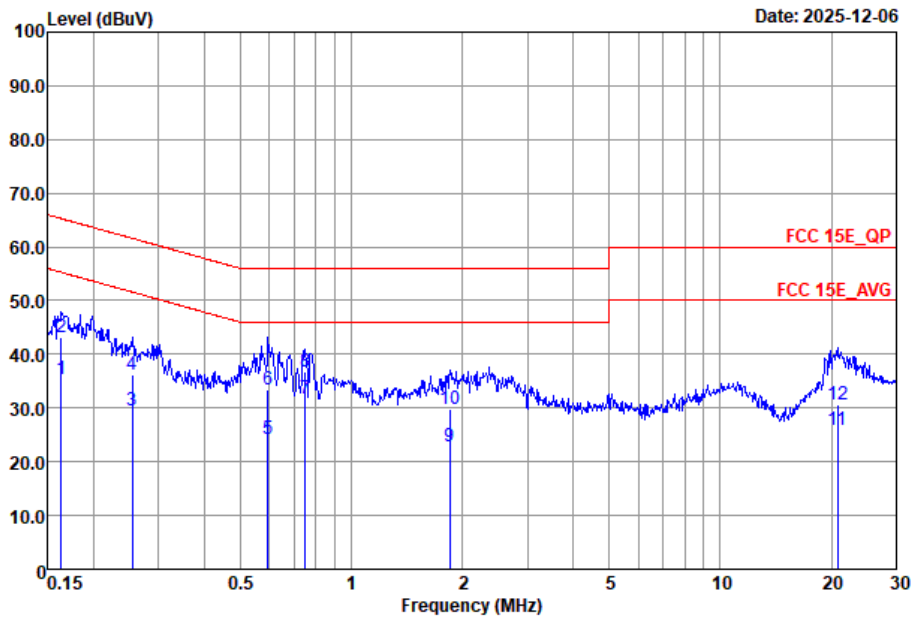

Site : CO02-SZ
Condition : FCC 15E_QP LISN_2025-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.16	35.47	-19.83	55.30	15.60	9.68	10.19	Average
2	0.16	43.07	-22.23	65.30	23.20	9.68	10.19	QP
3	0.25	29.45	-22.15	51.60	9.70	9.55	10.20	Average
4	0.25	36.25	-25.35	61.60	16.50	9.55	10.20	QP
5	0.59	24.18	-21.82	46.00	4.30	9.64	10.24	Average
6	0.59	33.48	-22.52	56.00	13.60	9.64	10.24	QP
7	0.75	31.77	-14.23	46.00	11.80	9.74	10.23	Average
8 *	0.75	36.77	-19.23	56.00	16.80	9.74	10.23	QP
9	1.85	22.86	-23.14	46.00	2.89	9.71	10.26	Average
10	1.85	29.76	-26.24	56.00	9.79	9.71	10.26	QP
11	20.81	25.80	-24.20	50.00	5.50	9.81	10.49	Average
12	20.81	30.60	-29.40	60.00	10.30	9.81	10.49	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	Wenbo Xiao	Relative Humidity :	50%
		Temperature :	20~22°C

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-2C	5.47-5.725	7+5	802.11be EHT40	134	5670	MCS0	-	-
Mode 2	U-NII-3	5.725-5.85	7+5	802.11ax HE40	151	5755	MCS0	-	-
Mode 3	CO_TX		7+5	802.11be EHT40	134	5670	MCS0	-	-
			7+5	802.11ax HE20	1	2412	MCS0	FULL	
			4	LTE B48					-
Mode 4	CO_TX		7+5	802.11be EHT40	134	5670	MCS0	-	-
			7+5	Bluetooth-LE	39	2480	2M		
			4	LTE B48					-
Mode 5	U-NII-2C	5.47-5.725	7+5	802.11be EHT40-LF	134	5670	MCS0	-	LF
Mode 6	U-NII-3	5.47-5.725	7+5	802.11ax HE40-LF	151	5755	MCS0	-	LF

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	PEAK Avg.	Result	Remark
1	802.11be EHT40	134	5727.95	65.12	68.30	-3.18	H	PEAK	Pass	Band Edge
1	802.11be EHT40	134	17010.00	48.54	68.30	-19.76	V	Peak	Pass	Harmonic
2	802.11ax HE40	151	5649.14	58.96	68.30	-9.34	V	PEAK	Pass	Band Edge
2	802.11ax HE40	151	17265.00	49.53	68.30	-18.77	V	Peak	Pass	Harmonic
3	802.11be EHT40	134	-	-	-	-	-	-	-	Band Edge
3	802.11be EHT40	134	17010.00	48.79	68.30	-19.51	V	Peak	Pass	Harmonic
4	802.11be EHT40	134	-	-	-	-	-	-	-	Band Edge
4	802.11be EHT40	134	17010.00	48.77	68.30	-19.53	V	Peak	Pass	Harmonic
5	802.11be EHT40-LF	134	201.69	33.56	43.50	-9.94	H	Peak	Pass	LF
6	802.11ax HE40-LF	151	200.72	33.94	43.50	-9.56	H	Peak	Pass	LF