FCC RF Test Report

APPLICANT	:	Motorola Mobility LLC
EQUIPMENT	:	Mobile Cellular Phone
BRAND NAME	:	Motorola
MODEL NAME	:	XT2453-3, XT2453-4, XT2453-5, XT2453V
FCC ID	:	IHDT56AR7
STANDARD	:	FCC Part 15 Subpart E §15.407
CLASSIFICATION	:	15E 6 GHz Low Power Indoor Client (6XD)
TEST DATE(S)	:	Feb. 24, 2024 ~ Apr. 07, 2024

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (ShenZhen)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia

ACCREDITED
Cert #5145.02

Sporton International Inc. (Kunshan)
No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China

Table of Contents

1 General Description 5
1.1 Applicant 5
1.2 Manufacturer 5
1.3 Product Feature of Equipment Under Test 5
1.4 Product Specification of Equipment Under Test 6
1.5 Modification of EUT 6
1.6 Specification of Accessory 7
1.7 Testing Location 7
1.8 Test Software 8
1.9 Applicable Standards 8
2 Test Configuration of Equipment Under Test 9
2.1 Carrier Frequency and Channel 9
2.2 Test Mode 11
2.3 Connection Diagram of Test System 13
2.4 Support Unit used in test configuration and system 14
2.5 EUT Operation Test Setup 14
2.6 Measurement Results Explanation Example 14
3 Test Result 15
3.1 26dB & 99% Occupied Bandwidth Measurement 15
3.2 Maximum conducted Output Power and Fundamental Maximum EIRP Measurement 19
3.3 Fundamental Power Spectral Density Measurement 20
3.4 In-Band Emissions (Channel Mask) 33
3.5 Contention Based Protocol 55
3.6 Unwanted Emissions Measurement 64
3.7 AC Conducted Emission Measurement 68
3.8 Antenna Requirements 70
4 List of Measuring Equipment 72
5 Measurement Uncertainty 73
Appendix A. Conducted Test Results
Appendix B. AC Conducted Emission Test Result
Appendix C. Radiated Spurious Emission
Appendix D. Duty Cycle Plots
Appendix E. Setup Photographs

History of this test report

Report No.	Version	Description	Issued Date
FR422203G	01	Initial issue of report	Apr. 10, 2024

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.407(a)(11)	26dB Emission Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.407(a)(8)	Maximum Conducted Output Power	Reporting only	-
3.2	15.407(a)(8)	Fundamental Maximum EIRP	Pass	-
3.3	15.407(a)(8)	Fundamental Power Spectral Density	Pass	-
3.4	15.407(b)(6)	In-Band Emissions (Channel Mask)	Pass	-
3.5	15.407(d)(6)	Contention Based Protocol	Pass	
3.6	15.407(b)	Unwanted Emissions	Pass	Under limit 3.22 dB at 2389.52 MHz
3.7	15.207	AC Conducted Emission	Pass	Under limit 16.31 dB at 0.502 MHz
3.8	15.203 15.407(a)	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section “Measurement Uncertainty”

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2453-3, XT2453-4, XT2453-5, XT2453V
FCC ID	IHDT56AR7
IMEI Code	Conducted: 358394210025438 Conduction: 358394210030735/358394210030743 Radiation: 358394210030412/358394210030420 CBP:358394210026279/358394210026287
HW Version	DVT2
SW Version	U3UC34.22
EUT Stage	Identical Prototype

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. The Four models are only for market segment purpose, no other difference.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	U-NII-5: 5925 MHz ~ 6425 MHz U-NII-6: 6425 MHz ~ 6525 MHz U-NII-7: 6525 MHz ~ 6875 MHz U-NII-8: 6875 MHz ~ 7125 MHz
Maximum EIRP	**<MIMO Ant.5+7>** **<5925 MHz ~ 7125 MHz >** 802.11ax HE20 : 6.24 dBm / 0.0042 W 802.11ax HE40 : 7.05 dBm / 0.0051 W 802.11ax HE80 : 6.82 dBm / 0.0048 W
99% Occupied Bandwidth	802.11ax HE20 : 19.03 MHz 802.11ax HE40 : 37.56 MHz 802.11ax HE80 : 77.80 MHz
Antenna Type / Gain	**<5925 MHz ~ 6425 MHz >** <Ant. 5> : Metal Antenna with gain -7.00 dBi <Ant. 7> : IFA Antenna with gain -7.00 dBi **<6425 MHz ~ 6525 MHz >** <Ant. 5> : Metal Antenna with gain -7.20 dBi <Ant. 7> : IFA Antenna with gain -7.20 dBi **<6525 MHz ~ 6875 MHz >** <Ant. 5> : Metal Antenna with gain -7.00 dBi <Ant. 7> : IFA Antenna with gain -6.80 dBi **<6875 MHz ~ 7125 MHz >** <Ant. 5> : Metal Antenna with gain -7.00 dBi <Ant. 7> : IFA Antenna with gain -7.00 dBi
Type of Modulation	802.11ax: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)

Remark:

1. WLAN 11ax support MIMO CDD & Beamforming mode, the maximimum EIRP of Beamforming mode will set less than CDD mode, thus full test CDD mode.
2. For WLAN SISO & MIMO mode, the whole testing has assessed only MIMO mode by referring to the higher normal output power.
3. 802.11ax support full RU tone and partial RU tone, both full RU and partial RU-left (for low CH) and partial RU-right (for high CH) are tested for conducted power/PSD/Channel Mask, all the other test case were performed with full RU with its maximum power/PSD.
4. The device does not support 802.11ax channel puncturing mode.
5. The device does not support UNII-8_CH233 (BW=20M, Center Frequency = 7115MHz).
6. CBP test with antenna path of minimum gain (Antenna 5, Gain = -7.2dBi).

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Specification of Accessory

Specification of Accessory				
Battery 1	**Brand Name**	Motorola	**Model Name**	QR11
Battery 2	**Brand Name**	Motorola	**Model Name**	QR31
USB Cable 1	**Brand Name**	Motorola(CABLETECH)	**Model Name**	SC18E05246
USB Cable 2	**Brand Name**	Motorola(SAIBAO)	**Model Name**	SC18D86732

1.7 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	**Sporton Site No.**	**FCC Designation No.**	**FCC Test Firm Registration No.**
	CO01-KS DFS01-KS	CN1257	314309

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	**Sporton Site No.**	**FCC Designation No.**	**FCC Test Firm Registration No.**
	TH01-SZ	CN1256	421272

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	**Sporton Site No.**	**FCC Designation No.**	**FCC Test Firm Registration No.**
	03CH01-SZ	CN1256	421272

1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	CO01-KS	AUDIX	E3	6.2009-8-24
2.	03CH01-SZ	AUDIX	E3	6.2009-8-24

1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart E
- FCC KDB 987594 D02 U-NII 6 GHz EMC Measurement v02r01
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- FCC KDB 414788 D01 Radiated Test Site v01r01.
- FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

<U-NII-5, 6, 7, 8>

BW 20M	**Channel**	1	5	9	13	17	21	25	29
	Freq. (MHz)	5955	5975	5995	6015	6035	6055	6075	6095
BW 40M	**Channel**	3		11		19		27	
	Freq. (MHz)	5965		6005		6045		6085	
BW 80M	**Channel**	7				23			
	Freq. (MHz)	5985				6065			

BW 20M	**Channel**	33	37	41	45	49	53	57	61
	Freq. (MHz)	6115	6135	6155	6175	6195	6215	6235	6255
BW 40M	**Channel**	35		43		51		59	
	Freq. (MHz)	6125		6165		6205		6245	
BW 80M	**Channel**	39				55			
	Freq. (MHz)	6145				6225			

BW 20M	**Channel**	65	69	73	77	81	85	89	93
	Freq. (MHz)	6275	6295	6315	6335	6355	6375	6395	6415
BW 40M	**Channel**	67		75		83		91	
	Freq. (MHz)	6285		6325		6365		6405	
BW 80M	**Channel**	71				87			
	Freq. (MHz)	6305				6385			

BW 20M	**Channel**	97	101	105	109	113	117	121	125
	Freq. (MHz)	6435	6455	6475	6495	6515	6535	6555	6575
BW 40M	**Channel**	99		107		115		123	
	Freq. (MHz)	6445		6485		6525		6565	
BW 80M	**Channel**	103				119			
	Freq. (MHz)	6465				6545			

BW 20M	Channel	129	133	137	141	145	149	153	157
	Freq. (MHz)	6595	6615	6635	6655	6675	6695	6715	6735
BW 40M	Channel	131		139		147		155	
	Freq. (MHz)	6605		6645		6685		6725	
BW 80M	Channel	135				151			
	Freq. (MHz)	6625				6705			

BW 20M	Channel	161	165	169	173	177	181	185	189
	Freq. (MHz)	6755	6775	6795	6815	6835	6855	6875	6895
BW 40M	Channel	163		171		179		187	
	Freq. (MHz)	6765		6805		6845		6885	
BW 80M	Channel	167				183			
	Freq. (MHz)	6785				6865			

BW 20M	Channel	193	197	201	205	209	213	217	221
	Freq. (MHz)	6915	6935	6955	6975	6995	7015	7035	7055
BW 40M	Channel	195		203		211		219	
	Freq. (MHz)	6925		6965		7005		7045	
BW 80M	Channel	199				215			
	Freq. (MHz)	6945				7025			

BW 20M	Channel	225	229
	Freq. (MHz)	7075	7095
BW 40M	Channel	227	
	Freq. (MHz)	7085	

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : GSM 850 Idle + BT Link + WLAN Link(6G) + USB Cable1(Charging From Adaptor)
Remark: For Radiated Test Cases, the EUT is a folding phone, pretest the open status and closed status, only the worst status perform final test and record in the report. For the accessories, pretest standalone mode / Earphone mode / Adapter mode / Wireless charging mode, only the worst status perform final test and record in the report.	

Simultaneous transmission
5G NR n48 ULMIMO Link + 802.11ax HE80 CH215_MIMO TX + BLE 2M_CH38_TX 5G NR n48 ULMIMO Link + 802.11ax HE80 CH215_MIMO TX + 802.11ax HE40 CH03_MIMO TX

Ch. #		5925-6425 MHz UNII-5	6425-6525 MHz UNII-6	6525-6875 MHz UNII-7	6875-7125 MHz UNII-8
		802.11ax HE20	802.11ax HE20	802.11ax HE20	802.11ax HE20
L	Low	001	097	117	189
M	Middle	045	105	149	209
H	High	093	113	181	229
Straddle		-	-	-	185

Ch. #		5925-6425 MHz UNII-5	6425-6525 MHz UNII-6	6525-6875 MHz UNII-7	6875-7125 MHz UNII-8
		802.11ax HE40	802.11ax HE40	802.11ax HE40	802.11ax HE40
L	Low	003	099	123	195
M	Middle	043	-	147	203
H	High	091	107	179	227
Straddle		-	115	-	187

Ch. #		5925-6425 MHz UNII-5	6425-6525 MHz UNII-6	6525-6875 MHz UNII-7	6875-7125 MHz UNII-8
		802.11ax HE80	802.11ax HE80	802.11ax HE80	802.11ax HE80
L	Low	007	103	135	199
M	Middle	039		151	-
H	High	087		167	215
Straddle		-	119	183	-

Remark: For radiation spurious emission, the final modulation and the worst data rate was reference the max RF conducted power.

2.3 Connection Diagram of Test System

For AC Conducted Emission

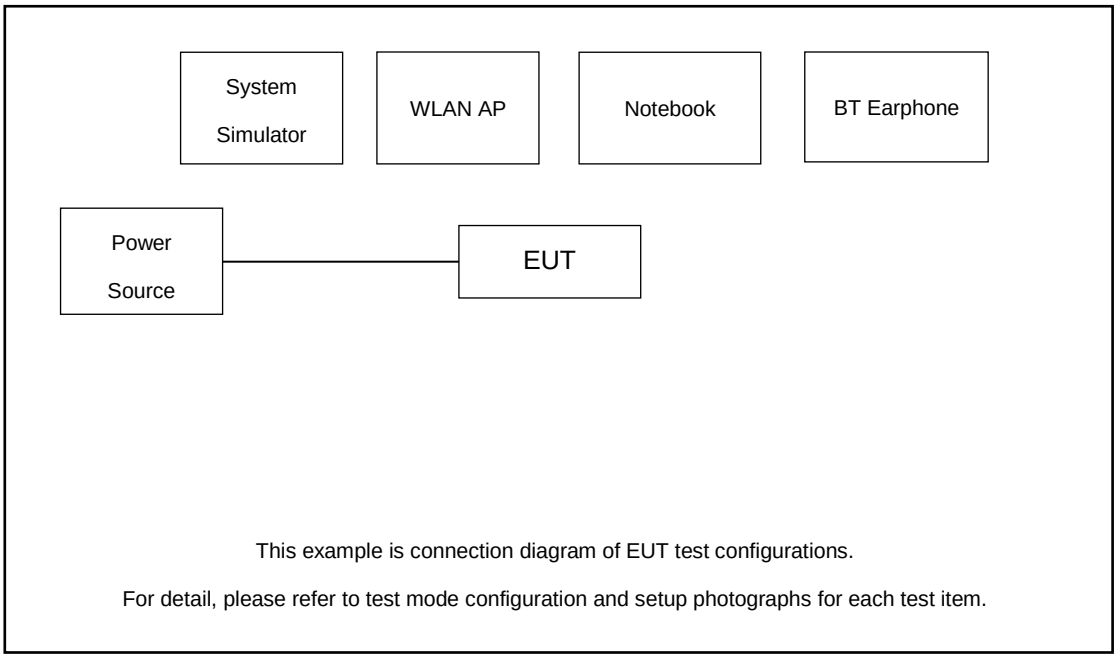

For Radiated Emission

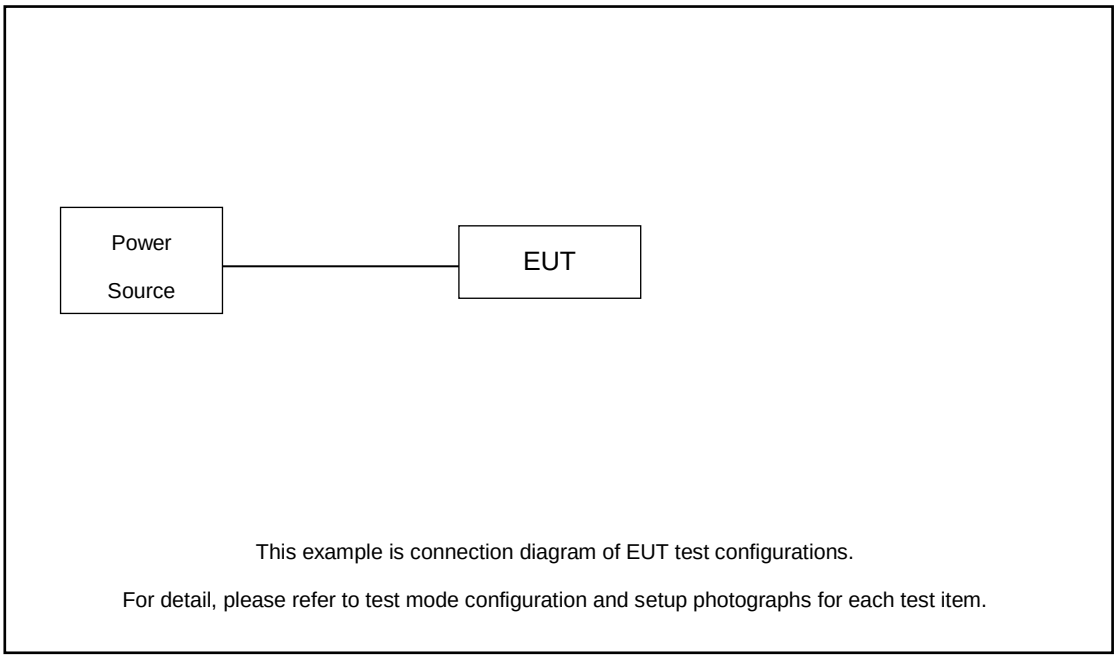

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8m
2.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
3.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
4.	AC Adapter	Moto	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program (QRCT TX Tool) was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 3.0 dB and 10dB attenuator.

Offset(dB) = RF cable loss(dB) + attenuator factor(dB).

= 3.0 + 10 = 13.0 (dB)

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 CFR 15.407 (a)(8)

The maximum transmitter channel bandwidth for U-NII devices in the 5.925-7.125 GHz band is 320 megahertz.

3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) ≥ 3 * RBW.
8. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

For 20MHz Bandwidth:

Maximum 26dB Bandwidth

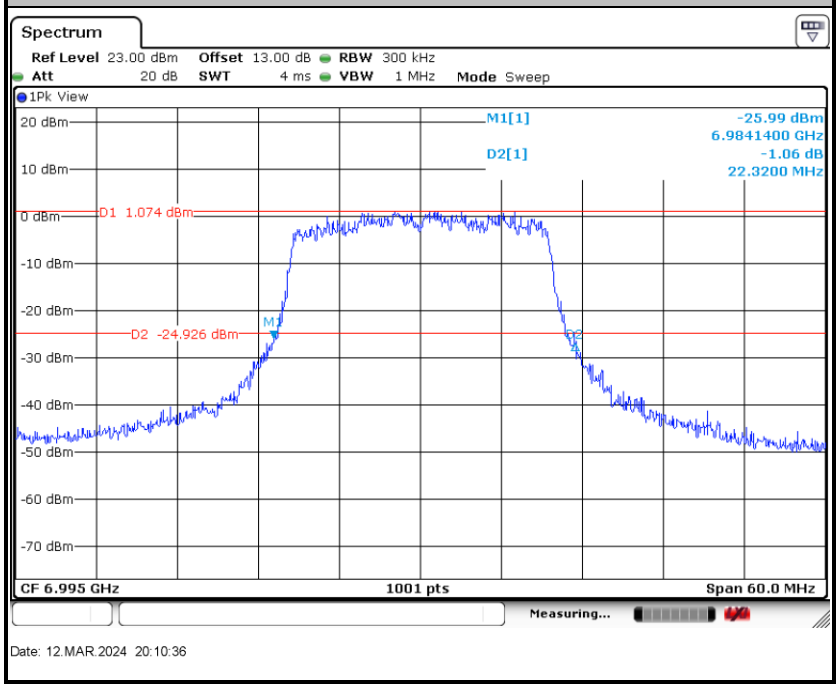

Maximum 99% Occupied Bandwidth

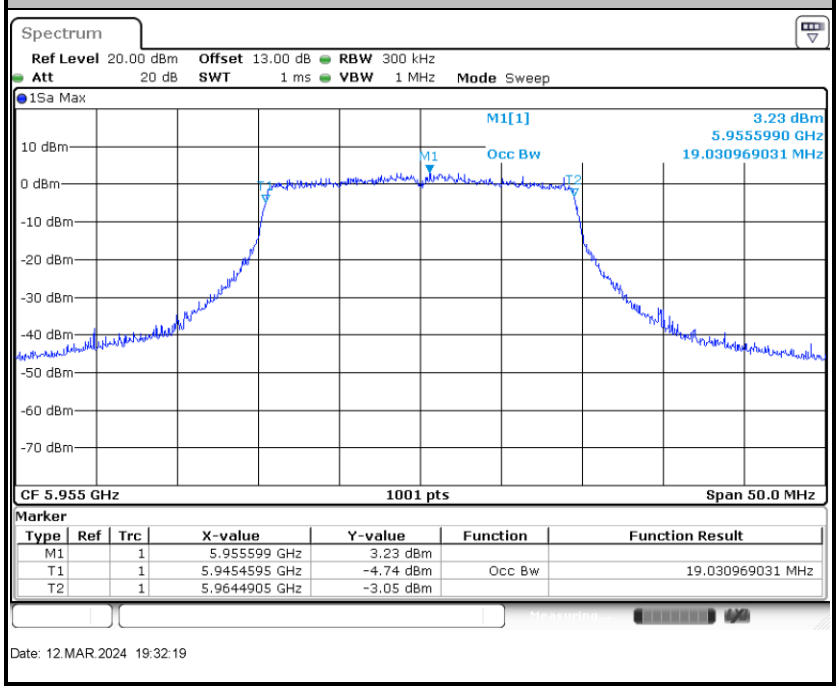

For 40MHz Bandwidth:

Maximum 26dB Bandwidth

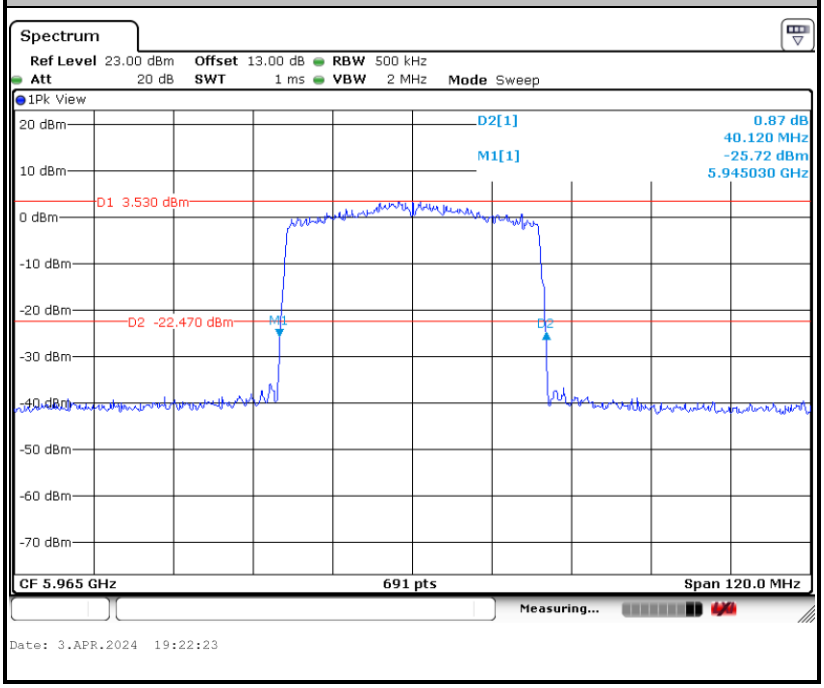

Maximum 99% Occupied Bandwidth

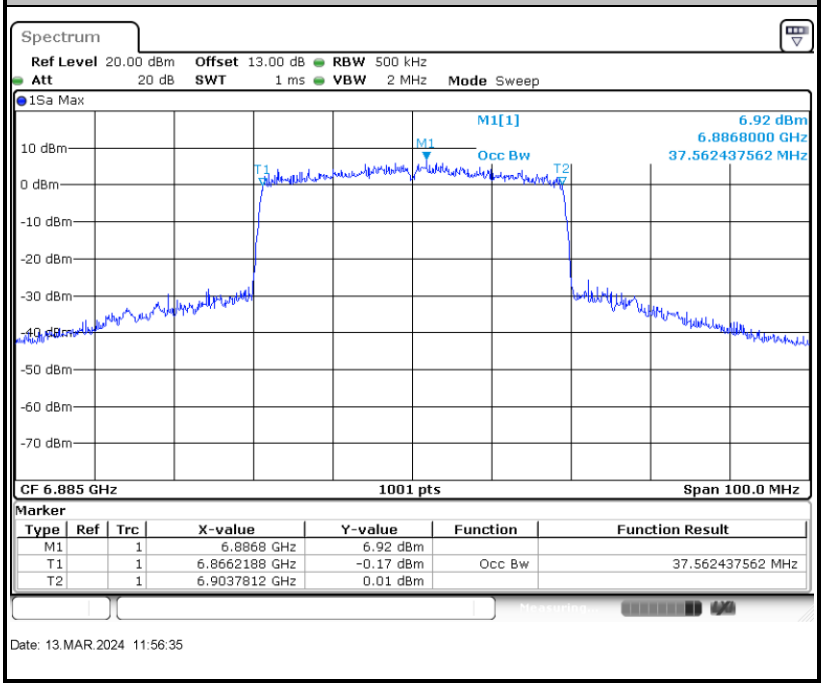

For 80MHz Bandwidth:

Maximum 26dB Bandwidth

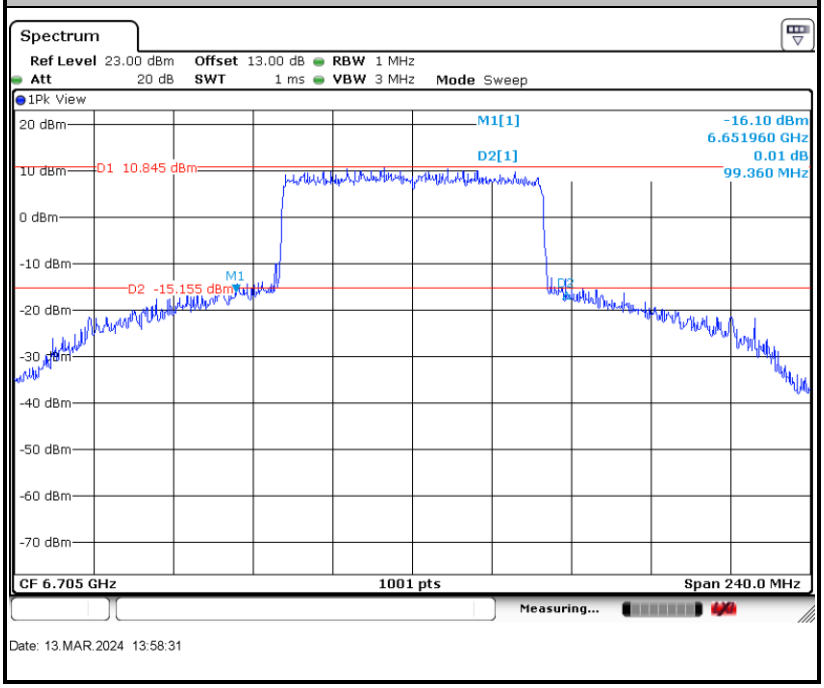

Maximum 99% Occupied Bandwidth

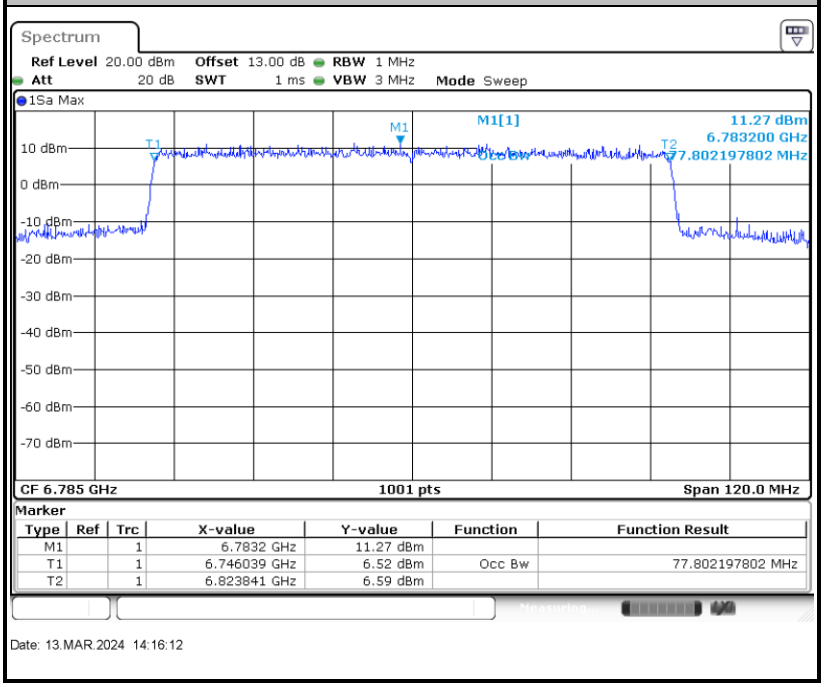

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Maximum conducted Output Power and Fundamental Maximum EIRP Measurement

3.2.1 Limit of Fundamental Maximum EIRP

<FCC 14-30 CFR 15.407>

(a)(8) For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum e.i.r.p. over the frequency band of operation must not exceed 24 dBm.

3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

3.2.3 Test Procedures

The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, 10 log(1/x), where x is the duty cycle.
4. For MIMO mode, the measure-and-sum technique should be used for measuring the in-band transmit power of a device.

3.2.4 Test Setup

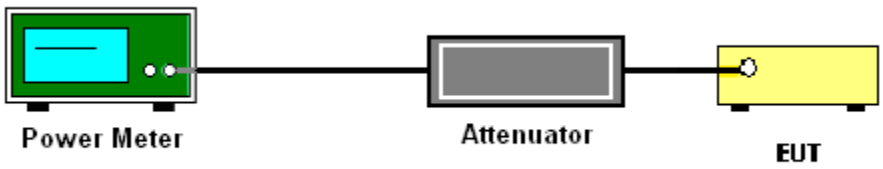

3.2.5 Test Result of Fundamental Maximum EIRP

Please refer to Appendix A.

3.3 Fundamental Power Spectral Density Measurement

3.3.1 Limit of Fundamental Power Spectral Density

<FCC 14-30 CFR 15.407>

(a)(8) For client devices operating under the control of an indoor access point in the 5.925-7.125 GHz bands, the maximum power spectral density must not exceed −1 dBm e.i.r.p. in any 1-megahertz band.

3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section F) Maximum power spectral density.

 # Method SA-2 #

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW ≥ 3 MHz.
- Number of points in sweep ≥ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add 10 log(1/x), where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add 10 log(1/0.25) = 6 dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, attenuator loss and duty factor. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

802.11ax HE20 Full RU	
Low CH01 5955MHz	High CH93 6415MHz
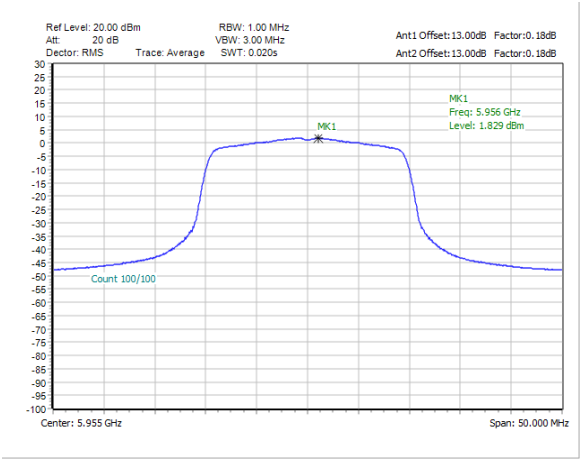	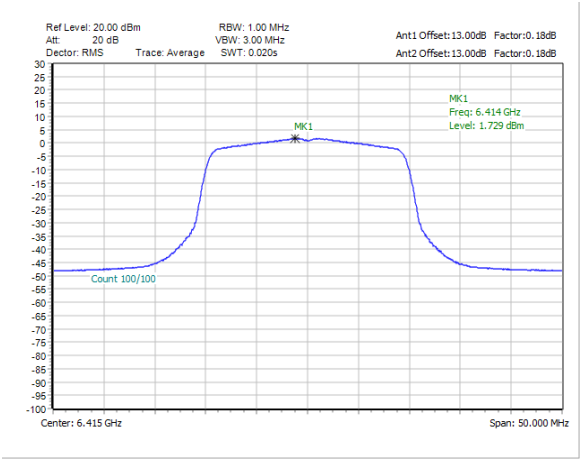
Middle CH45 6175MHz	
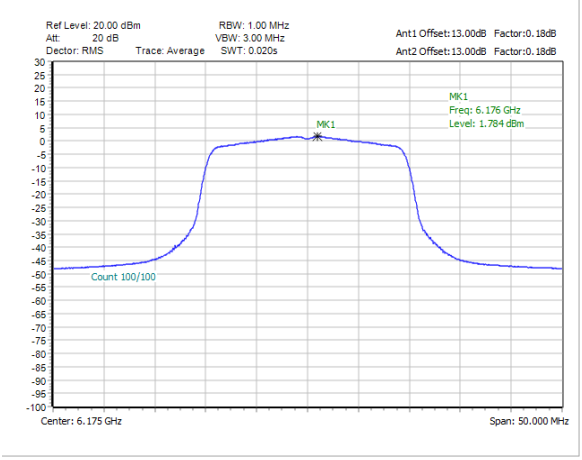	

802.11ax HE20 Full RU	
Low CH97 6435MHz	**High CH113 6515MHz**
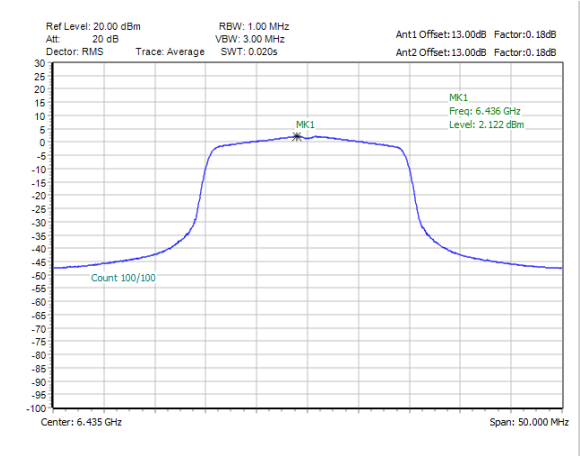	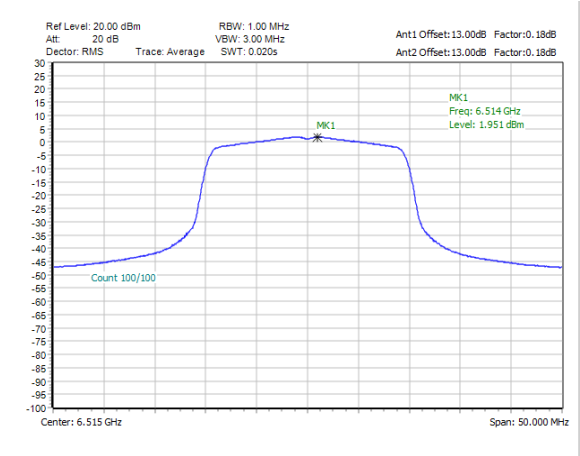
Middle CH 105 6475MHz	
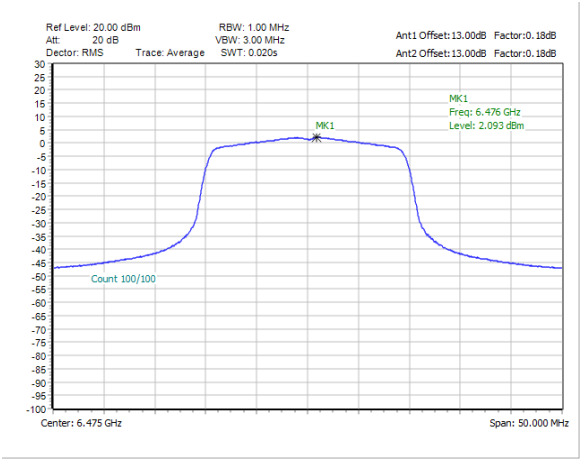	

802.11ax HE20 Full RU	
Low CH117 6535MHz	**High CH181 6855MHz**
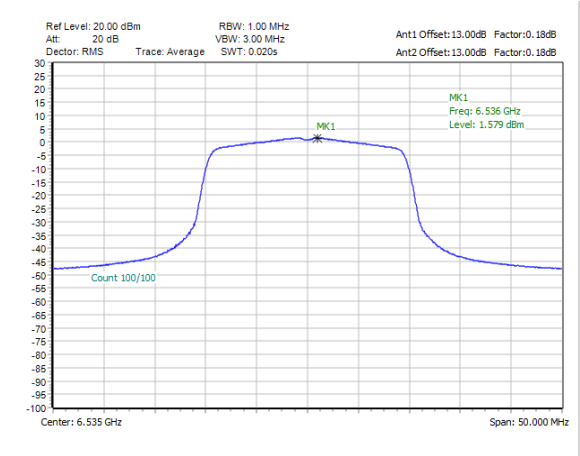	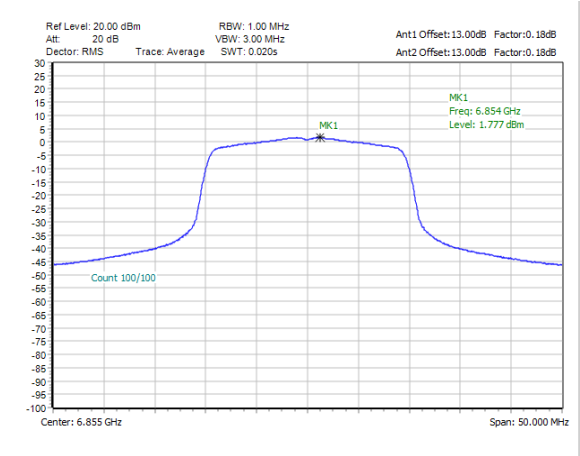
Middle CH149 6695MHz	
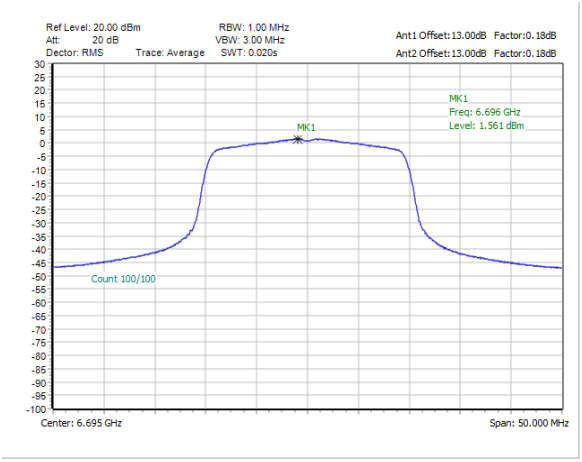	

802.11ax HE20 Full RU	
Low CH185 6875MHz	**High CH209 6995MHz**
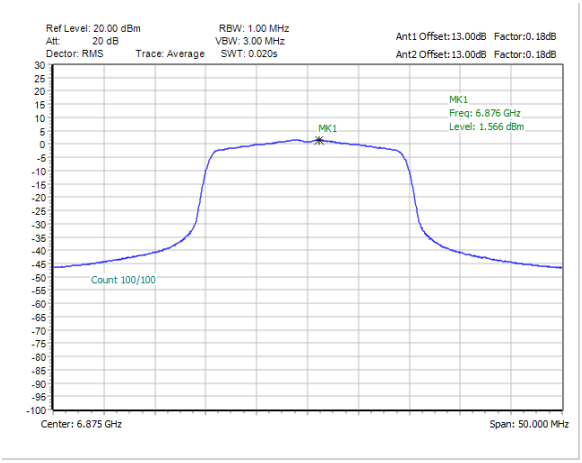	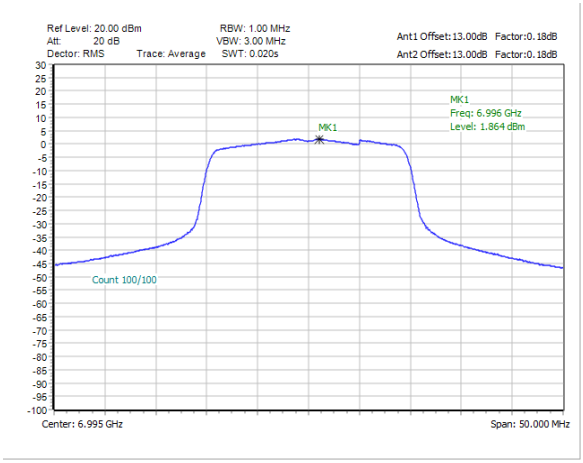
Middle CH189 6895MHz	
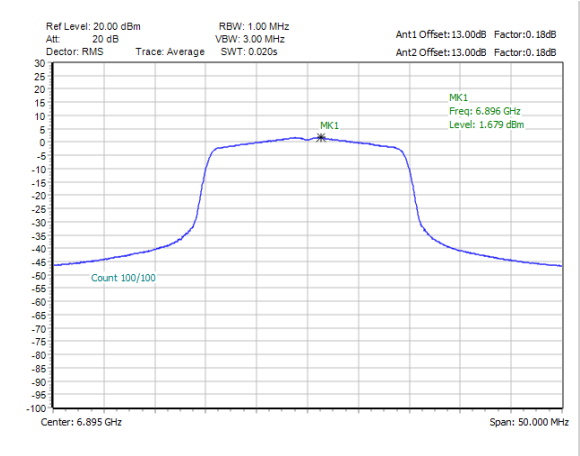	

802.11ax HE20 Full RU
Middle CH229 7095MHz
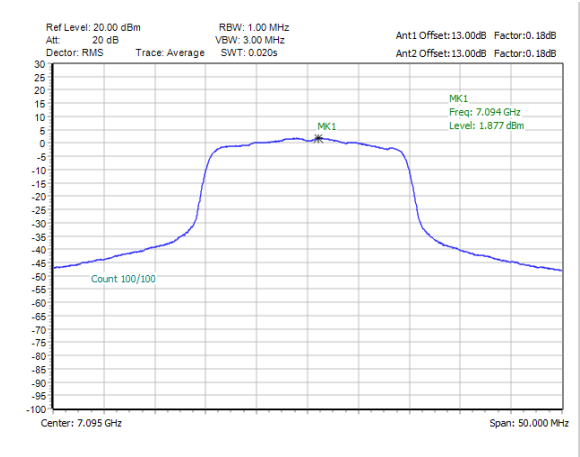

802.11ax HE40 Full RU	
Low CH03 5965MHz	**High CH91 6405MHz**
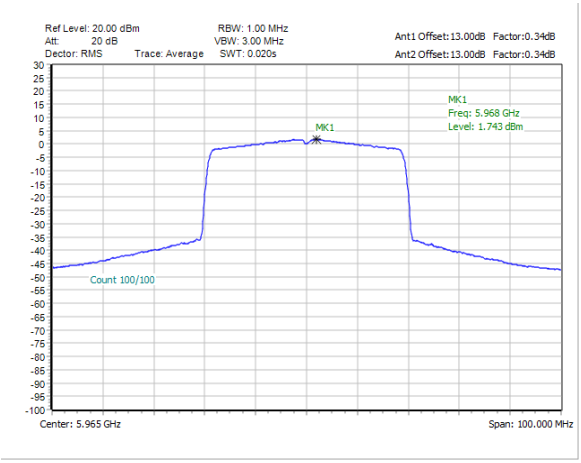	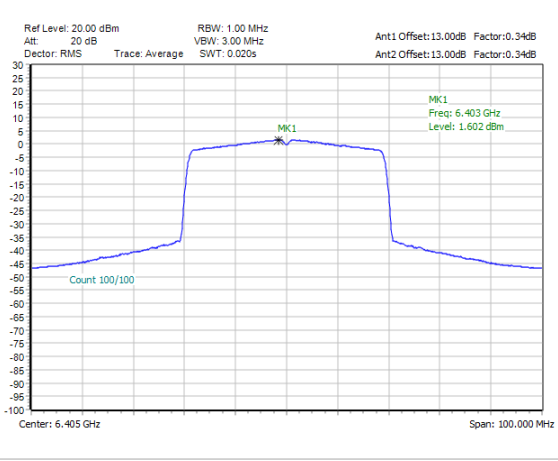
Middle CH43 6165MHz	
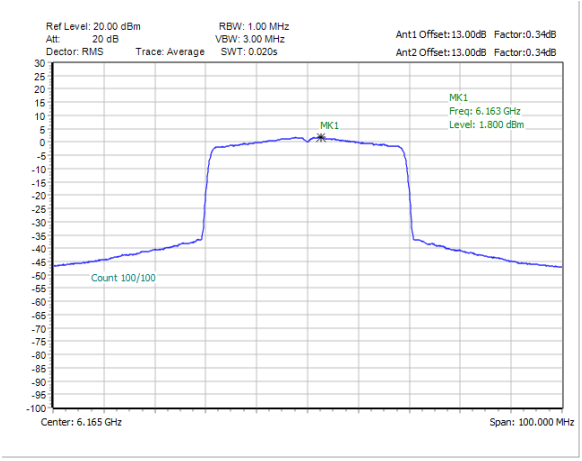	

802.11ax HE40 Full RU	
Low CH99 6445MHz	High CH115 6525MHz
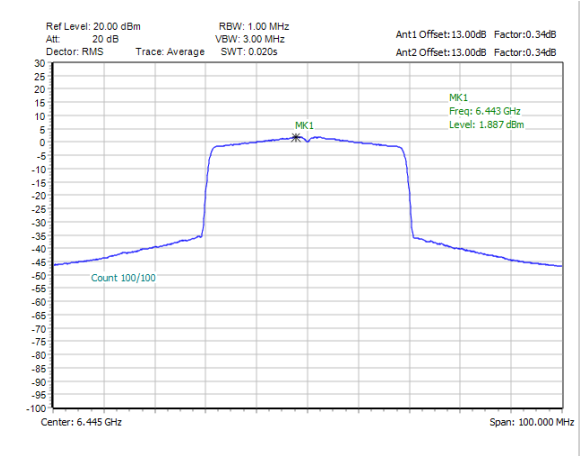	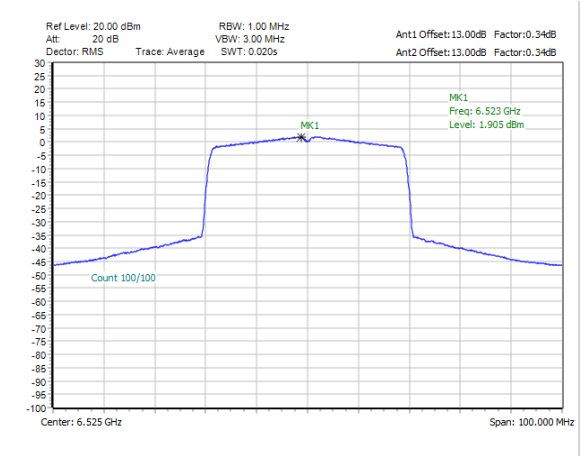
Middle CH107 6485MHz	
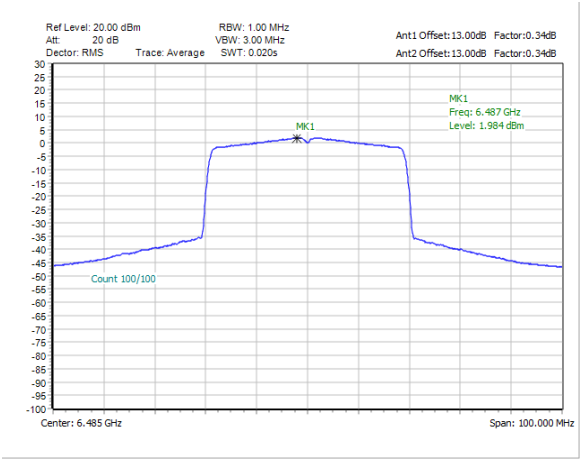	

802.11ax HE40 Full RU	
Low CH123 6565MHz	**High CH179 6845MHz**
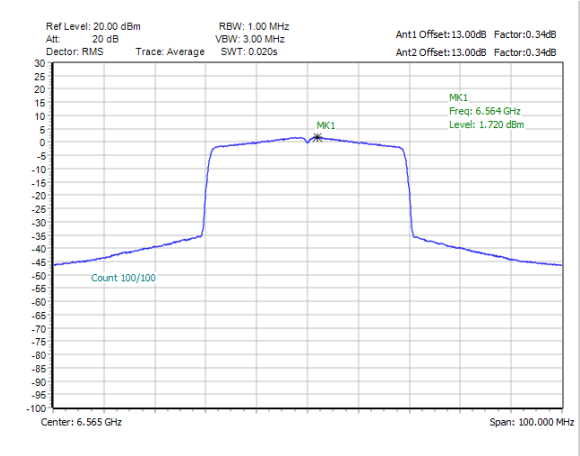	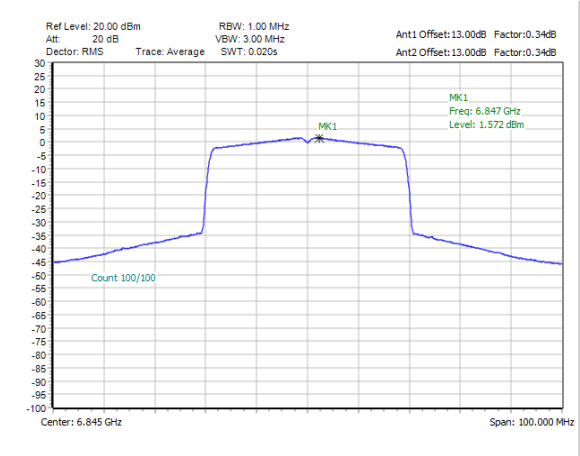
Middle CH147 6685MHz	
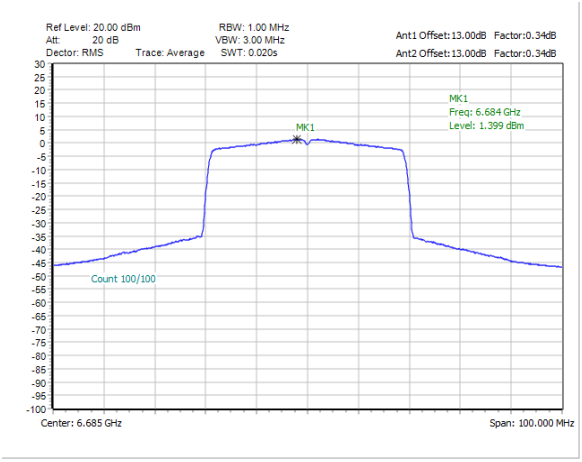	

802.11ax HE40 Full RU	
Low CH187 6885MHz	**High CH203 6965MHz**
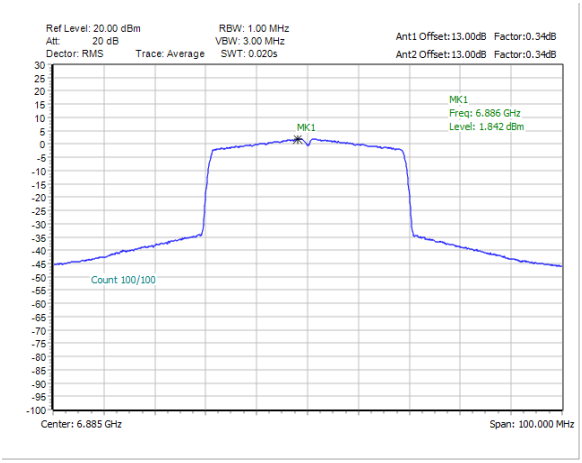	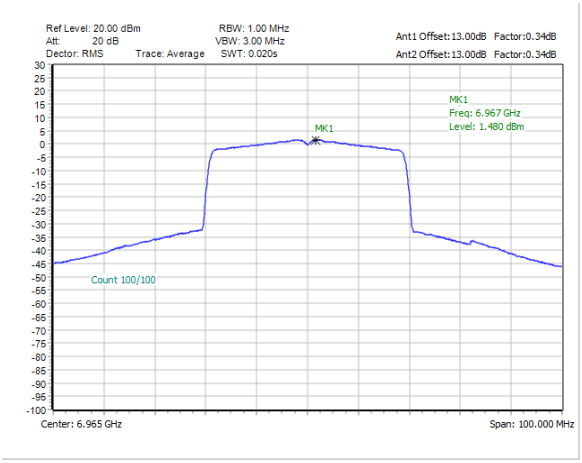
Middle CH195 6925MHz	
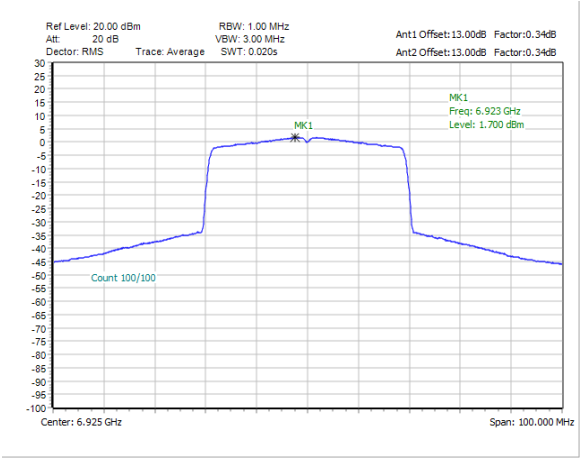	

802.11ax HE40 Full RU
Middle CH227 7085MHz
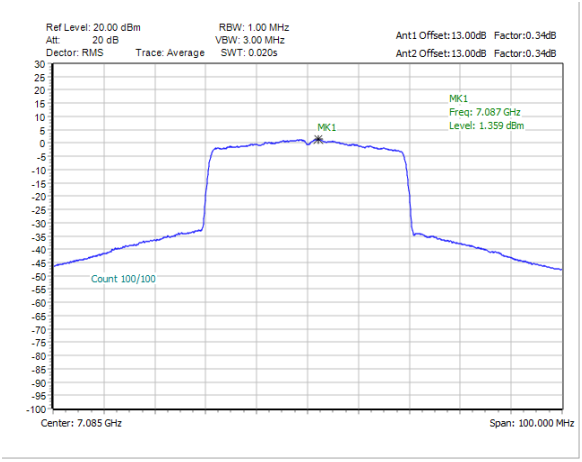

802.11ax HE80 Full RU	
Low CH07 5985MHz	High CH87 6385MHz
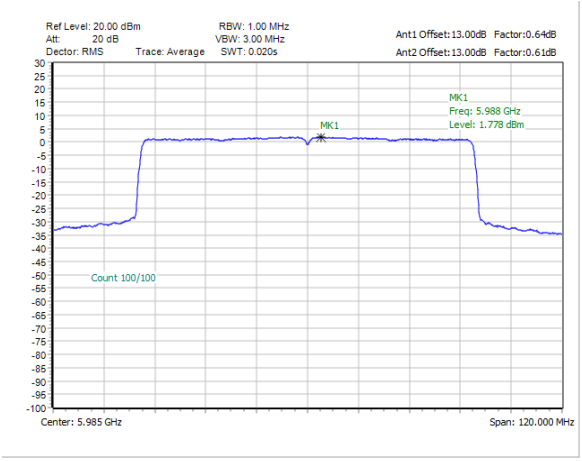	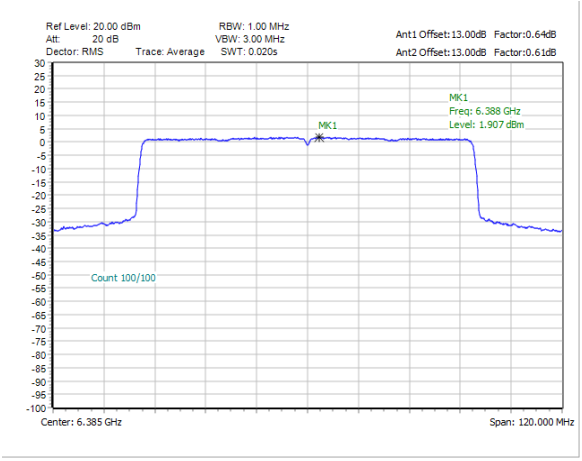
Middle CH39 6145MHz	
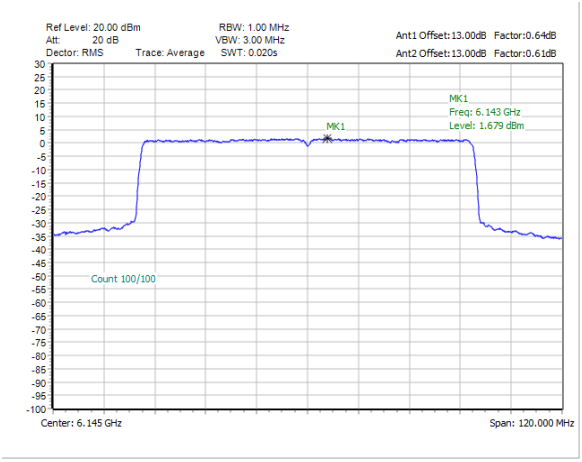	

802.11ax HE80 Full RU	
Low CH103 6465MHz	High CH119 6545MHz
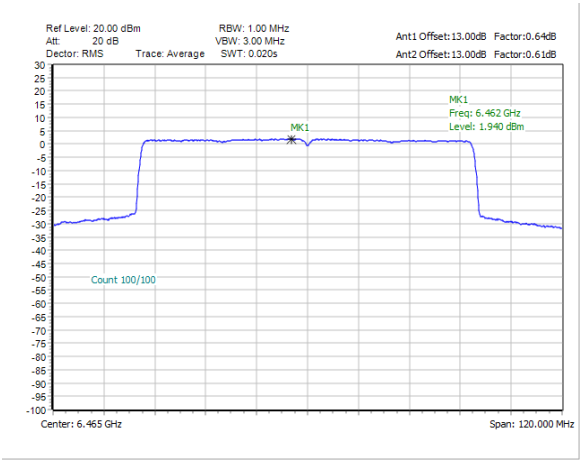	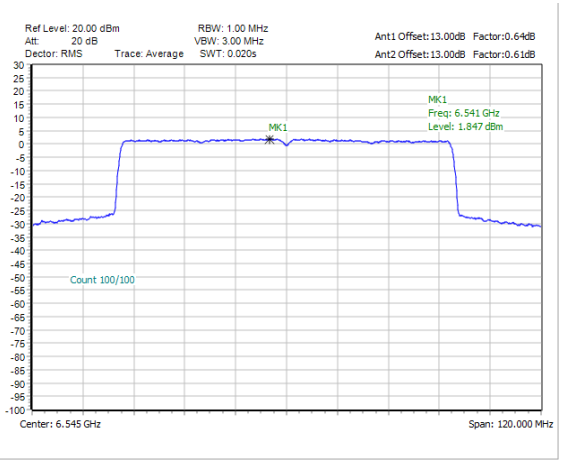

802.11ax HE80 Full RU	
Low CH135 6625MHz	High CH167 6785MHz
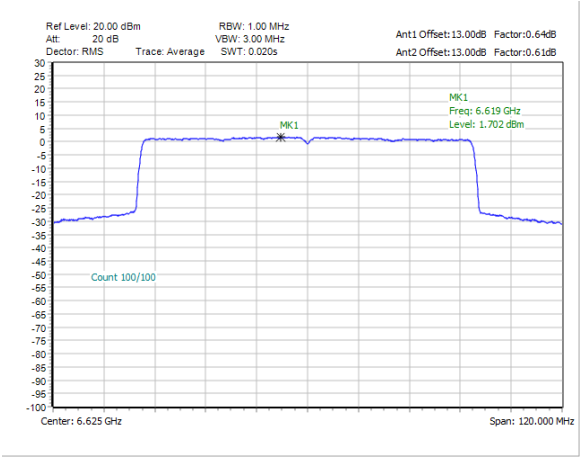	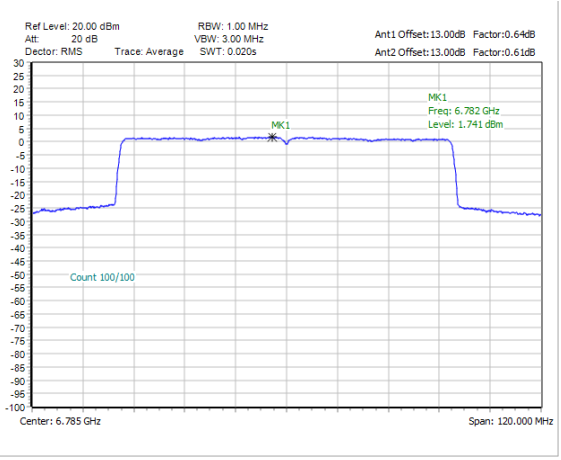

Middle CH151 6705MHz
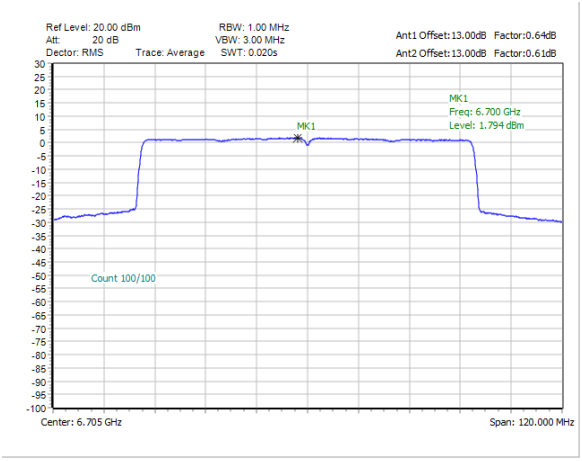

Middle CH183 6865MHz
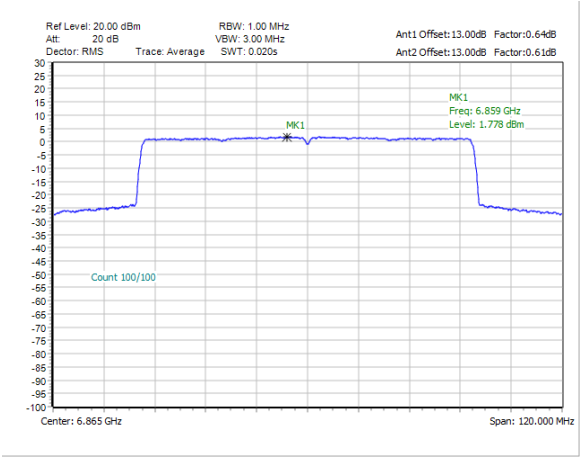

802.11ax HE80 Full RU	
Low CH199 6945MHz	High CH215 7025MHz
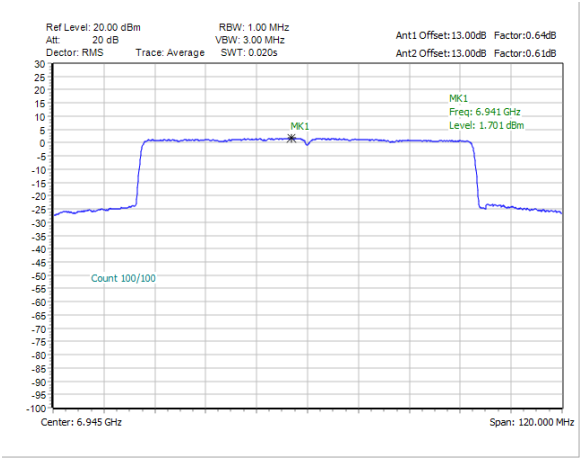	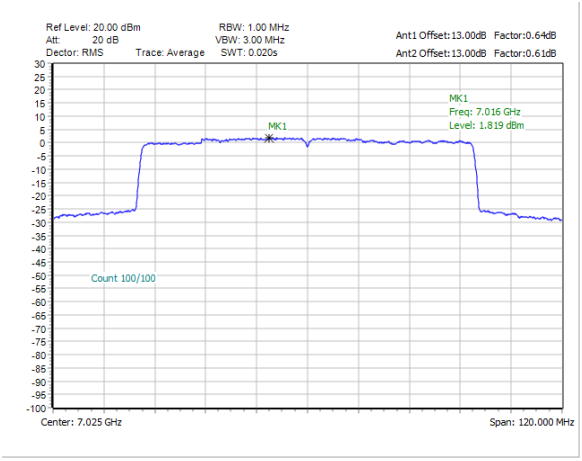

802.11ax HE20 Partial RU	
Low CH01 5955MHz 26RU0	**High CH229 7095MHz 26RU8**
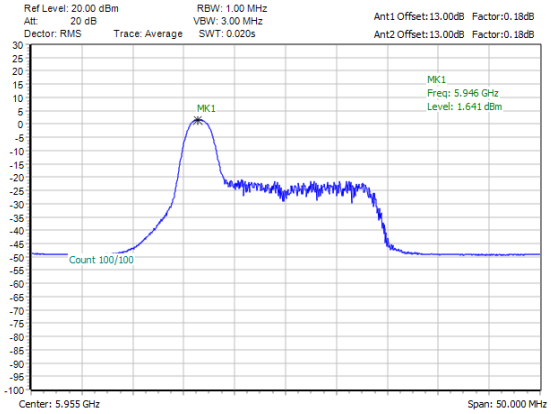	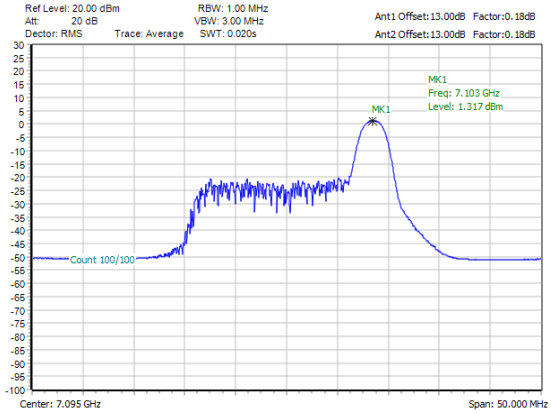
Low CH01 5955MHz 52RU37	**High CH229 7095MHz 52RU40**
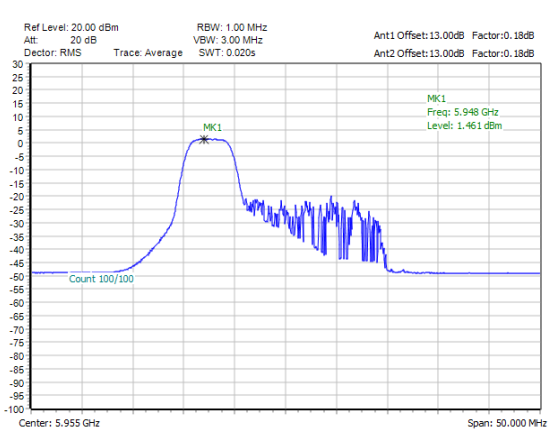	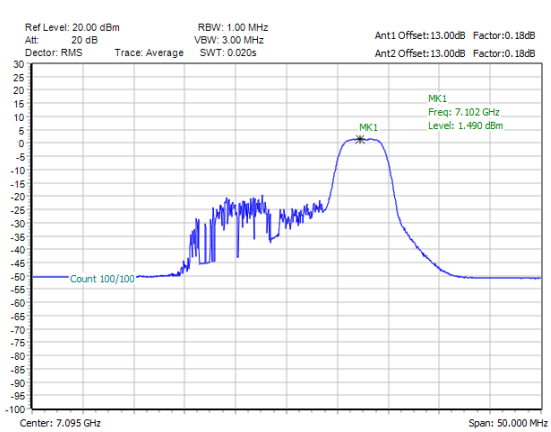
Low CH01 5955MHz 106RU53	**High CH229 7095MHz 106RU54**
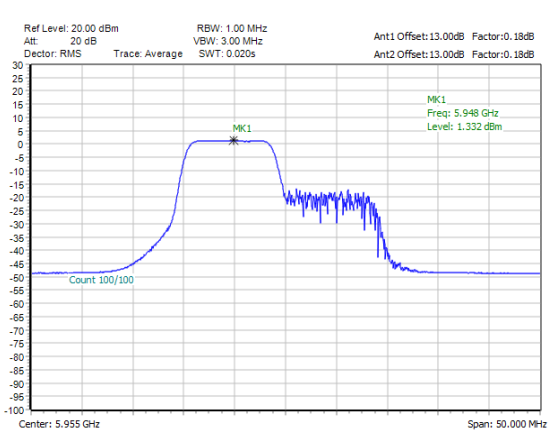	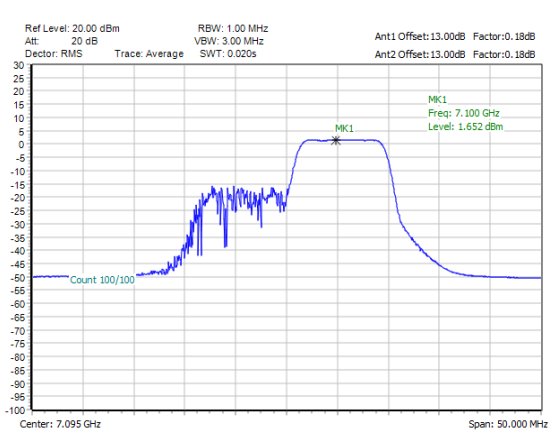

3.4 In-Band Emissions (Channel Mask)

3.4.1 Limit of Unwanted Emissions

<FCC 14-30 CFR 15.407>

(b)(6) For transmitters operating within the 5.925-7.125 GHz bands: Power spectral density must be suppressed by 20 dB at 1 MHz outside of channel edge, by 28 dB at one channel bandwidth from the channel center, and by 40 dB at one- and one-half times the channel bandwidth away from channel center. At frequencies between one megahertz outside an unlicensed device's channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20 dB and 28 dB suppression, and at frequencies between one and one- and one-half times an unlicensed device's channel bandwidth, the limits must be linearly interpolated between 28 dB and 40 dB suppression. Emissions removed from the channel center by more than one- and one-half times the channel bandwidth must be suppressed by at least 40 dB.

3.4.2 Measuring Instruments

See list of measuring equipment of this test report.

3.4.3 Test Procedures

The testing follows FCC KDB 987594 D02 U-NII 6GHz EMC Measurement.

Section J) In-Band Emissions.

1. Take nominal bandwidth as reference channel bandwidth provided that 26 dB emission bandwidth is always larger than nominal bandwidth
2. Measure the power spectral density (which will be used for emissions mask reference) using the following procedure:
   a) Set the span to encompass the entire 26 dB EBW of the signal.
   b) Set RBW = same RBW used for 26 dB EBW measurement.
   c) Set VBW ≥ 3 X RBW
   d) Number of points in sweep ≥ [2 X span / RBW].
   e) Sweep time = auto.
   f) Detector = RMS (i.e., power averaging)
   g) Trace average at least 100 traces in power averaging (rms) mode.
   h) Use the peak search function on the instrument to find the peak of the spectrum.
3. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
   a. Suppressed by 20 dB at 1 MHz outside of the channel edge.
   b. Suppressed by 28 dB at one channel bandwidth from the channel center.

c. Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.

4. Adjust the span to encompass the entire mask as necessary.
5. Clear trace.
6. Trace average at least 100 traces in power averaging (rms) mode.
7. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask.

3.4.4 Test Setup



3.4.5 Test Result

MIMO <Ant. 7+5(7)>

EUT Mode :	802.11ax HE20

Plot on Channel 5955MHz

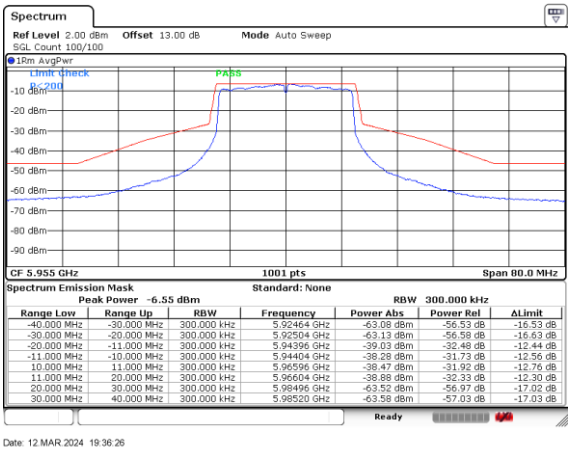

Plot on Channel 6175MHz

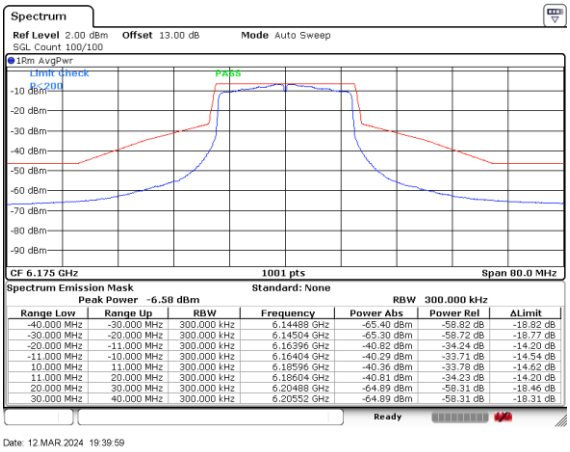

Plot on Channel 6415MHz

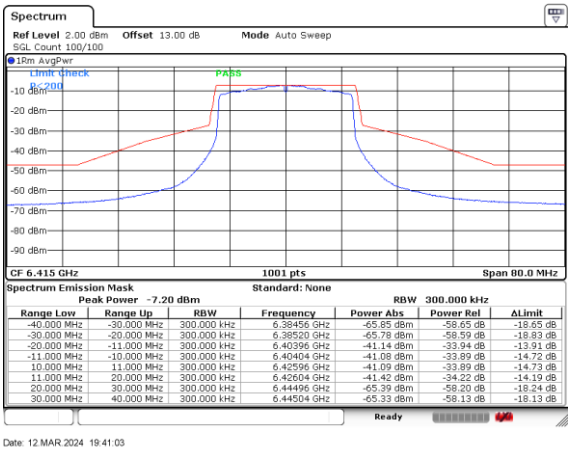

Plot on Channel 6435MHz

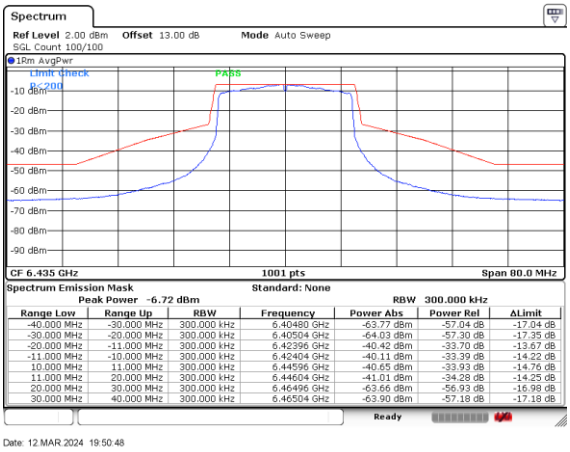

Plot on Channel 6475MHz

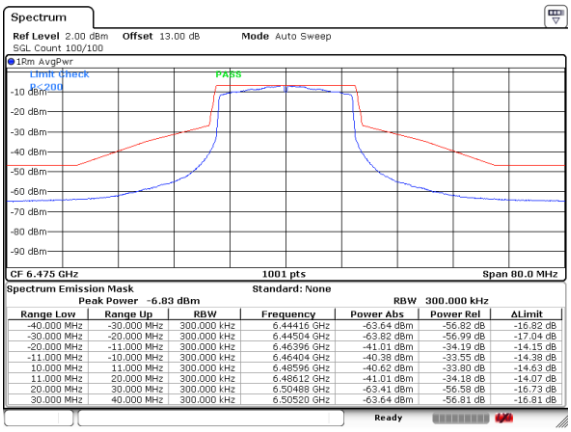

Spectrum Emission Mask Standard: None
Peak Power -6.83 dBm RBW 300.000 kHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-40.000 MHz	-30.000 MHz	300.000 kHz	6.44416 GHz	-63.64 dBm	-56.82 dB	-16.82 dB
-30.000 MHz	-20.000 MHz	300.000 kHz	6.44504 GHz	-63.82 dBm	-56.99 dB	-17.04 dB
-20.000 MHz	-11.000 MHz	300.000 kHz	6.46396 GHz	-41.01 dBm	-34.19 dB	-14.15 dB
-11.000 MHz	-10.000 MHz	300.000 kHz	6.46404 GHz	-40.38 dBm	-33.55 dB	-14.38 dB
10.000 MHz	11.000 MHz	300.000 kHz	6.48596 GHz	-40.62 dBm	-33.80 dB	-14.63 dB
11.000 MHz	20.000 MHz	300.000 kHz	6.48612 GHz	-41.01 dBm	-34.18 dB	-14.07 dB
20.000 MHz	30.000 MHz	300.000 kHz	6.50488 GHz	-63.41 dBm	-56.58 dB	-16.73 dB
30.000 MHz	40.000 MHz	300.000 kHz	6.50520 GHz	-63.64 dBm	-56.81 dB	-16.81 dB

Date: 12.MAR.2024 19:51:45

Plot on Channel 6515MHz

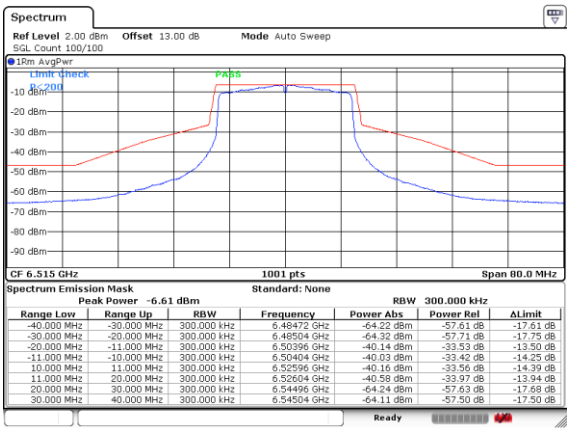

Spectrum Emission Mask Standard: None
Peak Power -6.61 dBm RBW 300.000 kHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-40.000 MHz	-30.000 MHz	300.000 kHz	6.48472 GHz	-64.22 dBm	-57.61 dB	-17.61 dB
-30.000 MHz	-20.000 MHz	300.000 kHz	6.48504 GHz	-64.32 dBm	-57.71 dB	-17.75 dB
-20.000 MHz	-11.000 MHz	300.000 kHz	6.50396 GHz	-40.14 dBm	-33.53 dB	-13.50 dB
-11.000 MHz	-10.000 MHz	300.000 kHz	6.50404 GHz	-40.03 dBm	-33.42 dB	-14.25 dB
10.000 MHz	11.000 MHz	300.000 kHz	6.52596 GHz	-40.16 dBm	-33.56 dB	-14.39 dB
11.000 MHz	20.000 MHz	300.000 kHz	6.52604 GHz	-40.58 dBm	-33.97 dB	-13.94 dB
20.000 MHz	30.000 MHz	300.000 kHz	6.54496 GHz	-64.24 dBm	-57.63 dB	-17.68 dB
30.000 MHz	40.000 MHz	300.000 kHz	6.54504 GHz	-64.11 dBm	-57.50 dB	-17.50 dB

Date: 12.MAR.2024 19:55:12

Plot on Channel 6535MHz

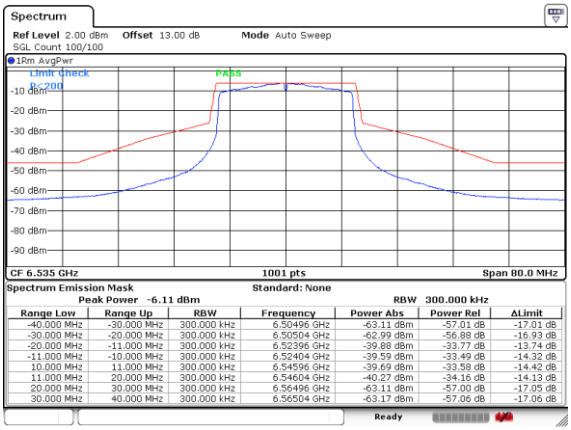

Spectrum Emission Mask Standard: None
Peak Power -6.11 dBm RBW 300.000 kHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-40.000 MHz	-30.000 MHz	300.000 kHz	6.50496 GHz	-63.11 dBm	-57.01 dB	-17.01 dB
-30.000 MHz	-20.000 MHz	300.000 kHz	6.50504 GHz	-62.99 dBm	-56.88 dB	-16.93 dB
-20.000 MHz	-11.000 MHz	300.000 kHz	6.52396 GHz	-39.88 dBm	-33.77 dB	-13.74 dB
-11.000 MHz	-10.000 MHz	300.000 kHz	6.52404 GHz	-39.59 dBm	-33.49 dB	-14.32 dB
10.000 MHz	11.000 MHz	300.000 kHz	6.54596 GHz	-39.69 dBm	-33.58 dB	-14.42 dB
11.000 MHz	20.000 MHz	300.000 kHz	6.54604 GHz	-40.27 dBm	-34.16 dB	-14.13 dB
20.000 MHz	30.000 MHz	300.000 kHz	6.56496 GHz	-63.11 dBm	-57.00 dB	-17.05 dB
30.000 MHz	40.000 MHz	300.000 kHz	6.56504 GHz	-63.17 dBm	-57.06 dB	-17.06 dB

Date: 12.MAR.2024 19:57:15

Plot on Channel 6695MHz

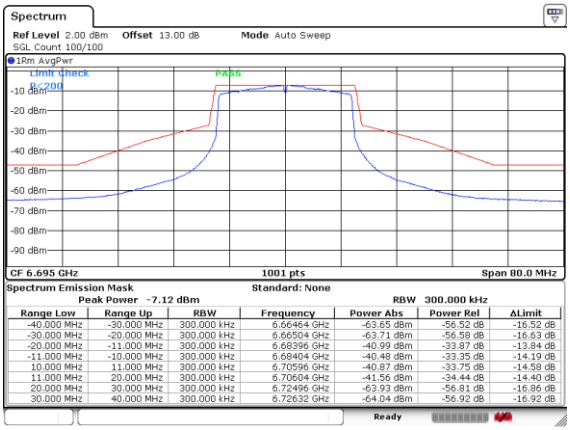

Spectrum Emission Mask Standard: None
Peak Power -7.12 dBm RBW 300.000 kHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-40.000 MHz	-30.000 MHz	300.000 kHz	6.66464 GHz	-63.65 dBm	-56.52 dB	-16.52 dB
-30.000 MHz	-20.000 MHz	300.000 kHz	6.66504 GHz	-63.71 dBm	-56.58 dB	-16.63 dB
-20.000 MHz	-11.000 MHz	300.000 kHz	6.68396 GHz	-40.99 dBm	-33.87 dB	-13.84 dB
-11.000 MHz	-10.000 MHz	300.000 kHz	6.68404 GHz	-40.48 dBm	-33.35 dB	-14.19 dB
10.000 MHz	11.000 MHz	300.000 kHz	6.70596 GHz	-40.87 dBm	-33.75 dB	-14.58 dB
11.000 MHz	20.000 MHz	300.000 kHz	6.70604 GHz	-41.56 dBm	-34.44 dB	-14.40 dB
20.000 MHz	30.000 MHz	300.000 kHz	6.72496 GHz	-63.93 dBm	-56.81 dB	-16.86 dB
30.000 MHz	40.000 MHz	300.000 kHz	6.72632 GHz	-64.04 dBm	-56.92 dB	-16.92 dB

Date: 12.MAR.2024 20:01:14

Plot on Channel 6855MHz

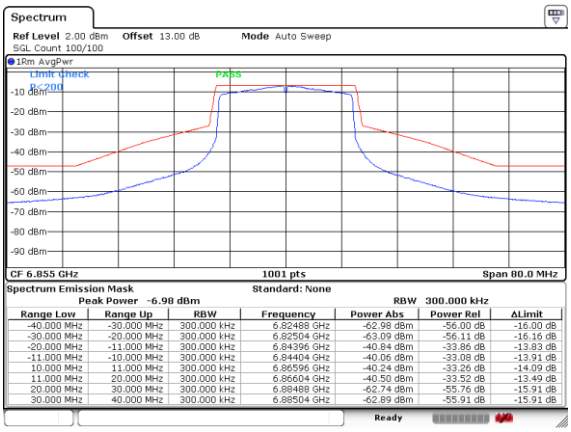

Date: 12.MAR.2024 20:02:02

Plot on Channel 6875MHz

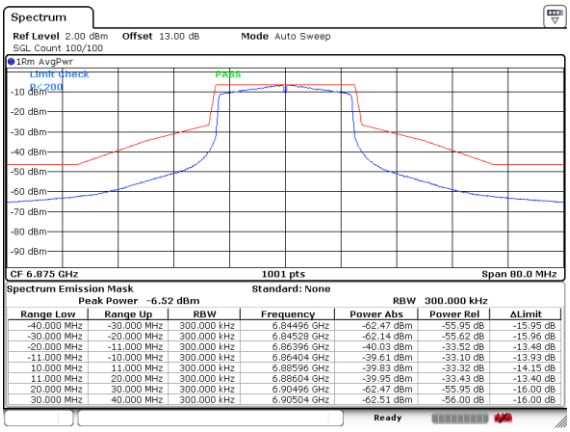

Date: 12.MAR.2024 20:04:46

Plot on Channel 6895MHz

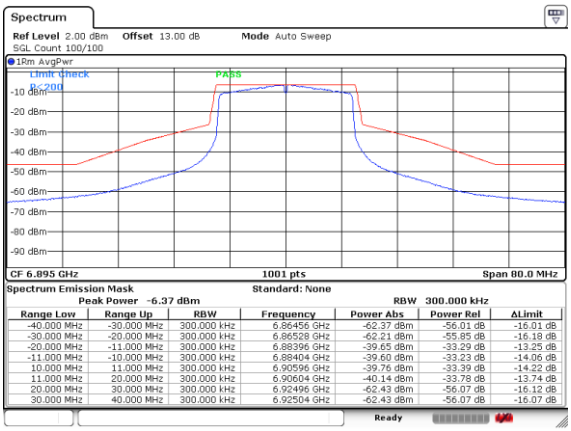

Date: 12.MAR.2024 20:08:50

Plot on Channel 6995MHz

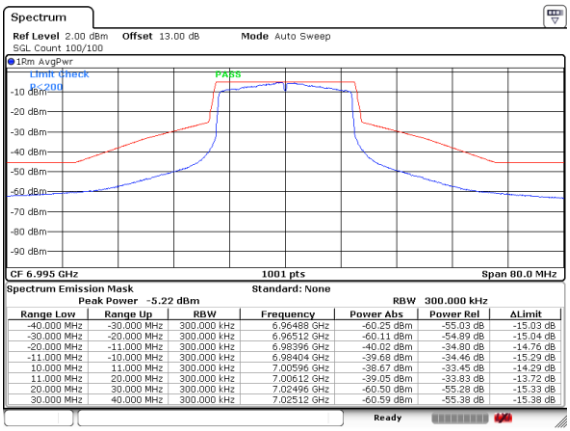

Date: 12.MAR.2024 20:13:06

Plot on Channel 7095MHz

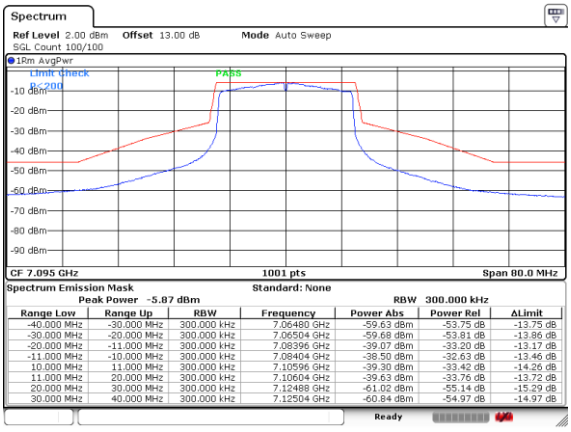

Date: 12.MAR.2024 20:14:06

EUT Mode :	802.11ax HE40

Plot on Channel 5965MHz

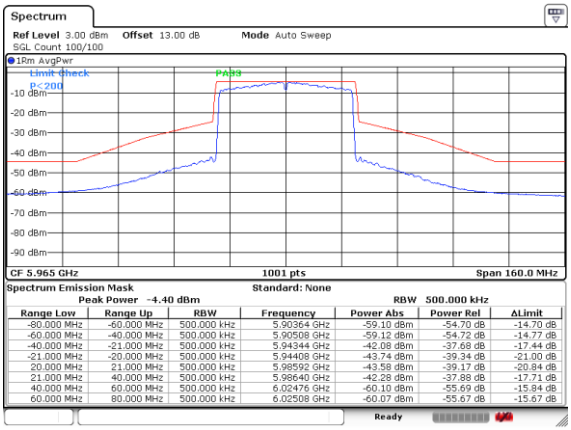

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-80.000 MHz	-60.000 MHz	500.000 kHz	5.90364 GHz	-59.10 dBm	-54.70 dB	-14.70 dB
-60.000 MHz	-40.000 MHz	500.000 kHz	5.90508 GHz	-59.12 dBm	-54.72 dB	-14.77 dB
-40.000 MHz	-21.000 MHz	500.000 kHz	5.94344 GHz	-42.08 dBm	-37.68 dB	-17.44 dB
-21.000 MHz	-20.000 MHz	500.000 kHz	5.94408 GHz	-43.74 dBm	-39.34 dB	-21.00 dB
20.000 MHz	21.000 MHz	500.000 kHz	5.98592 GHz	-43.58 dBm	-39.17 dB	-20.84 dB
21.000 MHz	40.000 MHz	500.000 kHz	5.98640 GHz	-42.28 dBm	-37.88 dB	-17.71 dB
40.000 MHz	60.000 MHz	500.000 kHz	6.02476 GHz	-60.10 dBm	-55.69 dB	-15.84 dB
60.000 MHz	80.000 MHz	500.000 kHz	6.02508 GHz	-60.07 dBm	-55.67 dB	-15.67 dB

Date: 12.MAR.2024 20:28:47

Plot on Channel 6165MHz

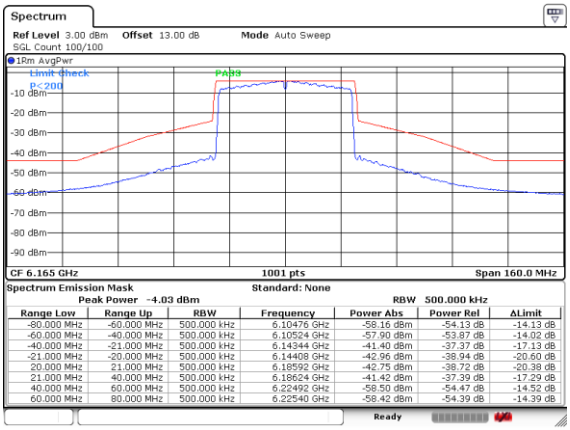

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-80.000 MHz	-60.000 MHz	500.000 kHz	6.10476 GHz	-58.16 dBm	-54.13 dB	-14.13 dB
-60.000 MHz	-40.000 MHz	500.000 kHz	6.10524 GHz	-57.90 dBm	-53.87 dB	-14.02 dB
-40.000 MHz	-21.000 MHz	500.000 kHz	6.14344 GHz	-41.40 dBm	-37.37 dB	-17.13 dB
-21.000 MHz	-20.000 MHz	500.000 kHz	6.14408 GHz	-42.96 dBm	-38.94 dB	-20.60 dB
20.000 MHz	21.000 MHz	500.000 kHz	6.18592 GHz	-42.75 dBm	-38.72 dB	-20.38 dB
21.000 MHz	40.000 MHz	500.000 kHz	6.18624 GHz	-41.42 dBm	-37.39 dB	-17.29 dB
40.000 MHz	60.000 MHz	500.000 kHz	6.22492 GHz	-58.50 dBm	-54.47 dB	-14.52 dB
60.000 MHz	80.000 MHz	500.000 kHz	6.22540 GHz	-58.42 dBm	-54.39 dB	-14.39 dB

Date: 12.MAR.2024 20:29:41

Plot on Channel 6405MHz

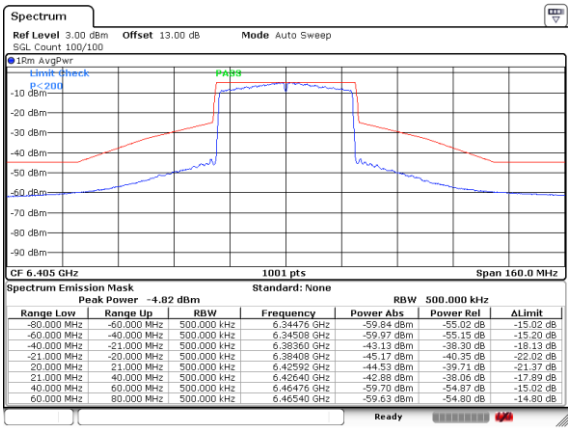

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-80.000 MHz	-60.000 MHz	500.000 kHz	6.34476 GHz	-59.84 dBm	-55.02 dB	-15.02 dB
-60.000 MHz	-40.000 MHz	500.000 kHz	6.34508 GHz	-59.97 dBm	-55.15 dB	-15.20 dB
-40.000 MHz	-21.000 MHz	500.000 kHz	6.38360 GHz	-43.13 dBm	-38.30 dB	-18.13 dB
-21.000 MHz	-20.000 MHz	500.000 kHz	6.38408 GHz	-45.17 dBm	-40.35 dB	-22.02 dB
20.000 MHz	21.000 MHz	500.000 kHz	6.42592 GHz	-44.53 dBm	-39.71 dB	-21.37 dB
21.000 MHz	40.000 MHz	500.000 kHz	6.42640 GHz	-42.88 dBm	-38.06 dB	-17.89 dB
40.000 MHz	60.000 MHz	500.000 kHz	6.46476 GHz	-59.70 dBm	-54.87 dB	-15.02 dB
60.000 MHz	80.000 MHz	500.000 kHz	6.46540 GHz	-59.63 dBm	-54.80 dB	-14.80 dB

Date: 12.MAR.2024 20:32:16

Plot on Channel 6445MHz

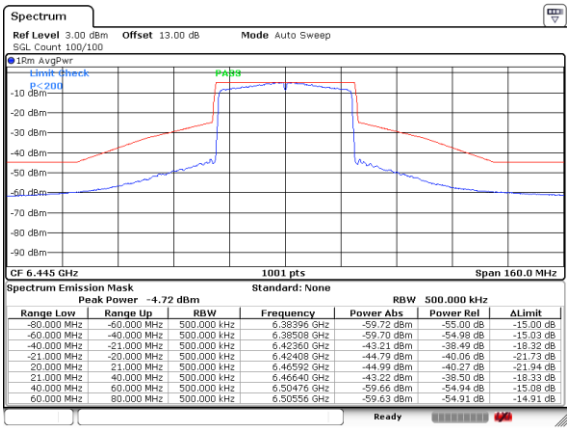

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-80.000 MHz	-60.000 MHz	500.000 kHz	6.38396 GHz	-59.72 dBm	-55.00 dB	-15.00 dB
-60.000 MHz	-40.000 MHz	500.000 kHz	6.38508 GHz	-59.70 dBm	-54.98 dB	-15.03 dB
-40.000 MHz	-21.000 MHz	500.000 kHz	6.42360 GHz	-43.21 dBm	-38.49 dB	-18.32 dB
-21.000 MHz	-20.000 MHz	500.000 kHz	6.42408 GHz	-44.79 dBm	-40.06 dB	-21.73 dB
20.000 MHz	21.000 MHz	500.000 kHz	6.46592 GHz	-44.99 dBm	-40.27 dB	-21.94 dB
21.000 MHz	40.000 MHz	500.000 kHz	6.46640 GHz	-43.22 dBm	-38.50 dB	-18.33 dB
40.000 MHz	60.000 MHz	500.000 kHz	6.50476 GHz	-59.66 dBm	-54.94 dB	-15.08 dB
60.000 MHz	80.000 MHz	500.000 kHz	6.50556 GHz	-59.63 dBm	-54.91 dB	-14.91 dB

Date: 12.MAR.2024 20:33:12

Plot on Channel 6485MHz

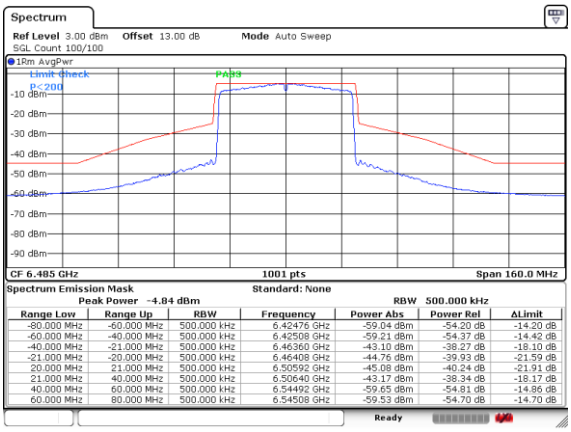

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-80.000 MHz	-60.000 MHz	500.000 kHz	6.42476 GHz	-59.04 dBm	-54.20 dB	-14.20 dB
-60.000 MHz	-40.000 MHz	500.000 kHz	6.42508 GHz	-59.21 dBm	-54.37 dB	-14.42 dB
-40.000 MHz	-21.000 MHz	500.000 kHz	6.46360 GHz	-43.10 dBm	-38.27 dB	-18.10 dB
-21.000 MHz	-20.000 MHz	500.000 kHz	6.46408 GHz	-44.76 dBm	-39.93 dB	-21.59 dB
20.000 MHz	21.000 MHz	500.000 kHz	6.50592 GHz	-45.08 dBm	-40.24 dB	-21.91 dB
21.000 MHz	40.000 MHz	500.000 kHz	6.50640 GHz	-43.17 dBm	-38.34 dB	-18.17 dB
40.000 MHz	60.000 MHz	500.000 kHz	6.54492 GHz	-59.65 dBm	-54.81 dB	-14.86 dB
60.000 MHz	80.000 MHz	500.000 kHz	6.54508 GHz	-59.53 dBm	-54.70 dB	-14.70 dB

Date: 13.MAR.2024 10:20:01

Plot on Channel 6525MHz

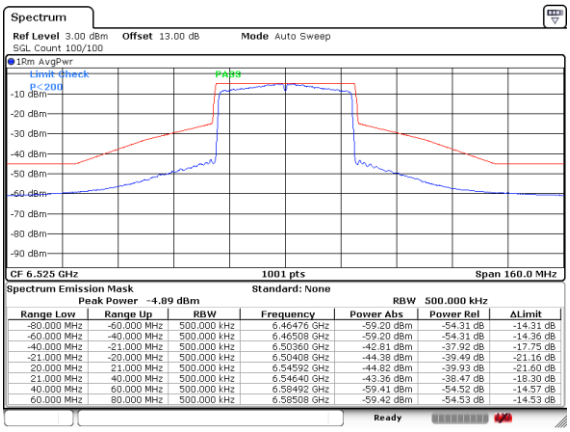

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-80.000 MHz	-60.000 MHz	500.000 kHz	6.46476 GHz	-59.20 dBm	-54.31 dB	-14.31 dB
-60.000 MHz	-40.000 MHz	500.000 kHz	6.46508 GHz	-59.20 dBm	-54.31 dB	-14.36 dB
-40.000 MHz	-21.000 MHz	500.000 kHz	6.50360 GHz	-42.81 dBm	-37.92 dB	-17.75 dB
-21.000 MHz	-20.000 MHz	500.000 kHz	6.50408 GHz	-44.38 dBm	-39.49 dB	-21.16 dB
20.000 MHz	21.000 MHz	500.000 kHz	6.54592 GHz	-44.82 dBm	-39.93 dB	-21.60 dB
21.000 MHz	40.000 MHz	500.000 kHz	6.54640 GHz	-43.36 dBm	-38.47 dB	-18.30 dB
40.000 MHz	60.000 MHz	500.000 kHz	6.58492 GHz	-59.41 dBm	-54.52 dB	-14.57 dB
60.000 MHz	80.000 MHz	500.000 kHz	6.58508 GHz	-59.42 dBm	-54.53 dB	-14.53 dB

Date: 13.MAR.2024 10:21:00

Plot on Channel 6565MHz

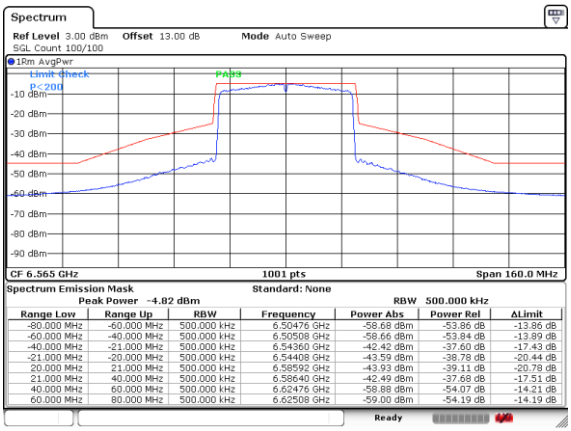

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-80.000 MHz	-60.000 MHz	500.000 kHz	6.50476 GHz	-58.68 dBm	-53.86 dB	-13.86 dB
-60.000 MHz	-40.000 MHz	500.000 kHz	6.50508 GHz	-58.66 dBm	-53.84 dB	-13.89 dB
-40.000 MHz	-21.000 MHz	500.000 kHz	6.54360 GHz	-42.42 dBm	-37.60 dB	-17.43 dB
-21.000 MHz	-20.000 MHz	500.000 kHz	6.54408 GHz	-43.59 dBm	-38.78 dB	-20.44 dB
20.000 MHz	21.000 MHz	500.000 kHz	6.58592 GHz	-43.93 dBm	-39.11 dB	-20.78 dB
21.000 MHz	40.000 MHz	500.000 kHz	6.58640 GHz	-42.49 dBm	-37.68 dB	-17.51 dB
40.000 MHz	60.000 MHz	500.000 kHz	6.62476 GHz	-58.88 dBm	-54.07 dB	-14.21 dB
60.000 MHz	80.000 MHz	500.000 kHz	6.62508 GHz	-59.00 dBm	-54.19 dB	-14.19 dB

Date: 13.MAR.2024 10:45:29

Plot on Channel 6685MHz

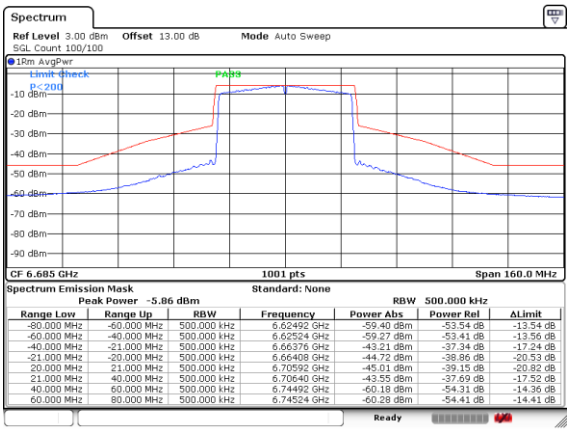

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-80.000 MHz	-60.000 MHz	500.000 kHz	6.62492 GHz	-59.40 dBm	-53.54 dB	-13.54 dB
-60.000 MHz	-40.000 MHz	500.000 kHz	6.62524 GHz	-59.27 dBm	-53.41 dB	-13.56 dB
-40.000 MHz	-21.000 MHz	500.000 kHz	6.66376 GHz	-43.21 dBm	-37.34 dB	-17.24 dB
-21.000 MHz	-20.000 MHz	500.000 kHz	6.66408 GHz	-44.72 dBm	-38.86 dB	-20.53 dB
20.000 MHz	21.000 MHz	500.000 kHz	6.70592 GHz	-45.01 dBm	-39.15 dB	-20.82 dB
21.000 MHz	40.000 MHz	500.000 kHz	6.70640 GHz	-43.55 dBm	-37.69 dB	-17.52 dB
40.000 MHz	60.000 MHz	500.000 kHz	6.74492 GHz	-60.18 dBm	-54.31 dB	-14.36 dB
60.000 MHz	80.000 MHz	500.000 kHz	6.74524 GHz	-60.28 dBm	-54.41 dB	-14.41 dB

Date: 13.MAR.2024 11:45:25

Plot on Channel 6845MHz

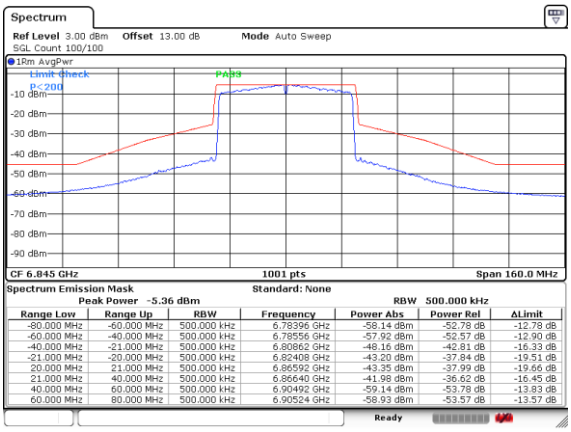

Spectrum Emission Mask Standard: None
Peak Power -5.36 dBm RBW 500.000 kHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-80.000 MHz	-60.000 MHz	500.000 kHz	6.78396 GHz	-58.14 dBm	-52.78 dB	-12.78 dB
-60.000 MHz	-40.000 MHz	500.000 kHz	6.78556 GHz	-57.92 dBm	-52.57 dB	-12.90 dB
-40.000 MHz	-21.000 MHz	500.000 kHz	6.80862 GHz	-48.16 dBm	-42.81 dB	-16.33 dB
-21.000 MHz	-20.000 MHz	500.000 kHz	6.82408 GHz	-43.20 dBm	-37.84 dB	-19.51 dB
20.000 MHz	21.000 MHz	500.000 kHz	6.86592 GHz	-43.35 dBm	-37.99 dB	-19.66 dB
21.000 MHz	40.000 MHz	500.000 kHz	6.86640 GHz	-41.98 dBm	-36.62 dB	-16.45 dB
40.000 MHz	60.000 MHz	500.000 kHz	6.90492 GHz	-59.14 dBm	-53.78 dB	-13.83 dB
60.000 MHz	80.000 MHz	500.000 kHz	6.90524 GHz	-58.93 dBm	-53.57 dB	-13.57 dB

Date: 13.MAR.2024 11:52:20

Plot on Channel 6885MHz

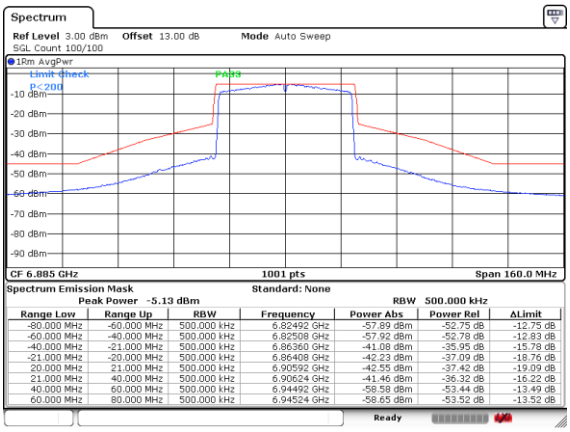

Spectrum Emission Mask Standard: None
Peak Power -5.13 dBm RBW 500.000 kHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-80.000 MHz	-60.000 MHz	500.000 kHz	6.82492 GHz	-57.89 dBm	-52.75 dB	-12.75 dB
-60.000 MHz	-40.000 MHz	500.000 kHz	6.82508 GHz	-57.92 dBm	-52.78 dB	-12.83 dB
-40.000 MHz	-21.000 MHz	500.000 kHz	6.86360 GHz	-41.08 dBm	-35.95 dB	-15.78 dB
-21.000 MHz	-20.000 MHz	500.000 kHz	6.86408 GHz	-42.23 dBm	-37.09 dB	-18.76 dB
20.000 MHz	21.000 MHz	500.000 kHz	6.90592 GHz	-42.55 dBm	-37.42 dB	-19.09 dB
21.000 MHz	40.000 MHz	500.000 kHz	6.90624 GHz	-41.46 dBm	-36.32 dB	-16.22 dB
40.000 MHz	60.000 MHz	500.000 kHz	6.94492 GHz	-58.58 dBm	-53.44 dB	-13.49 dB
60.000 MHz	80.000 MHz	500.000 kHz	6.94524 GHz	-58.65 dBm	-53.52 dB	-13.52 dB

Date: 13.MAR.2024 11:56:09

Plot on Channel 6925MHz

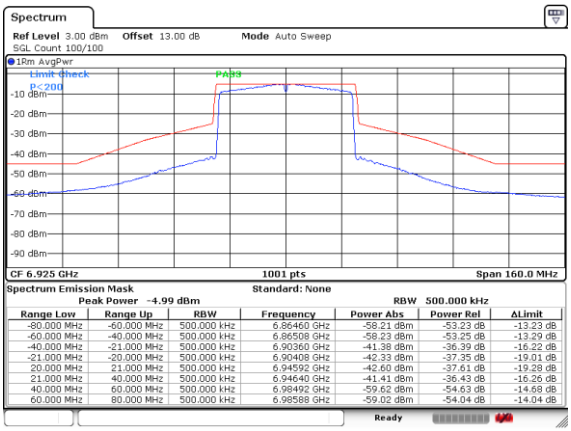

Spectrum Emission Mask Standard: None
Peak Power -4.99 dBm RBW 500.000 kHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-80.000 MHz	-60.000 MHz	500.000 kHz	6.86460 GHz	-58.21 dBm	-53.23 dB	-13.23 dB
-60.000 MHz	-40.000 MHz	500.000 kHz	6.86508 GHz	-58.23 dBm	-53.25 dB	-13.29 dB
-40.000 MHz	-21.000 MHz	500.000 kHz	6.90360 GHz	-41.38 dBm	-36.39 dB	-16.22 dB
-21.000 MHz	-20.000 MHz	500.000 kHz	6.90408 GHz	-42.33 dBm	-37.35 dB	-19.01 dB
20.000 MHz	21.000 MHz	500.000 kHz	6.94592 GHz	-42.60 dBm	-37.61 dB	-19.28 dB
21.000 MHz	40.000 MHz	500.000 kHz	6.94640 GHz	-41.41 dBm	-36.43 dB	-16.26 dB
40.000 MHz	60.000 MHz	500.000 kHz	6.98492 GHz	-59.62 dBm	-54.63 dB	-14.68 dB
60.000 MHz	80.000 MHz	500.000 kHz	6.98588 GHz	-59.02 dBm	-54.04 dB	-14.04 dB

Date: 13.MAR.2024 12:02:26

Plot on Channel 6965MHz

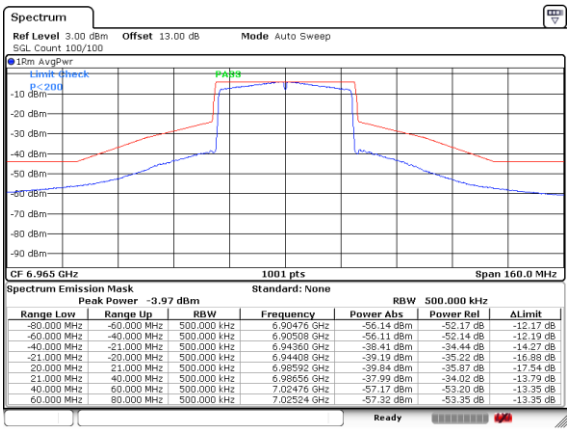

Spectrum Emission Mask Standard: None
Peak Power -3.97 dBm RBW 500.000 kHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-80.000 MHz	-60.000 MHz	500.000 kHz	6.90476 GHz	-56.14 dBm	-52.17 dB	-12.17 dB
-60.000 MHz	-40.000 MHz	500.000 kHz	6.90508 GHz	-56.11 dBm	-52.14 dB	-12.19 dB
-40.000 MHz	-21.000 MHz	500.000 kHz	6.94360 GHz	-38.41 dBm	-34.44 dB	-14.27 dB
-21.000 MHz	-20.000 MHz	500.000 kHz	6.94408 GHz	-39.19 dBm	-35.22 dB	-16.88 dB
20.000 MHz	21.000 MHz	500.000 kHz	6.98592 GHz	-39.84 dBm	-35.87 dB	-17.54 dB
21.000 MHz	40.000 MHz	500.000 kHz	6.98656 GHz	-37.99 dBm	-34.02 dB	-13.79 dB
40.000 MHz	60.000 MHz	500.000 kHz	7.02476 GHz	-57.17 dBm	-53.20 dB	-13.35 dB
60.000 MHz	80.000 MHz	500.000 kHz	7.02524 GHz	-57.32 dBm	-53.35 dB	-13.35 dB

Date: 13.MAR.2024 13:17:00

Plot on Channel 7085MHz

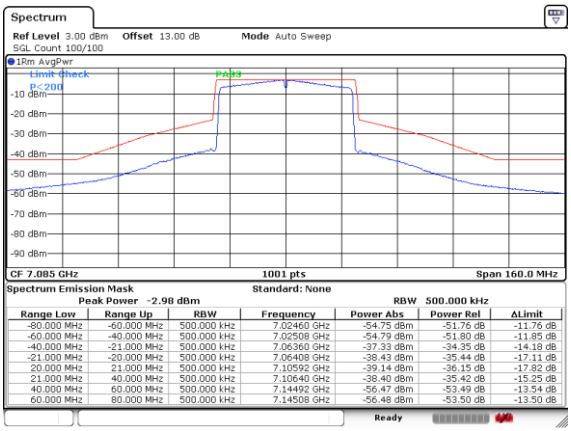

Spectrum Emission Mask Standard: None
Peak Power -2.98 dBm RBW 500.000 kHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-80.000 MHz	-60.000 MHz	500.000 kHz	7.02460 GHz	-54.75 dBm	-51.76 dB	-11.76 dB
-60.000 MHz	-40.000 MHz	500.000 kHz	7.02508 GHz	-54.79 dBm	-51.80 dB	-11.85 dB
-40.000 MHz	-21.000 MHz	500.000 kHz	7.06360 GHz	-37.33 dBm	-34.35 dB	-14.18 dB
-21.000 MHz	-20.000 MHz	500.000 kHz	7.06408 GHz	-38.43 dBm	-35.44 dB	-17.11 dB
20.000 MHz	21.000 MHz	500.000 kHz	7.10592 GHz	-39.14 dBm	-36.15 dB	-17.82 dB
21.000 MHz	40.000 MHz	500.000 kHz	7.10640 GHz	-38.40 dBm	-35.42 dB	-15.25 dB
40.000 MHz	60.000 MHz	500.000 kHz	7.14492 GHz	-56.47 dBm	-53.49 dB	-13.54 dB
60.000 MHz	80.000 MHz	500.000 kHz	7.14508 GHz	-56.48 dBm	-53.50 dB	-13.50 dB

Date: 13.MAR.2024 13:17:47

EUT Mode :	802.11ax HE80

Plot on Channel 5985MHz

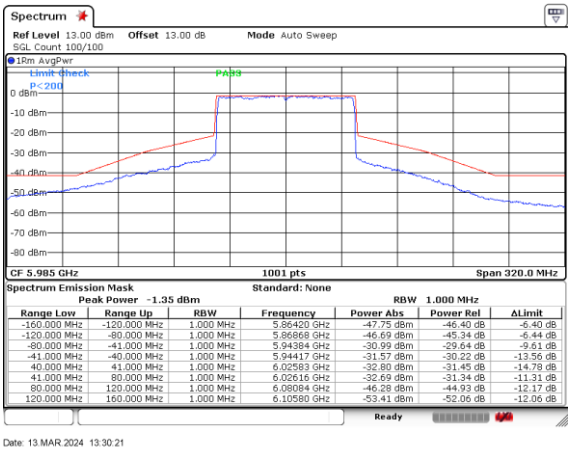

Date: 13.MAR.2024 13:30:21

Plot on Channel 6145MHz

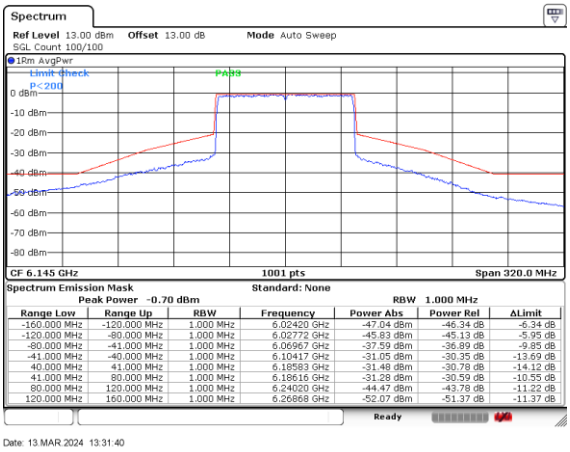

Date: 13.MAR.2024 13:31:40

Plot on Channel 6385MHz

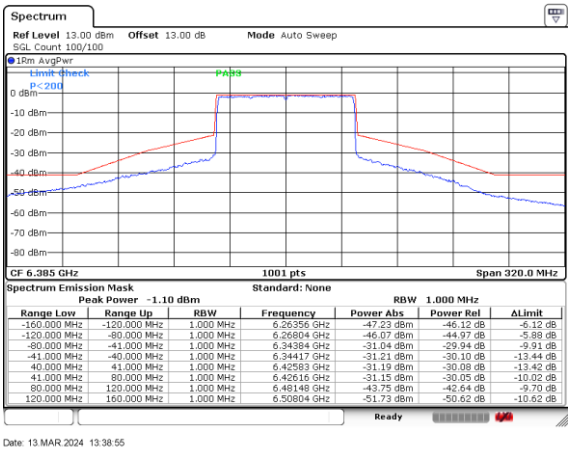

Date: 13.MAR.2024 13:38:55

Plot on Channel 6465MHz

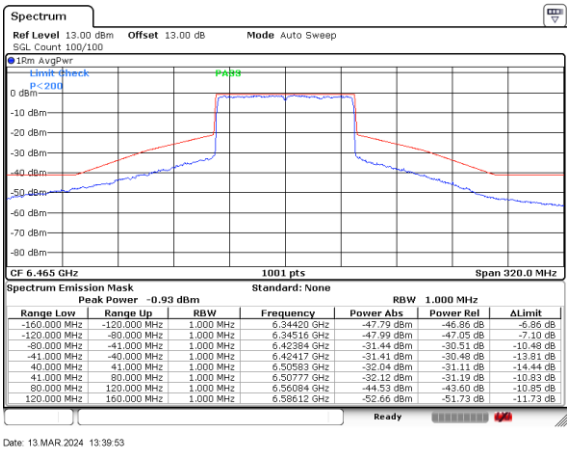

Date: 13.MAR.2024 13:39:53

Plot on Channel 6545MHz

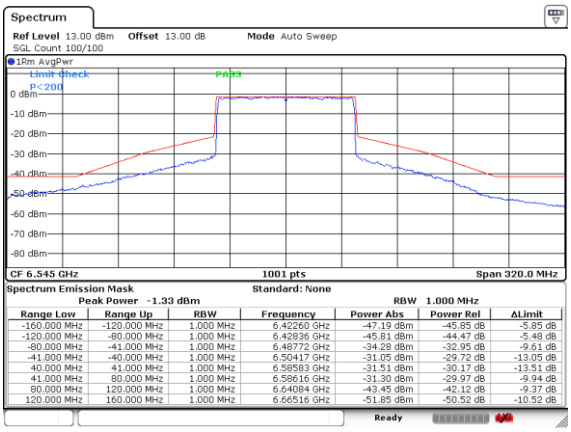

Spectrum Emission Mask Standard: None
Peak Power -1.33 dBm RBW 1.000 MHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-160.000 MHz	-120.000 MHz	1.000 MHz	6.42260 GHz	-47.19 dBm	-45.85 dB	-5.85 dB
-120.000 MHz	-80.000 MHz	1.000 MHz	6.42836 GHz	-45.81 dBm	-44.47 dB	-5.48 dB
-80.000 MHz	-41.000 MHz	1.000 MHz	6.46772 GHz	-34.28 dBm	-32.95 dB	-9.61 dB
-41.000 MHz	-40.000 MHz	1.000 MHz	6.50417 GHz	-31.05 dBm	-29.72 dB	-13.05 dB
40.000 MHz	41.000 MHz	1.000 MHz	6.58583 GHz	-31.51 dBm	-30.17 dB	-13.51 dB
41.000 MHz	80.000 MHz	1.000 MHz	6.58616 GHz	-31.30 dBm	-29.97 dB	-9.94 dB
80.000 MHz	120.000 MHz	1.000 MHz	6.64084 GHz	-43.45 dBm	-42.12 dB	-9.37 dB
120.000 MHz	160.000 MHz	1.000 MHz	6.66516 GHz	-51.85 dBm	-50.52 dB	-10.52 dB

Date: 13.MAR.2024 13:43:56

Plot on Channel 6625MHz

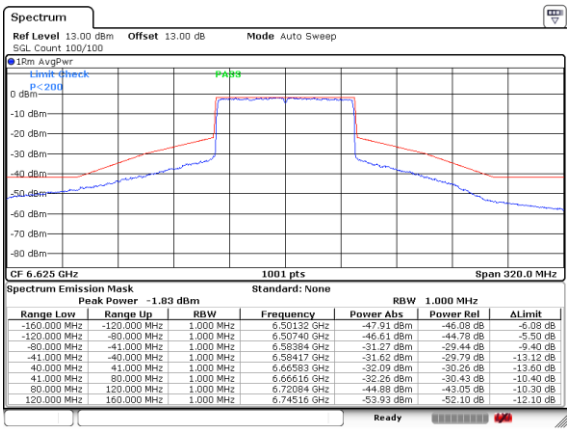

Spectrum Emission Mask Standard: None
Peak Power -1.83 dBm RBW 1.000 MHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-160.000 MHz	-120.000 MHz	1.000 MHz	6.50132 GHz	-47.91 dBm	-46.08 dB	-6.08 dB
-120.000 MHz	-80.000 MHz	1.000 MHz	6.50740 GHz	-46.61 dBm	-44.78 dB	-5.50 dB
-80.000 MHz	-41.000 MHz	1.000 MHz	6.58384 GHz	-31.27 dBm	-29.44 dB	-9.40 dB
-41.000 MHz	-40.000 MHz	1.000 MHz	6.58417 GHz	-31.62 dBm	-29.79 dB	-13.12 dB
40.000 MHz	41.000 MHz	1.000 MHz	6.66583 GHz	-32.09 dBm	-30.26 dB	-13.60 dB
41.000 MHz	80.000 MHz	1.000 MHz	6.66616 GHz	-32.26 dBm	-30.43 dB	-10.40 dB
80.000 MHz	120.000 MHz	1.000 MHz	6.72084 GHz	-44.88 dBm	-43.05 dB	-10.30 dB
120.000 MHz	160.000 MHz	1.000 MHz	6.74516 GHz	-53.93 dBm	-52.10 dB	-12.10 dB

Date: 13.MAR.2024 13:50:27

Plot on Channel 6705MHz

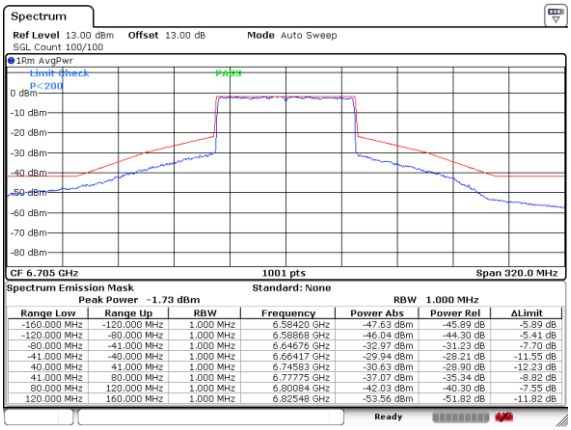

Spectrum Emission Mask Standard: None
Peak Power -1.73 dBm RBW 1.000 MHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-160.000 MHz	-120.000 MHz	1.000 MHz	6.58420 GHz	-47.63 dBm	-45.89 dB	-5.89 dB
-120.000 MHz	-80.000 MHz	1.000 MHz	6.58868 GHz	-46.04 dBm	-44.30 dB	-5.41 dB
-80.000 MHz	-41.000 MHz	1.000 MHz	6.64676 GHz	-32.97 dBm	-31.23 dB	-7.70 dB
-41.000 MHz	-40.000 MHz	1.000 MHz	6.66417 GHz	-29.94 dBm	-28.21 dB	-11.55 dB
40.000 MHz	41.000 MHz	1.000 MHz	6.74583 GHz	-30.63 dBm	-28.90 dB	-12.23 dB
41.000 MHz	80.000 MHz	1.000 MHz	6.77775 GHz	-37.07 dBm	-35.34 dB	-8.82 dB
80.000 MHz	120.000 MHz	1.000 MHz	6.80084 GHz	-42.03 dBm	-40.30 dB	-7.55 dB
120.000 MHz	160.000 MHz	1.000 MHz	6.82548 GHz	-53.56 dBm	-51.82 dB	-11.82 dB

Date: 13.MAR.2024 14:05:56

Plot on Channel 6785MHz

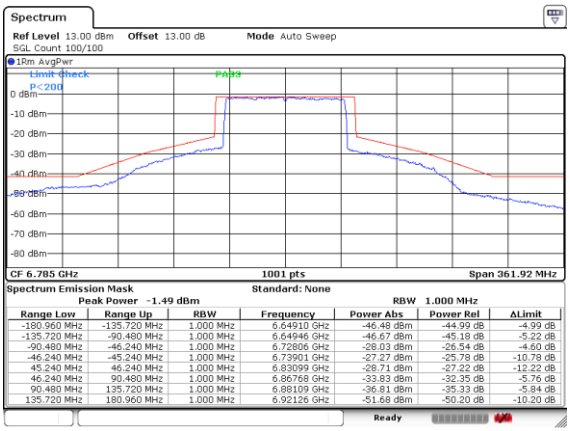

Spectrum Emission Mask Standard: None
Peak Power -1.49 dBm RBW 1.000 MHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-180.960 MHz	-135.720 MHz	1.000 MHz	6.64910 GHz	-46.48 dBm	-44.99 dB	-4.99 dB
-135.720 MHz	-90.480 MHz	1.000 MHz	6.64946 GHz	-46.67 dBm	-45.18 dB	-5.22 dB
-90.480 MHz	-46.240 MHz	1.000 MHz	6.72806 GHz	-28.03 dBm	-26.54 dB	-4.60 dB
-46.240 MHz	-45.240 MHz	1.000 MHz	6.73901 GHz	-27.27 dBm	-25.78 dB	-10.78 dB
45.240 MHz	46.240 MHz	1.000 MHz	6.83099 GHz	-28.71 dBm	-27.22 dB	-12.22 dB
46.240 MHz	90.480 MHz	1.000 MHz	6.86768 GHz	-33.83 dBm	-32.35 dB	-5.76 dB
90.480 MHz	135.720 MHz	1.000 MHz	6.88109 GHz	-36.81 dBm	-35.33 dB	-5.84 dB
135.720 MHz	180.960 MHz	1.000 MHz	6.92126 GHz	-51.68 dBm	-50.20 dB	-10.20 dB

Date: 13.MAR.2024 14:25:05

Plot on Channel 6865MHz

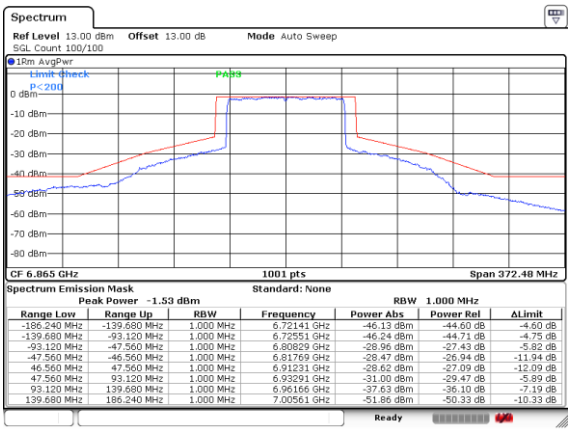

Spectrum Emission Mask Standard: None
Peak Power -1.53 dBm RBW 1.000 MHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-186.240 MHz	-139.680 MHz	1.000 MHz	6.72141 GHz	-46.13 dBm	-44.60 dB	-4.60 dB
-139.680 MHz	-93.120 MHz	1.000 MHz	6.72551 GHz	-46.24 dBm	-44.71 dB	-4.75 dB
-93.120 MHz	-47.560 MHz	1.000 MHz	6.80829 GHz	-28.96 dBm	-27.43 dB	-5.82 dB
-47.560 MHz	-46.560 MHz	1.000 MHz	6.81769 GHz	-28.47 dBm	-26.94 dB	-11.94 dB
46.560 MHz	47.560 MHz	1.000 MHz	6.91231 GHz	-28.62 dBm	-27.09 dB	-12.09 dB
47.560 MHz	93.120 MHz	1.000 MHz	6.93291 GHz	-31.00 dBm	-29.47 dB	-5.89 dB
93.120 MHz	139.680 MHz	1.000 MHz	6.96166 GHz	-37.63 dBm	-36.10 dB	-7.19 dB
139.680 MHz	186.240 MHz	1.000 MHz	7.00561 GHz	-51.86 dBm	-50.33 dB	-10.33 dB

Date: 13.MAR.2024 14:28:26

Plot on Channel 6945MHz

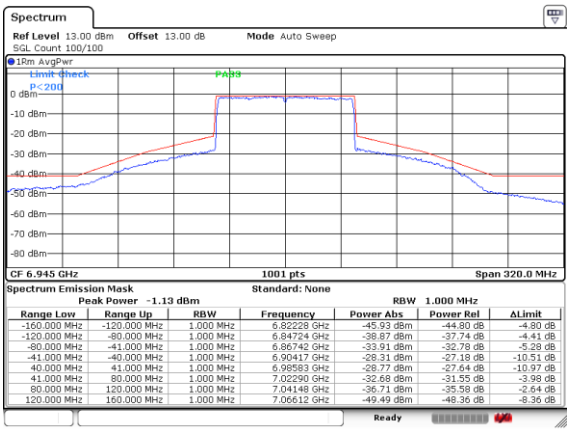

Spectrum Emission Mask Standard: None
Peak Power -1.13 dBm RBW 1.000 MHz

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-160.000 MHz	-120.000 MHz	1.000 MHz	6.82228 GHz	-45.93 dBm	-44.80 dB	-4.80 dB
-120.000 MHz	-80.000 MHz	1.000 MHz	6.84724 GHz	-36.87 dBm	-37.74 dB	-4.41 dB
-80.000 MHz	-41.000 MHz	1.000 MHz	6.86742 GHz	-33.91 dBm	-32.78 dB	-5.28 dB
-41.000 MHz	-40.000 MHz	1.000 MHz	6.90417 GHz	-28.31 dBm	-27.18 dB	-10.51 dB
40.000 MHz	41.000 MHz	1.000 MHz	6.98583 GHz	-28.77 dBm	-27.64 dB	-10.97 dB
41.000 MHz	80.000 MHz	1.000 MHz	7.02290 GHz	-32.68 dBm	-31.55 dB	-3.98 dB
80.000 MHz	120.000 MHz	1.000 MHz	7.04148 GHz	-36.71 dBm	-35.58 dB	-2.64 dB
120.000 MHz	160.000 MHz	1.000 MHz	7.06612 GHz	-49.49 dBm	-48.36 dB	-8.36 dB

Date: 13.MAR.2024 15:51:48

Plot on Channel 7025MHz

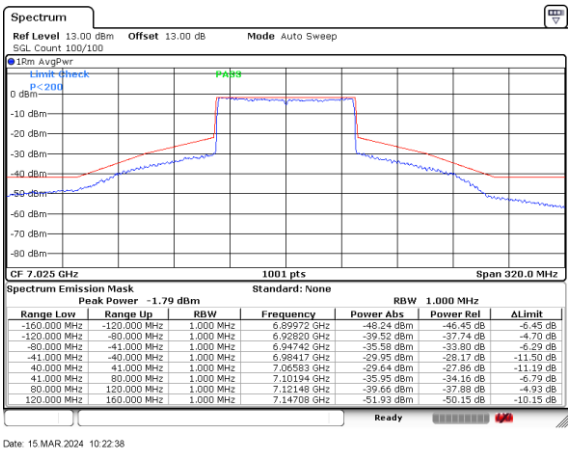

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-160.000 MHz	-120.000 MHz	1.000 MHz	6.89972 GHz	-48.24 dBm	-46.45 dB	-6.45 dB
-120.000 MHz	-80.000 MHz	1.000 MHz	6.92820 GHz	-39.52 dBm	-37.74 dB	-4.70 dB
-80.000 MHz	-41.000 MHz	1.000 MHz	6.94742 GHz	-35.58 dBm	-33.80 dB	-6.29 dB
-41.000 MHz	-40.000 MHz	1.000 MHz	6.98417 GHz	-29.95 dBm	-28.17 dB	-11.50 dB
40.000 MHz	41.000 MHz	1.000 MHz	7.06583 GHz	-29.64 dBm	-27.86 dB	-11.19 dB
41.000 MHz	80.000 MHz	1.000 MHz	7.10194 GHz	-35.95 dBm	-34.16 dB	-6.79 dB
80.000 MHz	120.000 MHz	1.000 MHz	7.12148 GHz	-39.66 dBm	-37.88 dB	-4.93 dB
120.000 MHz	160.000 MHz	1.000 MHz	7.14708 GHz	-51.93 dBm	-50.15 dB	-10.15 dB

<802.11ax Partial RU>

EUT Mode :	802.11ax HE20

Plot on Channel 5955MHz_26RU0

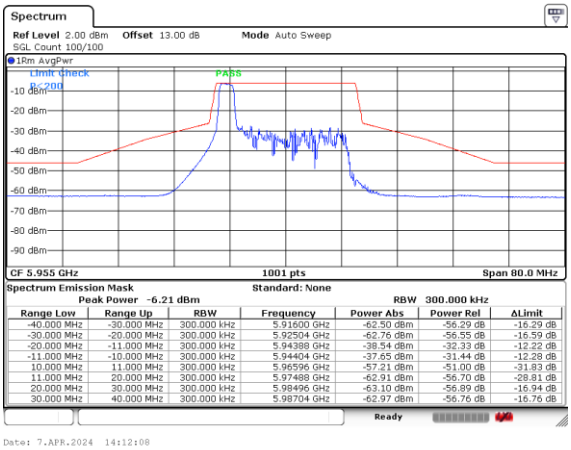

Plot on Channel 7095MHz_26RU8

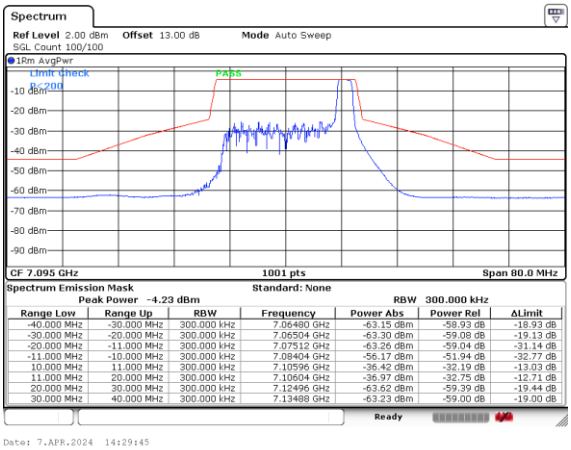

Plot on Channel 5955MHz_52RU37

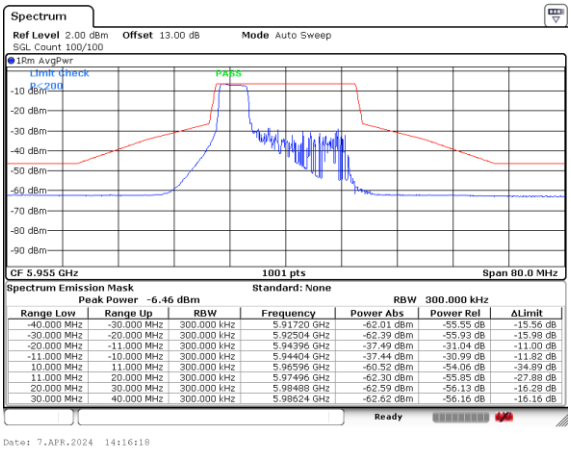

Plot on Channel 7095MHz_52RU40

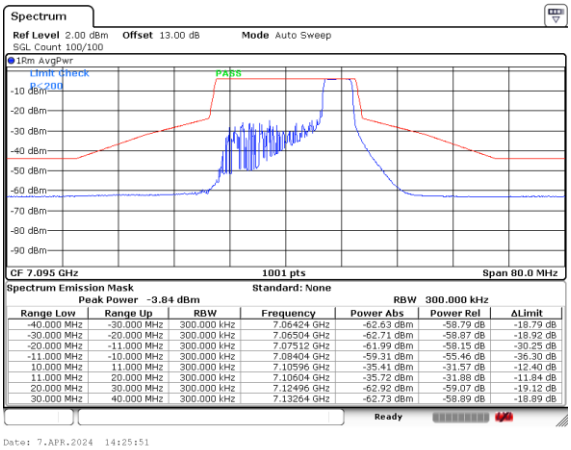

Plot on Channel 5955MHz_106RU53

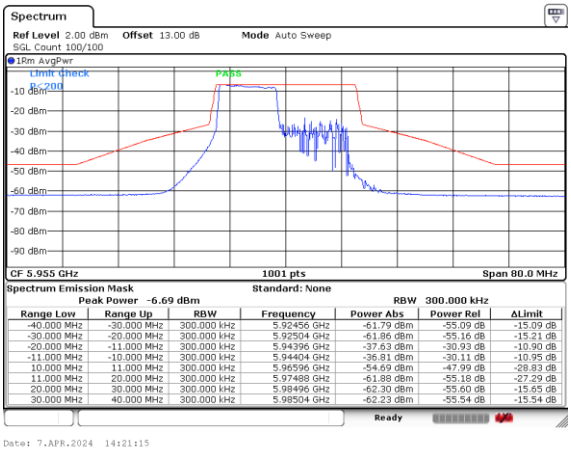

Plot on Channel 7095MHz_106RU54

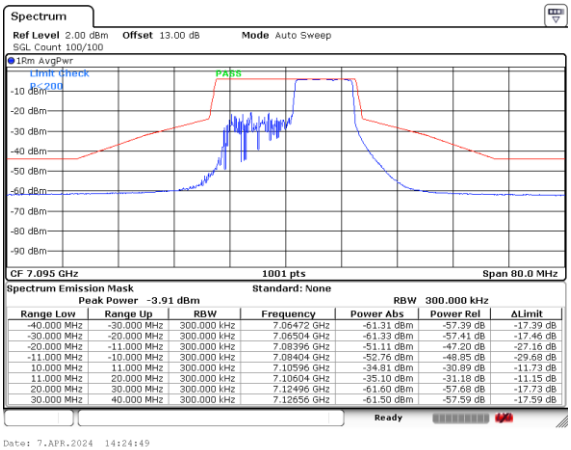

MIMO <Ant. 7+5(5)>

EUT Mode :	802.11ax HE20

Plot on Channel 5955MHz

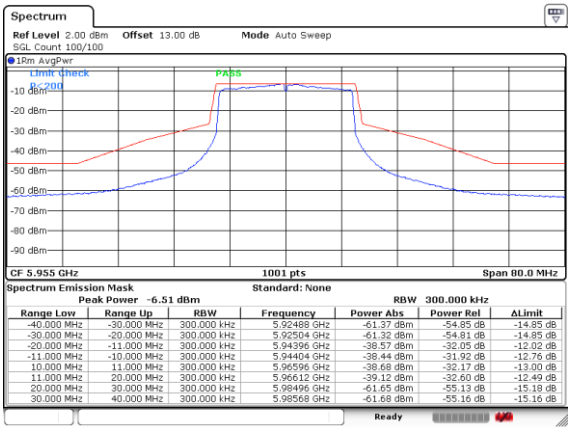

Plot on Channel 6175MHz

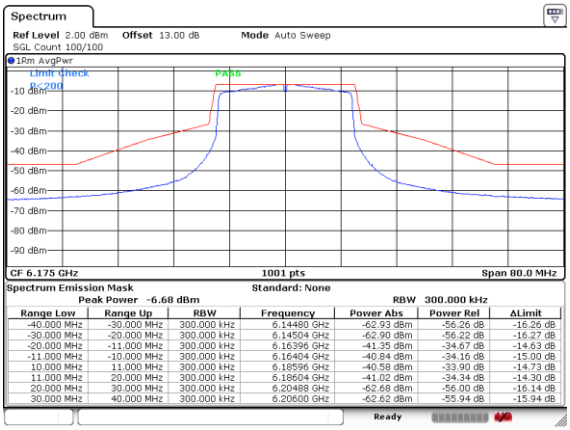

Plot on Channel 6415MHz

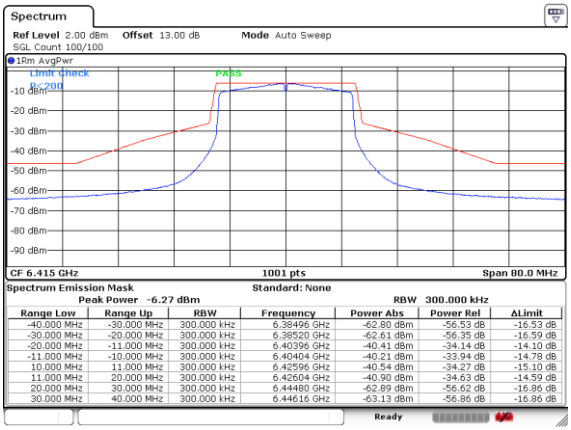

Plot on Channel 6435MHz

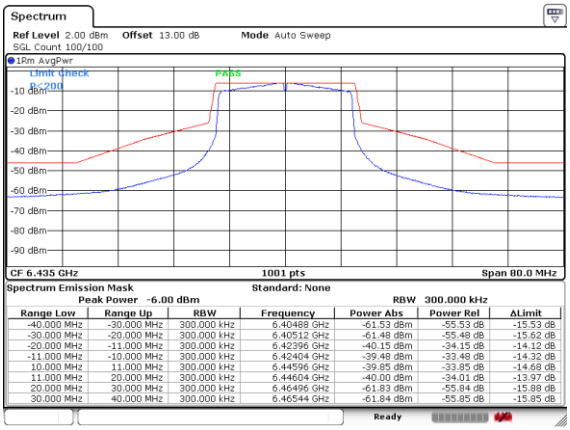

Plot on Channel 6475MHz

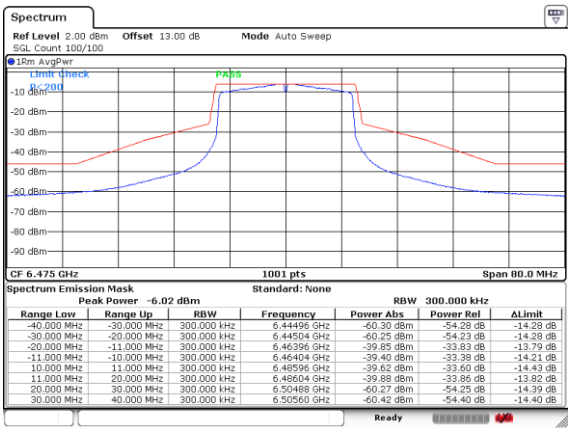

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-40.000 MHz	-30.000 MHz	300.000 kHz	6.44496 GHz	-60.30 dBm	-54.28 dB	-14.28 dB
-30.000 MHz	-20.000 MHz	300.000 kHz	6.44504 GHz	-60.25 dBm	-54.23 dB	-14.28 dB
-20.000 MHz	-11.000 MHz	300.000 kHz	6.46396 GHz	-39.85 dBm	-33.83 dB	-13.79 dB
-11.000 MHz	-10.000 MHz	300.000 kHz	6.46404 GHz	-39.40 dBm	-33.38 dB	-14.21 dB
10.000 MHz	11.000 MHz	300.000 kHz	6.48596 GHz	-39.62 dBm	-33.60 dB	-14.43 dB
11.000 MHz	20.000 MHz	300.000 kHz	6.48604 GHz	-39.88 dBm	-33.86 dB	-13.82 dB
20.000 MHz	30.000 MHz	300.000 kHz	6.50488 GHz	-60.27 dBm	-54.25 dB	-14.39 dB
30.000 MHz	40.000 MHz	300.000 kHz	6.50560 GHz	-60.42 dBm	-54.40 dB	-14.40 dB

Date: 12.MAR.2024 19:52:51

Plot on Channel 6515MHz

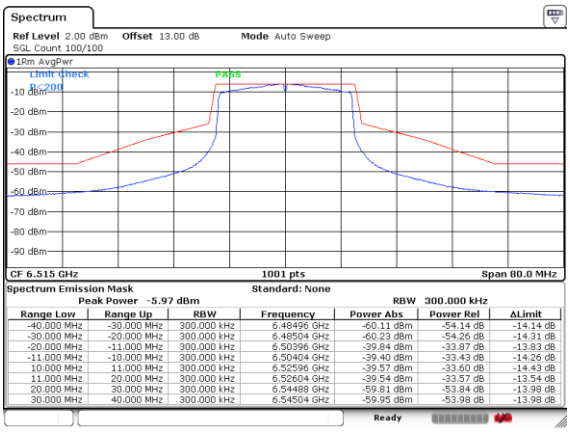

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-40.000 MHz	-30.000 MHz	300.000 kHz	6.48496 GHz	-60.11 dBm	-54.14 dB	-14.14 dB
-30.000 MHz	-20.000 MHz	300.000 kHz	6.48504 GHz	-60.23 dBm	-54.26 dB	-14.31 dB
-20.000 MHz	-11.000 MHz	300.000 kHz	6.50396 GHz	-39.84 dBm	-33.87 dB	-13.83 dB
-11.000 MHz	-10.000 MHz	300.000 kHz	6.50404 GHz	-39.40 dBm	-33.43 dB	-14.26 dB
10.000 MHz	11.000 MHz	300.000 kHz	6.52596 GHz	-39.57 dBm	-33.60 dB	-14.43 dB
11.000 MHz	20.000 MHz	300.000 kHz	6.52604 GHz	-39.54 dBm	-33.57 dB	-13.54 dB
20.000 MHz	30.000 MHz	300.000 kHz	6.54488 GHz	-59.81 dBm	-53.84 dB	-13.98 dB
30.000 MHz	40.000 MHz	300.000 kHz	6.54504 GHz	-59.95 dBm	-53.98 dB	-13.98 dB

Date: 12.MAR.2024 19:54:38

Plot on Channel 6535MHz

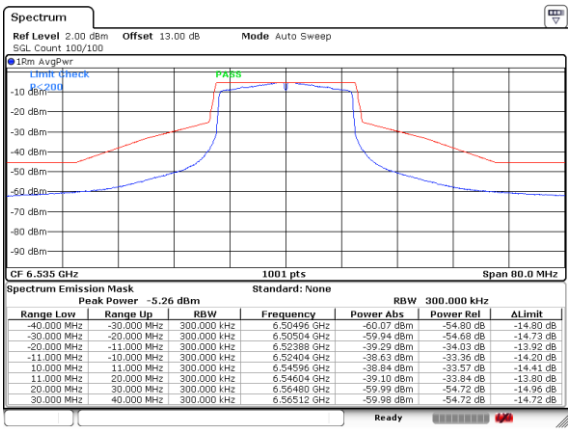

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-40.000 MHz	-30.000 MHz	300.000 kHz	6.50496 GHz	-60.07 dBm	-54.80 dB	-14.80 dB
-30.000 MHz	-20.000 MHz	300.000 kHz	6.50504 GHz	-59.94 dBm	-54.68 dB	-14.73 dB
-20.000 MHz	-11.000 MHz	300.000 kHz	6.52388 GHz	-39.29 dBm	-34.03 dB	-13.92 dB
-11.000 MHz	-10.000 MHz	300.000 kHz	6.52404 GHz	-38.63 dBm	-33.36 dB	-14.20 dB
10.000 MHz	11.000 MHz	300.000 kHz	6.54596 GHz	-38.84 dBm	-33.57 dB	-14.41 dB
11.000 MHz	20.000 MHz	300.000 kHz	6.54604 GHz	-39.10 dBm	-33.84 dB	-13.80 dB
20.000 MHz	30.000 MHz	300.000 kHz	6.56480 GHz	-59.99 dBm	-54.72 dB	-14.96 dB
30.000 MHz	40.000 MHz	300.000 kHz	6.56512 GHz	-59.98 dBm	-54.72 dB	-14.72 dB

Date: 12.MAR.2024 19:58:34

Plot on Channel 6695MHz

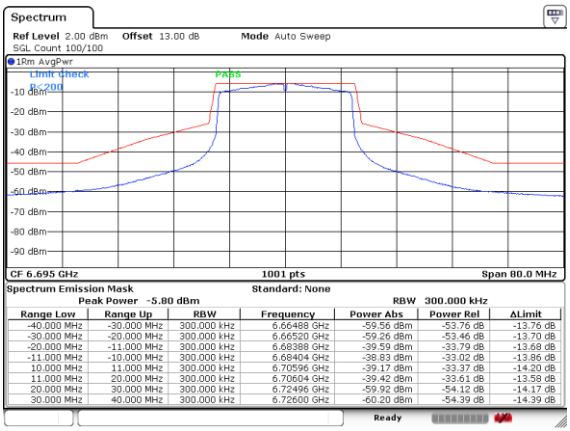

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-40.000 MHz	-30.000 MHz	300.000 kHz	6.66488 GHz	-59.56 dBm	-53.76 dB	-13.76 dB
-30.000 MHz	-20.000 MHz	300.000 kHz	6.66520 GHz	-59.26 dBm	-53.46 dB	-13.70 dB
-20.000 MHz	-11.000 MHz	300.000 kHz	6.68388 GHz	-39.59 dBm	-33.79 dB	-13.68 dB
-11.000 MHz	-10.000 MHz	300.000 kHz	6.68404 GHz	-38.83 dBm	-33.02 dB	-13.86 dB
10.000 MHz	11.000 MHz	300.000 kHz	6.70596 GHz	-39.17 dBm	-33.37 dB	-14.20 dB
11.000 MHz	20.000 MHz	300.000 kHz	6.70604 GHz	-39.42 dBm	-33.61 dB	-13.58 dB
20.000 MHz	30.000 MHz	300.000 kHz	6.72496 GHz	-59.92 dBm	-54.12 dB	-14.17 dB
30.000 MHz	40.000 MHz	300.000 kHz	6.72600 GHz	-60.20 dBm	-54.39 dB	-14.39 dB

Date: 12.MAR.2024 20:00:37

Plot on Channel 6855MHz

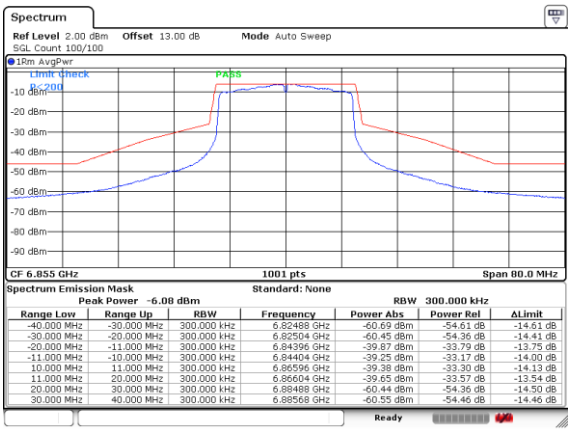

Plot on Channel 6875MHz

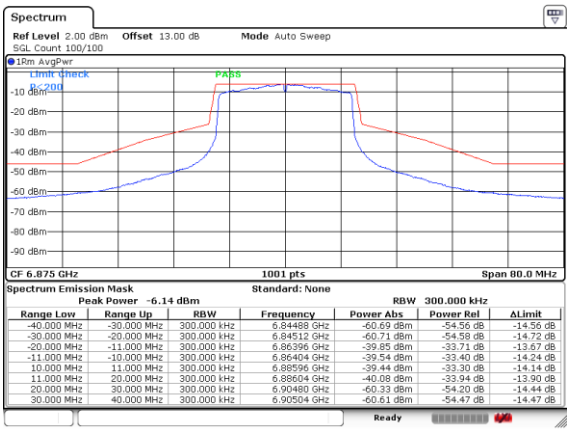

Plot on Channel 6895MHz

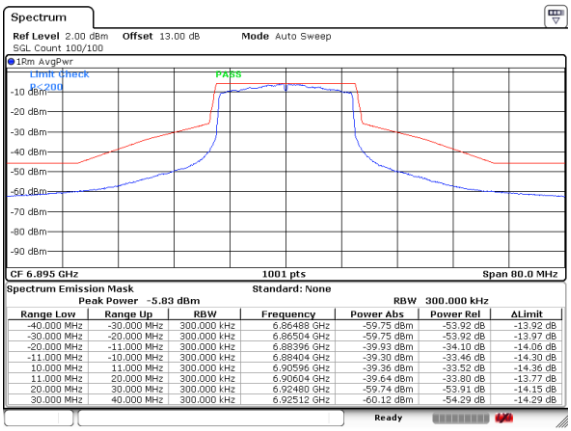

Plot on Channel 6995MHz

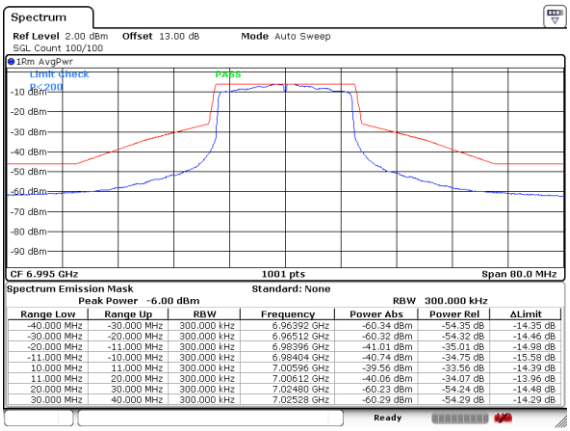

Plot on Channel 7095MHz

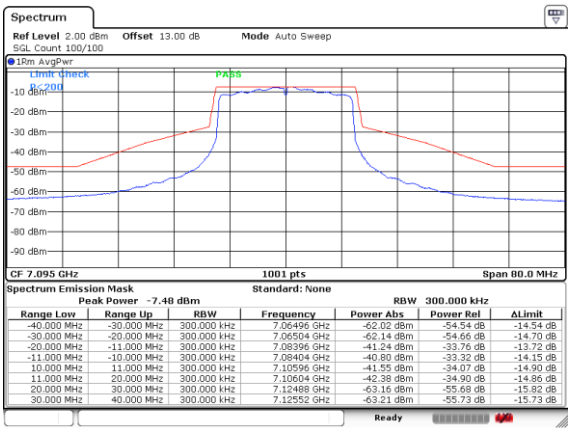

EUT Mode :	802.11ax HE40

Plot on Channel 5965MHz

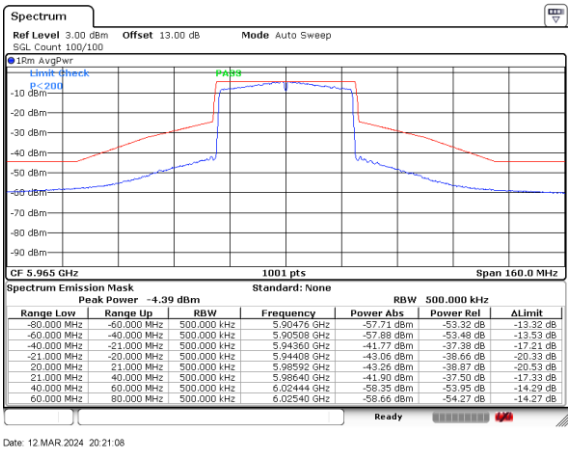

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-80.000 MHz	-60.000 MHz	500.000 kHz	5.90476 GHz	-57.71 dBm	-53.32 dB	-13.32 dB
-60.000 MHz	-40.000 MHz	500.000 kHz	5.90508 GHz	-57.88 dBm	-53.48 dB	-13.53 dB
-40.000 MHz	-21.000 MHz	500.000 kHz	5.94360 GHz	-41.77 dBm	-37.38 dB	-17.21 dB
-21.000 MHz	-20.000 MHz	500.000 kHz	5.94408 GHz	-43.06 dBm	-38.66 dB	-20.33 dB
20.000 MHz	21.000 MHz	500.000 kHz	5.98592 GHz	-43.26 dBm	-38.87 dB	-20.53 dB
21.000 MHz	40.000 MHz	500.000 kHz	5.98640 GHz	-41.90 dBm	-37.50 dB	-17.33 dB
40.000 MHz	60.000 MHz	500.000 kHz	6.02444 GHz	-58.35 dBm	-53.95 dB	-14.29 dB
60.000 MHz	80.000 MHz	500.000 kHz	6.02540 GHz	-58.66 dBm	-54.27 dB	-14.27 dB

Date: 12.MAR.2024 20:21:08

Plot on Channel 6165MHz

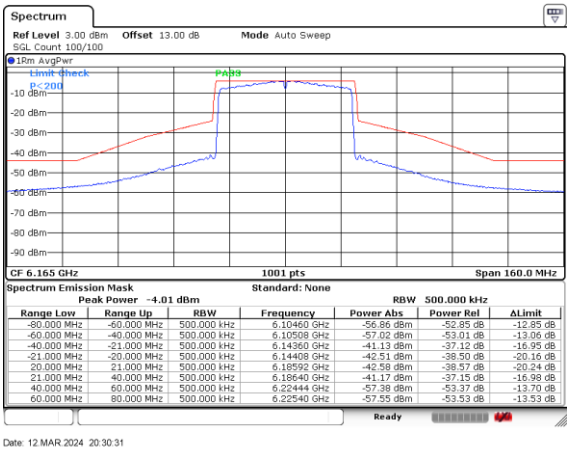

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-80.000 MHz	-60.000 MHz	500.000 kHz	6.10460 GHz	-56.86 dBm	-52.85 dB	-12.85 dB
-60.000 MHz	-40.000 MHz	500.000 kHz	6.10508 GHz	-57.02 dBm	-53.01 dB	-13.06 dB
-40.000 MHz	-21.000 MHz	500.000 kHz	6.14360 GHz	-41.13 dBm	-37.12 dB	-16.95 dB
-21.000 MHz	-20.000 MHz	500.000 kHz	6.14408 GHz	-42.51 dBm	-38.50 dB	-20.16 dB
20.000 MHz	21.000 MHz	500.000 kHz	6.18592 GHz	-42.58 dBm	-38.57 dB	-20.24 dB
21.000 MHz	40.000 MHz	500.000 kHz	6.18640 GHz	-41.17 dBm	-37.15 dB	-16.98 dB
40.000 MHz	60.000 MHz	500.000 kHz	6.22444 GHz	-57.38 dBm	-53.37 dB	-13.70 dB
60.000 MHz	80.000 MHz	500.000 kHz	6.22540 GHz	-57.55 dBm	-53.53 dB	-13.53 dB

Date: 12.MAR.2024 20:30:31

Plot on Channel 6405MHz

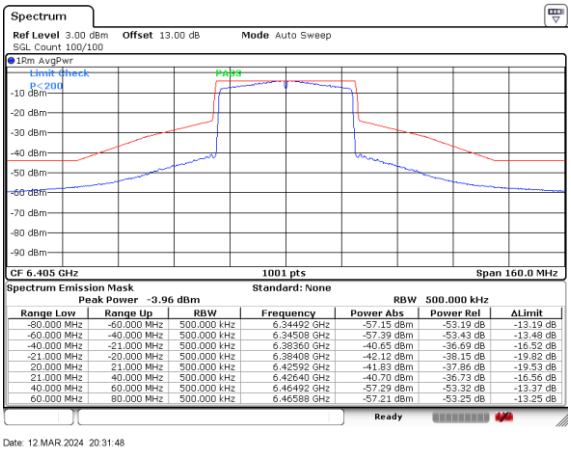

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-80.000 MHz	-60.000 MHz	500.000 kHz	6.34492 GHz	-57.15 dBm	-53.19 dB	-13.19 dB
-60.000 MHz	-40.000 MHz	500.000 kHz	6.34508 GHz	-57.39 dBm	-53.43 dB	-13.48 dB
-40.000 MHz	-21.000 MHz	500.000 kHz	6.38360 GHz	-40.65 dBm	-36.69 dB	-16.52 dB
-21.000 MHz	-20.000 MHz	500.000 kHz	6.38408 GHz	-42.12 dBm	-38.15 dB	-19.82 dB
20.000 MHz	21.000 MHz	500.000 kHz	6.42592 GHz	-41.83 dBm	-37.86 dB	-19.53 dB
21.000 MHz	40.000 MHz	500.000 kHz	6.42640 GHz	-40.70 dBm	-36.73 dB	-16.56 dB
40.000 MHz	60.000 MHz	500.000 kHz	6.46492 GHz	-57.29 dBm	-53.32 dB	-13.37 dB
60.000 MHz	80.000 MHz	500.000 kHz	6.46588 GHz	-57.21 dBm	-53.25 dB	-13.25 dB

Date: 12.MAR.2024 20:31:48

Plot on Channel 6445MHz

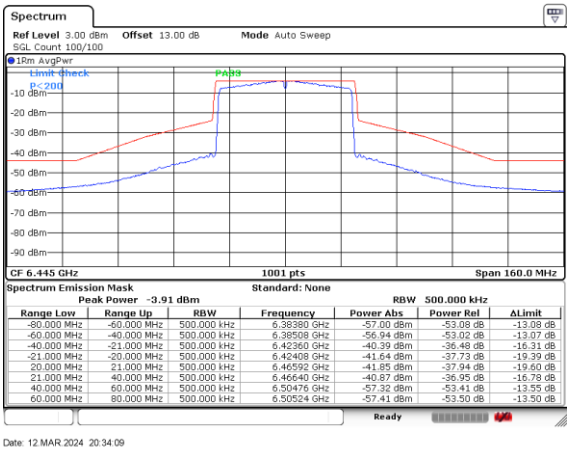

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-80.000 MHz	-60.000 MHz	500.000 kHz	6.38380 GHz	-57.00 dBm	-53.08 dB	-13.08 dB
-60.000 MHz	-40.000 MHz	500.000 kHz	6.38508 GHz	-56.94 dBm	-53.02 dB	-13.07 dB
-40.000 MHz	-21.000 MHz	500.000 kHz	6.42360 GHz	-40.39 dBm	-36.48 dB	-16.31 dB
-21.000 MHz	-20.000 MHz	500.000 kHz	6.42408 GHz	-41.64 dBm	-37.73 dB	-19.39 dB
20.000 MHz	21.000 MHz	500.000 kHz	6.46592 GHz	-41.85 dBm	-37.94 dB	-19.60 dB
21.000 MHz	40.000 MHz	500.000 kHz	6.46640 GHz	-40.87 dBm	-36.95 dB	-16.78 dB
40.000 MHz	60.000 MHz	500.000 kHz	6.50476 GHz	-57.32 dBm	-53.41 dB	-13.55 dB
60.000 MHz	80.000 MHz	500.000 kHz	6.50524 GHz	-57.41 dBm	-53.50 dB	-13.50 dB

Date: 12.MAR.2024 20:34:09

Plot on Channel 6485MHz

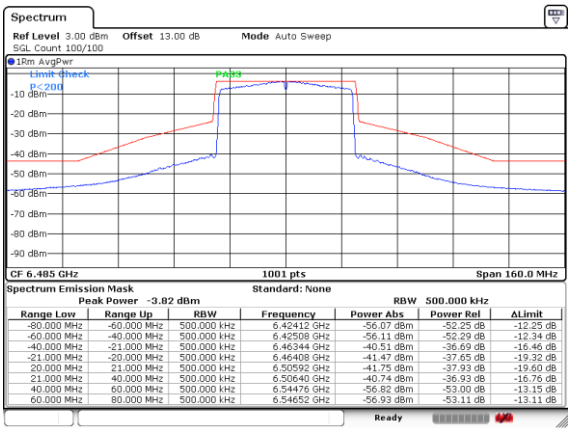

Date: 13.MAR.2024 10:19:30

Plot on Channel 6525MHz

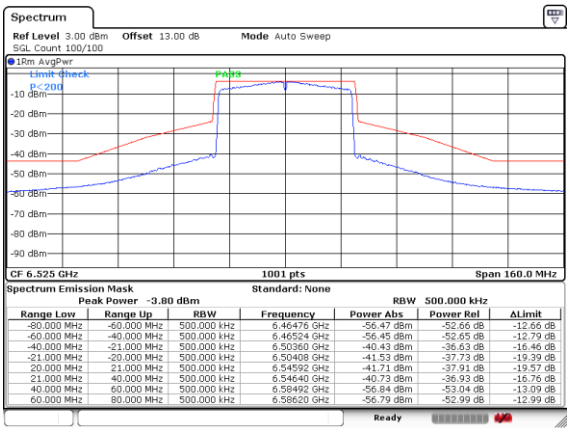

Date: 13.MAR.2024 10:28:49

Plot on Channel 6565MHz

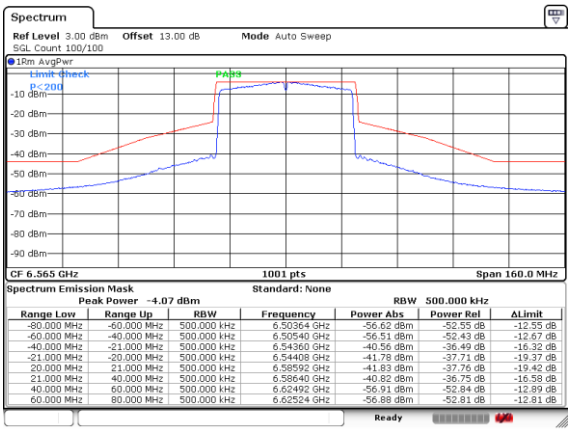

Date: 13.MAR.2024 10:44:55

Plot on Channel 6685MHz

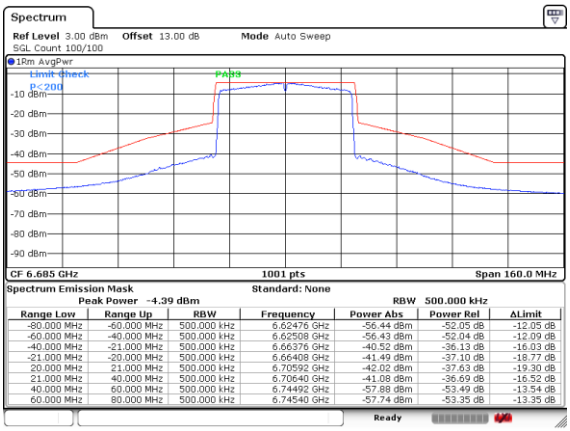

Date: 13.MAR.2024 11:47:53

Plot on Channel 6845MHz

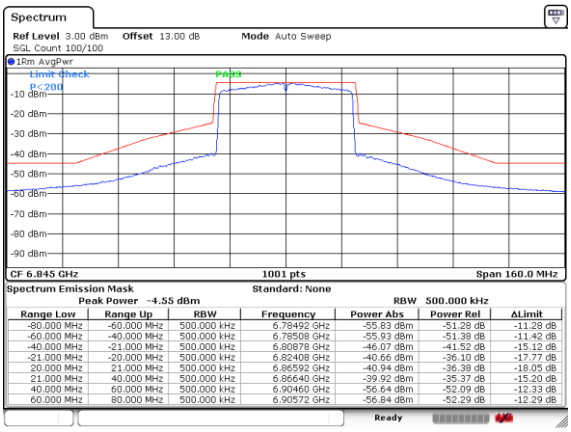

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-80.000 MHz	-60.000 MHz	500.000 kHz	6.78492 GHz	-55.83 dBm	-51.28 dB	-11.28 dB
-60.000 MHz	-40.000 MHz	500.000 kHz	6.78508 GHz	-55.93 dBm	-51.38 dB	-11.42 dB
-40.000 MHz	-21.000 MHz	500.000 kHz	6.80878 GHz	-46.07 dBm	-41.52 dB	-15.12 dB
-21.000 MHz	-20.000 MHz	500.000 kHz	6.82408 GHz	-40.66 dBm	-36.10 dB	-17.77 dB
20.000 MHz	21.000 MHz	500.000 kHz	6.86592 GHz	-40.94 dBm	-36.38 dB	-18.05 dB
21.000 MHz	40.000 MHz	500.000 kHz	6.86640 GHz	-39.92 dBm	-35.37 dB	-15.20 dB
40.000 MHz	60.000 MHz	500.000 kHz	6.90460 GHz	-56.64 dBm	-52.09 dB	-12.33 dB
60.000 MHz	80.000 MHz	500.000 kHz	6.90572 GHz	-56.84 dBm	-52.29 dB	-12.29 dB

Date: 13.MAR.2024 11:51:56

Plot on Channel 6885MHz

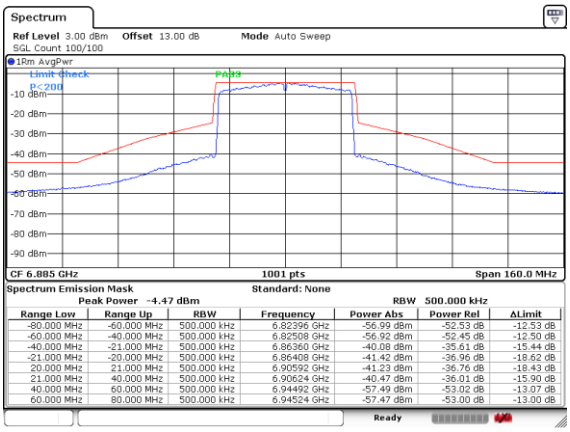

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-80.000 MHz	-60.000 MHz	500.000 kHz	6.82396 GHz	-56.99 dBm	-52.53 dB	-12.53 dB
-60.000 MHz	-40.000 MHz	500.000 kHz	6.82508 GHz	-56.92 dBm	-52.45 dB	-12.50 dB
-40.000 MHz	-21.000 MHz	500.000 kHz	6.86360 GHz	-40.08 dBm	-35.61 dB	-15.44 dB
-21.000 MHz	-20.000 MHz	500.000 kHz	6.86408 GHz	-41.42 dBm	-36.96 dB	-18.62 dB
20.000 MHz	21.000 MHz	500.000 kHz	6.90592 GHz	-41.23 dBm	-36.76 dB	-18.43 dB
21.000 MHz	40.000 MHz	500.000 kHz	6.90624 GHz	-40.47 dBm	-36.01 dB	-15.90 dB
40.000 MHz	60.000 MHz	500.000 kHz	6.94492 GHz	-57.49 dBm	-53.02 dB	-13.07 dB
60.000 MHz	80.000 MHz	500.000 kHz	6.94524 GHz	-57.47 dBm	-53.00 dB	-13.00 dB

Date: 13.MAR.2024 11:57:59

Plot on Channel 6925MHz

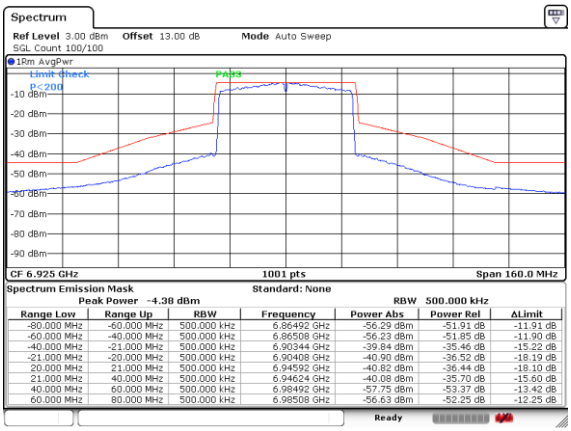

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-80.000 MHz	-60.000 MHz	500.000 kHz	6.86492 GHz	-56.29 dBm	-51.91 dB	-11.91 dB
-60.000 MHz	-40.000 MHz	500.000 kHz	6.86508 GHz	-56.23 dBm	-51.85 dB	-11.90 dB
-40.000 MHz	-21.000 MHz	500.000 kHz	6.90344 GHz	-39.84 dBm	-35.46 dB	-15.22 dB
-21.000 MHz	-20.000 MHz	500.000 kHz	6.90408 GHz	-40.90 dBm	-36.52 dB	-18.19 dB
20.000 MHz	21.000 MHz	500.000 kHz	6.94592 GHz	-40.82 dBm	-36.44 dB	-18.10 dB
21.000 MHz	40.000 MHz	500.000 kHz	6.94624 GHz	-40.08 dBm	-35.70 dB	-15.60 dB
40.000 MHz	60.000 MHz	500.000 kHz	6.98492 GHz	-57.75 dBm	-53.37 dB	-13.42 dB
60.000 MHz	80.000 MHz	500.000 kHz	6.98508 GHz	-56.63 dBm	-52.25 dB	-12.25 dB

Date: 13.MAR.2024 12:03:53

Plot on Channel 6965MHz

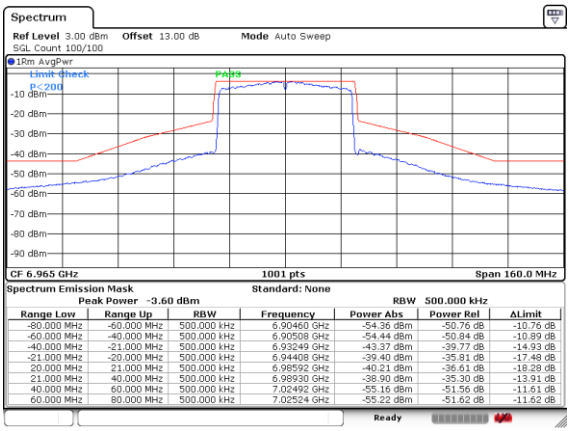

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-80.000 MHz	-60.000 MHz	500.000 kHz	6.90460 GHz	-54.36 dBm	-50.76 dB	-10.76 dB
-60.000 MHz	-40.000 MHz	500.000 kHz	6.90508 GHz	-54.44 dBm	-50.84 dB	-10.89 dB
-40.000 MHz	-21.000 MHz	500.000 kHz	6.93249 GHz	-43.37 dBm	-39.77 dB	-14.93 dB
-21.000 MHz	-20.000 MHz	500.000 kHz	6.94408 GHz	-39.40 dBm	-35.81 dB	-17.48 dB
20.000 MHz	21.000 MHz	500.000 kHz	6.98592 GHz	-40.21 dBm	-36.61 dB	-18.28 dB
21.000 MHz	40.000 MHz	500.000 kHz	6.98930 GHz	-38.90 dBm	-35.30 dB	-13.91 dB
40.000 MHz	60.000 MHz	500.000 kHz	7.02492 GHz	-55.16 dBm	-51.56 dB	-11.61 dB
60.000 MHz	80.000 MHz	500.000 kHz	7.02524 GHz	-55.22 dBm	-51.62 dB	-11.62 dB

Date: 13.MAR.2024 13:08:22

Plot on Channel 7085MHz

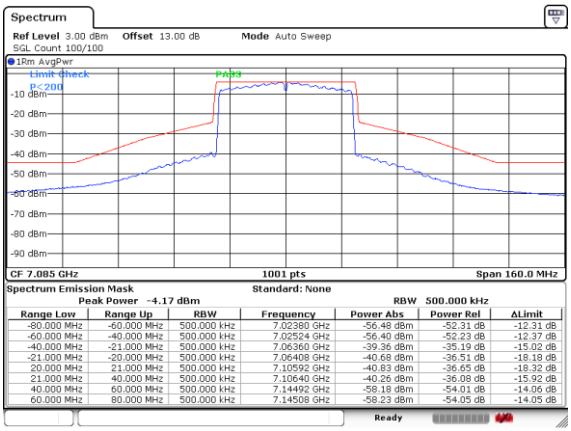

Range Low	Range Up	RBW	Frequency	Power Abs	Power Rel	ΔLimit
-80.000 MHz	-60.000 MHz	500.000 kHz	7.02380 GHz	-56.48 dBm	-52.31 dB	-12.31 dB
-60.000 MHz	-40.000 MHz	500.000 kHz	7.02524 GHz	-56.40 dBm	-52.23 dB	-12.37 dB
-40.000 MHz	-21.000 MHz	500.000 kHz	7.06360 GHz	-39.36 dBm	-35.19 dB	-15.02 dB
-21.000 MHz	-20.000 MHz	500.000 kHz	7.06408 GHz	-40.68 dBm	-36.51 dB	-18.18 dB
20.000 MHz	21.000 MHz	500.000 kHz	7.10592 GHz	-40.83 dBm	-36.65 dB	-18.32 dB
21.000 MHz	40.000 MHz	500.000 kHz	7.10640 GHz	-40.26 dBm	-36.08 dB	-15.92 dB
40.000 MHz	60.000 MHz	500.000 kHz	7.14492 GHz	-58.18 dBm	-54.01 dB	-14.06 dB
60.000 MHz	80.000 MHz	500.000 kHz	7.14508 GHz	-58.23 dBm	-54.05 dB	-14.05 dB

Date: 13.MAR.2024 13:20:05