

Date: 2025-11-14

01_LTE Band 71_20M_QPSK_1_0_Left Cheek_0mm_Ch133322

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 683.000 MHz; Duty Cycle: 1:1

Medium: HSL_750_251114 Medium parameters used: $f = 683.000$ MHz; $\sigma = 0.883$ S/m; $\epsilon_r = 42.9$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.223 W/kg; SAR (10g) = 0.156 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.281 W/kg; SAR (10g) = 0.176 W/kg

Smallest distance from peaks to all points 3 dB below = 21.8 mm

Ratio of SAR at M2 to SAR at M1 = 94.8 %

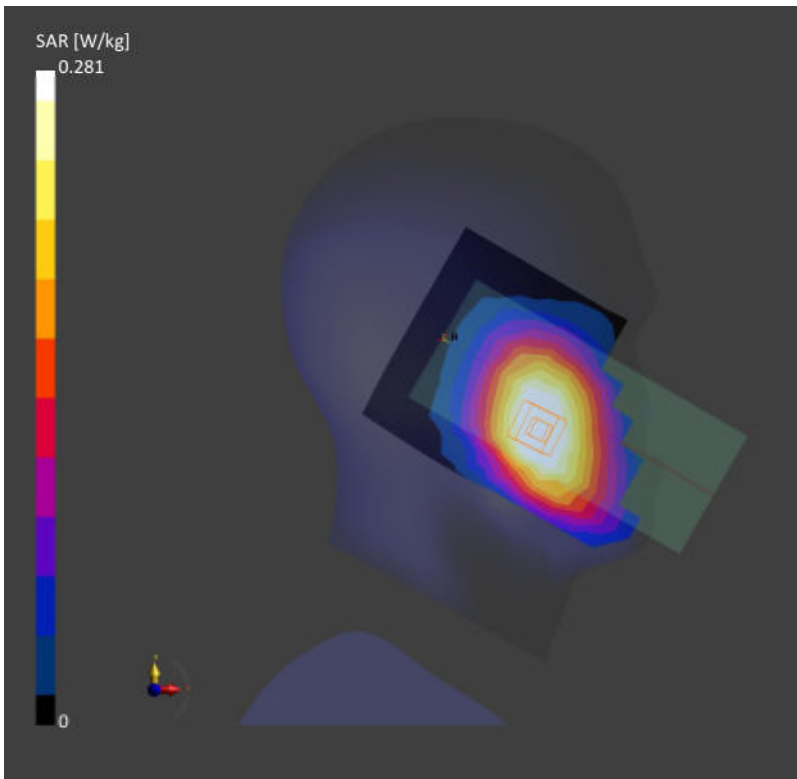

Date: 2025-11-14

02_LTE Band 12_10M_QPSK_1_0_Left Cheek_0mm_Ch23095

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 707.500 MHz; Duty Cycle: 1:1

Medium: HSL_750_251114 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.879$ S/m; $\epsilon_r = 43.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.184 W/kg; SAR (10g) = 0.128 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.291 W/kg; SAR (10g) = 0.153 W/kg

Smallest distance from peaks to all points 3 dB below = 21.3 mm

Ratio of SAR at M2 to SAR at M1 = 95.1 %

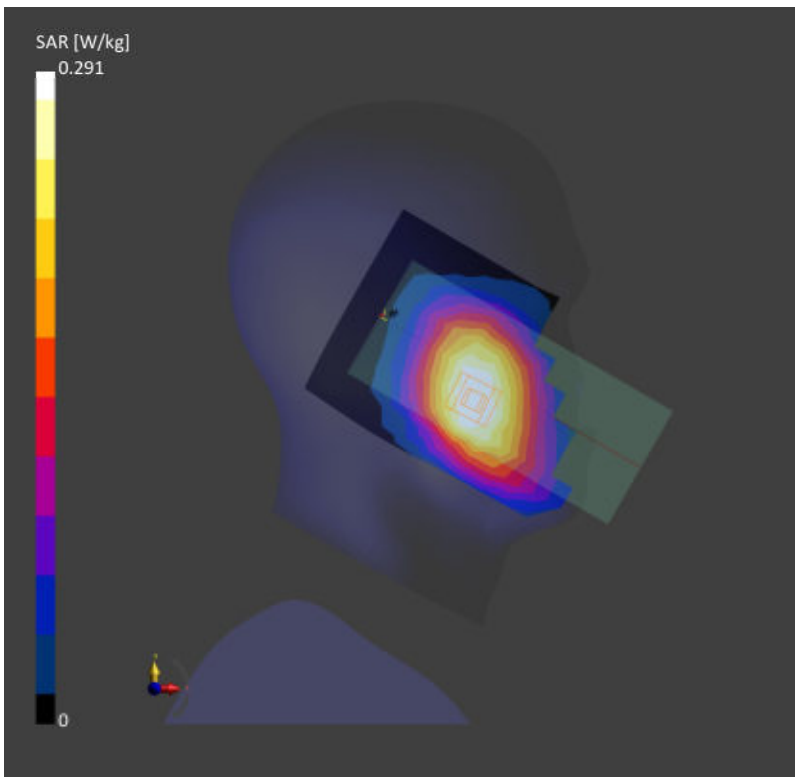

Date: 2025-11-14

03_LTE Band 13_10M_QPSK_1_0_Left Cheek_0mm_Ch23230

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 782.000 MHz; Duty Cycle: 1:1

Medium: HSL_750_251114 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 42.7$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.178 W/kg; SAR (10g) = 0.122 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.09 dB

SAR (1g) = 0.267 W/kg; SAR (10g) = 0.149 W/kg

Smallest distance from peaks to all points 3 dB below = 22.5 mm

Ratio of SAR at M2 to SAR at M1 = 94.0 %

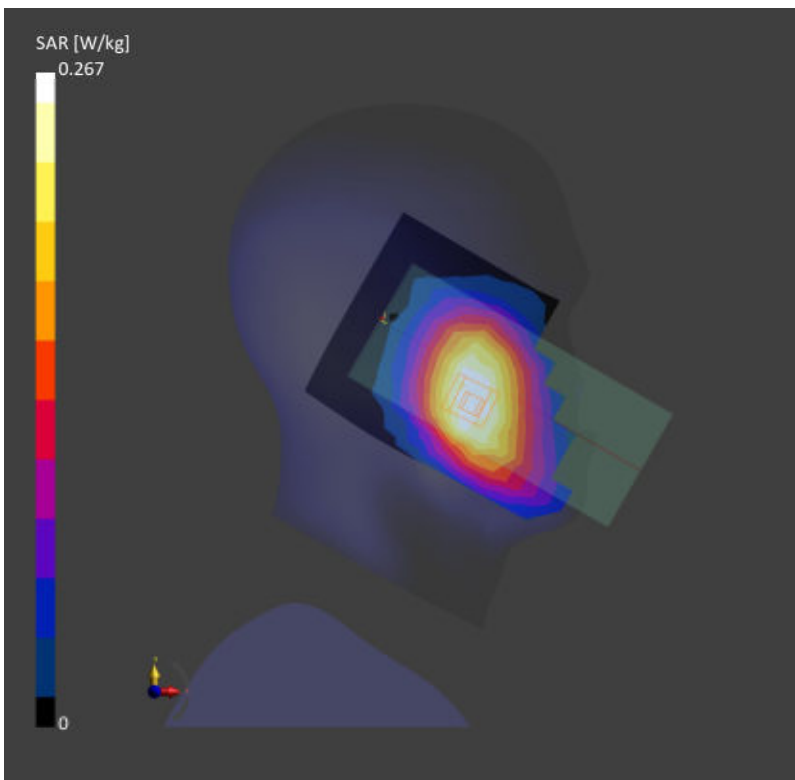

Date: 2025-11-14

04_LTE Band 14_10M_QPSK_1_0_Left Cheek_0mm_Ch23330

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 793.000 MHz; Duty Cycle: 1:1

Medium: HSL_750_251114 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.910$ S/m; $\epsilon_r = 42.3$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.233 W/kg; SAR (10g) = 0.161 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.07 dB

SAR (1g) = 0.242 W/kg; SAR (10g) = 0.192 W/kg

Smallest distance from peaks to all points 3 dB below = 20.4 mm

Ratio of SAR at M2 to SAR at M1 = 94.7 %

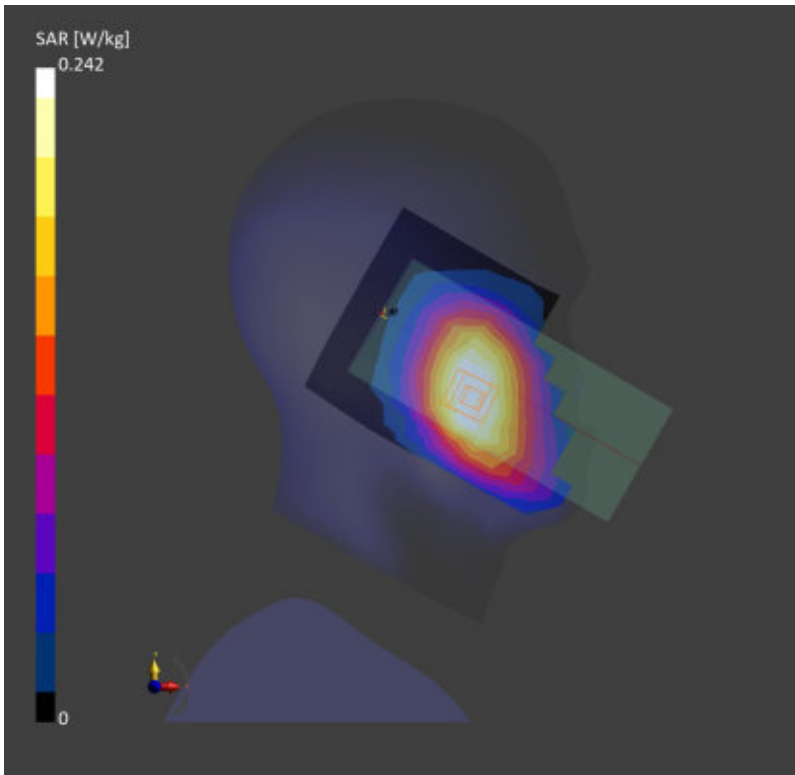

Date: 2025-11-14

05_FR1 n71_20M_QPSK_50_28_Left Cheek_0mm_Ch136100

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 680.500 MHz; Duty Cycle: 1:1

Medium: HSL_750_251114 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.860$ S/m; $\epsilon_r = 43.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.072 W/kg; SAR (10g) = 0.050 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.09 dB

SAR (1g) = 0.115 W/kg; SAR (10g) = 0.059 W/kg

Smallest distance from peaks to all points 3 dB below = 17.9 mm

Ratio of SAR at M2 to SAR at M1 = 94.5 %

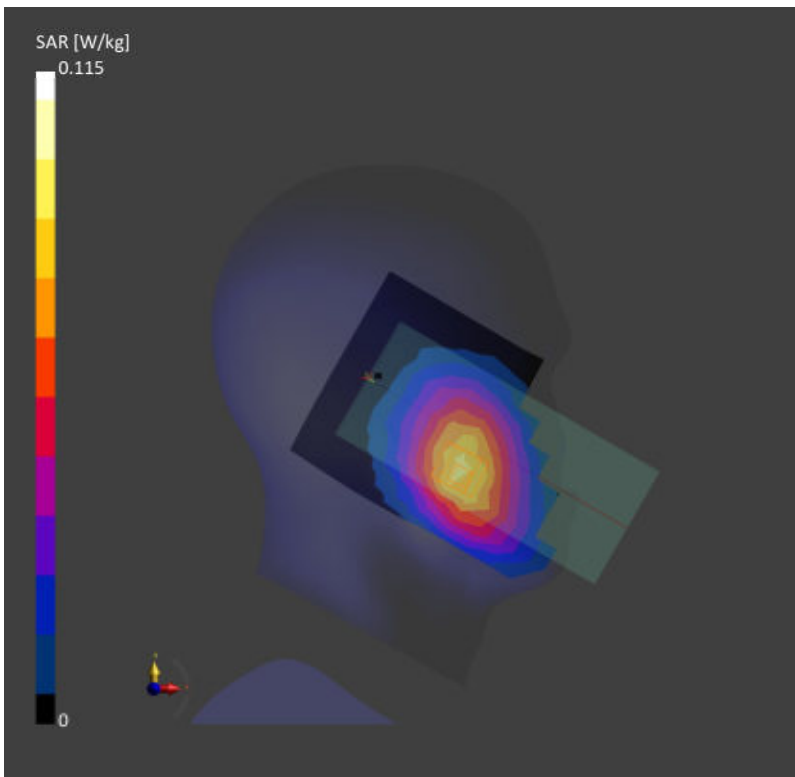

Date: 2025-11-14

06_FR1 n12_15M_QPSK_36_22_Right Cheek_0mm_Ch141500

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 707.500 MHz; Duty Cycle: 1:1

Medium: HSL_750_251114 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.879$ S/m; $\epsilon_r = 43.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10938-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.057 W/kg; SAR (10g) = 0.039 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.058 W/kg; SAR (10g) = 0.048 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 96.0 %

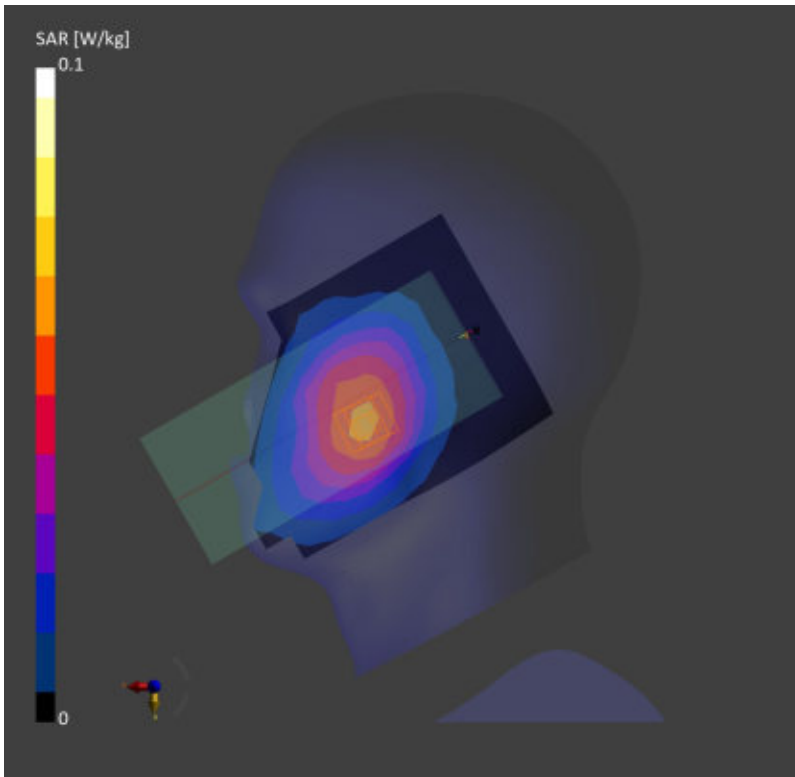

Date: 2025-11-14

07_FR1 n14_10M_QPSK_1_1_Left Cheek_0mm_Ch158600

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 793.000 MHz; Duty Cycle: 1:1

Medium: HSL_750_251114 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.910$ S/m; $\epsilon_r = 42.3$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.138 W/kg; SAR (10g) = 0.094 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.184 W/kg; SAR (10g) = 0.112 W/kg

Smallest distance from peaks to all points 3 dB below = 23.9 mm

Ratio of SAR at M2 to SAR at M1 = 95.8 %

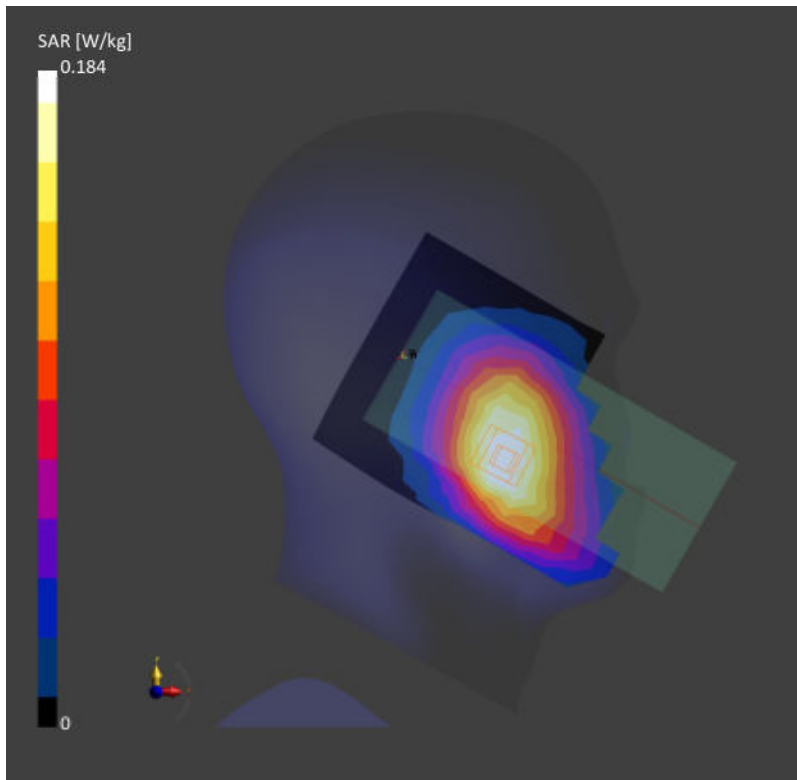

Date: 2025-11-15

08_GSM850_GPRS (4 Tx slots)_Left Cheek_0mm_Ch189

Communication System: GPRS-FDD

Frequency: 836.400 MHz; Duty Cycle: 1:2.08

Medium: HSL_835_251115 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.01, 8.65, 8.19); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.158 W/kg; SAR (10g) = 0.108 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.12 dB

SAR (1g) = 0.235 W/kg; SAR (10g) = 0.127 W/kg

Smallest distance from peaks to all points 3 dB below = 17.4 mm

Ratio of SAR at M2 to SAR at M1 = 95.8 %

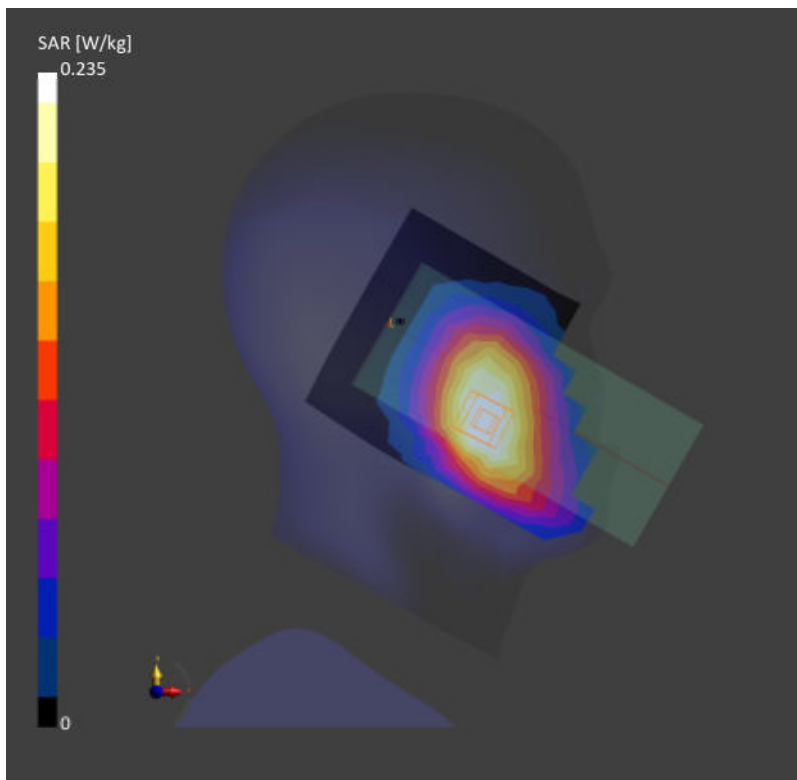

Date: 2025-11-15

09_WCDMA V_RMC 12.2Kbps_Left Cheek_0mm_Ch4182

Communication System: UMTS-FDD

Frequency: 836.400 MHz; Duty Cycle: 1:1

Medium: HSL_835_251115 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.01, 8.65, 8.19); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.229 W/kg; SAR (10g) = 0.156 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.197 W/kg; SAR (10g) = 0.154 W/kg

Smallest distance from peaks to all points 3 dB below = 16.9 mm

Ratio of SAR at M2 to SAR at M1 = 95.7 %

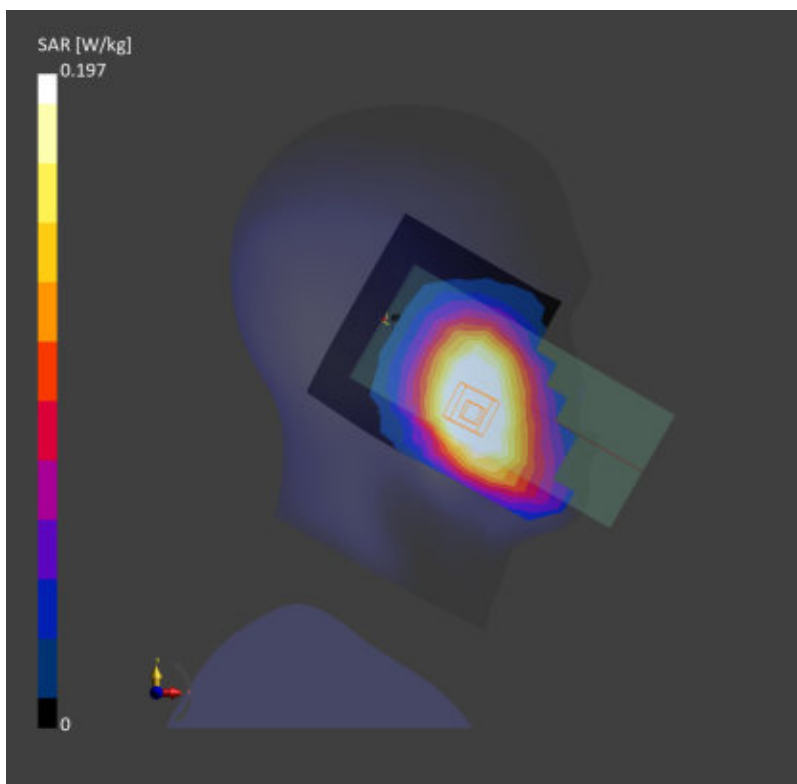

Date: 2025-11-15

10_LTE Band 26_15M_QPSK_1_0_Left Cheek_0mm_Ch26865

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: HSL_835_251115 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.01, 8.65, 8.19); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.237 W/kg; SAR (10g) = 0.163 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.298 W/kg; SAR (10g) = 0.196 W/kg

Smallest distance from peaks to all points 3 dB below = 21.3 mm

Ratio of SAR at M2 to SAR at M1 = 95.2 %

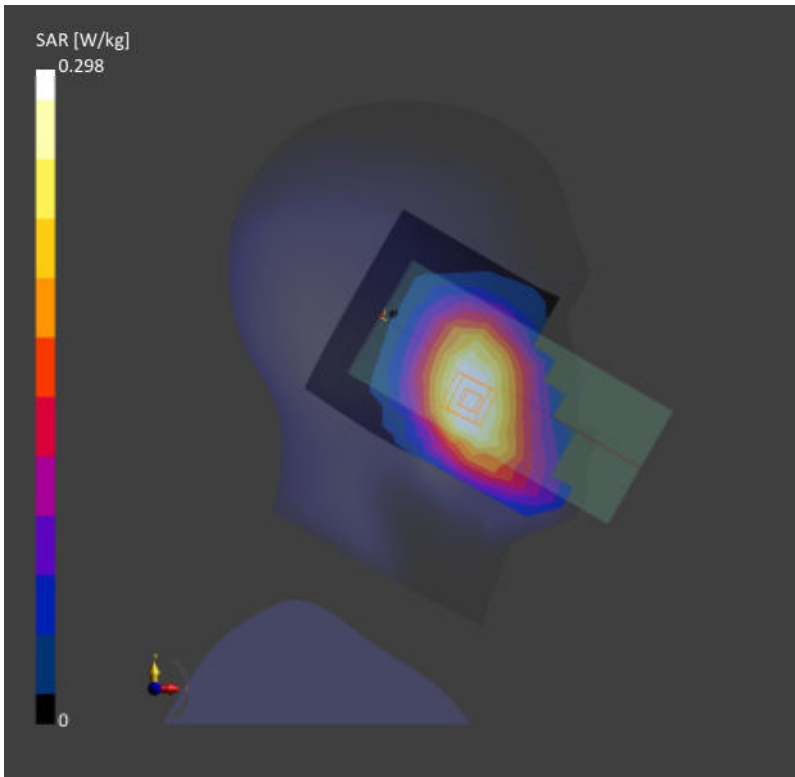

Date: 2025-11-15

11_FR1 n26_20M_QPSK_1_1_Left Cheek_0mm_Ch166300

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: HSL_835_251115 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.01, 8.65, 8.19); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.132 W/kg; SAR (10g) = 0.090 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.06 dB

SAR (1g) = 0.195 W/kg; SAR (10g) = 0.105 W/kg

Smallest distance from peaks to all points 3 dB below = 19.5 mm

Ratio of SAR at M2 to SAR at M1 = 94.5 %

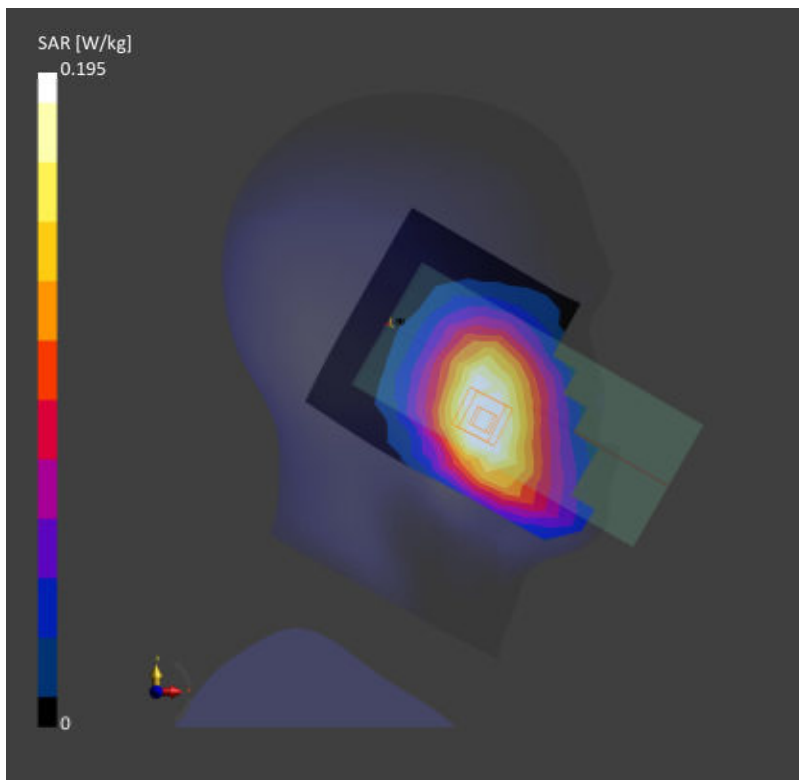

Date: 2025-11-16

12_WCDMA IV_RMC 12.2Kbps_Right Cheek_0mm_Ch1513

Communication System: UMTS-FDD

Frequency: 1752.600 MHz; Duty Cycle: 1:1

Medium: HSL_1750_251116 Medium parameters used: $f = 1752.600$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.86, 7.4, 7.01); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.605 W/kg; SAR (10g) = 0.349 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.647 W/kg; SAR (10g) = 0.367 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 89.7 %

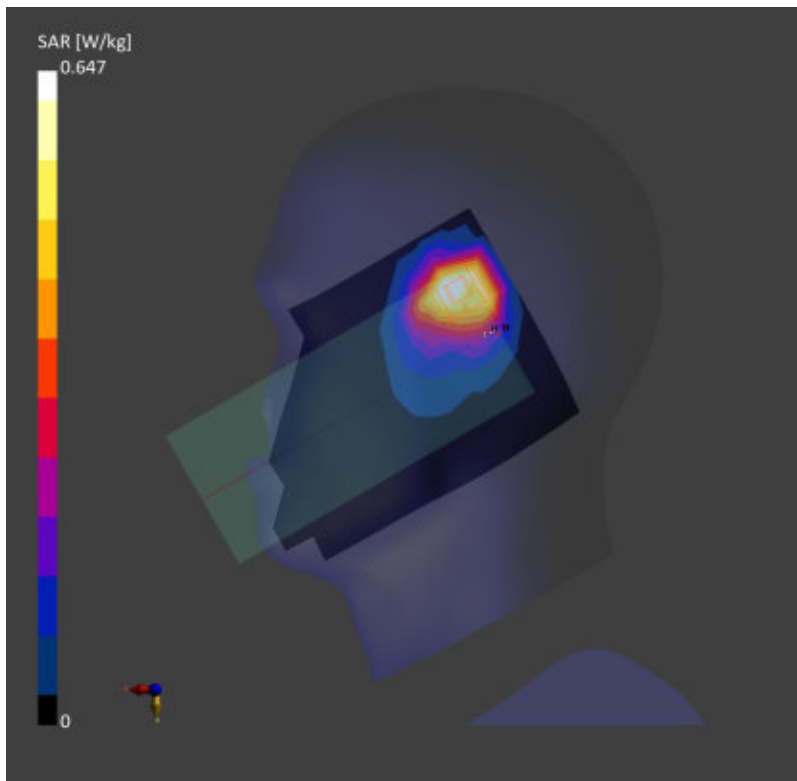

Date: 2025-11-16

13_LTE Band 66_20M_QPSK_1_0_Right Cheek_0mm_Ch132572

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 1770.000 MHz; Duty Cycle: 1:1

Medium: HSL_1750_251116 Medium parameters used: $f = 1770.000$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.86, 7.4, 7.01); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.487 W/kg; SAR (10g) = 0.283 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.16 dB

SAR (1g) = 0.502 W/kg; SAR (10g) = 0.291 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 85.7 %

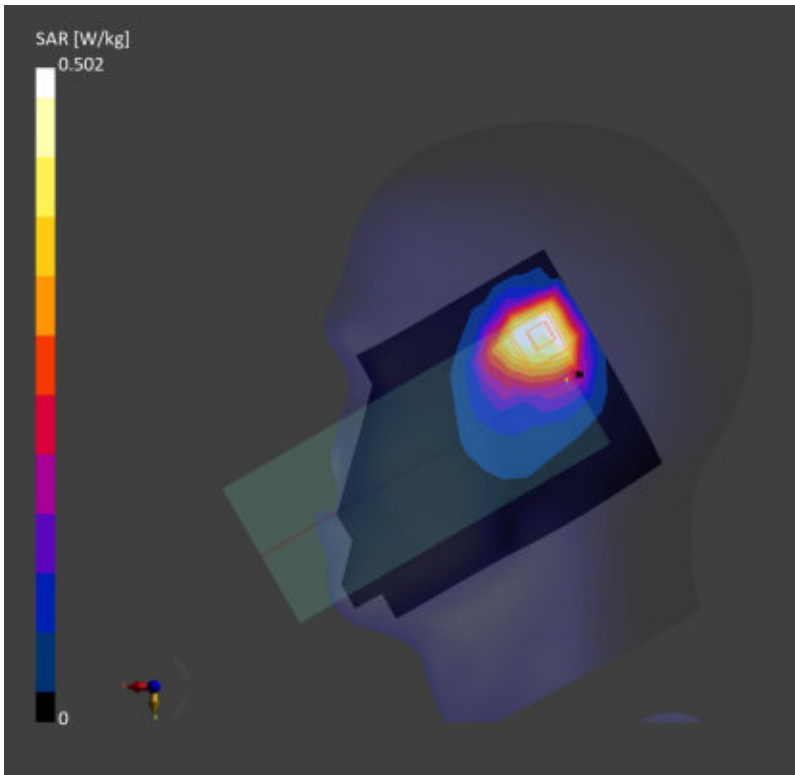

Date: 2025-11-16

14_FR1 n70_15M_QPSK_36_22_Right Cheek_0mm_Ch340500

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 1702.500 MHz; Duty Cycle: 1:1

Medium: HSL_1750_251116 Medium parameters used: $f=1702.500$ MHz; $\sigma=1.33$ S/m; $\epsilon_r=40.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.86, 7.4, 7.01); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10938-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.565 W/kg; SAR (10g) = 0.329 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.560 W/kg; SAR (10g) = 0.332 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 80.3 %

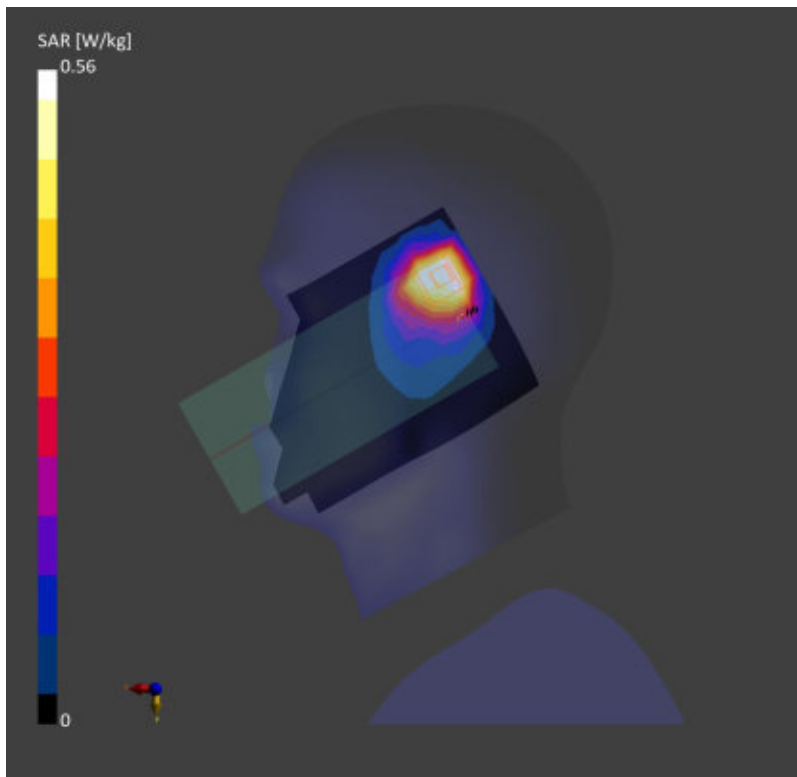

Date: 2025-11-16

15_FR1 n66_40M_QPSK_1_1_Right Cheek_0mm_Ch349000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 1745.000 MHz; Duty Cycle: 1:1

Medium: HSL_1750_251116 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.86, 7.4, 7.01); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.626 W/kg; SAR (10g) = 0.365 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.15 dB

SAR (1g) = 0.654 W/kg; SAR (10g) = 0.382 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 80.9 %

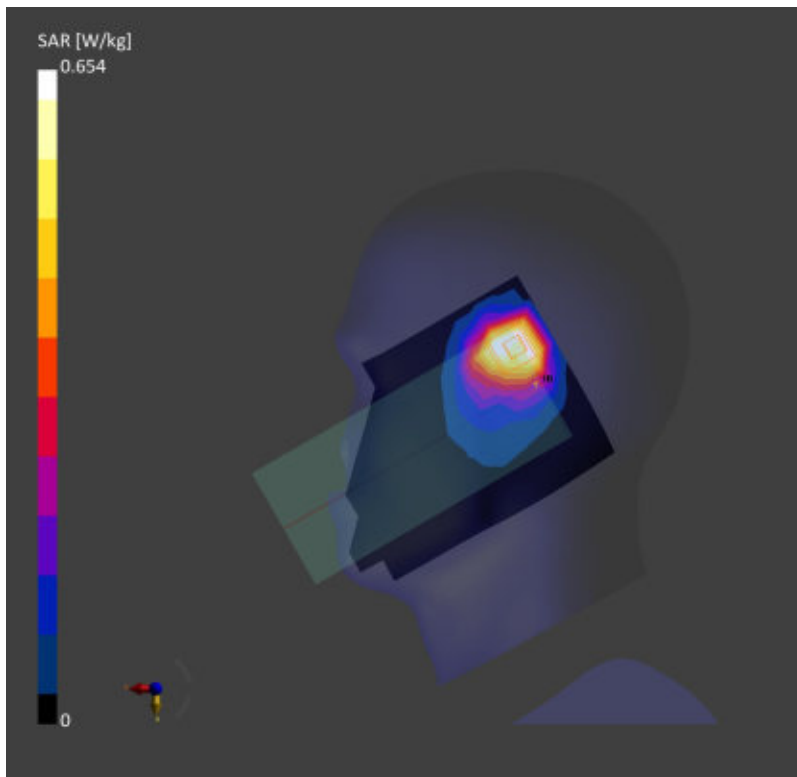

Date: 2025-11-17

16_GSM1900_GPRS (4 Tx slots)_Right Cheek_0mm_Ch661

Communication System: GPRS-FDD

Frequency: 1880.000 MHz; Duty Cycle: 1:2.08

Medium: HSL_1900_251117 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.64, 7.17, 6.79); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.493 W/kg; SAR (10g) = 0.245 W/kg;


Zoom Scan (33.0 mm x 33.0 mm x 30.0 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.499 W/kg; SAR (10g) = 0.227 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 79.6 %

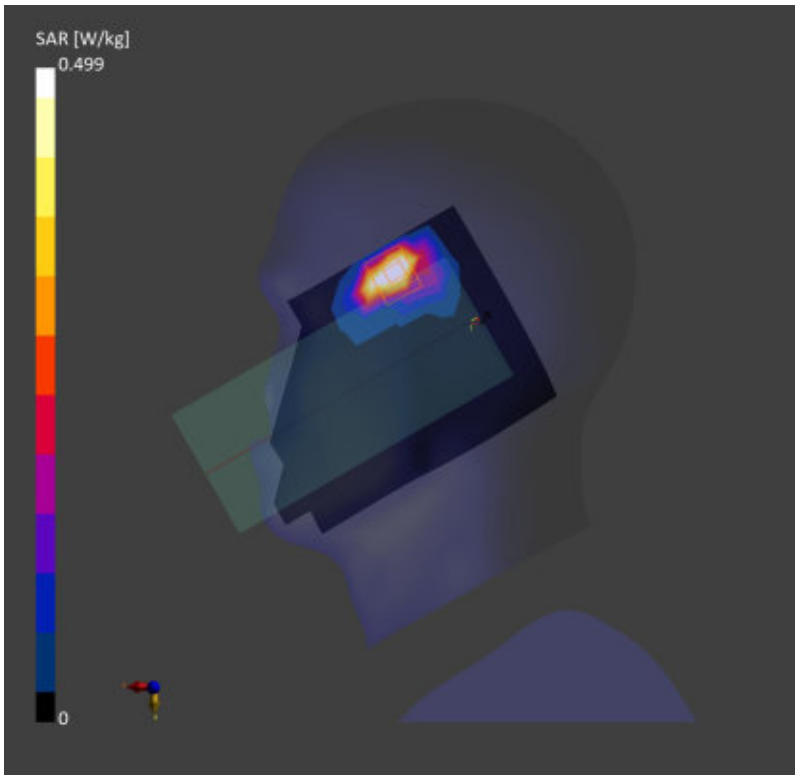

Date: 2025-11-17

17_WCDMA II_RMC 12.2Kbps_Right Cheek_0mm_Ch9262

Communication System: UMTS-FDD

Frequency: 1852.400 MHz; Duty Cycle: 1:1

Medium: HSL_1900_251117 Medium parameters used: $f = 1852.400$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 39.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.64, 7.17, 6.79); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.629 W/kg; SAR (10g) = 0.360 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.680 W/kg; SAR (10g) = 0.384 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 89.3 %

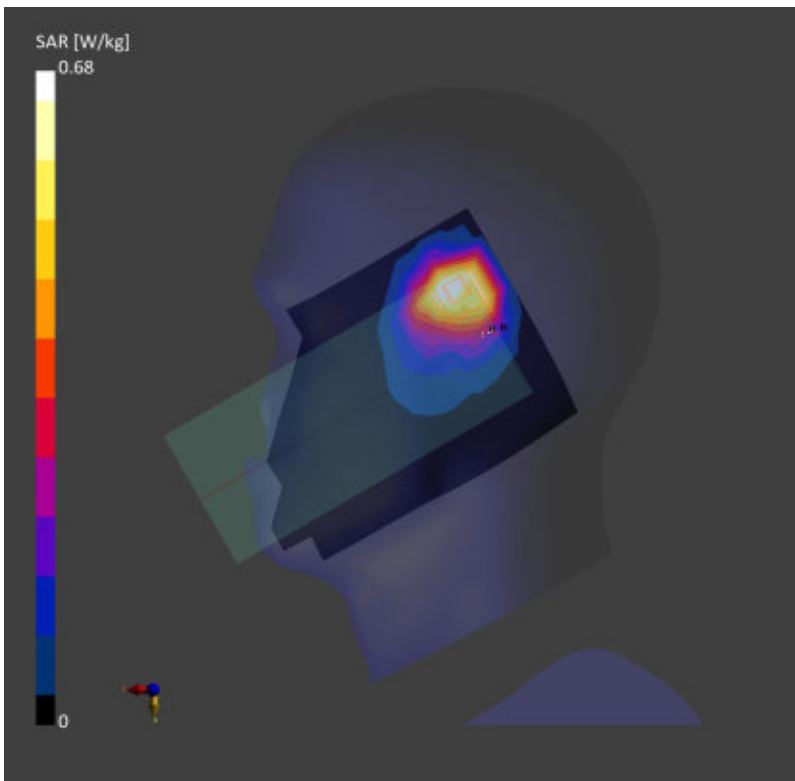

Date: 2025-11-17

18_LTE Band 25_20M_QPSK_1_0_Right Cheek_0mm_Ch26140

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 1860.000 MHz; Duty Cycle: 1:1

Medium: HSL_1900_251117 Medium parameters used: $f = 1860.000$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 39.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.64, 7.17, 6.79); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.483 W/kg; SAR (10g) = 0.279 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.532 W/kg; SAR (10g) = 0.303 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 87.4 %

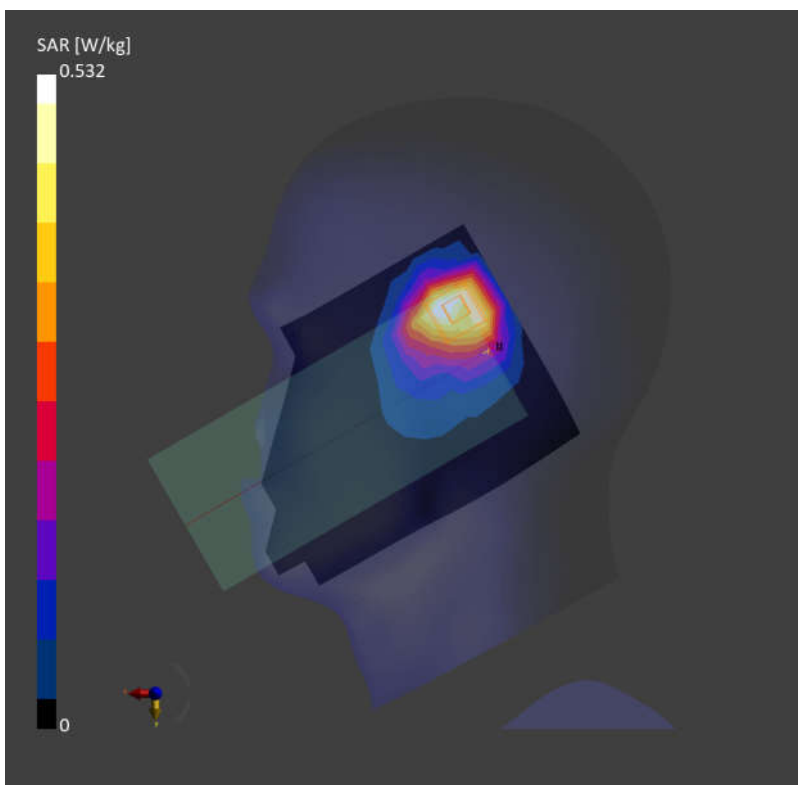

Date: 2025-11-17

19_FR1 n25_40M_QPSK_1_1_Right Cheek_0mm_Ch376500

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 1882.500 MHz; Duty Cycle: 1:1

Medium: HSL_1900_251117 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 39.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.64, 7.17, 6.79); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.578 W/kg; SAR (10g) = 0.286 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.16 dB

SAR (1g) = 0.636 W/kg; SAR (10g) = 0.288 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 79.4 %

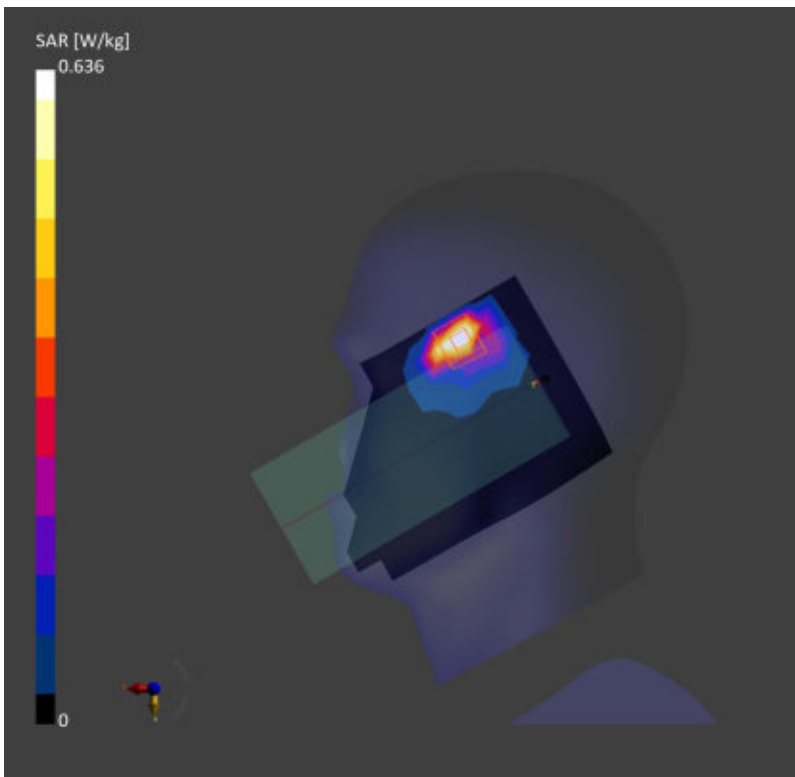

Date: 2025-11-18

20_LTE Band 30_10M_QPSK_1_0_Right Cheek_0mm_Ch27710

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 2310.000 MHz; Duty Cycle: 1:1

Medium: HSL_2300_251118 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.62$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.25, 6.75, 6.39); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.688 W/kg; SAR (10g) = 0.353 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.07 dB

SAR (1g) = 0.694 W/kg; SAR (10g) = 0.341 W/kg

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 81.8 %

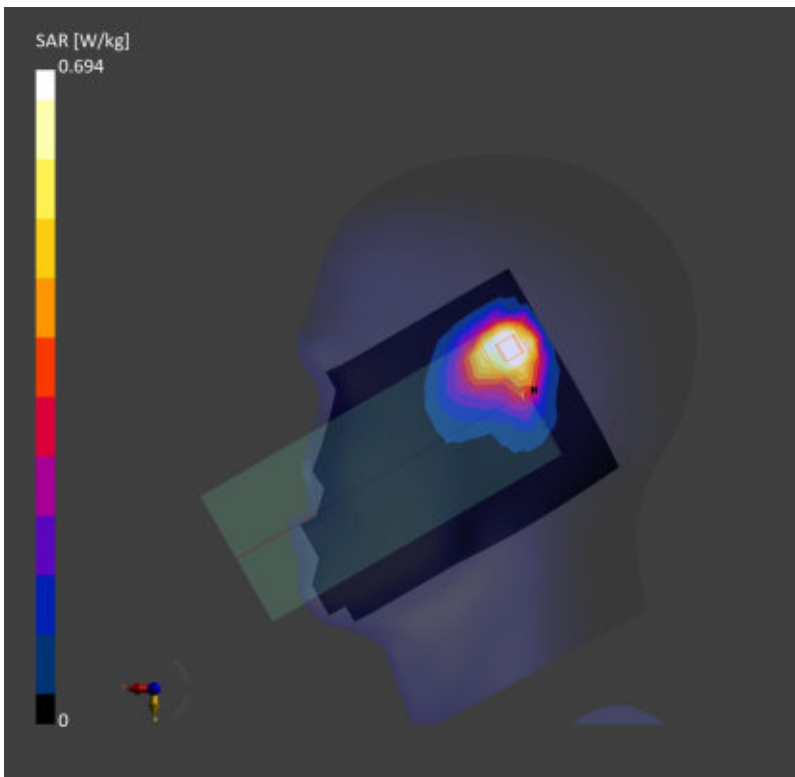

Date: 2025-11-18

21_FR1 n30_10M_QPSK_25_14_Right Cheek_0mm_Ch462000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 2310.000 MHz; Duty Cycle: 1:1

Medium: HSL_2300_251118 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.62$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.25, 6.75, 6.39); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.609 W/kg; SAR (10g) = 0.268 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.619 W/kg; SAR (10g) = 0.265 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 76.0 %

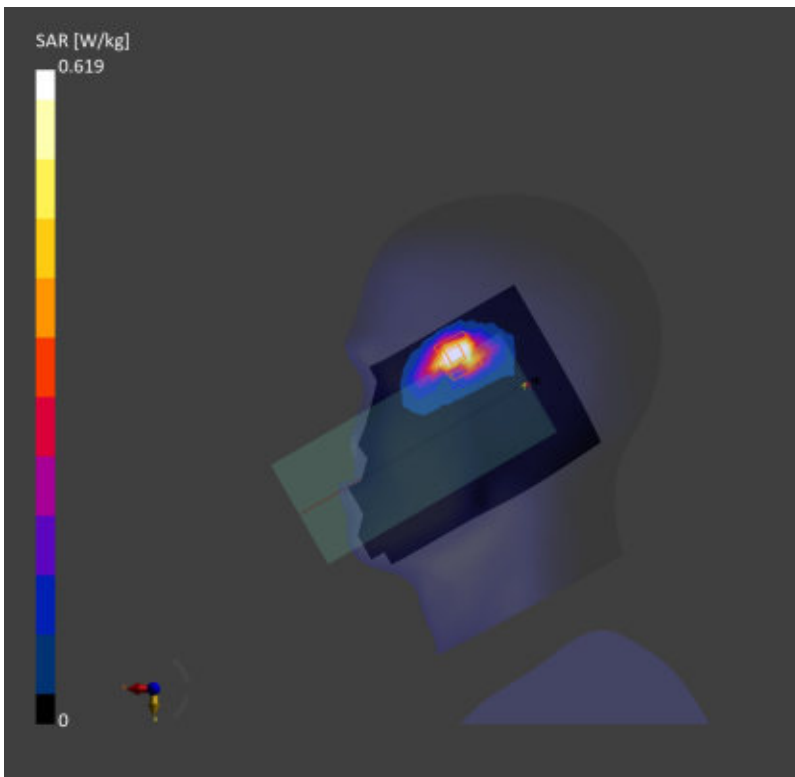

Date: 2025-11-19

22_LTE Band 7_20M_QPSK_1_0_Left Cheek_0mm_Ch21100

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 2535.000 MHz; Duty Cycle: 1:1

Medium: HSL_2600_251119 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.96, 6.44, 6.09); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.489 W/kg; SAR (10g) = 0.247 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 0.525 W/kg; SAR (10g) = 0.271 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 86.1 %

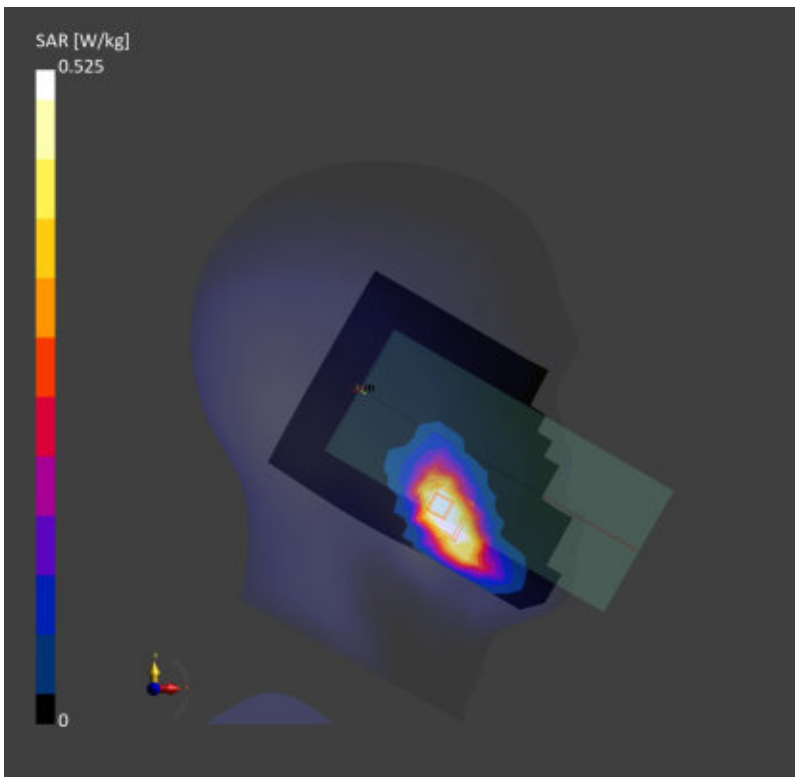

Date: 2025-11-19

23_LTE Band 41 HPUE_20M_QPSK_1_0_Right Tilted_0mm_Ch41055

Communication System: LTE-TDD

AntennaCfg:SISO; Frequency: 2636.500 MHz; Duty Cycle: 1:2.33

Medium: HSL_2600_251119 Medium parameters used: $f = 2636.500$ MHz; $\sigma = 1.96$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.96, 6.44, 6.09); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.626 W/kg; SAR (10g) = 0.272 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.09 dB

SAR (1g) = 0.627 W/kg; SAR (10g) = 0.268 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 78.4 %

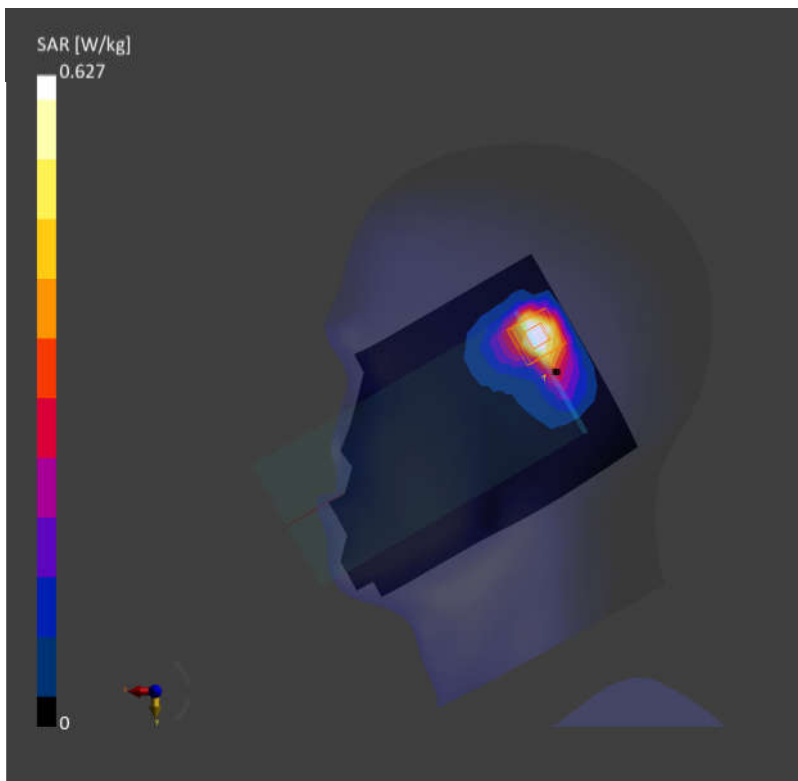

Date: 2025-11-19

24_FR1 n7_50M_QPSK_135_68_Right Tilted_0mm_Ch507000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 2535.000 MHz; Duty Cycle: 1:1

Medium: HSL_2600_251119 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.96, 6.44, 6.09); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10935-AAD

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.518 W/kg; SAR (10g) = 0.222 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.509 W/kg; SAR (10g) = 0.219 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 79.7 %

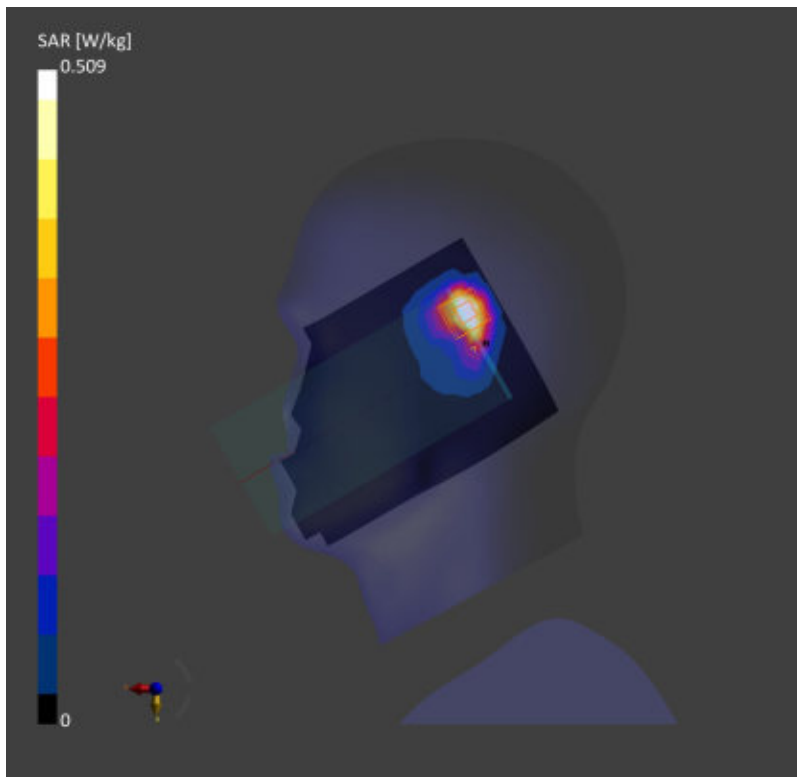

Date: 2025-11-19

25_FR1 n41 HPUE_100M_QPSK_135_69_Left Cheek_0mm_Ch518598

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 2592.990 MHz; Duty Cycle: 1:1

Medium: HSL_2600_251119 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.96, 6.44, 6.09); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10803-AAF

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.713 W/kg; SAR (10g) = 0.362 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 0.645 W/kg; SAR (10g) = 0.347 W/kg

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 86.2 %

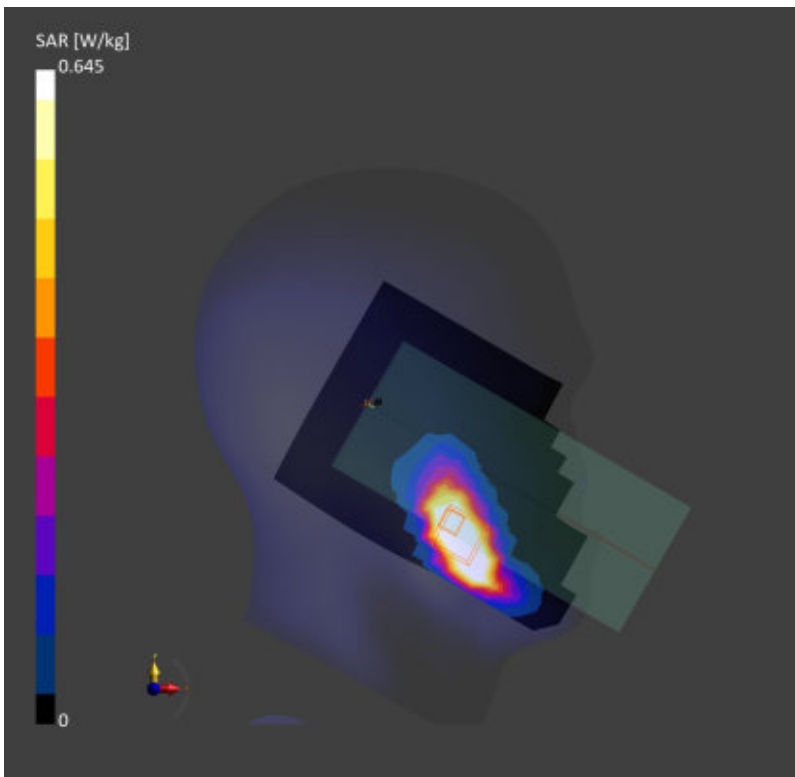

Date: 2025-11-20

26_LTE Band 48_20M_QPSK_1_0_Left Cheek_0mm_Ch55830

Communication System: LTE-TDD

AntennaCfg:SISO; Frequency: 3609.000 MHz; Duty Cycle: 1:1.59

Medium: HSL_3700_251120 Medium parameters used: $f = 3609.000$ MHz; $\sigma = 3.08$ S/m; $\epsilon_r = 37.6$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.57, 6.01, 5.69); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.581 W/kg; SAR (10g) = 0.210 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.02 dB

SAR (1g) = 0.668 W/kg; SAR (10g) = 0.235 W/kg

Smallest distance from peaks to all points 3 dB below = 5.0 mm

Ratio of SAR at M2 to SAR at M1 = 68.7 %

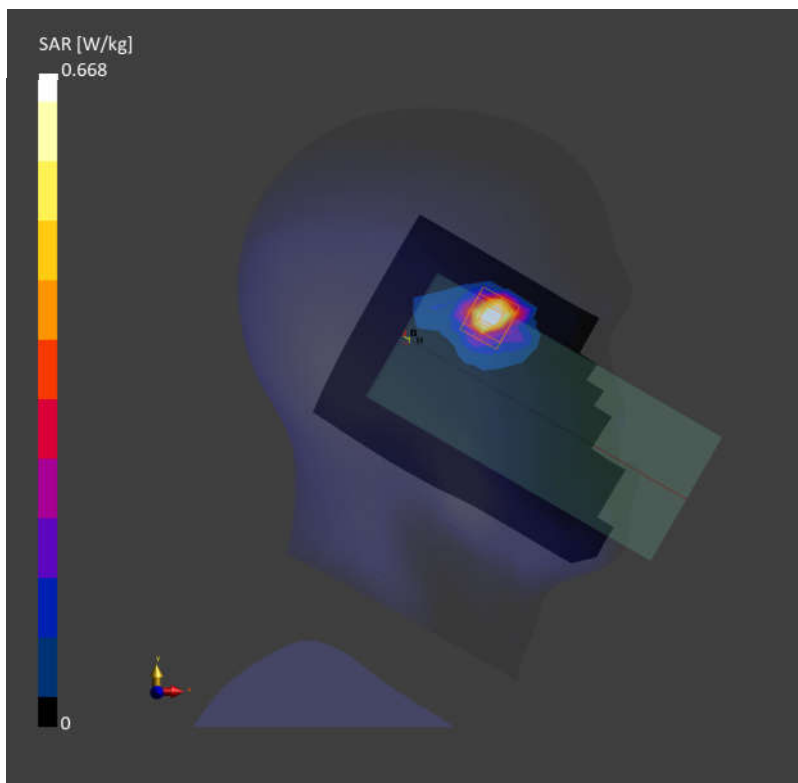

Date: 2025-11-20

27_FR1 n48_40M_QPSK_50_28_Left Cheek_0mm_Ch641666

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 3624.985 MHz; Duty Cycle: 1:1

Medium: HSL_3700_251120 Medium parameters used: $f = 3624.985$ MHz; $\sigma = 3.09$ S/m; $\epsilon_r = 37.7$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.57, 6.01, 5.69); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10797-AAF

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.590 W/kg; SAR (10g) = 0.212 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.09 dB

SAR (1g) = 0.700 W/kg; SAR (10g) = 0.227 W/kg

Smallest distance from peaks to all points 3 dB below = 5.3 mm

Ratio of SAR at M2 to SAR at M1 = 69.3 %

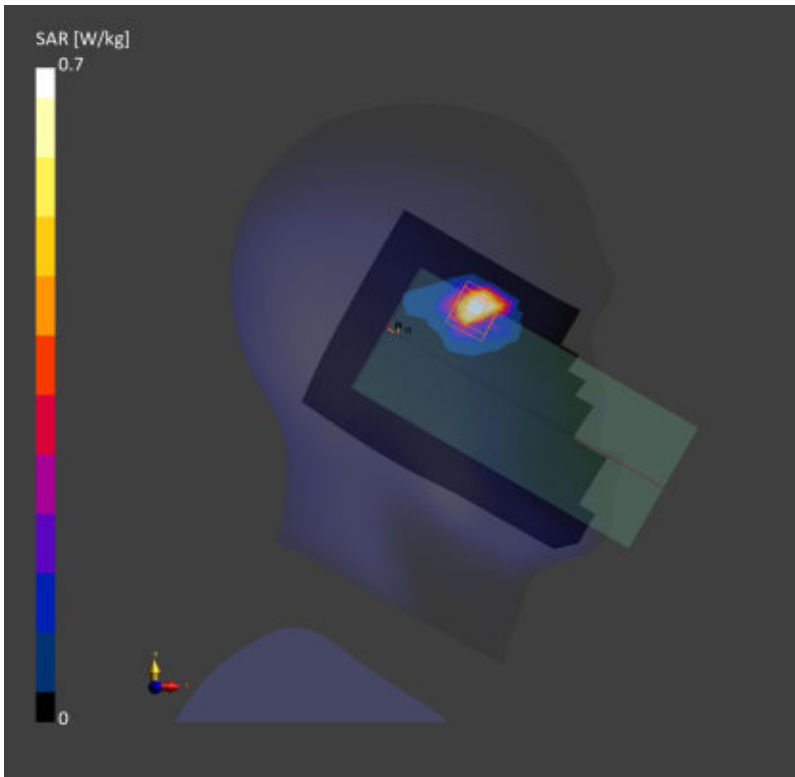

Date: 2025-11-21

28_FR1 n77 Part 27O HPUE_100M_QPSK_135_69_Left Cheek_0mm_Ch656000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 3840.000 MHz; Duty Cycle: 1:1

Medium: HSL_3900_251121 Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.33$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.49, 5.93, 5.62); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.612 W/kg; SAR (10g) = 0.225 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.13 dB

SAR (1g) = 0.724 W/kg; SAR (10g) = 0.237 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 68.0 %

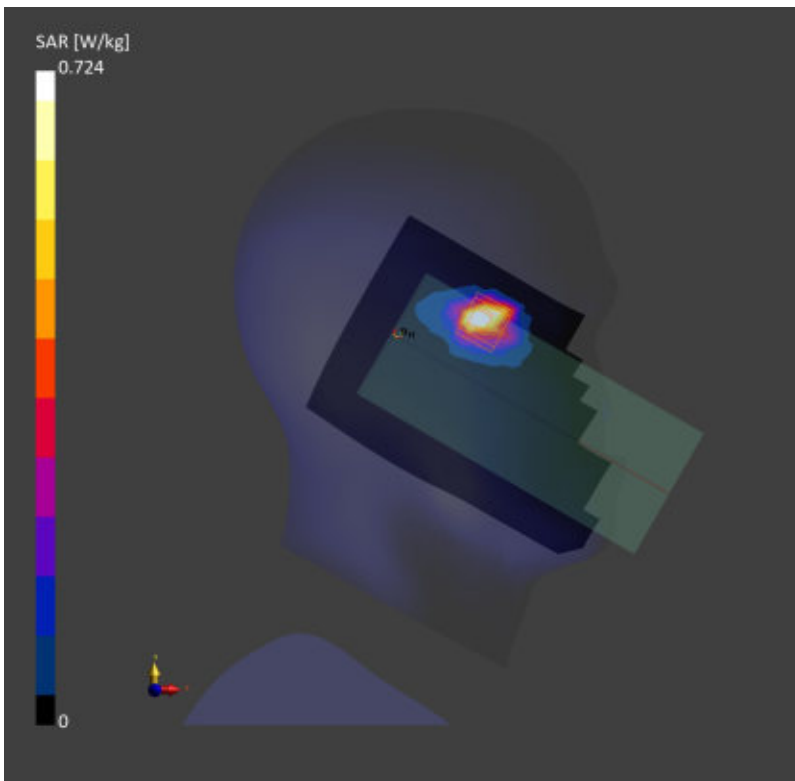

Date: 2025-11-22

29_WLAN2.4GHz_802.11b 1Mbps_Left Cheek_0mm_Ch11

Communication System: IEEE 802.11b WiFi 2.4 GHz

Frequency: 2462.000MHz; Duty Cycle: 1:1

Medium: HSL_2450_251122 Medium parameters used: $f = 2462.000$ MHz; $\sigma = 1.76$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.756 W/kg; SAR (10g) = 0.305 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.16 dB

SAR (1g) = 0.789 W/kg; SAR (10g) = 0.321 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 76.3 %

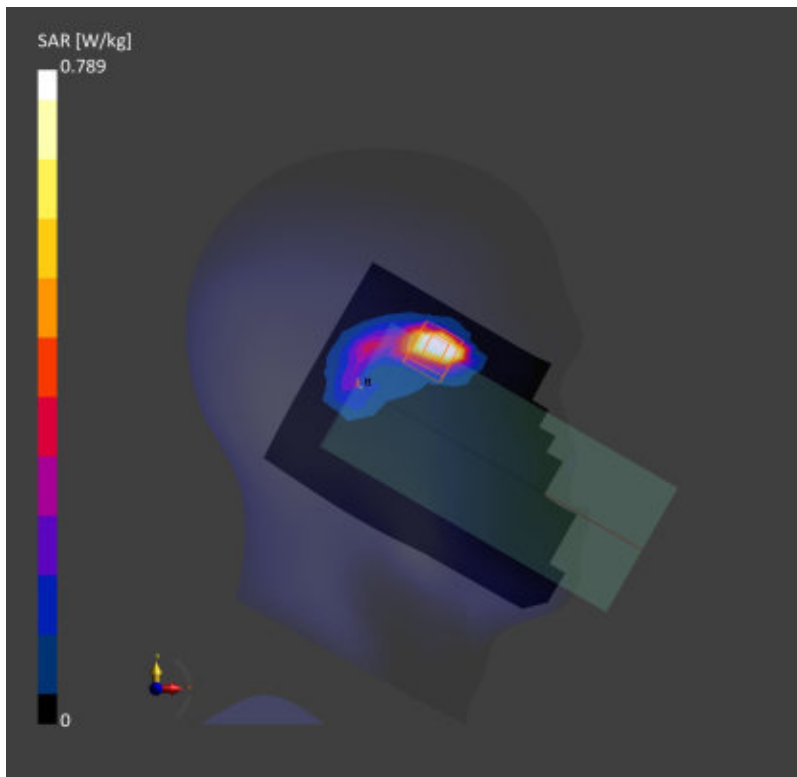

Date: 2025-11-22

30_Bluetooth_1Mbps_Left Cheek_0mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth

Frequency: 2441.000 MHz; Duty Cycle: 1:1.305

Medium: HSL_2450_251122 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.227 W/kg; SAR (10g) = 0.095 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.08 dB

SAR (1g) = 0.243 W/kg; SAR (10g) = 0.103 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 76.9 %

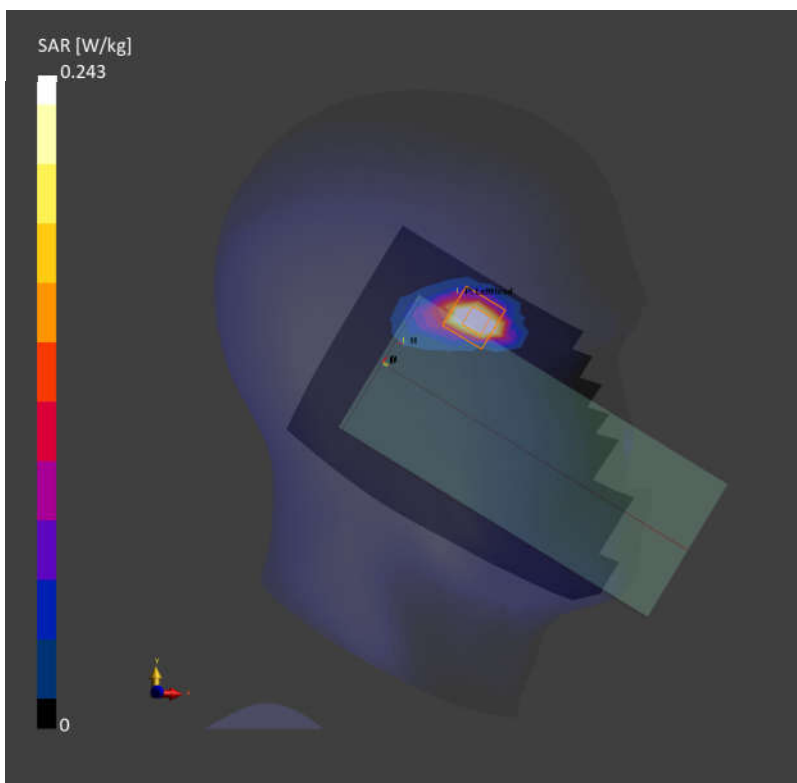

Date: 2025-11-23

31_WLAN5GHz_802.11n-HT40 MCS0_Left Cheek_0mm_Ch54

Communication System: IEEE 802.11n

Frequency: 5270.000 MHz; Duty Cycle: 1:1.067

Medium: HSL_5250_251123 Medium parameters used: $f = 5270.000$ MHz; $\sigma = 4.75$ S/m; $\epsilon_r = 36.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(4.79, 5.18, 4.9); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.620 W/kg; SAR (10g) = 0.237 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.05 dB

SAR (1g) = 0.688 W/kg; SAR (10g) = 0.240 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 64.8 %

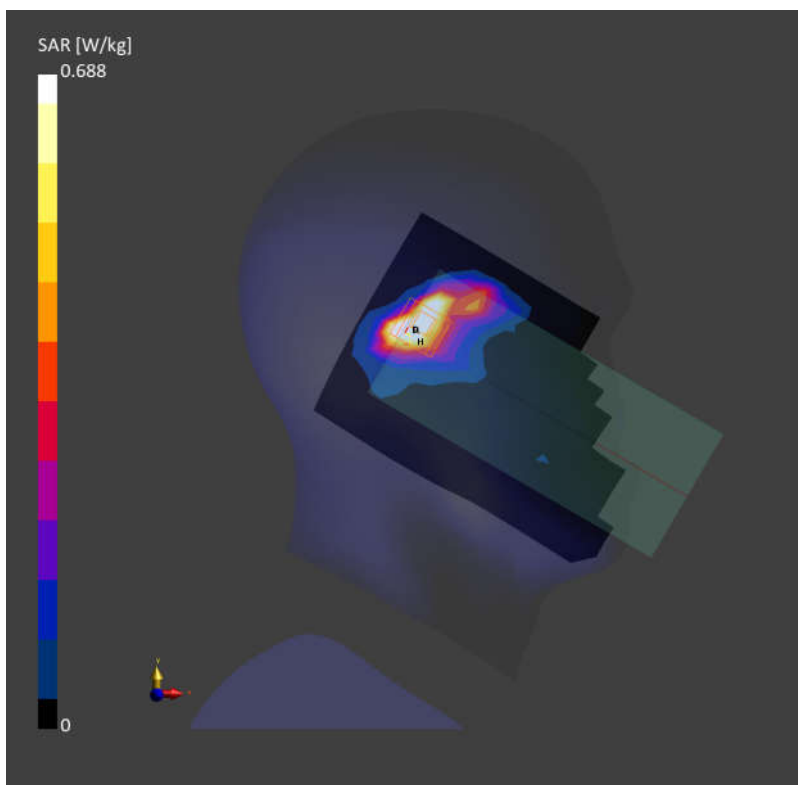

Date: 2025-11-24

32_WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch138

Communication System: IEEE 802.11ac WiFi

Frequency: 5690.000 MHz; Duty Cycle: 1:1.134

Medium: HSL_5600_251124 Medium parameters used: $f = 5690.000$ MHz; $\sigma = 5.19$ S/m; $\epsilon_r = 35.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(4.49, 4.85, 4.59); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.500 W/kg; SAR (10g) = 0.190 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.05 dB

SAR (1g) = 0.571 W/kg; SAR (10g) = 0.171 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 57.4 %

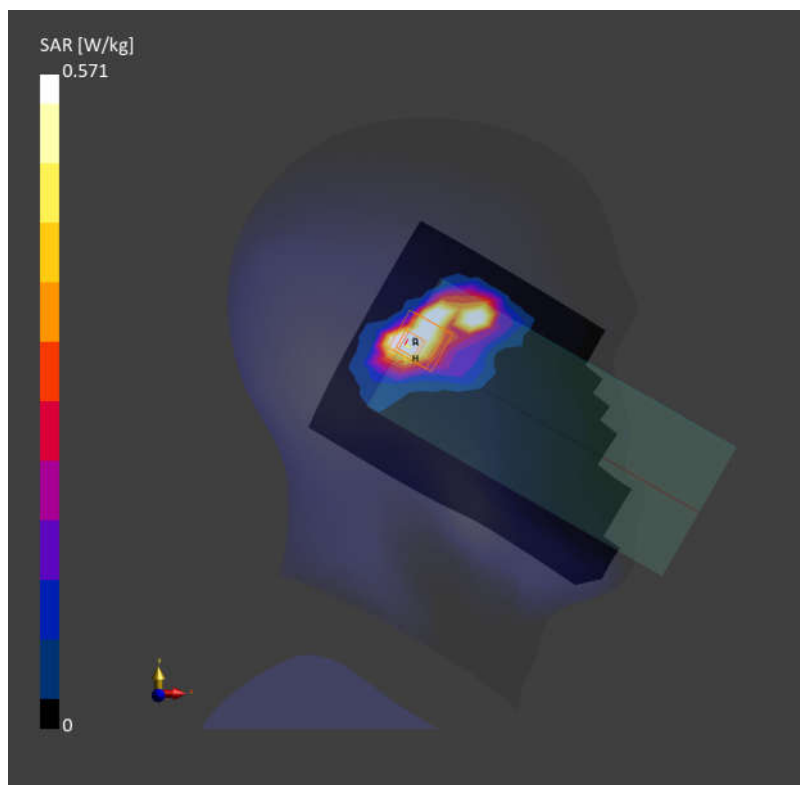

Date: 2025-11-25

33_WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch155

Communication System: IEEE 802.11ac WiFi

Frequency: 5775.000 MHz; Duty Cycle: 1:1.134

Medium: HSL_5800_251125 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.24$ S/m; $\epsilon_r = 35.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(4.49, 4.85, 4.59); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.570 W/kg; SAR (10g) = 0.200 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.08 dB

SAR (1g) = 0.670 W/kg; SAR (10g) = 0.197 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 57.6 %

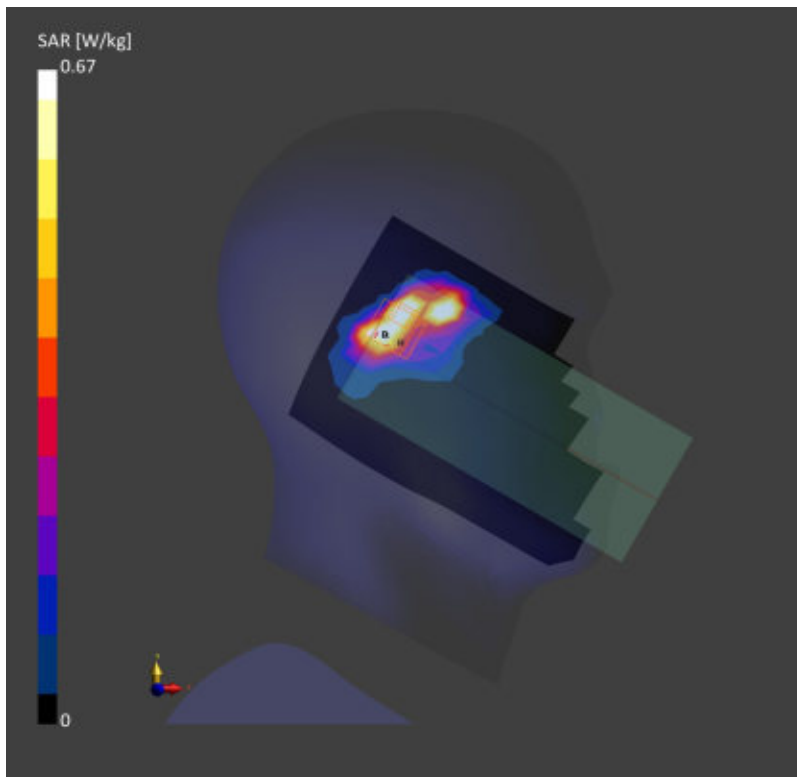

Date: 2025-11-25

34_WLAN6GHz_802.11ax-HE80 MCS0_Left Cheek_0mm_Ch119

Communication System: IEEE 802.11ax

Frequency: 6545.000MHz; Duty Cycle: 1:1.15

Medium: HSL_6500_251125 Medium parameters used: $f = 6545.000$ MHz; $\sigma = 6.19$ S/m; $\epsilon_r = 34.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(4.57, 4.93, 4.67); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10719-AAC

Area Scan (119.0 mm x 204.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.209 W/kg; SAR (10g) = 0.061 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.08 dB

SAR (1g) = 0.217 W/kg; SAR (10g) = 0.073 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 54.9 %

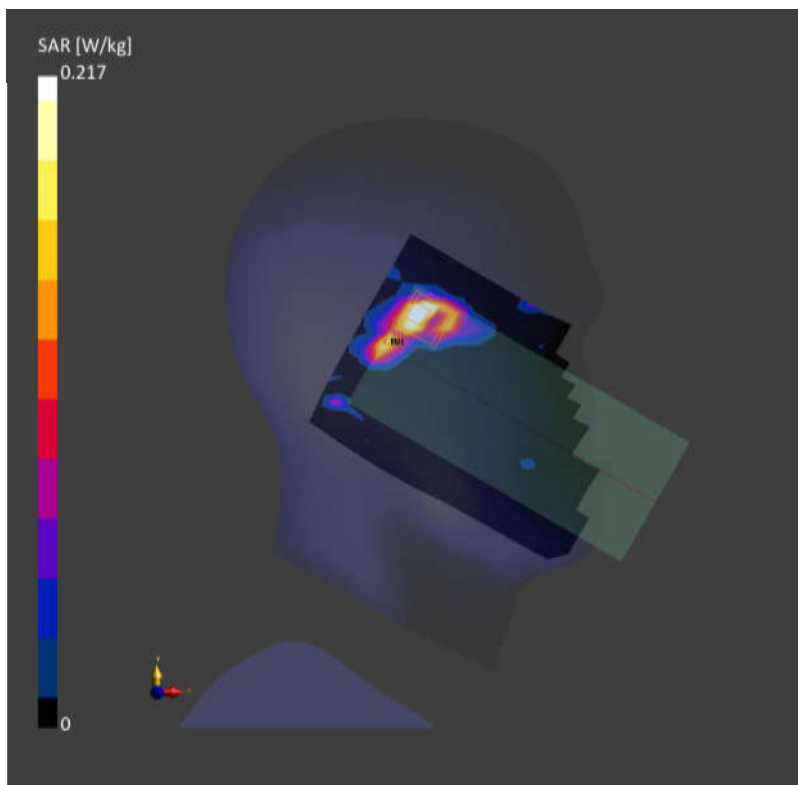psAPD (4.0cm², sq) = 1.64 [W/m²]

Date: 2025-11-14

35_LTE Band 71_20M_QPSK_1_0_Left Side_5mm_Ch133322

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 683.000 MHz; Duty Cycle: 1:1

Medium: HSL_750_251114 Medium parameters used: $f=683.000$ MHz; $\sigma=0.883$ S/m; $\epsilon_r=42.9$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.981 W/kg; SAR (10g) = 0.597 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.813 W/kg; SAR (10g) = 0.543 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 79.9 %

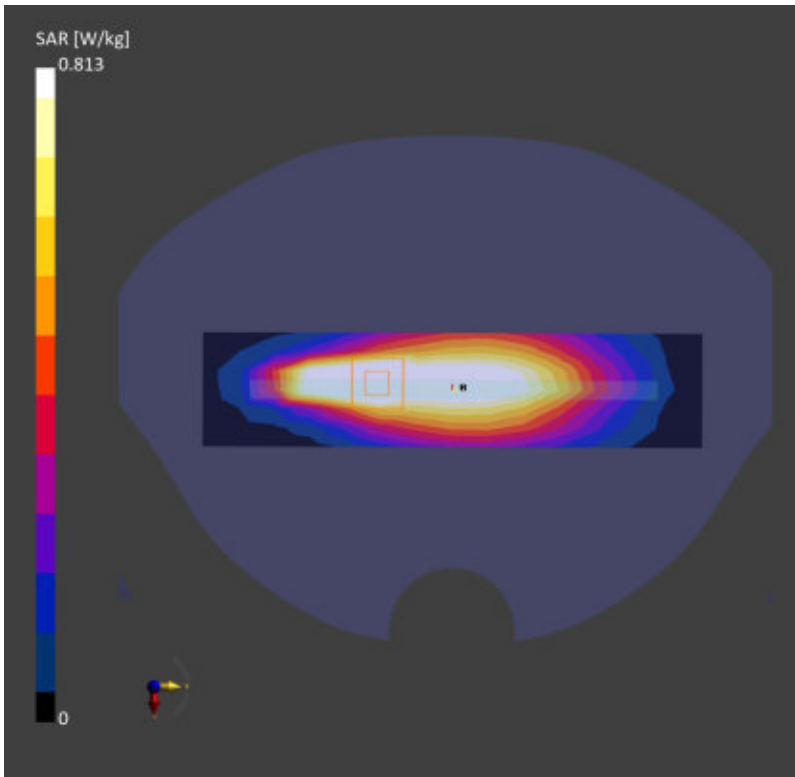

Date: 2025-11-14

36_LTE Band 12_10M_QPSK_1_0_Bottom Side_5mm_Ch23095

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 707.500 MHz; Duty Cycle: 1:1

Medium: HSL_750_251114 Medium parameters used: $f=707.500$ MHz; $\sigma=0.879$ S/m; $\epsilon_r=43.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.693 W/kg; SAR (10g) = 0.387 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.762 W/kg; SAR (10g) = 0.318 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 70.2 %

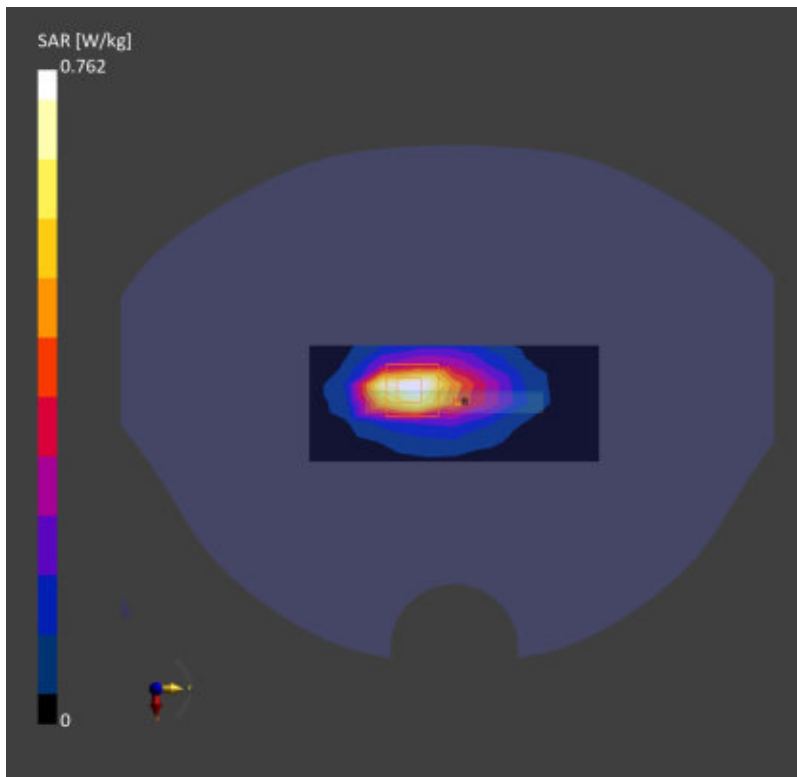

Date: 2025-11-14

37_LTE Band 13_10M_QPSK_1_0_Back_5mm_Ch23230

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 782.000 MHz; Duty Cycle: 1:1

Medium: HSL_750_251114 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 42.7$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.708 W/kg; SAR (10g) = 0.445 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.761 W/kg; SAR (10g) = 0.414 W/kg

Smallest distance from peaks to all points 3 dB below = 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 79.4 %

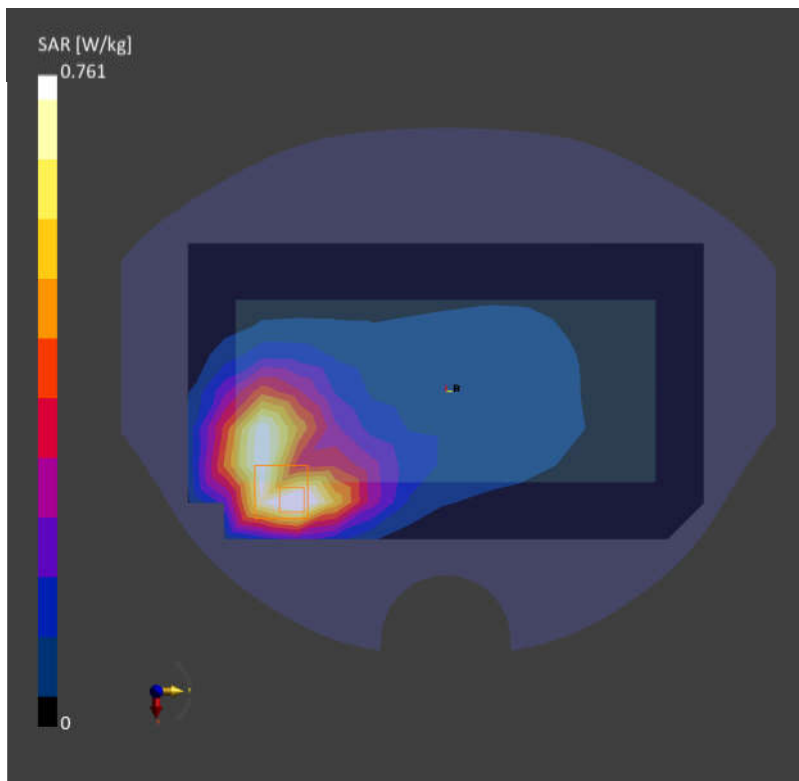

Date: 2025-11-14

38_LTE Band 14_10M_QPSK_1_0_Left Side_5mm_Ch23330

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 793.000 MHz; Duty Cycle: 1:1

Medium: HSL_750_251114 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.910$ S/m; $\epsilon_r = 42.3$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.744 W/kg; SAR (10g) = 0.401 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.15 dB

SAR (1g) = 0.786 W/kg; SAR (10g) = 0.344 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 76.4 %

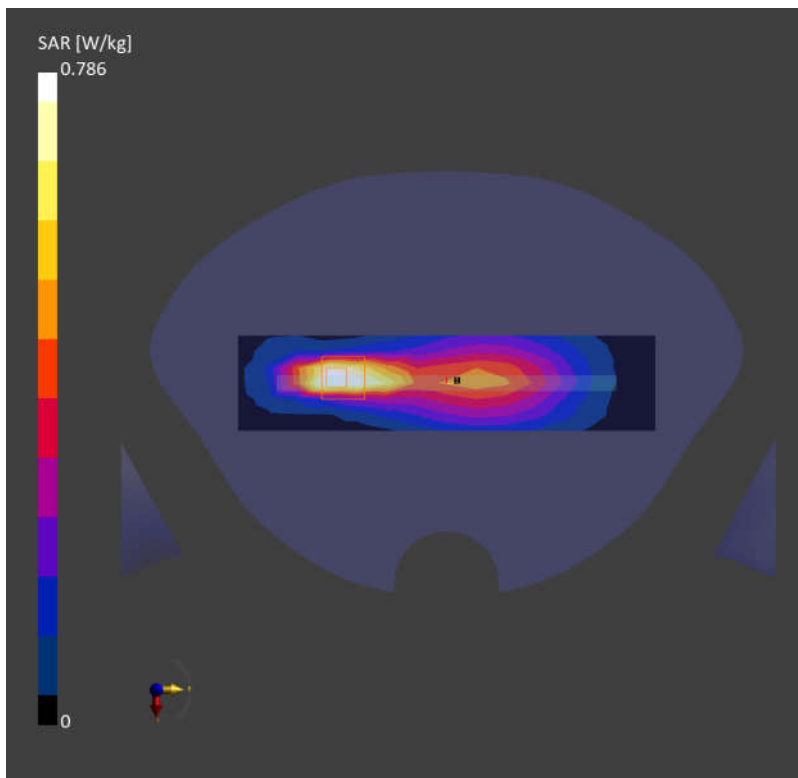

Date: 2025-11-14

39_FR1 n71_20M_QPSK_50_28_Left Side_5mm_Ch136100

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 680.500 MHz; Duty Cycle: 1:1

Medium: HSL_750_251114 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.860$ S/m; $\epsilon_r = 43.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.568 W/kg; SAR (10g) = 0.343 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.681 W/kg; SAR (10g) = 0.314 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 78.8 %

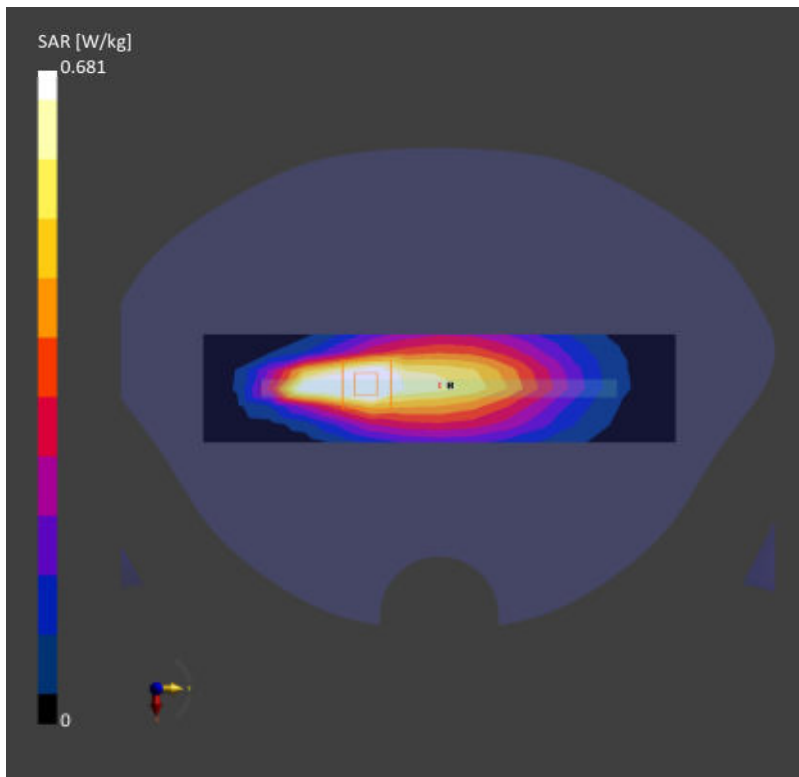

Date: 2025-11-14

40_FR1 n14_10M_QPSK_1_1_Back_5mm_Ch158600

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 793.000 MHz; Duty Cycle: 1:1

Medium: HSL_750_251114 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.910$ S/m; $\epsilon_r = 42.3$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.503 W/kg; SAR (10g) = 0.338 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 0.645 W/kg; SAR (10g) = 0.305 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 81.3 %

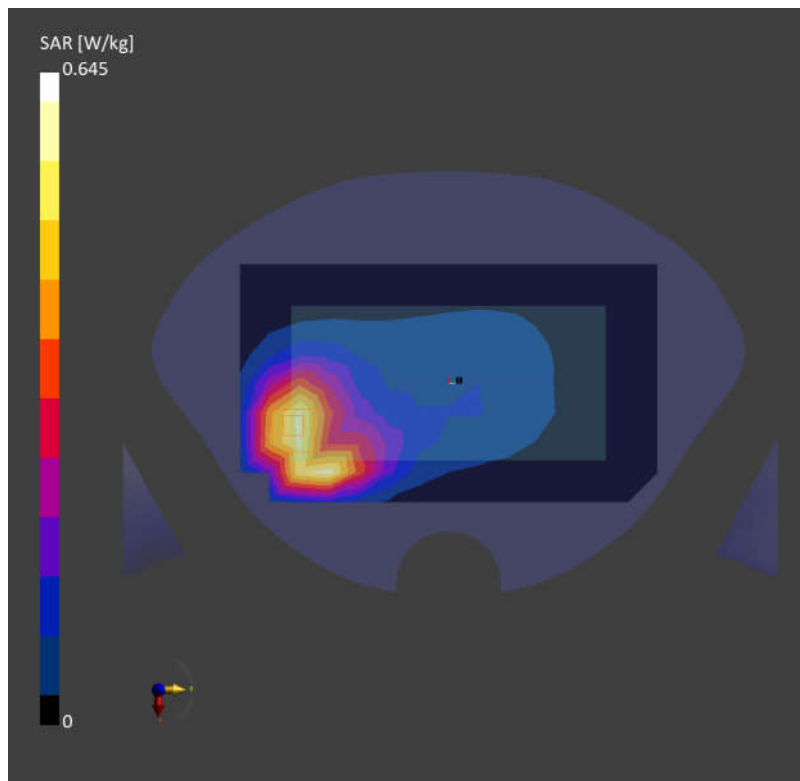

Date: 2025-11-15

41_GSM850_GPRS (4 Tx slots)_Back_5mm_Ch189

Communication System: GPRS-FDD

Frequency: 836.400 MHz; Duty Cycle: 1:2.08

Medium: HSL_835_251115 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.01, 8.65, 8.19); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.641 W/kg; SAR (10g) = 0.396 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.639 W/kg; SAR (10g) = 0.354 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 79.3 %

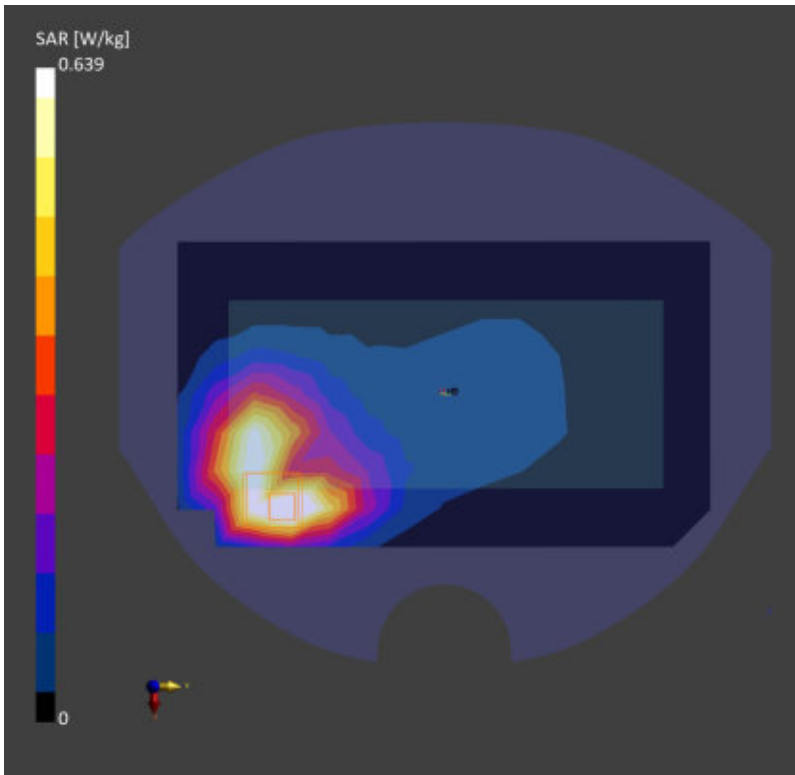

Date: 2025-11-15

42_WCDMA V_RMC 12.2Kbps_Back_5mm_Ch4182

Communication System: UMTS-FDD

Frequency: 836.400 MHz; Duty Cycle: 1:1

Medium: HSL_835_251115 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.01, 8.65, 8.19); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.860 W/kg; SAR (10g) = 0.554 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.912 W/kg; SAR (10g) = 0.503 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 80.3 %

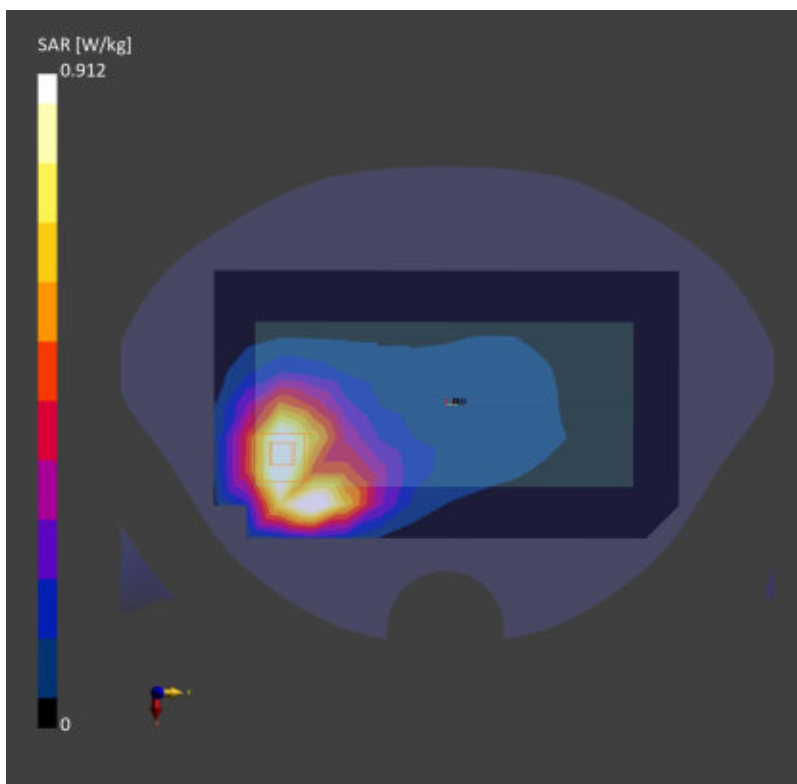

Date: 2025-11-15

43_LTE Band 26_15M_QPSK_1_0_Back_5mm_Ch26865

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: HSL_835_251115 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.01, 8.65, 8.19); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.03 W/kg; SAR (10g) = 0.667 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.597 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 78.5 %

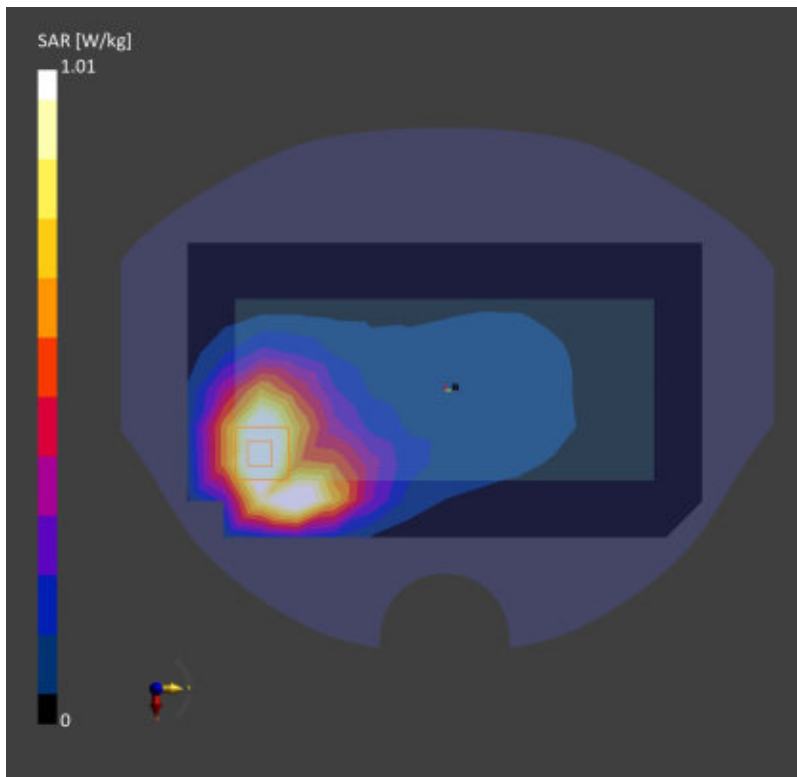

Date: 2025-11-15

44_FR1 n26_20M_QPSK_50_28_Back_5mm_Ch166300

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: HSL_835_251115 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.01, 8.65, 8.19); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.661 W/kg; SAR (10g) = 0.416 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.710 W/kg; SAR (10g) = 0.390 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 80.5 %

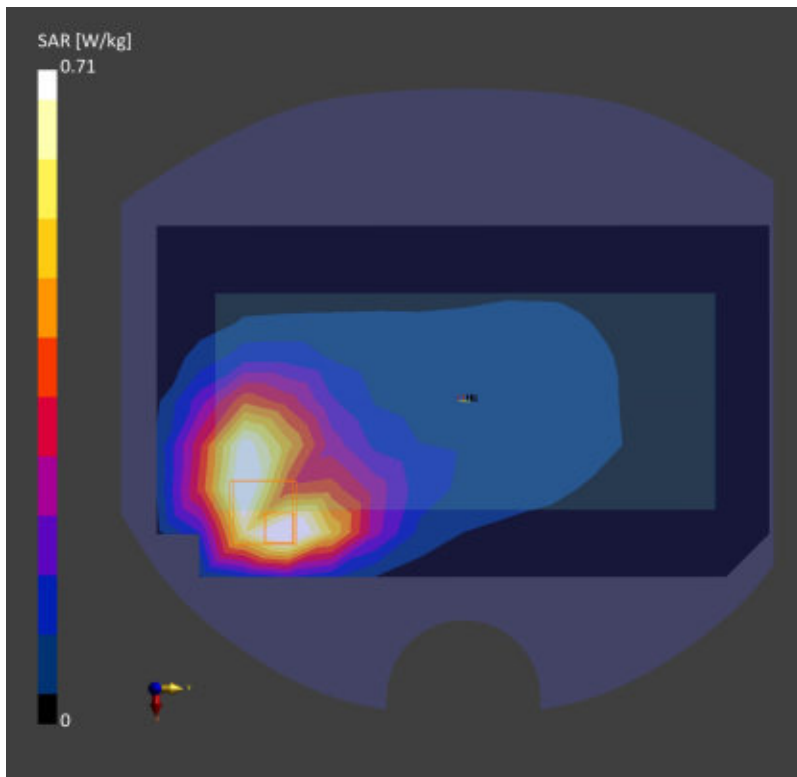

Date: 2025-11-16

45_WCDMA IV_RMC 12.2Kbps_Left Side_5mm_Ch1312

Communication System: UMTS-FDD

Frequency: 1712.400 MHz; Duty Cycle: 1:1

Medium: HSL_1750_251116 Medium parameters used: $f = 1712.400$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.86, 7.4, 7.01); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.805 W/kg; SAR (10g) = 0.374 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.14 dB

SAR (1g) = 0.756 W/kg; SAR (10g) = 0.343 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 80.7 %

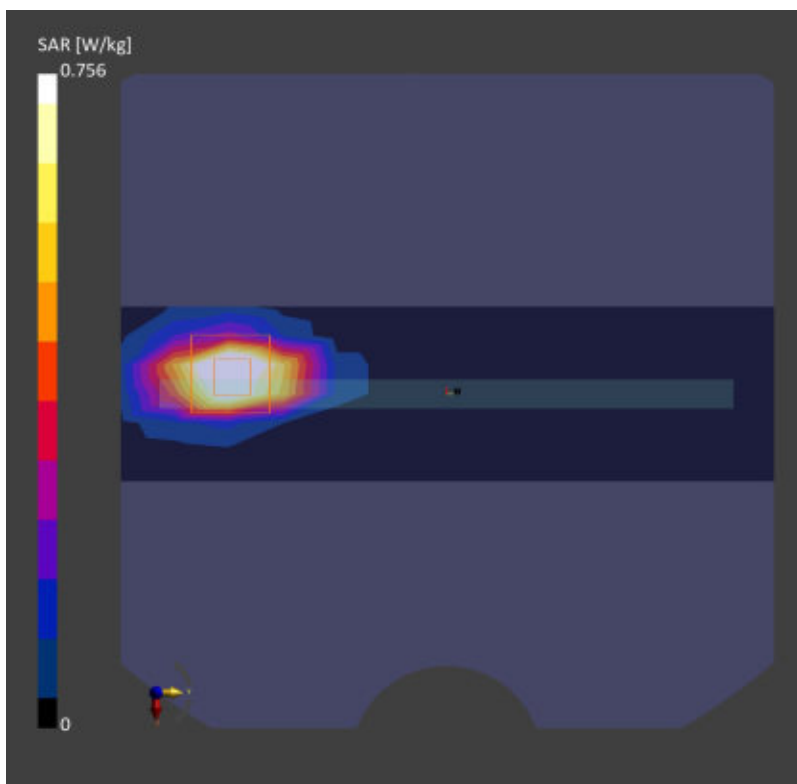

Date: 2025-11-16

46_LTE Band 66_20M_QPSK_1_0_Left Side_5mm_Ch132072

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 1720.000 MHz; Duty Cycle: 1:1

Medium: HSL_1750_251116 Medium parameters used: $f = 1720.000$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.86, 7.4, 7.01); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 1.16 W/kg; SAR (10g) = 0.544 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.08 dB

SAR (1g) = 0.951 W/kg; SAR (10g) = 0.511 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 82.0 %

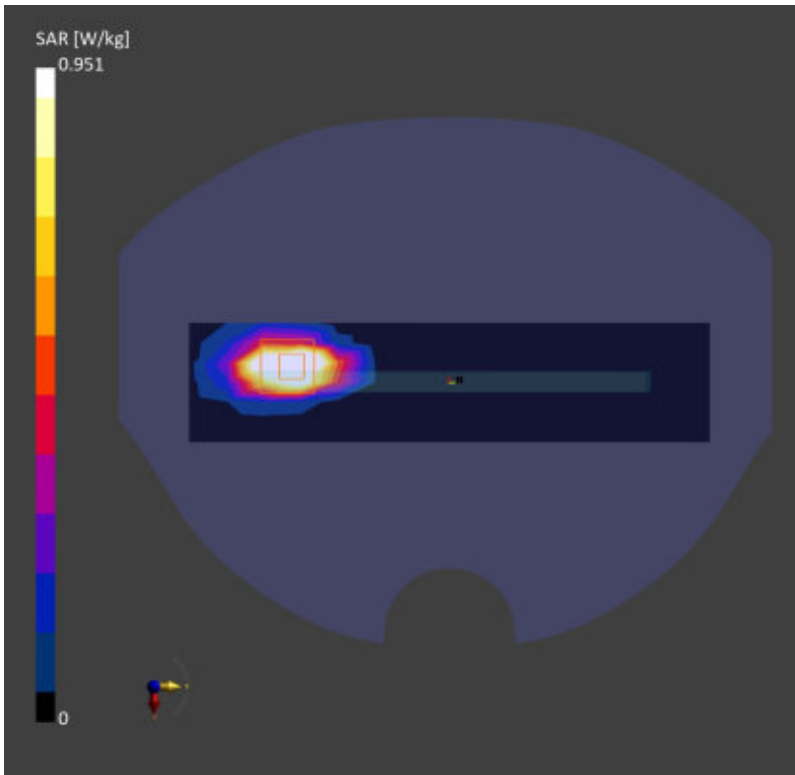

Date: 2025-11-16

47_FR1 n70_20M_QPSK_36_22_Bottom Side_5mm_Ch340500

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 1702.500 MHz; Duty Cycle: 1:1

Medium: HSL_1750_251116 Medium parameters used: $f = 1702.500$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.86, 7.4, 7.01); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10938-AAC

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.839 W/kg; SAR (10g) = 0.363 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.886 W/kg; SAR (10g) = 0.339 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 82.6 %

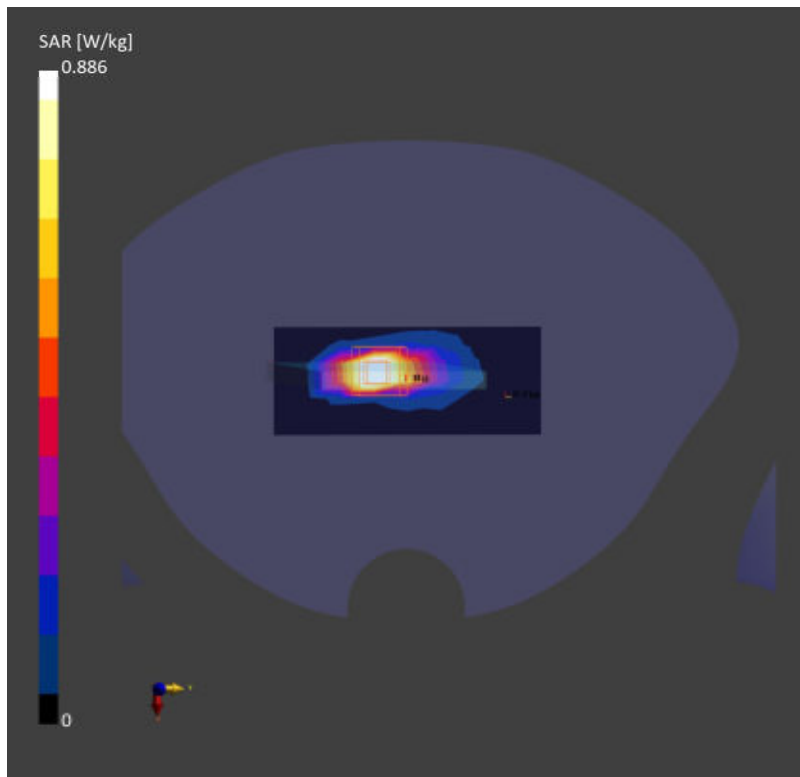

Date: 2025-11-16

48_FR1 n66_40M_QPSK_108_54_Bottom Side_5mm_Ch349000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 1745.000 MHz; Duty Cycle: 1:1

Medium: HSL_1750_251116 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.86, 7.4, 7.01); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 1.10 W/kg; SAR (10g) = 0.481 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 1.00 W/kg; SAR (10g) = 0.447 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 80.9 %

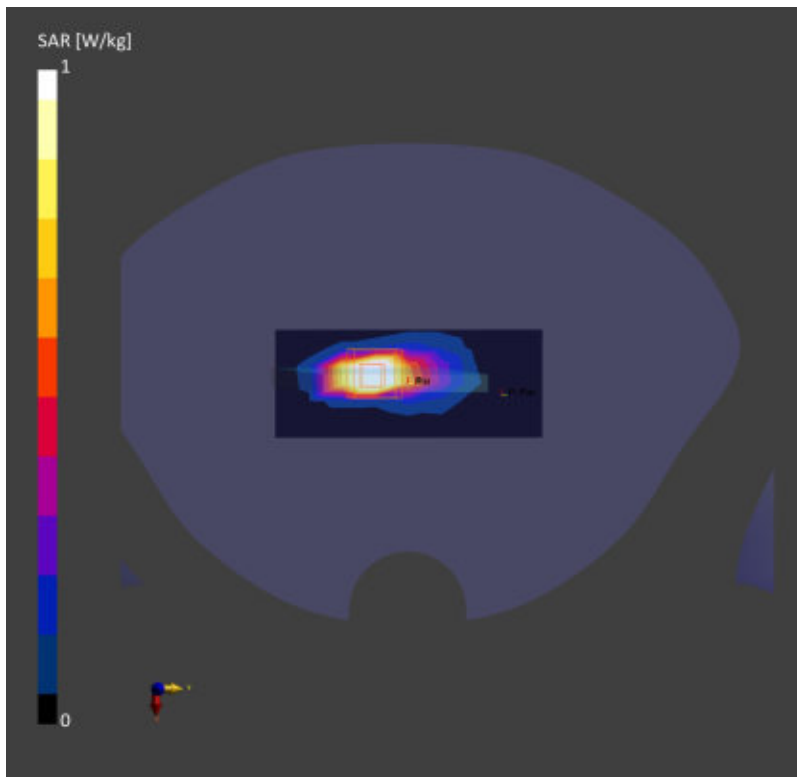

Date: 2025-11-17

49_GSM1900_GPRS (4 Tx slots)_Left Side_5mm_Ch512

Communication System: GPRS-FDD

Frequency: 1850.200 MHz; Duty Cycle: 1:2.08

Medium: HSL_1900_251117 Medium parameters used: $f = 1850.200$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 39.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.64, 7.17, 6.79); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.382 W/kg; SAR (10g) = 0.179 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.07 dB

SAR (1g) = 0.535 W/kg; SAR (10g) = 0.238 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 79.9 %

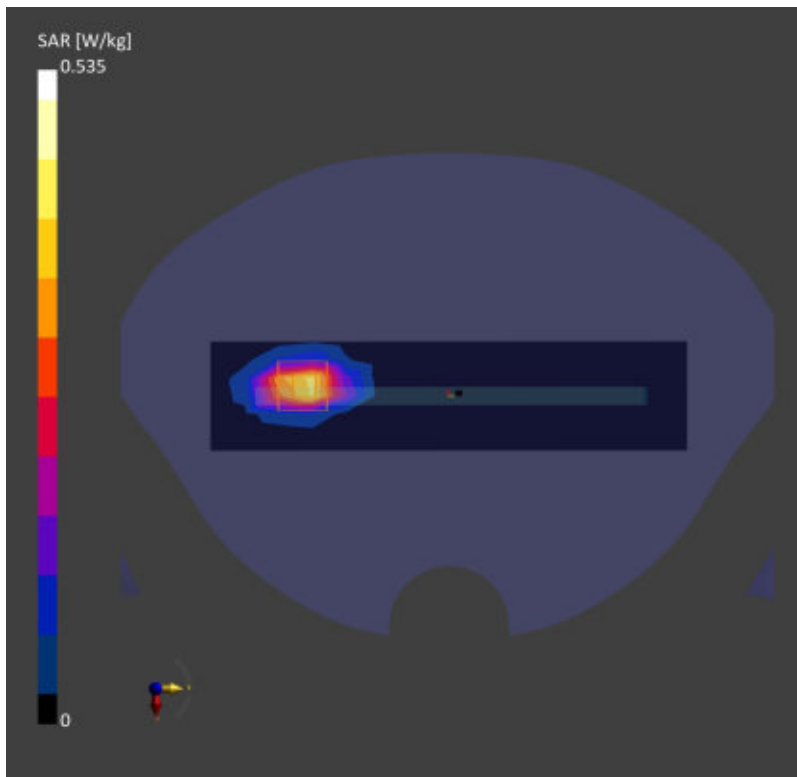

Date: 2025-11-17

50_WCDMA II_RMC 12.2Kbps_Back_5mm_Ch9262

Communication System: UMTS-FDD

Frequency: 1852.400 MHz; Duty Cycle: 1:1

Medium: HSL_1900_251117 Medium parameters used: $f = 1852.400$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 39.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.64, 7.17, 6.79); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.557 W/kg; SAR (10g) = 0.308 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.658 W/kg; SAR (10g) = 0.347 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 92.9 %

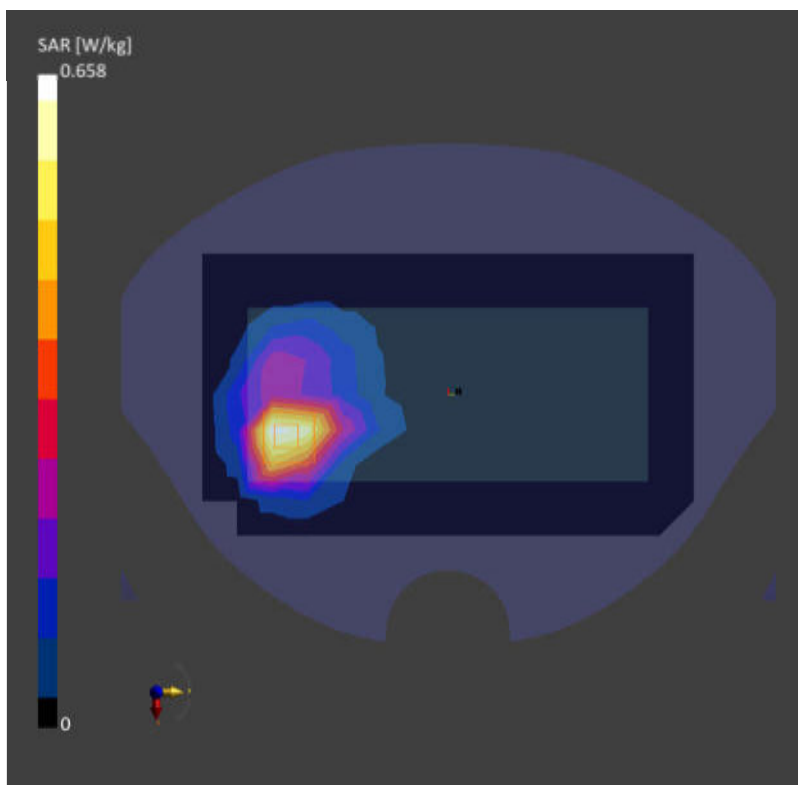

Date: 2025-11-17

51_LTE Band 25_20M_QPSK_1_0_Bottom Side_5mm_Ch26590

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 1905.000 MHz; Duty Cycle: 1:1

Medium: HSL_1900_251117 Medium parameters used: $f = 1905.000$ MHz; $\sigma = 1.46$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.64, 7.17, 6.79); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.806 W/kg; SAR (10g) = 0.330 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.778 W/kg; SAR (10g) = 0.306 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 78.7 %

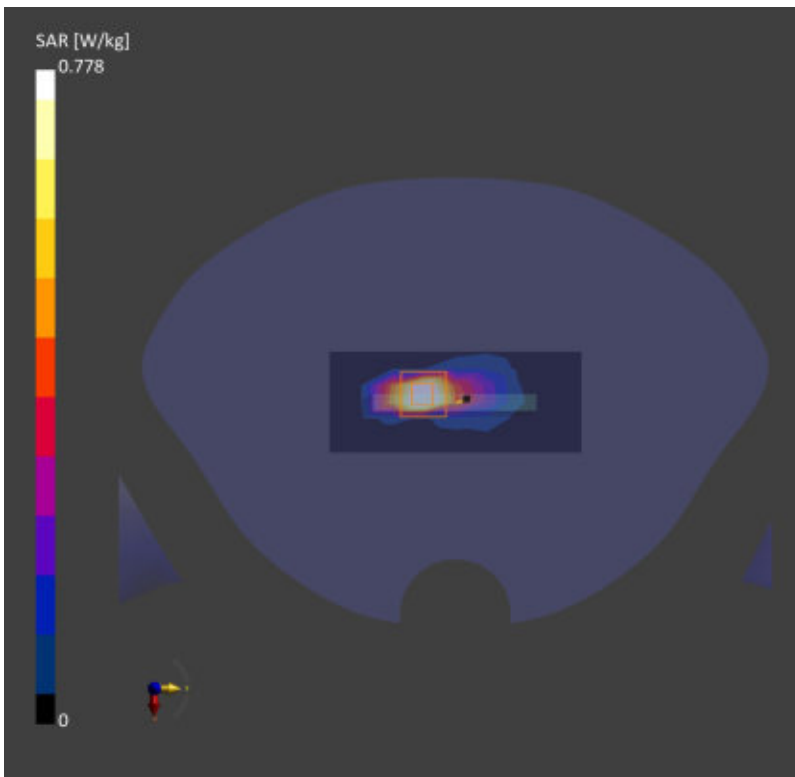

Date: 2025-11-17

52_FR1 n25_40M_QPSK_1_1_Bottom Side_5mm_Ch376500

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 1882.500 MHz; Duty Cycle: 1:1

Medium: HSL_1900_251117 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 39.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.64, 7.17, 6.79); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.697 W/kg; SAR (10g) = 0.345 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.778 W/kg; SAR (10g) = 0.343 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 82.6 %

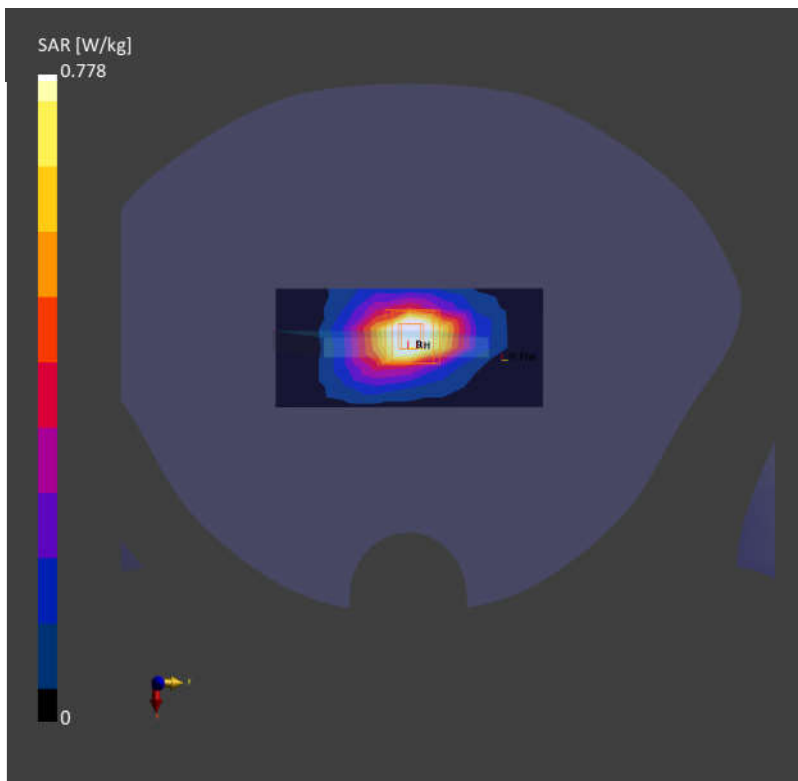

Date: 2025-11-18

53_LTE Band 30_10M_QPSK_1_0_Bottom Side_5mm_Ch27710

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 2310.000 MHz; Duty Cycle: 1:1

Medium: HSL_2300_251118 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.62$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.25, 6.75, 6.39); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 1.09 W/kg; SAR (10g) = 0.420 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.974 W/kg; SAR (10g) = 0.397 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 79.6 %

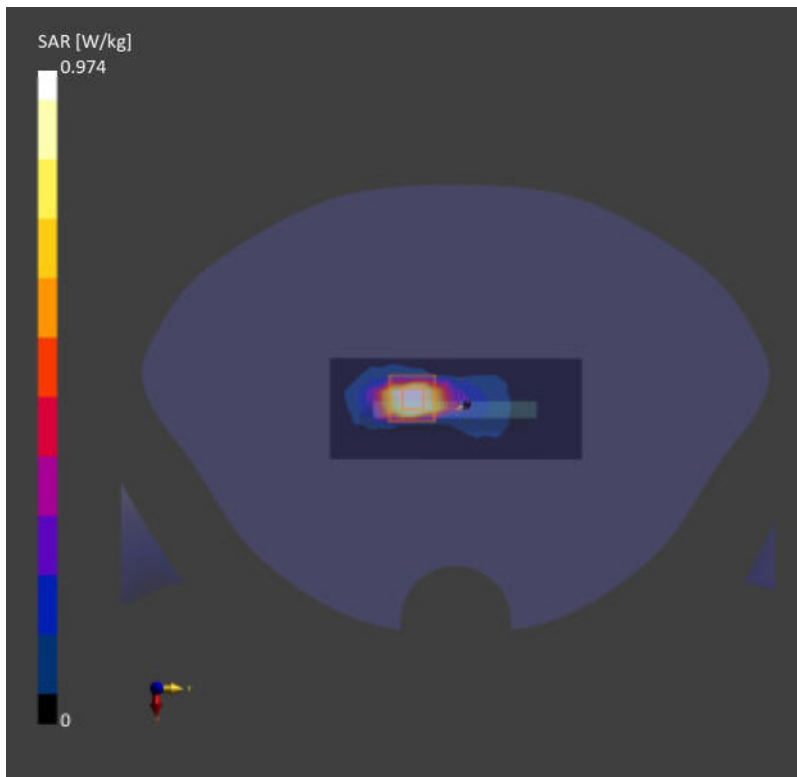

Date: 2025-11-18

54_FR1 n30_10M_QPSK_1_1_Bottom Side_5mm_Ch462000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 2310.000 MHz; Duty Cycle: 1:1

Medium: HSL_2300_251118 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.62$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.25, 6.75, 6.39); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.895 W/kg; SAR (10g) = 0.355 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.10 dB

SAR (1g) = 0.850 W/kg; SAR (10g) = 0.341 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 80.9 %

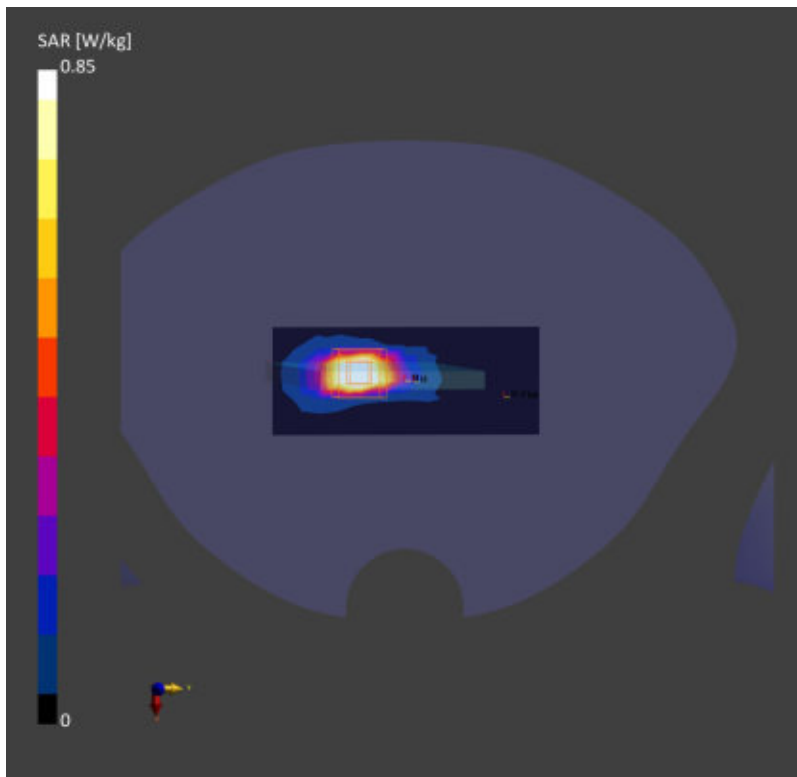

Date: 2025-11-19

55_LTE Band 7_20M_QPSK_1_0_Left Side_5mm_Ch21350

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 2560.000 MHz; Duty Cycle: 1:1

Medium: HSL_2600_251119 Medium parameters used: $f = 2560.000$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.96, 6.44, 6.09); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.383 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.06 dB

SAR (1g) = 0.939 W/kg; SAR (10g) = 0.352 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 77.7 %

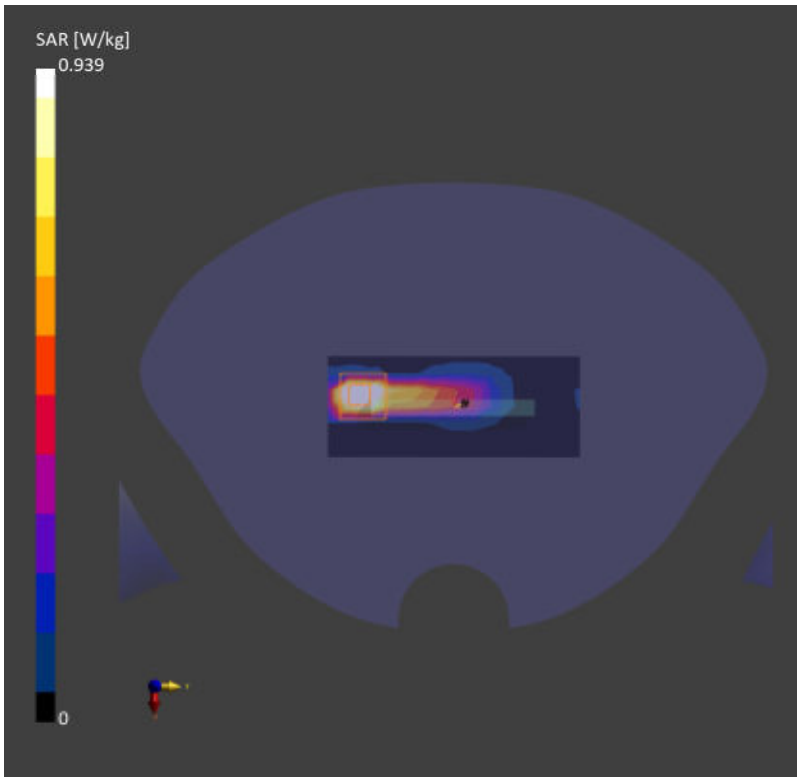

Date: 2025-11-19

56_LTE Band 41 HPUE_20M_QPSK_1_0_Left Side_5mm_Ch41055

Communication System: LTE-TDD

AntennaCfg:SISO; Frequency: 2636.500 MHz; Duty Cycle: 1:2.33

Medium: HSL_2600_251119 Medium parameters used: $f = 2636.500$ MHz; $\sigma = 1.96$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.96, 6.44, 6.09); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.928 W/kg; SAR (10g) = 0.348 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.914 W/kg; SAR (10g) = 0.341 W/kg

Smallest distance from peaks to all points 3 dB below = 5.9 mm

Ratio of SAR at M2 to SAR at M1 = 75.1 %

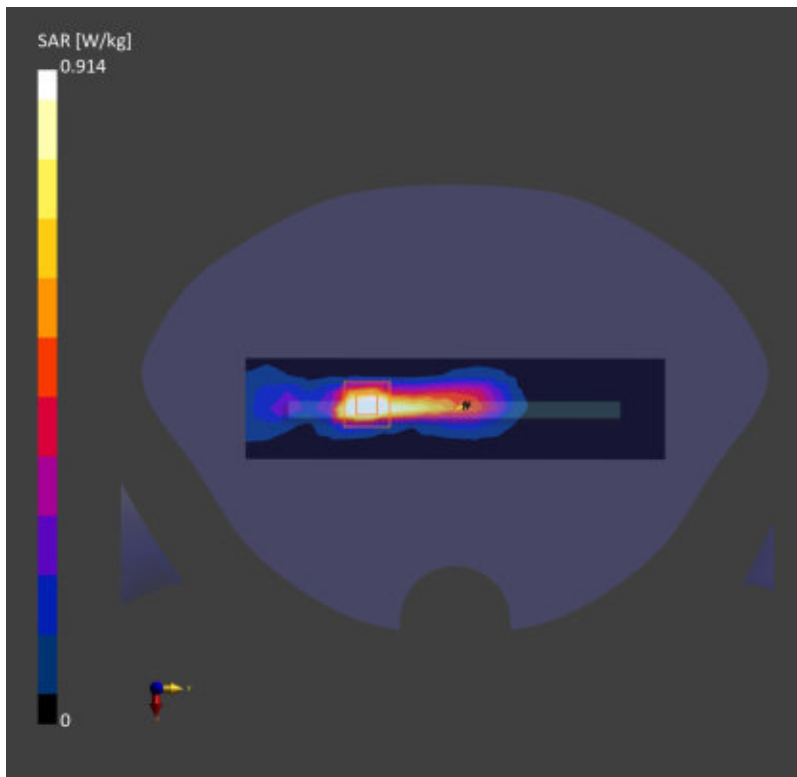

Date: 2025-11-19

57_FR1 n7_50M_QPSK_1_1_Bottom Side_5mm_Ch507000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 2535.000 MHz; Duty Cycle: 1:1

Medium: HSL_2600_251119 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.96, 6.44, 6.09); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10935-AAD

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.885 W/kg; SAR (10g) = 0.362 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.897 W/kg; SAR (10g) = 0.360 W/kg

Smallest distance from peaks to all points 3 dB below = 5.2 mm

Ratio of SAR at M2 to SAR at M1 = 78.3 %

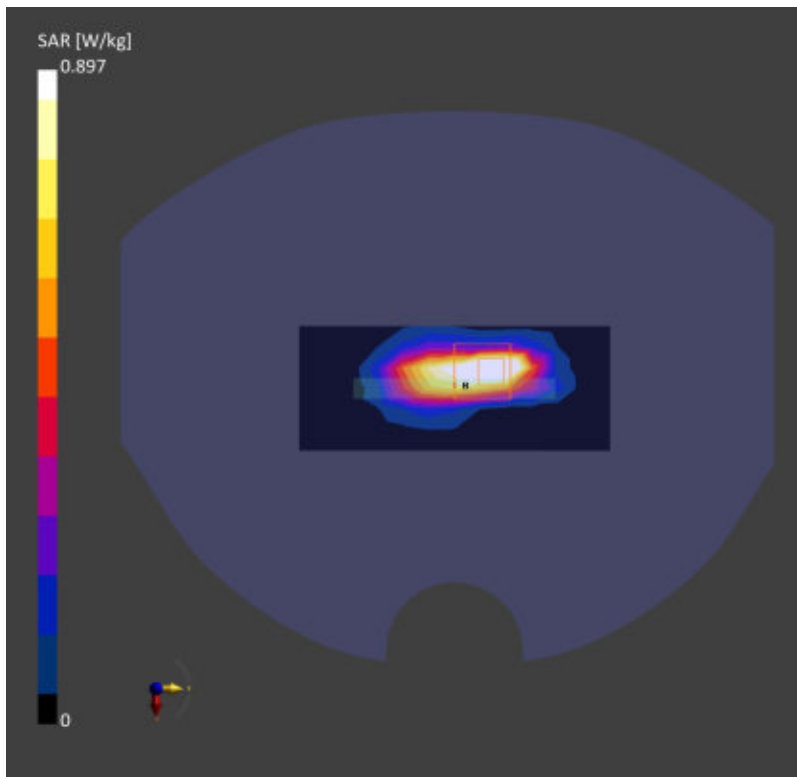

Date: 2025-11-19

58_FR1 n41 HPUE_100M_QPSK_135_69_Right Side_5mm_Ch518598

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 2592.990 MHz; Duty Cycle: 1:1

Medium: HSL_2600_251119 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.96, 6.44, 6.09); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10803-AAF

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.873 W/kg; SAR (10g) = 0.335 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.863 W/kg; SAR (10g) = 0.329 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 81.1 %

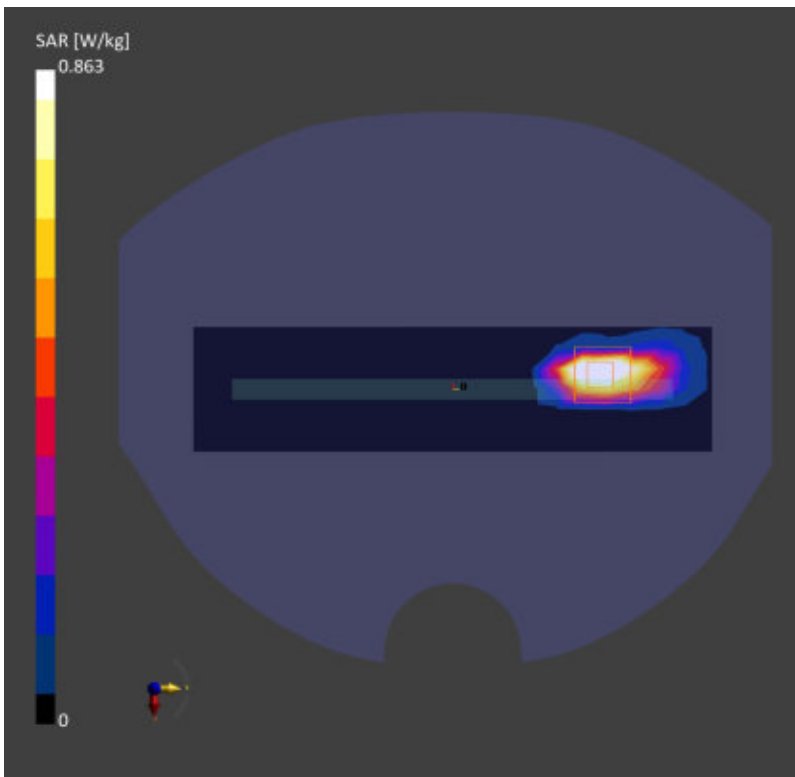

Date: 2025-11-20

59_LTE Band 48_20M_QPSK_1_0_Left Side_5mm_Ch55340

Communication System: LTE-TDD

AntennaCfg:SISO; Frequency: 3560.000 MHz; Duty Cycle: 1:1.59

Medium: HSL_3500_251120 Medium parameters used: $f = 3560.000$ MHz; $\sigma = 3.02$ S/m; $\epsilon_r = 37.7$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.62, 6.07, 5.74); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (48.0 mm x 220.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.419 W/kg; SAR (10g) = 0.214 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.02 dB

SAR (1g) = 0.472 W/kg; SAR (10g) = 0.205 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 79.3 %

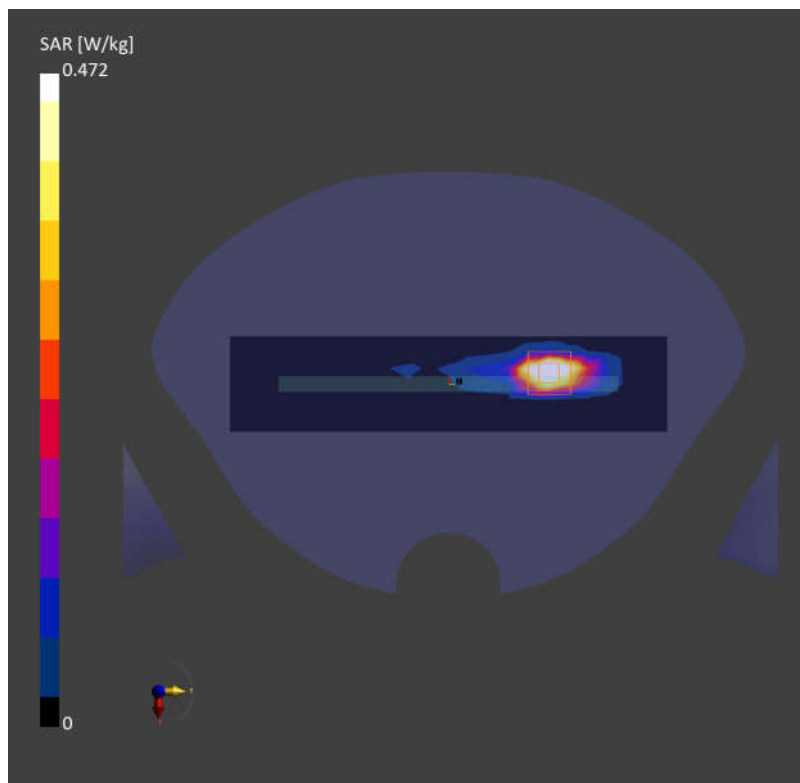

Date: 2025-11-20

60_FR1 n48_40M_QPSK_50_28_Right Side_5mm_Ch641666

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 3624.985 MHz; Duty Cycle: 1:1

Medium: HSL_3700_251120 Medium parameters used: $f = 3624.985$ MHz; $\sigma = 3.09$ S/m; $\epsilon_r = 37.7$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.57, 6.01, 5.69); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10803-AAF

Area Scan (48.0 mm x 220.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.588 W/kg; SAR (10g) = 0.203 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.02 dB

SAR (1g) = 0.467 W/kg; SAR (10g) = 0.192 W/kg

Smallest distance from peaks to all points 3 dB below = 5.9 mm

Ratio of SAR at M2 to SAR at M1 = 70.5 %

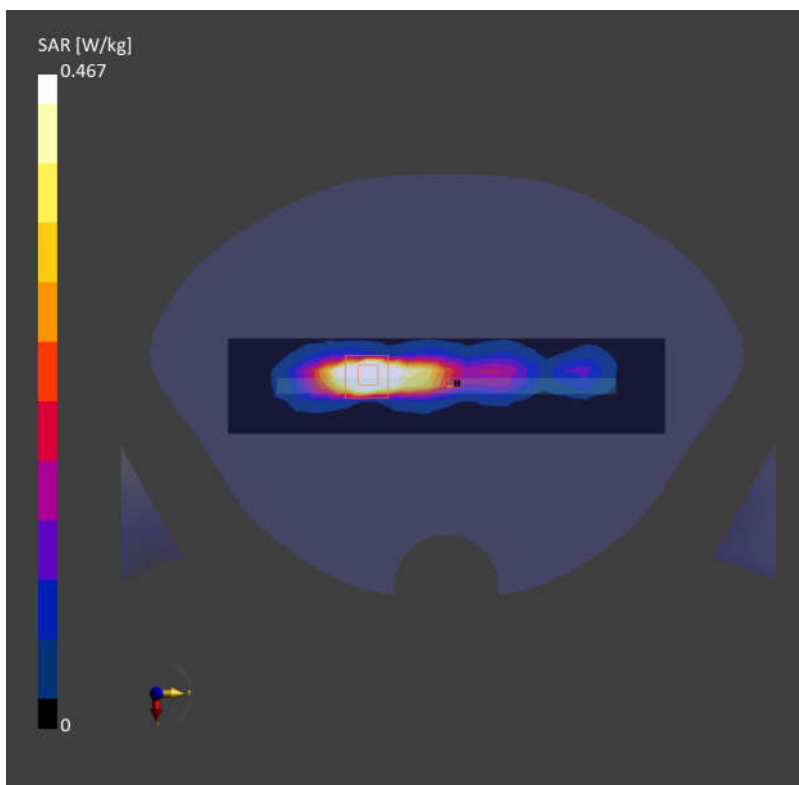

Date: 2025-11-22

61_Bluetooth_1Mbps_Right Side_5mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth

Frequency: 2441.000 MHz; Duty Cycle: 1:1.305

Medium: HSL_2450_251122 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.141 W/kg; SAR (10g) = 0.062 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.187 W/kg; SAR (10g) = 0.065 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 78.6 %

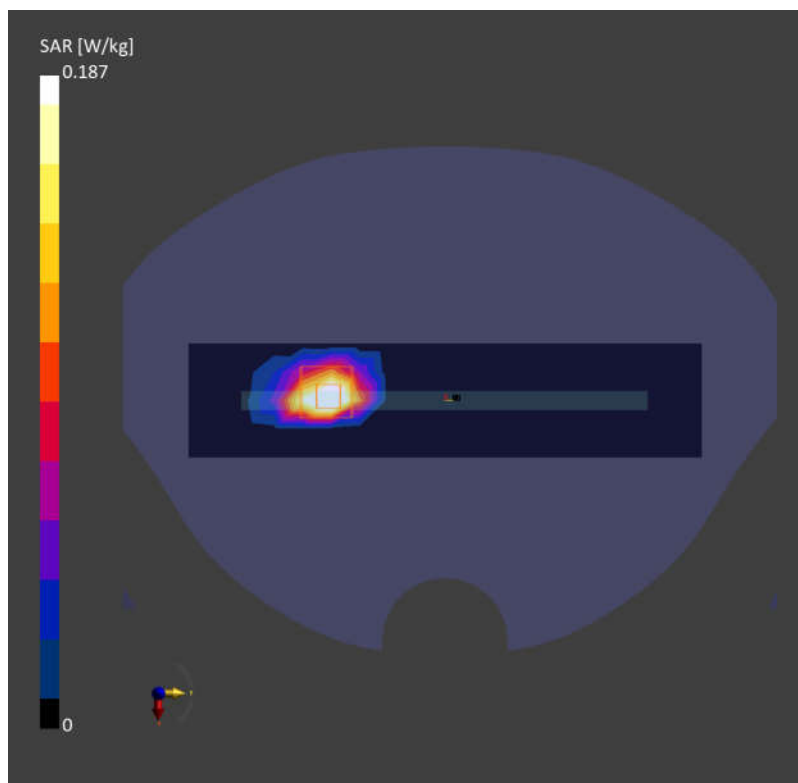

Date: 2025-11-23

62_WLAN5GHz_802.11n-HT40 MCS0_Right Side_5mm_Ch46

Communication System: IEEE 802.11n

Frequency: 5230.000 MHz; Duty Cycle: 1:1.067

Medium: HSL_5250_251123 Medium parameters used: $f = 5230.000$ MHz; $\sigma = 4.62$ S/m; $\epsilon_r = 36.4$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(4.79, 5.18, 4.9); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (48.0 mm x 220.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.487 W/kg; SAR (10g) = 0.143 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.19 dB

SAR (1g) = 0.369 W/kg; SAR (10g) = 0.139 W/kg

Smallest distance from peaks to all points 3 dB below = 4.4 mm

Ratio of SAR at M2 to SAR at M1 = 58.8 %

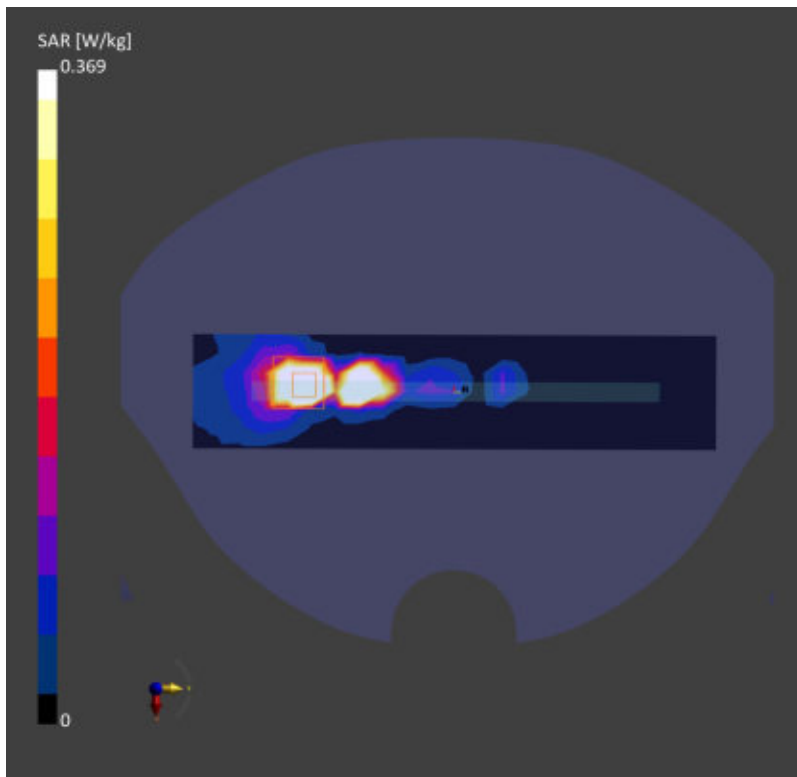

Date: 2025-11-25

63_WLAN5GHz_802.11ac-VHT80 MCS0_Top Side_5mm_Ch155

Communication System: IEEE 802.11ac WiFi

Frequency: 5775.000 MHz; Duty Cycle: 1:1.134

Medium: HSL_5800_251125 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.24$ S/m; $\epsilon_r = 35.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(4.49, 4.85, 4.59); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.262 W/kg; SAR (10g) = 0.073 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.02 dB

SAR (1g) = 0.323 W/kg; SAR (10g) = 0.070 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 56.9 %

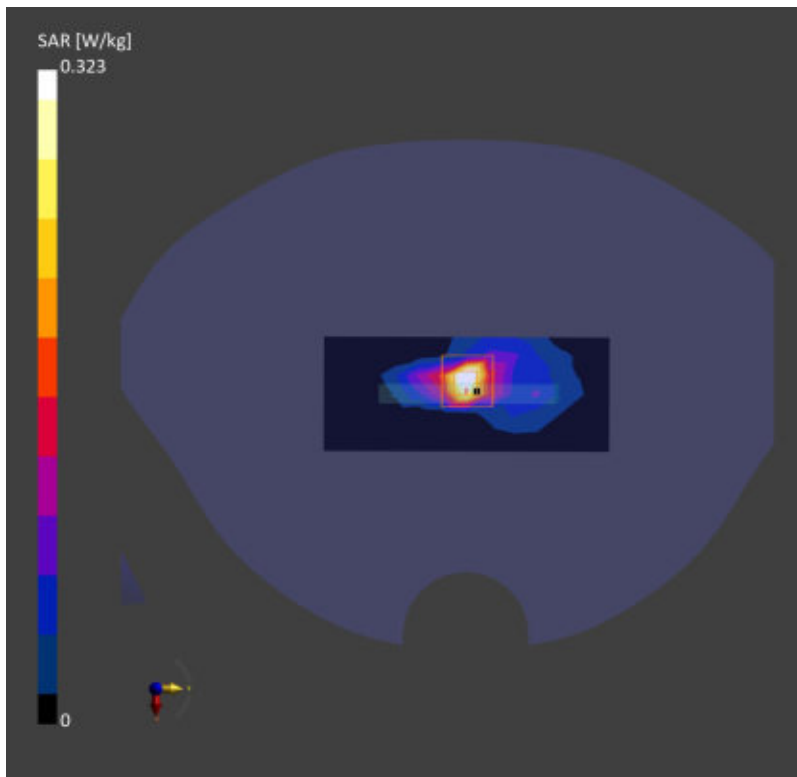

Date: 2025-11-14

64_FR1 n12_15M_QPSK_1_1_Back_5mm_Ch141500

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 707.500 MHz; Duty Cycle: 1:1

Medium: HSL_750_251114 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.879$ S/m; $\epsilon_r = 43.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10938-AAC

Area Scan (120.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.482 W/kg; SAR (10g) = 0.181 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.05 dB

SAR (1g) = 0.478 W/kg; SAR (10g) = 0.157 W/kg

Smallest distance from peaks to all points 3 dB below = 11.1 mm

Ratio of SAR at M2 to SAR at M1 = 79.6 %

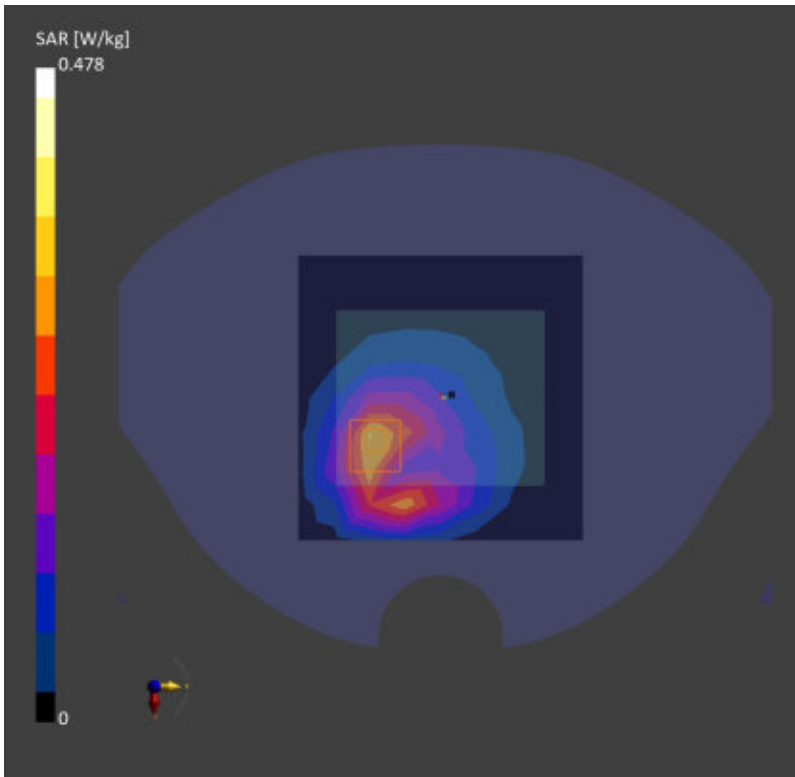

Date: 2025-11-21

65_FR1 n77 Part 27O HPUE other PA_100M_QPSK_135_69_Bottom Side_5mm_Ch656000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 3840.000 MHz; Duty Cycle: 1:1

Medium: HSL_3900_251121 Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.33$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.49, 5.93, 5.62); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.436 W/kg; SAR (10g) = 0.136 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.02 dB

SAR (1g) = 0.471 W/kg; SAR (10g) = 0.144 W/kg

Smallest distance from peaks to all points 3 dB below = 5.9 mm

Ratio of SAR at M2 to SAR at M1 = 71.7 %

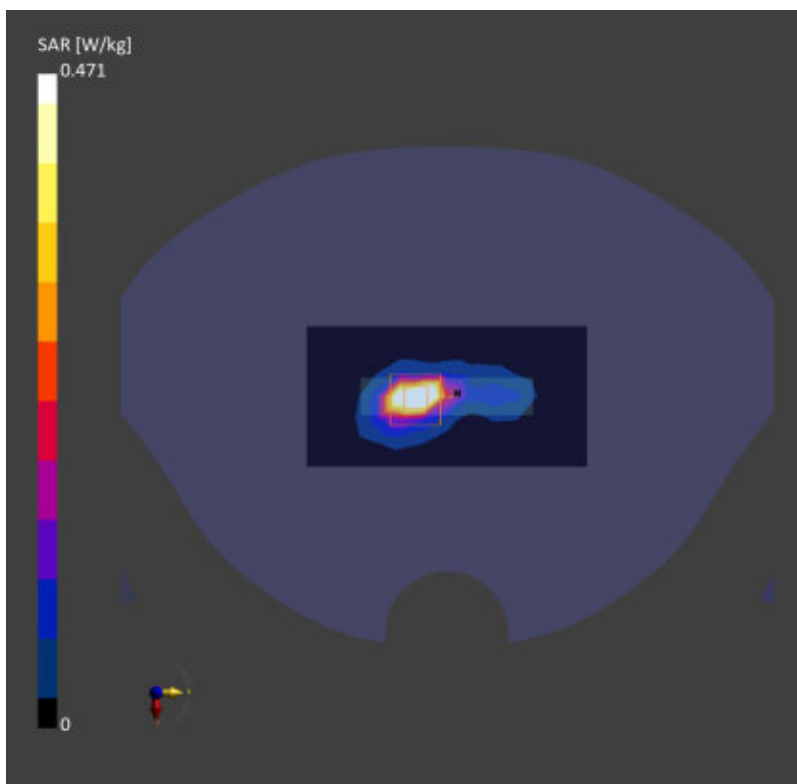

Date: 2025-11-22

66_WLAN2.4GHz_802.11b 1Mbps_Right Side_5mm_Ch6

Communication System: IEEE 802.11b WiFi 2.4 GHz

Frequency: 2437.000MHz; Duty Cycle: 1:1

Medium: HSL_2450_251122 Medium parameters used: $f = 2437.000$ MHz; $\sigma = 1.75$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.489 W/kg; SAR (10g) = 0.191 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.405 W/kg; SAR (10g) = 0.202 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 80.2 %

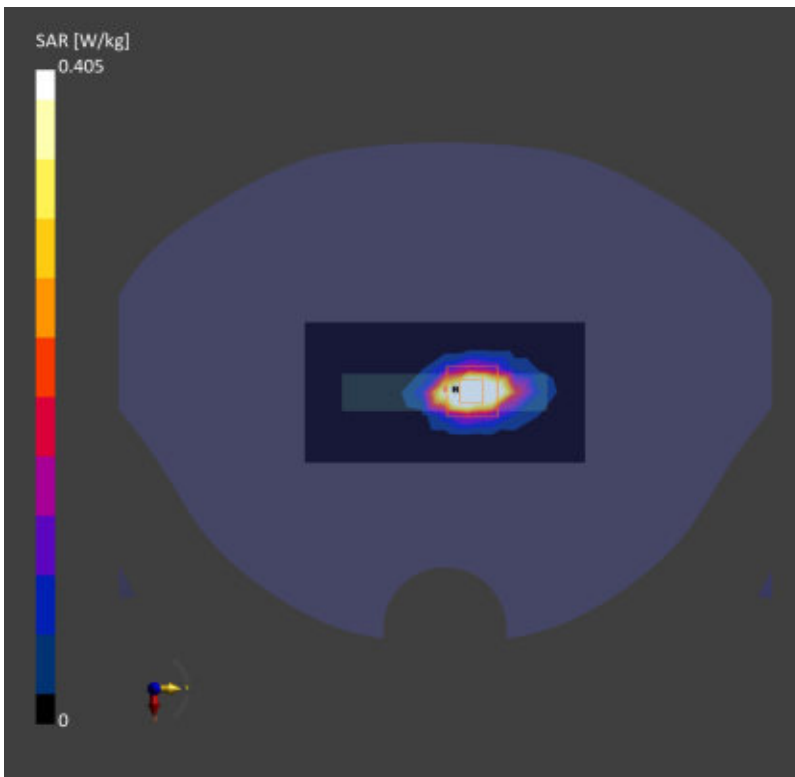

Date: 2025-11-14

67_LTE Band 71_20M_QPSK_1_0_Back_5mm_Ch133322

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 683.000 MHz; Duty Cycle: 1:1

Medium: HSL_750_251114 Medium parameters used: $f = 683.000$ MHz; $\sigma = 0.883$ S/m; $\epsilon_r = 42.9$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.623 W/kg; SAR (10g) = 0.419 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.677 W/kg; SAR (10g) = 0.366 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 76.9 %

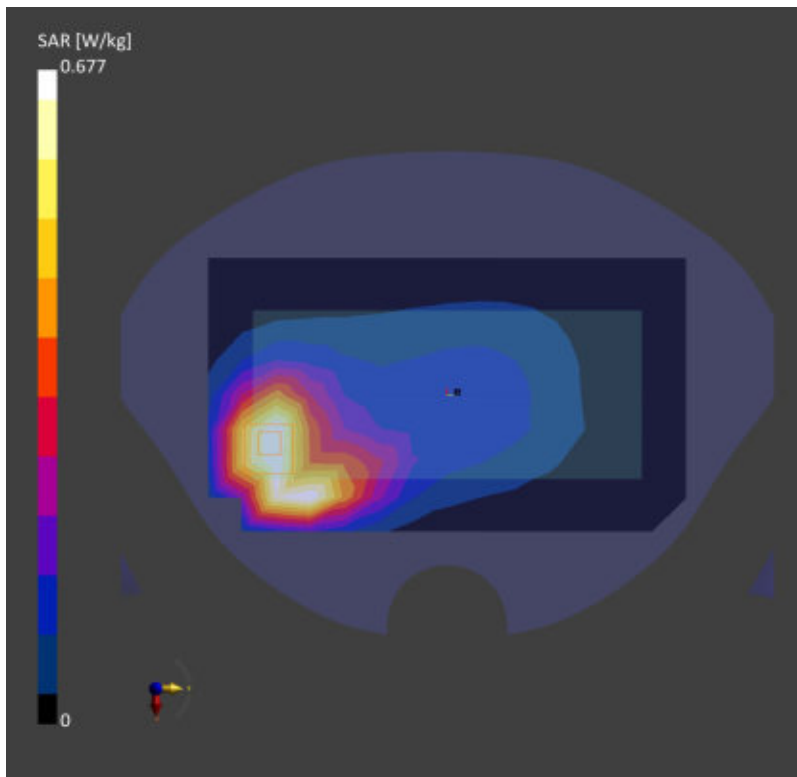

Date: 2025-11-14

68_LTE Band 12_10M_QPSK_1_0_Back_5mm_Ch23095

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 707.500 MHz; Duty Cycle: 1:1

Medium: HSL_750_251114 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.879$ S/m; $\epsilon_r = 43.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.601 W/kg; SAR (10g) = 0.420 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.673 W/kg; SAR (10g) = 0.439 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 79.6 %

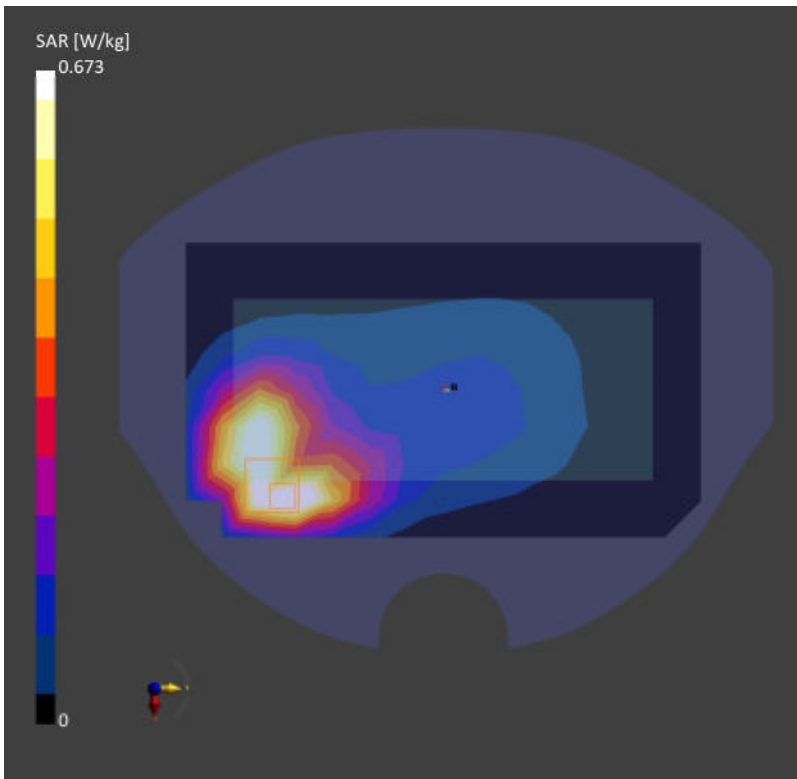

Date: 2025-11-14

69_LTE Band 13_10M_QPSK_1_0_Back_5mm_Ch23230

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 782.000 MHz; Duty Cycle: 1:1

Medium: HSL_750_251114 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 42.7$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.708 W/kg; SAR (10g) = 0.445 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.761 W/kg; SAR (10g) = 0.414 W/kg

Smallest distance from peaks to all points 3 dB below = 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 79.4 %

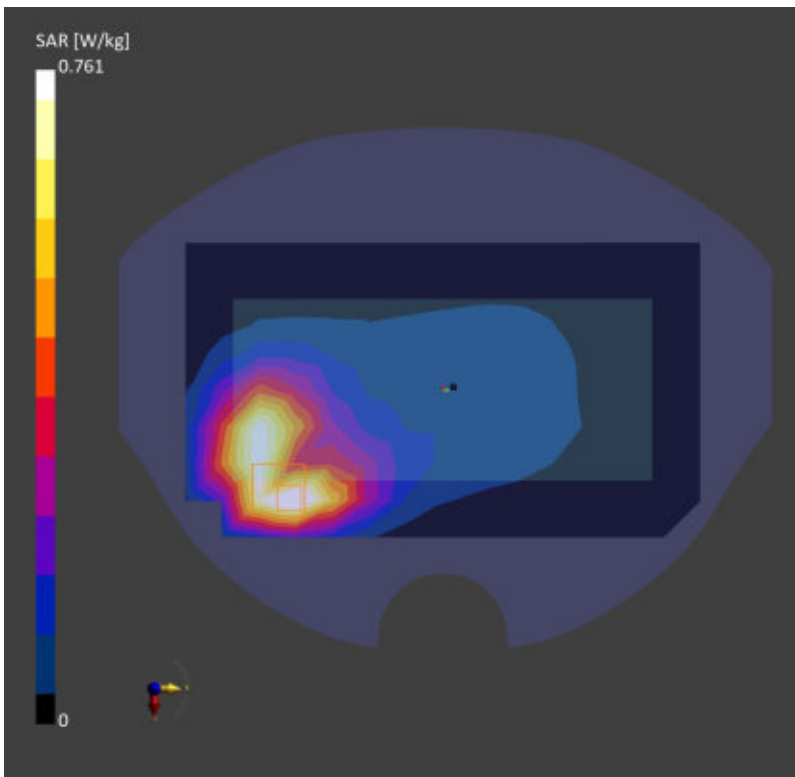

Date: 2025-11-14

70_LTE Band 14_10M_QPSK_1_0_Back_5mm_Ch23330

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 793.000 MHz; Duty Cycle: 1:1

Medium: HSL_750_251114 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.910$ S/m; $\epsilon_r = 42.3$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.855 W/kg; SAR (10g) = 0.536 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.912 W/kg; SAR (10g) = 0.496 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 80.0 %

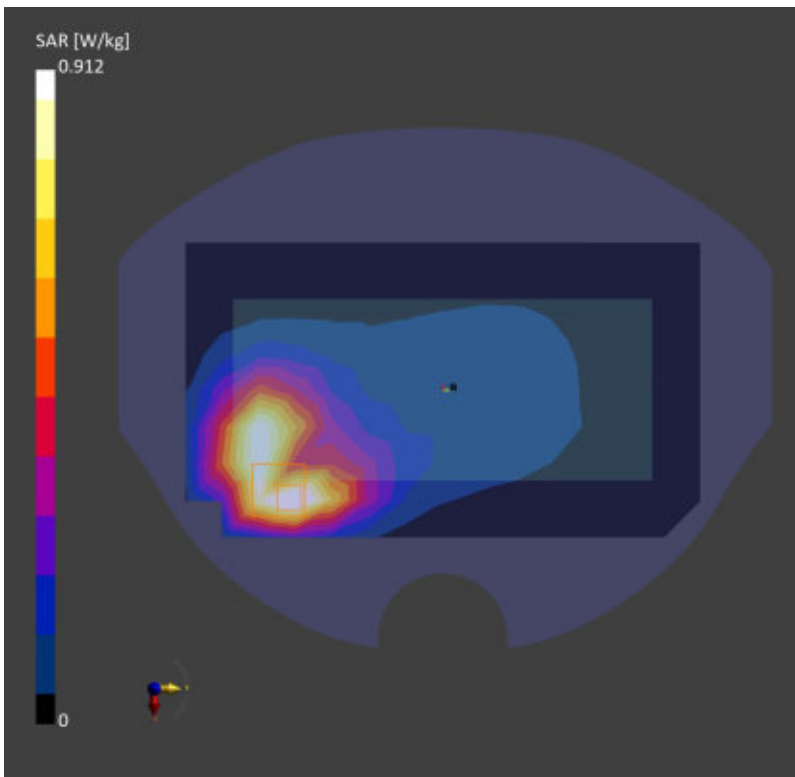

Date: 2025-11-14

71_FR1 n71_20M_QPSK_50_28_Back_5mm_Ch136100

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 680.500 MHz; Duty Cycle: 1:1

Medium: HSL_750_251114 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.860$ S/m; $\epsilon_r = 43.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.480 W/kg; SAR (10g) = 0.310 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.519 W/kg; SAR (10g) = 0.278 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 76.5 %

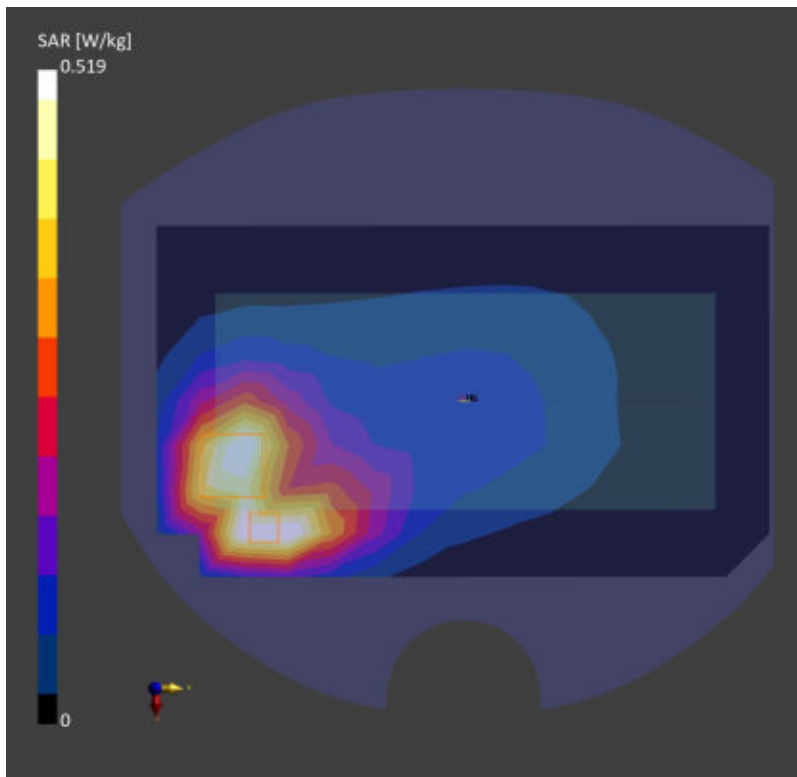

Date: 2025-11-14

72_FR1 n14_10M_QPSK_1_1_Back_5mm_Ch158600

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 793.000 MHz; Duty Cycle: 1:1

Medium: HSL_750_251114 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.910$ S/m; $\epsilon_r = 42.3$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10928-AAD

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.588 W/kg; SAR (10g) = 0.386 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 0.645 W/kg; SAR (10g) = 0.354 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 80.3 %

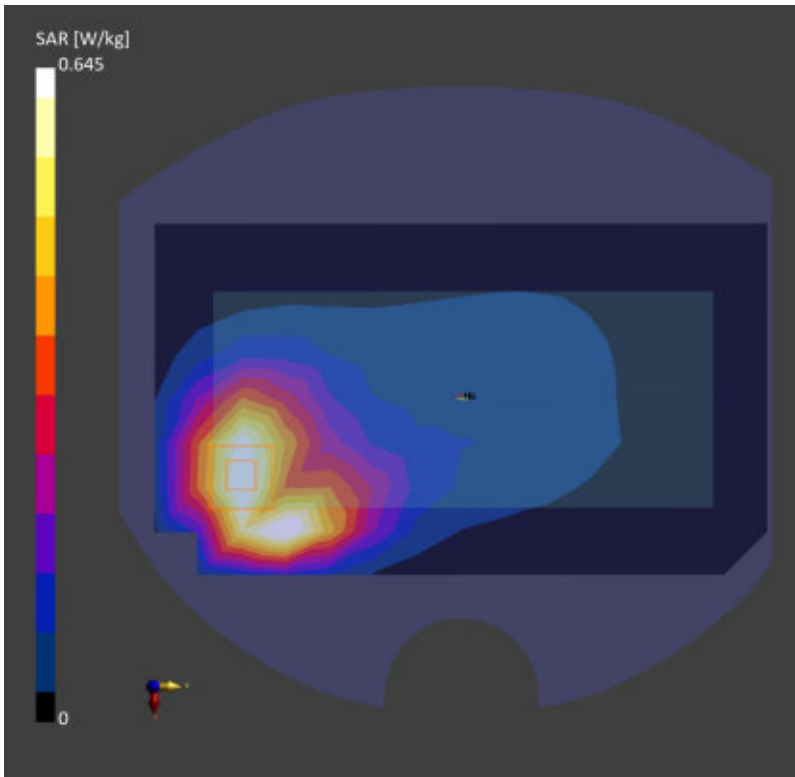

Date: 2025-11-15

73_GSM850_GPRS (4 Tx slots)_Back_5mm_Ch189

Communication System: GPRS-FDD

Frequency: 836.400 MHz; Duty Cycle: 1:2.08

Medium: HSL_835_251115 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.01, 8.65, 8.19); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.641 W/kg; SAR (10g) = 0.396 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.639 W/kg; SAR (10g) = 0.354 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 79.3 %

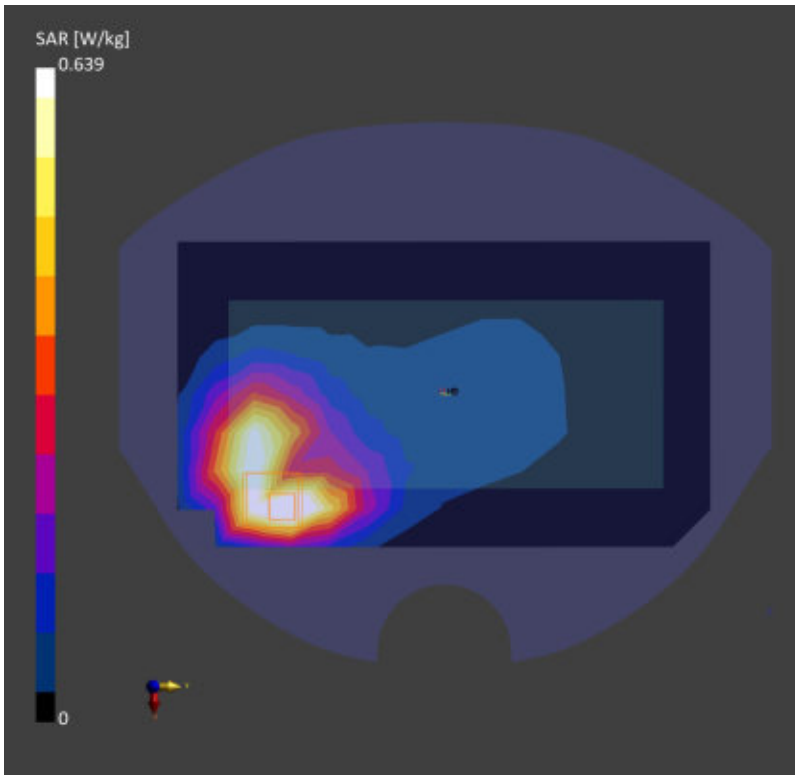

Date: 2025-11-15

74_WCDMA V_RMC 12.2Kbps_Back_5mm_Ch4182

Communication System: UMTS-FDD

Frequency: 836.400 MHz; Duty Cycle: 1:1

Medium: HSL_835_251115 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.01, 8.65, 8.19); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.860 W/kg; SAR (10g) = 0.554 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.912 W/kg; SAR (10g) = 0.503 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 80.3 %

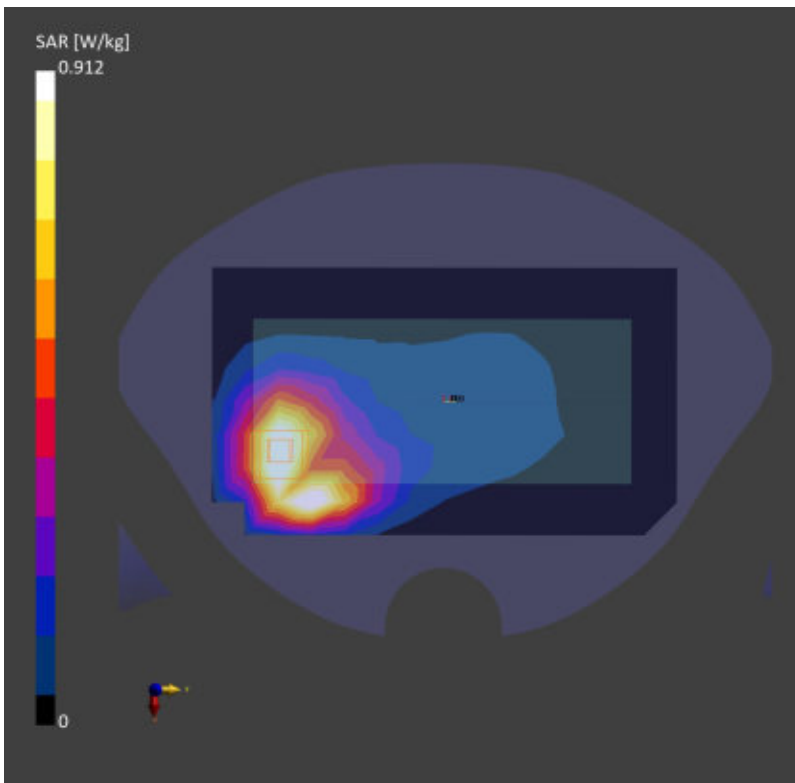

Date: 2025-11-15

75_LTE Band 26_15M_QPSK_1_0_Back_5mm_Ch26865

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: HSL_835_251115 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.01, 8.65, 8.19); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.03 W/kg; SAR (10g) = 0.667 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.597 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 78.5 %

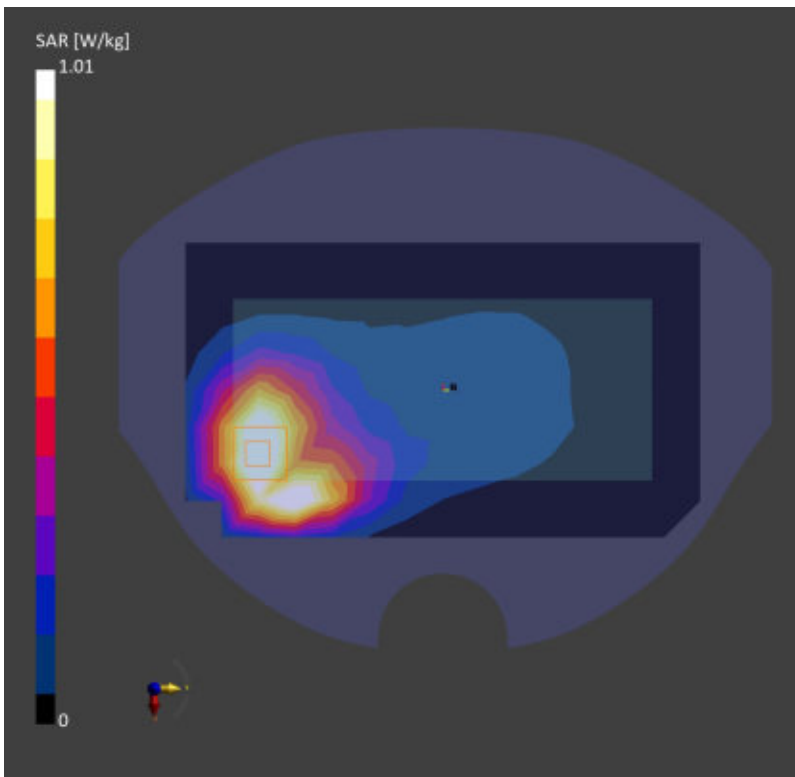

Date: 2025-11-15

76_FR1 n26_20M_QPSK_50_28_Back_5mm_Ch166300

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: HSL_835_251115 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.01, 8.65, 8.19); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.661 W/kg; SAR (10g) = 0.416 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.710 W/kg; SAR (10g) = 0.390 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 80.5 %

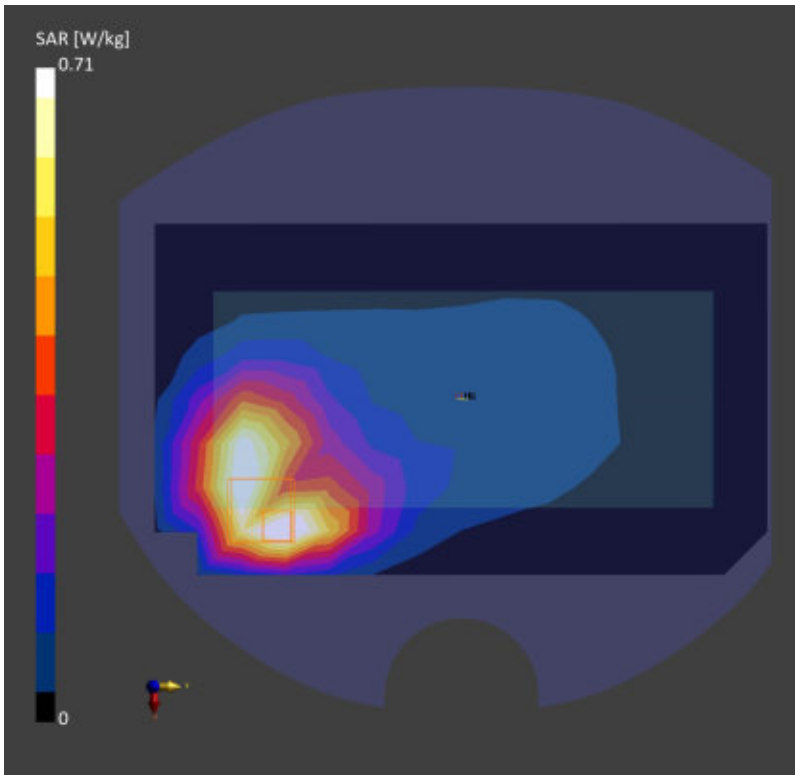

Date: 2025-11-16

77_WCDMA IV_RMC 12.2Kbps_Back_5mm_Ch1513

Communication System: UMTS-FDD

Frequency: 1752.600 MHz; Duty Cycle: 1:1

Medium: HSL_1750_251116 Medium parameters used: $f = 1752.600$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.86, 7.4, 7.01); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.739 W/kg; SAR (10g) = 0.402 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.786 W/kg; SAR (10g) = 0.438 W/kg

Smallest distance from peaks to all points 3 dB below = 11.9 mm

Ratio of SAR at M2 to SAR at M1 = 90.3 %

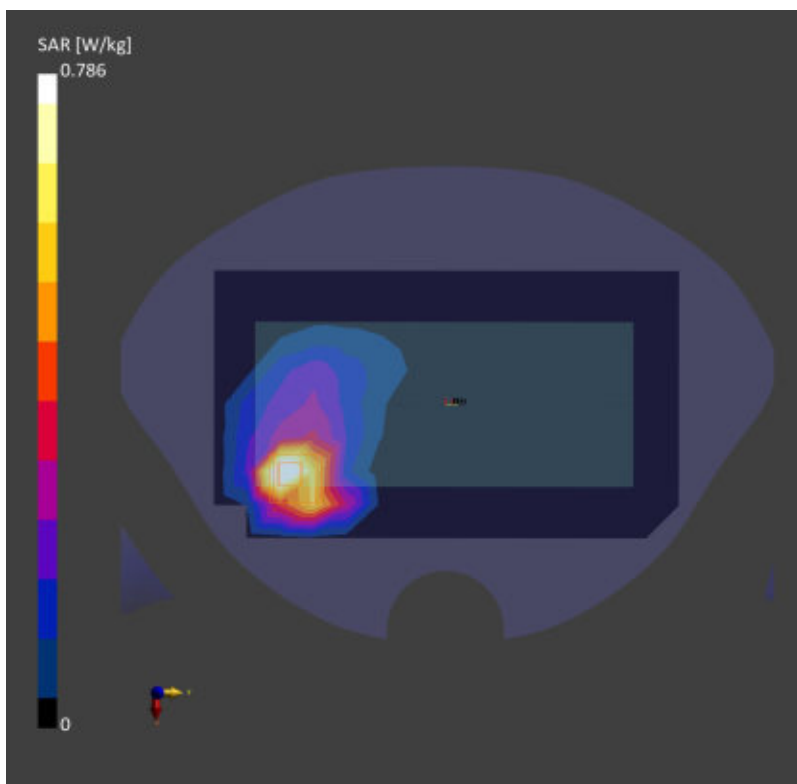

Date: 2025-11-16

78_LTE Band 66_20M_QPSK_1_0_Back_5mm_Ch132572

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 1770.000 MHz; Duty Cycle: 1:1

Medium: HSL_1750_251116 Medium parameters used: $f = 1770.000$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.86, 7.4, 7.01); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.778 W/kg; SAR (10g) = 0.404 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.05 dB

SAR (1g) = 0.908 W/kg; SAR (10g) = 0.429 W/kg

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 82.0 %

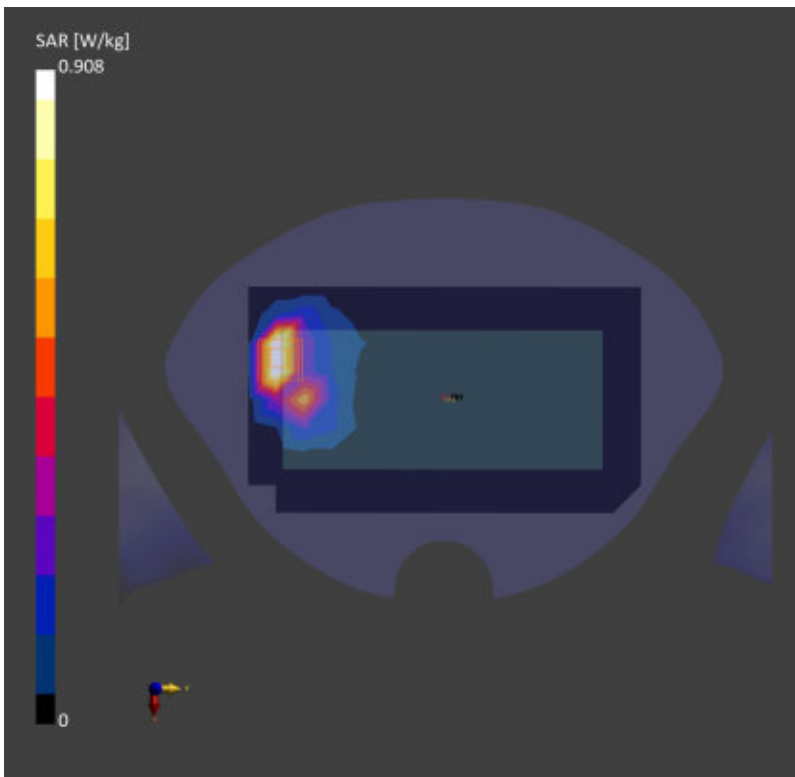

Date: 2025-11-16

79_FR1 n70_15M_QPSK_36_22_Back_5mm_Ch340500

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 1702.500 MHz; Duty Cycle: 1:1

Medium: HSL_1750_251116 Medium parameters used: $f = 1702.500$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.86, 7.4, 7.01); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10938-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.682 W/kg; SAR (10g) = 0.355 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 0.803 W/kg; SAR (10g) = 0.384 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 80.9 %

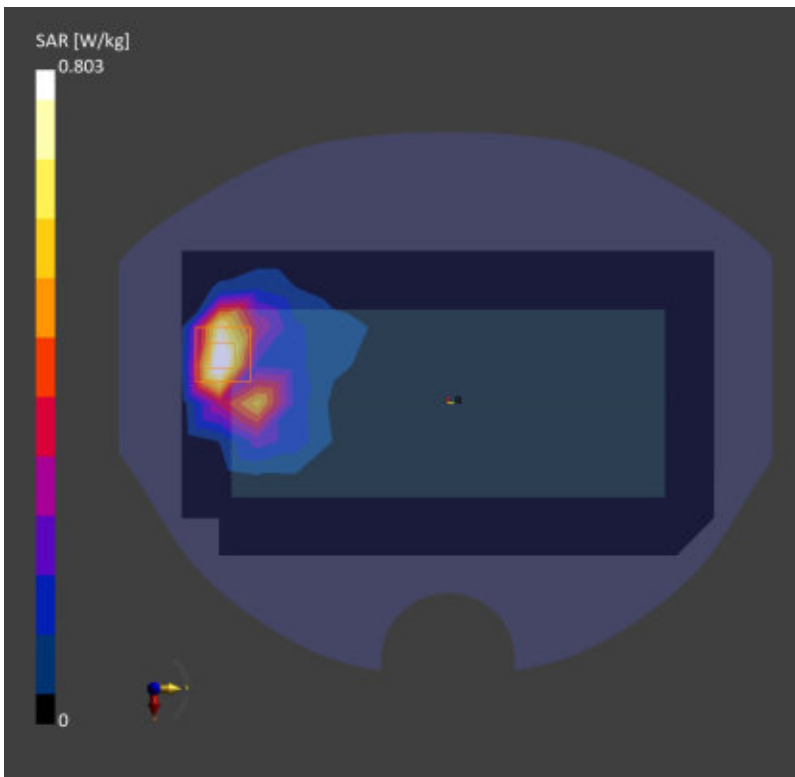

Date: 2025-11-16

80_FR1 n66_40M_QPSK_108_54_Back_5mm_Ch349000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 1745.000 MHz; Duty Cycle: 1:1

Medium: HSL_1750_251116 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.86, 7.4, 7.01); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.732 W/kg; SAR (10g) = 0.379 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.837 W/kg; SAR (10g) = 0.399 W/kg

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 81.4 %

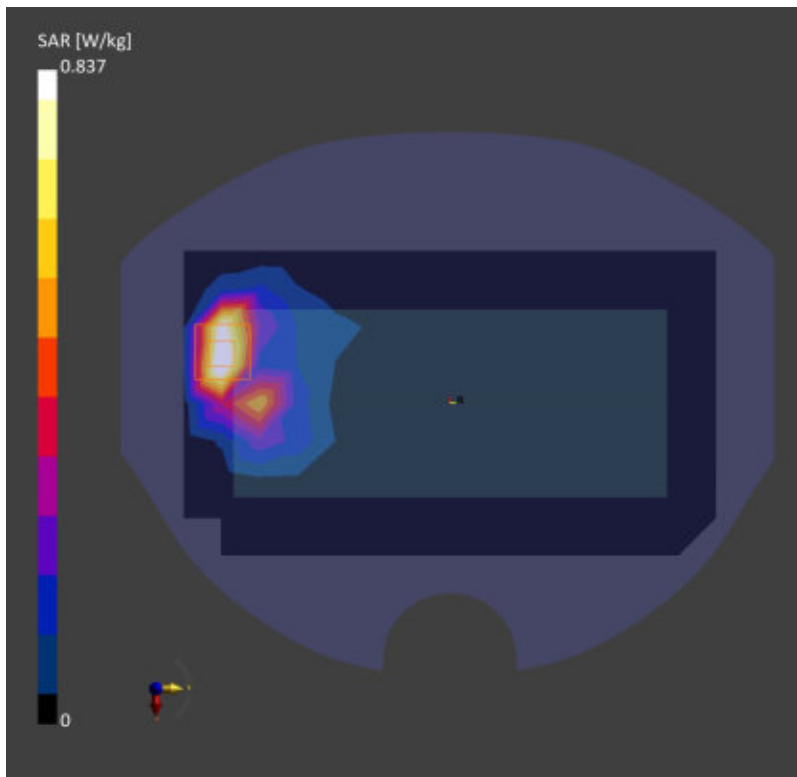

Date: 2025-11-17

81_GSM1900_GPRS (4 Tx slots)_Front_5mm_Ch661

Communication System: GPRS-FDD

Frequency: 1880.000 MHz; Duty Cycle: 1:2.08

Medium: HSL_1900_251117 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.64, 7.17, 6.79); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.749 W/kg; SAR (10g) = 0.387 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.677 W/kg; SAR (10g) = 0.354 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 82.7 %

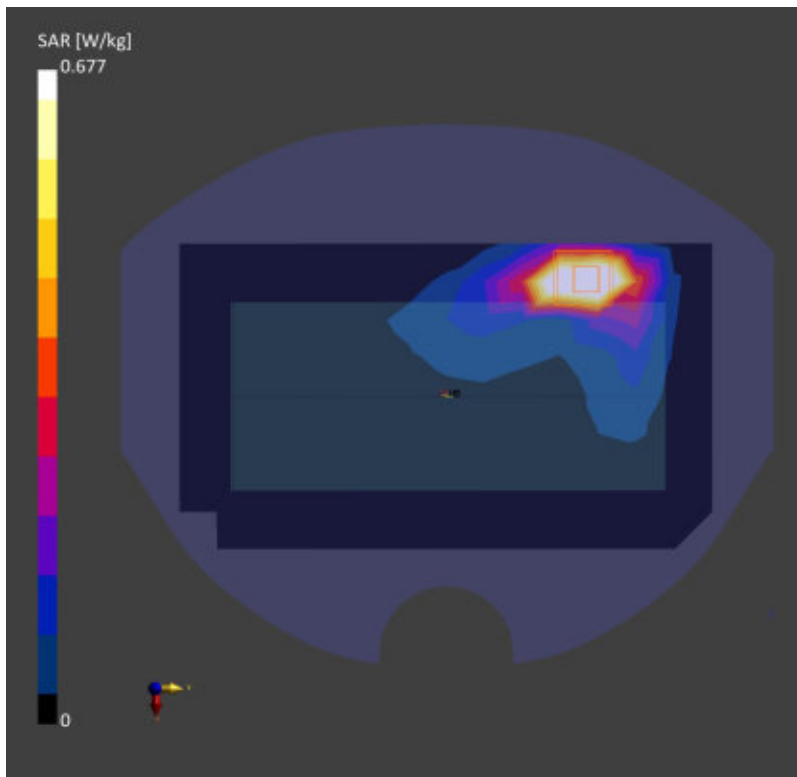

Date: 2025-11-17

82_WCDMA II_RMC 12.2Kbps_Back_5mm_Ch9262

Communication System: UMTS-FDD

Frequency: 1852.400 MHz; Duty Cycle: 1:1

Medium: HSL_1900_251117 Medium parameters used: $f = 1852.400$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 39.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.64, 7.17, 6.79); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.557 W/kg; SAR (10g) = 0.308 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.658 W/kg; SAR (10g) = 0.347 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 92.9 %

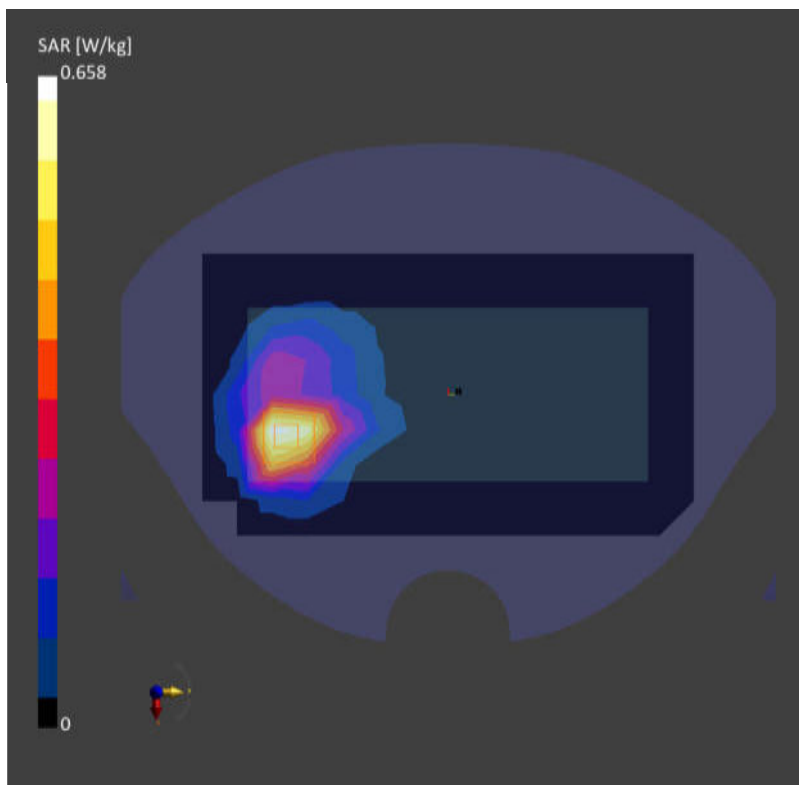

Date: 2025-11-17

83_LTE Band 25_20M_QPSK_1_0_Back_5mm_Ch26590

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 1905.000 MHz; Duty Cycle: 1:1

Medium: HSL_1900_251117 Medium parameters used: $f = 1905.000$ MHz; $\sigma = 1.46$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.64, 7.17, 6.79); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.694 W/kg; SAR (10g) = 0.349 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.837 W/kg; SAR (10g) = 0.381 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 81.3 %

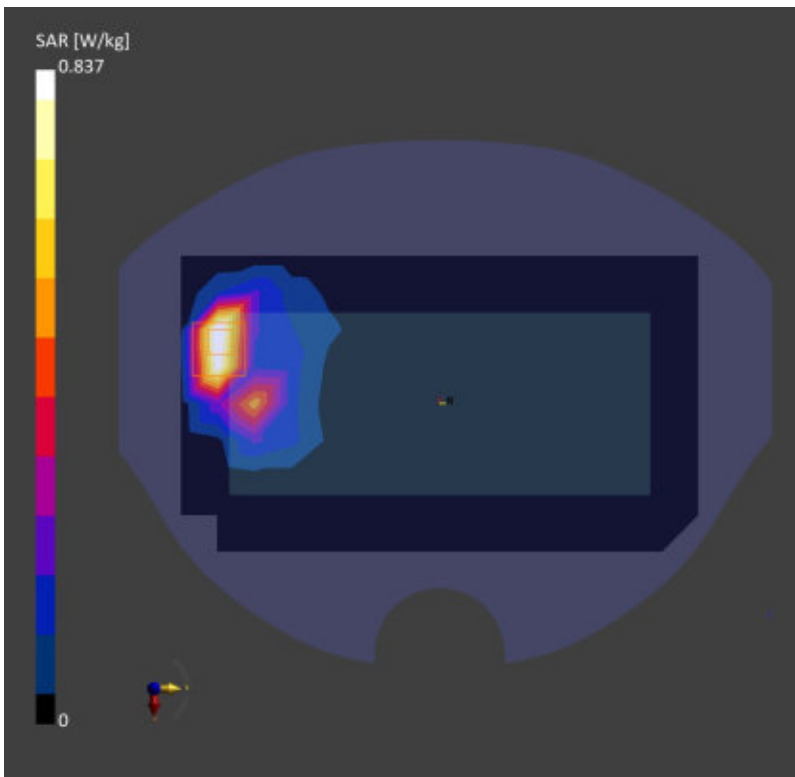

Date: 2025-11-17

84_FR1 n25_40M_QPSK_1_1_Back_5mm_Ch376500

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 1882.500 MHz; Duty Cycle: 1:1

Medium: HSL_1900_251117 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 39.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.64, 7.17, 6.79); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.681 W/kg; SAR (10g) = 0.361 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.17 dB

SAR (1g) = 0.714 W/kg; SAR (10g) = 0.394 W/kg

Smallest distance from peaks to all points 3 dB below = 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 91.1 %

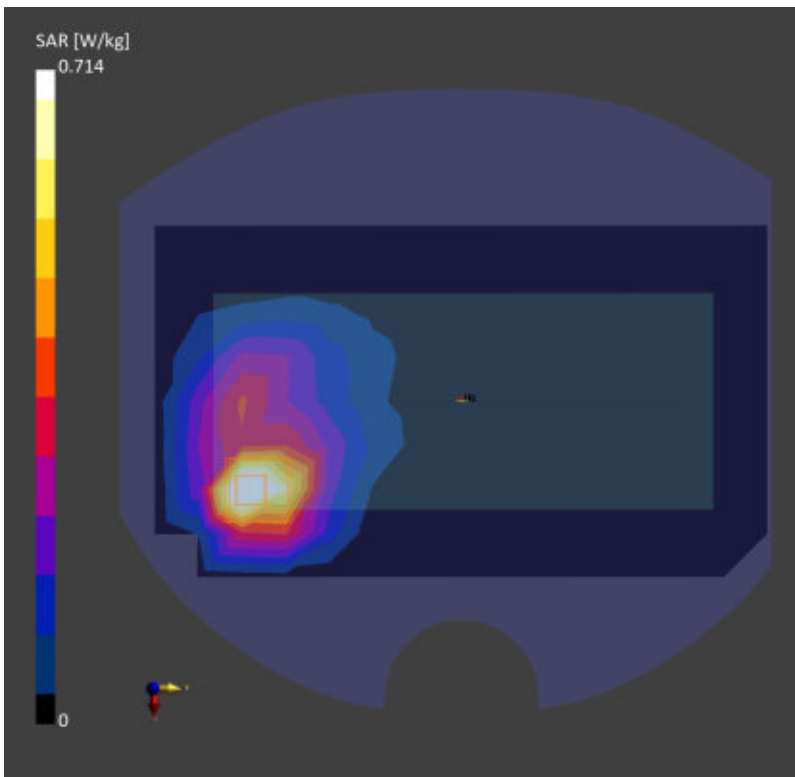

Date: 2025-11-18

85_LTE Band 30_10M_QPSK_1_0_Back_5mm_Ch27710

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 2310.000 MHz; Duty Cycle: 1:1

Medium: HSL_2300_251118 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.62$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.25, 6.75, 6.39); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.924 W/kg; SAR (10g) = 0.425 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.968 W/kg; SAR (10g) = 0.441 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 83.6 %

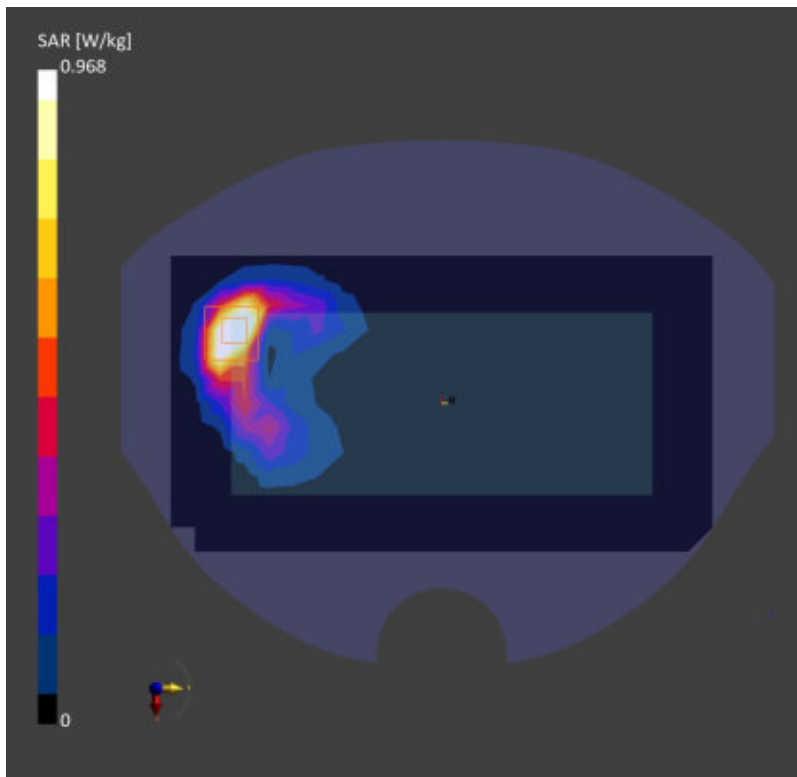

Date: 2025-11-18

86_FR1 n30_10M_QPSK_1_1_Back_5mm_Ch462000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 2310.000 MHz; Duty Cycle: 1:1

Medium: HSL_2300_251118 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.62$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.25, 6.75, 6.39); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.768 W/kg; SAR (10g) = 0.358 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.16 dB

SAR (1g) = 0.828 W/kg; SAR (10g) = 0.373 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 82.0 %

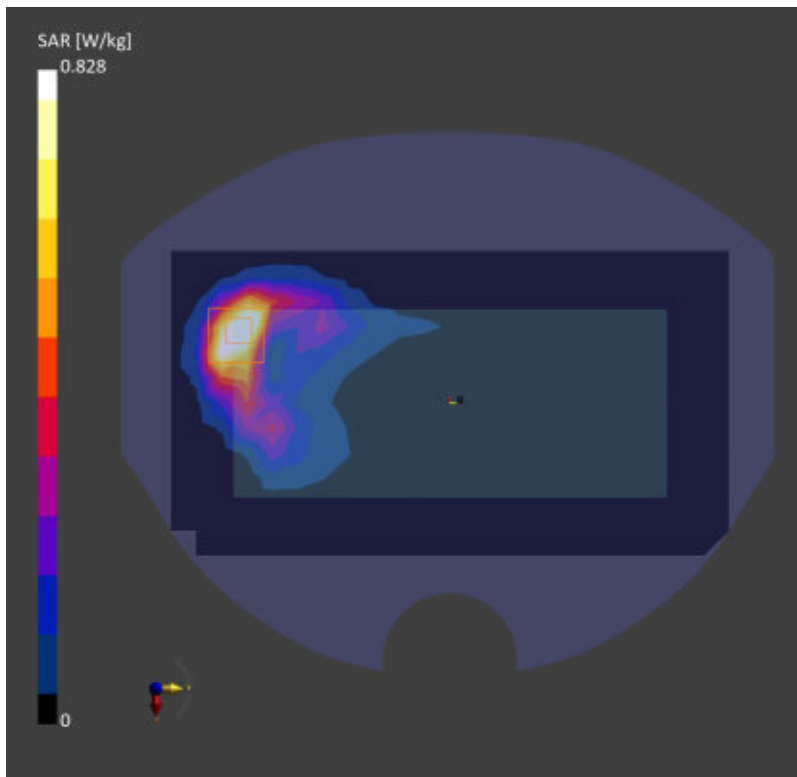

Date: 2025-11-19

87_LTE Band 7_20M_QPSK_1_0_Back_5mm_Ch21350

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 2560.000 MHz; Duty Cycle: 1:1

Medium: HSL_2600_251119 Medium parameters used: $f = 2560.000$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.96, 6.44, 6.09); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.780 W/kg; SAR (10g) = 0.351 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.867 W/kg; SAR (10g) = 0.355 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 81.7 %

