

Date: 2025-10-30

01_LTE Band 12_10M_QPSK_1_0_Left Cheek_0mm_Ch23095

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 707.500 MHz; Duty Cycle: 1:1

Medium: HSL_750_251030 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.880$ S/m; $\epsilon_r = 43.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(9.65, 9.73, 9.25); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.134 W/kg; SAR (10g) = 0.094 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.138 W/kg; SAR (10g) = 0.112 W/kg

Smallest distance from peaks to all points 3 dB below = 27.1 mm

Ratio of SAR at M2 to SAR at M1 = 96.6 %

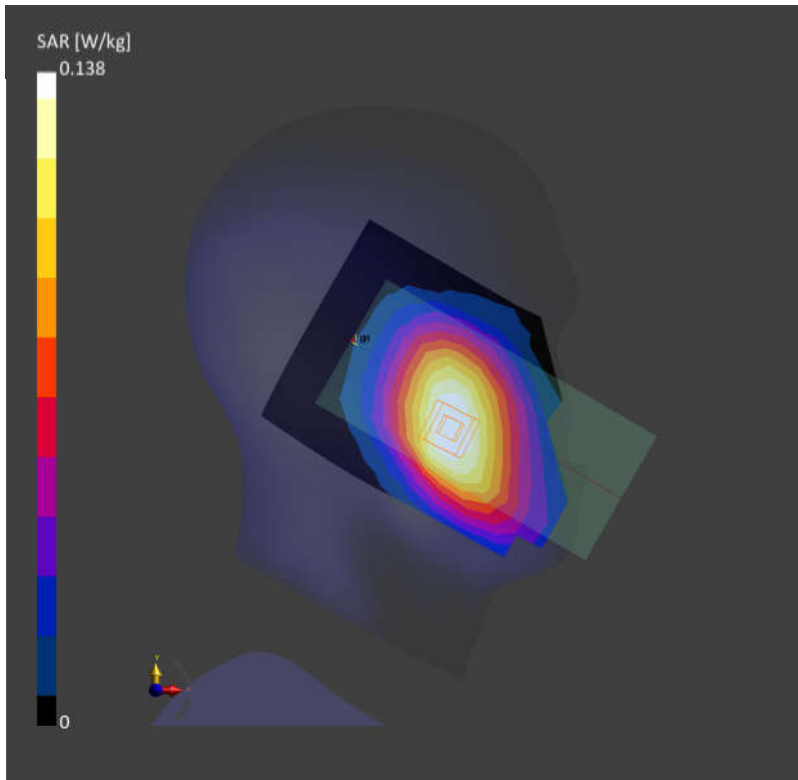

Date: 2025-10-30

02_LTE Band 13_10M_QPSK_1_0_Left Cheek_0mm_Ch23230

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 782.000 MHz; Duty Cycle: 1:1

Medium: HSL_750_251030 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.900$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(9.65, 9.73, 9.25); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.139 W/kg; SAR (10g) = 0.095 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.14 dB

SAR (1g) = 0.146 W/kg; SAR (10g) = 0.114 W/kg

Smallest distance from peaks to all points 3 dB below = 21.6 mm

Ratio of SAR at M2 to SAR at M1 = 95.3 %

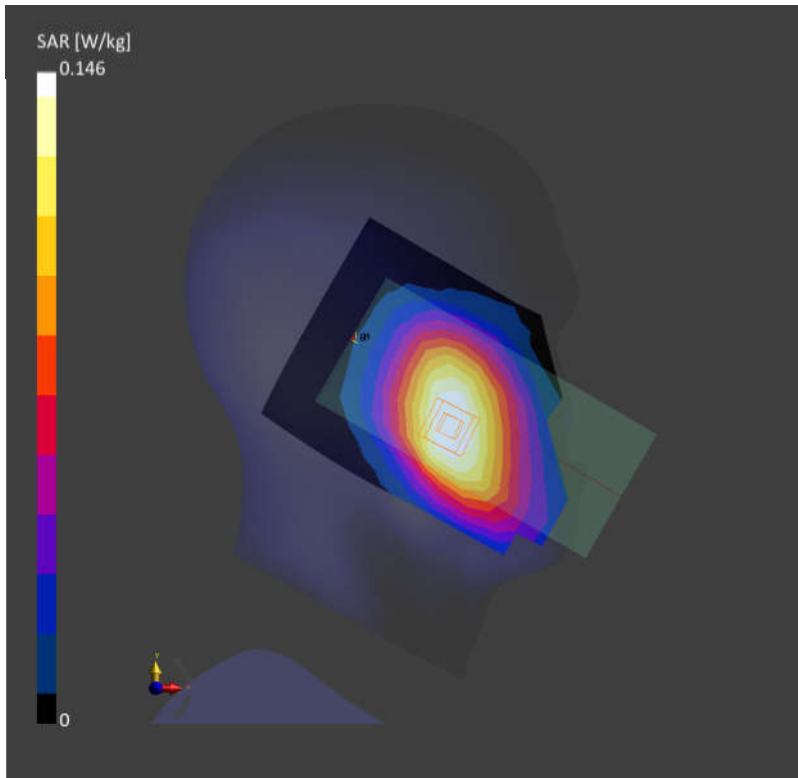

Date: 2025-10-30

03_GSM850_GPRS (4 Tx slots)_Left Cheek_0mm_Ch189

Communication System: GPRS-FDD

Frequency: 836.400 MHz; Duty Cycle: 1:2.08

Medium: HSL_835_251115 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(9.38, 9.47, 9.0); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.228 W/kg; SAR (10g) = 0.158 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.201 W/kg; SAR (10g) = 0.147 W/kg

Smallest distance from peaks to all points 3 dB below = 16.9 mm

Ratio of SAR at M2 to SAR at M1 = 94.3 %

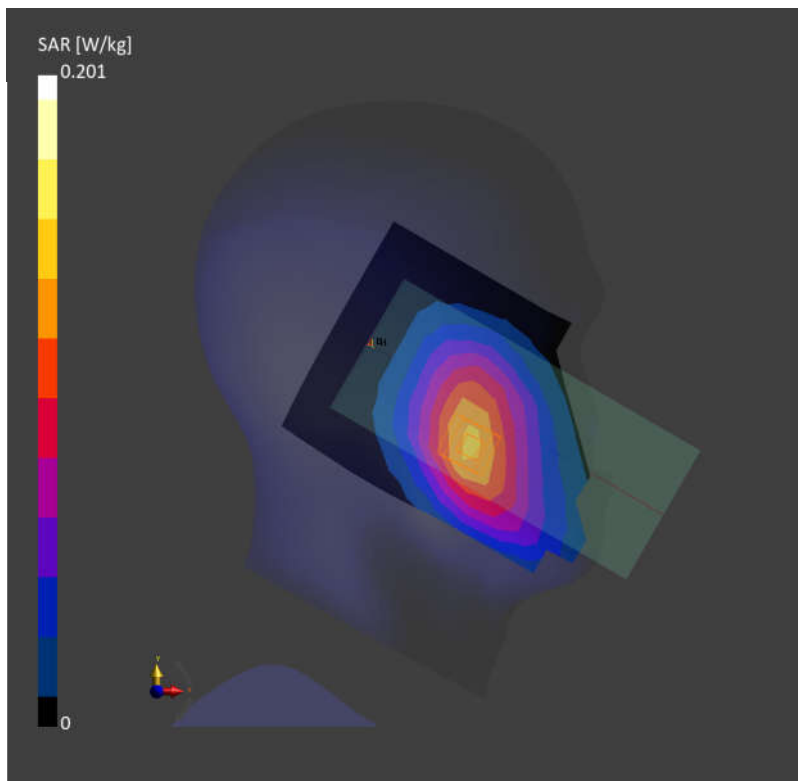

Date: 2025-10-30

04_WCDMA V_RMC 12.2Kbps_Left Cheek_0mm_Ch4182


Communication System: UMTS-FDD; Frequency: 836.400 MHz; Duty Cycle: 1:1
Medium: HSL_835_251030 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 42.5$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(9.38, 9.47, 9.0); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.200 W/kg; SAR (10g) = 0.136 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.08 dB
SAR (1g) = 0.204 W/kg; SAR (10g) = 0.159 W/kg
Smallest distance from peaks to all points 3 dB below = 20.3 mm
Ratio of SAR at M2 to SAR at M1 = 94.8 %

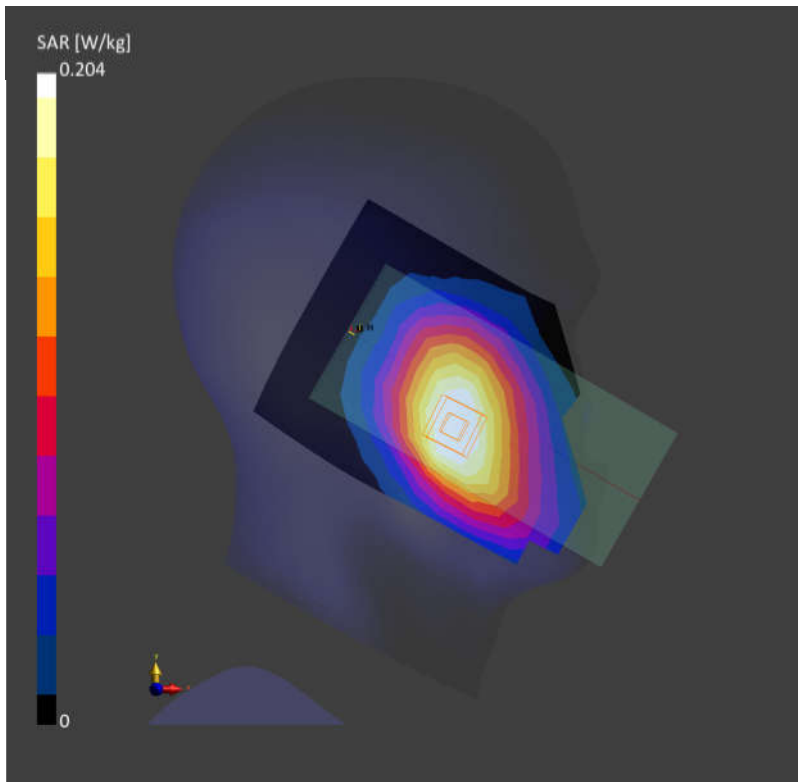

Date: 2025-10-30

05_LTE Band 26_15M_QPSK_1_0_Left Cheek_0mm_Ch26865

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: HSL_835_251030 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(9.38, 9.47, 9.0); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.198 W/kg; SAR (10g) = 0.166 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.201 W/kg; SAR (10g) = 0.179 W/kg

Smallest distance from peaks to all points 3 dB below = 20.1 mm

Ratio of SAR at M2 to SAR at M1 = 95.4 %

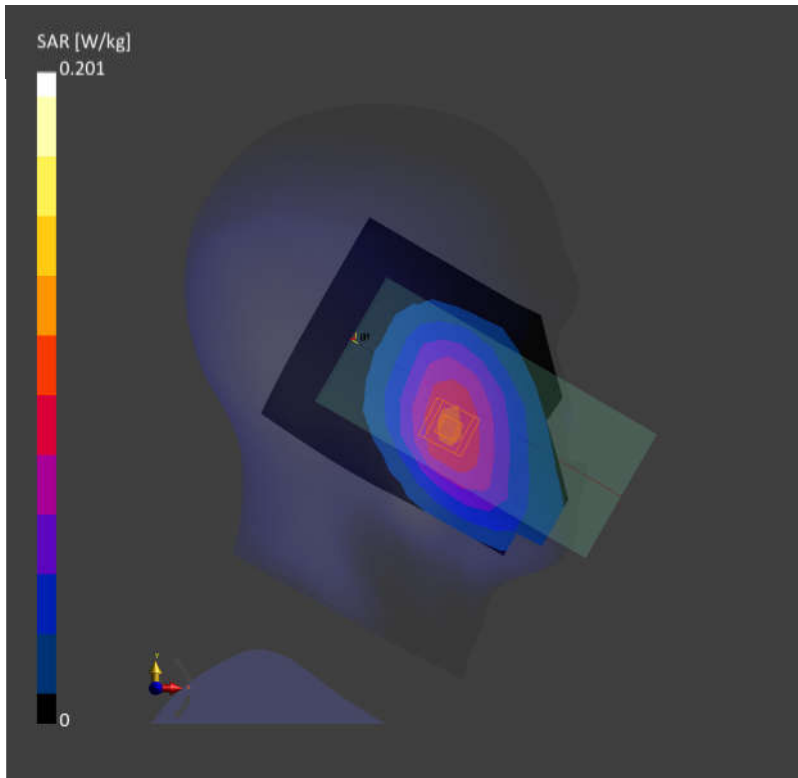

Date: 2025-10-30

06_FR1 n26_20M_QPSK_1_1_Left Cheek_0mm_Ch166300

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: HSL_835_251030 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(9.38, 9.47, 9.0); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.133 W/kg; SAR (10g) = 0.084 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.135 W/kg; SAR (10g) = 0.105 W/kg

Smallest distance from peaks to all points 3 dB below = 19.8 mm

Ratio of SAR at M2 to SAR at M1 = 93.8 %

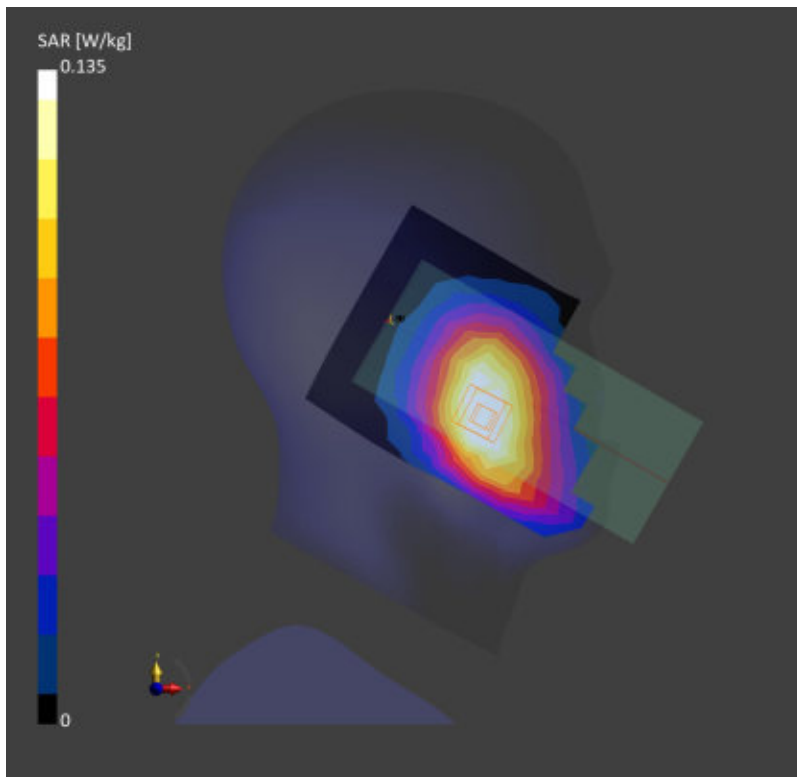

Date: 2025-11-10

07_WCDMA IV_RMC 12.2Kbps_Right Cheek_0mm_Ch1513


Communication System: UMTS-FDD (WCDMA); Frequency: 1752.600 MHz; Duty Cycle: 1:1
Medium: HSL_1750_251110 Medium parameters used: $f = 1752.600$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.6$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(8.13, 8.2, 7.79); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.595 W/kg; SAR (10g) = 0.339 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.02 dB
SAR (1g) = 0.610 W/kg; SAR (10g) = 0.350 W/kg
Smallest distance from peaks to all points 3 dB below = 8.5 mm
Ratio of SAR at M2 to SAR at M1 = 90.3 %

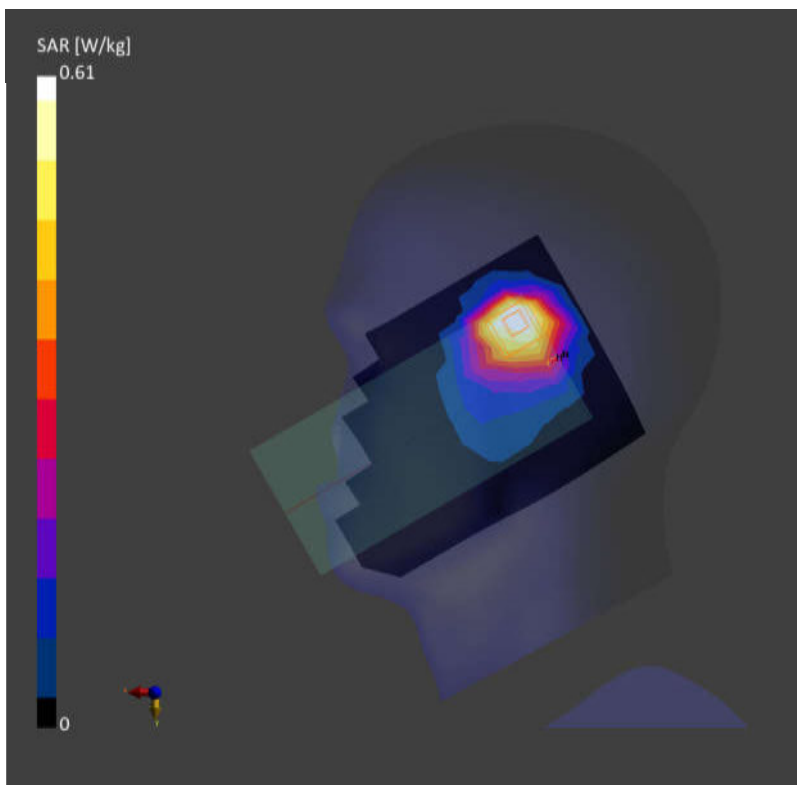

Date: 2025-11-10

08_LTE Band 66_20M_QPSK_1_0_Right Cheek_0mm_Ch132322

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 1745.000 MHz; Duty Cycle: 1:1

Medium: HSL_1750_251110 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(8.13, 8.2, 7.79); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.474 W/kg; SAR (10g) = 0.237 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.05 dB

SAR (1g) = 0.518 W/kg; SAR (10g) = 0.258 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 81.8 %

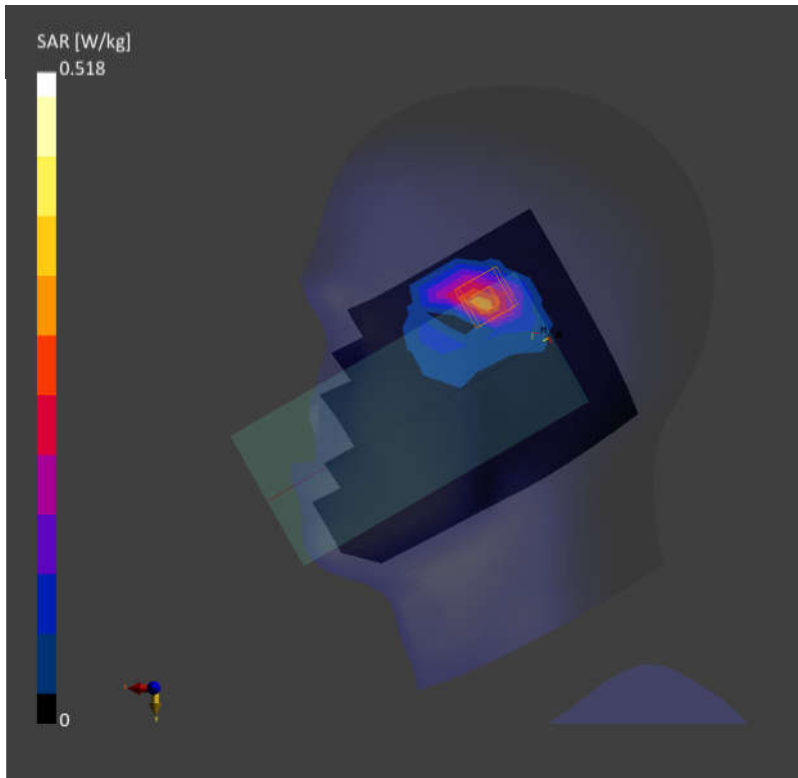

Date: 2025-11-10

09_FR1 n66_40M_QPSK_1_1_Right Cheek_0mm_Ch349000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 1745.000 MHz; Duty Cycle: 1:1

Medium: HSL_1750_251110 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(8.13, 8.2, 7.79); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.560 W/kg; SAR (10g) = 0.329 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.580 W/kg; SAR (10g) = 0.342 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 89.0 %

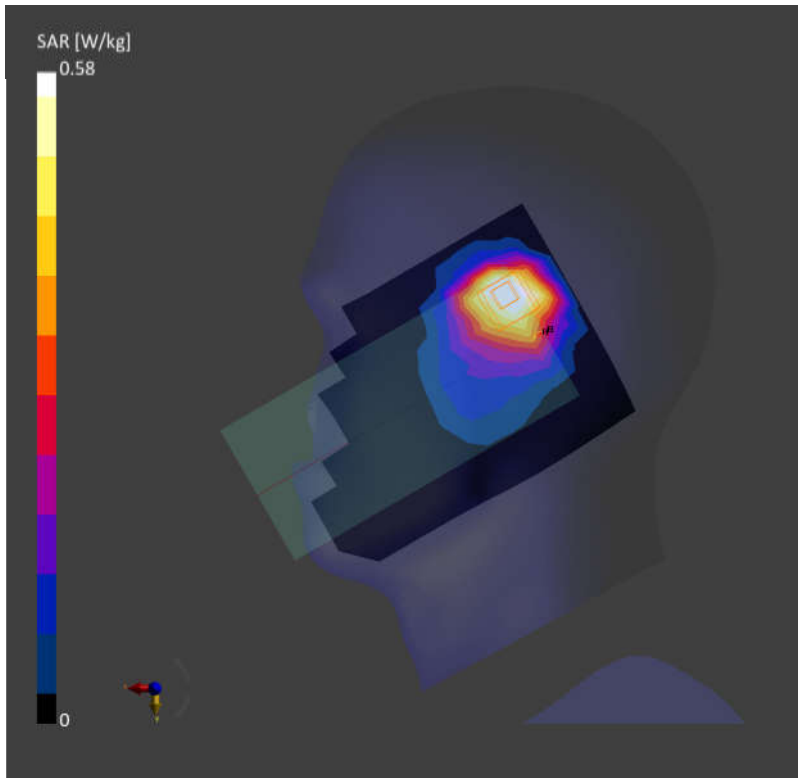

Date: 2025-11-08

10_GSM1900_GPRS (4 Tx slots)_Right Cheek_0mm_Ch661

Communication System: GPRS-FDD

Frequency: 1880.000 MHz; Duty Cycle: 1:2.08

Medium: HSL_1900_251108 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.91, 7.98, 7.59); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.535 W/kg; SAR (10g) = 0.328 W/kg;


Zoom Scan (31.2 mm x 31.2 mm x 30.0 mm): Measurement Grid: 5.2 mm x 5.2 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.553 W/kg; SAR (10g) = 0.356 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 88.3 %

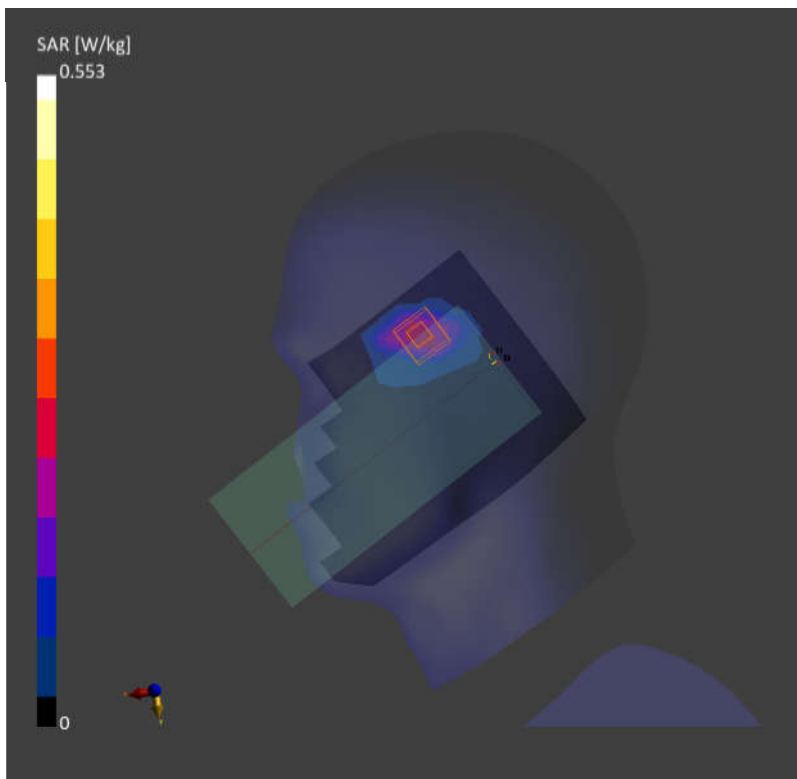

Date: 2025-11-08

11_WCDMA II_RMC 12.2Kbps_Right Cheek_0mm_Ch9262

Communication System: UMTS-FDD

Frequency: 1852.400 MHz; Duty Cycle: 1:1

Medium: HSL_1900_251108 Medium parameters used: $f = 1852.400$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 39.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.91, 7.98, 7.59); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.566 W/kg; SAR (10g) = 0.313 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.544 W/kg; SAR (10g) = 0.328 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 91.2 %

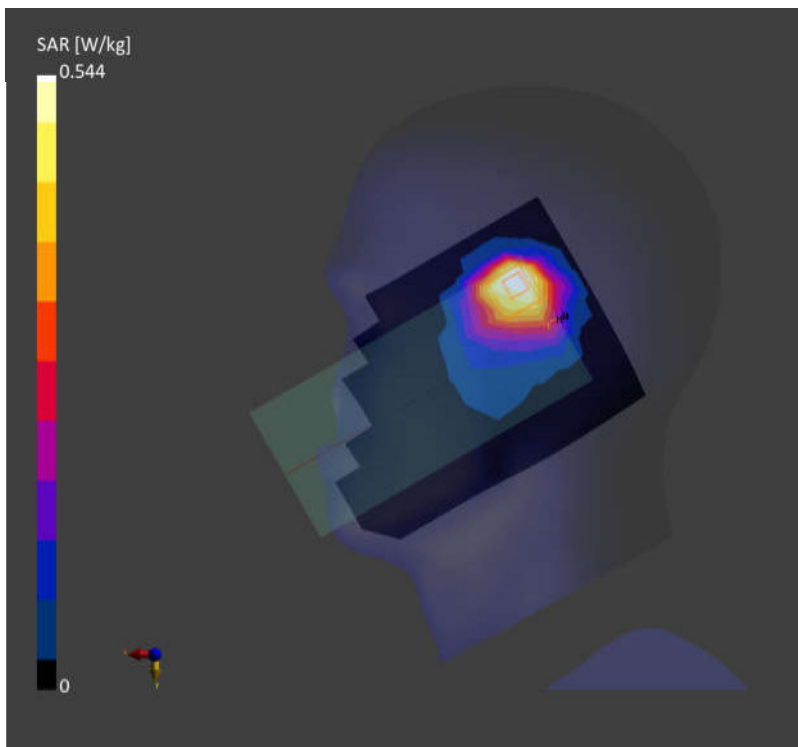

Date: 2025-11-08

12_LTE Band 25_20M_QPSK_1_0_Right Cheek_0mm_Ch26140

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 1860.000 MHz; Duty Cycle: 1:1

Medium: HSL_1900_251108 Medium parameters used: $f = 1860.000$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 39.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.91, 7.98, 7.59); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.428 W/kg; SAR (10g) = 0.248 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.566 W/kg; SAR (10g) = 0.264 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 91.4 %

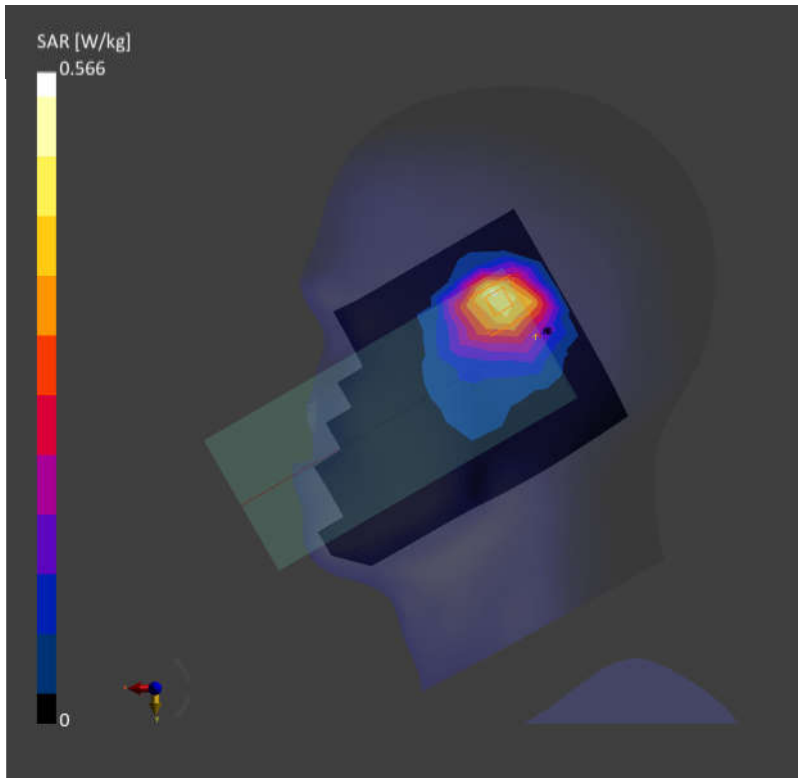

Date: 2025-11-08

13_FR1 n2_40M_QPSK_1_1_Right Cheek_0mm_Ch376000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 1880.000 MHz; Duty Cycle: 1:1

Medium: HSL_1900_251108 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.91, 7.98, 7.59); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.619 W/kg; SAR (10g) = 0.350 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.05 dB

SAR (1g) = 0.654 W/kg; SAR (10g) = 0.368 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 81.8 %

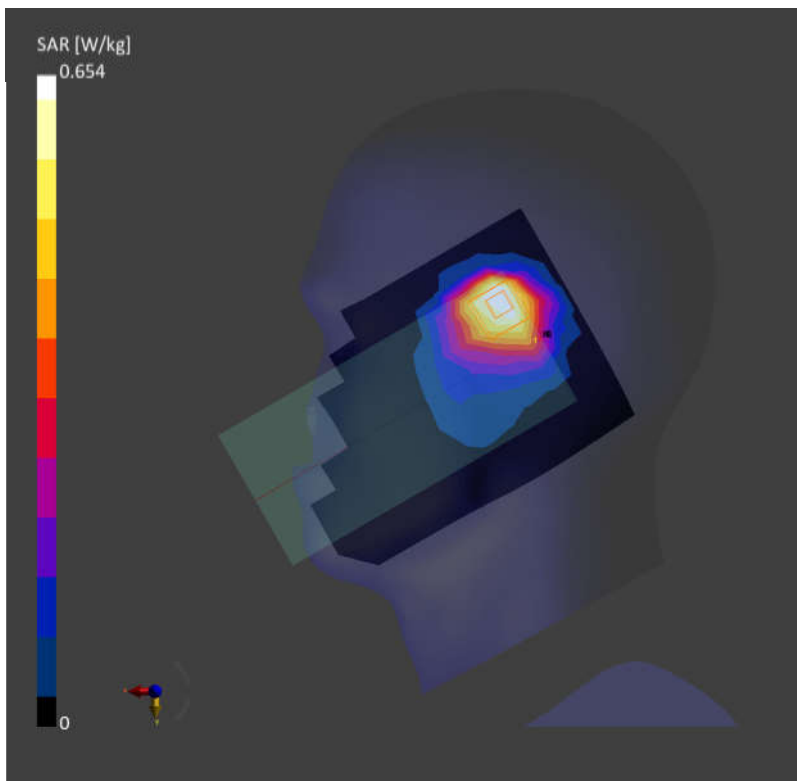

Date: 2025-11-02

14_LTE Band 7_20M_QPSK_1_0_Right Tilted_0mm_Ch21350

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 2560.000 MHz; Duty Cycle: 1:1

Medium: HSL_2600_251102 Medium parameters used: $f = 2560.000$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.16, 7.22, 6.86); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.501 W/kg; SAR (10g) = 0.234 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 0.542 W/kg; SAR (10g) = 0.230 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 81.0 %

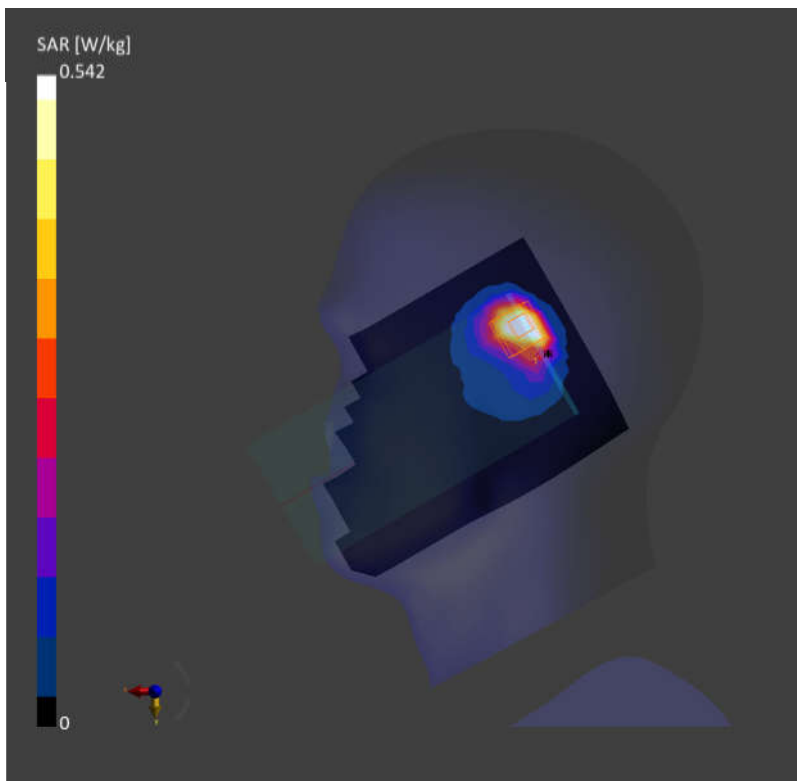

Date: 2025-11-02

15_LTE Band 41_20M_QPSK_1_0_Right Tilted_0mm_Ch41055

Communication System: LTE-TDD

AntennaCfg:SISO; Frequency: 2680.000 MHz; Duty Cycle: 1:1.59

Medium: HSL_2600_251102 Medium parameters used: $f = 2680.000$ MHz; $\sigma = 2.02$ S/m; $\epsilon_r = 38.4$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.16, 7.22, 6.86); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.557 W/kg; SAR (10g) = 0.258 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.05 dB

SAR (1g) = 0.642 W/kg; SAR (10g) = 0.274 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 79.0 %

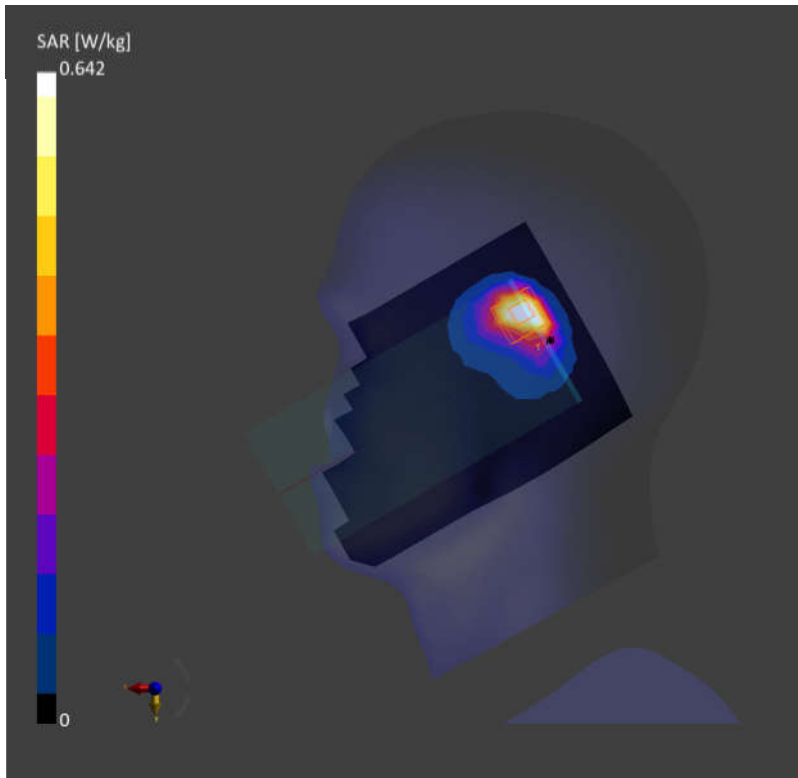

Date: 2025-11-02

16_FR1 n7_50M_QPSK_135_68_Right Tilted_0mm_Ch507000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 2535.000 MHz; Duty Cycle: 1:1

Medium: HSL_2600_251102 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.16, 7.22, 6.86); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10935-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.573 W/kg; SAR (10g) = 0.272 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 0.614 W/kg; SAR (10g) = 0.272 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 78.8 %

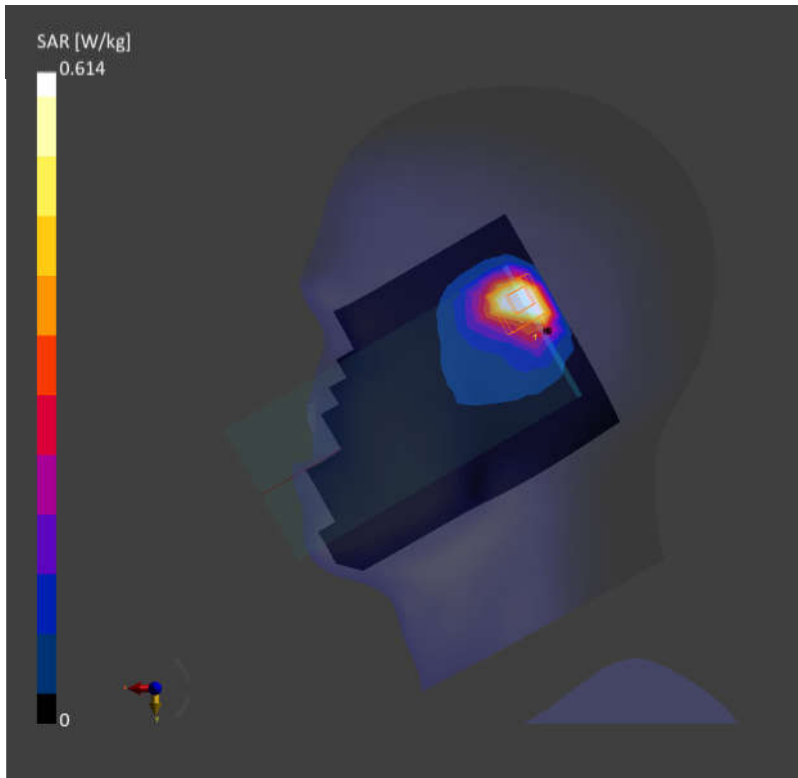

Date: 2025-11-02

17_FR1 n41_100M_QPSK_135_69_Left Cheek_0mm_Ch518598

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 2592.990 MHz; Duty Cycle: 1:1

Medium: HSL_2600_251102 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.16, 7.22, 6.86); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.522 W/kg; SAR (10g) = 0.208 W/kg;


Zoom Scan (32.0 mm x 32.0 mm x 33.4 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 0.545 W/kg; SAR (10g) = 0.204 W/kg

Smallest distance from peaks to all points 3 dB below = 4.4 mm

Ratio of SAR at M2 to SAR at M1 = 77.9 %

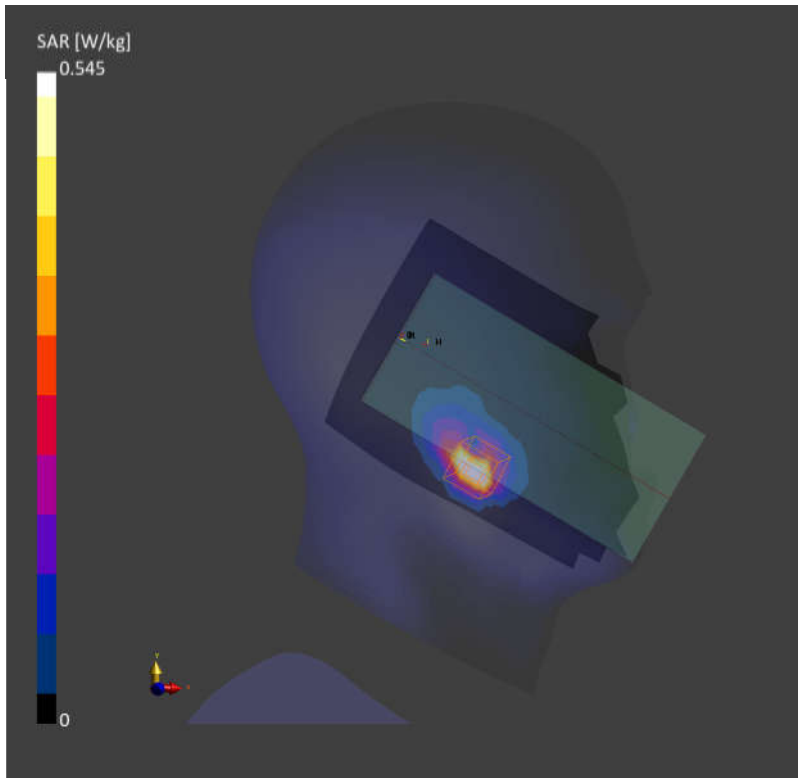

Date: 2025-11-03

18_LTE Band 42 Part 27Q_20M_QPSK_1_0_Right Cheek_0mm_Ch42990

Communication System: LTE-TDD

Frequency: 3540.000 MHz; Duty Cycle: 1:1.59

Medium: HSL_3500_251103 Medium parameters used: $f = 3540.000$ MHz; $\sigma = 2.99$ S/m; $\epsilon_r = 37.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(6.84, 6.91, 6.56); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.604 W/kg; SAR (10g) = 0.240 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.04 dB

SAR (1g) = 0.684 W/kg; SAR (10g) = 0.304 W/kg

Smallest distance from peaks to all points 3 dB below = 5.9 mm

Ratio of SAR at M2 to SAR at M1 = 79.2 %

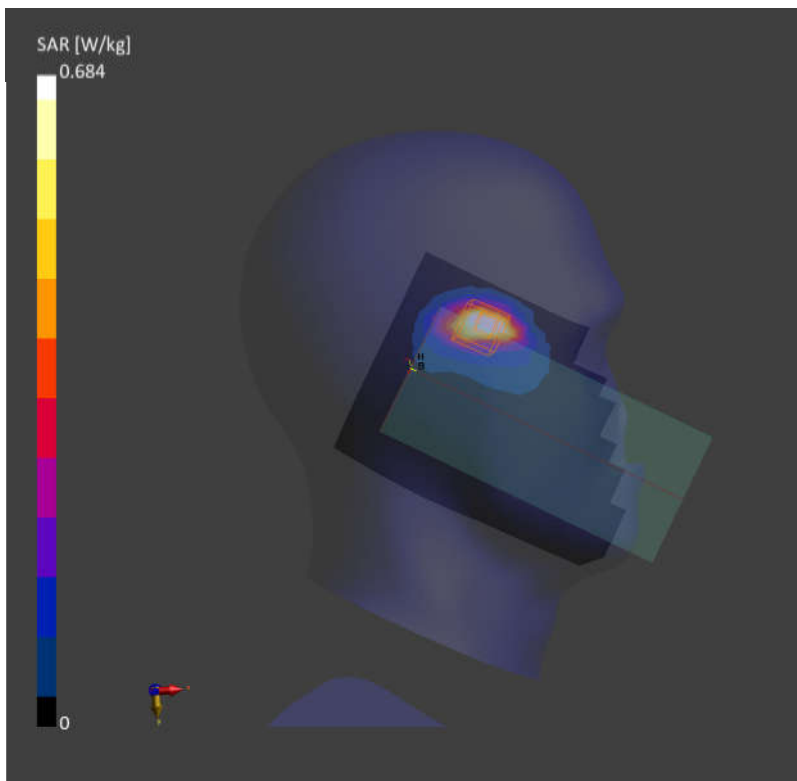

Date: 2025-11-04

19_FR1 n77 Part 27O HPUE_100M_QPSK_135_69_Right Cheek_0mm_Ch656000

Communication System: 5G NR

Frequency: 3840.000 MHz; Duty Cycle: 1:1

Medium: HSL_3900_251104 Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.32$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.66, 7.85, 6.77); Calibrated: 2025-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.484 W/kg; SAR (10g) = 0.204 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.15 dB

SAR (1g) = 0.545 W/kg; SAR (10g) = 0.217 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 74.5 %

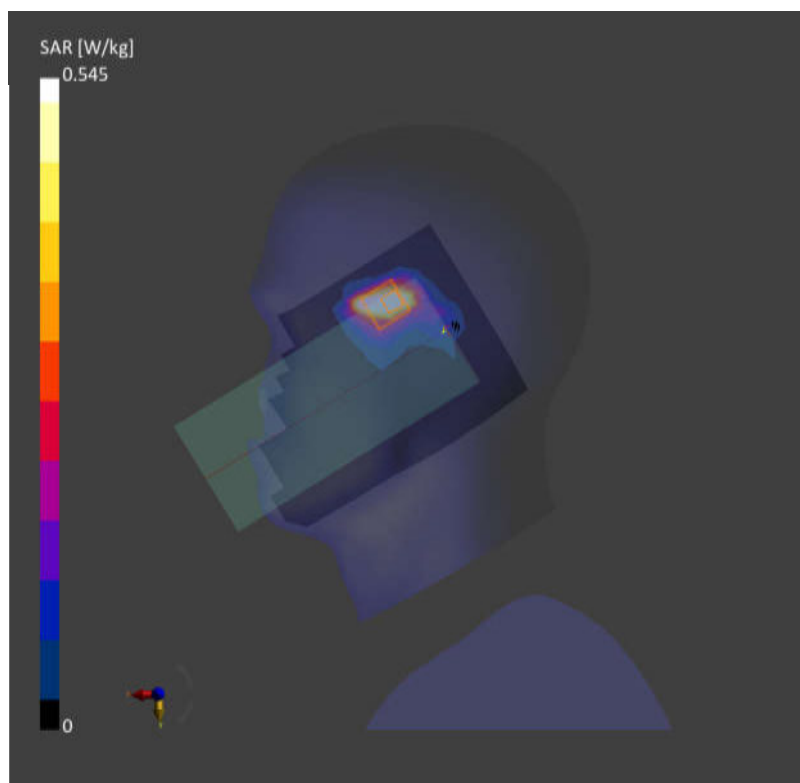

Date: 2025-11-02

20_WLAN2.4GHz_802.11b 1Mbps_Left Cheek_0mm_Ch11

Communication System: IEEE 802.11b WiFi 2.4 GHz

Frequency: 2462.000MHz; Duty Cycle: 1:1

Medium: HSL_2450_251102 Medium parameters used: $f = 2462.000$ MHz; $\sigma = 1.76$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.32, 7.38, 7.02); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.849 W/kg; SAR (10g) = 0.404 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.754 W/kg; SAR (10g) = 0.215 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 72.0 %

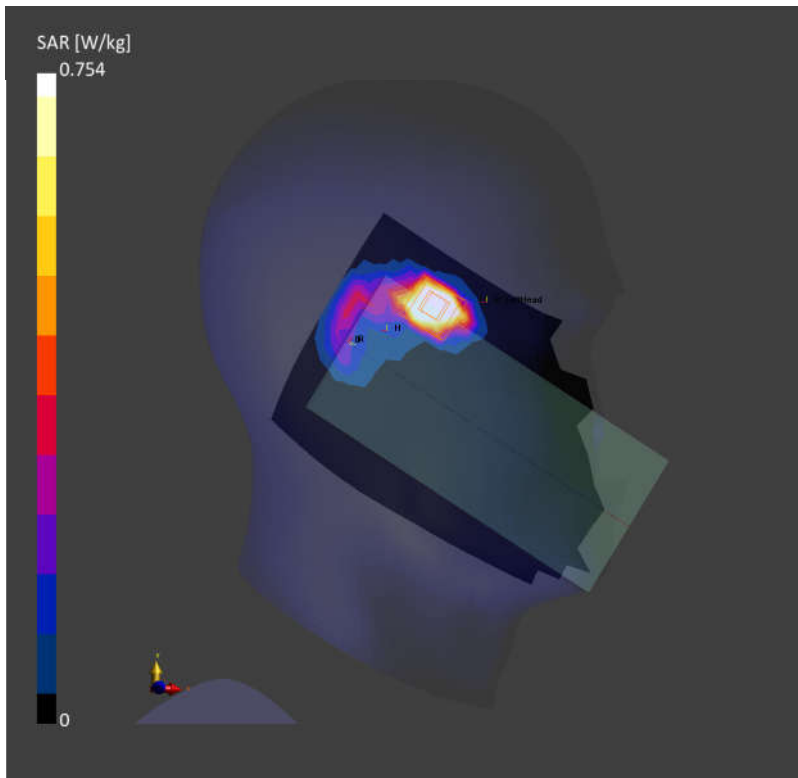

Date: 2025-11-02

21_Bluetooth_1Mbps_Left Cheek_0mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth

Frequency: 2441.000 MHz; Duty Cycle: 1:1.305

Medium: HSL_2450_251102 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.77$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.32, 7.38, 7.02); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.257 W/kg; SAR (10g) = 0.105 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.241 W/kg; SAR (10g) = 0.101 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 76.9 %

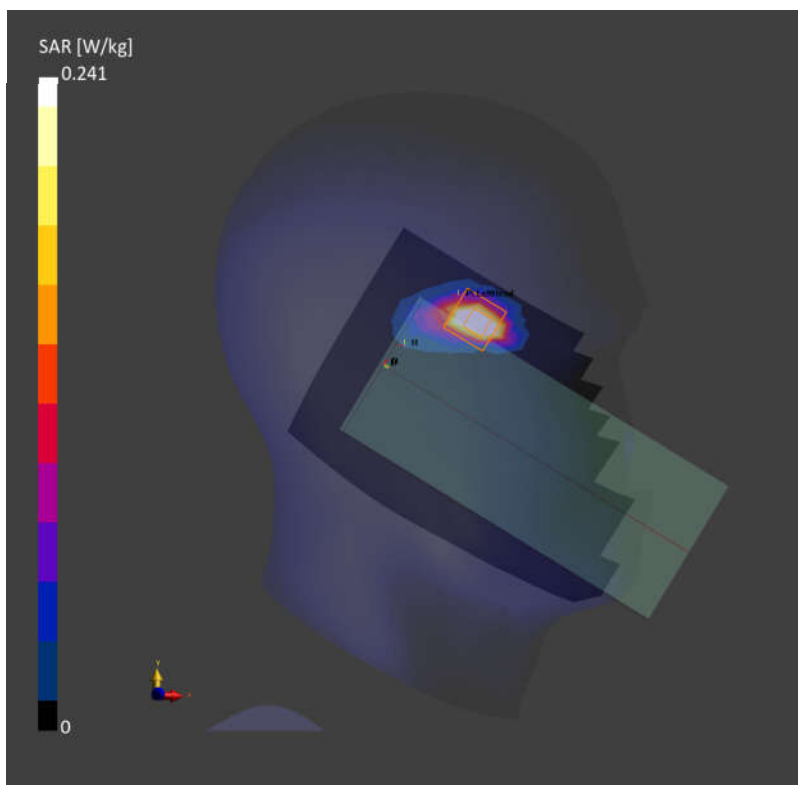

Date: 2025-11-05

22_WLAN5GHz_802.11n-HT40 MCS0_Left Cheek_0mm_Ch54

Communication System: IEEE 802.11n

Frequency: 5270.000 MHz; Duty Cycle: 1:1.067

Medium: HSL_5250_251105 Medium parameters used: $f = 5270.000$ MHz; $\sigma = 4.75$ S/m; $\epsilon_r = 36.4$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(6.03, 6.08, 5.78); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.506 W/kg; SAR (10g) = 0.183 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.09 dB

SAR (1g) = 0.557 W/kg; SAR (10g) = 0.191 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 63.2 %

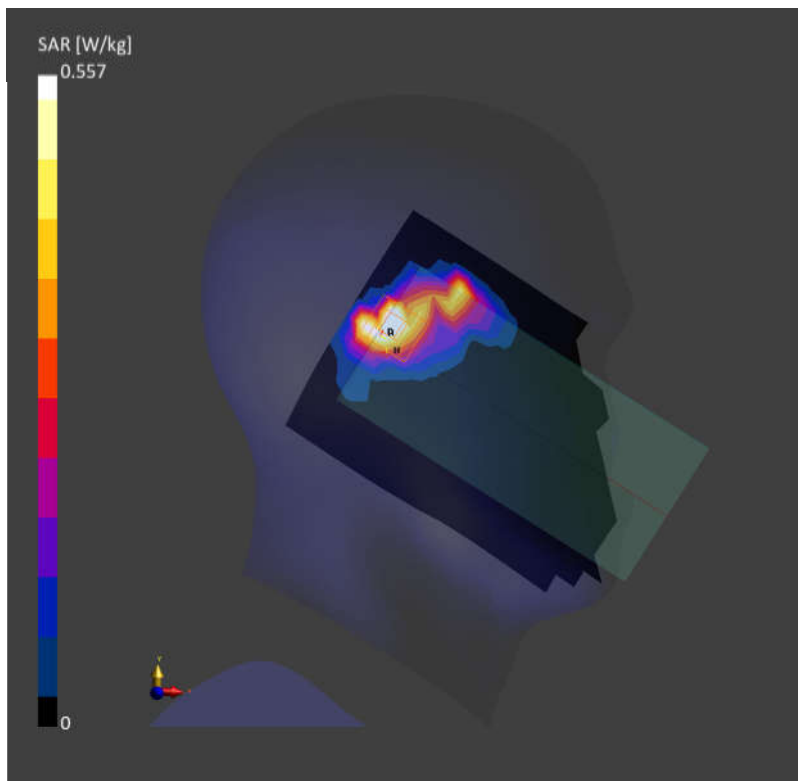

Date: 2025-11-06

23_WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch138

Communication System: IEEE 802.11ac WiFi

Frequency: 5690.000 MHz; Duty Cycle: 1:1.134

Medium: HSL_5600_251106 Medium parameters used: $f = 5690.000$ MHz; $\sigma = 5.12$ S/m; $\epsilon_r = 35.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(5.51, 5.56, 5.28); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.602 W/kg; SAR (10g) = 0.215 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.08 dB

SAR (1g) = 0.551 W/kg; SAR (10g) = 0.230 W/kg

Smallest distance from peaks to all points 3 dB below = 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 58.8 %

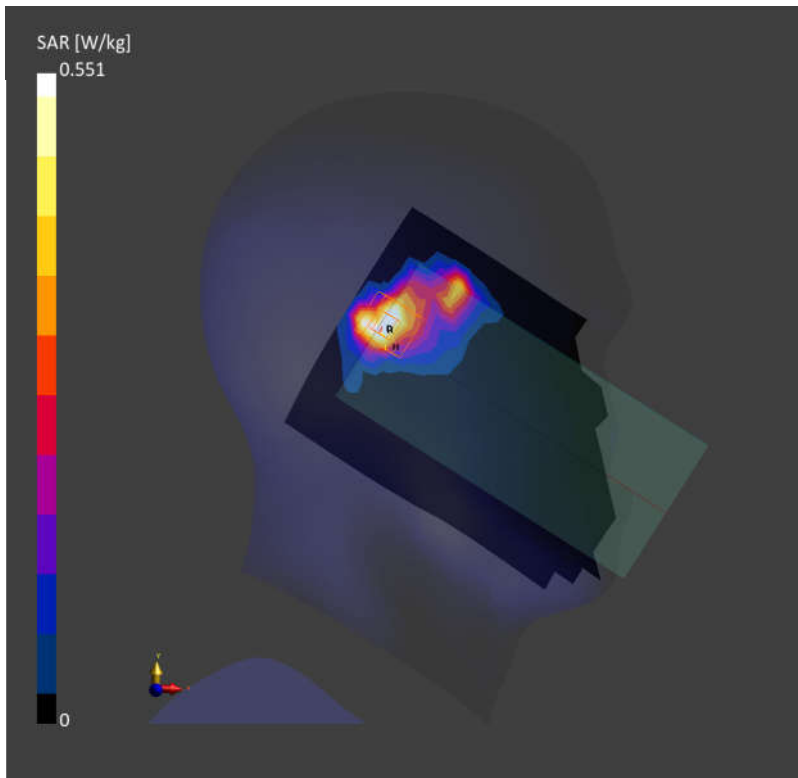

Date: 2025-11-06

24_WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch155

Communication System: IEEE 802.11ac WiFi

Frequency: 5775.000 MHz; Duty Cycle: 1:1.134

Medium: HSL_5800_251106 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.28$ S/m; $\epsilon_r = 35.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(5.51, 5.56, 5.28); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10554-AAE

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.620 W/kg; SAR (10g) = 0.233 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.06 dB

SAR (1g) = 0.604 W/kg; SAR (10g) = 0.203 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 58.8 %

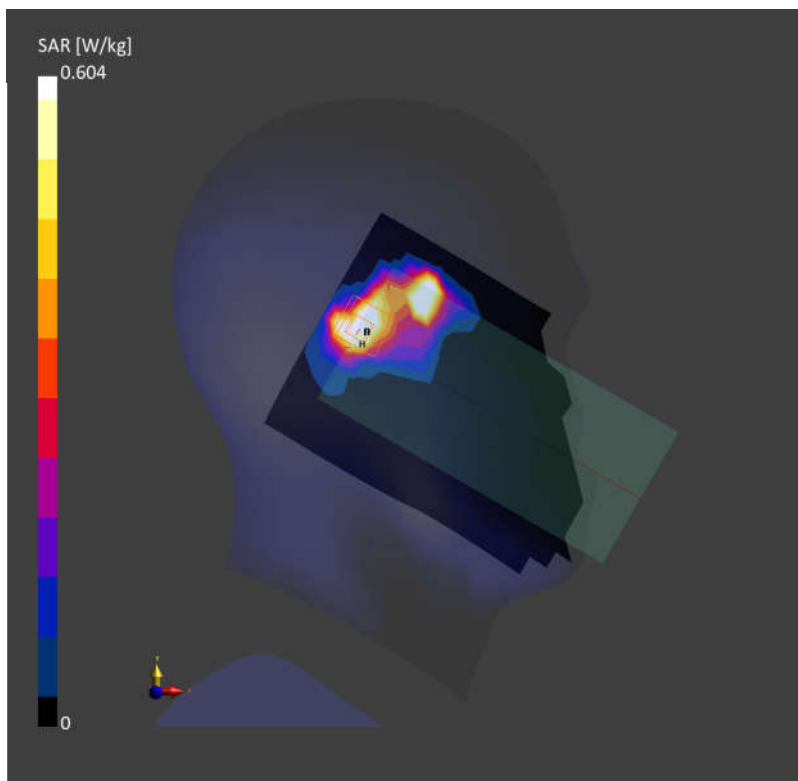

Date: 2025-11-09

90_WLAN6GHz_802.11ax-HE80 MCS0_Left Cheek_0mm_Ch119

Communication System: IEEE 802.11ax

Frequency: 6545.000MHz; Duty Cycle: 1:1.15

Medium: HSL_6500_251109 Medium parameters used: $f = 6545.000$ MHz; $\sigma = 6.15$ S/m; $\epsilon_r = 34.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(5.34, 6.3, 5.44); Calibrated: 2025-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10719-AAC

Area Scan (119.0 mm x 204.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.217 W/kg; SAR (10g) = 0.081 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.05 dB

SAR (1g) = 0.211 W/kg; SAR (10g) = 0.073 W/kg

Smallest distance from peaks to all points 3 dB below = 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 53.4 %

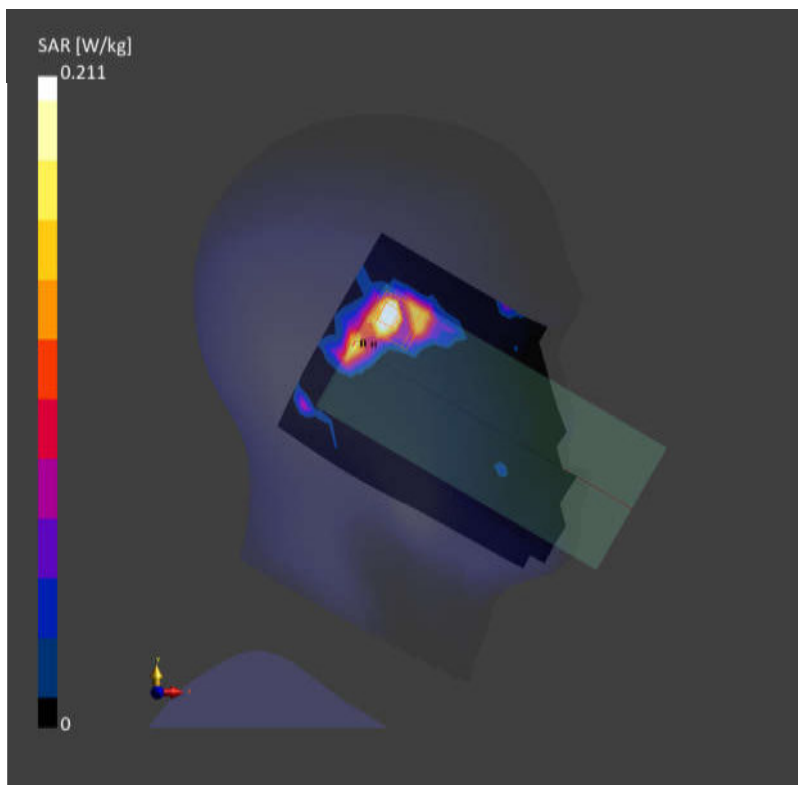psAPD (4.0cm², sq) = 1.48 [W/m²]

Date: 2025-10-30

25_LTE Band 12_10M_QPSK_1_0_Left Side_5mm_Ch23095

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 707.500 MHz; Duty Cycle: 1:1

Medium: HSL_750_251030 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.880$ S/m; $\epsilon_r = 43.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(9.65, 9.73, 9.25); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.832 W/kg; SAR (10g) = 0.511 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.797 W/kg; SAR (10g) = 0.473 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 77.0 %

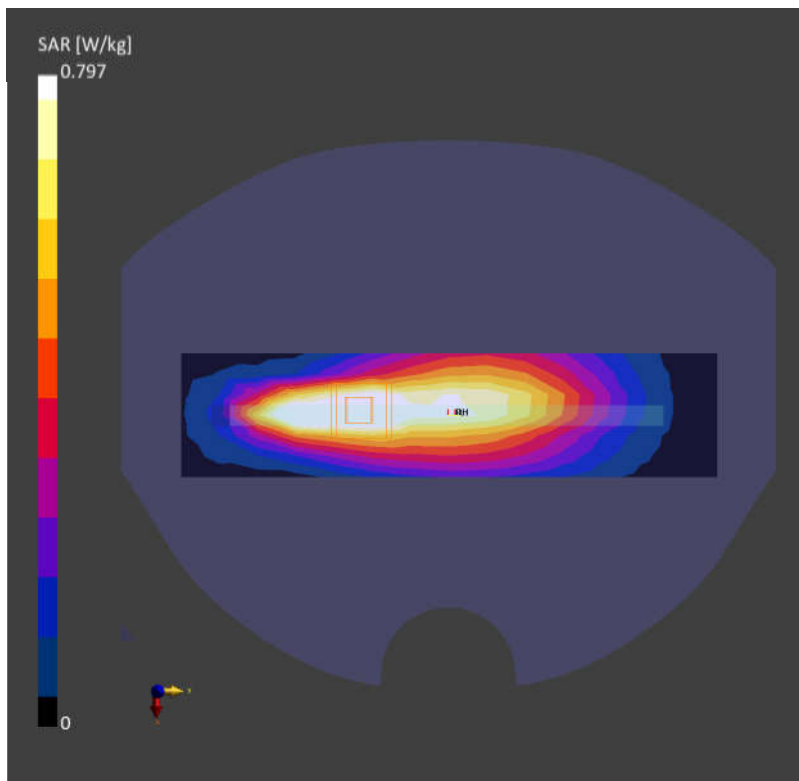

Date: 2025-10-30

26_LTE Band 13_10M_QPSK_1_0_Left Side_5mm_Ch23230

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 782.000 MHz; Duty Cycle: 1:1

Medium: HSL_750_251030 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.900$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(9.65, 9.73, 9.25); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.503 W/kg; SAR (10g) = 0.285 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.542 W/kg; SAR (10g) = 0.268 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 78.3 %

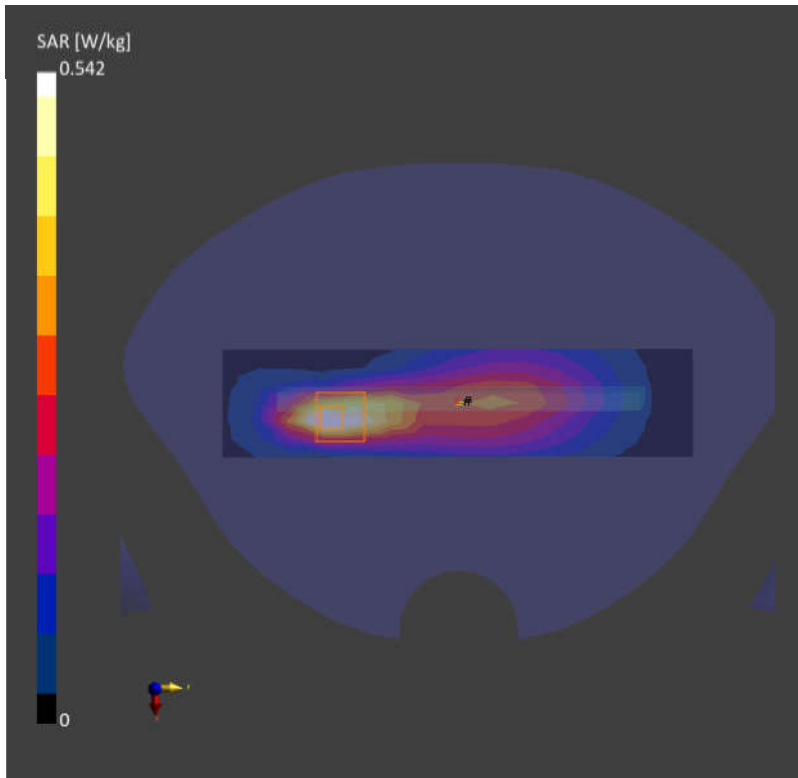

Date: 2025-10-30

27_GSM850_GPRS (4 Tx slots)_Back_5mm_Ch189

Communication System: GPRS-FDD

Frequency: 836.400 MHz; Duty Cycle: 1:2.08

Medium: HSL_835_251030 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(9.38, 9.47, 9.0); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.612 W/kg; SAR (10g) = 0.336 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.17 dB

SAR (1g) = 0.585 W/kg; SAR (10g) = 0.325 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 81.2 %

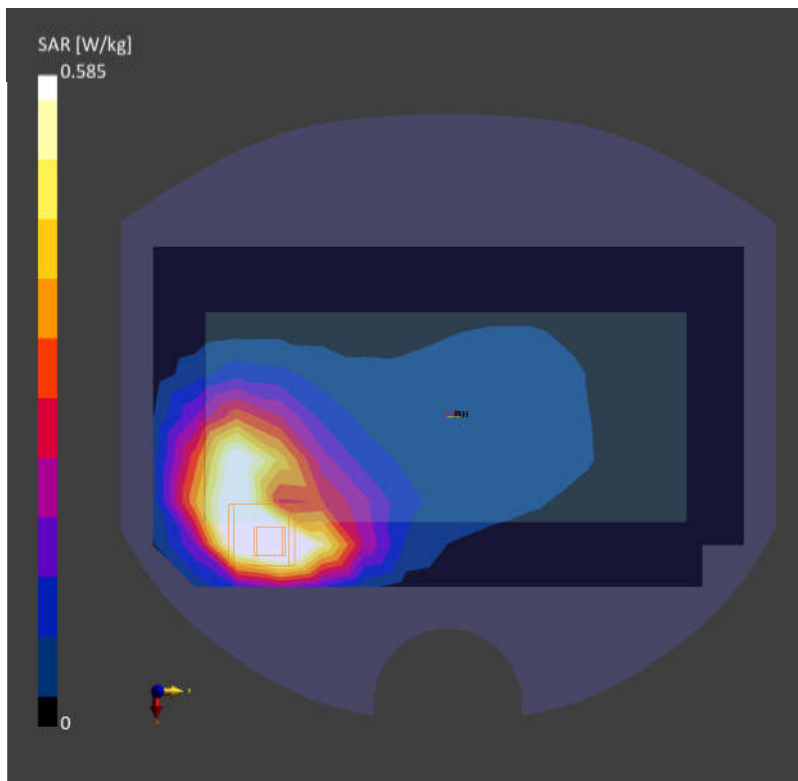

Date: 2025-10-30

28_WCDMA V_RMC 12.2Kbps_Back_5mm_Ch4182


Communication System: UMTS-FDD; Frequency: 836.400 MHz; Duty Cycle: 1:1
Medium: HSL_835_251030 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 42.5$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(9.38, 9.47, 9.0); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.750 W/kg; SAR (10g) = 0.468 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.09 dB
SAR (1g) = 0.736 W/kg; SAR (10g) = 0.404 W/kg
Smallest distance from peaks to all points 3 dB below = 9.4 mm
Ratio of SAR at M2 to SAR at M1 = 79.4 %

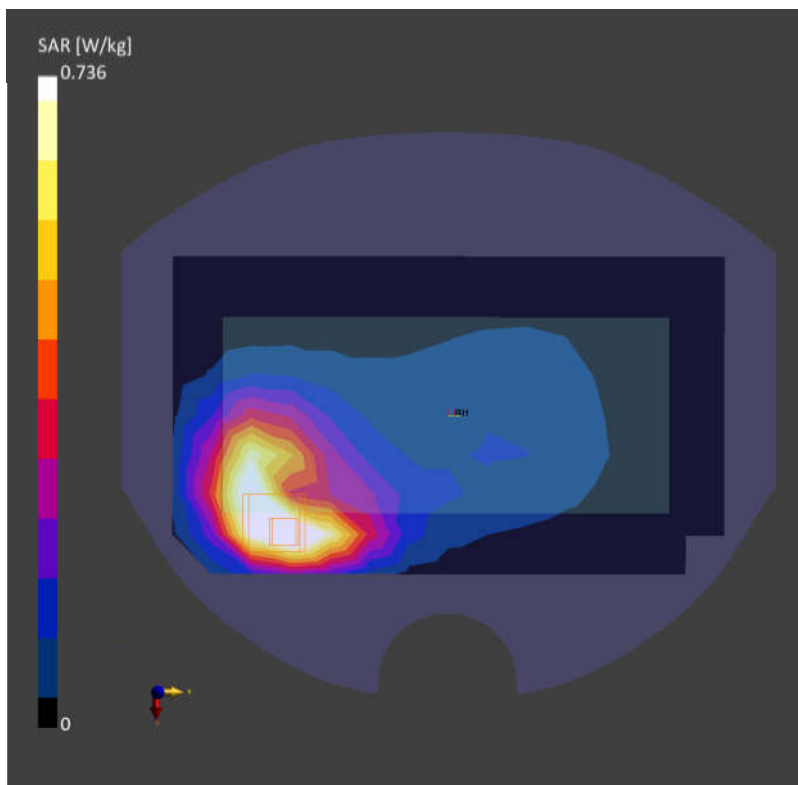

Date: 2025-10-30

29_LTE Band 26_15M_QPSK_1_0_Back_5mm_Ch26865

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: HSL_835_251030 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(9.38, 9.47, 9.0); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.743 W/kg; SAR (10g) = 0.472 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.715 W/kg; SAR (10g) = 0.404 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 80.9 %

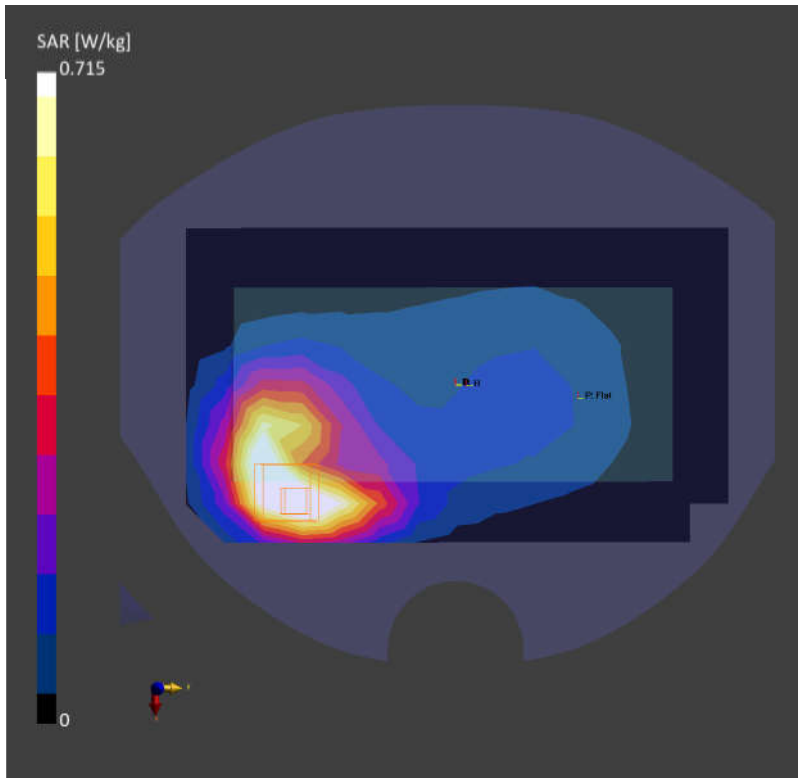

Date: 2025-10-30

30_FR1 n26_20M_QPSK_1_1_Back_5mm_Ch166300

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: HSL_835_251030 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(9.38, 9.47, 9.0); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.573 W/kg; SAR (10g) = 0.374 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.08 dB

SAR (1g) = 0.564 W/kg; SAR (10g) = 0.345 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 78.8 %

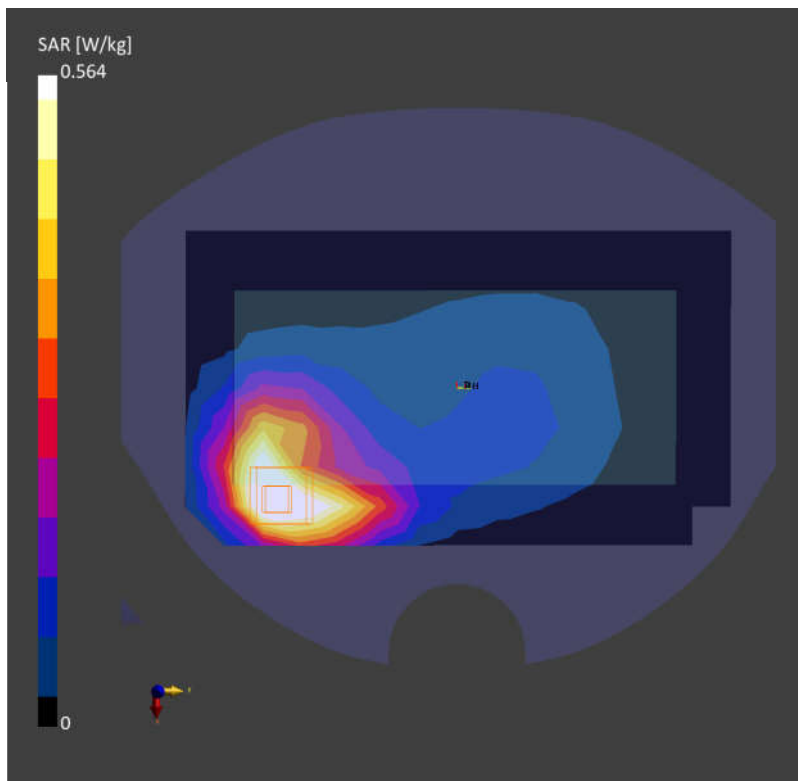

Date: 2025-11-10

31_WCDMA IV_RMC 12.2Kbps_Left Side_5mm_Ch1312


Communication System: UMTS-FDD; Frequency: 1712.400 MHz; Duty Cycle: 1:1
Medium: HSL_1750_251031 Medium parameters used: $f = 1712.400$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 40.9$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(8.13, 8.2, 7.79); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 0.794 W/kg; SAR (10g) = 0.361 W/kg;

Zoom Scan (33.0 mm x 33.0 mm x 30.0 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm
Power Drift = -0.05 dB
SAR (1g) = 0.761 W/kg; SAR (10g) = 0.342 W/kg
Smallest distance from peaks to all points 3 dB below = 6.6 mm
Ratio of SAR at M2 to SAR at M1 = 82.4 %

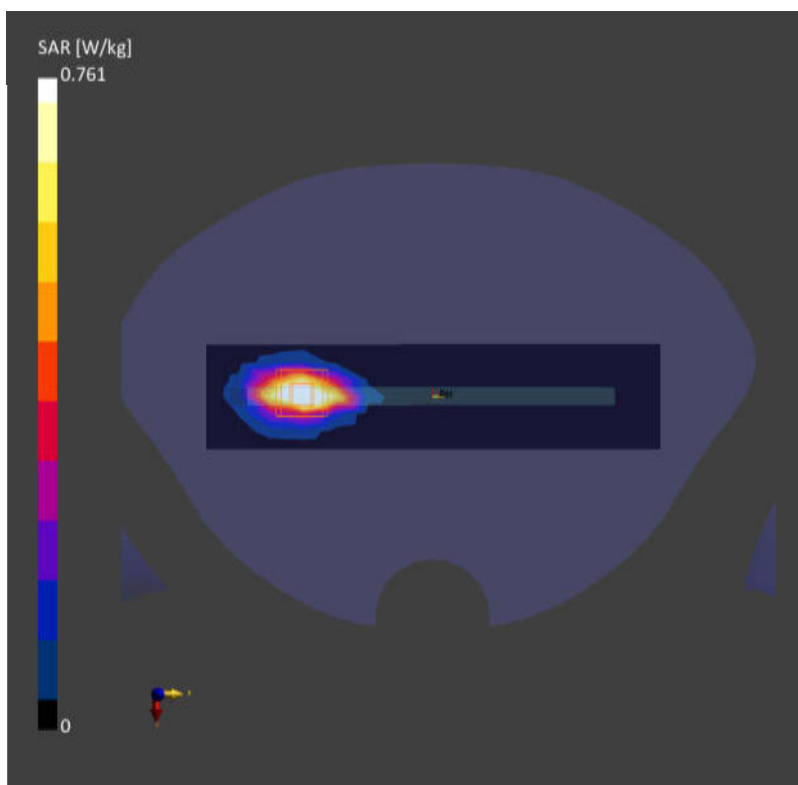

Date: 2025-11-10

32_LTE Band 66_20M_QPSK_1_0_Left Side_5mm_Ch132072

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 1720.000 MHz; Duty Cycle: 1:1

Medium: HSL_1750_251031 Medium parameters used: $f = 1720.000$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(8.13, 8.2, 7.79); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.737 W/kg; SAR (10g) = 0.349 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.08 dB

SAR (1g) = 0.727 W/kg; SAR (10g) = 0.337 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 83.0 %

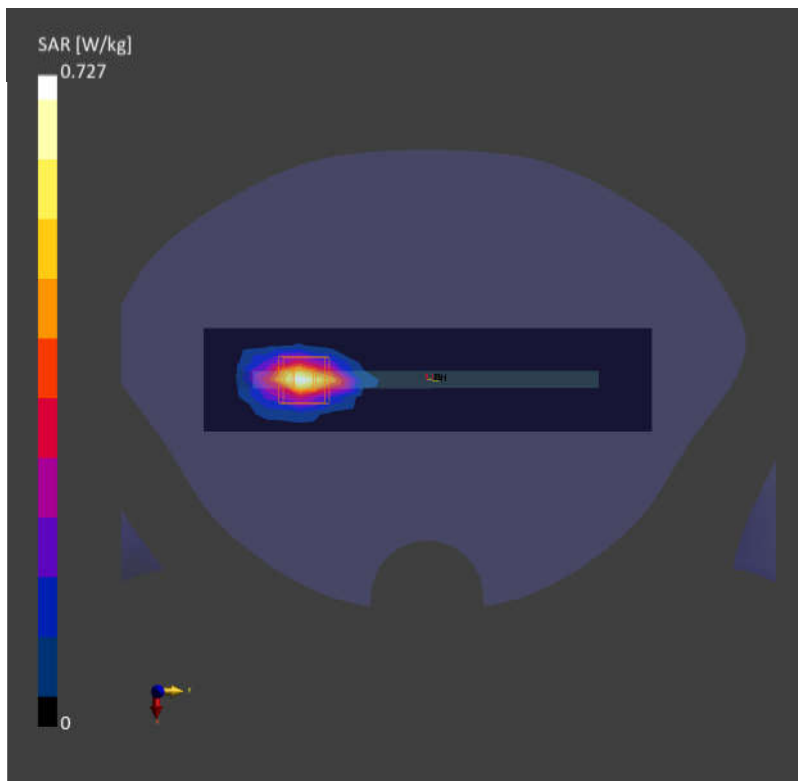

Date: 2025-11-10

33_FR1 n66 _40M_QPSK_108_54_Bottom Side_5mm_Ch349000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 1745.000 MHz; Duty Cycle: 1:1

Medium: HSL_1750_251031 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(8.13, 8.2, 7.79); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.850 W/kg; SAR (10g) = 0.361 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 0.781 W/kg; SAR (10g) = 0.322 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 75.9 %

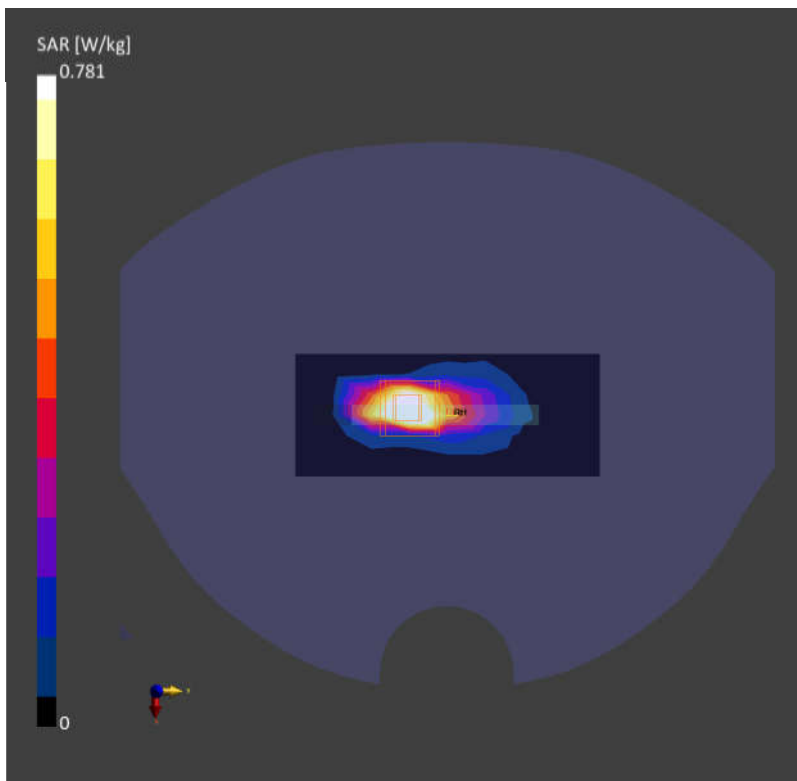

Date: 2025-11-08

34_GSM1900_GPRS (4 Tx slots)_Left Side_5mm_Ch512

Communication System: GPRS-FDD

Frequency: 1850.200 MHz; Duty Cycle: 1:2.08

Medium: HSL_1900_251108 Medium parameters used: $f = 1850.200$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 39.4$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.91, 7.98, 7.59); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.531 W/kg; SAR (10g) = 0.253 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.08 dB

SAR (1g) = 0.574 W/kg; SAR (10g) = 0.249 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 74.6 %

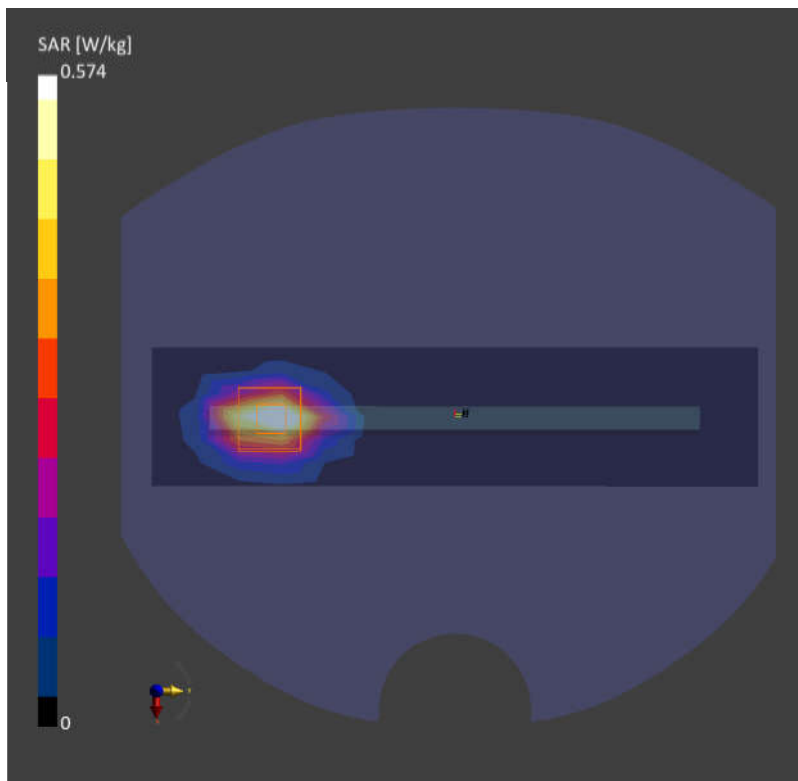

Date: 2025-11-08

35_WCDMA II_RMC 12.2Kbps_Back_5mm_Ch9262


Communication System: UMTS-FDD (WCDMA); Frequency: 1852.400 MHz; Duty Cycle: 1:1
Medium: HSL_1900_251108 Medium parameters used: $f = 1852.400$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 39.3$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.91, 7.98, 7.59); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.575 W/kg; SAR (10g) = 0.258 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.09 dB
SAR (1g) = 0.609 W/kg; SAR (10g) = 0.290 W/kg
Smallest distance from peaks to all points 3 dB below = 6.6 mm
Ratio of SAR at M2 to SAR at M1 = 81.8 %

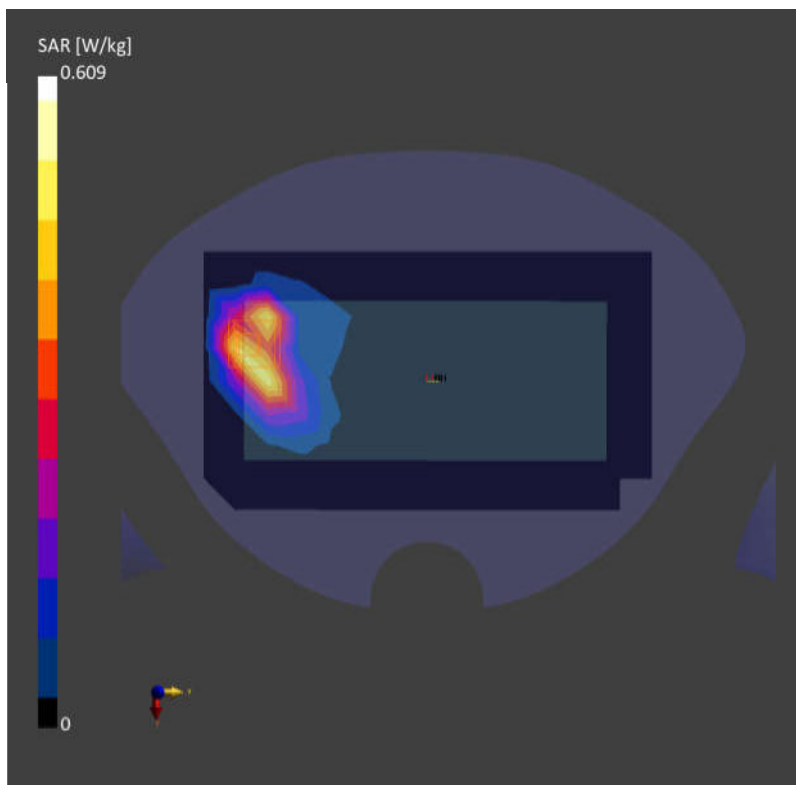

Date: 2025-11-08

36_LTE Band 25_20M_QPSK_1_0_Left Side_5mm_Ch26140

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 1860.000 MHz; Duty Cycle: 1:1

Medium: HSL_1900_251108 Medium parameters used: $f = 1860.000$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 39.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.91, 7.98, 7.59); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.717 W/kg; SAR (10g) = 0.338 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.08 dB

SAR (1g) = 0.727 W/kg; SAR (10g) = 0.334 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 78.8 %

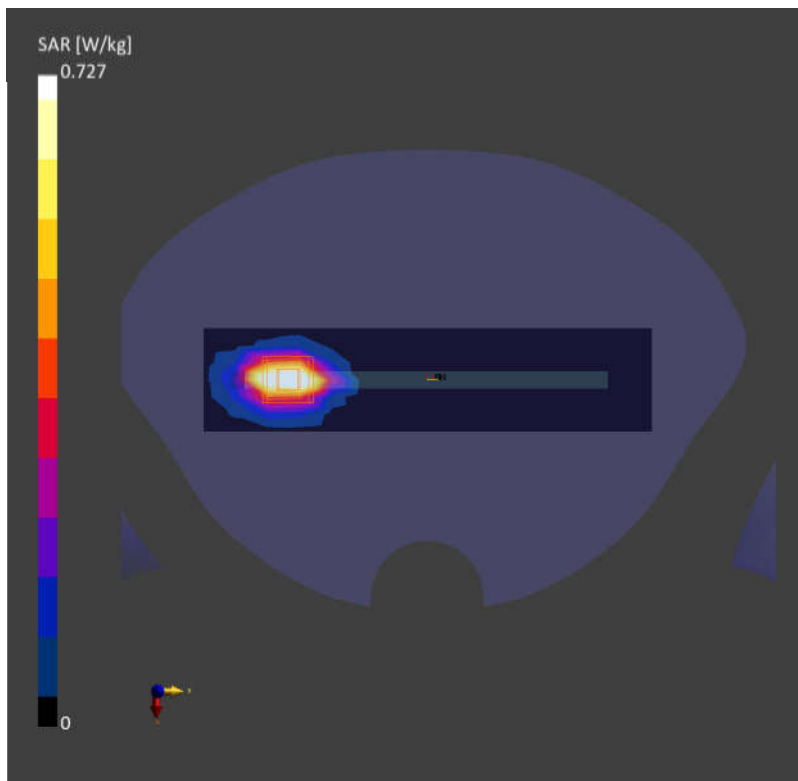

Date: 2025-11-08

37_FR1 n2_40M_QPSK_1_1_Bottom Side_5mm_Ch376000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 1880.000 MHz; Duty Cycle: 1:1

Medium: HSL_1900_251108 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.91, 7.98, 7.59); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10930-AAC

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.493 W/kg; SAR (10g) = 0.248 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.659 W/kg; SAR (10g) = 0.347 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 79.4 %

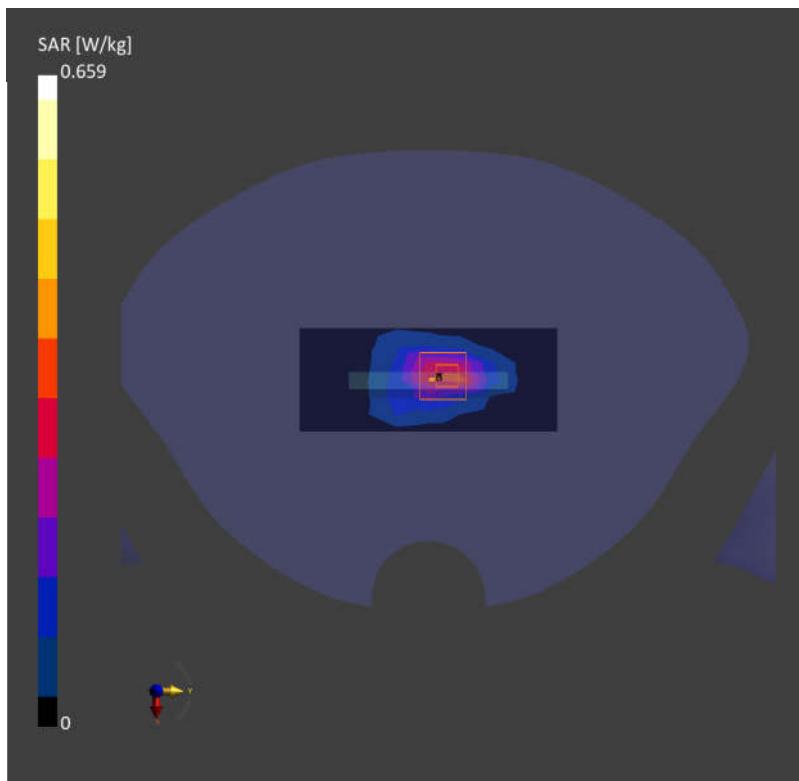

Date: 2025-11-02

38_LTE Band 7_20M_QPSK_1_0_Right Side_5mm_Ch21350

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 2560.000 MHz; Duty Cycle: 1:1

Medium: HSL_2600_251102 Medium parameters used: $f = 2560.000$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.16, 7.22, 6.86); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.823 W/kg; SAR (10g) = 0.338 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.785 W/kg; SAR (10g) = 0.311 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 79.8 %

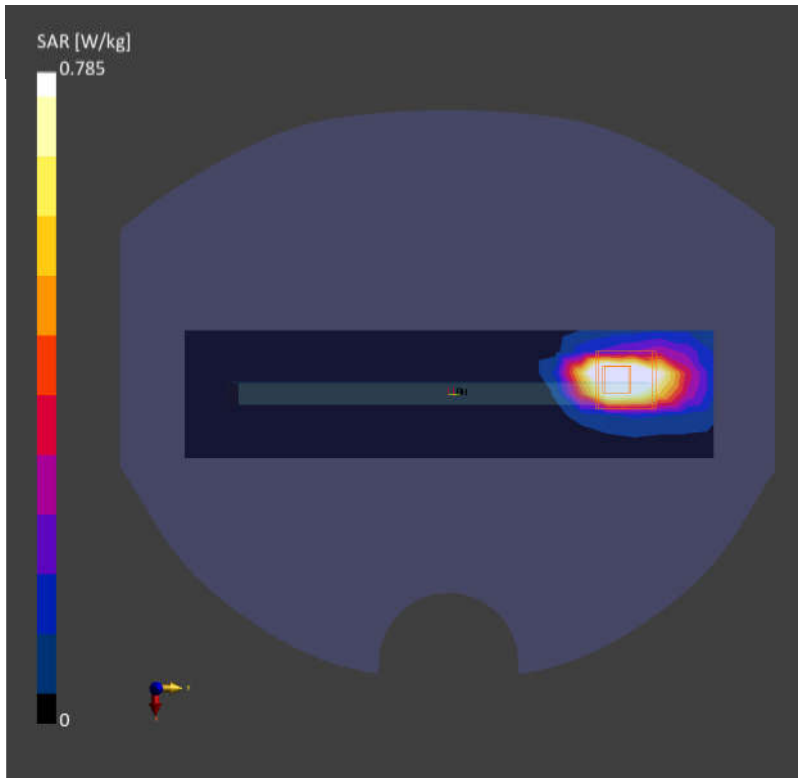

Date: 2025-11-02

39_LTE Band 41_20M_QPSK_1_0_Right Side_5mm_Ch41490

Communication System: LTE-TDD

AntennaCfg:SISO; Frequency: 2680.000 MHz; Duty Cycle: 1:1.59

Medium: HSL_2600_251102 Medium parameters used: $f = 2680.000$ MHz; $\sigma = 2.02$ S/m; $\epsilon_r = 38.4$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.16, 7.22, 6.86); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.686 W/kg; SAR (10g) = 0.258 W/kg;


Zoom Scan (30.8 mm x 30.8 mm x 30.0 mm): Measurement Grid: 4.4 mm x 4.4 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 0.604 W/kg; SAR (10g) = 0.257 W/kg

Smallest distance from peaks to all points 3 dB below = 5.3 mm

Ratio of SAR at M2 to SAR at M1 = 76.3 %

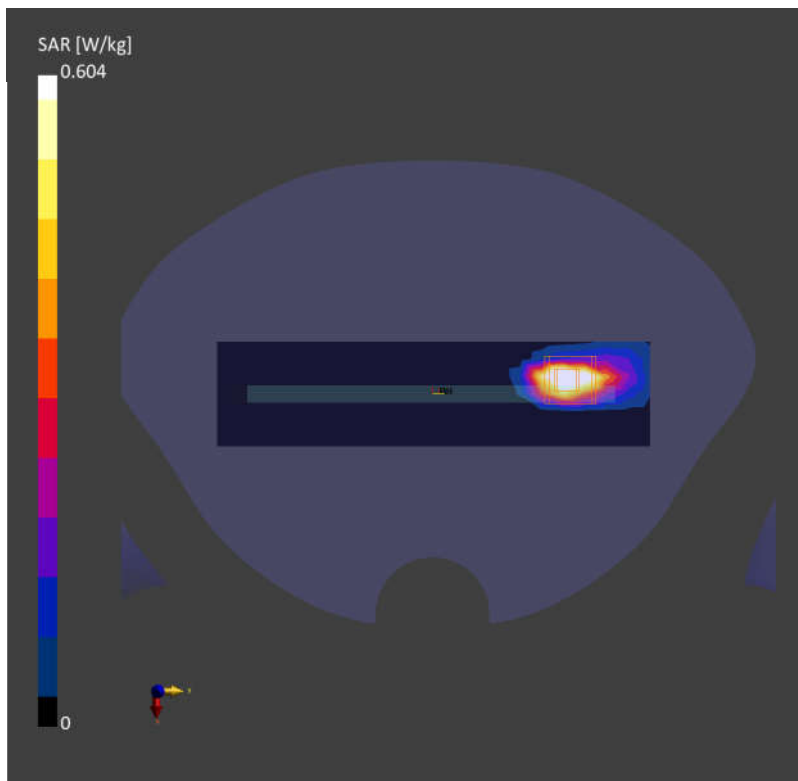

Date: 2025-11-02

40_FR1 n7_50M_QPSK_135_68_Right Side_5mm_Ch507000


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz) RBPosition:Mid
AntennaCfg:SISO; Frequency: 2535.000 MHz; Duty Cycle: 1:1
Medium: HSL_2600_251102 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 39.0$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.16, 7.22, 6.86); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10935-AAD

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm
SAR (1g) = 0.841 W/kg; SAR (10g) = 0.359 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.02 dB
SAR (1g) = 0.778 W/kg; SAR (10g) = 0.339 W/kg
Smallest distance from peaks to all points 3 dB below = 6.1 mm
Ratio of SAR at M2 to SAR at M1 = 85.0 %

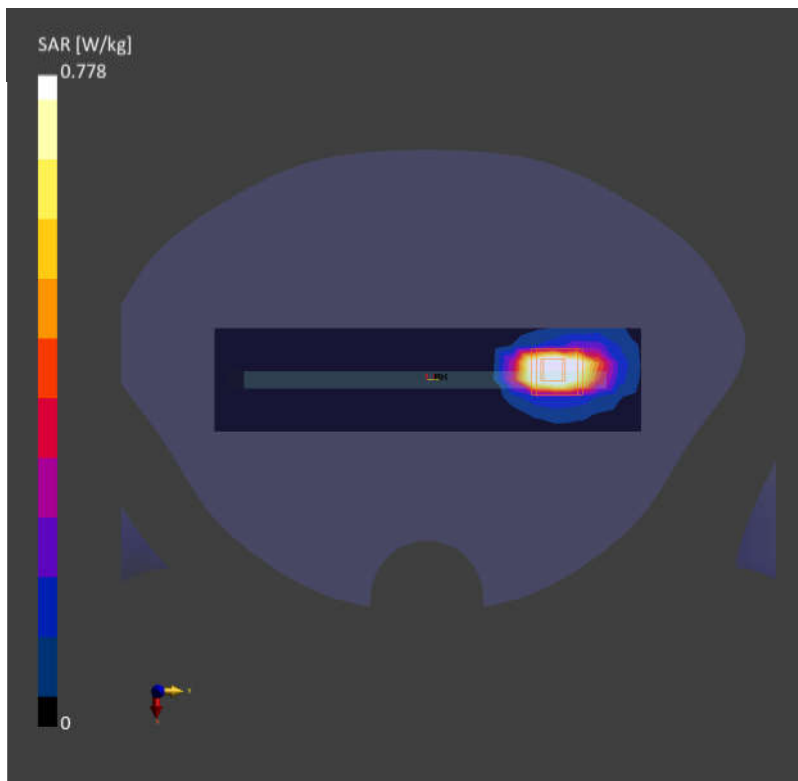

Date: 2025-11-02

41_FR1 n41_100M_QPSK_135_69_Right Side_5mm_Ch518598

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 2592.990 MHz; Duty Cycle: 1:1

Medium: HSL_2600_251102 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.16, 7.22, 6.86); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.693 W/kg; SAR (10g) = 0.282 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.689 W/kg; SAR (10g) = 0.273 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1mm

Ratio of SAR at M2 to SAR at M1 = 67.1 %

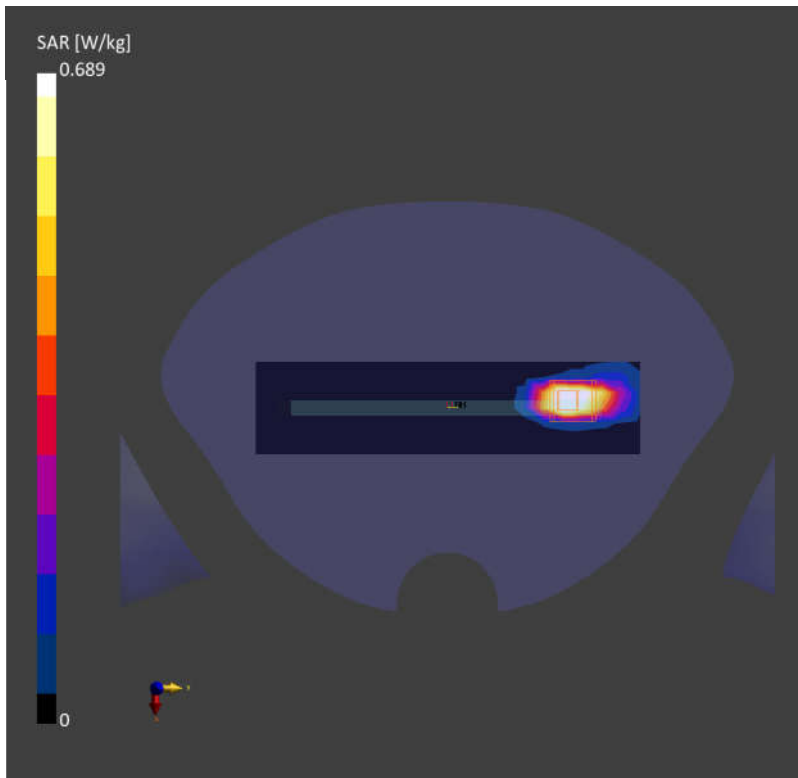

Date: 2025-11-03

42_LTE Band 42 Part 27Q_20M_QPSK_1_0_Left Side_5mm_Ch42590

Communication System: LTE-TDD

AntennaCfg:SISO; Frequency: 3500.000 MHz; Duty Cycle: 1:1.59

Medium: HSL_3500_251103 Medium parameters used: $f = 3500.000$ MHz; $\sigma = 2.97$ S/m; $\epsilon_r = 37.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(6.84, 6.91, 6.56); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.428 W/kg; SAR (10g) = 0.144 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.15 dB

SAR (1g) = 0.478 W/kg; SAR (10g) = 0.151 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 76.0 %

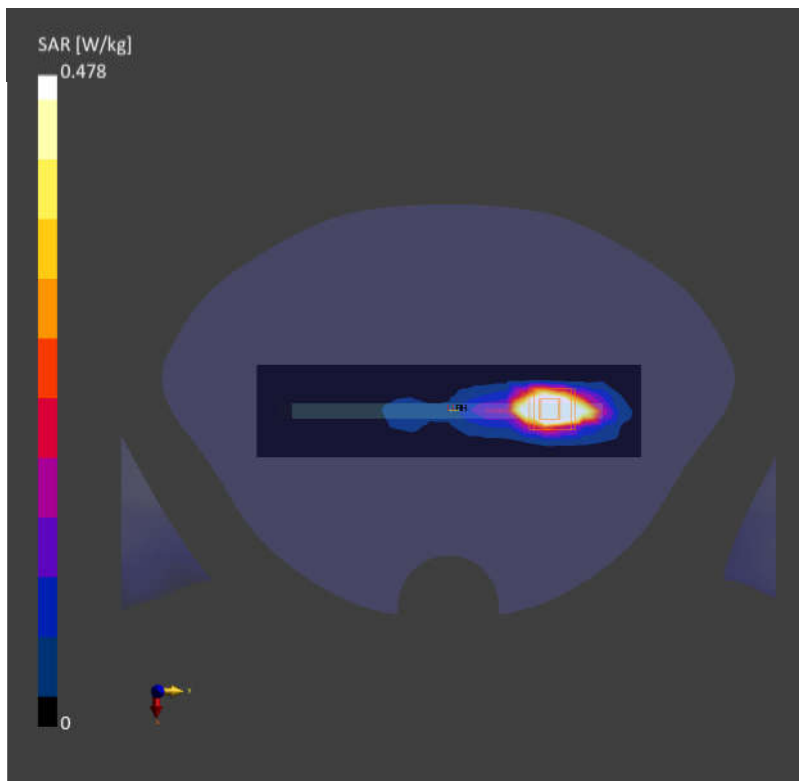

Date: 2025-11-04

43_FR1 n77 Part 27O HPUE_100M_QPSK_1_1_Top Side_5mm_Ch656000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 3840.000 MHz; Duty Cycle: 1:1

Medium: HSL_3900_251104 Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.32$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(6.66, 7.85, 6.77); Calibrated: 2025-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10803-AAF

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.435 W/kg; SAR (10g) = 0.158 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.05 dB

SAR (1g) = 0.451 W/kg; SAR (10g) = 0.182 W/kg

Smallest distance from peaks to all points 3 dB below = 5.9 mm

Ratio of SAR at M2 to SAR at M1 = 74.2 %

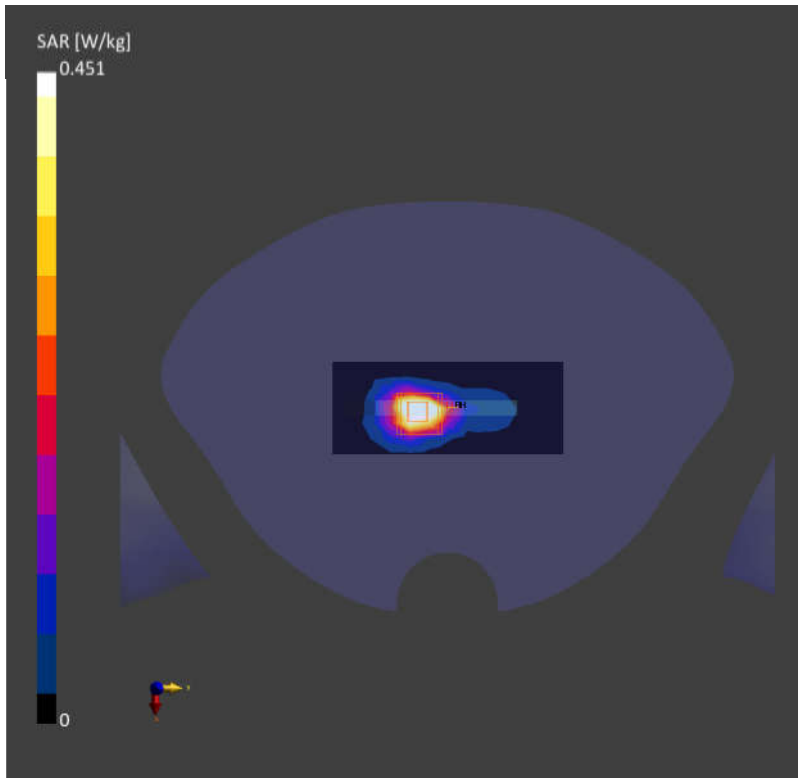

Date: 2025-11-02

44_Bluetooth_1Mbps_Right Side_5mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth

Frequency: 2441.000 MHz; Duty Cycle: 1:1.305

Medium: HSL_2450_251102 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.77$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.32, 7.38, 7.02); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.141 W/kg; SAR (10g) = 0.052 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.08 dB

SAR (1g) = 0.146 W/kg; SAR (10g) = 0.055 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 81.7 %

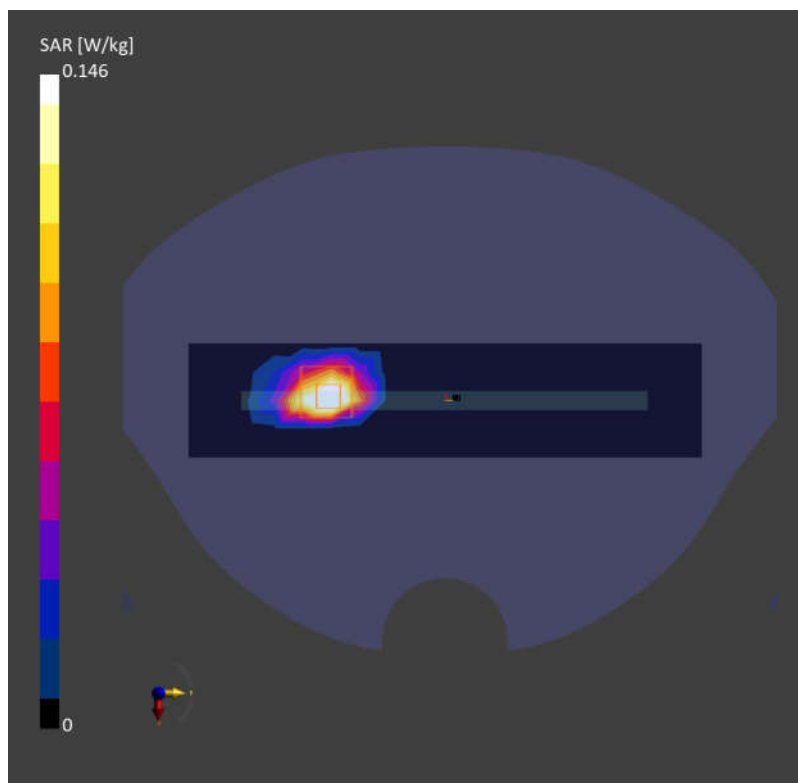

Date: 2025-11-05

45_WLAN5GHz_802.11n-HT40 MCS0_Right Side_5mm_Ch46

Communication System: IEEE 802.11n

Frequency: 5230.000 MHz; Duty Cycle: 1:1.067

Medium: HSL_5250_251105 Medium parameters used: $f = 5230.000$ MHz; $\sigma = 4.69$ S/m; $\epsilon_r = 36.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(6.03, 6.08, 5.78); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.322 W/kg; SAR (10g) = 0.098 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 0.361 W/kg; SAR (10g) = 0.107 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 62.5 %

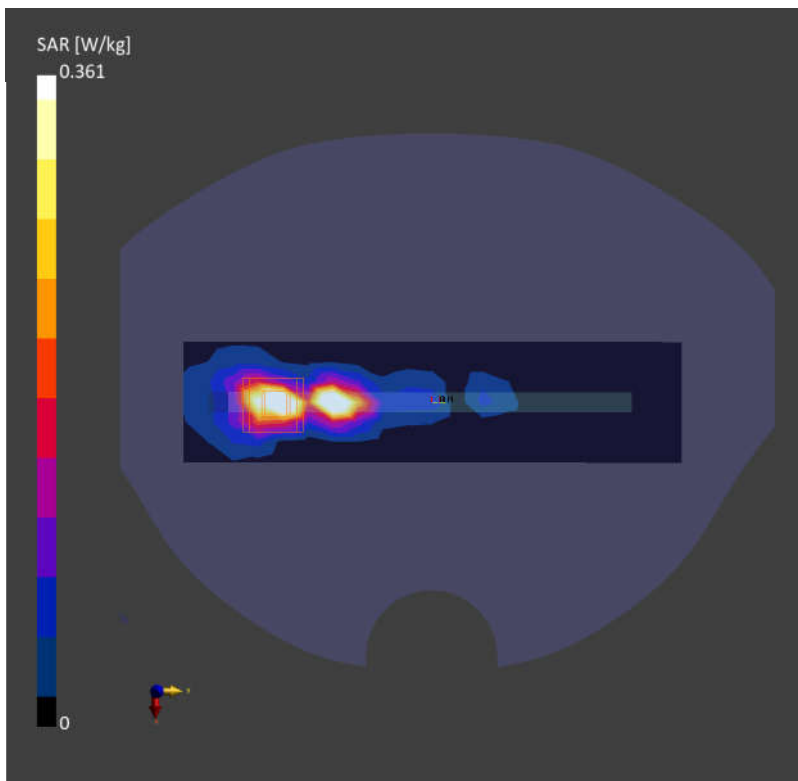

Date: 2025-11-06

46_WLAN5GHz_802.11ac-VHT80 MCS0_Top Side_5mm_Ch155

Communication System: IEEE 802.11ac WiFi

Frequency: 5775.000MHz; Duty Cycle: 1:1.134

Medium: HSL_5250_251106 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.28$ S/m; $\epsilon_r = 35.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(5.51, 5.56, 5.28); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.231 W/kg; SAR (10g) = 0.068 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.17 dB

SAR (1g) = 0.299 W/kg; SAR (10g) = 0.078 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 58.4 %

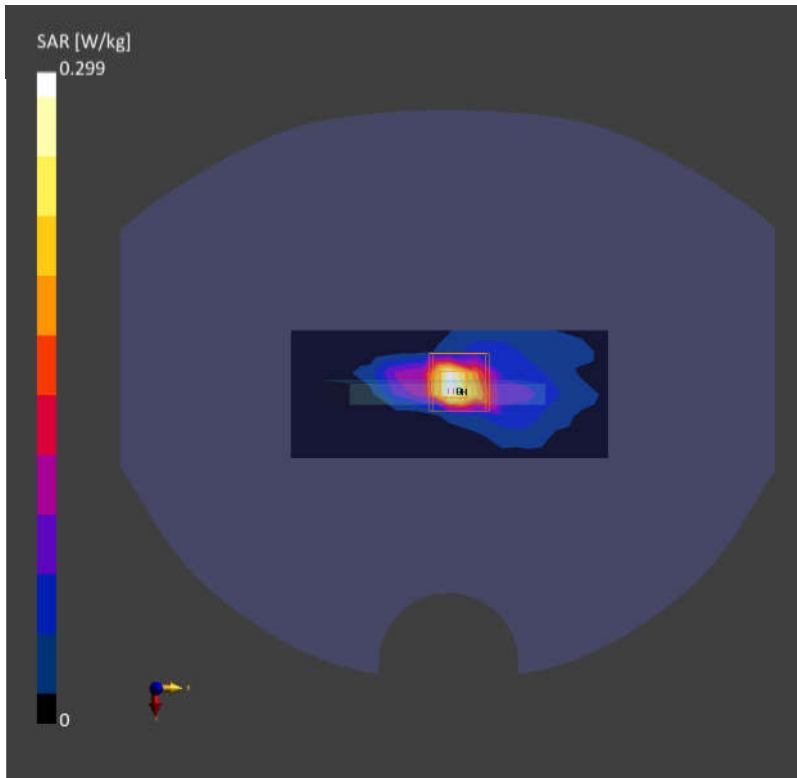

Date: 2025-11-02

47_WLAN2.4GHz_802.11b 1Mbps_Right Side_5mm_Ch6

Communication System: IEEE 802.11b WiFi 2.4 GHz

Frequency: 2437.000MHz; Duty Cycle: 1:1

Medium: HSL_2450_251102 Medium parameters used: $f = 2437.000$ MHz; $\sigma = 1.75$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.32, 7.38, 7.02); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.367 W/kg; SAR (10g) = 0.143 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.05 dB

SAR (1g) = 0.321 W/kg; SAR (10g) = 0.127 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 82.0 %

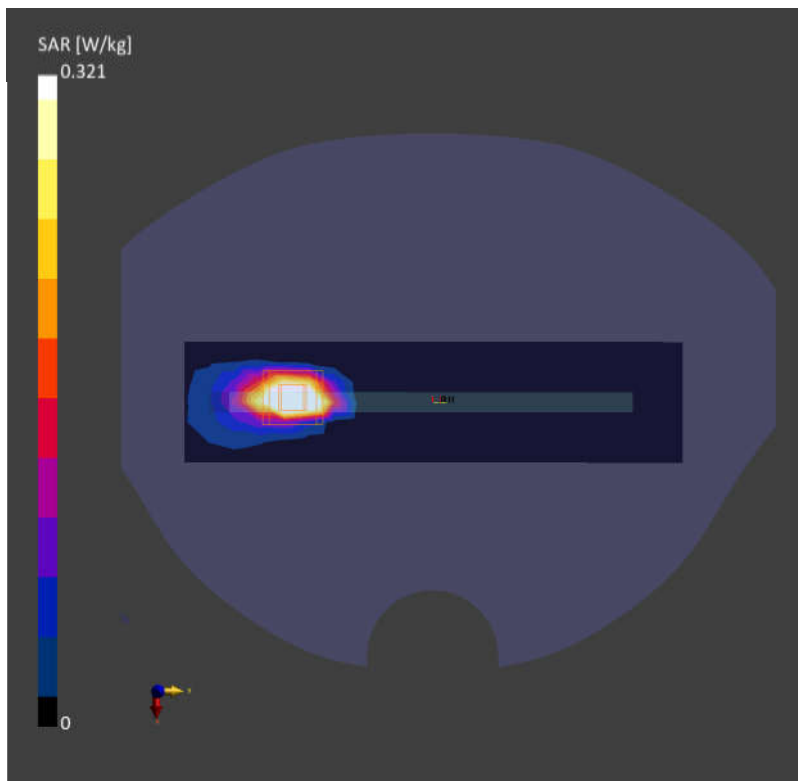

Date: 2025-10-30

48_GSM850_GPRS (4 Tx slots)_Back_5mm_Ch189

Communication System: GPRS-FDD

Frequency: 836.400 MHz; Duty Cycle: 1:2.08

Medium: HSL_835_251030 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(9.38, 9.47, 9.0); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.612 W/kg; SAR (10g) = 0.336 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.17 dB

SAR (1g) = 0.585 W/kg; SAR (10g) = 0.325 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 81.2 %

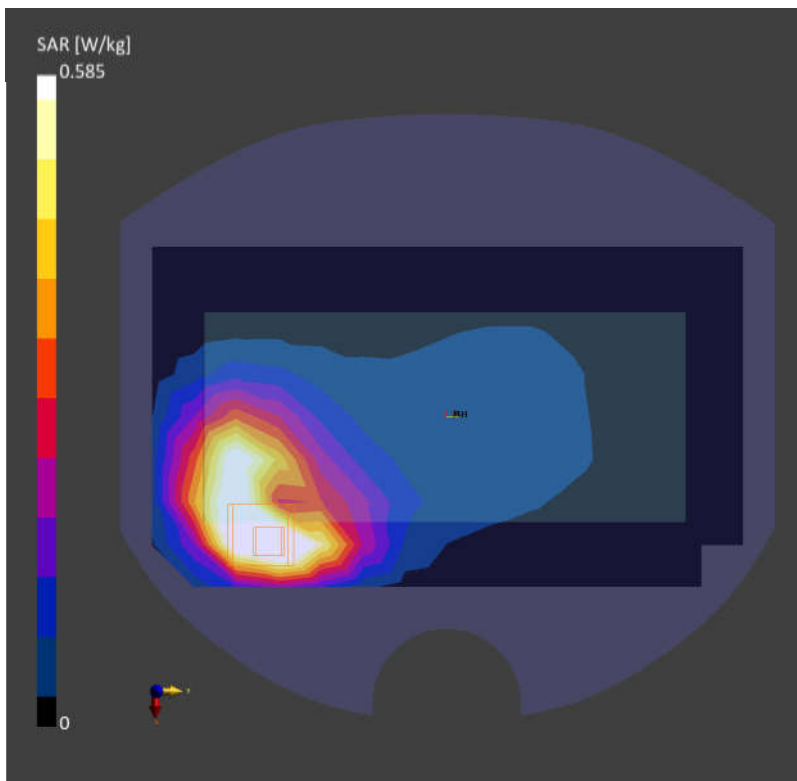

Date: 2025-10-30

49_WCDMA V_RMC 12.2Kbps_Back_5mm_Ch4182


Communication System: UMTS-FDD; Frequency: 836.400 MHz; Duty Cycle: 1:1
Medium: HSL_835_251030 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 42.5$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(9.38, 9.47, 9.0); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.750 W/kg; SAR (10g) = 0.468 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.09 dB
SAR (1g) = 0.736 W/kg; SAR (10g) = 0.404 W/kg
Smallest distance from peaks to all points 3 dB below = 9.4 mm
Ratio of SAR at M2 to SAR at M1 = 79.4 %

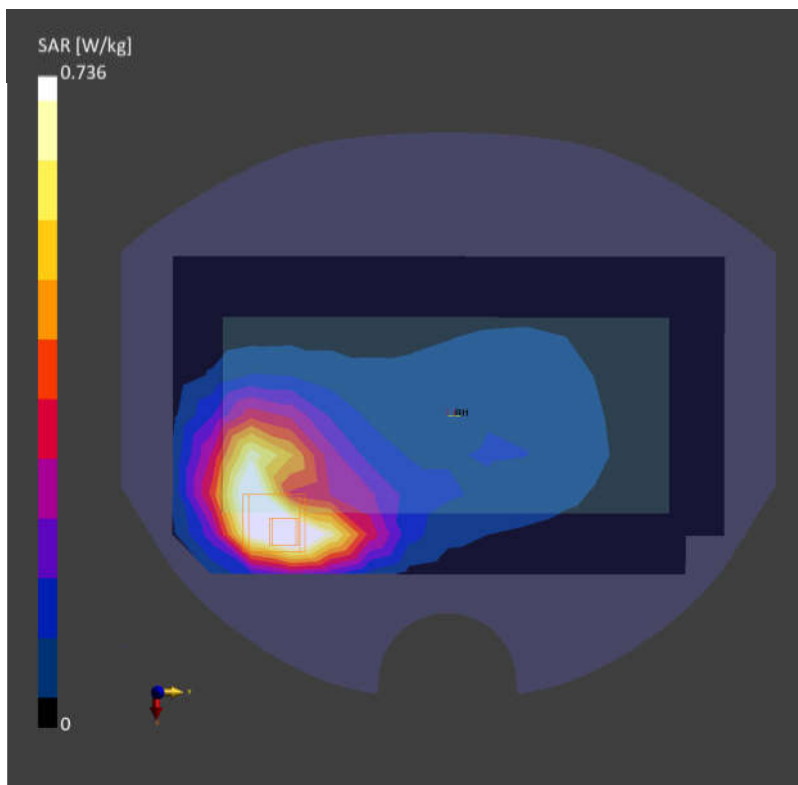

Date: 2025-10-30

50_LTE Band 26_15M_QPSK_1_0_Back_5mm_Ch26865

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: HSL_835_251030 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(9.38, 9.47, 9.0); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.743 W/kg; SAR (10g) = 0.472 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.715 W/kg; SAR (10g) = 0.404 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 80.9 %

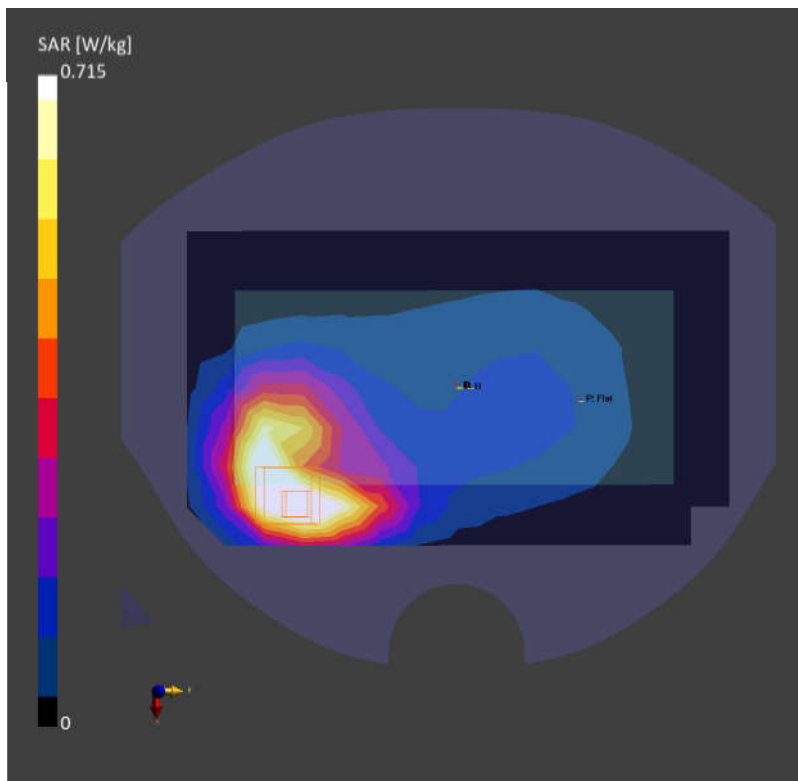

Date: 2025-10-30

51_FR1 n26_20M_QPSK_1_1_Back_5mm_Ch166300

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: HSL_835_251030 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(9.38, 9.47, 9.0); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.573 W/kg; SAR (10g) = 0.374 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.08 dB

SAR (1g) = 0.564 W/kg; SAR (10g) = 0.345 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 78.8 %

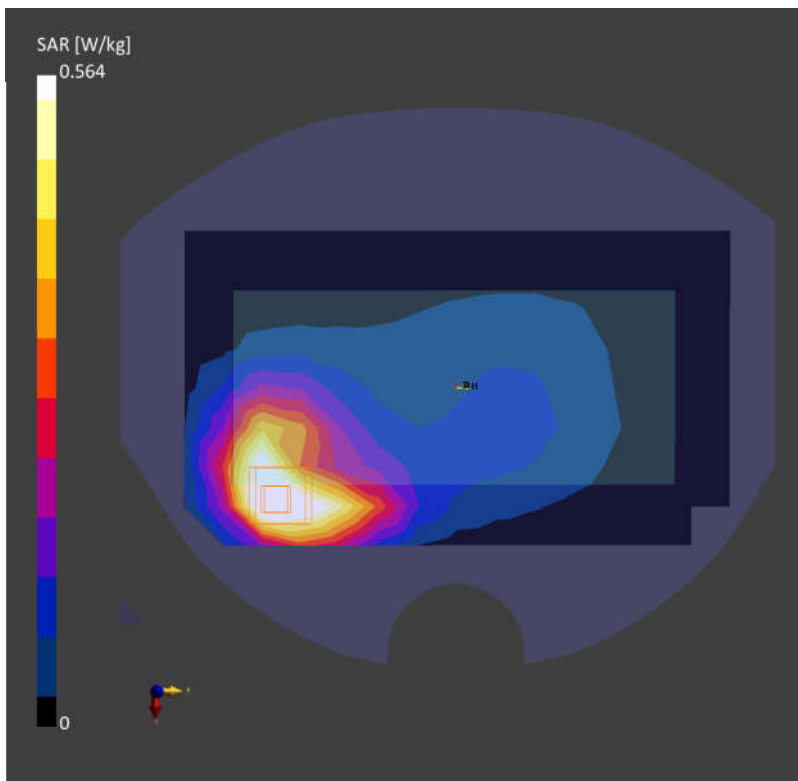

Date: 2025-11-10

52_WCDMA IV_RMC 12.2Kbps_Back_5mm_Ch1513


Communication System: UMTS-FDD; Frequency: 1752.600 MHz; Duty Cycle: 1:1
Medium: HSL_1750_251110 Medium parameters used: $f = 1752.600$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.7$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(8.13, 8.2, 7.79); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.839 W/kg; SAR (10g) = 0.502 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.03 dB
SAR (1g) = 0.884 W/kg; SAR (10g) = 0.458 W/kg
Smallest distance from peaks to all points 3 dB below = 12.3 mm
Ratio of SAR at M2 to SAR at M1 = 88.1 %

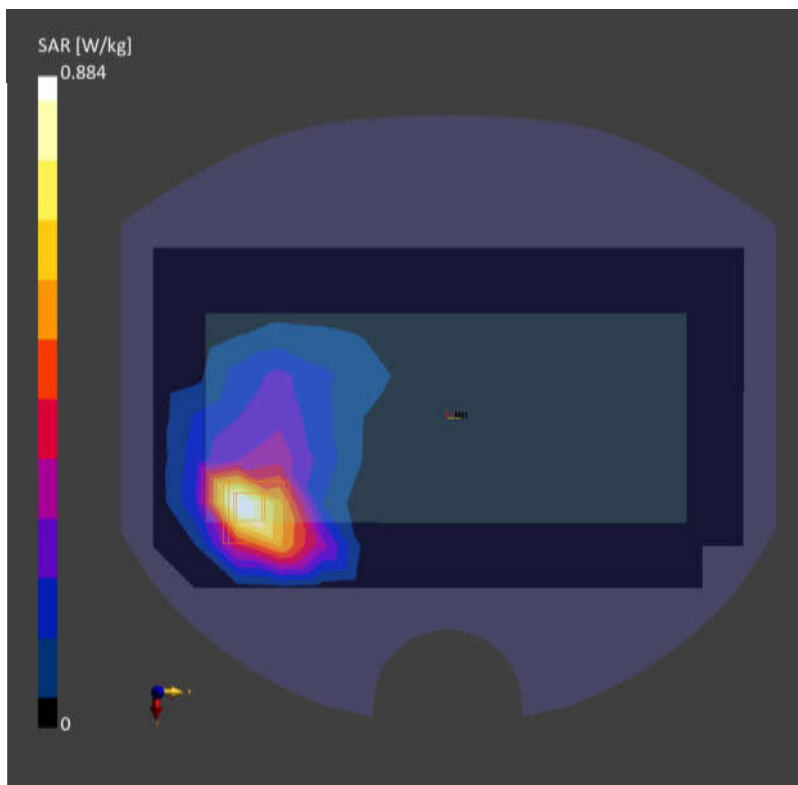

Date: 2025-11-10

53_LTE Band 66_20M_QPSK_1_0_Back_5mm_Ch132572

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 1770.000 MHz; Duty Cycle: 1:1

Medium: HSL_1750_251110 Medium parameters used: $f = 1770.000$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(8.13, 8.2, 7.79); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.626 W/kg; SAR (10g) = 0.318 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.754 W/kg; SAR (10g) = 0.358 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 80.9 %

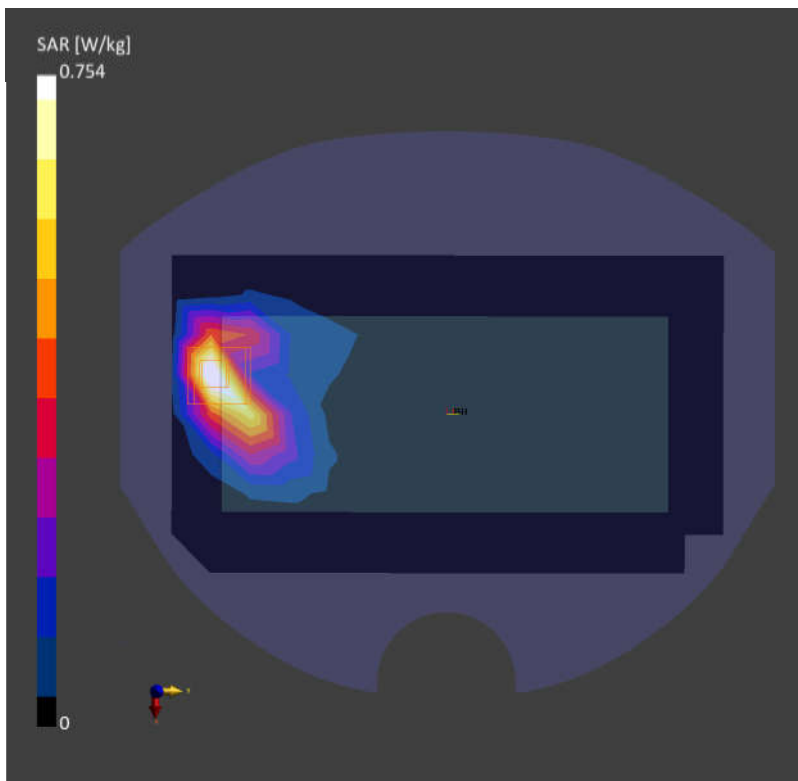

Date: 2025-11-10

54_FR1 n66_40M_QPSK_108_54_Back_5mm_Ch349000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 1745.000 MHz; Duty Cycle: 1:1

Medium: HSL_1750_251110 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(8.13, 8.2, 7.79); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.869 W/kg; SAR (10g) = 0.479 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.07 dB

SAR (1g) = 0.855 W/kg; SAR (10g) = 0.463 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 88.3 %

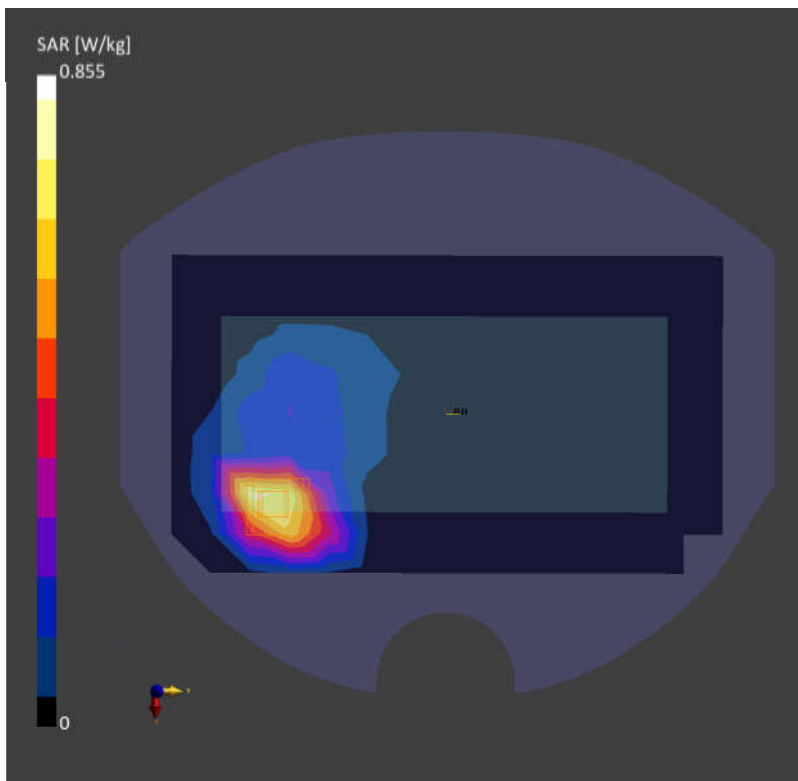

Date: 2025-11-08

55_GSM1900_GPRS (4 Tx slots)_Front_5mm_Ch661

Communication System: GPRS-FDD

Frequency: 1880.000 MHz; Duty Cycle: 1:2.08

Medium: HSL_1900_251108 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.91, 7.98, 7.59); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.309 W/kg; SAR (10g) = 0.159 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 0.580 W/kg; SAR (10g) = 0.186 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 81.6 %

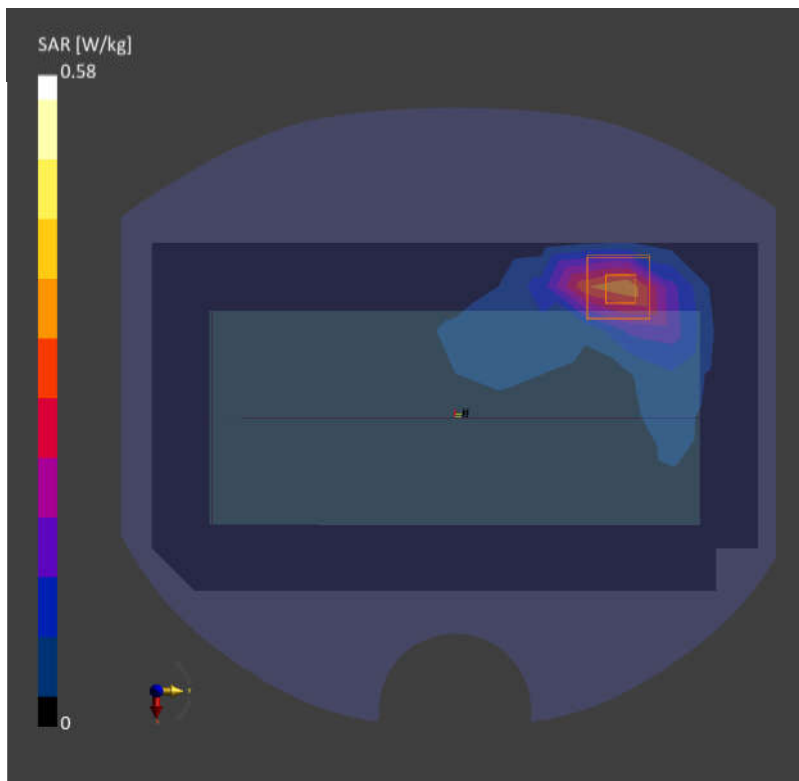

Date: 2025-11-08

56_WCDMA II_RMC 12.2Kbps_Back_5mm_Ch9262


Communication System: UMTS-FDD (WCDMA); Frequency: 1852.400 MHz; Duty Cycle: 1:1
Medium: HSL_1900_251108 Medium parameters used: $f = 1852.400$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 39.3$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.91, 7.98, 7.59); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.759 W/kg; SAR (10g) = 0.434 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.04 dB
SAR (1g) = 0.817 W/kg; SAR (10g) = 0.432 W/kg
Smallest distance from peaks to all points 3 dB below = 7.2 mm
Ratio of SAR at M2 to SAR at M1 = 80.1 %

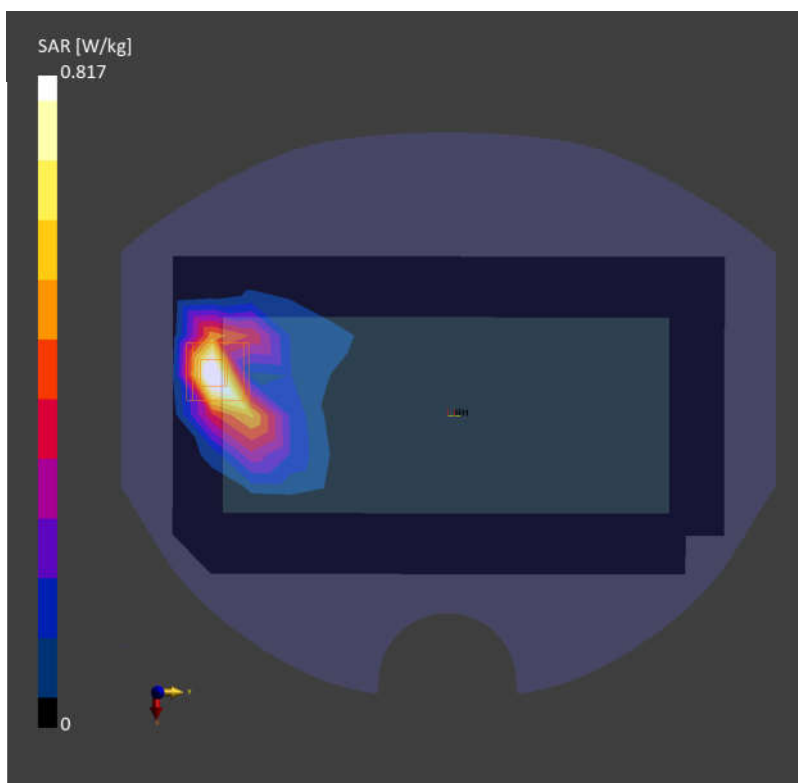

Date: 2025-11-08

57_LTE Band 25_20M_QPSK_1_0_Back_5mm_Ch26140

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 1860.000 MHz; Duty Cycle: 1:1

Medium: HSL_1900_251108 Medium parameters used: $f = 1860.000$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 39.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.91, 7.98, 7.59); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.739 W/kg; SAR (10g) = 0.371 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.11 dB

SAR (1g) = 0.751 W/kg; SAR (10g) = 0.387 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 90.0 %

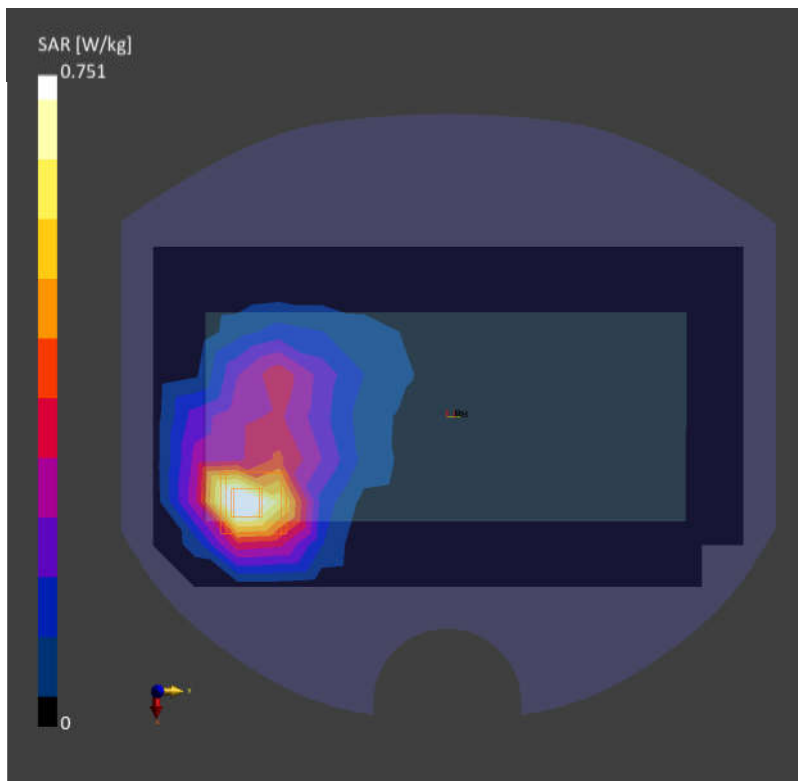

Date: 2025-11-08

58_FR1 n2_40M_QPSK_1_1_Back_5mm_Ch376000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 1880.000 MHz; Duty Cycle: 1:1

Medium: HSL_1900_251108 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.91, 7.98, 7.59); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.595 W/kg; SAR (10g) = 0.326 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.791 W/kg; SAR (10g) = 0.323 W/kg

Smallest distance from peaks to all points 3 dB below = 13.2 mm

Ratio of SAR at M2 to SAR at M1 = 88.3 %

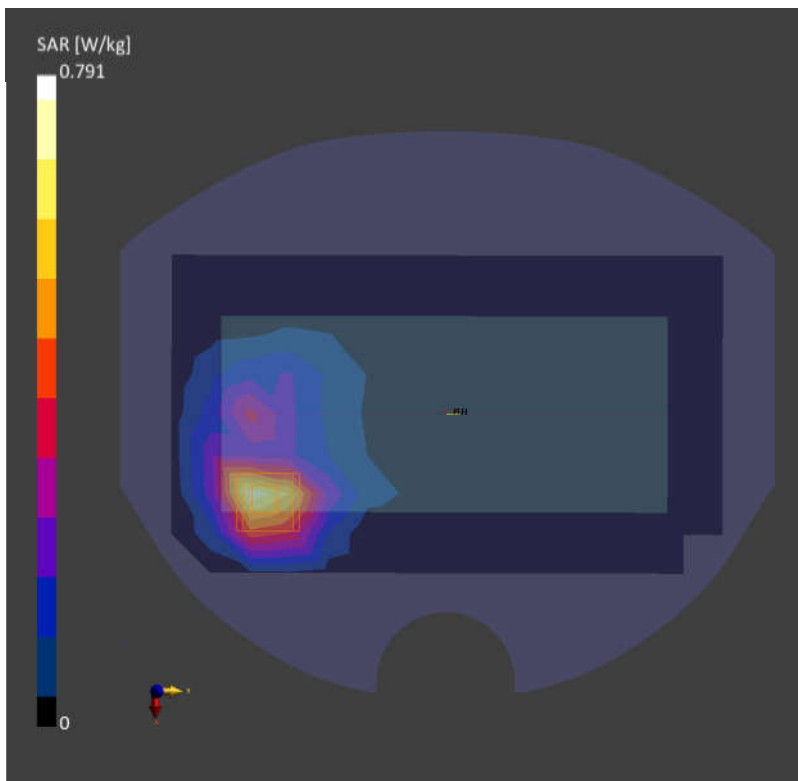

Date: 2025-11-02

59_LTE Band 7_20M_QPSK_1_0_Back_5mm_Ch21350

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 2560.000 MHz; Duty Cycle: 1:1

Medium: HSL_2600_251102 Medium parameters used: $f = 2560.000$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 38.9$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.16, 7.22, 6.86); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.808 W/kg; SAR (10g) = 0.472 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.887 W/kg; SAR (10g) = 0.474 W/kg

Smallest distance from peaks to all points 3 dB below = 5.3 mm

Ratio of SAR at M2 to SAR at M1 = 81.6 %

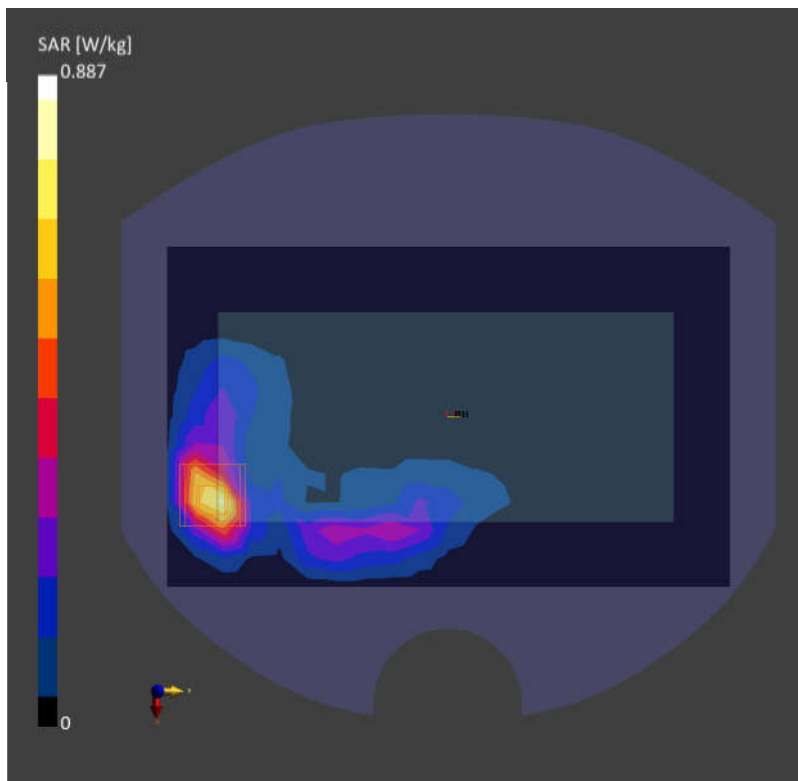

Date: 2025-11-02

60_LTE Band 41 HPUE_20M_QPSK_1_0_Back_5mm_Ch41055

Communication System: LTE-TDD

AntennaCfg:SISO; Frequency: 2636.500 MHz; Duty Cycle: 1:2.33

Medium: HSL_2600_251102 Medium parameters used: $f = 2636.500$ MHz; $\sigma = 1.96$ S/m; $\epsilon_r = 38.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7630; ConvF(7.16, 7.22, 6.86); Calibrated: 2025-09-30
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.464 W/kg; SAR (10g) = 0.204 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.816 W/kg; SAR (10g) = 0.207 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 81.8 %

