



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2657-1
FCC ID : IHDT56AR8
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Nov. 09, 2025 ~ Nov. 10, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	5
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	6
1.9 Specification of Accessory.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	8
2.1 Carrier Frequency Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	11
2.5 Radiated Band Edges and Spurious Emission Measurement	12
2.6 AC Conducted Emission Measurement.....	16
3 LIST OF MEASURING EQUIPMENT.....	18
4 MEASUREMENT UNCERTAINTY	19
APPENDIX A. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX B. RADIATED SPURIOUS EMISSION	
APPENDIX C. DUTY CYCLE PLOTS	
APPENDIX D. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR5O2401B	Rev. 01	Initial issue of report	Nov. 27, 2025



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
2.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 8.30 dB at 2486.56 MHz
2.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 11.88 dB at 3.14 MHz

Note: This is a variant report, the change note could be referred to the XT2657-1_Operational Description of Product Equality Declaration which is exhibit separately. According to the change, only the related test cases from original test report (Sporton Report Number 422203-01) were verified for the differences.

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2657-1
FCC ID	IHDT56AR8
IMEI Code	Conduction: 356743630003155/356743630003163 Radiation: 356743630003411/356743630003429
HW Version	DVT1
SW Version	WWC36.17
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Type of Modulation	Bluetooth LE : GFSK

Note: BLE 2Mbps does not support advertising channels (CH00/CH39).

1.5 Modification of EUT

No modifications are made to the EUT during all test items.



1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH06-KS	CN1257	314309

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH06-KS	AUDIX	E3	210616
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart C §15.247
- FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ANSI C63.10-2020

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



1.9 Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola(Salcomp)	Model Name	MC-331L
AC Adapter 1(EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-332L
AC Adapter 1(UK)	Brand Name	Motorola(Salcomp)	Model Name	MC-333L
AC Adapter 1(AR)	Brand Name	Motorola(Salcomp)	Model Name	MC-336L
AC Adapter 1(BR)	Brand Name	Motorola(Salcomp)	Model Name	MC-337L
AC Adapter 1(CHILE)	Brand Name	Motorola(Salcomp)	Model Name	MC-339L
AC Adapter 2(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-331L
AC Adapter 2(EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-332L
AC Adapter 2(UK)	Brand Name	Motorola(Chenyang)	Model Name	MC-333L
AC Adapter 2(AR)	Brand Name	Motorola(Chenyang)	Model Name	MC-336L
AC Adapter 2(BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-337L
Battery 1	Brand Name	Motorola	Model Name	SM12
Battery 2	Brand Name	Motorola	Model Name	SM36
USB Cable 1	Brand Name	Motorola(Saibao)	Model Name	SC18D22297
USB Cable 2	Brand Name	Motorola(Cabletech)	Model Name	SC18D22298
USB Cable 3	Brand Name	Motorola(Saibao)	Model Name	SC18D86732
USB Cable 4	Brand Name	Motorola(Cabletech)	Model Name	SC18E05246



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-

2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Radiated TCs	Mode 1: Bluetooth Tx CH38_2478 MHz_BLE 2Mbps
AC Conducted Emission	Mode 1: GSM 850 Idle + BT Link + WLAN Link(2.4G) + Battery + USB Cable 1 (Charging from Adapter 1)
Remark: For Radiated Test Cases, The tests were performance with Adapter 1 and USB Cable1.	

2.3 Connection Diagram of Test System

AC Conducted Emission:

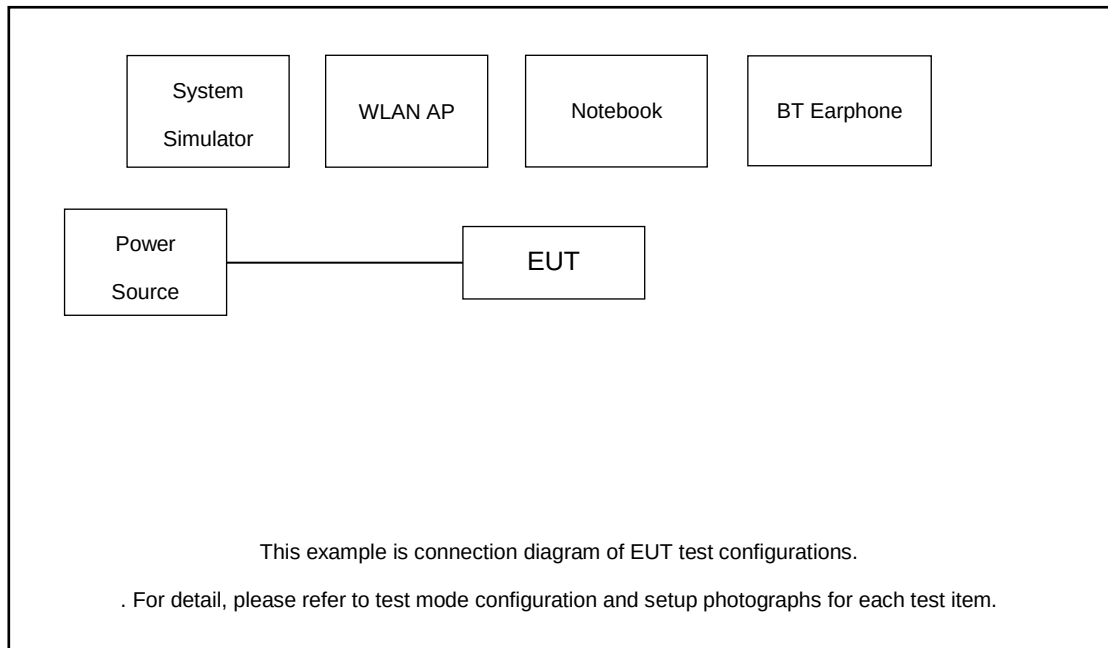

Radiated Emission:

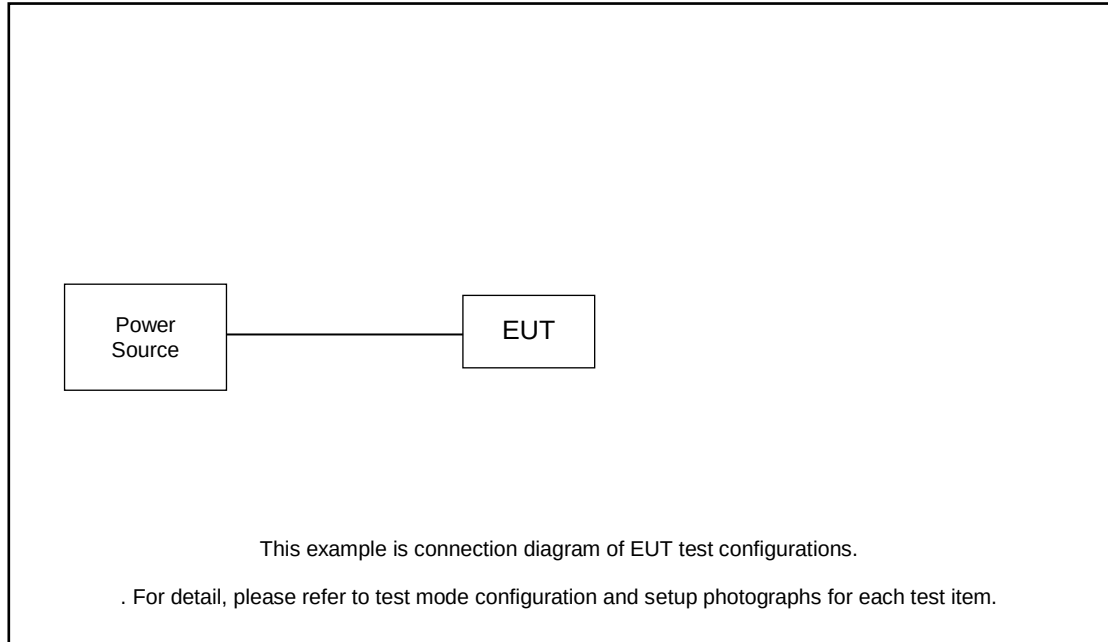



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	System Simulator	R&S	CMU 200	N/A	N/A	Unshielded, 1.8 m
2.	Notebook	Lenovo	G480	QDS-BRCM1050I	N/A	shielded cable DC O/P 1.8m , Unshielded AC I/P cable 1.8m
3.	Bluetooth Earphone	Lenovo	thinkplus-BH3	N/A	N/A	N/A
4.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m



2.5 Radiated Band Edges and Spurious Emission Measurement

2.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

2.5.2 Measuring Instruments


The section 4.0 of List of Measuring Equipment of this test report is used for test.

2.5.3 Test Procedures


1. The testing follows ANSI C63.10-2020 clause 6.3, 6.5, 6.6, 11.11 and 11.12.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

2.5.4 Test Setup


For radiated emissions below 30MHz

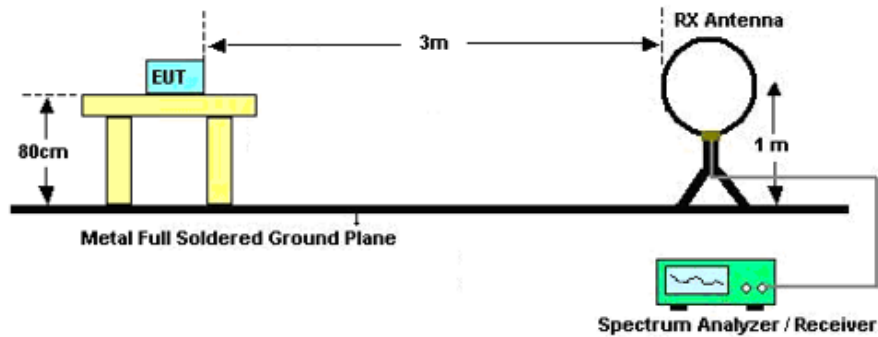

For radiated emissions from 30MHz to 1GHz

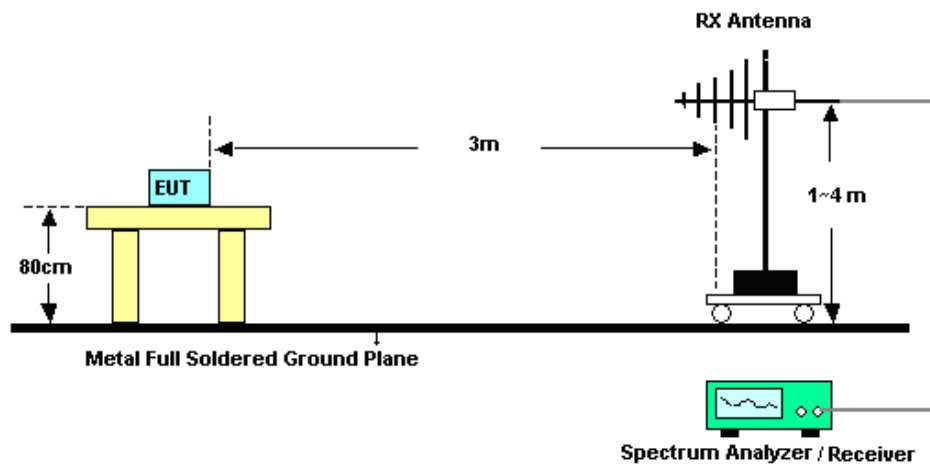

For radiated emissions above 1GHz

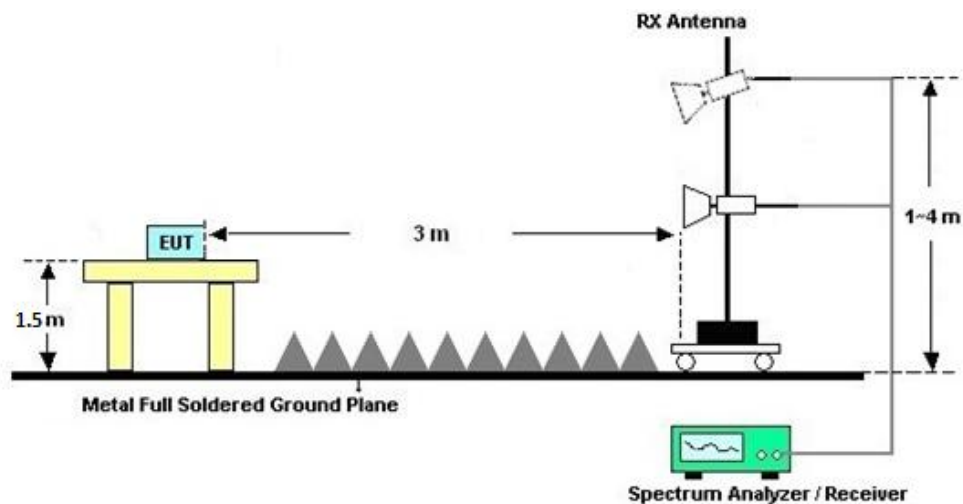

**2.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

2.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

2.5.7 Duty Cycle

Please refer to Appendix C.

2.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix B.

2.6 AC Conducted Emission Measurement

2.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


2.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

2.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

2.6.4 Test Setup

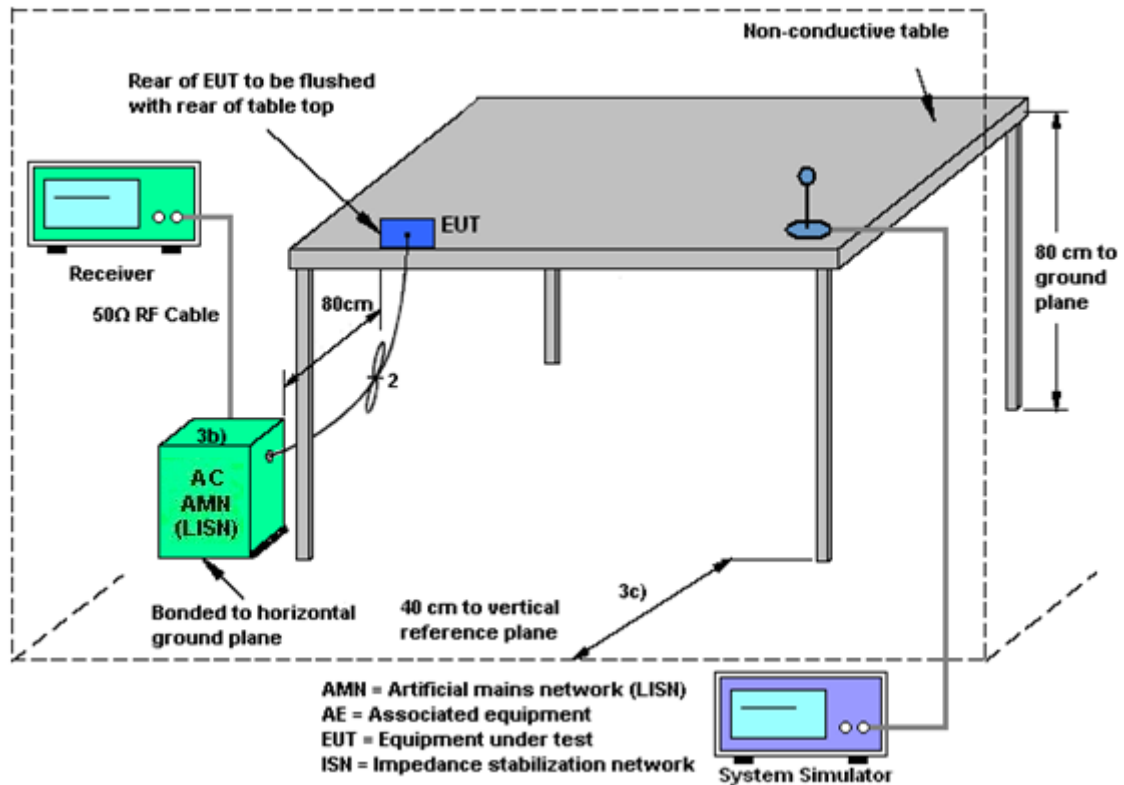

2.6.5 Test Result of AC Conducted Emission

Please refer to Appendix A.



3 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY57290157	3Hz~8.5GHz;Max 30dBm	Feb. 22, 2025	Nov. 09, 2025	Feb. 21, 2026	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471084	10Hz~44GHz	Jul. 03, 2025	Nov. 09, 2025	Jul. 02, 2026	Radiation (03CH06-KS)
Active loop antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Aug. 10, 2025	Nov. 09, 2025	Aug. 09, 2026	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	Mar. 24, 2025	Nov. 09, 2025	Mar. 23, 2026	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 14, 2025	Nov. 09, 2025	Apr. 13, 2026	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101116	18GHz~40GHz	Oct. 18, 2025	Nov. 09, 2025	Oct. 17, 2026	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	380827	9KHz ~1GHZ	Jul. 03, 2025	Nov. 09, 2025	Jul. 02, 2026	Radiation (03CH06-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Jan. 03, 2025	Nov. 09, 2025	Jan. 02, 2026	Radiation (03CH06-KS)
high gain Amplifier	EM	EM01G18GA	060845	1Ghz~18Ghz	Jan. 03, 2025	Nov. 09, 2025	Jan. 02, 2026	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY57280119	500MHz~26.5GHz	Oct. 10, 2025	Nov. 09, 2025	Oct. 09, 2026	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Nov. 09, 2025	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Nov. 09, 2025	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Nov. 09, 2025	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 16, 2025	Nov. 10, 2025	Apr. 15, 2026	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Jul. 03, 2025	Nov. 10, 2025	Jul. 02, 2026	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Dec. 24, 2024	Nov. 10, 2025	Dec. 23, 2025	Conduction (CO01-KS)
AC Power Source	Ouhan	APW-130NYT	202201040060	AC 0V~300V,45Hz~1000Hz	Apr. 16, 2025	Nov. 10, 2025	Apr. 15, 2026	Conduction (CO01-KS)

NCR: No Calibration Required



4 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.84 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.82 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.82 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)


Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.83 dB
---	---------

----- THE END -----



Appendix A. AC Conducted Emission Test Results


Test Engineer :	Amos Zhang	Temperature :	25.3 ~ 26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

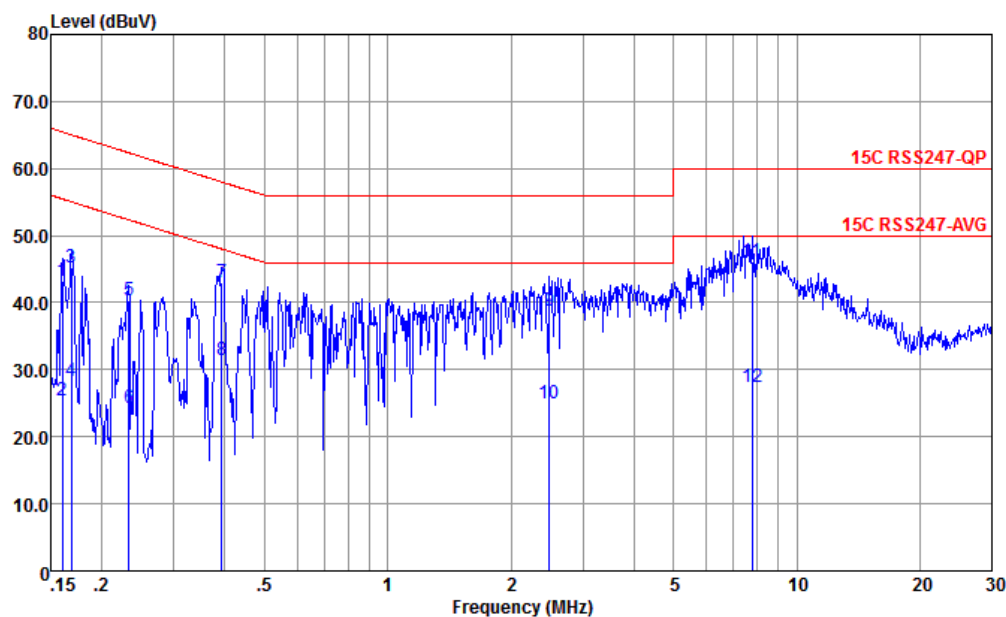

Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-L 24+80 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.160	43.19	-22.28	65.47	32.50	0.24	10.45	QP
2	0.160	25.29	-30.18	55.47	14.60	0.24	10.45	Average
3	0.169	45.20	-19.83	65.03	34.50	0.25	10.45	QP
4	0.169	28.20	-26.83	55.03	17.50	0.25	10.45	Average
5	0.233	40.24	-22.11	62.35	29.50	0.27	10.47	QP
6	0.233	24.24	-28.11	52.35	13.50	0.27	10.47	Average
7	0.393	43.04	-14.95	57.99	32.20	0.35	10.49	QP
8	0.393	31.34	-16.65	47.99	20.50	0.35	10.49	Average
9	2.487	38.85	-17.15	56.00	28.20	0.42	10.23	QP
10	2.487	24.85	-21.15	46.00	14.20	0.42	10.23	Average
11 *	7.769	46.11	-13.89	60.00	35.49	0.41	10.21	QP
12	7.769	27.61	-22.49	50.00	16.89	0.41	10.21	Average

Test Engineer :	Amos Zhang	Temperature :	25.3 ~ 26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

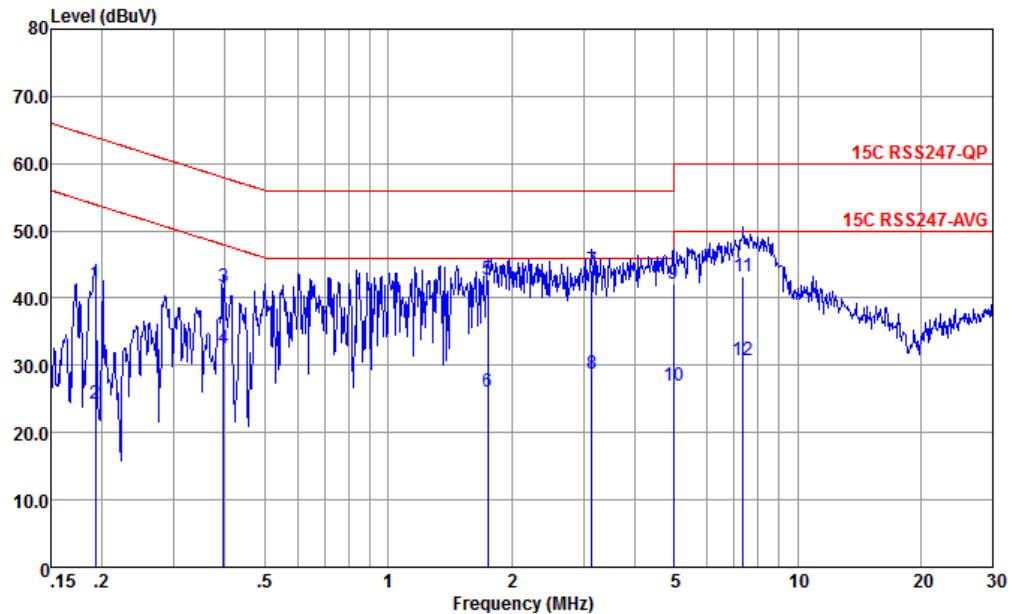

Site : CO01-KS
Condition : 15C RSS247-QP LISN-060105-N 24+80 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.192	42.20	-21.73	63.93	31.50	0.24	10.46	QP
2	0.192	24.20	-29.73	53.93	13.50	0.24	10.46	Average
3	0.396	41.63	-16.32	57.95	30.79	0.35	10.49	QP
4	0.396	32.43	-15.52	47.95	21.59	0.35	10.49	Average
5	1.753	42.83	-13.17	56.00	32.20	0.38	10.25	QP
6	1.753	26.13	-19.87	46.00	15.50	0.38	10.25	Average
7 *	3.140	44.12	-11.88	56.00	33.50	0.40	10.22	QP
8	3.140	28.82	-17.18	46.00	18.20	0.40	10.22	Average
9	4.978	42.10	-13.90	56.00	31.50	0.40	10.20	QP
10	4.978	26.90	-19.10	46.00	16.30	0.40	10.20	Average
11	7.368	43.21	-16.79	60.00	32.60	0.41	10.20	QP
12	7.368	30.81	-19.19	50.00	20.20	0.41	10.20	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix B. Radiated Spurious Emission

Test Engineer :	Jerry Xu	Relative Humidity :	41 ~ 42 %
		Temperature :	22 ~ 23 °C





Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	7	Bluetooth-LE_GSKF	38	2478	2Mbps	-	-





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE_GSKF	38	2486.56	45.70	54.00	-8.30	H	AVERAGE	Pass	Band Edge
1	Bluetooth-LE_GSKF	38	6195.00	51.34	63.69	-12.35	H	PEAK	Pass	Harmonic

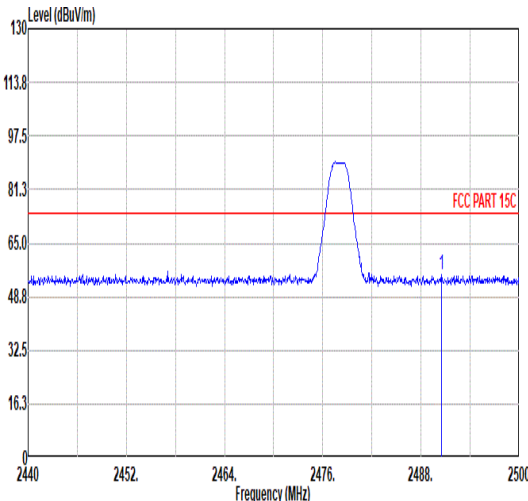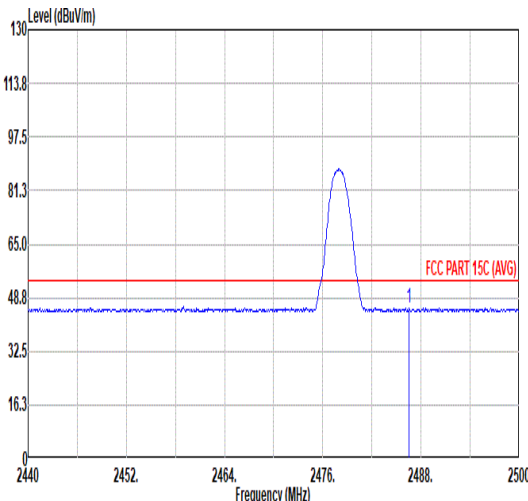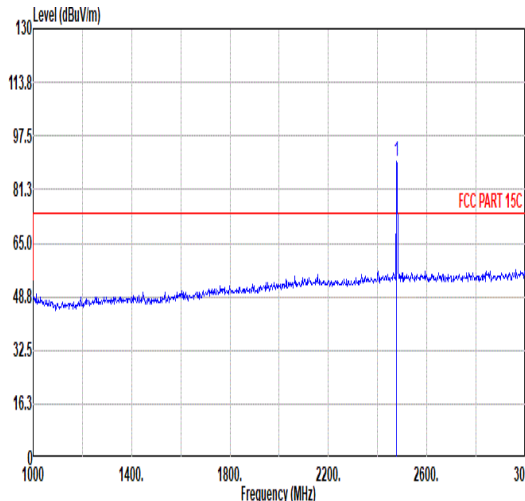
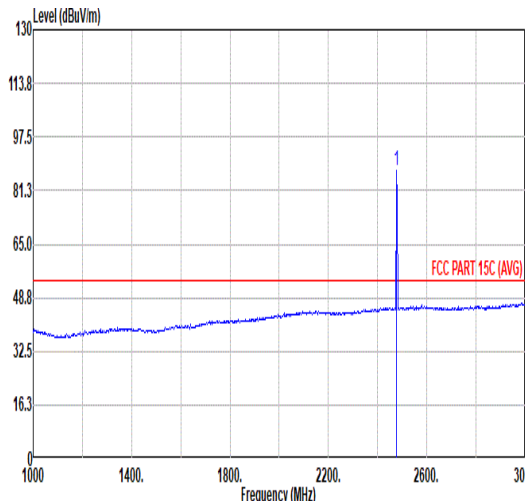


Mode	1																																																							
	Band Edge																																																							
	2400-2483.5_Bluetooth-LE_GSKF_CH38_2478MHz																																																							
ANT	7																																																							
Pol.	Horizontal																																																							
Peak	Fundamental																																																							
																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2490.46</td><td>55.65</td><td>74.00</td><td>-18.35</td><td>42.65</td><td>32.50</td><td>6.83</td><td>32.33</td><td>6.00</td><td>191</td><td>0 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2490.46	55.65	74.00	-18.35	42.65	32.50	6.83	32.33	6.00	191	0 PEAK
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2490.46	55.65	74.00	-18.35	42.65	32.50	6.83	32.33	6.00	191	0 PEAK																																													
Avg																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.56</td><td>45.70</td><td>54.00</td><td>-8.30</td><td>32.70</td><td>32.50</td><td>6.83</td><td>32.33</td><td>6.00</td><td>191</td><td>0 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2486.56	45.70	54.00	-8.30	32.70	32.50	6.83	32.33	6.00	191	0 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2486.56	45.70	54.00	-8.30	32.70	32.50	6.83	32.33	6.00	191	0 AVERAGE																																													
Peak																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>89.77</td><td>-----</td><td>-----</td><td>76.79</td><td>32.50</td><td>6.81</td><td>32.33</td><td>6.00</td><td>191</td><td>0 PEAK</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	89.77	-----	-----	76.79	32.50	6.81	32.33	6.00	191	0 PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2478.00	89.77	-----	-----	76.79	32.50	6.81	32.33	6.00	191	0 PEAK																																													
Avg																																																								
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>87.47</td><td>-----</td><td>-----</td><td>74.49</td><td>32.50</td><td>6.81</td><td>32.33</td><td>6.00</td><td>191</td><td>0 AVERAGE</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	87.47	-----	-----	74.49	32.50	6.81	32.33	6.00	191	0 AVERAGE
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	2478.00	87.47	-----	-----	74.49	32.50	6.81	32.33	6.00	191	0 AVERAGE																																													

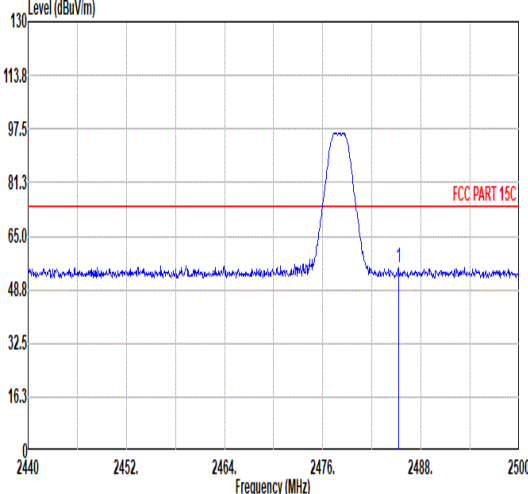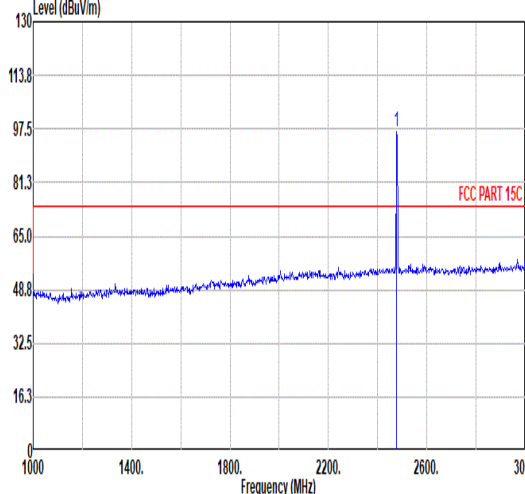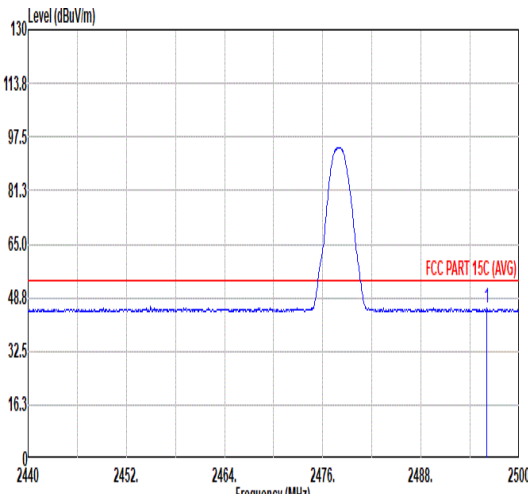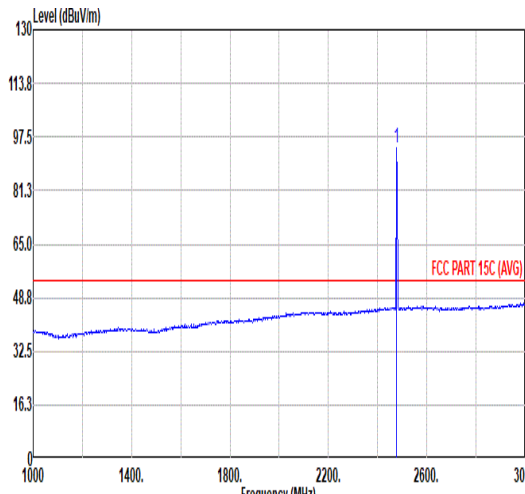

Mode	1																																																																																																																								
	Band Edge																																																																																																																								
	2400-2483.5_Bluetooth-LE_GSKF_CH38_2478MHz																																																																																																																								
ANT	7																																																																																																																								
Pol.	Vertical						Fundamental																																																																																																																		
Peak																																																																																																																									
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>2485.24</td><td>55.46</td><td>74.00</td><td>-18.54</td><td>42.47</td><td>32.50</td><td>6.82</td><td>32.33</td><td>6.00</td><td>229</td><td>222</td><td>PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1	2485.24	55.46	74.00	-18.54	42.47	32.50	6.82	32.33	6.00	229	222	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>2478.00</td><td>96.54</td><td>-----</td><td>-----</td><td>83.56</td><td>32.50</td><td>6.81</td><td>32.33</td><td>6.00</td><td>229</td><td>222</td><td>PEAK</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1	2478.00	96.54	-----	-----	83.56	32.50	6.81	32.33	6.00	229	222
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																
1	2485.24	55.46	74.00	-18.54	42.47	32.50	6.82	32.33	6.00	229	222	PEAK																																																																																																													
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																
1	2478.00	96.54	-----	-----	83.56	32.50	6.81	32.33	6.00	229	222	PEAK																																																																																																													
Avg																																																																																																																									
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>2496.04</td><td>45.42</td><td>54.00</td><td>-8.58</td><td>32.41</td><td>32.50</td><td>6.84</td><td>32.33</td><td>6.00</td><td>229</td><td>222</td><td>AVERAGE</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1	2496.04	45.42	54.00	-8.58	32.41	32.50	6.84	32.33	6.00	229	222	AVERAGE	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2"></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>cm</th><th>deg</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1</td><td>2478.00</td><td>94.40</td><td>-----</td><td>-----</td><td>81.42</td><td>32.50</td><td>6.81</td><td>32.33</td><td>6.00</td><td>229</td><td>222</td><td>AVERAGE</td></tr></table>													Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1	2478.00	94.40	-----	-----	81.42	32.50	6.81	32.33	6.00	229	222
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																
1	2496.04	45.42	54.00	-8.58	32.41	32.50	6.84	32.33	6.00	229	222	AVERAGE																																																																																																													
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		cm	deg																																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																
1	2478.00	94.40	-----	-----	81.42	32.50	6.81	32.33	6.00	229	222	AVERAGE																																																																																																													

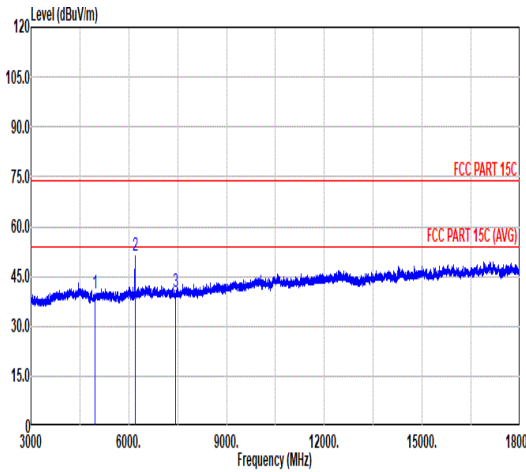
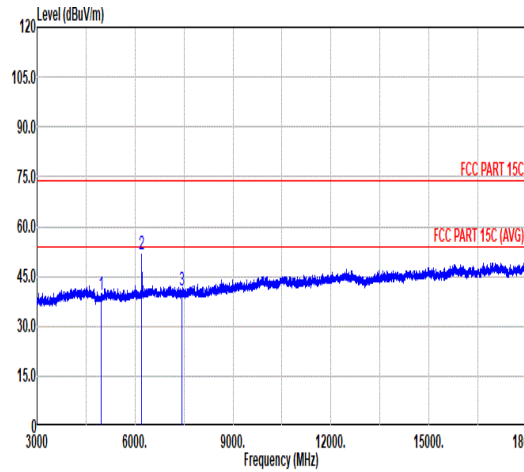


Mode	1																																																																																																																																																													
	Harmonic																																																																																																																																																													
	2400-2483.5_Bluetooth-LE_GSKF_CH38_2478MHz																																																																																																																																																													
ANT	7																																																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																																																							
Peak Avg																																																																																																																																																														
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4956.00</td><td>40.02</td><td>74.00</td><td>-33.98</td><td>62.44</td><td>34.02</td><td>9.75</td><td>66.19</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>6195.00</td><td>51.34</td><td>63.69</td><td>-12.35</td><td>71.43</td><td>35.41</td><td>10.94</td><td>66.44</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>3</td><td>7434.00</td><td>40.35</td><td>74.00</td><td>-33.65</td><td>59.25</td><td>35.77</td><td>12.03</td><td>66.70</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4956.00	40.02	74.00	-33.98	62.44	34.02	9.75	66.19	0.00	---	---	PEAK	2	6195.00	51.34	63.69	-12.35	71.43	35.41	10.94	66.44	0.00	---	---	PEAK	3	7434.00	40.35	74.00	-33.65	59.25	35.77	12.03	66.70	0.00	---	---	PEAK	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4956.00</td><td>39.55</td><td>74.00</td><td>-34.45</td><td>61.97</td><td>34.02</td><td>9.75</td><td>66.19</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>2</td><td>6195.00</td><td>51.63</td><td>74.45</td><td>-22.82</td><td>71.72</td><td>35.41</td><td>10.94</td><td>66.44</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr><tr><td>3</td><td>7434.00</td><td>40.68</td><td>74.00</td><td>-33.32</td><td>59.58</td><td>35.77</td><td>12.03</td><td>66.70</td><td>0.00</td><td>---</td><td>---</td><td>PEAK</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4956.00	39.55	74.00	-34.45	61.97	34.02	9.75	66.19	0.00	---	---	PEAK	2	6195.00	51.63	74.45	-22.82	71.72	35.41	10.94	66.44	0.00	---	---	PEAK	3	7434.00	40.68	74.00	-33.32	59.58	35.77	12.03	66.70	0.00	---	---	PEAK
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																				
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																			
1	4956.00	40.02	74.00	-33.98	62.44	34.02	9.75	66.19	0.00	---	---	PEAK																																																																																																																																																		
2	6195.00	51.34	63.69	-12.35	71.43	35.41	10.94	66.44	0.00	---	---	PEAK																																																																																																																																																		
3	7434.00	40.35	74.00	-33.65	59.25	35.77	12.03	66.70	0.00	---	---	PEAK																																																																																																																																																		
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																			
1	4956.00	39.55	74.00	-34.45	61.97	34.02	9.75	66.19	0.00	---	---	PEAK																																																																																																																																																		
2	6195.00	51.63	74.45	-22.82	71.72	35.41	10.94	66.44	0.00	---	---	PEAK																																																																																																																																																		
3	7434.00	40.68	74.00	-33.32	59.58	35.77	12.03	66.70	0.00	---	---	PEAK																																																																																																																																																		



Mode	1	
	18G-25G	
	2400-2483.5_Bluetooth-LE_GSKF_CH38_2478MHz	
ANT	7	
Pol.	Horizontal	Vertical
Peak Avg		

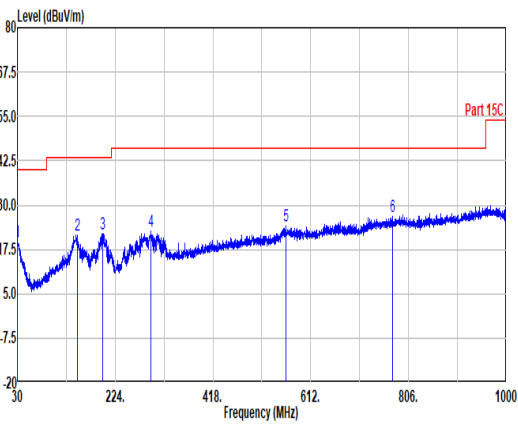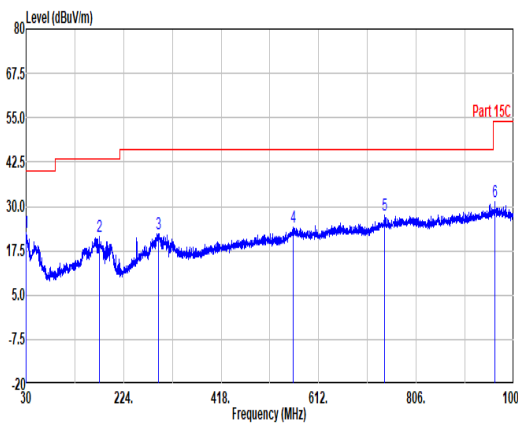

Mode	1																																																																																																																			
	30-1G																																																																																																																			
	2400-2483.5_Bluetooth-LE_GSKF_CH38_2478MHz																																																																																																																			
ANT	7																																																																																																																			
Pol.	Horizontal																																																																																																																			
Peak																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>30.73</td><td>19.74</td><td>40.00</td><td>-20.26</td><td>27.20</td><td>24.98</td><td>0.36</td><td>32.80</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>148.58</td><td>21.36</td><td>43.50</td><td>-22.14</td><td>35.67</td><td>17.08</td><td>1.32</td><td>32.71</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>199.02</td><td>22.06</td><td>43.50</td><td>-21.44</td><td>38.27</td><td>14.98</td><td>1.57</td><td>32.76</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>295.05</td><td>22.57</td><td>46.00</td><td>-23.43</td><td>34.07</td><td>19.44</td><td>1.89</td><td>32.83</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>563.26</td><td>23.97</td><td>46.00</td><td>-22.03</td><td>28.06</td><td>26.57</td><td>2.59</td><td>33.25</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>774.72</td><td>26.65</td><td>46.00</td><td>-19.35</td><td>28.25</td><td>28.51</td><td>3.01</td><td>33.12</td><td>0.00</td><td>---</td><td>Peak</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	30.73	19.74	40.00	-20.26	27.20	24.98	0.36	32.80	0.00	---	Peak	2	148.58	21.36	43.50	-22.14	35.67	17.08	1.32	32.71	0.00	---	Peak	3	199.02	22.06	43.50	-21.44	38.27	14.98	1.57	32.76	0.00	---	Peak	4	295.05	22.57	46.00	-23.43	34.07	19.44	1.89	32.83	0.00	---	Peak	5	563.26	23.97	46.00	-22.03	28.06	26.57	2.59	33.25	0.00	---	Peak	6	774.72	26.65	46.00	-19.35	28.25	28.51	3.01	33.12	0.00	---	Peak
		Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																										
	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																									
	1	30.73	19.74	40.00	-20.26	27.20	24.98	0.36	32.80	0.00	---	Peak																																																																																																								
	2	148.58	21.36	43.50	-22.14	35.67	17.08	1.32	32.71	0.00	---	Peak																																																																																																								
	3	199.02	22.06	43.50	-21.44	38.27	14.98	1.57	32.76	0.00	---	Peak																																																																																																								
	4	295.05	22.57	46.00	-23.43	34.07	19.44	1.89	32.83	0.00	---	Peak																																																																																																								
	5	563.26	23.97	46.00	-22.03	28.06	26.57	2.59	33.25	0.00	---	Peak																																																																																																								
6	774.72	26.65	46.00	-19.35	28.25	28.51	3.01	33.12	0.00	---	Peak																																																																																																									
Vertical																																																																																																																				
																																																																																																																				
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>30.49</td><td>22.67</td><td>40.00</td><td>-17.33</td><td>30.01</td><td>25.11</td><td>0.36</td><td>32.81</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>175.99</td><td>21.47</td><td>43.50</td><td>-22.03</td><td>37.55</td><td>15.21</td><td>1.45</td><td>32.74</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>3</td><td>293.36</td><td>22.38</td><td>46.00</td><td>-23.62</td><td>33.92</td><td>19.41</td><td>1.89</td><td>32.84</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>4</td><td>560.59</td><td>24.16</td><td>46.00</td><td>-21.84</td><td>28.24</td><td>26.58</td><td>2.58</td><td>33.24</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>5</td><td>742.95</td><td>27.48</td><td>46.00</td><td>-18.52</td><td>29.74</td><td>28.00</td><td>2.96</td><td>33.22</td><td>0.00</td><td>---</td><td>Peak</td></tr><tr><td>6</td><td>962.66</td><td>31.33</td><td>54.00</td><td>-22.67</td><td>28.24</td><td>31.27</td><td>3.35</td><td>31.53</td><td>0.00</td><td>---</td><td>Peak</td></tr></table>												Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	30.49	22.67	40.00	-17.33	30.01	25.11	0.36	32.81	0.00	---	Peak	2	175.99	21.47	43.50	-22.03	37.55	15.21	1.45	32.74	0.00	---	Peak	3	293.36	22.38	46.00	-23.62	33.92	19.41	1.89	32.84	0.00	---	Peak	4	560.59	24.16	46.00	-21.84	28.24	26.58	2.58	33.24	0.00	---	Peak	5	742.95	27.48	46.00	-18.52	29.74	28.00	2.96	33.22	0.00	---	Peak	6	962.66	31.33	54.00	-22.67	28.24	31.27	3.35	31.53	0.00	---	Peak	
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																											
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor		Remark																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																										
1	30.49	22.67	40.00	-17.33	30.01	25.11	0.36	32.81	0.00	---	Peak																																																																																																									
2	175.99	21.47	43.50	-22.03	37.55	15.21	1.45	32.74	0.00	---	Peak																																																																																																									
3	293.36	22.38	46.00	-23.62	33.92	19.41	1.89	32.84	0.00	---	Peak																																																																																																									
4	560.59	24.16	46.00	-21.84	28.24	26.58	2.58	33.24	0.00	---	Peak																																																																																																									
5	742.95	27.48	46.00	-18.52	29.74	28.00	2.96	33.22	0.00	---	Peak																																																																																																									
6	962.66	31.33	54.00	-22.67	28.24	31.27	3.35	31.53	0.00	---	Peak																																																																																																									

Appendix C. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth –LE 2Mbps	31.58	0.198	5.051	5.1kHz

Bluetooth – LE 2Mbps

