

Date: 2024-07-22

**01\_LTE Band 12\_10M\_QPSK\_1RB\_0Offset\_Left Cheek\_0mm\_Ch23095**

Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)

AntennaCfg:SISO; Frequency: 707.500 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used:  $f = 707.500$  MHz;  $\sigma = 0.901$  S/m;  $\epsilon_r = 42.4$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.19, 10.19, 10.19); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.141 W/kg; SAR (10g) = 0.099 W/kg;


**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 0.142 W/kg; SAR (10g) = 0.116 W/kg

Smallest distance from peaks to all points 3 dB below = > 16.0 mm

Ratio of SAR at M2 to SAR at M1 = 95.5 %

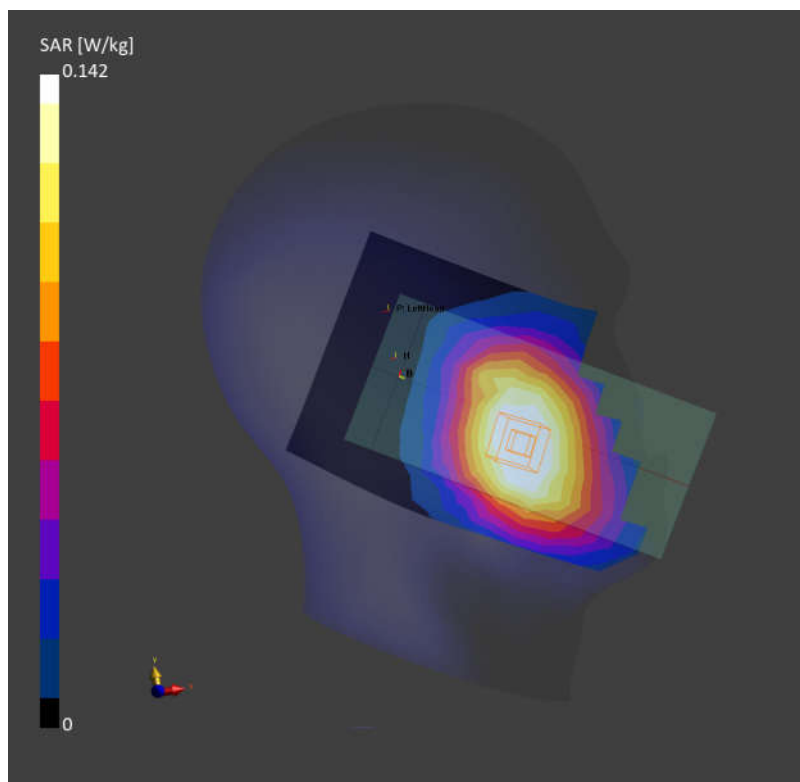

Date: 2024-07-22

**02\_LTE Band 13\_10M\_QPSK\_1RB\_0Offset\_Left Cheek\_0mm\_Ch23230**

Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)

AntennaCfg:SISO; Frequency: 782.000 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used:  $f = 782.000$  MHz;  $\sigma = 0.927$  S/m;  $\epsilon_r = 42.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.19, 10.19, 10.19); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.191 W/kg; SAR (10g) = 0.133 W/kg;


**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.205 W/kg; SAR (10g) = 0.167 W/kg

Smallest distance from peaks to all points 3 dB below = > 16.0 mm

Ratio of SAR at M2 to SAR at M1 = 94.3 %

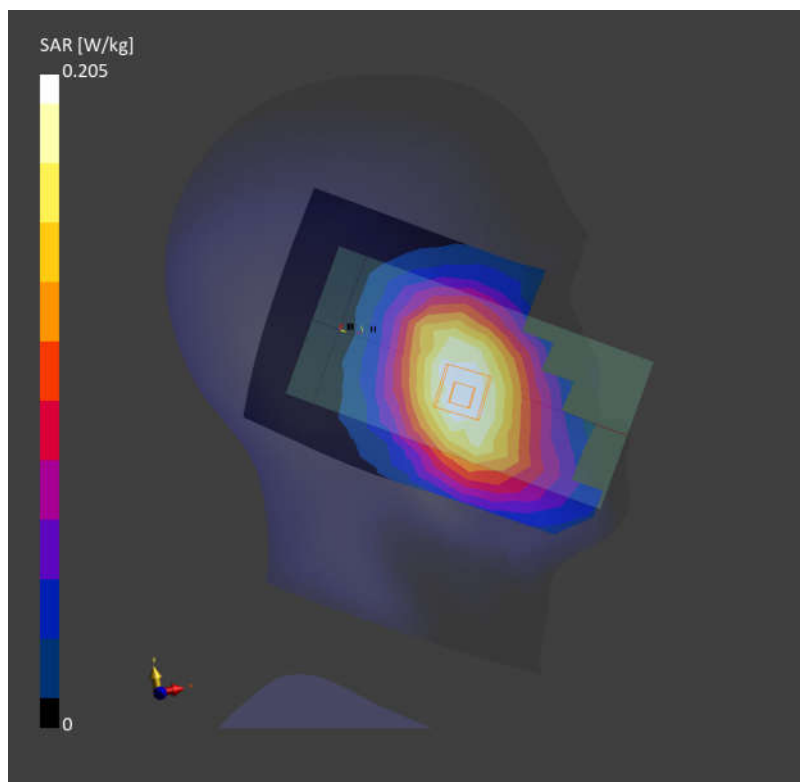

Date: 2024-07-24

**03\_GSM850\_GPRS (4 Tx slots)\_Left Cheek\_0mm\_Ch189**

Communication System: GPRS-FDD (TDMA, GMSK, TN 0)

Frequency: 836.400 MHz; DutyCycle: 1:2.08

Medium: Head Simulating Liquid Medium parameters used:  $f = 836.400$  MHz;  $\sigma = 0.913$  S/m;  $\epsilon_r = 42.7$ 

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(9.78, 9.78, 9.78); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: GSM, 10023-DAC

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.181 W/kg; SAR (10g) = 0.125 W/kg;


**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.17 dB

SAR (1g) = 0.194 W/kg; SAR (10g) = 0.154 W/kg

Smallest distance from peaks to all points 3 dB below = &gt; 16.0 mm

Ratio of SAR at M2 to SAR at M1 = 94.2 %

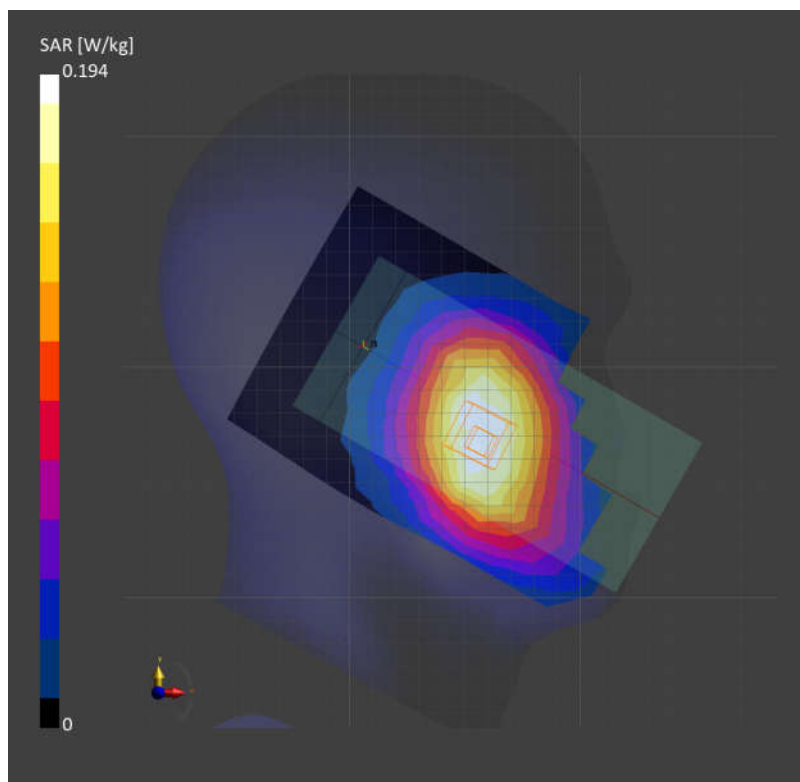

Date: 2024-07-24

**04\_WCDMA V\_RMC 12.2Kbps\_Left Cheek\_0mm\_Ch4182**

Communication System: UMTS-FDD (WCDMA); Frequency: 836.400 MHz; Duty Cycle: 1:1  
Medium: Head Simulating Liquid Medium parameters used:  $f = 836.400$  MHz;  $\sigma = 0.913$  S/m;  $\epsilon_r = 42.7$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7764; ConvF(9.78, 9.78, 9.78); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.208 W/kg; SAR (10g) = 0.142 W/kg;


**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.216 W/kg; SAR (10g) = 0.170 W/kg

Smallest distance from peaks to all points 3 dB below = > 16.0 mm

Ratio of SAR at M2 to SAR at M1 = 93.4 %

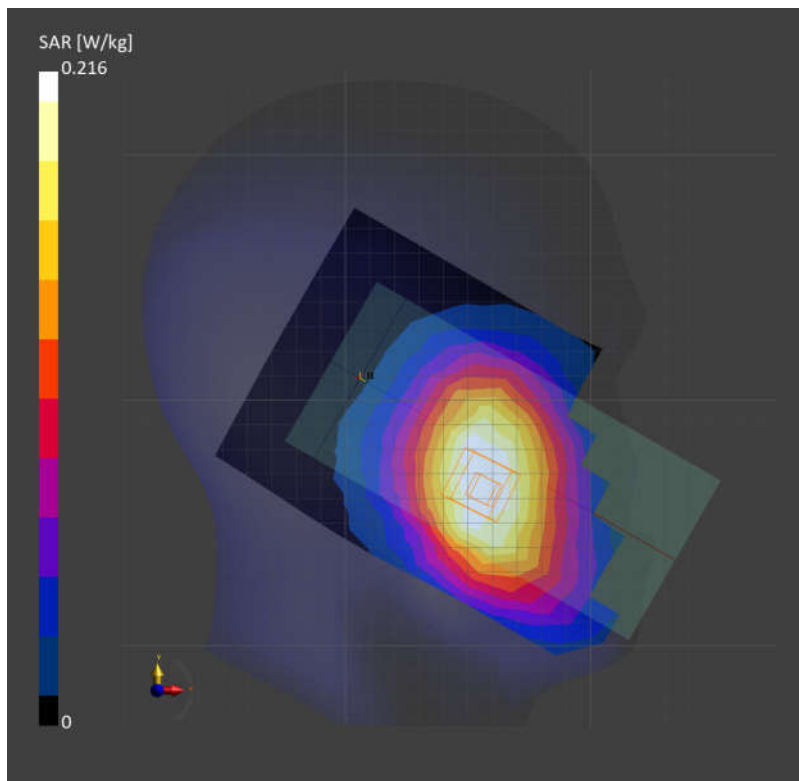

Date: 2024-07-24

**05\_LTE Band 26\_15M\_QPSK\_1RB\_0Offset\_Right Cheek\_0mm\_Ch26865**

Communication System: LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)

AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used:  $f = 831.500$  MHz;  $\sigma = 0.908$  S/m;  $\epsilon_r = 42.8$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7764; ConvF(9.78, 9.78, 9.78); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.588 W/kg; SAR (10g) = 0.395 W/kg;


**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 0.651 W/kg; SAR (10g) = 0.400 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 74.5 %

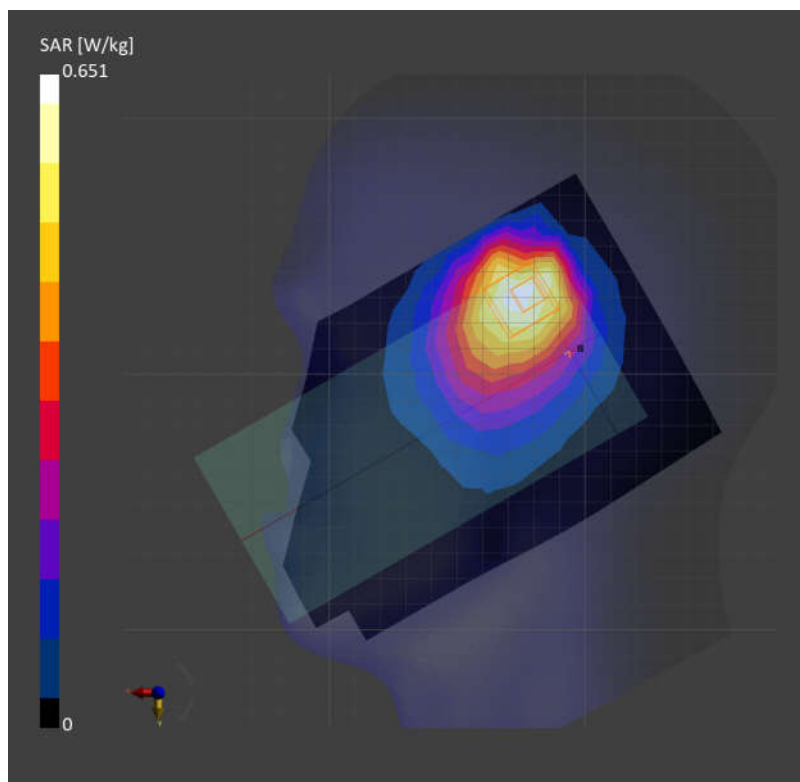

Date: 2024-07-24

**06\_FR1 n26\_20M\_QPSK\_1RB\_1Offset\_Right Cheek\_0mm\_Ch166300**

Communication System: 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)

AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used:  $f = 831.500$  MHz;  $\sigma = 0.908$  S/m;  $\epsilon_r = 42.8$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7764; ConvF(9.78, 9.78, 9.78); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.631 W/kg; SAR (10g) = 0.419 W/kg;


**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 0.695 W/kg; SAR (10g) = 0.424 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 71.8 %

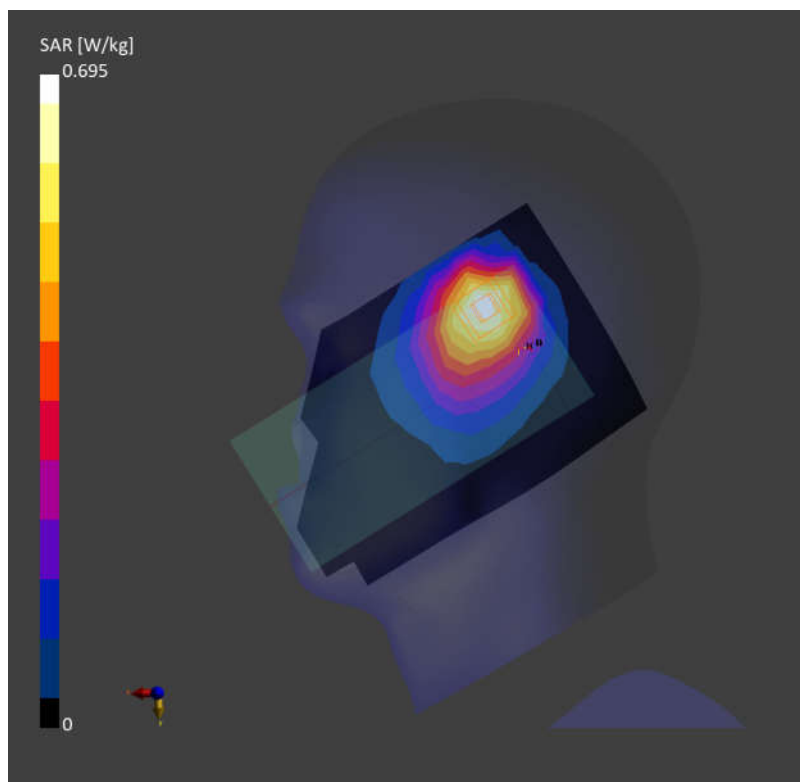

Date: 2024-07-26

**07\_WCDMA IV\_RMC 12.2Kbps\_Right Cheek\_0mm\_Ch1413**

Communication System: UMTS-FDD (WCDMA); Frequency: 1732.600 MHz; Duty Cycle: 1:1  
Medium: Head Simulating Liquid Medium parameters used:  $f = 1732.600$  MHz;  $\sigma = 1.37$  S/m;  $\epsilon_r = 40.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7764; ConvF(8.78, 8.78, 8.78); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.143 W/kg; SAR (10g) = 0.085 W/kg;


**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.08 dB

SAR (1g) = 0.146 W/kg; SAR (10g) = 0.101 W/kg

Smallest distance from peaks to all points 3 dB below = 10.7 mm

Ratio of SAR at M2 to SAR at M1 = 90.7 %

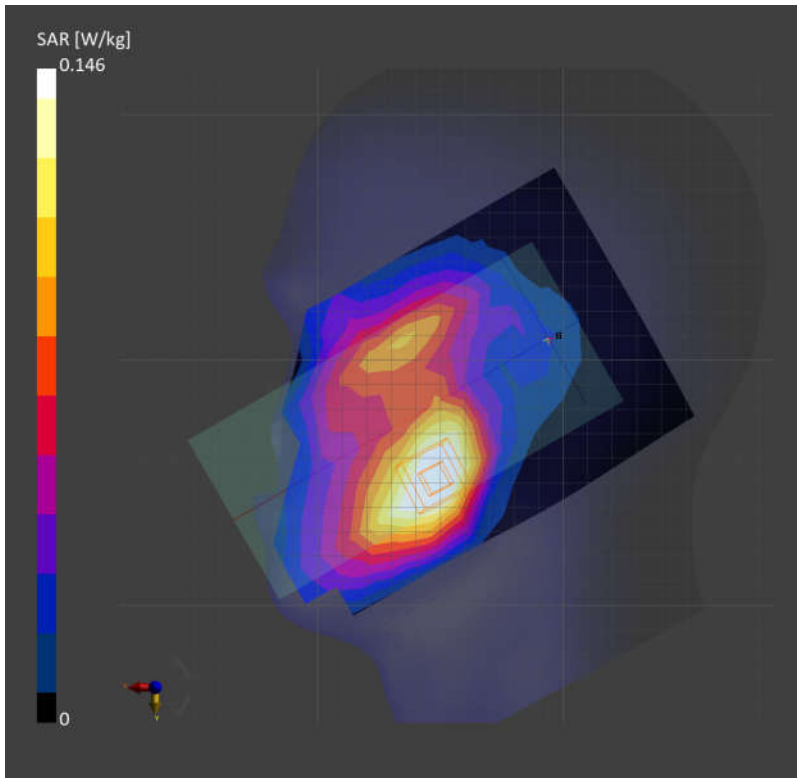

Date: 2024-07-26

**08\_LTE Band 66\_20M\_QPSK\_1RB\_0Offset\_Right Tilted\_0mm\_Ch132072**

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 1720.000 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used:  $f = 1720.000$  MHz;  $\sigma = 1.36$  S/m;  $\epsilon_r = 40.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.78, 8.78, 8.78); Calibrated: 2023-10-05

- Sensor-Surface: 1.4 mm

- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20

- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: RightHead

- Measurement Software: 16.4.0.5005

- UID: LTE-FDD, 10169-CAF

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.680 W/kg; SAR (10g) = 0.362 W/kg;


**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.710 W/kg; SAR (10g) = 0.366 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 80.0 %

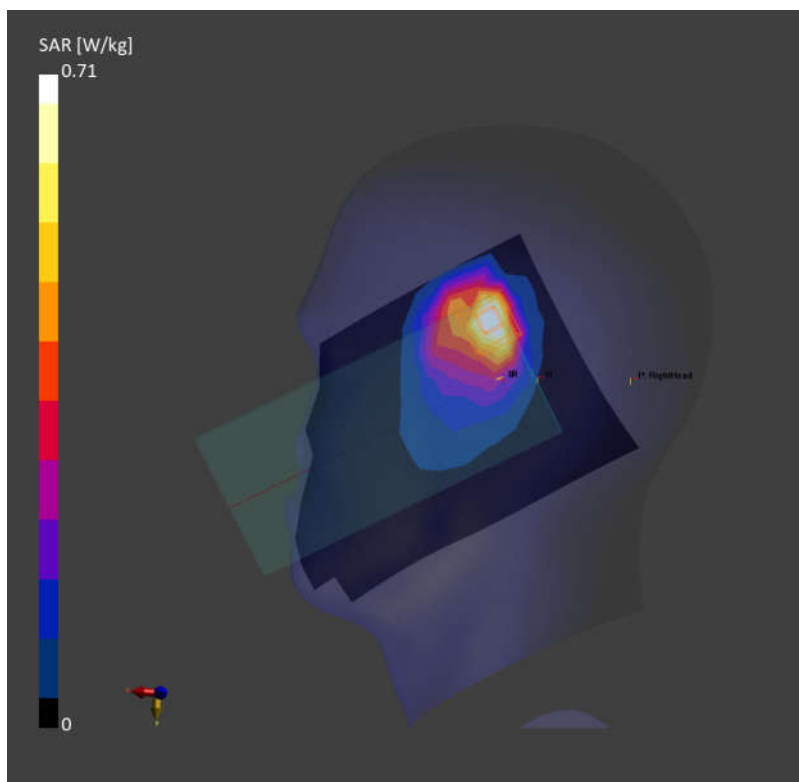

Date: 2024-07-26

**09\_FR1 n66\_40M\_QPSK\_1RB\_1Offset\_Right Tilted\_0mm\_Ch349000**

Communication System: 5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)

AntennaCfg:SISO; Frequency: 1745.000 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used:  $f = 1745.000$  MHz;  $\sigma = 1.38$  S/m;  $\epsilon_r = 40.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7764; ConvF(8.78, 8.78, 8.78); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10934-AAC

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.734 W/kg; SAR (10g) = 0.372 W/kg;


**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.09 dB

SAR (1g) = 0.707 W/kg; SAR (10g) = 0.347 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 78.4 %

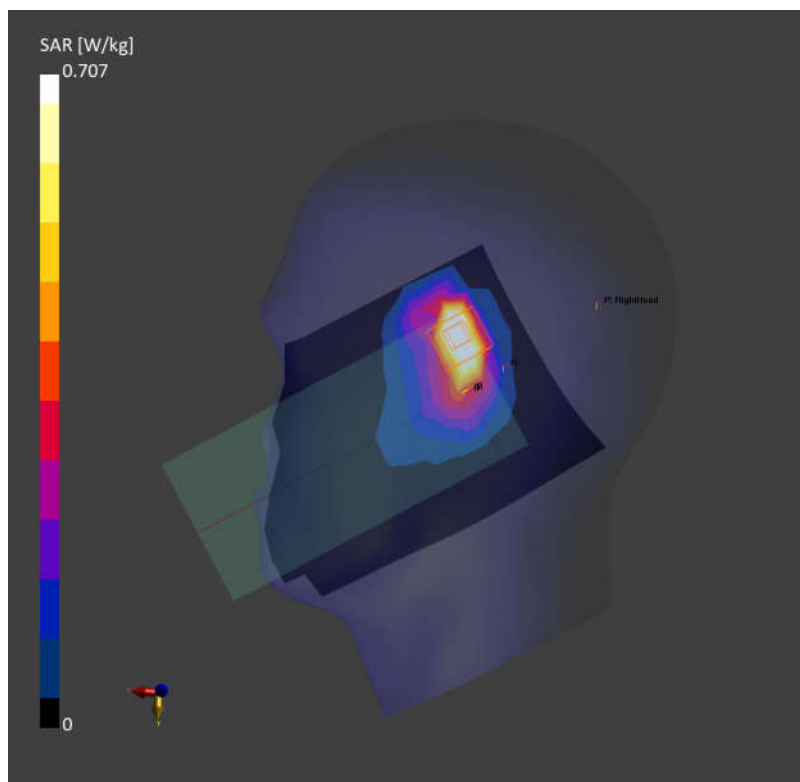

Date: 2024-07-27

**10\_GSM1900\_GPRS (1 Tx slots)\_Right Cheek\_0mm\_Ch661**

Communication System: GPRS-FDD (TDMA, GMSK, TN 0)

Frequency: 1880.000 MHz; DutyCycle: 1:8.3

Medium: Head Simulating Liquid Medium parameters used:  $f = 1880.000$  MHz;  $\sigma = 1.38$  S/m;  $\epsilon_r = 41.5$ 

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.46, 8.46, 8.46); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: GSM, 10023-DAC

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.045 W/kg; SAR (10g) = 0.026 W/kg;


**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.047 W/kg; SAR (10g) = 0.032 W/kg

Smallest distance from peaks to all points 3 dB below = 16.6 mm

Ratio of SAR at M2 to SAR at M1 = 91.0 %

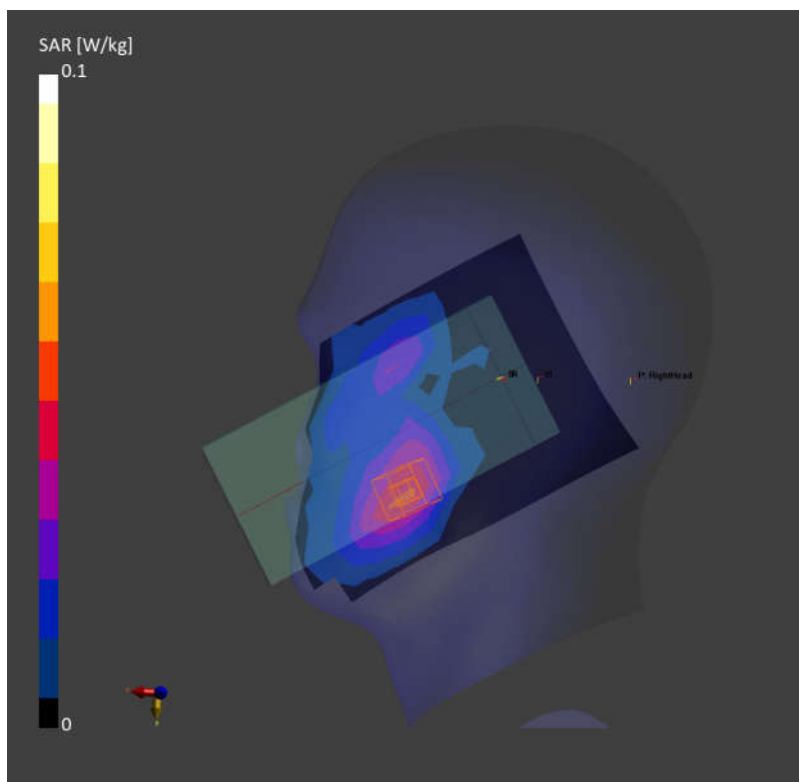

Date: 2024-07-27

**11\_WCDMA II\_RMC 12.2Kbps\_Right Cheek\_0mm\_Ch9400**

Communication System: UMTS-FDD (WCDMA); Frequency: 1880.000 MHz; Duty Cycle: 1:1  
Medium: Head Simulating Liquid Medium parameters used:  $f = 1880.000$  MHz;  $\sigma = 1.38$  S/m;  $\epsilon_r = 41.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7764; ConvF(8.46, 8.46, 8.46); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.112 W/kg; SAR (10g) = 0.066 W/kg;


**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.10 dB

SAR (1g) = 0.118 W/kg; SAR (10g) = 0.080 W/kg

Smallest distance from peaks to all points 3 dB below = 13.2 mm

Ratio of SAR at M2 to SAR at M1 = 91.0 %

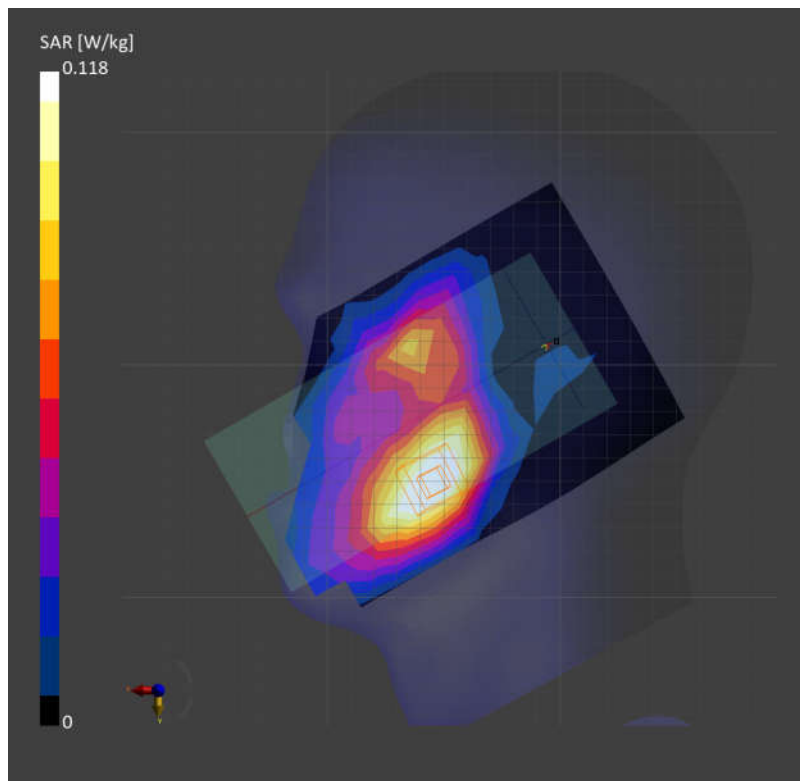

Date: 2024-07-27

**12\_LTE Band 25\_20M\_QPSK\_1RB\_0Offset\_Right Cheek\_0mm\_Ch26340**

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 1880.000 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used:  $f = 1880.000$  MHz;  $\sigma = 1.44$  S/m;  $\epsilon_r = 40.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7764; ConvF(8.46, 8.46, 8.46); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.731 W/kg; SAR (10g) = 0.407 W/kg;


**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.761 W/kg; SAR (10g) = 0.444 W/kg

Smallest distance from peaks to all points 3 dB below = 11.9 mm

Ratio of SAR at M2 to SAR at M1 = 87.7 %

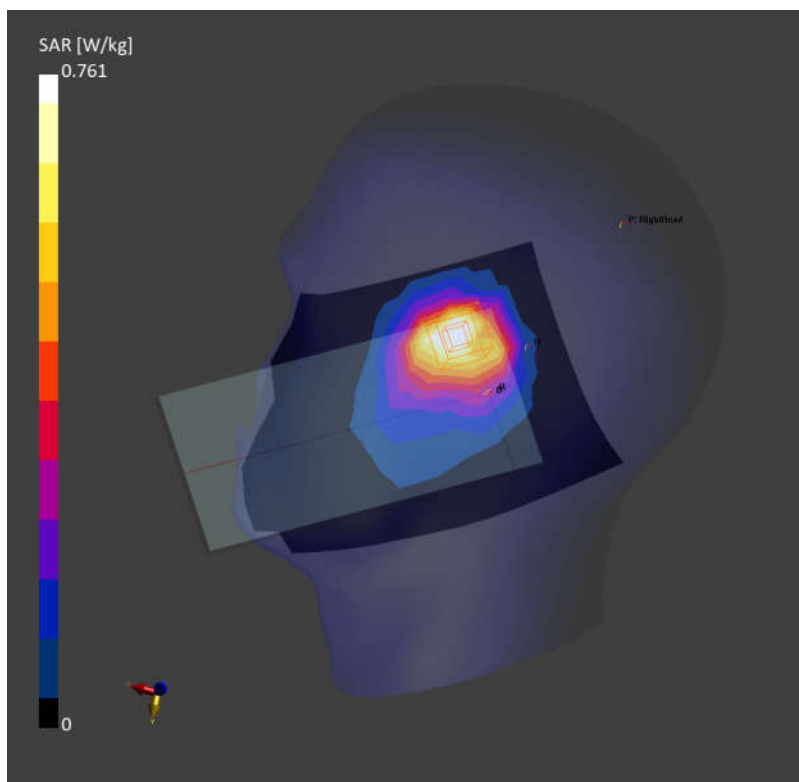

Date: 2024-07-27

**13\_FR1 n2\_20M\_QPSK\_50RB\_28Offset\_Right Cheek\_0mm\_Ch380000**

Communication System: 5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)

AntennaCfg:SISO; Frequency: 1900.000 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used:  $f = 1900.000$  MHz;  $\sigma = 1.46$  S/m;  $\epsilon_r = 39.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7764; ConvF(8.46, 8.46, 8.46); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.598 W/kg; SAR (10g) = 0.335 W/kg;


**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.701 W/kg; SAR (10g) = 0.411 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 88.3 %

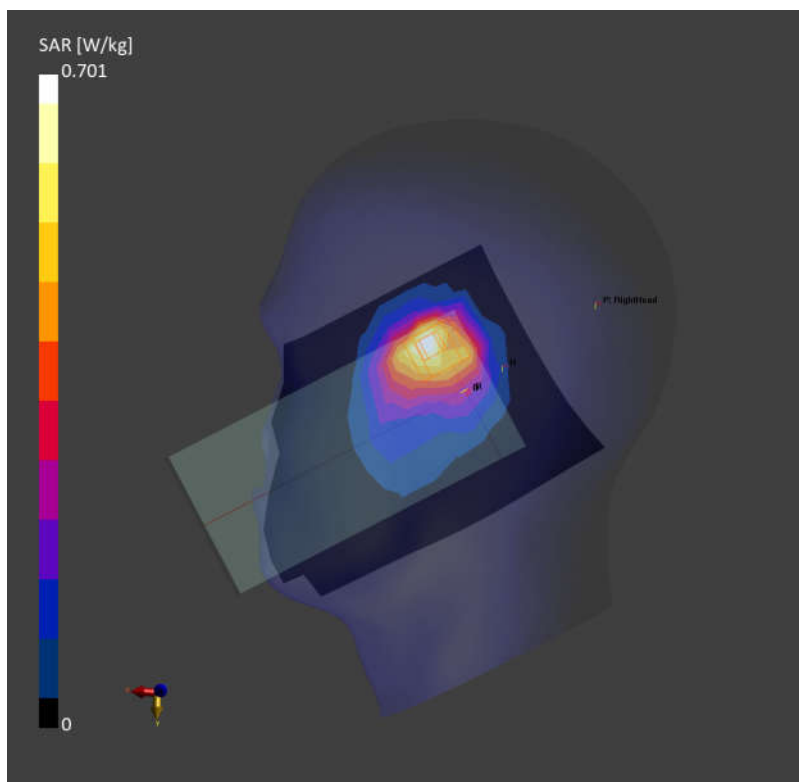

Date: 2024-07-28

**14\_LTE Band 7\_20M\_QPSK\_1RB\_0Offset\_Right Tilted\_0mm\_Ch20850**

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 2510.000 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used:  $f = 2510.000$  MHz;  $\sigma = 1.87$  S/m;  $\epsilon_r = 39.1$ 

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7764; ConvF(8.02, 8.02, 8.02); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

**Area Scan (120.0 mm x 192.0 mm):** Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.714 W/kg; SAR (10g) = 0.306 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.723 W/kg; SAR (10g) = 0.312 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 80.2 %

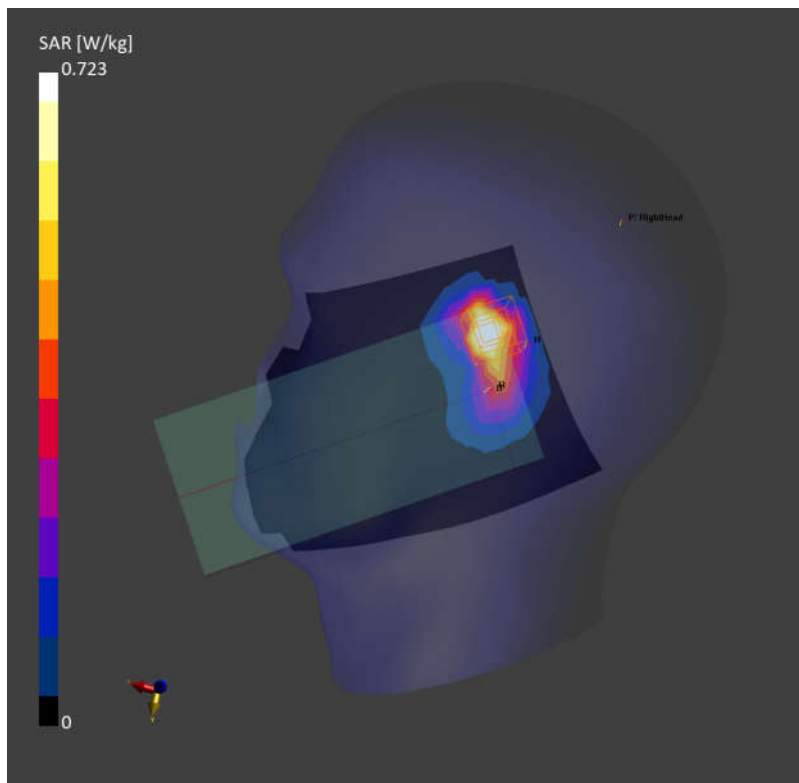

Date: 2024-07-28

**15\_LTE Band 41\_20M\_QPSK\_1RB\_0Offset\_Right Tilted\_0mm\_Ch39750**

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 2506.000 MHz; Duty Cycle: 1:1.59

Medium: Head Simulating Liquid Medium parameters used:  $f = 2506.000$  MHz;  $\sigma = 1.86$  S/m;  $\epsilon_r = 39.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.02, 8.02, 8.02); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

**Area Scan (120.0 mm x 192.0 mm):** Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.724 W/kg; SAR (10g) = 0.307 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.702 W/kg; SAR (10g) = 0.318 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 78.8 %

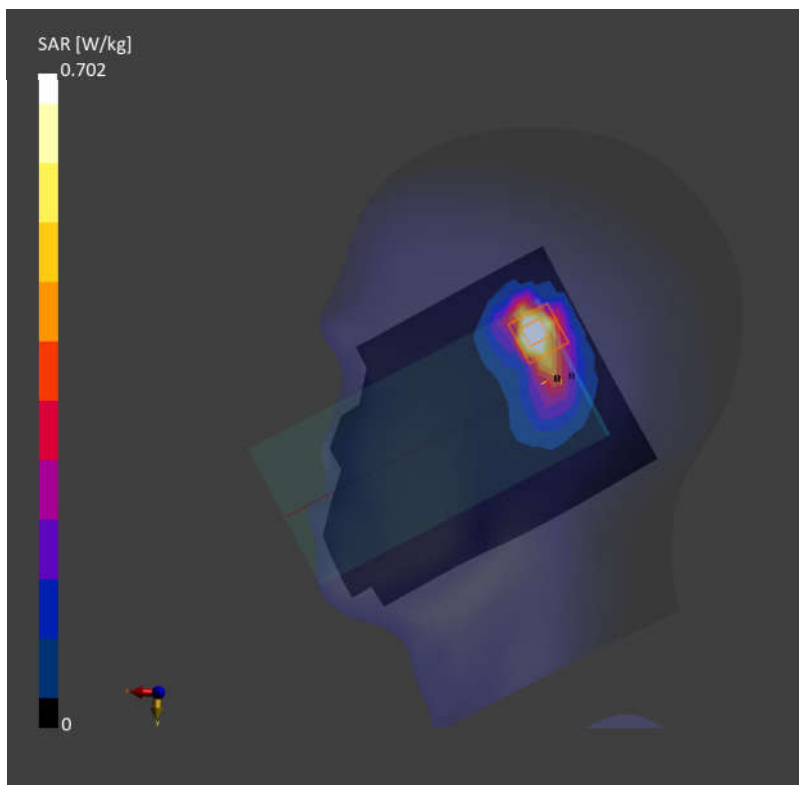

Date: 2024-07-28

**16\_FR1 n7\_40M\_QPSK\_216RB\_0Offset\_Right Tilted\_0mm\_Ch507000**

Communication System: 5G NR (DFT-s-OFDM, 100% RB, 40 MHz, QPSK, 15 kHz)

AntennaCfg:SISO; Frequency: 2535.000 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used:  $f = 2535.000$  MHz;  $\sigma = 1.90$  S/m;  $\epsilon_r = 39.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7764; ConvF(8.02, 8.02, 8.02); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10950-AAC

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 12.0 mm x 12.0 mm

SAR (1g) = 0.655 W/kg; SAR (10g) = 0.302 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.731 W/kg; SAR (10g) = 0.316 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 79.6 %

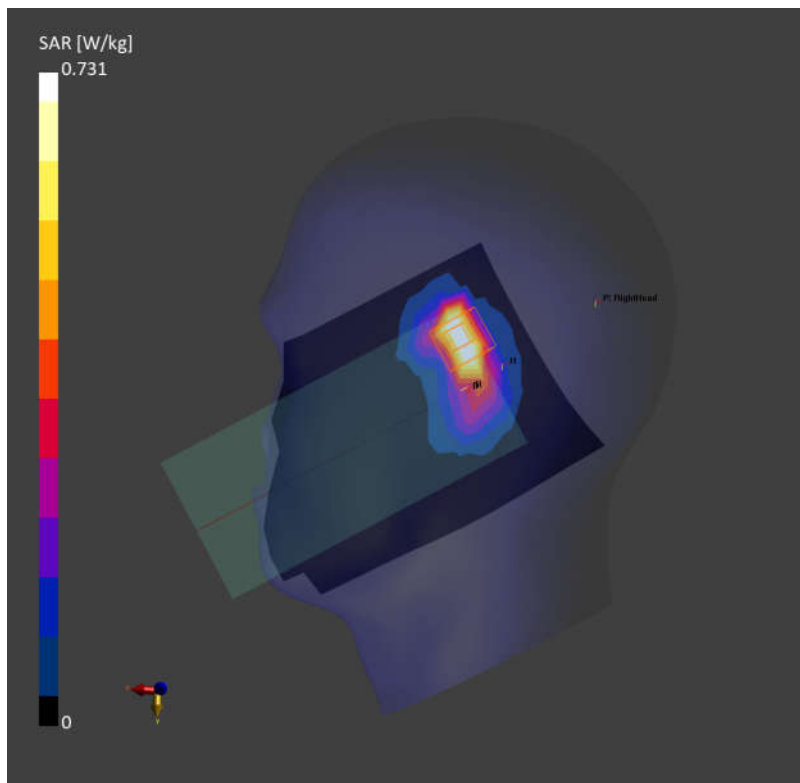

Date: 2024-07-30

**17\_LTE Band 42\_20M\_QPSK\_1RB\_0Offset\_Left Tilted\_0mm\_Ch42590**

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 3500.000 MHz; Duty Cycle: 1:1.59

Medium: Head Simulating Liquid Medium parameters used:  $f = 3500.000$  MHz;  $\sigma = 2.85$  S/m;  $\epsilon_r = 38.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7764; ConvF(7.11, 7.11, 7.11); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

**Area Scan (120.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.637 W/kg; SAR (10g) = 0.289 W/kg;


**Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 0.668 W/kg; SAR (10g) = 0.301 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 79.0 %

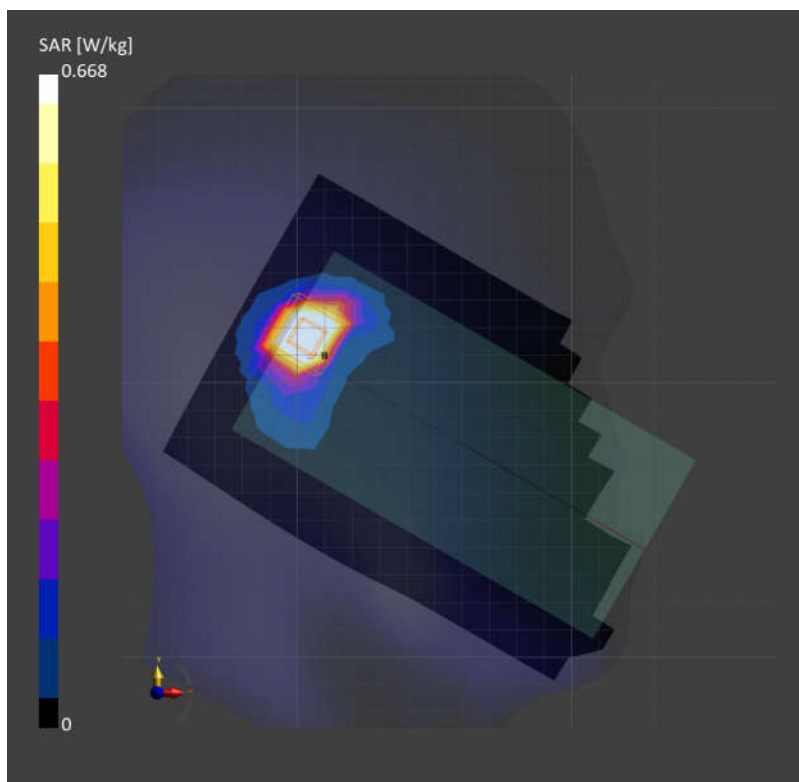

Date: 2024-07-30

**18\_FR1 n78\_100M\_QPSK\_135RB\_69Offset\_Left Cheek\_0mm\_Ch633334**

Communication System: 5G NR (DFT-s-OFDM, 50% RB, 100 MHz, QPSK, 30 kHz)

AntennaCfg:SISO; Frequency: 3500.010 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used:  $f = 3500.010$  MHz;  $\sigma = 2.79$  S/m;  $\epsilon_r = 39.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7764; ConvF(7.11, 7.11, 7.11); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

**Area Scan (120.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.636 W/kg; SAR (10g) = 0.253 W/kg;


**Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.04 dB

SAR (1g) = 0.697 W/kg; SAR (10g) = 0.262 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 78.5 %

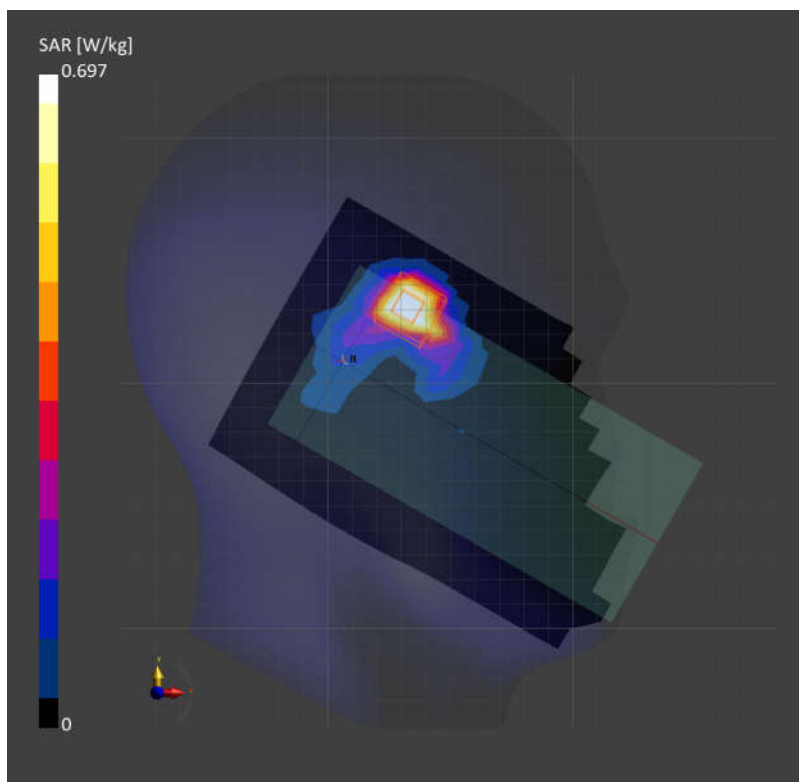

Date: 2024-08-11

**19\_WLAN2.4GHz\_802.11b 1Mbps\_Left Cheek\_0mm\_Ch6**

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps)

Frequency: 2437.000 MHz; Duty Cycle: 1:1.147

Medium: HSL Medium parameters used:  $f = 2437.000$  MHz;  $\sigma = 1.73$  S/m;  $\epsilon_r = 39.4$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.03, 8.03, 8.03); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB

**Area Scan (120.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.720 W/kg; SAR (10g) = 0.335 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.803 W/kg; SAR (10g) = 0.386 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 88.6 %

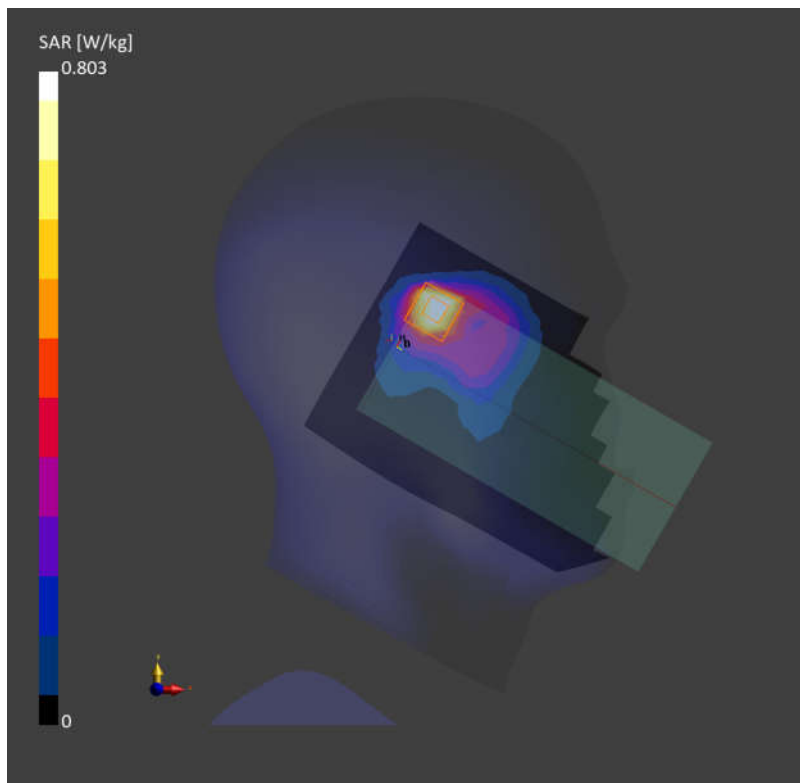

Date: 2024-08-11

**20\_Bluetooth\_1Mbps\_Left Cheek\_0mm\_Ch78**

Communication System: IEEE 802.15.1 Bluetooth (GFSK, DH5)

Frequency: 2480.000 MHz; DutyCycle: 1:1.303

Medium: HSL Medium parameters used:  $f = 2480.000$  MHz;  $\sigma = 1.73$  S/m;  $\epsilon_r = 39.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.03, 8.03, 8.03); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

**Area Scan (120.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.179 W/kg; SAR (10g) = 0.104 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.184 W/kg; SAR (10g) = 0.106 W/kg

Smallest distance from peaks to all points 3 dB below = 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 88.9 %

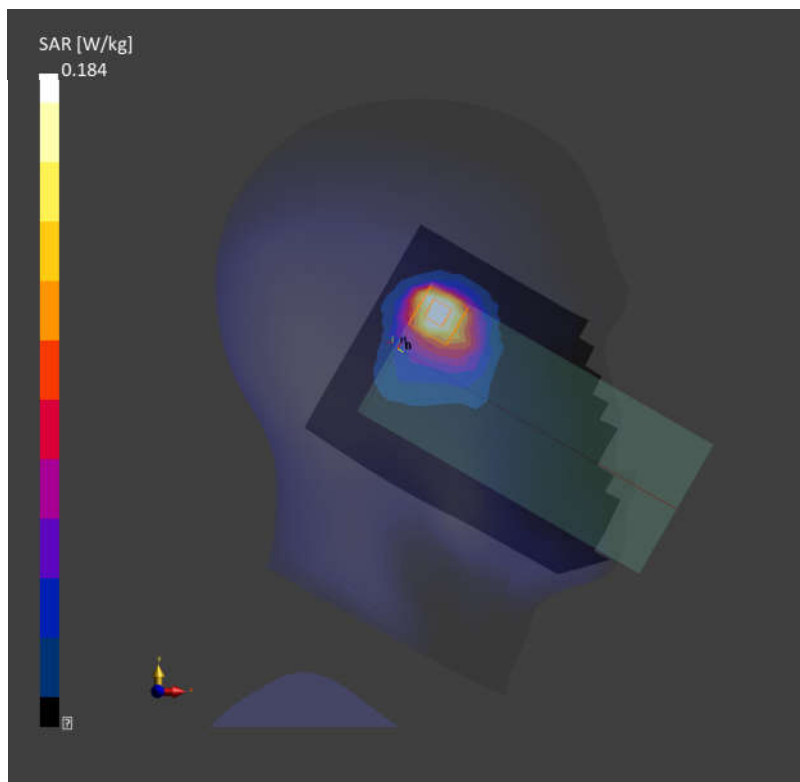

Date: 2024-08-12

**21\_WLAN5GHz\_802.11n-HT40 MCS0\_Left Cheek\_0mm\_Ch54**


Communication System: IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle)  
Frequency: 5270.000 MHz; Duty Cycle: 1:1.161  
Medium: HSL Medium parameters used:  $f = 5270.000$  MHz;  $\sigma = 4.64$  S/m;  $\epsilon_r = 35.6$   
Ambient Temperature: 23.1°C; Liquid Temperature: 22.5°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7764; ConvF(5.73, 5.73, 5.73); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

**Area Scan (120.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm  
SAR (1g) = 0.561 W/kg; SAR (10g) = 0.186 W/kg;

**Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm  
Power Drift = -0.07 dB  
SAR (1g) = 0.592 W/kg; SAR (10g) = 0.194 W/kg  
Smallest distance from peaks to all points 3 dB below = 5.8 mm  
Ratio of SAR at M2 to SAR at M1 = 62.2 %

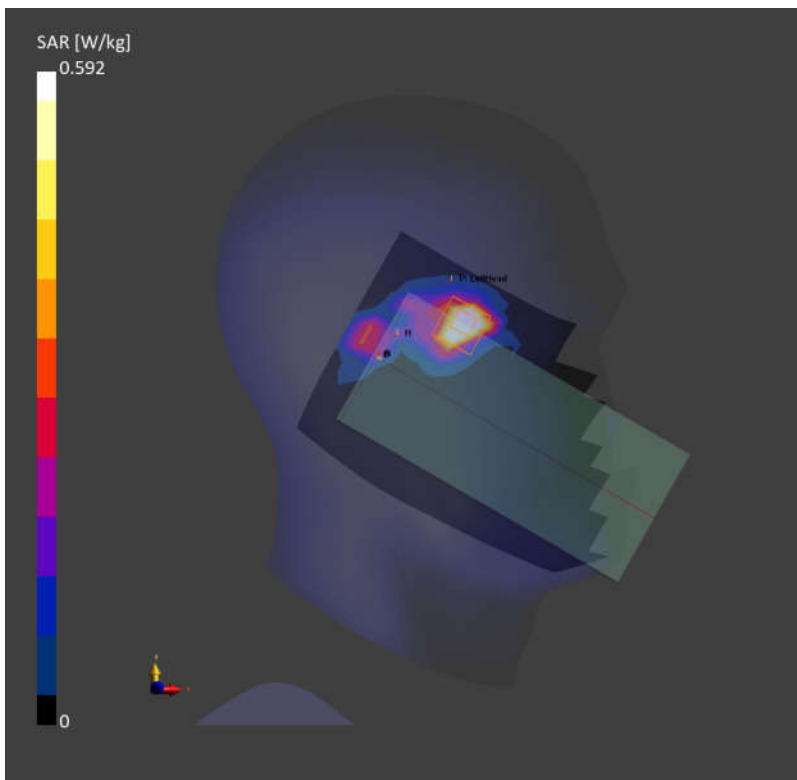

Date: 2024-08-12

**22\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Left Tilted\_0mm\_Ch138**

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)

Frequency: 5690.000 MHz; Duty Cycle: 1:1.17

Medium: HSL Medium parameters used:  $f = 5690.000$  MHz;  $\sigma = 4.91$  S/m;  $\epsilon_r = 35.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7764; ConvF(5.1, 5.1, 5.1); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

**Area Scan (120.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.543 W/kg; SAR (10g) = 0.177 W/kg;


**Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 0.670 W/kg; SAR (10g) = 0.196 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 60.4 %

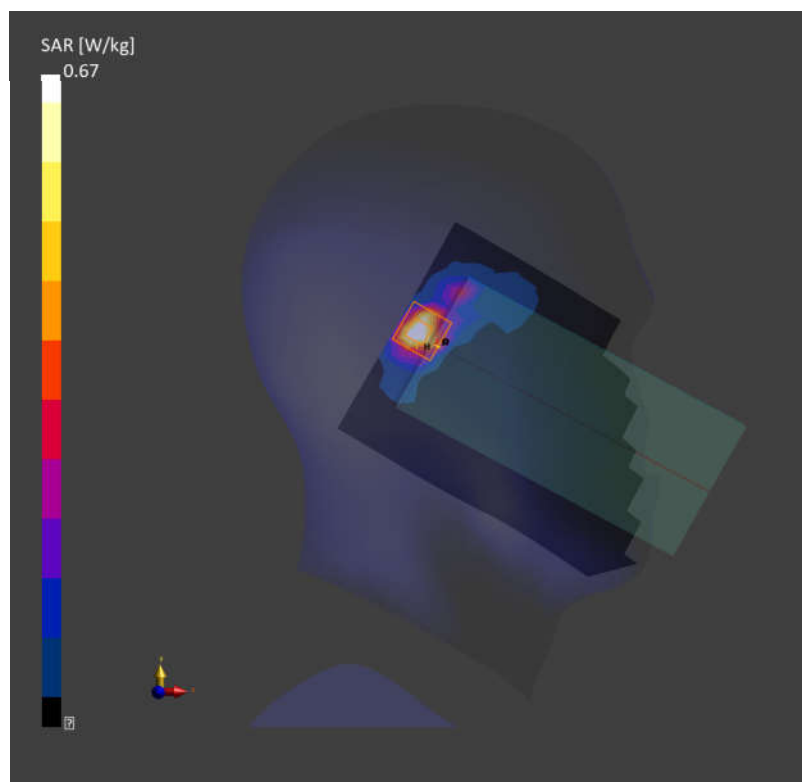

Date: 2024-08-12

**23\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Right Tilted\_0mm\_Ch155**

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)

Frequency: 5775.000 MHz; Duty Cycle: 1:1.17

Medium: HSL Medium parameters used:  $f = 5775.000$  MHz;  $\sigma = 5.16$  S/m;  $\epsilon_r = 34.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7764; ConvF(5.32, 5.32, 5.32); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

**Area Scan (120.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.607 W/kg; SAR (10g) = 0.225 W/kg;


**Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.17 dB

SAR (1g) = 0.668 W/kg; SAR (10g) = 0.226 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 66.2 %

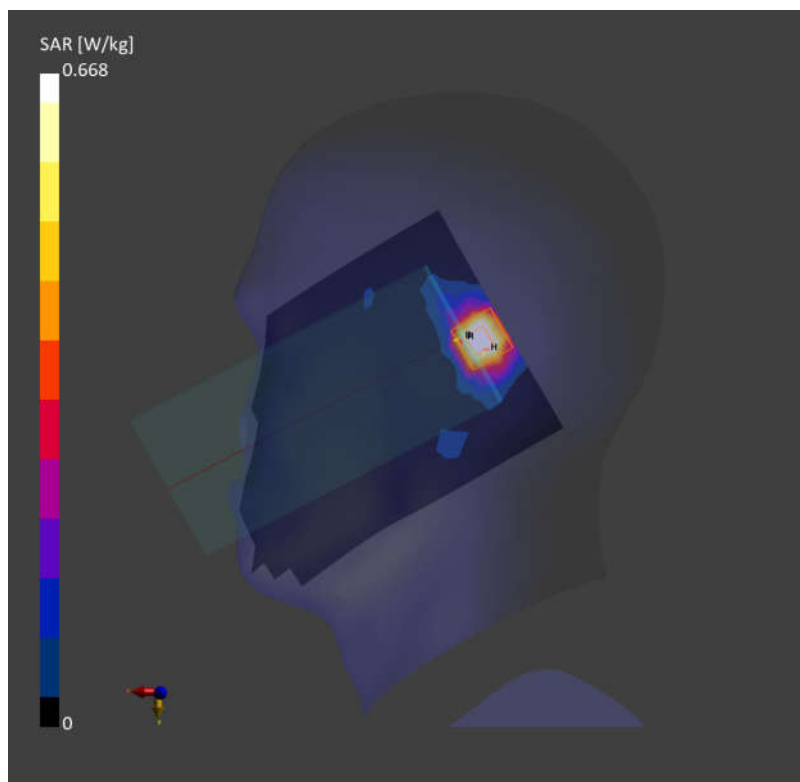

Date: 2024-08-01

**24\_LTE Band 12\_10M\_QPSK\_1RB\_0Offset\_Back\_5mm\_Ch23095**

Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)

AntennaCfg:SISO; Frequency: 707.500 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used:  $f = 707.500$  MHz;  $\sigma = 0.832$  S/m;  $\epsilon_r = 41.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.19, 10.19, 10.19); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.756 W/kg; SAR (10g) = 0.509 W/kg;


**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.13 dB

SAR (1g) = 0.736 W/kg; SAR (10g) = 0.391 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 71.1 %

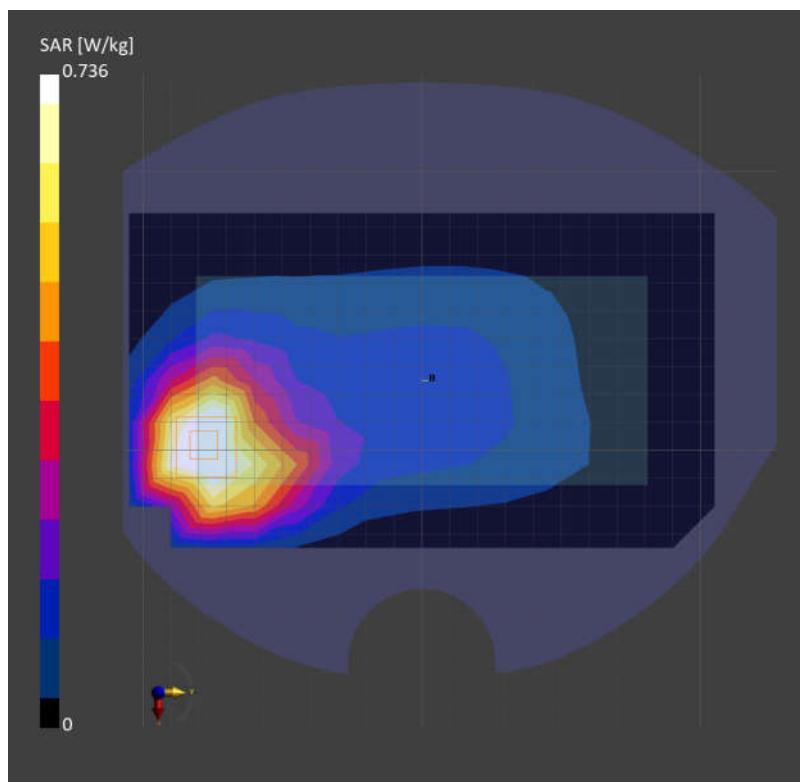

Date: 2024-08-01

**25\_LTE Band 13\_10M\_QPSK\_1RB\_0Offset\_Back\_5mm\_Ch23230**

Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)

AntennaCfg:SISO; Frequency: 782.000 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used:  $f = 782.000$  MHz;  $\sigma = 0.900$  S/m;  $\epsilon_r = 40.8$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.19, 10.19, 10.19); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.891 W/kg; SAR (10g) = 0.588 W/kg;


**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.14 dB

SAR (1g) = 0.871 W/kg; SAR (10g) = 0.479 W/kg

Smallest distance from peaks to all points 3 dB below = 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 73.6 %

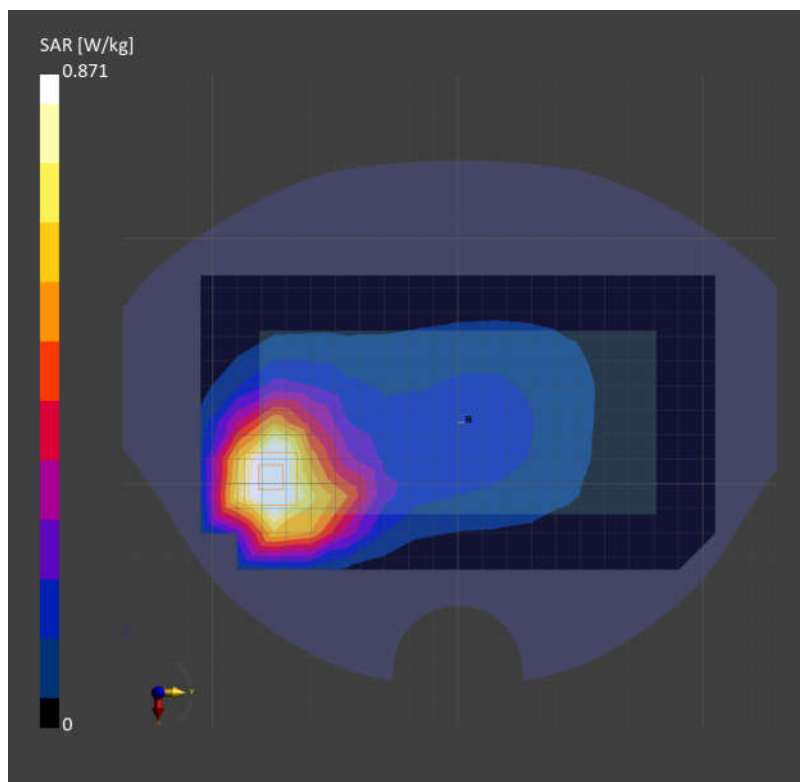

Date: 2024-08-03

**26\_GSM850\_GPRS (4 Tx slots)\_Back\_5mm\_Ch189**

Communication System: GPRS-FDD (TDMA, GMSK, TN 0); Frequency: 836.400 MHz; Duty Cycle: 1:2.08

Medium: Head Simulating Liquid Medium parameters used:  $f = 836.400$  MHz;  $\sigma = 0.921$  S/m;  $\epsilon_r = 40.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7764; ConvF(9.78, 9.78, 9.78); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10023-DAC

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.903 W/kg; SAR (10g) = 0.578 W/kg;


**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.08 dB

SAR (1g) = 0.824 W/kg; SAR (10g) = 0.461 W/kg

Smallest distance from peaks to all points 3 dB below = 11.9 mm

Ratio of SAR at M2 to SAR at M1 = 78.5 %

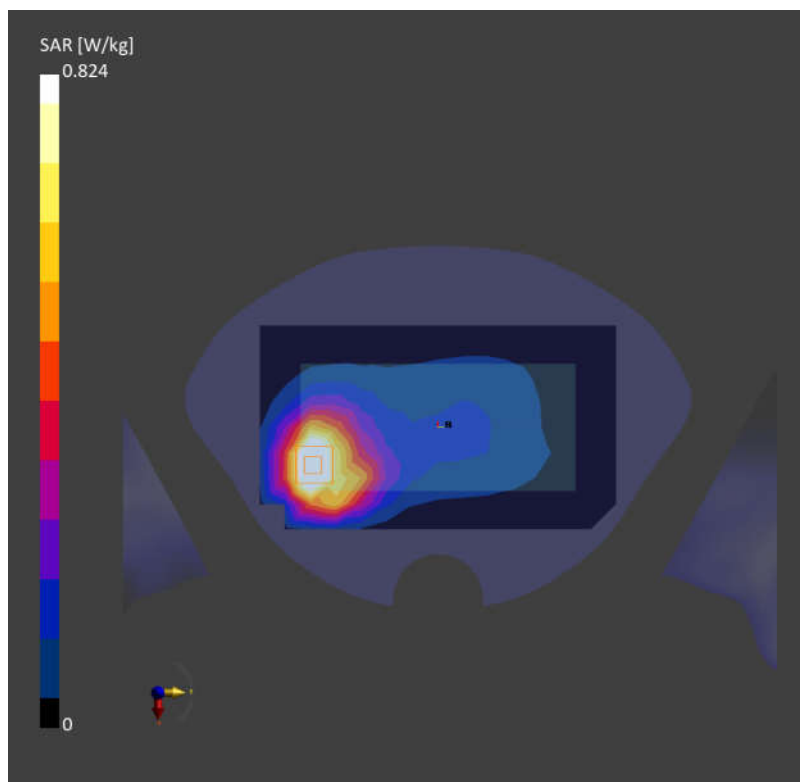

Date: 2024-08-03

**27\_WCDMA V\_RMC 12.2Kbps\_Back\_5mm\_Ch4233**

Communication System: UMTS-FDD (WCDMA); Frequency: 846.600 MHz; Duty Cycle: 1:1  
Medium: Head Simulating Liquid Medium parameters used:  $f = 846.600$  MHz;  $\sigma = 0.931$  S/m;  $\epsilon_r = 40.4$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7764; ConvF(9.78, 9.78, 9.78); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.667 W/kg;


**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.09 dB

SAR (1g) = 1.02 W/kg; SAR (10g) = 0.628 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 78.8 %

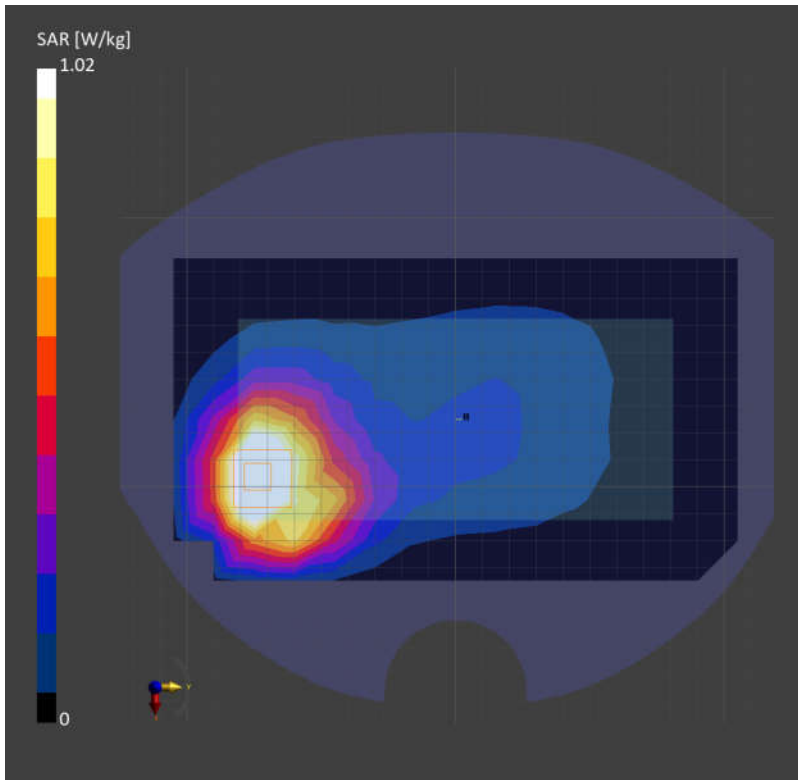

Date: 2024-08-03

**28\_LTE Band 26\_15M\_QPSK\_1RB\_0Offset\_Back\_5mm\_Ch26865**

Communication System: LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)

AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used:  $f = 831.500$  MHz;  $\sigma = 0.975$  S/m;  $\epsilon_r = 40.4$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7764; ConvF(9.78, 9.78, 9.78); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.978 W/kg; SAR (10g) = 0.626 W/kg;


**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.06 dB

SAR (1g) = 0.971 W/kg; SAR (10g) = 0.540 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 72.8 %

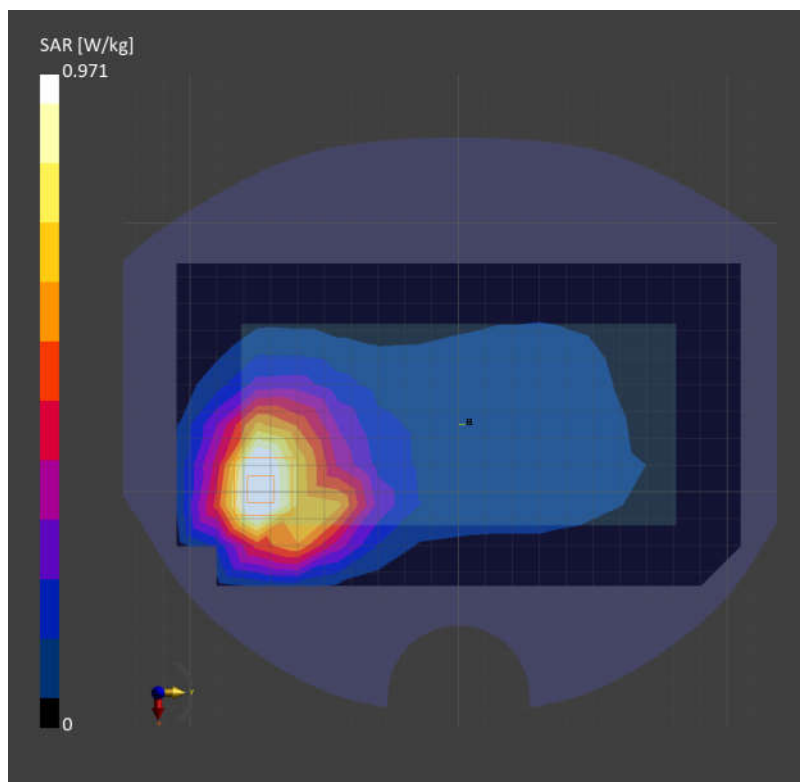

Date: 2024-08-03

**29\_FR1 n26\_20M\_QPSK\_50RB\_28Offset\_Back\_5mm\_Ch166300**

Communication System: 5G NR (DFT-s-OFDM, 50% RB, 20 MHz, QPSK, 15 kHz)

AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used:  $f = 831.500$  MHz;  $\sigma = 0.916$  S/m;  $\epsilon_r = 40.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7764; ConvF(9.78, 9.78, 9.78); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10947-AAC

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.794 W/kg; SAR (10g) = 0.519 W/kg;


**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.19 dB

SAR (1g) = 0.790 W/kg; SAR (10g) = 0.442 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 76.9 %

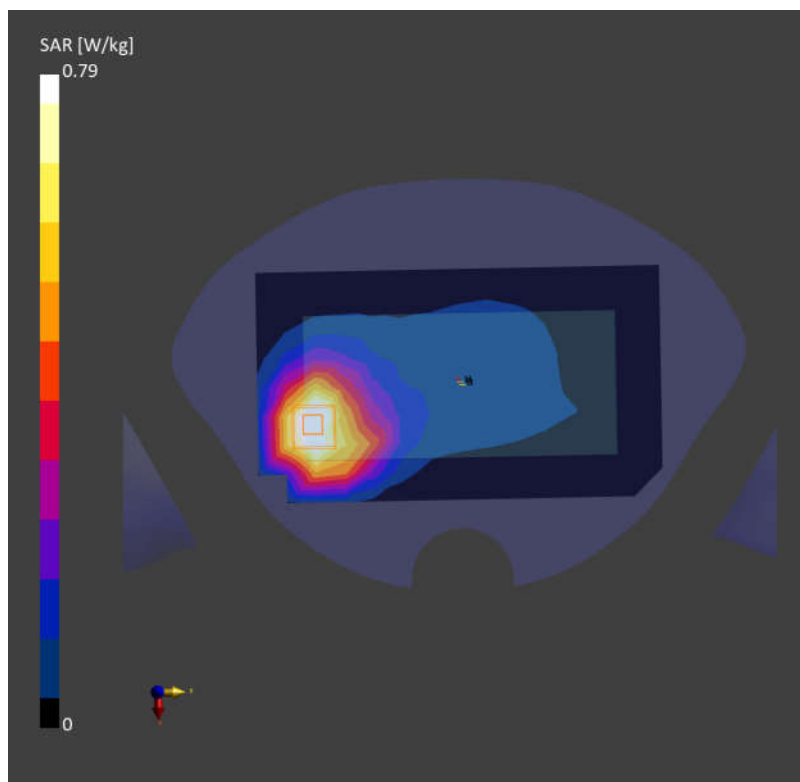

Date: 2024-08-05

**30\_WCDMA IV\_RMC 12.2Kbps\_Bottom Side\_5mm\_Ch1312**

Communication System: UMTS-FDD (WCDMA); Frequency: 1712.400 MHz; Duty Cycle: 1:1  
Medium: Head Simulating Liquid Medium parameters used:  $f = 1712.400$  MHz;  $\sigma = 1.37$  S/m;  $\epsilon_r = 38.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.9°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7764; ConvF(8.78, 8.78, 8.78); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

**Area Scan (48.0 mm x 120.0 mm):** Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 1.03 W/kg; SAR (10g) = 0.574 W/kg;


**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.15 dB

SAR (1g) = 1.05 W/kg; SAR (10g) = 0.584 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 80.4 %

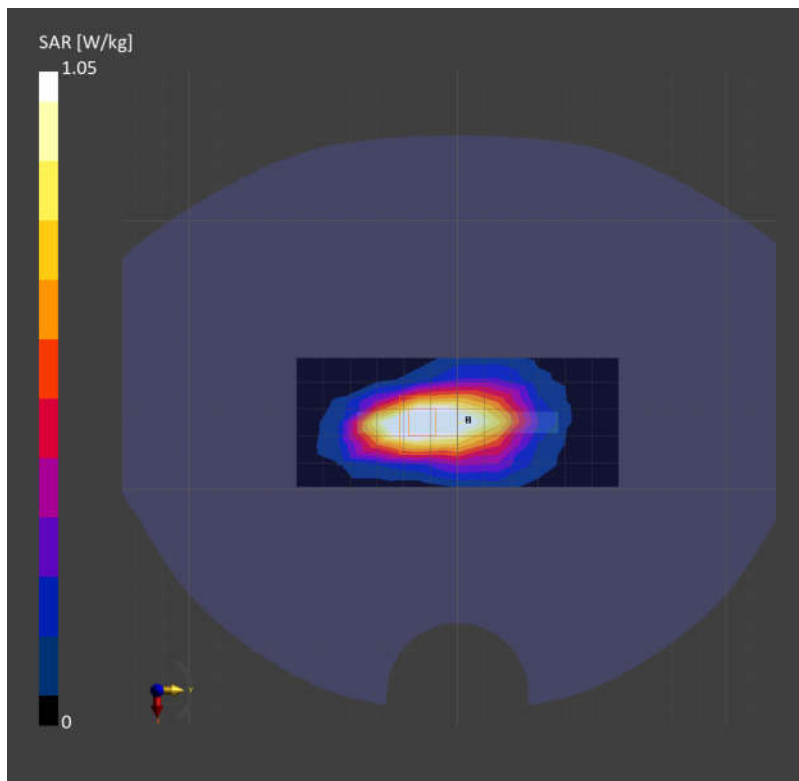

Date: 2024-08-05

**31\_LTE Band 66\_20M\_QPSK\_1RB\_0Offset\_Bottom Side\_5mm\_Ch132072**

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 1720.000 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used:  $f = 1720.000$  MHz;  $\sigma = 1.37$  S/m;  $\epsilon_r = 38.5$ 

Ambient Temperature: 23.4°C; Liquid Temperature: 22.9°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7764; ConvF(8.78, 8.78, 8.78); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

**Area Scan (48.0 mm x 120.0 mm):** Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.998 W/kg; SAR (10g) = 0.501 W/kg;


**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 1.02 W/kg; SAR (10g) = 0.509 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 81.1 %

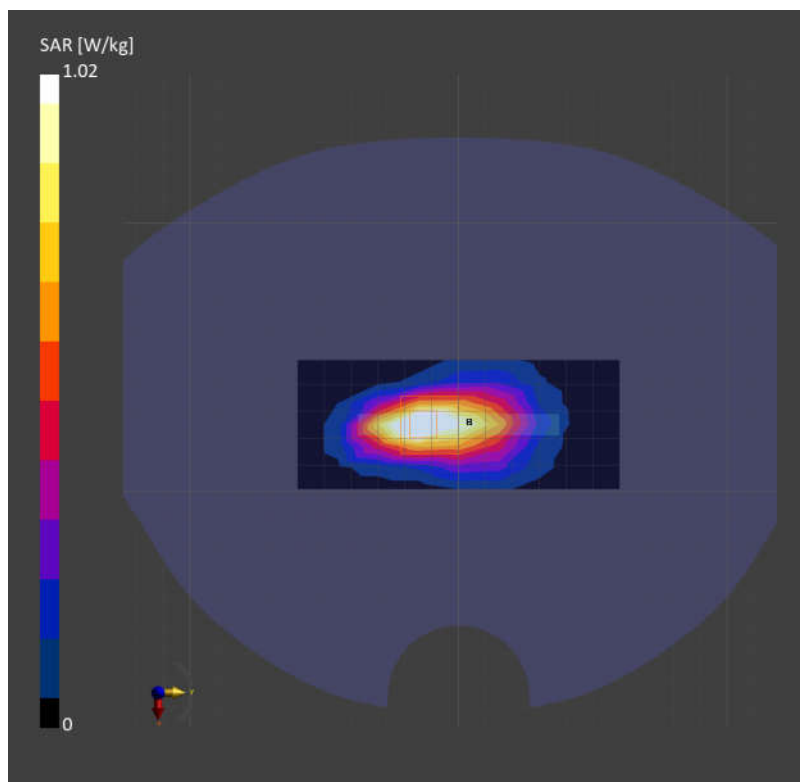

Date: 2024-08-05

**32\_FR1 n66\_40M\_QPSK\_1RB\_1Offset\_Bottom Side\_5mm\_Ch349000**

Communication System: 5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 15 kHz)

AntennaCfg:SISO; Frequency: 1745.000 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used:  $f = 1745.000$  MHz;  $\sigma = 1.39$  S/m;  $\epsilon_r = 38.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.9°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7764; ConvF(8.78, 8.78, 8.78); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10942-AAC

**Area Scan (48.0 mm x 120.0 mm):** Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 1.00 W/kg; SAR (10g) = 0.528 W/kg;


**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 1.07 W/kg; SAR (10g) = 0.544 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 81.8 %

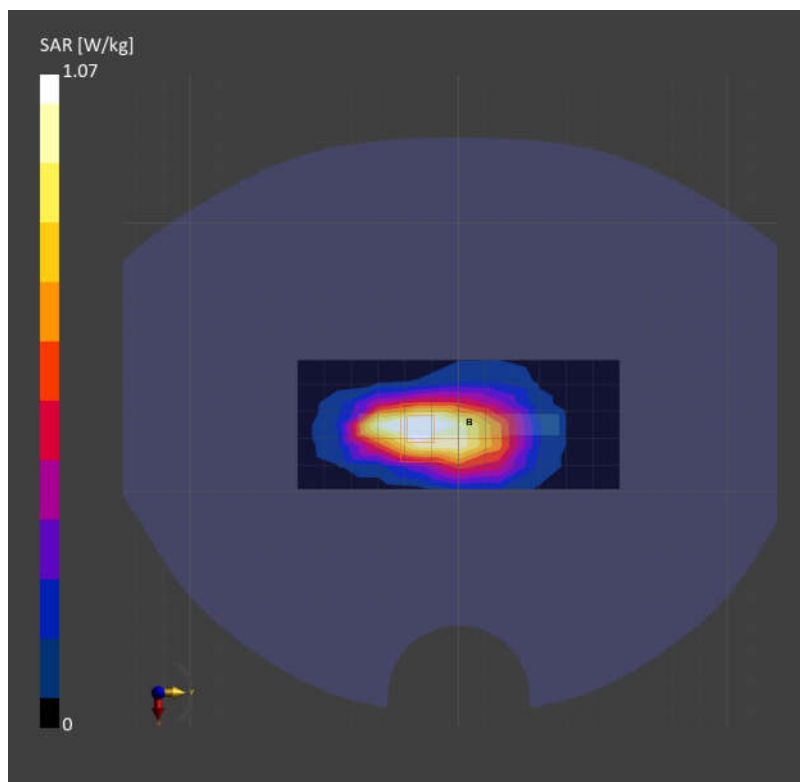

Date: 2024-08-06

**33\_GSM1900\_GPRS (1 Tx slots)\_Back\_5mm\_Ch810**

Communication System: GPRS-FDD (TDMA, GMSK, TN 0); Frequency: 1909.800 MHz; Duty Cycle: 1:8.3

Medium: Head Simulating Liquid Medium parameters used:  $f = 1909.800$  MHz;  $\sigma = 1.46$  S/m;  $\epsilon_r = 39.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.46, 8.46, 8.46); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10023-DAC

**Area Scan (120.0 mm x 210.0 mm):** Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.659 W/kg; SAR (10g) = 0.387 W/kg;


**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.16 dB

SAR (1g) = 0.748 W/kg; SAR (10g) = 0.425 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 83.7 %

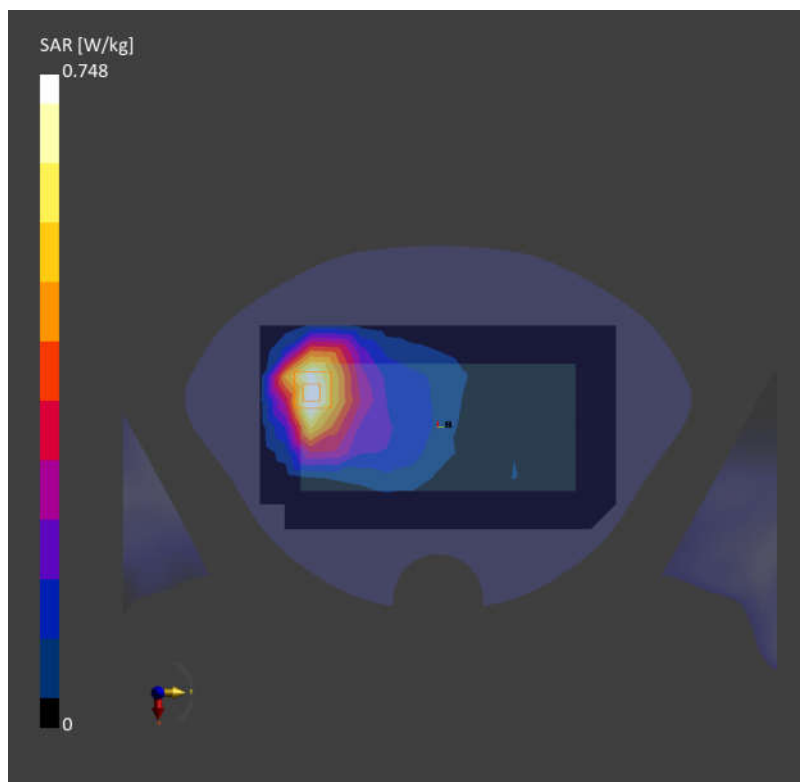

Date: 2024-08-06

**34\_WCDMA II\_RMC 12.2Kbps\_Bottom Side\_5mm\_Ch9538**

Communication System: UMTS-FDD (WCDMA); Frequency: 1907.600 MHz; Duty Cycle: 1:1  
Medium: Head Simulating Liquid Medium parameters used:  $f = 1907.600$  MHz;  $\sigma = 1.47$  S/m;  $\epsilon_r = 38.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7764; ConvF(8.46, 8.46, 8.46); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

**Area Scan (48.0 mm x 120.0 mm):** Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.888 W/kg; SAR (10g) = 0.426 W/kg;


**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.08 dB

SAR (1g) = 0.975 W/kg; SAR (10g) = 0.466 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 82.2 %

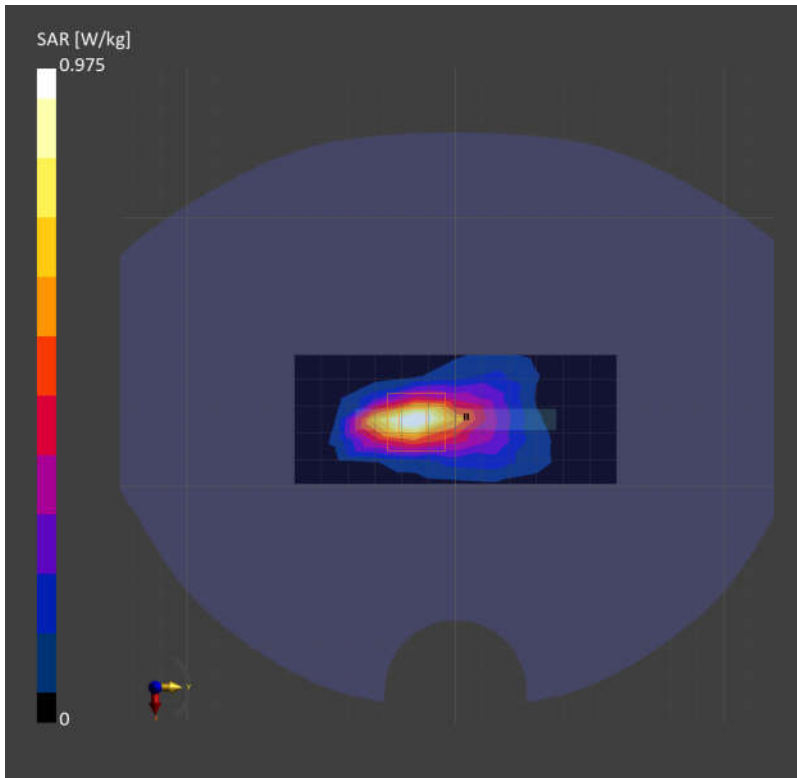

Date: 2024-08-06

**35\_LTE Band 25\_20M\_QPSK\_1RB\_0Offset\_Bottom Side\_5mm\_Ch26340**

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 1880.000 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used:  $f = 1880.000$  MHz;  $\sigma = 1.44$  S/m;  $\epsilon_r = 40.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.46, 8.46, 8.46); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

**Area Scan (48.0 mm x 120.0 mm):** Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.909 W/kg; SAR (10g) = 0.452 W/kg;


**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.08 dB

SAR (1g) = 0.955 W/kg; SAR (10g) = 0.457 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 81.2 %

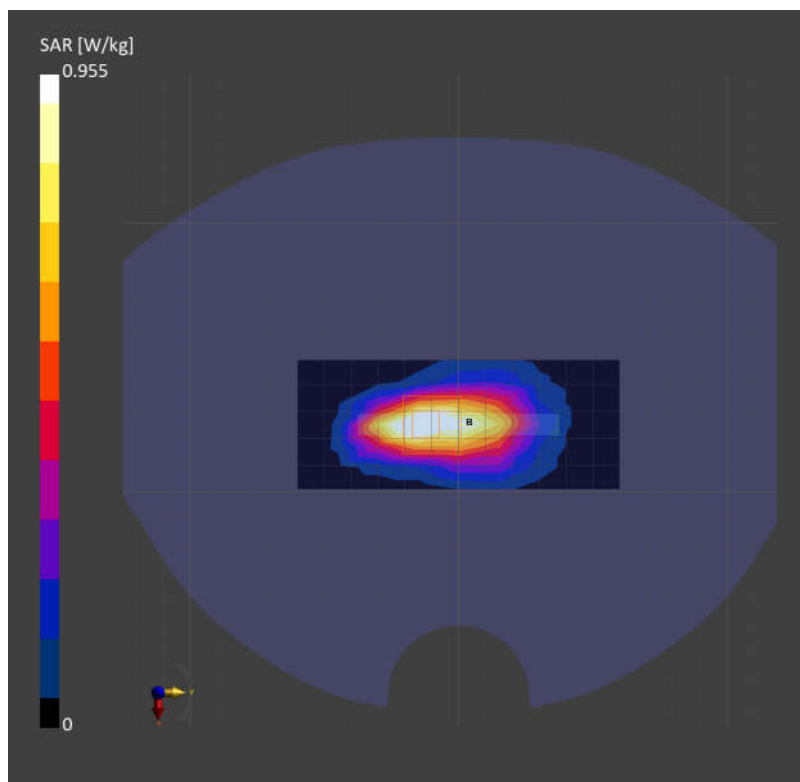

Date: 2024-08-06

**36\_FR1 n2\_20M\_QPSK\_1RB\_1Offset\_Bottom Side\_5mm\_Ch380000**

Communication System: 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)

AntennaCfg:SISO; Frequency: 1900.000 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used:  $f = 1900.000$  MHz;  $\sigma = 1.45$  S/m;  $\epsilon_r = 39.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7764; ConvF(8.46, 8.46, 8.46); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

**Area Scan (48.0 mm x 120.0 mm):** Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.859 W/kg; SAR (10g) = 0.377 W/kg;


**Zoom Scan (32.0 mm x 32.0 mm x 30.0 mm):** Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.06 dB

SAR (1g) = 0.921 W/kg; SAR (10g) = 0.380 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 75.7 %

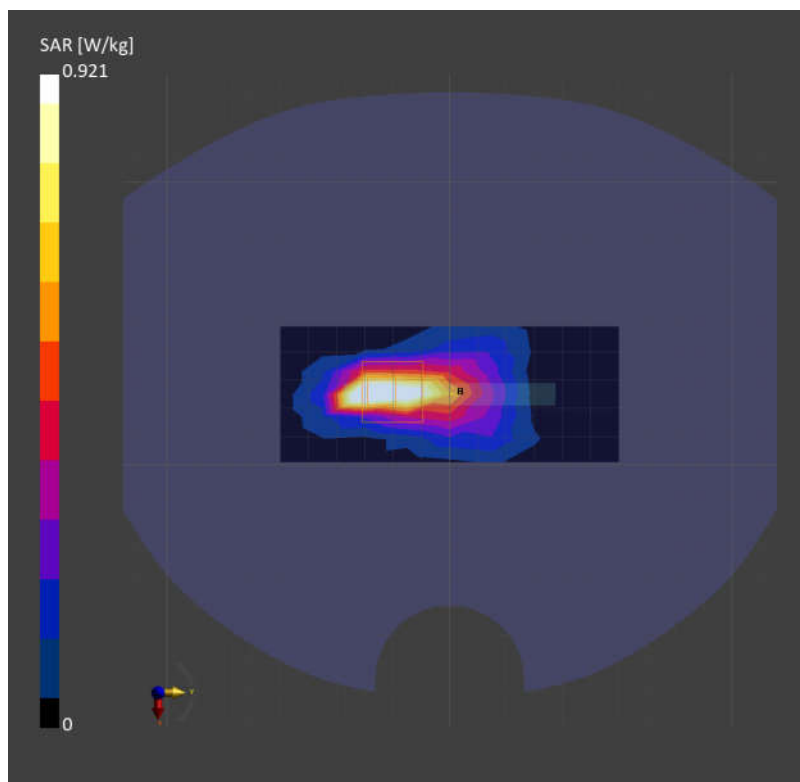

Date: 2024-08-08

**37\_LTE Band 7\_20M\_QPSK\_1RB\_0Offset\_Bottom Side\_5mm\_Ch21100**

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 2535.000 MHz; Duty Cycle: 1:1

Medium: Body Simulating Liquid Medium parameters used:  $f = 2535.000$  MHz;  $\sigma = 1.90$  S/m;  $\epsilon_r = 37.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.02, 8.02, 8.02); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

**Area Scan (48.0 mm x 120.0 mm):** Measurement Grid: 8.0 mm x 12.0 mm

SAR (1g) = 1.12 W/kg; SAR (10g) = 0.435 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 1.07 W/kg; SAR (10g) = 0.451 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 80.8 %

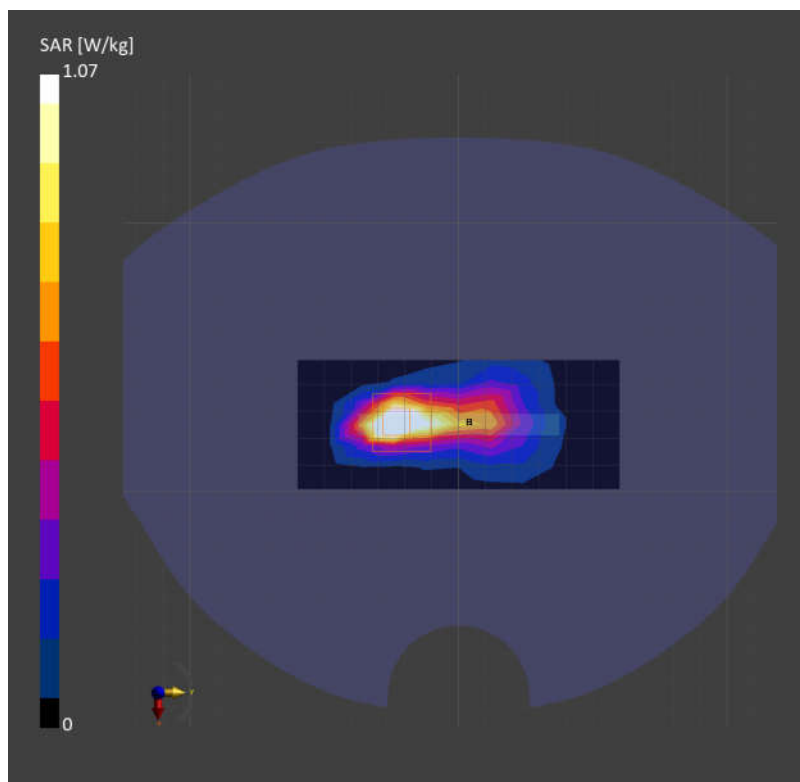

Date: 2024-08-08

**38\_LTE Band 41\_20M\_QPSK\_1RB\_0Offset\_Bottom Side\_5mm\_Ch41490**

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 2680.000 MHz; Duty Cycle: 1:1.59

Medium: Head Simulating Liquid Medium parameters used:  $f = 2680.000$  MHz;  $\sigma = 1.86$  S/m;  $\epsilon_r = 39.1$ 

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.02, 8.02, 8.02); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

**Area Scan (48.0 mm x 120.0 mm):** Measurement Grid: 8.0 mm x 12.0 mm

SAR (1g) = 1.07 W/kg; SAR (10g) = 0.437 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 1.07 W/kg; SAR (10g) = 0.440 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 76.1 %

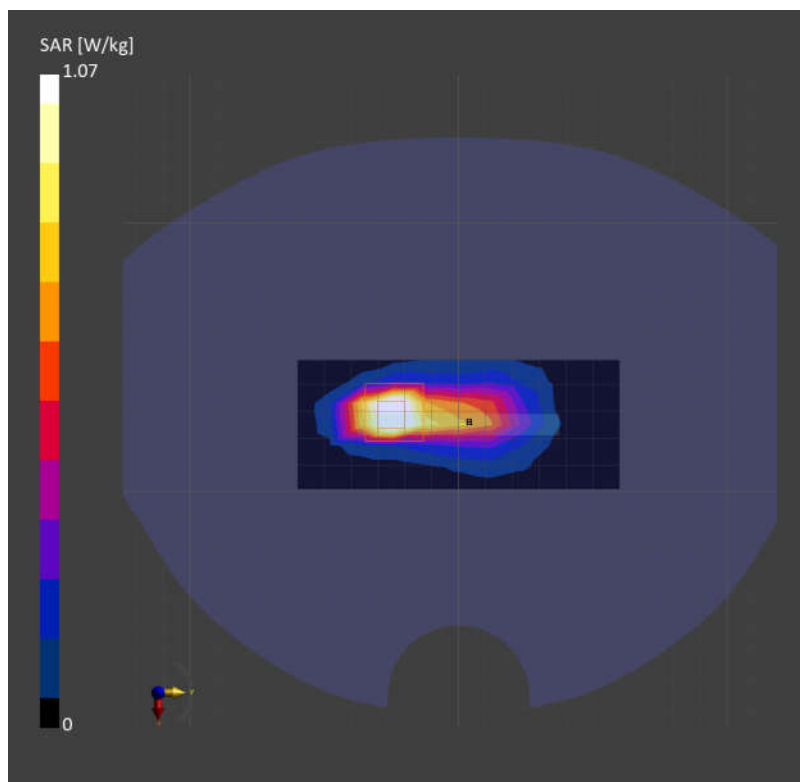

Date: 2024-08-08

**39\_FR1 n7\_40M\_QPSK\_108RB\_54Offset\_Bottom Side\_5mm\_Ch507000**

Communication System: 5G NR (DFT-s-OFDM, 50% RB, 40 MHz, QPSK, 15 kHz)

AntennaCfg:SISO; Frequency: 2535.000 MHz; Duty Cycle: 1:1

Medium: Body Simulating Liquid Medium parameters used:  $f = 2535.000$  MHz;  $\sigma = 1.90$  S/m;  $\epsilon_r = 37.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7764; ConvF(8.02, 8.02, 8.02); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10942-AAC

**Area Scan (48.0 mm x 120.0 mm):** Measurement Grid: 8.0 mm x 12.0 mm

SAR (1g) = 0.948 W/kg; SAR (10g) = 0.414 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.979 W/kg; SAR (10g) = 0.420 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 81.6 %

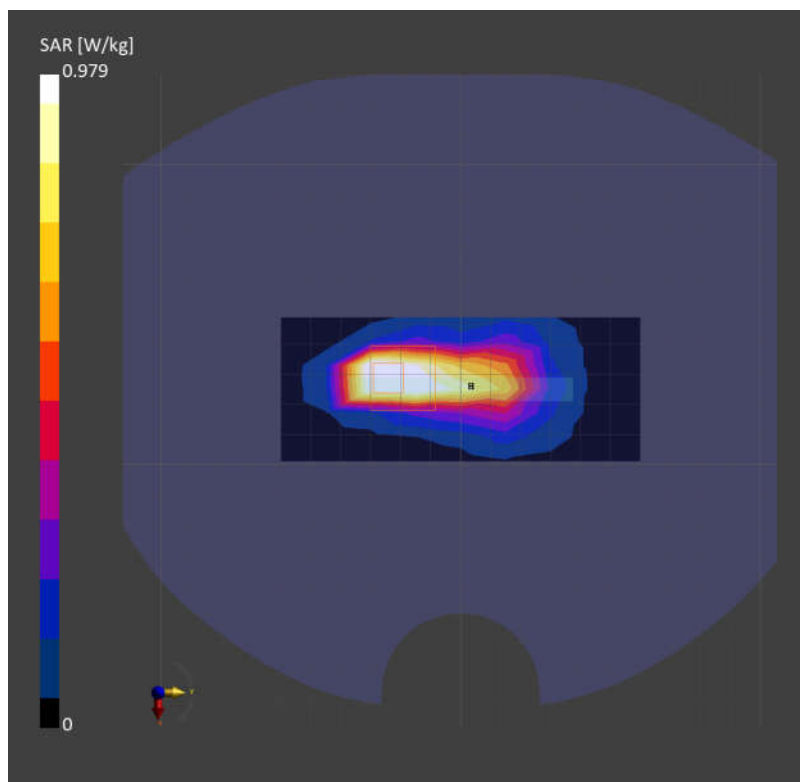

Date: 2024-08-09

**40\_LTE Band 42\_20M\_QPSK\_1RB\_0Offset\_Back\_5mm\_Ch42990**

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 3540.000 MHz; Duty Cycle: 1:1.59

Medium: Head Simulating Liquid Medium parameters used:  $f = 3540.000$  MHz;  $\sigma = 2.82$  S/m;  $\epsilon_r = 39.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7764; ConvF(7.11, 7.11, 7.11); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

**Area Scan (120.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.537 W/kg; SAR (10g) = 0.202 W/kg;


**Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.11 dB

SAR (1g) = 0.527 W/kg; SAR (10g) = 0.206 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 77.2 %

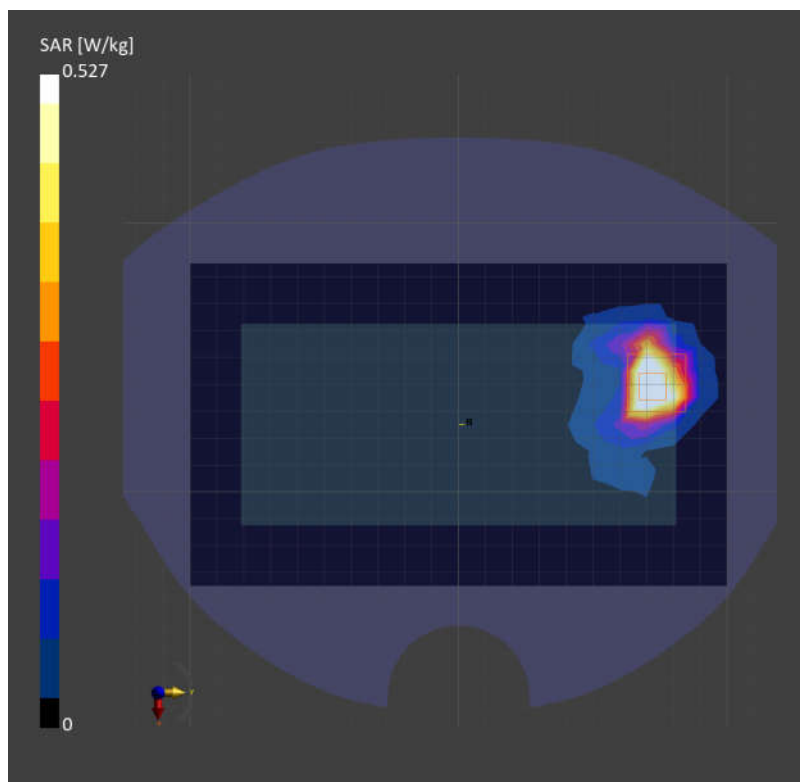

Date: 2024-08-09

**41\_FR1 n78\_100M\_QPSK\_1RB\_1Offset\_Right Side\_5mm\_Ch633334**

Communication System: 5G NR (CP-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)

AntennaCfg:SISO; Frequency: 3500.010 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used:  $f = 3500.010$  MHz;  $\sigma = 2.79$  S/m;  $\epsilon_r = 39.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7764; ConvF(7.11, 7.11, 7.11); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10803-AAF

**Area Scan (48.0 mm x 200.0 mm):** Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 1.07 W/kg; SAR (10g) = 0.399 W/kg;


**Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.05 dB

SAR (1g) = 1.04 W/kg; SAR (10g) = 0.384 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 76.5 %

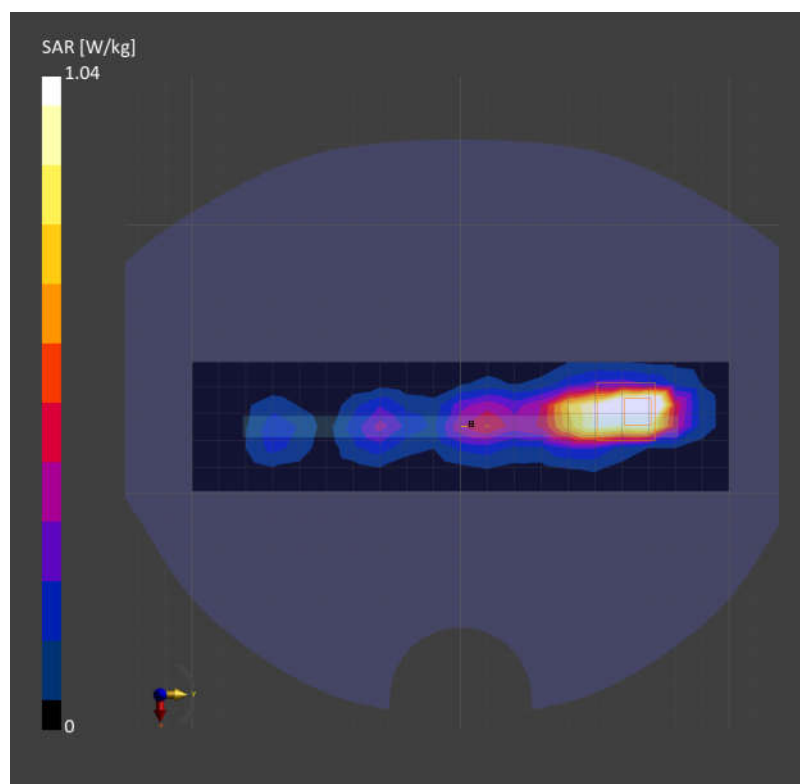

Date: 2024-08-11

**42\_WLAN2.4GHz\_802.11b 1Mbps\_Back\_5mm\_Ch11**

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps, 99pc duty cycle)

Frequency: 2462.000 MHz; Duty Cycle: 1:1.147

Medium: HSL Medium parameters used:  $f = 2462.000$  MHz;  $\sigma = 1.76$  S/m;  $\epsilon_r = 39.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7764; ConvF(8.03, 8.03, 8.03); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10415-AAA

**Area Scan (120.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.394 W/kg; SAR (10g) = 0.183 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.07 dB

SAR (1g) = 0.415 W/kg; SAR (10g) = 0.198 W/kg

Smallest distance from peaks to all points 3 dB below = 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 84.3 %

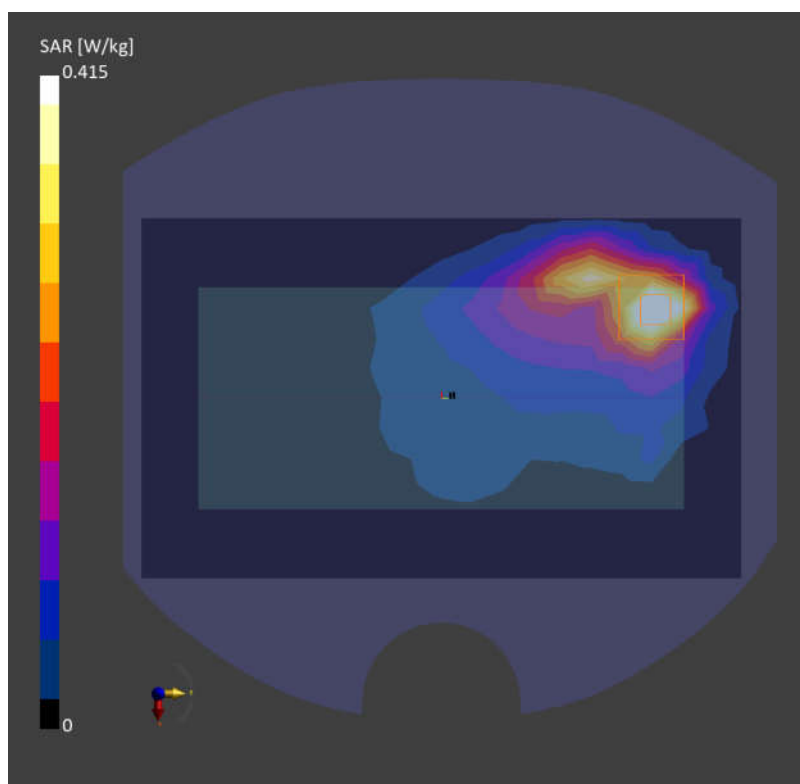

Date: 2024-08-11

**43\_Bluetooth\_1Mbps\_Back\_5mm\_Ch78**

Communication System: IEEE 802.15.1 Bluetooth (GFSK, DH5)

Frequency: 2480.000 MHz; DutyCycle: 1:1.303

Medium: HSL Medium parameters used:  $f = 2480.000$  MHz;  $\sigma = 1.73$  S/m;  $\epsilon_r = 39.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.03, 8.03, 8.03); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

**Area Scan (120.0 mm x 200.0 mm):** Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.200 W/kg; SAR (10g) = 0.099 W/kg;


**Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm):** Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.208 W/kg; SAR (10g) = 0.092 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 61.7 %

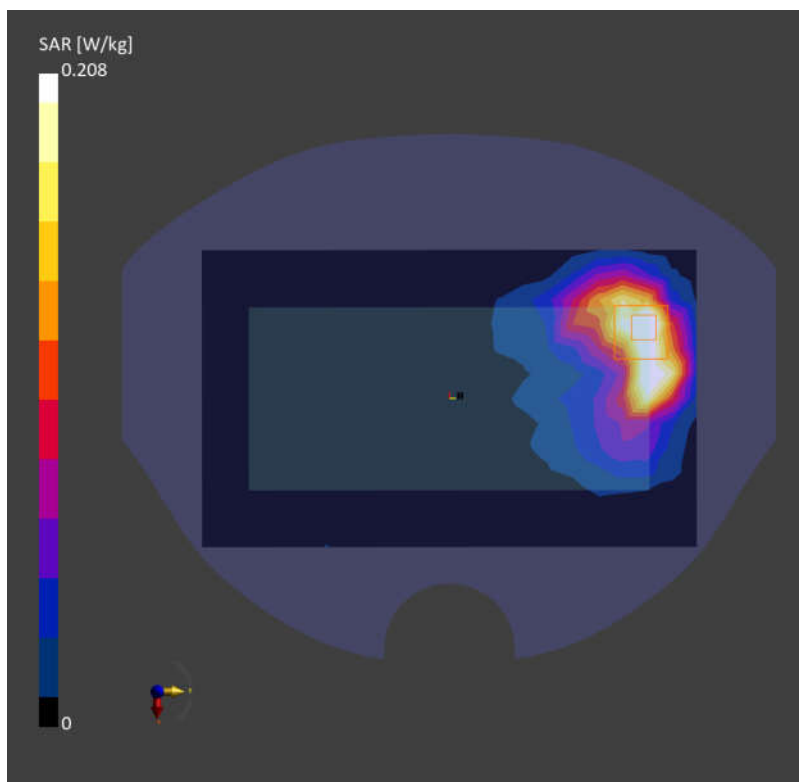

Date: 2024-08-12

**44\_WLAN5GHz\_802.11n-HT40 MCS0\_Top Side\_5mm\_Ch46**


Communication System: IEEE 802.11n (HT Mixed, 40MHz, MCS0, 90pc duty cycle)  
Frequency: 5230.000 MHz; Duty Cycle: 1:1.161  
Medium: HSL Medium parameters used:  $f = 5230.000$  MHz;  $\sigma = 4.54$  S/m;  $\epsilon_r = 35.8$   
Ambient Temperature: 23.1°C; Liquid Temperature: 22.5°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7764; ConvF(5.73, 5.73, 5.73); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

**Area Scan (48.0 mm x 120.0 mm):** Measurement Grid: 8.0 mm x 10.0 mm  
SAR (1g) = 0.247 W/kg; SAR (10g) = 0.074 W/kg;

**Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm  
Power Drift = -0.04 dB  
SAR (1g) = 0.340 W/kg; SAR (10g) = 0.092 W/kg  
Smallest distance from peaks to all points 3 dB below = 6.4 mm  
Ratio of SAR at M2 to SAR at M1 = 63.8 %

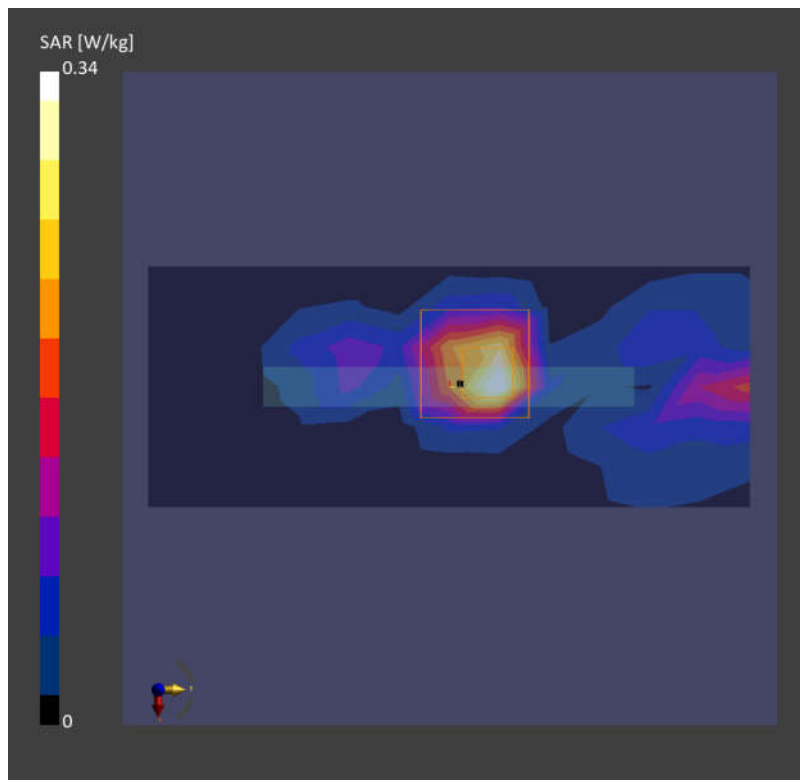

Date: 2024-08-12

**45\_WLAN5GHz\_802.11ac-VHT80 MCS0\_Top Side\_5mm\_Ch155**

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle)

Frequency: 5775.000 MHz; Duty Cycle: 1:1.17

Medium: HSL Medium parameters used:  $f = 5775.000$  MHz;  $\sigma = 5.13$  S/m;  $\epsilon_r = 34.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

**DASY6 Configuration:**

- Probe: EX3DV4 - SN7764; ConvF(5.32, 5.32, 5.32); Calibrated: 2023-10-05
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1303; Calibrated: 2023-11-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

**Area Scan (48.0 mm x 120.0 mm):** Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.295 W/kg; SAR (10g) = 0.092 W/kg;

**Zoom Scan (24.0 mm x 22.0 mm x 22.0 mm):** Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.08 dB

SAR (1g) = 0.375 W/kg; SAR (10g) = 0.108 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 62.9 %

