FCC SAR Test Report

APPLICANT	:	Motorola Mobility LLC
EQUIPMENT	:	Mobile Cellular Phone
BRAND NAME	:	Motorola
MODEL NAME	:	XT2521-2
FCC ID	:	IHDT56AT1
STANDARD	:	FCC 47 CFR Part 2 (2.1093)

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

Si Zhang

Approved by: Si Zhang

Sporton International Inc. (Shenzhen)
1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055
People's Republic of China

Table of Contents

1. Statement of Compliance **4**
2. Administration Data **5**
3. Guidance Applied **5**
4. Equipment Under Test (EUT) Information **6**
4.1 General Information 6
4.2 General LTE SAR Test and Reporting Considerations 7
5. Proximity Sensor Triggering Test **10**
6. RF Exposure Limits **12**
6.1 Uncontrolled Environment 12
6.2 Controlled Environment 12
7. Specific Absorption Rate (SAR) **13**
7.1 Introduction 13
7.2 SAR Definition 13
8. System Description and Setup **14**
8.1 E-Field Probe 15
8.2 Data Acquisition Electronics (DAE) 15
8.3 Phantom 16
8.4 Device Holder 17
9. Measurement Procedures **18**
9.1 Spatial Peak SAR Evaluation 18
9.2 Power Reference Measurement 19
9.3 Area Scan 19
9.4 Zoom Scan 20
9.5 Volume Scan Procedures 20
9.6 Power Drift Monitoring 20
10. Test Equipment List **21**
11. System Verification **22**
11.1 Tissue Simulating Liquids 22
11.2 Tissue Verification 22
11.3 System Performance Check Results 24
12. RF Exposure Positions **26**
12.1 Ear and handset reference point 26
12.2 Definition of the cheek position 27
12.3 Definition of the tilt position 28
12.4 Body Worn Accessory 29
12.5 Product Specific 10g SAR Exposure 30
12.6 Wireless Router 30
13. Conducted RF Output Power (Unit: dBm) **31**
14. Antenna Location **41**
15. SAR Test Results **42**
15.1 Head SAR 45
15.2 Hotspot SAR 48
15.3 Body Worn Accessory SAR 52
15.4 Product specific 10g SAR 56
15.5 Repeated SAR Measurement 61
16. Simultaneous Transmission Analysis **62**
16.1 Head Exposure Conditions 63
16.2 Hotspot Exposure Conditions 65
16.3 Body-Worn Accessory Exposure Conditions 67
16.4 Product specific 10g SAR Exposure Conditions 68
16.5 SPLSR Evaluation and Analysis 71
17. Uncertainty Assessment **80**
18. References **81**
Appendix A. Plots of System Performance Check
Appendix B. Plots of High SAR Measurement
Appendix C. DASY Calibration Certificate
Appendix D. Test Setup Photos
Appendix E. Conducted RF Output Power Table
Appendix F. Power reduction mechanism verification

Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA482104	Rev. 01	Initial issue of report	Oct. 24, 2024

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Motorola Mobility LLC, Mobile Cellular Phone, XT2521-2**, are as follows.

Highest 1g SAR Summary						
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 5mm)	Body-worn (Separation 5mm)	Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)			
Licensed	GSM	GSM850	0.39	1.31	1.31	1.59
		GSM1900	0.26	1.31	1.24	
	WCDMA	WCDMA II	0.55	1.27	1.26	
		WCDMA IV	0.38	1.35	1.28	
		WCDMA V	0.45	1.28	1.28	
	LTE	LTE Band 2	0.88	**1.39**	1.31	
		LTE Band 7	0.79	1.33	**1.42**	
		LTE Band 13	0.26	0.62	0.62	
		LTE Band 26/5	0.78	1.19	1.19	
		LTE Band 66/4	0.82	1.35	1.36	
		LTE Band 38	0.83	1.29	1.32	
DTS	WLAN	WLAN2.4GHz	**1.17**	0.76	1.23	1.58
NII		WLAN5GHz	**1.17**	0.65	1.17	1.59
DSS	Bluetooth	Bluetooth	0.13	0.16	0.16	1.59

Highest 10g SAR Summary				
Equipment Class	Frequency Band		Product Specific 10g SAR (W/kg) (Separation 0mm)	Highest Simultaneous Transmission 10g SAR (W/kg)
Licensed	GSM	GSM850	1.98	3.95
		GSM1900	2.98	
	WCDMA	WCDMA II	3.35	
		WCDMA IV	3.35	
		WCDMA V	1.60	
	LTE	LTE Band 2	**3.59**	
		LTE Band 7	3.40	
		LTE Band 26/5	1.94	
		LTE Band 66/4	3.43	
		LTE Band 38	2.78	
DTS	WLAN	WLAN2.4GHz	1.72	3.89
NII		WLAN5GHz	2.84	3.95
Date of Testing:			2024/9/13 ~ 2024/10/17	

Remark: This device supports LTE B4 / B5 and B66 / B26. Since the supported frequency span for LTE B4 / B5 falls completely within the supports frequency span for LTE B66 / B26, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B66 / B26.

Declaration of Conformity:
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
Comments and Explanations:
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

2. Administration Data

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Testing Laboratory			
Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	**Sporton Site No.**	**FCC Designation No.**	**FCC Test Firm Registration No.**
	SAR05-SZ	CN1256	421272

Applicant	
Company Name	Motorola Mobility LLC
Address	222 W, Merchandise Mart Plaza, Chicago IL 60654, USA

Manufacturer	
Company Name	Motorola Mobility LLC
Address	222 W, Merchandise Mart Plaza, Chicago IL 60654, USA

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2521-2
FCC ID	IHDT56AT1
IMEI Code	Sample 1: IMEI 1: 355811120026456 IMEI 2: 355811120026464 Sample 2: 356072250004321 Sample 3: IMEI 1: 355811120040994 IMEI 2: 355811120041000
Frequency Band	GSM850: 824 MHz ~ 849 MHz GSM1900: 1850 MHz ~ 1910 MHz WCDMA Band II: 1850 MHz ~ 1910 MHz WCDMA Band IV: 1710 MHz ~ 1755 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 38: 2570 MHz ~ 2620 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5720 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC : 13.56 MHz
Mode	GSM/GPRS/EGPRS AMR / RMC 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+ (16QAM uplink is supported) LTE: QPSK, 16QAM, 64QAM WLAN 2.4GHz : 802.11b/g/n HT20/ HT40 WLAN 5GHz : 802.11a/n/ac HT20/HT40/VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE NFC:ASK
HW Version	DVT2
SW Version	VVTA35.44
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
Remark: 1. This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation. 2. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications. 3. This device 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only). 4. This device does not support DTM operation and supports GPRS/EGPRS mode up to multi-slot class 12. 5. For dual SIM card mobile has two SIM slots and supports dual SIM dual standby. The WWAN radio transmission will	

be enabled by either one SIM at a time (single active). After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 slot to perform all tests.

6. There are two different types of EUT. They are single SIM card mobile and dual SIM card mobile. The others are the same including circuit design, PCB board, structure and all components.
7. The device implements the power management and proximity sensor /receiver detection/hotspot mode for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity). Details about the power management decision and sensor detection are provided in the operational description. And the device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to power table at appendix E.
8. For WLAN transmitter, while the device WLAN is transmitting simultaneously with the WWAN/BT antenna, the device power will be reduced power at head exposure conditions. For WLAN transmitter, while the device WLAN is transmitting simultaneously with the WWAN/BT antenna and Proximity sensors trigger, the device power will be reduced power at body-worn and extremity exposure conditions.
9. There are three samples, the different between them refer to the XT2521-2_Operational Description of Product Equality Declaration which is exhibit separately. According to the differences, sample 1 was chosen to perform full SAR testing and sample 2/3 verified the worst case of sample 1.

4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05	
FCC ID	IHDT56AT1
Equipment Name	Mobile Cellular Phone
Operating Frequency Range of each LTE transmission band	LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 26: 814 MHz ~ 849 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 66: 1710 MHz ~ 1780 MHz
Channel Bandwidth	LTE Band 2:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 4:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 13: 5MHz, 10MHz LTE Band 26:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 66:1.4MHz, 3MHz, 5MHz, 10MHz, 15MHz, 20MHz
Uplink Modulations used	QPSK / 16QAM / 64QAM
LTE Voice / Data requirements	Voice and Data
LTE Release Version	R9
CA Support	Not Supported
LTE MPR permanently built-in by design	**Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3** Modulation | Channel bandwidth / Transmission bandwidth (N_{RB}) | MPR (dB) 1.4 MHz | 3.0 MHz | 5 MHz | 10 MHz | 15 MHz | 20 MHz QPSK: > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 1 16 QAM: ≤ 5 | ≤ 4 | ≤ 8 | ≤ 12 | ≤ 16 | ≤ 18 | ≤ 1 16 QAM: > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 2 64 QAM: ≤ 5 | ≤ 4 | ≤ 8 | ≤ 12 | ≤ 16 | ≤ 18 | ≤ 2 64 QAM: > 5 | > 4 | > 8 | > 12 | > 16 | > 18 | ≤ 3 256 QAM: ≥ 1 | ≤ 5
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.
Power reduction applied to satisfy SAR compliance	Yes, when operating in Proximity sensors/receiver/hotspot detect mechanism, head/body -worn /hotspot/extremity will trigger reduced power for some bands applied to satisfy SAR compliance, the detail please referred to section 13.

Transmission (H, M, L) channel numbers and frequencies in each LTE band												
LTE Band 2												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	18607	1850.7	18615	1851.5	18625	1852.5	18650	1855	18675	1857.5	18700	1860
M	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880	18900	1880
H	19193	1909.3	19185	1908.5	19175	1907.5	19150	1905	19125	1902.5	19100	1900
LTE Band 4												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	19957	1710.7	19965	1711.5	19975	1712.5	20000	1715	20025	1717.5	20050	1720
M	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5	20175	1732.5
H	20393	1754.3	20385	1753.5	20375	1752.5	20350	1750	20325	1747.5	20300	1745
LTE Band 5								
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844
LTE Band 7								
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510
M	21100	2535	21100	2535	21100	2535	21100	2535
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560
LTE Band 13				
	Bandwidth 5 MHz		Bandwidth 10 MHz	
	Channel #	Freq.(MHz)	Channel #	Freq.(MHz)
L	23205	779.5	23230	782
M	23230	782		
H	23255	784.5		

LTE Band 26										
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	26697	814.7	26705	815.5	26715	816.5	26740	819	26765	821.5
M	26865	831.5	26865	831.5	26865	831.5	26865	831.5	26865	831.5
H	27033	848.3	27025	847.5	27015	846.5	26990	844	26965	841.5
LTE Band 38								
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580
M	38000	2595	38000	2595	38000	2595	38000	2595
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610
LTE Band 66												
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	131979	1710.7	131987	1711.5	131997	1712.5	132022	1715	132047	1717.5	132072	1720
M	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745	132322	1745
H	132665	1779.3	132657	1778.5	132647	1777.5	132622	1775	132597	1772.5	132572	1770

<For LTE Overlap Bands Description>

1) LTE Bands BW

Band	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
LTE Band 4	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 66	Yes	Yes	Yes	Yes	Yes	Yes
LTE Band 5	Yes	Yes	Yes	Yes		
LTE Band 26	Yes	Yes	Yes	Yes	Yes	

2) LTE Bands tune up:

Band	Ant	Full	ECI 2	ECI3	ECI 6	ECI 7
		Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit	Tune-up Limit
LTE Band 4	Ant.0	24	24	20.5	22	18.5
LTE Band 66	Ant.0	24	24	20.5	22	18.5
LTE Band 4	Ant.3	24	20	19.5	21.5	19.5
LTE Band 66	Ant.3	24	20	19.5	21.5	19.5
LTE Band 5	Ant.0	24	24	24	24	24
LTE Band 26	Ant.0	24	24	24	24	24
LTE Band 5	Ant.3	24	22	22	24	21
LTE Band 26	Ant.3	24	22	22	24	21

5. Proximity Sensor Triggering Test

<Proximity Sensor Triggering Distance>:

1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (5850MHz) and lowest (835MHz) frequency was used for proximity sensor triggering testing.
2. Capacitive proximity sensors placed coincident with antenna elements at the top and bottom ends of the phone are utilized to determine when the device comes in proximity of the user's body at the front or back of the device.
3. The output power will reduce to body worn power level when top and bottom sensor pad be detected.
4. The sensors used to detect the proximity of the user's body at the front or back surface of the device use a detection threshold distance. The data shown in the sections below shows the distance(s). When front or back body worn condition is detected reduced power will be active.
5. The device employs proximity sensors also can detect the presence of the user's a finger or hand when handheld state at the front/back/left/right/top/bottom sides of the device. When front/back/left/right/top/bottom sides of handheld condition is detected reduced power will be active.
6. For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance -1mm was performed.

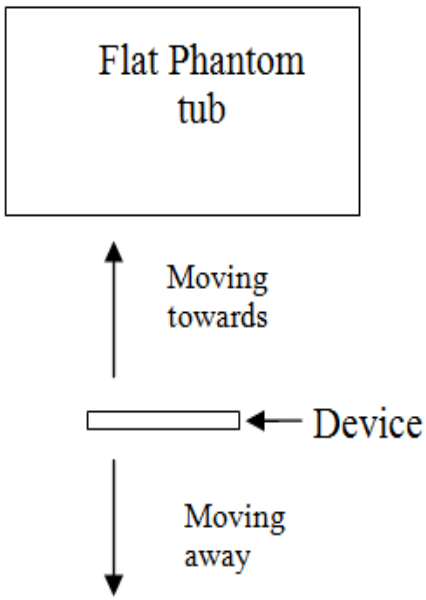	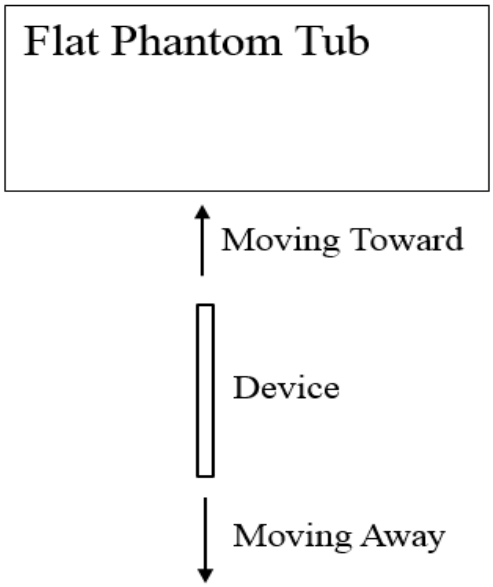
Sensor/Handheld detection test set-up, Front and Back sides	Handheld detection test set-up, Left Side/Right Side/Top Side/Bottom Side

<P-Sensor>

Proximity Sensor Triggering Distance (mm)				
Position	Front		Back	
	Moving towards	Moving away	Moving towards	Moving away
Minimum	17	19	28	29

<Handheld for Ant0>

Proximity Sensor Triggering Distance (mm)						
Position	Front		Back		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	6	7	12	14	12	13

<Handheld for Ant3>

Proximity Sensor Triggering Distance (mm)								
Position	Front		Back		Left Side		Top Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	5	6	11	12	6	7	7	8

<Handheld for Ant5>

Proximity Sensor Triggering Distance (mm)						
Position	Front		Back		Right Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	4	6	8	9	8	9

6. RF Exposure Limits

6.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

7. Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\mathbf{SAR} = \frac{\mathbf{d}}{\mathbf{dt}}\left(\frac{\mathbf{dW}}{\mathbf{dm}}\right) = \frac{\mathbf{d}}{\mathbf{dt}}\left(\frac{\mathbf{dW}}{\boldsymbol{\rho}\mathbf{dv}}\right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

$$\mathbf{SAR} = \frac{\boldsymbol{\sigma}|\mathbf{E}|^{\mathbf{2}}}{\boldsymbol{\rho}}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

8. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

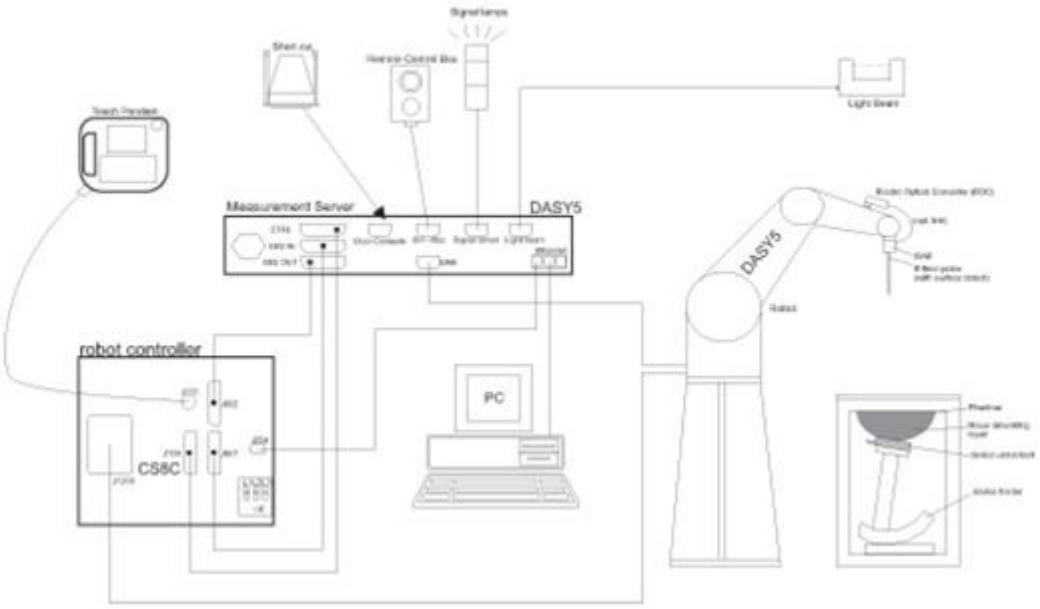

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Frequency	4 MHz – >10 GHz Linearity: ±0.2 dB (30 MHz – 10 GHz)
Directivity	±0.3 dB in TSL (rotation around probe axis) ±0.5 dB in TSL (rotation normal to probe axis)
Dynamic Range	10 µW/g – >100 mW/g Linearity: ±0.2 dB (noise: typically <1 µW/g)
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm

8.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.

Photo of DAE

8.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet
Measurement Areas	Left Hand, Right Hand, Flat Phantom

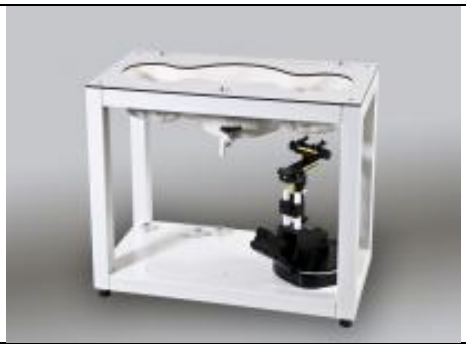

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)
Filling Volume	Approx. 30 liters
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm

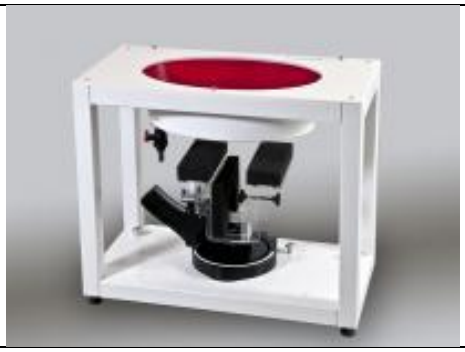

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices or for evaluating transmitters operating at low frequencies. ELI is fully compatible with standard and all known tissue simulating liquids.

8.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.

Mounting Device for Hand-Held Transmitters

Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.

Mounting Device for Laptops

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

(a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
(b) Read the WWAN RF power level from the base station simulator.
(c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
(d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

(a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
(b) Place the EUT in the positions as Appendix D demonstrates.
(c) Set scan area, grid size and other setting on the DASY software.
(d) Measure SAR results for the highest power channel on each testing position.
(e) Find out the largest SAR result on these testing positions of each band
(f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

(a) Power reference measurement
(b) Area scan
(c) Zoom scan
(d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

(a) Extraction of the measured data (grid and values) from the Zoom Scan
(b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
(c) Generation of a high-resolution mesh within the measured volume
(d) Interpolation of all measured values form the measurement grid to the high-resolution grid
(e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
(f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	½·δ·ln(2) ± 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scan spatial resolution: Δx_{Area}, Δy_{Area}	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: Δx_{Zoom}, Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	≤ 1.5·$\Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

* When zoom scan is required and the *reported* SAR from the *area scan based 1-g SAR estimation* procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

9.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

10. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1099	Dec. 15, 2021	Dec. 13, 2024
SPEAG	835MHz System Validation Kit	D835V2	4d162	Dec. 17, 2021	Dec. 15, 2024
SPEAG	1750MHz System Validation Kit	D1750V2	1137	Oct. 19, 2021	Oct. 17, 2024
SPEAG	1900MHz System Validation Kit	D1900V2	5d182	Dec. 20, 2021	Dec. 18, 2024
SPEAG	2450MHz System Validation Kit	D2450V2	924	Nov. 03, 2023	Nov. 02, 2024
SPEAG	2600MHz System Validation Kit	D2600V2	1070	Dec. 20, 2021	Dec. 18, 2024
SPEAG	5000MHz System Validation Kit	D5GHzV2	1341	Dec. 13, 2021	Dec. 11, 2024
SPEAG	Data Acquisition Electronics	DAE4	715	Jan. 25, 2024	Jan. 24, 2025
SPEAG	Dosimetric E-Field Probe	EX3DV4	7641	Jun. 03, 2024	Jun. 02, 2025
SPEAG	SAM Twin Phantom	QD 000 P41 AA	2033	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Anritsu	Radio communication analyzer	MT8820C	6201300653	Jul. 05, 2024	Jul. 04, 2025
Anritsu	Radio communication analyzer	MT8821C	6262314715	Jul. 04, 2024	Jul. 03, 2025
Agilent	Wireless Communication Test Set	E5515C	MY50267224	Jul. 03, 2024	Jul. 02, 2025
Keysight	Network Analyzer	E5071C	MY46523671	Oct. 16, 2023	Oct. 15, 2024
Keysight	Network Analyzer	E5071C	MY46523671	Oct. 15, 2024	Oct. 14, 2025
Speag	Dielectric Assessment KIT	DAK-3.5	1071	Feb. 19, 2024	Feb. 18, 2025
Agilent	Signal Generator	N5181A	MY50145381	Dec. 28, 2023	Dec. 27, 2024
Anritsu	Power Senor	MA2411B	1306099	Oct. 16, 2023	Oct. 15, 2024
Anritsu	Power Senor	MA2411B	1306099	Oct. 15, 2024	Oct. 14, 2025
Anritsu	Power Meter	ML2495A	1349001	Oct. 16, 2023	Oct. 15, 2024
Anritsu	Power Meter	ML2495A	1349001	Oct. 15, 2024	Oct. 14, 2025
Anritsu	Power Sensor	MA2411B	1542004	Dec. 28, 2023	Dec. 27, 2024
Anritsu	Power Meter	ML2495A	1339473	Dec. 28, 2023	Dec. 27, 2024
R&S	CBT BLUETOOTH TESTER	CBT	100963	Dec. 28, 2023	Dec. 27, 2024
R&S	Spectrum Analyzer	FSP7	100818	Jul. 04, 2024	Jul. 03, 2025
TES	Hygrometer	1310	200505600	Jul. 08, 2024	Jul. 07, 2025
Anymetre	Thermo-Hygrometer	JR593	2020062101	Jul. 09, 2024	Jul. 08, 2025
SPEAG	Device Holder	N/A	N/A	N/A	N/A
AR	Amplifier	5S1G4	0333096	Note 1	
Mini-Circuits	Amplifier	ZVE-3W-83+	599201528	Note 1	
ARRA	Power Divider	A3200-2	N/A	Note 1	
ET Industries	Dual Directional Coupler	C-058-10	N/A	Note 1	
Jinkexinhua	Attenuator	10db-8G	N/A	Note 1	

Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
2. The dipole calibration interval can be extended to 3 years with justification according to KDB 865664 D01. The dipoles are also not physically damaged, or repaired during the interval. The justification data in appendix C can be found which the return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration for each dipole.

11. System Verification

11.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

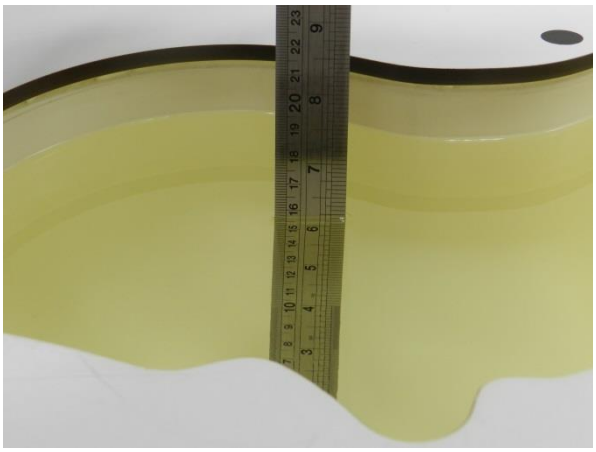

Fig 10.1Photo of Liquid Height for Head SAR

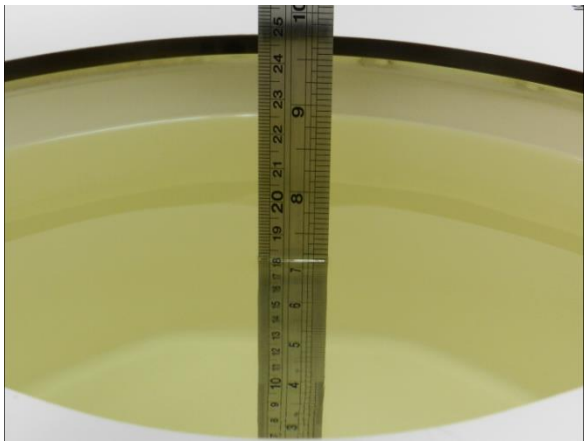

Fig 10.2 Photo of Liquid Height for Body SAR

11.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (εr)
For Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (℃)	Conductivity (σ)	Permittivity (ε_r)	Conductivity Target (σ)	Permittivity Target (ε_r)	Delta (σ) (%)	Delta (ε_r) (%)	Limit (%)	Date
750	Head	22.4	0.909	41.051	0.89	41.90	2.13	-2.03	±5	2024/9/13
750	Head	22.3	0.912	42.538	0.89	41.90	2.47	1.52	±5	2024/10/7
835	Head	22.3	0.931	43.155	0.90	41.50	3.44	3.99	±5	2024/9/14
835	Head	22.8	0.925	42.219	0.90	41.50	2.78	1.73	±5	2024/10/10
1750	Head	22.6	1.363	38.967	1.37	40.10	-0.51	-2.83	±5	2024/9/17
1750	Head	22.5	1.378	40.274	1.37	40.10	0.58	0.43	±5	2024/10/11
1900	Head	22.5	1.433	40.643	1.40	40.00	2.36	1.61	±5	2024/9/15
1900	Head	22.7	1.426	39.524	1.40	40.00	1.86	-1.19	±5	2024/10/12
2450	Head	22.6	1.816	38.596	1.80	39.20	0.89	-1.54	±5	2024/9/18
2450	Head	22.5	1.854	39.607	1.80	39.20	3.00	1.04	±5	2024/10/9
2600	Head	22.7	1.910	37.396	1.96	39.00	-2.55	-4.11	±5	2024/9/16
2600	Head	22.8	1.924	39.070	1.96	39.00	-1.84	0.18	±5	2024/10/17
5250	Head	22.5	4.510	34.764	4.71	35.95	-4.25	-3.30	±5	2024/9/17
5250	Head	22.3	4.726	36.478	4.71	35.95	0.34	1.47	±5	2024/10/13
5600	Head	22.6	4.845	34.280	5.07	35.50	-4.44	-3.44	±5	2024/9/19
5600	Head	22.5	5.154	35.870	5.07	35.50	1.66	1.04	±5	2024/10/14
5750	Head	22.7	4.995	34.065	5.22	35.35	-4.31	-3.64	±5	2024/9/20
5750	Head	22.5	5.329	35.584	5.22	35.35	2.09	0.66	±5	2024/10/16

11.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<1g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2024/9/13	750	Head	250	1099	7641	715	2.220	8.540	8.88	3.98
2024/10/7	750	Head	250	1099	7641	715	2.280	8.540	9.12	6.79
2024/9/14	835	Head	250	4d162	7641	715	2.570	9.640	10.28	6.64
2024/10/10	835	Head	250	4d162	7641	715	2.480	9.640	9.92	2.90
2024/9/17	1750	Head	250	1137	7641	715	9.450	36.500	37.8	3.56
2024/10/11	1750	Head	250	1137	7641	715	9.030	36.500	36.12	-1.04
2024/9/15	1900	Head	250	5d182	7641	715	10.400	39.600	41.6	5.05
2024/10/12	1900	Head	250	5d182	7641	715	9.520	39.600	38.08	-3.84
2024/9/18	2450	Head	250	924	7641	715	12.600	52.300	50.4	-3.63
2024/10/9	2450	Head	250	924	7641	715	13.400	52.300	53.6	2.49
2024/9/16	2600	Head	250	1070	7641	715	13.500	56.200	54	-3.91
2024/10/17	2600	Head	250	1070	7641	715	13.900	56.200	55.6	-1.07
2024/9/17	5250	Head	100	1341	7641	715	7.660	80.700	76.6	-5.08
2024/10/13	5250	Head	100	1341	7641	715	7.850	80.700	78.5	-2.73
2024/9/19	5600	Head	100	1341	7641	715	8.750	84.500	87.5	3.55
2024/10/14	5600	Head	100	1341	7641	715	8.860	84.500	88.6	4.85
2024/9/20	5750	Head	100	1341	7641	715	7.650	80.600	76.5	-5.09
2024/10/16	5750	Head	100	1341	7641	715	7.950	80.600	79.5	-1.36

<10g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2024/9/13	750	Head	250	1099	7641	715	1.480	5.650	5.92	4.78
2024/10/7	750	Head	250	1099	7641	715	1.510	5.650	6.04	6.90
2024/9/14	835	Head	250	4d162	7641	715	1.650	6.260	6.6	5.43
2024/10/10	835	Head	250	4d162	7641	715	1.590	6.260	6.36	1.60
2024/9/17	1750	Head	250	1137	7641	715	5.030	19.200	20.12	4.79
2024/10/11	1750	Head	250	1137	7641	715	4.720	19.200	18.88	-1.67
2024/9/15	1900	Head	250	5d182	7641	715	5.400	20.200	21.6	6.93
2024/10/12	1900	Head	250	5d182	7641	715	4.910	20.200	19.64	-2.77
2024/9/18	2450	Head	250	924	7641	715	5.760	24.500	23.04	-5.96
2024/10/9	2450	Head	250	924	7641	715	6.250	24.500	25	2.04
2024/9/16	2600	Head	250	1070	7641	715	6.020	24.600	24.08	-2.11
2024/10/17	2600	Head	250	1070	7641	715	6.250	24.600	25	1.63
2024/9/17	5250	Head	100	1341	7641	715	2.210	23.100	22.1	-4.33
2024/10/13	5250	Head	100	1341	7641	715	2.350	23.100	23.5	1.73
2024/9/19	5600	Head	100	1341	7641	715	2.460	24.000	24.6	2.50
2024/10/14	5600	Head	100	1341	7641	715	2.530	24.000	25.3	5.42
2024/9/20	5750	Head	100	1341	7641	715	2.120	22.700	21.2	-6.61
2024/10/16	5750	Head	100	1341	7641	715	2.260	22.700	22.6	-0.44

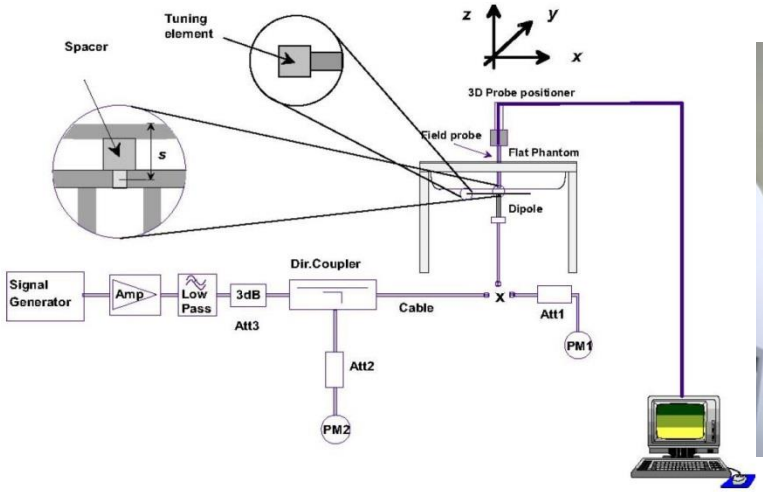

Fig 10.3.1 System Performance Check Setup

Fig 10.3.2 Setup Photo

12. RF Exposure Positions

12.1 Ear and handset reference point

Figure 11.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 11.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 11.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 11.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

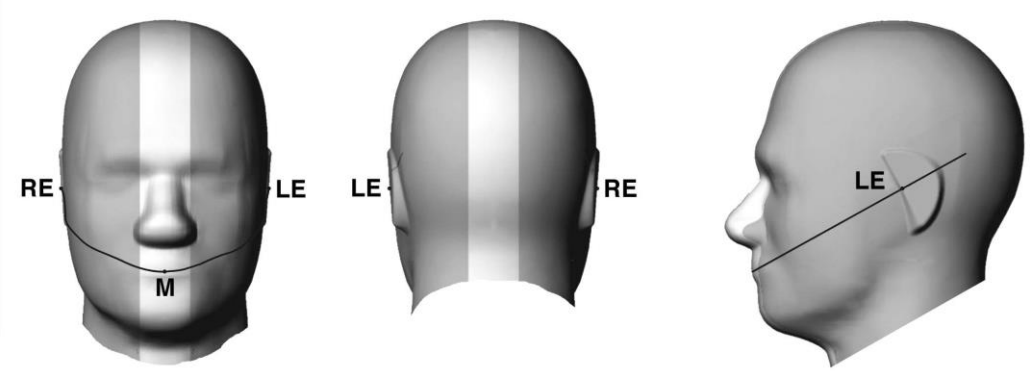

Fig 11.1.1 Front, back, and side views of SAM twin phantom

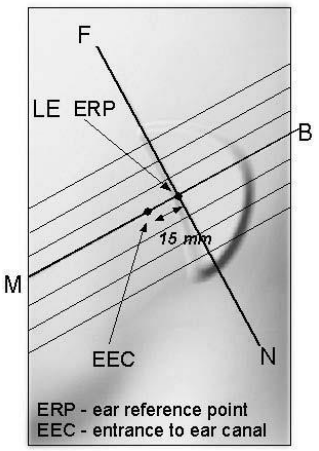

Fig 11.1.2 Close-up side view of phantom showing the ear region.

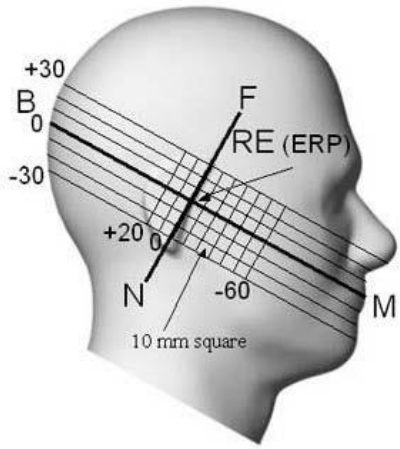

Fig 11.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

12.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width wt of the handset at the level of the acoustic output (point A in Figure 11.2.1 and Figure 11.2.2), and the midpoint of the width wb of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 11.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 11.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 11.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 11.2.3. The actual rotation angles should be documented in the test report.

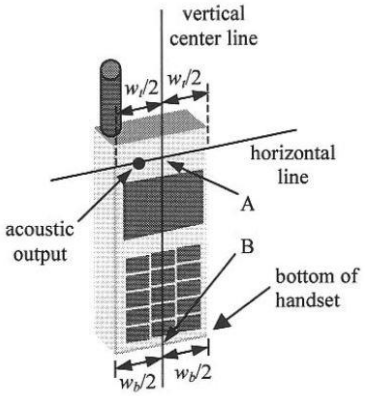

Fig 11.2.1 Handset vertical and horizontal reference lines—"fixed case

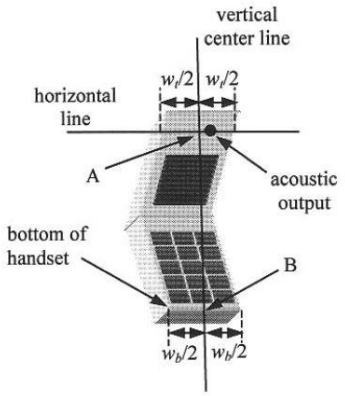

Fig 11.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

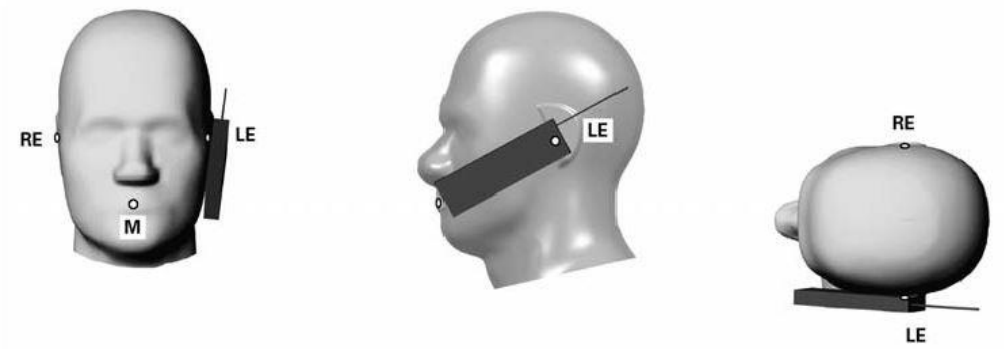

Fig 11.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

12.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 11.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

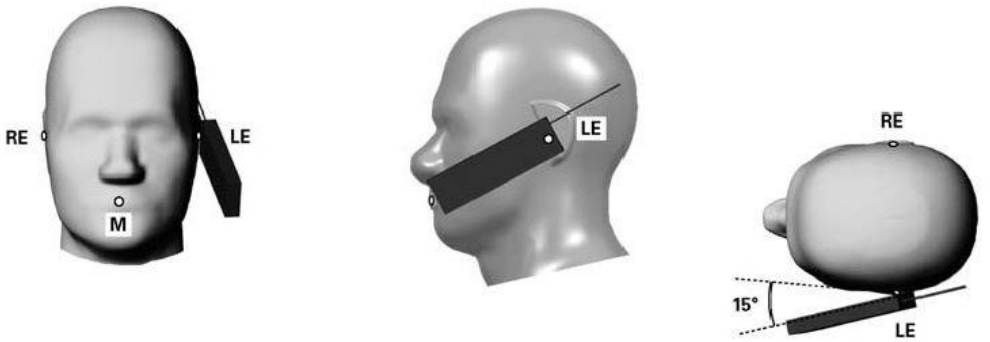

Fig 11.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

12.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 11.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

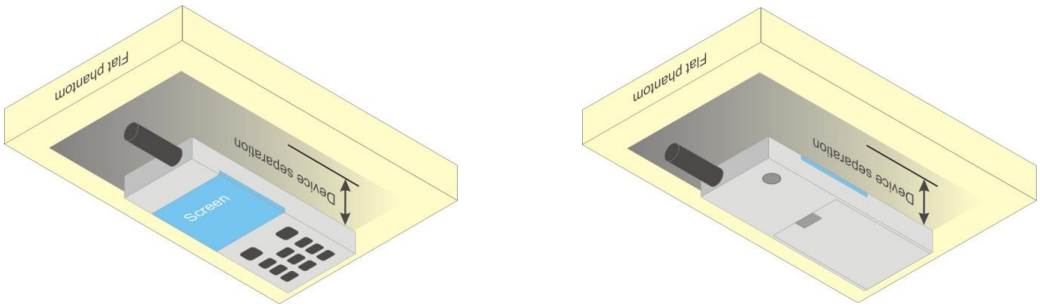

Fig 11.4 Body Worn Position

12.5 Product Specific 10g SAR Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, that can provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets and support voice calls next to the ear, according to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.

2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.6 The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

12.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets (L x W ≥ 9 cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined form general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The “Portable Hotspot” feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

13. Conducted RF Output Power (Unit: dBm)

The detailed conducted power table can refer to Appendix E.

<GSM Conducted Power>

General Note:

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is ≤ ¼ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For HSPA+ devices supporting 16 QAM in the uplink, power measurements procedure is according to the configurations in Table C.11.1.4 of 3GPP TS 34.121-1.
4. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
b. The RF path losses were compensated into the measurements.
c. A call was established between EUT and Base Station with following setting:
   i. Set Gain Factors (β_c and β_d) and parameters were set according to each
   ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
   iii. Set RMC 12.2Kbps + HSDPA mode.
   iv. Set Cell Power = -86 dBm
   v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
   vi. Select HSDPA Uplink Parameters
   vii. Set Delta ACK, Delta NACK and Delta CQI = 8
   viii. Set Ack-Nack Repetition Factor to 3
   ix. Set CQI Feedback Cycle (k) to 4 ms
   x. Set CQI Repetition Factor to 2
   xi. Power Ctrl Mode = All Up bits
d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: Δ_{ACK}, Δ_{NACK} and Δ_{CQI} = 30/15 with β_{hs} = 30/15 * β_c.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and Δ_{NACK} = 30/15 with β_{hs} = 30/15 * β_c, and Δ_{CQI} = 24/15 with β_{hs} = 24/15 * β_c.

Note 3: CM = 1 for β_c/β_d =12/15, β_{hs}/β_c=24/15. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to β_c = 11/15 and β_d = 15/15.

Setup Configuration

HSUPA Setup Configuration:

a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
b. The RF path losses were compensated into the measurements.
c. A call was established between EUT and Base Station with following setting * :
   i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
   ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
   iii. Set Cell Power = -86 dBm
   iv. Set Channel Type = 12.2k + HSPA
   v. Set UE Target Power
   vi. Power Ctrl Mode= Alternating bits
   vii. Set and observe the E-TFCI
   viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed}1: 47/15 β_{ed}2: 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK}, Δ_{NACK} and Δ_{CQI} = 30/15 with β_{hs} = 30/15 * β_c. For sub-test 5, Δ_{ACK}, Δ_{NACK} and Δ_{CQI} = 5/15 with β_{hs} = 5/15 * β_c.

Note 2: CM = 1 for β_c/β_d =12/15, β_{hs}/β_c=24/15. For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to β_c = 10/15 and β_d = 15/15.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
b. The RF path losses were compensated into the measurements.
c. A call was established between EUT and Base Station with following setting:
   i. Set RMC 12.2Kbps + HSDPA mode.
   ii. Set Cell Power = -25 dBm
   iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
   iv. Select HSDPA Uplink Parameters
   v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
      a). Subtest 1: β_c/β_d=2/15
      b). Subtest 2: β_c/β_d=12/15
      c). Subtest 3: β_c/β_d=15/8
      d). Subtest 4: β_c/β_d=15/4
   vi. Set Delta ACK, Delta NACK and Delta CQI = 8
   vii. Set Ack-Nack Repetition Factor to 3
   viii. Set CQI Feedback Cycle (k) to 4 ms
   ix. Set CQI Repetition Factor to 2
   x. Power Ctrl Mode = All Up bits
d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Proces ses	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

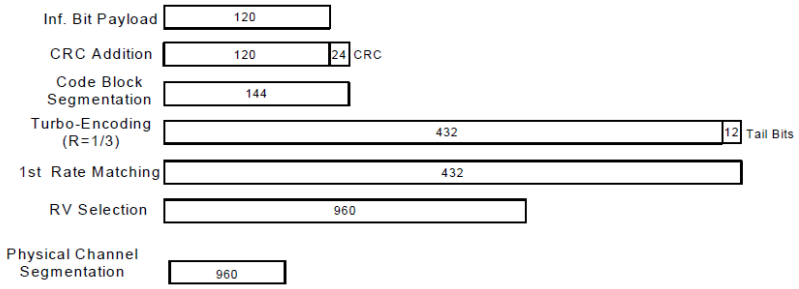

Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration

HSPA+ 3GPP release 7 (uplink category 7) 16QAM, Setup Configuration:

a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
b. The RF path losses were compensated into the measurements.
c. A call was established between EUT and Base Station with following setting * :
   i. Call Configs = 5.2E:HSPA+:UL with 16QAM
   ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.4, quoted from the TS 34.121-1 s5.2E
   iii. Set Channel Parms
   iv. Set Cell Power = -86 dBm
   v. Set Channel Type = HSPA
   vi. Set UE Target Power =21 dBm
   vii. Power Ctrl Mode= All Up Bits
   viii. Set Manual Uplink DPCH Bc/Bd = Manual
   ix. Set Manual Uplink DPCH Bc and Bd=15,15(for 34.121-1 v8.10.0 table C11.1.4 sub-test 1)
   x. Set HSPA Conn DL Channel Levels
   xi. Set HS-SCCH Configs
   xii. Set RB Test Mode Setup
   xiii. Set Common HSUPA Parameters
   xiv. Set Serving Grant
   xv. Confirm that E-TFCI is equal to the target E-TFCI of 105 for sub-test 1, and other subtest's E-TFCI
d. The transmitted maximum output power was recorded.

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note3)	β_d	β_{HS} (Note1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed}1: 30/15 β_{ed}2: 30/15	β_{ed}3: 24/15 β_{ed}4: 24/15	3.5	2.5	14	105	105

Note 1: Δ_{ACK}, Δ_{NACK} and Δ_{CQI} = 30/15 with β_{hs} = 30/15 * β_c.
Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).
Note 3: DPDCH is not configured, therefore the β_c is set to 1 and β_d = 0 by default.
Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.
Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signaled to use the extrapolation algorithm.

Setup Configuration

<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is ≤ ¼ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA / HSPA+) are less than ¼ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+.

<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is > not ½ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is > not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B4 / B5 / B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE B4 /B5 SAR test was covered by B66 / B26; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
   a. the maximum output power, including tolerance, for the smaller band is ≤ the larger band to qualify for the SAR test exclusion
   b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to May 2017 TCB workshop, for 16QAM and 64QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

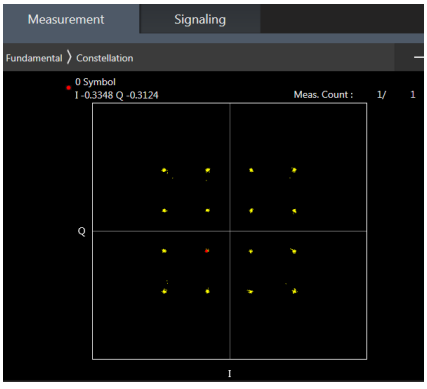

16QAM

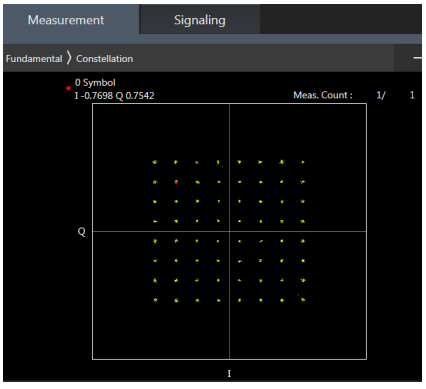

64QAM

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

a. 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations

b. "special subframe S" contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS

c. Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

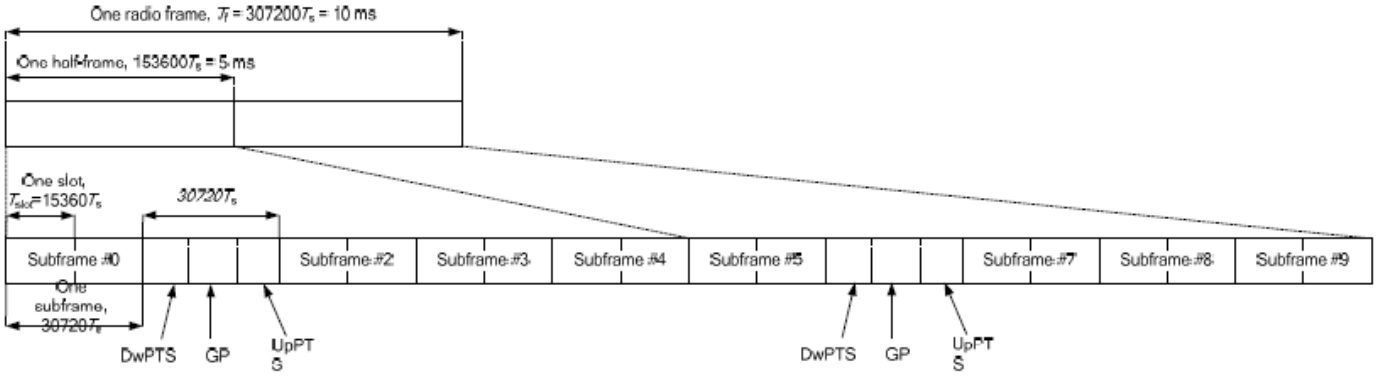

Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$			$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Special subframe (30720·T_s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	**Normal cyclic prefix in uplink**	**Extended cyclic prefix in uplink**
Uplink duty factor in one special subframe	**0~4**	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T_s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	**Normal cyclic prefix in uplink**	**Extended cyclic prefix in uplink**
Uplink duty factor in one special subframe	**0~3**	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

For LTE TDD Power class 3

i. Uplink-downlink configuration: 0. In a half-frame consisted of 5 subfames, uplink operation is in 3 uplink subframes and 1 special subframe.

ii. special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink

iii. for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is: (3+0.167)/5 = 63.3%

iv. for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is: (3+0.143)/5 = 62.9%

v. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

<WLAN Conducted Power>

General Note:

1. The maximum output power specified for production units are determined for all applicable 802.11 transmission modes in each standalone and aggregated frequency band. Maximum output power is measured for the highest maximum output power configuration(s) in each frequency band according to the default power measurement procedures. For “Not required”, SAR Test reduction was applied from KDB 248227 guidance, Sec. 2.1, b), 1) when the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration. Additional output power measurements were not necessary.
2. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
3. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
4. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
5. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
   a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
   b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
   c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

<2.4GHz Bluetooth>

General Note:

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle is 76.84 % as following figure, according to Oct. 2016 TCB workshop for Bluetooth SAR scaling need further consideration and the maximum duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to 83.3% for Bluetooth reported SAR calculation.

Bluetooth time-domain plot

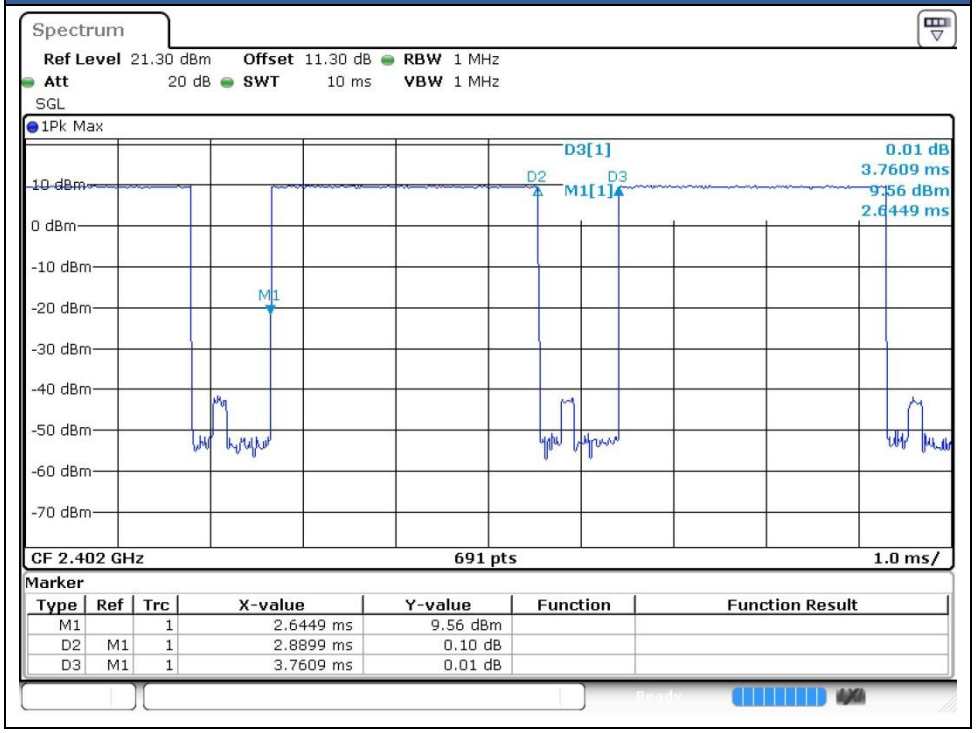

14. Antenna Location

The detailed antenna location information can refer to SAR Test Setup Photos.

15. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
   a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
   b. For SAR testing of WLAN/Bluetooth signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
   c. For SAR testing of Bluetooth signal with 83.3% theoretical duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle) *83.3%".
   d. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
   e. For WLAN/Bluetooth: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
   f. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix 63.3%/62.9% = 1.006 is applied to scale-up the measured SAR result. The Reported TDD LTE SAR (W/kg) = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
   · ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
   · ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
   · ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥0.8W/kg.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
5. The device implements the power management and proximity sensor /receiver detection/hotspot mode for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity). Details about the power management decision and sensor detection are provided in the operational description. And the device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to power table at appendix E.
6. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power (for handheld on state, the maximum full power means reduced power), including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold.
   a. For this device SAR for WWAN/WLAN transmitter scaled to maximum output power mode for product specific 10g SAR is higher than 1.2W/kg of GSM850/1900, WCDMA Band II/IV/V, LTE Band 2/4/5/7/26/38/66 and WLAN 2.4GHz /WLAN 5.2/5.8GHz therefore product specific 10g SAR is necessary.
   b. WLAN 5.3/5.5GHz tested the product specific 10g SAR since it has no hotspot mode.
   c. When 10-g product specific 10g SAR is considered, SAR thresholds is specified in the procedures for SAR test reduction and exclusion should be multiplied by 2.5.
7. Although the headset SAR is greater than 0.8 W/kg, the headset SAR verified the worst of the non-headset SAR and less than non-headset SAR, so there is no need to be tested other channels.
8. The following table “n/a” in the result means the SAR cube is too small to be detected.
9. For Bluetooth distance SAR test at Front 16mm and Back 27mm is only for simultaneous transmission analysis with WWAN.
10. SAR is not required because the distance from the antenna to the edge is > 25 mm as per KDB 941225 D06 Hotspot SAR.
11. For Phablet devices, when hotspot mode is not supported, Product specific 10-g SAR is required for all surfaces and edges with an antenna located at ≤ 25mm from that surface or edge in direct contact with a flat phantom, to address interactive hand use exposure conditions.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is ≤ ¼ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

WCDMA Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is ≤ ¼ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA / HSPA+) are less than ¼ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is > not ½ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is > not ½ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B4 / B5 / B26 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE B4/B5 SAR test was covered by B66 / B26; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
   a. the maximum output power, including tolerance, for the smaller band is ≤ the larger band to qualify for the SAR test exclusion
   b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band

WLAN/Bluetooth Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

15.1 Head SAR

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
750MHz																					
01	LTE Band 13	10M	QPSK	1	25	-	Right Cheek	0mm	Ant 0	ECI 2	23230	782	1	23.26	24.00	1.186	-	-	-0.06	0.216	**0.256**
	LTE Band 13	10M	QPSK	1	25	-	Right Tilted	0mm	Ant 0	ECI 2	23230	782	1	23.26	24.00	1.186	-	-	-0.11	0.126	0.149
	LTE Band 13	10M	QPSK	1	25	-	Left Cheek	0mm	Ant 0	ECI 2	23230	782	1	23.26	24.00	1.186	-	-	-0.02	0.206	0.244
	LTE Band 13	10M	QPSK	1	25	-	Left Tilted	0mm	Ant 0	ECI 2	23230	782	1	23.26	24.00	1.186	-	-	0.08	0.115	0.136
	LTE Band 13	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 0	ECI 2	23230	782	1	22.26	23.00	1.186	-	-	0.15	0.189	0.224
	LTE Band 13	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 0	ECI 2	23230	782	1	22.26	23.00	1.186	-	-	-0.01	0.115	0.136
	LTE Band 13	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 0	ECI 2	23230	782	1	22.26	23.00	1.186	-	-	0.11	0.183	0.217
	LTE Band 13	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 0	ECI 2	23230	782	1	22.26	23.00	1.186	-	-	-0.11	0.106	0.126
835MHz																					
02	GSM850	-	-	-	-	GPRS 2 TX Slot	Right Cheek	0mm	Ant 0	ECI 2	189	836.4	1	30.14	31.50	1.368	-	-	-0.02	0.285	**0.390**
	GSM850	-	-	-	-	GPRS 2 TX Slot	Right Tilted	0mm	Ant 0	ECI 2	189	836.4	1	30.14	31.50	1.368	-	-	-0.09	0.161	0.220
	GSM850	-	-	-	-	GPRS 2 TX Slot	Left Cheek	0mm	Ant 0	ECI 2	189	836.4	1	30.14	31.50	1.368	-	-	0.14	0.257	0.352
	GSM850	-	-	-	-	GPRS 2 TX Slot	Left Tilted	0mm	Ant 0	ECI 2	189	836.4	1	30.14	31.50	1.368	-	-	0.1	0.151	0.207
03	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	ECI 2	4182	836.4	1	23.13	24.00	1.222	-	-	0.03	0.364	**0.445**
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 0	ECI 2	4182	836.4	1	23.13	24.00	1.222	-	-	-0.12	0.203	0.248
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 0	ECI 2	4182	836.4	1	23.13	24.00	1.222	-	-	-0.04	0.363	0.444
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 0	ECI 2	4182	836.4	1	23.13	24.00	1.222	-	-	0.1	0.205	0.250
	LTE Band 26	15M	QPSK	1	37	-	Right Cheek	0mm	Ant 0	ECI 2	26865	831.5	1	23.25	24.00	1.189	-	-	0.02	0.290	0.345
	LTE Band 26	15M	QPSK	1	37	-	Right Tilted	0mm	Ant 0	ECI 2	26865	831.5	1	23.25	24.00	1.189	-	-	-0.13	0.171	0.203
	LTE Band 26	15M	QPSK	1	37	-	Left Cheek	0mm	Ant 0	ECI 2	26865	831.5	1	23.25	24.00	1.189	-	-	0.09	0.280	0.333
	LTE Band 26	15M	QPSK	1	37	-	Left Tilted	0mm	Ant 0	ECI 2	26865	831.5	1	23.25	24.00	1.189	-	-	-0.16	0.169	0.201
	LTE Band 26	15M	QPSK	36	0	-	Right Cheek	0mm	Ant 0	ECI 2	26865	831.5	1	22.15	23.00	1.216	-	-	-0.03	0.227	0.276
	LTE Band 26	15M	QPSK	36	0	-	Right Tilted	0mm	Ant 0	ECI 2	26865	831.5	1	22.15	23.00	1.216	-	-	0.11	0.133	0.162
	LTE Band 26	15M	QPSK	36	0	-	Left Cheek	0mm	Ant 0	ECI 2	26865	831.5	1	22.15	23.00	1.216	-	-	0.16	0.215	0.261
	LTE Band 26	15M	QPSK	36	0	-	Left Tilted	0mm	Ant 0	ECI 2	26865	831.5	1	22.15	23.00	1.216	-	-	-0.11	0.129	0.157
04	LTE Band 26	15M	QPSK	1	37	-	Right Cheek	0mm	Ant 3	ECI 2	26865	831.5	1	20.89	22.00	1.291	-	-	-0.02	0.602	**0.777**
	LTE Band 26	15M	QPSK	1	37	-	Right Cheek	0mm	Ant 3	ECI 2	26865	831.5	2	20.89	22.00	1.291	-	-	0.02	0.575	0.742
	LTE Band 26	15M	QPSK	1	37	-	Right Cheek	0mm	Ant 3	ECI 2	26865	831.5	3	20.89	22.00	1.291	-	-	0.06	0.453	0.585
	LTE Band 26	15M	QPSK	1	37	-	Right Tilted	0mm	Ant 3	ECI 2	26865	831.5	1	20.89	22.00	1.291	-	-	0.04	0.472	0.609
	LTE Band 26	15M	QPSK	1	37	-	Left Cheek	0mm	Ant 3	ECI 2	26865	831.5	1	20.89	22.00	1.291	-	-	0.13	0.445	0.575
	LTE Band 26	15M	QPSK	1	37	-	Left Tilted	0mm	Ant 3	ECI 2	26865	831.5	1	20.89	22.00	1.291	-	-	-0.11	0.377	0.487
	LTE Band 26	15M	QPSK	36	0	-	Right Cheek	0mm	Ant 3	ECI 2	26865	831.5	1	19.85	21.00	1.303	-	-	-0.06	0.392	0.511
	LTE Band 26	15M	QPSK	36	0	-	Right Tilted	0mm	Ant 3	ECI 2	26865	831.5	1	19.85	21.00	1.303	-	-	-0.1	0.308	0.401
	LTE Band 26	15M	QPSK	36	0	-	Left Cheek	0mm	Ant 3	ECI 2	26865	831.5	1	19.85	21.00	1.303	-	-	0.07	0.290	0.378
	LTE Band 26	15M	QPSK	36	0	-	Left Tilted	0mm	Ant 3	ECI 2	26865	831.5	1	19.85	21.00	1.303	-	-	0.06	0.245	0.319
1750MHz																					
05	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	ECI 2	1413	1732.6	1	23.16	24.00	1.213	-	-	0.08	0.315	**0.382**
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 0	ECI 2	1413	1732.6	1	23.16	24.00	1.213	-	-	0.1	0.129	0.157
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 0	ECI 2	1413	1732.6	1	23.16	24.00	1.213	-	-	0.05	0.228	0.277
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 0	ECI 2	1413	1732.6	1	23.16	24.00	1.213	-	-	-0.02	0.171	0.207
	LTE Band 66	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 0	ECI 2	132322	1745	1	23.22	24.00	1.197	-	-	0.04	0.290	0.347
	LTE Band 66	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 0	ECI 2	132322	1745	1	23.22	24.00	1.197	-	-	-0.01	0.134	0.160
	LTE Band 66	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 0	ECI 2	132322	1745	1	23.22	24.00	1.197	-	-	-0.06	0.229	0.274
	LTE Band 66	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 0	ECI 2	132322	1745	1	23.22	24.00	1.197	-	-	-0.09	0.172	0.206
	LTE Band 66	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 0	ECI 2	132322	1745	1	22.25	23.00	1.189	-	-	-0.04	0.227	0.270
	LTE Band 66	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 0	ECI 2	132322	1745	1	22.25	23.00	1.189	-	-	-0.03	0.103	0.122
	LTE Band 66	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 0	ECI 2	132322	1745	1	22.25	23.00	1.189	-	-	-0.07	0.175	0.208
	LTE Band 66	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 0	ECI 2	132322	1745	1	22.25	23.00	1.189	-	-	0.11	0.131	0.156
	LTE Band 66	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 3	ECI 2	132322	1745	1	18.66	20.00	1.361	-	-	0.14	0.595	0.810
	LTE Band 66	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 3	ECI 2	132322	1745	1	18.66	20.00	1.361	-	-	0.12	0.482	0.656

	LTE Band 66	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 3	ECI 2	132322	1745	1	18.66	20.00	1.361	-	-	0.13	0.358	0.487
	LTE Band 66	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 3	ECI 2	132322	1745	1	18.66	20.00	1.361	-	-	-0.13	0.345	0.470
	LTE Band 66	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 3	ECI 2	132072	1720	1	18.64	20.00	1.368	-	-	0.01	0.582	0.796
06	LTE Band 66	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 3	ECI 2	132572	1770	1	18.58	20.00	1.387	-	-	-0.03	0.588	**0.815**
	LTE Band 66	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	ECI 2	132322	1745	1	17.68	19.00	1.355	-	-	-0.03	0.407	0.552
	LTE Band 66	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 3	ECI 2	132322	1745	1	17.68	19.00	1.355	-	-	0	0.383	0.519
	LTE Band 66	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 3	ECI 2	132322	1745	1	17.68	19.00	1.355	-	-	-0.15	0.280	0.379
	LTE Band 66	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 3	ECI 2	132322	1745	1	17.68	19.00	1.355	-	-	-0.12	0.288	0.390
	LTE Band 66	20M	QPSK	100	0	-	Right Cheek	0mm	Ant 3	ECI 2	132322	1745	1	17.53	19.00	1.403	-	-	-0.15	0.409	0.574
1900MHz																					
07	GSM1900	-	-	-	-	GPRS 2 TX Slot	Right Cheek	0mm	Ant 0	ECI 2	661	1880	1	27.25	28.50	1.334	-	-	0.11	0.197	**0.263**
	GSM1900	-	-	-	-	GPRS 2 TX Slot	Right Tilted	0mm	Ant 0	ECI 2	661	1880	1	27.25	28.50	1.334	-	-	0.11	0.139	0.185
	GSM1900	-	-	-	-	GPRS 2 TX Slot	Left Cheek	0mm	Ant 0	ECI 2	661	1880	1	27.25	28.50	1.334	-	-	0.04	0.188	0.251
	GSM1900	-	-	-	-	GPRS 2 TX Slot	Left Tilted	0mm	Ant 0	ECI 2	661	1880	1	27.25	28.50	1.334	-	-	0.01	0.179	0.239
08	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	ECI 2	9400	1880	1	23.33	24.00	1.167	-	-	0.05	0.470	**0.548**
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 0	ECI 2	9400	1880	1	23.33	24.00	1.167	-	-	0.14	0.329	0.384
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 0	ECI 2	9400	1880	1	23.33	24.00	1.167	-	-	-0.03	0.465	0.543
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 0	ECI 2	9400	1880	1	23.33	24.00	1.167	-	-	0.01	0.428	0.499
	LTE Band 2	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 0	ECI 2	18900	1880	1	23.10	24.00	1.230	-	-	-0.13	0.358	0.440
	LTE Band 2	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 0	ECI 2	18900	1880	1	23.10	24.00	1.230	-	-	0.13	0.269	0.331
	LTE Band 2	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 0	ECI 2	18900	1880	1	23.10	24.00	1.230	-	-	-0.11	0.330	0.406
	LTE Band 2	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 0	ECI 2	18900	1880	1	23.10	24.00	1.230	-	-	0.07	0.322	0.396
	LTE Band 2	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 0	ECI 2	18900	1880	1	22.09	23.00	1.233	-	-	0.08	0.280	0.345
	LTE Band 2	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 0	ECI 2	18900	1880	1	22.09	23.00	1.233	-	-	-0.04	0.202	0.249
	LTE Band 2	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 0	ECI 2	18900	1880	1	22.09	23.00	1.233	-	-	-0.03	0.257	0.317
	LTE Band 2	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 0	ECI 2	18900	1880	1	22.09	23.00	1.233	-	-	0.05	0.253	0.312
	LTE Band 2	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 3	ECI 2	18900	1880	1	15.05	16.50	1.396	-	-	0.1	0.579	0.808
	LTE Band 2	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 3	ECI 2	18900	1880	1	15.05	16.50	1.396	-	-	-0.1	0.513	0.716
	LTE Band 2	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 3	ECI 2	18900	1880	1	15.05	16.50	1.396	-	-	0.07	0.304	0.424
	LTE Band 2	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 3	ECI 2	18900	1880	1	15.05	16.50	1.396	-	-	0.14	0.342	0.478
	LTE Band 2	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 3	ECI 2	18700	1860	1	14.91	16.50	1.442	-	-	0.15	0.595	0.858
09	LTE Band 2	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 3	ECI 2	19100	1900	1	14.91	16.50	1.442	-	-	-0.03	0.610	**0.880**
	LTE Band 2	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 3	ECI 2	19100	1900	2	14.91	16.50	1.442	-	-	0.11	0.491	0.708
	LTE Band 2	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 3	ECI 2	19100	1900	3	14.91	16.50	1.442	-	-	0.15	0.471	0.679
	LTE Band 2	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	ECI 2	18900	1880	1	13.98	15.50	1.419	-	-	0.08	0.441	0.626
	LTE Band 2	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 3	ECI 2	18900	1880	1	13.98	15.50	1.419	-	-	0.03	0.436	0.619
	LTE Band 2	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 3	ECI 2	18900	1880	1	13.98	15.50	1.419	-	-	0.1	0.256	0.363
	LTE Band 2	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 3	ECI 2	18900	1880	1	13.98	15.50	1.419	-	-	-0.14	0.289	0.410
	LTE Band 2	20M	QPSK	100	0	-	Right Cheek	0mm	Ant 3	ECI 2	18900	1880	1	14.02	15.50	1.406	-	-	0.09	0.442	0.621
2600MHz																					
	LTE Band 7	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 0	ECI 2	21100	2535	1	23.48	24.00	1.127	-	-	0.12	0.106	0.119
	LTE Band 7	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 0	ECI 2	21100	2535	1	23.48	24.00	1.127	-	-	-0.15	0.053	0.060
	LTE Band 7	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 0	ECI 2	21100	2535	1	23.48	24.00	1.127	-	-	0.13	0.054	0.061
	LTE Band 7	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 0	ECI 2	21100	2535	1	23.48	24.00	1.127	-	-	0.08	0.027	0.030
	LTE Band 7	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 0	ECI 2	21100	2535	1	22.50	23.00	1.122	-	-	-0.01	0.076	0.085
	LTE Band 7	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 0	ECI 2	21100	2535	1	22.50	23.00	1.122	-	-	-0.13	0.038	0.043
	LTE Band 7	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 0	ECI 2	21100	2535	1	22.50	23.00	1.122	-	-	0.16	0.042	0.047
	LTE Band 7	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 0	ECI 2	21100	2535	1	22.50	23.00	1.122	-	-	0.08	0.021	0.024
10	LTE Band 7	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 3	ECI 2	21100	2535	1	15.68	17.00	1.355	-	-	0.05	0.583	**0.790**
	LTE Band 7	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 3	ECI 2	21100	2535	1	15.68	17.00	1.355	-	-	-0.15	0.432	0.585
	LTE Band 7	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 3	ECI 2	21100	2535	1	15.68	17.00	1.355	-	-	-0.16	0.158	0.214
	LTE Band 7	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 3	ECI 2	21100	2535	1	15.68	17.00	1.355	-	-	-0.08	0.163	0.221
	LTE Band 7	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	ECI 2	21100	2535	1	14.71	16.00	1.346	-	-	-0.08	0.412	0.554
	LTE Band 7	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 3	ECI 2	21100	2535	1	14.71	16.00	1.346	-	-	-0.1	0.352	0.474
	LTE Band 7	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 3	ECI 2	21100	2535	1	14.71	16.00	1.346	-	-	-0.07	0.132	0.178
	LTE Band 7	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 3	ECI 2	21100	2535	1	14.71	16.00	1.346	-	-	-0.15	0.128	0.172

	LTE Band 38	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 0	ECI 2	38000	2595	1	23.46	24.00	1.132	62.9	1.006	0.09	0.045	0.051
	LTE Band 38	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 0	ECI 2	38000	2595	1	23.46	24.00	1.132	62.9	1.006	-0.01	0.023	0.026
	LTE Band 38	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 0	ECI 2	38000	2595	1	23.46	24.00	1.132	62.9	1.006	-0.03	0.042	0.048
	LTE Band 38	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 0	ECI 2	38000	2595	1	23.46	24.00	1.132	62.9	1.006	0.06	0.021	0.024
	LTE Band 38	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 0	ECI 2	38000	2595	1	22.53	23.00	1.114	62.9	1.006	-0.04	0.040	0.045
	LTE Band 38	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 0	ECI 2	38000	2595	1	22.53	23.00	1.114	62.9	1.006	0.15	0.020	0.022
	LTE Band 38	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 0	ECI 2	38000	2595	1	22.53	23.00	1.114	62.9	1.006	-0.09	0.038	0.043
	LTE Band 38	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 0	ECI 2	38000	2595	1	22.53	23.00	1.114	62.9	1.006	-0.05	0.019	0.021
11	LTE Band 38	20M	QPSK	1	49	-	Right Cheek	0mm	Ant 3	ECI 2	38000	2595	1	17.99	19.00	1.262	62.9	1.006	0.13	0.653	**0.829**
	LTE Band 38	20M	QPSK	1	49	-	Right Tilted	0mm	Ant 3	ECI 2	38000	2595	1	17.99	19.00	1.262	62.9	1.006	0	0.486	0.617
	LTE Band 38	20M	QPSK	1	49	-	Left Cheek	0mm	Ant 3	ECI 2	38000	2595	1	17.99	19.00	1.262	62.9	1.006	0.15	0.230	0.292
	LTE Band 38	20M	QPSK	1	49	-	Left Tilted	0mm	Ant 3	ECI 2	38000	2595	1	17.99	19.00	1.262	62.9	1.006	-0.04	0.207	0.263
	LTE Band 38	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 3	ECI 2	38000	2595	1	17.14	18.00	1.219	62.9	1.006	0.02	0.514	0.630
	LTE Band 38	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 3	ECI 2	38000	2595	1	17.14	18.00	1.219	62.9	1.006	-0.12	0.396	0.486
	LTE Band 38	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 3	ECI 2	38000	2595	1	17.14	18.00	1.219	62.9	1.006	-0.04	0.176	0.216
	LTE Band 38	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 3	ECI 2	38000	2595	1	17.14	18.00	1.219	62.9	1.006	0	0.160	0.196
	LTE Band 38	20M	QPSK	100	0	-	Right Cheek	0mm	Ant 3	ECI 2	38000	2595	1	17.11	18.00	1.227	62.9	1.006	0.07	0.514	0.635

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
2450MHz																	
	Bluetooth	DH5 1Mbps	Right Cheek	0mm	Ant 5	Full	78	2480	1	9.90	11.50	1.445	76.84	1.084	-0.07	0.039	0.061
	Bluetooth	DH5 1Mbps	Right Tilted	0mm	Ant 5	Full	78	2480	1	9.90	11.50	1.445	76.84	1.084	-0.06	0.042	0.066
12	Bluetooth	DH5 1Mbps	Left Cheek	0mm	Ant 5	Full	78	2480	1	9.90	11.50	1.445	76.84	1.084	-0.05	0.085	**0.134**
	Bluetooth	DH5 1Mbps	Left Tilted	0mm	Ant 5	Full	78	2480	1	9.90	11.50	1.445	76.84	1.084	0.08	0.054	0.085
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 5	Standalone	6	2437	1	16.00	17.50	1.413	100	1.000	0.12	0.290	0.410
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 5	Standalone	6	2437	1	16.00	17.50	1.413	100	1.000	0.09	0.325	0.459
13	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 5	Standalone	6	2437	1	16.00	17.50	1.413	100	1.000	-0.11	0.827	**1.168**
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 5	Standalone	6	2437	2	16.00	17.50	1.413	100	1.000	0.07	0.701	0.990
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 5	Standalone	6	2437	3	16.00	17.50	1.413	100	1.000	0.09	0.709	1.001
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 5	Standalone	6	2437	1	16.00	17.50	1.413	100	1.000	0.1	0.522	0.737
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 5	Standalone	1	2412	1	15.80	17.50	1.479	100	1.000	-0.08	0.720	1.065
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 5	Standalone	11	2462	1	15.90	17.50	1.445	100	1.000	-0.16	0.754	1.090
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 5	Simultaneous	6	2437	1	14.10	15.50	1.380	100	1.000	0.08	0.501	0.692
5000MHz																	
	WLAN5.3GHz	802.11n-HT40 MCS0	Right Cheek	0mm	Ant 5	Standalone	54	5270	1	15.54	17.00	1.400	100	1.000	-0.04	0.240	0.336
	WLAN5.3GHz	802.11n-HT40 MCS0	Right Tilted	0mm	Ant 5	Standalone	54	5270	1	15.54	17.00	1.400	100	1.000	-0.09	0.259	0.362
14	WLAN5.3GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 5	Standalone	54	5270	1	15.54	17.00	1.400	100	1.000	-0.04	0.839	**1.174**
	WLAN5.3GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 5	Standalone	54	5270	2	15.54	17.00	1.400	100	1.000	0.09	0.421	0.589
	WLAN5.3GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 5	Standalone	54	5270	3	15.54	17.00	1.400	100	1.000	0.05	0.358	0.501
	WLAN5.3GHz	802.11n-HT40 MCS0	Left Tilted	0mm	Ant 5	Standalone	54	5270	1	15.54	17.00	1.400	100	1.000	-0.12	0.421	0.589
	WLAN5.3GHz	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 5	Standalone	62	5310	1	14.73	16.00	1.340	100	1.000	0.09	0.597	0.800
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 5	Simultaneous	58	5290	1	12.42	14.00	1.439	100	1.000	-0.15	0.420	0.604
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 5	Standalone	122	5610	1	15.73	17.50	1.503	100	1.000	-0.07	0.237	0.356
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 5	Standalone	122	5610	1	15.73	17.50	1.503	100	1.000	0.02	0.240	0.361
15	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 5	Standalone	122	5610	1	15.73	17.50	1.503	100	1.000	-0.08	0.780	**1.172**
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 5	Standalone	122	5610	1	15.73	17.50	1.503	100	1.000	0.06	0.501	0.753
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 5	Standalone	106	5530	1	15.21	17.00	1.510	100	1.000	-0.09	0.481	0.726
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 5	Standalone	138	5690	1	15.68	17.50	1.521	100	1.000	0.1	0.683	1.039
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 5	Simultaneous	106	5530	1	13.77	15.00	1.327	100	1.000	-0.13	0.438	0.581
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 5	Standalone	155	5775	1	15.78	17.50	1.486	100	1.000	-0.1	0.242	0.360
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 5	Standalone	155	5775	1	15.78	17.50	1.486	100	1.000	0.14	0.311	0.462
16	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 5	Standalone	155	5775	1	15.78	17.50	1.486	100	1.000	0.11	0.758	**1.126**
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 5	Standalone	155	5775	1	15.78	17.50	1.486	100	1.000	-0.06	0.465	0.691
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 5	Simultaneous	155	5775	1	13.24	15.00	1.500	100	1.000	0.09	0.413	0.619

15.2 Hotspot SAR

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
750MHz																					
	LTE Band 13	10M	QPSK	1	25	-	Front	5mm	Ant 0	ECI 7	23230	782	1	23.26	24.00	1.186	-	-	0.09	0.308	0.365
17	LTE Band 13	10M	QPSK	1	25	-	Back	5mm	Ant 0	ECI 7	23230	782	1	23.26	24.00	1.186	-	-	-0.04	0.519	**0.615**
	LTE Band 13	10M	QPSK	1	25	-	Left Side	5mm	Ant 0	ECI 7	23230	782	1	23.26	24.00	1.186	-	-	0.1	0.234	0.277
	LTE Band 13	10M	QPSK	1	25	-	Right Side	5mm	Ant 0	ECI 7	23230	782	1	23.26	24.00	1.186	-	-	-0.15	0.387	0.459
	LTE Band 13	10M	QPSK	1	25	-	Bottom Side	5mm	Ant 0	ECI 7	23230	782	1	23.26	24.00	1.186	-	-	0.04	0.467	0.554
	LTE Band 13	10M	QPSK	25	0	-	Front	5mm	Ant 0	ECI 7	23230	782	1	22.26	23.00	1.186	-	-	-0.02	0.255	0.302
	LTE Band 13	10M	QPSK	25	0	-	Back	5mm	Ant 0	ECI 7	23230	782	1	22.26	23.00	1.186	-	-	0.13	0.449	0.532
	LTE Band 13	10M	QPSK	25	0	-	Left Side	5mm	Ant 0	ECI 7	23230	782	1	22.26	23.00	1.186	-	-	0.11	0.184	0.218
	LTE Band 13	10M	QPSK	25	0	-	Right Side	5mm	Ant 0	ECI 7	23230	782	1	22.26	23.00	1.186	-	-	0.05	0.313	0.371
	LTE Band 13	10M	QPSK	25	0	-	Bottom Side	5mm	Ant 0	ECI 7	23230	782	1	22.26	23.00	1.186	-	-	0.08	0.391	0.464
835MHz																					
	GSM850	-	-	-	-	GPRS 2 TX Slot	Front	5mm	Ant 0	ECI 7	189	836.4	1	30.14	31.50	1.368	-	-	0.13	0.533	0.729
	GSM850	-	-	-	-	GPRS 2 TX Slot	Back	5mm	Ant 0	ECI 7	189	836.4	1	30.14	31.50	1.368	-	-	0	0.841	1.150
	GSM850	-	-	-	-	GPRS 2 TX Slot	Left Side	5mm	Ant 0	ECI 7	189	836.4	1	30.14	31.50	1.368	-	-	0.11	0.364	0.498
	GSM850	-	-	-	-	GPRS 2 TX Slot	Right Side	5mm	Ant 0	ECI 7	189	836.4	1	30.14	31.50	1.368	-	-	-0.03	0.562	0.769
	GSM850	-	-	-	-	GPRS 2 TX Slot	Bottom Side	5mm	Ant 0	ECI 7	189	836.4	1	30.14	31.50	1.368	-	-	0.05	0.444	0.607
	GSM850	-	-	-	-	GPRS 2 TX Slot	Back	5mm	Ant 0	ECI 7	128	824.2	1	29.98	31.50	1.419	-	-	-0.12	0.840	1.192
18	GSM850	-	-	-	-	GPRS 2 TX Slot	Back	5mm	Ant 0	ECI 7	251	848.8	1	30.03	31.50	1.403	-	-	-0.15	0.934	**1.310**
	GSM850	-	-	-	-	GPRS 2 TX Slot	Back	5mm	Ant 0	ECI 7	251	848.8	2	30.03	31.50	1.403	-	-	0.02	0.897	1.258
	GSM850	-	-	-	-	GPRS 2 TX Slot	Back	5mm	Ant 0	ECI 7	251	848.8	3	30.03	31.50	1.403	-	-	0.04	0.755	1.059
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	ECI 7	4182	836.4	1	23.13	24.00	1.222	-	-	0.12	0.633	0.773
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	ECI 7	4182	836.4	1	23.13	24.00	1.222	-	-	-0.03	1.020	1.246
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Side	5mm	Ant 0	ECI 7	4182	836.4	1	23.13	24.00	1.222	-	-	-0.01	0.334	0.408
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Side	5mm	Ant 0	ECI 7	4182	836.4	1	23.13	24.00	1.222	-	-	-0.01	0.552	0.674
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	ECI 7	4182	836.4	1	23.13	24.00	1.222	-	-	-0.1	0.553	0.676
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	ECI 7	4132	826.4	1	23.10	24.00	1.230	-	-	-0.14	0.976	1.201
19	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	ECI 7	4233	846.6	1	23.07	24.00	1.239	-	-	-0.06	1.030	**1.276**
	LTE Band 26	15M	QPSK	1	37	-	Front	5mm	Ant 0	ECI 7	26865	831.5	1	23.25	24.00	1.189	-	-	0.05	0.557	0.662
20	LTE Band 26	15M	QPSK	1	37	-	Back	5mm	Ant 0	ECI 7	26865	831.5	1	23.25	24.00	1.189	-	-	-0.09	1.000	**1.189**
	LTE Band 26	15M	QPSK	1	37	-	Left Side	5mm	Ant 0	ECI 7	26865	831.5	1	23.25	24.00	1.189	-	-	0.02	0.336	0.399
	LTE Band 26	15M	QPSK	1	37	-	Right Side	5mm	Ant 0	ECI 7	26865	831.5	1	23.25	24.00	1.189	-	-	-0.11	0.503	0.598
	LTE Band 26	15M	QPSK	1	37	-	Bottom Side	5mm	Ant 0	ECI 7	26865	831.5	1	23.25	24.00	1.189	-	-	-0.13	0.445	0.529
	LTE Band 26	15M	QPSK	36	0	-	Front	5mm	Ant 0	ECI 7	26865	831.5	1	22.15	23.00	1.216	-	-	-0.02	0.482	0.586
	LTE Band 26	15M	QPSK	36	0	-	Back	5mm	Ant 0	ECI 7	26865	831.5	1	22.15	23.00	1.216	-	-	0.02	0.851	1.035
	LTE Band 26	15M	QPSK	36	0	-	Left Side	5mm	Ant 0	ECI 7	26865	831.5	1	22.15	23.00	1.216	-	-	0	0.282	0.343
	LTE Band 26	15M	QPSK	36	0	-	Right Side	5mm	Ant 0	ECI 7	26865	831.5	1	22.15	23.00	1.216	-	-	0.05	0.430	0.523
	LTE Band 26	15M	QPSK	36	0	-	Bottom Side	5mm	Ant 0	ECI 7	26865	831.5	1	22.15	23.00	1.216	-	-	0.05	0.401	0.488
	LTE Band 26	15M	QPSK	75	0	-	Back	5mm	Ant 0	ECI 7	26865	831.5	1	22.11	23.00	1.227	-	-	0.13	0.854	1.048
	LTE Band 26	15M	QPSK	1	37	-	Front	5mm	Ant 3	ECI 7	26865	831.5	1	19.89	21.00	1.291	-	-	0.11	0.199	0.257
	LTE Band 26	15M	QPSK	1	37	-	Back	5mm	Ant 3	ECI 7	26865	831.5	1	19.89	21.00	1.291	-	-	-0.15	0.515	0.665
	LTE Band 26	15M	QPSK	1	37	-	Left Side	5mm	Ant 3	ECI 7	26865	831.5	1	19.89	21.00	1.291	-	-	0.04	0.156	0.201
	LTE Band 26	15M	QPSK	1	37	-	Top Side	5mm	Ant 3	ECI 7	26865	831.5	1	19.89	21.00	1.291	-	-	-0.08	0.308	0.398
	LTE Band 26	15M	QPSK	36	0	-	Front	5mm	Ant 3	ECI 7	26865	831.5	1	18.85	20.00	1.303	-	-	0.14	0.175	0.228
	LTE Band 26	15M	QPSK	36	0	-	Back	5mm	Ant 3	ECI 7	26865	831.5	1	18.85	20.00	1.303	-	-	0.03	0.444	0.579
	LTE Band 26	15M	QPSK	36	0	-	Left Side	5mm	Ant 3	ECI 7	26865	831.5	1	18.85	20.00	1.303	-	-	-0.13	0.133	0.173
	LTE Band 26	15M	QPSK	36	0	-	Top Side	5mm	Ant 3	ECI 7	26865	831.5	1	18.85	20.00	1.303	-	-	-0.09	0.270	0.352
1750MHz																					
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	ECI 7	1413	1732.6	1	17.15	18.00	1.216	-	-	-0.02	0.370	0.450
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	ECI 7	1413	1732.6	1	17.15	18.00	1.216	-	-	-0.02	0.628	0.764
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Left Side	5mm	Ant 0	ECI 7	1413	1732.6	1	17.15	18.00	1.216	-	-	0.16	0.141	0.171
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Right Side	5mm	Ant 0	ECI 7	1413	1732.6	1	17.15	18.00	1.216	-	-	0.11	0.111	0.135

	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	ECI 7	1413	1732.6	1	17.15	18.00	1.216	-	-	-0.04	1.070	1.301
21	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	ECI 7	1312	1712.4	1	17.06	18.00	1.242	-	-	-0.06	1.090	**1.353**
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	ECI 7	1513	1752.6	1	17.10	18.00	1.230	-	-	0	1.070	1.316
	LTE Band 66	20M	QPSK	1	49	-	Front	5mm	Ant 0	ECI 7	132322	1745	1	17.78	18.50	1.180	-	-	0.13	0.382	0.451
	LTE Band 66	20M	QPSK	1	49	-	Back	5mm	Ant 0	ECI 7	132322	1745	1	17.78	18.50	1.180	-	-	0.15	0.655	0.773
	LTE Band 66	20M	QPSK	1	49	-	Left Side	5mm	Ant 0	ECI 7	132322	1745	1	17.78	18.50	1.180	-	-	-0.05	0.143	0.169
	LTE Band 66	20M	QPSK	1	49	-	Right Side	5mm	Ant 0	ECI 7	132322	1745	1	17.78	18.50	1.180	-	-	-0.15	0.115	0.136
	LTE Band 66	20M	QPSK	1	49	-	Bottom Side	5mm	Ant 0	ECI 7	132322	1745	1	17.78	18.50	1.180	-	-	-0.09	1.100	1.298
22	LTE Band 66	20M	QPSK	1	49	-	Bottom Side	5mm	Ant 0	ECI 7	132072	1720	1	17.74	18.50	1.191	-	-	-0.11	1.130	**1.346**
	LTE Band 66	20M	QPSK	1	49	-	Bottom Side	5mm	Ant 0	ECI 7	132572	1770	1	17.76	18.50	1.186	-	-	0.02	1.100	1.304
	LTE Band 66	20M	QPSK	50	0	-	Front	5mm	Ant 0	ECI 7	132322	1745	1	16.80	17.50	1.175	-	-	-0.12	0.334	0.392
	LTE Band 66	20M	QPSK	50	0	-	Back	5mm	Ant 0	ECI 7	132322	1745	1	16.80	17.50	1.175	-	-	-0.07	0.559	0.657
	LTE Band 66	20M	QPSK	50	0	-	Left Side	5mm	Ant 0	ECI 7	132322	1745	1	16.80	17.50	1.175	-	-	-0.11	0.127	0.149
	LTE Band 66	20M	QPSK	50	0	-	Right Side	5mm	Ant 0	ECI 7	132322	1745	1	16.80	17.50	1.175	-	-	-0.07	0.098	0.115
	LTE Band 66	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 0	ECI 7	132322	1745	1	16.80	17.50	1.175	-	-	0.16	0.953	1.120
	LTE Band 66	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 0	ECI 7	132072	1720	1	16.77	17.50	1.183	-	-	0.1	0.980	1.159
	LTE Band 66	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 0	ECI 7	132572	1770	1	16.72	17.50	1.197	-	-	-0.03	0.980	1.173
	LTE Band 66	20M	QPSK	100	0	-	Bottom Side	5mm	Ant 0	ECI 7	132322	1745	1	16.69	17.50	1.205	-	-	0.07	0.947	1.141
	LTE Band 66	20M	QPSK	1	49	-	Front	5mm	Ant 3	ECI 7	132322	1745	1	18.18	19.50	1.355	-	-	-0.15	0.194	0.263
	LTE Band 66	20M	QPSK	1	49	-	Back	5mm	Ant 3	ECI 7	132322	1745	1	18.18	19.50	1.355	-	-	-0.04	0.509	0.690
	LTE Band 66	20M	QPSK	1	49	-	Left Side	5mm	Ant 3	ECI 7	132322	1745	1	18.18	19.50	1.355	-	-	0.1	0.112	0.152
	LTE Band 66	20M	QPSK	1	49	-	Top Side	5mm	Ant 3	ECI 7	132322	1745	1	18.18	19.50	1.355	-	-	-0.09	0.387	0.524
	LTE Band 66	20M	QPSK	50	0	-	Front	5mm	Ant 3	ECI 7	132322	1745	1	17.17	18.50	1.358	-	-	-0.13	0.174	0.236
	LTE Band 66	20M	QPSK	50	0	-	Back	5mm	Ant 3	ECI 7	132322	1745	1	17.17	18.50	1.358	-	-	0.01	0.461	0.626
	LTE Band 66	20M	QPSK	50	0	-	Left Side	5mm	Ant 3	ECI 7	132322	1745	1	17.17	18.50	1.358	-	-	0	0.099	0.134
	LTE Band 66	20M	QPSK	50	0	-	Top Side	5mm	Ant 3	ECI 7	132322	1745	1	17.17	18.50	1.358	-	-	0.13	0.350	0.475
1900MHz																					
	GSM1900	-	-	-	-	GPRS 2 TX Slot	Front	5mm	Ant 0	ECI 7	661	1880	1	24.96	26.00	1.271	-	-	-0.12	0.531	0.675
	GSM1900	-	-	-	-	GPRS 2 TX Slot	Back	5mm	Ant 0	ECI 7	661	1880	1	24.96	26.00	1.271	-	-	0	0.664	0.844
	GSM1900	-	-	-	-	GPRS 2 TX Slot	Left Side	5mm	Ant 0	ECI 7	661	1880	1	24.96	26.00	1.271	-	-	0.1	0.300	0.381
	GSM1900	-	-	-	-	GPRS 2 TX Slot	Right Side	5mm	Ant 0	ECI 7	661	1880	1	24.96	26.00	1.271	-	-	-0.15	0.108	0.137
23	GSM1900	-	-	-	-	GPRS 2 TX Slot	Bottom Side	5mm	Ant 0	ECI 7	661	1880	1	24.96	26.00	1.271	-	-	0.08	1.030	**1.309**
	GSM1900	-	-	-	-	GPRS 2 TX Slot	Back	5mm	Ant 0	ECI 7	512	1850.2	1	24.86	26.00	1.300	-	-	0.08	0.509	0.662
	GSM1900	-	-	-	-	GPRS 2 TX Slot	Back	5mm	Ant 0	ECI 7	810	1909.8	1	24.91	26.00	1.285	-	-	0.06	0.760	0.977
	GSM1900	-	-	-	-	GPRS 2 TX Slot	Bottom Side	5mm	Ant 0	ECI 7	512	1850.2	1	24.86	26.00	1.300	-	-	-0.14	0.884	1.149
	GSM1900	-	-	-	-	GPRS 2 TX Slot	Bottom Side	5mm	Ant 0	ECI 7	810	1909.8	1	24.91	26.00	1.285	-	-	-0.08	0.912	1.172
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	ECI 7	9400	1880	1	17.32	18.00	1.169	-	-	0.03	0.527	0.616
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	ECI 7	9400	1880	1	17.32	18.00	1.169	-	-	-0.05	0.668	0.781
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Side	5mm	Ant 0	ECI 7	9400	1880	1	17.32	18.00	1.169	-	-	0.06	0.344	0.402
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Right Side	5mm	Ant 0	ECI 7	9400	1880	1	17.32	18.00	1.169	-	-	-0.16	0.124	0.145
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	ECI 7	9400	1880	1	17.32	18.00	1.169	-	-	0.01	1.040	1.216
24	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	ECI 7	9262	1852.4	1	17.31	18.00	1.172	-	-	-0.07	1.080	**1.266**
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	5mm	Ant 0	ECI 7	9538	1907.6	1	17.29	18.00	1.178	-	-	-0.01	0.984	1.159
	LTE Band 2	20M	QPSK	1	49	-	Front	5mm	Ant 0	ECI 7	18900	1880	1	16.62	17.50	1.225	-	-	-0.01	0.518	0.634
	LTE Band 2	20M	QPSK	1	49	-	Back	5mm	Ant 0	ECI 7	18900	1880	1	16.62	17.50	1.225	-	-	-0.06	0.689	0.844
	LTE Band 2	20M	QPSK	1	49	-	Left Side	5mm	Ant 0	ECI 7	18900	1880	1	16.62	17.50	1.225	-	-	-0.07	0.305	0.374
	LTE Band 2	20M	QPSK	1	49	-	Right Side	5mm	Ant 0	ECI 7	18900	1880	1	16.62	17.50	1.225	-	-	0.08	0.122	0.149
	LTE Band 2	20M	QPSK	1	49	-	Bottom Side	5mm	Ant 0	ECI 7	18900	1880	1	16.62	17.50	1.225	-	-	0.04	1.100	1.347
	LTE Band 2	20M	QPSK	1	49	-	Back	5mm	Ant 0	ECI 7	18700	1860	1	16.57	17.50	1.239	-	-	0.1	0.643	0.797
	LTE Band 2	20M	QPSK	1	49	-	Back	5mm	Ant 0	ECI 7	19100	1900	1	16.55	17.50	1.245	-	-	-0.06	0.709	0.882
25	LTE Band 2	20M	QPSK	1	49	-	Bottom Side	5mm	Ant 0	ECI 7	18700	1860	1	16.57	17.50	1.239	-	-	-0.12	1.120	**1.387**
	LTE Band 2	20M	QPSK	1	49	-	Bottom Side	5mm	Ant 0	ECI 7	18700	1860	2	16.57	17.50	1.239	-	-	0.12	0.994	1.231
	LTE Band 2	20M	QPSK	1	49	-	Bottom Side	5mm	Ant 0	ECI 7	18700	1860	3	16.57	17.50	1.239	-	-	-0.08	0.845	1.047
	LTE Band 2	20M	QPSK	1	49	-	Bottom Side	5mm	Ant 0	ECI 7	19100	1900	1	16.55	17.50	1.245	-	-	-0.09	1.060	1.319
	LTE Band 2	20M	QPSK	50	0	-	Front	5mm	Ant 0	ECI 7	18900	1880	1	15.64	16.50	1.219	-	-	-0.01	0.441	0.538
	LTE Band 2	20M	QPSK	50	0	-	Back	5mm	Ant 0	ECI 7	18900	1880	1	15.64	16.50	1.219	-	-	0.07	0.589	0.718

	LTE Band 2	20M	QPSK	50	0	-	Left Side	5mm	Ant 0	ECI 7	18900	1880	1	15.64	16.50	1.219	-	-	0.13	0.264	0.322
	LTE Band 2	20M	QPSK	50	0	-	Right Side	5mm	Ant 0	ECI 7	18900	1880	1	15.64	16.50	1.219	-	-	0.03	0.103	0.126
	LTE Band 2	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 0	ECI 7	18900	1880	1	15.64	16.50	1.219	-	-	0.08	0.946	1.153
	LTE Band 2	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 0	ECI 7	18700	1860	1	15.58	16.50	1.236	-	-	0.02	0.978	1.209
	LTE Band 2	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 0	ECI 7	19100	1900	1	15.62	16.50	1.225	-	-	0.16	0.894	1.095
	LTE Band 2	20M	QPSK	100	0	-	Back	5mm	Ant 0	ECI 7	18900	1880	1	15.64	16.50	1.219	-	-	0.08	0.589	0.718
	LTE Band 2	20M	QPSK	100	0	-	Bottom Side	5mm	Ant 0	ECI 7	18900	1880	1	15.64	16.50	1.219	-	-	0.06	0.935	1.140
	LTE Band 2	20M	QPSK	1	49	-	Front	5mm	Ant 3	ECI 7	18900	1880	1	14.17	15.50	1.358	-	-	0.02	0.178	0.242
	LTE Band 2	20M	QPSK	1	49	-	Back	5mm	Ant 3	ECI 7	18900	1880	1	14.17	15.50	1.358	-	-	0.13	0.407	0.553
	LTE Band 2	20M	QPSK	1	49	-	Left Side	5mm	Ant 3	ECI 7	18900	1880	1	14.17	15.50	1.358	-	-	0.11	0.090	0.122
	LTE Band 2	20M	QPSK	1	49	-	Top Side	5mm	Ant 3	ECI 7	18900	1880	1	14.17	15.50	1.358	-	-	0.14	0.455	0.618
	LTE Band 2	20M	QPSK	50	0	-	Front	5mm	Ant 3	ECI 7	18900	1880	1	13.14	14.50	1.368	-	-	-0.04	0.166	0.227
	LTE Band 2	20M	QPSK	50	0	-	Back	5mm	Ant 3	ECI 7	18900	1880	1	13.14	14.50	1.368	-	-	0.09	0.376	0.514
	LTE Band 2	20M	QPSK	50	0	-	Left Side	5mm	Ant 3	ECI 7	18900	1880	1	13.14	14.50	1.368	-	-	0.14	0.084	0.115
	LTE Band 2	20M	QPSK	50	0	-	Top Side	5mm	Ant 3	ECI 7	18900	1880	1	13.14	14.50	1.368	-	-	0.09	0.418	0.572
2600MHz																					
	LTE Band 7	20M	QPSK	1	49	-	Front	5mm	Ant 0	ECI 7	21100	2535	1	13.58	14.00	1.102	-	-	-0.16	0.431	0.475
	LTE Band 7	20M	QPSK	1	49	-	Back	5mm	Ant 0	ECI 7	21100	2535	1	13.58	14.00	1.102	-	-	0.15	1.040	1.146
	LTE Band 7	20M	QPSK	1	49	-	Left Side	5mm	Ant 0	ECI 7	21100	2535	1	13.58	14.00	1.102	-	-	-0.02	0.058	0.064
	LTE Band 7	20M	QPSK	1	49	-	Right Side	5mm	Ant 0	ECI 7	21100	2535	1	13.58	14.00	1.102	-	-	0.02	0.040	0.044
	LTE Band 7	20M	QPSK	1	49	-	Bottom Side	5mm	Ant 0	ECI 7	21100	2535	1	13.58	14.00	1.102	-	-	-0.14	1.160	1.278
	LTE Band 7	20M	QPSK	1	49	-	Back	5mm	Ant 0	ECI 7	20850	2510	1	13.53	14.00	1.114	-	-	-0.04	0.846	0.943
	LTE Band 7	20M	QPSK	1	49	-	Back	5mm	Ant 0	ECI 7	21350	2560	1	13.57	14.00	1.104	-	-	-0.06	1.020	1.126
	LTE Band 7	20M	QPSK	1	49	-	Bottom Side	5mm	Ant 0	ECI 7	20850	2510	1	13.53	14.00	1.114	-	-	0.01	1.000	1.114
26	LTE Band 7	20M	QPSK	1	49	-	Bottom Side	5mm	Ant 0	ECI 7	21350	2560	1	13.57	14.00	1.104	-	-	-0.08	1.200	**1.325**
	LTE Band 7	20M	QPSK	1	49	-	Bottom Side	5mm	Ant 0	ECI 7	21350	2560	2	13.57	14.00	1.104	-	-	0.05	1.150	1.270
	LTE Band 7	20M	QPSK	1	49	-	Bottom Side	5mm	Ant 0	ECI 7	21350	2560	3	13.57	14.00	1.104	-	-	0.08	1.140	1.259
	LTE Band 7	20M	QPSK	50	0	-	Front	5mm	Ant 0	ECI 7	21100	2535	1	12.65	13.00	1.084	-	-	0.01	0.382	0.414
	LTE Band 7	20M	QPSK	50	0	-	Back	5mm	Ant 0	ECI 7	21100	2535	1	12.65	13.00	1.084	-	-	0.16	0.944	1.023
	LTE Band 7	20M	QPSK	50	0	-	Left Side	5mm	Ant 0	ECI 7	21100	2535	1	12.65	13.00	1.084	-	-	0.09	0.050	0.054
	LTE Band 7	20M	QPSK	50	0	-	Right Side	5mm	Ant 0	ECI 7	21100	2535	1	12.65	13.00	1.084	-	-	0.12	0.035	0.038
	LTE Band 7	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 0	ECI 7	21100	2535	1	12.65	13.00	1.084	-	-	-0.14	1.060	1.149
	LTE Band 7	20M	QPSK	50	0	-	Back	5mm	Ant 0	ECI 7	20850	2510	1	12.58	13.00	1.102	-	-	-0.06	0.756	0.833
	LTE Band 7	20M	QPSK	50	0	-	Back	5mm	Ant 0	ECI 7	21350	2560	1	12.57	13.00	1.104	-	-	-0.02	0.885	0.977
	LTE Band 7	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 0	ECI 7	20850	2510	1	12.58	13.00	1.102	-	-	-0.1	0.903	0.995
	LTE Band 7	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 0	ECI 7	21350	2560	1	12.57	13.00	1.104	-	-	-0.03	1.050	1.159
	LTE Band 7	20M	QPSK	100	0	-	Back	5mm	Ant 0	ECI 7	21100	2535	1	12.56	13.00	1.107	-	-	-0.01	0.945	1.046
	LTE Band 7	20M	QPSK	100	0	-	Bottom Side	5mm	Ant 0	ECI 7	21100	2535	1	12.56	13.00	1.107	-	-	0.02	1.070	1.184
	LTE Band 7	20M	QPSK	1	49	-	Front	5mm	Ant 3	ECI 7	21100	2535	1	13.66	15.00	1.361	-	-	0.05	0.200	0.272
	LTE Band 7	20M	QPSK	1	49	-	Back	5mm	Ant 3	ECI 7	21100	2535	1	13.66	15.00	1.361	-	-	-0.04	0.505	0.688
	LTE Band 7	20M	QPSK	1	49	-	Left Side	5mm	Ant 3	ECI 7	21100	2535	1	13.66	15.00	1.361	-	-	0.12	0.402	0.547
	LTE Band 7	20M	QPSK	1	49	-	Top Side	5mm	Ant 3	ECI 7	21100	2535	1	13.66	15.00	1.361	-	-	0.11	0.412	0.561
	LTE Band 7	20M	QPSK	50	0	-	Front	5mm	Ant 3	ECI 7	21100	2535	1	12.66	14.00	1.361	-	-	-0.04	0.183	0.249
	LTE Band 7	20M	QPSK	50	0	-	Back	5mm	Ant 3	ECI 7	21100	2535	1	12.66	14.00	1.361	-	-	0.04	0.465	0.633
	LTE Band 7	20M	QPSK	50	0	-	Left Side	5mm	Ant 3	ECI 7	21100	2535	1	12.66	14.00	1.361	-	-	-0.08	0.358	0.487
	LTE Band 7	20M	QPSK	50	0	-	Top Side	5mm	Ant 3	ECI 7	21100	2535	1	12.66	14.00	1.361	-	-	-0.16	0.369	0.502
	LTE Band 38	20M	QPSK	1	49	-	Front	5mm	Ant 0	ECI 7	38000	2595	1	15.08	15.50	1.102	62.9	1.006	0.09	0.381	0.422
	LTE Band 38	20M	QPSK	1	49	-	Back	5mm	Ant 0	ECI 7	38000	2595	1	15.08	15.50	1.102	62.9	1.006	-0.13	0.906	1.004
	LTE Band 38	20M	QPSK	1	49	-	Left Side	5mm	Ant 0	ECI 7	38000	2595	1	15.08	15.50	1.102	62.9	1.006	0.08	0.047	0.052
	LTE Band 38	20M	QPSK	1	49	-	Right Side	5mm	Ant 0	ECI 7	38000	2595	1	15.08	15.50	1.102	62.9	1.006	0.13	0.025	0.028
27	LTE Band 38	20M	QPSK	1	49	-	Bottom Side	5mm	Ant 0	ECI 7	38000	2595	1	15.08	15.50	1.102	62.9	1.006	-0.03	1.160	**1.285**
	LTE Band 38	20M	QPSK	50	0	-	Front	5mm	Ant 0	ECI 7	38000	2595	1	14.19	14.50	1.074	62.9	1.006	0.12	0.328	0.354
	LTE Band 38	20M	QPSK	50	0	-	Back	5mm	Ant 0	ECI 7	38000	2595	1	14.19	14.50	1.074	62.9	1.006	-0.02	0.827	0.894
	LTE Band 38	20M	QPSK	50	0	-	Left Side	5mm	Ant 0	ECI 7	38000	2595	1	14.19	14.50	1.074	62.9	1.006	-0.07	0.041	0.044
	LTE Band 38	20M	QPSK	50	0	-	Right Side	5mm	Ant 0	ECI 7	38000	2595	1	14.19	14.50	1.074	62.9	1.006	0.15	0.021	0.023
	LTE Band 38	20M	QPSK	50	0	-	Bottom Side	5mm	Ant 0	ECI 7	38000	2595	1	14.19	14.50	1.074	62.9	1.006	-0.01	1.030	1.113

	LTE Band 38	20M	QPSK	100	0	-	Back	5mm	Ant 0	ECI 7	38000	2595	1	14.11	14.50	1.094	62.9	1.006	-0.12	0.799	0.879
	LTE Band 38	20M	QPSK	100	0	-	Bottom Side	5mm	Ant 0	ECI 7	38000	2595	1	14.11	14.50	1.094	62.9	1.006	-0.02	1.010	1.112
	LTE Band 38	20M	QPSK	1	49	-	Front	5mm	Ant 3	ECI 7	38000	2595	1	15.44	16.50	1.276	62.9	1.006	-0.15	0.210	0.270
	LTE Band 38	20M	QPSK	1	49	-	Back	5mm	Ant 3	ECI 7	38000	2595	1	15.44	16.50	1.276	62.9	1.006	-0.02	0.503	0.646
	LTE Band 38	20M	QPSK	1	49	-	Left Side	5mm	Ant 3	ECI 7	38000	2595	1	15.44	16.50	1.276	62.9	1.006	0.04	0.367	0.471
	LTE Band 38	20M	QPSK	1	49	-	Top Side	5mm	Ant 3	ECI 7	38000	2595	1	15.44	16.50	1.276	62.9	1.006	-0.13	0.357	0.458
	LTE Band 38	20M	QPSK	50	0	-	Front	5mm	Ant 3	ECI 7	38000	2595	1	14.50	15.50	1.259	62.9	1.006	0.11	0.179	0.227
	LTE Band 38	20M	QPSK	50	0	-	Back	5mm	Ant 3	ECI 7	38000	2595	1	14.50	15.50	1.259	62.9	1.006	-0.03	0.431	0.546
	LTE Band 38	20M	QPSK	50	0	-	Left Side	5mm	Ant 3	ECI 7	38000	2595	1	14.50	15.50	1.259	62.9	1.006	0.14	0.317	0.401
	LTE Band 38	20M	QPSK	50	0	-	Top Side	5mm	Ant 3	ECI 7	38000	2595	1	14.50	15.50	1.259	62.9	1.006	-0.13	0.303	0.384

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
2450MHz																	
	Bluetooth	DH5 1Mbps	Front	5mm	Ant 5	Full	78	2480	1	9.90	11.50	1.445	76.84	1.084	0.04	0.031	0.049
28	Bluetooth	DH5 1Mbps	Back	5mm	Ant 5	Full	78	2480	1	9.90	11.50	1.445	76.84	1.084	-0.06	0.100	**0.156**
	Bluetooth	DH5 1Mbps	Right Side	5mm	Ant 5	Full	78	2480	1	9.90	11.50	1.445	76.84	1.084	-0.12	0.047	0.073
	Bluetooth	DH5 1Mbps	Top Side	5mm	Ant 5	Full	78	2480	1	9.90	11.50	1.445	76.84	1.084	0.09	0.047	0.074
	WLAN2.4GHz	802.11b 1Mbps	Front	5mm	Ant 5	Hotspot on	6	2437	1	14.50	16.00	1.413	100	1.000	0.01	0.204	0.288
29	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 5	Hotspot on	6	2437	1	14.50	16.00	1.413	100	1.000	-0.07	0.536	**0.757**
	WLAN2.4GHz	802.11b 1Mbps	Right Side	5mm	Ant 5	Hotspot on	6	2437	1	14.50	16.00	1.413	100	1.000	-0.09	0.283	0.400
	WLAN2.4GHz	802.11b 1Mbps	Top Side	5mm	Ant 5	Hotspot on	6	2437	1	14.50	16.00	1.413	100	1.000	0.07	0.311	0.439
5000MHz																	
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Front	5mm	Ant 5	Hotspot on	42	5210	1	8.29	10.00	1.483	100	1.000	0.11	0.083	0.123
30	WLAN5.2GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5	Hotspot on	42	5210	1	8.29	10.00	1.483	100	1.000	0.13	0.441	**0.654**
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5	Hotspot on	42	5210	2	8.29	10.00	1.483	100	1.000	-0.05	0.331	0.491
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5	Hotspot on	42	5210	3	8.29	10.00	1.483	100	1.000	0.03	0.285	0.423
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Right Side	5mm	Ant 5	Hotspot on	42	5210	1	8.29	10.00	1.483	100	1.000	0.07	0.356	0.528
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Top Side	5mm	Ant 5	Hotspot on	42	5210	1	8.29	10.00	1.483	100	1.000	0.08	0.137	0.203
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Front	5mm	Ant 5	Hotspot on	155	5775	1	6.31	8.00	1.476	100	1.000	-0.14	0.047	0.069
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5	Hotspot on	155	5775	1	6.31	8.00	1.476	100	1.000	0.02	0.351	0.518
31	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Side	5mm	Ant 5	Hotspot on	155	5775	1	6.31	8.00	1.476	100	1.000	0.09	0.396	**0.584**
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Top Side	5mm	Ant 5	Hotspot on	155	5775	1	6.31	8.00	1.476	100	1.000	-0.12	0.172	0.254

15.3 Body Worn Accessory SAR

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Headset	Power Reduction	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
750MHz																						
	LTE Band 13	10M	QPSK	1	25	-	Front	5mm	Ant 0	-	ECI 4	23230	782	1	23.26	24.00	1.186	-	-	0.03	0.308	0.365
32	LTE Band 13	10M	QPSK	1	25	-	Back	5mm	Ant 0	-	ECI 4	23230	782	1	23.26	24.00	1.186	-	-	-0.04	0.519	**0.615**
	LTE Band 13	10M	QPSK	25	0	-	Front	5mm	Ant 0	-	ECI 4	23230	782	1	22.26	23.00	1.186	-	-	-0.05	0.255	0.302
	LTE Band 13	10M	QPSK	25	0	-	Back	5mm	Ant 0	-	ECI 4	23230	782	1	22.26	23.00	1.186	-	-	-0.15	0.449	0.532
835MHz																						
	GSM850	-	-	-	-	GPRS 2 TX Slot	Front	5mm	Ant 0	-	ECI 4	189	836.4	1	30.14	31.50	1.368	-	-	0.1	0.533	0.729
	GSM850	-	-	-	-	GPRS 2 TX Slot	Back	5mm	Ant 0	-	ECI 4	189	836.4	1	30.14	31.50	1.368	-	-	-0.12	0.841	1.150
	GSM850	-	-	-	-	GPRS 2 TX Slot	Back	5mm	Ant 0	-	ECI 4	128	824.2	1	29.98	31.50	1.419	-	-	-0.13	0.840	1.192
33	GSM850	-	-	-	-	GPRS 2 TX Slot	Back	5mm	Ant 0	-	ECI 4	251	848.8	1	30.03	31.50	1.403	-	-	-0.15	0.934	**1.310**
	GSM850	-	-	-	-	GPRS 2 TX Slot	Back	5mm	Ant 0	-	ECI 4	251	848.8	2	30.03	31.50	1.403	-	-	0.12	0.915	1.284
	GSM850	-	-	-	-	GPRS 2 TX Slot	Back	5mm	Ant 0	-	ECI 4	251	848.8	3	30.03	31.50	1.403	-	-	0.08	0.825	1.157
	GSM850	-	-	-	-	GPRS 2 TX Slot	Back	5mm	Ant 0	Headset	ECI 4	251	848.8	1	30.03	31.50	1.403	-	-	0.02	0.914	1.282
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	-	ECI 4	4182	836.4	1	23.13	24.00	1.222	-	-	-0.07	0.633	0.773
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	ECI 4	4182	836.4	1	23.13	24.00	1.222	-	-	0.01	1.020	1.246
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	ECI 4	4132	826.4	1	23.10	24.00	1.230	-	-	-0.08	0.976	1.201
34	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	ECI 4	4233	846.6	1	23.07	24.00	1.239	-	-	-0.06	1.030	**1.276**
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	Headset	ECI 4	4233	846.6	1	23.07	24.00	1.239	-	-	0.02	0.980	1.214
	LTE Band 26	15M	QPSK	1	37	-	Front	5mm	Ant 0	-	ECI 4	26865	831.5	1	23.25	24.00	1.189	-	-	-0.1	0.557	0.662
35	LTE Band 26	15M	QPSK	1	37	-	Back	5mm	Ant 0	-	ECI 4	26865	831.5	1	23.25	24.00	1.189	-	-	-0.09	1.000	**1.189**
	LTE Band 26	15M	QPSK	36	0	-	Front	5mm	Ant 0	-	ECI 4	26865	831.5	1	22.15	23.00	1.216	-	-	-0.14	0.482	0.586
	LTE Band 26	15M	QPSK	36	0	-	Back	5mm	Ant 0	-	ECI 4	26865	831.5	1	22.15	23.00	1.216	-	-	0.05	0.851	1.035
	LTE Band 26	15M	QPSK	75	0	-	Back	5mm	Ant 0	-	ECI 4	26865	831.5	1	22.11	23.00	1.227	-	-	-0.09	0.854	1.048
	LTE Band 26	15M	QPSK	1	37	-	Front	5mm	Ant 3	-	ECI 3	26865	831.5	1	20.81	22.00	1.315	-	-	-0.14	0.255	0.335
	LTE Band 26	15M	QPSK	1	37	-	Back	5mm	Ant 3	-	ECI 3	26865	831.5	1	20.81	22.00	1.315	-	-	-0.05	0.661	0.869
	LTE Band 26	15M	QPSK	1	37	-	Front	16mm	Ant 3	-	ECI 4	26865	831.5	1	22.79	24.00	1.321	-	-	-0.19	0.128	0.169
	LTE Band 26	15M	QPSK	1	37	-	Back	27mm	Ant 3	-	ECI 4	26865	831.5	1	22.79	24.00	1.321	-	-	-0.08	0.086	0.114
	LTE Band 26	15M	QPSK	36	0	-	Front	5mm	Ant 3	-	ECI 3	26865	831.5	1	19.78	21.00	1.324	-	-	0.04	0.225	0.298
	LTE Band 26	15M	QPSK	36	0	-	Back	5mm	Ant 3	-	ECI 3	26865	831.5	1	19.78	21.00	1.324	-	-	0.14	0.569	0.754
	LTE Band 26	15M	QPSK	75	0	-	Back	5mm	Ant 3	-	ECI 3	26865	831.5	1	19.78	21.00	1.324	-	-	-0.05	0.594	0.787
1750MHz																						
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	-	ECI 3	1413	1732.6	1	19.64	20.50	1.219	-	-	0.04	0.619	0.755
36	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	ECI 3	1413	1732.6	1	19.64	20.50	1.219	-	-	-0.06	1.050	**1.280**
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	ECI 3	1312	1712.4	1	19.62	20.50	1.225	-	-	0.16	1.010	1.237
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	ECI 3	1513	1752.6	1	19.61	20.50	1.227	-	-	0.07	1.010	1.240
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	Headset	ECI 3	1413	1732.6	1	19.64	20.50	1.219	-	-	0.03	0.968	1.180
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	16mm	Ant 0	-	ECI 4	1413	1732.6	1	23.16	24.00	1.213	-	-	-0.13	0.309	0.375
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	27mm	Ant 0	-	ECI 4	1413	1732.6	1	23.16	24.00	1.213	-	-	0.01	0.144	0.175
	LTE Band 66	20M	QPSK	1	49	-	Front	5mm	Ant 0	-	ECI 3	132322	1745	1	19.77	20.50	1.183	-	-	-0.05	0.624	0.738
	LTE Band 66	20M	QPSK	1	49	-	Back	5mm	Ant 0	-	ECI 3	132322	1745	1	19.77	20.50	1.183	-	-	0.06	1.070	1.266
37	LTE Band 66	20M	QPSK	1	49	-	Back	5mm	Ant 0	-	ECI 3	132072	1720	1	19.71	20.50	1.199	-	-	0.03	1.130	**1.355**
	LTE Band 66	20M	QPSK	1	49	-	Back	5mm	Ant 0	-	ECI 3	132072	1720	2	19.71	20.50	1.199	-	-	-0.14	1.050	1.259
	LTE Band 66	20M	QPSK	1	49	-	Back	5mm	Ant 0	-	ECI 3	132072	1720	3	19.71	20.50	1.199	-	-	0.18	0.899	1.078
	LTE Band 66	20M	QPSK	1	49	-	Back	5mm	Ant 0	-	ECI 3	132572	1770	1	19.70	20.50	1.202	-	-	0.1	1.010	1.214
	LTE Band 66	20M	QPSK	1	49	-	Back	5mm	Ant 0	Headset	ECI 3	132072	1720	1	19.71	20.50	1.199	-	-	0.09	1.050	1.259
	LTE Band 66	20M	QPSK	1	49	-	Front	16mm	Ant 0	-	ECI 4	132322	1745	1	23.22	24.00	1.197	-	-	-0.13	0.303	0.363
	LTE Band 66	20M	QPSK	1	49	-	Back	27mm	Ant 0	-	ECI 4	132322	1745	1	23.22	24.00	1.197	-	-	0.09	0.132	0.158
	LTE Band 66	20M	QPSK	50	0	-	Front	5mm	Ant 0	-	ECI 3	132322	1745	1	18.82	19.50	1.169	-	-	-0.11	0.545	0.637
	LTE Band 66	20M	QPSK	50	0	-	Back	5mm	Ant 0	-	ECI 3	132322	1745	1	18.82	19.50	1.169	-	-	-0.04	0.913	1.068
	LTE Band 66	20M	QPSK	50	0	-	Back	5mm	Ant 0	-	ECI 3	132072	1720	1	18.80	19.50	1.175	-	-	0.01	0.967	1.136
	LTE Band 66	20M	QPSK	50	0	-	Back	5mm	Ant 0	-	ECI 3	132572	1770	1	18.79	19.50	1.178	-	-	0.12	0.888	1.046
	LTE Band 66	20M	QPSK	100	0	-	Back	5mm	Ant 0	-	ECI 3	132322	1745	1	18.68	19.50	1.208	-	-	-0.14	0.903	1.091

	LTE Band 66	20M	QPSK	1	49	-	Front	5mm	Ant 3	-	ECI 3	132322	1745	1	18.22	19.50	1.343	-	-	0.1	0.210	0.282
	LTE Band 66	20M	QPSK	1	49	-	Back	5mm	Ant 3	-	ECI 3	132322	1745	1	18.22	19.50	1.343	-	-	-0.07	0.598	0.803
	LTE Band 66	20M	QPSK	1	49	-	Back	5mm	Ant 3	-	ECI 3	132072	1720	1	18.18	19.50	1.355	-	-	-0.16	0.495	0.671
	LTE Band 66	20M	QPSK	1	49	-	Back	5mm	Ant 3	-	ECI 3	132572	1770	1	18.18	19.50	1.355	-	-	0.03	0.603	0.817
	LTE Band 66	20M	QPSK	1	49	-	Front	16mm	Ant 3	-	ECI 4	132322	1745	1	22.64	24.00	1.368	-	-	-0.02	0.120	0.164
	LTE Band 66	20M	QPSK	1	49	-	Back	27mm	Ant 3	-	ECI 4	132322	1745	1	22.64	24.00	1.368	-	-	0.04	0.066	0.090
	LTE Band 66	20M	QPSK	50	0	-	Front	5mm	Ant 3	-	ECI 3	132322	1745	1	17.18	18.50	1.355	-	-	-0.04	0.188	0.255
	LTE Band 66	20M	QPSK	50	0	-	Back	5mm	Ant 3	-	ECI 3	132322	1745	1	17.18	18.50	1.355	-	-	0.11	0.499	0.676
	LTE Band 66	20M	QPSK	100	0	-	Back	5mm	Ant 3	-	ECI 3	132322	1745	1	17.09	18.50	1.384	-	-	0	0.495	0.685
1900MHz																						
	GSM1900	-	-	-	-	GPRS 2 TX Slot	Front	5mm	Ant 0	-	ECI 3	661	1880	1	26.43	27.50	1.279	-	-	0.11	0.647	0.828
	GSM1900	-	-	-	-	GPRS 2 TX Slot	Front	5mm	Ant 0	-	ECI 3	512	1850.2	1	26.36	27.50	1.300	-	-	-0.05	0.496	0.645
	GSM1900	-	-	-	-	GPRS 2 TX Slot	Front	5mm	Ant 0	-	ECI 3	810	1909.8	1	26.33	27.50	1.309	-	-	0.16	0.740	0.969
	GSM1900	-	-	-	-	GPRS 2 TX Slot	Back	5mm	Ant 0	-	ECI 3	661	1880	1	26.43	27.50	1.279	-	-	0.07	0.825	1.055
	GSM1900	-	-	-	-	GPRS 2 TX Slot	Back	5mm	Ant 0	-	ECI 3	512	1850.2	1	26.36	27.50	1.300	-	-	-0.1	0.633	0.823
38	GSM1900	-	-	-	-	GPRS 2 TX Slot	Back	5mm	Ant 0	-	ECI 3	810	1909.8	1	26.33	27.50	1.309	-	-	0.05	0.944	**1.236**
	GSM1900	-	-	-	-	GPRS 2 TX Slot	Back	5mm	Ant 0	Headset	ECI 3	810	1909.8	1	26.33	27.50	1.309	-	-	0.03	0.915	1.198
	GSM1900	-	-	-	-	GPRS 2 TX Slot	Front	16mm	Ant 0	-	ECI 4	810	1909.8	1	27.10	28.50	1.380	-	-	-0.15	0.230	0.317
	GSM1900	-	-	-	-	GPRS 2 TX Slot	Back	27mm	Ant 0	-	ECI 4	810	1909.8	1	27.10	28.50	1.380	-	-	0	0.095	0.131
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	-	ECI 3	9400	1880	1	18.76	19.50	1.186	-	-	0.09	0.812	0.963
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	-	ECI 3	9262	1852.4	1	18.74	19.50	1.191	-	-	0.05	0.754	0.898
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	-	ECI 3	9538	1907.6	1	18.75	19.50	1.189	-	-	-0.12	0.832	0.989
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	ECI 3	9400	1880	1	18.76	19.50	1.186	-	-	0.02	1.030	1.221
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	ECI 3	9262	1852.4	1	18.74	19.50	1.191	-	-	0.04	0.960	1.144
39	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	-	ECI 3	9538	1907.6	1	18.75	19.50	1.189	-	-	-0.09	1.060	**1.260**
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	Headset	ECI 3	9538	1907.6	1	18.75	19.50	1.189	-	-	0.02	0.996	1.184
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	16mm	Ant 0	-	ECI 4	9400	1880	1	23.33	24.00	1.167	-	-	-0.08	0.544	0.635
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	27mm	Ant 0	-	ECI 4	9400	1880	1	23.33	24.00	1.167	-	-	0.12	0.235	0.274
	LTE Band 2	20M	QPSK	1	49	-	Front	5mm	Ant 0	-	ECI 3	18900	1880	1	18.66	19.50	1.213	-	-	-0.06	0.782	0.949
	LTE Band 2	20M	QPSK	1	49	-	Front	5mm	Ant 0	-	ECI 3	18700	1860	1	18.62	19.50	1.225	-	-	-0.14	0.729	0.893
	LTE Band 2	20M	QPSK	1	49	-	Front	5mm	Ant 0	-	ECI 3	19100	1900	1	18.62	19.50	1.225	-	-	0.08	0.804	0.985
	LTE Band 2	20M	QPSK	1	49	-	Back	5mm	Ant 0	-	ECI 3	18900	1880	1	18.66	19.50	1.213	-	-	0.03	1.040	1.262
	LTE Band 2	20M	QPSK	1	49	-	Back	5mm	Ant 0	-	ECI 3	18700	1860	1	18.62	19.50	1.225	-	-	0.04	0.971	1.189
40	LTE Band 2	20M	QPSK	1	49	-	Back	5mm	Ant 0	-	ECI 3	19100	1900	1	18.62	19.50	1.225	-	-	-0.01	1.070	**1.310**
	LTE Band 2	20M	QPSK	1	49	-	Back	5mm	Ant 0	Headset	ECI 3	19100	1900	1	18.62	19.50	1.225	-	-	0.03	1.030	1.261
	LTE Band 2	20M	QPSK	1	49	-	Front	16mm	Ant 0	-	ECI 4	18900	1880	1	23.10	24.00	1.230	-	-	-0.06	0.515	0.634
	LTE Band 2	20M	QPSK	1	49	-	Back	27mm	Ant 0	-	ECI 4	18900	1880	1	23.10	24.00	1.230	-	-	0.09	0.221	0.272
	LTE Band 2	20M	QPSK	50	0	-	Front	5mm	Ant 0	-	ECI 3	18900	1880	1	17.63	18.50	1.222	-	-	0.05	0.667	0.815
	LTE Band 2	20M	QPSK	50	0	-	Back	5mm	Ant 0	-	ECI 3	18900	1880	1	17.63	18.50	1.222	-	-	-0.07	0.889	1.086
	LTE Band 2	20M	QPSK	50	0	-	Back	5mm	Ant 0	-	ECI 3	18700	1860	1	17.61	18.50	1.227	-	-	-0.03	0.877	1.076
	LTE Band 2	20M	QPSK	50	0	-	Back	5mm	Ant 0	-	ECI 3	19100	1900	1	17.59	18.50	1.233	-	-	-0.08	0.922	1.137
	LTE Band 2	20M	QPSK	100	0	-	Front	5mm	Ant 0	-	ECI 3	18900	1880	1	17.65	18.50	1.216	-	-	0.02	0.667	0.811
	LTE Band 2	20M	QPSK	100	0	-	Back	5mm	Ant 0	-	ECI 3	18900	1880	1	17.65	18.50	1.216	-	-	0.09	0.889	1.081
	LTE Band 2	20M	QPSK	1	49	-	Front	5mm	Ant 3	-	ECI 3	18900	1880	1	15.69	17.00	1.352	-	-	-0.04	0.258	0.349
	LTE Band 2	20M	QPSK	1	49	-	Back	5mm	Ant 3	-	ECI 3	18900	1880	1	15.69	17.00	1.352	-	-	0.04	0.598	0.809
	LTE Band 2	20M	QPSK	1	49	-	Back	5mm	Ant 3	-	ECI 3	18700	1860	1	15.63	17.00	1.371	-	-	-0.02	0.538	0.738
	LTE Band 2	20M	QPSK	1	49	-	Back	5mm	Ant 3	-	ECI 3	19100	1900	1	15.63	17.00	1.371	-	-	0.05	0.645	0.884
	LTE Band 2	20M	QPSK	1	49	-	Front	16mm	Ant 3	-	ECI 4	18900	1880	1	22.62	24.00	1.374	-	-	-0.15	0.263	0.361
	LTE Band 2	20M	QPSK	1	49	-	Back	27mm	Ant 3	-	ECI 4	18900	1880	1	22.62	24.00	1.374	-	-	-0.08	0.184	0.253
	LTE Band 2	20M	QPSK	50	0	-	Front	5mm	Ant 3	-	ECI 3	18900	1880	1	14.63	16.00	1.371	-	-	0.08	0.239	0.328
	LTE Band 2	20M	QPSK	50	0	-	Back	5mm	Ant 3	-	ECI 3	18900	1880	1	14.63	16.00	1.371	-	-	-0.15	0.540	0.740
	LTE Band 2	20M	QPSK	100	0	-	Back	5mm	Ant 3	-	ECI 3	18900	1880	1	14.52	16.00	1.406	-	-	0.11	0.531	0.747
2600MHz																						
	LTE Band 7	20M	QPSK	1	49	-	Front	5mm	Ant 0	-	ECI 3	21100	2535	1	14.03	14.50	1.114	-	-	0.02	0.526	0.586
41	LTE Band 7	20M	QPSK	1	49	-	Back	5mm	Ant 0	-	ECI 3	21100	2535	1	14.03	14.50	1.114	-	-	0.03	1.270	**1.415**
	LTE Band 7	20M	QPSK	1	49	-	Back	5mm	Ant 0	-	ECI 3	21100	2535	2	14.03	14.50	1.114	-	-	0.06	1.150	1.281

	LTE Band 7	20M	QPSK	1	49	-	Back	5mm	Ant 0	-	ECI 3	21100	2535	3	14.03	14.50	1.114	-	-	0.08	1.040	1.159
	LTE Band 7	20M	QPSK	1	49	-	Back	5mm	Ant 0	-	ECI 3	20850	2510	1	13.99	14.50	1.125	-	-	-0.03	1.030	1.158
	LTE Band 7	20M	QPSK	1	49	-	Back	5mm	Ant 0	-	ECI 3	21350	2560	1	13.93	14.50	1.140	-	-	0.04	1.240	1.414
	LTE Band 7	20M	QPSK	1	49	-	Back	5mm	Ant 0	Headset	ECI 3	21100	2535	1	14.03	14.50	1.114	-	-	0.12	1.210	1.348
	LTE Band 7	20M	QPSK	1	49	-	Front	16mm	Ant 0	-	ECI 4	21100	2535	1	23.48	24.00	1.127	-	-	0.05	0.676	0.762
	LTE Band 7	20M	QPSK	1	49	-	Back	27mm	Ant 0	-	ECI 4	21100	2535	1	23.48	24.00	1.127	-	-	0.18	0.578	0.652
	LTE Band 7	20M	QPSK	50	0	-	Front	5mm	Ant 0	-	ECI 3	21100	2535	1	13.04	13.50	1.112	-	-	0.11	0.467	0.519
	LTE Band 7	20M	QPSK	50	0	-	Back	5mm	Ant 0	-	ECI 3	21100	2535	1	13.04	13.50	1.112	-	-	0.07	1.150	1.278
	LTE Band 7	20M	QPSK	50	0	-	Back	5mm	Ant 0	-	ECI 3	20850	2510	1	12.97	13.50	1.130	-	-	-0.08	0.923	1.043
	LTE Band 7	20M	QPSK	50	0	-	Back	5mm	Ant 0	-	ECI 3	21350	2560	1	13.01	13.50	1.119	-	-	-0.02	1.080	1.209
	LTE Band 7	20M	QPSK	100	0	-	Back	5mm	Ant 0	-	ECI 3	21100	2535	1	12.99	13.50	1.125	-	-	-0.06	1.150	1.293
	LTE Band 7	20M	QPSK	1	49	-	Front	5mm	Ant 3	-	ECI 3	21100	2535	1	14.63	16.00	1.371	-	-	0.13	0.253	0.347
	LTE Band 7	20M	QPSK	1	49	-	Back	5mm	Ant 3	-	ECI 3	21100	2535	1	14.63	16.00	1.371	-	-	-0.14	0.638	0.875
	LTE Band 7	20M	QPSK	1	49	-	Back	5mm	Ant 3	-	ECI 3	20850	2510	1	14.53	16.00	1.403	-	-	0.08	0.610	0.856
	LTE Band 7	20M	QPSK	1	49	-	Back	5mm	Ant 3	-	ECI 3	21350	2560	1	14.60	16.00	1.380	-	-	0.02	0.614	0.848
	LTE Band 7	20M	QPSK	1	49	-	Front	16mm	Ant 3	-	ECI 4	21100	2535	1	22.60	24.00	1.380	-	-	-0.03	0.319	0.440
	LTE Band 7	20M	QPSK	1	49	-	Back	27mm	Ant 3	-	ECI 4	21100	2535	1	22.60	24.00	1.380	-	-	0.1	0.151	0.208
	LTE Band 7	20M	QPSK	50	0	-	Front	5mm	Ant 3	-	ECI 3	21100	2535	1	13.66	15.00	1.361	-	-	0.1	0.231	0.314
	LTE Band 7	20M	QPSK	50	0	-	Back	5mm	Ant 3	-	ECI 3	21100	2535	1	13.66	15.00	1.361	-	-	-0.12	0.587	0.799
	LTE Band 7	20M	QPSK	100	0	-	Back	5mm	Ant 3	-	ECI 3	21100	2535	1	13.67	15.00	1.358	-	-	0.12	0.585	0.795
	LTE Band 38	20M	QPSK	1	49	-	Front	5mm	Ant 0	-	ECI 3	38000	2595	1	15.97	16.50	1.130	62.9	1.006	0.01	0.488	0.555
42	LTE Band 38	20M	QPSK	1	49	-	Back	5mm	Ant 0	-	ECI 3	38000	2595	1	15.97	16.50	1.130	62.9	1.006	-0.08	1.160	**1.318**
	LTE Band 38	20M	QPSK	1	49	-	Back	5mm	Ant 0	Headset	ECI 3	38000	2595	1	15.97	16.50	1.130	62.9	1.006	0.03	1.050	1.193
	LTE Band 38	20M	QPSK	1	49	-	Front	16mm	Ant 0	-	ECI 4	38000	2595	1	23.46	24.00	1.132	62.9	1.006	0.19	0.443	0.505
	LTE Band 38	20M	QPSK	1	49	-	Back	27mm	Ant 0	-	ECI 4	38000	2595	1	23.46	24.00	1.132	62.9	1.006	-0.08	0.362	0.412
	LTE Band 38	20M	QPSK	50	0	-	Front	5mm	Ant 0	-	ECI 3	38000	2595	1	15.11	15.50	1.094	62.9	1.006	0.08	0.420	0.462
	LTE Band 38	20M	QPSK	50	0	-	Back	5mm	Ant 0	-	ECI 3	38000	2595	1	15.11	15.50	1.094	62.9	1.006	0.06	1.020	1.123
	LTE Band 38	20M	QPSK	100	0	-	Back	5mm	Ant 0	-	ECI 3	38000	2595	1	15.05	15.50	1.109	62.9	1.006	-0.11	1.060	1.183
	LTE Band 38	20M	QPSK	1	49	-	Front	5mm	Ant 3	-	ECI 3	38000	2595	1	16.61	17.50	1.227	62.9	1.006	0.19	0.273	0.337
	LTE Band 38	20M	QPSK	1	49	-	Back	5mm	Ant 3	-	ECI 3	38000	2595	1	16.61	17.50	1.227	62.9	1.006	0.03	0.654	0.808
	LTE Band 38	20M	QPSK	1	49	-	Front	16mm	Ant 3	-	ECI 4	38000	2595	1	22.99	24.00	1.262	62.9	1.006	0.14	0.272	0.345
	LTE Band 38	20M	QPSK	1	49	-	Back	27mm	Ant 3	-	ECI 4	38000	2595	1	22.99	24.00	1.262	62.9	1.006	0.01	0.112	0.142
	LTE Band 38	20M	QPSK	50	0	-	Front	5mm	Ant 3	-	ECI 3	38000	2595	1	15.67	16.50	1.211	62.9	1.006	0.05	0.233	0.284
	LTE Band 38	20M	QPSK	50	0	-	Back	5mm	Ant 3	-	ECI 3	38000	2595	1	15.67	16.50	1.211	62.9	1.006	0.02	0.561	0.683
	LTE Band 38	20M	QPSK	100	0	-	Back	5mm	Ant 3	-	ECI 3	38000	2595	1	15.59	16.50	1.233	62.9	1.006	0.19	0.551	0.684

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Headset	Power Reduction	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
2450MHz																		
	Bluetooth	DH5 1Mbps	Front	5mm	Ant 5	-	Full	78	2480	1	9.90	11.50	1.445	76.84	1.084	0	0.031	0.049
43	Bluetooth	DH5 1Mbps	Back	5mm	Ant 5	-	Full	78	2480	1	9.90	11.50	1.445	76.84	1.084	-0.06	0.100	**0.156**
	Bluetooth	DH5 1Mbps	Front	16mm	Ant 5	-	Full	78	2480	1	9.90	11.50	1.445	76.84	1.084	-	n/a	n/a
	Bluetooth	DH5 1Mbps	Back	27mm	Ant 5	-	Full	78	2480	1	9.90	11.50	1.445	76.84	1.084	-	n/a	n/a
	WLAN2.4GHz	802.11b 1Mbps	Front	5mm	Ant 5	-	Standalone	6	2437	1	15.50	17.00	1.413	100	1.000	0.05	0.240	0.339
44	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 5	-	Standalone	6	2437	1	15.50	17.00	1.413	100	1.000	0.13	0.873	**1.233**
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 5	-	Standalone	1	2412	1	15.30	17.00	1.479	100	1.000	0.16	0.604	0.893
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 5	-	Standalone	11	2462	1	15.40	17.00	1.445	100	1.000	0.12	0.706	1.020
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 5	Headset	Standalone	6	2437	1	15.50	17.00	1.413	100	1.000	0.03	0.831	1.174
	WLAN2.4GHz	802.11n-HT40 MCS0	Back	5mm	Ant 5		Standalone	6	2437	1	15.40	17.00	1.445	100	1.000	0.05	0.822	1.188
	WLAN2.4GHz	802.11b 1Mbps	Back	5mm	Ant 5	-	Simultaneous	6	2437	1	13.00	14.50	1.413	100	1.000	0.05	0.494	0.698
	WLAN2.4GHz	802.11b 1Mbps	Front	16mm	Ant 5	-	Full	6	2437	1	19.00	20.50	1.413	100	1.000	-0.1	0.118	0.167
	WLAN2.4GHz	802.11b 1Mbps	Back	27mm	Ant 5	-	Full	6	2437	1	19.00	20.50	1.413	100	1.000	0.18	0.065	0.092
5000MHz																		
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Front	5mm	Ant 5	-	Standalone	58	5290	1	10.28	12.00	1.486	100	1.000	-0.07	0.129	0.192
45	WLAN5.3GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5	-	Standalone	58	5290	1	10.28	12.00	1.486	100	1.000	0.02	0.787	**1.169**
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5	-	Standalone	58	5290	2	10.28	12.00	1.486	100	1.000	0.05	0.364	0.541
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5	-	Standalone	58	5290	3	10.28	12.00	1.486	100	1.000	0.04	0.342	0.508
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5	-	Simultaneous	58	5290	1	6.79	8.50	1.483	100	1.000	0.03	0.343	0.509
	WLAN5.3GHz	802.11a 6Mbps	Front	16mm	Ant 5	-	Full	56	5280	1	17.64	19.00	1.368	100	1.000	0.12	0.198	0.271
	WLAN5.3GHz	802.11a 6Mbps	Back	27mm	Ant 5	-	Full	56	5280	1	17.64	19.00	1.368	100	1.000	0.14	0.775	1.060
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Back	27mm	Ant 5	-	Simultaneous	58	5290	1	6.79	8.50	1.483	100	1.000	0.05	0.071	0.105
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Front	5mm	Ant 5	-	Standalone	106	5530	1	9.19	11.00	1.517	100	1.000	-0.03	0.121	0.184
46	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5	-	Standalone	106	5530	1	9.19	11.00	1.517	100	1.000	-0.07	0.723	**1.097**
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5	-	Standalone	122	5610	1	9.16	11.00	1.528	100	1.000	-0.13	0.629	0.961
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5	-	Standalone	138	5690	1	9.08	11.00	1.556	100	1.000	0.07	0.681	1.060
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5	-	Simultaneous	106	5530	1	6.26	8.00	1.493	100	1.000	-0.14	0.361	0.539
	WLAN5.5GHz	802.11a 6Mbps	Front	16mm	Ant 5	-	Full	116	5580	1	17.35	19.00	1.462	100	1.000	-0.02	0.171	0.250
	WLAN5.5GHz	802.11a 6Mbps	Back	27mm	Ant 5	-	Full	116	5580	1	17.35	19.00	1.462	100	1.000	0.18	0.582	0.851
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Front	5mm	Ant 5	-	Standalone	155	5775	1	8.72	10.50	1.507	100	1.000	-0.13	0.100	0.151
47	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5	-	Standalone	155	5775	1	8.72	10.50	1.507	100	1.000	0.12	0.744	**1.121**
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	5mm	Ant 5	-	Simultaneous	155	5775	1	5.73	7.50	1.503	100	1.000	-0.1	0.363	0.546
	WLAN5.8GHz	802.11a 6Mbps	Front	16mm	Ant 5	-	Full	157	5785	1	17.40	19.00	1.445	100	1.000	0.02	0.165	0.238
	WLAN5.8GHz	802.11a 6Mbps	Back	27mm	Ant 5	-	Full	157	5785	1	17.40	19.00	1.445	100	1.000	-0.02	0.528	0.763

15.4 Product specific 10g SAR

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
835MHz																					
48	GSM850	-	-	-	-	GPRS 2 TX Slot	Back	0mm	Ant 0	ECI 4	189	836.4	1	30.14	31.50	1.368	-	-	0.06	1.450	**1.983**
49	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 0	ECI 4	4182	836.4	1	23.13	24.00	1.222	-	-	0.07	1.310	**1.601**
50	LTE Band 26	15M	QPSK	1	37	-	Back	0mm	Ant 3	ECI 4	26865	831.5	1	22.79	24.00	1.321	-	-	-0.06	1.470	**1.942**
	LTE Band 26	15M	QPSK	36	0	-	Back	0mm	Ant 3	ECI 4	26865	831.5	1	21.75	23.00	1.334	-	-	-0.07	1.180	1.574
1750MHz																					
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	0mm	Ant 0	ECI 6	1413	1732.6	1	20.59	21.50	1.233	-	-	0.14	1.060	1.307
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 0	ECI 6	1413	1732.6	1	20.59	21.50	1.233	-	-	-0.08	2.120	2.614
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 0	ECI 6	1312	1712.4	1	20.55	21.50	1.245	-	-	-0.05	2.170	2.701
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 0	ECI 6	1513	1752.6	1	20.53	21.50	1.250	-	-	0.15	2.140	2.676
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	ECI 6	1413	1732.6	1	20.59	21.50	1.233	-	-	0.11	2.630	3.243
51	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	ECI 6	1312	1712.4	1	20.55	21.50	1.245	-	-	0.12	2.690	**3.348**
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	ECI 6	1513	1752.6	1	20.53	21.50	1.250	-	-	-0.03	2.650	3.313
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	ECI 4	1413	1732.6	1	23.16	24.00	1.213	-	-	-0.11	1.010	1.226
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Back	11mm	Ant 0	ECI 4	1413	1732.6	1	23.16	24.00	1.213	-	-	0.02	0.824	1.000
	WCDMA IV	-	-	-	-	RMC 12.2Kbps	Bottom Side	11mm	Ant 0	ECI 4	1413	1732.6	1	23.16	24.00	1.213	-	-	0.07	1.040	1.262
	LTE Band 66	20M	QPSK	1	49	-	Front	0mm	Ant 0	ECI 6	132322	1745	1	21.30	22.00	1.175	-	-	0.06	1.140	1.339
	LTE Band 66	20M	QPSK	1	49	-	Back	0mm	Ant 0	ECI 6	132322	1745	1	21.30	22.00	1.175	-	-	-0.16	2.340	2.749
	LTE Band 66	20M	QPSK	1	49	-	Back	0mm	Ant 0	ECI 6	132072	1720	1	21.21	22.00	1.199	-	-	-0.06	2.420	2.903
	LTE Band 66	20M	QPSK	1	49	-	Back	0mm	Ant 0	ECI 6	132572	1770	1	21.23	22.00	1.194	-	-	-0.03	2.350	2.806
	LTE Band 66	20M	QPSK	1	49	-	Bottom Side	0mm	Ant 0	ECI 6	132322	1745	1	21.30	22.00	1.175	-	-	-0.01	2.760	3.243
52	LTE Band 66	20M	QPSK	1	49	-	Bottom Side	0mm	Ant 0	ECI 6	132072	1720	1	21.21	22.00	1.199	-	-	-0.12	2.860	**3.431**
	LTE Band 66	20M	QPSK	1	49	-	Bottom Side	0mm	Ant 0	ECI 6	132572	1770	1	21.23	22.00	1.194	-	-	-0.15	2.770	3.307
	LTE Band 66	20M	QPSK	1	49	-	Front	5mm	Ant 0	ECI 4	132322	1745	1	23.22	24.00	1.197	-	-	0.13	1.100	1.316
	LTE Band 66	20M	QPSK	1	49	-	Back	11mm	Ant 0	ECI 4	132322	1745	1	23.22	24.00	1.197	-	-	0.16	0.766	0.917
	LTE Band 66	20M	QPSK	1	49	-	Bottom Side	11mm	Ant 0	ECI 4	132322	1745	1	23.22	24.00	1.197	-	-	-0.01	1.060	1.269
	LTE Band 66	20M	QPSK	50	0	-	Front	0mm	Ant 0	ECI 6	132322	1745	1	20.29	21.00	1.178	-	-	0.05	0.898	1.057
	LTE Band 66	20M	QPSK	50	0	-	Back	0mm	Ant 0	ECI 6	132322	1745	1	20.29	21.00	1.178	-	-	0.09	2.050	2.414
	LTE Band 66	20M	QPSK	50	0	-	Back	0mm	Ant 0	ECI 6	132072	1720	1	20.25	21.00	1.189	-	-	0	2.470	2.936
	LTE Band 66	20M	QPSK	50	0	-	Back	0mm	Ant 0	ECI 6	132572	1770	1	20.22	21.00	1.197	-	-	0.18	2.480	2.968
	LTE Band 66	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 0	ECI 6	132322	1745	1	20.29	21.00	1.178	-	-	0.11	2.450	2.885
	LTE Band 66	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 0	ECI 6	132072	1720	1	20.25	21.00	1.189	-	-	0.08	2.470	2.936
	LTE Band 66	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 0	ECI 6	132572	1770	1	20.22	21.00	1.197	-	-	0.16	2.480	2.968
	LTE Band 66	20M	QPSK	100	0	-	Back	0mm	Ant 0	ECI 6	132322	1745	1	20.20	21.00	1.202	-	-	0.07	2.470	2.970
	LTE Band 66	20M	QPSK	100	0	-	Bottom Side	0mm	Ant 0	ECI 6	132322	1745	1	20.20	21.00	1.202	-	-	0.16	2.480	2.982
	LTE Band 66	20M	QPSK	1	49	-	Back	0mm	Ant 3	ECI 6	132322	1745	1	20.21	21.50	1.346	-	-	-0.09	1.530	2.059
	LTE Band 66	20M	QPSK	1	49	-	Back	0mm	Ant 3	ECI 6	132072	1720	1	20.15	21.50	1.365	-	-	0.19	1.350	1.842
	LTE Band 66	20M	QPSK	1	49	-	Back	0mm	Ant 3	ECI 6	132572	1770	1	20.16	21.50	1.361	-	-	-0.16	1.760	2.396
	LTE Band 66	20M	QPSK	1	49	-	Top Side	0mm	Ant 3	ECI 6	132322	1745	1	20.21	21.50	1.346	-	-	-0.11	1.580	2.126
	LTE Band 66	20M	QPSK	1	49	-	Top Side	0mm	Ant 3	ECI 6	132072	1720	1	20.15	21.50	1.365	-	-	-0.03	1.390	1.897
	LTE Band 66	20M	QPSK	1	49	-	Top Side	0mm	Ant 3	ECI 6	132572	1770	1	20.16	21.50	1.361	-	-	-0.02	1.810	2.464
	LTE Band 66	20M	QPSK	1	49	-	Back	10mm	Ant 3	ECI 4	132322	1745	1	22.64	24.00	1.368	-	-	-0.14	0.775	1.060
	LTE Band 66	20M	QPSK	1	49	-	Top Side	6mm	Ant 3	ECI 4	132322	1745	1	22.64	24.00	1.368	-	-	0.14	0.704	0.963
	LTE Band 66	20M	QPSK	50	0	-	Back	0mm	Ant 3	ECI 6	132322	1745	1	19.22	20.50	1.343	-	-	0.08	1.370	1.840
	LTE Band 66	20M	QPSK	50	0	-	Top Side	0mm	Ant 3	ECI 6	132322	1745	1	19.22	20.50	1.343	-	-	-0.04	1.440	1.934
	LTE Band 66	20M	QPSK	100	0	-	Back	0mm	Ant 3	ECI 6	132322	1745	1	19.08	20.50	1.387	-	-	0.05	1.330	1.844
	LTE Band 66	20M	QPSK	100	0	-	Top Side	0mm	Ant 3	ECI 6	132322	1745	1	19.08	20.50	1.387	-	-	0.09	1.410	1.955
1900MHz																					
	GSM1900	-	-	-	-	GPRS 2 TX Slot	Front	0mm	Ant 0	ECI 4	661	1880	1	27.25	28.50	1.334	-	-	0.09	1.160	1.547
	GSM1900	-	-	-	-	GPRS 2 TX Slot	Back	0mm	Ant 0	ECI 4	661	1880	1	27.25	28.50	1.334	-	-	0.1	2.070	2.760
	GSM1900	-	-	-	-	GPRS 2 TX Slot	Back	0mm	Ant 0	ECI 4	512	1850.2	1	26.92	28.50	1.439	-	-	-0.12	1.950	2.806
	GSM1900	-	-	-	-	GPRS 2 TX Slot	Back	0mm	Ant 0	ECI 4	810	1909.8	1	27.10	28.50	1.380	-	-	0.01	1.880	2.595

	GSM1900	-	-	-	-	GPRS 2 TX Slot	Bottom Side	0mm	Ant 0	ECI 4	661	1880	1	27.25	28.50	1.334	-	-	-0.19	1.920	2.560
53	GSM1900	-	-	-	-	GPRS 2 TX Slot	Bottom Side	0mm	Ant 0	ECI 4	512	1850.2	1	26.92	28.50	1.439	-	-	-0.06	2.070	**2.978**
	GSM1900	-	-	-	-	GPRS 2 TX Slot	Bottom Side	0mm	Ant 0	ECI 4	810	1909.8	1	27.10	28.50	1.380	-	-	0.1	1.760	2.429
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	0mm	Ant 0	ECI 6	9400	1880	1	20.81	21.50	1.172	-	-	-0.13	1.540	1.805
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 0	ECI 6	9400	1880	1	20.81	21.50	1.172	-	-	0.19	2.800	3.282
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 0	ECI 6	9262	1852.4	1	20.80	21.50	1.175	-	-	-0.15	2.790	3.278
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	0mm	Ant 0	ECI 6	9538	1907.6	1	20.78	21.50	1.180	-	-	-0.12	2.780	3.281
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Left Side	0mm	Ant 0	ECI 4	9400	1880	1	23.33	24.00	1.167	-	-	-0.1	1.700	1.984
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	ECI 6	9400	1880	1	20.81	21.50	1.172	-	-	0	2.700	3.165
54	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	ECI 6	9262	1852.4	1	20.80	21.50	1.175	-	-	0.14	2.850	**3.348**
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	0mm	Ant 0	ECI 6	9538	1907.6	1	20.78	21.50	1.180	-	-	0.17	2.520	2.974
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Front	5mm	Ant 0	ECI 4	9400	1880	1	23.33	24.00	1.167	-	-	0.06	1.150	1.342
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Back	11mm	Ant 0	ECI 4	9400	1880	1	23.33	24.00	1.167	-	-	-0.05	1.040	1.213
	WCDMA II	-	-	-	-	RMC 12.2Kbps	Bottom Side	11mm	Ant 0	ECI 4	9400	1880	1	23.33	24.00	1.167	-	-	0.14	1.030	1.202
	LTE Band 2	20M	QPSK	1	49	-	Front	0mm	Ant 0	ECI 6	18900	1880	1	21.14	22.00	1.219	-	-	0.08	1.490	1.816
	LTE Band 2	20M	QPSK	1	49	-	Back	0mm	Ant 0	ECI 6	18900	1880	1	21.14	22.00	1.219	-	-	0.19	2.830	3.450
	LTE Band 2	20M	QPSK	1	49	-	Back	0mm	Ant 0	ECI 6	18700	1860	1	21.12	22.00	1.225	-	-	-0.12	2.810	3.441
	LTE Band 2	20M	QPSK	1	49	-	Back	0mm	Ant 0	ECI 6	19100	1900	1	21.10	22.00	1.230	-	-	0.04	2.830	3.482
	LTE Band 2	20M	QPSK	1	49	-	Left Side	0mm	Ant 0	ECI 4	18900	1880	1	23.10	24.00	1.230	-	-	0.09	1.750	2.153
	LTE Band 2	20M	QPSK	1	49	-	Left Side	0mm	Ant 0	ECI 4	18700	1860	1	23.04	24.00	1.247	-	-	0	1.830	2.283
	LTE Band 2	20M	QPSK	1	49	-	Left Side	0mm	Ant 0	ECI 4	19100	1900	1	23.06	24.00	1.242	-	-	0.14	1.680	2.086
	LTE Band 2	20M	QPSK	1	49	-	Bottom Side	0mm	Ant 0	ECI 6	18900	1880	1	21.14	22.00	1.219	-	-	-0.11	2.810	3.425
55	LTE Band 2	20M	QPSK	1	49	-	Bottom Side	0mm	Ant 0	ECI 6	18700	1860	1	21.12	22.00	1.225	-	-	-0.02	2.930	**3.588**
	LTE Band 2	20M	QPSK	1	49	-	Bottom Side	0mm	Ant 0	ECI 6	18700	1860	2	21.12	22.00	1.225	-	-	0.03	2.650	3.245
	LTE Band 2	20M	QPSK	1	49	-	Bottom Side	0mm	Ant 0	ECI 6	18700	1860	3	21.12	22.00	1.225	-	-	0.15	2.450	3.000
	LTE Band 2	20M	QPSK	1	49	-	Bottom Side	0mm	Ant 0	ECI 6	19100	1900	1	21.10	22.00	1.230	-	-	-0.1	2.680	3.297
	LTE Band 2	20M	QPSK	1	49	-	Front	5mm	Ant 0	ECI 4	18900	1880	1	23.10	24.00	1.230	-	-	0.18	1.100	1.353
	LTE Band 2	20M	QPSK	1	49	-	Back	11mm	Ant 0	ECI 4	18900	1880	1	23.10	24.00	1.230	-	-	-0.1	0.974	1.198
	LTE Band 2	20M	QPSK	1	49	-	Bottom Side	11mm	Ant 0	ECI 4	18900	1880	1	23.10	24.00	1.230	-	-	0.03	1.030	1.267
	LTE Band 2	20M	QPSK	50	0	-	Front	0mm	Ant 0	ECI 6	18900	1880	1	20.15	21.00	1.216	-	-	-0.04	1.290	1.569
	LTE Band 2	20M	QPSK	50	0	-	Back	0mm	Ant 0	ECI 6	18900	1880	1	20.15	21.00	1.216	-	-	0.13	2.500	3.040
	LTE Band 2	20M	QPSK	50	0	-	Back	0mm	Ant 0	ECI 6	18700	1860	1	20.05	21.00	1.245	-	-	0.15	2.490	3.099
	LTE Band 2	20M	QPSK	50	0	-	Back	0mm	Ant 0	ECI 6	19100	1900	1	20.08	21.00	1.236	-	-	-0.18	2.380	2.942
	LTE Band 2	20M	QPSK	50	0	-	Left Side	0mm	Ant 0	ECI 4	18900	1880	1	22.09	23.00	1.233	-	-	-0.06	1.530	1.887
	LTE Band 2	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 0	ECI 6	18900	1880	1	20.15	21.00	1.216	-	-	0.11	2.510	3.053
	LTE Band 2	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 0	ECI 6	18700	1860	1	20.05	21.00	1.245	-	-	0.02	2.530	3.149
	LTE Band 2	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 0	ECI 6	19100	1900	1	20.08	21.00	1.236	-	-	0.04	2.230	2.756
	LTE Band 2	20M	QPSK	100	0	-	Back	0mm	Ant 0	ECI 6	18900	1880	1	20.08	21.00	1.236	-	-	0.19	2.510	3.102
	LTE Band 2	20M	QPSK	100	0	-	Left Side	0mm	Ant 0	ECI 4	18900	1880	1	22.06	23.00	1.242	-	-	0.11	1.530	1.900
	LTE Band 2	20M	QPSK	100	0	-	Bottom Side	0mm	Ant 0	ECI 6	18900	1880	1	20.08	21.00	1.236	-	-	0.18	2.230	2.756
	LTE Band 2	20M	QPSK	1	49	-	Front	0mm	Ant 3	ECI 6	18900	1880	1	18.13	19.50	1.371	-	-	0.13	0.778	1.067
	LTE Band 2	20M	QPSK	1	49	-	Back	0mm	Ant 3	ECI 6	18900	1880	1	18.13	19.50	1.371	-	-	0.05	1.510	2.070
	LTE Band 2	20M	QPSK	1	49	-	Back	0mm	Ant 3	ECI 6	18700	1860	1	18.07	19.50	1.390	-	-	0.15	1.470	2.043
	LTE Band 2	20M	QPSK	1	49	-	Back	0mm	Ant 3	ECI 6	19100	1900	1	18.04	19.50	1.400	-	-	-0.05	1.560	2.183
	LTE Band 2	20M	QPSK	1	49	-	Top Side	0mm	Ant 3	ECI 6	18900	1880	1	18.13	19.50	1.371	-	-	-0.17	1.870	2.564
	LTE Band 2	20M	QPSK	1	49	-	Top Side	0mm	Ant 3	ECI 6	18700	1860	1	18.07	19.50	1.390	-	-	0.09	1.820	2.530
	LTE Band 2	20M	QPSK	1	49	-	Top Side	0mm	Ant 3	ECI 6	19100	1900	1	18.04	19.50	1.400	-	-	-0.11	1.920	2.687
	LTE Band 2	20M	QPSK	1	49	-	Front	4mm	Ant 3	ECI 4	18900	1880	1	22.62	24.00	1.374	-	-	-0.02	1.280	1.759
	LTE Band 2	20M	QPSK	1	49	-	Back	10mm	Ant 3	ECI 4	18900	1880	1	22.62	24.00	1.374	-	-	-0.04	1.310	1.800
	LTE Band 2	20M	QPSK	1	49	-	Top Side	6mm	Ant 3	ECI 4	18900	1880	1	22.62	24.00	1.374	-	-	-0.14	1.800	2.473
	LTE Band 2	20M	QPSK	1	49	-	Top Side	6mm	Ant 3	ECI 4	18700	1860	1	22.52	24.00	1.406	-	-	0.09	1.770	2.489
	LTE Band 2	20M	QPSK	1	49	-	Top Side	6mm	Ant 3	ECI 4	19100	1900	1	22.54	24.00	1.400	-	-	-0.03	1.790	2.505
	LTE Band 2	20M	QPSK	50	0	-	Front	0mm	Ant 3	ECI 6	18900	1880	1	17.16	18.50	1.361	-	-	0.04	0.722	0.983
	LTE Band 2	20M	QPSK	50	0	-	Back	0mm	Ant 3	ECI 6	18900	1880	1	17.16	18.50	1.361	-	-	-0.17	1.380	1.879
	LTE Band 2	20M	QPSK	50	0	-	Top Side	0mm	Ant 3	ECI 6	18900	1880	1	17.16	18.50	1.361	-	-	-0.16	1.630	2.219
	LTE Band 2	20M	QPSK	50	0	-	Top Side	0mm	Ant 3	ECI 6	18700	1860	1	17.15	18.50	1.365	-	-	-0.09	1.640	2.238

	LTE Band 2	20M	QPSK	50	0	-	Top Side	0mm	Ant 3	ECI 6	19100	1900	1	17.10	18.50	1.380	-	-	-0.14	1.690	2.333
	LTE Band 2	20M	QPSK	100	0	-	Back	0mm	Ant 3	ECI 6	18900	1880	1	17.02	18.50	1.406	-	-	-0.16	1.340	1.884
	LTE Band 2	20M	QPSK	100	0	-	Top Side	0mm	Ant 3	ECI 6	18900	1880	1	17.02	18.50	1.406	-	-	0.15	1.690	2.376
2600MHz																					
	LTE Band 7	20M	QPSK	1	49	-	Front	0mm	Ant 0	ECI 6	21100	2535	1	17.46	18.00	1.132	-	-	-0.04	1.690	1.914
	LTE Band 7	20M	QPSK	1	49	-	Back	0mm	Ant 0	ECI 6	21100	2535	1	17.46	18.00	1.132	-	-	-0.14	2.870	3.250
56	LTE Band 7	20M	QPSK	1	49	-	Back	0mm	Ant 0	ECI 6	20850	2510	1	17.32	18.00	1.169	-	-	0.07	2.910	**3.403**
	LTE Band 7	20M	QPSK	1	49	-	Back	0mm	Ant 0	ECI 6	20850	2510	2	17.32	18.00	1.169	-	-	0.04	2.780	3.251
	LTE Band 7	20M	QPSK	1	49	-	Back	0mm	Ant 0	ECI 6	20850	2510	3	17.32	18.00	1.169	-	-	0.01	2.450	2.865
	LTE Band 7	20M	QPSK	1	49	-	Back	0mm	Ant 0	ECI 6	21350	2560	1	17.39	18.00	1.151	-	-	-0.18	2.690	3.096
	LTE Band 7	20M	QPSK	1	49	-	Bottom Side	0mm	Ant 0	ECI 6	21100	2535	1	17.46	18.00	1.132	-	-	0.08	1.800	2.038
	LTE Band 7	20M	QPSK	1	49	-	Bottom Side	0mm	Ant 0	ECI 6	20850	2510	1	17.32	18.00	1.169	-	-	-0.1	1.790	2.093
	LTE Band 7	20M	QPSK	1	49	-	Bottom Side	0mm	Ant 0	ECI 6	21350	2560	1	17.39	18.00	1.151	-	-	-0.1	1.650	1.899
	LTE Band 7	20M	QPSK	1	49	-	Front	5mm	Ant 0	ECI 4	21100	2535	1	23.48	24.00	1.127	-	-	-0.12	2.510	2.829
	LTE Band 7	20M	QPSK	1	49	-	Front	5mm	Ant 0	ECI 4	20850	2510	1	23.40	24.00	1.148	-	-	0.13	2.450	2.813
	LTE Band 7	20M	QPSK	1	49	-	Front	5mm	Ant 0	ECI 4	21350	2560	1	23.40	24.00	1.148	-	-	-0.08	2.410	2.767
	LTE Band 7	20M	QPSK	1	49	-	Back	11mm	Ant 0	ECI 4	21100	2535	1	23.48	24.00	1.127	-	-	0.13	2.600	2.931
	LTE Band 7	20M	QPSK	1	49	-	Back	11mm	Ant 0	ECI 4	20850	2510	1	23.40	24.00	1.148	-	-	0.01	2.540	2.916
	LTE Band 7	20M	QPSK	1	49	-	Back	11mm	Ant 0	ECI 4	21350	2560	1	23.40	24.00	1.148	-	-	0.09	2.550	2.928
	LTE Band 7	20M	QPSK	1	49	-	Bottom Side	11mm	Ant 0	ECI 4	21100	2535	1	23.48	24.00	1.127	-	-	-0.08	2.580	2.908
	LTE Band 7	20M	QPSK	1	49	-	Bottom Side	11mm	Ant 0	ECI 4	20850	2510	1	23.40	24.00	1.148	-	-	-0.03	2.410	2.767
	LTE Band 7	20M	QPSK	1	49	-	Bottom Side	11mm	Ant 0	ECI 4	21350	2560	1	23.40	24.00	1.148	-	-	-0.05	2.520	2.893
	LTE Band 7	20M	QPSK	50	0	-	Front	0mm	Ant 0	ECI 6	21100	2535	1	16.55	17.00	1.109	-	-	-0.04	1.350	1.497
	LTE Band 7	20M	QPSK	50	0	-	Back	0mm	Ant 0	ECI 6	21100	2535	1	16.55	17.00	1.109	-	-	0.15	2.280	2.529
	LTE Band 7	20M	QPSK	50	0	-	Back	0mm	Ant 0	ECI 6	20850	2510	1	16.52	17.00	1.117	-	-	-0.12	2.320	2.591
	LTE Band 7	20M	QPSK	50	0	-	Back	0mm	Ant 0	ECI 6	21350	2560	1	16.48	17.00	1.127	-	-	0.03	2.130	2.401
	LTE Band 7	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 0	ECI 6	21100	2535	1	16.55	17.00	1.109	-	-	-0.04	1.390	1.542
	LTE Band 7	20M	QPSK	100	0	-	Back	0mm	Ant 0	ECI 6	21100	2535	1	16.48	17.00	1.127	-	-	-0.02	1.410	1.589
	LTE Band 7	20M	QPSK	100	0	-	Bottom Side	0mm	Ant 0	ECI 6	21100	2535	1	16.48	17.00	1.127	-	-	0.1	1.300	1.465
	LTE Band 7	20M	QPSK	1	49	-	Front	0mm	Ant 3	ECI 6	21100	2535	1	18.16	19.50	1.361	-	-	-0.12	0.777	1.058
	LTE Band 7	20M	QPSK	1	49	-	Back	0mm	Ant 3	ECI 6	21100	2535	1	18.16	19.50	1.361	-	-	0.06	1.800	2.451
	LTE Band 7	20M	QPSK	1	49	-	Back	0mm	Ant 3	ECI 6	20850	2510	1	18.13	19.50	1.371	-	-	-0.1	1.880	2.577
	LTE Band 7	20M	QPSK	1	49	-	Back	0mm	Ant 3	ECI 6	21350	2560	1	18.13	19.50	1.371	-	-	-0.03	1.740	2.385
	LTE Band 7	20M	QPSK	1	49	-	Left Side	0mm	Ant 3	ECI 6	21100	2535	1	18.16	19.50	1.361	-	-	-0.06	1.550	2.110
	LTE Band 7	20M	QPSK	1	49	-	Left Side	0mm	Ant 3	ECI 6	20850	2510	1	18.13	19.50	1.371	-	-	-0.14	1.620	2.221
	LTE Band 7	20M	QPSK	1	49	-	Left Side	0mm	Ant 3	ECI 6	21350	2560	1	18.13	19.50	1.371	-	-	-0.07	1.500	2.056
	LTE Band 7	20M	QPSK	1	49	-	Top Side	0mm	Ant 3	ECI 6	21100	2535	1	18.16	19.50	1.361	-	-	-0.03	0.888	1.209
	LTE Band 7	20M	QPSK	1	49	-	Front	4mm	Ant 3	ECI 4	21100	2535	1	22.60	24.00	1.380	-	-	0.04	1.740	2.402
	LTE Band 7	20M	QPSK	1	49	-	Back	10mm	Ant 3	ECI 4	21100	2535	1	22.60	24.00	1.380	-	-	0.04	1.920	2.650
	LTE Band 7	20M	QPSK	1	49	-	Left Side	5mm	Ant 3	ECI 4	21100	2535	1	22.60	24.00	1.380	-	-	-0.11	0.992	1.369
	LTE Band 7	20M	QPSK	1	49	-	Top Side	6mm	Ant 3	ECI 4	21100	2535	1	22.60	24.00	1.380	-	-	0.09	0.909	1.255
	LTE Band 7	20M	QPSK	50	0	-	Front	0mm	Ant 3	ECI 6	21100	2535	1	17.21	18.50	1.346	-	-	-0.01	0.705	0.949
	LTE Band 7	20M	QPSK	50	0	-	Back	0mm	Ant 3	ECI 6	21100	2535	1	17.21	18.50	1.346	-	-	-0.04	1.550	2.086
	LTE Band 7	20M	QPSK	50	0	-	Back	0mm	Ant 3	ECI 6	20850	2510	1	17.12	18.50	1.374	-	-	0.09	1.620	2.226
	LTE Band 7	20M	QPSK	50	0	-	Back	0mm	Ant 3	ECI 6	21350	2560	1	17.14	18.50	1.368	-	-	-0.1	1.520	2.079
	LTE Band 7	20M	QPSK	50	0	-	Left Side	0mm	Ant 3	ECI 6	21100	2535	1	17.21	18.50	1.346	-	-	-0.19	1.350	1.817
	LTE Band 7	20M	QPSK	50	0	-	Top Side	0mm	Ant 3	ECI 6	21100	2535	1	17.21	18.50	1.346	-	-	-0.02	0.799	1.075
	LTE Band 7	20M	QPSK	100	0	-	Back	0mm	Ant 3	ECI 6	21100	2535	1	17.17	18.50	1.358	-	-	0.18	1.300	1.766
	LTE Band 7	20M	QPSK	100	0	-	Left Side	0mm	Ant 3	ECI 6	21100	2535	1	17.17	18.50	1.358	-	-	0.03	0.799	1.085
	LTE Band 38	20M	QPSK	1	49	-	Front	0mm	Ant 0	ECI 6	38000	2595	1	18.95	19.50	1.135	62.9	1.006	0.18	1.030	1.176
	LTE Band 38	20M	QPSK	1	49	-	Back	0mm	Ant 0	ECI 6	38000	2595	1	18.95	19.50	1.135	62.9	1.006	0.15	1.610	1.838
	LTE Band 38	20M	QPSK	1	49	-	Bottom Side	0mm	Ant 0	ECI 6	38000	2595	1	18.95	19.50	1.135	62.9	1.006	-0.05	0.914	1.044
	LTE Band 38	20M	QPSK	1	49	-	Front	5mm	Ant 0	ECI 4	38000	2595	1	23.46	24.00	1.132	62.9	1.006	-0.13	1.960	2.233
	LTE Band 38	20M	QPSK	1	49	-	Back	11mm	Ant 0	ECI 4	38000	2595	1	23.46	24.00	1.132	62.9	1.006	0.01	2.190	2.495
	LTE Band 38	20M	QPSK	1	49	-	Bottom Side	11mm	Ant 0	ECI 4	38000	2595	1	23.46	24.00	1.132	62.9	1.006	0.16	2.010	2.290
	LTE Band 38	20M	QPSK	50	0	-	Front	0mm	Ant 0	ECI 6	38000	2595	1	18.19	18.50	1.074	62.9	1.006	0	0.877	0.948

	LTE Band 38	20M	QPSK	50	0	-	Back	0mm	Ant 0	ECI 6	38000	2595	1	18.19	18.50	1.074	62.9	1.006	0.17	1.400	1.513
	LTE Band 38	20M	QPSK	50	0	-	Bottom Side	0mm	Ant 0	ECI 6	38000	2595	1	18.19	18.50	1.074	62.9	1.006	-0.12	0.781	0.844
	LTE Band 38	20M	QPSK	100	0	-	Back	0mm	Ant 0	ECI 6	38000	2595	1	18.13	18.50	1.089	62.9	1.006	0.12	1.410	1.545
	LTE Band 38	20M	QPSK	1	49	-	Front	0mm	Ant 3	ECI 6	38000	2595	1	21.13	22.00	1.222	62.9	1.006	0.12	1.430	1.758
57	LTE Band 38	20M	QPSK	1	49	-	Back	0mm	Ant 3	ECI 6	38000	2595	1	21.13	22.00	1.222	62.9	1.006	0.09	2.260	**2.778**
	LTE Band 38	20M	QPSK	1	49	-	Left Side	0mm	Ant 3	ECI 6	38000	2595	1	21.13	22.00	1.222	62.9	1.006	0.01	2.080	2.557
	LTE Band 38	20M	QPSK	1	49	-	Top Side	0mm	Ant 3	ECI 6	38000	2595	1	21.13	22.00	1.222	62.9	1.006	-0.03	1.540	1.893
	LTE Band 38	20M	QPSK	1	49	-	Front	4mm	Ant 3	ECI 4	38000	2595	1	22.99	24.00	1.262	62.9	1.006	-0.06	1.320	1.676
	LTE Band 38	20M	QPSK	1	49	-	Back	10mm	Ant 3	ECI 4	38000	2595	1	22.99	24.00	1.262	62.9	1.006	-0.17	1.350	1.714
	LTE Band 38	20M	QPSK	1	49	-	Left Side	5mm	Ant 3	ECI 4	38000	2595	1	22.99	24.00	1.262	62.9	1.006	-0.03	1.330	1.688
	LTE Band 38	20M	QPSK	1	49	-	Top Side	6mm	Ant 3	ECI 4	38000	2595	1	22.99	24.00	1.262	62.9	1.006	0.19	1.740	2.209
	LTE Band 38	20M	QPSK	50	0	-	Front	0mm	Ant 3	ECI 6	38000	2595	1	20.06	21.00	1.242	62.9	1.006	-0.11	1.260	1.574
	LTE Band 38	20M	QPSK	50	0	-	Back	0mm	Ant 3	ECI 6	38000	2595	1	20.06	21.00	1.242	62.9	1.006	0.04	1.980	2.473
	LTE Band 38	20M	QPSK	50	0	-	Left Side	0mm	Ant 3	ECI 6	38000	2595	1	20.06	21.00	1.242	62.9	1.006	-0.07	1.790	2.236
	LTE Band 38	20M	QPSK	50	0	-	Top Side	0mm	Ant 3	ECI 6	38000	2595	1	20.06	21.00	1.242	62.9	1.006	0.02	1.310	1.636
	LTE Band 38	20M	QPSK	100	0	-	Back	0mm	Ant 3	ECI 6	38000	2595	1	20.04	21.00	1.247	62.9	1.006	-0.09	1.920	2.409
	LTE Band 38	20M	QPSK	100	0	-	Left Side	0mm	Ant 3	ECI 6	38000	2595	1	20.04	21.00	1.247	62.9	1.006	-0.07	1.720	2.158

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
2450MHz																	
58	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 5	Full	6	2437	1	19.00	20.50	1.413	100	1.000	-0.07	1.220	**1.723**
	WLAN2.4GHz	802.11b 1Mbps	Top Side	0mm	Ant 5	Full	6	2437	1	19.00	20.50	1.413	100	1.000	0.12	0.676	0.955
	WLAN2.4GHz	802.11b 1Mbps	Back	0mm	Ant 5	Simultaneous	6	2437	1	16.40	18.00	1.445	100	1.000	0.17	0.723	1.045
	WLAN2.4GHz	802.11b 1Mbps	Back	7mm	Ant 5	Full	6	2437	1	19.00	20.50	1.413	100	1.000	0.09	0.366	0.517
5000MHz																	
	WLAN5.2GHz	802.11n-HT40 MCS0	Back	0mm	Ant 5	Standalone	46	5230	1	15.68	17.00	1.355	100	1.000	0.1	1.060	1.437
59	WLAN5.2GHz	802.11n-HT40 MCS0	Right Side	0mm	Ant 5	Standalone	46	5230	1	15.68	17.00	1.355	100	1.000	0.05	1.830	**2.480**
	WLAN5.2GHz	802.11n-HT40 MCS0	Right Side	0mm	Ant 5	Standalone	38	5190	1	14.31	16.00	1.476	100	1.000	0.02	1.340	1.977
	WLAN5.2GHz	802.11a 6Mbps	Top Side	0mm	Ant 5	Full	48	5240	1	17.73	19.00	1.340	100	1.000	-0.09	0.890	1.192
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 5	Simultaneous	42	5210	1	13.24	15.00	1.500	100	1.000	0.03	0.568	0.852
	WLAN5.2GHz	802.11a 6Mbps	Back	7mm	Ant 5	Full	48	5240	1	17.73	19.00	1.340	100	1.000	-0.11	1.700	2.277
	WLAN5.2GHz	802.11a 6Mbps	Right Side	7mm	Ant 5	Full	48	5240	1	17.73	19.00	1.340	100	1.000	0.13	1.410	1.889
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Back	11mm	Ant 5	Simultaneous	42	5210	1	13.24	15.00	1.500	100	1.000	0.05	0.355	0.532
	WLAN5.2GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 5	Simultaneous	42	5210	1	13.24	15.00	1.500	100	1.000	0.01	0.431	0.646
	WLAN5.3GHz	802.11n-HT40 MCS0	Front	0mm	Ant 5	Standalone	54	5270	1	15.54	17.00	1.400	100	1.000	0.05	0.704	0.985
	WLAN5.3GHz	802.11n-HT40 MCS0	Back	0mm	Ant 5	Standalone	54	5270	1	15.54	17.00	1.400	100	1.000	0.05	1.220	1.707
60	WLAN5.3GHz	802.11n-HT40 MCS0	Right Side	0mm	Ant 5	Standalone	54	5270	1	15.54	17.00	1.400	100	1.000	-0.03	1.950	**2.729**
	WLAN5.3GHz	802.11n-HT40 MCS0	Right Side	0mm	Ant 5	Standalone	54	5270	1	15.54	17.00	1.400	100	1.000	0.09	1.910	2.673
	WLAN5.3GHz	802.11n-HT40 MCS0	Right Side	0mm	Ant 5	Standalone	54	5270	2	15.54	17.00	1.400	100	1.000	-0.12	1.150	1.610
	WLAN5.3GHz	802.11n-HT40 MCS0	Right Side	0mm	Ant 5	Standalone	54	5270	3	15.54	17.00	1.400	100	1.000	-0.13	0.983	1.376
	WLAN5.3GHz	802.11a 6Mbps	Top Side	0mm	Ant 5	Full	56	5280	1	17.64	19.00	1.368	100	1.000	0.07	0.875	1.197
	WLAN5.3GHz	802.11n-HT40 MCS0	Back	0mm	Ant 5	Simultaneous	54	5270	1	13.75	15.00	1.334	100	1.000	-0.14	0.731	0.975
	WLAN5.3GHz	802.11a 6Mbps	Front	3mm	Ant 5	Full	56	5280	1	17.64	19.00	1.368	100	1.000	0.18	0.838	1.146
	WLAN5.3GHz	802.11a 6Mbps	Back	7mm	Ant 5	Full	56	5280	1	17.64	19.00	1.368	100	1.000	0.1	1.690	2.311
	WLAN5.3GHz	802.11a 6Mbps	Right Side	7mm	Ant 5	Full	56	5280	1	17.64	19.00	1.368	100	1.000	-0.09	1.840	2.517
	WLAN5.3GHz	802.11a 6Mbps	Front	5mm	Ant 5	Full	56	5280	1	17.64	19.00	1.368	100	1.000	-0.14	0.670	0.916
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Back	11mm	Ant 5	Simultaneous	58	5290	1	13.39	15.00	1.449	100	1.000	0.02	0.347	0.503
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 5	Simultaneous	58	5290	1	13.39	15.00	1.449	100	1.000	0.05	0.414	0.600
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 5	Standalone	106	5530	1	15.21	17.00	1.510	100	1.000	-0.05	0.366	0.553
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 5	Standalone	106	5530	1	15.21	17.00	1.510	100	1.000	0.02	0.975	1.472
61	WLAN5.5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 5	Standalone	106	5530	1	15.21	17.00	1.510	100	1.000	-0.12	1.880	**2.839**
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 5	Standalone	122	5610	1	15.20	17.00	1.514	100	1.000	0.18	1.570	2.376
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 5	Standalone	138	5690	1	15.08	17.00	1.556	100	1.000	-0.05	1.500	2.334
	WLAN5.5GHz	802.11a 6Mbps	Top Side	0mm	Ant 5	Full	116	5580	1	17.35	19.00	1.462	100	1.000	0.17	0.705	1.031

	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 5	Simultaneous	106	5530	1	13.30	15.00	1.479	100	1.000	0.05	0.744	1.100
	WLAN5.5GHz	802.11a 6Mbps	Front	3mm	Ant 5	Full	116	5580	1	17.35	19.00	1.462	100	1.000	0.09	0.921	1.347
	WLAN5.5GHz	802.11a 6Mbps	Back	7mm	Ant 5	Full	116	5580	1	17.35	19.00	1.462	100	1.000	0.19	1.910	2.793
	WLAN5.5GHz	802.11a 6Mbps	Right Side	7mm	Ant 5	Full	116	5580	1	17.35	19.00	1.462	100	1.000	-0.15	1.820	2.661
	WLAN5.5GHz	802.11a 6Mbps	Front	5mm	Ant 5	Full	116	5580	1	17.35	19.00	1.462	100	1.000	0.05	0.737	1.078
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	11mm	Ant 5	Simultaneous	106	5530	1	13.30	15.00	1.479	100	1.000	0.04	0.403	0.596
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 5	Simultaneous	106	5530	1	13.30	15.00	1.479	100	1.000	0.12	0.469	0.694
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 5	Standalone	155	5775	1	15.28	17.00	1.486	100	1.000	-0.07	1.060	1.575
62	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 5	Standalone	155	5775	1	15.28	17.00	1.486	100	1.000	-0.08	1.880	**2.794**
	WLAN5.8GHz	802.11a 6Mbps	Top Side	0mm	Ant 5	Full	157	5785	1	17.40	19.00	1.445	100	1.000	-0.01	0.757	1.094
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 5	Simultaneous	155	5775	1	14.34	16.00	1.466	100	1.000	0.09	0.712	1.043
	WLAN5.8GHz	802.11a 6Mbps	Back	7mm	Ant 5	Full	157	5785	1	17.40	19.00	1.445	100	1.000	0.12	1.770	2.558
	WLAN5.8GHz	802.11a 6Mbps	Right Side	7mm	Ant 5	Full	157	5785	1	17.40	19.00	1.445	100	1.000	0.13	1.850	2.674
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	11mm	Ant 5	Simultaneous	155	5775	1	14.34	16.00	1.466	100	1.000	0.12	0.471	0.690
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 5	Simultaneous	155	5775	1	14.34	16.00	1.466	100	1.000	0.12	0.551	0.808

15.5 Repeated SAR Measurement

<1g>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	WLAN5GHz	-	-	-	-	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 5	Standalone	54	5270	1	15.54	17.00	1.400	100	1.000	-0.04	0.839	1	1.174
2nd	WLAN5GHz	-	-	-	-	802.11n-HT40 MCS0	Left Cheek	0mm	Ant 5	Standalone	54	5270	1	15.54	17.00	1.400	100	1.000	0.01	0.821	1.022	1.149
1st	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	ECI 7	4233	846.6	1	23.07	24.00	1.239	-	-	-0.06	1.030	1	1.276
2nd	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	5mm	Ant 0	ECI 7	4233	846.6	1	23.07	24.00	1.239	-	-	0.01	0.998	1.032	1.236
1st	LTE Band 66	20M	QPSK	1	49	-	Bottom Side	5mm	Ant 0	ECI 7	132072	1720	1	17.74	18.50	1.191	-	-	-0.11	1.130	1	1.346
2nd	LTE Band 66	20M	QPSK	1	49	-	Bottom Side	5mm	Ant 0	ECI 7	132072	1720	1	17.74	18.50	1.191	-	-	0.03	1.080	1.046	1.287
1st	LTE Band 2	20M	QPSK	1	49	-	Bottom Side	5mm	Ant 0	ECI 7	18700	1860	1	16.57	17.50	1.239	-	-	-0.12	1.120	1	1.387
2nd	LTE Band 2	20M	QPSK	1	49	-	Bottom Side	5mm	Ant 0	ECI 7	18700	1860	1	16.57	17.50	1.239	-	-	0.04	1.080	1.037	1.338
1st	LTE Band 7	20M	QPSK	1	49	-	Back	5mm	Ant 0	ECI 3	21100	2535	1	14.03	14.50	1.114	-	-	0.03	1.270	1	1.415
2nd	LTE Band 7	20M	QPSK	1	49	-	Back	5mm	Ant 0	ECI 3	21100	2535	1	14.03	14.50	1.114	-	-	-0.12	1.250	1.016	1.393
1st	WLAN2.4GHz	-	-	-	-	802.11b 1Mbps	Back	5mm	Ant 5	Standalone	6	2437	1	15.50	17.00	1.413	100	1.000	0.13	0.873	1	1.233
2nd	WLAN2.4GHz	-	-	-	-	802.11b 1Mbps	Back	5mm	Ant 5	Standalone	6	2437	1	15.50	17.00	1.413	100	1.000	0.12	0.866	1.008	1.223

<10g>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Sample	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Ratio	Reported 10g SAR (W/kg)
1st	LTE Band 66	20M	QPSK	1	49	Bottom Side	0mm	Ant 0	ECI 6	132072	1720	1	21.21	22.00	1.199	-0.12	2.860	1	3.431
2nd	LTE Band 66	20M	QPSK	1	49	Bottom Side	0mm	Ant 0	ECI 6	132072	1720	1	21.21	22.00	1.199	0.05	2.810	1.018	3.371
1st	LTE Band 2	20M	QPSK	1	49	Bottom Side	0mm	Ant 0	-	ECI 6	18700	1860	1	21.12	22.00	-0.02	2.930	1	3.588
2nd	LTE Band 2	20M	QPSK	1	49	Bottom Side	0mm	Ant 0	-	ECI 6	18700	1860	1	21.12	22.00	0.11	2.850	1.018	3.490
1st	LTE Band 7	20M	QPSK	1	49	Back	0mm	Ant 0	ECI 6	20850	2510	1	17.32	18.00	1.169	0.07	2.910	1	3.403
2nd	LTE Band 7	20M	QPSK	1	49	Back	0mm	Ant 0	ECI 6	20850	2510	1	17.32	18.00	1.169	0.05	2.850	1.021	3.333

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥0.8W/kg.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR <1.45W/kg, only one repeated measurement is required.
3. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
4. The ratio is the difference in percentage between original and repeated *measured SAR*.
5. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

16. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Mobile Cellular Phone			
		Head	Body	Hotspot	Product specific 10g SAR
1.	WWAN + WLAN2.4GHz	Yes	Yes	Yes	Yes
2.	WWAN + WLAN5GHz	Yes	Yes	Yes	Yes
3.	WWAN + Bluetooth	Yes	Yes	Yes	Yes
4.	WLAN5GHz + Bluetooth	Yes	Yes	Yes	Yes
5.	WWAN + WLAN5GHz + Bluetooth	Yes	Yes	Yes	Yes
6.	WWAN + WLAN2.4GHz + NFC				Yes
7.	WWAN + WLAN5GHz + NFC				Yes
8.	WWAN + Bluetooth + NFC				Yes
9.	WLAN5GHz + Bluetooth + NFC				Yes
10.	WWAN + WLAN5GHz + Bluetooth + NFC				Yes

General Note:

1. This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), and LTE supports VoLTE function.
2. EUT will choose each GSM, WCDMA and LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
3. This device WLAN 2.4GHz supports hotspot operation and Bluetooth support tethering applications.
4. This device 2.4GHz WLAN/ 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WLAN Direct (GC/GO), and 5.3GHz / 5.5GHz supports WLAN Direct (GC only).
5. According to the EUT characteristic, WLAN 5GHz and Bluetooth can transmit simultaneously.
6. According to the EUT characteristic, WLAN 5GHz and WLAN 2.4GHz cannot transmit simultaneously.
7. WLAN 2.4GHz and Bluetooth share the same antenna and they cannot transmit simultaneously.
8. NFC can transmit simultaneously with other Radios in extremity exposure condition.
9. The worst case 5 GHz WLAN SAR for each configuration was used for SAR summation.
10. When stand-alone SAR is not required for a transmitter or antenna, its SAR is considered zero in the SAR summing process to assess Multi-band transmission SAR compliance.
11. The maximum SAR summation is calculated based on the same configuration and test position.
12. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
    i) 1g Scalar SAR summation < 1.6W/kg and 10g Scalar SAR summation < 4.0W/kg.
    ii) SPLSR = (SAR1 + SAR2)^1.5 / (min. separation distance, mm), and the peak separation distance is determined from the square root of [(x1-x2)2 + (y1-y2)2 + (z1-z2)2], where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
    iii) If SPLSR ≤ 0.04 for 1g SAR and SPLSR≤ 0.10 for 10g SAR, simultaneously transmission SAR measurement is not necessary.
    iv) Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR < 1.6W/kg and 10g SAR < 4.0W/kg.
    v) The SPLSR calculated results please refer to section 16.5.

16.1 Head Exposure Conditions

WWAN Band		Exposure Position	1	3	4	5	1+3	1+4+5
			WWAN	WLAN2.4GHz Ant 5	WLAN5GHz Ant 5	Bluetooth Ant 5	Summed	Summed
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
GSM	GSM850 Ant 0	Right Cheek	0.390	0.410	0.360	0.061	0.80	0.81
		Right Tilted	0.220	0.459	0.462	0.066	0.68	0.75
		Left Cheek	0.352	0.692	0.619	0.134	1.04	1.11
		Left Tilted	0.207	0.737	0.753	0.085	0.94	1.05
	GSM1900 Ant 0	Right Cheek	0.263	0.410	0.360	0.061	0.67	0.68
		Right Tilted	0.185	0.459	0.462	0.066	0.64	0.71
		Left Cheek	0.251	0.692	0.619	0.134	0.94	1.00
		Left Tilted	0.239	0.737	0.753	0.085	0.98	1.08
WCDMA	WCDMA II Ant 0	Right Cheek	0.548	0.410	0.360	0.061	0.96	0.97
		Right Tilted	0.384	0.459	0.462	0.066	0.84	0.91
		Left Cheek	0.543	0.692	0.619	0.134	1.24	1.30
		Left Tilted	0.499	0.737	0.753	0.085	1.24	1.34
	WCDMA IV Ant 0	Right Cheek	0.382	0.410	0.360	0.061	0.79	0.80
		Right Tilted	0.157	0.459	0.462	0.066	0.62	0.69
		Left Cheek	0.277	0.692	0.619	0.134	0.97	1.03
		Left Tilted	0.207	0.737	0.753	0.085	0.94	1.05
	WCDMA V Ant 0	Right Cheek	0.445	0.410	0.360	0.061	0.86	0.87
		Right Tilted	0.248	0.459	0.462	0.066	0.71	0.78
		Left Cheek	0.444	0.692	0.619	0.134	1.14	1.20
		Left Tilted	0.250	0.737	0.753	0.085	0.99	1.09
LTE	LTE Band 2 Ant 3	Right Cheek	0.880	0.410	0.360	0.061	1.29	1.30
		Right Tilted	0.716	0.459	0.462	0.066	1.18	1.24
		Left Cheek	0.424	0.692	0.619	0.134	1.12	1.18
		Left Tilted	0.478	0.737	0.753	0.085	1.22	1.32
	LTE Band 2 Ant 0	Right Cheek	0.440	0.410	0.360	0.061	0.85	0.86
		Right Tilted	0.331	0.459	0.462	0.066	0.79	0.86
		Left Cheek	0.406	0.692	0.619	0.134	1.10	1.16
		Left Tilted	0.396	0.737	0.753	0.085	1.13	1.23
	LTE Band 7 Ant 3	Right Cheek	0.790	0.410	0.360	0.061	1.20	1.21
		Right Tilted	0.585	0.459	0.462	0.066	1.04	1.11
		Left Cheek	0.214	0.692	0.619	0.134	0.91	0.97
		Left Tilted	0.221	0.737	0.753	0.085	0.96	1.06
	LTE Band 7 Ant 0	Right Cheek	0.119	0.410	0.360	0.061	0.53	0.54
		Right Tilted	0.060	0.459	0.462	0.066	0.52	0.59
		Left Cheek	0.061	0.692	0.619	0.134	0.75	0.81
		Left Tilted	0.030	0.737	0.753	0.085	0.77	0.87
	LTE Band 13 Ant 0	Right Cheek	0.256	0.410	0.360	0.061	0.67	0.68
		Right Tilted	0.149	0.459	0.462	0.066	0.61	0.68
		Left Cheek	0.244	0.692	0.619	0.134	0.94	1.00
		Left Tilted	0.136	0.737	0.753	0.085	0.87	0.97
	LTE Band 26 Ant 3	Right Cheek	0.777	0.410	0.360	0.061	1.19	1.20
		Right Tilted	0.609	0.459	0.462	0.066	1.07	1.14
		Left Cheek	0.575	0.692	0.619	0.134	1.27	1.33
		Left Tilted	0.487	0.737	0.753	0.085	1.22	1.33
	LTE Band 26 Ant 0	Right Cheek	0.345	0.410	0.360	0.061	0.76	0.77
		Right Tilted	0.203	0.459	0.462	0.066	0.66	0.73
		Left Cheek	0.333	0.692	0.619	0.134	1.03	1.09
		Left Tilted	0.201	0.737	0.753	0.085	0.94	1.04
	LTE Band 66 Ant 3	Right Cheek	0.815	0.410	0.360	0.061	1.23	1.24
		Right Tilted	0.656	0.459	0.462	0.066	1.12	1.18
		Left Cheek	0.487	0.692	0.619	0.134	1.18	1.24

		Left Tilted	0.470	0.737	0.753	0.085	1.21	1.31
	LTE Band 66 Ant 0	Right Cheek	0.347	0.410	0.360	0.061	0.76	0.77
		Right Tilted	0.160	0.459	0.462	0.066	0.62	0.69
		Left Cheek	0.274	0.692	0.619	0.134	0.97	1.03
		Left Tilted	0.206	0.737	0.753	0.085	0.94	1.04
	LTE Band 38 Ant 3	Right Cheek	0.829	0.410	0.360	0.061	1.24	1.25
		Right Tilted	0.617	0.459	0.462	0.066	1.08	1.15
		Left Cheek	0.292	0.692	0.619	0.134	0.98	1.05
		Left Tilted	0.263	0.737	0.753	0.085	1.00	1.10
	LTE Band 38 Ant 0	Right Cheek	0.051	0.410	0.360	0.061	0.46	0.47
		Right Tilted	0.026	0.459	0.462	0.066	0.49	0.55
		Left Cheek	0.048	0.692	0.619	0.134	0.74	0.80
		Left Tilted	0.024	0.737	0.753	0.085	0.76	0.86

Exposure Position	4	5	4+5
	WLAN5GHz Ant 5	Bluetooth Ant 5	Summed
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
Right Cheek	0.360	0.061	0.42
Right Tilted	0.462	0.066	0.53
Left Cheek	1.174	0.134	1.31
Left Tilted	0.753	0.085	0.84

16.2 Hotspot Exposure Conditions

WWAN Band		Exposure Position	1	3	4	5	1+3	1+4+5	SPLSR
			WWAN	WLAN2.4GHz Ant 5	WLAN5GHz Ant 5	Bluetooth Ant 5	Summed	Summed	
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	
GSM	GSM850 Ant 0	Front	0.729	0.288	0.123	0.049	1.02	0.90	
		Back	1.310	0.757	0.654	0.156	**2.07**	**2.12**	**Case1/8**
		Left side	0.498				0.50	0.50	
		Right side	0.769	0.400	0.584	0.073	1.17	1.43	
		Top side		0.439	0.254	0.074	0.44	0.33	
		Bottom side	0.607				0.61	0.61	
	GSM1900 Ant 0	Front	0.675	0.288	0.123	0.049	0.96	0.85	
		Back	0.977	0.757	0.654	0.156	**1.73**	**1.79**	**Case 2/9**
		Left side	0.381				0.38	0.38	
		Right side	0.137	0.400	0.584	0.073	0.54	0.79	
		Top side		0.439	0.254	0.074	0.44	0.33	
		Bottom side	1.309				1.31	1.31	
WCDMA	WCDMA II Ant 0	Front	0.616	0.288	0.123	0.049	0.90	0.79	
		Back	0.781	0.757	0.654	0.156	1.54	1.59	
		Left side	0.402				0.40	0.40	
		Right side	0.145	0.400	0.584	0.073	0.55	0.80	
		Top side		0.439	0.254	0.074	0.44	0.33	
		Bottom side	1.266				1.27	1.27	
	WCDMA IV Ant 0	Front	0.450	0.288	0.123	0.049	0.74	0.62	
		Back	0.764	0.757	0.654	0.156	1.52	1.57	
		Left side	0.171				0.17	0.17	
		Right side	0.135	0.400	0.584	0.073	0.54	0.79	
		Top side		0.439	0.254	0.074	0.44	0.33	
		Bottom side	1.353				1.35	1.35	
	WCDMA V Ant 0	Front	0.773	0.288	0.123	0.049	1.06	0.95	
		Back	1.276	0.757	0.654	0.156	**2.03**	**2.09**	**Case 3/10**
		Left side	0.408				0.41	0.41	
		Right side	0.674	0.400	0.584	0.073	1.07	1.33	
		Top side		0.439	0.254	0.074	0.44	0.33	
		Bottom side	0.676				0.68	0.68	
LTE	LTE Band 2 Ant 3	Front	0.242	0.288	0.123	0.049	0.53	0.41	
		Back	0.553	0.757	0.654	0.156	1.31	1.36	
		Left side	0.122				0.12	0.12	
		Right side		0.400	0.584	0.073	0.40	0.66	
		Top side	0.618	0.439	0.254	0.074	1.06	0.95	
		Bottom side					0.00	0.00	
	LTE Band 2 Ant 0	Front	0.634	0.288	0.123	0.049	0.92	0.81	
		Back	0.882	0.757	0.654	0.156	**1.64**	**1.69**	**Case 4/11**
		Left side	0.374				0.37	0.37	
		Right side	0.149	0.400	0.584	0.073	0.55	0.81	
		Top side		0.439	0.254	0.074	0.44	0.33	
		Bottom side	1.387				1.39	1.39	
	LTE Band 7 Ant 3	Front	0.272	0.288	0.123	0.049	0.56	0.44	
		Back	0.688	0.757	0.654	0.156	1.45	1.50	
		Left side	0.547				0.55	0.55	
		Right side		0.400	0.584	0.073	0.40	0.66	
		Top side	0.561	0.439	0.254	0.074	1.00	0.89	
		Bottom side					0.00	0.00	
	LTE Band 7 Ant 0	Front	0.475	0.288	0.123	0.049	0.76	0.65	
		Back	1.146	0.757	0.654	0.156	**1.90**	**1.96**	**Case 5/12**
		Left side	0.064				0.06	0.06	

		Right side	0.044	0.400	0.584	0.073	0.44	0.70	
		Top side		0.439	0.254	0.074	0.44	0.33	
		Bottom side	1.325				1.33	1.33	
	LTE Band 13 Ant 0	Front	0.365	0.288	0.123	0.049	0.65	0.54	
		Back	0.615	0.757	0.654	0.156	1.37	1.43	
		Left side	0.277				0.28	0.28	
		Right side	0.459	0.400	0.584	0.073	0.86	1.12	
		Top side		0.439	0.254	0.074	0.44	0.33	
		Bottom side	0.554				0.55	0.55	
	LTE Band 26 Ant 3	Front	0.257	0.288	0.123	0.049	0.55	0.43	
		Back	0.665	0.757	0.654	0.156	1.42	1.48	
		Left side	0.201				0.20	0.20	
		Right side		0.400	0.584	0.073	0.40	0.66	
		Top side	0.398	0.439	0.254	0.074	0.84	0.73	
		Bottom side					0.00	0.00	
	LTE Band 26 Ant 0	Front	0.662	0.288	0.123	0.049	0.95	0.83	
		Back	1.189	0.757	0.654	0.156	**1.95**	**2.00**	**Case 6/13**
		Left side	0.399				0.40	0.40	
		Right side	0.598	0.400	0.584	0.073	1.00	1.26	
		Top side		0.439	0.254	0.074	0.44	0.33	
		Bottom side	0.529				0.53	0.53	
	LTE Band 66 Ant 3	Front	0.263	0.288	0.123	0.049	0.55	0.44	
		Back	0.690	0.757	0.654	0.156	1.45	1.50	
		Left side	0.152				0.15	0.15	
		Right side		0.400	0.584	0.073	0.40	0.66	
		Top side	0.524	0.439	0.254	0.074	0.96	0.85	
		Bottom side					0.00	0.00	
	LTE Band 66 Ant 0	Front	0.451	0.288	0.123	0.049	0.74	0.62	
		Back	0.773	0.757	0.654	0.156	1.53	1.58	
		Left side	0.169				0.17	0.17	
		Right side	0.136	0.400	0.584	0.073	0.54	0.79	
		Top side		0.439	0.254	0.074	0.44	0.33	
		Bottom side	1.346				1.35	1.35	
	LTE Band 38 Ant 3	Front	0.270	0.288	0.123	0.049	0.56	0.44	
		Back	0.646	0.757	0.654	0.156	1.40	1.46	
		Left side	0.471				0.47	0.47	
		Right side		0.400	0.584	0.073	0.40	0.66	
		Top side	0.458	0.439	0.254	0.074	0.90	0.79	
		Bottom side					0.00	0.00	
	LTE Band 38 Ant 0	Front	0.422	0.288	0.123	0.049	0.71	0.59	
		Back	1.004	0.757	0.654	0.156	**1.76**	**1.81**	**Case 7/14**
		Left side	0.052				0.05	0.05	
		Right side	0.028	0.400	0.584	0.073	0.43	0.69	
		Top side		0.439	0.254	0.074	0.44	0.33	
		Bottom side	1.285				1.29	1.29	

Exposure Position	4	5	4+5
	WLAN5GHz Ant 5	Bluetooth Ant 5	Summed
	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
Front	0.123	0.049	0.17
Back	0.654	0.156	0.81
Left side			0.00
Right side	0.584	0.073	0.66
Top side	0.254	0.074	0.33
Bottom side			0.00

16.3 Body-Worn Accessory Exposure Conditions

WWAN Band		Exposure Position	1	3	4	5	1+3	1+4+5	SPLSR
			WWAN	WLAN2.4GHz_B Ant 5	WLAN5GHz_B Ant 5	Bluetooth Ant 5	Summed	Summed	
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	
GSM	GSM850 Ant 0	Front	0.729	0.339	0.192	0.049	1.07	0.97	
		Back	1.310	0.698	0.546	0.156	**2.01**	**2.01**	**Case 15/25**
	GSM1900 Ant 0	Front	0.969	0.339	0.192	0.049	1.31	1.21	
		Back	1.236	0.698	0.546	0.156	**1.93**	**1.94**	**Case 16/26**
WCDMA	WCDMA II Ant 0	Front	0.989	0.339	0.192	0.049	1.33	1.23	
		Back	1.260	0.698	0.546	0.156	**1.96**	**1.96**	**Case 17/27**
	WCDMA IV Ant 0	Front	0.755	0.339	0.192	0.049	1.09	1.00	
		Back	1.280	0.698	0.546	0.156	**1.98**	**1.98**	**Case 18/28**
	WCDMA V Ant 0	Front	0.773	0.339	0.192	0.049	1.11	1.01	
		Back	1.276	0.698	0.546	0.156	**1.97**	**1.98**	**Case 19/29**
LTE	LTE Band 2 Ant 3	Front	0.349	0.339	0.192	0.049	0.69	0.59	
		Back	0.884	0.698	0.546	0.156	**1.58**	**1.59**	
	LTE Band 2 Ant 0	Front	0.985	0.339	0.192	0.049	1.32	1.23	
		Back	1.310	0.698	0.546	0.156	**2.01**	**2.01**	**Case 20/30**
	LTE Band 7 Ant 3	Front	0.347	0.339	0.192	0.049	0.69	0.59	
		Back	0.875	0.698	0.546	0.156	1.57	1.58	
	LTE Band 7 Ant 0	Front	0.586	0.339	0.192	0.049	0.93	0.83	
		Back	1.415	0.698	0.546	0.156	**2.11**	**2.12**	**Case 21/31**
	LTE Band 13 Ant 0	Front	0.365	0.339	0.192	0.049	0.70	0.61	
		Back	0.615	0.698	0.546	0.156	1.31	1.32	
	LTE Band 26 Ant 3	Front	0.335	0.339	0.192	0.049	0.67	0.58	
		Back	0.869	0.698	0.546	0.156	1.57	1.57	
	LTE Band 26 Ant 0	Front	0.662	0.339	0.192	0.049	1.00	0.90	
		Back	1.189	0.698	0.546	0.156	**1.89**	**1.89**	**Case 22/32**
	LTE Band 66 Ant 3	Front	0.282	0.339	0.192	0.049	0.62	0.52	
		Back	0.817	0.698	0.546	0.156	1.52	1.52	
	LTE Band 66 Ant 0	Front	0.738	0.339	0.192	0.049	1.08	0.98	
		Back	1.355	0.698	0.546	0.156	**2.05**	**2.06**	**Case 23/33**
	LTE Band 38 Ant 3	Front	0.337	0.339	0.192	0.049	0.68	0.58	
		Back	0.808	0.698	0.546	0.156	1.51	1.51	
	LTE Band 38 Ant 0	Front	0.555	0.339	0.192	0.049	0.89	0.80	
		Back	1.318	0.698	0.546	0.156	**2.02**	**2.02**	**Case 24/34**

Exposure Position	4	5	**4+5**
	WLAN5GHz_B Ant 5	Bluetooth Ant 5	**Summed**
	1g SAR (W/kg)	1g SAR (W/kg)	**1g SAR (W/kg)**
Front	0.192	0.049	0.24
Back	1.169	0.156	1.33

<Sensor off>

WWAN Band	Exposure Position	1	3	4	1+3	1+4
		WWAN	WLAN2.4GHz Ant 5	WLAN5GHz Ant 5	Summed	Summed
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
All Band Ant 0	Front	0.762	0.167	0.271	0.93	1.03
	Back	0.652	0.092	0.851	0.74	1.50
All Band Ant 3	Front	0.440	0.167	0.271	0.61	0.71
	Back	0.253	0.092	0.851	0.35	1.10

16.4 Product specific 10g SAR Exposure Conditions

Remark:

1. For Bluetooth Product specific 10g stand-alone SAR is not required for a transmitter or antenna, due to 1g hotspot SAR is <1.2W/kg.

WWAN Band		Exposure Position	1	3	4	5	1+3+5	1+4+5	SPLSR
			WWAN	WLAN2.4GHz Ant 5	WLAN5GHz Ant 5	NFC	Summed	Summed	
			10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	
GSM	GSM850 Ant 0	Front			0.985		0.00	0.99	
		Back	1.983	1.045	1.100	0.039	3.07	3.12	
		Left side					0.00	0.00	
		Right side			2.839		0.00	2.84	
		Top side			1.197		0.00	1.20	
		Bottom side					0.00	0.00	
	GSM1900 Ant 0	Front	1.547		0.985		1.55	2.53	
		Back	2.806	1.045	1.100	0.039	**3.89**	**3.95**	
		Left side					0.00	0.00	
		Right side			2.839		0.00	2.84	
		Top side			1.197		0.00	1.20	
		Bottom side	2.978				2.98	2.98	
WCDMA	WCDMA II Ant 0	Front	1.805		0.985		1.81	2.79	
		Back	3.282	1.045	1.100	0.039	**4.37**	**4.42**	**Case 35/39**
		Left side	1.984				1.98	1.98	
		Right side			2.839		0.00	2.84	
		Top side			1.197		0.00	1.20	
		Bottom side	3.348				3.35	3.35	
	WCDMA IV Ant 0	Front	1.307		0.985		1.31	2.29	
		Back	2.701	1.045	1.100	0.039	3.79	3.84	
		Left side					0.00	0.00	
		Right side			2.839		0.00	2.84	
		Top side			1.197		0.00	1.20	
		Bottom side	3.348				3.35	3.35	
	WCDMA V Ant 0	Front			0.985		0.00	0.99	
		Back	1.601	1.045	1.100	0.039	2.69	2.74	
		Left side					0.00	0.00	
		Right side			2.839		0.00	2.84	
		Top side			1.197		0.00	1.20	
		Bottom side					0.00	0.00	
LTE	LTE Band 2 Ant 3	Front	1.067		0.985		1.07	2.05	
		Back	2.183	1.045	1.100	0.039	3.27	3.32	
		Left side					0.00	0.00	
		Right side			2.839		0.00	2.84	
		Top side	2.687		1.197		2.69	3.88	
		Bottom side					0.00	0.00	
	LTE Band 2 Ant 0	Front	1.816		0.985		1.82	2.80	
		Back	3.482	1.045	1.100	0.039	**4.57**	**4.62**	**Case 36/40**
		Left side	2.283				2.28	2.28	
		Right side			2.839		0.00	2.84	
		Top side			1.197		0.00	1.20	
		Bottom side	3.588				3.59	3.59	
	LTE Band 7 Ant 3	Front	1.058		0.985		1.06	2.04	
		Back	2.577	1.045	1.100	0.039	3.66	3.72	
		Left side	2.221				2.22	2.22	
		Right side			2.839		0.00	2.84	
		Top side	1.209		1.197		1.21	2.41	
		Bottom side					0.00	0.00	
	LTE Band 7 Ant 0	Front	1.914		0.985		1.91	2.90	

		Back	3.403	1.045	1.100	0.039	**4.49**	**4.54**	**Case 37/41**
		Left side					0.00	0.00	
		Right side			2.839		0.00	2.84	
		Top side			1.197		0.00	1.20	
		Bottom side	2.093				2.09	2.09	
	LTE Band 13 Ant 0	Front			0.985		0.00	0.99	
		Back		1.045	1.100	0.039	1.08	1.14	
		Left side					0.00	0.00	
		Right side			2.839		0.00	2.84	
		Top side			1.197		0.00	1.20	
		Bottom side					0.00	0.00	
	LTE Band 26 Ant 3	Front			0.985		0.00	0.99	
		Back	1.942	1.045	1.100	0.039	3.03	3.08	
		Left side					0.00	0.00	
		Right side			2.839		0.00	2.84	
		Top side			1.197		0.00	1.20	
		Bottom side					0.00	0.00	
	LTE Band 26 Ant 0	Front			0.985		0.00	0.99	
		Back		1.045	1.100	0.039	1.08	1.14	
		Left side					0.00	0.00	
		Right side			2.839		0.00	2.84	
		Top side			1.197		0.00	1.20	
		Bottom side					0.00	0.00	
	LTE Band 66 Ant 3	Front			0.985		0.00	0.99	
		Back	2.396	1.045	1.100	0.039	3.48	3.54	
		Left side					0.00	0.00	
		Right side			2.839		0.00	2.84	
		Top side	2.464		1.197		2.46	3.66	
		Bottom side					0.00	0.00	
	LTE Band 66 Ant 0	Front	1.339		0.985		1.34	2.32	
		Back	2.970	1.045	1.100	0.039	**4.05**	**4.11**	**Case 38/42**
		Left side					0.00	0.00	
		Right side			2.839		0.00	2.84	
		Top side			1.197		0.00	1.20	
		Bottom side	3.431				3.43	3.43	
	LTE Band 38 Ant 3	Front	1.758		0.985		1.76	2.74	
		Back	2.778	1.045	1.100	0.039	3.86	3.92	
		Left side	2.557				2.56	2.56	
		Right side			2.839		0.00	2.84	
		Top side	1.893		1.197		1.89	3.09	
		Bottom side					0.00	0.00	
	LTE Band 38 Ant 0	Front	1.176		0.985		1.18	2.16	
		Back	1.838	1.045	1.100	0.039	2.92	2.98	
		Left side					0.00	0.00	
		Right side			2.839		0.00	2.84	
		Top side			1.197		0.00	1.20	
		Bottom side	1.044				1.04	1.04	

<Sensor off>

WWAN Band	Exposure Position	1	3	4	1+3	1+4
		WWAN	WLAN2.4GHz Ant 5	WLAN5GHz Ant 5	Summed	Summed
		10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)	10g SAR (W/kg)
All Bands Ant 0	Front	2.829		1.078	2.83	3.91
	Back	2.931	0.517	0.690	3.45	3.62
	Left side				0.00	0.00
	Right side			2.674	0.00	2.67
	Top side				0.00	0.00
	Bottom side	2.908			2.91	2.91
All Bands Ant 3	Front	2.402		1.347	2.40	3.75
	Back	2.650	0.517	0.808	3.17	3.46
	Left side	1.688			1.69	1.69
	Right side			2.674	0.00	2.67
	Top side	2.505			2.51	2.51
	Bottom side				0.00	0.00

16.5 SPLSR Evaluation and Analysis

General Note:

1. When standalone SAR is measured for both antennas in the pair, the peak location separation distance is computed by the square root of [(x1−x2)2 + (y1−y2)2 + (z1−z2)2], where (x1, y1, z1) and (x2, y2, z2) are the coordinates in the area scans or extrapolated peak SAR locations in the zoom scans, as appropriate.
2. SPLSR = (SAR1 + SAR2)1.5 / (min. separation distance, mm). If SPLSR ≤ 0.04 for 1g SAR and SPLSR ≤ 0.10 for 10g SAR, simultaneously transmission SAR measurement is not necessary.
3. Per April 2022 TCB Workshop Notes, WLAN5GHz was summed algebraically with the BT for the purposes of hybrid SPLSR combination and they are located at the top of the device, and they are share the same antenna.
4. Per April 2022 TCB Workshop, instead of doing a small volume scan over a co-located antenna pair, used summing the SAR values of the co-located pair and using that value in SPLSR calculation. In the calculation used the minimum distance between the spatially separated antenna and the closest antenna of the co-located antenna pair to be conservative.

For Hotspot

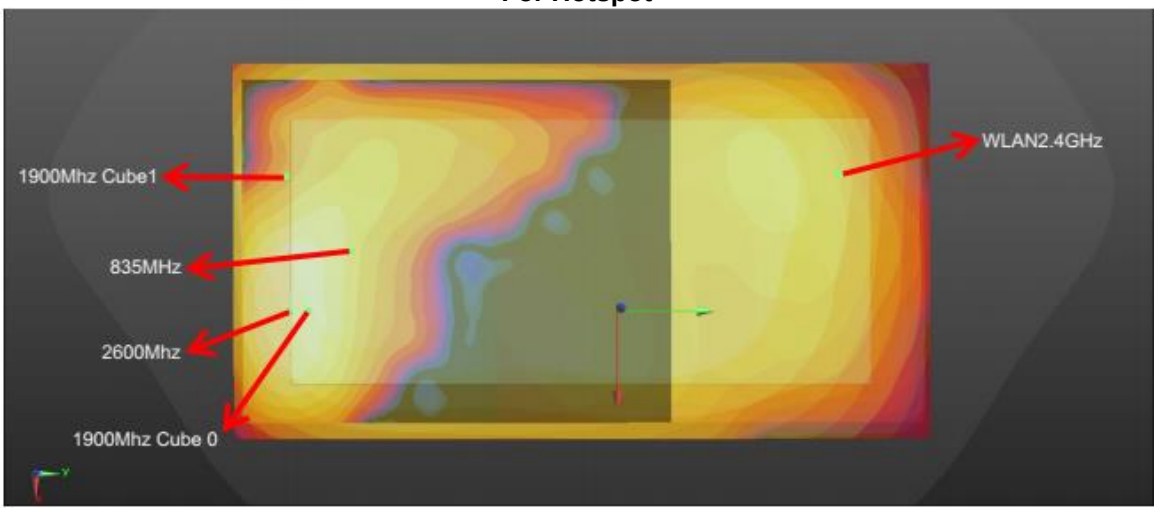

WWAN + WLAN 2.4GHz Back_5mm

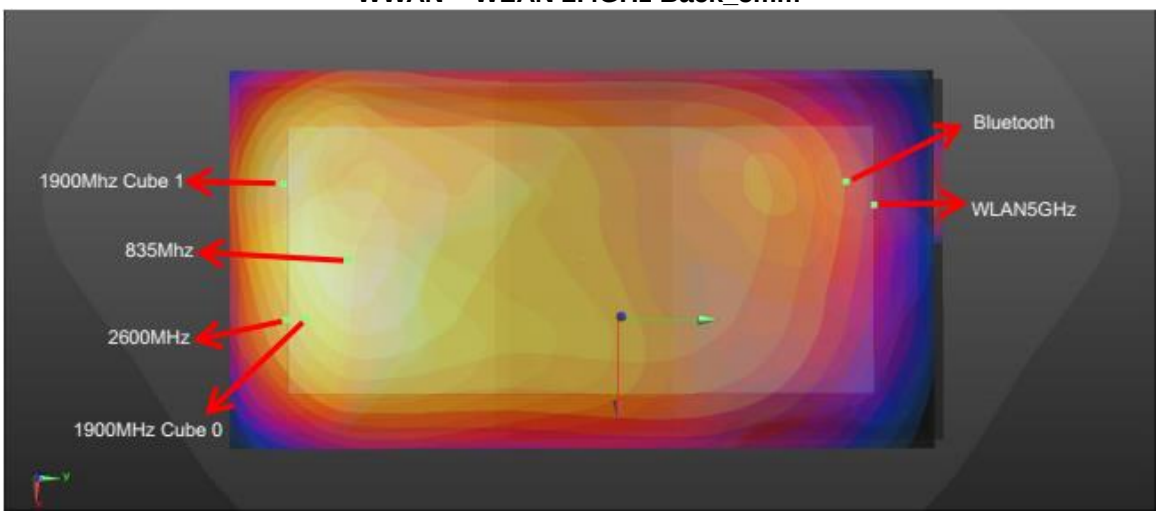

WWAN + WLAN 5GHz + Bluetooth Back_5mm

For Body-worn

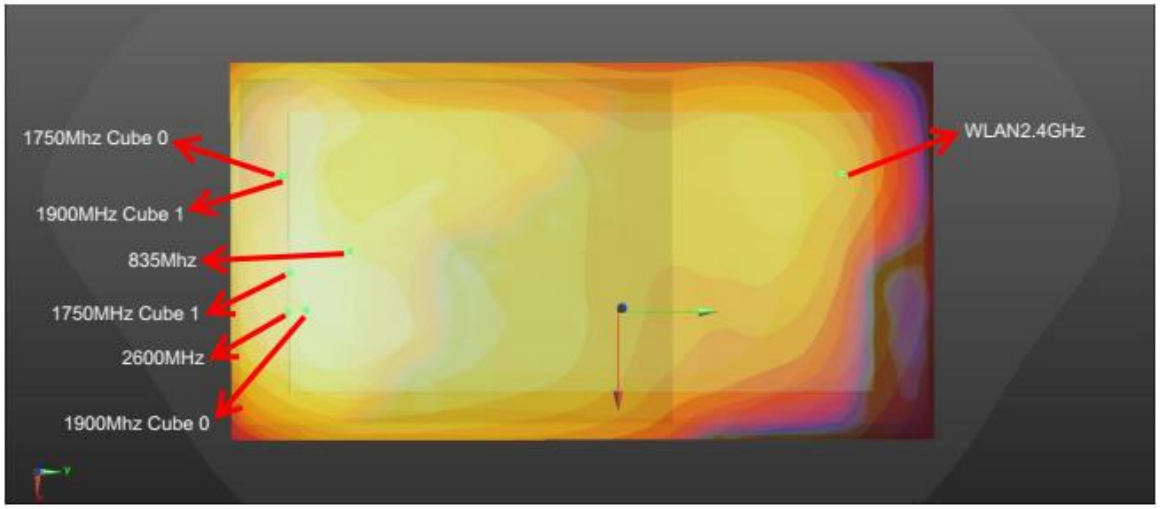

WWAN + WLAN 2.4GHz Back_5mm

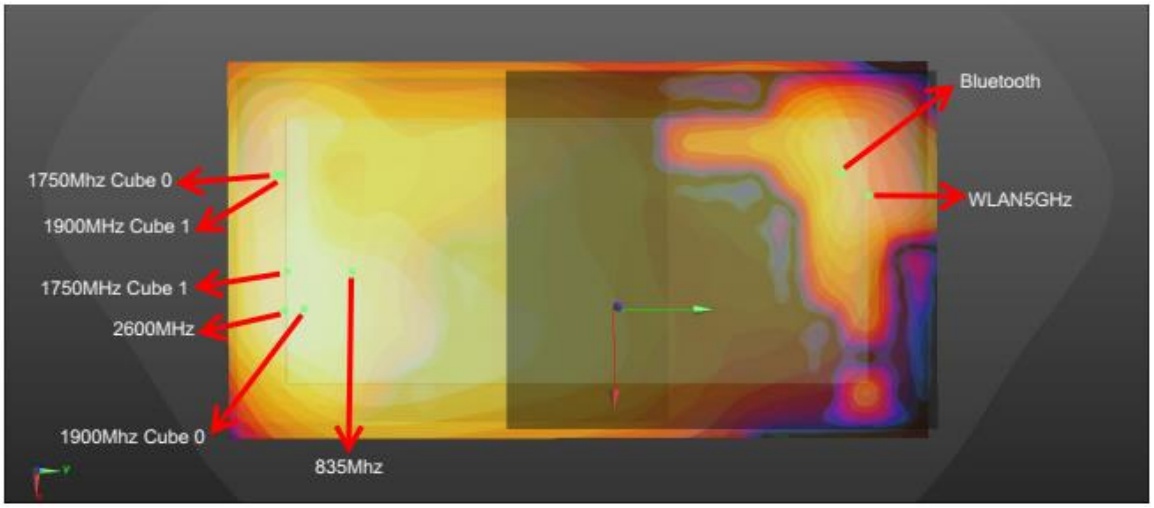

WWAN + WLAN 5GHz + Bluetooth Back_5mm

For Extremity

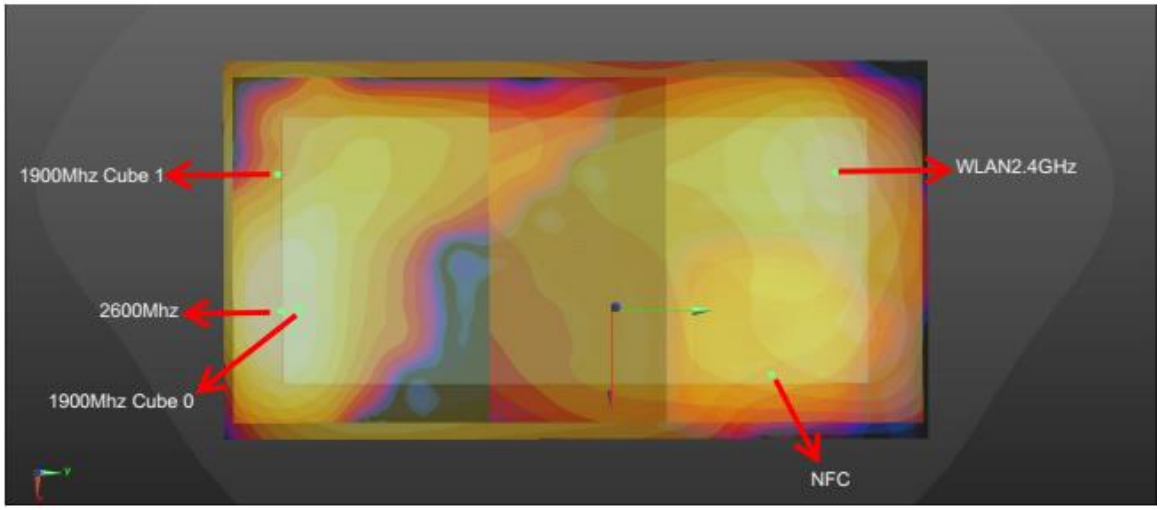

WWAN + WLAN 2.4GHz + NFC Back_0mm

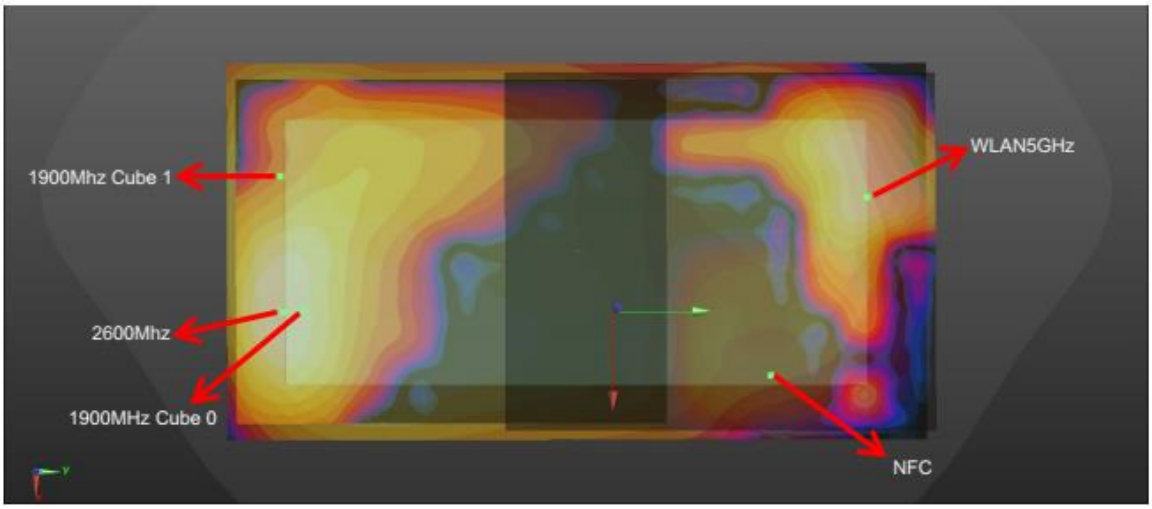

WWAN + WLAN 5GHzGHz + NFC Back_0mm

For Hotspot

	Band	Position	SAR (W/kg)	SUM SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					(mm)	X	Y	Z				
Case 1	GSM850 Ant 0	Back	1.31	1.31	5mm	-0.033	-0.0725	-0.209	145.7	2.07	0.02	Not required
	WLAN2.4GHz Ant 5		0.757	0.757	5mm	-0.0516	0.072	-0.209				
Case 2	Band	Position	SAR (W/kg)	SUM SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					(mm)	X	Y	Z				
	GSM1900 Ant 0	Back	0.977	0.977	5mm	-0.0085	-0.0675	-0.209	146.0	1.73	0.02	Not required
	WLAN2.4GHz Ant 5		0.757	0.757	5mm	-0.0516	0.072	-0.209				
Case 3	Band	Position	SAR (W/kg)	SUM SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					(mm)	X	Y	Z				
	WCDMA V Ant 0	Back	1.276	1.276	5mm	-0.031	-0.074	-0.209	147.4	2.03	0.02	Not required
	WLAN2.4GHz Ant 5		0.757	0.757	5mm	-0.0516	0.072	-0.209				
Case 4	Band	Position	SAR (W/kg)	SUM SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					(mm)	X	Y	Z				
	LTE Band 2 Ant 0 Cube 0	Back	0.882	0.882	5mm	-0.0085	-0.0765	-0.209	154.6	1.64	0.01	Not required
	WLAN2.4GHz Ant 5		0.757	0.757	5mm	-0.0516	0.072	-0.209				
	LTE Band 2 Ant 0 Cube 1	Back	0.882	0.882	5mm	-0.046	-0.0825	-0.21	154.6	1.64	0.01	Not required
	WLAN2.4GHz Ant 5		0.757	0.757	5mm	-0.0516	0.072	-0.209				
Case 5	Band	Position	SAR (W/kg)	SUM SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					(mm)	X	Y	Z				
	LTE Band 7 Ant 0	Back	1.146	1.146	5mm	-0.0082	-0.0818	-0.209	159.8	1.90	0.02	Not required
	WLAN2.4GHz Ant 5		0.757	0.757	5mm	-0.0516	0.072	-0.209				
Case 6	Band	Position	SAR (W/kg)	SUM SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					(mm)	X	Y	Z				
	LTE Band 26 Ant 0	Back	1.189	1.189	5mm	-0.019	-0.063	-0.209	138.9	1.95	0.02	Not required
	WLAN2.4GHz Ant 5		0.757	0.757	5mm	-0.0516	0.072	-0.209				
Case 7	Band	Position	SAR (W/kg)	SUM SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					(mm)	X	Y	Z				
	LTE Band 38 Ant 0	Back	1.004	1.004	5mm	-0.007	-0.0782	-0.209	156.7	1.76	0.01	Not required
	WLAN2.4GHz Ant 5		0.757	0.757	5mm	-0.0516	0.072	-0.209				

	Band	Position	SAR (W/kg)	SUM SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					(mm)	X	Y	Z				
Case 8	GSM850 Ant 0	Back	1.31	1.31	5mm	-0.033	-0.0725	-0.209	151.3	2.12	0.02	Not required
	Bluetooth		0.156	0.81	5mm							
	WLAN5GHz Ant 5		0.654		5mm	-0.049	0.078	-0.209				
	GSM850 Ant 0	Back	1.31	1.31	5mm	-0.033	-0.0725	-0.209	146.3	2.12	0.02	Not required
	Bluetooth		0.156	0.81	5mm	-0.0466	0.0732	-0.209				
	WLAN5GHz Ant 5		0.654		5mm							
Case 9	GSM1900 Ant 0	Back	0.977	0.977	5mm	-0.0085	-0.0675	-0.209	151.0	1.79	0.02	Not required
	Bluetooth		0.156	0.81	5mm							
	WLAN5GHz Ant 5		0.654		5mm	-0.049	0.078	-0.209				
	GSM1900 Ant 0	Back	0.977	0.977	5mm	-0.0085	-0.0675	-0.209	145.8	1.79	0.02	Not required
	Bluetooth		0.156	0.81	5mm	-0.0466	0.0732	-0.209				
	WLAN5GHz Ant 5		0.654		5mm							
Case 10	WCDMA V Ant 0	Back	1.276	1.276	5mm	-0.031	-0.074	-0.209	153.1	2.09	0.02	Not required
	Bluetooth		0.156	0.81	5mm							
	WLAN5GHz Ant 5		0.654		5mm	-0.049	0.078	-0.209				
	WCDMA V Ant 0	Back	1.276	1.276	5mm	-0.031	-0.074	-0.209	148.0	2.09	0.02	Not required
	Bluetooth		0.156	0.81	5mm	-0.0466	0.0732	-0.209				
	WLAN5GHz Ant 5		0.654		5mm							
Case 11	LTE Band 2 Ant 0 Cube 0	Back	0.882	0.882	5mm	-0.0085	-0.0765	-0.209	159.7	1.69	0.01	Not required
	Bluetooth		0.156	0.81	5mm							
	WLAN5GHz Ant 5		0.654		5mm	-0.049	0.078	-0.209				
	LTE Band 2 Ant 0 Cube 0	Back	0.882	0.882	5mm	-0.0085	-0.0765	-0.209	154.5	1.69	0.01	Not required
	Bluetooth		0.156	0.81	5mm	-0.0466	0.0732	-0.209				
	WLAN5GHz Ant 5		0.654		5mm							
	LTE Band 2 Ant 0 Cube 1	Back	0.882	0.882	5mm	-0.046	-0.0825	-0.21	160.5	1.69	0.01	Not required
	Bluetooth		0.156	0.81	5mm							
	WLAN5GHz Ant 5		0.654		5mm	-0.049	0.078	-0.209				
	LTE Band 2 Ant 0 Cube 1	Back	0.882	0.882	5mm	-0.046	-0.0825	-0.21	155.7	1.69	0.01	Not required
	Bluetooth		0.156	0.81	5mm	-0.0466	0.0732	-0.209				
	WLAN5GHz Ant 5		0.654		5mm							
Case 12	LTE Band 7 Ant 0	Back	1.146	1.146	5mm	-0.0082	-0.0818	-0.209	164.9	1.96	0.02	Not required
	Bluetooth		0.156	0.81	5mm							
	WLAN5GHz Ant 5		0.654		5mm	-0.049	0.078	-0.209				
	LTE Band 7 Ant 0	Back	1.146	1.146	5mm	-0.0082	-0.0818	-0.209	159.7	1.96	0.02	Not required
	Bluetooth		0.156	0.81	5mm	-0.0466	0.0732	-0.209				
	WLAN5GHz Ant 5		0.654		5mm							
Case 13	LTE Band 26 Ant 0	Back	1.189	1.189	5mm	-0.019	-0.063	-0.209	144.2	2.00	0.02	Not required
	Bluetooth		0.156	0.81	5mm							
	WLAN5GHz Ant 5		0.654		5mm	-0.049	0.078	-0.209				
	LTE Band 26 Ant 0	Back	1.189	1.189	5mm	-0.019	-0.063	-0.209	139.0	2.00	0.02	Not required
	Bluetooth		0.156	0.81	5mm	-0.0466	0.0732	-0.209				
	WLAN5GHz Ant 5		0.654		5mm							

	Band	Position	SAR (W/kg)	SUM SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					(mm)	X	Y	Z				
Case 14	LTE Band 38 Ant 0	Back	1.004	1.004	5mm	-0.007	-0.0782	-0.209	161.7	1.81	0.02	Not required
	Bluetooth		0.156	0.81	5mm							
	WLAN5GHz Ant 5		0.654		5mm	-0.049	0.078	-0.209				
	LTE Band 38 Ant 0	Back	1.004	1.004	5mm	-0.007	-0.0782	-0.209	156.5	1.81	0.02	Not required
	Bluetooth		0.156	0.81	5mm	-0.0466	0.0732	-0.209				
	WLAN5GHz Ant 5		0.654		5mm							

For Body

	Band	Position	SAR (W/kg)	SUM SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					(mm)	X	Y	Z				
Case 15	GSM850 Ant 0	Back	1.31	1.31	5mm	-0.033	-0.0725	-0.209	145.7	2.01	0.02	Not required
	WLAN2.4GHz Ant 5		0.698	0.698	5mm	-0.0516	0.072	-0.209				
Case 16	GSM1900 Ant 0	Back	1.236	1.236	5mm	-0.0085	-0.0675	-0.209	146.0	1.93	0.02	Not required
	WLAN2.4GHz Ant 5		0.698	0.698	5mm	-0.0516	0.072	-0.209				
Case 17	WCDMA II Ant 0	Back	1.26	1.26	5mm	-0.007	-0.063	-0.209	142.2	1.96	0.02	Not required
	WLAN2.4GHz Ant 5		0.698	0.698	5mm	-0.0516	0.072	-0.209				
Case 18	WCDMA IV Ant 0 Cube 0	Back	1.28	1.28	5mm	-0.046	-0.084	-0.21	156.1	1.98	0.02	Not required
	WLAN2.4GHz Ant 5		0.698	0.698	5mm	-0.0516	0.072	-0.209				
	WCDMA IV Ant 0 Cube 1	Back	1.28	1.28	5mm	-0.018	-0.086	-0.209	161.5	1.98	0.02	Not required
	WLAN2.4GHz Ant 5		0.698	0.698	5mm	-0.0516	0.072	-0.209				
Case 19	WCDMA V Ant 0	Back	1.276	1.276	5mm	-0.031	-0.074	-0.209	147.4	1.97	0.02	Not required
	WLAN2.4GHz Ant 5		0.698	0.698	5mm	-0.0516	0.072	-0.209				
Case 20	LTE Band 2 Ant 0 Cube 0	Back	1.31	1.31	5mm	-0.0085	-0.0765	-0.209	154.6	2.01	0.02	Not required
	WLAN2.4GHz Ant 5		0.698	0.698	5mm	-0.0516	0.072	-0.209				
	LTE Band 2 Ant 0 Cube 1	Back	1.31	1.31	5mm	-0.046	-0.0825	-0.21	154.6	2.01	0.02	Not required
	WLAN2.4GHz Ant 5		0.698	0.698	5mm	-0.0516	0.072	-0.209				
Case 21	LTE Band 7 Ant 0	Back	1.415	1.415	5mm	-0.0082	-0.0818	-0.209	159.8	2.11	0.02	Not required
	WLAN2.4GHz Ant 5		0.698	0.698	5mm	-0.0516	0.072	-0.209				
Case 22	LTE Band 26 Ant 0	Back	1.189	1.189	5mm	-0.019	-0.063	-0.209	138.9	1.89	0.02	Not required
	WLAN2.4GHz Ant 5		0.698	0.698	5mm	-0.0516	0.072	-0.209				
Case 23	LTE Band 66 Ant 0 Cube 0	Back	1.355	1.355	5mm	-0.046	-0.084	-0.21	156.1	2.05	0.02	Not required
	WLAN2.4GHz Ant 5		0.698	0.698	5mm	-0.0516	0.072	-0.209				
	LTE Band 66 Ant 0 Cube 1	Back	1.355	1.355	5mm	-0.035	-0.081	-0.209	153.9	2.05	0.02	Not required
	WLAN2.4GHz Ant 5		0.698	0.698	5mm	-0.0516	0.072	-0.209				
Case 24	LTE Band 38 Ant 0	Back	1.318	1.318	5mm	-0.007	-0.0782	-0.209	156.7	2.02	0.02	Not required
	WLAN2.4GHz Ant 5		0.698	0.698	5mm	-0.0516	0.072	-0.209				

	Band	Position	SAR (W/kg)	SUM SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					(mm)	X	Y	Z				
Case 25	GSM850 Ant 0	Back	1.31	1.31	5mm	-0.033	-0.0725	-0.209	146.3	2.01	0.02	Not required
	WLAN5GHz Ant 5		0.546	0.702	5mm							
	Bluetooth Ant 5		0.156		5mm	-0.0466	0.0732	-0.209				
	GSM850 Ant 0	Back	1.31	1.31	5mm	-0.033	-0.0725	-0.209	151.3	2.01	0.02	Not required
	WLAN5GHz Ant 5		0.546	0.702	5mm	-0.049	0.078	-0.209				
	Bluetooth Ant 5		0.156		5mm							
Case 26	Band	Position	SAR (W/kg)	SUM SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					(mm)	X	Y	Z				
	GSM1900 Ant 0	Back	1.236	1.236	5mm	-0.0085	-0.0675	-0.209	145.8	1.94	0.02	Not required
	WLAN5GHz Ant 5		0.546	0.702	5mm							
	Bluetooth Ant 5		0.156		5mm	-0.0466	0.0732	-0.209				
	GSM1900 Ant 0	Back	1.236	1.236	5mm	-0.0085	-0.0675	-0.209	151.0	1.94	0.02	Not required
	WLAN5GHz Ant 5		0.546	0.702	5mm	-0.049	0.078	-0.209				
	Bluetooth Ant 5		0.156		5mm							
Case 27	Band	Position	SAR (W/kg)	SUM SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					(mm)	X	Y	Z				
	WCDMA II Ant 0	Back	1.26	1.26	5mm	-0.007	-0.063	-0.209	141.8	1.96	0.02	Not required
	WLAN5GHz Ant 5		0.546	0.702	5mm							
	Bluetooth Ant 5		0.156		5mm	-0.0466	0.0732	-0.209				
	WCDMA II Ant 0	Back	1.26	1.26	5mm	-0.007	-0.063	-0.209	147.1	1.96	0.02	Not required
	WLAN5GHz Ant 5		0.546	0.702	5mm	-0.049	0.078	-0.209				
	Bluetooth Ant 5		0.156		5mm							
Case 28	Band	Position	SAR (W/kg)	SUM SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					(mm)	X	Y	Z				
	WCDMA IV Ant 0 Cube 0	Back	1.28	1.28	5mm	-0.046	-0.084	-0.21	157.2	1.98	0.02	Not required
	WLAN5GHz Ant 5		0.546	0.702	5mm							
	Bluetooth Ant 5		0.156		5mm	-0.0466	0.0732	-0.209				
	WCDMA IV Ant 0 Cube 0	Back	1.28	1.28	5mm	-0.046	-0.084	-0.21	162.0	1.98	0.02	Not required
	WLAN5GHz Ant 5		0.546	0.702	5mm	-0.049	0.078	-0.209				
	Bluetooth Ant 5		0.156		5mm							
	WCDMA IV Ant 0 Cube 1	Back	1.28	1.28	5mm	-0.018	-0.086	-0.209	161.7	1.98	0.02	Not required
	WLAN5GHz Ant 5		0.546	0.702	5mm							
	Bluetooth Ant 5		0.156		5mm	-0.0466	0.0732	-0.209				
	WCDMA IV Ant 0 Cube 1	Back	1.28	1.28	5mm	-0.018	-0.086	-0.209	166.9	1.98	0.02	Not required
	WLAN5GHz Ant 5		0.546	0.702	5mm	-0.049	0.078	-0.209				
	Bluetooth Ant 5		0.156		5mm							
Case 29	Band	Position	SAR (W/kg)	SUM SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					(mm)	X	Y	Z				
	WCDMA V Ant 0	Back	1.276	1.276	5mm	-0.031	-0.074	-0.209	148.0	1.98	0.02	Not required
	WLAN5GHz Ant 5		0.546	0.702	5mm							
	Bluetooth Ant 5		0.156		5mm	-0.0466	0.0732	-0.209				
	WCDMA V Ant 0	Back	1.276	1.276	5mm	-0.031	-0.074	-0.209	153.1	1.98	0.02	Not required
	WLAN5GHz Ant 5		0.546	0.702	5mm	-0.049	0.078	-0.209				
	Bluetooth Ant 5		0.156		5mm							
Case 30	Band	Position	SAR (W/kg)	SUM SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					(mm)	X	Y	Z				
	LTE Band 2 Ant 0 Cube 0	Back	1.31	1.31	5mm	-0.0085	-0.0765	-0.209	154.5	2.01	0.02	Not required
	WLAN5GHz Ant 5		0.546	0.702	5mm							
	Bluetooth Ant 5		0.156		5mm	-0.0466	0.0732	-0.209				
	LTE Band 2 Ant 0 Cube 0	Back	1.31	1.31	5mm	-0.0085	-0.0765	-0.209	159.7	2.01	0.02	Not required
	WLAN5GHz Ant 5		0.546	0.702	5mm	-0.049	0.078	-0.209				
	Bluetooth Ant 5		0.156		5mm							
	LTE Band 2 Ant 0 Cube 1	Back	1.31	1.31	5mm	-0.046	-0.0825	-0.21	155.7	2.01	0.02	Not required

	WLAN5GHz Ant 5		0.546	0.702	5mm							
	Bluetooth Ant 5		0.156		5mm	-0.0466	0.0732	-0.209				
	LTE Band 2 Ant 0 Cube 1		1.31	1.31	5mm	-0.046	-0.0825	-0.21				
	WLAN5GHz Ant 5	Back	0.546	0.702	5mm	-0.049	0.078	-0.209	160.5	2.01	0.02	Not required
	Bluetooth Ant 5		0.156		5mm							
Case 31	**Band**	**Position**	**SAR (W/kg)**	**SUM SAR (W/kg)**	**Gap (mm)**	**SAR peak location (m) X**	**Y**	**Z**	**3D distance (mm)**	**Summed SAR (W/kg)**	**SPLSR Results**	**Simultaneous SAR**
	LTE Band 7 Ant 0		1.415	1.415	5mm	-0.0082	-0.0818	-0.209				
	WLAN5GHz Ant 5	Back	0.546	0.702	5mm				159.7	2.12	0.02	Not required
	Bluetooth Ant 5		0.156		5mm	-0.0466	0.0732	-0.209				
	LTE Band 7 Ant 0		1.415	1.415	5mm	-0.0082	-0.0818	-0.209				
	WLAN5GHz Ant 5	Back	0.546	0.702	5mm	-0.049	0.078	-0.209	164.9	2.12	0.02	Not required
	Bluetooth Ant 5		0.156		5mm							
Case 32	**Band**	**Position**	**SAR (W/kg)**	**SUM SAR (W/kg)**	**Gap (mm)**	**SAR peak location (m) X**	**Y**	**Z**	**3D distance (mm)**	**Summed SAR (W/kg)**	**SPLSR Results**	**Simultaneous SAR**
	LTE Band 26 Ant 0		1.189	1.189	5mm	-0.019	-0.063	-0.209				
	WLAN5GHz Ant 5	Back	0.546	0.702	5mm				139.0	1.89	0.02	Not required
	Bluetooth Ant 5		0.156		5mm	-0.0466	0.0732	-0.209				
	LTE Band 26 Ant 0		1.189	1.189	5mm	-0.019	-0.063	-0.209				
	WLAN5GHz Ant 5	Back	0.546	0.702	5mm	-0.049	0.078	-0.209	144.2	1.89	0.02	Not required
	Bluetooth Ant 5		0.156		5mm							
Case 33	**Band**	**Position**	**SAR (W/kg)**	**SUM SAR (W/kg)**	**Gap (mm)**	**SAR peak location (m) X**	**Y**	**Z**	**3D distance (mm)**	**Summed SAR (W/kg)**	**SPLSR Results**	**Simultaneous SAR**
	LTE Band 66 Ant 0 Cube 0		1.355	1.355	5mm	-0.046	-0.084	-0.21				
	WLAN5GHz Ant 5	Back	0.546	0.702	5mm				157.2	2.06	0.02	Not required
	Bluetooth Ant 5		0.156		5mm	-0.0466	0.0732	-0.209				
	LTE Band 66 Ant 0 Cube 0		1.355	1.355	5mm	-0.046	-0.084	-0.21				
	WLAN5GHz Ant 5	Back	0.546	0.702	5mm	-0.049	0.078	-0.209	162.0	2.06	0.02	Not required
	Bluetooth Ant 5		0.156		5mm							
	LTE Band 66 Ant 0 Cube 1		1.355	1.355	5mm	-0.035	-0.081	-0.209				
	WLAN5GHz Ant 5	Back	0.546	0.702	5mm				154.6	2.06	0.02	Not required
	Bluetooth Ant 5		0.156		5mm	-0.0466	0.0732	-0.209				
	LTE Band 66 Ant 0 Cube 1		1.355	1.355	5mm	-0.035	-0.081	-0.209				
	WLAN5GHz Ant 5	Back	0.546	0.702	5mm	-0.049	0.078	-0.209	159.6	2.06	0.02	Not required
	Bluetooth Ant 5		0.156		5mm							
Case 34	**Band**	**Position**	**SAR (W/kg)**	**SUM SAR (W/kg)**	**Gap (mm)**	**SAR peak location (m) X**	**Y**	**Z**	**3D distance (mm)**	**Summed SAR (W/kg)**	**SPLSR Results**	**Simultaneous SAR**
	LTE Band 38		1.318	1.318	5mm	-0.007	-0.0782	-0.209				
	WLAN5GHz Ant 5	Back	0.546	0.702	5mm				156.5	2.02	0.02	Not required
	Bluetooth Ant 5		0.156		5mm	-0.0466	0.0732	-0.209				
	LTE Band 38		1.318	1.318	5mm	-0.007	-0.0782	-0.209				
	WLAN5GHz Ant 5	Back	0.546	0.702	5mm	-0.049	0.078	-0.209	161.7	2.02	0.02	Not required
	Bluetooth Ant 5		0.156		5mm							

For Extremity

	Band	Position	SAR (W/kg)	SUM SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					(mm)	X	Y	Z				
Case 35	WCDMA II Ant 0	Back	3.282	3.282	0mm	-0.007	-0.063	-0.209	142.1	4.33	0.06	Not required
	WLAN2.4GHz Ant 5		1.045	1.045	0mm	-0.0513	0.072	-0.209				
	WCDMA II Ant 0	Back	3.282	3.282	0mm	-0.007	-0.063	-0.209	110.2	3.32	0.05	Not required
	NFC		0.039	0.039	0mm	0.0095	0.046	-0.208				
	WLAN2.4GHz Ant 5	Back	1.045	1.045	0mm	-0.0513	0.072	-0.209	66.1	1.08	0.02	Not required
	NFC		0.039	0.039	0mm	0.0095	0.046	-0.208				
	Band	Position	SAR (W/kg)	SUM SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					(mm)	X	Y	Z				
Case 36	LTE Band 2 Ant 0 Cube 0	Back	3.482	3.482	0mm	-0.0085	-0.0765	-0.209	154.5	4.53	0.06	Not required
	WLAN2.4GHz Ant 5		1.045	1.045	0mm	-0.0513	0.072	-0.209				
	LTE Band 2 Ant 0 Cube 0	Back	3.482	3.482	0mm	-0.0085	-0.0765	-0.209	123.8	3.52	0.05	Not required
	NFC		0.039	0.039	0mm	0.0095	0.046	-0.208				
	WLAN2.4GHz Ant 5	Back	1.045	1.045	0mm	-0.0513	0.072	-0.209	66.1	1.08	0.02	Not required
	NFC		0.039	0.039	0mm	0.0095	0.046	-0.208				
	LTE Band 2 Ant 0 Cube 1	Back	3.482	3.482	0mm	-0.046	-0.0825	-0.21	154.6	4.53	0.06	Not required
	WLAN2.4GHz Ant 5		1.045	1.045	0mm	-0.0513	0.072	-0.209				
	LTE Band 2 Ant 0 Cube 1	Back	3.482	3.482	0mm	-0.046	-0.0825	-0.21	140.0	3.52	0.05	Not required
	NFC		0.039	0.039	0mm	0.0095	0.046	-0.208				
	WLAN2.4GHz Ant 5	Back	1.045	1.045	0mm	-0.0513	0.072	-0.209	66.1	1.08	0.02	Not required
	NFC		0.039	0.039	0mm	0.0095	0.046	-0.208				
	Band	Position	SAR (W/kg)	SUM SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					(mm)	X	Y	Z				
Case 37	LTE Band 66 Ant 0	Back	2.97	2.97	0mm	-0.046	-0.084	-0.21	156.1	4.02	0.05	Not required
	WLAN2.4GHz Ant 5		1.045	1.045	0mm	-0.0513	0.072	-0.209				
	LTE Band 66 Ant 0	Back	2.97	2.97	0mm	-0.046	-0.084	-0.21	141.4	3.01	0.04	Not required
	NFC		0.039	0.039	0mm	0.0095	0.046	-0.208				
	WLAN2.4GHz Ant 5	Back	1.045	1.045	0mm	-0.0513	0.072	-0.209	66.1	1.08	0.02	Not required
	NFC		0.039	0.039	0mm	0.0095	0.046	-0.208				
	Band	Position	SAR (W/kg)	SUM SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					(mm)	X	Y	Z				
Case 38	LTE Band 38 Ant 0	Back	3.083	3.083	0mm	-0.0094	-0.0794	-0.209	157.1	4.13	0.05	Not required
	WLAN2.4GHz Ant 5		1.045	1.045	0mm	-0.0513	0.072	-0.209				
	LTE Band 38 Ant 0	Back	3.083	3.083	0mm	-0.0094	-0.0794	-0.209	126.8	3.12	0.04	Not required
	NFC		0.039	0.039	0mm	0.0095	0.046	-0.208				
	WLAN2.4GHz Ant 5	Back	1.045	1.045	0mm	-0.0513	0.072	-0.209	66.1	1.08	0.02	Not required
	NFC		0.039	0.039	0mm	0.0095	0.046	-0.208				

	Band	Position	SAR (W/kg)	SUM SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					(mm)	X	Y	Z				
Case 39	WCDMA II Ant 0	Back	3.282	3.282	0mm	-0.007	-0.063	-0.209	146.6	4.38	0.06	Not required
	WLAN5GHz Ant 5		1.1	1.1	0mm	-0.047	0.078	-0.209				
	WCDMA II Ant 0	Back	3.282	3.282	0mm	-0.007	-0.063	-0.209	110.2	3.32	0.05	Not required
	NFC		0.039	0.039	0mm	0.0095	0.046	-0.208				
	WLAN5GHz Ant 5	Back	1.1	1.1	0mm	-0.047	0.078	-0.209	64.9	1.14	0.02	Not required
	NFC		0.039	0.039	0mm	0.0095	0.046	-0.208				
	Band	Position	SAR (W/kg)	SUM SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					(mm)	X	Y	Z				
Case 40	LTE Band 2 Ant 0 Cube 0	Back	3.482	3.482	0mm	-0.0085	-0.0765	-0.209	159.2	4.58	0.06	Not required
	WLAN5GHz Ant 5		1.1	1.1	0mm	-0.047	0.078	-0.209				
	LTE Band 2 Ant 0 Cube 0	Back	3.482	3.482	0mm	-0.0085	-0.0765	-0.209	123.8	3.52	0.05	Not required
	NFC		0.039	0.039	0mm	0.0095	0.046	-0.208				
	WLAN5GHz Ant 5	Back	1.1	1.1	0mm	-0.047	0.078	-0.209	64.9	1.14	0.02	Not required
	NFC		0.039	0.039	0mm	0.0095	0.046	-0.208				

	LTE Band 2 Ant 0 Cube 1	Back	3.482	3.482	0mm	-0.046	-0.0825	-0.21	160.5	4.58	0.06	Not required
	WLAN5GHz Ant 5		1.1	1.1	0mm	-0.047	0.078	-0.209				
	LTE Band 2 Ant 0 Cube 1	Back	3.482	3.482	0mm	-0.046	-0.0825	-0.21	140.0	3.52	0.05	Not required
	NFC		0.039	0.039	0mm	0.0095	0.046	-0.208				
	WLAN5GHz Ant 5	Back	1.1	1.1	0mm	-0.047	0.078	-0.209	64.9	1.14	0.02	Not required
	NFC		0.039	0.039	0mm	0.0095	0.046	-0.208				
Case 41	Band	Position	SAR (W/kg)	SUM SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					(mm)	X	Y	Z				
	LTE Band 7 Ant 0	Back	3.403	3.403	0mm	-0.0094	-0.0794	-0.209	161.8	4.50	0.06	Not required
	WLAN5GHz Ant 5		1.1	1.1	0mm	-0.047	0.078	-0.209				
	LTE Band 7 Ant 0	Back	3.403	3.403	0mm	-0.0094	-0.0794	-0.209	126.8	3.44	0.05	Not required
	NFC		0.039	0.039	0mm	0.0095	0.046	-0.208				
	WLAN5GHz Ant 5	Back	1.1	1.1	0mm	-0.047	0.078	-0.209	64.9	1.14	0.02	Not required
	NFC		0.039	0.039	0mm	0.0095	0.046	-0.208				
Case 42	Band	Position	SAR (W/kg)	SUM SAR (W/kg)	Gap	SAR peak location (m)			3D distance (mm)	Summed SAR (W/kg)	SPLSR Results	Simultaneous SAR
					(mm)	X	Y	Z				
	LTE Band 66 Ant 0	Back	2.97	2.97	0mm	-0.046	-0.084	-0.21	162.0	4.07	0.05	Not required
	WLAN5GHz Ant 5		1.1	1.1	0mm	-0.047	0.078	-0.209				
	LTE Band 66 Ant 0	Back	2.97	2.97	0mm	-0.046	-0.084	-0.21	141.4	3.01	0.04	Not required
	NFC		0.039	0.039	0mm	0.0095	0.046	-0.208				
	WLAN5GHz Ant 5	Back	1.1	1.1	0mm	-0.047	0.078	-0.209	64.9	1.14	0.02	Not required
	NFC		0.039	0.039	0mm	0.0095	0.046	-0.208				

Test Engineer : Hank Huang, Kevin Xu, David Dai, Bin He

17. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be ≤ 30%, for a confidence interval of k = 2. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

18. References

[1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”

[2] ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992

[3] IEEE Std. 1528-2013, “IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, Sep 2013

[4] SPEAG DASY System Handbook

[5] FCC KDB 248227 D01 v02r02, “SAR Guidance for IEEE 802.11 (WiFi) Transmitters”, Oct 2015.

[6] FCC KDB 447498 D01 v06, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, Oct 2015

[7] FCC KDB 648474 D04 v01r03, “SAR Evaluation Considerations for Wireless Handsets”, Oct 2015.

[8] FCC KDB 941225 D01 v03r01, “3G SAR MEAUREMENT PROCEDURES”, Oct 2015

[9] FCC KDB 941225 D05 v02r05, “SAR Evaluation Considerations for LTE Devices”, Dec 2015

[10] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.

[11] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.

[12] FCC KDB 865664 D02 v01r02, “RF Exposure Compliance Reporting and Documentation Considerations” Oct 2015.

[13] FCC KDB 616217 D04 v01r02, “SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers”, Oct 2015

------THE END------