

Date: 2025-11-30

115_LTE Band 41_20M_QPSK_1RB_0Offset_Left Side_0mm_Ch40185

Communication System: LTE-TDD

AntennaCfg:SISO; Frequency: 2549.500 MHz; Duty Cycle: 1:1.59

Medium: HSL_2600_251130 Medium parameters used: $f = 2549.500$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 38.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7918; ConvF(7.22, 7.02, 6.78); Calibrated: 2025-03-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2025-07-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (48.0 mm x 220.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 4.57 W/kg; SAR (10g) = 1.97 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 4.67 W/kg; SAR (10g) = 2.18 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 70.4 %

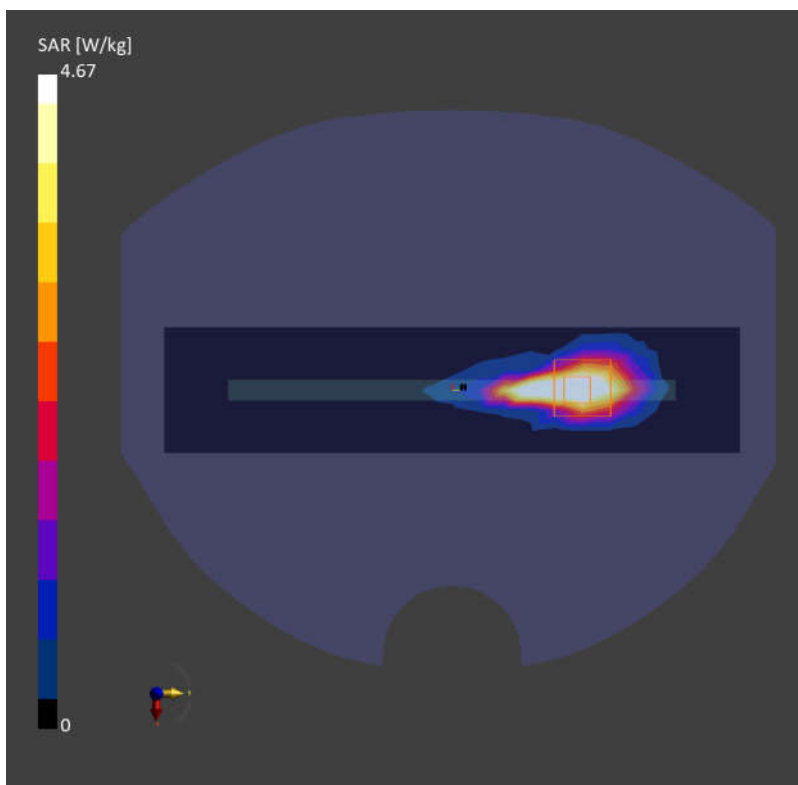

Date: 2025-11-30

116_FR1 n7_50M_QPSK_1RB_1Offset_Left Side_0mm_Ch507000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 2535.000 MHz; Duty Cycle: 1:1

Medium: HSL_2600_251130 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7918; ConvF(7.22, 7.02, 6.78); Calibrated: 2025-03-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2025-07-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10943-AAD

Area Scan (48.0 mm x 220.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 5.59 W/kg; SAR (10g) = 1.88 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 5.41 W/kg; SAR (10g) = 2.13 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 59.1 %

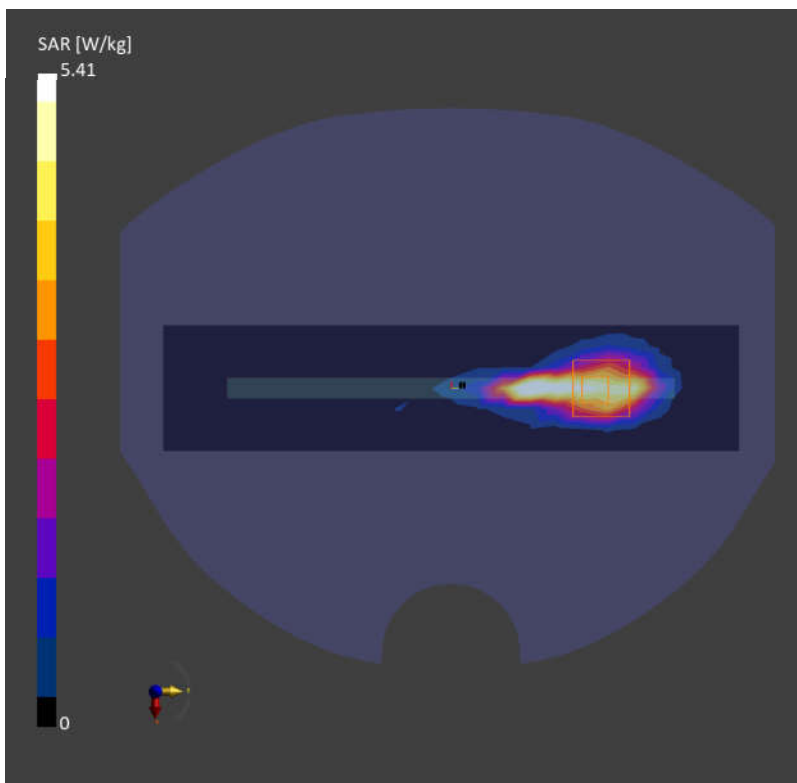

Date: 2025-11-30

117_FR1 n41_100M_QPSK_1RB_1Offset_Top Side_0mm_Ch518598

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 2592.990 MHz; Duty Cycle: 1:1

Medium: HSL_2600_251130 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 38.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7918; ConvF(7.22, 7.02, 6.78); Calibrated: 2025-03-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2025-07-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 5.87 W/kg; SAR (10g) = 1.86 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 6.34 W/kg; SAR (10g) = 1.88 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 67.3 %

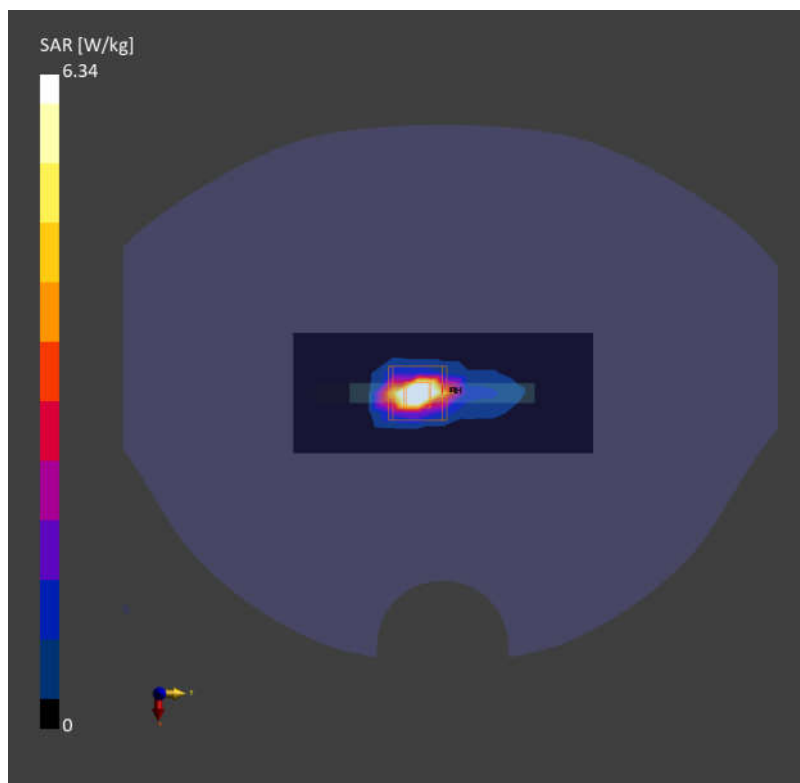

Date: 2025-12-01

118_LTE Band 42 Part 27Q_20M_QPSK_1RB_0Offset_Top Side_0mm_Ch42190

Communication System: LTE-TDD

AntennaCfg:SISO; Frequency: 3460.000 MHz; Duty Cycle: 1:1.59

Medium: HSL_3500_251201 Medium parameters used: $f = 3460.000$ MHz; $\sigma = 2.91$ S/m; $\epsilon_r = 37.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7918; ConvF(6.86, 6.67, 6.44); Calibrated: 2025-03-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2025-07-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 8.15 W/kg; SAR (10g) = 2.37 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.06 dB

SAR (1g) = 11.3 W/kg; SAR (10g) = 2.56 W/kg

Smallest distance from peaks to all points 3 dB below = 5.3 mm

Ratio of SAR at M2 to SAR at M1 = 65.5 %

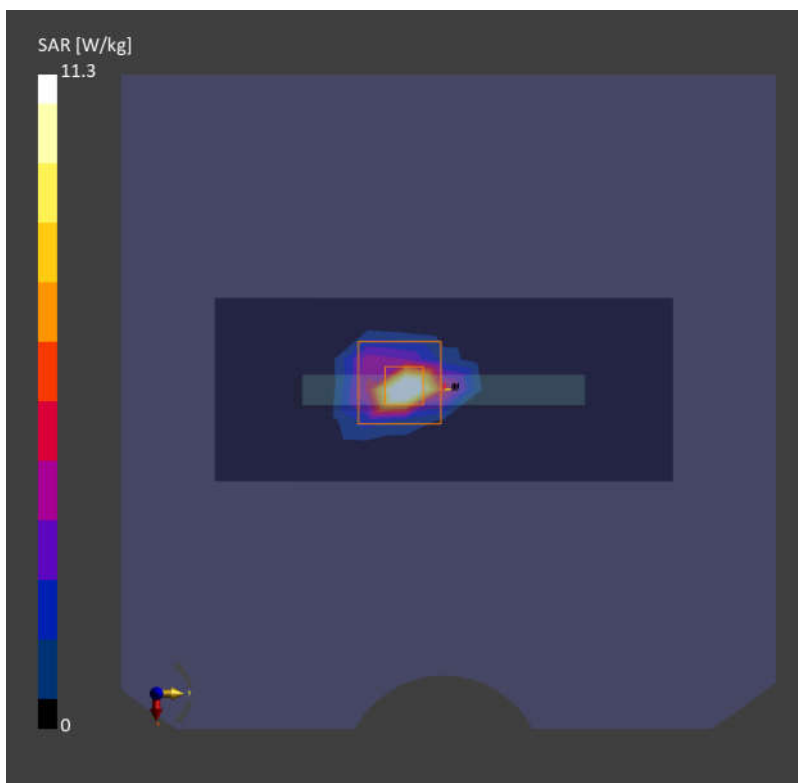

Date: 2025-12-02

119_LTE Band 48_20M_QPSK_1RB_0Offset_Top Side_0mm_Ch55830

Communication System: LTE-TDD

AntennaCfg:SISO; Frequency: 3609.000 MHz; Duty Cycle: 1:1.59

Medium: HSL_3700_251202 Medium parameters used: $f = 3609.000$ MHz; $\sigma = 3.08$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7918; ConvF(6.77, 6.58, 6.35); Calibrated: 2025-03-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2025-07-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 7.88 W/kg; SAR (10g) = 1.74 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 8.20 W/kg; SAR (10g) = 1.82 W/kg

Smallest distance from peaks to all points 3 dB below = 5.2 mm

Ratio of SAR at M2 to SAR at M1 = 65.3 %

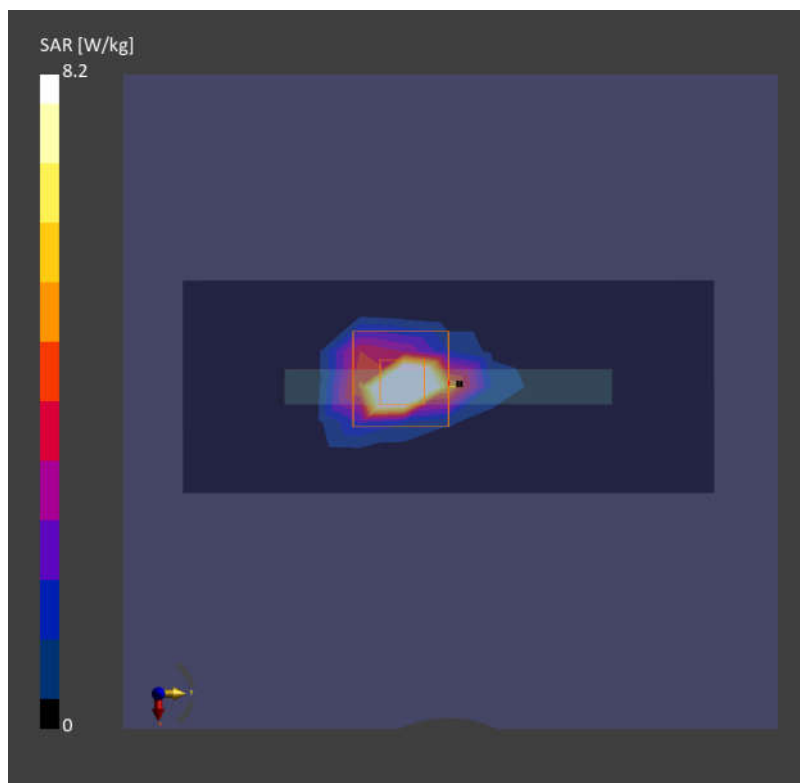

Date: 2025-12-02

120_FR1 n48_40M_QPSK_50RB_28Offset_Top Side_0mm_Ch641666

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 3624.985 MHz; Duty Cycle: 1:1

Medium: HSL_3700_251202 Medium parameters used: $f = 3624.985$ MHz; $\sigma = 3.11$ S/m; $\epsilon_r = 37.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7918; ConvF(6.77, 6.58, 6.35); Calibrated: 2025-03-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2025-07-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 5.67 W/kg; SAR (10g) = 2.23 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.17 dB

SAR (1g) = 6.40 W/kg; SAR (10g) = 2.43 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 62.9 %

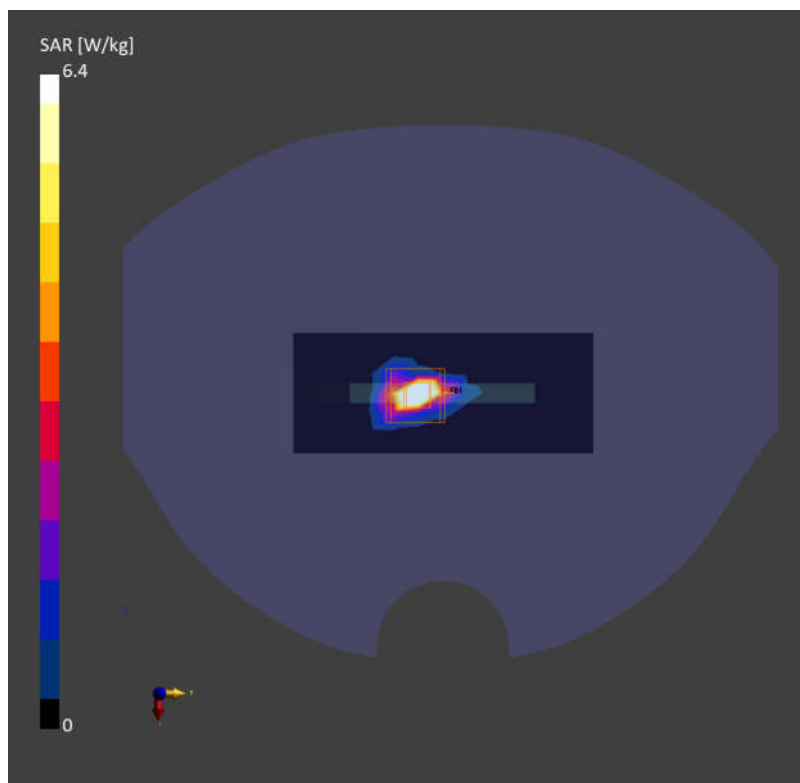

Date: 2025-12-02

121_FR1 n77_100M_QPSK_135RB_69Offset_Right Side_0mm_Ch656000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 3840.000 MHz; Duty Cycle: 1:1

Medium: HSL_3900_251202 Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.32$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7918; ConvF(6.68, 6.49, 6.27); Calibrated: 2025-03-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2025-07-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (48.0 mm x 220.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 9.84 W/kg; SAR (10g) = 2.84 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 10.8 W/kg; SAR (10g) = 2.42 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 67.3 %

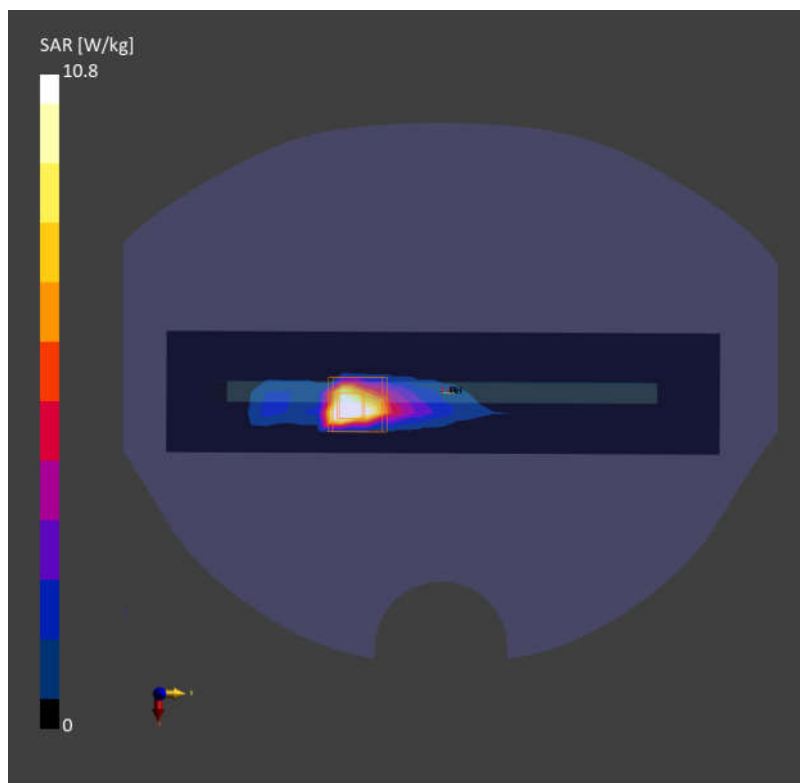

Date: 2025-12-03

122_WLAN2.4GHz_802.11b 1Mbps_Top Side_0mm_Ch6

Communication System: IEEE 802.11b WiFi 2.4 GHz

Frequency: 2437.000MHz; Duty Cycle: 1:1.03

Medium: HSL_2450_251203 Medium parameters used: $f = 2437.000$ MHz; $\sigma = 1.76$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7918; ConvF(7.36, 7.16, 6.91); Calibrated: 2025-03-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2025-07-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 2.70 W/kg; SAR (10g) = 1.33 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 2.78 W/kg; SAR (10g) = 1.32 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 78.8 %

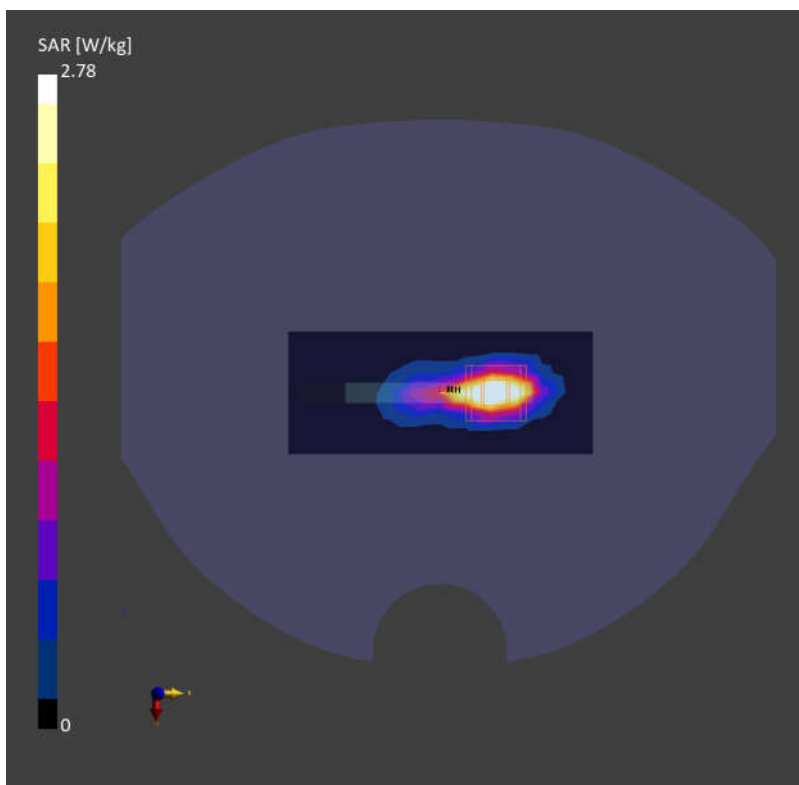

Date: 2025-12-03

123_Bluetooth_1Mbps_Front_0mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth

Frequency: 2441.000 MHz; Duty Cycle: 1:1.298

Medium: HSL_2450_251203 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7918; ConvF(7.36, 7.16, 6.91); Calibrated: 2025-03-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2025-07-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 220.0 mm): Measurement Grid: 12.0 mm x 10.0 mm

SAR (1g) = 0.546 W/kg; SAR (10g) = 0.254 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 1.40 W/kg; SAR (10g) = 0.486 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 63.1 %

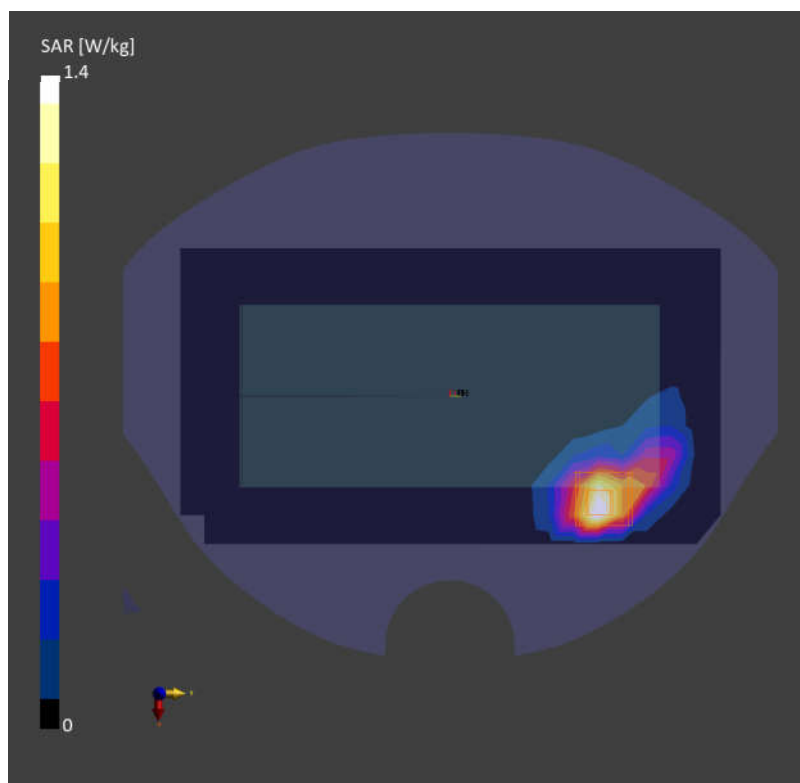

Date: 2025-12-04

124_WLAN5GHz_802.11n-HT40 MCS0_Right Side_0mm_Ch46

Communication System: IEEE 802.11n

Frequency: 5230.000 MHz; Duty Cycle: 1:1

Medium: HSL_5250_251204 Medium parameters used: $f = 5230.000$ MHz; $\sigma = 4.70$ S/m; $\epsilon_r = 36.4$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7918; ConvF(5.93, 5.77, 5.57); Calibrated: 2025-03-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2025-07-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (48.0 mm x 220.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 5.22 W/kg; SAR (10g) = 1.31 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.03 dB

SAR (1g) = 6.14 W/kg; SAR (10g) = 1.34 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 59.7 %

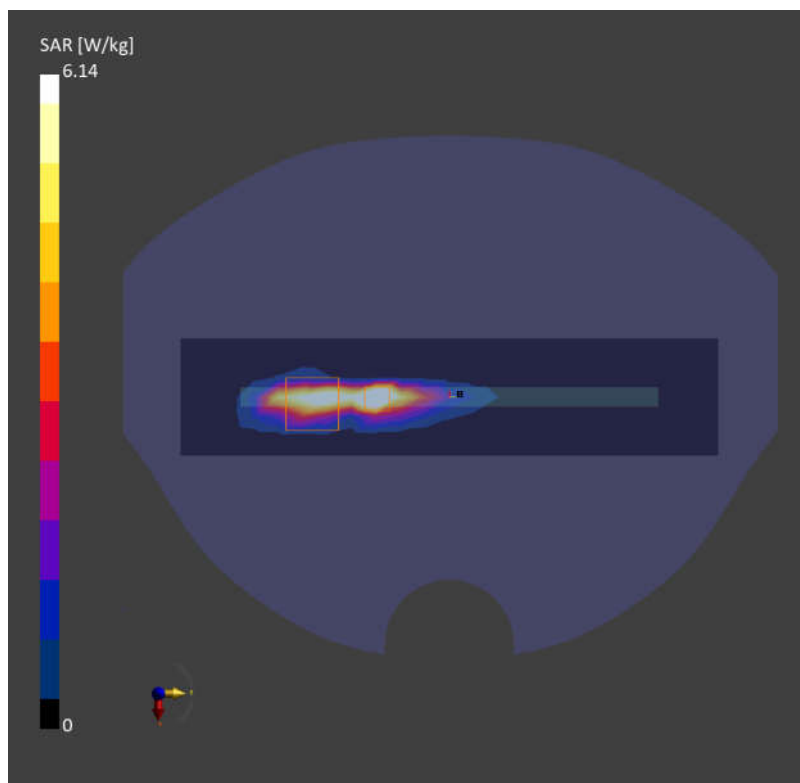

Date: 2025-12-04

125_WLAN5GHz_802.11n-HT40 MCS0_Right Side_0mm_Ch54

Communication System: IEEE 802.11n

Frequency: 5270.000 MHz; Duty Cycle: 1:1

Medium: HSL_5250_251204 Medium parameters used: $f = 5270.000$ MHz; $\sigma = 4.69$ S/m; $\epsilon_r = 36.4$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7918; ConvF(5.93, 5.77, 5.57); Calibrated: 2025-03-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2025-07-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (48.0 mm x 220.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 6.70 W/kg; SAR (10g) = 1.73 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.09 dB

SAR (1g) = 6.36 W/kg; SAR (10g) = 1.68 W/kg

Smallest distance from peaks to all points 3 dB below = 12.3 mm

Ratio of SAR at M2 to SAR at M1 = 62.2 %

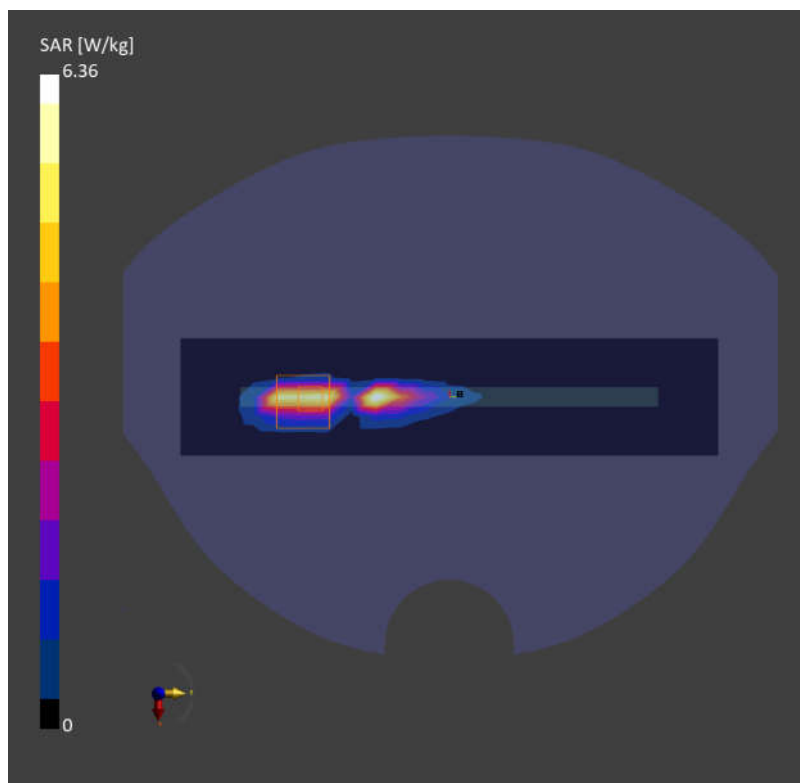

Date: 2025-12-05

126_WLAN5GHz_802.11n-HT40 MCS0_Right Side_0mm_Ch110

Communication System: IEEE 802.11n

Frequency: 5550.000 MHz; Duty Cycle: 1:1

Medium: HSL_5600_251205 Medium parameters used: $f = 5550.000$ MHz; $\sigma = 5.02$ S/m; $\epsilon_r = 35.8$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7918; ConvF(5.42, 5.27, 5.08); Calibrated: 2025-03-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2025-07-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (48.0 mm x 220.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 5.28 W/kg; SAR (10g) = 1.40 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.10 dB

SAR (1g) = 5.67 W/kg; SAR (10g) = 1.66 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 64.1 %

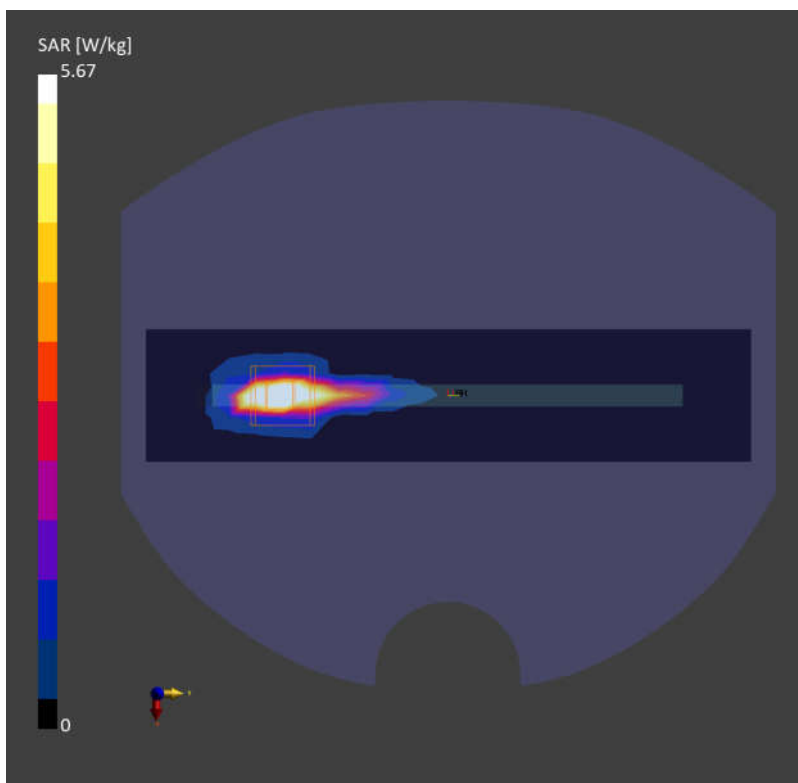

Date: 2025-12-06

127_WLAN5GHz_802.11a 6Mbps_Right Side_0mm_Ch165

Communication System: IEEE 802.11n

Frequency: 5825.000 MHz; Duty Cycle: 1:1.009

Medium: HSL_5800_251206 Medium parameters used: $f = 5825.000$ MHz; $\sigma = 5.30$ S/m; $\epsilon_r = 35.7$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7918; ConvF(5.53, 5.38, 5.19); Calibrated: 2025-03-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2025-07-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (48.0 mm x 220.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 8.09 W/kg; SAR (10g) = 2.09 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.07 dB

SAR (1g) = 7.96 W/kg; SAR (10g) = 2.05 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 55.3 %

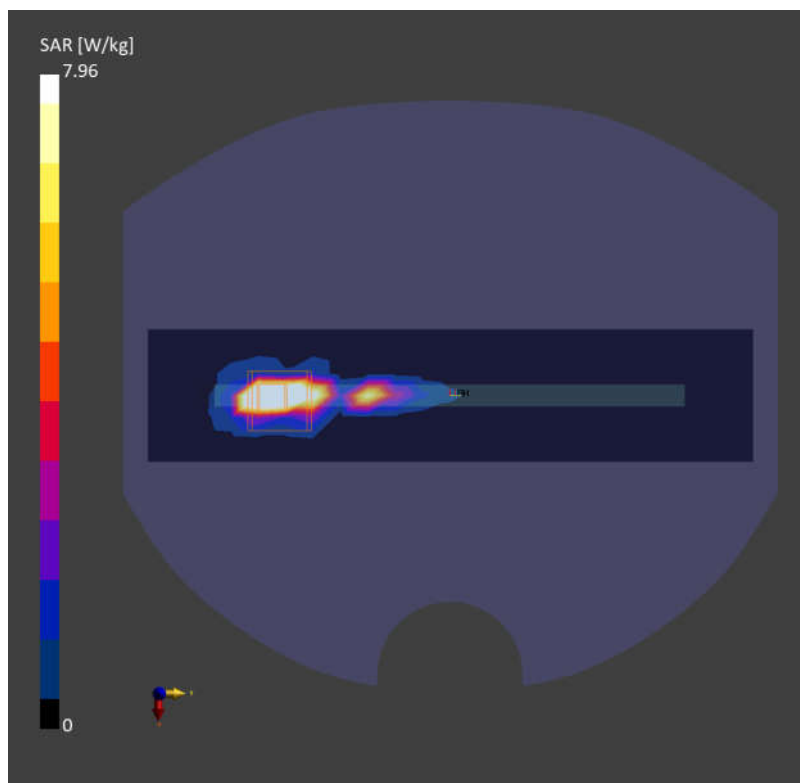

Date: 2025-12-06

128_WLAN6GHz_802.11be-EHT320 MCS0_Top Side_0mm_Ch31

Communication System: IEEE 802.11be (320MHz, MCS0, 99pc duty cycle)

Frequency: 6105.000MHz; Duty Cycle: 1:1.004

Medium: HSL Medium parameters used: $f = 6105.000$ MHz; $\sigma = 5.62$ S/m; $\epsilon_r = 35.4$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.67, 5.52, 5.62); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2025-07-15
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2024; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 11026-AAB

Area Scan (48.0 mm x 119.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.822 W/kg; SAR (10g) = 0.228 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm


Power Drift = -0.01 dB

SAR (1g) = 1.03 W/kg; SAR (10g) = 0.254 W/kg

Smallest distance from peaks to all points 3 dB below = 3.7 mm

Ratio of SAR at M2 to SAR at M1 = 51.9 %

psAPD (4.0cm², sq) = 5.84 [W/m²]

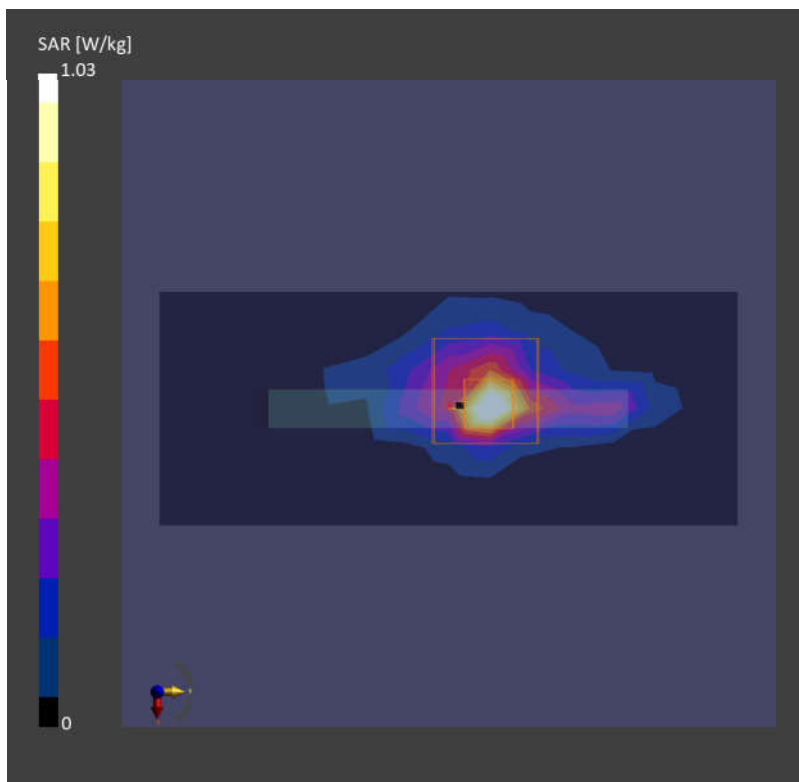

For PD

01_WLAN6GHz_802.11be-EHT320 MCS0_Front_2mm_Ch159

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]
Device,	172.0 x 74.0 x 8.0

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	FRONT, 2.00	U-NII-7	WLAN, 11026-AAA	6745.0, 159	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1065	Air -	EUmmWV4 - SN9441_F1-55GHz, 2025-11-17	DAE4 Sn1338, 2025-03-18

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

Scan Type	5G Scan
Date	2025-12-19
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	1.59
psPDtot+ [W/m ²]	2.27
psPDmod+ [W/m ²]	4.05
E _{max} [V/m]	61.4
Power Drift [dB]	0.01

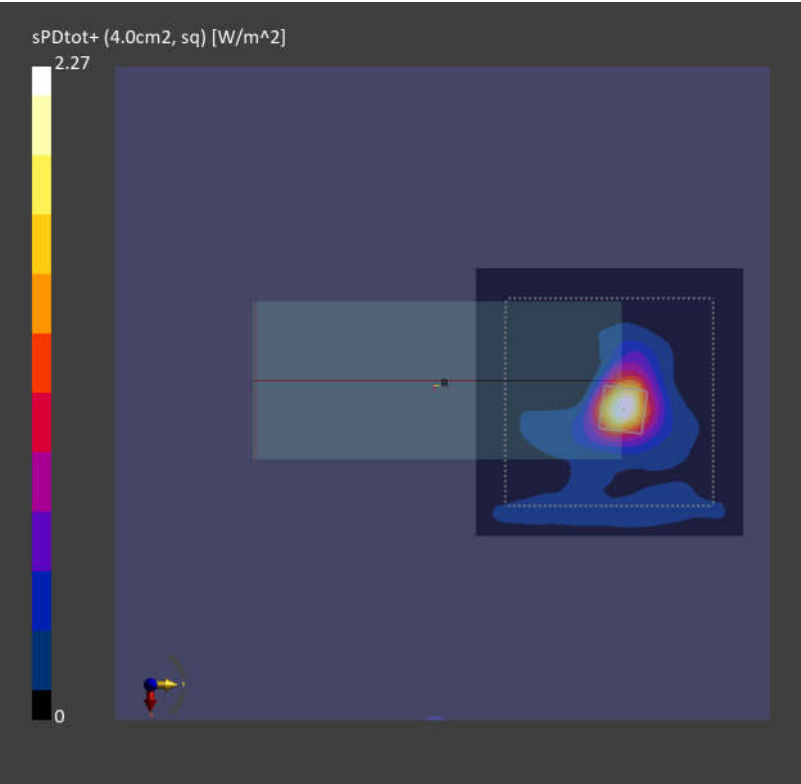

02_WLAN6GHz_802.11be-EHT320 MCS0_Front_2mm_Ch127

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]
Device,	172.0 x 74.0 x 8.0

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	EDGE TOP, 2.00	U-NII-7	WLAN, 11026-AAA	6585.0, 127	1.0

Hardware Setup

Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave - 1065	Air -	EUmmWV4 - SN9441_F1-55GHz, 2025-11-17	DAE4 Sn1338, 2025-03-18

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

Scan Type	5G Scan
Date	2025-12-19
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	1.63
psPDtot+ [W/m ²]	2.39
psPDmod+ [W/m ²]	4.35
E _{max} [V/m]	60.1
Power Drift [dB]	-0.03

