

Date: 2025-08-24

48_LTE Band 2_20M_QPSK_1_0_Back_5mm_Ch18700

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 1860.000 MHz; Duty Cycle: 1:1

Medium: HSL_1900_250824 Medium parameters used: $f = 1860.000$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 39.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.15, 8.07, 8.2); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.479 W/kg; SAR (10g) = 0.265 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.477 W/kg; SAR (10g) = 0.265 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 83.8 %

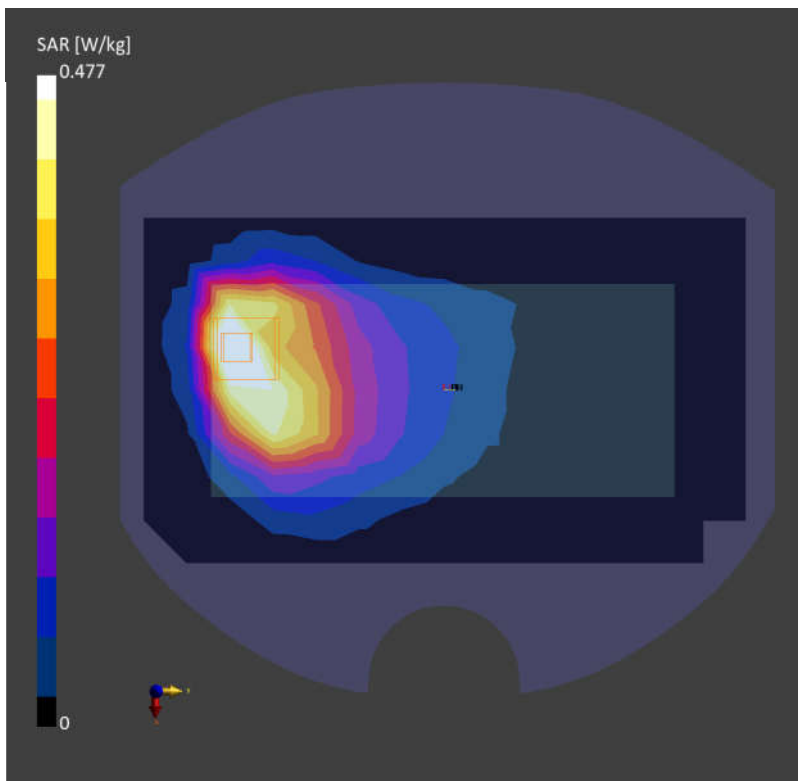

Date: 2025-08-26

49_LTE Band 7_20M_QPSK_1_0_Back_5mm_Ch20850

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 2510.000 MHz; Duty Cycle: 1:1

Medium: HSL_2600_250826 Medium parameters used: $f = 2510.000$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(7.53, 7.46, 7.57); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.729 W/kg; SAR (10g) = 0.342 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.12 dB

SAR (1g) = 0.764 W/kg; SAR (10g) = 0.363 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 81.0 %

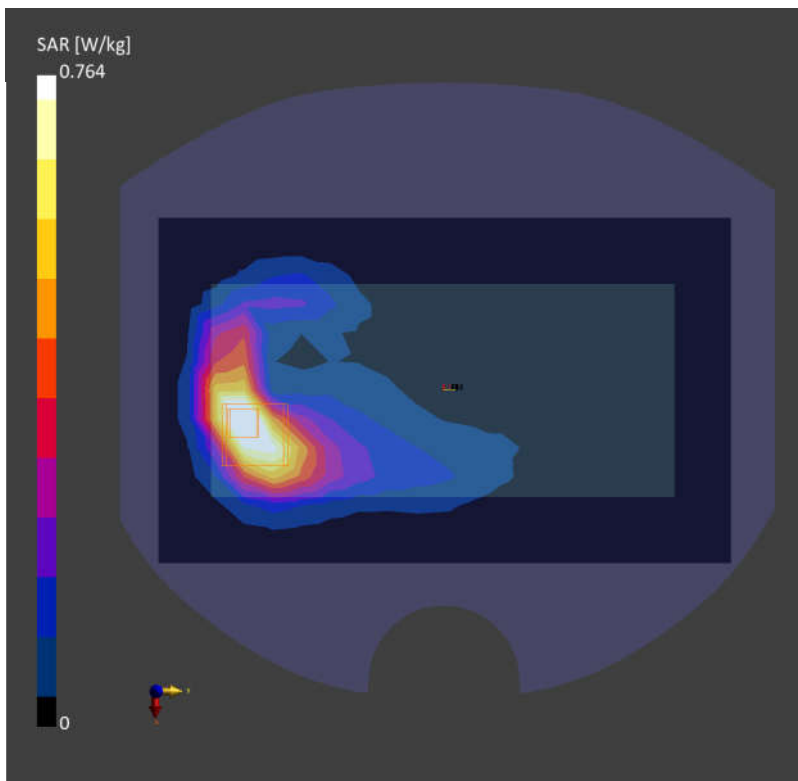

Date: 2025-08-26

50_LTE Band 41_20M_QPSK_1_0_Back_5mm_Ch39750

Communication System: LTE-TDD

AntennaCfg:SISO; Frequency: 2506.000 MHz; Duty Cycle: 1:1.59

Medium: HSL_2600_250826 Medium parameters used: $f = 2506.000$ MHz; $\sigma = 1.81$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(7.53, 7.46, 7.57); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.718 W/kg; SAR (10g) = 0.327 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.730 W/kg; SAR (10g) = 0.342 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 81.5 %

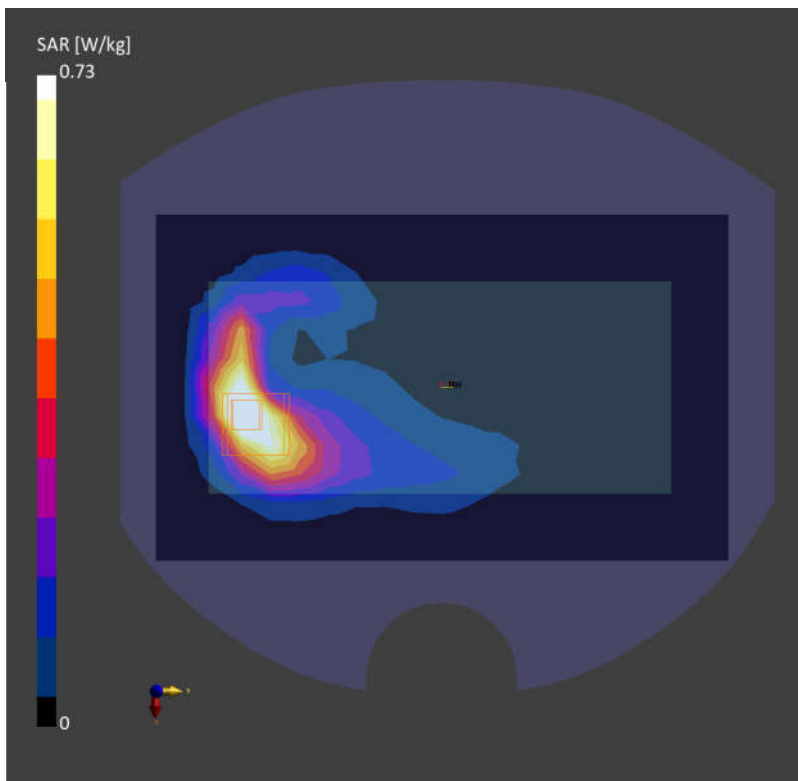

Date: 2025-08-26

51_FR1 n7_50M_QPSK_1_1_Back_5mm_Ch507000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 2535.000 MHz; Duty Cycle: 1:1

Medium: HSL_2600_250826 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(7.53, 7.46, 7.57); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10935-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.23 W/kg; SAR (10g) = 0.543 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.17 dB

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.566 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 80.7 %

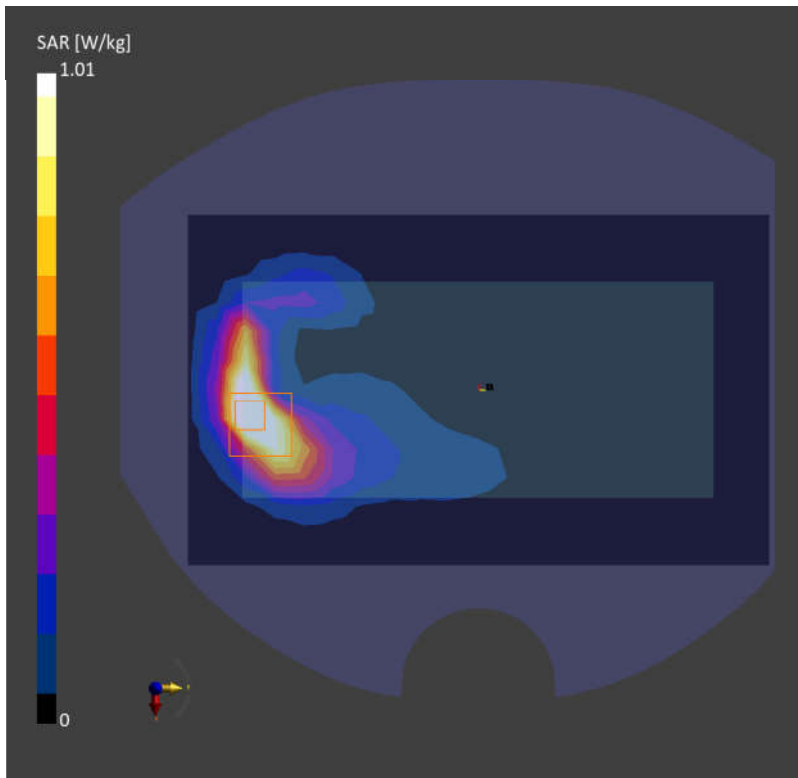

Date: 2025-08-26

52_FR1 n41_100M_QPSK_135_69_Back_5mm_Ch518598

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 2592.990 MHz; Duty Cycle: 1:1

Medium: HSL_2600_250826 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(7.53, 7.46, 7.57); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.04 W/kg; SAR (10g) = 0.446 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.11 dB

SAR (1g) = 0.945 W/kg; SAR (10g) = 0.464 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 80.4 %

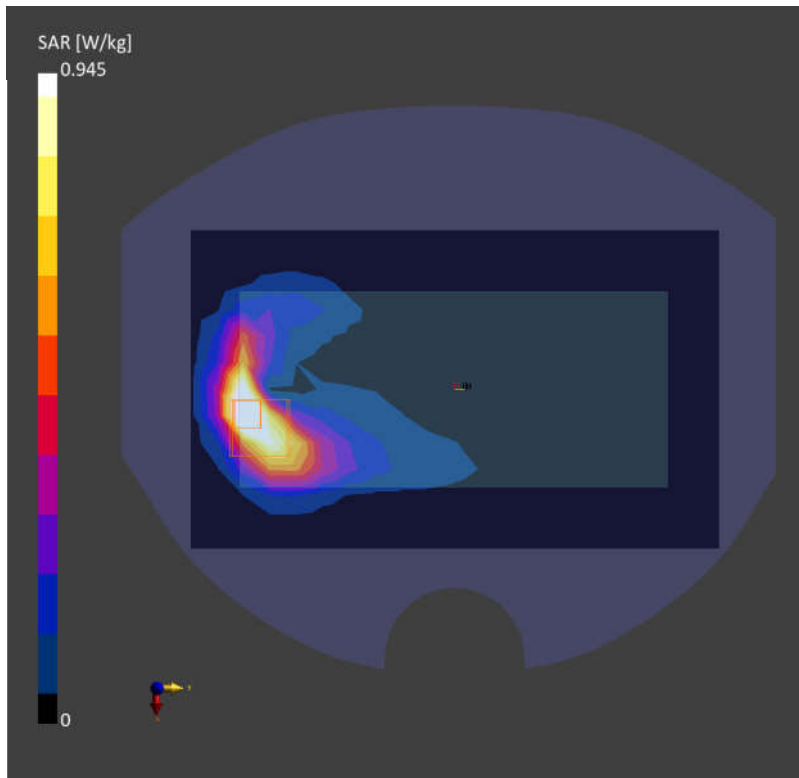

Date: 2025-08-27

53_LTE Band 42_20M_QPSK_1_0_Back_5mm_Ch42190

Communication System: LTE-TDD

AntennaCfg:SISO; Frequency: 3460.000 MHz; Duty Cycle: 1:1.59

Medium: HSL_3500_250827 Medium parameters used: $f = 3460.000$ MHz; $\sigma = 2.93$ S/m; $\epsilon_r = 37.8$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(7.03, 6.96, 7.07); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.508 W/kg; SAR (10g) = 0.201 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.09 dB

SAR (1g) = 0.509 W/kg; SAR (10g) = 0.205 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 78.2 %

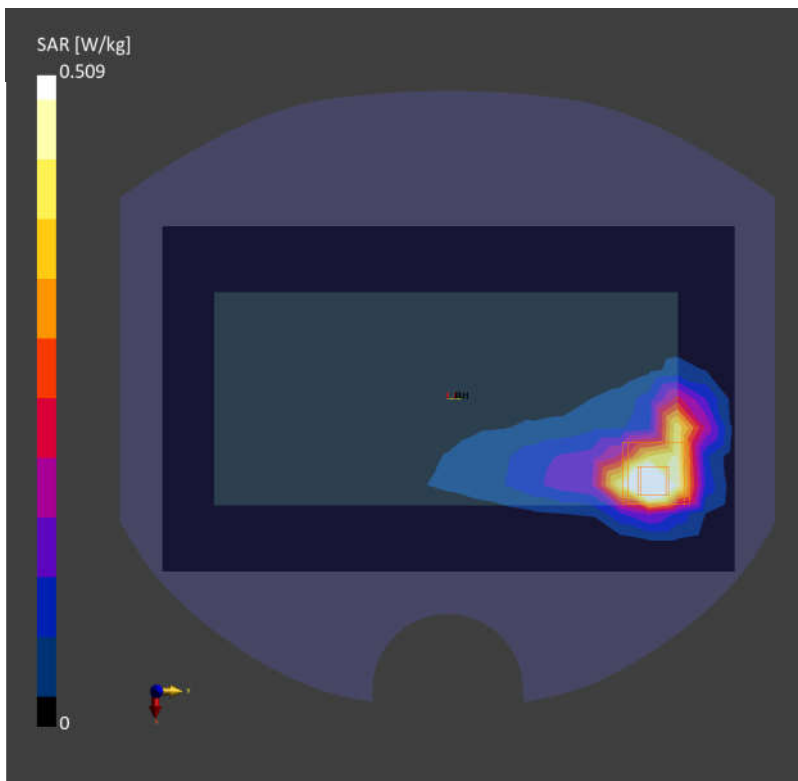

Date: 2025-08-28

54_FR1 n77_100M_QPSK_135_69_Back_5mm_Ch656000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 3840.000 MHz; Duty Cycle: 1:1

Medium: HSL_3900_250828 Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.34$ S/m; $\epsilon_r = 37.4$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.49, 5.93, 5.62); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.600 W/kg; SAR (10g) = 0.235 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.08 dB

SAR (1g) = 0.618 W/kg; SAR (10g) = 0.245 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 74.8 %

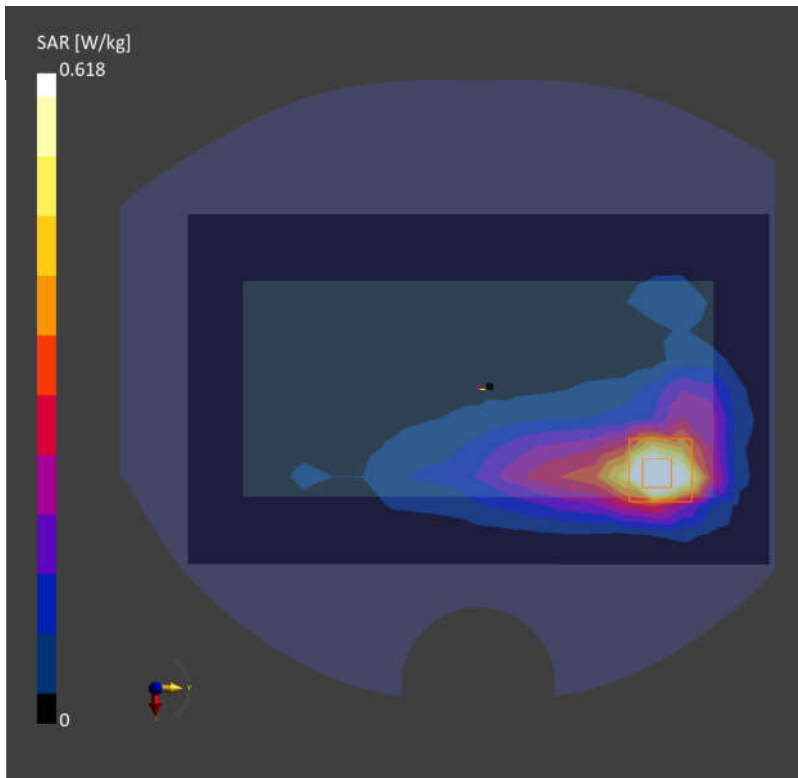

Date: 2025-08-25

55_WLAN2.4GHz_802.11b 1Mbps_Back_5mm_Ch1

Communication System: IEEE 802.11b WiFi 2.4 GHz

Frequency: 2412.000MHz; Duty Cycle: 1:1.009

Medium: HSL_2450_250825 Medium parameters used: $f = 2412.000$ MHz; $\sigma = 1.74$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(7.61, 7.54, 7.66); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.300 W/kg; SAR (10g) = 0.140 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.08 dB

SAR (1g) = 0.381 W/kg; SAR (10g) = 0.130 W/kg

Smallest distance from peaks to all points 3 dB below = 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.7 %

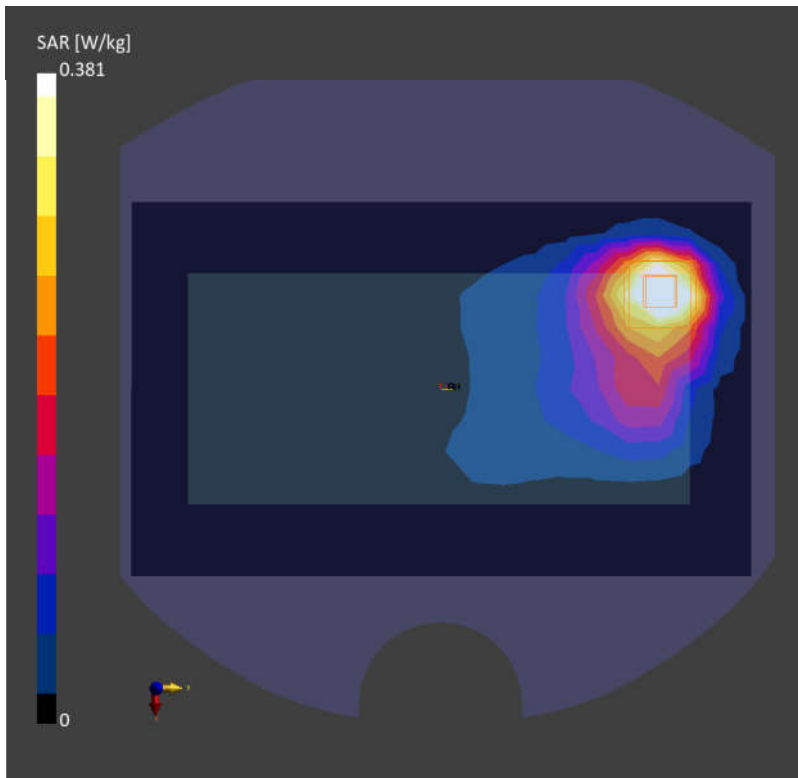

Date: 2025-08-25

56_Bluetooth_1Mbps_Back_5mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth;

Frequency: 2441.000 MHz; Duty Cycle: 1:1.308

Medium: HSL_2450_250825 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(7.61, 7.54, 7.66); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 12.0 mm x 10.0 mm

SAR (1g) = 0.178 W/kg; SAR (10g) = 0.090 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.05 dB

SAR (1g) = 0.173 W/kg; SAR (10g) = 0.073 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 76.9 %

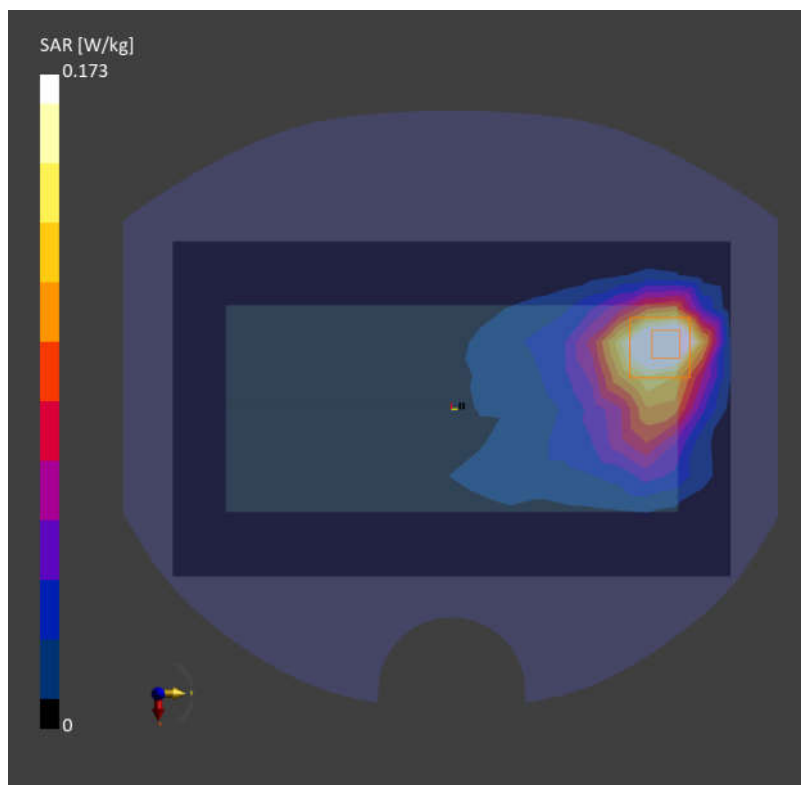

Date: 2025-08-29

57_WLAN5GHz_802.11n-HT40 MCS0_Front_5mm_Ch54

Communication System: IEEE 802.11n

Frequency: 5270.000 MHz; Duty Cycle: 1:1.067

Medium: HSL_5250_250829 Medium parameters used: $f = 5270.000$ MHz; $\sigma = 4.71$ S/m; $\epsilon_r = 36.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(5.92, 5.86, 5.95); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.343 W/kg; SAR (10g) = 0.116 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.05 dB

SAR (1g) = 0.377 W/kg; SAR (10g) = 0.127 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 62.9 %

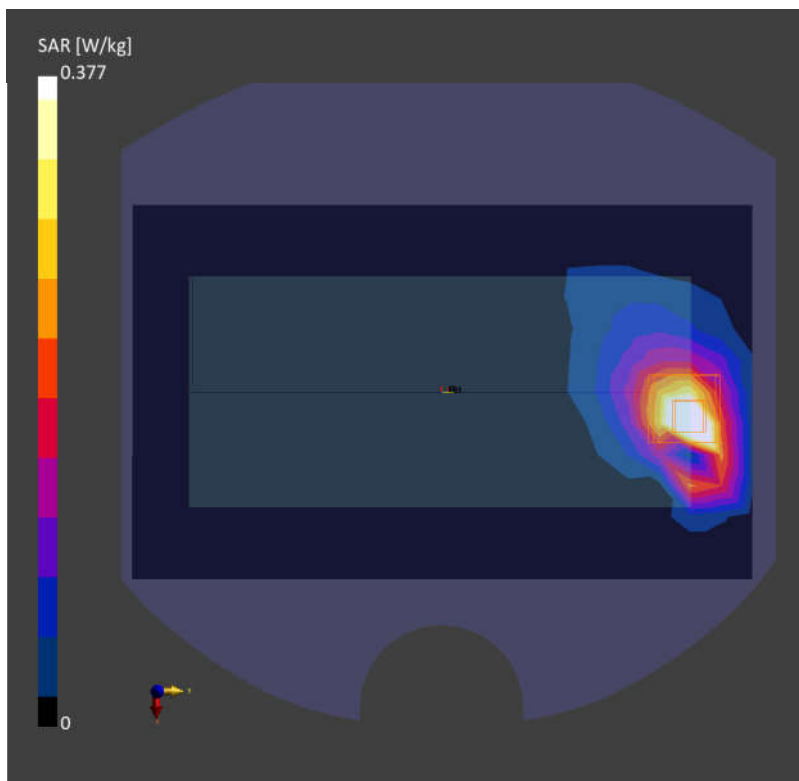

Date: 2025-08-31

58_WLAN5GHz_802.11n-HT40 MCS0_Back_5mm_Ch142

Communication System: IEEE 802.11n

Frequency: 5710.000 MHz; Duty Cycle: 1:1.067

Medium: HSL_5750_250831 Medium parameters used: $f = 5710.000$ MHz; $\sigma = 5.13$ S/m; $\epsilon_r = 35.8$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(5.57, 5.52, 5.6); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.420 W/kg; SAR (10g) = 0.161 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 0.409 W/kg; SAR (10g) = 0.162 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 55.5 %

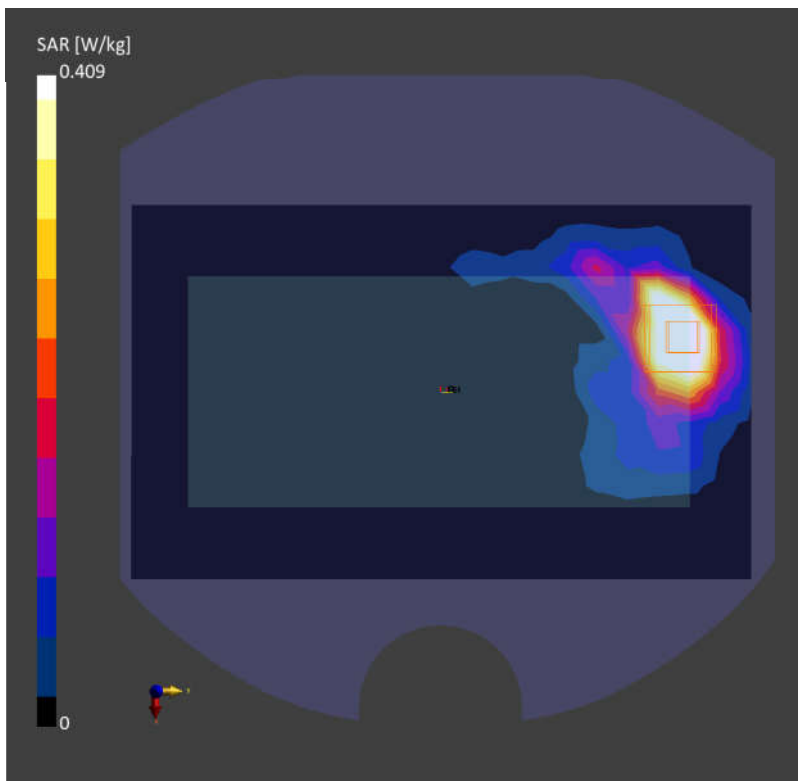

Date: 2025-08-31

59_WLAN5GHz_802.11ax-HE40 MCS0_Back_5mm_Ch151

Communication System: IEEE 802.11ax

Frequency: 5755.000MHz; Duty Cycle: 1:1.082

Medium: HSL_5750_250831 Medium parameters used: $f = 5755.000$ MHz; $\sigma = 5.21$ S/m; $\epsilon_r = 35.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(5.57, 5.52, 5.6); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10695-AAC

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.439 W/kg; SAR (10g) = 0.174 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 0.474 W/kg; SAR (10g) = 0.174 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 57.2 %

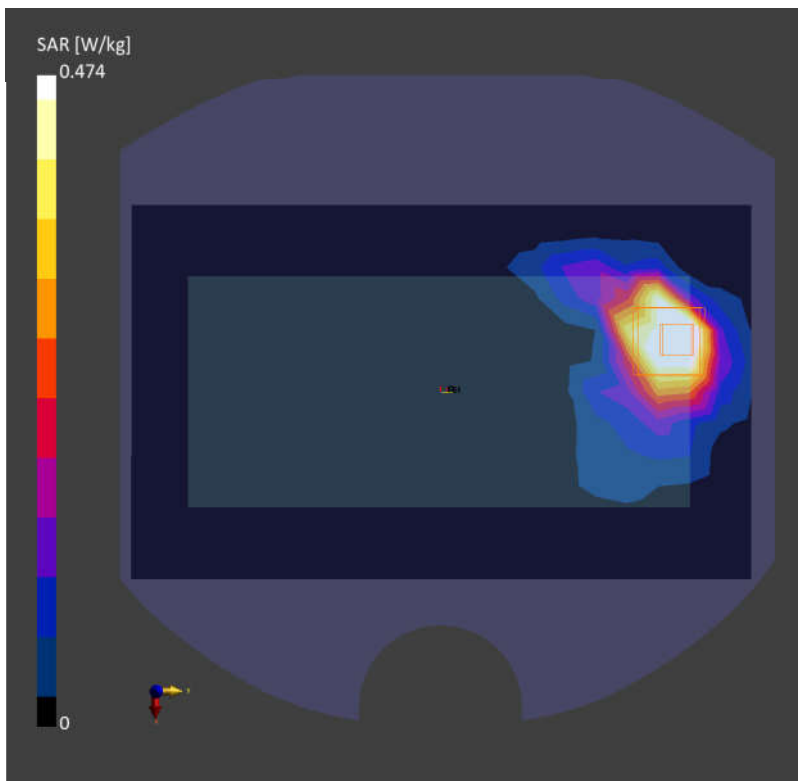

Date: 2025-08-23

60_GSM850_GPRS (3 Tx slots)_Back_0mm_Ch189


Communication System: GPRS-FDD; Frequency: 836.400 MHz; Duty Cycle: 1:2.77
Medium: HSL_835_250823 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 42.5$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(10.22, 10.12, 10.28); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10027-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 1.94 W/kg; SAR (10g) = 1.15 W/kg;

Zoom Scan (33.6 mm x 33.6 mm x 33.4 mm): Measurement Grid: 4.2 mm x 4.2 mm x 1.4 mm
Power Drift = -0.02 dB
SAR (1g) = 1.88 W/kg; SAR (10g) = 0.936 W/kg
Smallest distance from peaks to all points 3 dB below = 4.8 mm
Ratio of SAR at M2 to SAR at M1 = 63.1 %

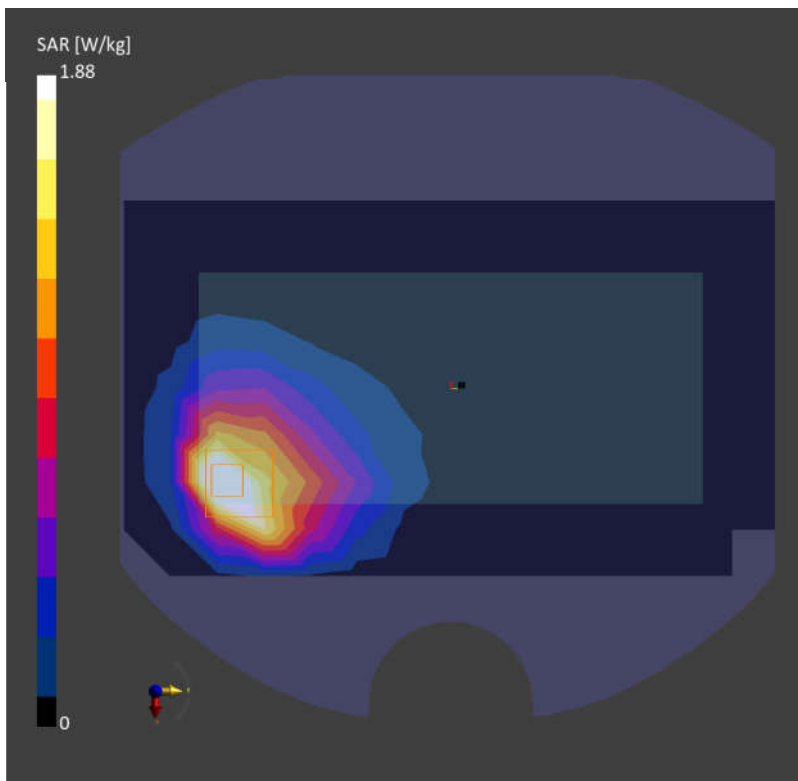

Date: 2025-08-23

61_WCDMA V_RMC 12.2Kbps_Back_0mm_Ch4182

Communication System: UMTS-FDD; Frequency: 836.400 MHz; Duty Cycle: 1:1
Medium: HSL_835_250823 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 42.5$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(10.22, 10.12, 10.28); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 2.34 W/kg; SAR (10g) = 1.47 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 2.17 W/kg; SAR (10g) = 1.08 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 67.5 %

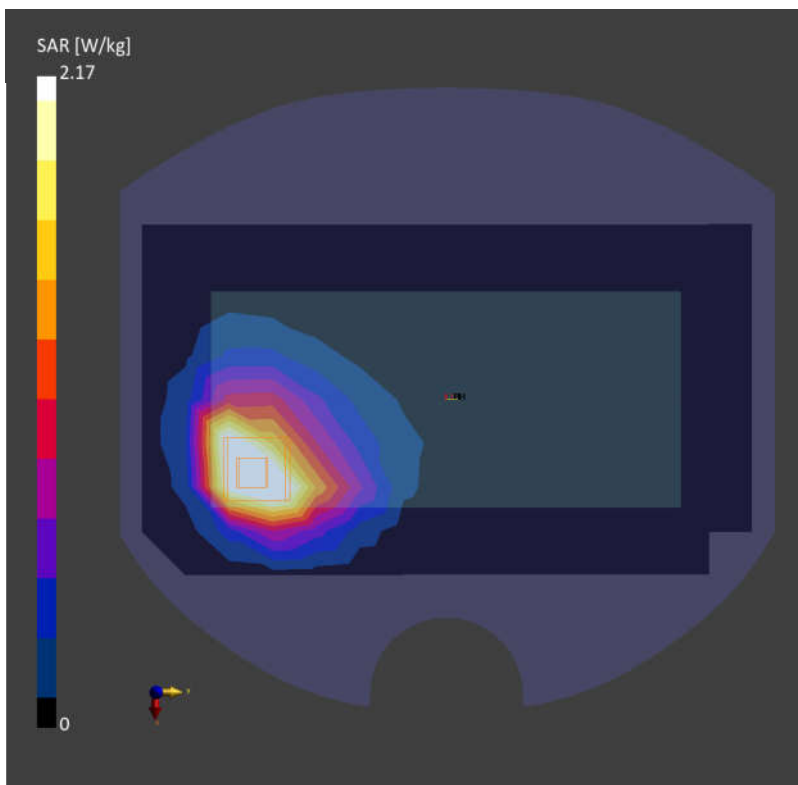

Date: 2025-08-23

62_LTE Band 5_10M_QPSK_1_0_Back_0mm_Ch20525

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 836.500 MHz; Duty Cycle: 1:1

Medium: HSL_835_250823 Medium parameters used: $f = 836.500$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(10.22, 10.12, 10.28); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.19 W/kg; SAR (10g) = 0.725 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 1.10 W/kg; SAR (10g) = 0.645 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 78.5 %

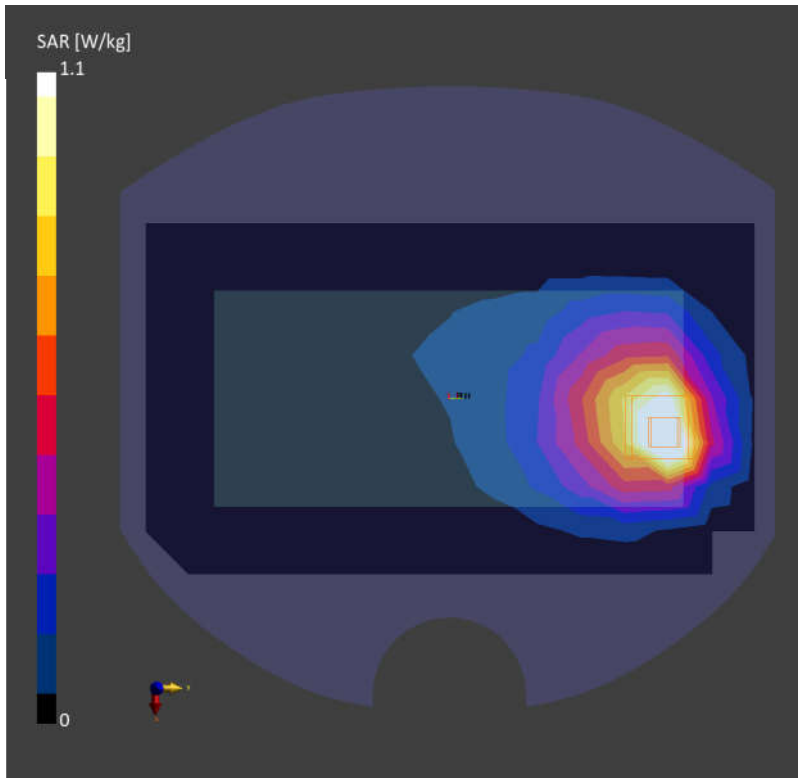

Date: 2025-08-23

63_FR1 n5_20M_QPSK_1_1_Back_0mm_Ch167300

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 836.500 MHz; Duty Cycle: 1:1

Medium: HSL_835_250823 Medium parameters used: $f = 836.500$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(10.22, 10.12, 10.28); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.892 W/kg; SAR (10g) = 0.543 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.837 W/kg; SAR (10g) = 0.494 W/kg

Smallest distance from peaks to all points 3 dB below = 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 78.0 %

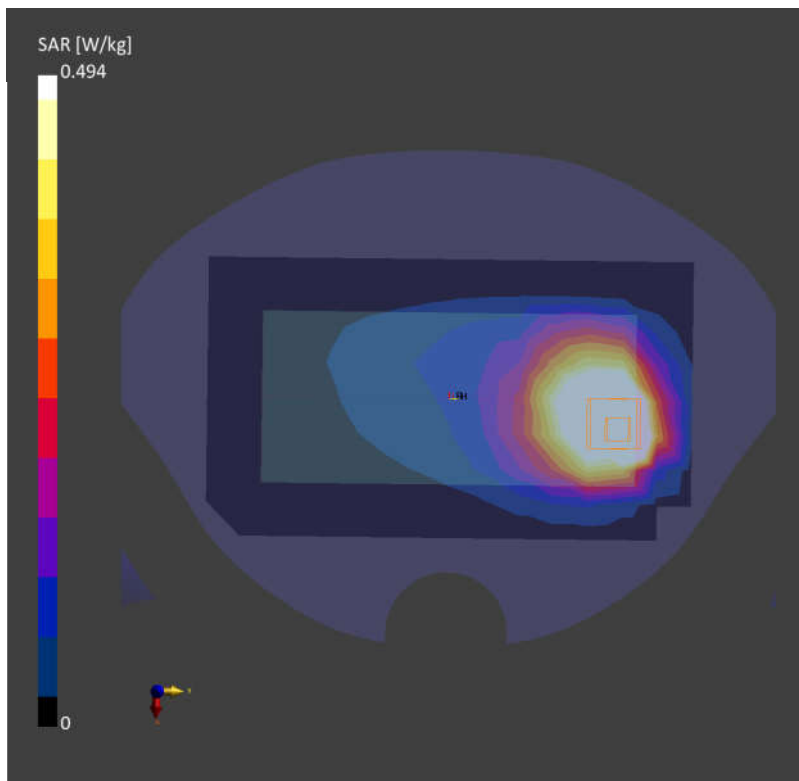

Date: 2025-08-24

64_GSM1900_GPRS (3 Tx slots)_Back_0mm_Ch512


Communication System: GPRS-FDD; Frequency: 1850.200 MHz; Duty Cycle: 1:2.77
Medium: HSL_1900_250824 Medium parameters used: $f = 1850.200$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 39.4$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.15, 8.07, 8.2); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10027-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 3.94 W/kg; SAR (10g) = 2.02 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.17 dB
SAR (1g) = 4.02 W/kg; SAR (10g) = 1.90 W/kg
Smallest distance from peaks to all points 3 dB below = 6.9 mm
Ratio of SAR at M2 to SAR at M1 = 74.6 %

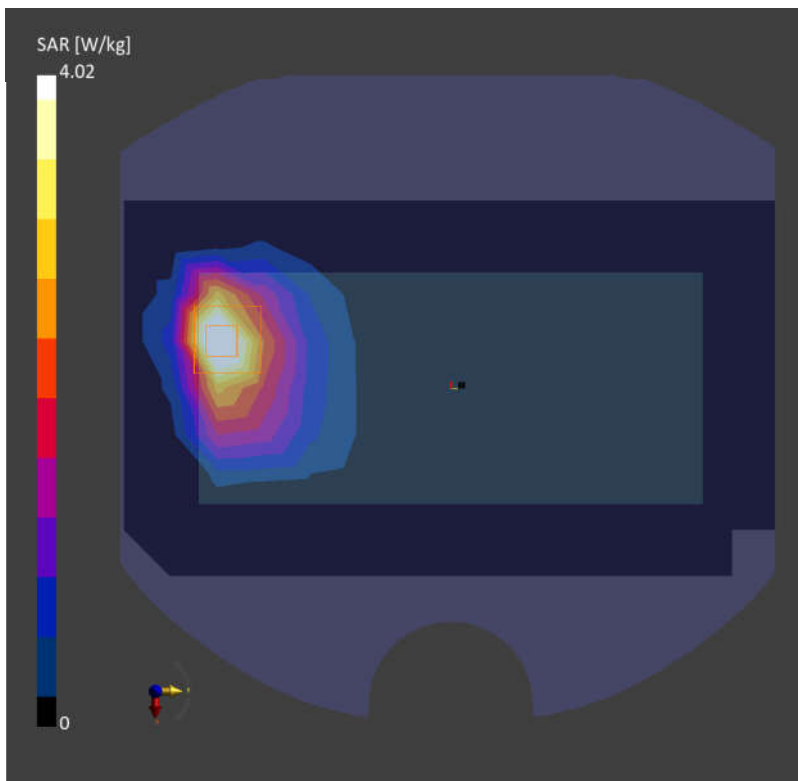

Date: 2025-08-24

65_WCDMA II_RMC 12.2Kbps_Bottom Side_0mm_Ch9262


Communication System: UMTS-FDD (WCDMA); Frequency: 1852.400 MHz; Duty Cycle: 1:1
Medium: HSL_1900_250824 Medium parameters used: $f = 1852.400$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 39.4$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.15, 8.07, 8.2); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm
SAR (1g) = 3.41 W/kg; SAR (10g) = 1.58 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.02 dB
SAR (1g) = 3.29 W/kg; SAR (10g) = 1.53 W/kg
Smallest distance from peaks to all points 3 dB below = 6.6 mm
Ratio of SAR at M2 to SAR at M1 = 66.4 %

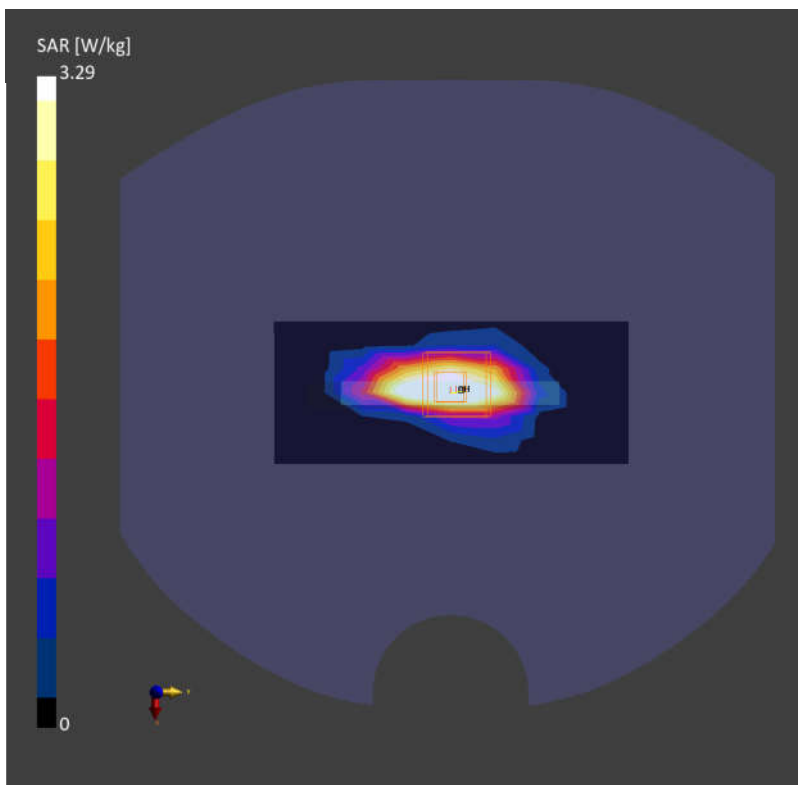

Date: 2025-08-24

66_LTE Band 2_20M_QPSK_1_0_Front_0mm_Ch18700

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 1860.000 MHz; Duty Cycle: 1:1

Medium: HSL_1900_250824 Medium parameters used: $f = 1860.000$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 39.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(8.15, 8.07, 8.2); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 5.44 W/kg; SAR (10g) = 2.83 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.07 dB

SAR (1g) = 5.20 W/kg; SAR (10g) = 2.32 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 78.0 %

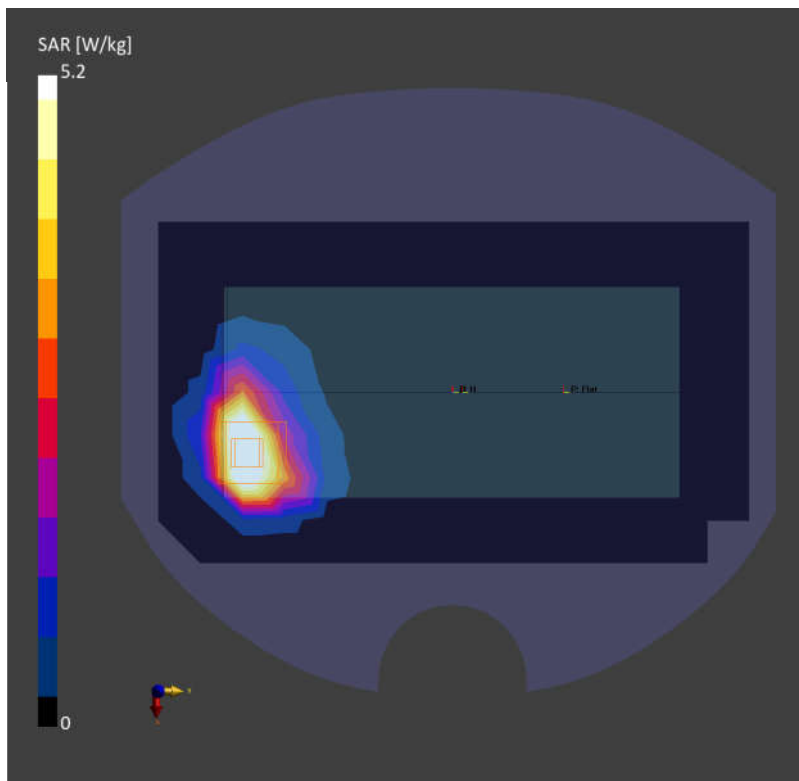

Date: 2025-08-26

67_LTE Band 7_20M_QPSK_1_0_Bottom Side_0mm_Ch21350

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 2560.000 MHz; Duty Cycle: 1:1

Medium: HSL_2600_250826 Medium parameters used: $f = 2560.000$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 38.9$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(7.53, 7.46, 7.57); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 6.63 W/kg; SAR (10g) = 2.50 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.08 dB

SAR (1g) = 6.14 W/kg; SAR (10g) = 2.19 W/kg

Smallest distance from peaks to all points 3 dB below = 5.5 mm

Ratio of SAR at M2 to SAR at M1 = 67.2 %

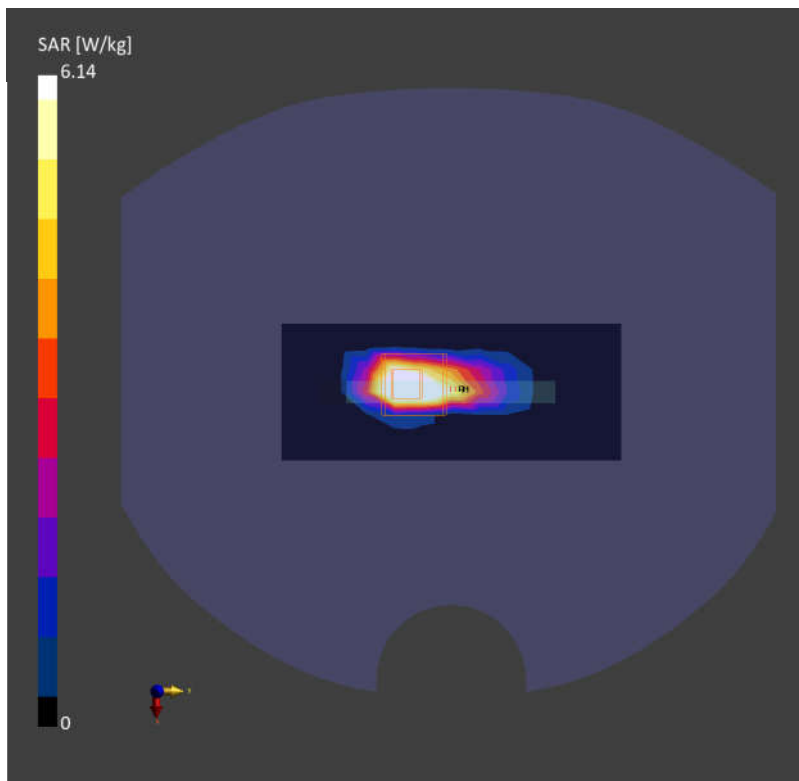

Date: 2025-08-26

68_LTE Band 41_20M_QPSK_1_0_Bottom Side_0mm_Ch40185

Communication System: LTE-TDD

AntennaCfg:SISO; Frequency: 2549.500 MHz; Duty Cycle: 1:2.33

Medium: HSL_2600_250826 Medium parameters used: $f = 2549.500$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 38.8$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(7.53, 7.46, 7.57); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 9.16 W/kg; SAR (10g) = 2.44 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 8.66 W/kg; SAR (10g) = 2.31 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 73.4 %

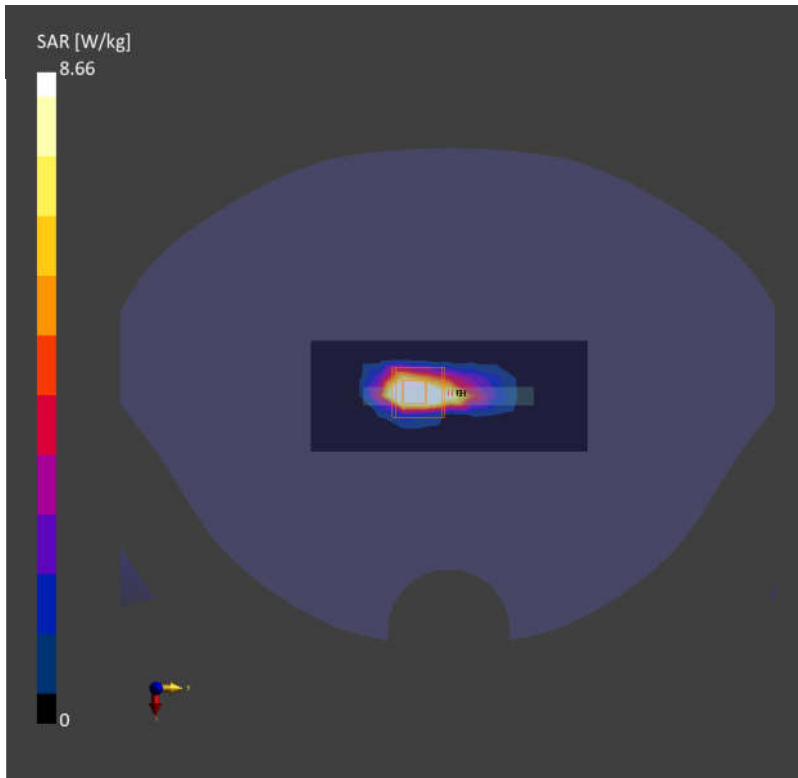

Date: 2025-08-26

69_FR1 n7_50M_QPSK_135_68_Bottom Side_0mm_Ch507000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 2535.000 MHz; Duty Cycle: 1:1

Medium: HSL_2600_250826 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(7.53, 7.46, 7.57); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10943-AAD

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 8.68 W/kg; SAR (10g) = 2.25 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 8.31 W/kg; SAR (10g) = 2.49 W/kg

Smallest distance from peaks to all points 3 dB below = 5.2 mm

Ratio of SAR at M2 to SAR at M1 = 66.3 %

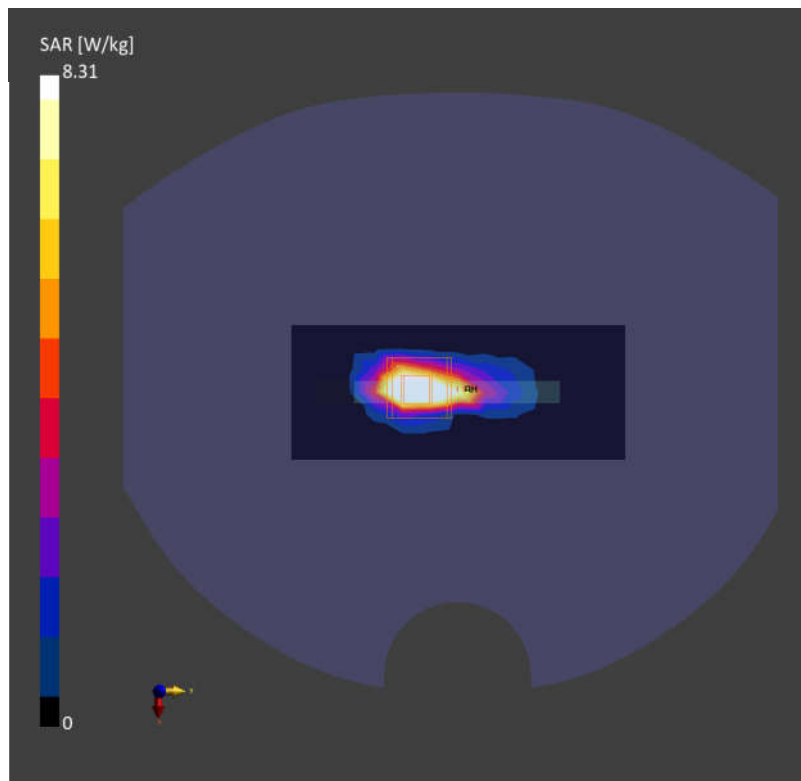

Date: 2025-08-26

70_FR1 n41_100M_QPSK_1_1_Bottom Side_0mm_Ch518598

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 2592.990 MHz; Duty Cycle: 1:1

Medium: HSL_2600_250826 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(7.53, 7.46, 7.57); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 7.97 W/kg; SAR (10g) = 2.67 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 7.42 W/kg; SAR (10g) = 2.31 W/kg

Smallest distance from peaks to all points 3 dB below = 5.0 mm

Ratio of SAR at M2 to SAR at M1 = 72.8 %

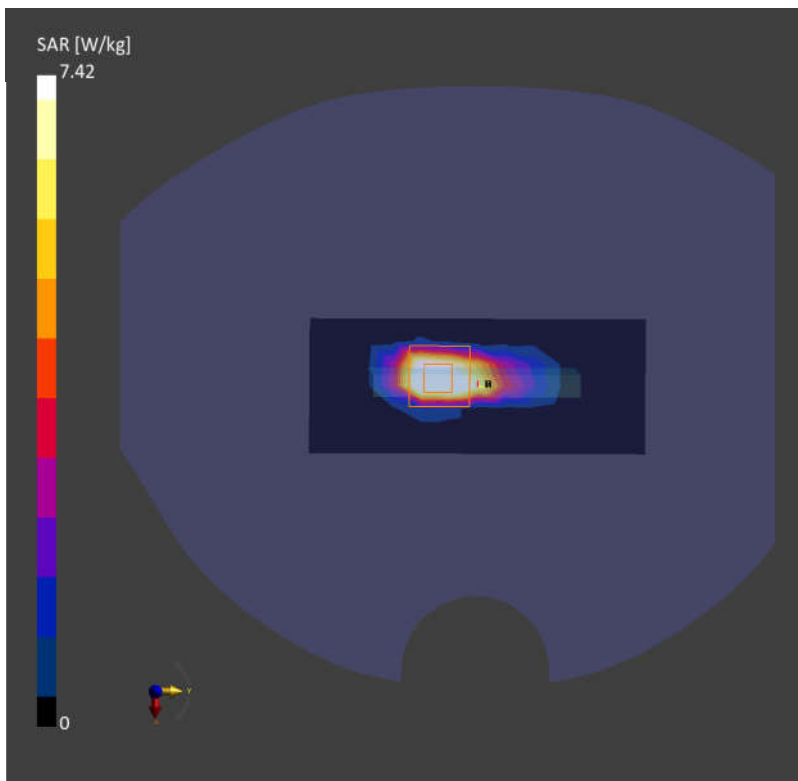

Date: 2025-08-27

71_LTE Band 42_20M_QPSK_1_0_Left Side_0mm_Ch42990

Communication System: LTE-TDD

AntennaCfg:SISO; Frequency: 3540.000 MHz; Duty Cycle: 1:1.59

Medium: HSL_3500_250827 Medium parameters used: $f = 3540.000$ MHz; $\sigma = 3.00$ S/m; $\epsilon_r = 37.7$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(7.03, 6.96, 7.07); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 3.87 W/kg; SAR (10g) = 1.36 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.10 dB

SAR (1g) = 3.82 W/kg; SAR (10g) = 1.22 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 54.6 %

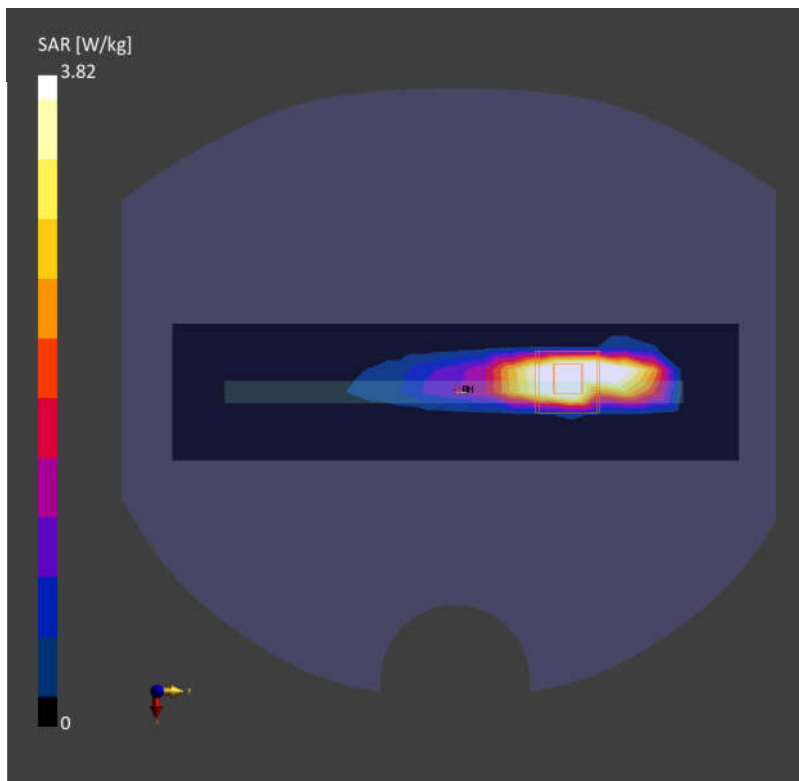

Date: 2025-08-28

72_FR1 n77_100M_QPSK_135_69_Top Side_0mm_Ch656000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 3840.000 MHz; Duty Cycle: 1:1

Medium: HSL_3900_250828 Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.34$ S/m; $\epsilon_r = 37.4$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.49, 5.93, 5.62); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 6.58 W/kg; SAR (10g) = 2.08 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 6.52 W/kg; SAR (10g) = 1.97 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 65.6 %

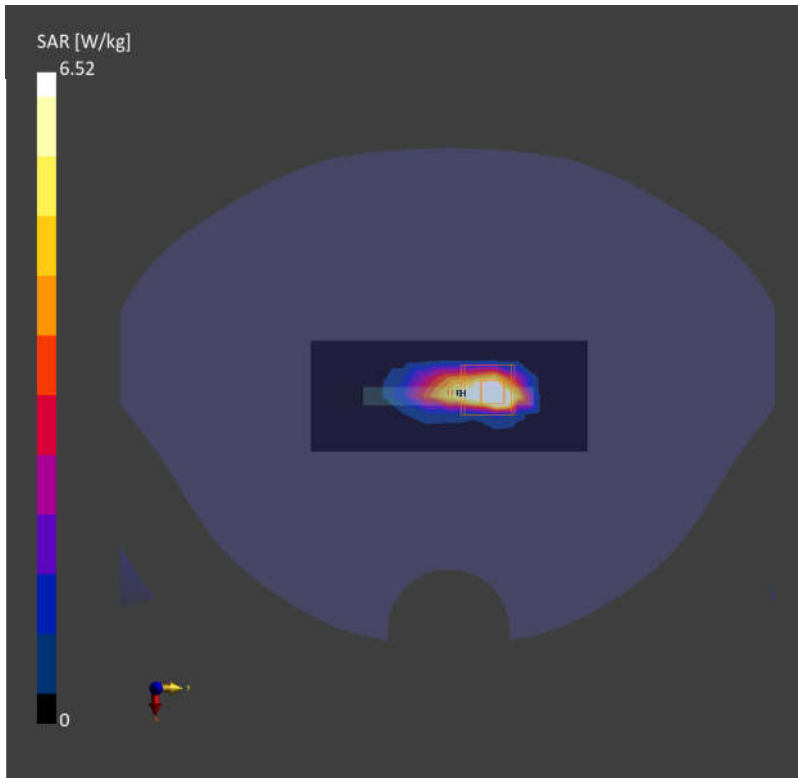

Date: 2025-08-29

73_WLAN5GHz_802.11n-HT40 MCS0_Top Side_0mm_Ch54

Communication System: IEEE 802.11n

Frequency: 5270.000 MHz; Duty Cycle: 1:1.067

Medium: HSL_5250_250829 Medium parameters used: $f = 5270.000$ MHz; $\sigma = 4.71$ S/m; $\epsilon_r = 36.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(5.92, 5.86, 5.95); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 2.54 W/kg; SAR (10g) = 0.697 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 2.91 W/kg; SAR (10g) = 0.695 W/kg

Smallest distance from peaks to all points 3 dB below = 4.2 mm

Ratio of SAR at M2 to SAR at M1 = 55.3 %

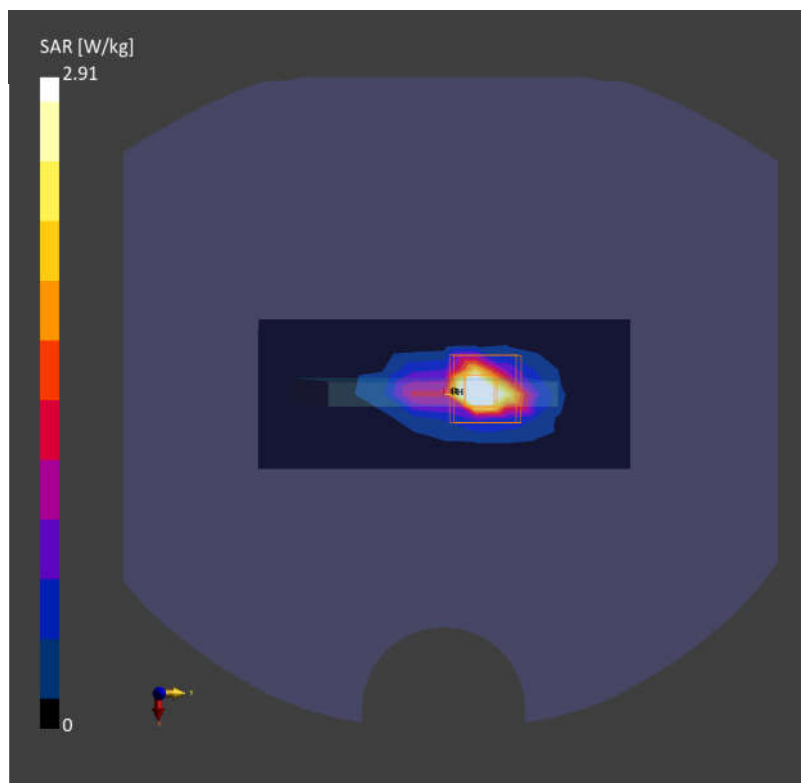

Date: 2025-08-31

74_WLAN5GHz_802.11n-HT40 MCS0_Top Side_0mm_Ch142

Communication System: IEEE 802.11n

Frequency: 5710.000 MHz; Duty Cycle: 1:1.067

Medium: HSL_5750_250831 Medium parameters used: $f = 5710.000$ MHz; $\sigma = 5.13$ S/m; $\epsilon_r = 35.8$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7627; ConvF(5.57, 5.52, 5.6); Calibrated: 2025-07-01
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 3.35 W/kg; SAR (10g) = 0.858 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.04 dB

SAR (1g) = 3.55 W/kg; SAR (10g) = 0.834 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 56.4 %

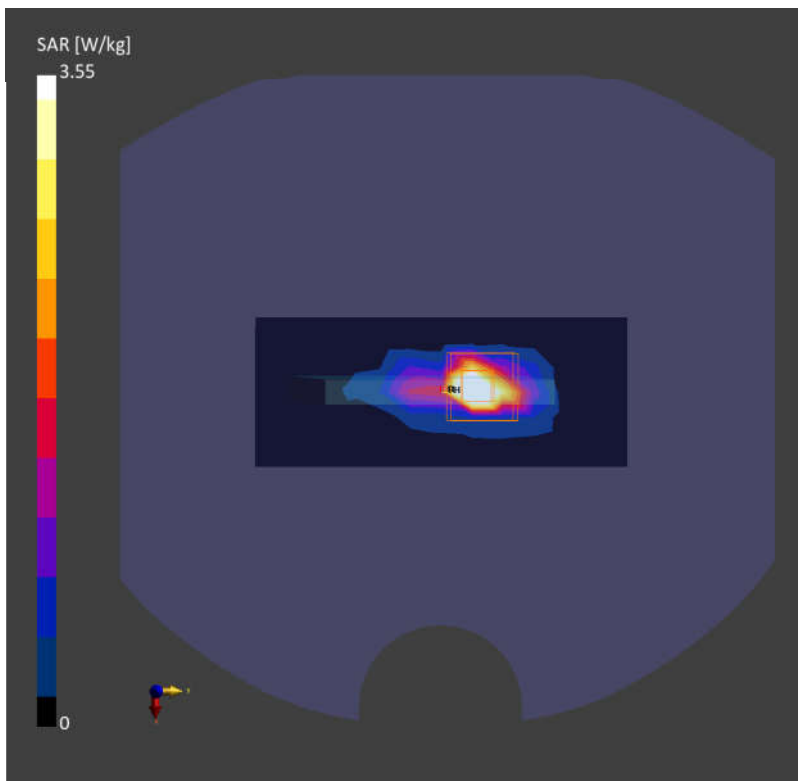

Date: 2025-08-27

75_NFC_ASK_Back_0mm

Communication System: CW; Frequency: 13.600 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 13.600$ MHz; $\sigma = 0.761$ S/m; $\epsilon_r = 53.7$
Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(16.06, 16.97, 16.03); Calibrated: 2025-05-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1358; Calibrated: 2025-07-15
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2151; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.081 W/kg; SAR (10g) = 0.041 W/kg;

Zoom Scan (34.3 mm x 34.3 mm x 33.4 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.07 dB
SAR (1g) = 0.073 W/kg; SAR (10g) = 0.028 W/kg
Smallest distance from peaks to all points 3 dB below = 6.2 mm
Ratio of SAR at M2 to SAR at M1 = 59.1 %

