



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2603-1,XT2603-2
FCC ID : IHDT56AW1
STANDARD : FCC Part 15 Subpart C §15.209
CLASSIFICATION : (DCD) Part 15 Low Power Transmitter Below 1705 kHz
TEST DATE(S) : Oct. 29, 2025 ~ Nov. 18, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Applicant.....	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test	5
1.4 Modification of EUT	5
1.5 Test Location	6
1.6 Test Software	6
1.7 Applied Standards	6
1.8 Specification of Accessory	7
2 Test Configuration of Equipment Under Test	8
2.1 Test Mode	8
2.2 Connection Diagram of Test System	9
2.3 Support Unit used in test configuration and system	9
3 Test Result	10
3.1 20dB and 99% Occupied Bandwidth Measurement	10
3.2 Radiated Emission Measurement	12
3.3 AC Conducted Emission Measurement	21
3.4 Antenna Requirements.....	25
4 List of Measuring Equipment.....	26
5 Measurement Uncertainty	27
Appendix A. Setup Photographs	



History of this test report

Report No.	Version	Description	Issued Date
FR591906E	01	Initial issue of report	Dec. 05, 2025

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	2.1049	20dB Bandwidth	Reporting Only	-
3.1	2.1049	99% Occupied Bandwidth	Reporting Only	-
3.2	15.209	Radiated Emission	Pass	Under limit 30.83 dB at 60.07 MHz
3.3	15.207	AC Conducted Emission	Pass	Under limit 11.66 dB at 8.546 MHz
3.4	15.203	Antenna Requirements	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2603-1,XT2603-2
FCC ID	IHDT56AW1
IMEI Code	Radiation : 350158880024015/350158880024023 Conducted: 350158880023439/350158880023447 Conduction: 350158880024015/350158880024023
HW Version	DVT2
SW Version	W2WV36.22
WPT Frequency Range	115kHz~ 145 kHz
WPT Type of Modulation	ASK
WPT Antenna Type	Coil Antenna
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are two kinds of EUT, the sample 1(XT2603-2) is P-SIM + eSIM and the sample 2(XT2603-1) is P-SIM +P-SIM. According to the difference, we choose sample 1 to full test.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Test Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO01-KS 03CH02-KS TH01-KS	CN1257	314309

1.6 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH02-KS	AUDIX	E3	6.2009-8-24a1
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.209, §15.207
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ ANSI C63.10-2020

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

1.8 Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola(Salcomp)	Model Name	MC-901
AC Adapter 1(EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-902
AC Adapter 1(UK)	Brand Name	Motorola(Salcomp)	Model Name	MC-903
AC Adapter 1(AU)	Brand Name	Motorola(Salcomp)	Model Name	MC-905
AC Adapter 1(AR)	Brand Name	Motorola(Salcomp)	Model Name	MC-906
AC Adapter 1(BR)	Brand Name	Motorola(Salcomp)	Model Name	MC-907
AC Adapter 1(CHILE)	Brand Name	Motorola(Salcomp)	Model Name	MC-909
AC Adapter 2(US)	Brand Name	Motorola(AOHAI)	Model Name	MC-901
AC Adapter 2(EU)	Brand Name	Motorola(AOHAI)	Model Name	MC-902
AC Adapter 2(UK)	Brand Name	Motorola(AOHAI)	Model Name	MC-903
AC Adapter 2(AU)	Brand Name	Motorola(AOHAI)	Model Name	MC-905
AC Adapter 2(AR)	Brand Name	Motorola(AOHAI)	Model Name	MC-906
AC Adapter 2(BR)	Brand Name	Motorola(AOHAI)	Model Name	MC-907
AC Adapter 2(CHILE)	Brand Name	Motorola(AOHAI)	Model Name	MC-909
AC Adapter 3(IN)	Brand Name	Motorola(AOHAI)	Model Name	MC-904
AC Adapter 3(IN Local)	Brand Name	Motorola(AOHAI)	Model Name	MC-904
AC Adapter 4(IN Local)	Brand Name	Motorola(Salcomp)	Model Name	MC-904
AC Adapter 4(IN)	Brand Name	Motorola(Salcomp)	Model Name	MC-904
Battery	Brand Name	Motorola (ATL)	Model Name	SR52
USB Cable 1	Brand Name	Motorola(SAIBAO)	Model Name	SC18D71644
USB Cable 2	Brand Name	Motorola(Luxshare)	Model Name	SC18E08104
USB Cable 3	Brand Name	Motorola(SAIBAO)	Model Name	SC18D86731
USB Cable 4	Brand Name	Motorola(Luxshare)	Model Name	SC18E08103
USB Cable 5	Brand Name	Motorola(SAIBAO)	Model Name	SC18E46326
USB Cable 6	Brand Name	Motorola(SAIBAO)	Model Name	SC18E59082
Magnetic Protective Cover	Brand Name	Motorola(Topwell)	Model Name	SS68E96654
Stylus	Brand Name	Motorola(Maxeye)	Model Name	XT2604-1




2 Test Configuration of Equipment Under Test

2.1 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 1000 MHz).
- b. AC power line Conducted Emission was tested under maximum output power.

Test Items	Function Type
AC Conducted Emission	Mode 1: WPT Charging + Battery Level < 10%(Load) + Charging distance:0 cm + Tx(Reverse charging)
	Mode 2: WPT Charging + Battery Level 50% (40%`60%)(Load) + Charging distance:0 cm + Tx(Reverse charging)
	Mode 3: WPT Charging + Battery Level >90% (Load) + Charging distance:0 cm + Tx(Reverse charging)
	Mode 4: WPT Charging + Battery Level 50% (40%`60%)(Load)+ Charging distance max 2mm + Tx(Reverse charging)
Radiated Emission	Mode 1: WPT Charging + Battery Level < 10%(Load) + Charging distance:0 cm + Tx(Reverse charging)
	Mode 2: WPT Charging + Battery Level 50% (40%`60%)(Load) + Charging distance:0 cm + Tx(Reverse charging)
	Mode 3: WPT Charging + Battery Level >90% (Load) + Charging distance:0 cm + Tx(Reverse charging)
	Mode 4: WPT Charging + Battery Level < 10% (Load) + Charging distance:max 2mm + Tx(Reverse charging)
Remark:	
1. The worst case of conducted emission is mode 3; only the test data of it was reported.	
2. The worst case of radiated emission is mode 1; only the test data of it was reported.	
3. The tests were performed with Adapter 1 and USB Cable 1.	

2.2 Connection Diagram of Test System

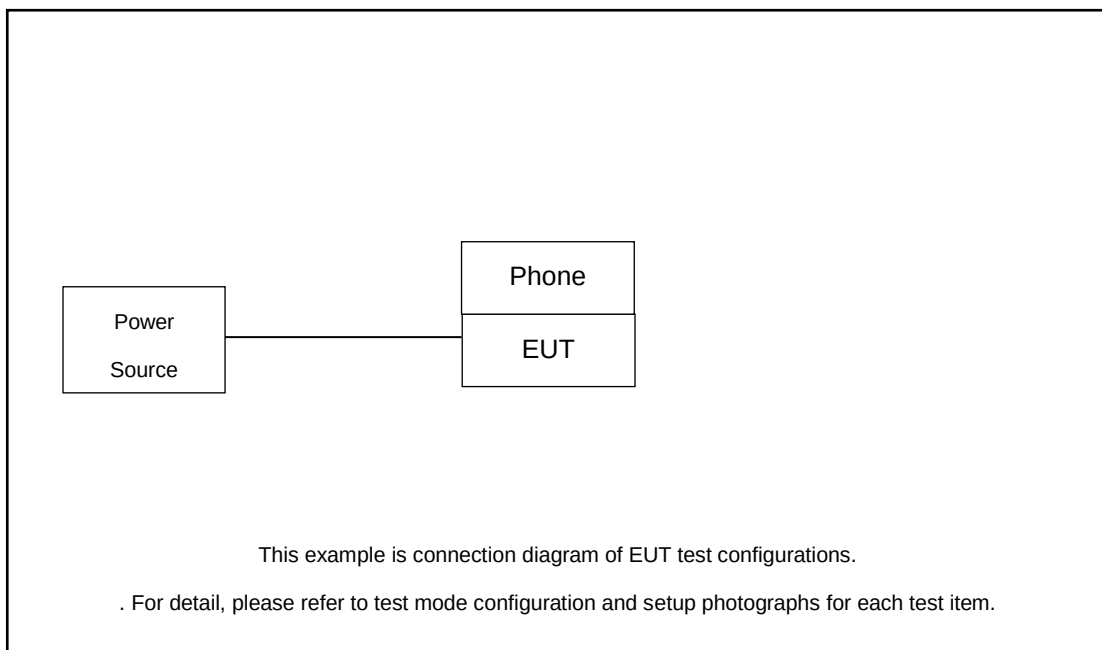

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Mobile Phone	Motor	Urus (Vantage)	N/A	N/A	N/A

3 Test Result

3.1 20dB and 99% Occupied Bandwidth Measurement

3.1.1 Limit of 20dB and 99% Occupied Bandwidth

Reporting only, 99% OBW shall not located within 15.205 restricted bands.


3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The 20dB bandwidth is measured with a spectrum analyzer connected via a receiver antenna placed near the EUT while wirelessly charging a charging board.
2. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
3. Measure and record the results in the test report.

3.1.4 Test Setup

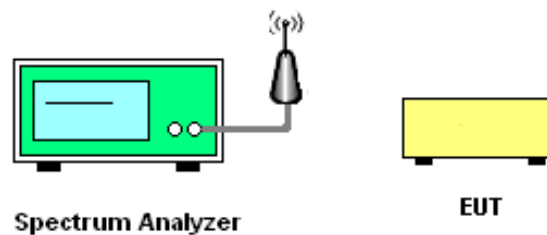




3.1.5 Test Result of 20dB and 99% Bandwidth

Test Engineer :	Smile	Temperature :	22~24°C
		Relative Humidity :	53~55%


Occupied Bandwidth (kHz)	Frequency (kHz)
20dB Bandwidth(KHz)	746.7
99% Bandwidth(KHz)	638.2

Remark: Because the measured signal is CW adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW

20 dB Bandwidth Plot

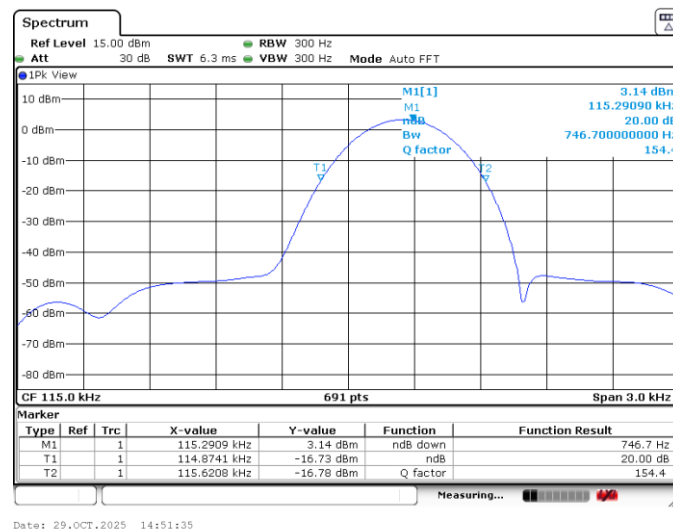

99% Occupied Bandwidth Plot

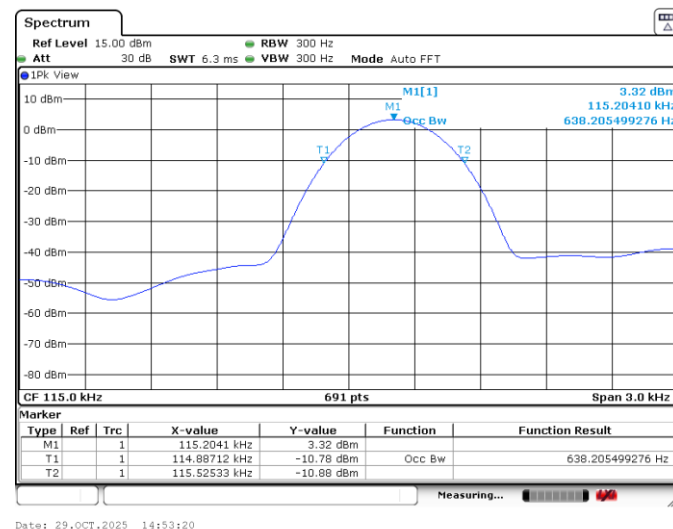

3.2 Radiated Emission Measurement

3.2.1 Limit of Radiated Emission

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Receiver Parameter	Setting
Frequency Range: 9kHz~150kHz	RBW 200Hz for QP
Frequency Range: 150kHz~30MHz	RBW 9kHz for QP
Frequency Range: 30MHz~1000MHz	RBW 120kHz for Peak

Note: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For radiated emissions from 9kHz to 1GHz test distance is 3m

For 9kHz ~ 30MHz

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);
3. specific line (dBμV/m) = $20 \log$ Emission level (μV/m)
4. Limit line = specific limits (dBμV/m) + distance extrapolation factor.

3.2.2 Measuring Instruments


See list of measuring equipment of this test report.

3.2.3 Measuring Instrument Setting

Follow the guidelines in C63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.

3.2.4 Test Setup of Radiated Emission


For radiated emissions below 30MHz

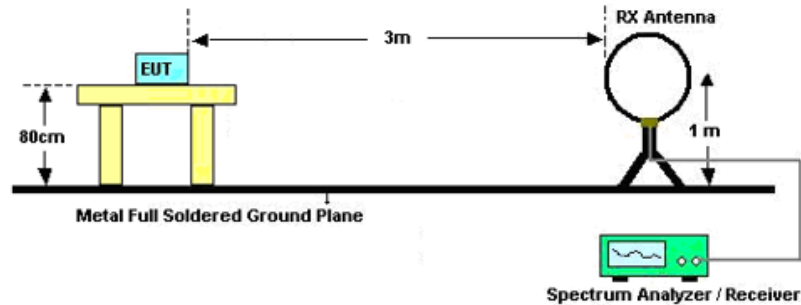

Note:

1. There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.
2. Tested for radiated below 30 MHz using a loop antenna in accordance with C63.10, the antenna was positioned in three antenna orientations: horizontal, vertical, and ground-parallel three polarization's, the worst case is horizontal & vertical polarization, test data of two mode was reported.

For radiated emissions above 30MHz

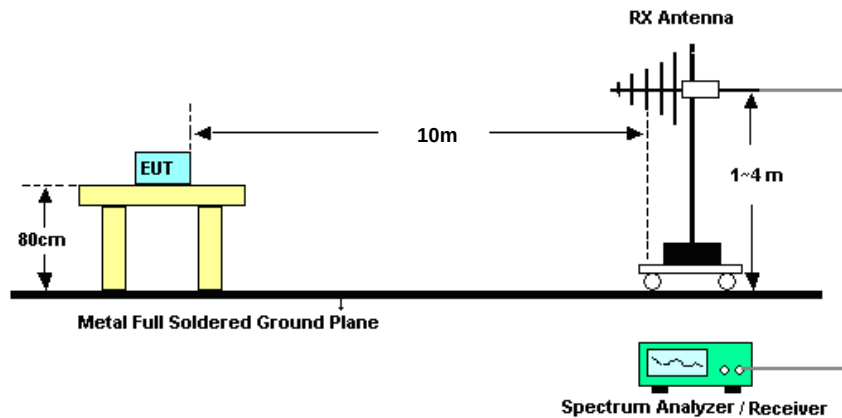




3.2.5 The Worst Test Result of Fundamental Emission


Frequency (MHz)	Level (dBuV/m) @3m	Distance Factor (dB)	Corrected level @300m (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Remark	Pol/Phase
0.1152	74.44	80	-5.56	26.37	-31.93	54.67	19.69	0.08	AV	Perpendicular
0.1151	68.81	80	-11.19	26.38	-37.57	49.04	19.69	0.08	AV	Parallel

Note: The field strength is tested at 3m distance then convert to 300m by adding distance factor $40 \cdot \log(d1/d2)$

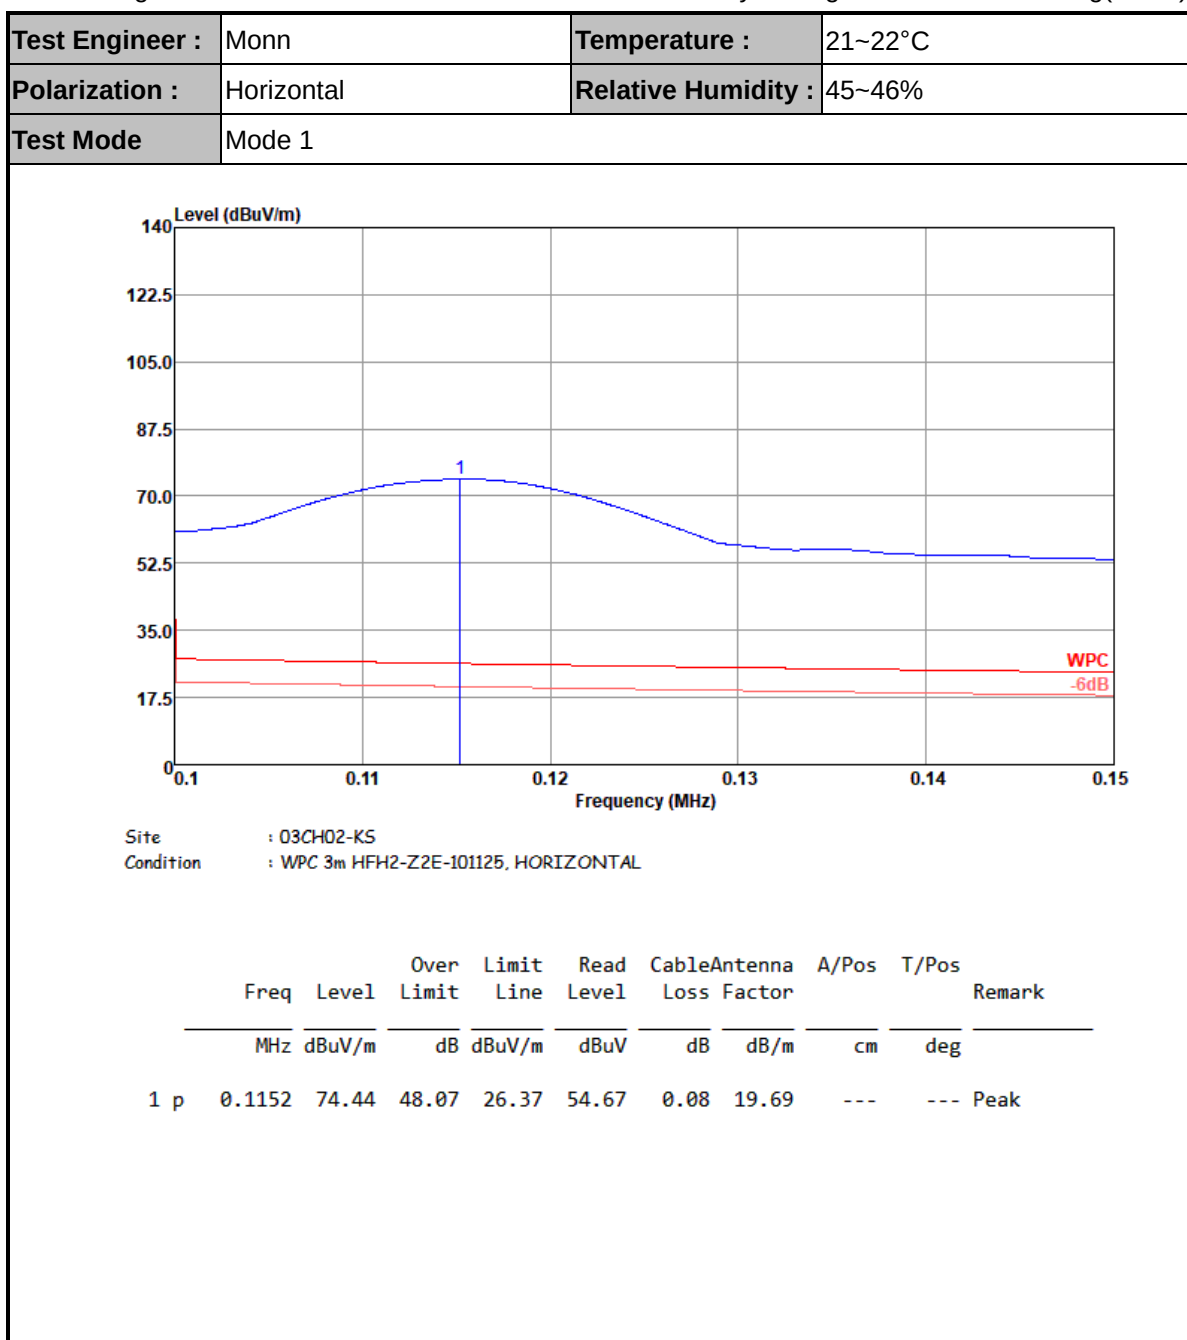



Test Engineer :	Monn	Temperature :	21~22°C
Polarization :	Vertical	Relative Humidity :	45~46%
Test Mode	Mode 1		

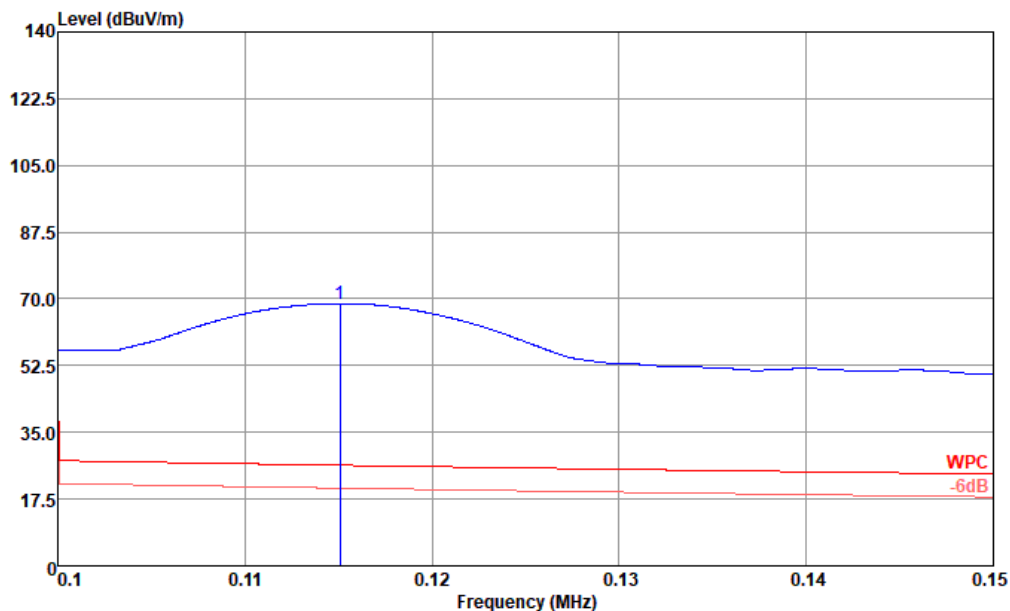

Site : 03CH02-KS
Condition : WPC 3m HFH2-Z2E-101125, VERTICAL

	Freq	Level	Over Limit	Limit Line	Read Level	CableAntenna Loss Factor	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB/m	cm	deg
1 p	0.1151	68.81	42.43	26.38	49.04	0.08	19.69	---	Peak

Note:

1. $\text{Level(dBuV/m)} = \text{Read Level(dBuV)} + \text{Antenna Factor(dB/m)} + \text{Cable Loss(dB)}$
2. $\text{Over Limit(dB)} = \text{Level(dBuV/m)} - \text{Limit Line(dBuV/m)}$
3. $\text{Distance extrapolation factor} = 40 \log (\text{specific distance} / \text{test distance}) \text{ (dB)}$



3.2.6 The Worst Test Result of Radiated Emission (9kHz ~ 30MHz)


Frequency (MHz)	Level 3m (dBuV/m)	Distance Factor (dB)	Corrected Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Remark	Pol/Phase
0.0299	57.11	80	-22.89	38.09	-60.98	37.32	19.73	0.06	Average	Horizontal
0.0565	43.81	80	-36.19	32.81	-69	24.1	19.64	0.07	Average	Horizontal
0.5978	46.92	40	6.92	32.06	-25.14	27.32	19.5	0.1	QP	Horizontal
4.3890	32.95	40	-7.05	29.5	-36.55	13.47	19.33	0.15	QP	Horizontal
13.851	34.82	40	-5.18	29.5	-34.68	14.82	19.7	0.3	QP	Horizontal
25.672	34.17	40	-5.83	29.5	-35.33	13.68	20.09	0.4	QP	Horizontal
0.0330	54.91	80	-25.09	37.23	-62.32	35.12	19.73	0.06	Average	Vertical
0.0561	51.17	80	-28.83	32.62	-61.45	31.46	19.64	0.07	Average	Vertical
0.7172	41.2	40	1.2	30.47	-29.27	21.6	19.5	0.1	QP	Vertical
4.5380	31	40	-9	29.5	-38.5	11.49	19.37	0.14	QP	Vertical
16.090	30.72	40	-9.28	29.5	-38.78	10.72	19.7	0.3	QP	Vertical
27.254	31.92	40	-8.08	29.5	-37.58	11.33	20.16	0.43	QP	Vertical

Note:

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);
3. Corrected Level = Level @3m (dBuV/m) - distance extrapolation factor.



Test Engineer :	Monn	Temperature :	21~22°C
Polarization :	Horizontal	Relative Humidity :	45~46%
Test Mode	Mode 1		

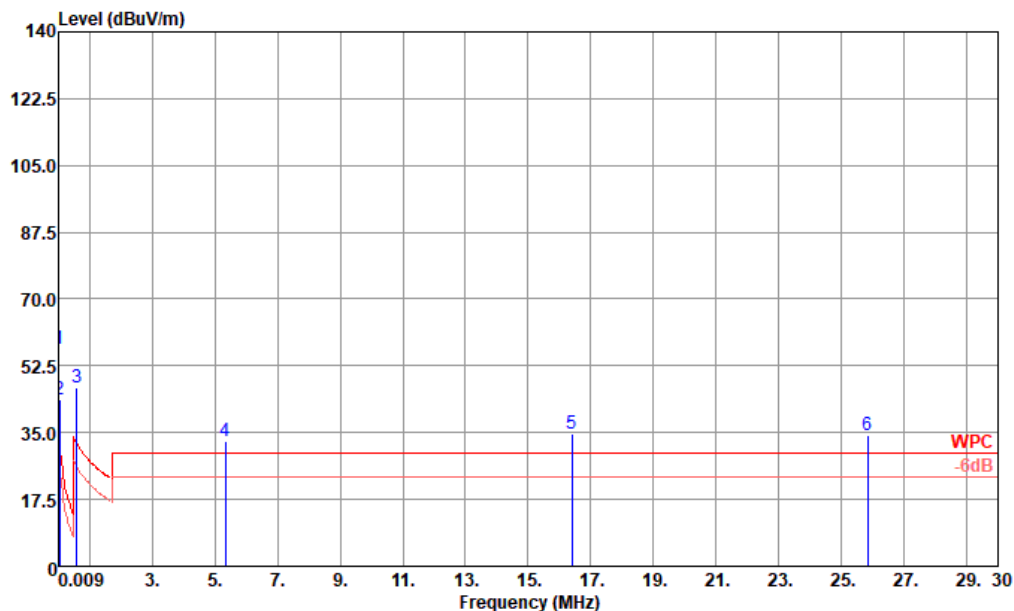


Site : 03CH02-KS
Condition : WPC 3m HFH2-Z2E-101125 HORIZONTAL

		Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	A/Pos	T/Pos	Remark
		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	
1	a	0.0299	57.11	19.02	38.09	37.32	19.73	0.06	---	---	Average
2	*	0.0548	43.81	11.00	32.81	24.10	19.64	0.07	---	---	Average
3	q	0.5978	46.92	14.86	32.06	27.32	19.50	0.10	---	---	QP
4	*	5.3439	32.95	3.45	29.50	13.47	19.33	0.15	---	---	QP
5	*	16.3884	34.82	5.32	29.50	14.82	19.70	0.30	---	---	QP
6	*	25.8509	34.17	4.67	29.50	13.68	20.09	0.40	---	---	QP



Test Engineer :	Monn	Temperature :	21~22°C
Polarization :	Vertical	Relative Humidity :	45~46%
Test Mode	Mode 1		

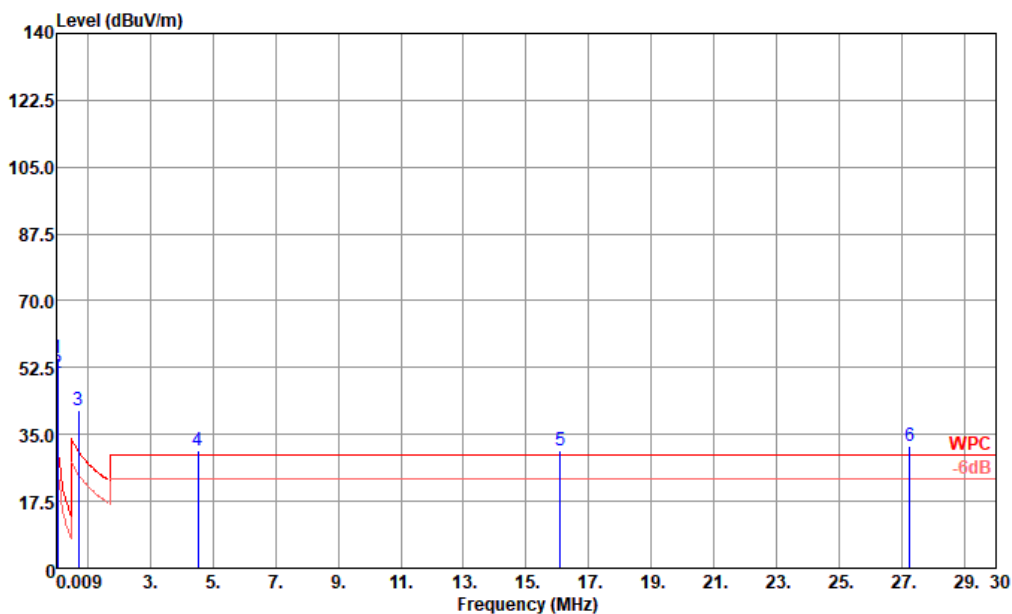


Site : 03CH02-KS
Condition : WPC 3m HFH2-Z2E-101125 VERTICAL

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Cable Loss	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	
1 *	0.0330	54.91	17.68	37.23	35.12	19.73	0.06	---	---	Average
2 a	0.0561	51.17	18.55	32.62	31.46	19.64	0.07	---	---	Average
3 q	0.7172	41.20	10.73	30.47	21.60	19.50	0.10	---	---	QP
4 *	4.5380	31.00	1.50	29.50	11.49	19.37	0.14	---	---	QP
5 *	16.0899	30.72	1.22	29.50	10.72	19.70	0.30	---	---	QP
6 *	27.2538	31.92	2.42	29.50	11.33	20.16	0.43	---	---	QP

3.2.7 Test Result of Radiated Emission (30MHz ~ 1000MHz)

Test Engineer :	Monn	Temperature :	21~22°C
Polarization :	Horizontal	Relative Humidity :	45~46%
Test Mode	Mode 1		

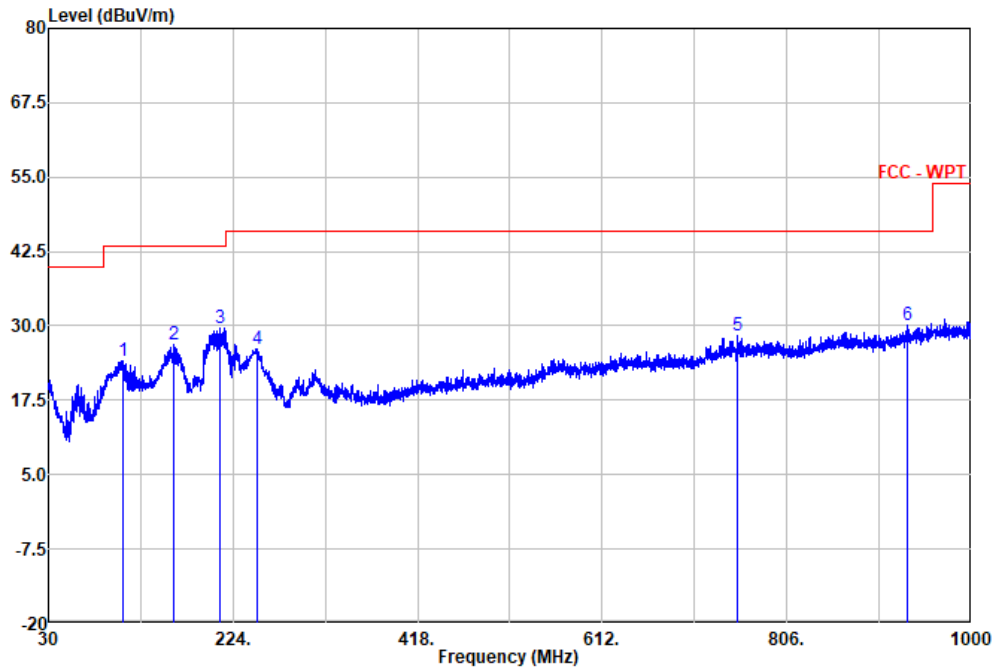


Site : 03CH02-KS
Condition: FCC - WPT 3m CBL6111D SN 59915 Horizontal

	Freq	Level	Limit	Over	Read	Ant	Cable	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	
1	108.33	24.09	43.50	-19.41	38.87	17.00	1.13	---	---	Peak
2	161.19	26.84	43.50	-16.66	41.62	16.63	1.38	---	---	Peak
3	210.66	29.68	43.50	-13.82	45.62	15.22	1.61	---	---	Peak
4	248.74	26.19	46.00	-19.81	38.72	18.65	1.74	---	---	Peak
5	754.59	28.43	46.00	-17.57	30.38	28.56	2.98	---	---	Peak
6	933.31	30.25	46.00	-15.75	28.54	30.49	3.30	---	---	Peak



Test Engineer :	Monn	Temperature :	21~22°C
Polarization :	Vertical	Relative Humidity :	45~46%
Test Mode	Mode 1		

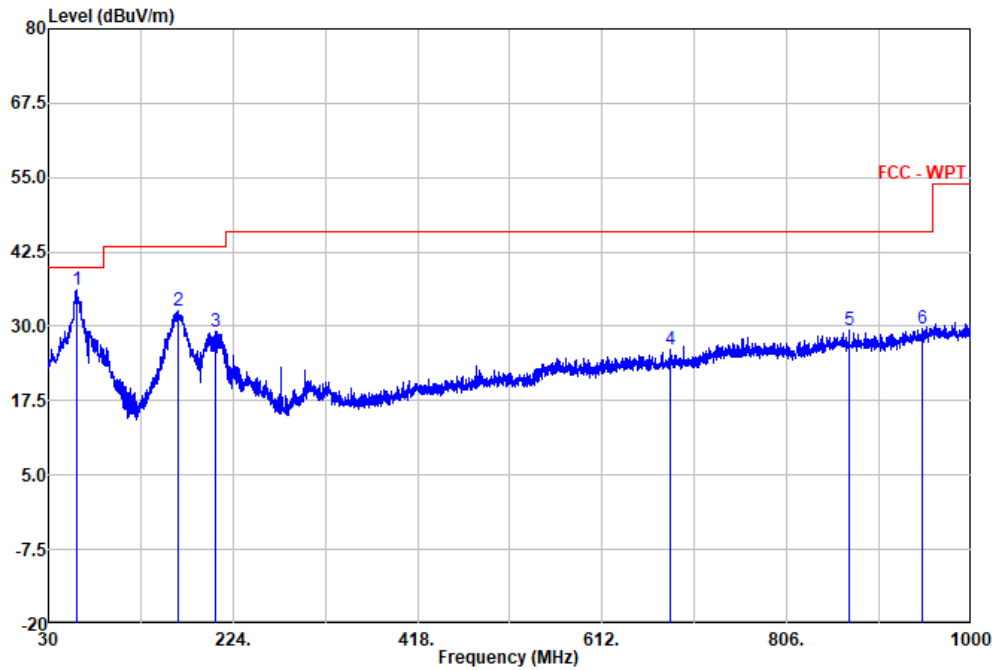

Site : 03CH02-KS
Condition: FCC - WPT 3m CBL6111D SN 59915 Vertical

	Freq	Level	Limit	Over	Read	Ant	Cable	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	
1	60.07	36.17	40.00	-3.83	56.24	12.13	0.66	---	---	Peak
2	166.04	32.73	43.50	-10.77	47.88	16.22	1.41	---	---	Peak
3	204.84	29.13	43.50	-14.37	45.01	15.28	1.59	---	---	Peak
4	682.81	26.03	46.00	-19.97	29.96	26.79	2.84	---	---	Peak
5	871.96	29.37	46.00	-16.63	29.12	29.80	3.19	---	---	Peak
6	947.62	29.72	46.00	-16.28	27.39	30.92	3.33	---	---	Peak

3.3 AC Conducted Emission Measurement

3.3.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.3.2 Measuring Instruments

See list of measuring equipment of this test report.


3.3.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.



3.3.5 Test Result of AC Conducted Emission

Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

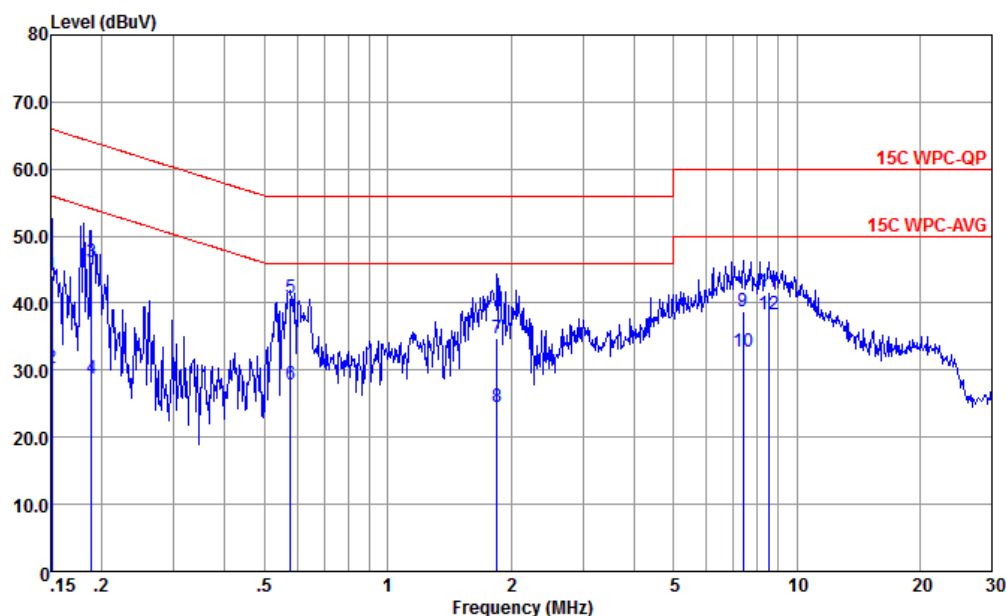


Site : CO01-KS
Condition : 15C WPC-QP LISN-060105-L 2024 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.151	44.11	-21.85	65.96	33.50	0.19	10.42	QP
2	0.151	30.21	-25.75	55.96	19.60	0.19	10.42	Average
3	0.188	46.08	-18.03	64.11	35.50	0.17	10.41	QP
4	0.188	28.78	-25.33	54.11	18.20	0.17	10.41	Average
5	0.579	40.84	-15.16	56.00	30.50	0.15	10.19	QP
6	0.579	27.94	-18.06	46.00	17.60	0.15	10.19	Average
7	1.848	34.79	-21.21	56.00	24.50	0.21	10.08	QP
8	1.848	24.59	-21.41	46.00	14.30	0.21	10.08	Average
9	7.407	38.79	-21.21	60.00	28.20	0.27	10.32	QP
10	7.407	32.69	-17.31	50.00	22.10	0.27	10.32	Average
11	8.546	41.64	-18.36	60.00	30.90	0.26	10.48	QP
12 *	8.546	38.34	-11.66	50.00	27.60	0.26	10.48	Average



Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

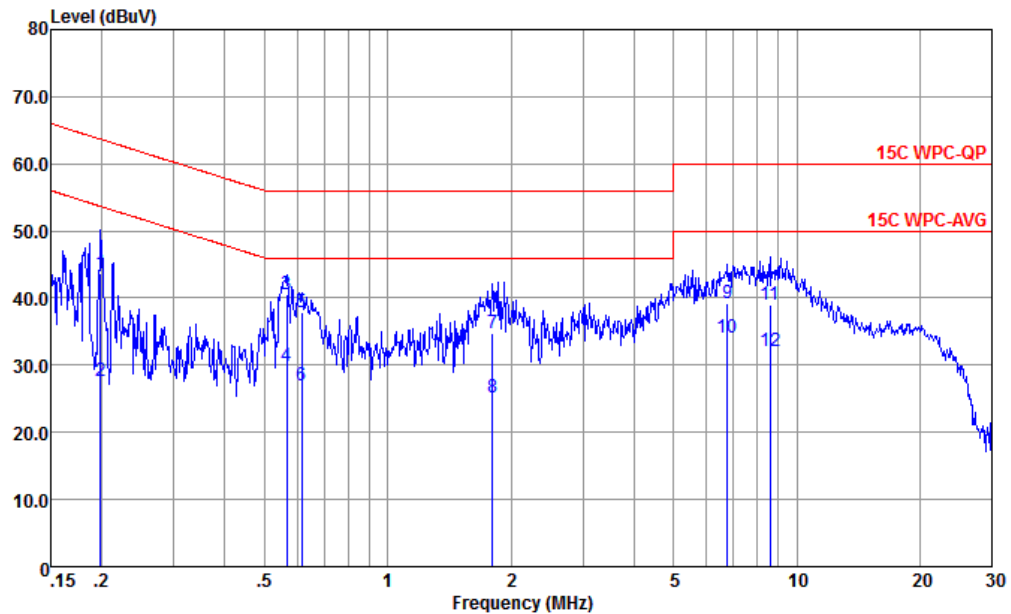

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.199	43.74	-19.93	63.67	33.20	0.13	10.41	QP
2	0.199	27.74	-26.93	53.67	17.20	0.13	10.41	Average
3 *	0.567	40.54	-15.46	56.00	30.20	0.15	10.19	QP
4	0.567	29.94	-16.06	46.00	19.60	0.15	10.19	Average
5	0.617	37.82	-18.18	56.00	27.50	0.15	10.17	QP
6	0.617	26.92	-19.08	46.00	16.60	0.15	10.17	Average
7	1.800	34.86	-21.14	56.00	24.59	0.19	10.08	QP
8	1.800	25.16	-20.84	46.00	14.89	0.19	10.08	Average
9	6.769	39.23	-20.77	60.00	28.80	0.21	10.22	QP
10	6.769	34.03	-15.97	50.00	23.60	0.21	10.22	Average
11	8.592	38.89	-21.11	60.00	28.21	0.20	10.48	QP
12	8.592	32.19	-17.81	50.00	21.51	0.20	10.48	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



3.4 Antenna Requirements

3.4.1 Standard Applicable

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.4.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Dec. 03, 2024	Nov. 09, 2025	Dec. 02, 2025	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Aug. 10, 2025	Nov. 09, 2025	Aug. 09, 2026	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	59915	30MHz~1GHz	Aug. 12, 2025	Nov. 09, 2025	Aug. 11, 2026	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	413740	9KHz~1GHz	Jan. 02, 2025	Nov. 09, 2025	Jan. 01, 2026	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Nov. 09, 2025	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Nov. 09, 2025	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Nov. 09, 2025	NCR	Radiation (03CH02-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 16, 2025	Nov. 18, 2025	Apr. 15, 2026	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Jul. 03, 2025	Nov. 18, 2025	Jul. 02, 2026	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Dec. 24, 2024	Nov. 18, 2025	Dec. 23, 2025	Conduction (CO01-KS)
AC Power Source	Ouhan	APW-130NYT	202201040060	AC 0V~300V,45Hz~1000Hz	Apr. 16, 2025	Nov. 18, 2025	Apr. 15, 2026	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Jul. 07, 2025	Oct. 29, 2025	Jul. 06, 2026	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2025	Oct. 29, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2025	Oct. 29, 2025	Jan. 01, 2026	Conducted (TH01-KS)

NCR: No Calibration Required



5 Measurement Uncertainty

Uncertainty of Conducted Measurement

Occupied Channel Bandwidth	$\pm 0.384\%$
----------------------------	---------------

Uncertainty of AC Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.84dB
---	--------

Uncertainty of Radiated Emission Measurement (9 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.30dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.18dB
---	--------

----- THE END -----