





CH09 Peak Power Measurement Plots


Mode 55: cidx-27_sts-0_packet length-127

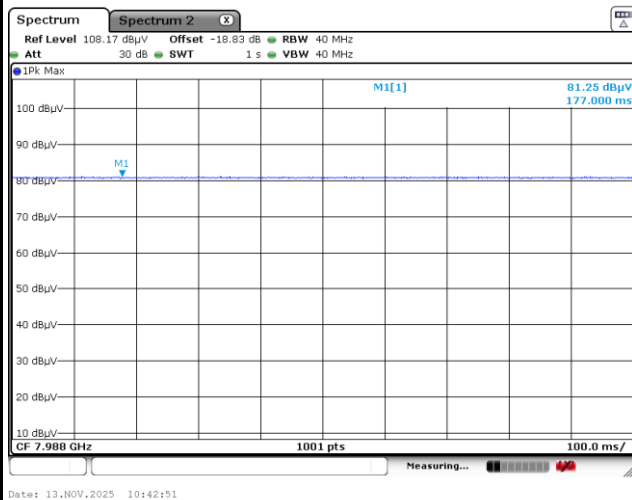

Mode 56: cidx-27_sts-1_packet length-127

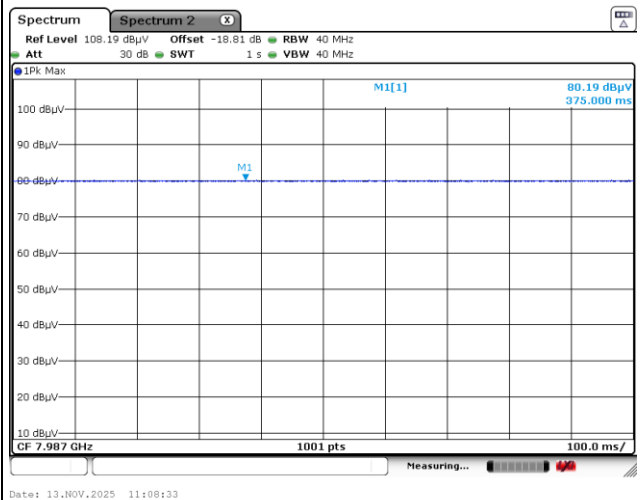

Mode 57: cidx-27_sts-3_packet length-0

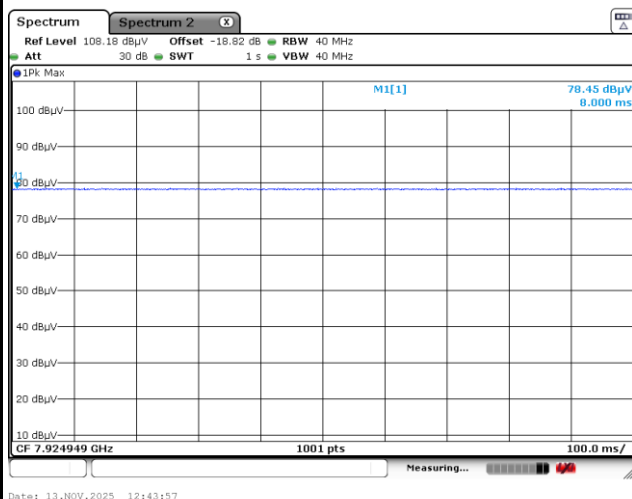





<Ant.11>

CH05 Peak Power Measurement Plots


Mode 103: cidx-27_sts-0_packet length-127

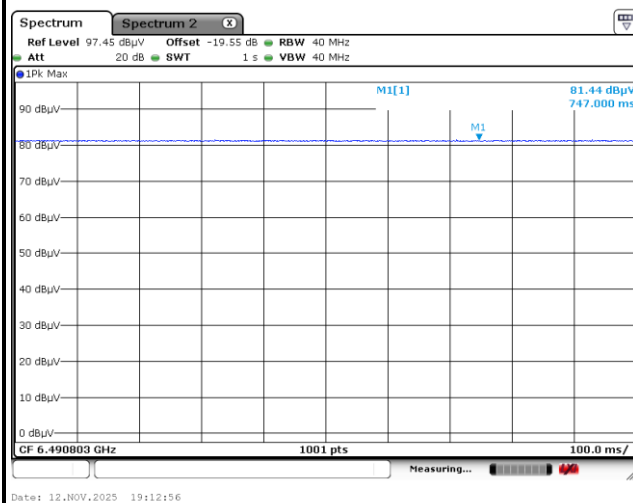

Mode 104: cidx-27_sts-1_packet length-127

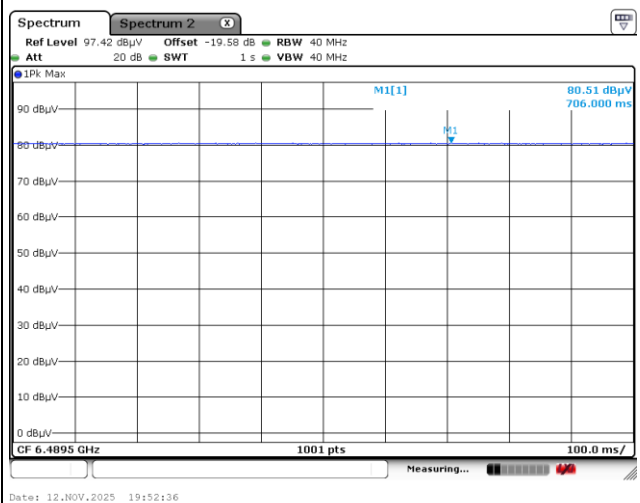


Mode 105: cidx-27_sts-3_packet length-0

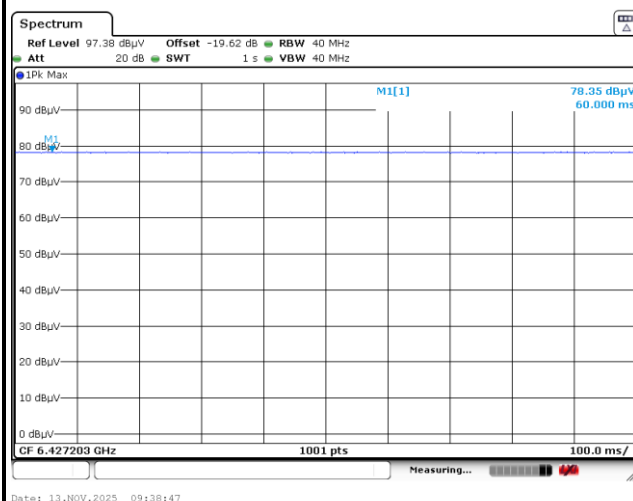




CH09 Peak Power Measurement Plots


Mode 127: cidx-27_sts-0_packet length-127

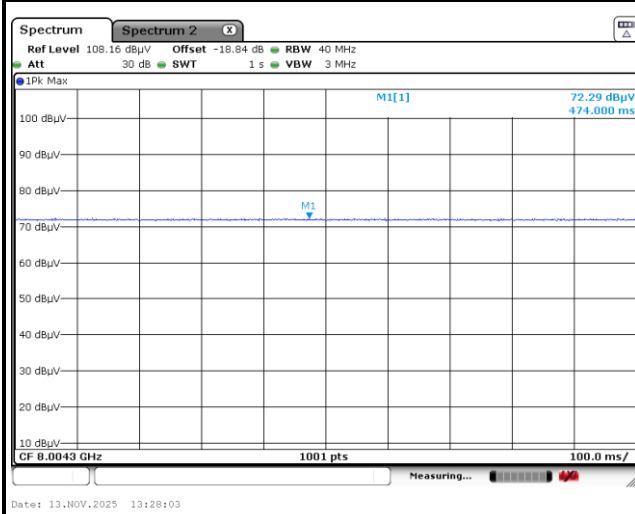

Mode 128: cidx-27_sts-1_packet length-127

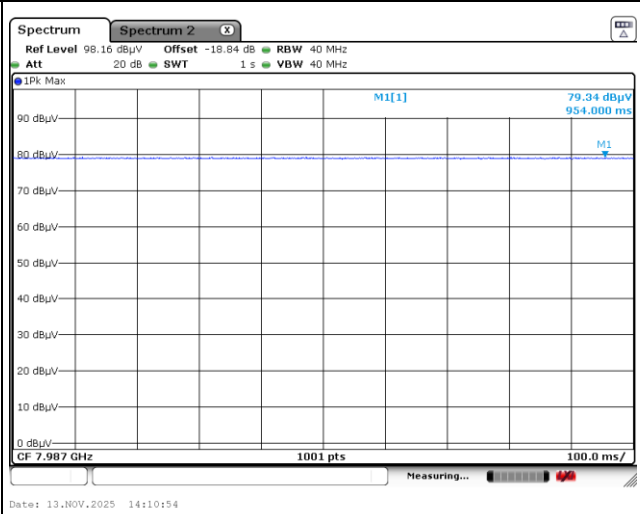

Mode 129: cidx-27_sts-3_packet length-0

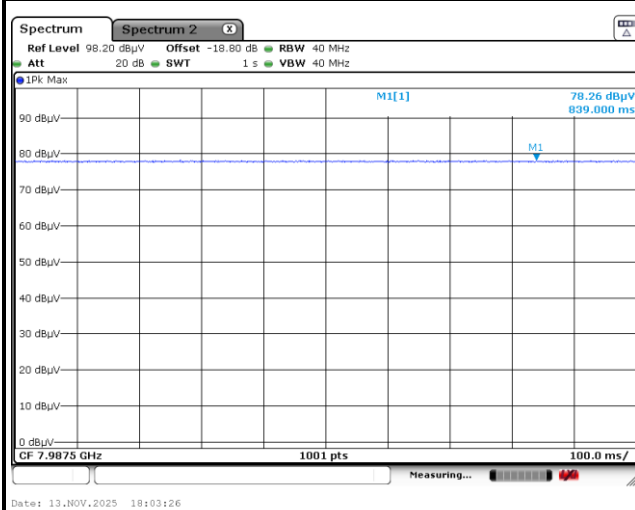





<Ant.7>

CH05 Peak Power Measurement Plots


Mode 34: cidx-28_sts-0_packet length-127

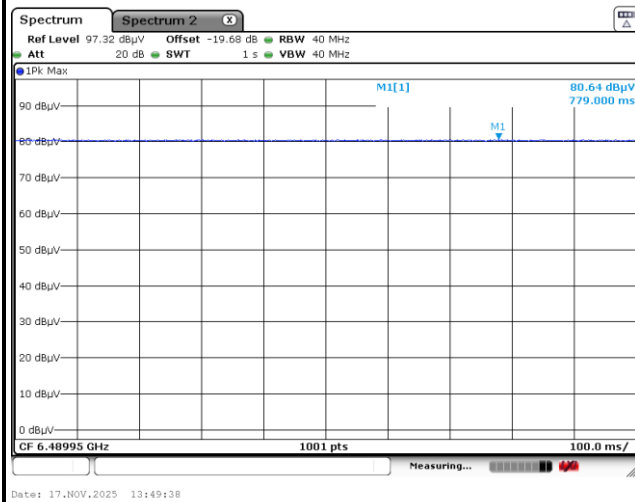

Mode 35: cidx-28_sts-1_packet length-127

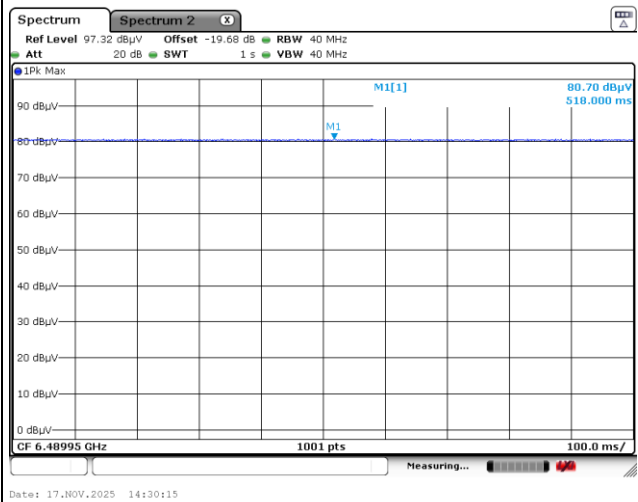


Mode 36: cidx-28_sts-3_packet length-0

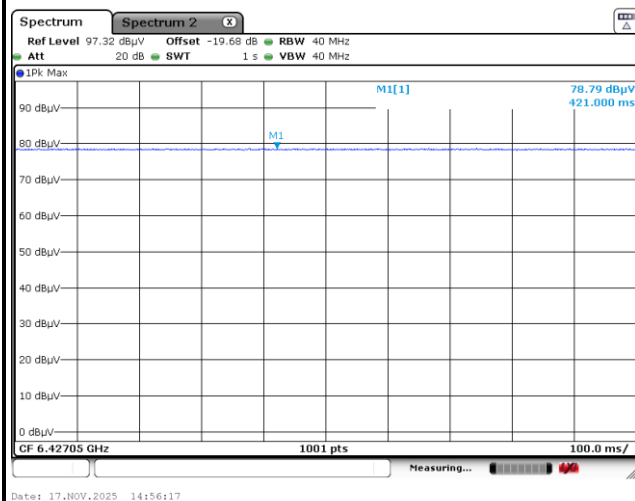




CH09 Peak Power Measurement Plots


Mode 58: cidx-28_sts-0_packet length-127

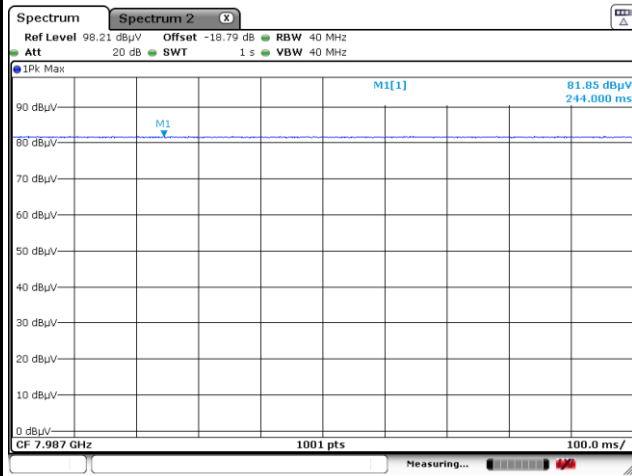

Mode 59: cidx-28_sts-1_packet length-127

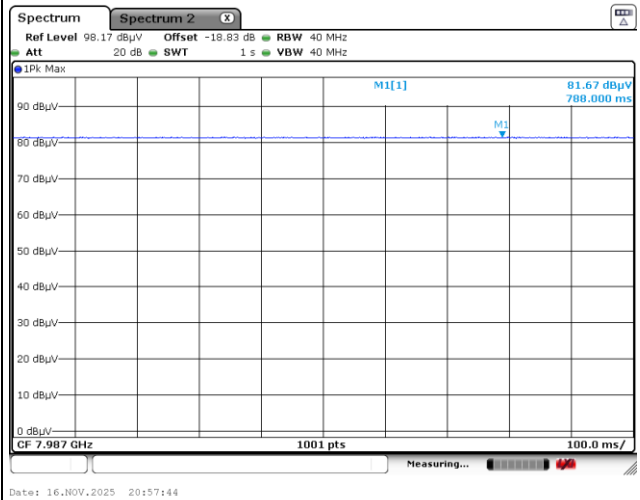

Mode 60: cidx-28_sts-3_packet length-0

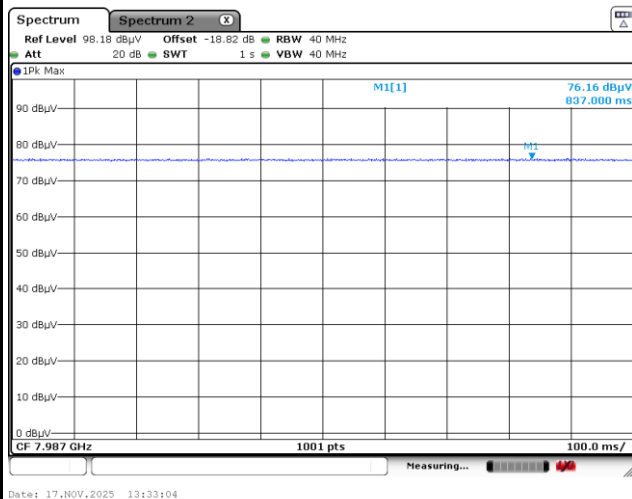





<Ant.11>


CH05 Peak Power Measurement Plots

Mode 106: cidx-28_sts-0_packet length-127

Mode 107: cidx-28_sts-1_packet length-127

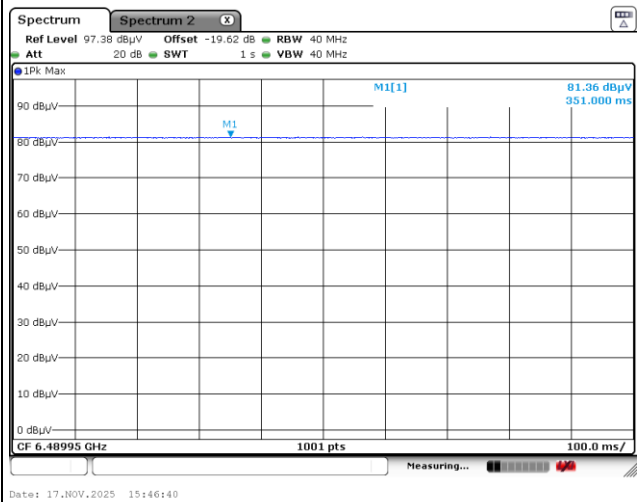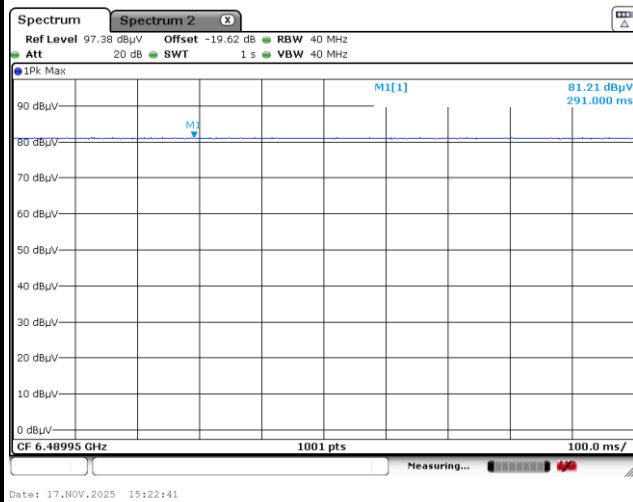


Mode 108: cidx-28_sts-3_packet length-0

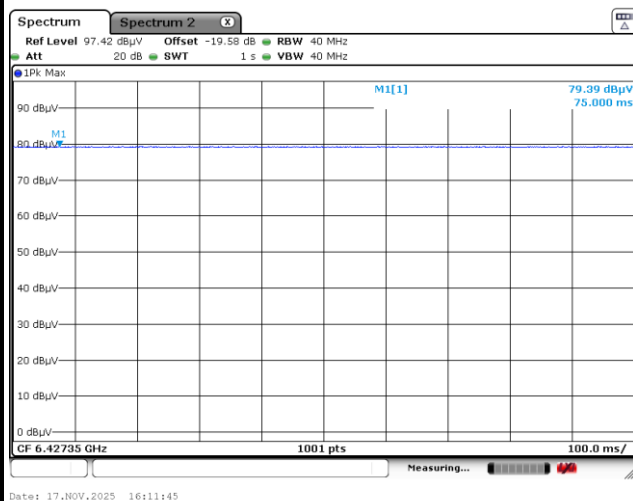




CH09 Peak Power Measurement Plots


Mode 130: cidx-28_sts-0_packet length-127

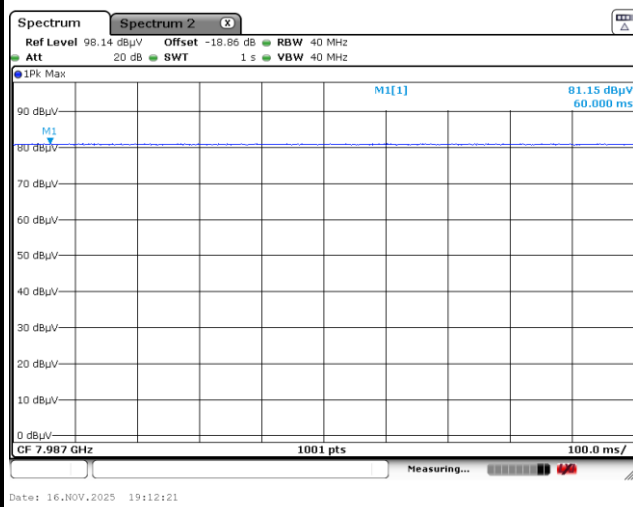

Mode 131: cidx-28_sts-1_packet length-127

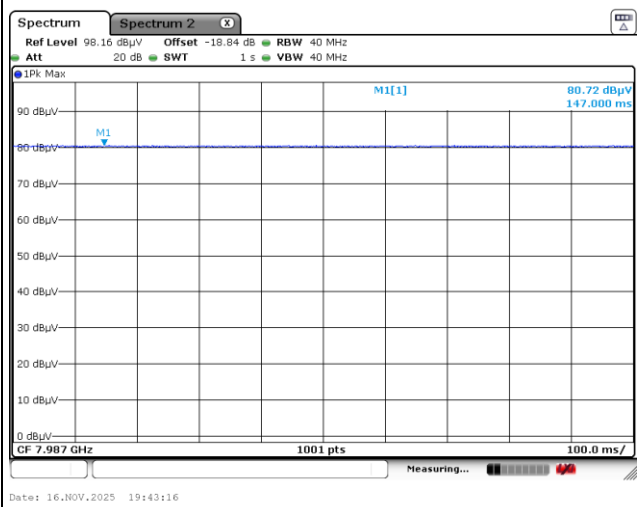

Mode 132: cidx-28_sts-3_packet length-0

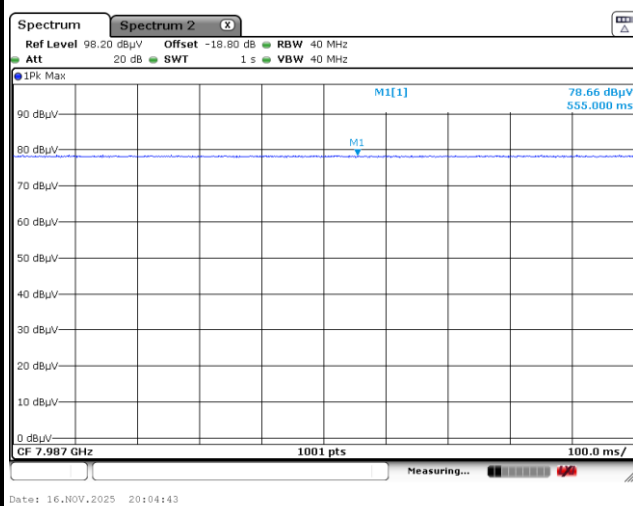





<Ant.7>

CH05 Peak Power Measurement Plots


Mode 37: cidx-29_sts-0_packet length-150

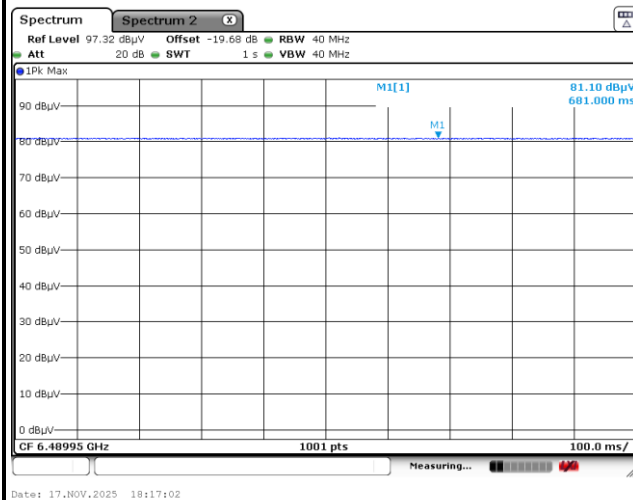

Mode 38: cidx-29_sts-1_packet length-150

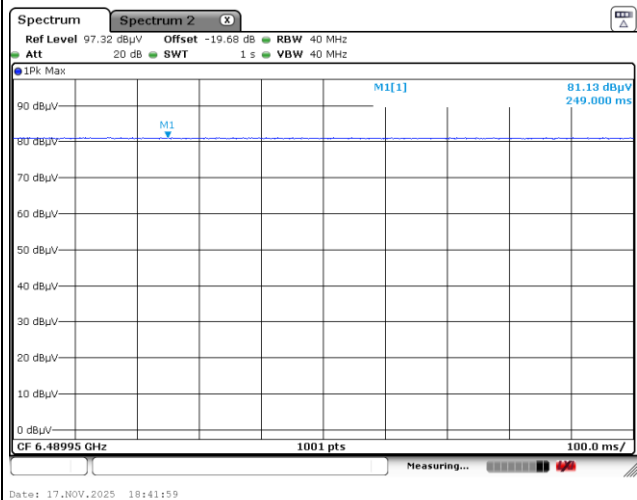


Mode 39: cidx-29_sts-3_packet length-0

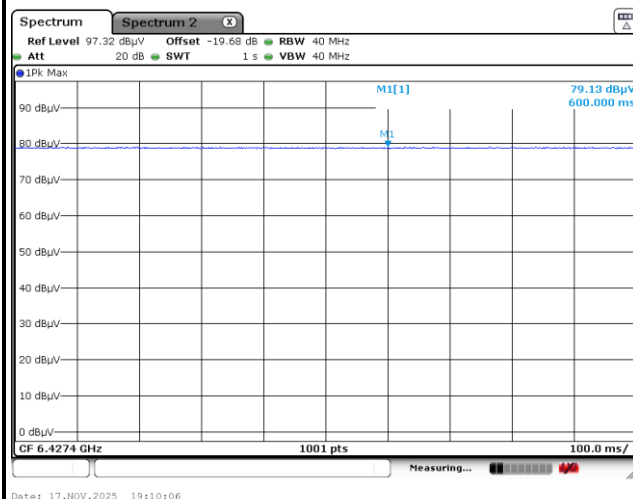




CH09 Peak Power Measurement Plots

Mode 61: cidx-29_sts-0_packet length-150

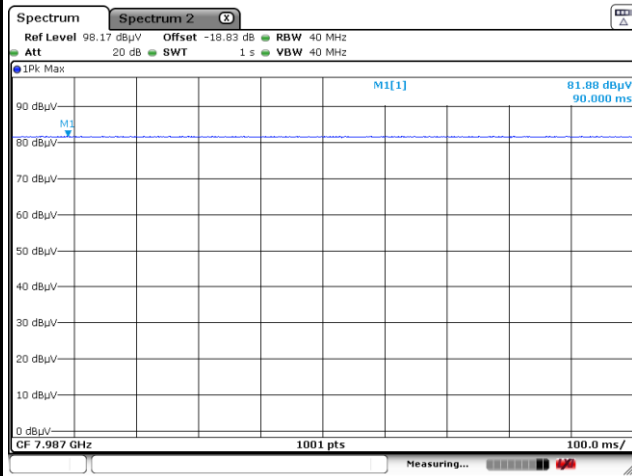


Date: 18.NOV.2025 10:06:16

Mode 62: cidx-29_sts-1_packet length-150

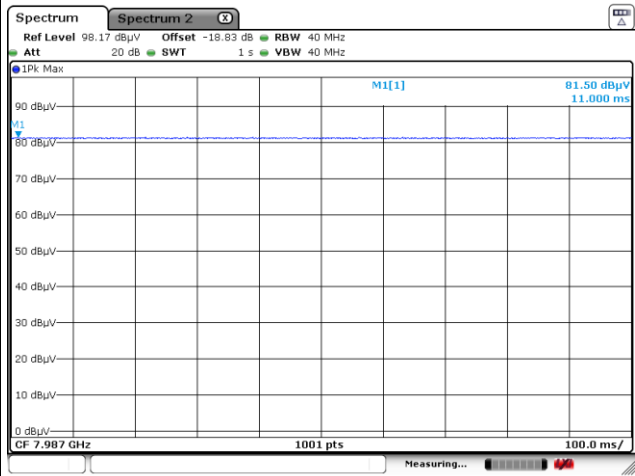

Date: 18.NOV.2025 10:25:18

Mode 63: cidx-29_sts-3_packet length-0

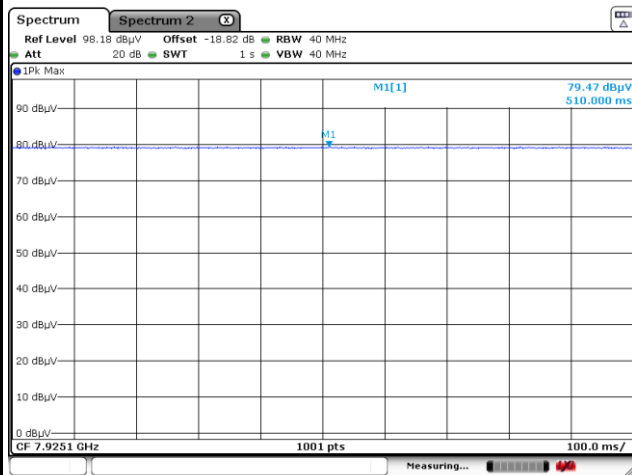


Date: 18.NOV.2025 10:51:04




<Ant.11>

CH05 Peak Power Measurement Plots


Mode 109: cidx-29_sts-0_packet length-150

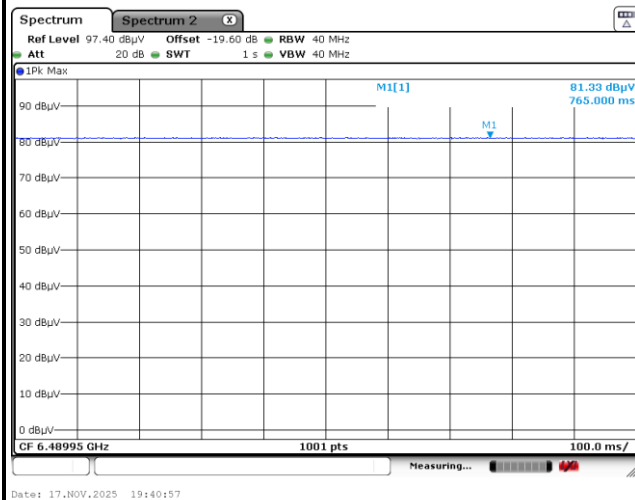

Mode 110: cidx-29_sts-1_packet length-150

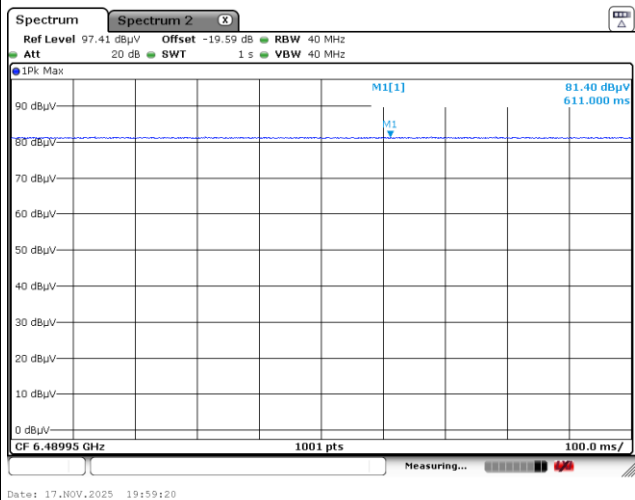


Mode 111: cidx-29_sts-3_packet length-0

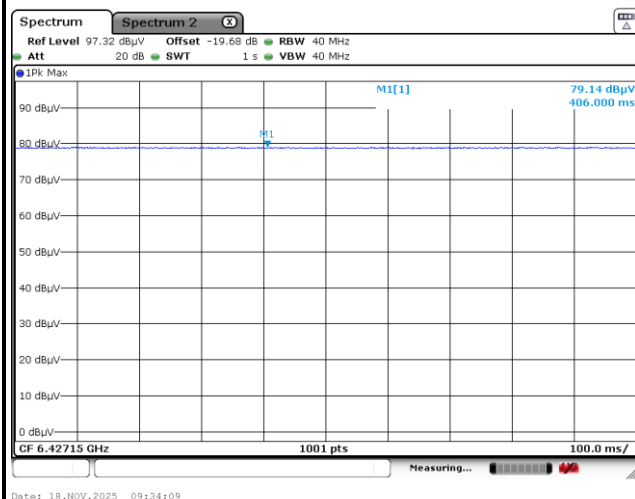




CH09 Peak Power Measurement Plots


Mode 133: cidx-29_sts-0_packet length-150

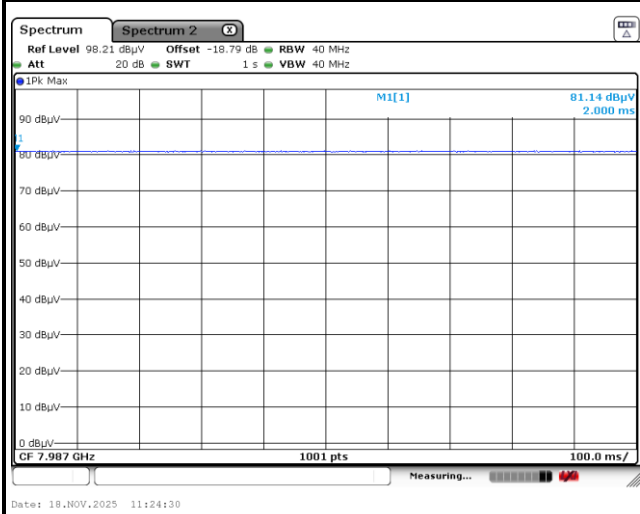

Mode 134: cidx-29_sts-1_packet length-150

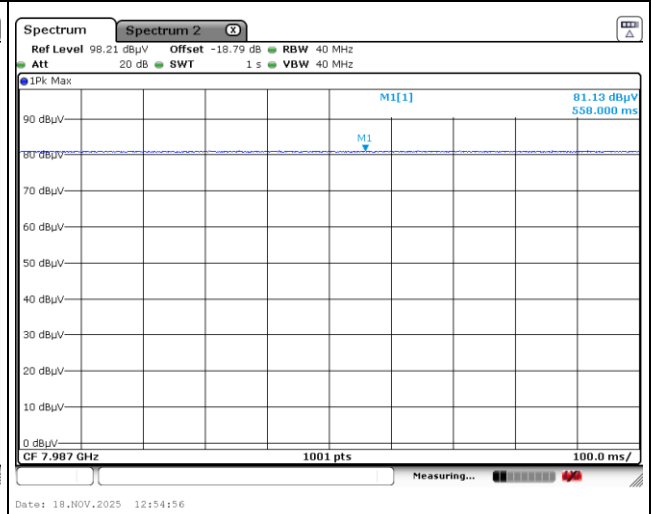

Mode 135: cidx-29_sts-3_packet length-0

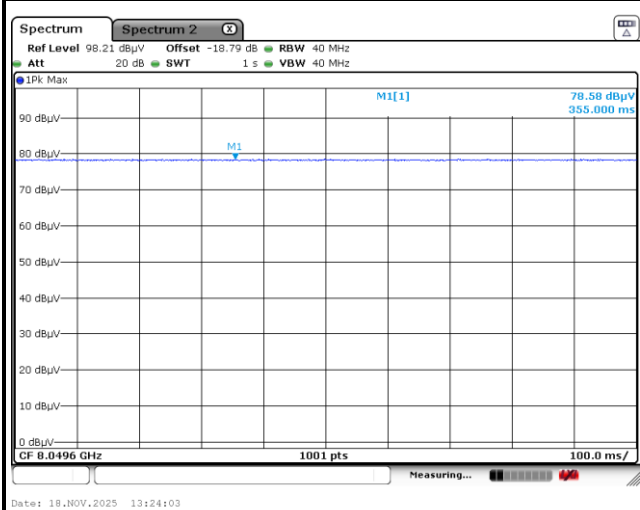





<Ant.7>

CH05 Peak Power Measurement Plots


Mode 40: cidx-30_sts-0_packet length-150

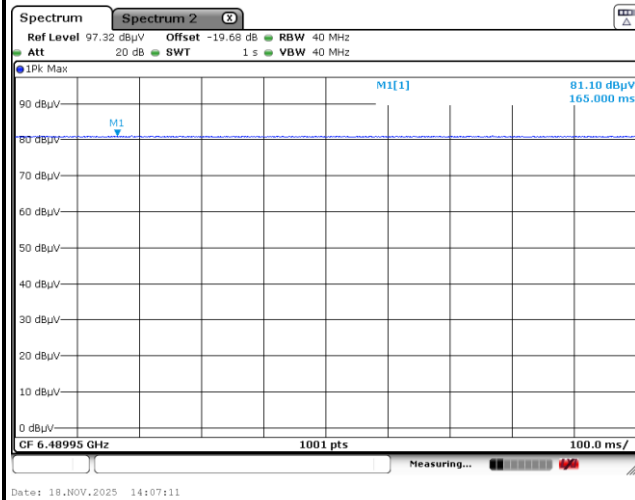

Mode 41: cidx-30_sts-1_packet length-150

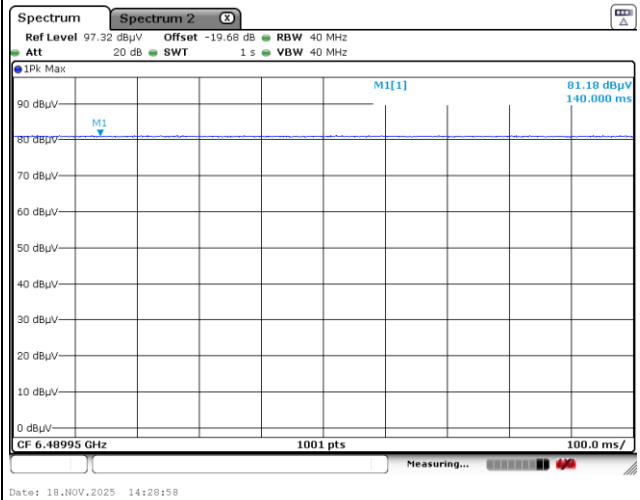


Mode 42: cidx-30_sts-3_packet length-0

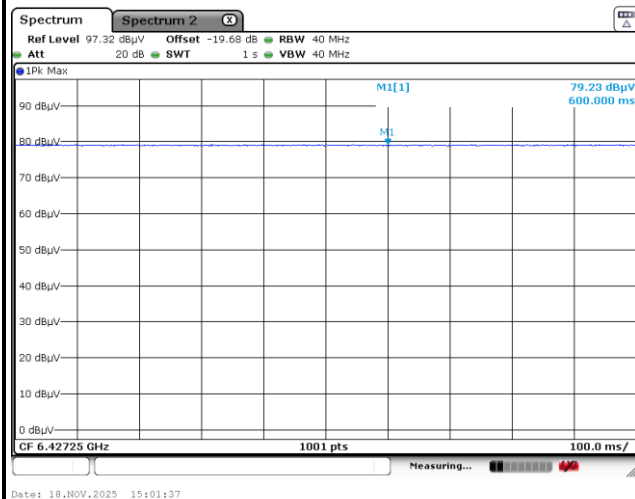




CH09 Peak Power Measurement Plots

Mode 64: cidx-30_sts-0_packet length-150

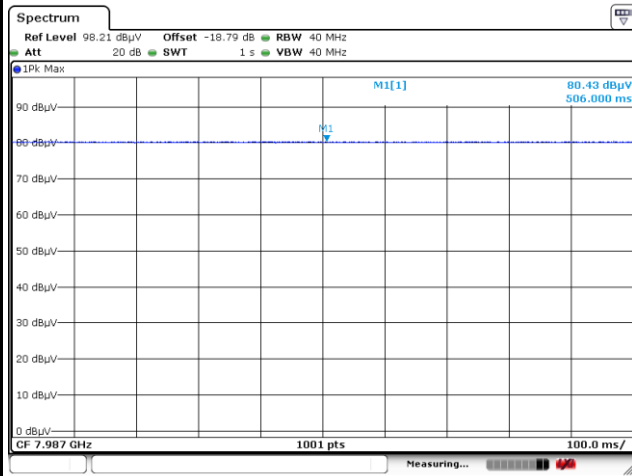


Date: 19.NOV.2025 09:15:23

Mode 65: cidx-30_sts-1_packet length-150

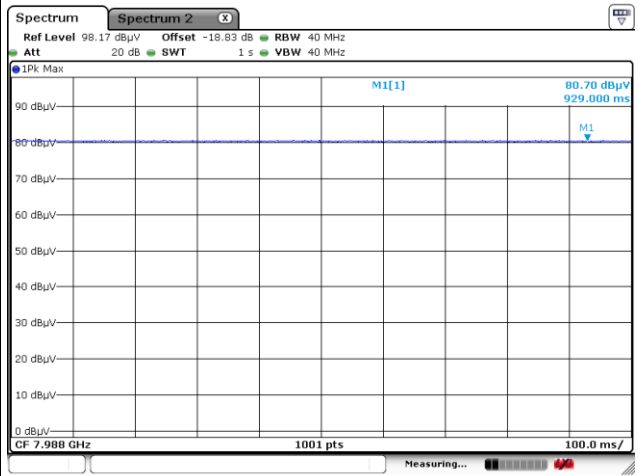

Date: 19.NOV.2025 09:44:10

Mode 66: cidx-30_sts-3_packet length-0

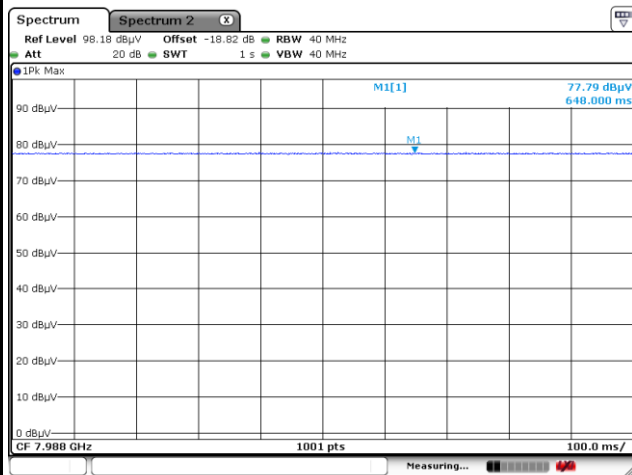


Date: 19.NOV.2025 10:25:54




<Ant.11>

CH05 Peak Power Measurement Plots


Mode 112: cidx-30_sts-0_packet length-150

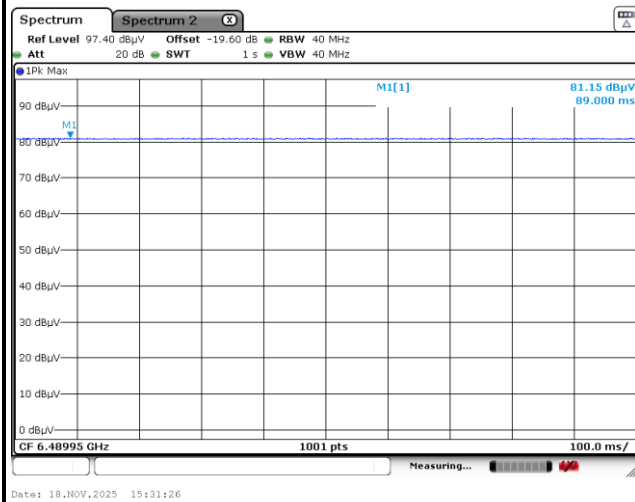

Mode 113: cidx-30_sts-1_packet length-150

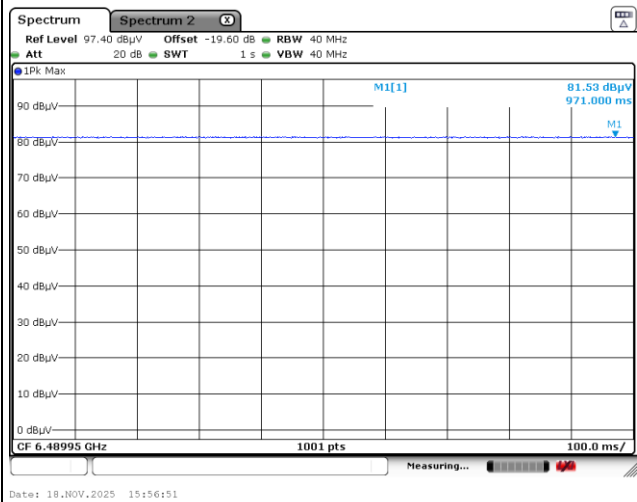


Mode 114: cidx-30_sts-3_packet length-0

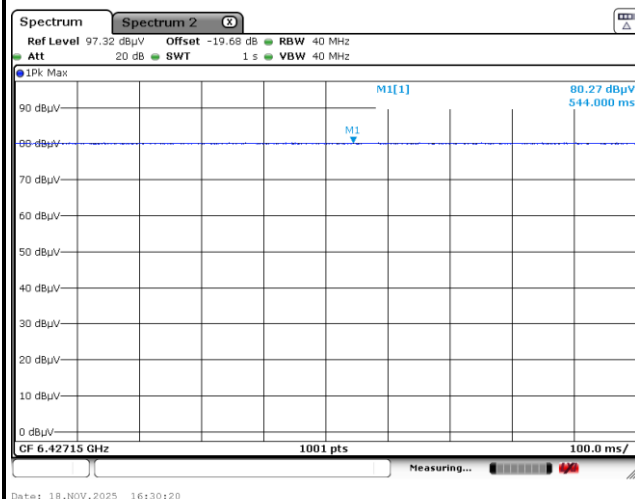




CH09 Peak Power Measurement Plots


Mode 136: cidx-30_sts-0_packet length-150

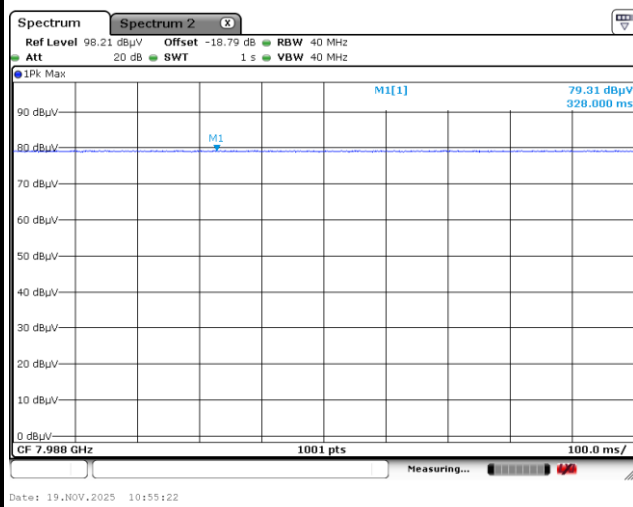

Mode 137: cidx-30_sts-1_packet length-150

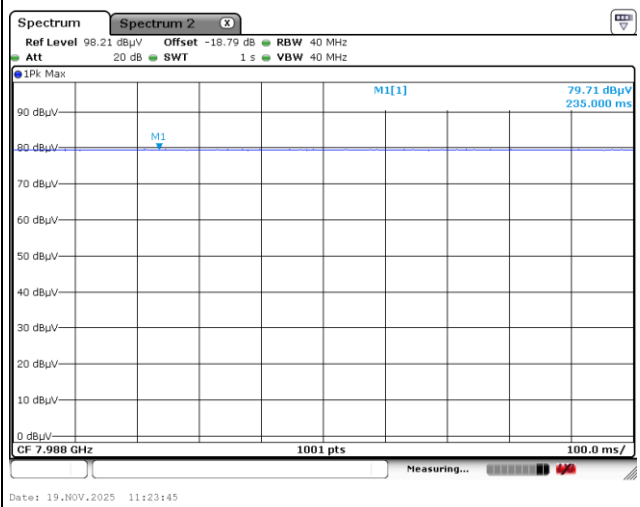

Mode 138: cidx-30_sts-3_packet length-0

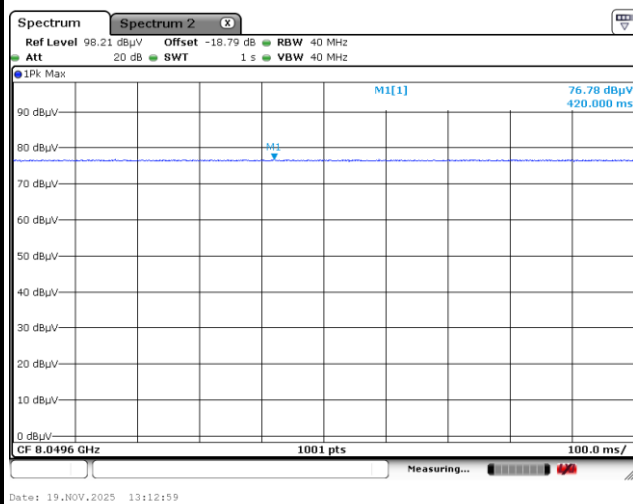





<Ant.7>

CH05 Peak Power Measurement Plots


Mode 43: cidx-31_sts-0_packet length-150

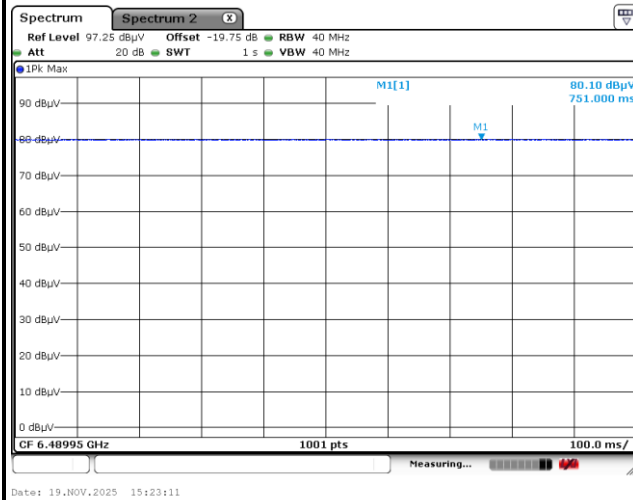

Mode 44: cidx-31_sts-1_packet length-150

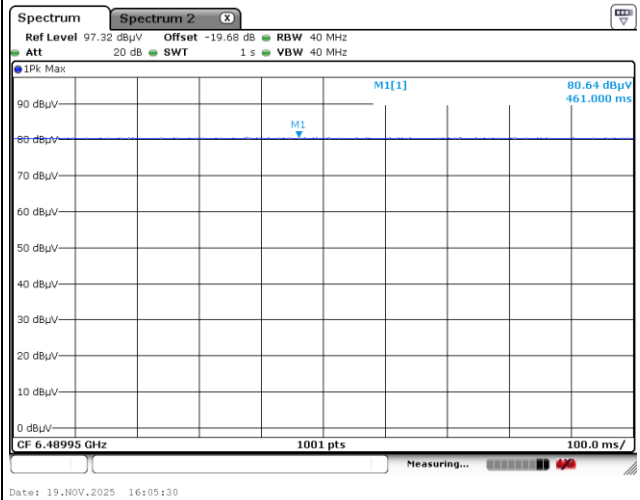


Mode 45: cidx-31_sts-3_packet length-0

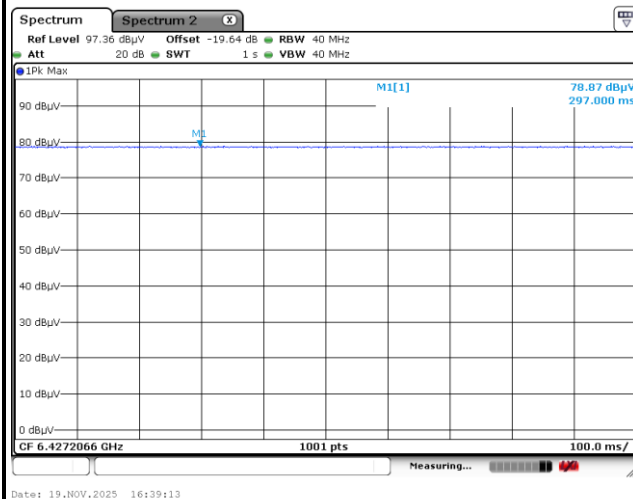




CH09 Peak Power Measurement Plots

Mode 67: cidx-31_sts-0_packet length-150

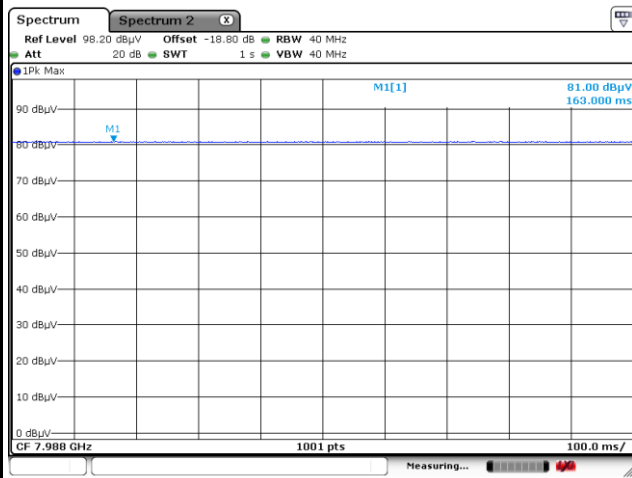


Date: 19.NOV.2025 18:58:44

Mode 68: cidx-31_sts-1_packet length-150

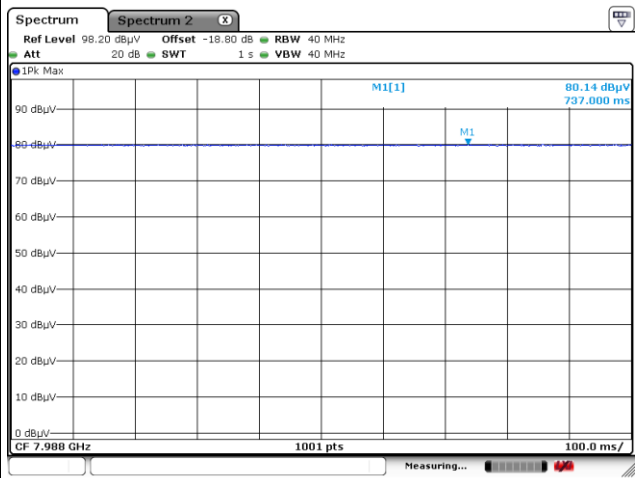

Date: 19.NOV.2025 19:32:07

Mode 69: cidx-31_sts-3_packet length-0

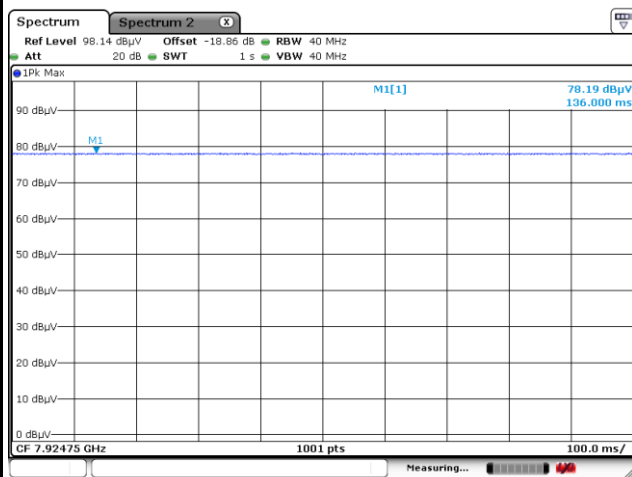


Date: 19.NOV.2025 20:00:23




<Ant.11>

CH05 Peak Power Measurement Plots


Mode 115: cidx-31_sts-0_packet length-150

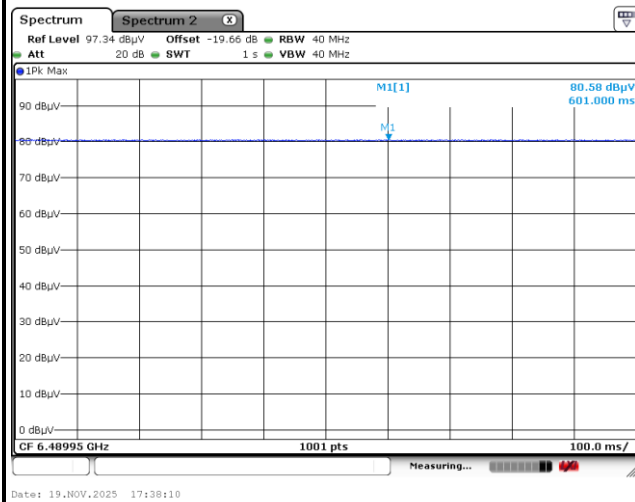

Mode 116: cidx-31_sts-1_packet length-150

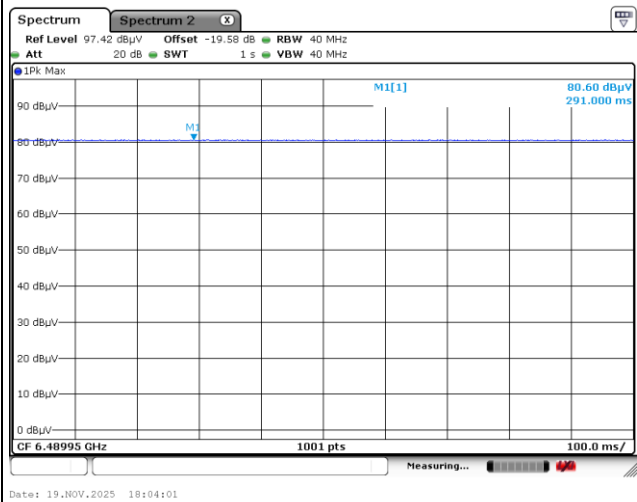


Mode 117: cidx-31_sts-3_packet length-0

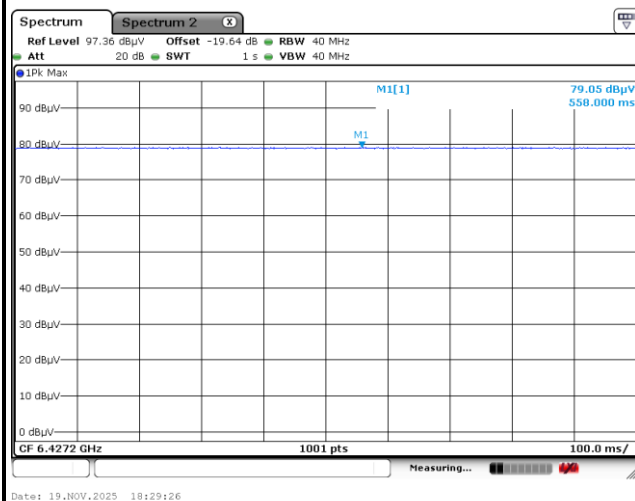




CH09 Peak Power Measurement Plots


Mode 139: cidx-31_sts-0_packet length-150

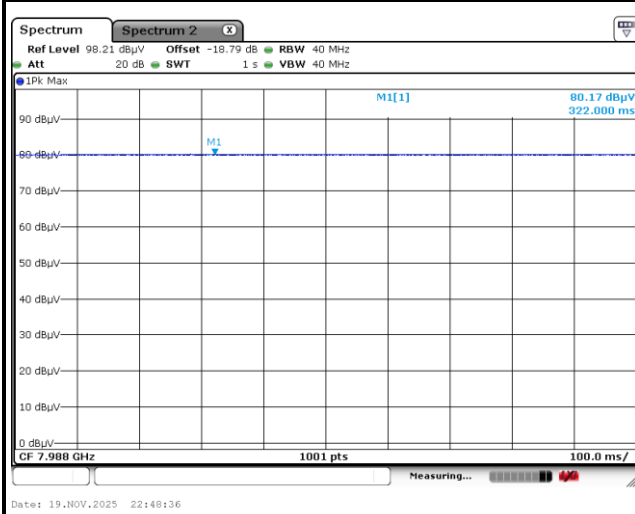

Mode 140: cidx-31_sts-1_packet length-150

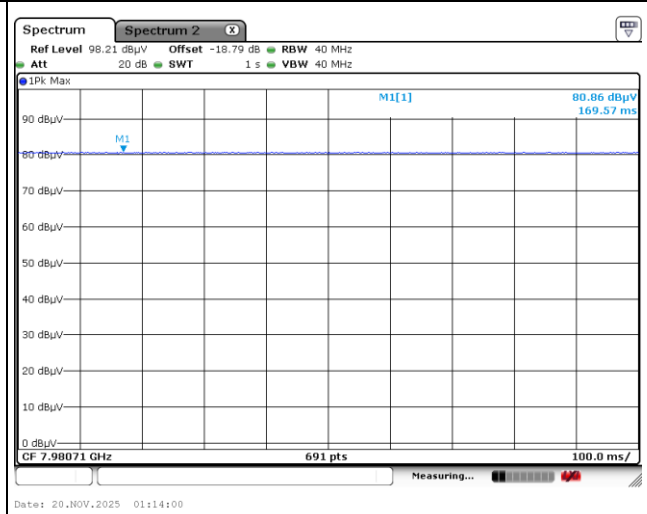

Mode 141: cidx-31_sts-3_packet length-0

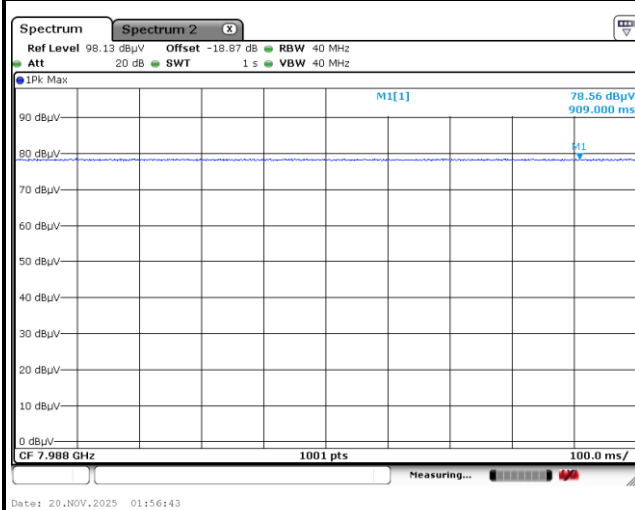




<Ant.7>


CH05 Peak Power Measurement Plots

Mode 46: cidx-32_sts-0_packet length-150

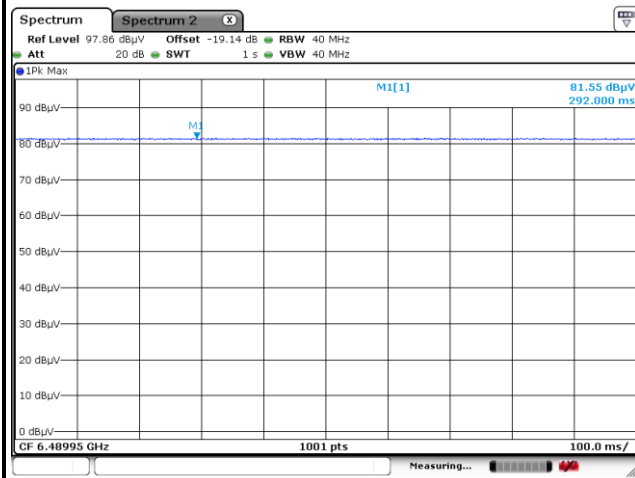


Date: 20.NOV.2025 04:21:03

Mode 47: cidx-32_sts-1_packet length-150

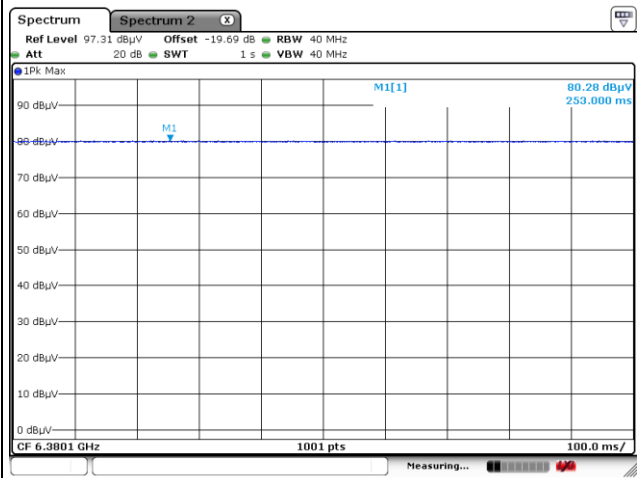

Date: 20.NOV.2025 05:22:19

Mode 48: cidx-32_sts-3_packet length-0

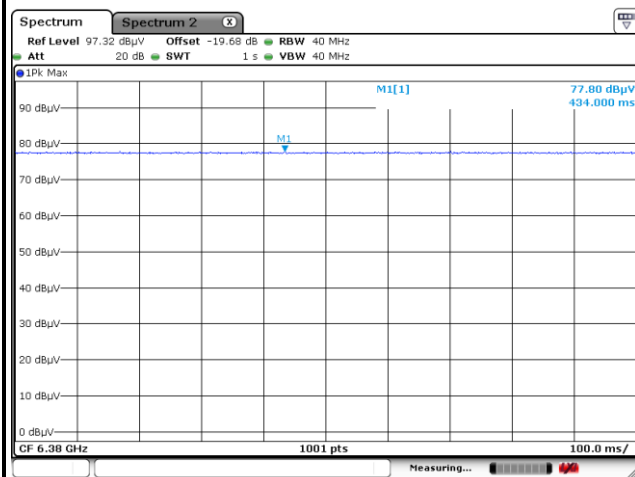


Date: 20.NOV.2025 05:41:47




CH09 Peak Power Measurement Plots


Mode 70: cidx-32_sts-0_packet length-150

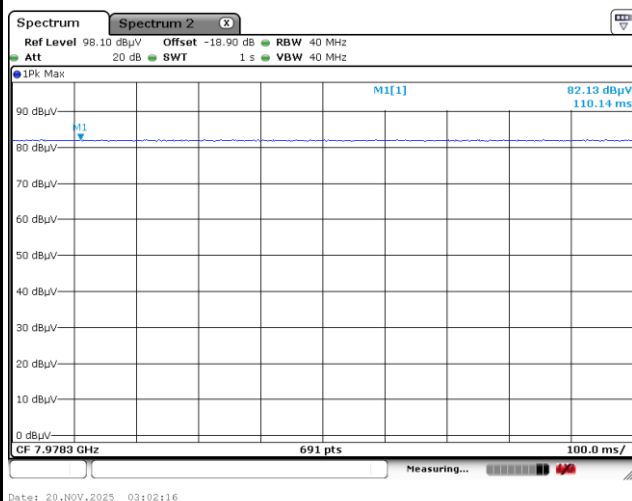

Mode 71: cidx-32_sts-1_packet length-150

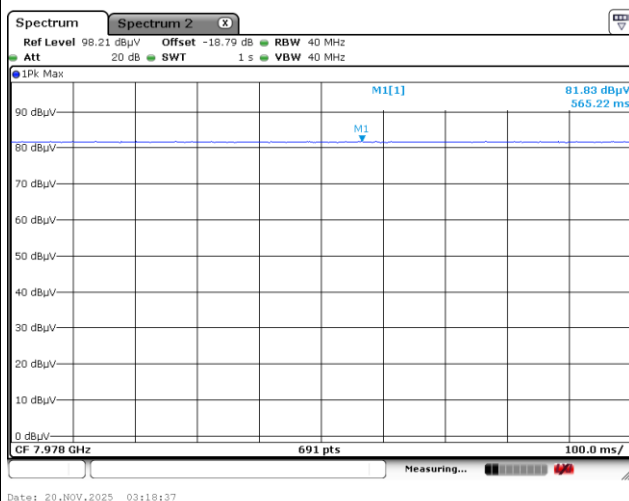

Mode 72: cidx-32_sts-3_packet length-0

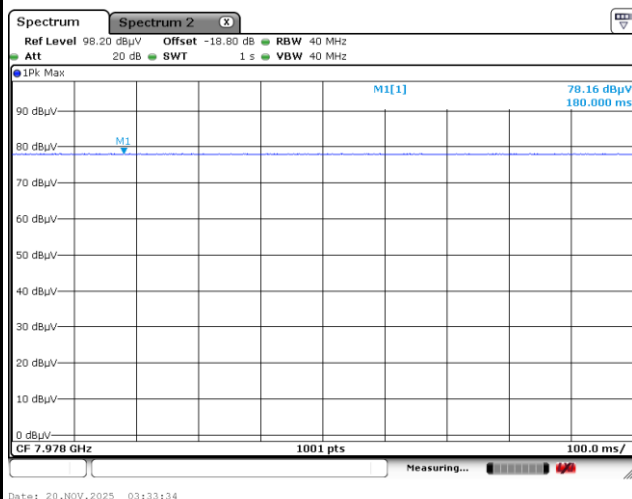





<Ant.11>

CH05 Peak Power Measurement Plots


Mode 118: cidx-32_sts-0_packet length-150

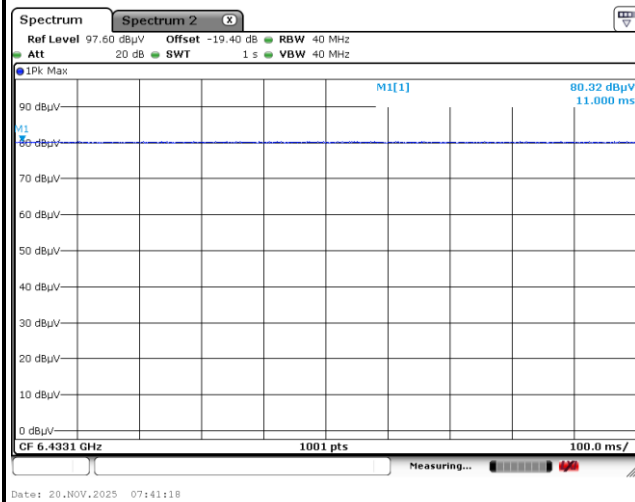

Mode 119: cidx-32_sts-1_packet length-150

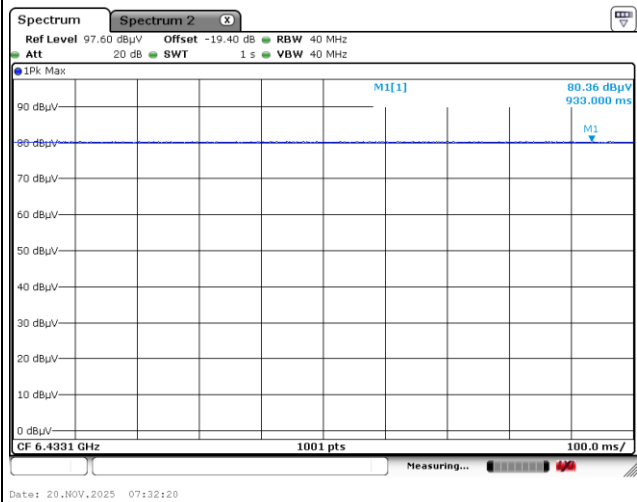


Mode 120: cidx-32_sts-3_packet length-0

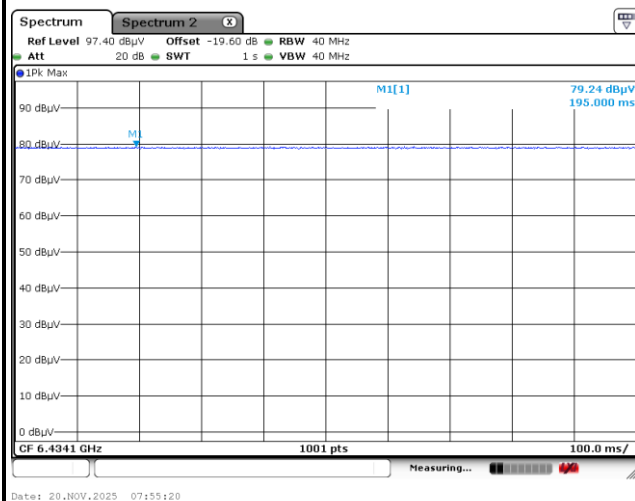




CH09 Peak Power Measurement Plots


Mode 142: cidx-32_sts-0_packet length-150

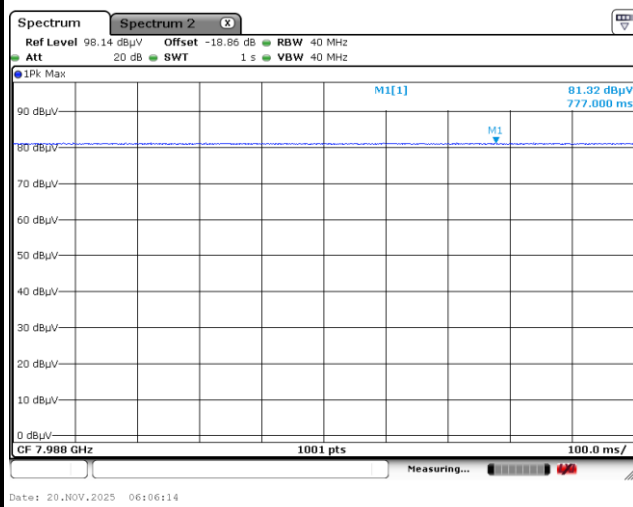

Mode 143: cidx-32_sts-1_packet length-150

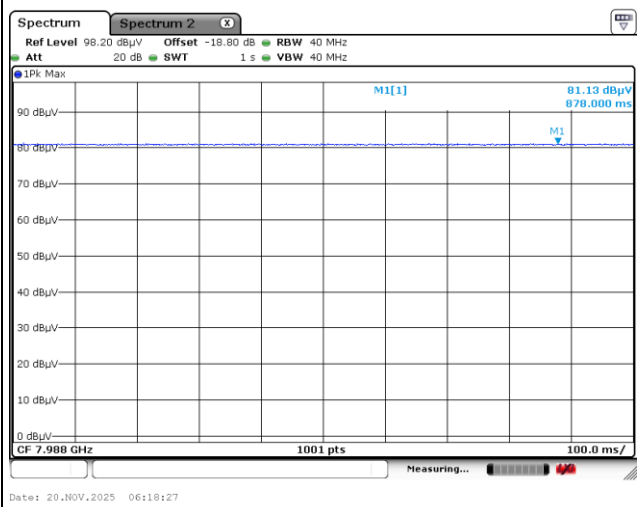

Mode 144: cidx-32_sts-3_packet length-0

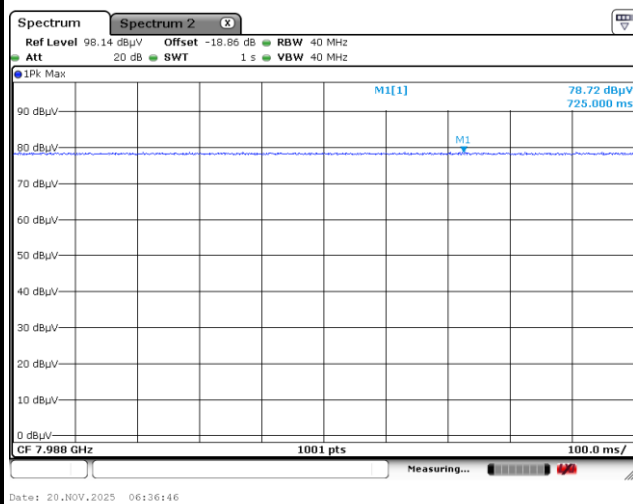



3.5 Radiated Emissions

3.5.1 Radiated Emissions Limit

Radiated Emissions below 960MHz and Emissions from Digital Circuitry Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Radiated Emissions above 960MHz Limit		
Frequency Range (MHz)	EIRP (dBm)	EIRP (dBuV/m @3m)
960-1610	-75.3	19.93
1610-1990	-63.3	31.93
1990-3100	-61.3	33.93
3100-10600	-41.3	53.93
Above 10600	-61.3	33.93

Radiated Emissions in GPS Bands Limit		
Frequency Range (MHz)	EIRP (dBm)	EIRP (dBuV/m @3m)
1164-1240	-85.3	9.90
1559-1610	-85.3	9.90

Note: $E \text{ (dBuV/m)} = \text{EIRP (dBm)} + 95.20$, example, $E(\text{dBuV/m}) = -85.3 + 95.20 = 9.90 \text{ dBuV/m}$.



3.5.2 Measuring Instruments




Refer a test equipment and calibration data table in this test report.

3.5.3 Test Procedures


Test Method for Radiated Emissions above 960MHz	
☒	Radiated Emissions above 960MHz
☒	Refer as ANSI C63.10, clause 10.3.1 for radiated measurement procedure testing.
☒	Refer as ANSI C63.10, clause 10.3.2 for measurement distance is 3m. In some cases, it may be necessary to measure the radiated UWB emissions at a closer distance to obtain enough signal and margin to overcome the measurement system noise floor. Distance extrapolation factor = 20 log (test distance [X m]/specific distance [3 m]) (dB)
☒	Refer as ANSI C63.10, clause 10.3.4 for rms detector procedure testing.
☒	Refer as ANSI C63.10, clause 10.3.7 for evaluating AVG-PSD (RBW=1MHz).
☒	Refer as ANSI C63.10, clause 10.3.10 for evaluating AVG-PSD in GPS Band (RBW≥1kHz).
☒	For radiated measurement.
☒	Refer as ANSI C63.10, clause 10.3.8 following eirp can be used radiated test configuration.
☒	Refer as ANSI C63.10, clause 10.3.9 following eirp can be directly determined using the field strength.

Test Method for Radiated Emissions below 960MHz and Emissions from Digital Circuitry	
☒	Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements) for above 30MHz-960MHz; 40dB/decade for frequency below 30MHz.
☒	For the transmitter unwanted emissions shall be measured using following options below:
☒	Refer as ANSI C63.10, clause 4.1.5 Detector functions and selection of bandwidth
☐	Refer as ANSI C63.10, clause 4.1.5.2.5 average value of pulsed emissions. Adjusted by a “duty cycle correction factor”, derived from 20log (dwell time/100 ms). Average emission = peak emission + 20 log (duty cycle).
☒	Refer as ANSI C63.10, clause 4.1.5.2.2 measurement procedure peak limit.
☒	For radiated measurement.
☒	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
☒	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
☒	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1 GHz and test distance is 0.5m or 1m or 3m.
☒	If the noise floor can't meet the limit, the test distance will be shorten and described in the report.
☒	Any unwanted emissions level shall not exceed the fundamental emission level.


3.5.4 Test Setup

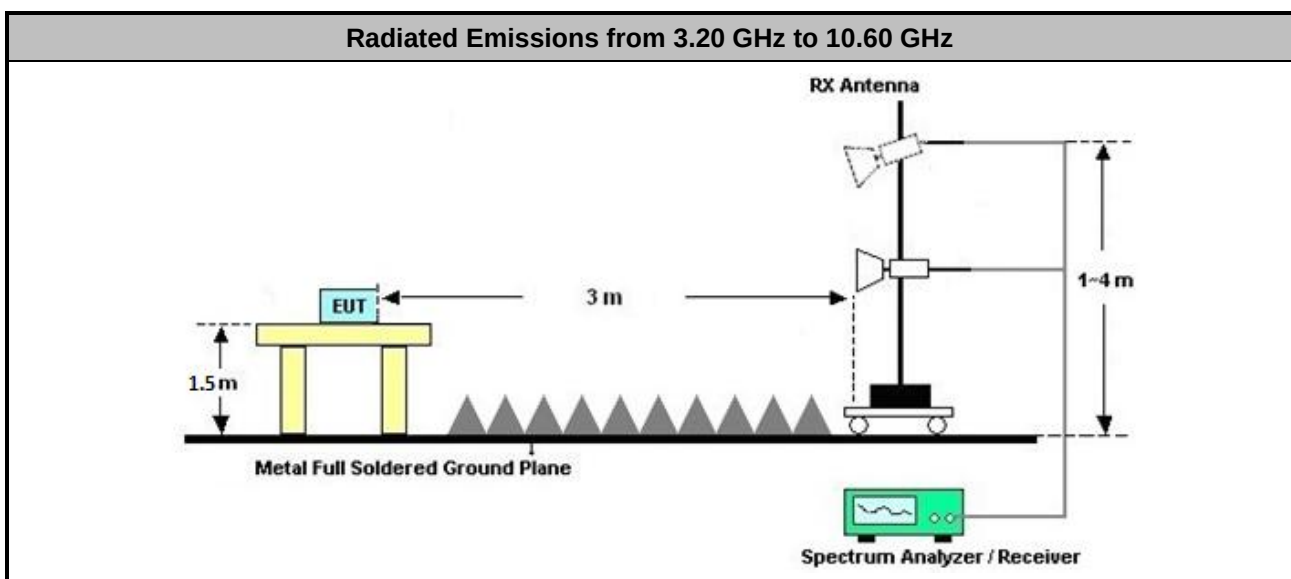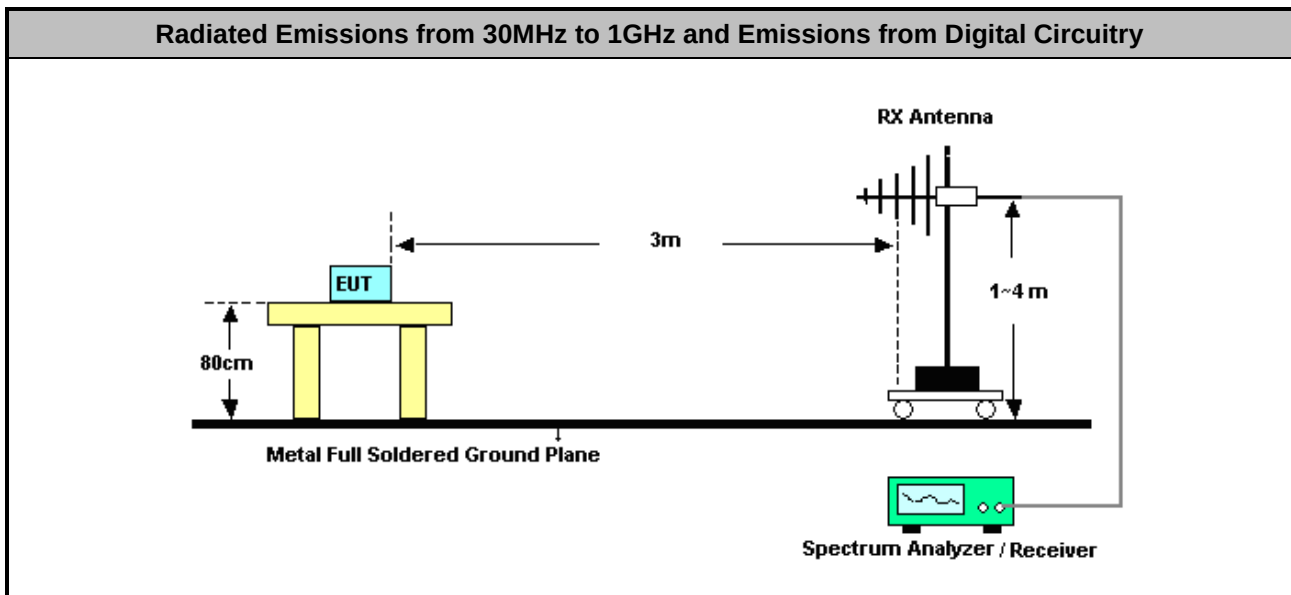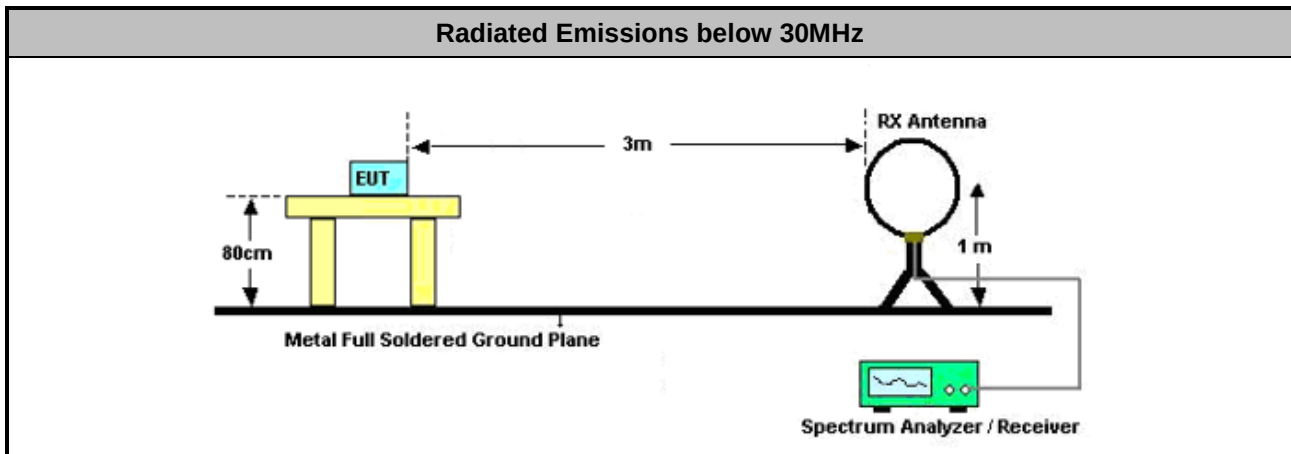

Radiated Emissions from 0.96GHz to 1.164 GHz, 1.24GHz to 1.559 GHz and 10.60 GHz to 18GHz

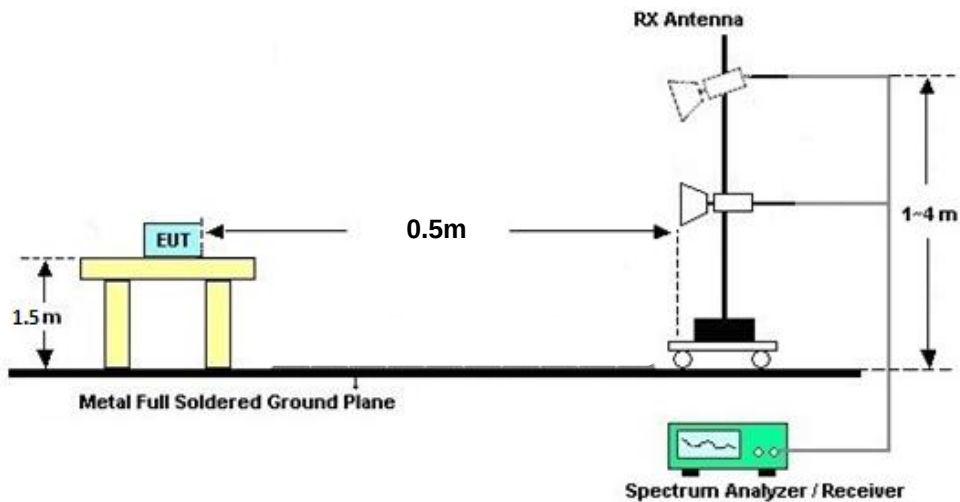

Radiated Emissions 1.164 GHz to 1.24GHz, 1.559 GHz to 1.61GHz, 1.61 GHz to 3.2GHz and above 18GHz

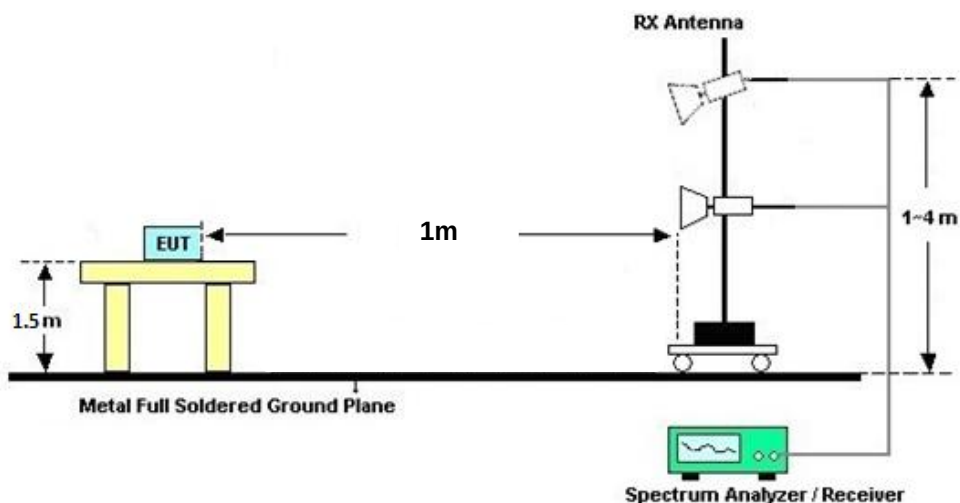

Note 1: Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna and the frequency range of 1 GHz to 40 GHz using a calibrated horn antenna.

Note 2: If test distance other than 3m is used, the used test distance will be recorded in test result.

3.5.5 Radiated Emissions (Below 30MHz)

All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

There is adequate comparison measurement of both open-field test site and alternative test site -semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.



3.5.6 Radiated Emissions (Fundamental)

Mode		ANT	Frequency (MHz)	Emission Level (dBuV/m)	Emission Limit (dBm/MHz)	Emission Limit (dBuV/m)	Margin (dB)	Power setting	Result	Pol (H/V)
Mode 1	BPRF	7	6386	51.80	-41.3	53.93	-2.13	255	Pass	V
Mode 2		7	6386	52.7	-41.3	53.93	-1.23	255	Pass	V
Mode 3		7	6386	50.31	-41.3	53.93	-3.62	255	Pass	V
Mode 73		11	6386	52.19	-41.3	53.93	-1.74	255	Pass	H
Mode 74		11	6407	53.04	-41.3	53.93	-0.89	255	Pass	H
Mode 75		11	6420	50.41	-41.3	53.93	-3.52	255	Pass	H
Mode 13		7	7868	51.87	-41.3	53.93	-2.06	255	Pass	V
Mode 14		7	7883	53.06	-41.3	53.93	-0.87	255	Pass	V
Mode 15		7	7880	50.62	-41.3	53.93	-3.31	255	Pass	V
Mode 85		11	8072	51.58	-41.3	53.93	-2.35	255	Pass	V
Mode 86		11	7887	52.53	-41.3	53.93	-1.4	255	Pass	V
Mode 87		11	7887	50.37	-41.3	53.93	-3.56	255	Pass	V
Mode 4	BPRF	7	6333	50.71	-41.3	53.93	-3.22	255	Pass	V
Mode 5		7	6423	52.84	-41.3	53.93	-1.09	255	Pass	V
Mode 6		7	6372	50.52	-41.3	53.93	-3.41	255	Pass	V
Mode 76		11	6423	51.92	-41.3	53.93	-2.01	255	Pass	H
Mode 77		11	6434	53.06	-41.3	53.93	-0.87	255	Pass	H
Mode 78		11	6357	50.52	-41.3	53.93	-3.41	255	Pass	H
Mode 16		7	7865	51.87	-41.3	53.93	-2.06	255	Pass	V
Mode 17		7	7987	52.85	-41.3	53.93	-1.08	255	Pass	V
Mode 18		7	7870	51.22	-41.3	53.93	-2.71	255	Pass	V
Mode 88		11	8132	51.01	-41.3	53.93	-2.92	255	Pass	V
Mode 89		11	7987	52.65	-41.3	53.93	-1.28	255	Pass	V
Mode 90		11	7870	50.21	-41.3	53.93	-3.72	255	Pass	V
Mode 7	BPRF	7	6386	51.69	-41.3	53.93	-2.24	255	Pass	V
Mode 8		7	6386	52.92	-41.3	53.93	-1.01	255	Pass	V
Mode 9		7	6386	50.93	-41.3	53.93	-3	255	Pass	V
Mode 79		11	6412	51.99	-41.3	53.93	-1.94	255	Pass	H
Mode 80		11	6447	52.23	-41.3	53.93	-1.7	255	Pass	H
Mode 81		11	6386	50.43	-41.3	53.93	-3.5	255	Pass	H
Mode 19		7	7863	51.52	-41.3	53.93	-2.41	255	Pass	V
Mode 20		7	7870	52.79	-41.3	53.93	-1.14	255	Pass	V
Mode 21		7	7870	50.45	-41.3	53.93	-3.48	255	Pass	V
Mode 91		11	8036	51.59	-41.3	53.93	-2.34	255	Pass	V
Mode 92		11	8074	52.65	-41.3	53.93	-1.28	255	Pass	V
Mode 93		11	7886	50.18	-41.3	53.93	-3.75	255	Pass	V
Mode 10	BPRF	7	6386	51.17	-41.3	53.93	-2.76	255	Pass	V
Mode 11		7	6386	52.46	-41.3	53.93	-1.47	255	Pass	V
Mode 12		7	6407	49.62	-41.3	53.93	-4.31	255	Pass	V
Mode 82		11	6386	51.55	-41.3	53.93	-2.38	255	Pass	H
Mode 83		11	6410	51.98	-41.3	53.93	-1.95	255	Pass	H
Mode 84		11	6386	49.7	-41.3	53.93	-4.23	255	Pass	H
Mode 22		7	8028	51.82	-41.3	53.93	-2.11	255	Pass	V



Mode		ANT	Frequency (MHz)	Emission Level (dBuV/m)	Emission Limit (dBm/MHz)	Emission Limit (dBuV/m)	Margin (dB)	Power setting	Result	Pol (H/V)
Mode 23		7	7861	53.19	-41.3	53.93	-0.74	255	Pass	V
Mode 24		7	7870	50.8	-41.3	53.93	-3.13	255	Pass	V
Mode 94		11	7917	51.32	-41.3	53.93	-2.61	255	Pass	V
Mode 95		11	8073	52.03	-41.3	53.93	-1.9	255	Pass	V
Mode 96		11	8070	49.82	-41.3	53.93	-4.11	255	Pass	V
Mode 25	HPRF	7	6386	48.24	-41.3	53.93	-5.69	255	Pass	V
Mode 26		7	6386	50.44	-41.3	53.93	-3.49	255	Pass	V
Mode 27		7	6379	48.87	-41.3	53.93	-5.06	255	Pass	V
Mode 97		11	6406	48.84	-41.3	53.93	-5.09	255	Pass	H
Mode 98		11	6406	50.53	-41.3	53.93	-3.4	255	Pass	H
Mode 99		11	6406	49.64	-41.3	53.93	-4.29	255	Pass	H
Mode 49		7	7881	49.23	-41.3	53.93	-4.7	255	Pass	V
Mode 50		7	7903	51.27	-41.3	53.93	-2.66	255	Pass	V
Mode 51		7	7903	49.72	-41.3	53.93	-4.21	255	Pass	V
Mode 121		11	8071	47.53	-41.3	53.93	-6.4	255	Pass	V
Mode 122		11	7920	49.51	-41.3	53.93	-4.42	255	Pass	V
Mode 123		11	8067	47.9	-41.3	53.93	-6.03	255	Pass	V
Mode 28	HPRF	7	6424	49.05	-41.3	53.93	-4.88	255	Pass	V
Mode 29		7	6410	49.71	-41.3	53.93	-4.22	255	Pass	V
Mode 30		7	6410	49.82	-41.3	53.93	-4.11	255	Pass	V
Mode 100		11	6436	49.68	-41.3	53.93	-4.25	255	Pass	H
Mode 101		11	6427	51.02	-41.3	53.93	-2.91	255	Pass	H
Mode 102		11	6440	48.2	-41.3	53.93	-5.73	255	Pass	H
Mode 52		7	7865	49.64	-41.3	53.93	-4.29	255	Pass	V
Mode 53		7	7865	51.52	-41.3	53.93	-2.41	255	Pass	V
Mode 54		7	7908	50.11	-41.3	53.93	-3.82	255	Pass	V
Mode 124		11	8068	47.25	-41.3	53.93	-6.68	255	Pass	V
Mode 125		11	8004	49.53	-41.3	53.93	-4.4	255	Pass	V
Mode 126		11	8028	47.92	-41.3	53.93	-6.01	255	Pass	V
Mode 31	HPRF	7	6411	47.63	-41.3	53.93	-6.3	255	Pass	V
Mode 32		7	6410	51.38	-41.3	53.93	-2.55	255	Pass	V
Mode 33		7	6410	50.05	-41.3	53.93	-3.88	255	Pass	V
Mode 103		11	6457	48.62	-41.3	53.93	-5.31	255	Pass	H
Mode 104		11	6449	51.8	-41.3	53.93	-2.13	255	Pass	H
Mode 105		11	6427	48.82	-41.3	53.93	-5.11	255	Pass	H
Mode 55		7	7869	47.67	-41.3	53.93	-6.26	255	Pass	V
Mode 56		7	7883	49.23	-41.3	53.93	-4.7	255	Pass	V
Mode 57		7	7876	48.62	-41.3	53.93	-5.31	255	Pass	V
Mode 127		11	8057	46.54	-41.3	53.93	-7.39	255	Pass	V
Mode 128		11	8055	48.74	-41.3	53.93	-5.19	255	Pass	V
Mode 129		11	8067	48	-41.3	53.93	-5.93	255	Pass	V
Mode 34	HPRF	7	6384	48.07	-41.3	53.93	-5.86	255	Pass	V
Mode 35		7	6386	50.43	-41.3	53.93	-3.5	255	Pass	V
Mode 36		7	6386	49.21	-41.3	53.93	-4.72	255	Pass	V



Mode	ANT	Frequency (MHz)	Emission Level (dBuV/m)	Emission Limit (dBm/MHz)	Emission Limit (dBuV/m)	Margin (dB)	Power setting	Result	Pol (H/V)
Mode 106	11	6425	48.58	-41.3	53.93	-5.35	255	Pass	H
Mode 107	11	6425	50.26	-41.3	53.93	-3.67	255	Pass	H
Mode 108	11	6444	48.99	-41.3	53.93	-4.94	255	Pass	H
Mode 58	7	7987	48.89	-41.3	53.93	-5.04	255	Pass	V
Mode 59	7	7868	50.46	-41.3	53.93	-3.47	255	Pass	V
Mode 60	7	7876	46.35	-41.3	53.93	-7.58	255	Pass	V
Mode 130	11	8042	47.74	-41.3	53.93	-6.19	255	Pass	V
Mode 131	11	8055	49.34	-41.3	53.93	-4.59	255	Pass	V
Mode 132	11	8067	48.07	-41.3	53.93	-5.86	255	Pass	V
Mode 37	7	6386	49.61	-41.3	53.93	-4.32	255	Pass	V
Mode 38	7	6386	50.98	-41.3	53.93	-2.95	255	Pass	V
Mode 39	7	6386	49.45	-41.3	53.93	-4.48	255	Pass	V
Mode 109	11	6432	48.86	-41.3	53.93	-5.07	255	Pass	H
Mode 110	11	6440	50.85	-41.3	53.93	-3.08	255	Pass	H
Mode 111	11	6386	49.19	-41.3	53.93	-4.74	255	Pass	H
Mode 61	7	7869	49.52	-41.3	53.93	-4.41	255	Pass	V
Mode 62	7	7868	51.04	-41.3	53.93	-2.89	255	Pass	V
Mode 63	7	7876	49.49	-41.3	53.93	-4.44	255	Pass	V
Mode 133	11	8071	48.51	-41.3	53.93	-5.42	255	Pass	V
Mode 134	11	8071	50.43	-41.3	53.93	-3.5	255	Pass	V
Mode 135	11	8071	48.65	-41.3	53.93	-5.28	255	Pass	V
Mode 40	7	6386	49.56	-41.3	53.93	-4.37	255	Pass	V
Mode 41	7	6386	51.24	-41.3	53.93	-2.69	255	Pass	V
Mode 42	7	6386	49.8	-41.3	53.93	-4.13	255	Pass	V
Mode 112	11	6432	49.07	-41.3	53.93	-4.86	255	Pass	H
Mode 113	11	6432	51.16	-41.3	53.93	-2.77	255	Pass	H
Mode 114	11	6386	50.26	-41.3	53.93	-3.67	255	Pass	H
Mode 64	7	7888	47.95	-41.3	53.93	-5.98	255	Pass	V
Mode 65	7	7868	50.16	-41.3	53.93	-3.77	255	Pass	V
Mode 66	7	7876	48.48	-41.3	53.93	-5.45	255	Pass	V
Mode 136	11	7888	47.34	-41.3	53.93	-6.59	255	Pass	V
Mode 137	11	7889	49.04	-41.3	53.93	-4.89	255	Pass	V
Mode 138	11	8071	47.1	-41.3	53.93	-6.83	255	Pass	V
Mode 43	7	6341	48.45	-41.3	53.93	-5.48	255	Pass	V
Mode 44	7	6386	50.27	-41.3	53.93	-3.66	255	Pass	V
Mode 45	7	6410	48.74	-41.3	53.93	-5.19	255	Pass	V
Mode 115	11	6403	48.91	-41.3	53.93	-5.02	255	Pass	H
Mode 116	11	6444	50.09	-41.3	53.93	-3.84	255	Pass	H
Mode 117	11	6410	49.03	-41.3	53.93	-4.9	255	Pass	H
Mode 67	7	7886	48.32	-41.3	53.93	-5.61	255	Pass	V
Mode 68	7	7886	49.5	-41.3	53.93	-4.43	255	Pass	V
Mode 69	7	7934	48.72	-41.3	53.93	-5.21	255	Pass	V
Mode 139	11	8071	47.67	-41.3	53.93	-6.26	255	Pass	V
Mode 140	11	8071.02	48.05	-41.3	53.93	-5.88	255	Pass	V






Mode		ANT	Frequency (MHz)	Emission Level (dBuV/m)	Emission Limit (dBm/MHz)	Emission Limit (dBuV/m)	Margin (dB)	Power setting	Result	Pol (H/V)
Mode 141		11	8033	48.69	-41.3	53.93	-5.24	255	Pass	V
Mode 46	HPRF	7	6592	50.97	-41.3	53.93	-2.96	255	Pass	V
Mode 47		7	6380	51.73	-41.3	53.93	-2.2	255	Pass	V
Mode 48		7	6592	50.31	-41.3	53.93	-3.62	255	Pass	V
Mode 118		11	6592	50.29	-41.3	53.93	-3.64	255	Pass	H
Mode 119		11	6592	52.2	-41.3	53.93	-1.73	255	Pass	H
Mode 120		11	6434	50.02	-41.3	53.93	-3.91	255	Pass	H
Mode 70		7	7978	50.01	-41.3	53.93	-3.92	255	Pass	V
Mode 71		7	7907.25	50.36	-41.3	53.93	-3.57	255	Pass	V
Mode 72		7	7908	50.6	-41.3	53.93	-3.33	255	Pass	V
Mode 142		11	8043	48.67	-41.3	53.93	-5.26	255	Pass	V
Mode 143		11	7886	50.46	-41.3	53.93	-3.47	255	Pass	V
Mode 144		11	8042	48.58	-41.3	53.93	-5.35	255	Pass	V




Note: E (dBuV/m) Limit= EIRP (dBm) Lmit + 95.2 = -41.3 + 95.2 = 53.9 dBuV/m.



<Ant.7>

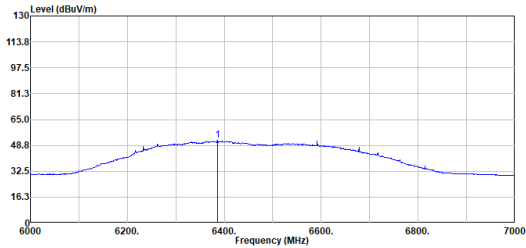
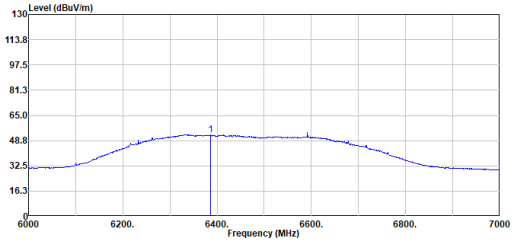
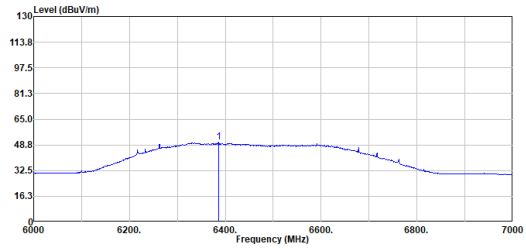
CH05 Radiated Emissions (Fundamental)																																																																																										
Operating Function	Adapter Mode		Polarization		V																																																																																					
			Test Distance		3m																																																																																					
Mode 1: cidx-9_sts-0_packet length-127						Mode 2: cidx-9_sts-1_packet length-127																																																																																				
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>6386.00</td><td>51.88</td><td>-----</td><td>71.48</td><td>35.50</td><td>11.11</td><td>66.29</td><td>0.00</td><td>100</td><td>279</td><td>Average</td><td>VERTICAL</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	6386.00	51.88	-----	71.48	35.50	11.11	66.29	0.00	100	279	Average	VERTICAL	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>6386.00</td><td>52.70</td><td>-----</td><td>72.38</td><td>35.50</td><td>11.11</td><td>66.29</td><td>0.00</td><td>100</td><td>269</td><td>Average</td><td>Vertical</td></tr></table>							Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	6386.00	52.70	-----	72.38	35.50	11.11	66.29	0.00	100	269	Average	Vertical
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	6386.00	51.88	-----	71.48	35.50	11.11	66.29	0.00	100	279	Average	VERTICAL																																																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	6386.00	52.70	-----	72.38	35.50	11.11	66.29	0.00	100	269	Average	Vertical																																																																														
Mode 3: cidx-9_sts-3_packet length-0																																																																																										
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>6386.00</td><td>50.31</td><td>-----</td><td>69.99</td><td>35.50</td><td>11.11</td><td>66.29</td><td>0.00</td><td>100</td><td>268</td><td>Peak</td><td>Vertical</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	6386.00	50.31	-----	69.99	35.50	11.11	66.29	0.00	100	268	Peak	Vertical																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	6386.00	50.31	-----	69.99	35.50	11.11	66.29	0.00	100	268	Peak	Vertical																																																																														

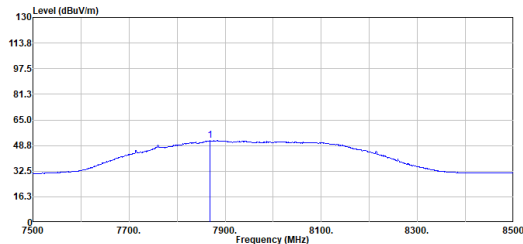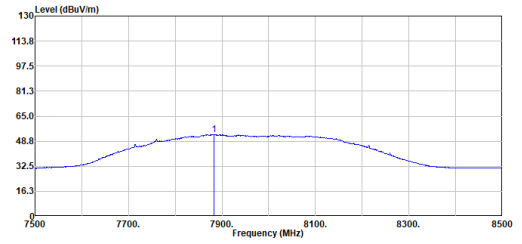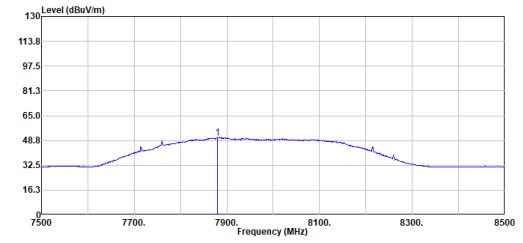




CH09 Radiated Emissions (Fundamental)																																																																																										
Operating Function	Adapter Mode					Polarization			V																																																																																	
						Test Distance			3m																																																																																	
Mode 13: cidx-9_sts-0_packet length-127						Mode 14: cidx-9_sts-1_packet length-127																																																																																				
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 7868.00</td><td>51.87</td><td>-----</td><td>-----</td><td>70.70</td><td>35.84</td><td>12.38</td><td>67.05</td><td>0.00</td><td>100</td><td>265</td><td>Average</td><td>Vertical</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 7868.00	51.87	-----	-----	70.70	35.84	12.38	67.05	0.00	100	265	Average	Vertical	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 7883.00</td><td>53.06</td><td>-----</td><td>-----</td><td>71.87</td><td>35.87</td><td>12.39</td><td>67.07</td><td>0.00</td><td>100</td><td>265</td><td>Average</td><td>Vertical</td></tr></table>							Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 7883.00	53.06	-----	-----	71.87	35.87	12.39	67.07	0.00	100	265	Average	Vertical
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 7868.00	51.87	-----	-----	70.70	35.84	12.38	67.05	0.00	100	265	Average	Vertical																																																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 7883.00	53.06	-----	-----	71.87	35.87	12.39	67.07	0.00	100	265	Average	Vertical																																																																														
Mode 15: cidx-9_sts-3_packet length-0																																																																																										
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 7888.00</td><td>50.62</td><td>-----</td><td>-----</td><td>69.43</td><td>35.86</td><td>12.39</td><td>67.06</td><td>0.00</td><td>100</td><td>265</td><td>Peak</td><td>Vertical</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 7888.00	50.62	-----	-----	69.43	35.86	12.39	67.06	0.00	100	265	Peak	Vertical																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 7888.00	50.62	-----	-----	69.43	35.86	12.39	67.06	0.00	100	265	Peak	Vertical																																																																														



<Ant.11>




CH05 Radiated Emissions (Fundamental)																																																																																										
Operating Function	Adapter Mode				Polarization			H																																																																																		
					Test Distance			3m																																																																																		
Mode 73: cidx-9_sts-0_packet length-127						Mode 74: cidx-9_sts-1_packet length-127																																																																																				
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>6386.00</td><td>52.19</td><td>-----</td><td>71.87</td><td>35.50</td><td>11.11</td><td>66.29</td><td>0.00</td><td>178</td><td>128</td><td>Average</td><td>Horizontal</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	6386.00	52.19	-----	71.87	35.50	11.11	66.29	0.00	178	128	Average	Horizontal	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>6407.00</td><td>53.04</td><td>-----</td><td>72.68</td><td>35.50</td><td>11.13</td><td>66.27</td><td>0.00</td><td>161</td><td>132</td><td>Average</td><td>Horizontal</td></tr></table>							Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	6407.00	53.04	-----	72.68	35.50	11.13	66.27	0.00	161	132	Average	Horizontal
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	6386.00	52.19	-----	71.87	35.50	11.11	66.29	0.00	178	128	Average	Horizontal																																																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	6407.00	53.04	-----	72.68	35.50	11.13	66.27	0.00	161	132	Average	Horizontal																																																																														
Mode 75: cidx-9_sts-3_packet length-0																																																																																										
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>6420.00</td><td>50.41</td><td>-----</td><td>70.03</td><td>35.50</td><td>11.14</td><td>66.26</td><td>0.00</td><td>158</td><td>132</td><td>Average</td><td>Horizontal</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	6420.00	50.41	-----	70.03	35.50	11.14	66.26	0.00	158	132	Average	Horizontal																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	6420.00	50.41	-----	70.03	35.50	11.14	66.26	0.00	158	132	Average	Horizontal																																																																														

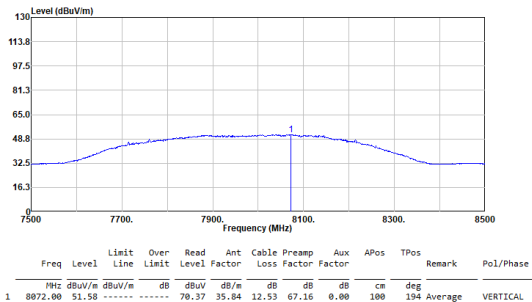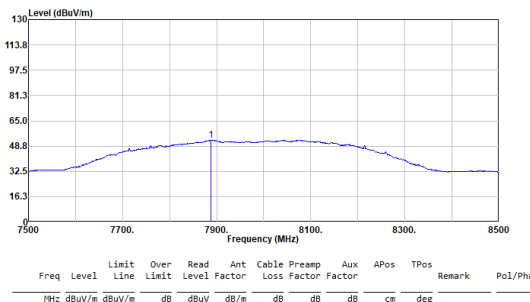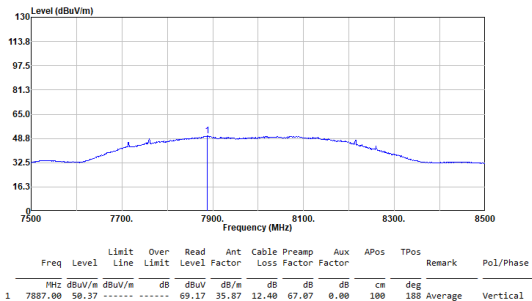

CH09 Radiated Emissions (Fundamental)												
Operating Function	Adapter Mode		Polarization		V							
			Test Distance		3m							
Mode 85: cidx-9_sts-0_packet length-127					Mode 86: cidx-9_sts-1_packet length-127							
												
Mode 87: cidx-9_sts-3_packet length-0												
												






<Ant.7>

CH05 Radiated Emissions (Fundamental)																																																																																										
Operating Function	Adapter Mode		Polarization				V																																																																																			
			Test Distance				3m																																																																																			
Mode 4: cidx-10_sts-0_packet length-127			Mode 5: cidx-10_sts-1_packet length-127																																																																																							
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6333.00</td><td>50.71</td><td>-----</td><td>-----</td><td>70.48</td><td>35.50</td><td>11.06</td><td>66.33</td><td>0.00</td><td>100</td><td>276</td><td>Average</td><td>Vertical</td></tr></table>			Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 6333.00	50.71	-----	-----	70.48	35.50	11.06	66.33	0.00	100	276	Average	Vertical	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6423.00</td><td>52.84</td><td>-----</td><td>-----</td><td>72.46</td><td>35.50</td><td>11.14</td><td>66.26</td><td>0.00</td><td>105</td><td>267</td><td>Average</td><td>Vertical</td></tr></table>										Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 6423.00	52.84	-----	-----	72.46	35.50	11.14	66.26	0.00	105	267	Average	Vertical
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 6333.00	50.71	-----	-----	70.48	35.50	11.06	66.33	0.00	100	276	Average	Vertical																																																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 6423.00	52.84	-----	-----	72.46	35.50	11.14	66.26	0.00	105	267	Average	Vertical																																																																														
Mode 6: cidx-10_sts-3_packet length-0																																																																																										
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6372.00</td><td>50.52</td><td>-----</td><td>-----</td><td>70.23</td><td>35.50</td><td>11.09</td><td>66.30</td><td>0.00</td><td>100</td><td>279</td><td>Average</td><td>Vertical</td></tr></table>			Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 6372.00	50.52	-----	-----	70.23	35.50	11.09	66.30	0.00	100	279	Average	Vertical																																																	
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 6372.00	50.52	-----	-----	70.23	35.50	11.09	66.30	0.00	100	279	Average	Vertical																																																																														






CH09 Radiated Emissions (Fundamental)

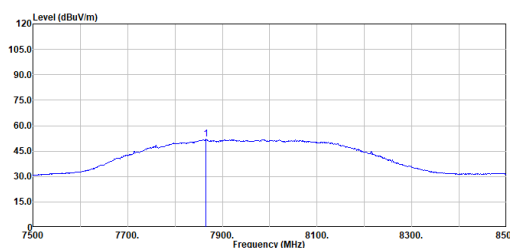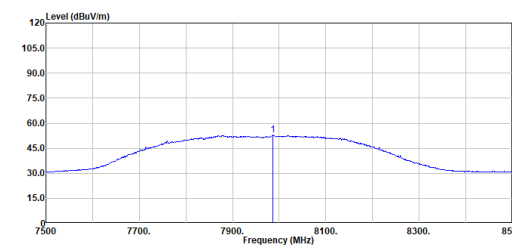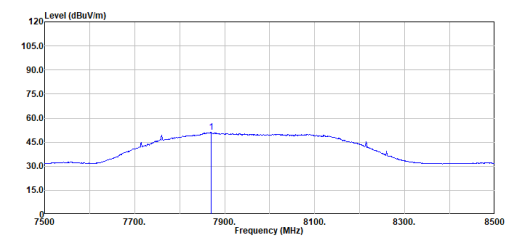Operating Function	Adapter Mode	Polarization	V																																																																														
		Test Distance	3m																																																																														
Mode 16: cidx-10_sts-0_packet length-127		Mode 17: cidx-10_sts-1_packet length-127																																																																															
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 7865.00</td><td>51.87</td><td>-----</td><td>-----</td><td>70.71</td><td>35.83</td><td>12.38</td><td>67.05</td><td>0.00</td><td>100</td><td>266</td><td>Average</td><td>Vertical</td></tr></table>		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 7865.00	51.87	-----	-----	70.71	35.83	12.38	67.05	0.00	100	266	Average	Vertical	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 7987.00</td><td>52.85</td><td>-----</td><td>-----</td><td>71.76</td><td>35.00</td><td>12.46</td><td>67.17</td><td>0.00</td><td>100</td><td>273</td><td>Average</td><td></td></tr></table>		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 7987.00	52.85	-----	-----	71.76	35.00	12.46	67.17	0.00	100	273	Average	
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																							
1 7865.00	51.87	-----	-----	70.71	35.83	12.38	67.05	0.00	100	266	Average	Vertical																																																																					
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																							
1 7987.00	52.85	-----	-----	71.76	35.00	12.46	67.17	0.00	100	273	Average																																																																						
Mode 18: cidx-10_sts-3_packet length-0																																																																																	
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 7870.00</td><td>51.22</td><td>-----</td><td>-----</td><td>70.05</td><td>35.84</td><td>12.39</td><td>67.06</td><td>0.00</td><td>100</td><td>266</td><td>Average</td><td>Vertical</td></tr></table>		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 7870.00	51.22	-----	-----	70.05	35.84	12.39	67.06	0.00	100	266	Average	Vertical																																									
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																							
1 7870.00	51.22	-----	-----	70.05	35.84	12.39	67.06	0.00	100	266	Average	Vertical																																																																					






<Ant.11>

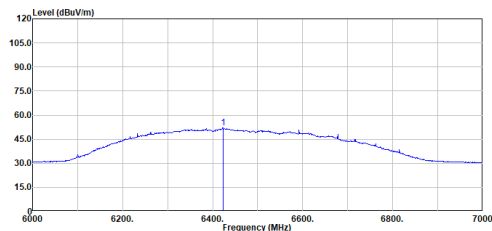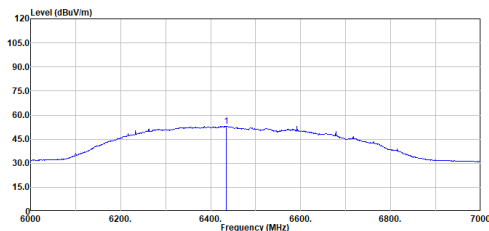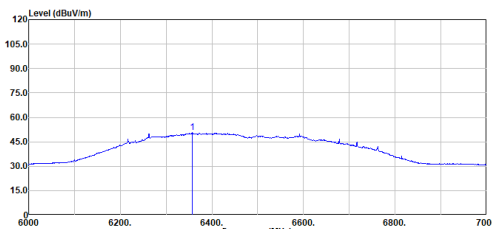CH05 Radiated Emissions (Fundamental)																																																																																										
Operating Function	Adapter Mode		Polarization				H																																																																																			
			Test Distance				3m																																																																																			
Mode 76: cidx-10_sts-0_packet length-127			Mode 77: cidx-10_sts-1_packet length-127																																																																																							
 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6423.00</td><td>51.92</td><td>-----</td><td></td><td>71.54</td><td>35.50</td><td>11.14</td><td>66.26</td><td>0.00</td><td>170</td><td>130</td><td>Average</td><td>Horizontal</td></tr></table>			Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg			1 6423.00	51.92	-----		71.54	35.50	11.14	66.26	0.00	170	130	Average	Horizontal	 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6434.00</td><td>53.06</td><td>-----</td><td></td><td>72.66</td><td>35.50</td><td>11.15</td><td>66.25</td><td>0.00</td><td>167</td><td>131</td><td>Average</td><td></td></tr></table>										Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg			1 6434.00	53.06	-----		72.66	35.50	11.15	66.25	0.00	167	131	Average	
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg																																																																																
1 6423.00	51.92	-----		71.54	35.50	11.14	66.26	0.00	170	130	Average	Horizontal																																																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg																																																																																
1 6434.00	53.06	-----		72.66	35.50	11.15	66.25	0.00	167	131	Average																																																																															
Mode 78: cidx-10_sts-3_packet length-0																																																																																										
 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6357.00</td><td>50.52</td><td>-----</td><td></td><td>70.25</td><td>35.50</td><td>11.08</td><td>66.31</td><td>0.00</td><td>179</td><td>130</td><td>Average</td><td>Horizontal</td></tr></table>			Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg			1 6357.00	50.52	-----		70.25	35.50	11.08	66.31	0.00	179	130	Average	Horizontal																																																	
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg																																																																																
1 6357.00	50.52	-----		70.25	35.50	11.08	66.31	0.00	179	130	Average	Horizontal																																																																														






CH09 Radiated Emissions (Fundamental)

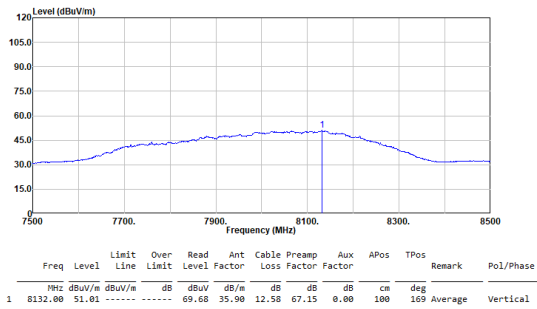
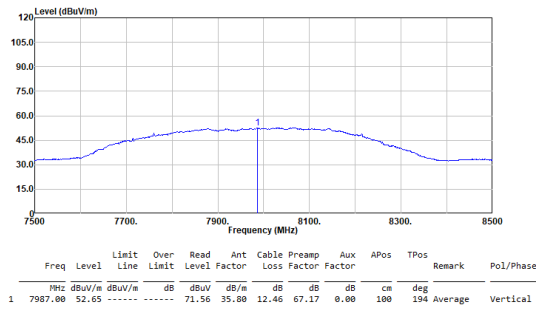
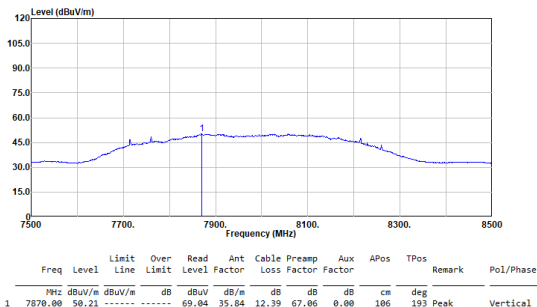
Operating Function	Adapter Mode	Polarization	V
		Test Distance	3m
Mode 88: cidx-10_sts-0_packet length-127		Mode 89: cidx-10_sts-1_packet length-127	
			
Mode 90: cidx-10_sts-3_packet length-0			
			



<Ant.7>

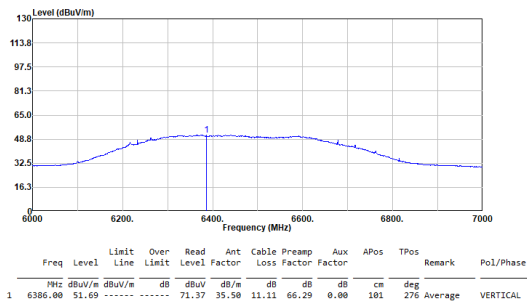
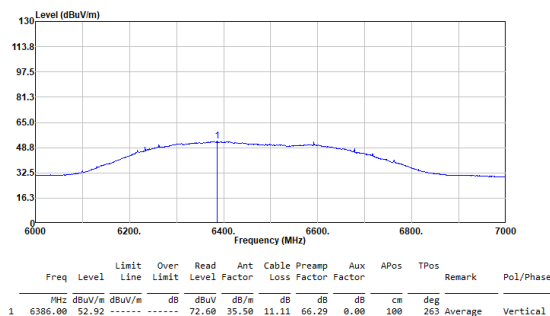
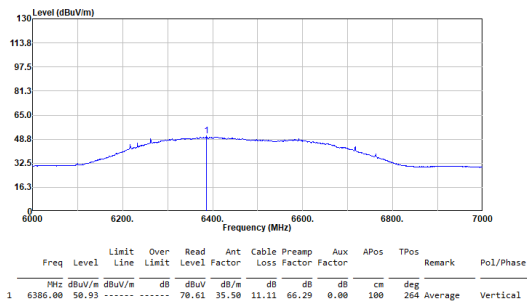
CH05 Radiated Emissions (Fundamental)											
Operating Function	Adapter Mode		Polarization				V				
			Test Distance				3m				
Mode 7: cidx-11_sts-0_packet length-127						Mode 8: cidx-11_sts-1_packet length-127					
											
Mode 9: cidx-11_sts-3_packet length-0											
											

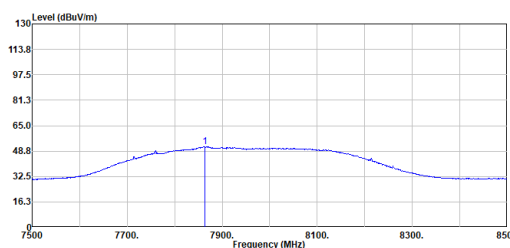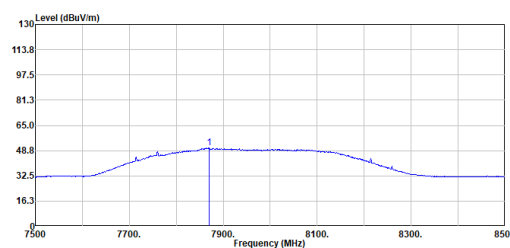




CH09 Radiated Emissions (Fundamental)																																																																																										
Operating Function	Adapter Mode						Polarization			V																																																																																
							Test Distance			3m																																																																																
Mode 19: cidx-11_sts-0_packet length-127						Mode 20: cidx-11_sts-1_packet length-127																																																																																				
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 7863.00</td><td>51.52</td><td>-----</td><td>-----</td><td>70.36</td><td>35.83</td><td>12.38</td><td>67.05</td><td>0.00</td><td>100</td><td>263</td><td>Average</td><td>Vertical</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 7863.00	51.52	-----	-----	70.36	35.83	12.38	67.05	0.00	100	263	Average	Vertical	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 7870.00</td><td>52.79</td><td>-----</td><td>-----</td><td>71.62</td><td>35.84</td><td>12.39</td><td>67.06</td><td>0.00</td><td>100</td><td>263</td><td>Average</td><td>Vertical</td></tr></table>							Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 7870.00	52.79	-----	-----	71.62	35.84	12.39	67.06	0.00	100	263	Average	Vertical
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 7863.00	51.52	-----	-----	70.36	35.83	12.38	67.05	0.00	100	263	Average	Vertical																																																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 7870.00	52.79	-----	-----	71.62	35.84	12.39	67.06	0.00	100	263	Average	Vertical																																																																														
Mode 21: cidx-11_sts-3_packet length-0																																																																																										
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 7870.00</td><td>50.45</td><td>-----</td><td>-----</td><td>69.28</td><td>35.84</td><td>12.39</td><td>67.06</td><td>0.00</td><td>100</td><td>262</td><td>Average</td><td>Vertical</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 7870.00	50.45	-----	-----	69.28	35.84	12.39	67.06	0.00	100	262	Average	Vertical																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 7870.00	50.45	-----	-----	69.28	35.84	12.39	67.06	0.00	100	262	Average	Vertical																																																																														



<Ant.11>

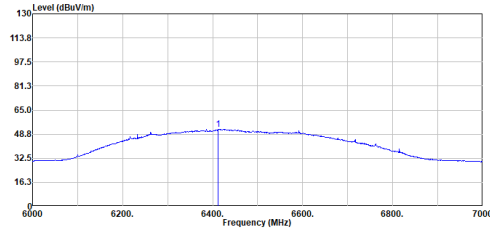
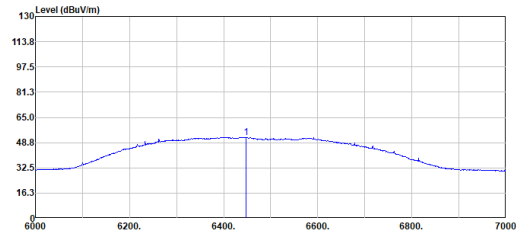
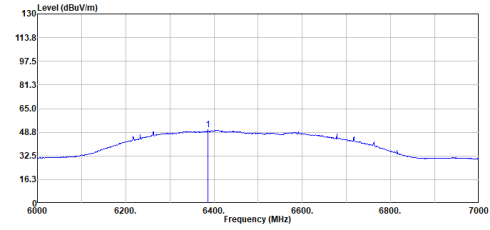
CH05 Radiated Emissions (Fundamental)																																																																																										
Operating Function	Adapter Mode						Polarization		H																																																																																	
							Test Distance		3m																																																																																	
Mode 79: cidx-11_sts-0_packet length-127						Mode 80: cidx-11_sts-1_packet length-127																																																																																				
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6412.00</td><td>51.99</td><td>-----</td><td></td><td>71.63</td><td>35.50</td><td>11.13</td><td>66.27</td><td>0.00</td><td>155</td><td>129</td><td>Average</td><td>Horizontal</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg			1 6412.00	51.99	-----		71.63	35.50	11.13	66.27	0.00	155	129	Average	Horizontal	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6447.00</td><td>52.23</td><td>-----</td><td></td><td>71.81</td><td>35.50</td><td>11.16</td><td>66.24</td><td>0.00</td><td>161</td><td>132</td><td>Average</td><td>Horizontal</td></tr></table>							Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg			1 6447.00	52.23	-----		71.81	35.50	11.16	66.24	0.00	161	132	Average	Horizontal
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg																																																																																
1 6412.00	51.99	-----		71.63	35.50	11.13	66.27	0.00	155	129	Average	Horizontal																																																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg																																																																																
1 6447.00	52.23	-----		71.81	35.50	11.16	66.24	0.00	161	132	Average	Horizontal																																																																														
Mode 81: cidx-11_sts-3_packet length-0																																																																																										
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6386.00</td><td>50.43</td><td>-----</td><td></td><td>70.11</td><td>35.50</td><td>11.11</td><td>66.29</td><td>0.00</td><td>160</td><td>131</td><td>Average</td><td>Horizontal</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg			1 6386.00	50.43	-----		70.11	35.50	11.11	66.29	0.00	160	131	Average	Horizontal																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg																																																																																
1 6386.00	50.43	-----		70.11	35.50	11.11	66.29	0.00	160	131	Average	Horizontal																																																																														

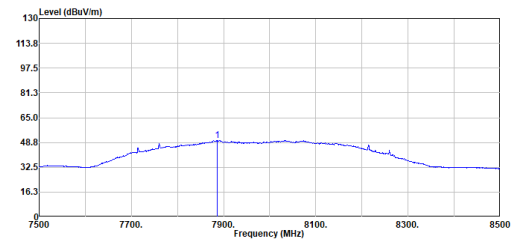




CH09 Radiated Emissions (Fundamental)																																																																																										
Operating Function	Adapter Mode				Polarization				V																																																																																	
					Test Distance				3m																																																																																	
Mode 91: cidx-11_sts-0_packet length-127						Mode 92: cidx-11_sts-1_packet length-127																																																																																				
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 8036.00</td><td>51.59</td><td>-----</td><td>-----</td><td>70.46</td><td>35.80</td><td>12.50</td><td>67.17</td><td>0.00</td><td>100</td><td>187</td><td>Average</td><td>Vertical</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 8036.00	51.59	-----	-----	70.46	35.80	12.50	67.17	0.00	100	187	Average	Vertical	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 8074.00</td><td>52.65</td><td>-----</td><td>-----</td><td>71.43</td><td>35.85</td><td>12.53</td><td>67.16</td><td>0.00</td><td>101</td><td>191</td><td>Average</td><td>Vertical</td></tr></table>							Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 8074.00	52.65	-----	-----	71.43	35.85	12.53	67.16	0.00	101	191	Average	Vertical
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 8036.00	51.59	-----	-----	70.46	35.80	12.50	67.17	0.00	100	187	Average	Vertical																																																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 8074.00	52.65	-----	-----	71.43	35.85	12.53	67.16	0.00	101	191	Average	Vertical																																																																														
Mode 93: cidx-11_sts-3_packet length-0																																																																																										
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 7886.00</td><td>50.18</td><td>-----</td><td>-----</td><td>68.98</td><td>35.87</td><td>12.48</td><td>67.07</td><td>0.00</td><td>100</td><td>187</td><td>Average</td><td>Vertical</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 7886.00	50.18	-----	-----	68.98	35.87	12.48	67.07	0.00	100	187	Average	Vertical																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 7886.00	50.18	-----	-----	68.98	35.87	12.48	67.07	0.00	100	187	Average	Vertical																																																																														



<Ant.7>

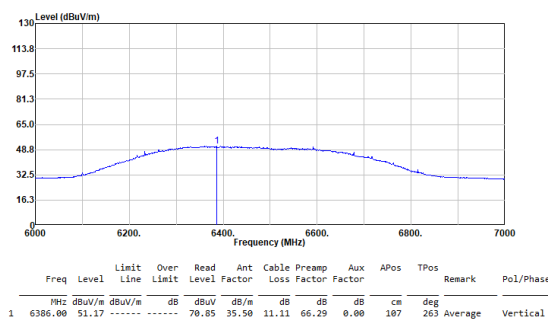
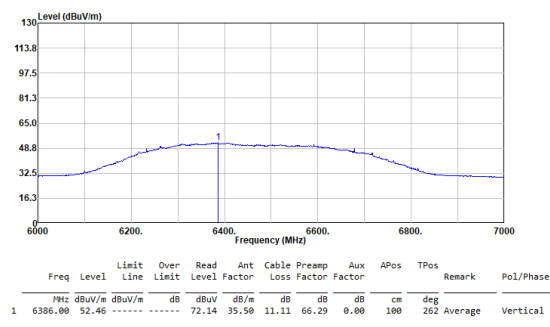
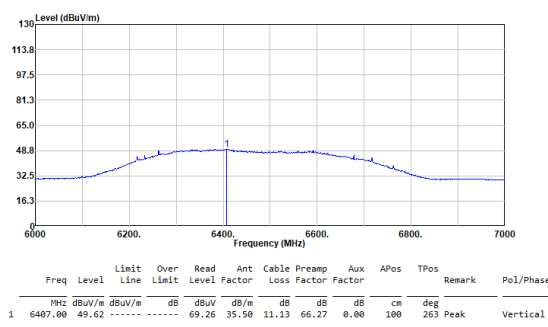
CH05 Radiated Emissions (Fundamental)												
Operating Function	Adapter Mode		Polarization				V					
			Test Distance				3m					
Mode 10: cidx-12_sts-0_packet length-127			Mode 11: cidx-12_sts-1_packet length-127									
												
Mode 12: cidx-12_sts-3_packet length-0												
												

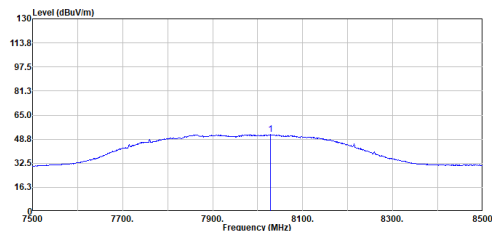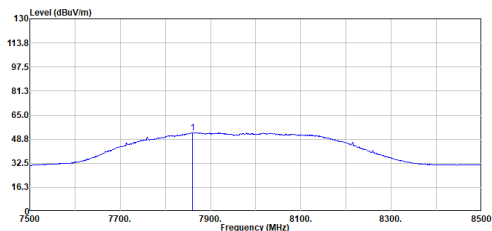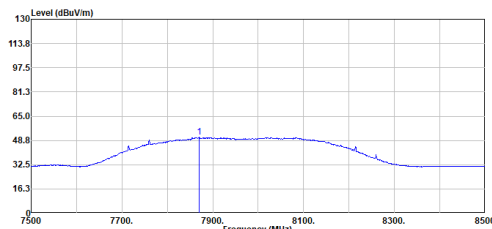




CH09 Radiated Emissions (Fundamental)																																																																																										
Operating Function	Adapter Mode		Polarization		V																																																																																					
			Test Distance		3m																																																																																					
Mode 22: cidx-12_sts-0_packet length-127						Mode 23: cidx-12_sts-1_packet length-127																																																																																				
 <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1 7828.00</td><td>51.82</td><td>-----</td><td>-----</td><td>70.70</td><td>35.80</td><td>12.49</td><td>67.17</td><td>0.00</td><td>114</td><td>266</td><td>Average</td><td>VERTICAL</td></tr></tbody></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m		dB	dB	dB	dB	dB	cm	deg			1 7828.00	51.82	-----	-----	70.70	35.80	12.49	67.17	0.00	114	266	Average	VERTICAL	 <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1 7861.00</td><td>53.19</td><td>-----</td><td>-----</td><td>72.04</td><td>35.82</td><td>12.38</td><td>67.05</td><td>0.00</td><td>114</td><td>275</td><td>Average</td><td>Vertical</td></tr></tbody></table>							Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m		dB	dB	dB	dB	dB	cm	deg			1 7861.00	53.19	-----	-----	72.04	35.82	12.38	67.05	0.00	114	275	Average	Vertical
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m		dB	dB	dB	dB	dB	cm	deg																																																																																
1 7828.00	51.82	-----	-----	70.70	35.80	12.49	67.17	0.00	114	266	Average	VERTICAL																																																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m		dB	dB	dB	dB	dB	cm	deg																																																																																
1 7861.00	53.19	-----	-----	72.04	35.82	12.38	67.05	0.00	114	275	Average	Vertical																																																																														
Mode 24: cidx-12_sts-3_packet length-0																																																																																										
 <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1 7878.00</td><td>50.80</td><td>-----</td><td>-----</td><td>69.63</td><td>35.84</td><td>12.39</td><td>67.06</td><td>0.00</td><td>100</td><td>273</td><td>Average</td><td>Vertical</td></tr></tbody></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m		dB	dB	dB	dB	dB	cm	deg			1 7878.00	50.80	-----	-----	69.63	35.84	12.39	67.06	0.00	100	273	Average	Vertical																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m		dB	dB	dB	dB	dB	cm	deg																																																																																
1 7878.00	50.80	-----	-----	69.63	35.84	12.39	67.06	0.00	100	273	Average	Vertical																																																																														



<Ant.11>

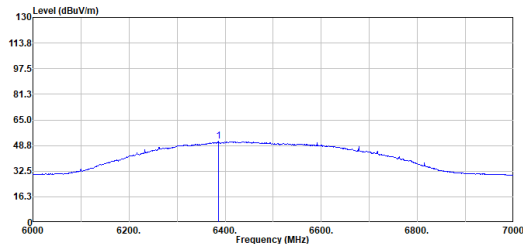
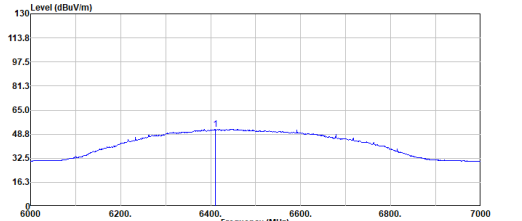

CH05 Radiated Emissions (Fundamental)																																																																																										
Operating Function	Adapter Mode					Polarization			H																																																																																	
						Test Distance			3m																																																																																	
Mode 82: cidx-12_sts-0_packet length-127						Mode 83: cidx-12_sts-1_packet length-127																																																																																				
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>6386.00</td><td>51.55</td><td>-----</td><td>71.23</td><td>35.50</td><td>11.11</td><td>66.29</td><td>0.00</td><td>100</td><td>322</td><td>Average</td><td>Horizontal</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	6386.00	51.55	-----	71.23	35.50	11.11	66.29	0.00	100	322	Average	Horizontal	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>6410.00</td><td>51.98</td><td>-----</td><td>71.62</td><td>35.50</td><td>11.13</td><td>66.27</td><td>0.00</td><td>100</td><td>324</td><td>Average</td><td>Horizontal</td></tr></table>							Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	6410.00	51.98	-----	71.62	35.50	11.13	66.27	0.00	100	324	Average	Horizontal
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	6386.00	51.55	-----	71.23	35.50	11.11	66.29	0.00	100	322	Average	Horizontal																																																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	6410.00	51.98	-----	71.62	35.50	11.13	66.27	0.00	100	324	Average	Horizontal																																																																														
Mode 84: cidx-12_sts-3_packet length-0																																																																																										
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>6386.00</td><td>49.70</td><td>-----</td><td>69.38</td><td>35.50</td><td>11.11</td><td>66.29</td><td>0.00</td><td>100</td><td>326</td><td>Average</td><td>Horizontal</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	6386.00	49.70	-----	69.38	35.50	11.11	66.29	0.00	100	326	Average	Horizontal																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	6386.00	49.70	-----	69.38	35.50	11.11	66.29	0.00	100	326	Average	Horizontal																																																																														

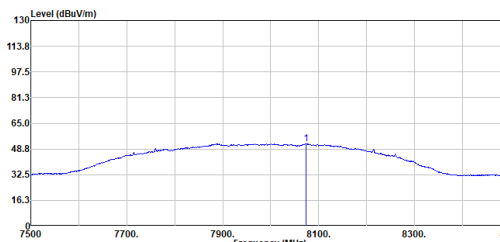

CH09 Radiated Emissions (Fundamental)																																																																																																											
Operating Function	Adapter Mode				Polarization			V																																																																																																			
					Test Distance			3m																																																																																																			
Mode 94: cidx-12_sts-0_packet length-127						Mode 95: cidx-12_sts-1_packet length-127																																																																																																					
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 7917.00</td><td>51.32</td><td>-----</td><td>-----</td><td>70.13</td><td>35.87</td><td>12.42</td><td>67.10</td><td>0.00</td><td>100</td><td>192 Average</td><td>Vertical</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 7917.00	51.32	-----	-----	70.13	35.87	12.42	67.10	0.00	100	192 Average	Vertical	<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 8073.00</td><td>52.03</td><td>-----</td><td>-----</td><td>70.81</td><td>35.85</td><td>12.53</td><td>67.16</td><td>0.00</td><td>100</td><td>184 Average</td><td>Vertical</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 8073.00	52.03	-----	-----	70.81	35.85	12.53	67.16	0.00	100	184 Average	Vertical
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																	
1 7917.00	51.32	-----	-----	70.13	35.87	12.42	67.10	0.00	100	192 Average	Vertical																																																																																																
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																	
1 8073.00	52.03	-----	-----	70.81	35.85	12.53	67.16	0.00	100	184 Average	Vertical																																																																																																
Mode 96: cidx-12_sts-3_packet length-0																																																																																																											
<table><tr><th></th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 8070.00</td><td>49.82</td><td>-----</td><td>-----</td><td>68.61</td><td>35.84</td><td>12.53</td><td>67.16</td><td>0.00</td><td>100</td><td>190 Average</td><td>Vertical</td></tr></table>							Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 8070.00	49.82	-----	-----	68.61	35.84	12.53	67.16	0.00	100	190 Average	Vertical																																																						
	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																	
1 8070.00	49.82	-----	-----	68.61	35.84	12.53	67.16	0.00	100	190 Average	Vertical																																																																																																






<Ant.7>

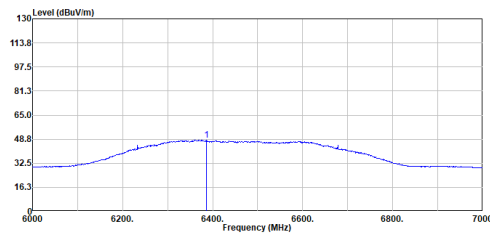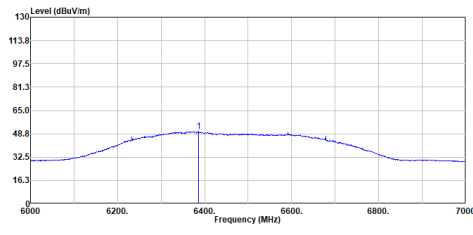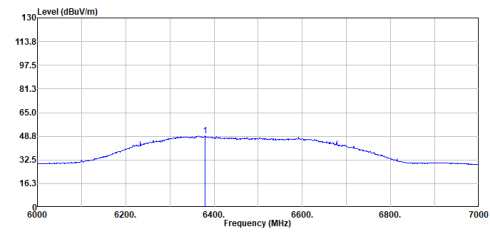CH05 Radiated Emissions (Fundamental)																																																																																										
Operating Function	Adapter Mode		Polarization				V																																																																																			
			Test Distance				3m																																																																																			
Mode 25: cidx-25_sts-0_packet length-127			Mode 26: cidx-25_sts-1_packet length-127																																																																																							
 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6386.00</td><td>48.24</td><td>-----</td><td>-----</td><td>67.92</td><td>35.50</td><td>11.11</td><td>66.29</td><td>0.00</td><td>100</td><td>276</td><td>Average</td><td>Vertical</td></tr></table>			Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg			1 6386.00	48.24	-----	-----	67.92	35.50	11.11	66.29	0.00	100	276	Average	Vertical	 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6386.00</td><td>50.44</td><td>-----</td><td>-----</td><td>70.12</td><td>35.50</td><td>11.11</td><td>66.29</td><td>0.00</td><td>100</td><td>278</td><td>Average</td><td>Vertical</td></tr></table>										Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg			1 6386.00	50.44	-----	-----	70.12	35.50	11.11	66.29	0.00	100	278	Average	Vertical
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg																																																																																
1 6386.00	48.24	-----	-----	67.92	35.50	11.11	66.29	0.00	100	276	Average	Vertical																																																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg																																																																																
1 6386.00	50.44	-----	-----	70.12	35.50	11.11	66.29	0.00	100	278	Average	Vertical																																																																														
Mode 27: cidx-25_sts-3_packet length-0																																																																																										
 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6379.00</td><td>48.87</td><td>-----</td><td>-----</td><td>68.56</td><td>35.50</td><td>11.10</td><td>66.29</td><td>0.00</td><td>100</td><td>277</td><td>Average</td><td>Vertical</td></tr></table>			Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg			1 6379.00	48.87	-----	-----	68.56	35.50	11.10	66.29	0.00	100	277	Average	Vertical																																																	
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg																																																																																
1 6379.00	48.87	-----	-----	68.56	35.50	11.10	66.29	0.00	100	277	Average	Vertical																																																																														






CH09 Radiated Emissions (Fundamental)

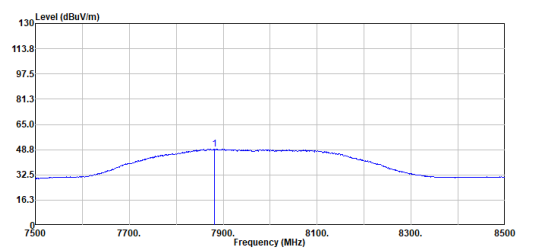
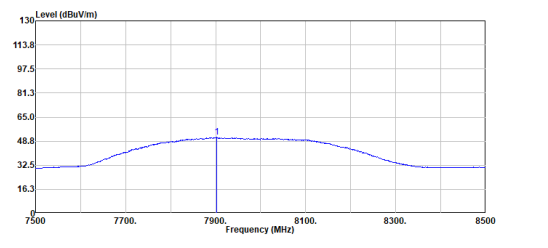
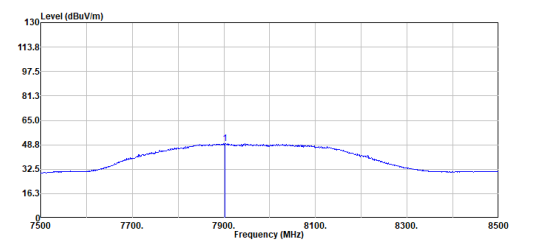
Operating Function	Adapter Mode	Polarization	V																																																																														
		Test Distance	3m																																																																														
Mode 49: cidx-25_sts-0_packet length-127		Mode 50: cidx-25_sts-1_packet length-127																																																																															
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 7881.00</td><td>49.23</td><td>-----</td><td>-----</td><td>68.05</td><td>35.86</td><td>12.39</td><td>67.07</td><td>0.00</td><td>104</td><td>268</td><td>Average</td><td>VERTICAL</td></tr></table>		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 7881.00	49.23	-----	-----	68.05	35.86	12.39	67.07	0.00	104	268	Average	VERTICAL	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 7903.00</td><td>51.27</td><td>-----</td><td>-----</td><td>70.06</td><td>35.89</td><td>12.41</td><td>67.09</td><td>0.00</td><td>100</td><td>274</td><td>Average</td><td>Vertical</td></tr></table>		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 7903.00	51.27	-----	-----	70.06	35.89	12.41	67.09	0.00	100	274	Average	Vertical
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																							
1 7881.00	49.23	-----	-----	68.05	35.86	12.39	67.07	0.00	104	268	Average	VERTICAL																																																																					
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																							
1 7903.00	51.27	-----	-----	70.06	35.89	12.41	67.09	0.00	100	274	Average	Vertical																																																																					
Mode 51: cidx-25_sts-3_packet length-0																																																																																	
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 7903.00</td><td>49.72</td><td>-----</td><td>-----</td><td>68.51</td><td>35.89</td><td>12.41</td><td>67.09</td><td>0.00</td><td>108</td><td>275</td><td>Average</td><td>Vertical</td></tr></table>		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 7903.00	49.72	-----	-----	68.51	35.89	12.41	67.09	0.00	108	275	Average	Vertical																																									
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																							
1 7903.00	49.72	-----	-----	68.51	35.89	12.41	67.09	0.00	108	275	Average	Vertical																																																																					



<Ant.11>




CH05 Radiated Emissions (Fundamental)																																																																																										
Operating Function	Adapter Mode		Polarization				H																																																																																			
			Test Distance				3m																																																																																			
Mode 97: cidx-25_sts-0_packet length-127			Mode 98: cidx-25_sts-1_packet length-127																																																																																							
 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>6406.00</td><td>48.84</td><td>-----</td><td>68.48</td><td>35.50</td><td>11.13</td><td>66.27</td><td>0.00</td><td>182</td><td>127</td><td>Average</td><td>Horizontal</td></tr></table>			Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	6406.00	48.84	-----	68.48	35.50	11.13	66.27	0.00	182	127	Average	Horizontal	 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>6406.00</td><td>50.53</td><td>-----</td><td>70.17</td><td>35.50</td><td>11.13</td><td>66.27</td><td>0.00</td><td>182</td><td>133</td><td>Average</td><td>Horizontal</td></tr></table>										Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	6406.00	50.53	-----	70.17	35.50	11.13	66.27	0.00	182	133	Average	Horizontal
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	6406.00	48.84	-----	68.48	35.50	11.13	66.27	0.00	182	127	Average	Horizontal																																																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	6406.00	50.53	-----	70.17	35.50	11.13	66.27	0.00	182	133	Average	Horizontal																																																																														
Mode 99: cidx-25_sts-3_packet length-0																																																																																										
 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>6406.00</td><td>49.64</td><td>-----</td><td>69.28</td><td>35.50</td><td>11.13</td><td>66.27</td><td>0.00</td><td>161</td><td>132</td><td>Average</td><td>Horizontal</td></tr></table>			Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	6406.00	49.64	-----	69.28	35.50	11.13	66.27	0.00	161	132	Average	Horizontal																																																	
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	6406.00	49.64	-----	69.28	35.50	11.13	66.27	0.00	161	132	Average	Horizontal																																																																														

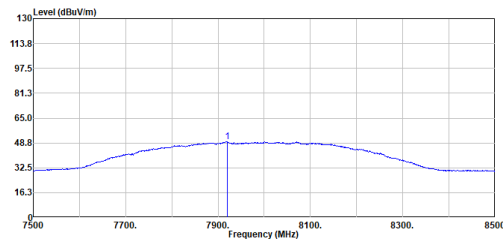

CH09 Radiated Emissions (Fundamental)																																																																																																															
Operating Function	Adapter Mode						Polarization			V																																																																																																					
							Test Distance			3m																																																																																																					
Mode 121: cidx-25_sts-0_packet length-127							Mode 122: cidx-25_sts-1_packet length-127																																																																																																								
 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>8071.00</td><td>47.53</td><td>-----</td><td>-----</td><td>66.32</td><td>35.84</td><td>12.53</td><td>67.16</td><td>0.00</td><td>100</td><td>190</td><td>Average</td><td>Vertical</td></tr></tbody></table>															Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	8071.00	47.53	-----	-----	66.32	35.84	12.53	67.16	0.00	100	190	Average	Vertical	 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>7920.00</td><td>49.51</td><td>-----</td><td>-----</td><td>68.33</td><td>35.86</td><td>12.42</td><td>67.10</td><td>0.00</td><td>100</td><td>193</td><td>Average</td><td>Vertical</td></tr></tbody></table>															Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	7920.00	49.51	-----	-----	68.33	35.86	12.42	67.10	0.00	100	193	Average	Vertical
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																				
1	8071.00	47.53	-----	-----	66.32	35.84	12.53	67.16	0.00	100	190	Average	Vertical																																																																																																		
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																				
1	7920.00	49.51	-----	-----	68.33	35.86	12.42	67.10	0.00	100	193	Average	Vertical																																																																																																		
Mode 123: cidx-25_sts-3_packet length-0																																																																																																															
 <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr></thead><tbody><tr><td>1</td><td>8067.00</td><td>47.90</td><td>-----</td><td>-----</td><td>66.70</td><td>35.83</td><td>12.53</td><td>67.16</td><td>0.00</td><td>100</td><td>198</td><td>Average</td><td>Vertical</td></tr></tbody></table>															Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	8067.00	47.90	-----	-----	66.70	35.83	12.53	67.16	0.00	100	198	Average	Vertical																																																								
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																				
1	8067.00	47.90	-----	-----	66.70	35.83	12.53	67.16	0.00	100	198	Average	Vertical																																																																																																		






<Ant.7>

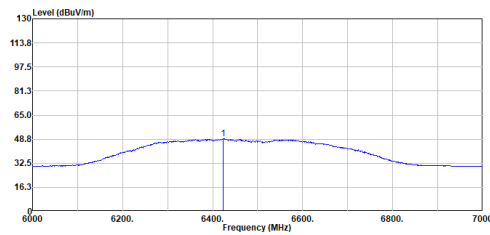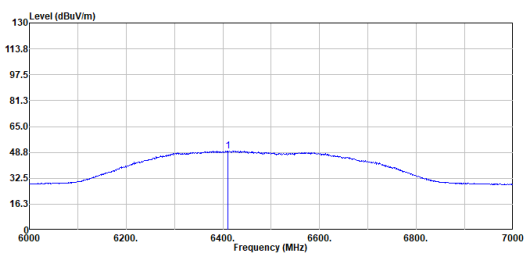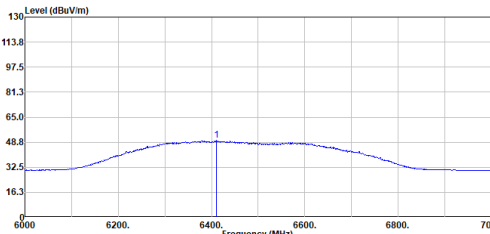CH05 Radiated Emissions (Fundamental)																																																																																										
Operating Function	Adapter Mode					Polarization			V																																																																																	
						Test Distance			3m																																																																																	
Mode 28: cidx-26_sts-0_packet length-127						Mode 29: cidx-26_sts-1_packet length-127																																																																																				
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6424.00</td><td>49.05</td><td>-----</td><td>-----</td><td>68.67</td><td>35.50</td><td>11.14</td><td>66.26</td><td>0.00</td><td>105</td><td>277</td><td>Average</td><td>VERTICAL</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg			1 6424.00	49.05	-----	-----	68.67	35.50	11.14	66.26	0.00	105	277	Average	VERTICAL	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6410.00</td><td>49.71</td><td>-----</td><td>-----</td><td>69.35</td><td>35.50</td><td>11.13</td><td>66.27</td><td>0.00</td><td>101</td><td>268</td><td>Average</td><td>Vertical</td></tr></table>							Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg			1 6410.00	49.71	-----	-----	69.35	35.50	11.13	66.27	0.00	101	268	Average	Vertical
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg																																																																																
1 6424.00	49.05	-----	-----	68.67	35.50	11.14	66.26	0.00	105	277	Average	VERTICAL																																																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg																																																																																
1 6410.00	49.71	-----	-----	69.35	35.50	11.13	66.27	0.00	101	268	Average	Vertical																																																																														
Mode 30: cidx-26_sts-3_packet length-0																																																																																										
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6410.00</td><td>49.82</td><td>-----</td><td>-----</td><td>69.46</td><td>35.50</td><td>11.13</td><td>66.27</td><td>0.00</td><td>100</td><td>267</td><td>Average</td><td>Vertical</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg			1 6410.00	49.82	-----	-----	69.46	35.50	11.13	66.27	0.00	100	267	Average	Vertical																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg																																																																																
1 6410.00	49.82	-----	-----	69.46	35.50	11.13	66.27	0.00	100	267	Average	Vertical																																																																														






CH09 Radiated Emissions (Fundamental)

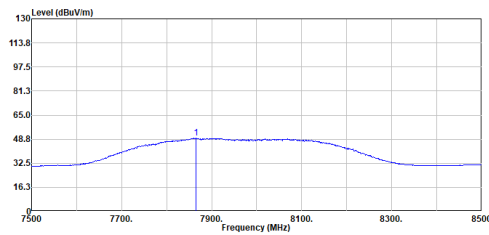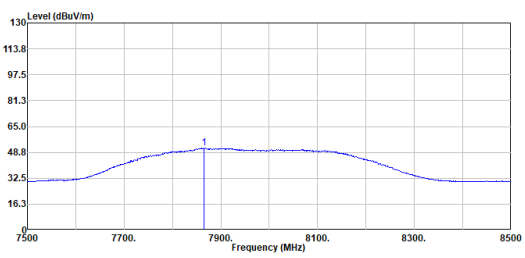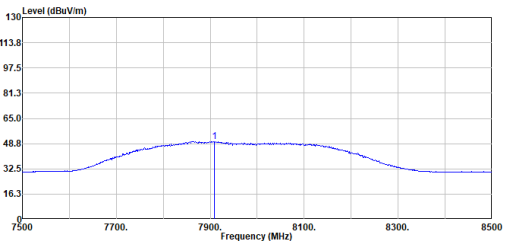Operating Function	Adapter Mode	Polarization	V																																																																														
		Test Distance	3m																																																																														
Mode 52: cidx-26_sts-0_packet length-127		Mode 53: cidx-26_sts-1_packet length-127																																																																															
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 7865.00</td><td>49.64</td><td>-----</td><td>-----</td><td>68.48</td><td>35.83</td><td>12.38</td><td>67.05</td><td>0.00</td><td>100</td><td>266</td><td>Average</td><td>VERTICAL</td></tr></table>		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg			1 7865.00	49.64	-----	-----	68.48	35.83	12.38	67.05	0.00	100	266	Average	VERTICAL	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 7865.00</td><td>51.52</td><td>-----</td><td>-----</td><td>70.36</td><td>35.83</td><td>12.38</td><td>67.05</td><td>0.00</td><td>100</td><td>267</td><td>Average</td><td>Vertical</td></tr></table>		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg			1 7865.00	51.52	-----	-----	70.36	35.83	12.38	67.05	0.00	100	267	Average	Vertical
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																					
MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg																																																																							
1 7865.00	49.64	-----	-----	68.48	35.83	12.38	67.05	0.00	100	266	Average	VERTICAL																																																																					
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																					
MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg																																																																							
1 7865.00	51.52	-----	-----	70.36	35.83	12.38	67.05	0.00	100	267	Average	Vertical																																																																					
Mode 54: cidx-26_sts-3_packet length-0																																																																																	
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 7908.00</td><td>50.11</td><td>-----</td><td>-----</td><td>68.91</td><td>35.88</td><td>12.41</td><td>67.09</td><td>0.00</td><td>100</td><td>268</td><td>Average</td><td>Vertical</td></tr></table>		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg			1 7908.00	50.11	-----	-----	68.91	35.88	12.41	67.09	0.00	100	268	Average	Vertical																																									
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																					
MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg																																																																							
1 7908.00	50.11	-----	-----	68.91	35.88	12.41	67.09	0.00	100	268	Average	Vertical																																																																					






<Ant.11>

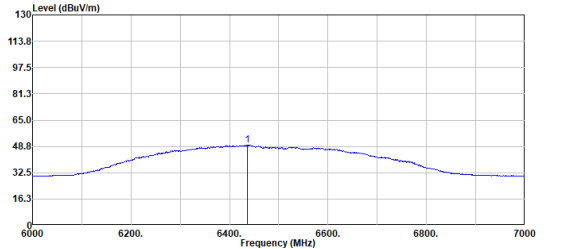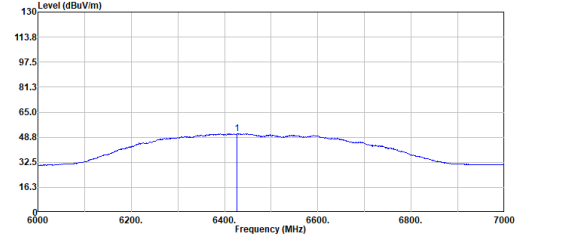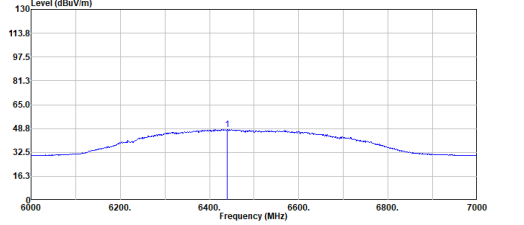CH05 Radiated Emissions (Fundamental)																																																																																										
Operating Function	Adapter Mode		Polarization		H																																																																																					
			Test Distance		3m																																																																																					
Mode 100: cidx-26_sts-0_packet length-127			Mode 101: cidx-26_sts-1_packet length-127																																																																																							
 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6436.00</td><td>49.68</td><td>-----</td><td>-----</td><td>69.28</td><td>35.50</td><td>11.15</td><td>66.25</td><td>0.00</td><td>167</td><td>124</td><td>Average</td><td>Horizontal</td></tr></table>			Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 6436.00	49.68	-----	-----	69.28	35.50	11.15	66.25	0.00	167	124	Average	Horizontal	 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6427.00</td><td>51.02</td><td>-----</td><td>-----</td><td>70.64</td><td>35.50</td><td>11.14</td><td>66.26</td><td>0.00</td><td>176</td><td>128</td><td>Average</td><td>Horizontal</td></tr></table>										Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 6427.00	51.02	-----	-----	70.64	35.50	11.14	66.26	0.00	176	128	Average	Horizontal
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 6436.00	49.68	-----	-----	69.28	35.50	11.15	66.25	0.00	167	124	Average	Horizontal																																																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 6427.00	51.02	-----	-----	70.64	35.50	11.14	66.26	0.00	176	128	Average	Horizontal																																																																														
Mode 102: cidx-26_sts-3_packet length-0																																																																																										
 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6440.00</td><td>48.20</td><td>-----</td><td>-----</td><td>67.79</td><td>35.50</td><td>11.16</td><td>66.25</td><td>0.00</td><td>100</td><td>317</td><td>Average</td><td>Horizontal</td></tr></table>			Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 6440.00	48.20	-----	-----	67.79	35.50	11.16	66.25	0.00	100	317	Average	Horizontal																																																	
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 6440.00	48.20	-----	-----	67.79	35.50	11.16	66.25	0.00	100	317	Average	Horizontal																																																																														






CH09 Radiated Emissions (Fundamental)




Operating Function	Adapter Mode	Polarization	V																																																																														
		Test Distance	3m																																																																														
Mode 124: cidx-26_sts-0_packet length-127		Mode 125: cidx-26_sts-1_packet length-127																																																																															
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 8065.00</td><td>47.25</td><td>-----</td><td>-----</td><td>66.84</td><td>35.84</td><td>12.53</td><td>67.16</td><td>0.00</td><td>100</td><td>196</td><td>Average</td><td>Vertical</td></tr></table>		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 8065.00	47.25	-----	-----	66.84	35.84	12.53	67.16	0.00	100	196	Average	Vertical	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 8064.00</td><td>49.53</td><td>-----</td><td>-----</td><td>68.44</td><td>35.80</td><td>12.47</td><td>67.18</td><td>0.00</td><td>100</td><td>193</td><td>Average</td><td>Vertical</td></tr></table>		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 8064.00	49.53	-----	-----	68.44	35.80	12.47	67.18	0.00	100	193	Average	Vertical
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																							
1 8065.00	47.25	-----	-----	66.84	35.84	12.53	67.16	0.00	100	196	Average	Vertical																																																																					
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																							
1 8064.00	49.53	-----	-----	68.44	35.80	12.47	67.18	0.00	100	193	Average	Vertical																																																																					
Mode 126: cidx-26_sts-3_packet length-0																																																																																	
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 8028.00</td><td>47.92</td><td>-----</td><td>-----</td><td>66.80</td><td>35.80</td><td>12.49</td><td>67.17</td><td>0.00</td><td>100</td><td>195</td><td>Average</td><td>Vertical</td></tr></table>		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 8028.00	47.92	-----	-----	66.80	35.80	12.49	67.17	0.00	100	195	Average	Vertical																																									
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																							
1 8028.00	47.92	-----	-----	66.80	35.80	12.49	67.17	0.00	100	195	Average	Vertical																																																																					



<Ant.7>

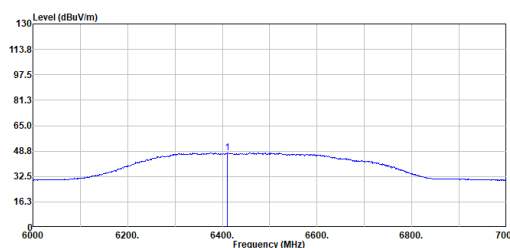

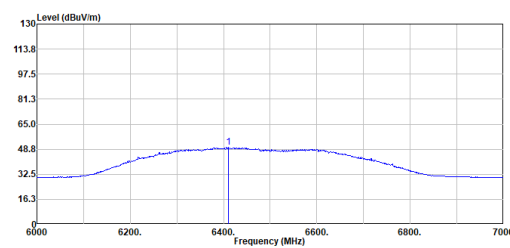
CH05 Radiated Emissions (Fundamental)																																																																																										
Operating Function	Adapter Mode					Polarization			V																																																																																	
						Test Distance			3m																																																																																	
Mode 31: cidx-27_sts-0_packet length-127						Mode 32: cidx-27_sts-1_packet length-127																																																																																				
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6411.00</td><td>47.63</td><td>-----</td><td>-----</td><td>67.27</td><td>35.50</td><td>11.13</td><td>66.27</td><td>0.00</td><td>100</td><td>263</td><td>Average</td><td>VERTICAL</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 6411.00	47.63	-----	-----	67.27	35.50	11.13	66.27	0.00	100	263	Average	VERTICAL	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6410.00</td><td>51.38</td><td>-----</td><td>-----</td><td>71.02</td><td>35.50</td><td>11.13</td><td>66.27</td><td>0.00</td><td>100</td><td>268</td><td>Average</td><td>Vertical</td></tr></table>							Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 6410.00	51.38	-----	-----	71.02	35.50	11.13	66.27	0.00	100	268	Average	Vertical
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 6411.00	47.63	-----	-----	67.27	35.50	11.13	66.27	0.00	100	263	Average	VERTICAL																																																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 6410.00	51.38	-----	-----	71.02	35.50	11.13	66.27	0.00	100	268	Average	Vertical																																																																														
Mode 33: cidx-27_sts-3_packet length-0																																																																																										
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6410.00</td><td>50.05</td><td>-----</td><td>-----</td><td>69.69</td><td>35.50</td><td>11.13</td><td>66.27</td><td>0.00</td><td>101</td><td>268</td><td>Average</td><td>Vertical</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 6410.00	50.05	-----	-----	69.69	35.50	11.13	66.27	0.00	101	268	Average	Vertical																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 6410.00	50.05	-----	-----	69.69	35.50	11.13	66.27	0.00	101	268	Average	Vertical																																																																														

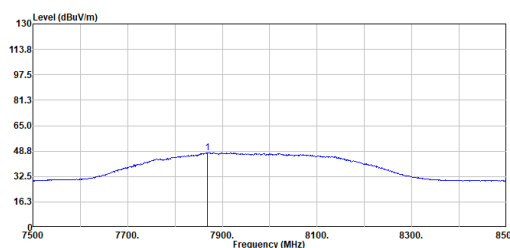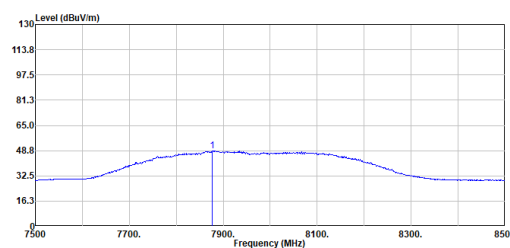

CH09 Radiated Emissions (Fundamental)																																																																																										
Operating Function	Adapter Mode					Polarization			V																																																																																	
						Test Distance			3m																																																																																	
Mode 55: cidx-27_sts-0_packet length-127						Mode 56: cidx-27_sts-1_packet length-127																																																																																				
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>7869.00</td><td>47.67</td><td>-----</td><td>66.50</td><td>35.84</td><td>12.38</td><td>67.05</td><td>0.00</td><td>100</td><td>267</td><td>Average</td><td>VERTICAL</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	7869.00	47.67	-----	66.50	35.84	12.38	67.05	0.00	100	267	Average	VERTICAL	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>7883.00</td><td>49.23</td><td>-----</td><td>68.04</td><td>35.87</td><td>12.39</td><td>67.07</td><td>0.00</td><td>112</td><td>277</td><td>Average</td><td>Vertical</td></tr></table>							Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	7883.00	49.23	-----	68.04	35.87	12.39	67.07	0.00	112	277	Average	Vertical
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	7869.00	47.67	-----	66.50	35.84	12.38	67.05	0.00	100	267	Average	VERTICAL																																																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	7883.00	49.23	-----	68.04	35.87	12.39	67.07	0.00	112	277	Average	Vertical																																																																														
Mode 57: cidx-27_sts-3_packet length-0																																																																																										
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>7876.00</td><td>48.62</td><td>-----</td><td>67.44</td><td>35.85</td><td>12.39</td><td>67.06</td><td>0.00</td><td>111</td><td>274</td><td>Average</td><td>Vertical</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	7876.00	48.62	-----	67.44	35.85	12.39	67.06	0.00	111	274	Average	Vertical																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	7876.00	48.62	-----	67.44	35.85	12.39	67.06	0.00	111	274	Average	Vertical																																																																														



<Ant.11>

CH05 Radiated Emissions (Fundamental)																																																																																										
Operating Function	Adapter Mode					Polarization			H																																																																																	
						Test Distance			3m																																																																																	
Mode 103: cidx-27_sts-0_packet length-127						Mode 104: cidx-27_sts-1_packet length-127																																																																																				
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6457.00</td><td>48.62</td><td>-----</td><td>-----</td><td>68.17</td><td>35.51</td><td>11.17</td><td>66.23</td><td>0.00</td><td>100</td><td>320</td><td>Average</td><td>Horizontal</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 6457.00	48.62	-----	-----	68.17	35.51	11.17	66.23	0.00	100	320	Average	Horizontal	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6449.00</td><td>51.00</td><td>-----</td><td>-----</td><td>71.38</td><td>35.50</td><td>11.16</td><td>66.24</td><td>0.00</td><td>100</td><td>330</td><td>Average</td><td>Horizontal</td></tr></table>							Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 6449.00	51.00	-----	-----	71.38	35.50	11.16	66.24	0.00	100	330	Average	Horizontal
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 6457.00	48.62	-----	-----	68.17	35.51	11.17	66.23	0.00	100	320	Average	Horizontal																																																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 6449.00	51.00	-----	-----	71.38	35.50	11.16	66.24	0.00	100	330	Average	Horizontal																																																																														
Mode 105: cidx-27_sts-3_packet length-0																																																																																										
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6427.00</td><td>48.82</td><td>-----</td><td>-----</td><td>68.44</td><td>35.50</td><td>11.14</td><td>66.26</td><td>0.00</td><td>100</td><td>314</td><td>Average</td><td>Horizontal</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 6427.00	48.82	-----	-----	68.44	35.50	11.14	66.26	0.00	100	314	Average	Horizontal																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 6427.00	48.82	-----	-----	68.44	35.50	11.14	66.26	0.00	100	314	Average	Horizontal																																																																														



CH09 Radiated Emissions (Fundamental)

Operating Function

Adapter Mode


Polarization

V


Test Distance

3m


Mode 127: cidx-27_sts-0_packet length-127

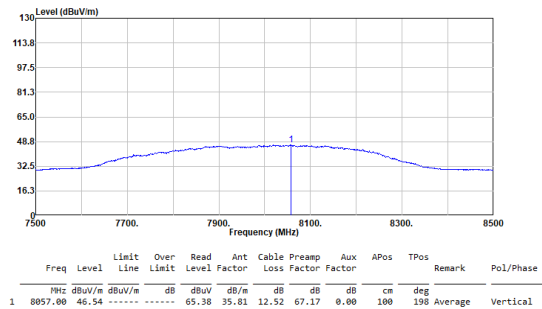

Mode 128: cidx-27_sts-1_packet length-127



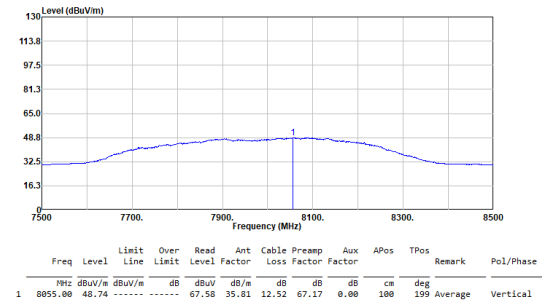


Mode 129: cidx-27_sts-3_packet length-0

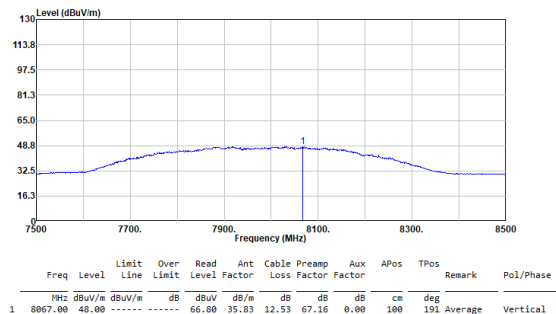






<Ant.7>

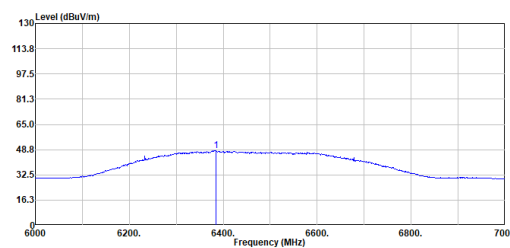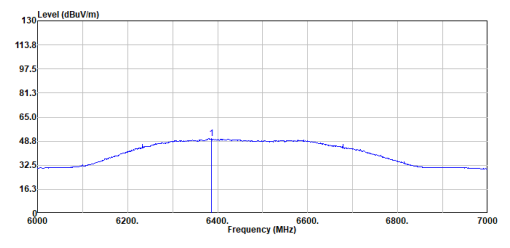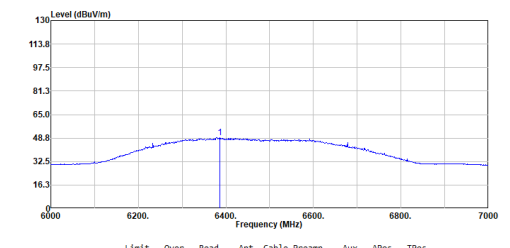CH05 Radiated Emissions (Fundamental)																																																																																										
Operating Function	Adapter Mode		Polarization				V																																																																																			
			Test Distance				3m																																																																																			
Mode 34: cidx-28_sts-0_packet length-127			Mode 35: cidx-28_sts-1_packet length-127																																																																																							
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6384.00</td><td>48.07</td><td>-----</td><td>-----</td><td>67.75</td><td>35.50</td><td>11.11</td><td>66.29</td><td>0.00</td><td>101</td><td>266</td><td>Average</td><td>VERTICAL</td></tr></table>			Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 6384.00	48.07	-----	-----	67.75	35.50	11.11	66.29	0.00	101	266	Average	VERTICAL	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6386.00</td><td>50.43</td><td>-----</td><td>-----</td><td>70.11</td><td>35.50</td><td>11.11</td><td>66.29</td><td>0.00</td><td>101</td><td>267</td><td>Average</td><td>Vertical</td></tr></table>										Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 6386.00	50.43	-----	-----	70.11	35.50	11.11	66.29	0.00	101	267	Average	Vertical
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 6384.00	48.07	-----	-----	67.75	35.50	11.11	66.29	0.00	101	266	Average	VERTICAL																																																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 6386.00	50.43	-----	-----	70.11	35.50	11.11	66.29	0.00	101	267	Average	Vertical																																																																														
Mode 36: cidx-28_sts-3_packet length-0																																																																																										
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6386.00</td><td>49.21</td><td>-----</td><td>-----</td><td>68.89</td><td>35.50</td><td>11.11</td><td>66.29</td><td>0.00</td><td>101</td><td>266</td><td>Average</td><td>Vertical</td></tr></table>			Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 6386.00	49.21	-----	-----	68.89	35.50	11.11	66.29	0.00	101	266	Average	Vertical																																																	
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 6386.00	49.21	-----	-----	68.89	35.50	11.11	66.29	0.00	101	266	Average	Vertical																																																																														






CH09 Radiated Emissions (Fundamental)

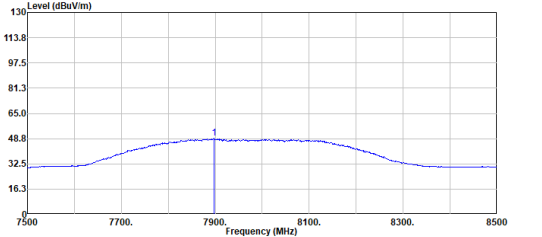
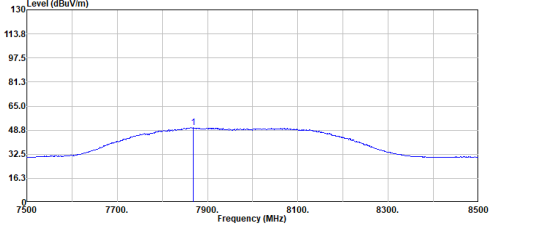
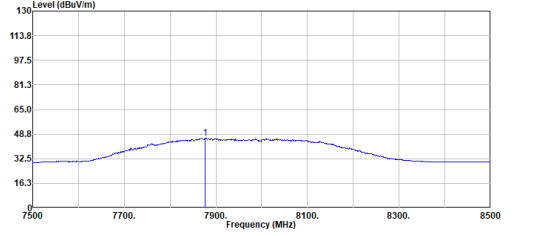
Operating Function	Adapter Mode	Polarization	V																																																																														
		Test Distance	3m																																																																														
Mode 58: cidx-28_sts-0_packet length-127		Mode 59: cidx-28_sts-1_packet length-127																																																																															
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 7897.00</td><td>48.89</td><td>-----</td><td>-----</td><td>67.68</td><td>35.89</td><td>12.40</td><td>67.08</td><td>0.00</td><td>118</td><td>266 Average</td><td></td><td>Vertical</td></tr></table>		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 7897.00	48.89	-----	-----	67.68	35.89	12.40	67.08	0.00	118	266 Average		Vertical	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 7868.00</td><td>50.46</td><td>-----</td><td>-----</td><td>69.29</td><td>35.84</td><td>12.38</td><td>67.05</td><td>0.00</td><td>100</td><td>265 Average</td><td></td><td>Vertical</td></tr></table>		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 7868.00	50.46	-----	-----	69.29	35.84	12.38	67.05	0.00	100	265 Average		Vertical
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																							
1 7897.00	48.89	-----	-----	67.68	35.89	12.40	67.08	0.00	118	266 Average		Vertical																																																																					
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																							
1 7868.00	50.46	-----	-----	69.29	35.84	12.38	67.05	0.00	100	265 Average		Vertical																																																																					
Mode 60: cidx-28_sts-3_packet length-0																																																																																	
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 7876.00</td><td>46.35</td><td>-----</td><td>-----</td><td>65.17</td><td>35.85</td><td>12.39</td><td>67.06</td><td>0.00</td><td>100</td><td>281 Average</td><td></td><td>Vertical</td></tr></table>		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 7876.00	46.35	-----	-----	65.17	35.85	12.39	67.06	0.00	100	281 Average		Vertical																																									
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																							
1 7876.00	46.35	-----	-----	65.17	35.85	12.39	67.06	0.00	100	281 Average		Vertical																																																																					



<Ant.11>

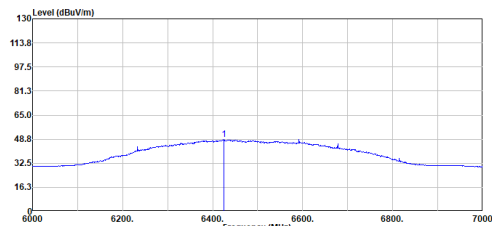
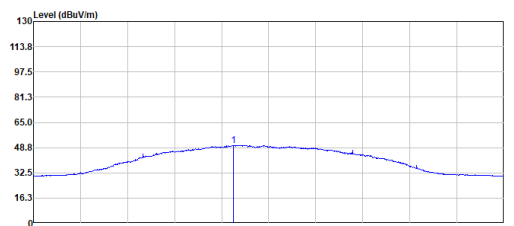
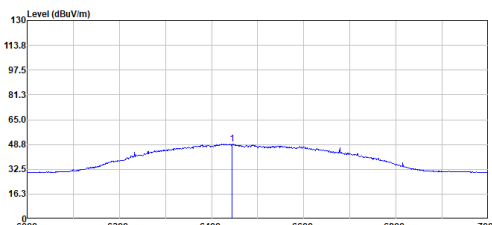
CH05 Radiated Emissions (Fundamental)																																																																																										
Operating Function	Adapter Mode					Polarization			H																																																																																	
						Test Distance			3m																																																																																	
Mode 106: cidx-28_sts-0_packet length-127						Mode 107: cidx-28_sts-1_packet length-127																																																																																				
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6425.00</td><td>48.58</td><td>-----</td><td>-----</td><td>68.20</td><td>35.50</td><td>11.14</td><td>66.26</td><td>0.00</td><td>111</td><td>317</td><td>Average</td><td>Horizontal</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg			1 6425.00	48.58	-----	-----	68.20	35.50	11.14	66.26	0.00	111	317	Average	Horizontal	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6425.00</td><td>50.26</td><td>-----</td><td>-----</td><td>69.88</td><td>35.50</td><td>11.14</td><td>66.26</td><td>0.00</td><td>111</td><td>318</td><td>Average</td><td>Horizontal</td></tr></table>							Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg			1 6425.00	50.26	-----	-----	69.88	35.50	11.14	66.26	0.00	111	318	Average	Horizontal
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg																																																																																
1 6425.00	48.58	-----	-----	68.20	35.50	11.14	66.26	0.00	111	317	Average	Horizontal																																																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg																																																																																
1 6425.00	50.26	-----	-----	69.88	35.50	11.14	66.26	0.00	111	318	Average	Horizontal																																																																														
Mode 108: cidx-28_sts-3_packet length-0																																																																																										
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6444.00</td><td>48.99</td><td>-----</td><td>-----</td><td>68.57</td><td>35.50</td><td>11.16</td><td>66.24</td><td>0.00</td><td>111</td><td>317</td><td>Average</td><td>Horizontal</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg			1 6444.00	48.99	-----	-----	68.57	35.50	11.16	66.24	0.00	111	317	Average	Horizontal																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg																																																																																
1 6444.00	48.99	-----	-----	68.57	35.50	11.16	66.24	0.00	111	317	Average	Horizontal																																																																														

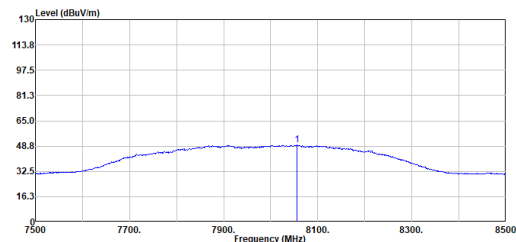




CH09 Radiated Emissions (Fundamental)																																																																																																	
Operating Function	Adapter Mode				Polarization				V																																																																																								
					Test Distance				3m																																																																																								
Mode 130: cidx-28_sts-0_packet length-127							Mode 131: cidx-28_sts-1_packet length-127																																																																																										
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>8042.00</td><td>47.74</td><td>-----</td><td>-----</td><td>66.68</td><td>35.80</td><td>12.51</td><td>67.17</td><td>0.00</td><td>109</td><td>192</td><td>Average</td><td>Vertical</td></tr></table> <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>8055.00</td><td>49.34</td><td>-----</td><td>-----</td><td>68.18</td><td>35.81</td><td>12.52</td><td>67.17</td><td>0.00</td><td>106</td><td>193</td><td>Average</td><td>Vertical</td></tr></table>															Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	8042.00	47.74	-----	-----	66.68	35.80	12.51	67.17	0.00	109	192	Average	Vertical		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	8055.00	49.34	-----	-----	68.18	35.81	12.52	67.17	0.00	106	193	Average	Vertical
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																						
1	8042.00	47.74	-----	-----	66.68	35.80	12.51	67.17	0.00	109	192	Average	Vertical																																																																																				
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																						
1	8055.00	49.34	-----	-----	68.18	35.81	12.52	67.17	0.00	106	193	Average	Vertical																																																																																				
Mode 132: cidx-28_sts-3_packet length-0																																																																																																	
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>8067.00</td><td>48.07</td><td>-----</td><td>-----</td><td>66.87</td><td>35.83</td><td>12.53</td><td>67.16</td><td>0.00</td><td>100</td><td>193</td><td>Average</td><td>Vertical</td></tr></table>															Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	8067.00	48.07	-----	-----	66.87	35.83	12.53	67.16	0.00	100	193	Average	Vertical																																										
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																						
1	8067.00	48.07	-----	-----	66.87	35.83	12.53	67.16	0.00	100	193	Average	Vertical																																																																																				



<Ant.7>

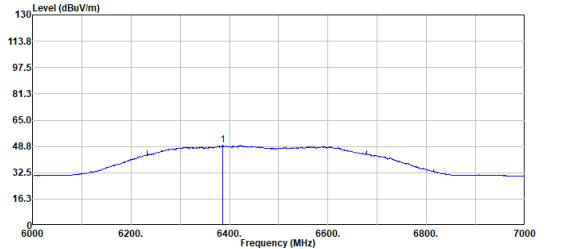
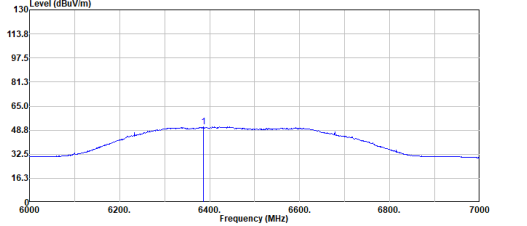
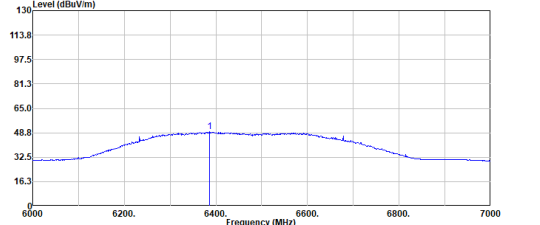
CH05 Radiated Emissions (Fundamental)																																																																																										
Operating Function	Adapter Mode				Polarization			V																																																																																		
					Test Distance			3m																																																																																		
Mode 37: cidx-29_sts-0_packet length-150						Mode 38: cidx-29_sts-1_packet length-150																																																																																				
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>6386.00</td><td>49.61</td><td>-----</td><td>69.29</td><td>35.50</td><td>11.11</td><td>66.29</td><td>0.00</td><td>102</td><td>268</td><td>Average</td><td>Vertical</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	6386.00	49.61	-----	69.29	35.50	11.11	66.29	0.00	102	268	Average	Vertical	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>6386.00</td><td>50.98</td><td>-----</td><td>70.66</td><td>35.50</td><td>11.11</td><td>66.29</td><td>0.00</td><td>100</td><td>268</td><td>Average</td><td>Vertical</td></tr></table>							Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	6386.00	50.98	-----	70.66	35.50	11.11	66.29	0.00	100	268	Average	Vertical
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	6386.00	49.61	-----	69.29	35.50	11.11	66.29	0.00	102	268	Average	Vertical																																																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	6386.00	50.98	-----	70.66	35.50	11.11	66.29	0.00	100	268	Average	Vertical																																																																														
Mode 39: cidx-29_sts-3_packet length-0																																																																																										
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>6386.00</td><td>49.45</td><td>-----</td><td>69.13</td><td>35.50</td><td>11.11</td><td>66.29</td><td>0.00</td><td>104</td><td>267</td><td>Average</td><td>Vertical</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	6386.00	49.45	-----	69.13	35.50	11.11	66.29	0.00	104	267	Average	Vertical																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	6386.00	49.45	-----	69.13	35.50	11.11	66.29	0.00	104	267	Average	Vertical																																																																														

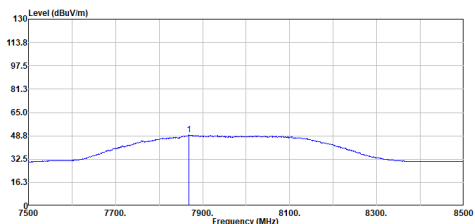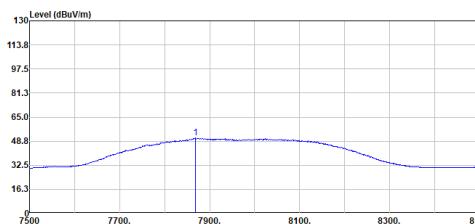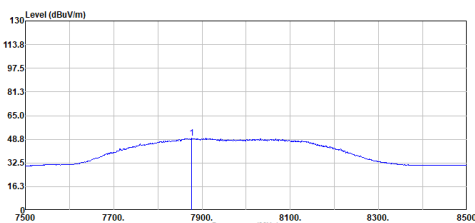

CH09 Radiated Emissions (Fundamental)																																																																																										
Operating Function	Adapter Mode				Polarization		V																																																																																			
					Test Distance		3m																																																																																			
Mode 61: cidx-29_sts-0_packet length-150				Mode 62: cidx-29_sts-1_packet length-150																																																																																						
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 7869.00</td><td>49.52</td><td>-----</td><td>-----</td><td>68.35</td><td>35.84</td><td>12.38</td><td>67.05</td><td>0.00</td><td>100</td><td>266</td><td>Average</td><td>VERTICAL</td></tr></table>				Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 7869.00	49.52	-----	-----	68.35	35.84	12.38	67.05	0.00	100	266	Average	VERTICAL	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 7868.00</td><td>51.04</td><td>-----</td><td>-----</td><td>69.87</td><td>35.84</td><td>12.38</td><td>67.05</td><td>0.00</td><td>100</td><td>264</td><td>Average</td><td>Vertical</td></tr></table>									Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 7868.00	51.04	-----	-----	69.87	35.84	12.38	67.05	0.00	100	264	Average	Vertical
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 7869.00	49.52	-----	-----	68.35	35.84	12.38	67.05	0.00	100	266	Average	VERTICAL																																																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 7868.00	51.04	-----	-----	69.87	35.84	12.38	67.05	0.00	100	264	Average	Vertical																																																																														
Mode 63: cidx-29_sts-3_packet length-0																																																																																										
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 7876.00</td><td>49.49</td><td>-----</td><td>-----</td><td>68.31</td><td>35.85</td><td>12.39</td><td>67.06</td><td>0.00</td><td>103</td><td>265</td><td>Average</td><td>Vertical</td></tr></table>				Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 7876.00	49.49	-----	-----	68.31	35.85	12.39	67.06	0.00	103	265	Average	Vertical																																																
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 7876.00	49.49	-----	-----	68.31	35.85	12.39	67.06	0.00	103	265	Average	Vertical																																																																														



<Ant.11>

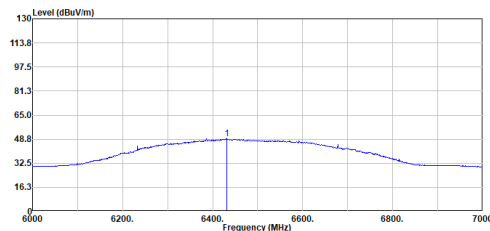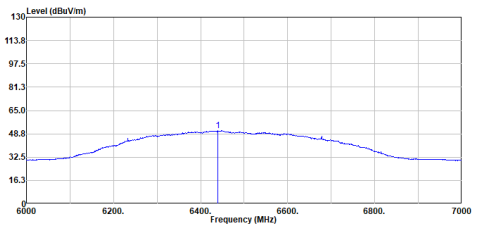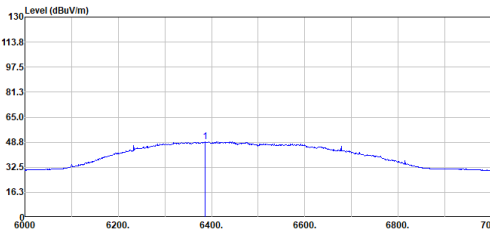CH05 Radiated Emissions (Fundamental)																																																																																										
Operating Function	Adapter Mode					Polarization		H																																																																																		
						Test Distance		3m																																																																																		
Mode 109: cidx-29_sts-0_packet length-150						Mode 110: cidx-29_sts-1_packet length-150																																																																																				
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6432.00</td><td>48.86</td><td>-----</td><td></td><td>68.46</td><td>35.50</td><td>11.15</td><td>66.25</td><td>0.00</td><td>100</td><td>318</td><td>Average</td><td>Horizontal</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg			1 6432.00	48.86	-----		68.46	35.50	11.15	66.25	0.00	100	318	Average	Horizontal	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6440.00</td><td>50.85</td><td>-----</td><td></td><td>70.44</td><td>35.50</td><td>11.16</td><td>66.25</td><td>0.00</td><td>110</td><td>318</td><td>Average</td><td>Horizontal</td></tr></table>							Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg			1 6440.00	50.85	-----		70.44	35.50	11.16	66.25	0.00	110	318	Average	Horizontal
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg																																																																																
1 6432.00	48.86	-----		68.46	35.50	11.15	66.25	0.00	100	318	Average	Horizontal																																																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg																																																																																
1 6440.00	50.85	-----		70.44	35.50	11.16	66.25	0.00	110	318	Average	Horizontal																																																																														
Mode 111: cidx-29_sts-3_packet length-0																																																																																										
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dB</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6386.00</td><td>49.19</td><td>-----</td><td></td><td>68.87</td><td>35.50</td><td>11.11</td><td>66.29</td><td>0.00</td><td>143</td><td>139</td><td>Average</td><td>Horizontal</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg			1 6386.00	49.19	-----		68.87	35.50	11.11	66.29	0.00	143	139	Average	Horizontal																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m		dB	dB/m	dB	dB	dB	cm	deg																																																																																
1 6386.00	49.19	-----		68.87	35.50	11.11	66.29	0.00	143	139	Average	Horizontal																																																																														



CH09 Radiated Emissions (Fundamental)

Operating Function

Adapter Mode


Polarization

V


Test Distance

3m


Mode 133: cidx-29_sts-0_packet length-150

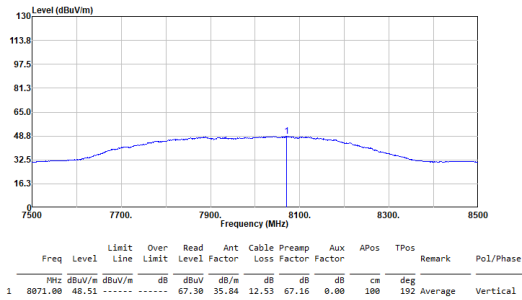

Mode 134: cidx-29_sts-1_packet length-150



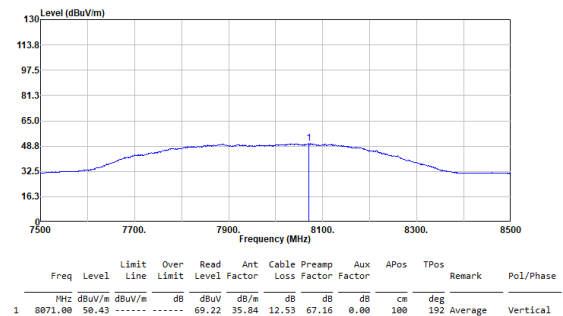


Mode 135: cidx-29_sts-3_packet length-0

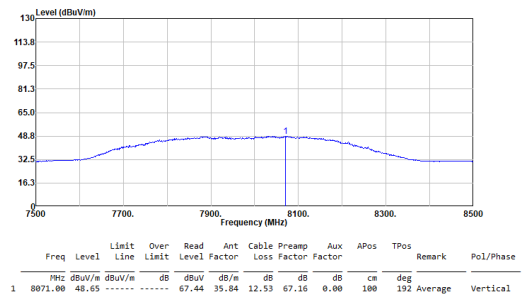






<Ant.7>

CH05 Radiated Emissions (Fundamental)																																																																																										
Operating Function	Adapter Mode					Polarization		V																																																																																		
						Test Distance		3m																																																																																		
Mode 40: cidx-30_sts-0_packet length-150					Mode 41: cidx-30_sts-1_packet length-150																																																																																					
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6386.00</td><td>49.56</td><td>-----</td><td>-----</td><td>69.24</td><td>35.50</td><td>11.11</td><td>66.29</td><td>0.00</td><td>100</td><td>267</td><td>Average</td><td>Vertical</td></tr></table>					Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 6386.00	49.56	-----	-----	69.24	35.50	11.11	66.29	0.00	100	267	Average	Vertical	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6386.00</td><td>51.24</td><td>-----</td><td>-----</td><td>70.92</td><td>35.50</td><td>11.11</td><td>66.29</td><td>0.00</td><td>100</td><td>268</td><td>Average</td><td>Vertical</td></tr></table>								Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 6386.00	51.24	-----	-----	70.92	35.50	11.11	66.29	0.00	100	268	Average	Vertical
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 6386.00	49.56	-----	-----	69.24	35.50	11.11	66.29	0.00	100	267	Average	Vertical																																																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 6386.00	51.24	-----	-----	70.92	35.50	11.11	66.29	0.00	100	268	Average	Vertical																																																																														
Mode 42: cidx-30_sts-3_packet length-0																																																																																										
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6386.00</td><td>49.00</td><td>-----</td><td>-----</td><td>69.48</td><td>35.50</td><td>11.11</td><td>66.29</td><td>0.00</td><td>101</td><td>266</td><td>Average</td><td>Vertical</td></tr></table>					Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 6386.00	49.00	-----	-----	69.48	35.50	11.11	66.29	0.00	101	266	Average	Vertical																																															
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 6386.00	49.00	-----	-----	69.48	35.50	11.11	66.29	0.00	101	266	Average	Vertical																																																																														






CH09 Radiated Emissions (Fundamental)

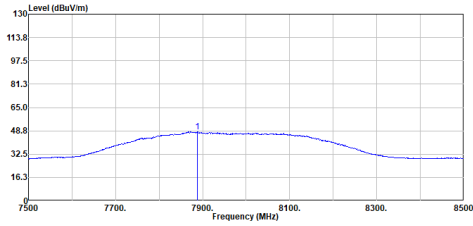
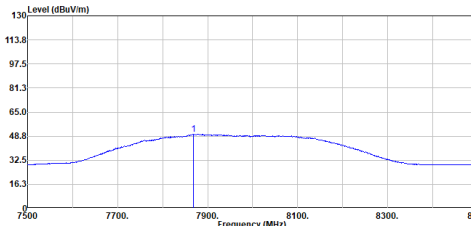
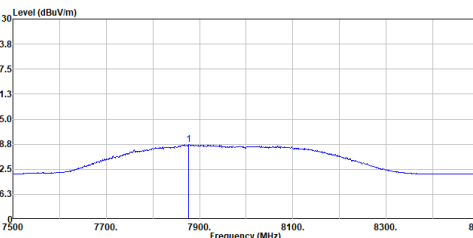
Operating Function	Adapter Mode	Polarization	V																																																																														
		Test Distance	3m																																																																														
Mode 64: cidx-30_sts-0_packet length-150		Mode 65: cidx-30_sts-1_packet length-150																																																																															
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 7888.00</td><td>47.95</td><td>-----</td><td>-----</td><td>66.74</td><td>35.88</td><td>12.40</td><td>67.07</td><td>0.00</td><td>100</td><td>264</td><td>Average</td><td>Vertical</td></tr></table>		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 7888.00	47.95	-----	-----	66.74	35.88	12.40	67.07	0.00	100	264	Average	Vertical	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 7868.00</td><td>50.16</td><td>-----</td><td>-----</td><td>68.99</td><td>35.84</td><td>12.38</td><td>67.05</td><td>0.00</td><td>100</td><td>265</td><td>Average</td><td>Vertical</td></tr></table>		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 7868.00	50.16	-----	-----	68.99	35.84	12.38	67.05	0.00	100	265	Average	Vertical
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																							
1 7888.00	47.95	-----	-----	66.74	35.88	12.40	67.07	0.00	100	264	Average	Vertical																																																																					
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																							
1 7868.00	50.16	-----	-----	68.99	35.84	12.38	67.05	0.00	100	265	Average	Vertical																																																																					
Mode 66: cidx-30_sts-3_packet length-0																																																																																	
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 7876.00</td><td>48.48</td><td>-----</td><td>-----</td><td>67.30</td><td>35.85</td><td>12.39</td><td>67.06</td><td>0.00</td><td>100</td><td>265</td><td>Average</td><td>Vertical</td></tr></table>		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 7876.00	48.48	-----	-----	67.30	35.85	12.39	67.06	0.00	100	265	Average	Vertical																																									
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																							
1 7876.00	48.48	-----	-----	67.30	35.85	12.39	67.06	0.00	100	265	Average	Vertical																																																																					



<Ant.11>


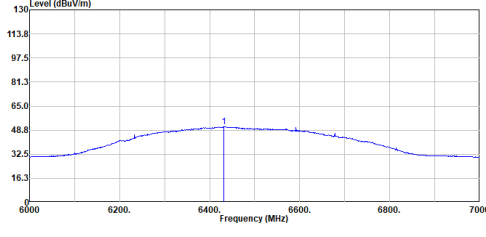

CH05 Radiated Emissions (Fundamental)																																																																																										
Operating Function	Adapter Mode					Polarization			H																																																																																	
						Test Distance			3m																																																																																	
Mode 112: cidx-30_sts-0_packet length-150						Mode 113: cidx-30_sts-1_packet length-150																																																																																				
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>6432.00</td><td>49.07</td><td>-----</td><td>68.67</td><td>35.50</td><td>11.15</td><td>66.25</td><td>0.00</td><td>100</td><td>317</td><td>Average</td><td>Horizontal</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	6432.00	49.07	-----	68.67	35.50	11.15	66.25	0.00	100	317	Average	Horizontal	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>6432.00</td><td>51.16</td><td>-----</td><td>70.76</td><td>35.50</td><td>11.15</td><td>66.25</td><td>0.00</td><td>100</td><td>318</td><td>Average</td><td>Horizontal</td></tr></table>							Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	6432.00	51.16	-----	70.76	35.50	11.15	66.25	0.00	100	318	Average	Horizontal
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	6432.00	49.07	-----	68.67	35.50	11.15	66.25	0.00	100	317	Average	Horizontal																																																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	6432.00	51.16	-----	70.76	35.50	11.15	66.25	0.00	100	318	Average	Horizontal																																																																														
Mode 114: cidx-30_sts-3_packet length-0																																																																																										
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>6386.00</td><td>50.26</td><td>-----</td><td>69.94</td><td>35.50</td><td>11.11</td><td>66.29</td><td>0.00</td><td>176</td><td>128</td><td>Average</td><td>Horizontal</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	6386.00	50.26	-----	69.94	35.50	11.11	66.29	0.00	176	128	Average	Horizontal																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1	6386.00	50.26	-----	69.94	35.50	11.11	66.29	0.00	176	128	Average	Horizontal																																																																														

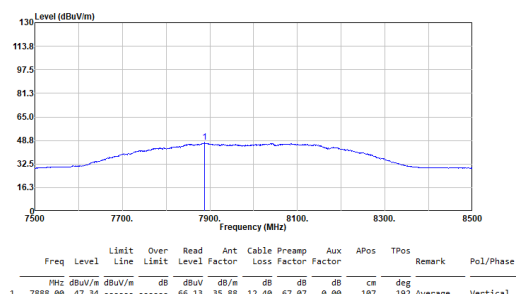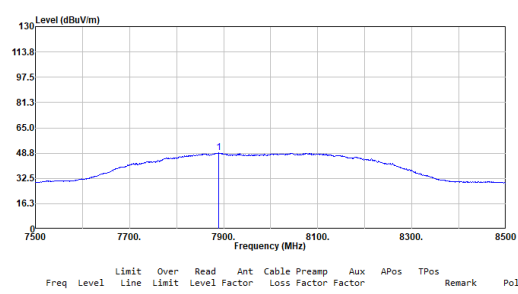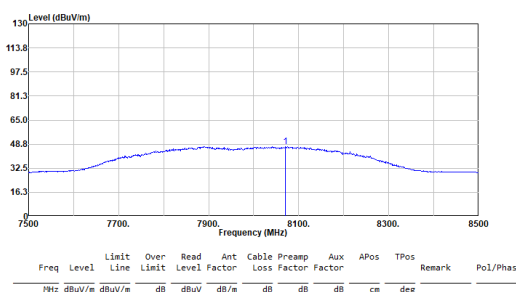

CH09 Radiated Emissions (Fundamental)												
Operating Function	Adapter Mode		Polarization				V					
			Test Distance				3m					
Mode 136: cidx-30_sts-0_packet length-150			Mode 137: cidx-30_sts-1_packet length-150									
												
Mode 138: cidx-30_sts-3_packet length-0												
												






<Ant.7>

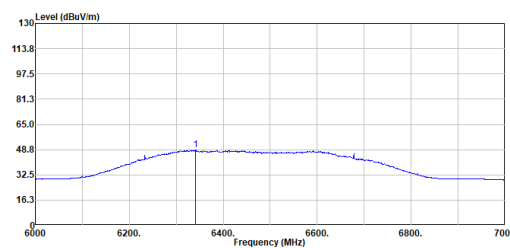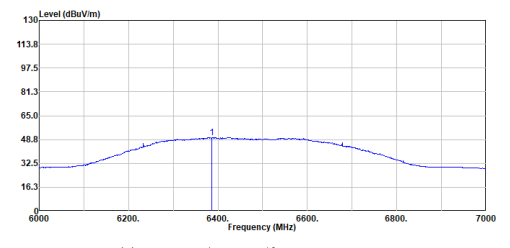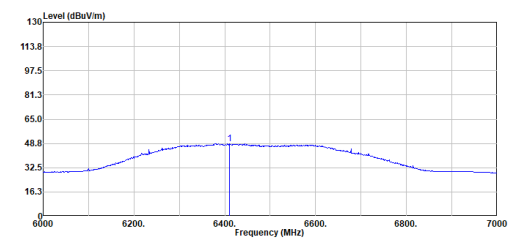CH05 Radiated Emissions (Fundamental)																																																																																										
Operating Function	Adapter Mode				Polarization			V																																																																																		
					Test Distance			3m																																																																																		
Mode 43: cidx-31_sts-0_packet length-150						Mode 44: cidx-31_sts-1_packet length-150																																																																																				
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6341.00</td><td>48.45</td><td>-----</td><td>-----</td><td>68.20</td><td>35.50</td><td>11.07</td><td>66.32</td><td>0.00</td><td>100</td><td>271</td><td>Average</td><td>Vertical</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 6341.00	48.45	-----	-----	68.20	35.50	11.07	66.32	0.00	100	271	Average	Vertical	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6386.00</td><td>50.27</td><td>-----</td><td>-----</td><td>69.95</td><td>35.50</td><td>11.11</td><td>66.29</td><td>0.00</td><td>104</td><td>267</td><td>Average</td><td>Vertical</td></tr></table>							Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 6386.00	50.27	-----	-----	69.95	35.50	11.11	66.29	0.00	104	267	Average	Vertical
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 6341.00	48.45	-----	-----	68.20	35.50	11.07	66.32	0.00	100	271	Average	Vertical																																																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 6386.00	50.27	-----	-----	69.95	35.50	11.11	66.29	0.00	104	267	Average	Vertical																																																																														
Mode 45: cidx-31_sts-3_packet length-0																																																																																										
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6410.00</td><td>48.74</td><td>-----</td><td>-----</td><td>68.38</td><td>35.50</td><td>11.13</td><td>66.27</td><td>0.00</td><td>100</td><td>267</td><td>Average</td><td>Vertical</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 6410.00	48.74	-----	-----	68.38	35.50	11.13	66.27	0.00	100	267	Average	Vertical																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 6410.00	48.74	-----	-----	68.38	35.50	11.13	66.27	0.00	100	267	Average	Vertical																																																																														






CH09 Radiated Emissions (Fundamental)

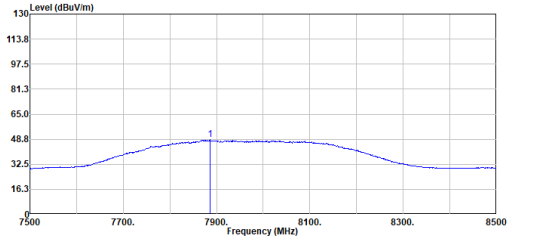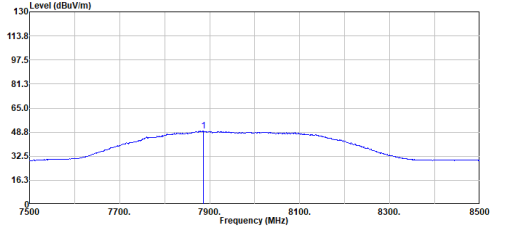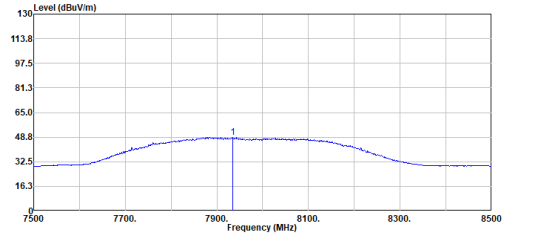Operating Function	Adapter Mode	Polarization	V																																																																														
		Test Distance	3m																																																																														
Mode 67: cidx-31_sts-0_packet length-150		Mode 68: cidx-31_sts-1_packet length-150																																																																															
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 7886.00</td><td>48.32</td><td>-----</td><td>-----</td><td>67.12</td><td>35.87</td><td>12.40</td><td>67.07</td><td>0.00</td><td>100</td><td>266</td><td>Average</td><td>Vertical</td></tr></table>		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 7886.00	48.32	-----	-----	67.12	35.87	12.40	67.07	0.00	100	266	Average	Vertical	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 7886.00</td><td>49.50</td><td>-----</td><td>-----</td><td>68.30</td><td>35.87</td><td>12.40</td><td>67.07</td><td>0.00</td><td>100</td><td>265</td><td>Average</td><td>Vertical</td></tr></table>		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 7886.00	49.50	-----	-----	68.30	35.87	12.40	67.07	0.00	100	265	Average	Vertical
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																							
1 7886.00	48.32	-----	-----	67.12	35.87	12.40	67.07	0.00	100	266	Average	Vertical																																																																					
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																							
1 7886.00	49.50	-----	-----	68.30	35.87	12.40	67.07	0.00	100	265	Average	Vertical																																																																					
Mode 69: cidx-31_sts-3_packet length-0																																																																																	
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 7934.00</td><td>48.72</td><td>-----</td><td>-----</td><td>67.58</td><td>35.83</td><td>12.43</td><td>67.12</td><td>0.00</td><td>100</td><td>278</td><td>Average</td><td>Vertical</td></tr></table>		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 7934.00	48.72	-----	-----	67.58	35.83	12.43	67.12	0.00	100	278	Average	Vertical																																									
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																							
1 7934.00	48.72	-----	-----	67.58	35.83	12.43	67.12	0.00	100	278	Average	Vertical																																																																					






<Ant.11>

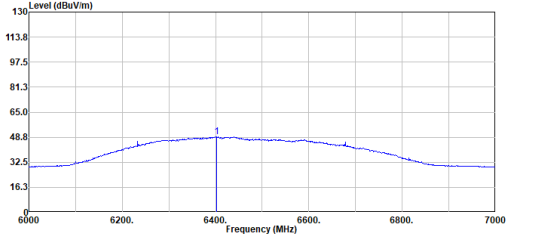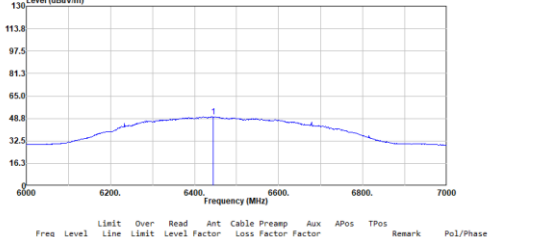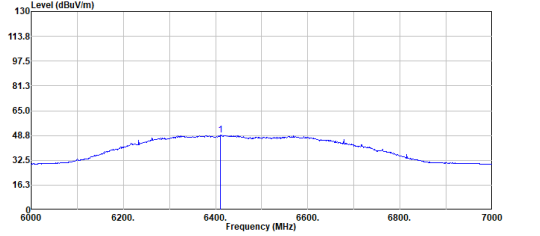CH05 Radiated Emissions (Fundamental)																																																																																																					
Operating Function	Adapter Mode		Polarization				H																																																																																														
			Test Distance				3m																																																																																														
Mode 115: cidx-31_sts-0_packet length-150						Mode 116: cidx-31_sts-1_packet length-150																																																																																															
<table><tr><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>6403.00</td><td>48.91</td><td>-----</td><td>66.57</td><td>35.50</td><td>11.12</td><td>66.28</td><td>0.00</td><td>165</td><td>130 Average</td><td>Horizontal</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	Freq	Level	Line	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	6403.00	48.91	-----	66.57	35.50	11.12	66.28	0.00	165	130 Average	Horizontal	<table><tr><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>6444.00</td><td>50.09</td><td>-----</td><td>69.67</td><td>35.50</td><td>11.16</td><td>66.24</td><td>0.00</td><td>109</td><td>110 Average</td><td>Horizontal</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	Freq	Level	Line	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	6444.00	50.09	-----	69.67	35.50	11.16	66.24	0.00	109	110 Average	Horizontal
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																																											
Freq	Level	Line	Level	Factor	Loss	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	6403.00	48.91	-----	66.57	35.50	11.12	66.28	0.00	165	130 Average	Horizontal																																																																																										
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																																											
Freq	Level	Line	Level	Factor	Loss	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	6444.00	50.09	-----	69.67	35.50	11.16	66.24	0.00	109	110 Average	Horizontal																																																																																										
Mode 117: cidx-31_sts-3_packet length-0																																																																																																					
<table><tr><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>6410.00</td><td>49.03</td><td>-----</td><td>68.67</td><td>35.50</td><td>11.13</td><td>66.27</td><td>0.00</td><td>153</td><td>134 Average</td><td>Horizontal</td></tr></table>						Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	Freq	Level	Line	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	6410.00	49.03	-----	68.67	35.50	11.13	66.27	0.00	153	134 Average	Horizontal																																																			
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																																											
Freq	Level	Line	Level	Factor	Loss	Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	6410.00	49.03	-----	68.67	35.50	11.13	66.27	0.00	153	134 Average	Horizontal																																																																																										






CH09 Radiated Emissions (Fundamental)




Operating Function	Adapter Mode	Polarization	V																																																																														
		Test Distance	3m																																																																														
Mode 139: cidx-31_sts-0_packet length-150		Mode 140: cidx-31_sts-1_packet length-150																																																																															
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 8071.00</td><td>47.67</td><td>-----</td><td>-----</td><td>66.46</td><td>35.84</td><td>12.53</td><td>67.16</td><td>0.00</td><td>100</td><td>194</td><td>Average</td><td>Vertical</td></tr></table>		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 8071.00	47.67	-----	-----	66.46	35.84	12.53	67.16	0.00	100	194	Average	Vertical	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 8071.02</td><td>48.05</td><td>-----</td><td>-----</td><td>66.84</td><td>35.84</td><td>12.53</td><td>67.16</td><td>0.00</td><td>100</td><td>193</td><td>Average</td><td>Vertical</td></tr></table>		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 8071.02	48.05	-----	-----	66.84	35.84	12.53	67.16	0.00	100	193	Average	Vertical
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																							
1 8071.00	47.67	-----	-----	66.46	35.84	12.53	67.16	0.00	100	194	Average	Vertical																																																																					
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																							
1 8071.02	48.05	-----	-----	66.84	35.84	12.53	67.16	0.00	100	193	Average	Vertical																																																																					
Mode 141: cidx-31_sts-3_packet length-0																																																																																	
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 8033.00</td><td>48.69</td><td>-----</td><td>-----</td><td>67.56</td><td>35.80</td><td>12.50</td><td>67.17</td><td>0.00</td><td>100</td><td>192</td><td>Average</td><td>Vertical</td></tr></table>		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 8033.00	48.69	-----	-----	67.56	35.80	12.50	67.17	0.00	100	192	Average	Vertical																																									
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																							
1 8033.00	48.69	-----	-----	67.56	35.80	12.50	67.17	0.00	100	192	Average	Vertical																																																																					



<Ant.7>

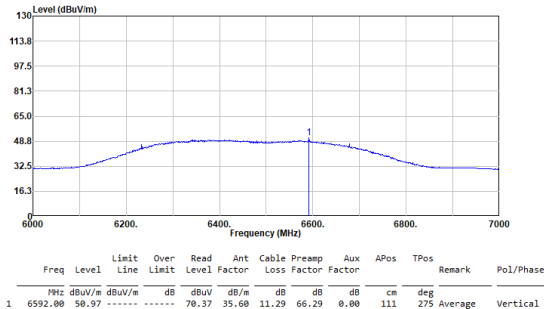
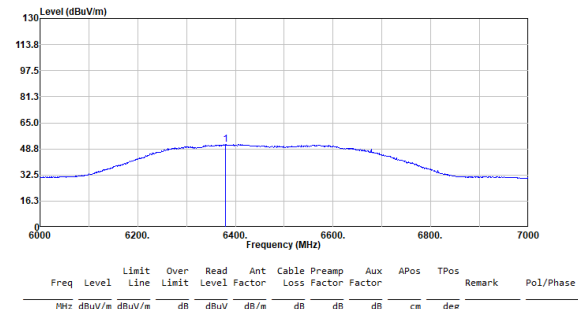
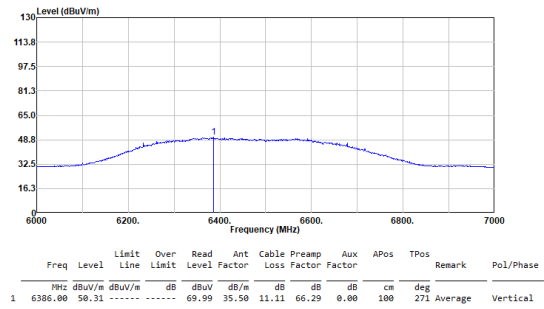
CH05 Radiated Emissions (Fundamental)																																																																																																	
Operating Function	Adapter Mode				Polarization				V																																																																																								
					Test Distance				3m																																																																																								
Mode 46: cidx-32_sts-0_packet length-150							Mode 47: cidx-32_sts-1_packet length-150																																																																																										
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>6592.00</td><td>50.97</td><td>-----</td><td>-----</td><td>70.37</td><td>35.60</td><td>11.29</td><td>66.29</td><td>0.00</td><td>111</td><td>275</td><td>Average</td><td>Vertical</td></tr></table> <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>6388.00</td><td>51.73</td><td>-----</td><td>-----</td><td>71.42</td><td>35.50</td><td>11.10</td><td>66.29</td><td>0.00</td><td>100</td><td>274</td><td>Average</td><td>Vertical</td></tr></table>															Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	6592.00	50.97	-----	-----	70.37	35.60	11.29	66.29	0.00	111	275	Average	Vertical		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	6388.00	51.73	-----	-----	71.42	35.50	11.10	66.29	0.00	100	274	Average	Vertical
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																						
1	6592.00	50.97	-----	-----	70.37	35.60	11.29	66.29	0.00	111	275	Average	Vertical																																																																																				
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																						
1	6388.00	51.73	-----	-----	71.42	35.50	11.10	66.29	0.00	100	274	Average	Vertical																																																																																				
Mode 48: cidx-32_sts-3_packet length-0																																																																																																	
<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>6386.00</td><td>50.31</td><td>-----</td><td>-----</td><td>69.99</td><td>35.50</td><td>11.11</td><td>66.29</td><td>0.00</td><td>100</td><td>271</td><td>Average</td><td>Vertical</td></tr></table>															Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	6386.00	50.31	-----	-----	69.99	35.50	11.11	66.29	0.00	100	271	Average	Vertical																																										
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																						
1	6386.00	50.31	-----	-----	69.99	35.50	11.11	66.29	0.00	100	271	Average	Vertical																																																																																				

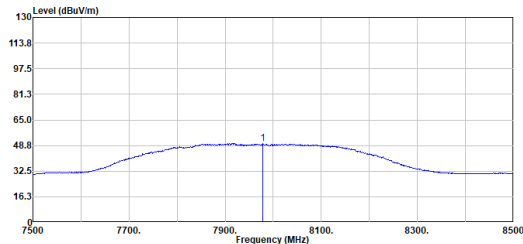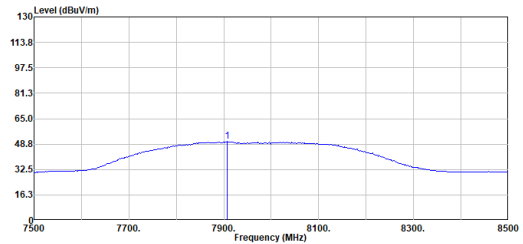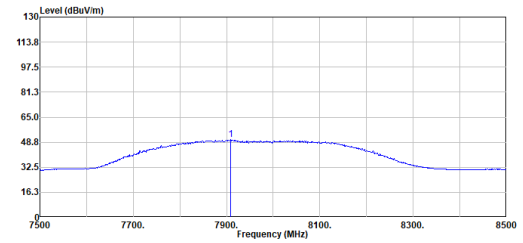

CH09 Radiated Emissions (Fundamental)																																																																																										
Operating Function	Adapter Mode					Polarization			V																																																																																	
						Test Distance			3m																																																																																	
Mode 70: cidx-32_sts-0_packet length-150						Mode 71: cidx-32_sts-1_packet length-150																																																																																				
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 7978.00</td><td>50.01</td><td>-----</td><td>-----</td><td>68.91</td><td>35.80</td><td>12.46</td><td>67.16</td><td>0.00</td><td>110</td><td>270</td><td>Average</td><td>Vertical</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 7978.00	50.01	-----	-----	68.91	35.80	12.46	67.16	0.00	110	270	Average	Vertical	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 7987.25</td><td>50.36</td><td>-----</td><td>-----</td><td>69.15</td><td>35.89</td><td>12.41</td><td>67.09</td><td>0.00</td><td>113</td><td>272</td><td>Average</td><td>Vertical</td></tr></table>							Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 7987.25	50.36	-----	-----	69.15	35.89	12.41	67.09	0.00	113	272	Average	Vertical
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 7978.00	50.01	-----	-----	68.91	35.80	12.46	67.16	0.00	110	270	Average	Vertical																																																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 7987.25	50.36	-----	-----	69.15	35.89	12.41	67.09	0.00	113	272	Average	Vertical																																																																														
Mode 72: cidx-32_sts-3_packet length-0																																																																																										
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 7988.00</td><td>50.60</td><td>-----</td><td>-----</td><td>69.40</td><td>35.88</td><td>12.41</td><td>67.09</td><td>0.00</td><td>114</td><td>274</td><td>Average</td><td>Vertical</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 7988.00	50.60	-----	-----	69.40	35.88	12.41	67.09	0.00	114	274	Average	Vertical																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 7988.00	50.60	-----	-----	69.40	35.88	12.41	67.09	0.00	114	274	Average	Vertical																																																																														






<Ant.11>

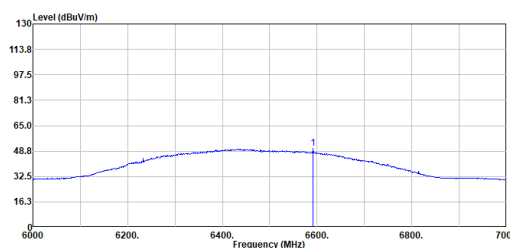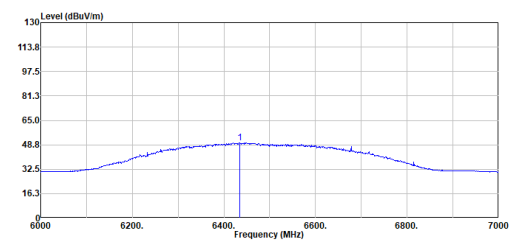CH05 Radiated Emissions (Fundamental)																																																																																										
Operating Function	Adapter Mode					Polarization			H																																																																																	
						Test Distance			3m																																																																																	
Mode 118: cidx-32_sts-0_packet length-150						Mode 119: cidx-32_sts-1_packet length-150																																																																																				
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6592.00</td><td>50.29</td><td>-----</td><td>-----</td><td>69.69</td><td>35.60</td><td>11.29</td><td>66.29</td><td>0.00</td><td>100</td><td>319</td><td>Average</td><td>Horizontal</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 6592.00	50.29	-----	-----	69.69	35.60	11.29	66.29	0.00	100	319	Average	Horizontal	<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6592.00</td><td>52.20</td><td>-----</td><td>-----</td><td>71.60</td><td>35.60</td><td>11.29</td><td>66.29</td><td>0.00</td><td>101</td><td>320</td><td>Average</td><td>Horizontal</td></tr></table>							Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 6592.00	52.20	-----	-----	71.60	35.60	11.29	66.29	0.00	101	320	Average	Horizontal
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 6592.00	50.29	-----	-----	69.69	35.60	11.29	66.29	0.00	100	319	Average	Horizontal																																																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 6592.00	52.20	-----	-----	71.60	35.60	11.29	66.29	0.00	101	320	Average	Horizontal																																																																														
Mode 120: cidx-32_sts-3_packet length-0																																																																																										
<table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 6434.00</td><td>50.02</td><td>-----</td><td>-----</td><td>69.62</td><td>35.50</td><td>11.15</td><td>66.25</td><td>0.00</td><td>100</td><td>320</td><td>Average</td><td>Horizontal</td></tr></table>						Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1 6434.00	50.02	-----	-----	69.62	35.50	11.15	66.25	0.00	100	320	Average	Horizontal																																														
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																
1 6434.00	50.02	-----	-----	69.62	35.50	11.15	66.25	0.00	100	320	Average	Horizontal																																																																														




CH09 Radiated Emissions (Fundamental)

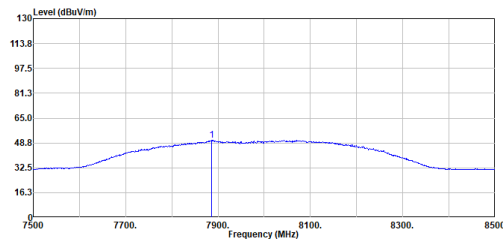Operating Function	Adapter Mode	Polarization	V																																																																														
		Test Distance	3m																																																																														
Mode 142: cidx-32_sts-0_packet length-150		Mode 143: cidx-32_sts-1_packet length-150																																																																															
 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>Loss</th><th>Factor</th><th>Factor</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 8043.00</td><td>48.67</td><td>-----</td><td>-----</td><td>67.53</td><td>35.80</td><td>12.51</td><td>67.17</td><td>0.00</td><td>100</td><td>193</td><td>Average</td><td>Vertical</td></tr></table>		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	Loss	Factor	Factor	dB	cm	deg		1 8043.00	48.67	-----	-----	67.53	35.80	12.51	67.17	0.00	100	193	Average	Vertical	 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>Loss</th><th>Factor</th><th>Factor</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 7886.00</td><td>58.46</td><td>-----</td><td>-----</td><td>69.26</td><td>35.87</td><td>12.40</td><td>67.07</td><td>0.00</td><td>100</td><td>196</td><td>Average</td><td>Vertical</td></tr></table>		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	Loss	Factor	Factor	dB	cm	deg		1 7886.00	58.46	-----	-----	69.26	35.87	12.40	67.07	0.00	100	196	Average	Vertical
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	Loss	Factor	Factor	dB	cm	deg																																																																						
1 8043.00	48.67	-----	-----	67.53	35.80	12.51	67.17	0.00	100	193	Average	Vertical																																																																					
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	Loss	Factor	Factor	dB	cm	deg																																																																						
1 7886.00	58.46	-----	-----	69.26	35.87	12.40	67.07	0.00	100	196	Average	Vertical																																																																					
Mode 144: cidx-32_sts-3_packet length-0																																																																																	
 <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>Loss</th><th>Factor</th><th>Factor</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 8042.00</td><td>48.58</td><td>-----</td><td>-----</td><td>67.44</td><td>35.80</td><td>12.51</td><td>67.17</td><td>0.00</td><td>100</td><td>194</td><td>Average</td><td>Vertical</td></tr></table>		Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	Loss	Factor	Factor	dB	cm	deg		1 8042.00	48.58	-----	-----	67.44	35.80	12.51	67.17	0.00	100	194	Average	Vertical																																									
Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	Loss	Factor	Factor	dB	cm	deg																																																																						
1 8042.00	48.58	-----	-----	67.44	35.80	12.51	67.17	0.00	100	194	Average	Vertical																																																																					



3.5.7 Radiated Emissions (30MHz – 1GHz)


<Ant. 11>

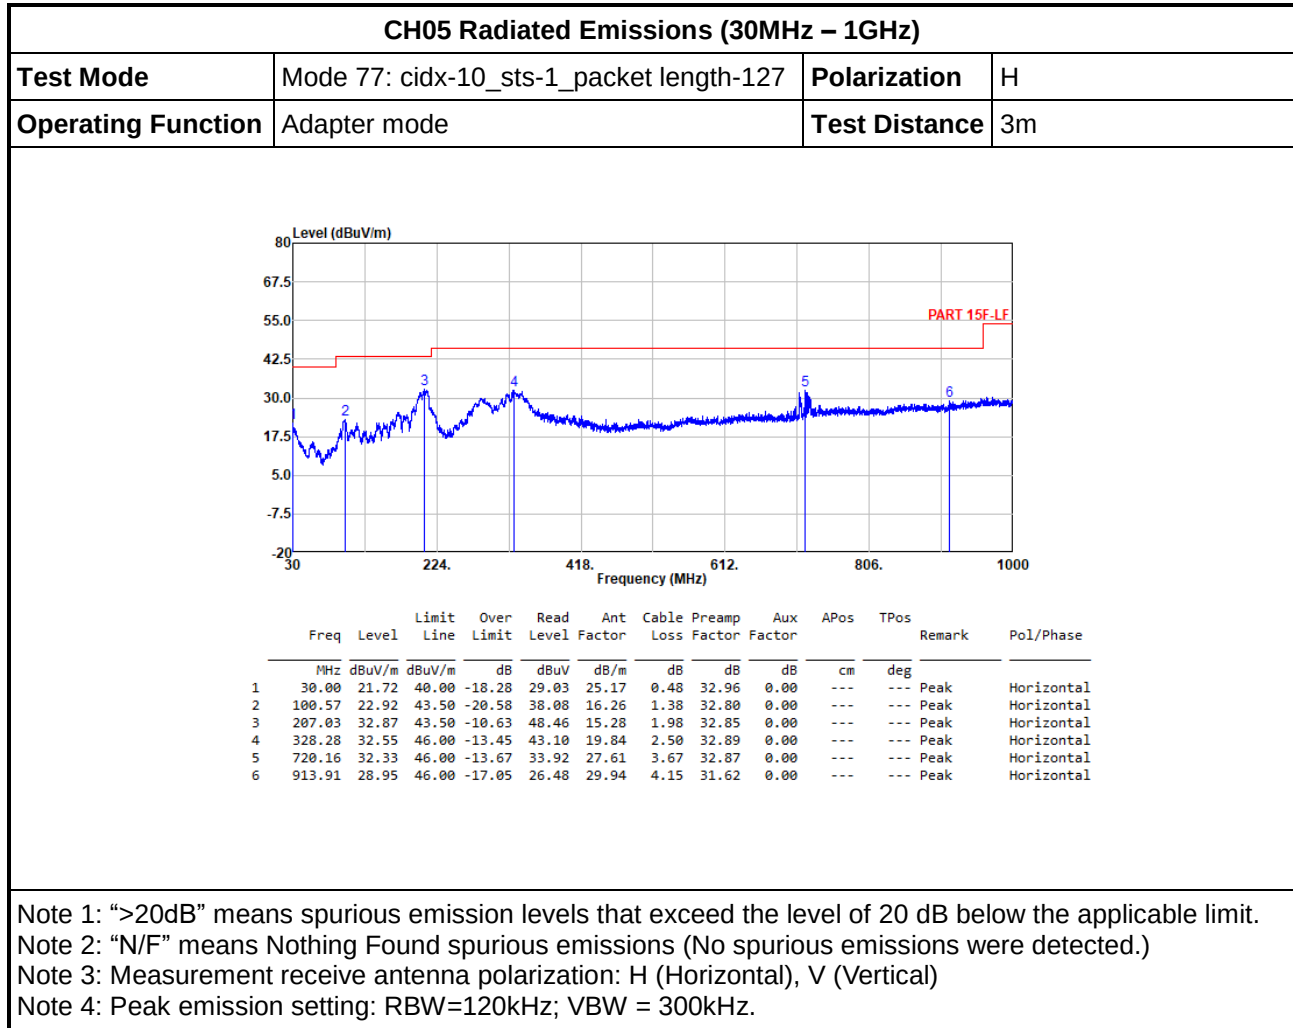



CH05 Radiated Emissions (30MHz – 1GHz)

Test Mode	Mode 77: cidx-10_sts-1_packet length-127	Polarization	V
Operating Function	Adapter mode	Test Distance	3m

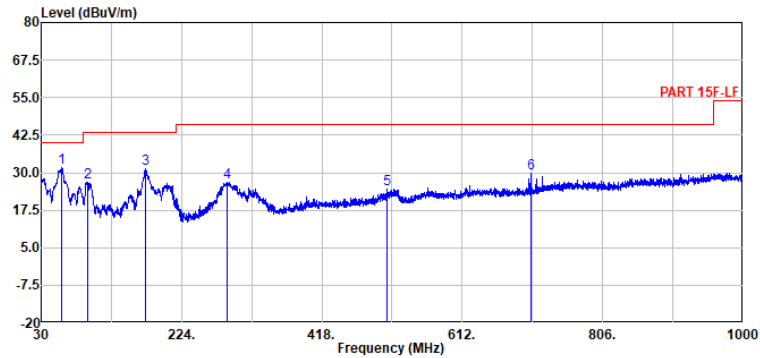


	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		
1	58.62	31.72	40.00	-8.28	51.71	12.22	0.84	33.05	0.00	---	---	Peak	Vertical
2	93.54	26.85	43.50	-16.65	43.01	15.39	1.30	32.85	0.00	---	---	Peak	Vertical
3	174.29	31.33	43.50	-12.17	46.97	15.55	1.81	33.00	0.00	---	---	Peak	Vertical
4	286.32	26.84	46.00	-19.16	38.16	19.26	2.33	32.91	0.00	---	---	Peak	Vertical
5	508.45	24.50	46.00	-21.50	29.72	24.50	3.10	32.82	0.00	---	---	Peak	Vertical
6	707.06	29.78	46.00	-16.22	32.07	27.01	3.64	32.94	0.00	---	---	Peak	Vertical

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
Note 4: Peak emission setting: RBW=120kHz; VBW = 300kHz.



CH09 Radiated Emissions (30MHz – 1GHz)

Test Mode	Mode 89: cidx-10_sts-1_packet length-127	Polarization	H
Operating Function	Adapter Mode	Test Distance	3m

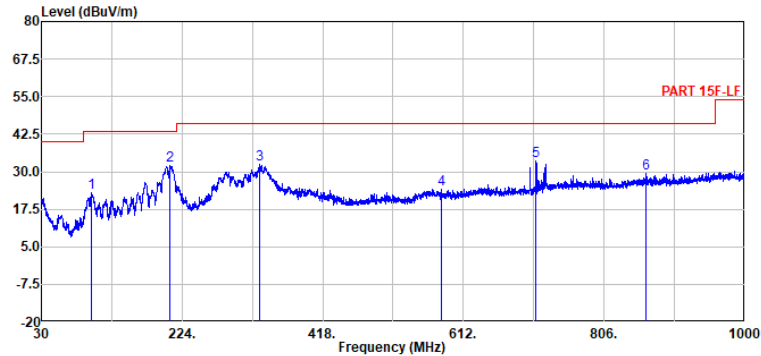


	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		
1	98.63	23.09	43.50	-20.41	38.54	16.02	1.36	32.83	0.00	---	---	Peak	Horizontal
2	207.27	31.93	43.50	-11.57	47.52	15.28	1.98	32.85	0.00	---	---	Peak	Horizontal
3	330.94	32.27	46.00	-13.73	42.63	20.01	2.51	32.88	0.00	---	---	Peak	Horizontal
4	581.93	24.14	46.00	-21.86	27.49	26.08	3.31	32.74	0.00	---	---	Peak	Horizontal
5	712.40	33.43	46.00	-12.57	35.51	27.18	3.65	32.91	0.00	---	---	Peak	Horizontal
6	863.23	29.26	46.00	-16.74	27.41	29.87	4.02	32.04	0.00	---	---	Peak	Horizontal

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
Note 4: Peak emission setting: RBW=120kHz; VBW = 300kHz.



CH09 Radiated Emissions (30MHz – 1GHz)

Test Mode	Mode 89: cidx-10_sts-1_packet length-127	Polarization	V
Operating Function	Adapter Mode	Test Distance	3m

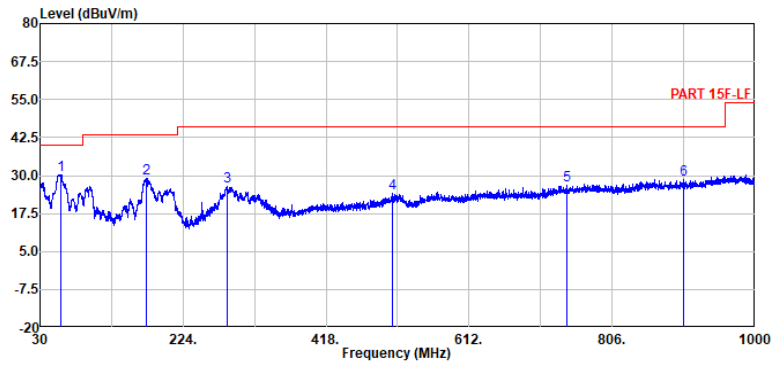

	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	
1	58.62	30.37	40.00	-9.63	50.36	12.22	0.84	33.05	0.00	---	---	Peak	Vertical
2	173.80	29.19	43.50	-14.31	44.81	15.58	1.80	33.00	0.00	---	---	Peak	Vertical
3	283.66	26.40	46.00	-19.60	37.81	19.17	2.32	32.90	0.00	---	---	Peak	Vertical
4	507.24	24.14	46.00	-21.86	29.38	24.50	3.09	32.83	0.00	---	---	Peak	Vertical
5	744.41	26.71	46.00	-19.29	27.20	28.51	3.74	32.74	0.00	---	---	Peak	Vertical
6	903.49	28.62	46.00	-17.38	26.49	29.74	4.13	31.74	0.00	---	---	Peak	Vertical

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: Peak emission setting: RBW=120kHz; VBW = 300kHz.




<Ant.7>

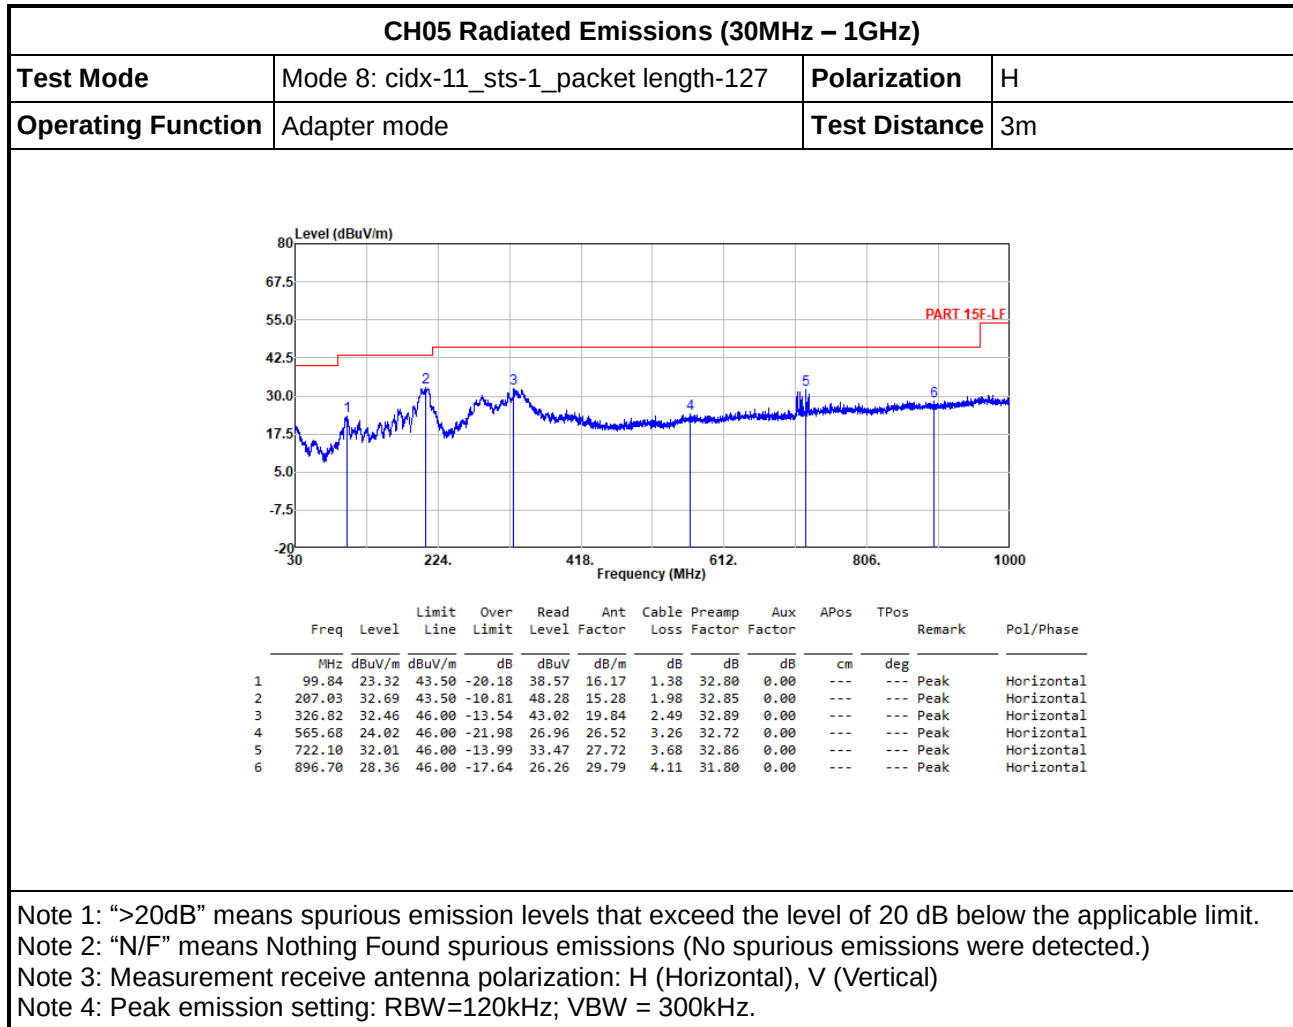



CH05 Radiated Emissions (30MHz – 1GHz)

Test Mode	Mode 8: cidx-11_sts-1_packet length-127	Polarization	V
Operating Function	Adapter mode	Test Distance	3m

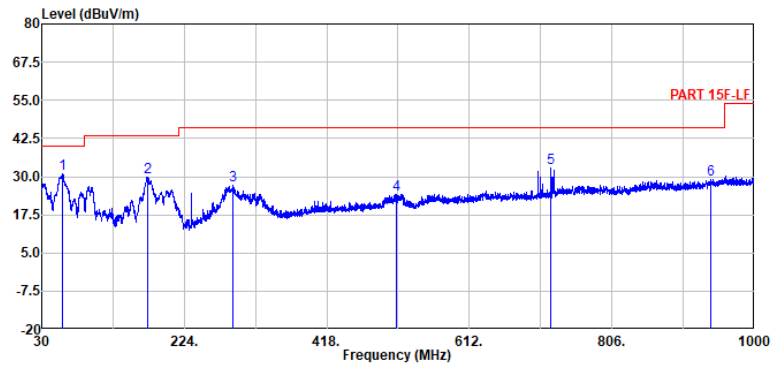


	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		
1	58.62	30.85	40.00	-9.15	50.84	12.22	0.84	33.05	0.00	---	---	Peak	Vertical
2	174.05	29.85	43.50	-13.65	45.48	15.57	1.80	33.00	0.00	---	---	Peak	Vertical
3	290.45	27.03	46.00	-18.97	38.24	19.36	2.35	32.92	0.00	---	---	Peak	Vertical
4	512.33	24.23	46.00	-21.77	29.46	24.47	3.11	32.81	0.00	---	---	Peak	Vertical
5	722.58	32.87	46.00	-13.13	34.30	27.75	3.68	32.86	0.00	---	---	Peak	Vertical
6	939.86	29.23	46.00	-16.77	25.68	30.68	4.20	31.33	0.00	---	---	Peak	Vertical

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
Note 4: Peak emission setting: RBW=120kHz; VBW = 300kHz.



CH09 Radiated Emissions (30MHz – 1GHz)

Test Mode	Mode 23: cidx-12_sts-1_packet length-127	Polarization	H
Operating Function	Adapter mode	Test Distance	3m

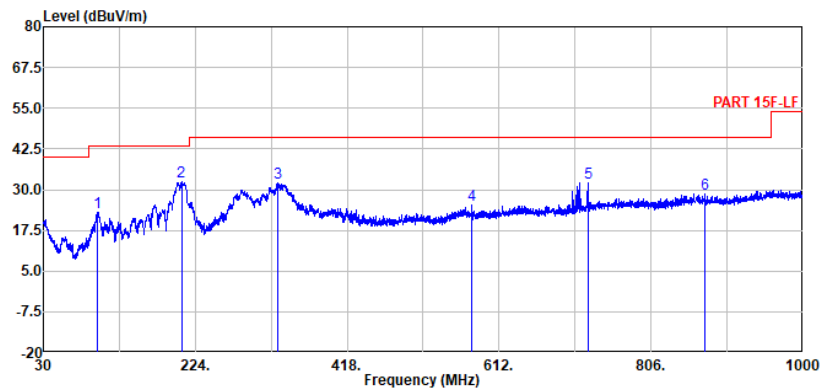

	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		
1	99.11	23.21	43.50	-20.29	38.59	16.07	1.37	32.82	0.00	---	---	Peak	Horizontal
2	206.30	32.29	43.50	-11.21	47.88	15.28	1.98	32.85	0.00	---	---	Peak	Horizontal
3	328.76	31.96	46.00	-14.04	42.47	19.88	2.50	32.89	0.00	---	---	Peak	Horizontal
4	576.84	25.10	46.00	-20.90	28.32	26.21	3.30	32.73	0.00	---	---	Peak	Horizontal
5	725.49	32.05	46.00	-13.95	33.25	27.95	3.69	32.84	0.00	---	---	Peak	Horizontal
6	874.87	28.71	46.00	-17.29	26.82	29.80	4.05	31.96	0.00	---	---	Peak	Horizontal

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: Peak emission setting: RBW=120kHz; VBW = 300kHz.



CH09 Radiated Emissions (30MHz – 1GHz)

Test Mode	Mode 23: cidx-12_sts-1_packet length-127	Polarization	V
Operating Function	Adapter mode	Test Distance	3m

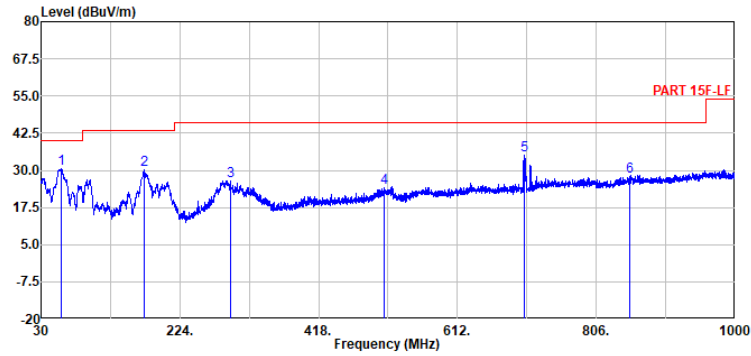


	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	
1	58.37	30.73	40.00	-9.27	50.69	12.25	0.84	33.05	0.00	---	---	Peak	Vertical
2	174.05	30.34	43.50	-13.16	45.97	15.57	1.80	33.00	0.00	---	---	Peak	Vertical
3	294.33	26.59	46.00	-19.41	37.73	19.42	2.37	32.93	0.00	---	---	Peak	Vertical
4	509.67	24.02	46.00	-21.98	29.26	24.48	3.10	32.82	0.00	---	---	Peak	Vertical
5	706.09	35.20	46.00	-10.80	37.52	26.99	3.64	32.95	0.00	---	---	Peak	Vertical
6	852.80	27.82	46.00	-18.18	26.22	29.71	4.00	32.11	0.00	---	---	Peak	Vertical

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.
Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)
Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)
Note 4: Peak emission setting: RBW=120kHz; VBW = 300kHz.



3.5.8 Radiated Emissions (960MHz – 40GHz)


<Ant.11>

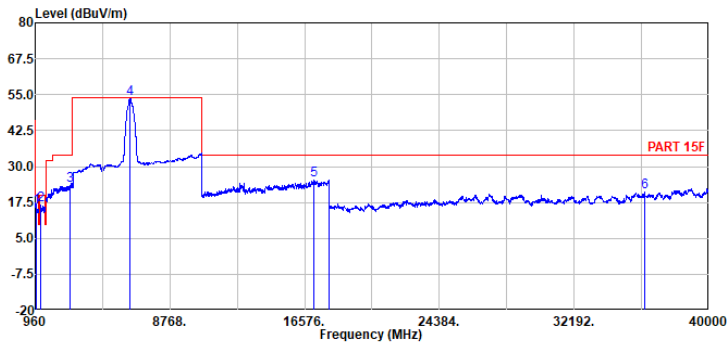CH05 Radiated Emissions (960MHz – 40GHz)																																																																																																																													
Test Mode	Mode 77: cidx-10_sts-1_packet length-127							Polarization		H																																																																																																																			
Operating Function	Adapter Mode																																																																																																																												
Test Distance	960 ~1164 MHz: 0.5m 1164 ~ 1240 MHz: 1m 1240 ~ 1559 MHz: 0.5m 1559 ~ 1610 MHz: 1m 1610 ~ 3200 MHz: 1m 1610 ~ 10600 MHz: 3m 10600 ~ 18000 MHz: 0.5m 18000 ~ 40000 MHz: 1m																																																																																																																												
 <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>1048.13</td><td>16.01</td><td>19.90</td><td>-3.89</td><td>64.08</td><td>28.23</td><td>4.43</td><td>65.17</td><td>-15.56</td><td>---</td><td>---</td><td>Average</td><td>Horizontal</td></tr><tr><td>2</td><td>1284.98</td><td>16.44</td><td>19.90</td><td>-3.46</td><td>64.21</td><td>28.17</td><td>4.90</td><td>65.28</td><td>-15.56</td><td>---</td><td>---</td><td>Average</td><td>Horizontal</td></tr><tr><td>3</td><td>2969.45</td><td>23.42</td><td>33.90</td><td>-10.48</td><td>58.43</td><td>32.82</td><td>7.50</td><td>65.79</td><td>-9.54</td><td>---</td><td>---</td><td>Average</td><td>Horizontal</td></tr><tr><td>4</td><td>6419.00</td><td>53.50</td><td>53.90</td><td>-0.40</td><td>73.12</td><td>35.50</td><td>11.14</td><td>66.26</td><td>0.00</td><td>---</td><td>---</td><td>Average</td><td>Horizontal</td></tr><tr><td>5</td><td>17104.60</td><td>25.41</td><td>33.90</td><td>-8.49</td><td>45.85</td><td>41.09</td><td>18.73</td><td>64.70</td><td>-15.56</td><td>---</td><td>---</td><td>Average</td><td>Horizontal</td></tr><tr><td>6</td><td>36282.00</td><td>21.25</td><td>33.93</td><td>-12.68</td><td>20.15</td><td>38.09</td><td>27.80</td><td>55.25</td><td>-9.54</td><td>---</td><td>---</td><td>Average</td><td>Horizontal</td></tr></table>															Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		cm	deg		1	1048.13	16.01	19.90	-3.89	64.08	28.23	4.43	65.17	-15.56	---	---	Average	Horizontal	2	1284.98	16.44	19.90	-3.46	64.21	28.17	4.90	65.28	-15.56	---	---	Average	Horizontal	3	2969.45	23.42	33.90	-10.48	58.43	32.82	7.50	65.79	-9.54	---	---	Average	Horizontal	4	6419.00	53.50	53.90	-0.40	73.12	35.50	11.14	66.26	0.00	---	---	Average	Horizontal	5	17104.60	25.41	33.90	-8.49	45.85	41.09	18.73	64.70	-15.56	---	---	Average	Horizontal	6	36282.00	21.25	33.93	-12.68	20.15	38.09	27.80	55.25	-9.54	---	---	Average	Horizontal
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB		cm	deg																																																																																																																	
1	1048.13	16.01	19.90	-3.89	64.08	28.23	4.43	65.17	-15.56	---	---	Average	Horizontal																																																																																																																
2	1284.98	16.44	19.90	-3.46	64.21	28.17	4.90	65.28	-15.56	---	---	Average	Horizontal																																																																																																																
3	2969.45	23.42	33.90	-10.48	58.43	32.82	7.50	65.79	-9.54	---	---	Average	Horizontal																																																																																																																
4	6419.00	53.50	53.90	-0.40	73.12	35.50	11.14	66.26	0.00	---	---	Average	Horizontal																																																																																																																
5	17104.60	25.41	33.90	-8.49	45.85	41.09	18.73	64.70	-15.56	---	---	Average	Horizontal																																																																																																																
6	36282.00	21.25	33.93	-12.68	20.15	38.09	27.80	55.25	-9.54	---	---	Average	Horizontal																																																																																																																
Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical) Note 4: Average emission setting outside GPS Bands: RBW=1MHz; VBW=3MHz. Note 5: Average emission setting in GPS bands: RBW=1kHz; VBW=3kHz. Note 6: #4 is fundamental signal. Note 7: - Distance extrapolation factor = $20 \log (\text{test distance [X m]}/\text{specific distance [3 m]})$ (dB) Example: Distance extrapolation factor = $20 \log (0.5\text{m}/3\text{m}) = -15.56$ (dB) - Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Distance Factor (Aux Factor) (dB) = Level (dBuV/m)																																																																																																																													



CH05 Radiated Emissions (960MHz – 40GHz)

Test Mode	Mode 77: cidx-10_sts-1_packet length-127	Polarization	V
Operating Function	Adapter Mode		
Test Distance	960 ~1164 MHz: 0.5m 1164 ~ 1240 MHz: 1m 1240 ~ 1559 MHz: 0.5m 1559 ~ 1610 MHz: 1m 1610 ~ 3200 MHz: 1m 1610 ~ 10600 MHz: 3m 10600 ~ 18000 MHz: 0.5m 18000 ~ 40000 MHz: 1m		

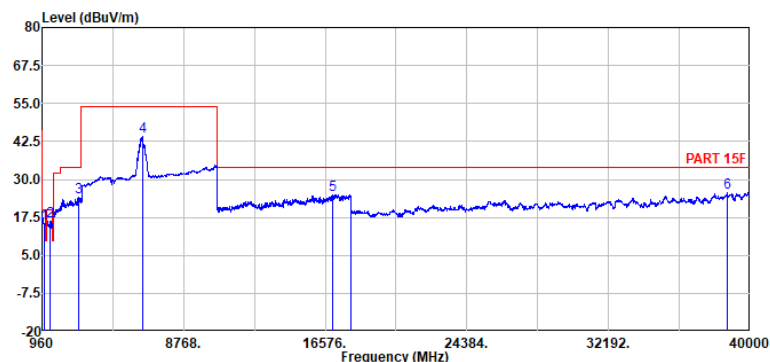

	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		
1	1081.79	15.60	19.90	-4.30	64.42	27.44	4.50	65.20	-15.56	---	---	Average	Vertical
2	1409.71	16.28	19.90	-3.62	63.78	28.32	5.13	65.39	-15.56	---	---	Average	Vertical
3	2991.71	24.06	33.90	-9.84	58.90	32.95	7.53	65.78	-9.54	---	---	Average	Vertical
4	6485.60	44.03	53.90	-9.87	63.47	35.57	11.20	66.21	0.00	---	---	Average	Vertical
5	16993.60	25.05	33.90	-8.85	45.13	41.41	18.66	64.59	-15.56	---	---	Average	Vertical
6	38746.00	25.62	33.93	-8.31	21.95	39.50	28.61	54.90	-9.54	---	---	Average	Vertical

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: Average emission setting outside GPS Bands: RBW=1MHz; VBW=3MHz.

Note 5: Average emission setting in GPS bands: RBW=1kHz; VBW=3kHz.

Note 6: #4 is fundamental signal.


Note 7:

- Distance extrapolation factor = $20 \log (\text{test distance [X m]}/\text{specific distance [3 m]})$ (dB)
Example: Distance extrapolation factor = $20 \log (0.5\text{m}/3\text{m}) = -15.56$ (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Distance Factor (Aux Factor) (dB) = Level (dBuV/m)



CH09 Radiated Emissions (960MHz – 40GHz)

Test Mode	Mode 89: cidx-10_sts-1_packet length-127	Polarization	H
Operating Function	Adapter mode		
Test Distance	960 ~1164 MHz: 0.5m 1164 ~ 1240 MHz: 1m 1240 ~ 1559 MHz: 0.5m 1559 ~ 1610 MHz: 1m 1610 ~ 3200 MHz: 1m 1610 ~ 10600 MHz: 3m 10600 ~ 18000 MHz: 0.5m 18000 ~ 40000 MHz: 1m		

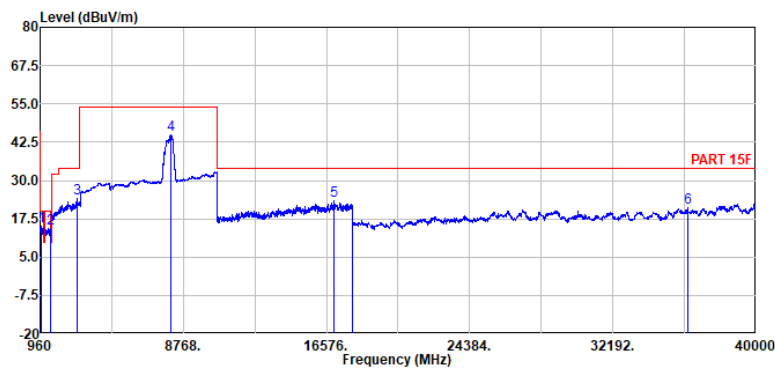

	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		
1	1047.31	15.19	19.90	-4.71	63.25	28.24	4.43	65.17	-15.56	---	---	Average	Horizontal
2	1552.30	14.46	19.90	-5.44	61.63	28.42	5.38	65.41	-15.56	---	---	Average	Horizontal
3	2985.35	24.16	33.90	-9.74	59.05	32.91	7.52	65.78	-9.54	---	---	Average	Horizontal
4	8069.20	44.92	53.90	-8.98	63.71	35.84	12.53	67.16	0.00	---	---	Average	Horizontal
5	16993.60	23.25	33.90	-10.65	43.33	41.41	18.66	64.59	-15.56	---	---	Average	Horizontal
6	36282.00	21.25	33.93	-12.68	20.15	38.09	27.80	55.25	-9.54	---	---	Average	Horizontal

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: Average emission setting outside GPS Bands: RBW=1MHz; VBW=3MHz.


Note 5: Average emission setting in GPS bands: RBW=1kHz; VBW=3kHz.

Note 6: #4 is fundamental signal.

Note 7:


- Distance extrapolation factor = $20 \log (\text{test distance [X m]}/\text{specific distance [3 m]})$ (dB)
Example: Distance extrapolation factor = $20 \log (0.5\text{m}/3\text{m}) = -15.56$ (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Distance Factor (Aux Factor) (dB) = Level (dBuV/m)

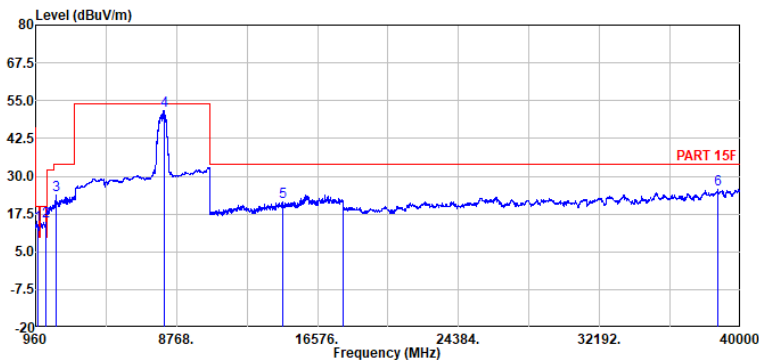

CH09 Radiated Emissions (960MHz – 40GHz)																																																																																																																													
Test Mode	Mode 89: cidx-10_sts-1_packet length-127							Polarization	V																																																																																																																				
Operating Function	Adapter mode																																																																																																																												
Test Distance	960 ~1164 MHz: 0.5m 1164 ~ 1240 MHz: 1m 1240 ~ 1559 MHz: 0.5m 1559 ~ 1610 MHz: 1m 1610 ~ 3200 MHz: 1m 1610 ~ 10600 MHz: 3m 10600 ~ 18000 MHz: 0.5m 18000 ~ 40000 MHz: 1m																																																																																																																												
 <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>1083.42</td><td>13.98</td><td>19.90</td><td>-5.92</td><td>62.84</td><td>27.40</td><td>4.50</td><td>65.20</td><td>-15.56</td><td>---</td><td>---</td><td>Average</td><td>Vertical</td></tr><tr><td>2</td><td>1553.26</td><td>15.22</td><td>19.90</td><td>-4.68</td><td>62.38</td><td>28.43</td><td>5.38</td><td>65.41</td><td>-15.56</td><td>---</td><td>---</td><td>Average</td><td>Vertical</td></tr><tr><td>3</td><td>2071.10</td><td>23.81</td><td>33.90</td><td>-10.09</td><td>60.46</td><td>31.78</td><td>6.23</td><td>65.12</td><td>-9.54</td><td>---</td><td>---</td><td>Average</td><td>Vertical</td></tr><tr><td>4</td><td>8076.60</td><td>51.64</td><td>53.90</td><td>-2.26</td><td>70.41</td><td>35.85</td><td>12.54</td><td>67.16</td><td>0.00</td><td>---</td><td>---</td><td>Average</td><td>Vertical</td></tr><tr><td>5</td><td>14647.80</td><td>21.33</td><td>33.90</td><td>-12.57</td><td>45.24</td><td>39.65</td><td>17.21</td><td>65.21</td><td>-15.56</td><td>---</td><td>---</td><td>Average</td><td>Vertical</td></tr><tr><td>6</td><td>38746.00</td><td>25.62</td><td>33.93</td><td>-8.31</td><td>21.95</td><td>39.50</td><td>28.61</td><td>54.90</td><td>-9.54</td><td>---</td><td>---</td><td>Average</td><td>Vertical</td></tr></table>															Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1	1083.42	13.98	19.90	-5.92	62.84	27.40	4.50	65.20	-15.56	---	---	Average	Vertical	2	1553.26	15.22	19.90	-4.68	62.38	28.43	5.38	65.41	-15.56	---	---	Average	Vertical	3	2071.10	23.81	33.90	-10.09	60.46	31.78	6.23	65.12	-9.54	---	---	Average	Vertical	4	8076.60	51.64	53.90	-2.26	70.41	35.85	12.54	67.16	0.00	---	---	Average	Vertical	5	14647.80	21.33	33.90	-12.57	45.24	39.65	17.21	65.21	-15.56	---	---	Average	Vertical	6	38746.00	25.62	33.93	-8.31	21.95	39.50	28.61	54.90	-9.54	---	---	Average	Vertical
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																	
1	1083.42	13.98	19.90	-5.92	62.84	27.40	4.50	65.20	-15.56	---	---	Average	Vertical																																																																																																																
2	1553.26	15.22	19.90	-4.68	62.38	28.43	5.38	65.41	-15.56	---	---	Average	Vertical																																																																																																																
3	2071.10	23.81	33.90	-10.09	60.46	31.78	6.23	65.12	-9.54	---	---	Average	Vertical																																																																																																																
4	8076.60	51.64	53.90	-2.26	70.41	35.85	12.54	67.16	0.00	---	---	Average	Vertical																																																																																																																
5	14647.80	21.33	33.90	-12.57	45.24	39.65	17.21	65.21	-15.56	---	---	Average	Vertical																																																																																																																
6	38746.00	25.62	33.93	-8.31	21.95	39.50	28.61	54.90	-9.54	---	---	Average	Vertical																																																																																																																
Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical) Note 4: Average emission setting outside GPS Bands: RBW=1MHz; VBW=3MHz. Note 5: Average emission setting in GPS bands: RBW=1kHz; VBW=3kHz. Note 6: #4 is fundamental signal. Note 7: - Distance extrapolation factor = 20 log (test distance [X m]/specific distance [3 m]) (dB) Example: Distance extrapolation factor = 20log (0.5m/3m) = -15.56 (dB) - Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Distance Factor (Aux Factor) (dB) = Level (dBuV/m)																																																																																																																													




<Ant.7>

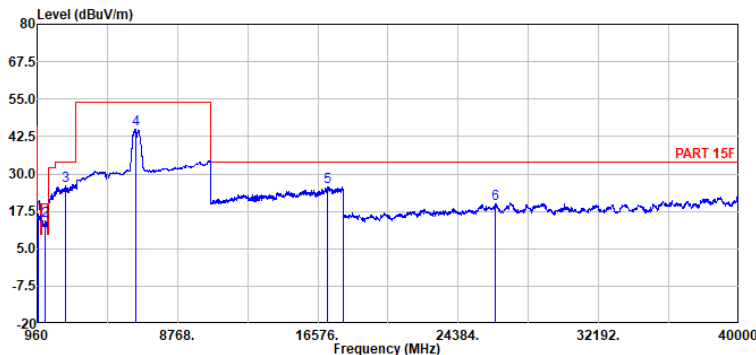CH05 Radiated Emissions (960MHz – 40GHz)																																																																																																																													
Test Mode	Mode 8: cidx-11_sts-1_packet length-127							Polarization	H																																																																																																																				
Operating Function	Adapter Mode																																																																																																																												
Test Distance	960 ~1164 MHz: 0.5m 1164 ~ 1240 MHz: 1m 1240 ~ 1559 MHz: 0.5m 1559 ~ 1610 MHz: 1m 1610 ~ 3200 MHz: 1m 1610 ~ 10600 MHz: 3m 10600 ~ 18000 MHz: 0.5m 18000 ~ 40000 MHz: 1m																																																																																																																												
 <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>1819.77</td><td>16.54</td><td>19.90</td><td>-3.36</td><td>64.26</td><td>28.62</td><td>4.37</td><td>65.15</td><td>-15.56</td><td>---</td><td>---</td><td>Average</td><td>Horizontal</td></tr><tr><td>2</td><td>1416.73</td><td>14.51</td><td>19.90</td><td>-5.39</td><td>62.05</td><td>28.27</td><td>5.14</td><td>65.39</td><td>-15.56</td><td>---</td><td>---</td><td>Average</td><td>Horizontal</td></tr><tr><td>3</td><td>2557.64</td><td>25.94</td><td>33.90</td><td>-7.96</td><td>61.74</td><td>32.48</td><td>6.93</td><td>65.67</td><td>-9.54</td><td>---</td><td>---</td><td>Average</td><td>Horizontal</td></tr><tr><td>4</td><td>6419.00</td><td>44.82</td><td>53.90</td><td>-9.08</td><td>64.44</td><td>35.50</td><td>11.14</td><td>66.26</td><td>0.00</td><td>---</td><td>---</td><td>Average</td><td>Horizontal</td></tr><tr><td>5</td><td>17134.20</td><td>25.58</td><td>33.90</td><td>-8.32</td><td>46.10</td><td>41.03</td><td>18.75</td><td>64.74</td><td>-15.56</td><td>---</td><td>---</td><td>Average</td><td>Horizontal</td></tr><tr><td>6</td><td>26470.00</td><td>20.15</td><td>33.93</td><td>-13.78</td><td>22.76</td><td>36.33</td><td>23.49</td><td>52.89</td><td>-9.54</td><td>---</td><td>---</td><td>Average</td><td>Horizontal</td></tr></table>															Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	1819.77	16.54	19.90	-3.36	64.26	28.62	4.37	65.15	-15.56	---	---	Average	Horizontal	2	1416.73	14.51	19.90	-5.39	62.05	28.27	5.14	65.39	-15.56	---	---	Average	Horizontal	3	2557.64	25.94	33.90	-7.96	61.74	32.48	6.93	65.67	-9.54	---	---	Average	Horizontal	4	6419.00	44.82	53.90	-9.08	64.44	35.50	11.14	66.26	0.00	---	---	Average	Horizontal	5	17134.20	25.58	33.90	-8.32	46.10	41.03	18.75	64.74	-15.56	---	---	Average	Horizontal	6	26470.00	20.15	33.93	-13.78	22.76	36.33	23.49	52.89	-9.54	---	---	Average	Horizontal
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																		
1	1819.77	16.54	19.90	-3.36	64.26	28.62	4.37	65.15	-15.56	---	---	Average	Horizontal																																																																																																																
2	1416.73	14.51	19.90	-5.39	62.05	28.27	5.14	65.39	-15.56	---	---	Average	Horizontal																																																																																																																
3	2557.64	25.94	33.90	-7.96	61.74	32.48	6.93	65.67	-9.54	---	---	Average	Horizontal																																																																																																																
4	6419.00	44.82	53.90	-9.08	64.44	35.50	11.14	66.26	0.00	---	---	Average	Horizontal																																																																																																																
5	17134.20	25.58	33.90	-8.32	46.10	41.03	18.75	64.74	-15.56	---	---	Average	Horizontal																																																																																																																
6	26470.00	20.15	33.93	-13.78	22.76	36.33	23.49	52.89	-9.54	---	---	Average	Horizontal																																																																																																																
Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical) Note 4: Average emission setting outside GPS Bands: RBW=1MHz; VBW=3MHz. Note 5: Average emission setting in GPS bands: RBW=1kHz; VBW=3kHz. Note 6: #4 is fundamental signal. Note 7: Distance extrapolation factor = 20 log (test distance [X m]/specific distance [3 m]) (dB) Example: Distance extrapolation factor = 20log (0.5m/3m) = -15.56 (dB) Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Distance Factor (Aux Factor) (dB) = Level (dBuV/m)																																																																																																																													



CH05 Radiated Emissions (960MHz – 40GHz)

Test Mode	Mode 8: cidx-11_sts-1_packet length-127	Polarization	V
Operating Function	Adapter Mode		
Test Distance	960 ~1164 MHz: 0.5m 1164 ~ 1240 MHz: 1m 1240 ~ 1559 MHz: 0.5m 1559 ~ 1610 MHz: 1m 1610 ~ 3200 MHz: 1m 1610 ~ 10600 MHz: 3m 10600 ~ 18000 MHz: 0.5m 18000 ~ 40000 MHz: 1m		

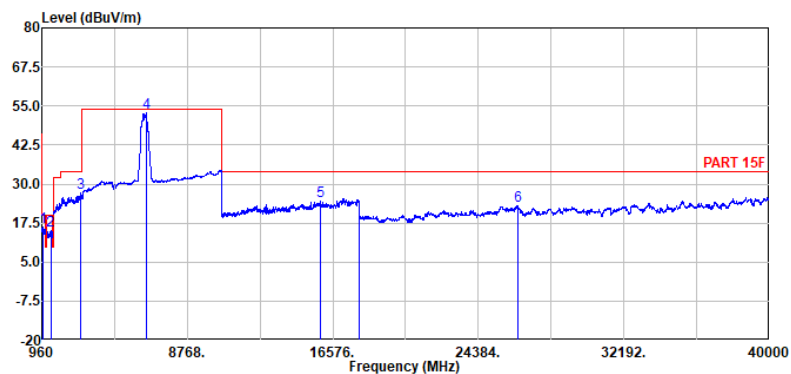

	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		
1	998.15	16.33	19.90	-3.57	63.80	28.90	4.33	65.14	-15.56	---	---	Average	Vertical
2	1434.59	15.05	19.90	-4.85	62.71	28.12	5.17	65.39	-15.56	---	---	Average	Vertical
3	3028.28	27.01	33.90	-6.89	61.75	33.00	7.57	65.77	-9.54	---	---	Average	Vertical
4	6552.20	52.73	53.90	-1.17	72.12	35.60	11.26	66.25	0.00	---	---	Average	Vertical
5	15898.40	24.54	33.90	-9.36	46.44	40.80	17.81	64.95	-15.56	---	---	Average	Vertical
6	26492.00	23.07	33.93	-10.86	25.62	36.38	23.50	52.89	-9.54	---	---	Average	Vertical

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: Average emission setting outside GPS Bands: RBW=1MHz; VBW=3MHz.

Note 5: Average emission setting in GPS bands: RBW=1kHz; VBW=3kHz.

Note 6: #4 is fundamental signal.


Note 7:

- Distance extrapolation factor = $20 \log (\text{test distance [X m]}/\text{specific distance [3 m]})$ (dB)
Example: Distance extrapolation factor = $20 \log (0.5\text{m}/3\text{m}) = -15.56$ (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Distance Factor (Aux Factor) (dB) = Level (dBuV/m)



CH09 Radiated Emissions (960MHz – 40GHz)

Test Mode	Mode 23: cidx-12_sts-1_packet length-127	Polarization	H
Operating Function	Adapter Mode		
Test Distance	960 ~1164 MHz: 0.5m 1164 ~ 1240 MHz: 1m 1240 ~ 1559 MHz: 0.5m 1559 ~ 1610 MHz: 1m 1610 ~ 3200 MHz: 1m 1610 ~ 10600 MHz: 3m 10600 ~ 18000 MHz: 0.5m 18000 ~ 40000 MHz: 1m		

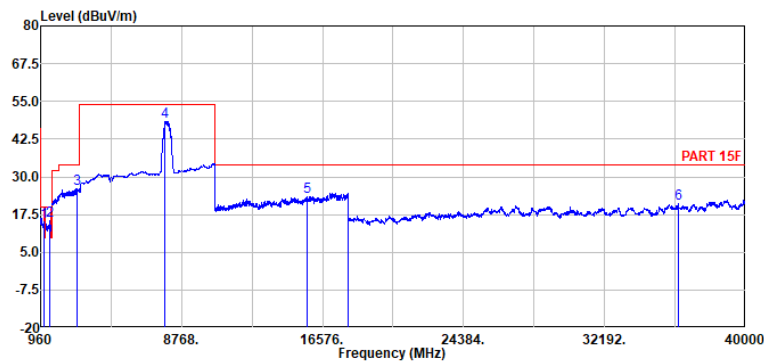

	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	
1	1122.18	15.20	19.90	-4.70	64.30	27.04	4.58	65.16	-15.56	---	---	Average	Horizontal
2	1440.01	15.42	19.90	-4.48	63.11	28.08	5.18	65.39	-15.56	---	---	Average	Horizontal
3	3001.25	26.15	33.90	-7.75	60.93	33.00	7.54	65.78	-9.54	---	---	Average	Horizontal
4	7862.00	48.45	53.90	-5.45	67.30	35.82	12.38	67.05	0.00	---	---	Average	Horizontal
5	15735.60	23.56	33.90	-10.34	45.99	40.41	17.73	65.01	-15.56	---	---	Average	Horizontal
6	36282.00	21.25	33.93	-12.68	20.15	38.09	27.80	55.25	-9.54	---	---	Average	Horizontal

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: Average emission setting outside GPS Bands: RBW=1MHz; VBW=3MHz.

Note 5: Average emission setting in GPS bands: RBW=1kHz; VBW=3kHz.

Note 6: #4 is fundamental signal.

Note 7:


- Distance extrapolation factor = $20 \log (\text{test distance [X m]}/\text{specific distance [3 m]})$ (dB)
Example: Distance extrapolation factor = $20 \log (0.5\text{m}/3\text{m}) = -15.56$ (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Distance Factor (Aux Factor) (dB) = Level (dBuV/m)

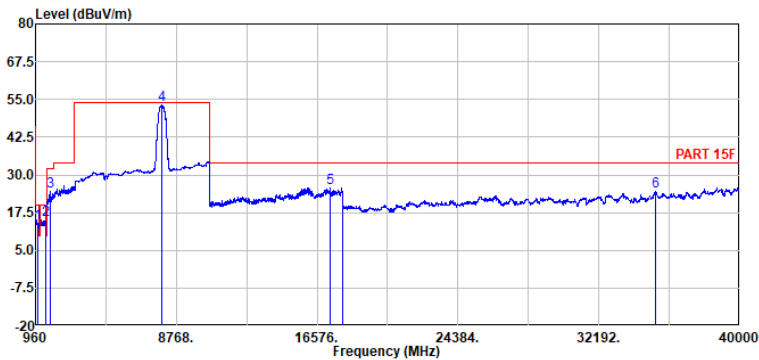CH09 Radiated Emissions (960MHz – 40GHz)																																																																																																																													
Test Mode	Mode 23: cidx-12_sts-1_packet length-127							Polarization	V																																																																																																																				
Operating Function	Adapter Mode																																																																																																																												
Test Distance	960 ~1164 MHz: 0.5m 1164 ~ 1240 MHz: 1m 1240 ~ 1559 MHz: 0.5m 1559 ~ 1610 MHz: 1m 1610 ~ 3200 MHz: 1m 1610 ~ 10600 MHz: 3m 10600 ~ 18000 MHz: 0.5m 18000 ~ 40000 MHz: 1m																																																																																																																												
 <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>1116.88</td><td>14.04</td><td>19.90</td><td>-5.86</td><td>63.17</td><td>27.03</td><td>4.57</td><td>65.17</td><td>-15.56</td><td>---</td><td>---</td><td>Average</td><td>Vertical</td></tr><tr><td>2</td><td>1552.94</td><td>15.26</td><td>19.90</td><td>-4.64</td><td>62.42</td><td>28.43</td><td>5.38</td><td>65.41</td><td>-15.56</td><td>---</td><td>---</td><td>Average</td><td>Vertical</td></tr><tr><td>3</td><td>1761.05</td><td>24.62</td><td>31.90</td><td>-7.28</td><td>63.95</td><td>29.92</td><td>5.74</td><td>65.45</td><td>-9.54</td><td>---</td><td>---</td><td>Average</td><td>Vertical</td></tr><tr><td>4</td><td>7987.80</td><td>53.18</td><td>53.90</td><td>-0.72</td><td>72.09</td><td>35.80</td><td>12.46</td><td>67.17</td><td>0.00</td><td>---</td><td>---</td><td>Average</td><td>Vertical</td></tr><tr><td>5</td><td>17311.80</td><td>25.74</td><td>33.90</td><td>-8.16</td><td>46.63</td><td>40.79</td><td>18.85</td><td>64.97</td><td>-15.56</td><td>---</td><td>---</td><td>Average</td><td>Vertical</td></tr><tr><td>6</td><td>35358.00</td><td>24.45</td><td>33.93</td><td>-9.48</td><td>24.40</td><td>37.89</td><td>27.44</td><td>55.74</td><td>-9.54</td><td>---</td><td>---</td><td>Average</td><td>Vertical</td></tr></table>															Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1	1116.88	14.04	19.90	-5.86	63.17	27.03	4.57	65.17	-15.56	---	---	Average	Vertical	2	1552.94	15.26	19.90	-4.64	62.42	28.43	5.38	65.41	-15.56	---	---	Average	Vertical	3	1761.05	24.62	31.90	-7.28	63.95	29.92	5.74	65.45	-9.54	---	---	Average	Vertical	4	7987.80	53.18	53.90	-0.72	72.09	35.80	12.46	67.17	0.00	---	---	Average	Vertical	5	17311.80	25.74	33.90	-8.16	46.63	40.79	18.85	64.97	-15.56	---	---	Average	Vertical	6	35358.00	24.45	33.93	-9.48	24.40	37.89	27.44	55.74	-9.54	---	---	Average	Vertical
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																																																	
1	1116.88	14.04	19.90	-5.86	63.17	27.03	4.57	65.17	-15.56	---	---	Average	Vertical																																																																																																																
2	1552.94	15.26	19.90	-4.64	62.42	28.43	5.38	65.41	-15.56	---	---	Average	Vertical																																																																																																																
3	1761.05	24.62	31.90	-7.28	63.95	29.92	5.74	65.45	-9.54	---	---	Average	Vertical																																																																																																																
4	7987.80	53.18	53.90	-0.72	72.09	35.80	12.46	67.17	0.00	---	---	Average	Vertical																																																																																																																
5	17311.80	25.74	33.90	-8.16	46.63	40.79	18.85	64.97	-15.56	---	---	Average	Vertical																																																																																																																
6	35358.00	24.45	33.93	-9.48	24.40	37.89	27.44	55.74	-9.54	---	---	Average	Vertical																																																																																																																
Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical) Note 4: Average emission setting outside GPS Bands: RBW=1MHz; VBW=3MHz. Note 5: Average emission setting in GPS bands: RBW=1kHz; VBW=3kHz. Note 6: #4 is fundamental signal. Note 7: - Distance extrapolation factor = 20 log (test distance [X m]/specific distance [3 m]) (dB) Example: Distance extrapolation factor = 20log (0.5m/3m) = -15.56 (dB) - Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Distance Factor (Aux Factor) (dB) = Level (dBuV/m)																																																																																																																													



3.5.9 Radiated Emissions (1164MHz – 1240MHz)


<Ant.11>

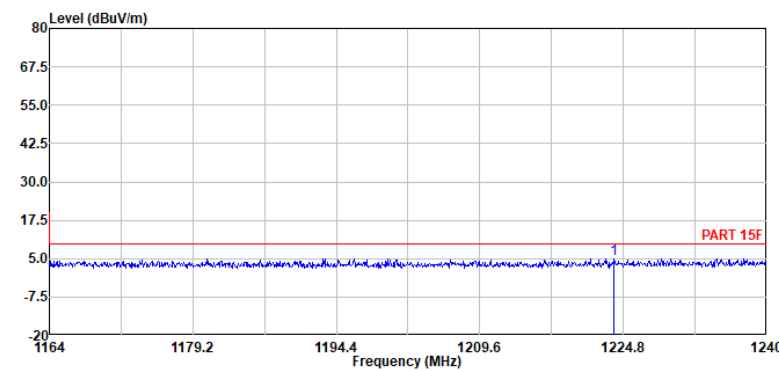CH05 Radiated Emissions (1164MHz – 1240MHz)																																																							
Test Mode	Mode 77: cidx-10_sts-1_packet length-127							Polarization		H																																													
Operating Function	Adapter Mode							Test Distance		1m																																													
 <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th><th>Pol/Phase</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>1223.81</td><td>5.06</td><td>9.90</td><td>-4.84</td><td>47.01</td><td>27.89</td><td>4.78</td><td>65.08</td><td>-9.54</td><td>---</td><td>---</td><td>Average</td><td>Horizontal</td></tr></table>															Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg			1	1223.81	5.06	9.90	-4.84	47.01	27.89	4.78	65.08	-9.54	---	---	Average	Horizontal
	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																												
1	1223.81	5.06	9.90	-4.84	47.01	27.89	4.78	65.08	-9.54	---	---	Average	Horizontal																																										
Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit. Note 2: “N/F” means Nothing Found spurious emissions (No spurious emissions were detected.) Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical) Note 4: Average emission setting: RBW=1kHz; VBW=3kHz. Note 5: - Distance extrapolation factor = $20 \log (\text{test distance [X m]}/\text{specific distance [3 m]})$ (dB) Example: Distance extrapolation factor = $20 \log (1\text{m}/3\text{m}) = -9.54$ (dB) - Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Distance Factor (Aux Factor) (dB) = Level (dBuV/m)																																																							



CH05 Radiated Emissions (1164MHz – 1240MHz)

Test Mode	Mode 77: cidx-10_sts-1_packet length-127	Polarization	V
Operating Function	Adapter Mode	Test Distance	1m

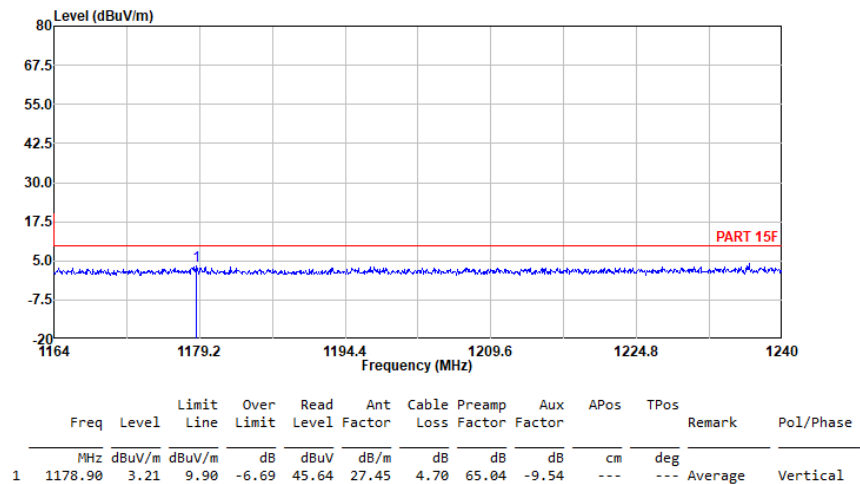

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: “N/F” means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: Average emission setting: RBW=1kHz; VBW=3kHz.


Note 5:

- Distance extrapolation factor = $20 \log (\text{test distance [X m]}/\text{specific distance [3 m]})$ (dB)
Example: Distance extrapolation factor = $20 \log (1\text{m}/3\text{m}) = -9.54$ (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Distance Factor (Aux Factor) (dB) = Level (dBuV/m)



CH09 Radiated Emissions (1164MHz – 1240MHz)

Test Mode	Mode 89: cidx-10_sts-1_packet length-127	Polarization	H
Operating Function	Adapter Mode	Test Distance	1m

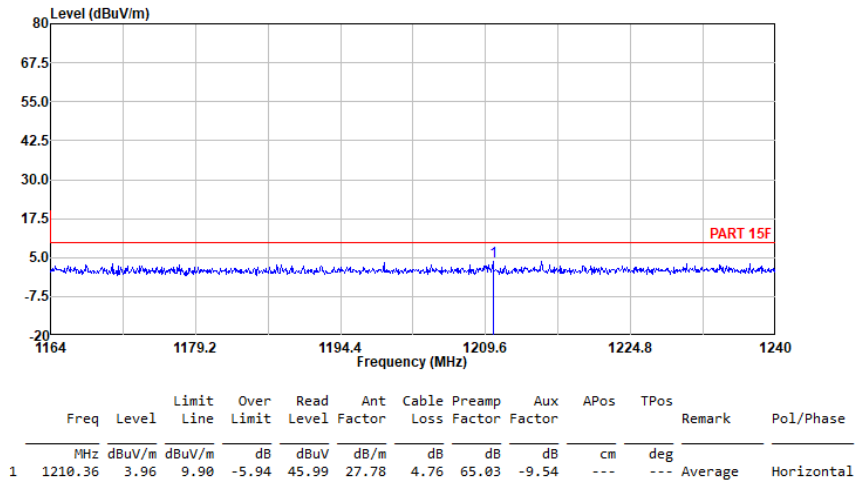

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: “N/F” means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: Average emission setting: RBW=1kHz; VBW=3kHz.


Note 5:

- Distance extrapolation factor = $20 \log (\text{test distance [X m]}/\text{specific distance [3 m]})$ (dB)
Example: Distance extrapolation factor = $20 \log (1\text{m}/3\text{m}) = -9.54$ (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Distance Factor (Aux Factor) (dB) = Level (dBuV/m)



CH09 Radiated Emissions (1164MHz – 1240MHz)

Test Mode	Mode 89: cidx-10_sts-1_packet length-127	Polarization	V
Operating Function	Adapter Mode	Test Distance	1m

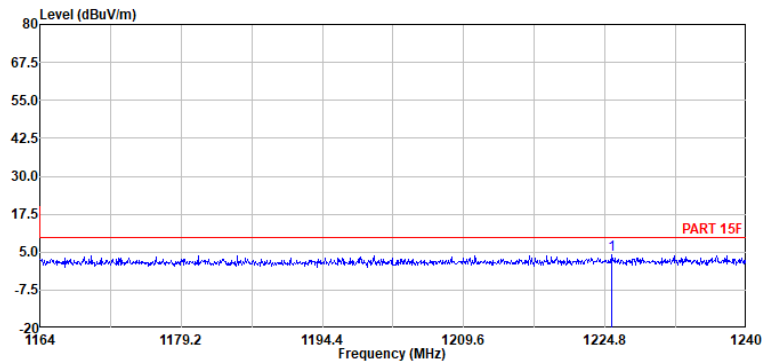

	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		
1	1225.56	4.05	9.90	-5.85	45.98	27.90	4.79	65.08	-9.54	---	---	Average	Vertical

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)


Note 4: Average emission setting: RBW=1kHz; VBW=3kHz.

Note 5:

- Distance extrapolation factor = $20 \log (\text{test distance [X m]}/\text{specific distance [3 m]})$ (dB)
Example: Distance extrapolation factor = $20 \log (1\text{m}/3\text{m}) = -9.54$ (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Distance Factor (Aux Factor) (dB) = Level (dBuV/m)




<Ant.7>

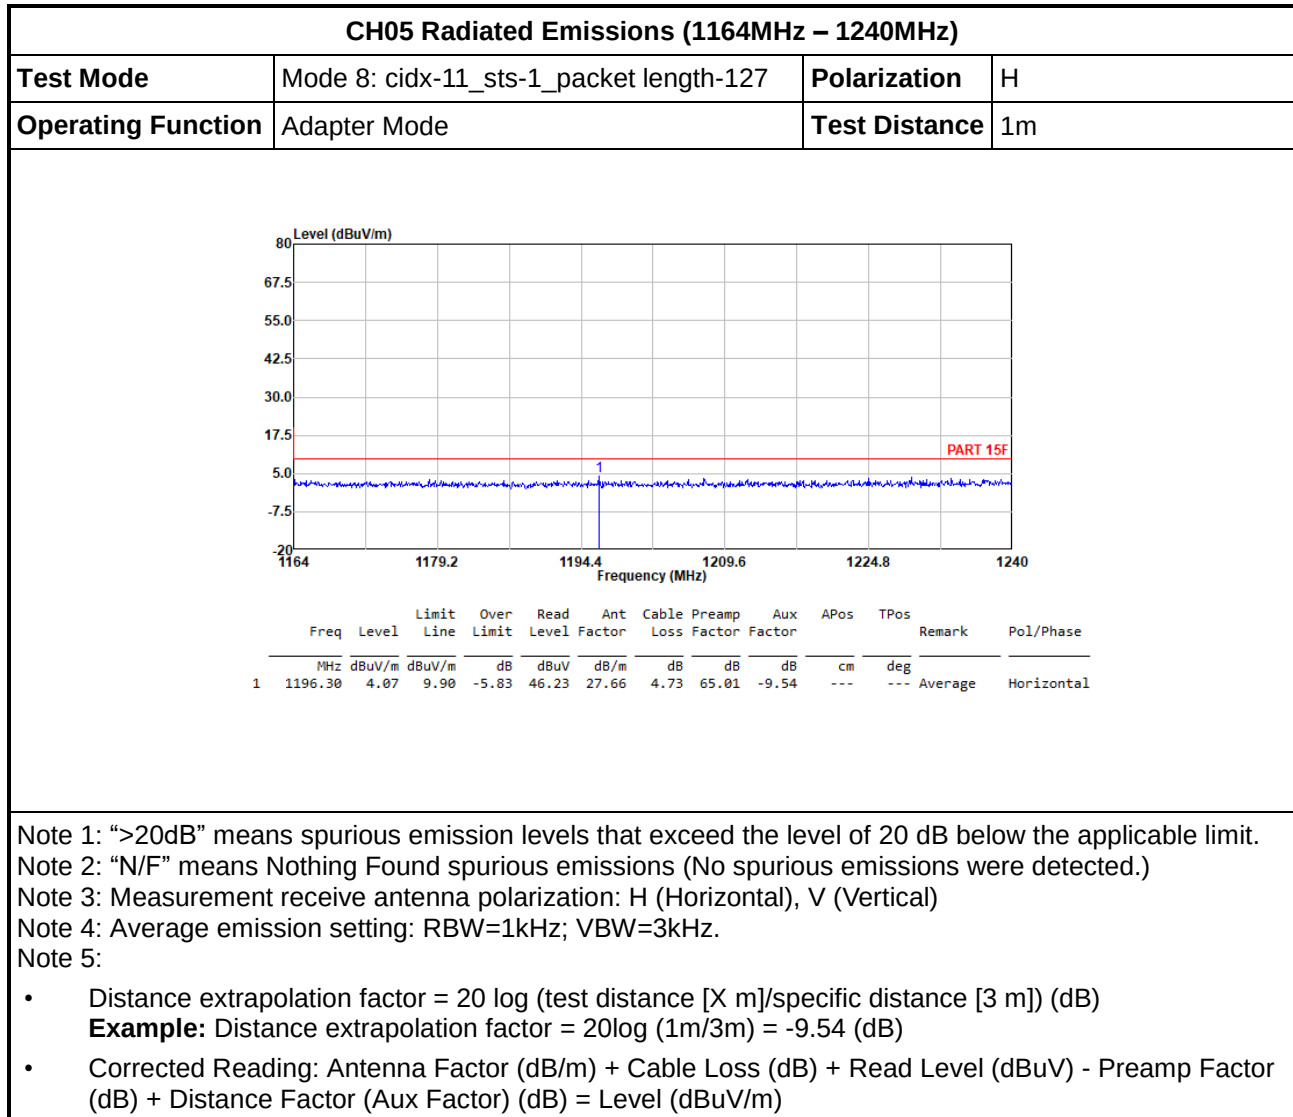



CH05 Radiated Emissions (1164MHz – 1240MHz)

Test Mode	Mode 8: cidx-11_sts-1_packet length-127	Polarization	V
Operating Function	Adapter Mode	Test Distance	1m

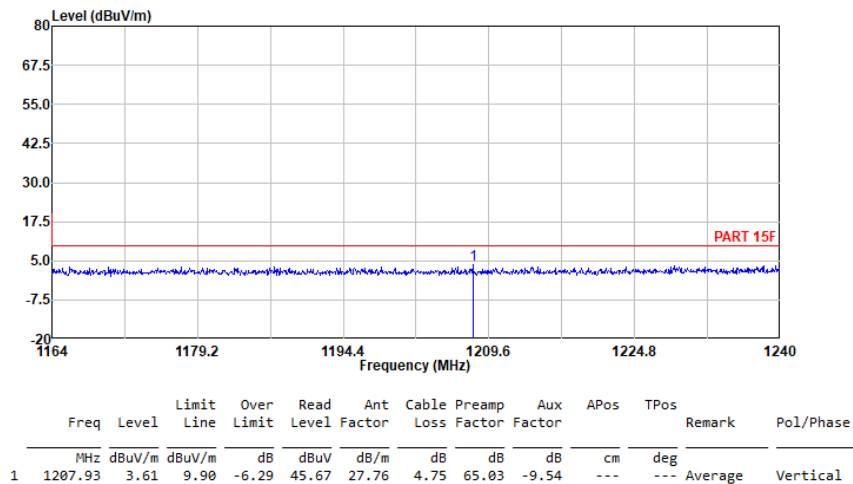

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: “N/F” means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: Average emission setting: RBW=1kHz; VBW=3kHz.


Note 5:

- Distance extrapolation factor = $20 \log (\text{test distance [X m]}/\text{specific distance [3 m]})$ (dB)
Example: Distance extrapolation factor = $20 \log (1\text{m}/3\text{m}) = -9.54$ (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Distance Factor (Aux Factor) (dB) = Level (dBuV/m)



CH09 Radiated Emissions (1164MHz – 1240MHz)

Test Mode	Mode 23: cidx-12_sts-1_packet length-127	Polarization	H
Operating Function	Adapter Mode	Test Distance	1m

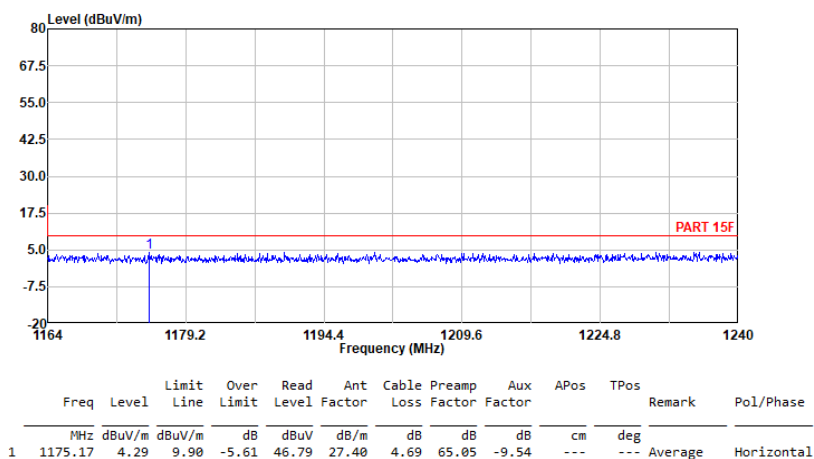

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: “N/F” means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: Average emission setting: RBW=1kHz; VBW=3kHz.


Note 5:

- Distance extrapolation factor = $20 \log (\text{test distance [X m]}/\text{specific distance [3 m]})$ (dB)
Example: Distance extrapolation factor = $20 \log (1\text{m}/3\text{m}) = -9.54$ (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Distance Factor (Aux Factor) (dB) = Level (dBuV/m)



CH09 Radiated Emissions (1164MHz – 1240MHz)

Test Mode	Mode 23: cidx-12_sts-1_packet length-127	Polarization	V
Operating Function	Adapter Mode	Test Distance	1m

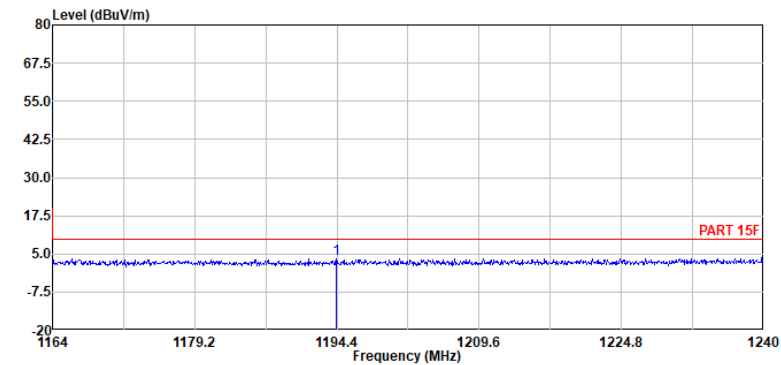

	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		
1	1194.32	3.52	9.90	-6.38	45.71	27.63	4.73	65.01	-9.54	---	---	Average	Vertical

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: “N/F” means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: Average emission setting: RBW=1kHz; VBW=3kHz.


Note 5:

- Distance extrapolation factor = $20 \log (\text{test distance [X m]}/\text{specific distance [3 m]})$ (dB)
Example: Distance extrapolation factor = $20 \log (1\text{m}/3\text{m}) = -9.54$ (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Distance Factor (Aux Factor) (dB) = Level (dBuV/m)



3.5.10 Radiated Emissions (1559MHz – 1610MHz)


<Ant.11>

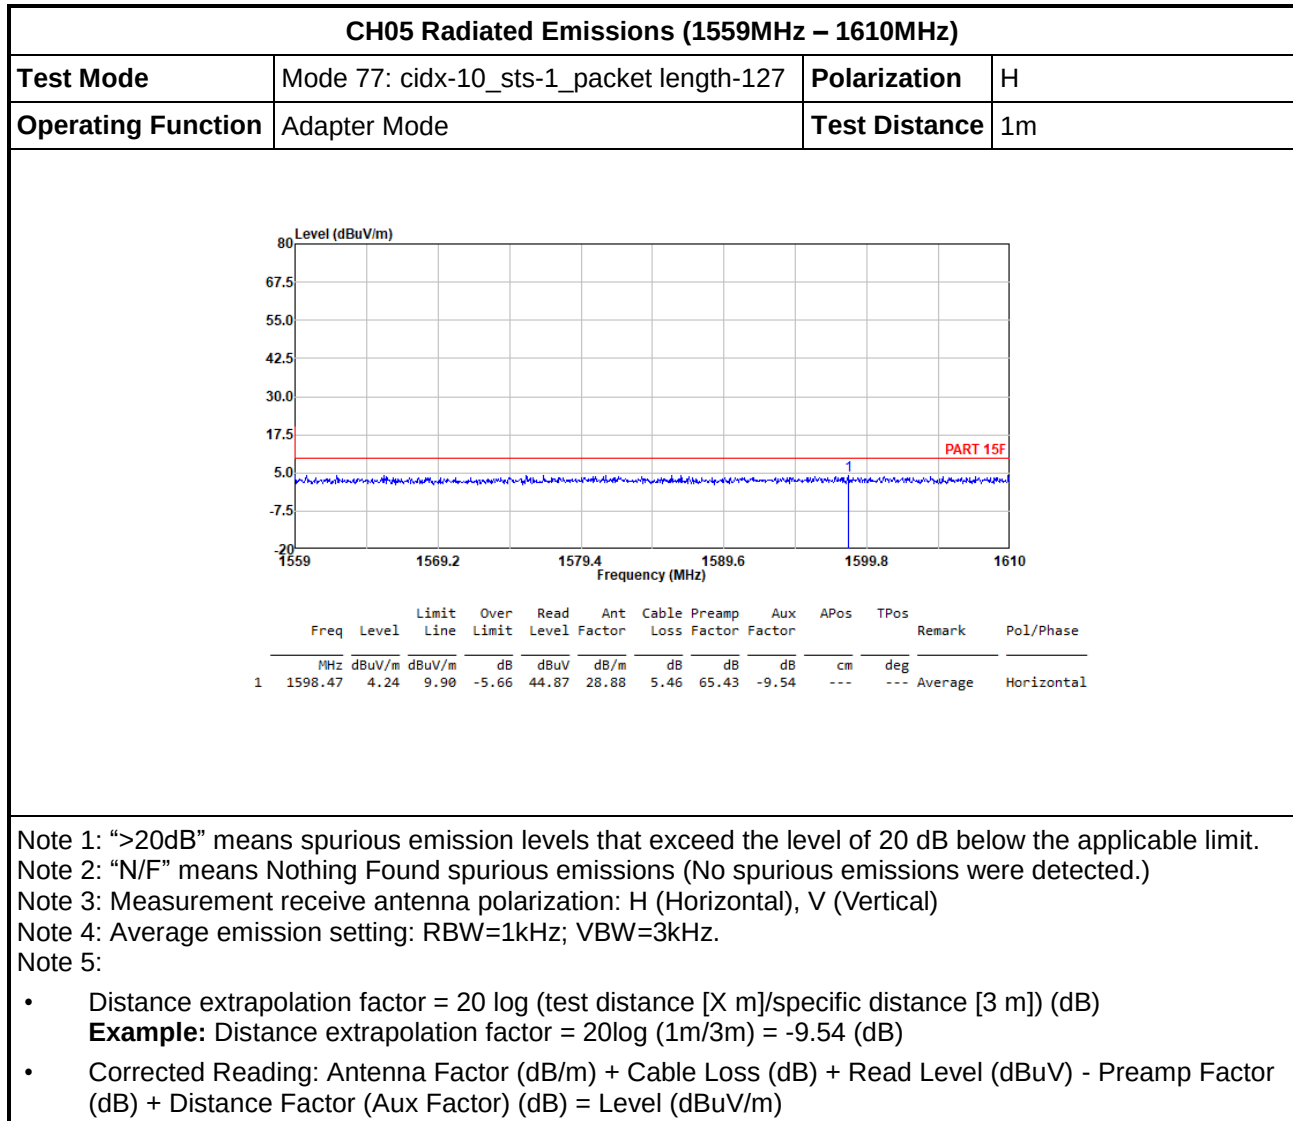



CH05 Radiated Emissions (1559MHz – 1610MHz)

Test Mode	Mode 77: cidx-10_sts-1_packet length-127	Polarization	V
Operating Function	Adapter Mode	Test Distance	1m

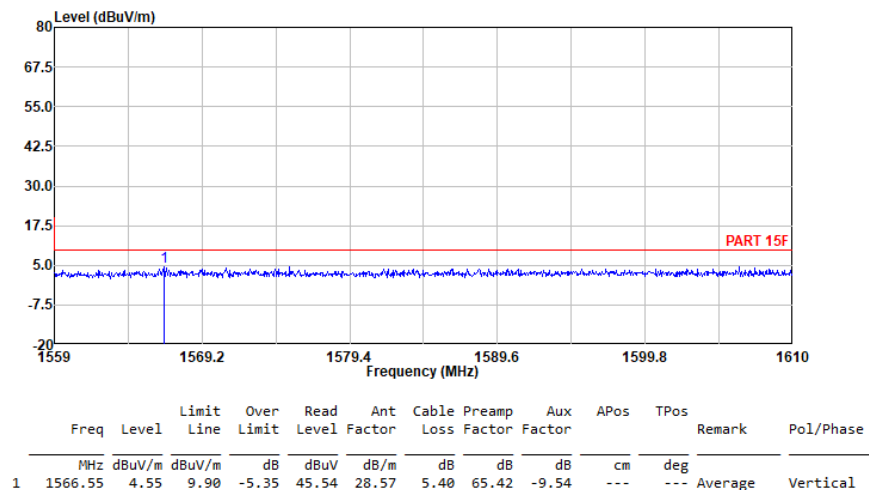

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: “N/F” means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: Average emission setting: RBW=1kHz; VBW=3kHz.


Note 5:

- Distance extrapolation factor = $20 \log (\text{test distance [X m]}/\text{specific distance [3 m]})$ (dB)
Example: Distance extrapolation factor = $20 \log (1\text{m}/3\text{m}) = -9.54$ (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Distance Factor (Aux Factor) (dB) = Level (dBuV/m)



CH09 Radiated Emissions (1559MHz – 1610MHz)

Test Mode	Mode 89: cidx-10_sts-1_packet length-127	Polarization	H
Operating Function	Adapter Mode	Test Distance	1m

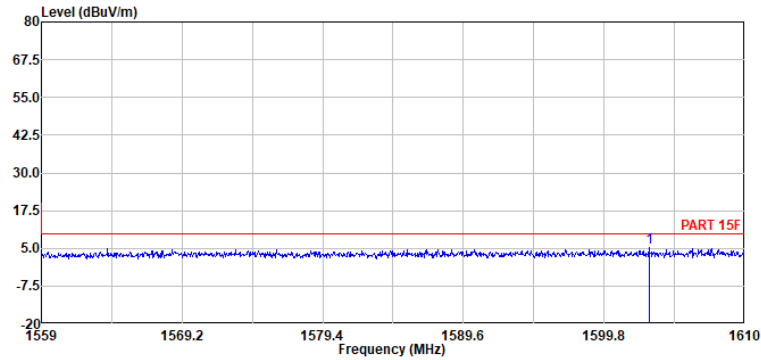

	Freq	Level	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		
1	1603.06	5.28	9.90	-4.62	45.90	28.88	5.47	65.43	-9.54	---	---	Average	Horizontal

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: “N/F” means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: Average emission setting: RBW=1kHz; VBW=3kHz.


Note 5:

- Distance extrapolation factor = $20 \log (\text{test distance [X m]}/\text{specific distance [3 m]})$ (dB)
Example: Distance extrapolation factor = $20 \log (1\text{m}/3\text{m}) = -9.54$ (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Distance Factor (Aux Factor) (dB) = Level (dBuV/m)



CH09 Radiated Emissions (1559MHz – 1610MHz)

Test Mode	Mode 89: cidx-10_sts-1_packet length-127	Polarization	V
Operating Function	Adapter Mode	Test Distance	1m

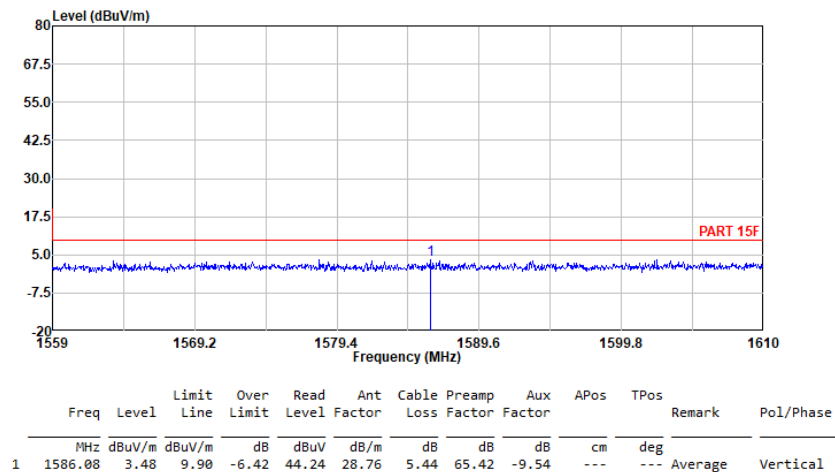

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: “N/F” means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: Average emission setting: RBW=1kHz; VBW=3kHz.

Note 5:

- Distance extrapolation factor = $20 \log (\text{test distance [X m]}/\text{specific distance [3 m]})$ (dB)
Example: Distance extrapolation factor = $20 \log (1\text{m}/3\text{m}) = -9.54$ (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Distance Factor (Aux Factor) (dB) = Level (dBuV/m)




Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	Pol/Phase
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	
1594.19	4.23	9.90	-5.67	44.91	28.84	5.45	65.43	-9.54	---	---	Average	Horizontal

- Distance extrapolation factor = $20 \log (\text{test distance [X m]}/\text{specific distance [3 m]})$ (dB)
Example: Distance extrapolation factor = $20 \log (1\text{m}/3\text{m}) = -9.54$ (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Distance Factor (Aux Factor) (dB) = Level (dBuV/m)



CH05 Radiated Emissions (1559MHz – 1610MHz)

Test Mode	Mode 8: cidx-11_sts-1_packet length-127	Polarization	V
Operating Function	Adapter Mode	Test Distance	1m

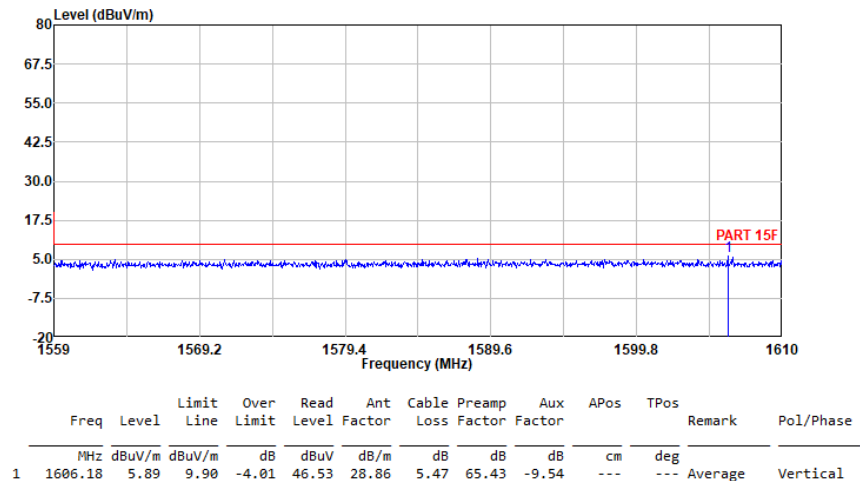

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: “N/F” means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: Average emission setting: RBW=1kHz; VBW=3kHz.


Note 5:

- Distance extrapolation factor = $20 \log (\text{test distance [X m]}/\text{specific distance [3 m]})$ (dB)
Example: Distance extrapolation factor = $20 \log (1\text{m}/3\text{m}) = -9.54$ (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Distance Factor (Aux Factor) (dB) = Level (dBuV/m)



CH09 Radiated Emissions (1559MHz – 1610MHz)

Test Mode	Mode 23: cidx-12_sts-1_packet length-127	Polarization	H
Operating Function	Adapter Mode	Test Distance	1m

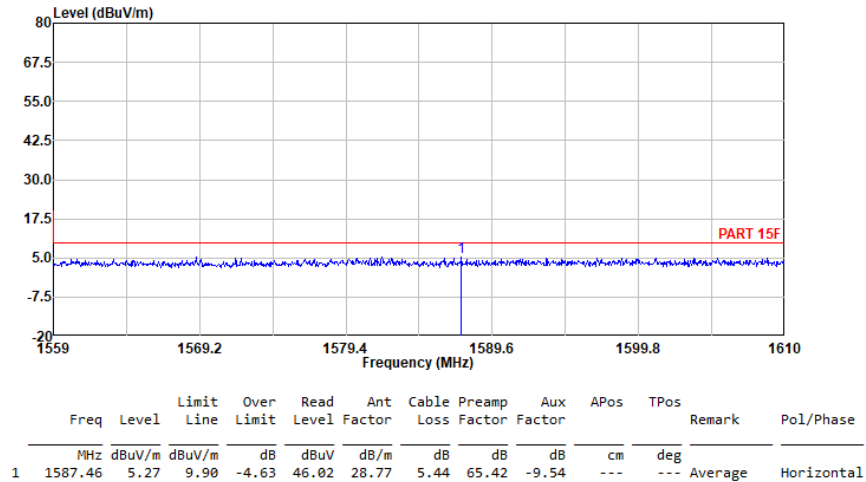

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: Average emission setting: RBW=1kHz; VBW=3kHz.


Note 5:

- Distance extrapolation factor = $20 \log (\text{test distance [X m]}/\text{specific distance [3 m]})$ (dB)
Example: Distance extrapolation factor = $20 \log (1\text{m}/3\text{m}) = -9.54$ (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Distance Factor (Aux Factor) (dB) = Level (dBuV/m)



CH09 Radiated Emissions (1559MHz – 1610MHz)

Test Mode	Mode 23: cidx-12_sts-1_packet length-127	Polarization	V
Operating Function	Adapter Mode	Test Distance	1m

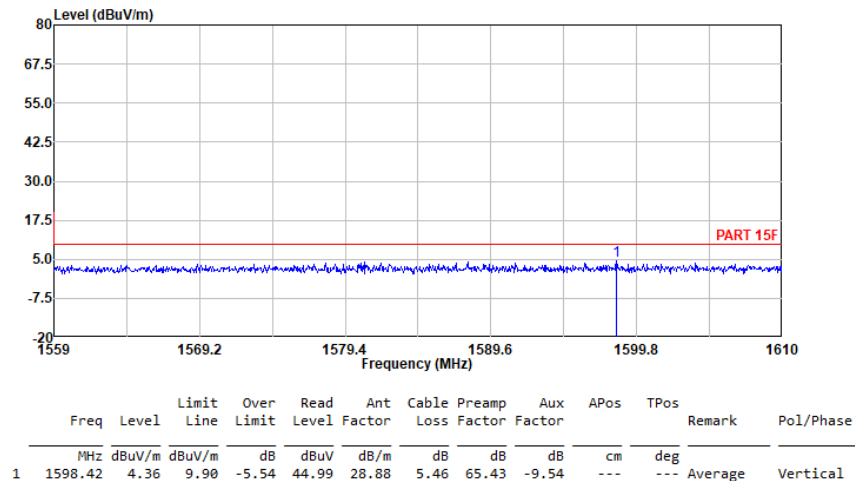

Note 1: “>20dB” means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: “N/F” means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: Average emission setting: RBW=1kHz; VBW=3kHz.

Note 5:

- Distance extrapolation factor = $20 \log (\text{test distance [X m]}/\text{specific distance [3 m]})$ (dB)
Example: Distance extrapolation factor = $20 \log (1\text{m}/3\text{m}) = -9.54$ (dB)
- Corrected Reading: Antenna Factor (dB/m) + Cable Loss (dB) + Read Level (dBuV) - Preamp Factor (dB) + Distance Factor (Aux Factor) (dB) = Level (dBuV/m)



4 Test Equipment and Calibration Data

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY57290157	3Hz~8.5GHz;Max 30dBm	Feb. 22, 2025	Oct. 29, 2025~Dec. 04, 2025	Feb. 21, 2026	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471084	10Hz~44GHz	Jul. 03, 2025	Oct. 29, 2025~Dec. 04, 2025	Jul. 02, 2026	Radiation (03CH06-KS)
Active loop antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Aug. 10, 2025	Oct. 29, 2025~Dec. 04, 2025	Aug. 09, 2026	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz~1GHz	Mar. 24, 2025	Oct. 29, 2025~Dec. 04, 2025	Mar. 23, 2026	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00218652	1GHz~18GHz	Apr. 14, 2025	Oct. 29, 2025~Dec. 04, 2025	Apr. 13, 2026	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101116	18GHz~40GHz	Oct. 18, 2025	Oct. 29, 2025~Dec. 04, 2025	Oct. 17, 2026	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	380827	9KHz ~1GHZ	Jul. 03, 2025	Oct. 29, 2025~Dec. 04, 2025	Jul. 02, 2026	Radiation (03CH06-KS)
Amplifier	EM	EM18G40GA	060728	18~40GHz	Jan. 03, 2025	Oct. 29, 2025~Dec. 04, 2025	Jan. 02, 2026	Radiation (03CH06-KS)
high gain Amplifier	EM	EM01G18GA	060845	1Ghz~18Ghz	Jan. 03, 2025	Oct. 29, 2025~Dec. 04, 2025	Jan. 02, 2026	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY57280119	500MHz~26.5GHz	Oct. 10, 2025	Oct. 29, 2025~Dec. 04, 2025	Oct. 09, 2026	Radiation (03CH06-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Oct. 29, 2025~Dec. 04, 2025	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Oct. 29, 2025~Dec. 04, 2025	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Oct. 29, 2025~Dec. 04, 2025	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 16, 2025	Nov. 18, 2025	Apr. 15, 2026	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Jul. 03, 2025	Nov. 18, 2025	Jul. 02, 2026	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Dec. 24, 2024	Nov. 18, 2025	Dec. 23, 2025	Conduction (CO01-KS)
AC Power Source	Ouhan	APW-130NYT	202201040060	AC 0V~300V,45Hz~1000Hz	Apr. 16, 2025	Nov. 18, 2025	Apr. 15, 2026	Conduction (CO01-KS)

NCR: No Calibration Required.



5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.84dB
---	--------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.18 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.88 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.36 dB
---	---------

----- THE END -----