

Date: 2025-11-20

01_GSM850_GPRS 3 Tx slot_Right Cheek_0mm_Ch251

Communication System: GPRS-FDD

Frequency: 848.800 MHz; DutyCycle: 1:2.77

Medium: HSL_835_251120 Medium parameters used: $f = 848.800$ MHz; $\sigma = 0.937$ S/m; $\epsilon_r = 42.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.17, 9.9, 10.08); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: GSM, 10023-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.660 W/kg; SAR (10g) = 0.337 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.659 W/kg; SAR (10g) = 0.325 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 79.0 %

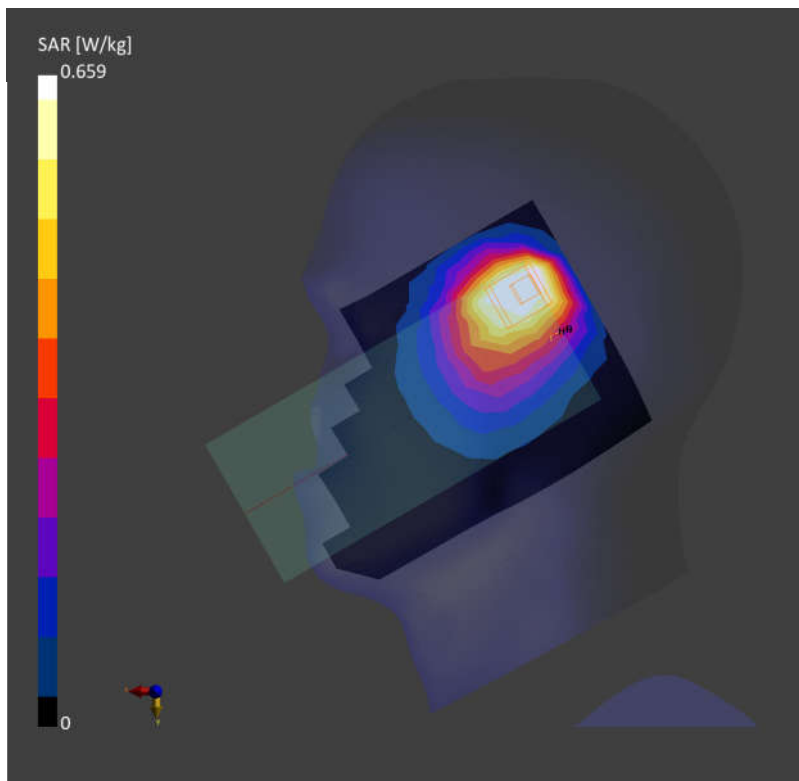

Date: 2025-11-21

02_GSM1900_GPRS 3 Tx slots_Right Cheek_0mm_Ch661

Communication System: GPRS-FDD

Frequency: 1880.000 MHz; Duty Cycle: 1:2.77

Medium: HSL_1900_251121 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 40.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.21, 7.99, 8.14); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: GSM, 10027-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.756 W/kg; SAR (10g) = 0.367 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.12 dB

SAR (1g) = 0.737 W/kg; SAR (10g) = 0.326 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 79.8 %

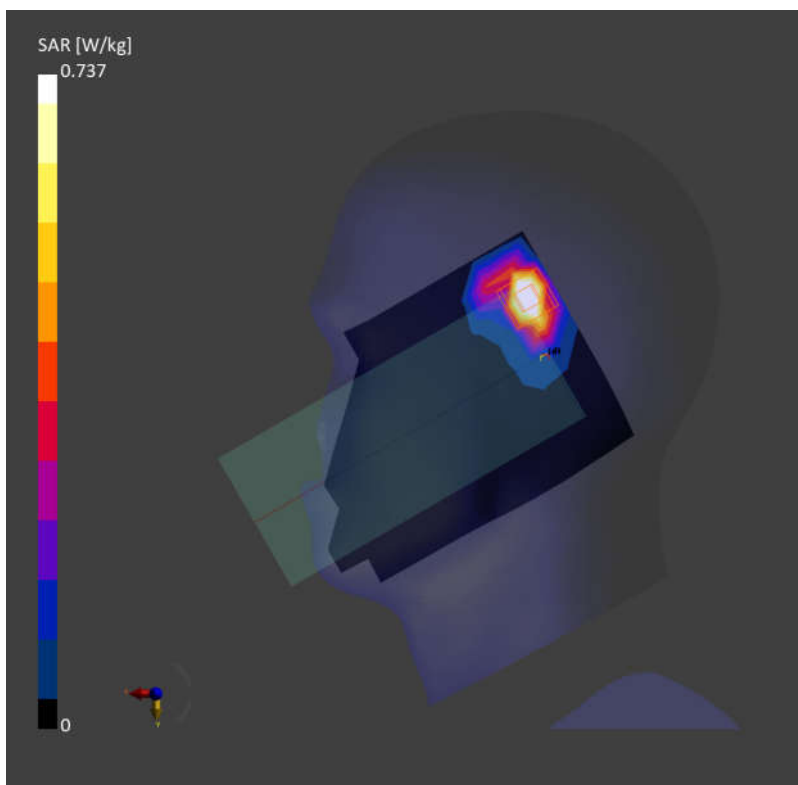

Date: 2025-11-21

03_WCDMA II_RMC 12.2Kbps_Right Cheek_0mm_Ch9538

Communication System: UMTS-FDD

Frequency: 1907.600 MHz; Duty Cycle: 1:1

Medium: HSL_1900_251121 Medium parameters used: $f = 1907.600$ MHz; $\sigma = 1.48$ S/m; $\epsilon_r = 41.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.21, 7.99, 8.14); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.705 W/kg; SAR (10g) = 0.340 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.06 dB

SAR (1g) = 0.715 W/kg; SAR (10g) = 0.318 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 70.3 %

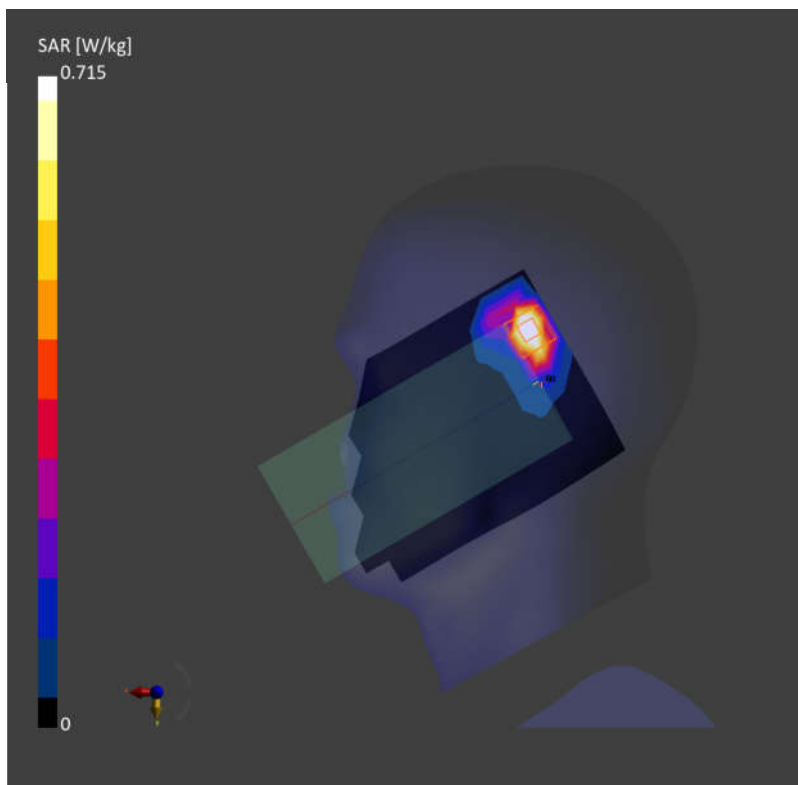

Date: 2025-11-21

04_WCDMA IV_RMC 12.2Kbps_Right Cheek_0mm_Ch1513

Communication System: UMTS-FDD

Frequency: 1752.600 MHz; Duty Cycle: 1:1

Medium: HSL_1750_251121 Medium parameters used: $f = 1752.600$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 40.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.4, 8.17, 8.33); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.743 W/kg; SAR (10g) = 0.377 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.08 dB

SAR (1g) = 0.744 W/kg; SAR (10g) = 0.335 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 81.3 %

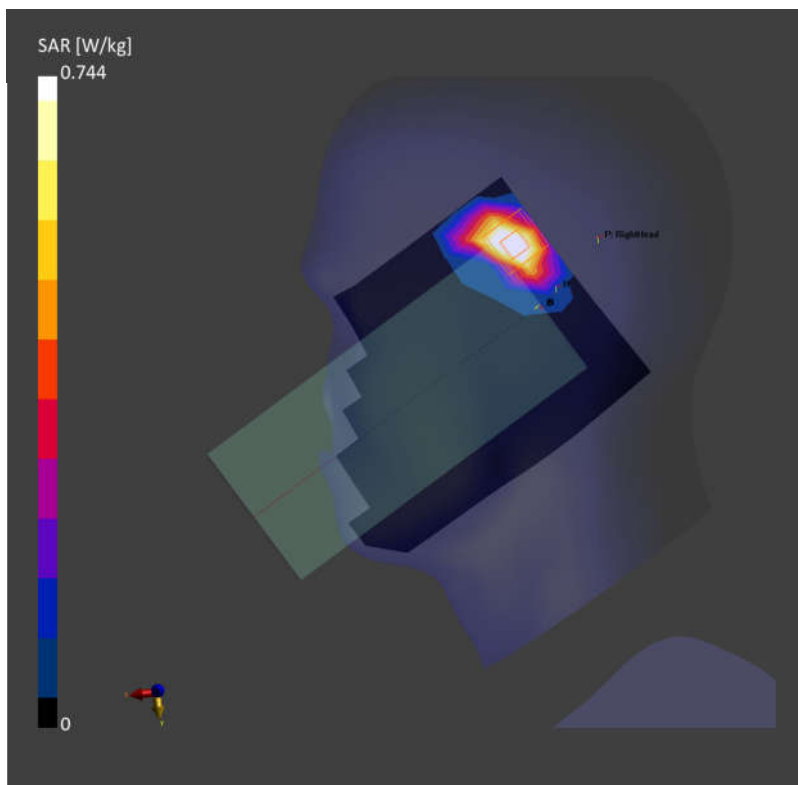

Date: 2025-11-20

05_WCDMA V_RMC 12.2Kbps_Right Cheek_0mm_Ch4233

Communication System: UMTS-FDD

Frequency: 846.600 MHz; Duty Cycle: 1:1

Medium: HSL_835_251120 Medium parameters used: $f = 846.600$ MHz; $\sigma = 0.927$ S/m; $\epsilon_r = 42.3$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.17, 9.9, 10.08); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.701 W/kg; SAR (10g) = 0.465 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.687 W/kg; SAR (10g) = 0.450 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 76.5 %

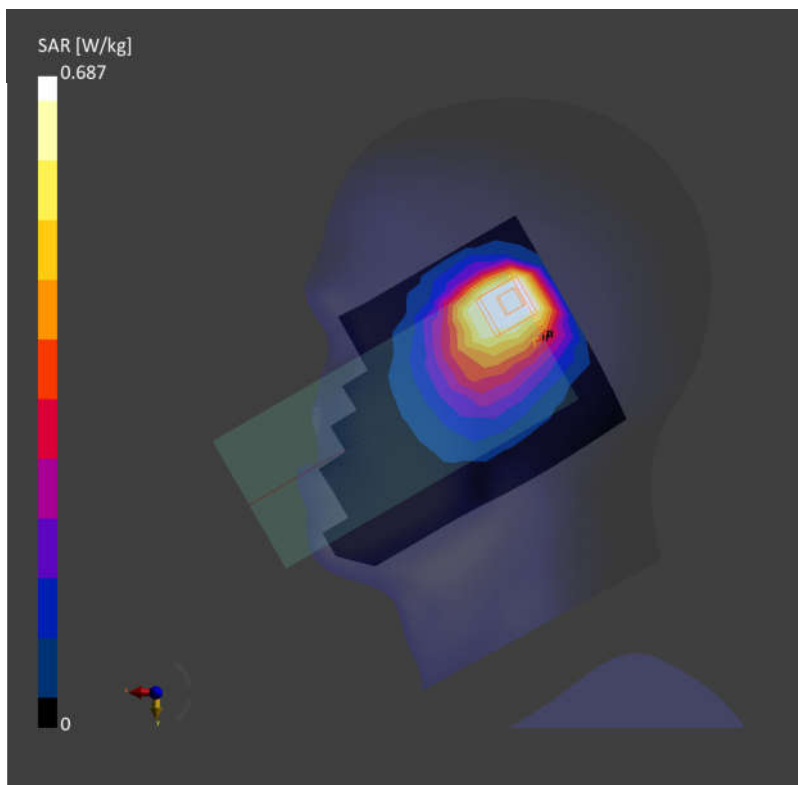

Date: 2025-11-21

06_LTE Band 2_20M_QPSK_1_0_Right Cheek_0mm_Ch19100

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 1900.000 MHz; Duty Cycle: 1:1

Medium: HSL_1900_251121 Medium parameters used: $f = 1900.000$ MHz; $\sigma = 1.47$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.21, 7.99, 8.14); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.762 W/kg; SAR (10g) = 0.373 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.08 dB

SAR (1g) = 0.748 W/kg; SAR (10g) = 0.335 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 83.7 %

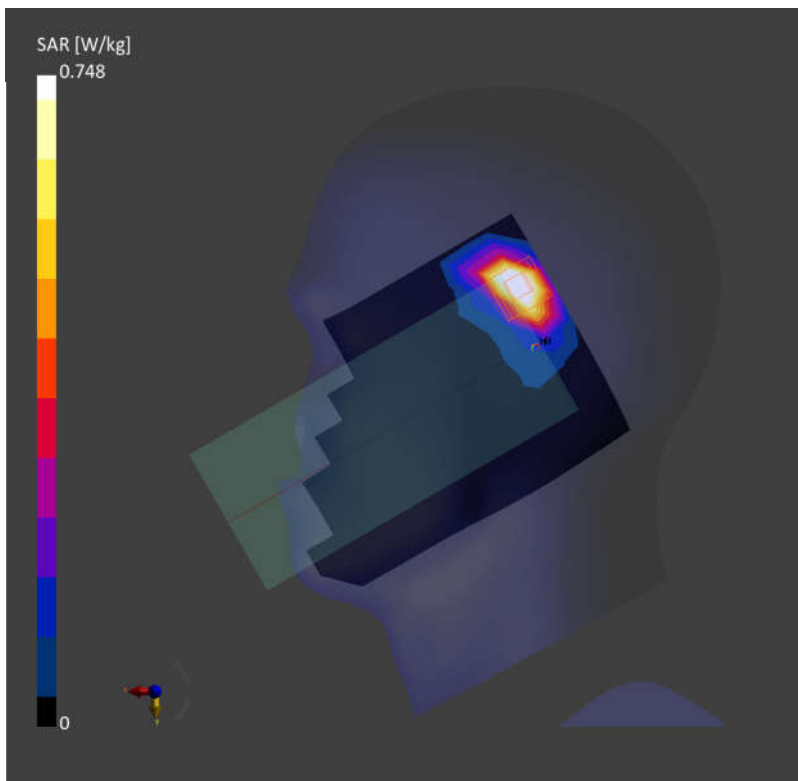

Date: 2025-11-23

07_LTE Band 7_20M_QPSK_1_0_Right Cheek_0mm_Ch21350

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 2560.000 MHz; Duty Cycle: 1:1

Medium: HSL_2600_251123 Medium parameters used: $f = 2560.000$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(7.49, 7.28, 7.42); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.672 W/kg; SAR (10g) = 0.289 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.683 W/kg; SAR (10g) = 0.285 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 79.0 %

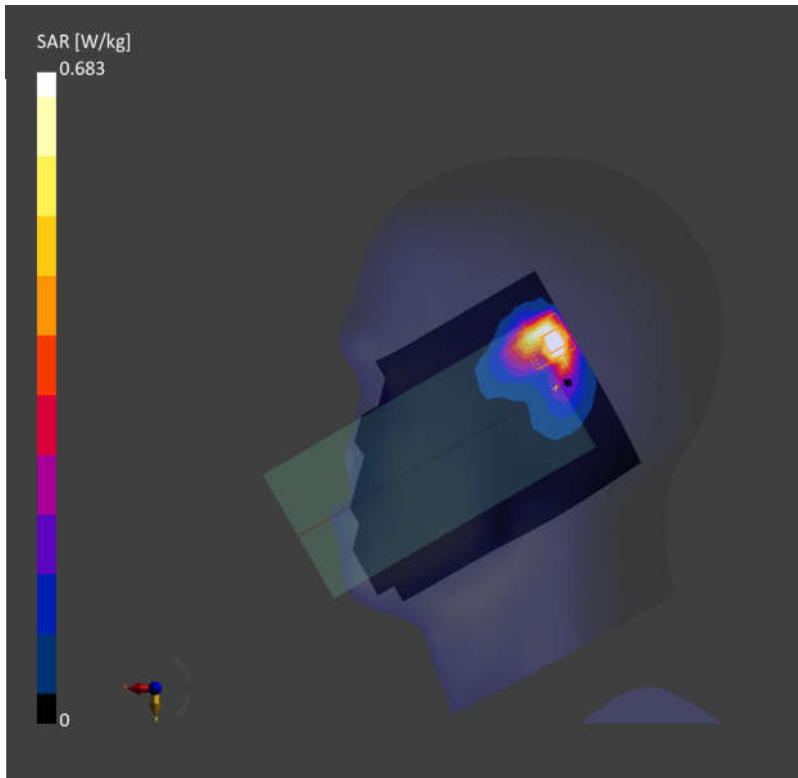

Date: 2025-11-20

08_LTE Band 12_10M_QPSK_1_0_Right Cheek_0mm_Ch23095

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 707.500 MHz; Duty Cycle: 1:1

Medium: HSL_750_251120 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.878$ S/m; $\epsilon_r = 43.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.37, 10.09, 10.28); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.617 W/kg; SAR (10g) = 0.326 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.663 W/kg; SAR (10g) = 0.355 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 77.7 %

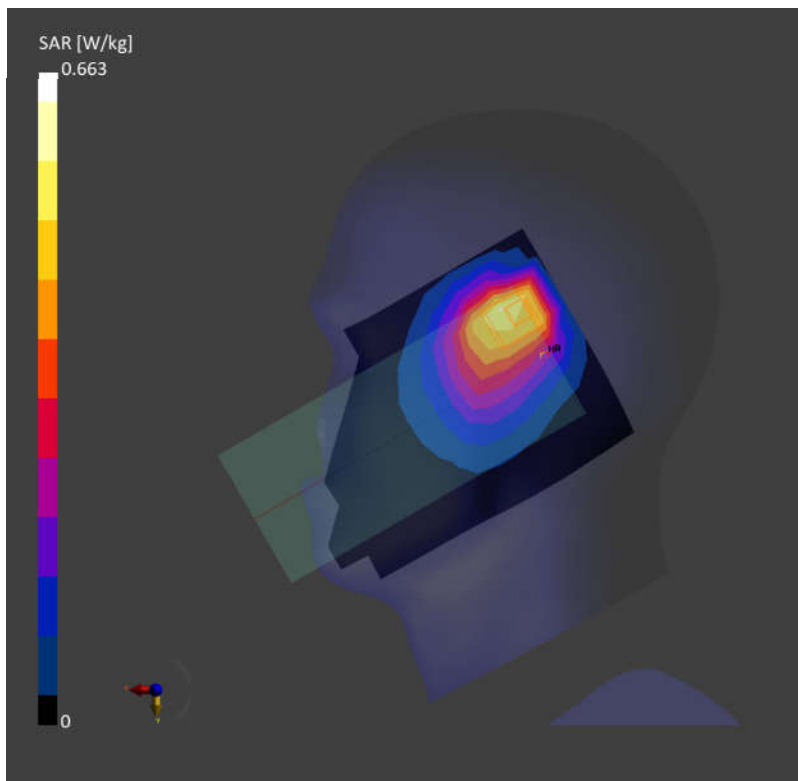

Date: 2025-11-20

09_LTE Band 13_10M_QPSK_1_0_Right Cheek_0mm_Ch23230

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 782.000 MHz; Duty Cycle: 1:1

Medium: HSL_750_251120 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.901$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.37, 10.09, 10.28); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.603 W/kg; SAR (10g) = 0.405 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.655 W/kg; SAR (10g) = 0.412 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 69.4 %

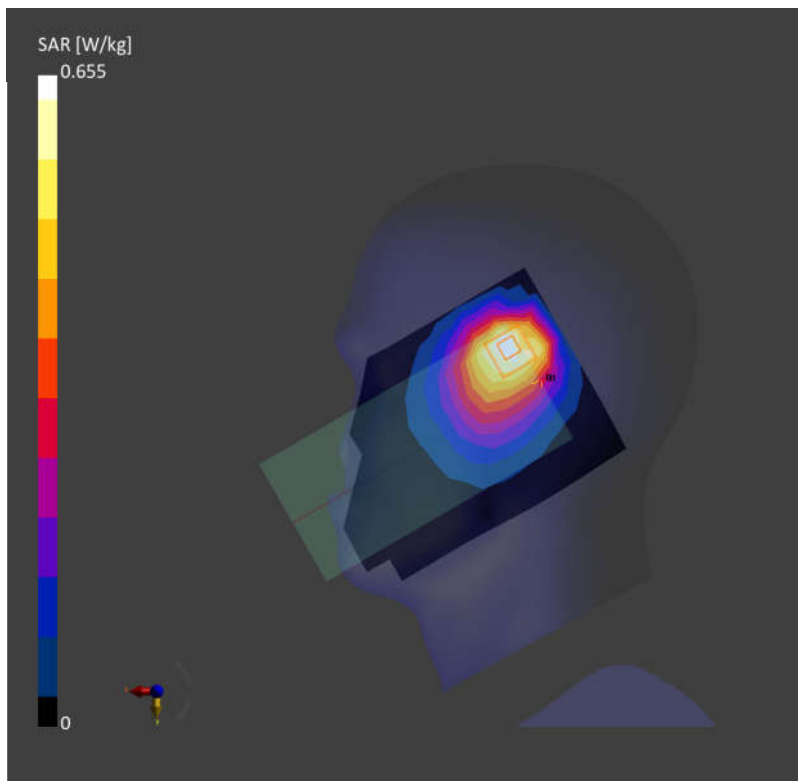

Date: 2025-11-20

10_LTE Band 26_15M_QPSK_1_0_Right Cheek_0mm_Ch26865

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1

Medium: HSL_835_251120 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.922$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.17, 9.9, 10.08); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.641 W/kg; SAR (10g) = 0.317 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 0.622 W/kg; SAR (10g) = 0.328 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 74.5 %

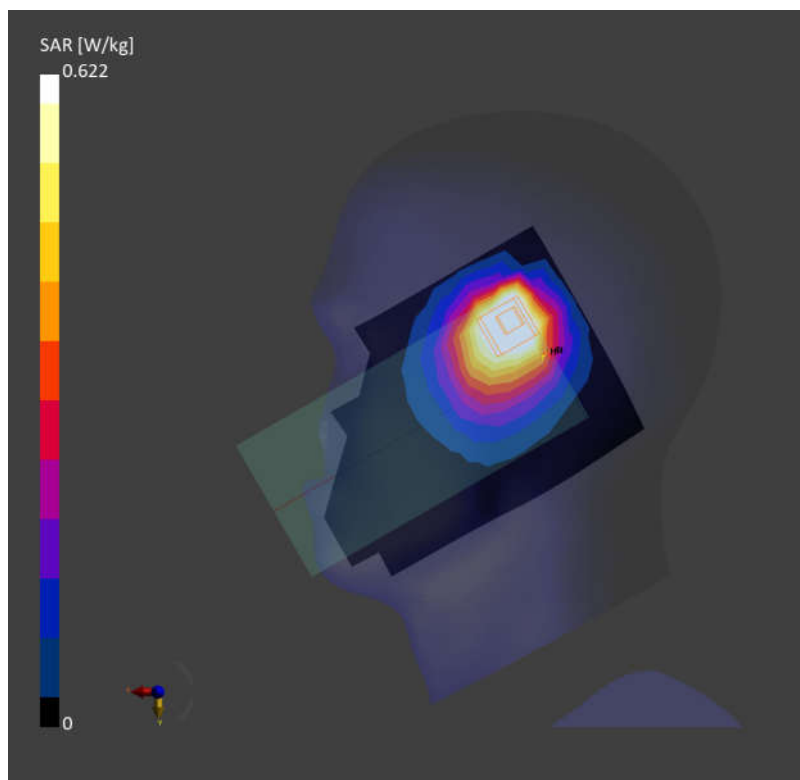

Date: 2025-11-21

11_LTE Band 66_20M_QPSK_1_0_Right Cheek_0mm_Ch132572

Communication System: LTE-FDD

AntennaCfg:SISO; Frequency: 1770.000 MHz; Duty Cycle: 1:1

Medium: HSL_1750_251121 Medium parameters used: $f = 1770.000$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 40.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.4, 8.17, 8.33); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.727 W/kg; SAR (10g) = 0.359 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.704 W/kg; SAR (10g) = 0.339 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 83.1 %

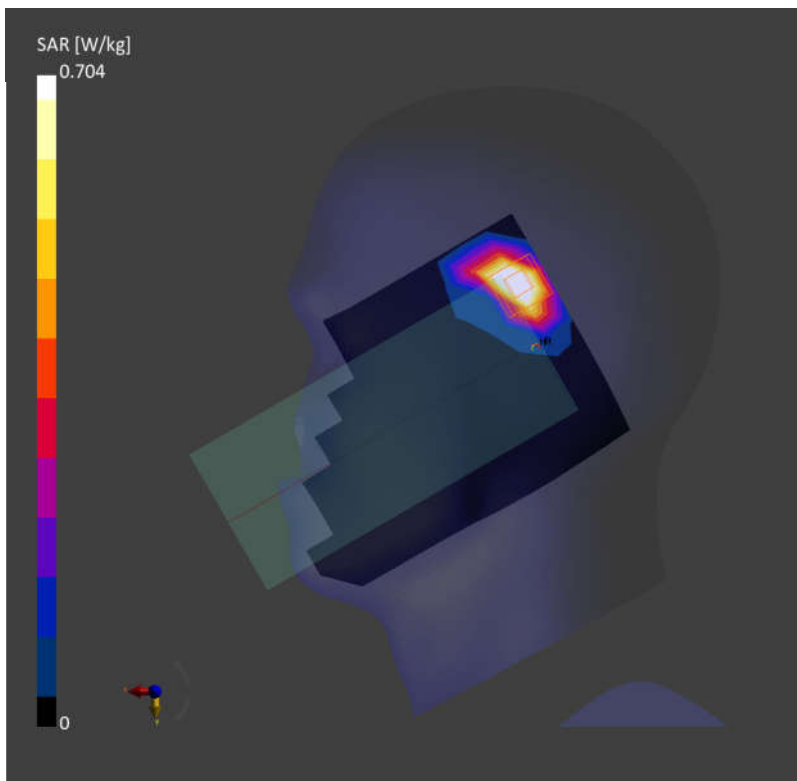

Date: 2025-11-23

12_LTE Band 41_20M_QPSK_1_0_Left Cheek_0mm_Ch39750

Communication System: LTE-TDD

AntennaCfg:SISO; Frequency: 2506.000 MHz; Duty Cycle: 1:1

Medium: HSL_2600_251123 Medium parameters used: $f = 2506.000$ MHz; $\sigma = 1.80$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(7.49, 7.28, 7.42); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.689 W/kg; SAR (10g) = 0.264 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.716 W/kg; SAR (10g) = 0.234 W/kg

Smallest distance from peaks to all points 3 dB below = 5.3 mm

Ratio of SAR at M2 to SAR at M1 = 86.3 %

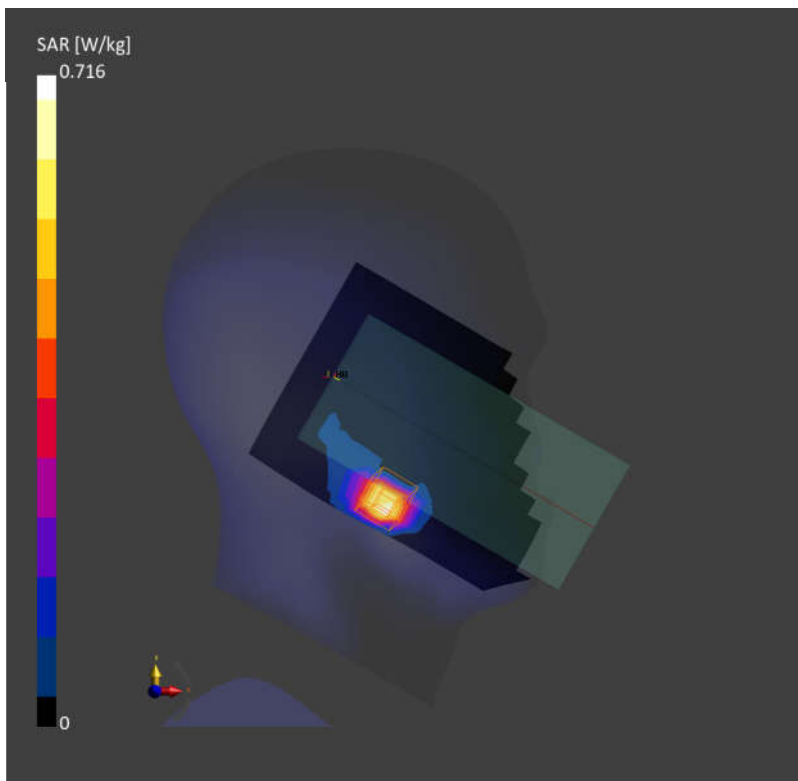

Date: 2025-11-24

13_LTE Band 42_20M_QPSK_1_0_Right Cheek_0mm_Ch42990

Communication System: LTE-TDD

AntennaCfg:SISO; Frequency: 3540.000 MHz; Duty Cycle: 1:1

Medium: HSL_3500_251124 Medium parameters used: $f = 3540.000$ MHz; $\sigma = 2.94$ S/m; $\epsilon_r = 37.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(6.94, 6.76, 6.88); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.594 W/kg; SAR (10g) = 0.234 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.02 dB

SAR (1g) = 0.625 W/kg; SAR (10g) = 0.257 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 72.1 %

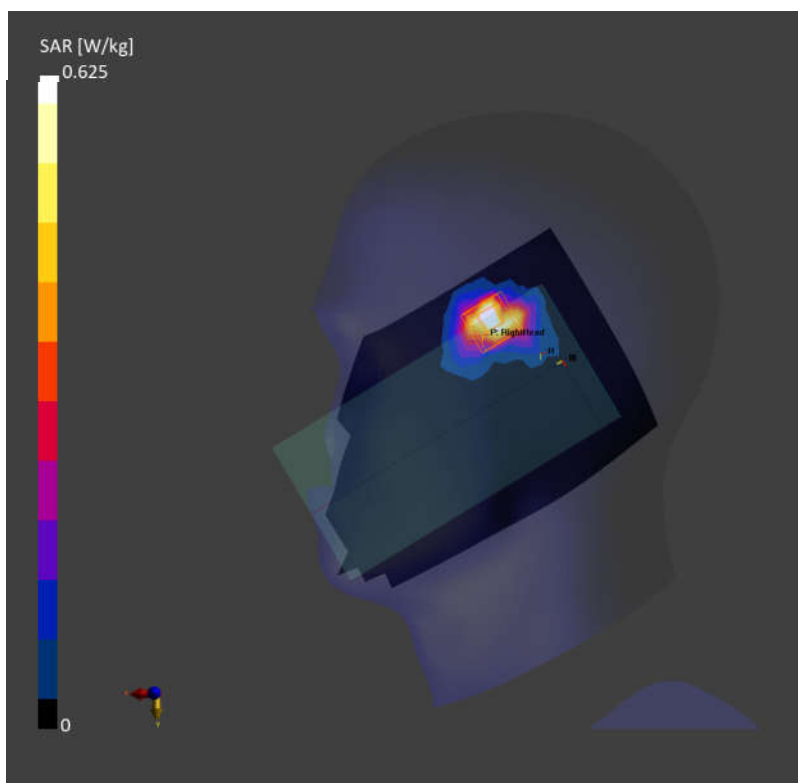

Date: 2025-11-21

14_FR1 n2_20M_BPSK_50_28_Right Cheek_0mm_Ch380000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 1900.000 MHz; Duty Cycle: 1:1

Medium: HSL_1900_251121 Medium parameters used: $f = 1900.000$ MHz; $\sigma = 1.47$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.21, 7.99, 8.14); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.684 W/kg; SAR (10g) = 0.340 W/kg;


Zoom Scan (34.3 mm x 34.3 mm x 33.4 mm): Measurement Grid: 4.9 mm x 4.9 mm x 1.4 mm

Power Drift = -0.06 dB

SAR (1g) = 0.663 W/kg; SAR (10g) = 0.296 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 83.7 %

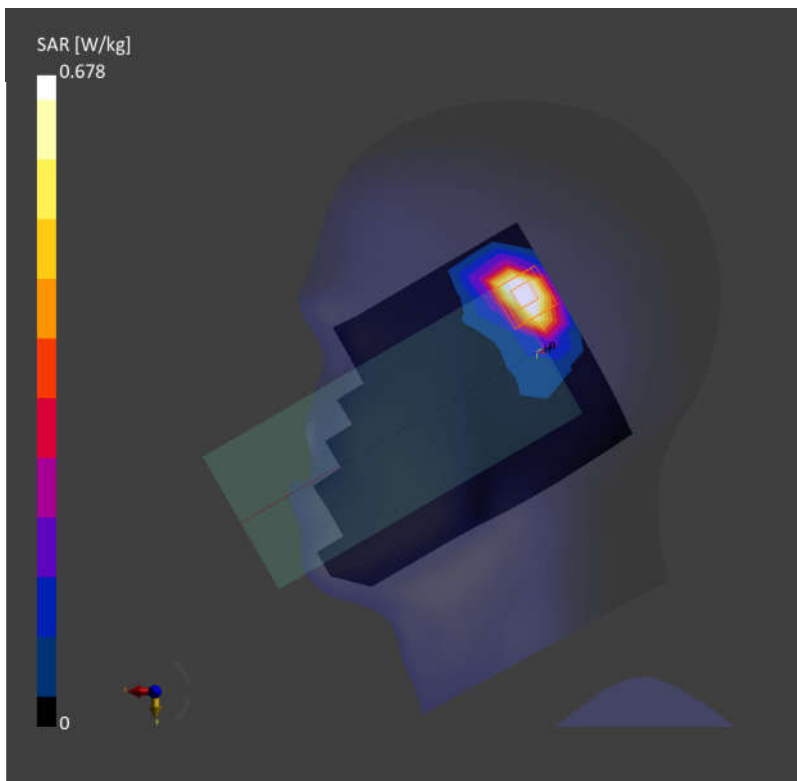

Date: 2025-11-23

15_FR1 n7_50M_BPSK_1_1_Right Tilted_0mm_Ch507000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 2535.000 MHz; Duty Cycle: 1:1

Medium: HSL_2600_251123 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(7.49, 7.28, 7.42); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10935-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.758 W/kg; SAR (10g) = 0.314 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.712 W/kg; SAR (10g) = 0.292 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 78.1 %

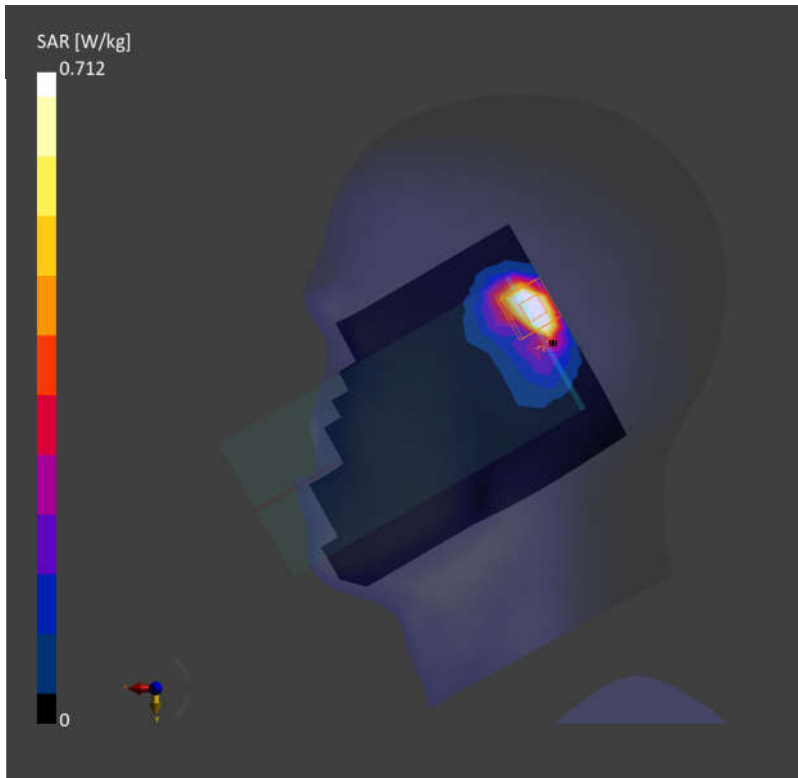

Date: 2025-11-21

16_FR1 n66_40M_BPSK_108_54_Right Tilted_0mm_Ch349000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 1745.000 MHz; Duty Cycle: 1:1

Medium: HSL_1750_251121 Medium parameters used: $f=1745.000$ MHz; $\sigma=1.39$ S/m; $\epsilon_r=40.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.4, 8.17, 8.33); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.675 W/kg; SAR (10g) = 0.316 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.14 dB

SAR (1g) = 0.685 W/kg; SAR (10g) = 0.294 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 81.8 %

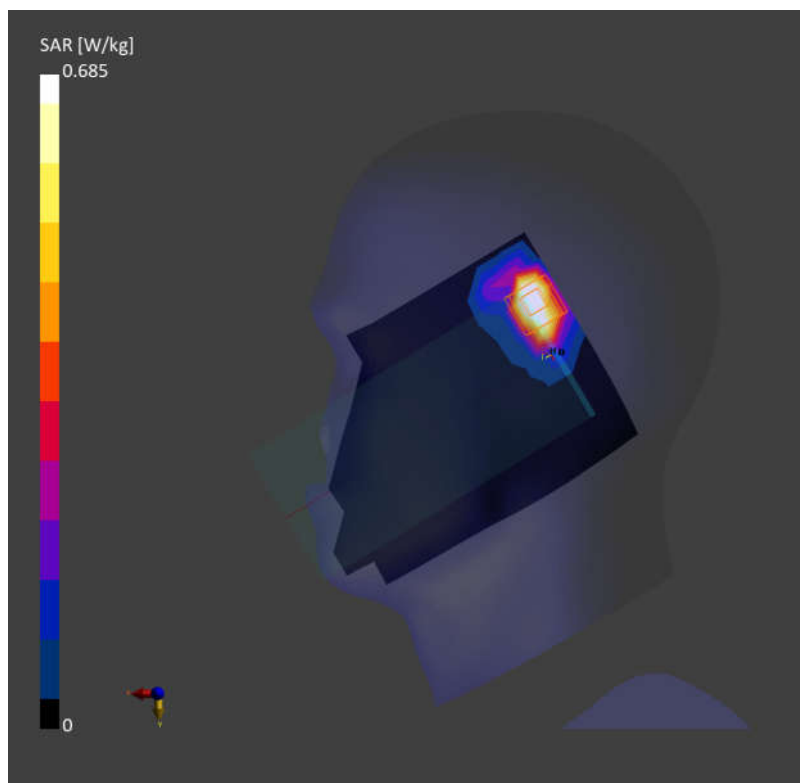

Date: 2025-11-23

17_FR1 n41_100M_BPSK_135_69_Left Cheek_0mm_Ch518598

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 2592.990 MHz; Duty Cycle: 1:1

Medium: HSL_2600_251123 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.9°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(7.49, 7.28, 7.42); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.588 W/kg; SAR (10g) = 0.257 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.08 dB

SAR (1g) = 0.717 W/kg; SAR (10g) = 0.279 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 82.3 %

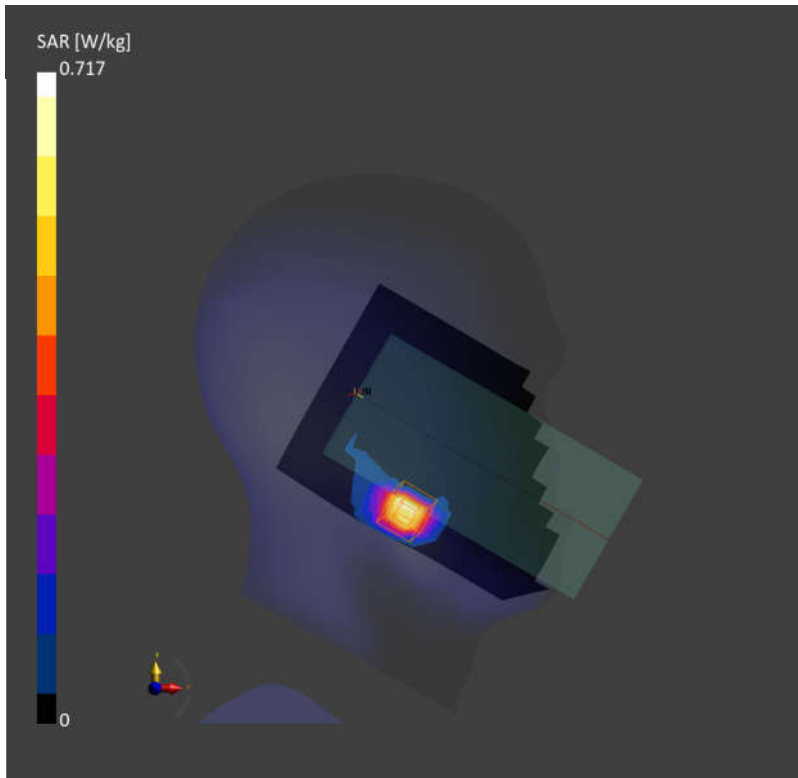

Date: 2025-11-24

18_FR1 n77_100M_BPSK_1_1_Left Tilted_0mm_Ch656000

Communication System: 5G NR

AntennaCfg:SISO; Frequency: 3840.000 MHz; Duty Cycle: 1:1

Medium: HSL_3900_251124 Medium parameters used: $f=3840.000$ MHz; $\sigma=3.35$ S/m; $\epsilon_r=37.4$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(6.81, 6.63, 6.75); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10803-AAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.747 W/kg; SAR (10g) = 0.275 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = -0.11 dB

SAR (1g) = 0.749 W/kg; SAR (10g) = 0.267 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 72.2 %

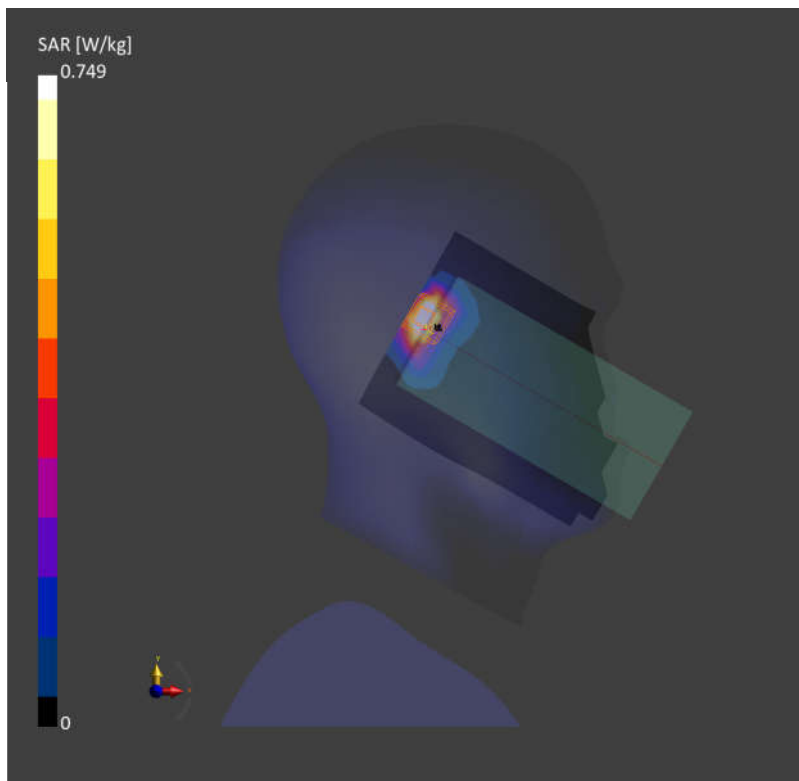

Date: 2025-11-23

19_WLAN2.4GHz_802.11b 1Mbps_Left Cheek_0mm_Ch11

Communication System: IEEE 802.11b WiFi 2.4 GHz

Frequency: 2462.000MHz; Duty Cycle: 1:1.026

Medium: HSL_2450_251123 Medium parameters used: $f = 2462.000$ MHz; $\sigma = 1.76$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(7.65, 7.44, 7.58); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.983 W/kg; SAR (10g) = 0.492 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.09 dB

SAR (1g) = 0.993 W/kg; SAR (10g) = 0.495 W/kg

Smallest distance from peaks to all points 3 dB below = 10.0 mm

Ratio of SAR at M2 to SAR at M1 = 83.4 %

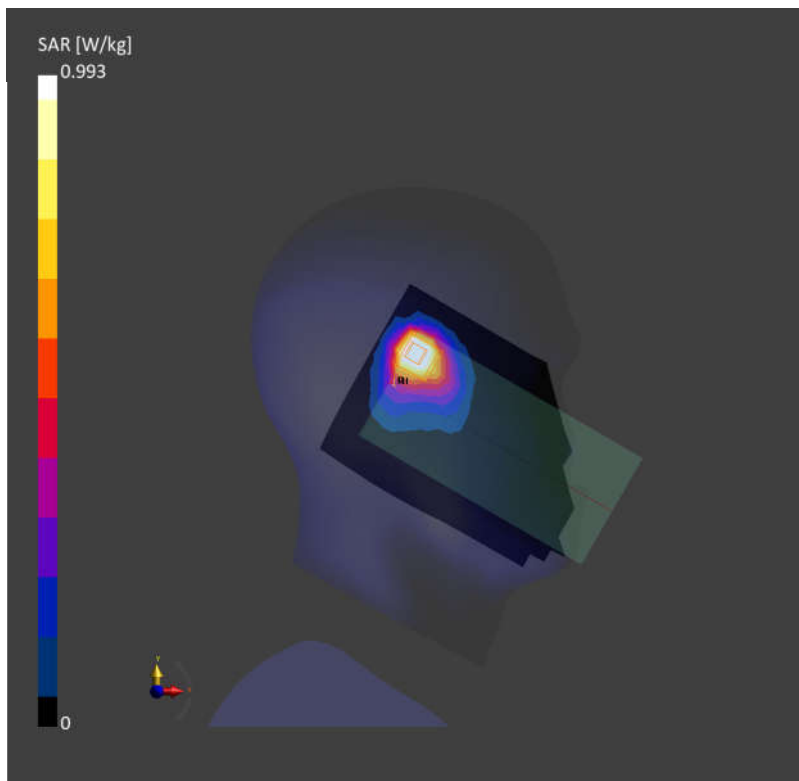

Date: 2025-11-27

20_WLAN5GHz_802.11n-HT80 MCS0_Left Cheek_0mm_Ch54

Communication System: IEEE 802.11n

Frequency: 5270.000 MHz; Duty Cycle: 1:1

Medium: HSL_5250_251127 Medium parameters used: $f = 5270.000$ MHz; $\sigma = 4.64$ S/m; $\epsilon_r = 36.4$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.9, 5.74, 5.85); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.665 W/kg; SAR (10g) = 0.242 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.06 dB

SAR (1g) = 0.771 W/kg; SAR (10g) = 0.249 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 58.6 %

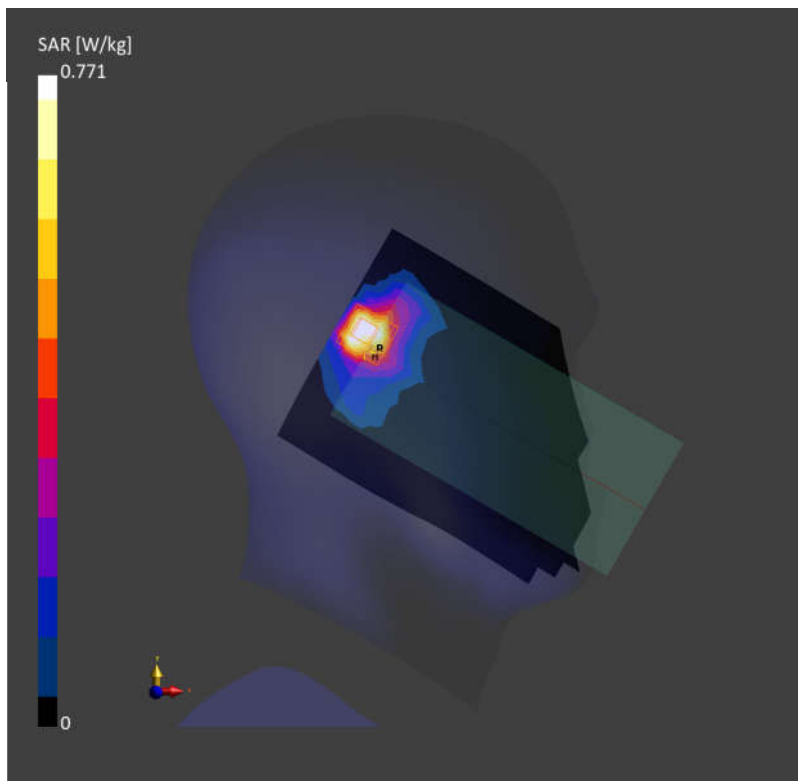

Date: 2025-11-28

21_WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch138

Communication System: IEEE 802.11ac WiFi

Frequency: 5690.000 MHz; Duty Cycle: 1:1

Medium: HSL_5600_251128 Medium parameters used: $f = 5690.000$ MHz; $\sigma = 5.10$ S/m; $\epsilon_r = 35.8$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.45, 5.3, 5.4); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.860 W/kg; SAR (10g) = 0.303 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.06 dB

SAR (1g) = 0.912 W/kg; SAR (10g) = 0.312 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 60.2 %

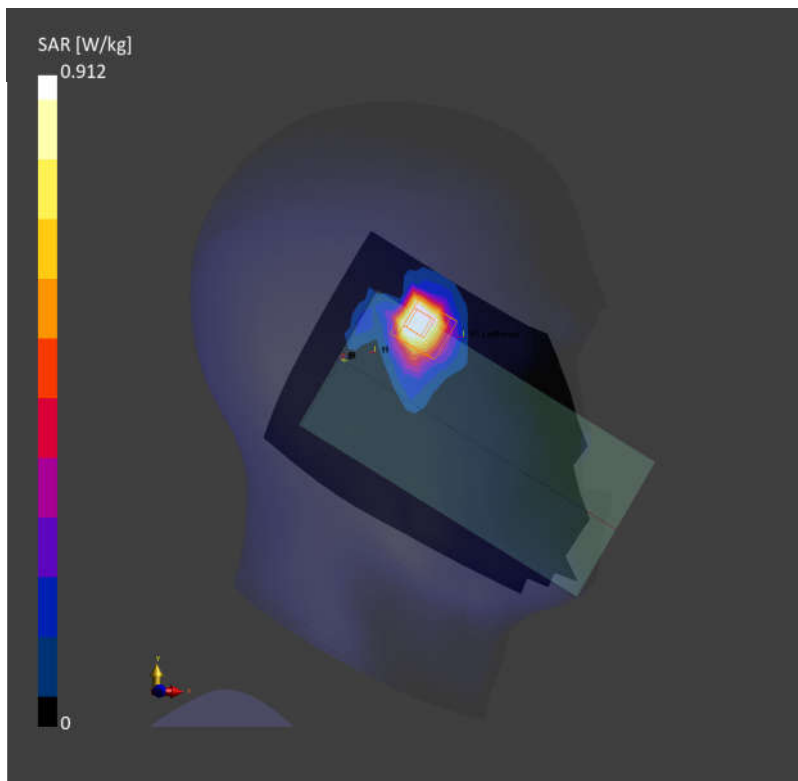

Date: 2025-11-29

22_WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch155

Communication System: IEEE 802.11ac WiFi

Frequency: 5775.000 MHz; Duty Cycle: 1:1

Medium: HSL_5800_251129 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.21$ S/m; $\epsilon_r = 35.6$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.31, 5.17, 5.27); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.817 W/kg; SAR (10g) = 0.294 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.01 dB

SAR (1g) = 0.876 W/kg; SAR (10g) = 0.314 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 60.4 %

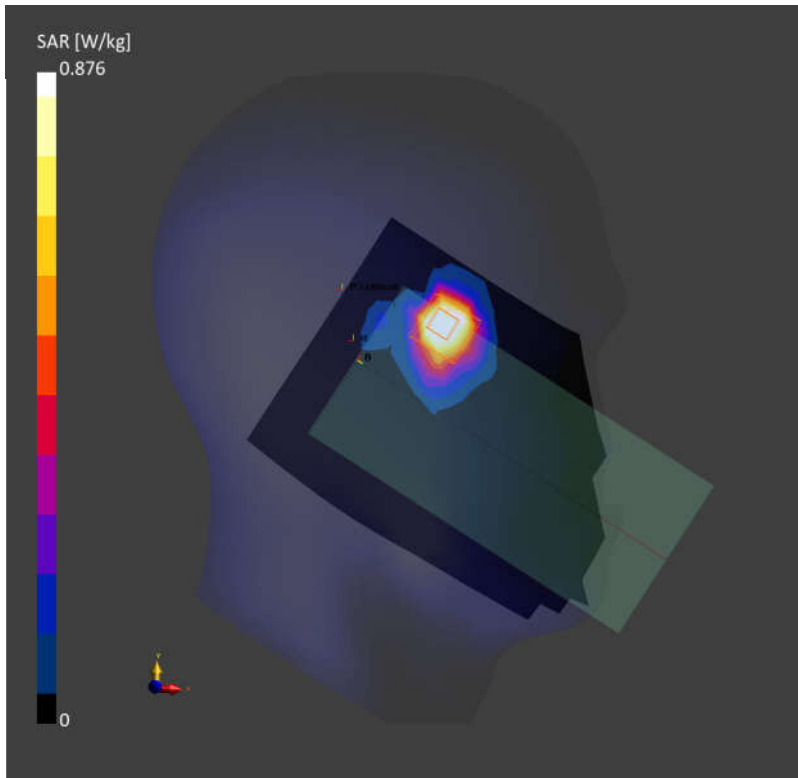

Date: 2025-11-23

23_Bluetooth_1Mbps_Left Cheek_0mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth

Frequency: 2441.000 MHz; Duty Cycle: 1:1.297

Medium: HSL_2450_251123 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.77$ S/m; $\epsilon_r = 39.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(7.65, 7.44, 7.58); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2021; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.254 W/kg; SAR (10g) = 0.125 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.11 dB

SAR (1g) = 0.276 W/kg; SAR (10g) = 0.138 W/kg

Smallest distance from peaks to all points 3 dB below = 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 84.8 %

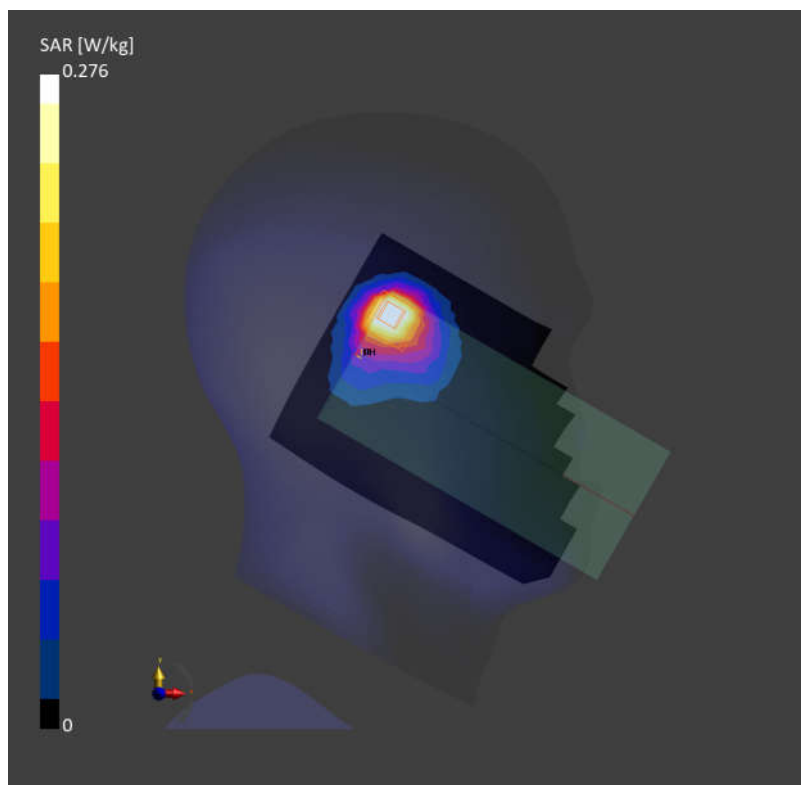

Date: 2025-12-01

24_WLAN6GHz_802.11AX-HE80 MCS0_Left Tilted_0mm_Ch135

Communication System: IEEE 802.11ax

Frequency: 6625.000MHz; Duty Cycle: 1:1

Medium: HSL_6500_251201 Medium parameters used: $f = 6625.000$ MHz; $\sigma = 6.26$ S/m; $\epsilon_r = 34.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(4.57, 4.93, 4.67); Calibrated: 2025-07-25
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1691; Calibrated: 2025-06-04
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2022; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10719-AAC

Area Scan (119.0 mm x 204.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.554 W/kg; SAR (10g) = 0.164 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm


Power Drift = -0.05 dB

SAR (1g) = 0.626 W/kg; SAR (10g) = 0.178 W/kg

Smallest distance from peaks to all points 3 dB below = 3.5 mm

Ratio of SAR at M2 to SAR at M1 = 44.5 %

psAPD (4.0cm2, sq) = 4.01 [W/m2]

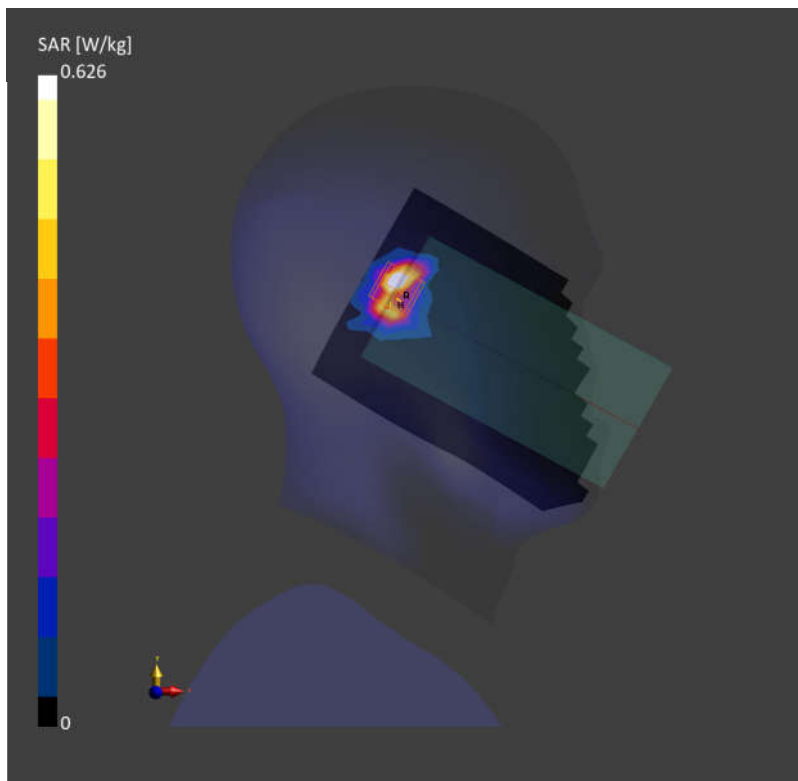

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/11/22

25_GSM850_GPRS (3 Tx slots)_Back_5mm_Ch251

Communication System: UID 0, GSM850 (0); Frequency: 848.8 MHz; Duty Cycle: 1:2.77

Medium: HSL_835_251122 Medium parameters used: $f = 849$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 42.501$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.16, 8.28, 8.98) @ 848.8 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.10 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.15 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 2.51 W/kg

SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.565 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 41.2%

Maximum value of SAR (measured) = 1.97 W/kg

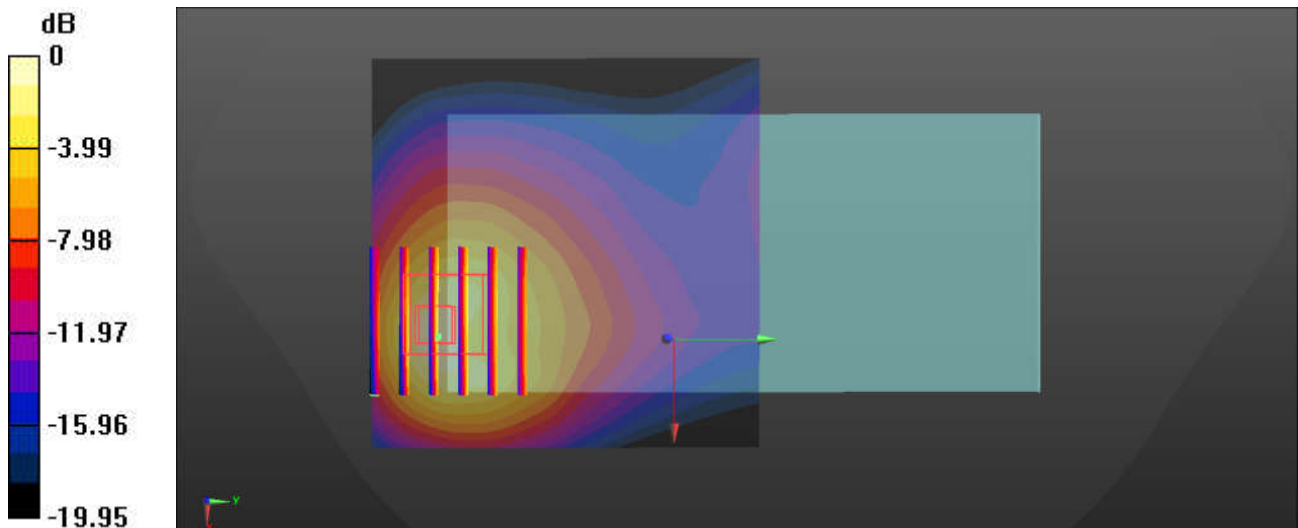

0 dB = 1.97 W/kg = 2.94 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/11/26

26_GSM1900_GPRS 3 Tx slots_Back_5mm_Ch512

Communication System: UID 0, PCS (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2.77

Medium: HSL_1900_251126 Medium parameters used: $f = 1850$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 40.217$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.78, 7.03, 7.63) @ 1850.2 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.966 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.356 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.548 W/kg; SAR(10 g) = 0.288 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.3%

Maximum value of SAR (measured) = 0.803 W/kg

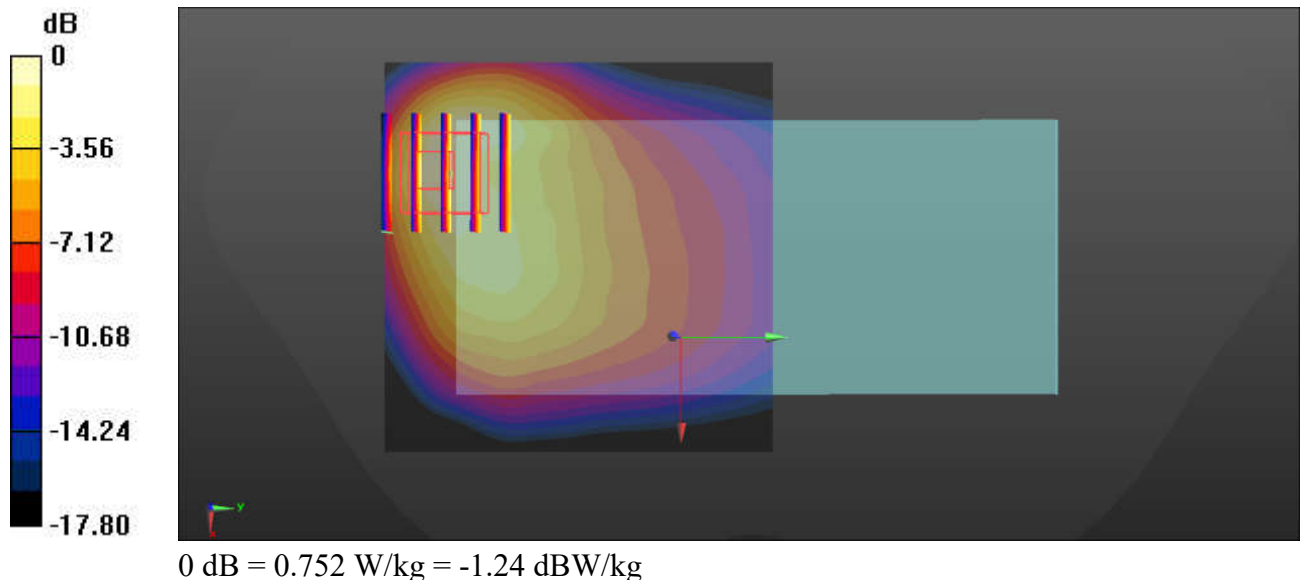

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/11/26

27_WCDMA II_RMC 12.2Kbps_Back_5mm_Ch9538

Communication System: UID 0, WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium: HSL_1900_251126 Medium parameters used: $f = 1911$ MHz; $\sigma = 1.47$ S/m; $\epsilon_r = 41.093$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.78, 7.03, 7.63) @ 1907.6 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 1.86 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.485 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.544 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 59.5%

Maximum value of SAR (measured) = 1.46 W/kg

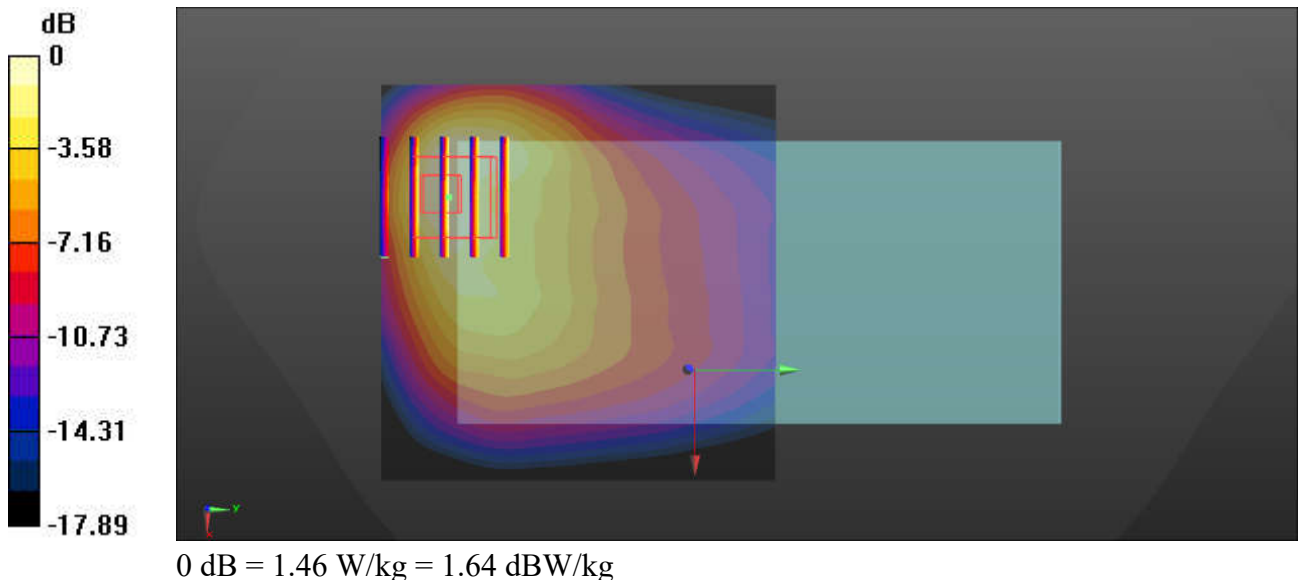

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/11/24

28_WCDMA IV_RMC 12.2Kbps_Bottom Side_5mm_Ch1513

Communication System: UID 0, WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1
 Medium: HSL_1750_251124 Medium parameters used: $f = 1753$ MHz; $\sigma = 1.387$ S/m; $\epsilon_r = 40.281$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.92, 7.17, 7.77) @ 1752.6 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 1.35 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.30 V/m; Power Drift = 0.16 dB


Peak SAR (extrapolated) = 1.78 W/kg

SAR(1 g) = 0.925 W/kg; SAR(10 g) = 0.465 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 52.2%

Maximum value of SAR (measured) = 1.48 W/kg

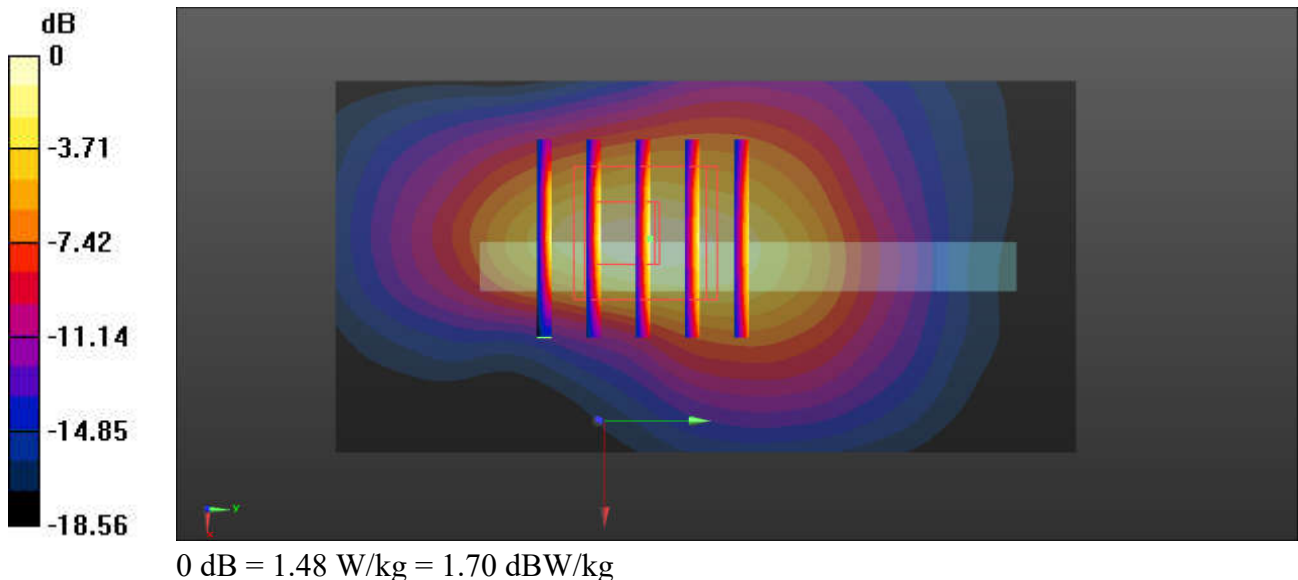

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/11/22

29_WCDMA V_RMC 12.2Kbps_Back_5mm_Ch4233

Communication System: UID 0, WCDMA (0); Frequency: 846.6 MHz; Duty Cycle: 1:1
 Medium: HSL_835_251122 Medium parameters used: $f = 847$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 42.162$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.16, 8.28, 8.98) @ 846.6 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 1.72 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.546 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 2.23 W/kg

SAR(1 g) = 0.980 W/kg; SAR(10 g) = 0.514 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 40.2%

Maximum value of SAR (measured) = 1.72 W/kg

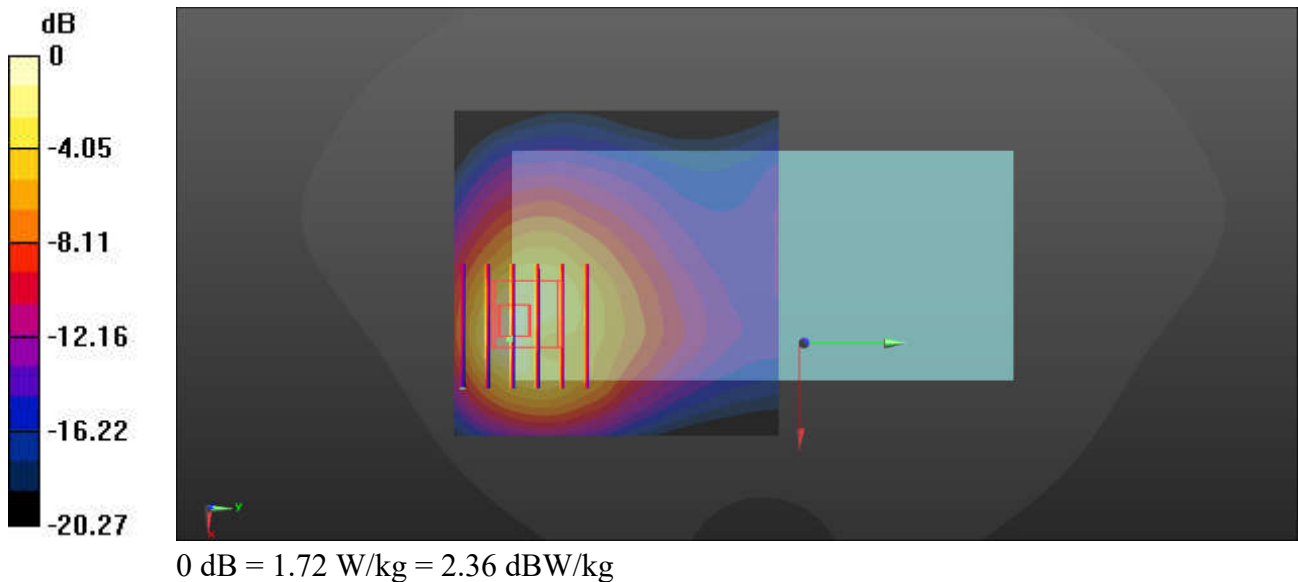

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/11/26

30_LTE Band 2_20M_QPSK_1_0_Back_5mm_Ch18700

Communication System: UID 0, LTE-FDD (0); Frequency: 1860 MHz; Duty Cycle: 1:1
 Medium: HSL_1900_251126 Medium parameters used: $f = 1850$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 40.217$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.78, 7.03, 7.63) @ 1860 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 1.62 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 1.740 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 2.23 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.505 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 48.5%

Maximum value of SAR (measured) = 1.88 W/kg

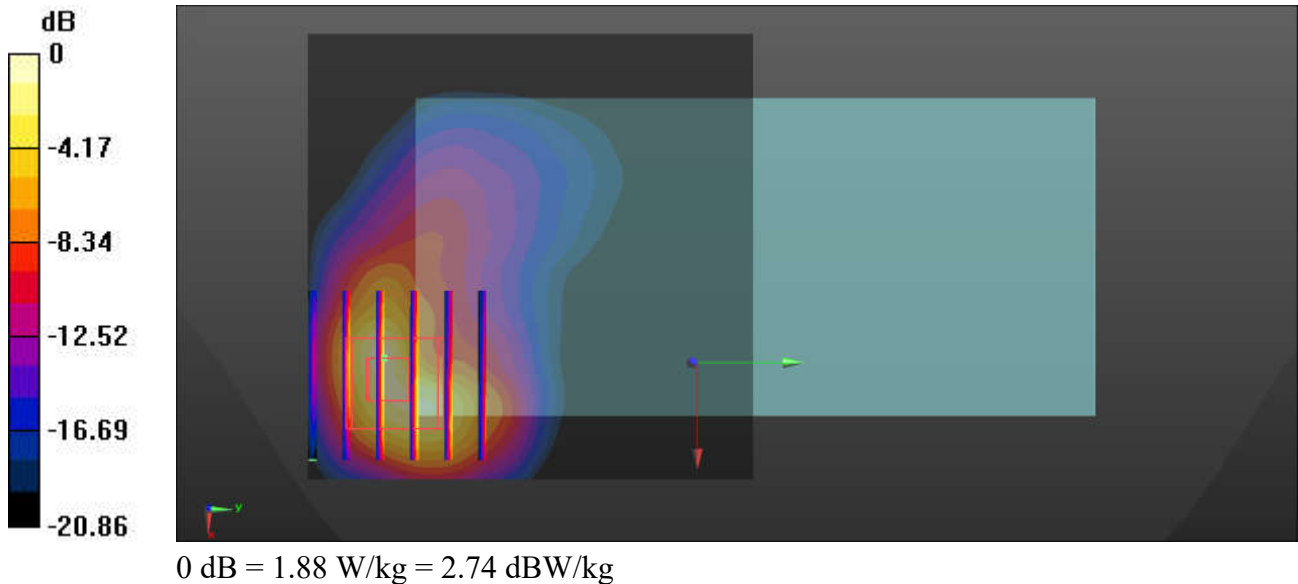

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/11/28

31_LTE Band 7_20M_QPSK_1_0_Bottom Side_5mm_Ch21100

Communication System: UID 0, LTE-FDD (0); Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium: HSL_2600_251128 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.869$ S/m; $\epsilon_r = 39.088$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C


DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.08, 6.41, 6.95) @ 2535 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
 Maximum value of SAR (interpolated) = 1.76 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 22.98 V/m; Power Drift = 0.14 dB
 Peak SAR (extrapolated) = 2.14 W/kg
SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.466 W/kg
 Smallest distance from peaks to all points 3 dB below = 6.7 mm
 Ratio of SAR at M2 to SAR at M1 = 47.7%
 Maximum value of SAR (measured) = 1.75 W/kg

Zoom Scan (7x7x7)/Cube 1: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
 Reference Value = 22.98 V/m; Power Drift = 0.14 dB
 Peak SAR (extrapolated) = 2.07 W/kg
SAR(1 g) = 0.822 W/kg; SAR(10 g) = 0.366 W/kg
 Smallest distance from peaks to all points 3 dB below = 6.3 mm
 Ratio of SAR at M2 to SAR at M1 = 47.8%
 Maximum value of SAR (measured) = 1.57 W/kg

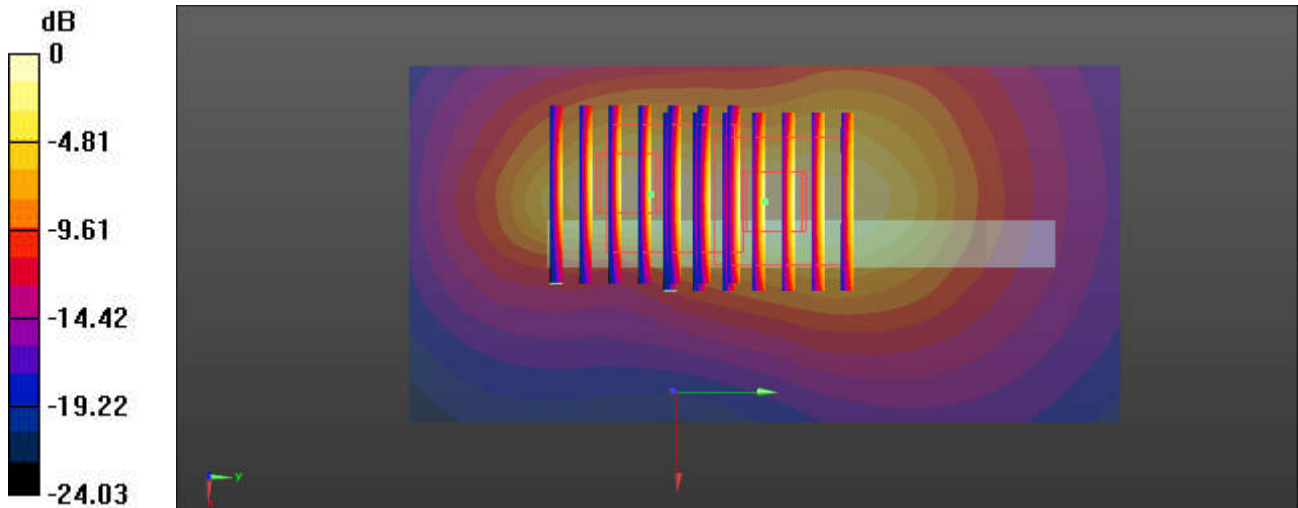

0 dB = 1.57 W/kg = 1.96 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/11/20

32_LTE Band 12_10M_QPSK_1_0_Back_5mm_Ch23095

Communication System: UID 0, LTE-FDD (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium: HSL_750_251120 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.878$ S/m; $\epsilon_r = 43.091$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.35, 8.46, 9.17) @ 707.5 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.916 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.956 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 1.13 W/kg

SAR(1 g) = 0.521 W/kg; SAR(10 g) = 0.290 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 46.8%

Maximum value of SAR (measured) = 0.822 W/kg

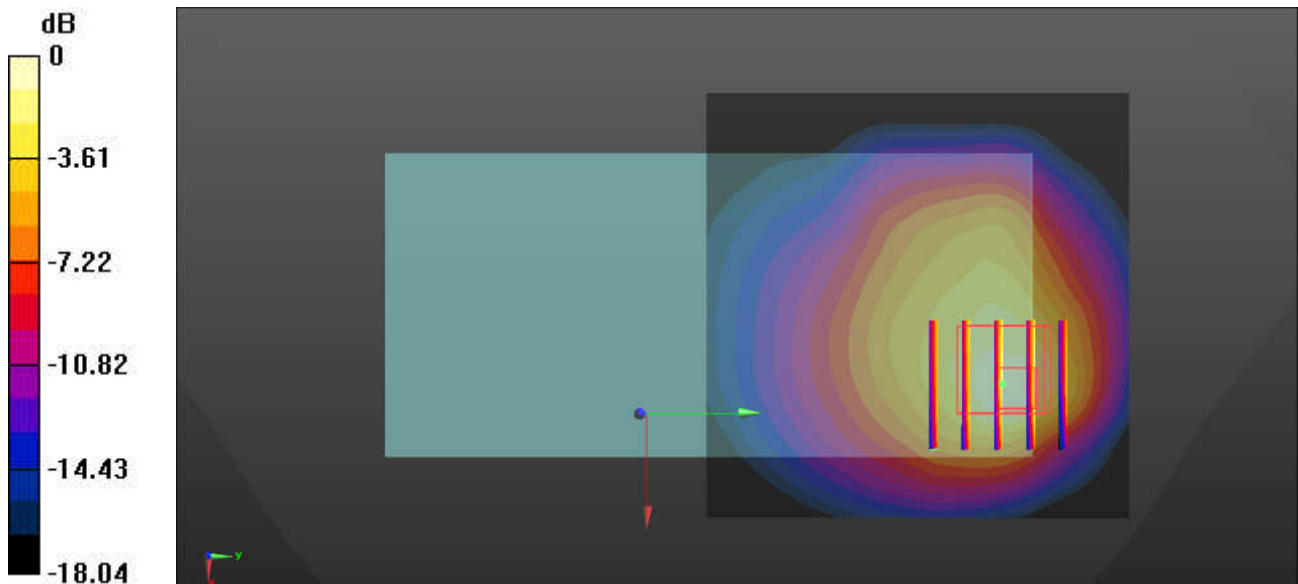

0 dB = 0.822 W/kg = -0.85 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/11/20

33_LTE Band 13_10M_QPSK_1_0_Back_5mm_Ch23230

Communication System: UID 0, LTE-FDD (0); Frequency: 782 MHz; Duty Cycle: 1:1
 Medium: HSL_750_251120 Medium parameters used: $f = 782$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 42.757$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.35, 8.46, 9.17) @ 750 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x71x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
 Maximum value of SAR (interpolated) = 1.31 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.436 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.82 W/kg

SAR(1 g) = 0.765 W/kg; SAR(10 g) = 0.461 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 38.4%

Maximum value of SAR (measured) = 1.35 W/kg

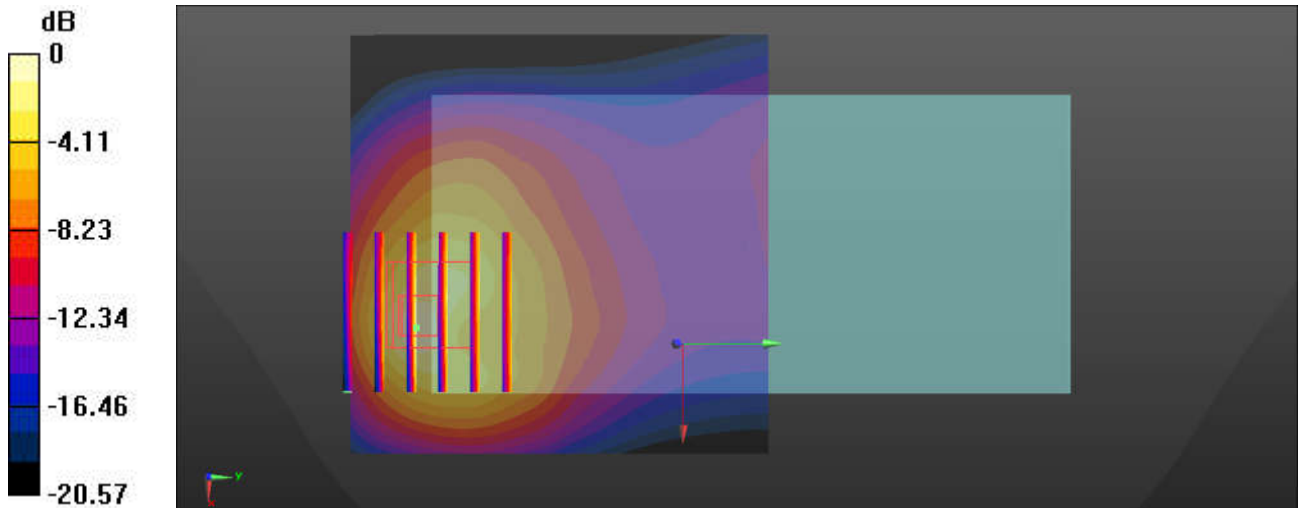

0 dB = 1.35 W/kg = 0.97 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/11/22

34_LTE Band 26_15M_QPSK_1_0_Back_5mm_Ch26865

Communication System: UID 0, LTE-FDD (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
 Medium: HSL_835_251122 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 42.472$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.16, 8.28, 8.98) @ 831.5 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 1.96 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.872 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 2.33 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.542 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 44.2%

Maximum value of SAR (measured) = 1.86 W/kg

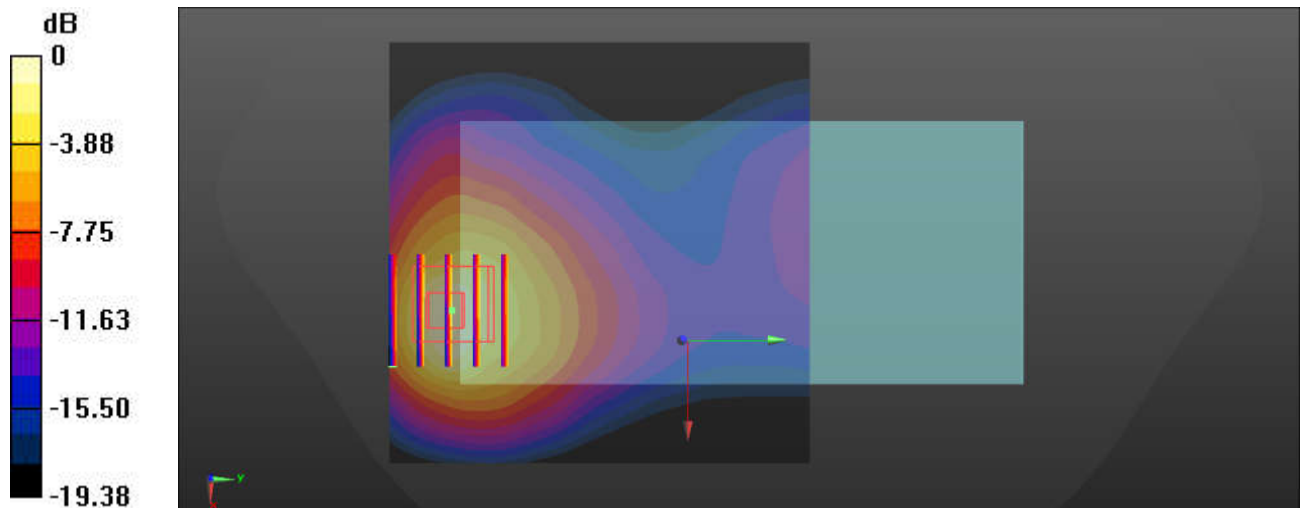

0 dB = 1.86 W/kg = 2.70 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/11/24

35_LTE Band 66_20M_QPSK_1_0_Bottom Side_5mm_Ch132572

Communication System: UID 0, LTE-FDD (0); Frequency: 1770 MHz; Duty Cycle: 1:1
 Medium: HSL_1750_251124 Medium parameters used: $f = 1770$ MHz; $\sigma = 1.408$ S/m; $\epsilon_r = 40.054$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.92, 7.17, 7.77) @ 1770 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 1.55 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.93 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 2.02 W/kg

SAR(1 g) = 1.06 W/kg; SAR(10 g) = 0.541 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 52.4%

Maximum value of SAR (measured) = 1.68 W/kg

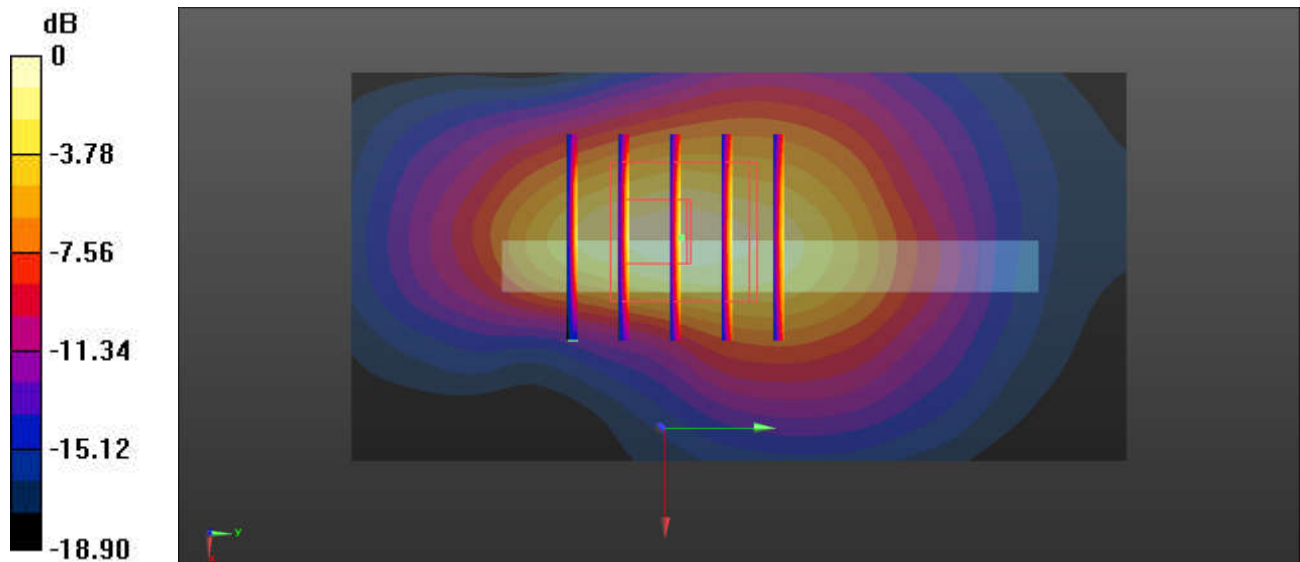

0 dB = 1.68 W/kg = 2.25 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/11/28

36_LTE Band 41_20M_QPSK_1_0_Bottom Side_5mm_Ch41055

Communication System: UID 0, LTE-TDD (0); Frequency: 2636.5 MHz; Duty Cycle: 1:1.59

Medium: HSL_2600_251128 Medium parameters used: $f = 2636.5$ MHz; $\sigma = 1.96$ S/m; $\epsilon_r = 38.692$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.08, 6.41, 6.95) @ 2636.5 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.42 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.07 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.15 W/kg

SAR(1 g) = 0.950 W/kg; SAR(10 g) = 0.407 W/kg

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 46.4%

Maximum value of SAR (measured) = 1.69 W/kg

Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 28.07 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.66 W/kg

SAR(1 g) = 0.710 W/kg; SAR(10 g) = 0.304 W/kg

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 42.9%

Maximum value of SAR (measured) = 1.28 W/kg

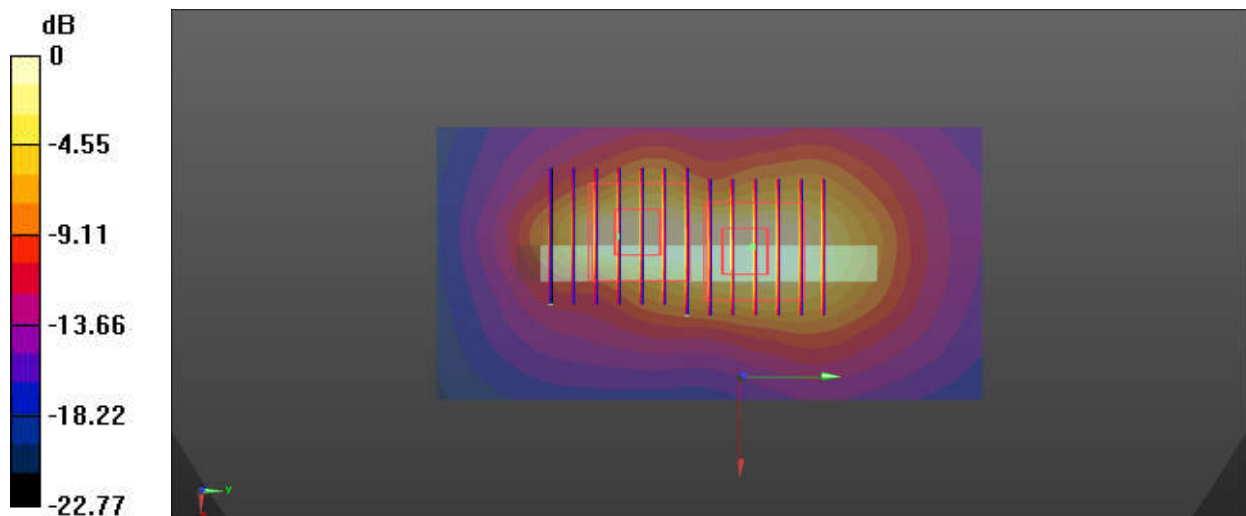

0 dB = 1.28 W/kg = 1.07 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/11/30

37_LTE Band 42_20M_QPSK_1_0_Top Side_5mm_Ch42590

Communication System: UID 0, LTE-TDD (0); Frequency: 3500 MHz; Duty Cycle: 1:1.59

Medium: HSL_3500_251130 Medium parameters used: $f = 3500$ MHz; $\sigma = 2.978$ S/m; $\epsilon_r = 37.671$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(6.95, 6.28, 6.81) @ 3500 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (41x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.849 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 14.77 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 0.477 W/kg; SAR(10 g) = 0.145 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 69.7%

Maximum value of SAR (measured) = 1.05 W/kg

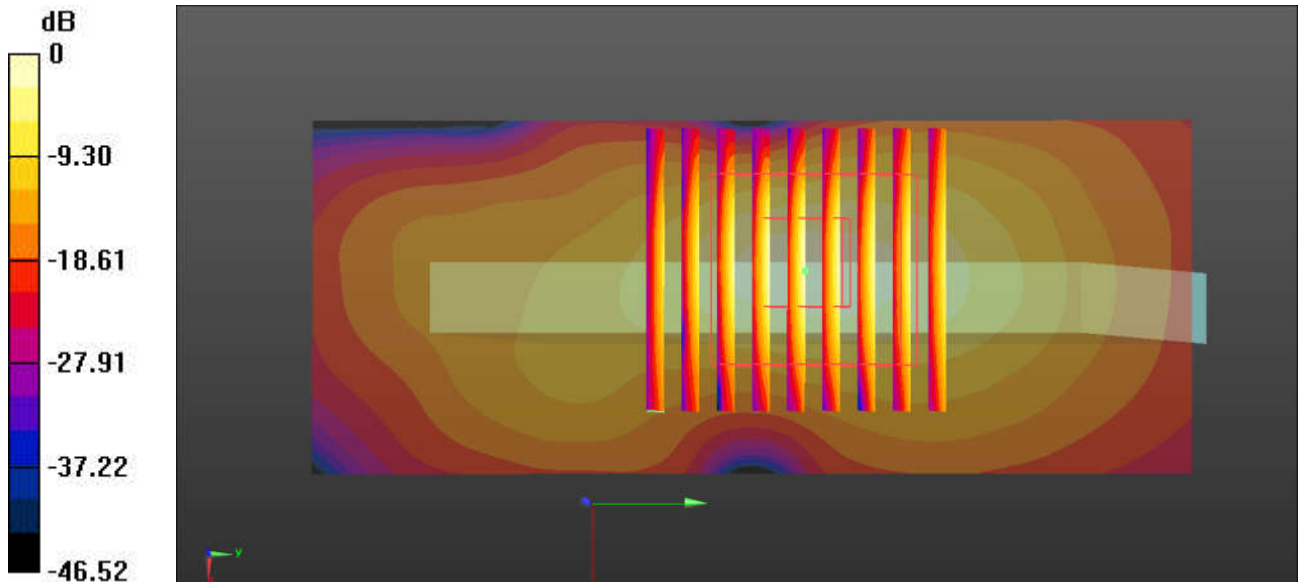

0 dB = 1.05 W/kg = 0.21 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/11/26

38_FR1 n2_20M_BPSK_50_28_Bottom Side_5mm_Ch380000

Communication System: UID 0, 5G NR (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL_1900_251126 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.461$ S/m; $\epsilon_r = 40.935$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.78, 7.03, 7.63) @ 1900 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.35 W/kg

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.46 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.88 W/kg

SAR(1 g) = 0.956 W/kg; SAR(10 g) = 0.481 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 51.7%

Maximum value of SAR (measured) = 1.29 W/kg

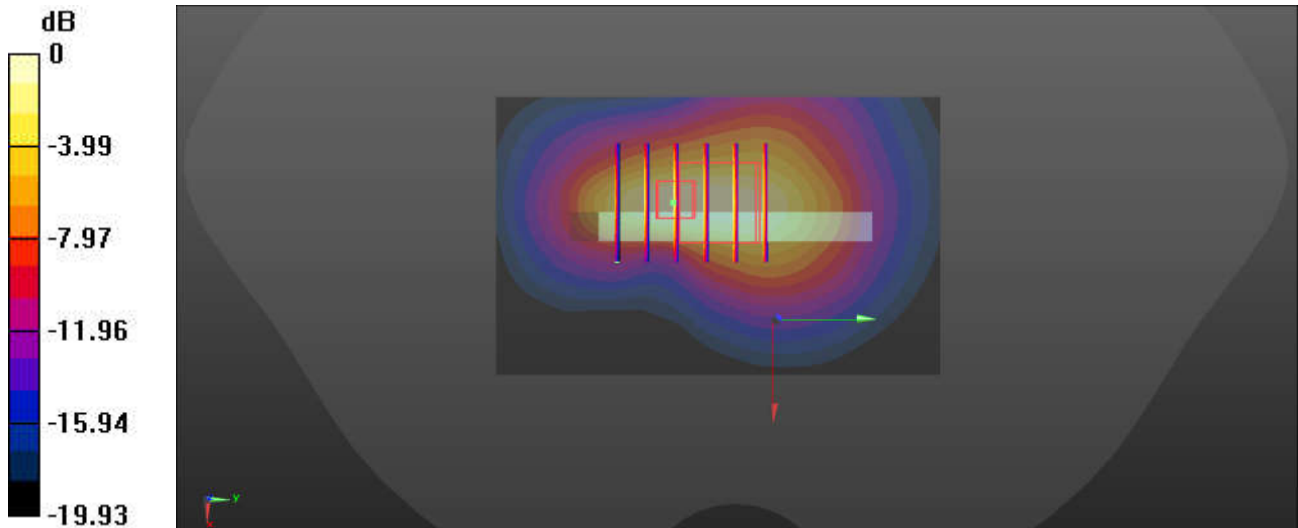

0 dB = 1.29 W/kg = 1.11 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/11/28

39_FR1 n7_50M_BPSK_135_68_Bottom Side_5mm_Ch507000

Communication System: UID 0, 5G NR (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL_2600_251128 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.869$ S/m; $\epsilon_r = 39.088$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.08, 6.41, 6.95) @ 2535 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.72 W/kg

Zoom Scan (7x12x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 23.79 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.29 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.450 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 48.4%

Maximum value of SAR (measured) = 1.75 W/kg

Zoom Scan (7x12x7)/Cube 1: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 23.79 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 2.22 W/kg

SAR(1 g) = 0.987 W/kg; SAR(10 g) = 0.441 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 48.5%

Maximum value of SAR (measured) = 1.72 W/kg

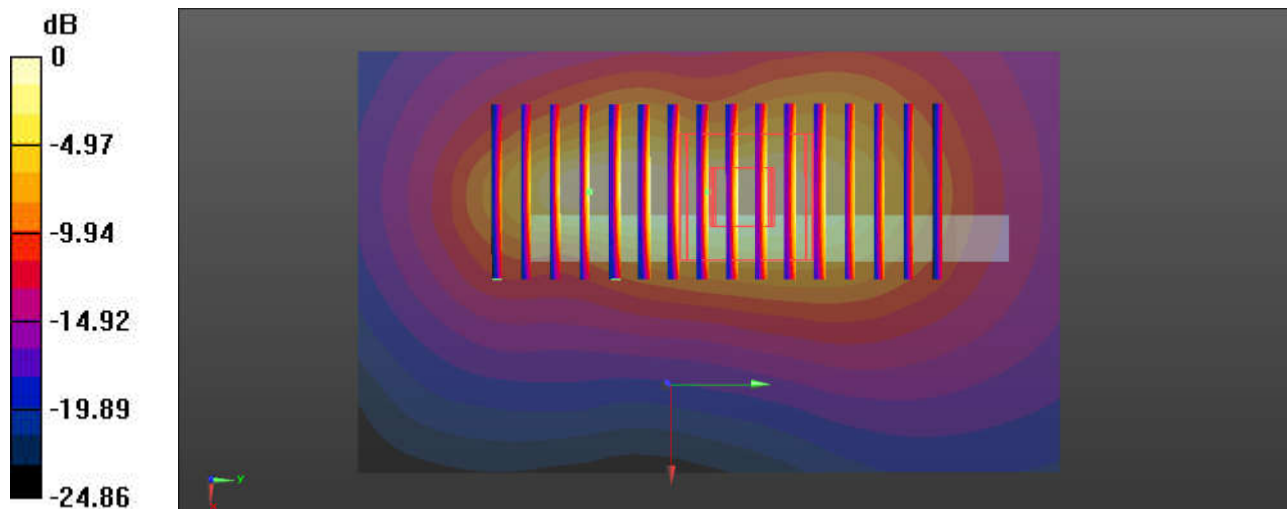

0 dB = 1.75 W/kg = 2.43 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/11/24

40_FR1 n66_40M_BPSK_108_54_Bottom Side_5mm_Ch349000

Communication System: UID 0, 5G NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL_1750_251124 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.397$ S/m; $\epsilon_r = 40.183$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.92, 7.17, 7.77) @ 1750 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.41 W/kg

Zoom Scan (5x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.73 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 2.00 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.542 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 56%

Maximum value of SAR (measured) = 1.40 W/kg

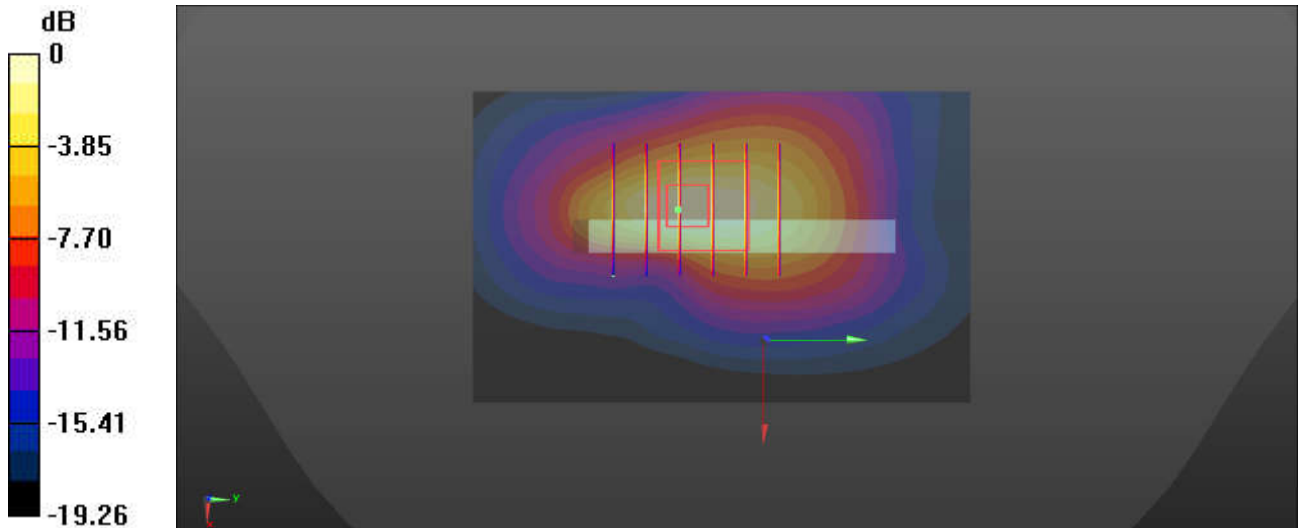

0 dB = 1.40 W/kg = 1.46 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/11/28

41_FR1 n41_100M_BPSK_1_271_Bottom Side_5mm_Ch518598

Communication System: UID 0, 5G NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1

Medium: HSL_2600_251128 Medium parameters used: $f = 2592.99$ MHz; $\sigma = 1.916$ S/m; $\epsilon_r = 38.585$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.08, 6.41, 6.95) @ 2529.99 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.51 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.16 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 2.33 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.435 W/kg

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 47.4%

Maximum value of SAR (measured) = 1.77 W/kg

Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 31.16 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 2.32 W/kg

SAR(1 g) = 0.886 W/kg; SAR(10 g) = 0.366 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 47.6%

Maximum value of SAR (measured) = 1.73 W/kg

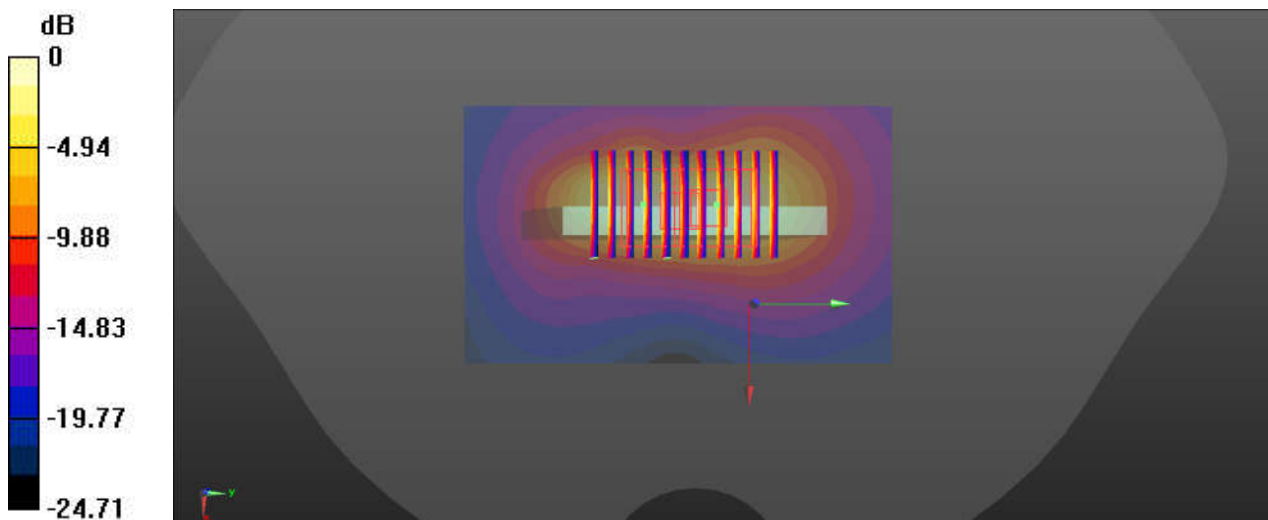

0 dB = 1.73 W/kg = 2.38 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/12/2

42_FR1 n77_100M_BPSK_270_0_Right Side_5mm_Ch656000

Communication System: UID 0, 5G NR (0); Frequency: 3840 MHz; Duty Cycle: 1:1

Medium: HSL_3900_251202 Medium parameters used: $f = 3840$ MHz; $\sigma = 3.342$ S/m; $\epsilon_r = 37.375$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(6.91, 6.25, 6.77) @ 3840 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x191x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.05 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 11.03 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 3.20 W/kg

SAR(1 g) = 0.826 W/kg; SAR(10 g) = 0.232 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 68.7%

Maximum value of SAR (measured) = 2.04 W/kg

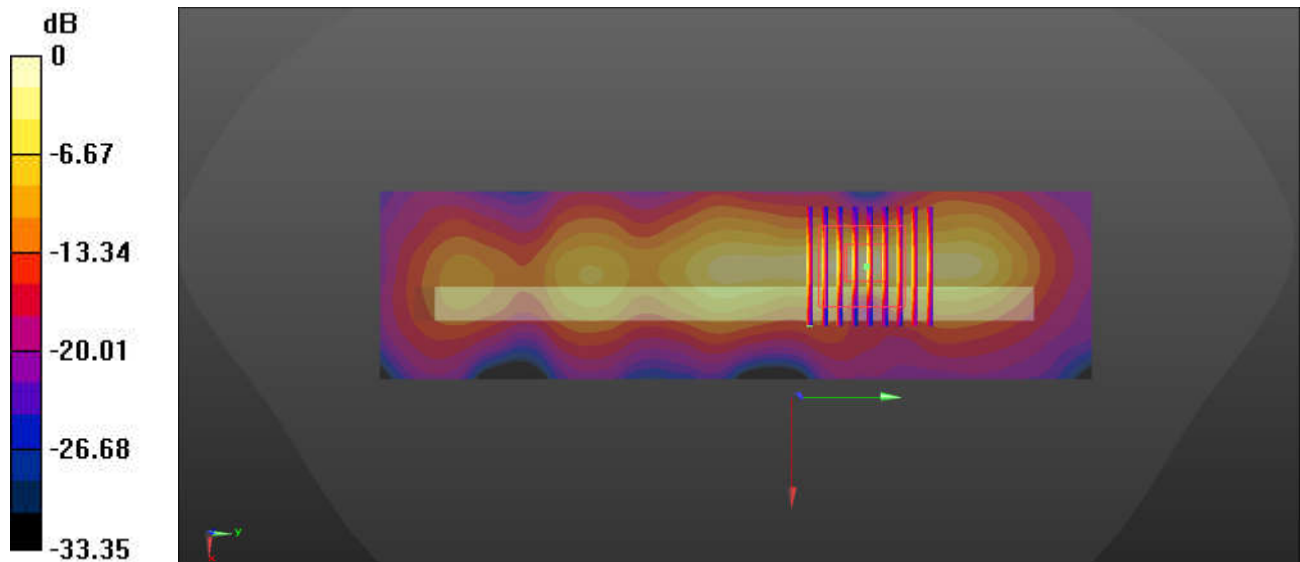

0 dB = 2.04 W/kg = 3.10 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/12/1

43_WLAN2.4GHz_802.11b 1Mbps_Back_5mm_Ch1

Communication System: UID 0, WLAN2.4GHz (0); Frequency: 2412 MHz; Duty Cycle: 1:1.026
 Medium: HSL_2450_251201 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.728$ S/m; $\epsilon_r = 39.226$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.21, 6.52, 7.07) @ 2412 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.780 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.432 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.948 W/kg

SAR(1 g) = 0.472 W/kg; SAR(10 g) = 0.198 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 51%

Maximum value of SAR (measured) = 0.758 W/kg

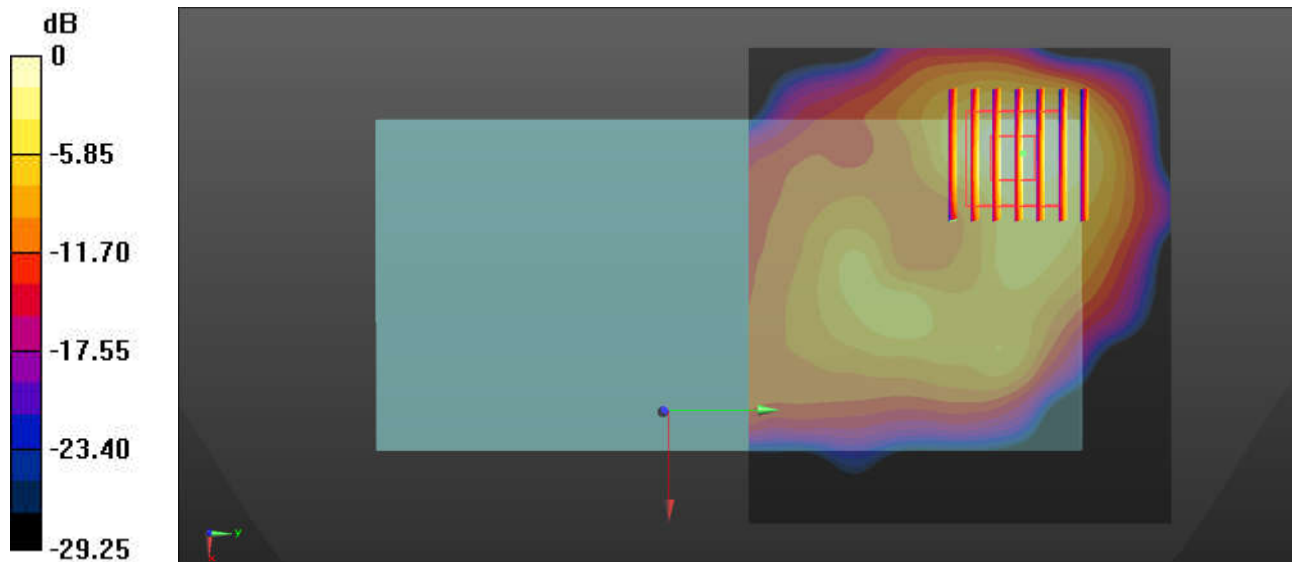

0 dB = 0.758 W/kg = -1.20 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/12/3

44_WLAN5GHz_802.11ac-VHT80 MCS0_Top Side_5mm_Ch42

Communication System: UID 0, WLAN5GHz (0); Frequency: 5210 MHz; Duty Cycle: 1:1
 Medium: HSL_5250_251203 Medium parameters used: $f = 5210$ MHz; $\sigma = 4.618$ S/m; $\epsilon_r = 36.28$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.51, 4.98, 5.4) @ 5210 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x121x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm
 Maximum value of SAR (interpolated) = 0.908 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 12.85 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 2.10 W/kg

SAR(1 g) = 0.413 W/kg; SAR(10 g) = 0.116 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.8%

Maximum value of SAR (measured) = 1.10 W/kg

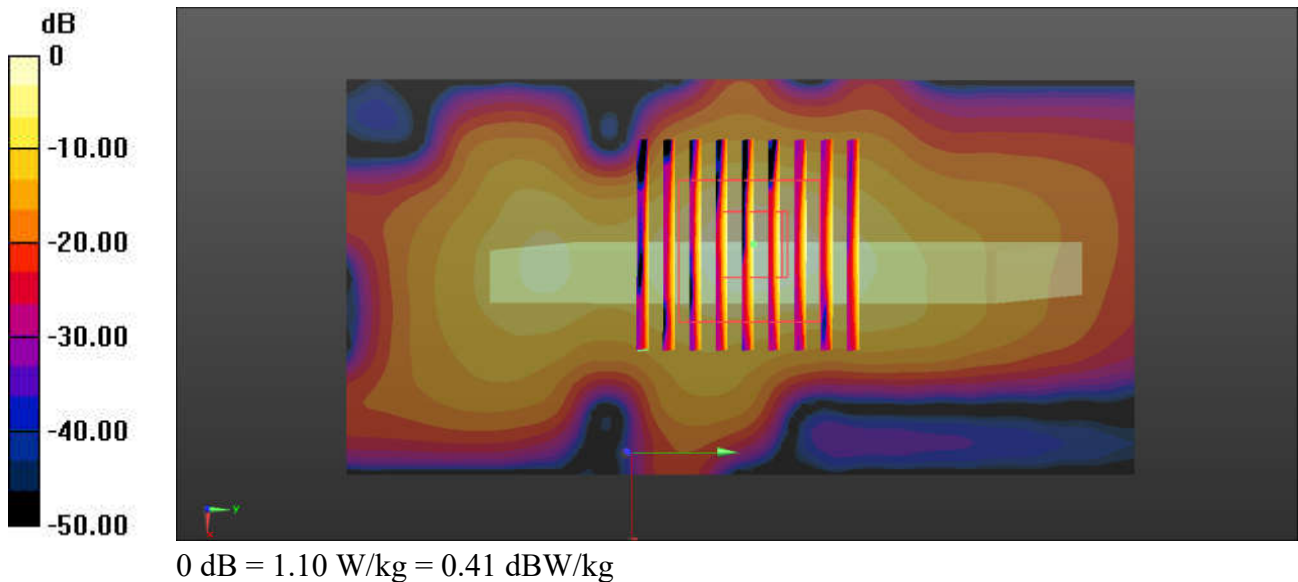

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/12/5

45_WLAN5GHz_802.11ac-VHT80 MCS0_Right Side_5mm_Ch155

Communication System: UID 0, WLAN5GHz (0); Frequency: 5775 MHz; Duty Cycle: 1:1
 Medium: HSL_5800_251205 Medium parameters used: $f = 5775$ MHz; $\sigma = 5.268$ S/m; $\epsilon_r = 35.792$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(5.43, 4.91, 5.32) @ 5800 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (41x201x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm
 Maximum value of SAR (interpolated) = 0.936 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 5.822 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 2.52 W/kg

SAR(1 g) = 0.399 W/kg; SAR(10 g) = 0.116 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 52.7%

Maximum value of SAR (measured) = 1.15 W/kg

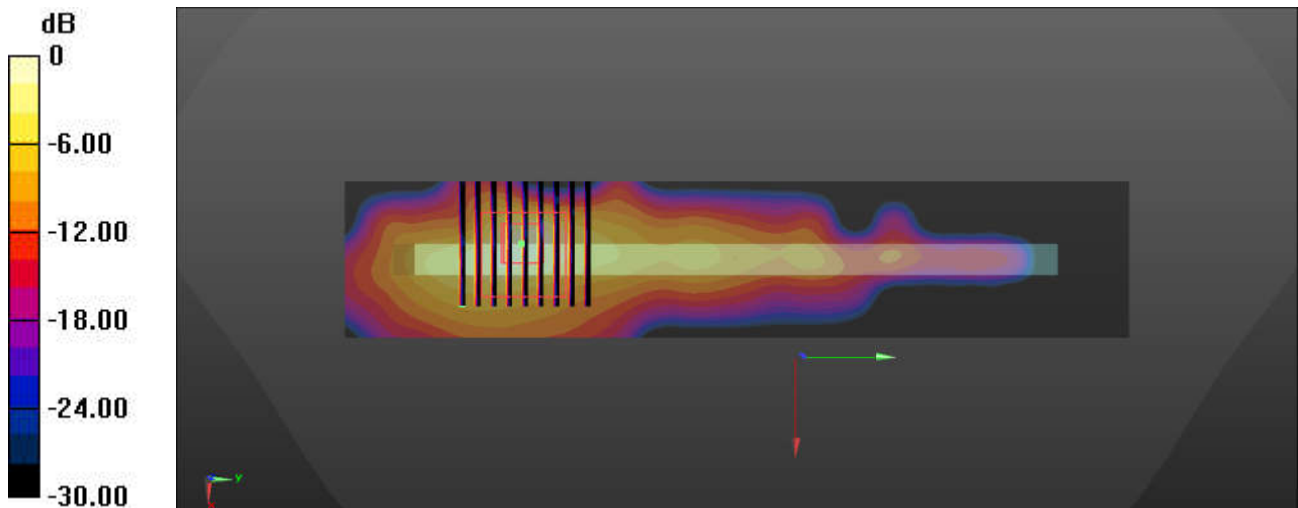

0 dB = 1.15 W/kg = 0.61 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/12/1

46_Bluetooth_1Mbps_Back_5mm_Ch39

Communication System: UID 0, Bluetooth (0); Frequency: 2441 MHz; Duty Cycle: 1:1.297

Medium: HSL_2450_251201 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.775$ S/m; $\epsilon_r = 39.311$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.21, 6.52, 7.07) @ 2441 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.321 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.983 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.406 W/kg

SAR(1 g) = 0.188 W/kg; SAR(10 g) = 0.077 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 49.3%

Maximum value of SAR (measured) = 0.317 W/kg

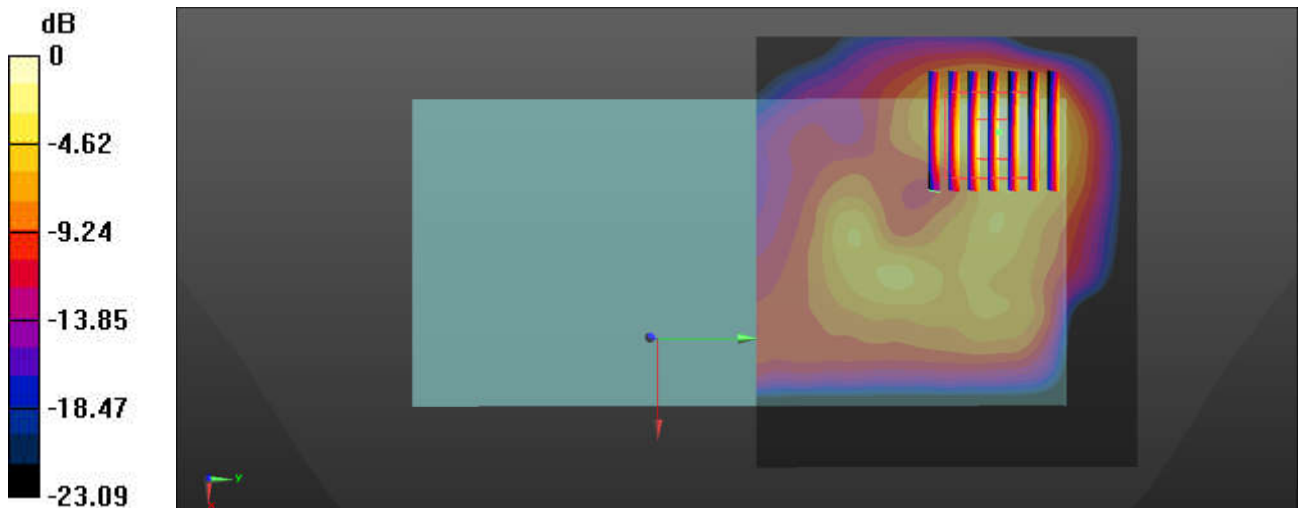

0 dB = 0.317 W/kg = -4.99 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/11/22

47_GSM850_GPRS (3 Tx slots)_Back_5mm_Ch251

Communication System: UID 0, GSM850 (0); Frequency: 848.8 MHz; Duty Cycle: 1:2.77

Medium: HSL_835_251122 Medium parameters used: $f = 849$ MHz; $\sigma = 0.943$ S/m; $\epsilon_r = 42.501$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.16, 8.28, 8.98) @ 848.8 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 2.10 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.15 V/m; Power Drift = -0.14 dB


Peak SAR (extrapolated) = 2.51 W/kg

SAR(1 g) = 1.09 W/kg; SAR(10 g) = 0.565 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 41.2%

Maximum value of SAR (measured) = 1.97 W/kg

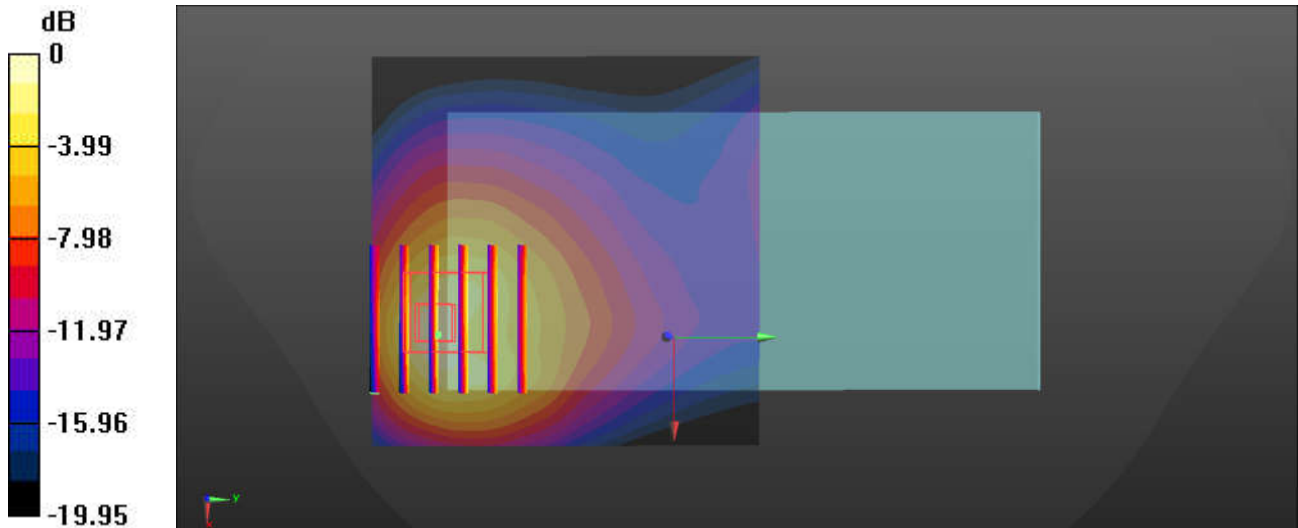

0 dB = 1.97 W/kg = 2.94 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/11/26

48_GSM1900_GPRS (3 Tx slots)_Back_5mm_Ch512

Communication System: UID 0, PCS (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2.77

Medium: HSL_1900_251126 Medium parameters used: $f = 1850$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 40.217$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.78, 7.03, 7.63) @ 1850.2 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.11 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.061 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.673 W/kg; SAR(10 g) = 0.332 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 46.9%

Maximum value of SAR (measured) = 1.38 W/kg

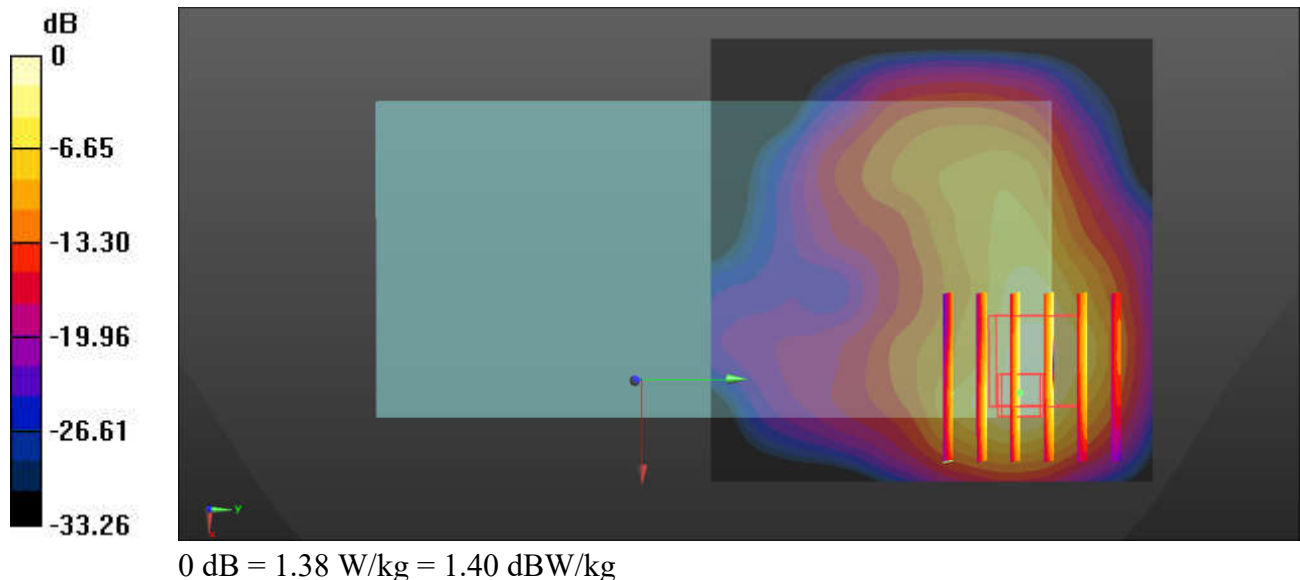

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/11/26

49_WCDMA II_RMC 12.2Kbps_Back_5mm_Ch9538

Communication System: UID 0, WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium: HSL_1900_251126 Medium parameters used: $f = 1911$ MHz; $\sigma = 1.47$ S/m; $\epsilon_r = 41.093$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.78, 7.03, 7.63) @ 1907.6 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 1.86 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.485 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.84 W/kg

SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.544 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 59.5%

Maximum value of SAR (measured) = 1.46 W/kg

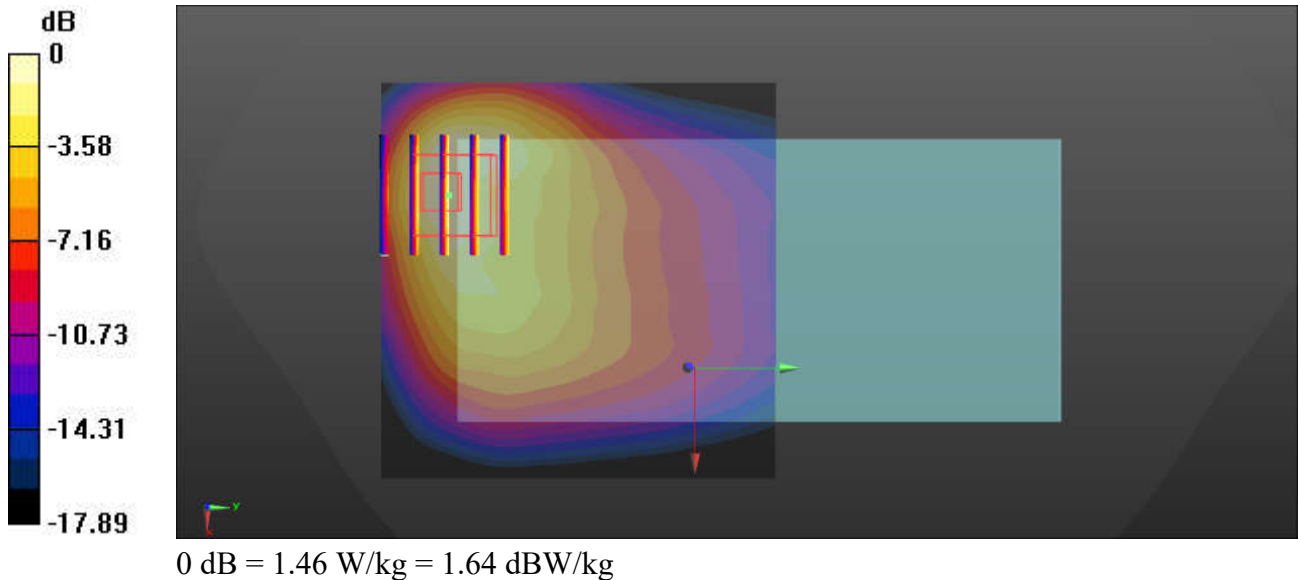

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/11/24

50_WCDMA IV_RMC 12.2Kbps_Back_5mm_Ch1513

Communication System: UID 0, WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1
 Medium: HSL_1750_251124 Medium parameters used: $f = 1753$ MHz; $\sigma = 1.387$ S/m; $\epsilon_r = 40.281$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.92, 7.17, 7.77) @ 1752.6 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 1.67 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.900 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 1.81 W/kg

SAR(1 g) = 0.959 W/kg; SAR(10 g) = 0.508 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 55.5%

Maximum value of SAR (measured) = 1.42 W/kg

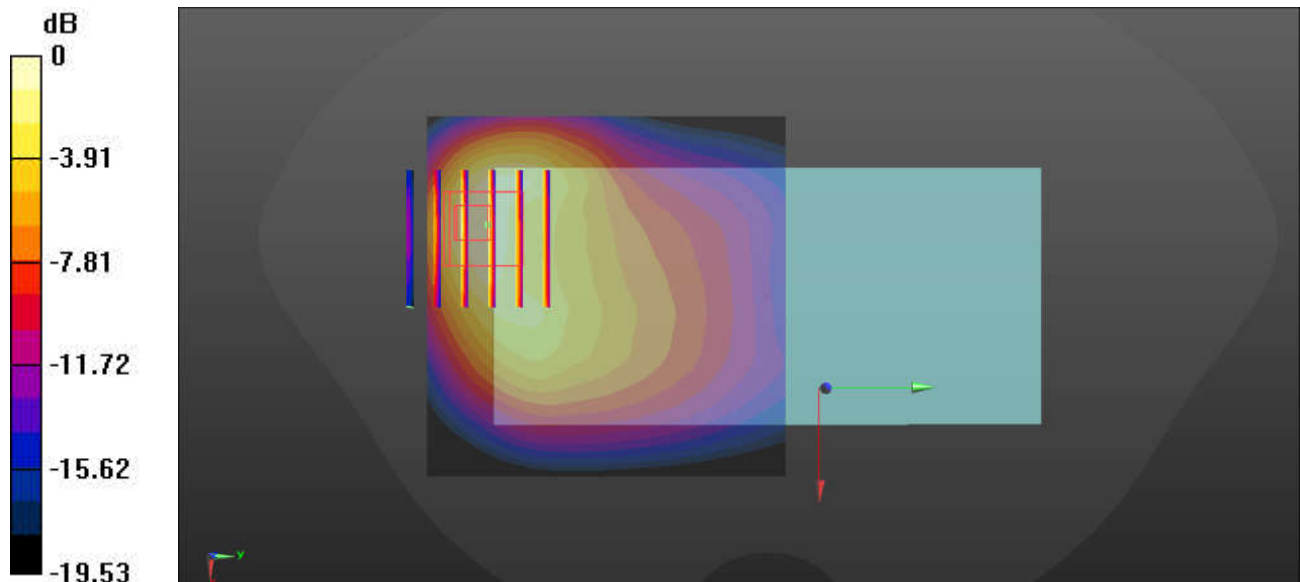

0 dB = 1.42 W/kg = 1.52 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/11/22

51_WCDMA V_RMC 12.2Kbps_Back_5mm_Ch4233


Communication System: UID 0, WCDMA (0); Frequency: 846.6 MHz; Duty Cycle: 1:1
 Medium: HSL_835_251122 Medium parameters used: $f = 847$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 42.162$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.16, 8.28, 8.98) @ 846.6 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 1.72 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 9.546 V/m; Power Drift = -0.02 dB
 Peak SAR (extrapolated) = 2.23 W/kg
SAR(1 g) = 0.980 W/kg; SAR(10 g) = 0.514 W/kg
 Smallest distance from peaks to all points 3 dB below = 8.2 mm
 Ratio of SAR at M2 to SAR at M1 = 40.2%
 Maximum value of SAR (measured) = 1.72 W/kg

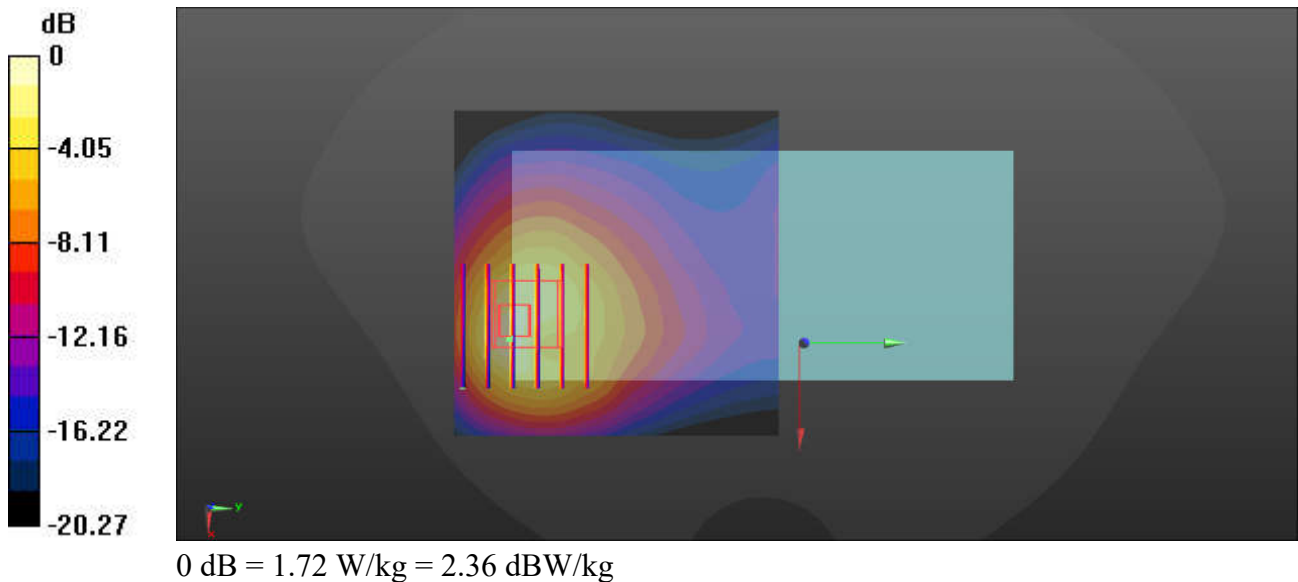

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/11/26

52_LTE Band 2_20M_QPSK_1_0_Back_5mm_Ch19100

Communication System: UID 0, LTE-FDD (0); Frequency: 1900 MHz; Duty Cycle: 1:1
 Medium: HSL_1900_251126 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.461$ S/m; $\epsilon_r = 40.935$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.78, 7.03, 7.63) @ 1900 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 1.81 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.552 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 2.04 W/kg

SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.546 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 51.8%

Maximum value of SAR (measured) = 1.68 W/kg

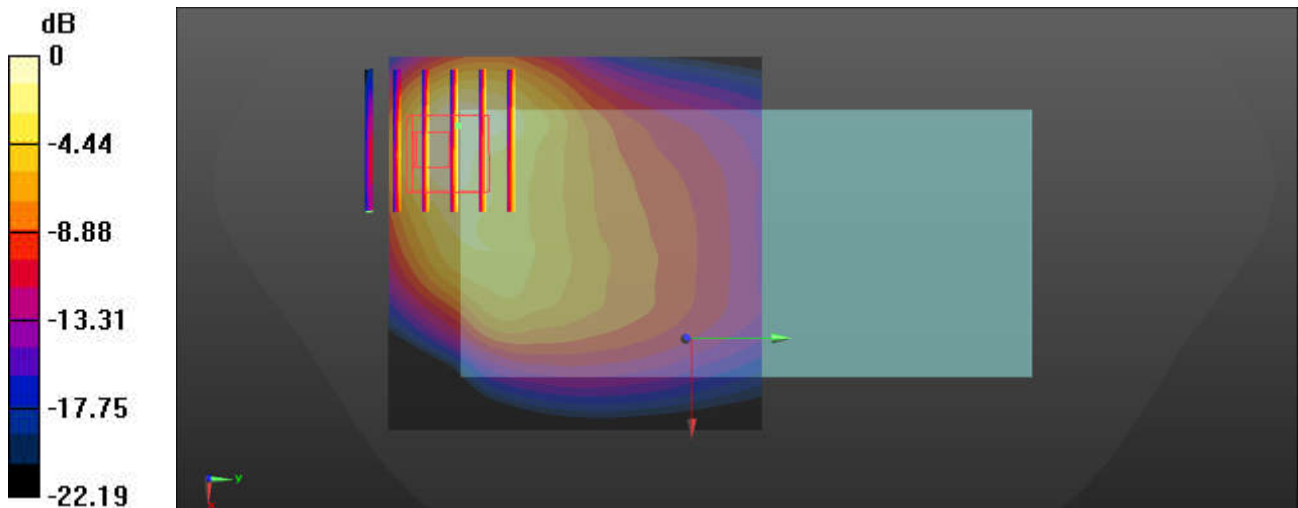

0 dB = 1.68 W/kg = 2.25 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/11/28

53_LTE Band 7_20M_QPSK_1_0_Back_5mm_Ch21350

Communication System: UID 0, LTE-FDD (0); Frequency: 2560 MHz; Duty Cycle: 1:1
 Medium: HSL_2600_251128 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.865$ S/m; $\epsilon_r = 38.942$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.08, 6.41, 6.95) @ 2560 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (101x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
 Maximum value of SAR (interpolated) = 1.74 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 3.180 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 2.80 W/kg

SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.413 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 41.2%

Maximum value of SAR (measured) = 2.13 W/kg

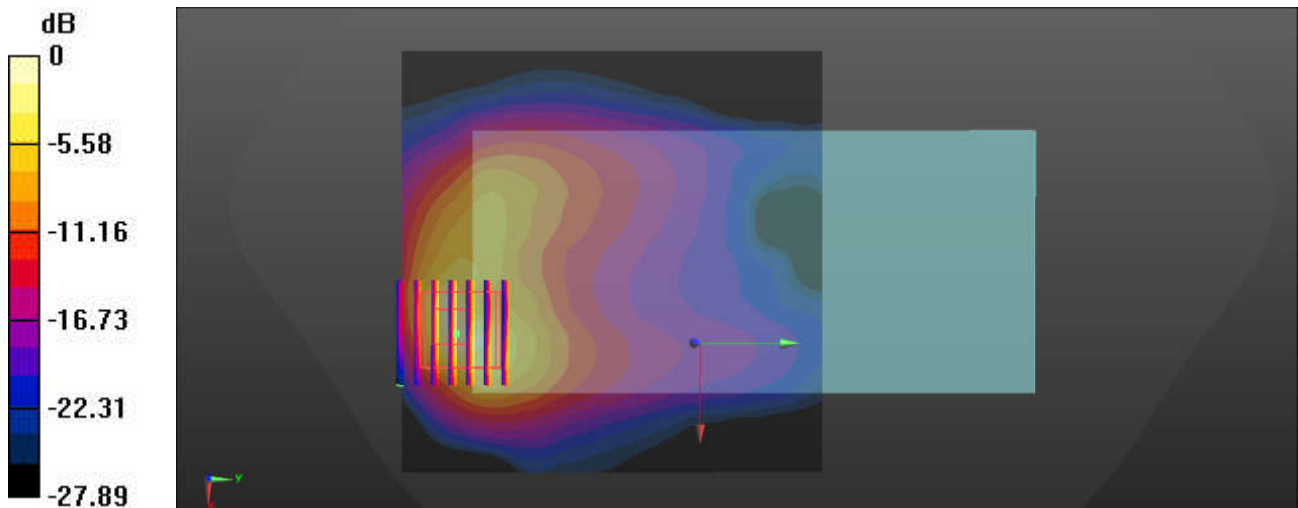

0 dB = 2.13 W/kg = 3.28 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/11/20

54_LTE Band 12_10M_QPSK_1_0_Back_5mm_Ch23095

Communication System: UID 0, LTE-FDD (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium: HSL_750_251120 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.878$ S/m; $\epsilon_r = 43.091$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.35, 8.46, 9.17) @ 707.5 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 1.29 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.817 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.727 W/kg; SAR(10 g) = 0.401 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 44.7%

Maximum value of SAR (measured) = 1.12 W/kg

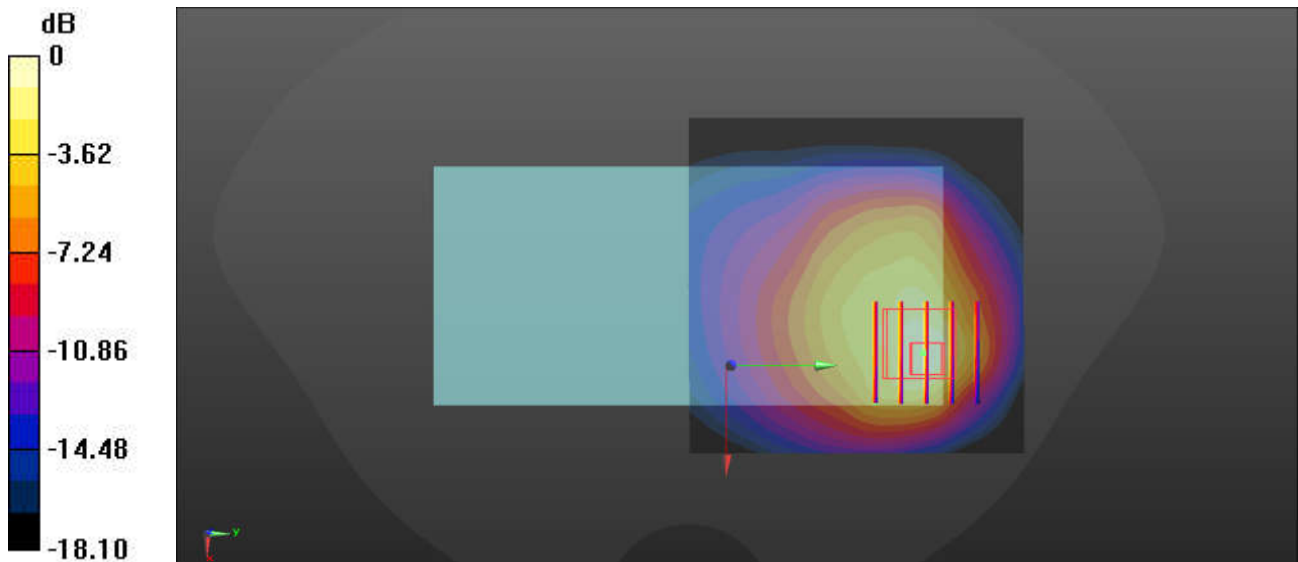

0 dB = 1.12 W/kg = 0.49 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/11/20

55_LTE Band 13_10M_QPSK_1_0_Back_5mm_Ch23230

Communication System: UID 0, LTE-FDD (0); Frequency: 782 MHz; Duty Cycle: 1:1
 Medium: HSL_750_251120 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.898 \text{ S/m}$; $\epsilon_r = 42.757$; $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.35, 8.46, 9.17) @ 782 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x71x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 1.21 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.979 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 1.36 W/kg

SAR(1 g) = 0.694 W/kg; SAR(10 g) = 0.416 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 51.2%

Maximum value of SAR (measured) = 1.02 W/kg

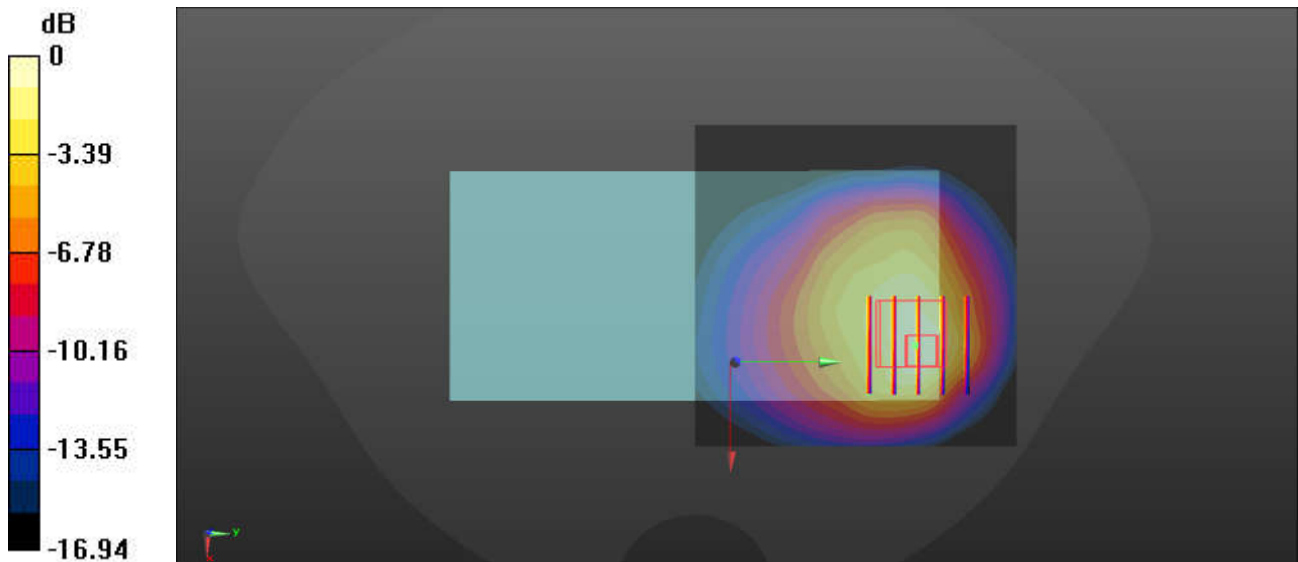

0 dB = 1.02 W/kg = 0.09 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/11/22

56_LTE Band 26_15M_QPSK_1_0_Back_5mm_Ch26865

Communication System: UID 0, LTE-FDD (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
 Medium: HSL_835_251122 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 42.472$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(9.16, 8.28, 8.98) @ 831.5 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
 Maximum value of SAR (interpolated) = 1.96 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 9.872 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 2.33 W/kg

SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.542 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 44.2%

Maximum value of SAR (measured) = 1.86 W/kg

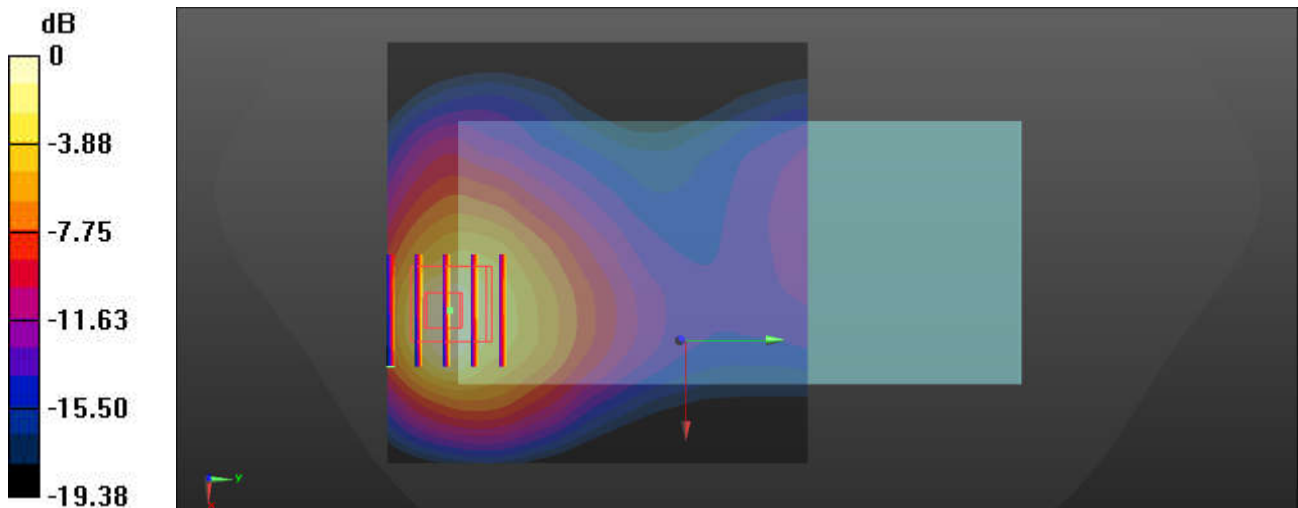

0 dB = 1.86 W/kg = 2.70 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/11/24

57_LTE Band 66_20M_QPSK_1_0_Bottom Side_5mm_Ch132572

Communication System: UID 0, LTE-FDD (0); Frequency: 1770 MHz; Duty Cycle: 1:1
 Medium: HSL_1750_251124 Medium parameters used: $f = 1770$ MHz; $\sigma = 1.408$ S/m; $\epsilon_r = 40.054$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.92, 7.17, 7.77) @ 1770 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (41x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 1.55 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.93 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 2.02 W/kg

SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.551 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 52.4%

Maximum value of SAR (measured) = 1.68 W/kg

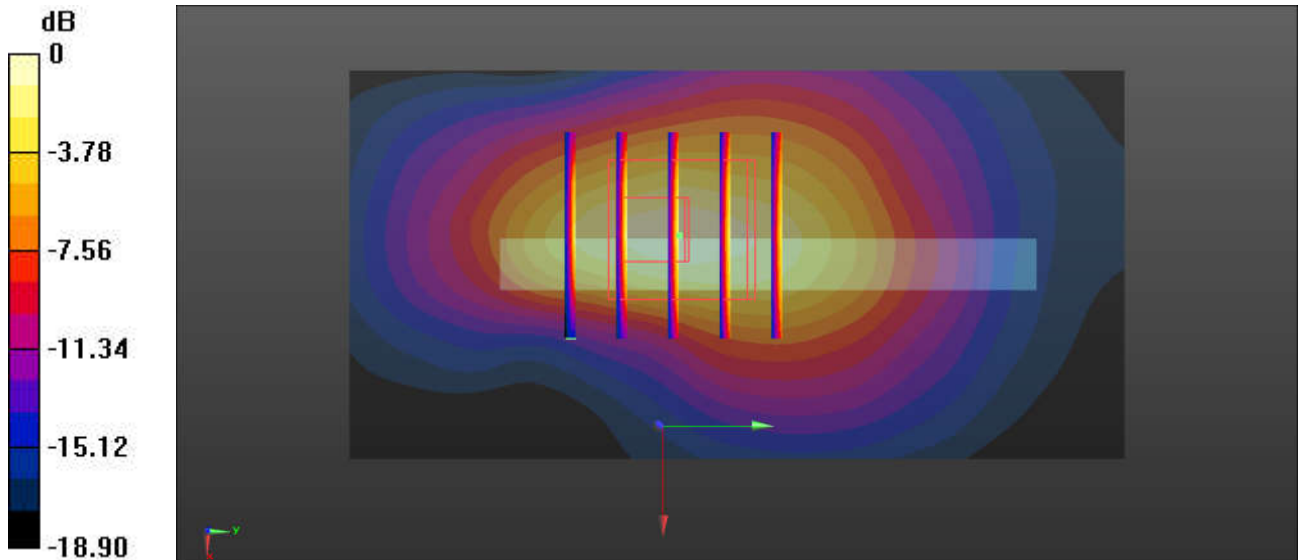

0 dB = 1.68 W/kg = 2.25 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2025/11/28

58_LTE Band 41_20M_QPSK_1_0_Back_5mm_Ch41490

Communication System: UID 0, LTE-TDD (0); Frequency: 2680 MHz; Duty Cycle: 1:1.59

Medium: HSL_2600_251128 Medium parameters used: $f = 2680$ MHz; $\sigma = 2.016$ S/m; $\epsilon_r = 38.33$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3857; ConvF(7.08, 6.41, 6.95) @ 2680 MHz; Calibrated: 2025/2/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Type: QD 000 P40 CD; Serial: 1842
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 2.20 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.347 V/m; Power Drift = 0.19 dB


Peak SAR (extrapolated) = 2.81 W/kg

SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.394 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 41.8%

Maximum value of SAR (measured) = 2.12 W/kg

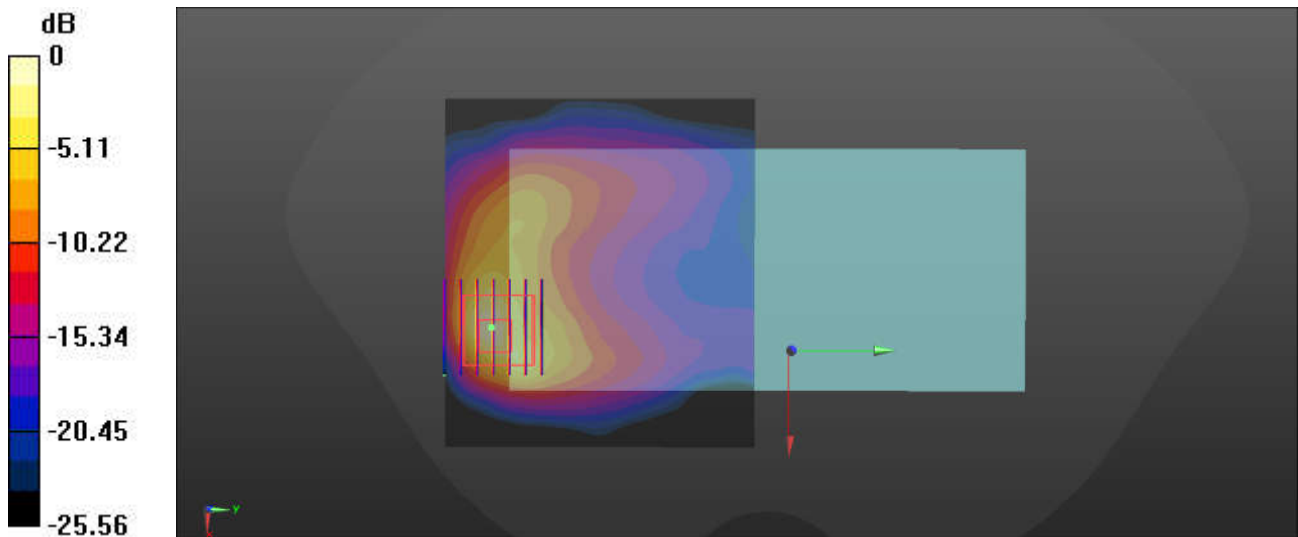

0 dB = 2.12 W/kg = 3.26 dBW/kg