

Date: 2026-01-27

01_LTE Band 7_20M_QPSK_1_49_Front_10mm_Ch21100

Communication System: LTE-FDD RBPosition:MidAntennaCfg:SISO; Frequency: 2535.000

MHz; Duty Cycle: 1:1

Medium: HSL_2600_260127 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(7.49, 7.28, 7.42); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1753; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (80.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.960 W/kg; SAR (10g) = 0.439 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.916 W/kg; SAR (10g) = 0.437 W/kg

Smallest distance from peaks to all points 3 dB below = 5.3 mm

Ratio of SAR at M2 to SAR at M1 = 85.4 %

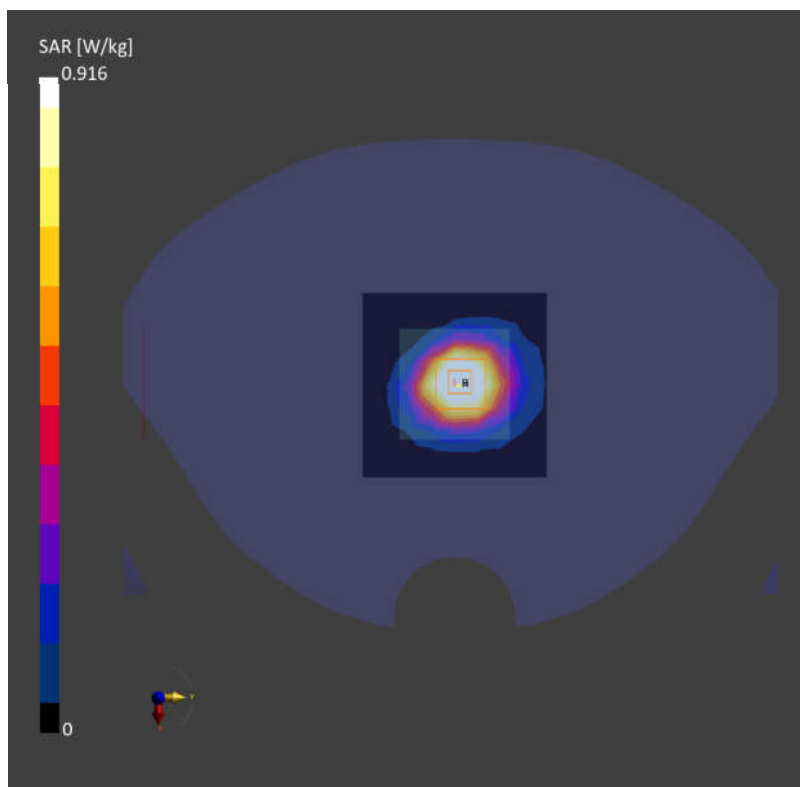

Date: 2026-01-22

02_LTE Band 12_10M_QPSK_1_0_Front_10mm_Ch23095

Communication System: LTE-FDD RBPosition:MidAntennaCfg:SISO; Frequency: 707.500

MHz; Duty Cycle: 1:1

Medium: HSL_750_260122 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.881$ S/m; $\epsilon_r = 43.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.37, 10.09, 10.28); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1753; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 90.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.01 W/kg; SAR (10g) = 0.006 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 0.008 W/kg; SAR (10g) = 0.003 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 89.4 %

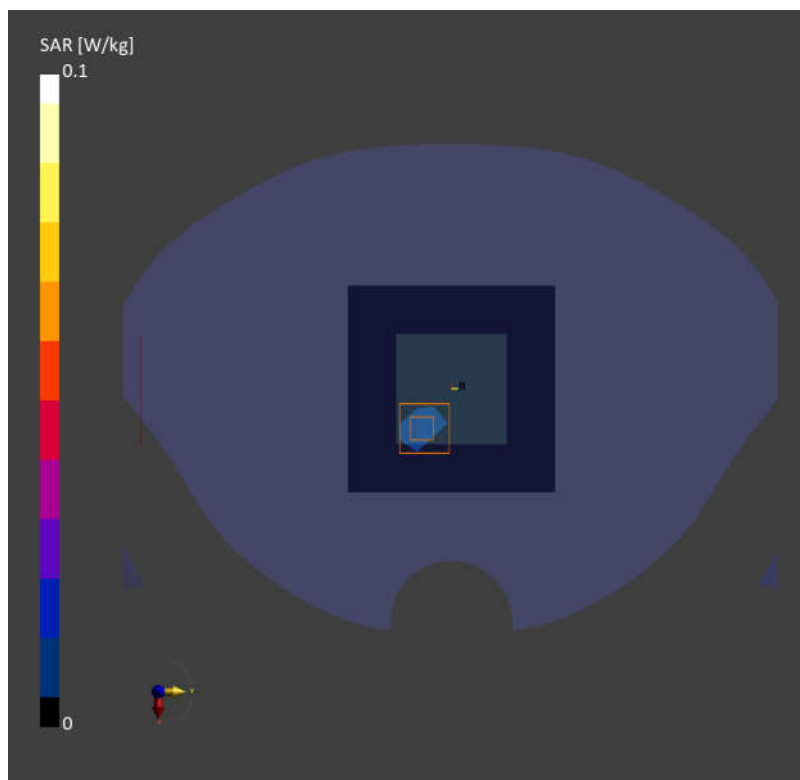

Date: 2026-01-22

03_LTE Band 13_10M_QPSK_1_0_Front_10mm_Ch23230

Communication System: LTE-FDD RBPosition:MidAntennaCfg:SISO; Frequency: 782.000

MHz; Duty Cycle: 1:1

Medium: HSL_750_260122 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 42.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.37, 10.09, 10.28); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1753; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 90.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.006 W/kg; SAR (10g) = 0.003 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.05 dB

SAR (1g) = 0.006 W/kg; SAR (10g) = 0.003 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 91.3 %

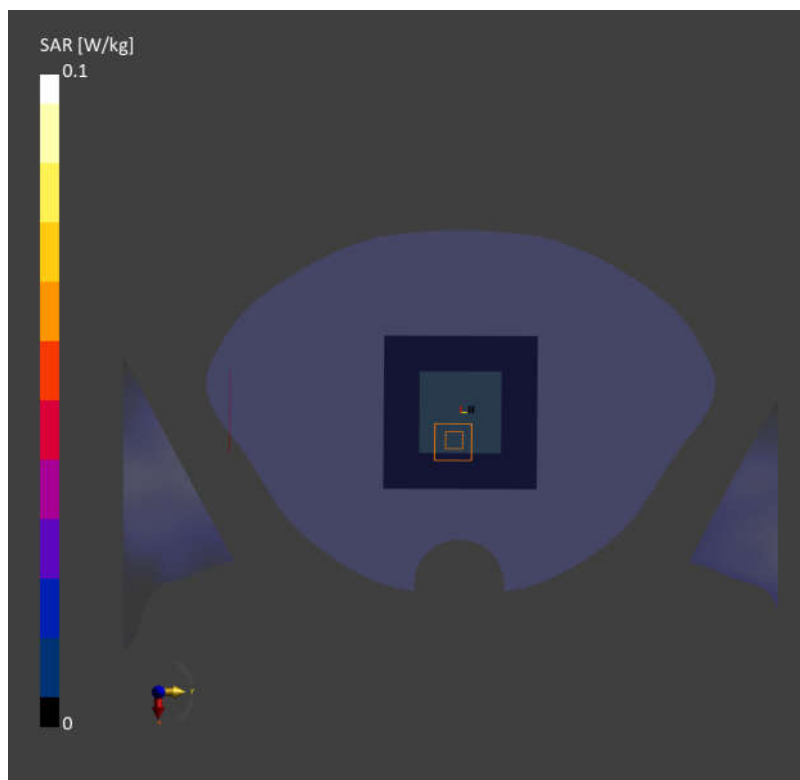

Date: 2026-01-25

04_LTE Band 25_20M_QPSK_1_49_Front_10mm_Ch26340

Communication System: LTE-FDD RBPosition:MidAntennaCfg:SISO; Frequency: 1880.000

MHz; Duty Cycle: 1:1

Medium: HSL_1900_260125 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.21, 7.99, 8.14); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1753; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 90.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.376 W/kg; SAR (10g) = 0.208 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.419 W/kg; SAR (10g) = 0.249 W/kg

Smallest distance from peaks to all points 3 dB below = 14.0 mm

Ratio of SAR at M2 to SAR at M1 = 90.3 %

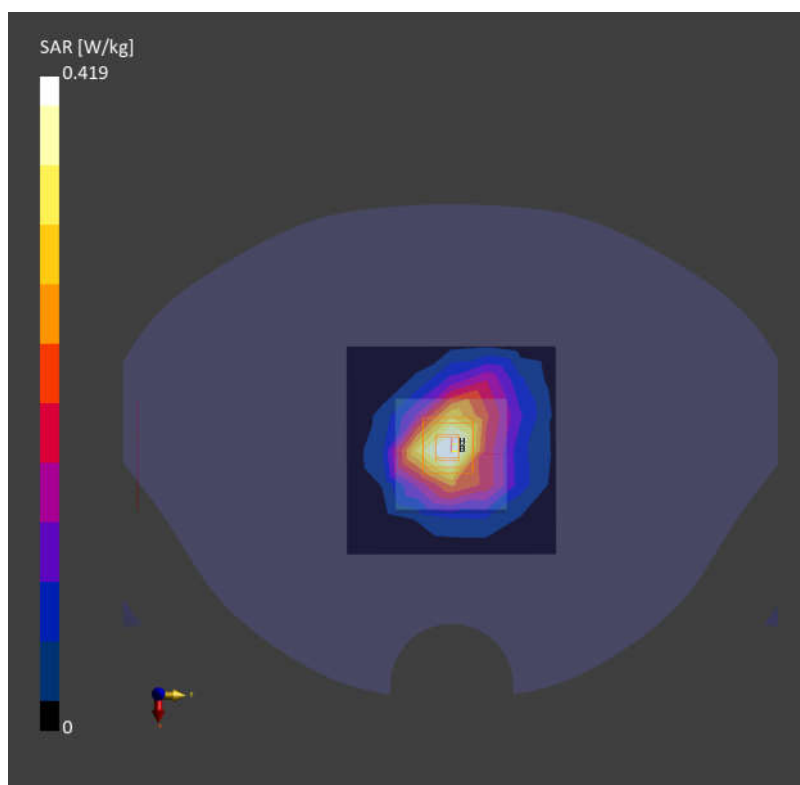

Date: 2026-01-23

05_LTE Band 26_15M_QPSK_1_0_Front_10mm_Ch26865


Communication System: LTE-FDD RBPosition:MidAntennaCfg:SISO; Frequency: 831.500 MHz; Duty Cycle: 1:1
Medium: HSL_835_260123 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 42.5$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.17, 9.9, 10.08); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1753; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

Area Scan (90.0 mm x 90.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.009 W/kg; SAR (10g) = 0.005 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.00 dB
SAR (1g) = 0.008 W/kg; SAR (10g) = 0.004 W/kg
Smallest distance from peaks to all points 3 dB below = 10.3 mm
Ratio of SAR at M2 to SAR at M1 = 87.3 %

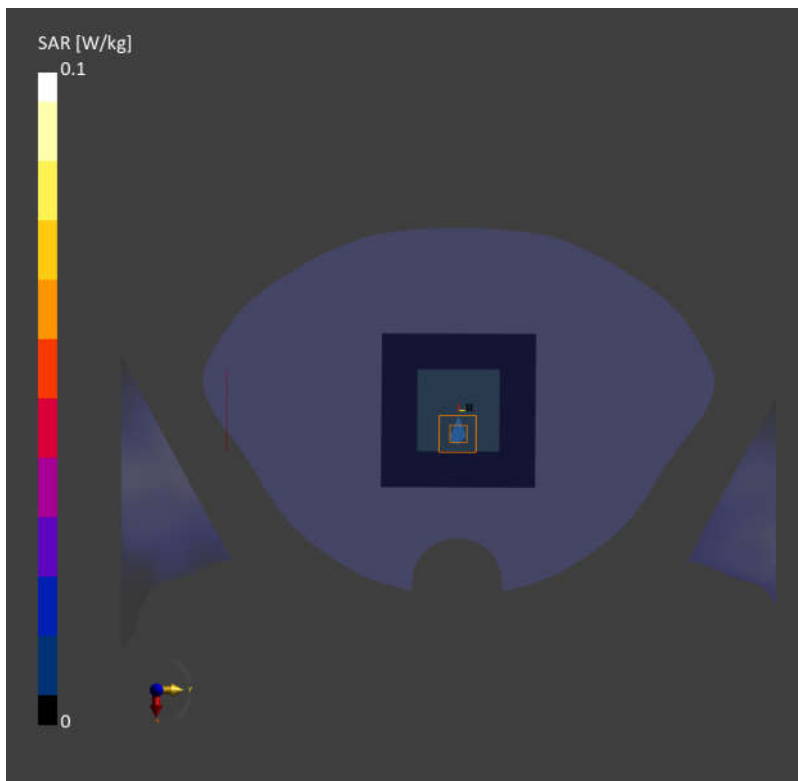

Date: 2026-01-24

06_LTE Band 66_20M_QPSK_1_49_Front_10mm_Ch132572

Communication System: LTE-FDD RBPosition:MidAntennaCfg:SISO; Frequency: 1770.000

MHz; Duty Cycle: 1:1

Medium: HSL_1750_260124 Medium parameters used: $f = 1770.000$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 40.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.4, 8.17, 8.33); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1753; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 90.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.430 W/kg; SAR (10g) = 0.253 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.14 dB

SAR (1g) = 0.437 W/kg; SAR (10g) = 0.282 W/kg

Smallest distance from peaks to all points 3 dB below = 15.7 mm

Ratio of SAR at M2 to SAR at M1 = 90.9 %

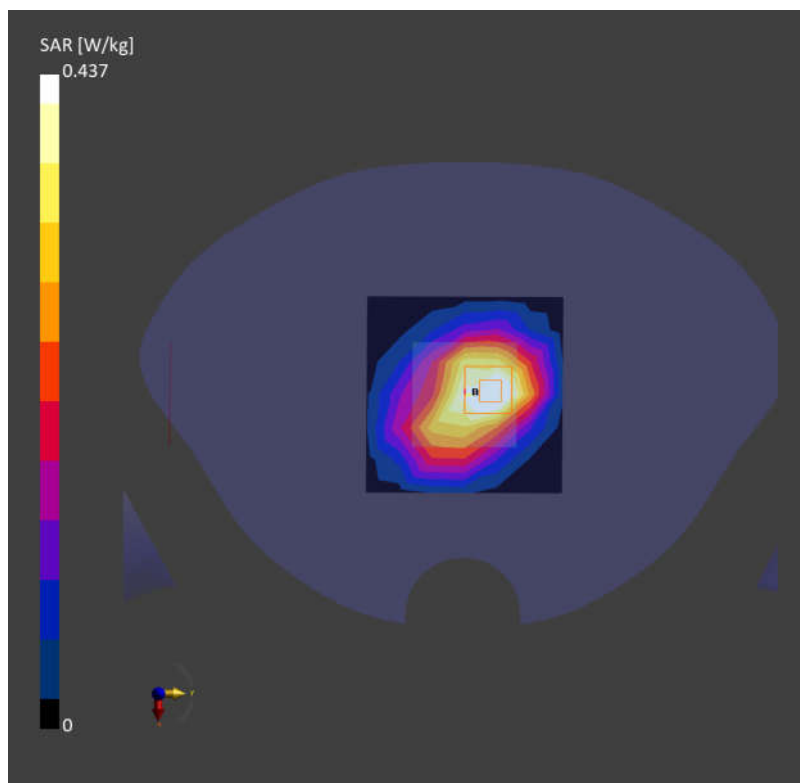

Date: 2026-01-22

07_LTE Band 71_20M_QPSK_1_49_Front_10mm_Ch133297

Communication System: LTE-FDD RBPosition:MidAntennaCfg:SISO; Frequency: 680.500

MHz; Duty Cycle: 1:1

Medium: HSL_750_260122 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r = 43.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.37, 10.09, 10.28); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1753; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 90.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.008 W/kg; SAR (10g) = 0.005 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.01 dB

SAR (1g) = 0.008 W/kg; SAR (10g) = 0.004 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 90.9 %

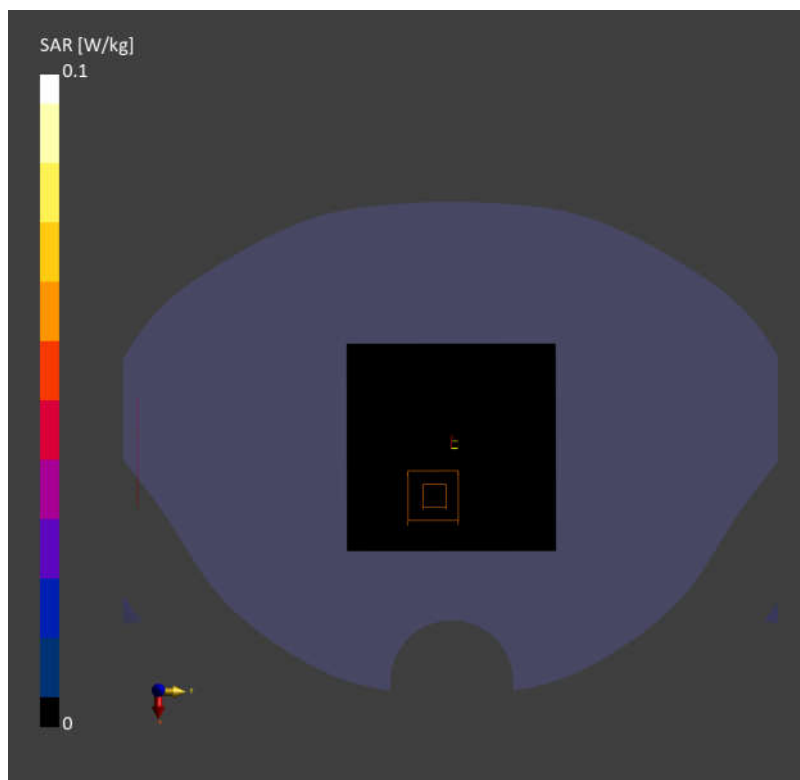

Date: 2026-01-29

08_WLAN2.4GHz_802.11b 1Mbps_Front_10mm_Ch11

Communication System: IEEE 802.11b WiFi 2.4 GHz;

Frequency: 2462.000MHz; Duty Cycle: 1:1.011

Medium: HSL_2450_260129 Medium parameters used: $f = 2462.000$ MHz; $\sigma = 1.76$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(7.65, 7.44, 7.58); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1753; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB

Area Scan (80.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.325 W/kg; SAR (10g) = 0.169 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.09 dB

SAR (1g) = 0.340 W/kg; SAR (10g) = 0.187 W/kg

Smallest distance from peaks to all points 3 dB below = 13.9 mm

Ratio of SAR at M2 to SAR at M1 = 87.7 %

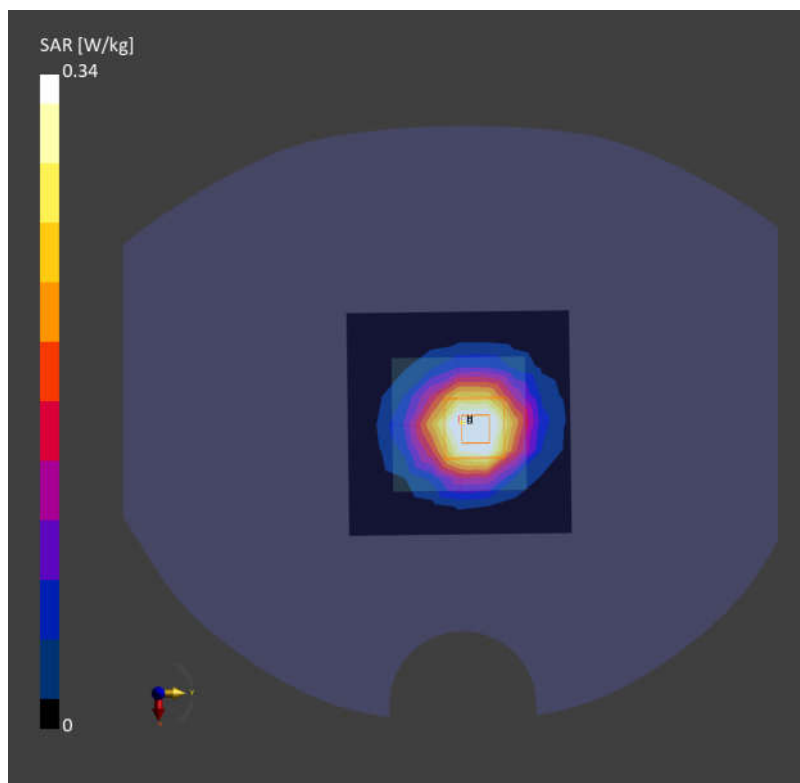

Date: 2026-01-31

09_WLAN5GHz_802.11a 6Mbps_Front_10mm_Ch48

Communication System: IEEE 802.11a WiFi 5 GHz;

Frequency: 5240.000 MHz; Duty Cycle: 1:1.021

Medium: HSL_5250_260131 Medium parameters used: $f = 5240.000$ MHz; $\sigma = 4.69$ S/m; $\epsilon_r = 36.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.9, 5.74, 5.85); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1753; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10317-AAE

Area Scan (80.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.018 W/kg; SAR (10g) = 0.006 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.06 dB

SAR (1g) = 0.007 W/kg; SAR (10g) = 0.001 W/kg

Smallest distance from peaks to all points 3 dB below = 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 75.0 %

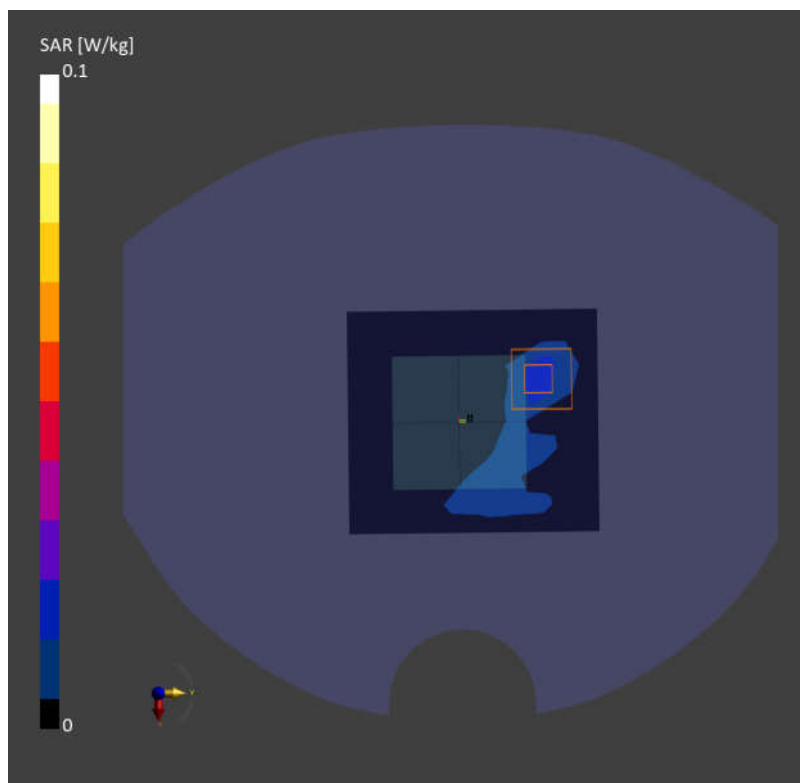

Date: 2026-01-31

10_WLAN5GHz_802.11a 6Mbps_Front_10mm_Ch56

Communication System: IEEE 802.11a WiFi 5 GHz;

Frequency: 5280.000 MHz; Duty Cycle: 1:1.021

Medium: HSL_5250_260131 Medium parameters used: $f = 5280.000$ MHz; $\sigma = 4.73$ S/m; $\epsilon_r = 36.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.9, 5.74, 5.85); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1753; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10317-AAE

Area Scan (80.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.017 W/kg; SAR (10g) = 0.005 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.17 dB

SAR (1g) = 0.013 W/kg; SAR (10g) = 0.004 W/kg

Smallest distance from peaks to all points 3 dB below = 4.2 mm

Ratio of SAR at M2 to SAR at M1 = 73.6 %

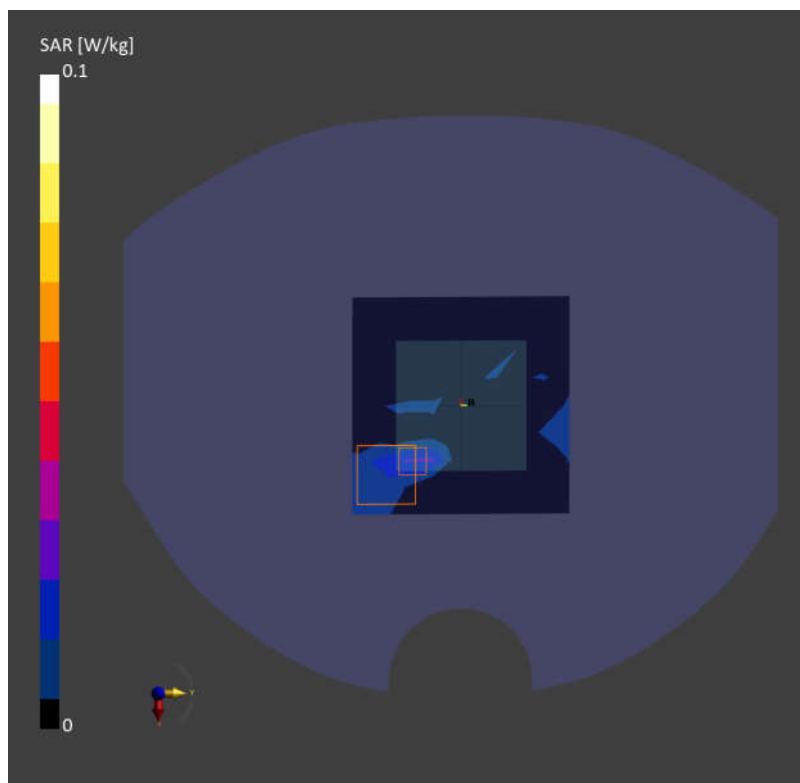

11_WLAN5GHz_802.11a 6Mbps_Front_10mm_Ch140

Communication System: IEEE 802.11a WiFi 5 GHz;

Frequency: 5700.000 MHz; Duty Cycle: 1:1.021

Medium: HSL_5800_260204 Medium parameters used: $f = 5700.000$ MHz; $\sigma = 5.09$ S/m; $\epsilon_r = 35.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.31, 5.17, 5.27); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1753; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10317-AAE

Area Scan (80.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.024 W/kg; SAR (10g) = 0.008 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.04 dB

SAR (1g) = 0.017 W/kg; SAR (10g) = 0.005 W/kg

Smallest distance from peaks to all points 3 dB below = 4.2 mm

Ratio of SAR at M2 to SAR at M1 = 76.5 %

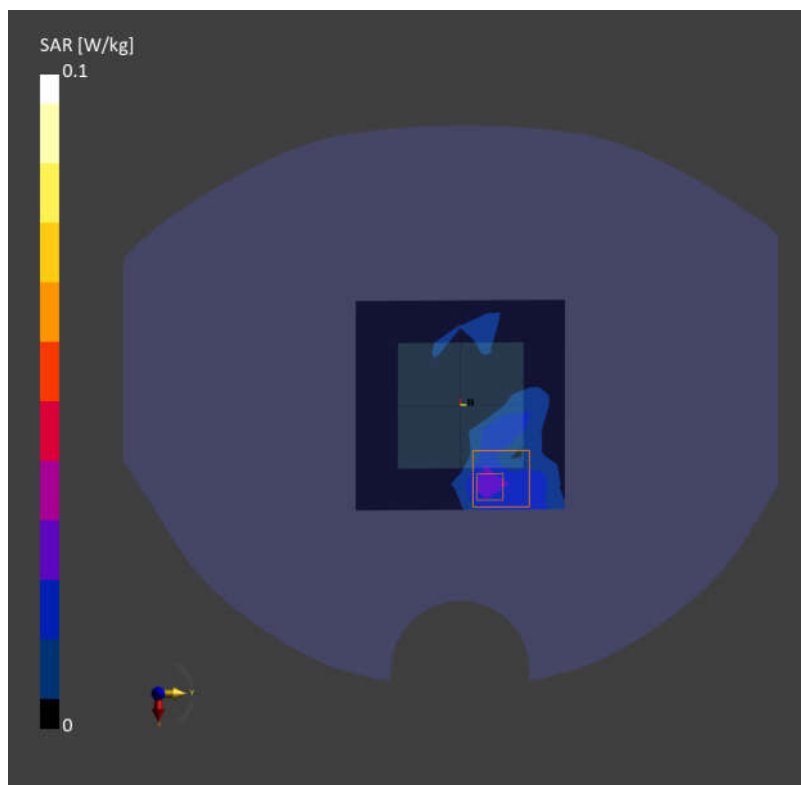

Date: 2026-02-04

12_WLAN5GHz_802.11a 6Mbps_Front_10mm_Ch149

Communication System: IEEE 802.11a WiFi 5 GHz;

Frequency: 5745.000 MHz; Duty Cycle: 1:1.021

Medium: HSL_5800_260204 Medium parameters used: $f = 5745.000$ MHz; $\sigma = 5.14$ S/m; $\epsilon_r = 35.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.31, 5.17, 5.27); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1753; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10317-AAE

Area Scan (80.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.021 W/kg; SAR (10g) = 0.007 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 0.017 W/kg; SAR (10g) = 0.004 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 63.4 %

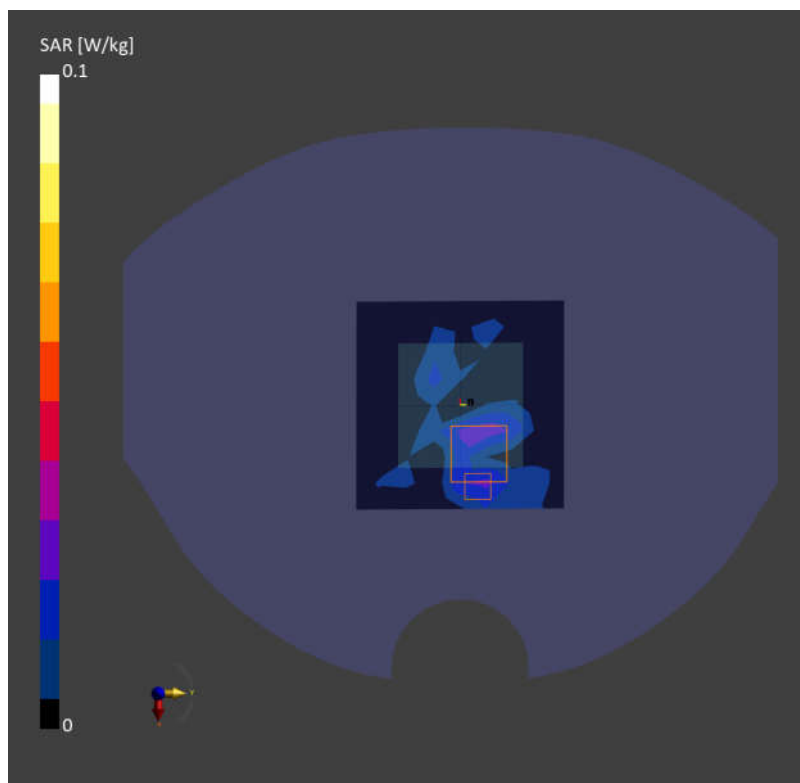

Date: 2026-01-29

13_Bluetooth_1Mbps_Front_10mm_Ch78

Communication System: IEEE 802.15.1 Bluetooth;

Frequency: 2480.000 MHz; Duty Cycle: 1:1.3

Medium: HSL_2450_260129 Medium parameters used: $f = 2480.000$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 38.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(7.65, 7.44, 7.58); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1753; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (80.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.143 W/kg; SAR (10g) = 0.075 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.08 dB

SAR (1g) = 0.145 W/kg; SAR (10g) = 0.080 W/kg

Smallest distance from peaks to all points 3 dB below = 12.6 mm

Ratio of SAR at M2 to SAR at M1 = 88.0 %

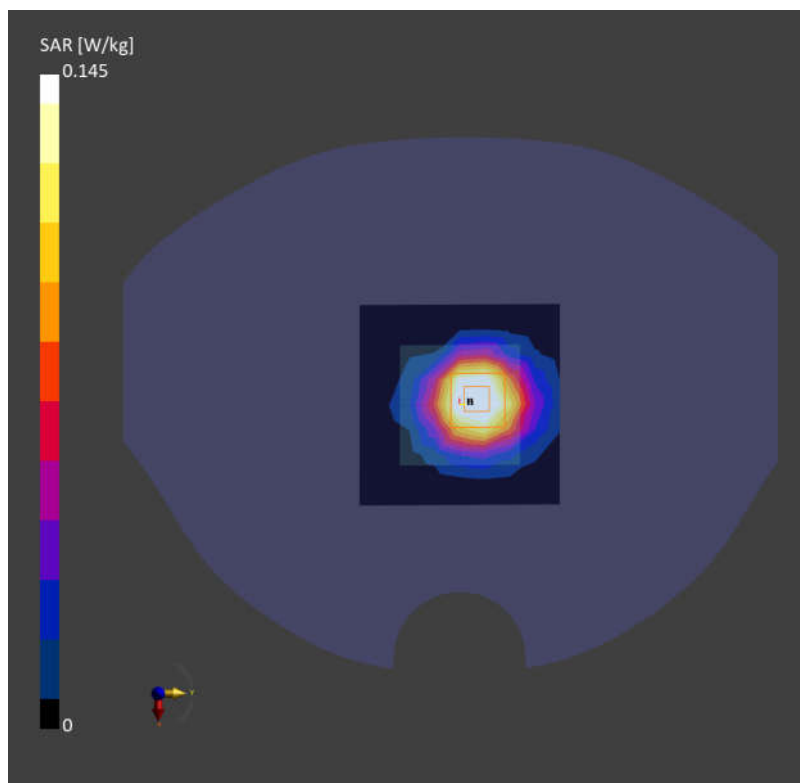

Date: 2026-01-27

14_LTE Band 7_20M_QPSK_1_49_Back_0mm_Ch21100

Communication System: LTE-FDD RBPosition:MidAntennaCfg:SISO; Frequency: 2535.000

MHz; Duty Cycle: 1:1

Medium: HSL_2600_260127 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(7.49, 7.28, 7.42); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1753; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (80.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.54 W/kg; SAR (10g) = 0.659 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.01 dB

SAR (1g) = 1.43 W/kg; SAR (10g) = 0.632 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 90.1 %

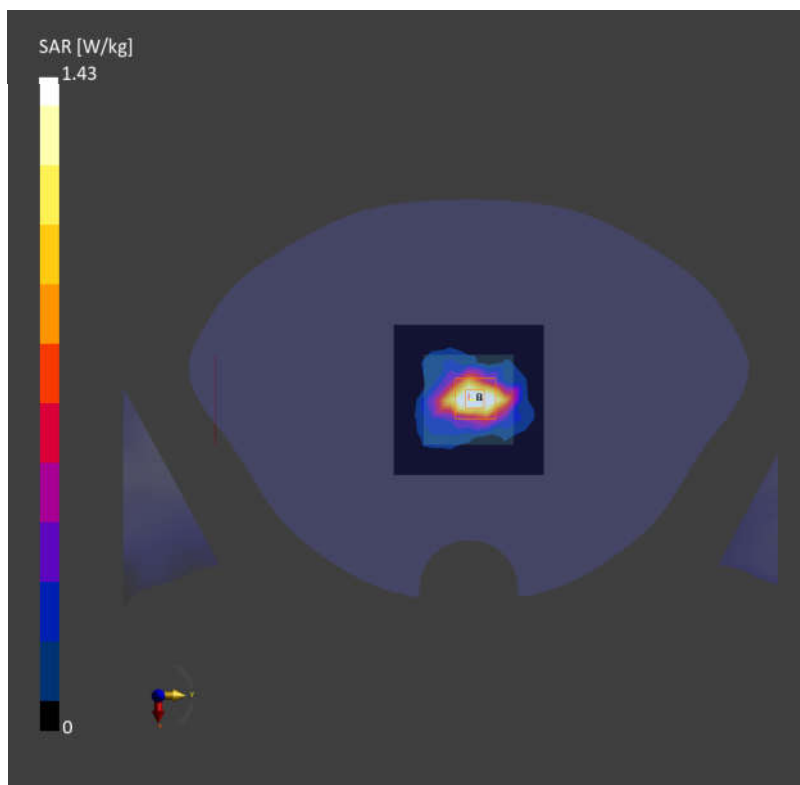

Date: 2026-01-22

15_LTE Band 12_10M_QPSK_1_0_Back_0mm_Ch23095

Communication System: LTE-FDD RBPosition:MidAntennaCfg:SISO; Frequency: 707.500

MHz; Duty Cycle: 1:1

Medium: HSL_750_260122 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.881$ S/m; $\epsilon_r = 43.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.37, 10.09, 10.28); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1753; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 90.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.375 W/kg; SAR (10g) = 0.211 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.07 dB

SAR (1g) = 0.394 W/kg; SAR (10g) = 0.154 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 55.0 %

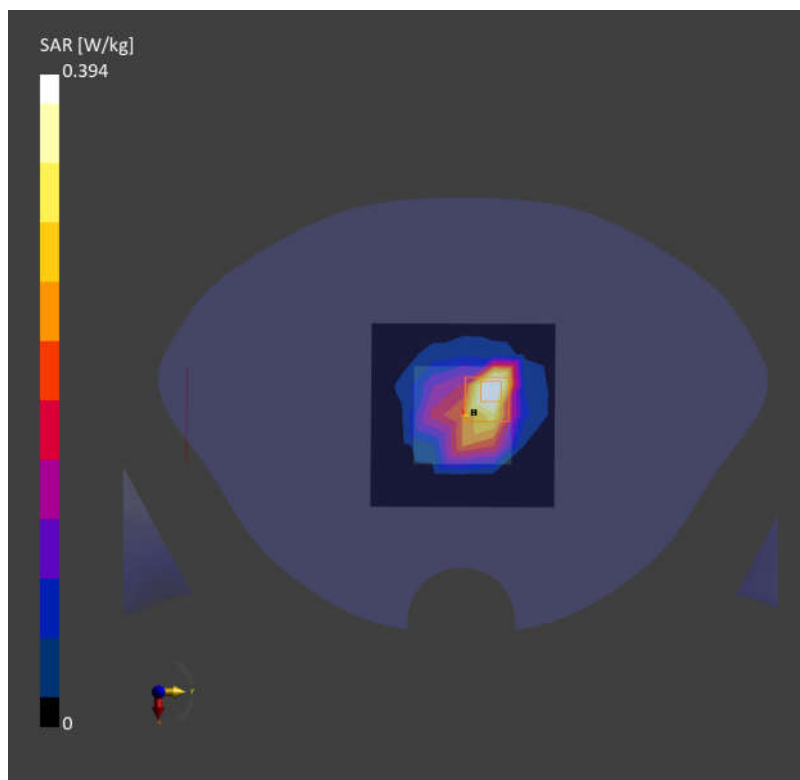

Date: 2026-01-22

16_LTE Band 13_10M_QPSK_1_0_Back_0mm_Ch23230

Communication System: LTE-FDD RBPosition:MidAntennaCfg:SISO; Frequency: 782.000

MHz; Duty Cycle: 1:1

Medium: HSL_750_260122 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 42.9$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.37, 10.09, 10.28); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1753; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (90.0 mm x 90.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.443 W/kg; SAR (10g) = 0.263 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.08 dB

SAR (1g) = 0.376 W/kg; SAR (10g) = 0.172 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 55.7 %

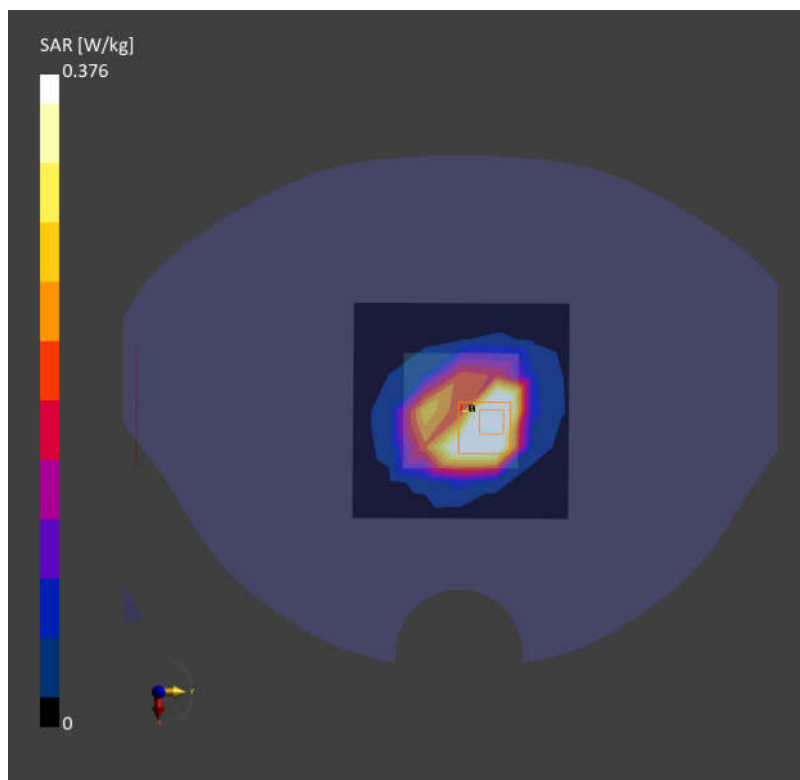

Date: 2026-01-25

17_LTE Band 25_20M_QPSK_1_49_Back_0mm_Ch26340

Communication System: LTE-FDD RBPosition:MidAntennaCfg:SISO; Frequency: 1880.000

MHz; Duty Cycle: 1:1

Medium: HSL_1900_260125 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.21, 7.99, 8.14); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1753; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 90.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 2.58 W/kg; SAR (10g) = 1.33 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.04 dB

SAR (1g) = 2.36 W/kg; SAR (10g) = 1.18 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 82.4 %

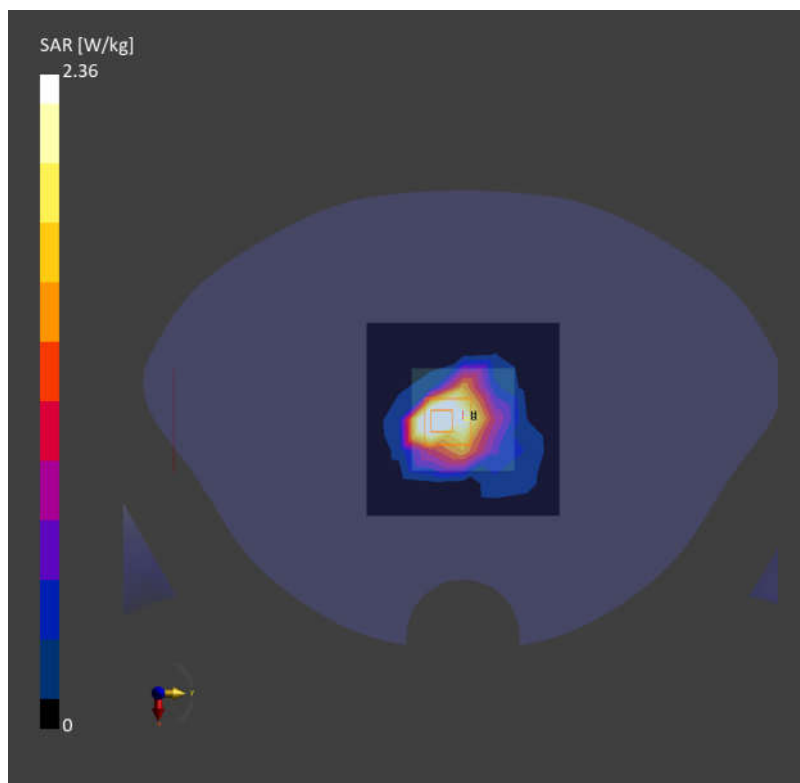

Date: 2026-01-23

18_LTE Band 26_15M_QPSK_1_0_Back_0mm_Ch26865

Communication System: LTE-FDD RBPosition:MidAntennaCfg:SISO; Frequency: 831.500

MHz; Duty Cycle: 1:1

Medium: HSL_835_260123 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.17, 9.9, 10.08); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1753; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

Area Scan (90.0 mm x 90.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.277 W/kg; SAR (10g) = 0.178 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.307 W/kg; SAR (10g) = 0.124 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 70.4 %

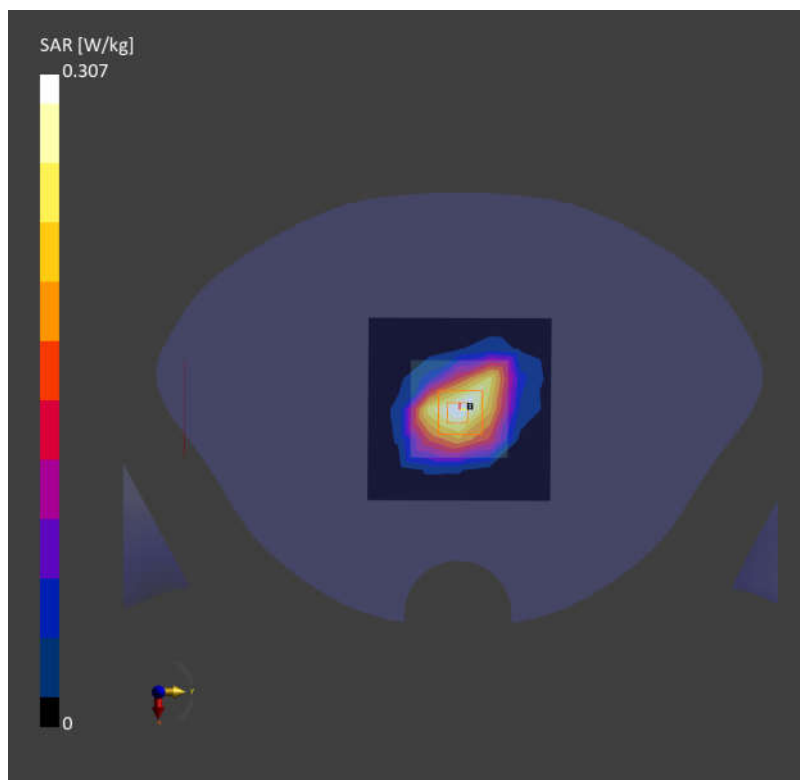

Date: 2026-01-24

19_LTE Band 66_20M_QPSK_1_49_Back_0mm_Ch132572

Communication System: LTE-FDD RBPosition:MidAntennaCfg:SISO; Frequency: 1770.000

MHz; Duty Cycle: 1:1

Medium: HSL_1750_260124 Medium parameters used: $f = 1770.000$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 40.1$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(8.4, 8.17, 8.33); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1753; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 90.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 2.45 W/kg; SAR (10g) = 1.37 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.18 dB

SAR (1g) = 2.09 W/kg; SAR (10g) = 1.02 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 79.2 %

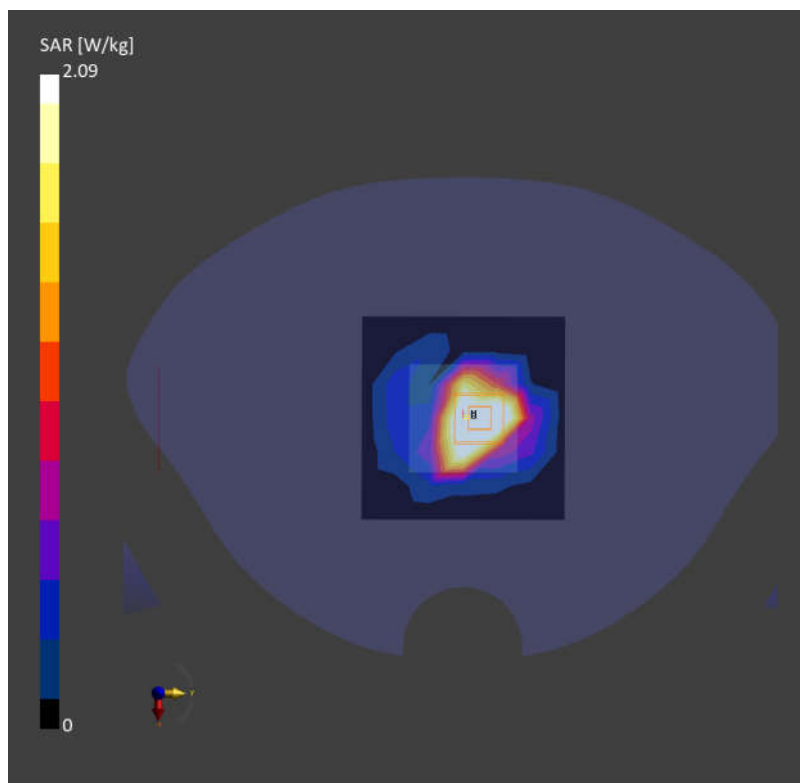

Date: 2026-01-22

20_LTE Band 71_20M_QPSK_50_24_Back_0mm_Ch133297

Communication System: LTE-FDD RBPosition:MidAntennaCfg:SISO; Frequency: 680.500

MHz; Duty Cycle: 1:1

Medium: HSL_750_260122 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r = 43.0$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(10.37, 10.09, 10.28); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1753; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (90.0 mm x 90.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.151 W/kg; SAR (10g) = 0.098 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.03 dB

SAR (1g) = 0.162 W/kg; SAR (10g) = 0.074 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 55.2 %

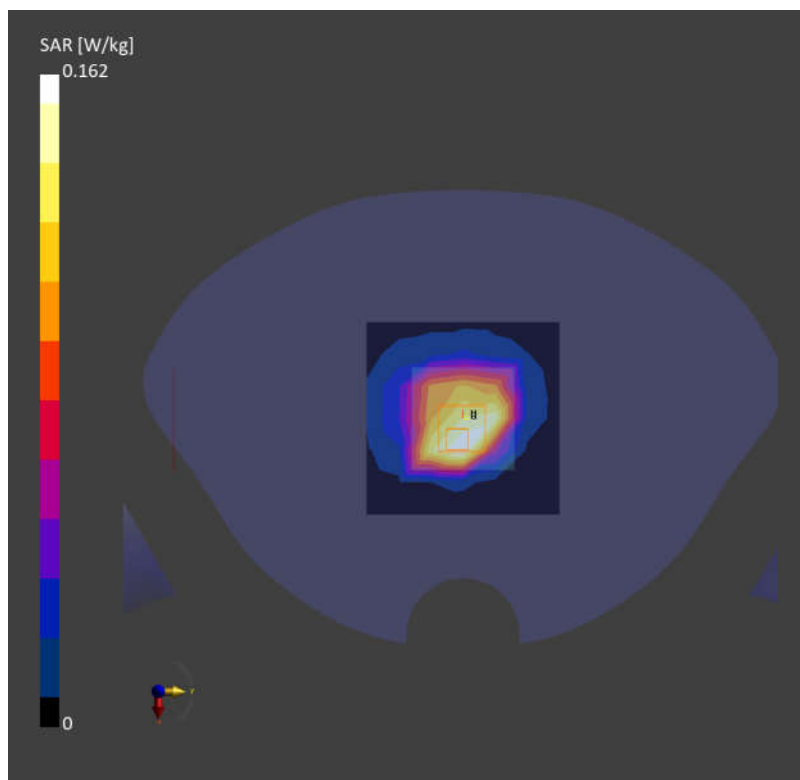

Date: 2026-01-29

21_WLAN2.4GHz_802.11b 1Mbps_Back_0mm_Ch11

Communication System: IEEE 802.11b WiFi 2.4 GHz;

Frequency: 2462.000MHz; Duty Cycle: 1:1.011

Medium: HSL_2450_260129 Medium parameters used: $f = 2462.000$ MHz; $\sigma = 1.76$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(7.65, 7.44, 7.58); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1753; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB

Area Scan (80.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.534 W/kg; SAR (10g) = 0.239 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.02 dB

SAR (1g) = 0.554 W/kg; SAR (10g) = 0.243 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 84.3 %

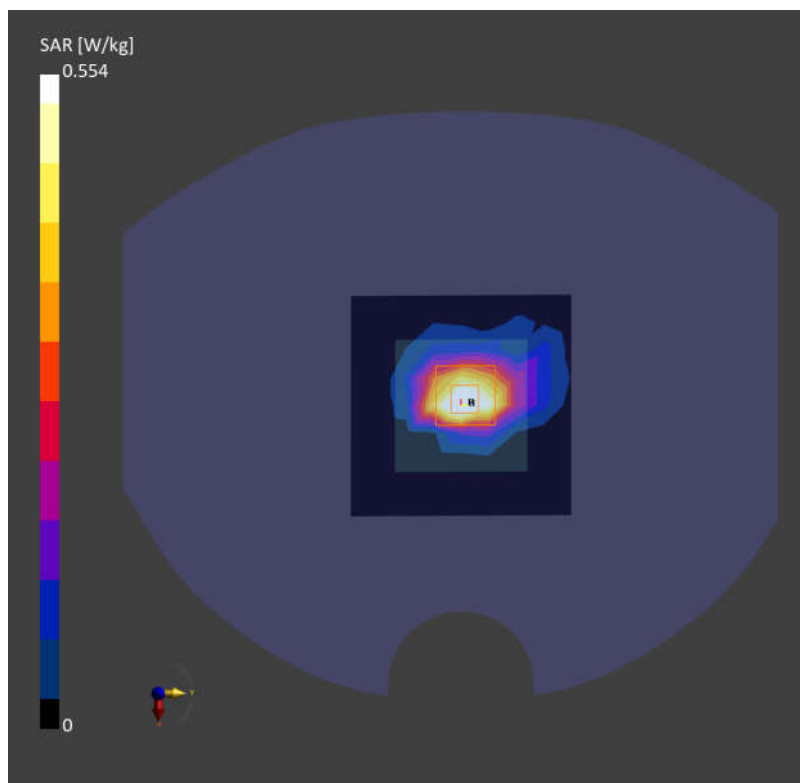

Date: 2026-01-31

22_WLAN5GHz_802.11a 6Mbps_Back_0mm_Ch48

Communication System: IEEE 802.11a WiFi 5 GHz;

Frequency: 5240.000 MHz; Duty Cycle: 1:1.021

Medium: HSL_5250_260131 Medium parameters used: $f = 5240.000$ MHz; $\sigma = 4.69$ S/m; $\epsilon_r = 36.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.9, 5.74, 5.85); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1753; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10317-AAE

Area Scan (80.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.463 W/kg; SAR (10g) = 0.161 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.10 dB

SAR (1g) = 0.505 W/kg; SAR (10g) = 0.164 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 64.6 %

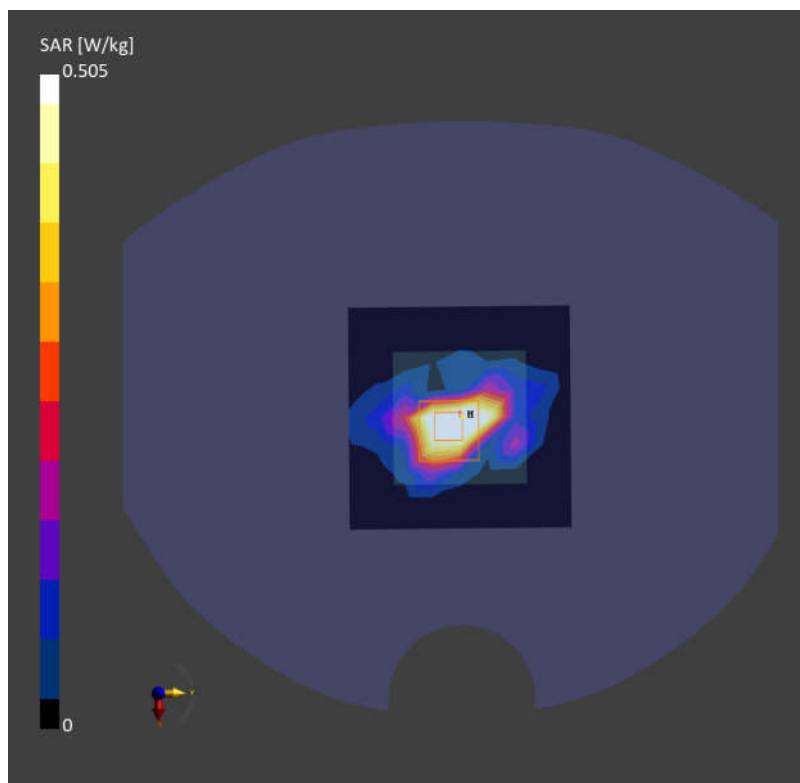

Date: 2026-01-31

23_WLAN5GHz_802.11a 6Mbps_Back_0mm_Ch56

Communication System: IEEE 802.11a WiFi 5 GHz;

Frequency: 5280.000 MHz; Duty Cycle: 1:1.021

Medium: HSL_5250_260131 Medium parameters used: $f = 5280.000$ MHz; $\sigma = 4.73$ S/m; $\epsilon_r = 36.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.9, 5.74, 5.85); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1753; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10317-AAE

Area Scan (80.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.342 W/kg; SAR (10g) = 0.126 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.18 dB

SAR (1g) = 0.346 W/kg; SAR (10g) = 0.121 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 65.5 %

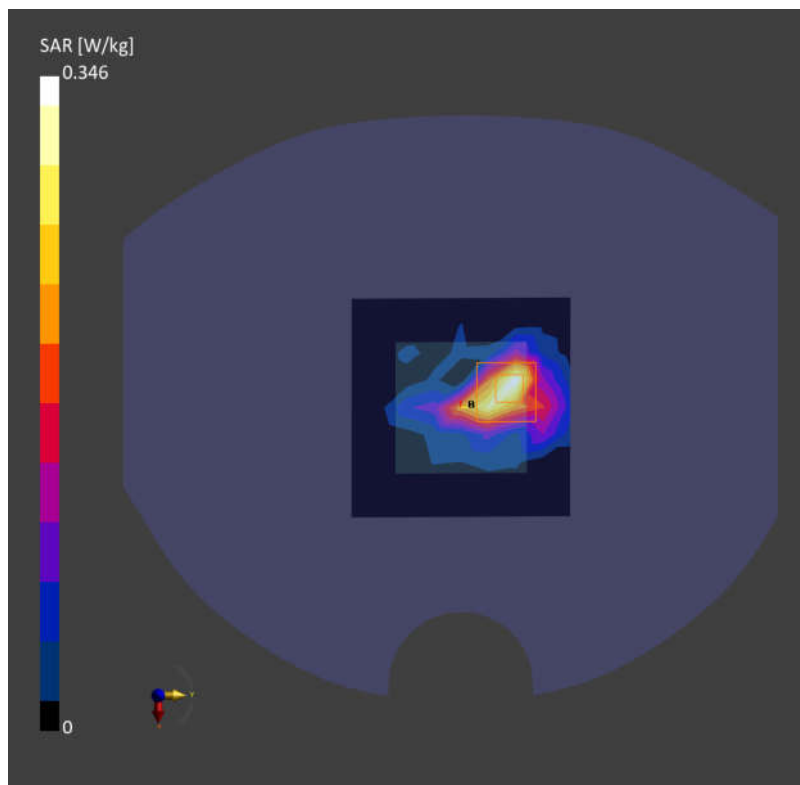

24_WLAN5GHz_802.11a 6Mbps_Back_0mm_Ch140

Communication System: IEEE 802.11a WiFi 5 GHz;

Frequency: 5700.000 MHz; Duty Cycle: 1:1.021

Medium: HSL_5800_260202 Medium parameters used: $f = 5700.000$ MHz; $\sigma = 5.09$ S/m; $\epsilon_r = 35.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.31, 5.17, 5.27); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1753; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10317-AAE

Area Scan (80.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.698 W/kg; SAR (10g) = 0.229 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.06 dB

SAR (1g) = 0.790 W/kg; SAR (10g) = 0.234 W/kg

Smallest distance from peaks to all points 3 dB below = 5.3 mm

Ratio of SAR at M2 to SAR at M1 = 61.9 %

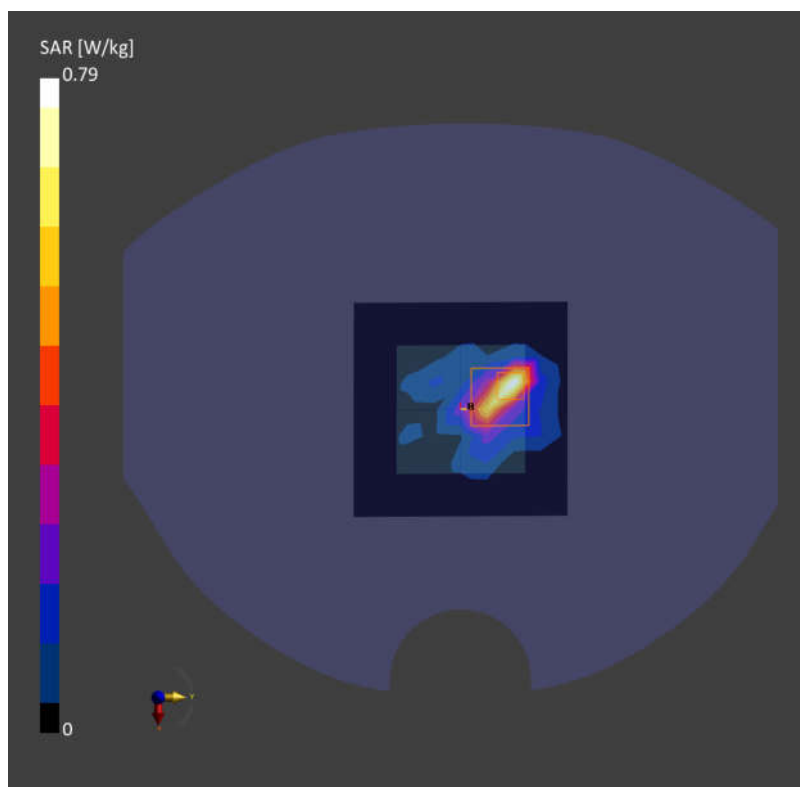

Date: 2026-02-04

25_WLAN5GHz_802.11a 6Mbps_Back_0mm_Ch149

Communication System: IEEE 802.11a WiFi 5 GHz;

Frequency: 5745.000 MHz; Duty Cycle: 1:1.021

Medium: HSL_5800_260204 Medium parameters used: $f = 5745.000$ MHz; $\sigma = 5.14$ S/m; $\epsilon_r = 35.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(5.31, 5.17, 5.27); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1753; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10317-AAE

Area Scan (80.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.923 W/kg; SAR (10g) = 0.314 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.13 dB

SAR (1g) = 1.04 W/kg; SAR (10g) = 0.324 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 60.8 %

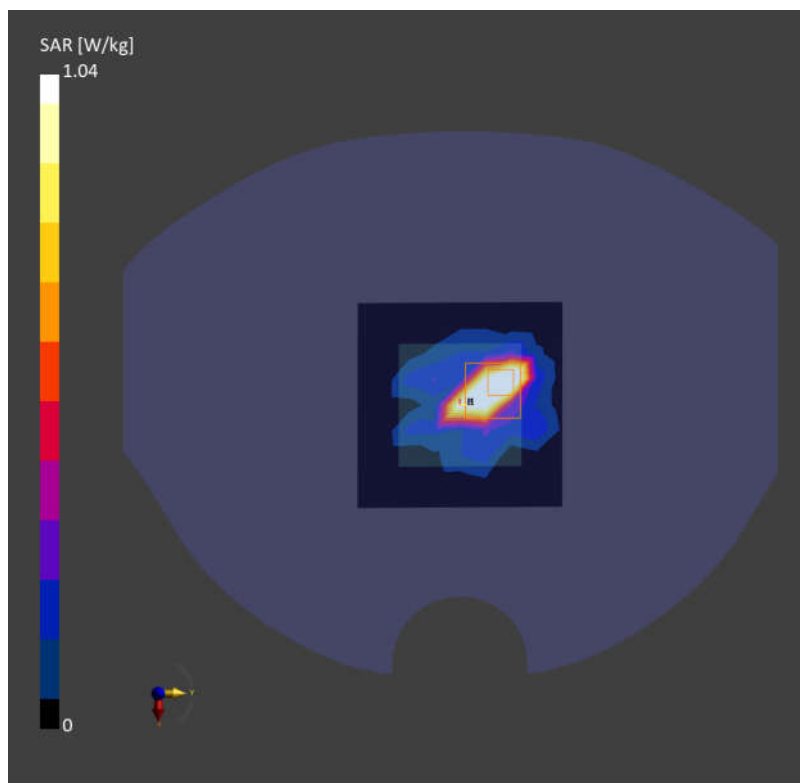

Date: 2026-01-29

26_Bluetooth_1Mbps_Back_0mm_Ch78

Communication System: IEEE 802.15.1 Bluetooth;

Frequency: 2480.000 MHz; Duty Cycle: 1:1.3

Medium: HSL_2450_260129 Medium parameters used: $f = 2480.000$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 38.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.9°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7764; ConvF(7.65, 7.44, 7.58); Calibrated: 2025-10-22
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1338; Calibrated: 2025-03-18
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 1753; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (80.0 mm x 80.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.341 W/kg; SAR (10g) = 0.149 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.18 dB

SAR (1g) = 0.330 W/kg; SAR (10g) = 0.142 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 83.7 %

