

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/4/9

01_WCDMA II_RMC 12.2Kbps_Front_10mm_Ch9400

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium: HSL_1900_260409 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.331$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.1 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.64, 7.17, 6.79) @ 1900 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
 Maximum value of SAR (interpolated) = 0.612 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 19.05 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 0.749 W/kg

SAR(1 g) = 0.509 W/kg; SAR(10 g) = 0.308 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 70.6%

Maximum value of SAR (measured) = 0.594 W/kg

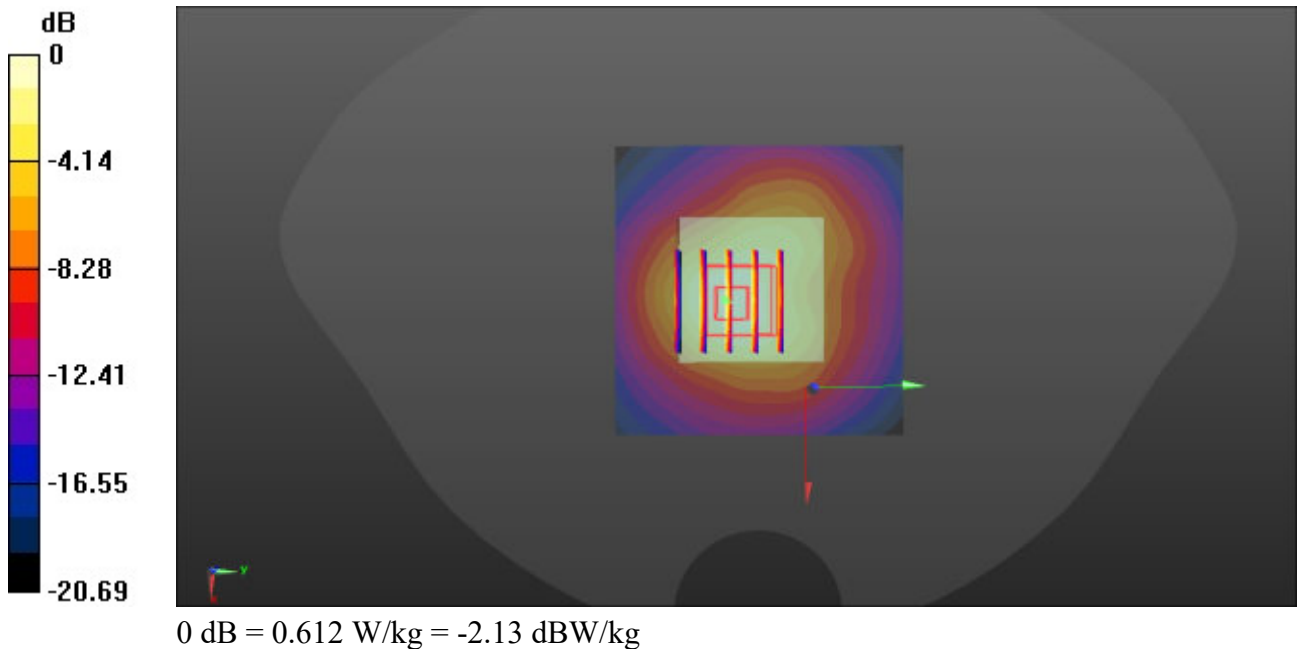

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/4/4

02_WCDMA IV_RMC 12.2Kbps_Front_10mm_Ch1413

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium: HSL_1750_260404 Medium parameters used: $f = 1733$ MHz; $\sigma = 1.364$ S/m; $\epsilon_r = 40.841$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.86, 7.4, 7.01) @ 1750 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.293 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.36 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.345 W/kg

SAR(1 g) = 0.274 W/kg; SAR(10 g) = 0.190 W/kg

Smallest distance from peaks to all points 3 dB below = 19.5 mm

Ratio of SAR at M2 to SAR at M1 = 75.6%

Maximum value of SAR (measured) = 0.303 W/kg

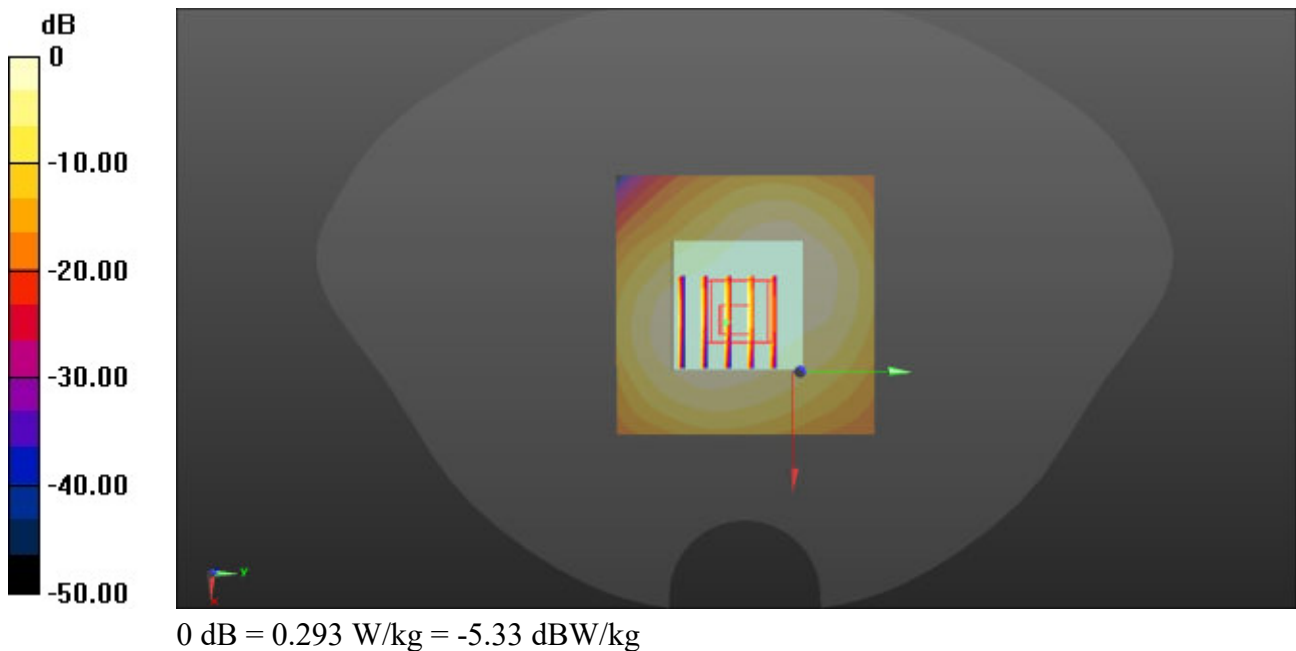

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/3/27

03_WCDMA V_RMC 12.2Kbps_Front_10mm_Ch4182

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1
 Medium: HSL_835_260327 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 42.605$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.01, 8.65, 8.19) @ 835 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0167 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.563 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.0250 W/kg

SAR(1 g) = 0.014 W/kg; SAR(10 g) = 0.00796 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 58.8%

Maximum value of SAR (measured) = 0.0172 W/kg

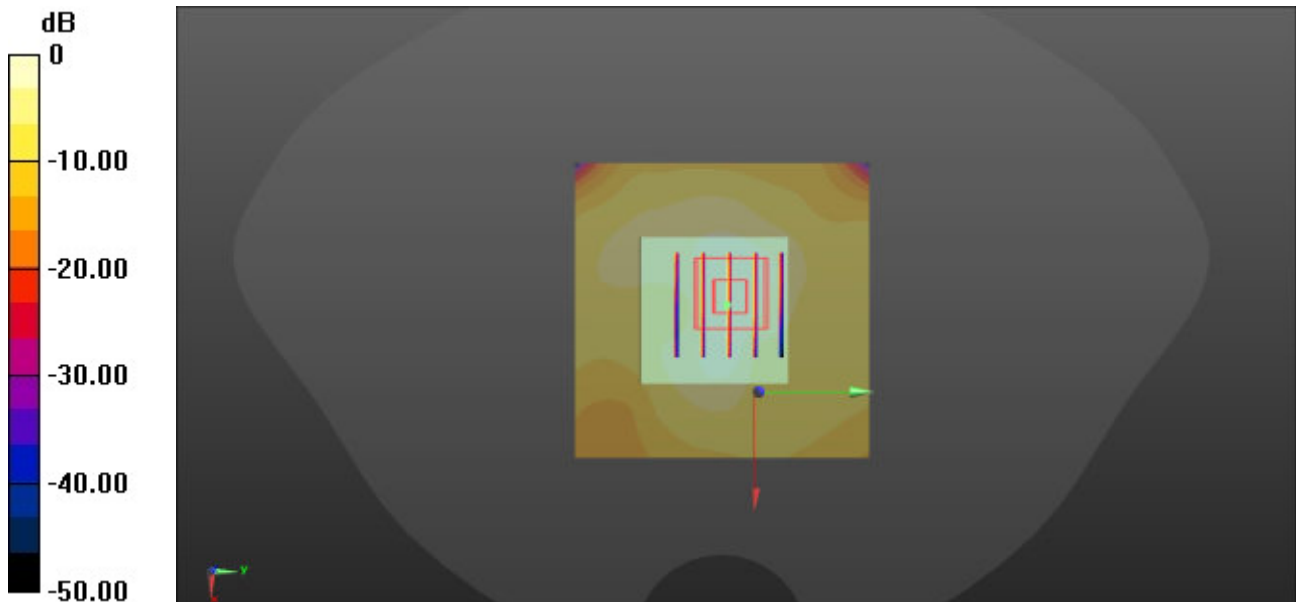

0 dB = 0.0167 W/kg = -17.77 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/4/13

04_LTE Band 7_20M_QPSK_1_0_Front_10mm_Ch21100

Communication System: UID 0, LTE-FDD (0); Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium: HSL_2600_260413 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.869$ S/m; $\epsilon_r = 39.069$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.96, 6.44, 6.09) @ 2600 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
 Maximum value of SAR (interpolated) = 1.32 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.34 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.894 W/kg; SAR(10 g) = 0.502 W/kg

Smallest distance from peaks to all points 3 dB below = 13.5 mm

Ratio of SAR at M2 to SAR at M1 = 60.5%

Maximum value of SAR (measured) = 1.24 W/kg

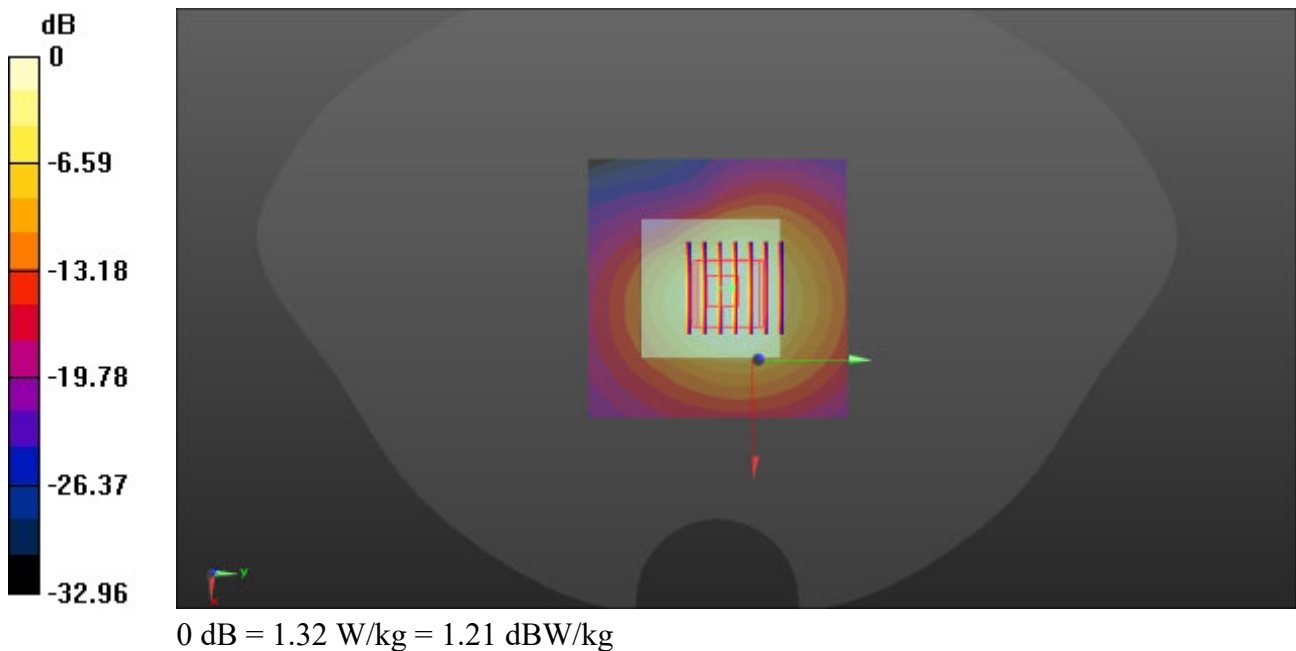

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/3/23

05_LTE Band 12_10M_QPSK_1_0_Front_10mm_Ch23095

Communication System: UID 0, LTE-FDD (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium: HSL_750_260323 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.879$ S/m; $\epsilon_r = 43.163$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36) @ 750 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0110 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.831 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 0.0170 W/kg

SAR(1 g) = 0.00972 W/kg; SAR(10 g) = 0.00573 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 62.3%

Maximum value of SAR (measured) = 0.0118 W/kg

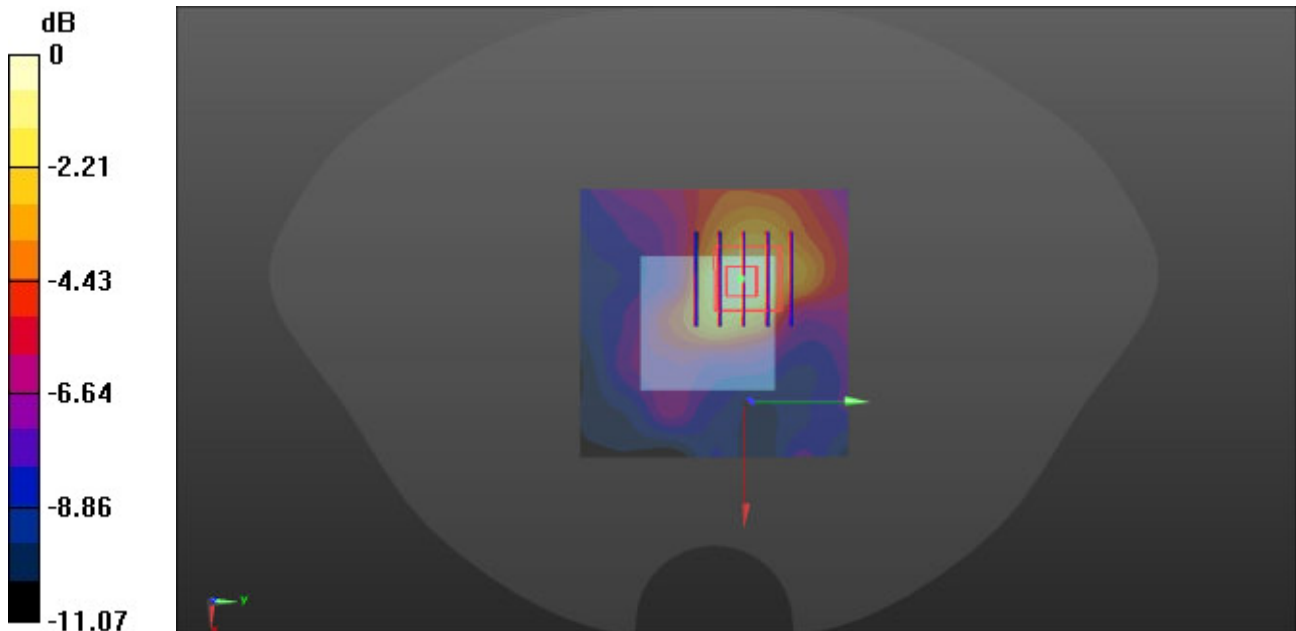

0 dB = 0.0110 W/kg = -19.59 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/3/23

06_LTE Band 13_10M_QPSK_1_0_Front_10mm_Ch23230

Communication System: UID 0, LTE-FDD (0); Frequency: 782 MHz; Duty Cycle: 1:1
 Medium: HSL_750_260323 Medium parameters used: $f = 782$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 42.896$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36) @ 750 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0124 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.568 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 0.0170 W/kg

SAR(1 g) = 0.00983 W/kg; SAR(10 g) = 0.00562 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 60.9%

Maximum value of SAR (measured) = 0.0118 W/kg

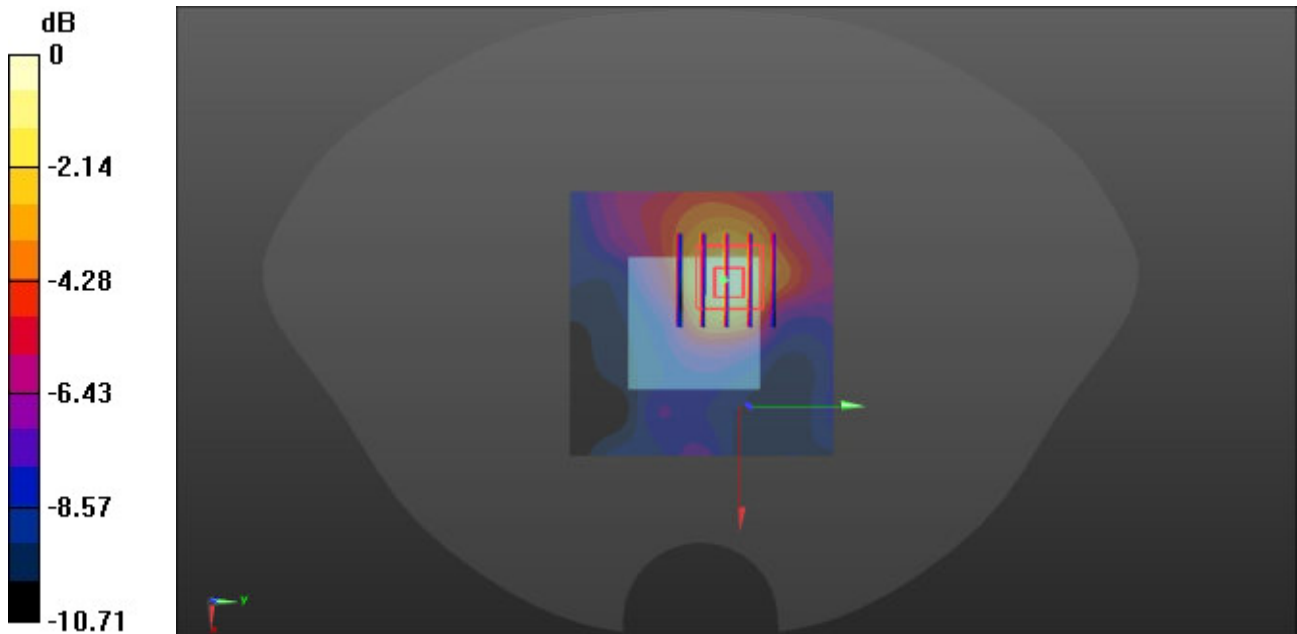

0 dB = 0.0124 W/kg = -19.07 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/4/9

07_LTE Band 2_20M_QPSK_1_0_Front_10mm_Ch18900

Communication System: UID 0, LTE-FDD (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium: HSL_1900_260409 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.331$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.1 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.64, 7.17, 6.79) @ 1900 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
 Maximum value of SAR (interpolated) = 0.853 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 24.04 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.755 W/kg; SAR(10 g) = 0.465 W/kg

Smallest distance from peaks to all points 3 dB below = 12.9 mm

Ratio of SAR at M2 to SAR at M1 = 70.8%

Maximum value of SAR (measured) = 0.863 W/kg

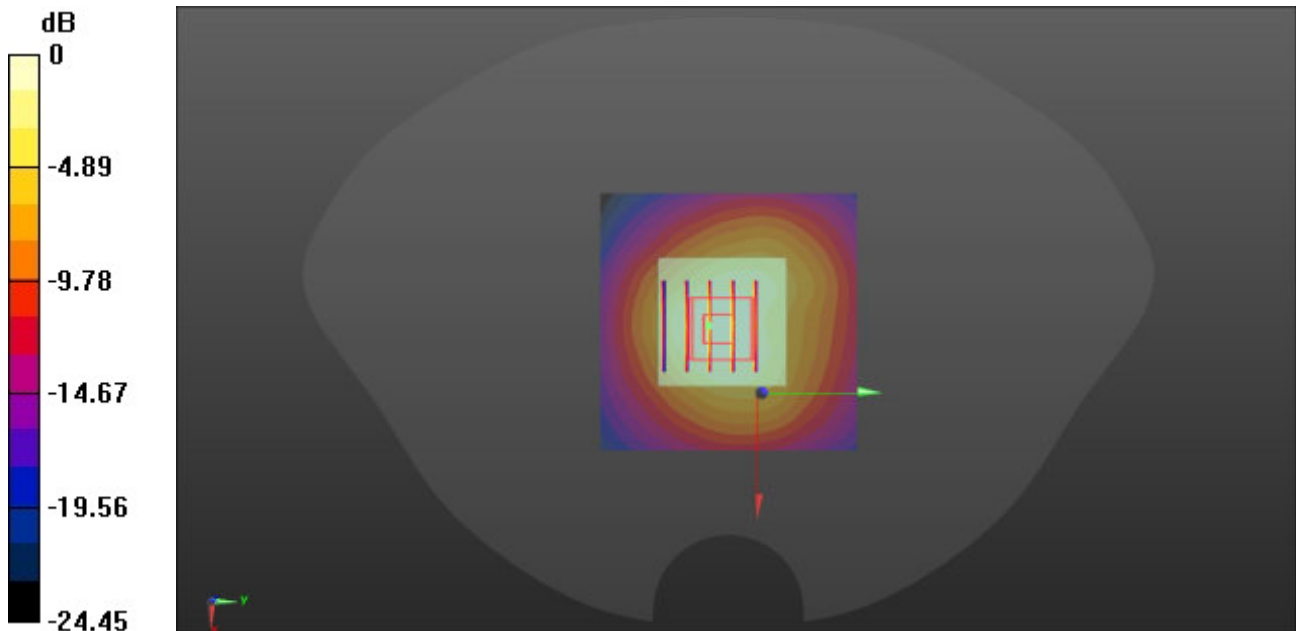

0 dB = 0.853 W/kg = -0.69 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/3/27

08_LTE Band 26_15M_QPSK_1_0_Front_10mm_Ch26865

Communication System: UID 0, LTE-FDD (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
 Medium: HSL_835_260327 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 42.494$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.01, 8.65, 8.19) @ 835 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
 Maximum value of SAR (interpolated) = 0.0163 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.955 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.0230 W/kg

SAR(1 g) = 0.013 W/kg; SAR(10 g) = 0.00759 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 59.3%

Maximum value of SAR (measured) = 0.0164 W/kg

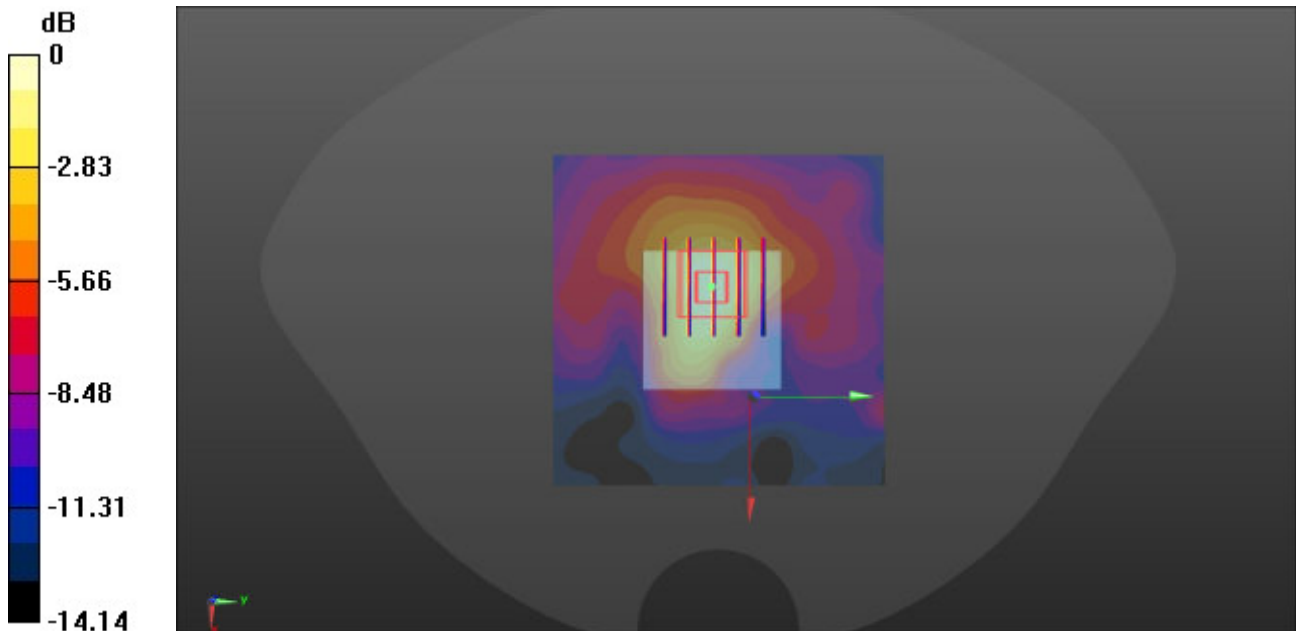

0 dB = 0.0163 W/kg = -17.88 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/4/4

09_LTE Band 66_20M_QPSK_1_49_Front_10mm_Ch132572

Communication System: UID 0, LTE-FDD (0); Frequency: 1770 MHz; Duty Cycle: 1:1
 Medium: HSL_1750_260404 Medium parameters used: $f = 1770$ MHz; $\sigma = 1.396$ S/m; $\epsilon_r = 40.638$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.86, 7.4, 7.01) @ 1750 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.429 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.52 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.469 W/kg

SAR(1 g) = 0.353 W/kg; SAR(10 g) = 0.237 W/kg

Smallest distance from peaks to all points 3 dB below = 17.9 mm

Ratio of SAR at M2 to SAR at M1 = 72.8%

Maximum value of SAR (measured) = 0.401 W/kg

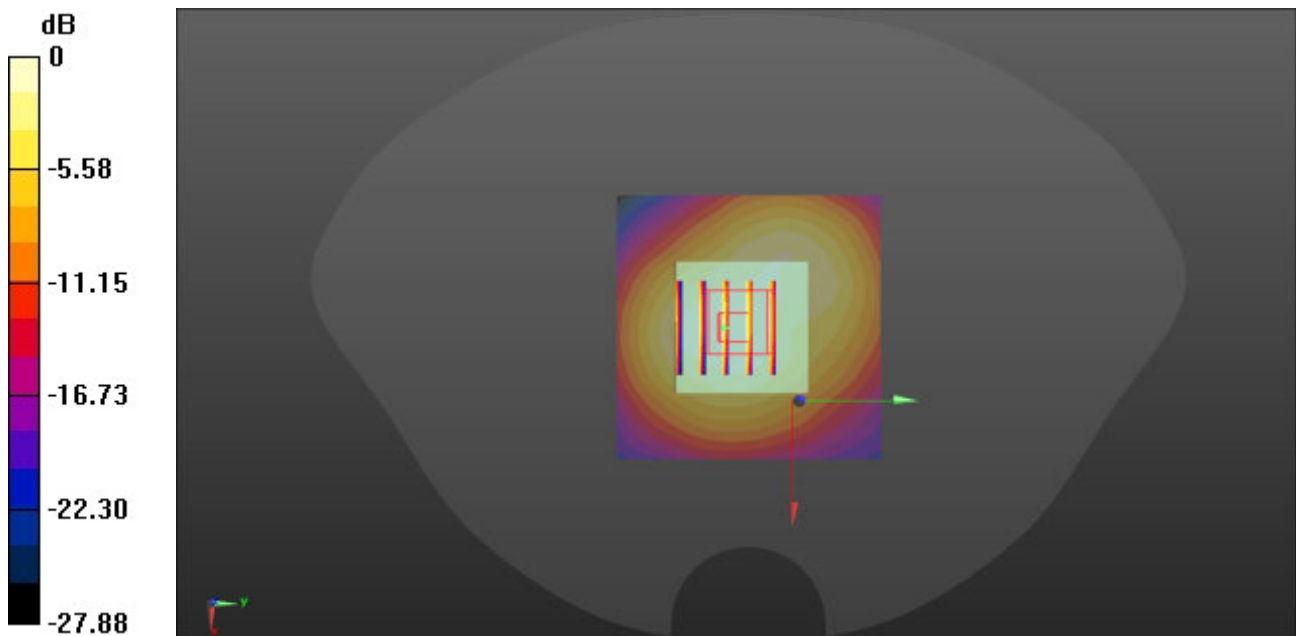

0 dB = 0.429 W/kg = -3.68 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/4/13

10_LTE Band 41_20M_QPSK_1_0_Back_0mm_Ch40620

Communication System: UID 0, LTE-TDD (0); Frequency: 2593 MHz; Duty Cycle: 1:1.59
 Medium: HSL_2600_260413 Medium parameters used: $f = 2593$ MHz; $\sigma = 1.924$ S/m; $\epsilon_r = 38.545$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.96, 6.44, 6.09) @ 2600 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
 Maximum value of SAR (interpolated) = 1.22 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 22.96 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.781 W/kg; SAR(10 g) = 0.382 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 56.6%

Maximum value of SAR (measured) = 1.10 W/kg

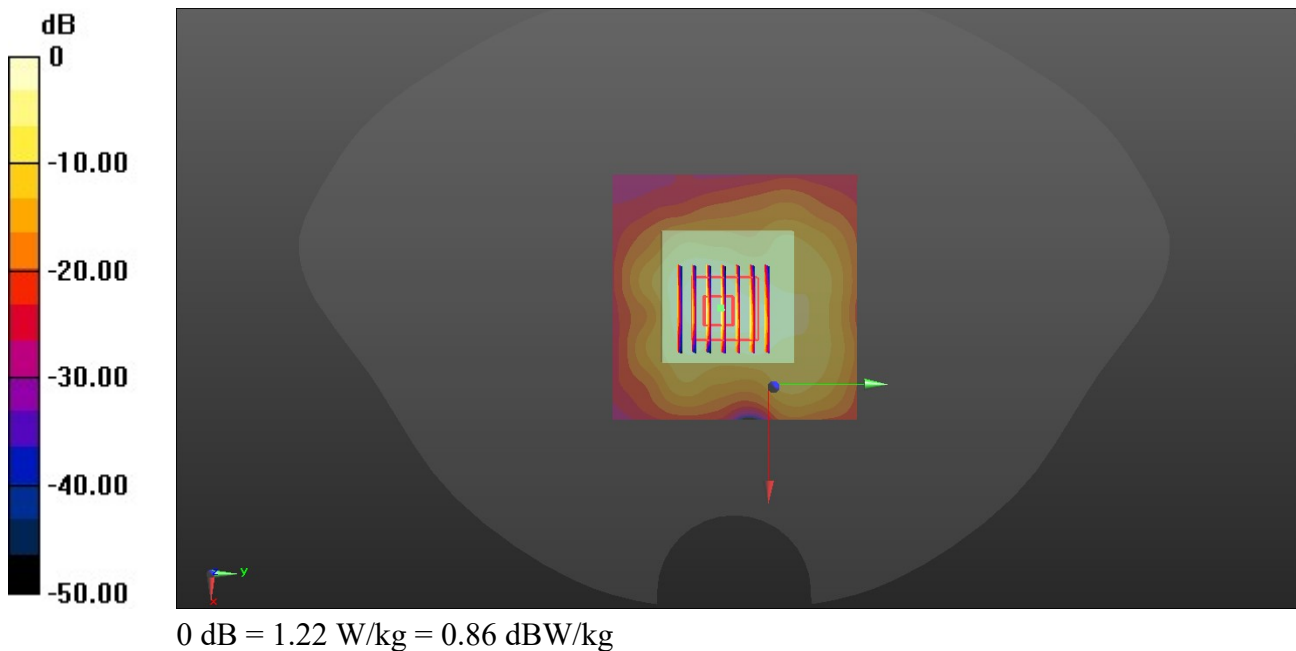

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/4/11

11_WLAN2.4GHz_802.11b 1Mbps_Front_10mm_Ch11

Communication System: UID 0, WLAN2.4GHz (0); Frequency: 2462 MHz; Duty Cycle: 1:1.011
 Medium: HSL_2450_260411 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.77$ S/m; $\epsilon_r = 38.942$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23) @ 2450 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x71x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
 Maximum value of SAR (interpolated) = 0.426 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 15.48 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.486 W/kg

SAR(1 g) = 0.321 W/kg; SAR(10 g) = 0.184 W/kg

Smallest distance from peaks to all points 3 dB below = 13.9 mm

Ratio of SAR at M2 to SAR at M1 = 66.8%

Maximum value of SAR (measured) = 0.384 W/kg

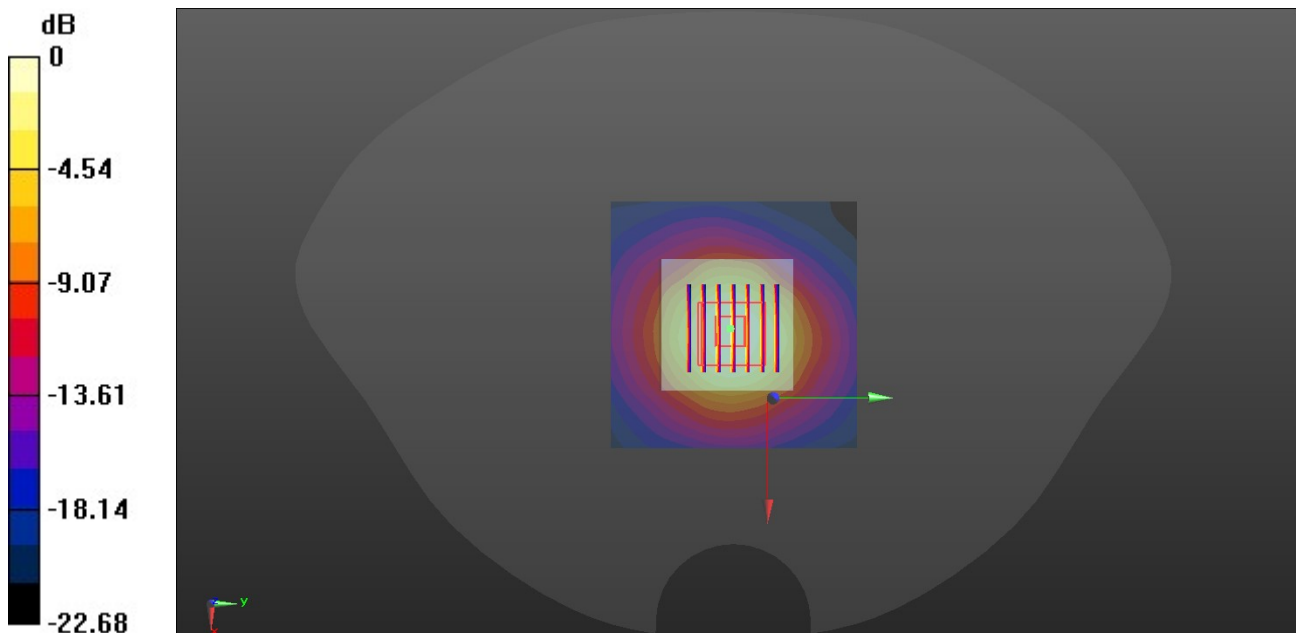

0 dB = 0.426 W/kg = -3.71 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/4/15

12_WLAN5GHz_802.11a 6Mbps_Front_10mm_Ch48

Communication System: UID 0, WLAN5GHz (0); Frequency: 5240 MHz; Duty Cycle: 1:1.021

Medium: HSL_5250_260415 Medium parameters used: $f = 5240$ MHz; $\sigma = 4.654$ S/m; $\epsilon_r = 36.48$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(4.79, 5.18, 4.9) @ 5250 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0888 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.175 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.150 W/kg

SAR(1 g) = 0.047 W/kg; SAR(10 g) = 0.028 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 72.2%

Maximum value of SAR (measured) = 0.0866 W/kg

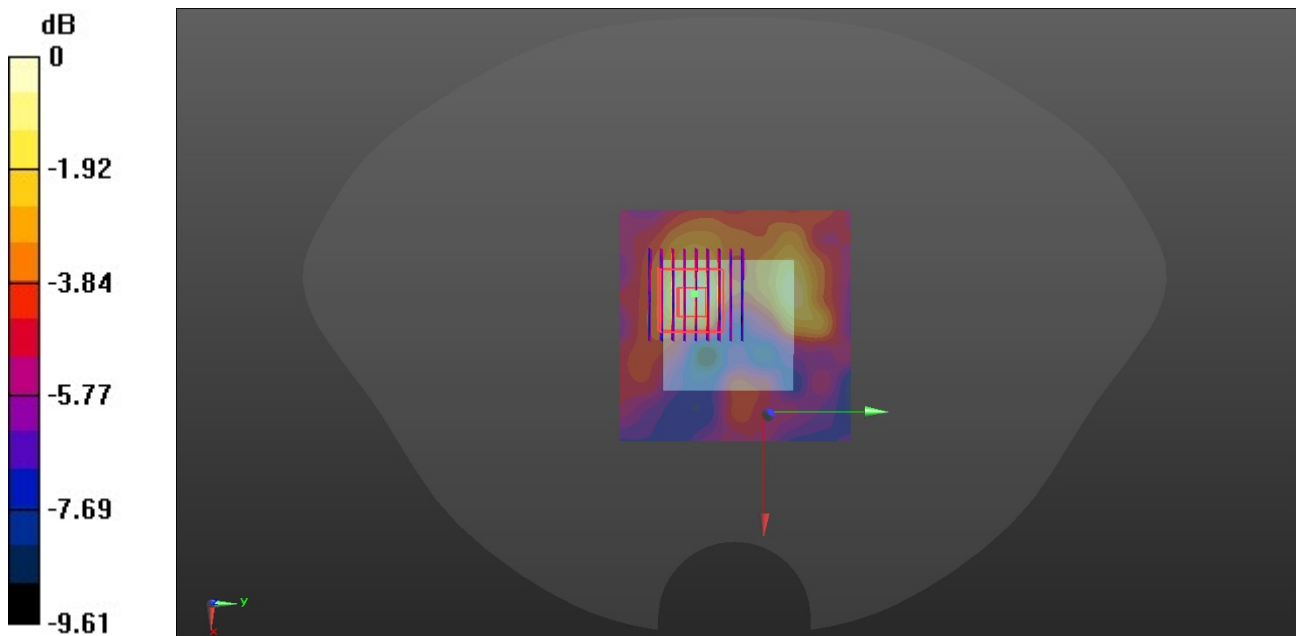

0 dB = 0.0888 W/kg = -10.52 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/4/15

13_WLAN5GHz_802.11a 6Mbps_Front_10mm_Ch56

Communication System: UID 0, WLAN5GHz (0); Frequency: 5280 MHz; Duty Cycle: 1:1.021

Medium: HSL_5250_260415 Medium parameters used: $f = 5280$ MHz; $\sigma = 4.767$ S/m; $\epsilon_r = 36.263$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(4.79, 5.18, 4.9) @ 5250 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.113 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.039 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 0.232 W/kg

SAR(1 g) = 0.039 W/kg; SAR(10 g) = 0.015 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 70.7%

Maximum value of SAR (measured) = 0.102 W/kg

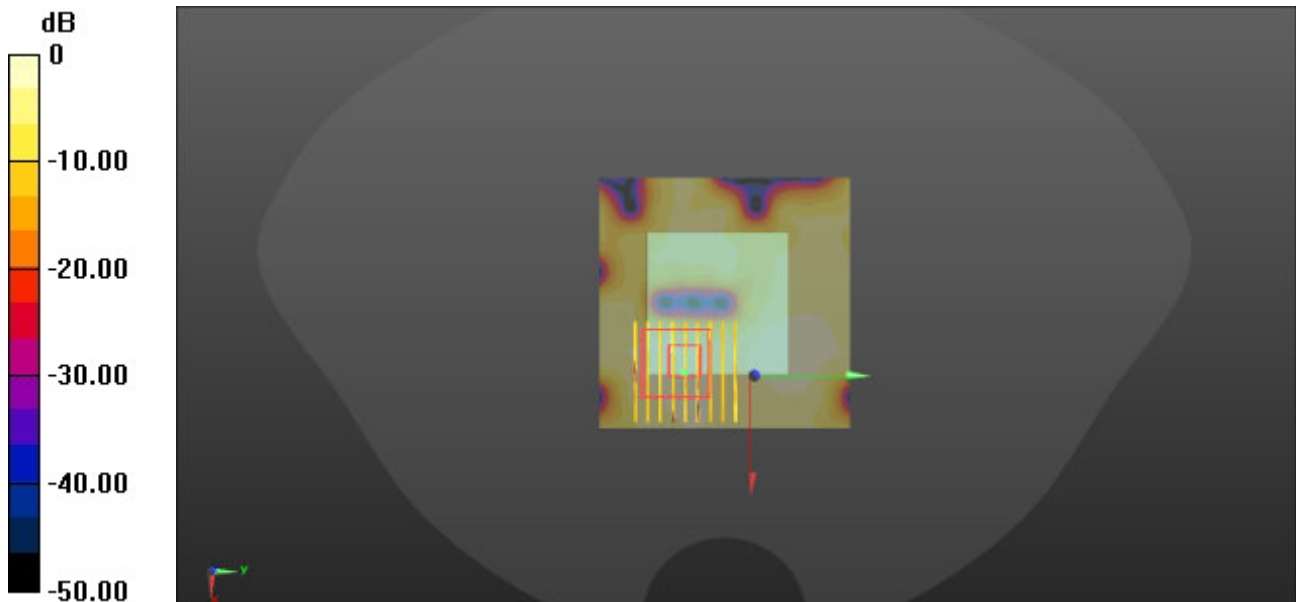

0 dB = 0.113 W/kg = -9.47 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/4/17

14_WLAN5GHz_802.11a 6Mbps_Front_10mm_Ch140

Communication System: UID 0, WLAN5GHz (0); Frequency: 5700 MHz; Duty Cycle: 1:1.021

Medium: HSL_5800_260417 Medium parameters used: $f = 5700$ MHz; $\sigma = 5.189$ S/m; $\epsilon_r = 35.648$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(4.49, 4.85, 4.59) @ 5800 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (91x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0965 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.908 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.159 W/kg

SAR(1 g) = 0.024 W/kg; SAR(10 g) = 0.00902 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 61.9%

Maximum value of SAR (measured) = 0.0667 W/kg

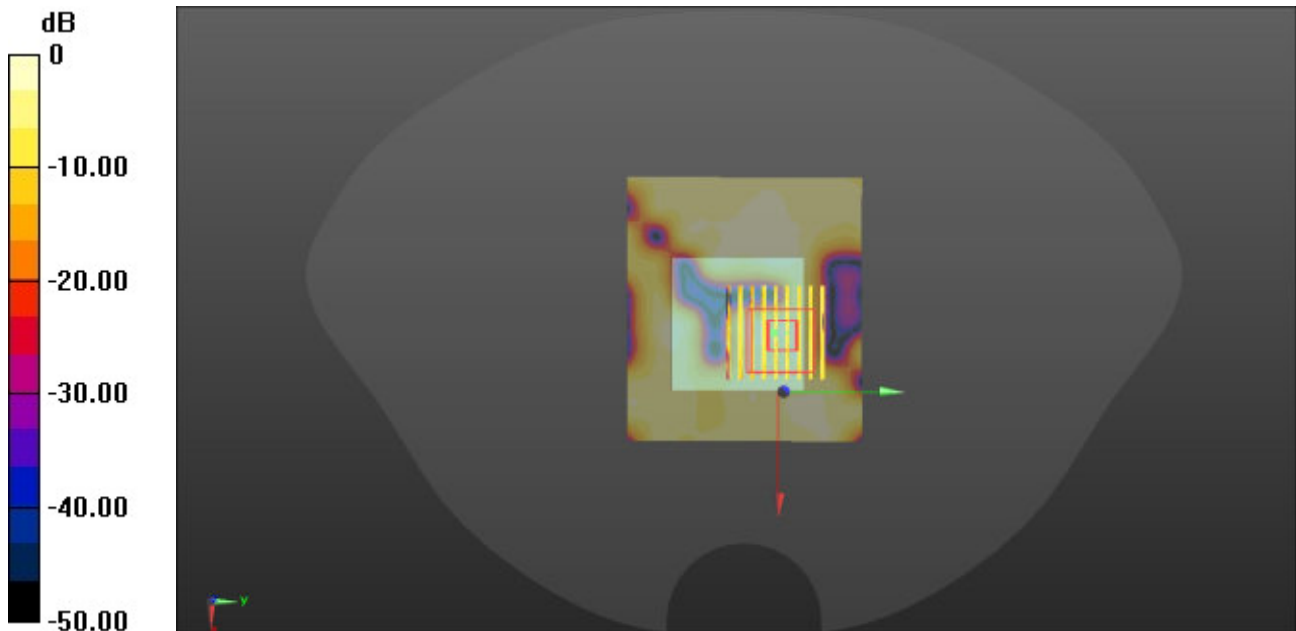

0 dB = 0.0965 W/kg = -10.15 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/4/17

15_WLAN5GHz_802.11a 6Mbps_Front_10mm_Ch149

Communication System: UID 0, WLAN5GHz (0); Frequency: 5745 MHz; Duty Cycle: 1:1.021

Medium: HSL_5800_260417 Medium parameters used: $f = 5745$ MHz; $\sigma = 5.245$ S/m; $\epsilon_r = 35.639$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(4.49, 4.85, 4.59) @ 5800 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.113 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.568 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.144 W/kg

SAR(1 g) = 0.046 W/kg; SAR(10 g) = 0.031 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 71.3%

Maximum value of SAR (measured) = 0.0889 W/kg

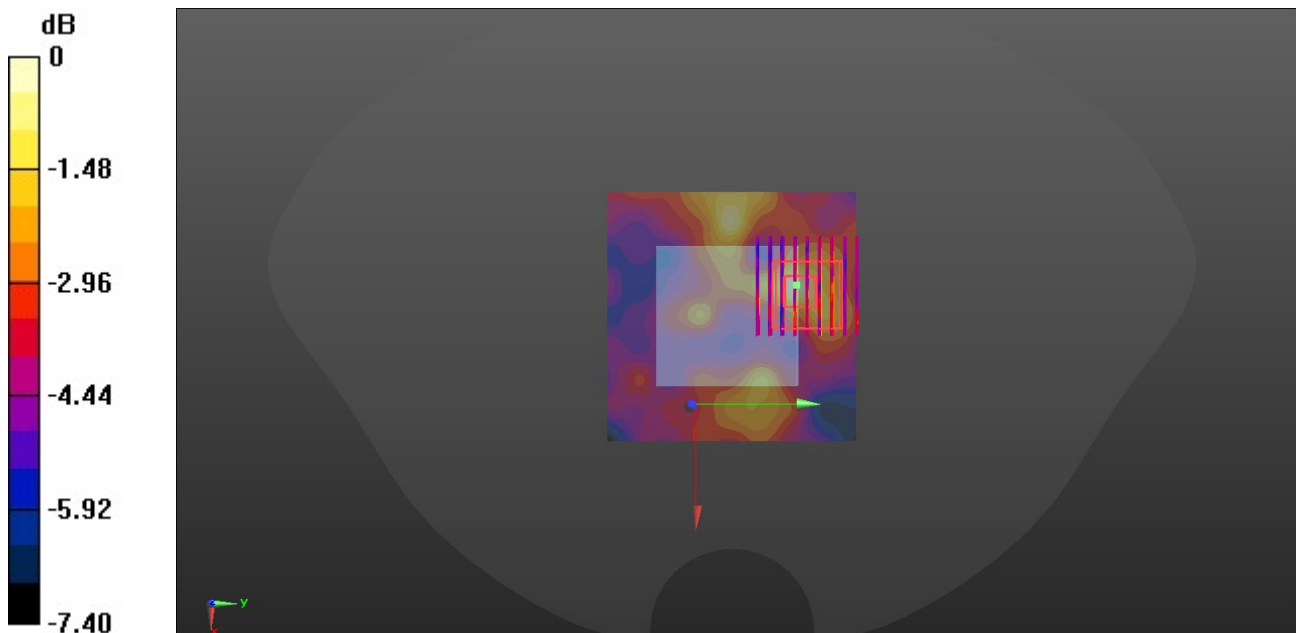

0 dB = 0.113 W/kg = -9.47 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/4/11

16_Bluetooth_1Mbps_Front_10mm_Ch78

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1.3

Medium: HSL_2450_260411 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.822$ S/m; $\epsilon_r = 39.025$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23) @ 2450 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x71x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.200 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 10.55 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.243 W/kg

SAR(1 g) = 0.156 W/kg; SAR(10 g) = 0.090 W/kg

Smallest distance from peaks to all points 3 dB below = 12.5 mm

Ratio of SAR at M2 to SAR at M1 = 67.1%

Maximum value of SAR (measured) = 0.185 W/kg

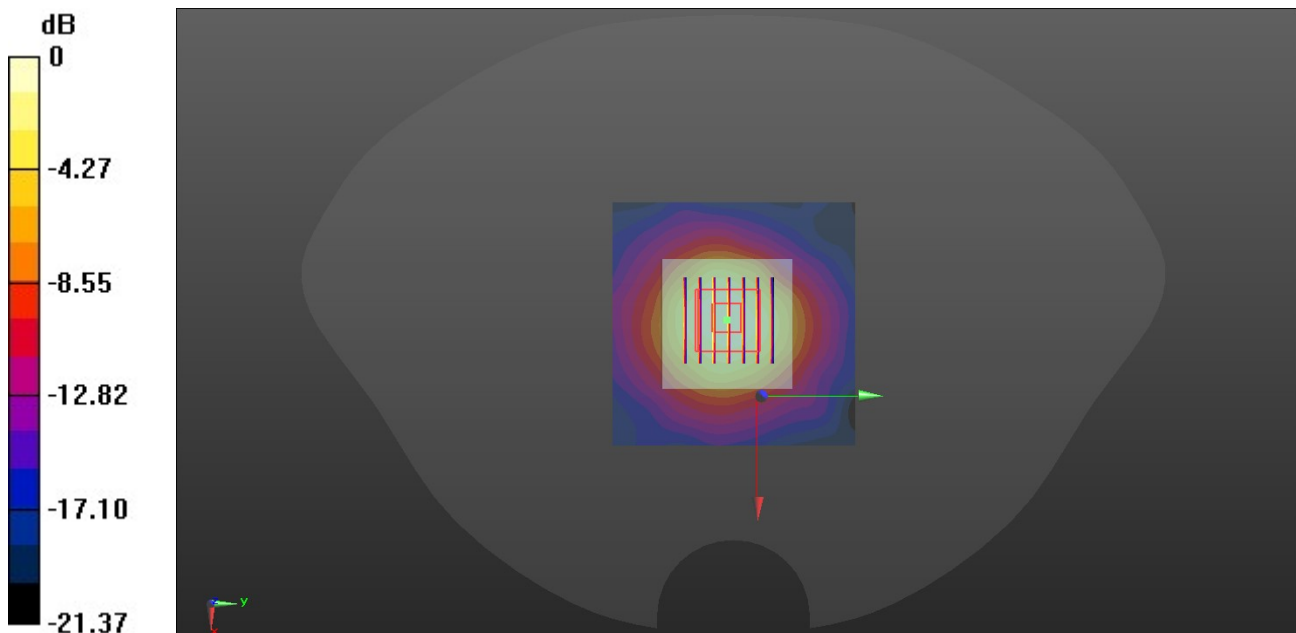

0 dB = 0.200 W/kg = -6.99 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/4/9

17_WCDMA II_RMC 12.2Kbps_Back_0mm_Ch9400

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium: HSL_1900_260409 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.331$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.1 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.64, 7.17, 6.79) @ 1900 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
 Maximum value of SAR (interpolated) = 3.83 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 37.86 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 4.67 W/kg

SAR(1 g) = 2.44 W/kg; SAR(10 g) = 1.23 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.2%

Maximum value of SAR (measured) = 2.71 W/kg

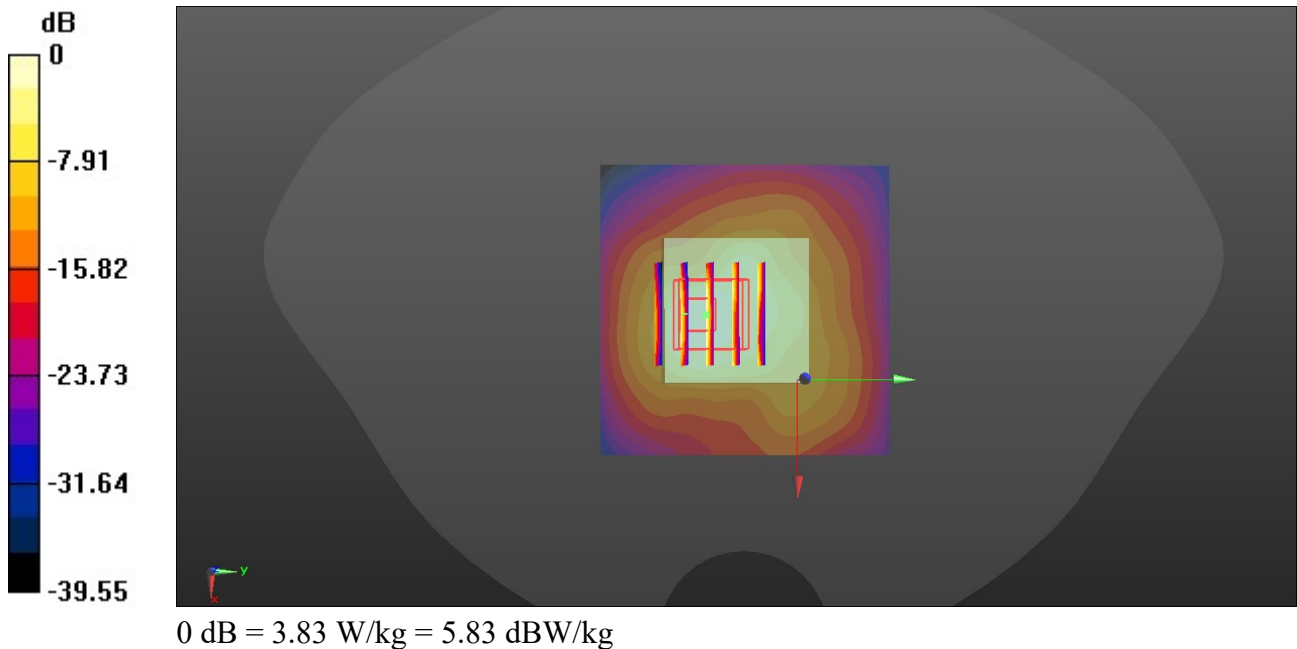

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/4/4

18_WCDMA IV_RMC 12.2Kbps_Back_0mm_Ch1413

Communication System: UID 0, WCDMA (0); Frequency: 1732.6 MHz; Duty Cycle: 1:1
 Medium: HSL_1750_260404 Medium parameters used: $f = 1733$ MHz; $\sigma = 1.364$ S/m; $\epsilon_r = 40.841$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.86, 7.4, 7.01) @ 1750 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
 Maximum value of SAR (interpolated) = 3.46 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 36.46 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 6.01 W/kg

SAR(1 g) = 2.46 W/kg; SAR(10 g) = 1.16 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 60.6%

Maximum value of SAR (measured) = 2.46 W/kg

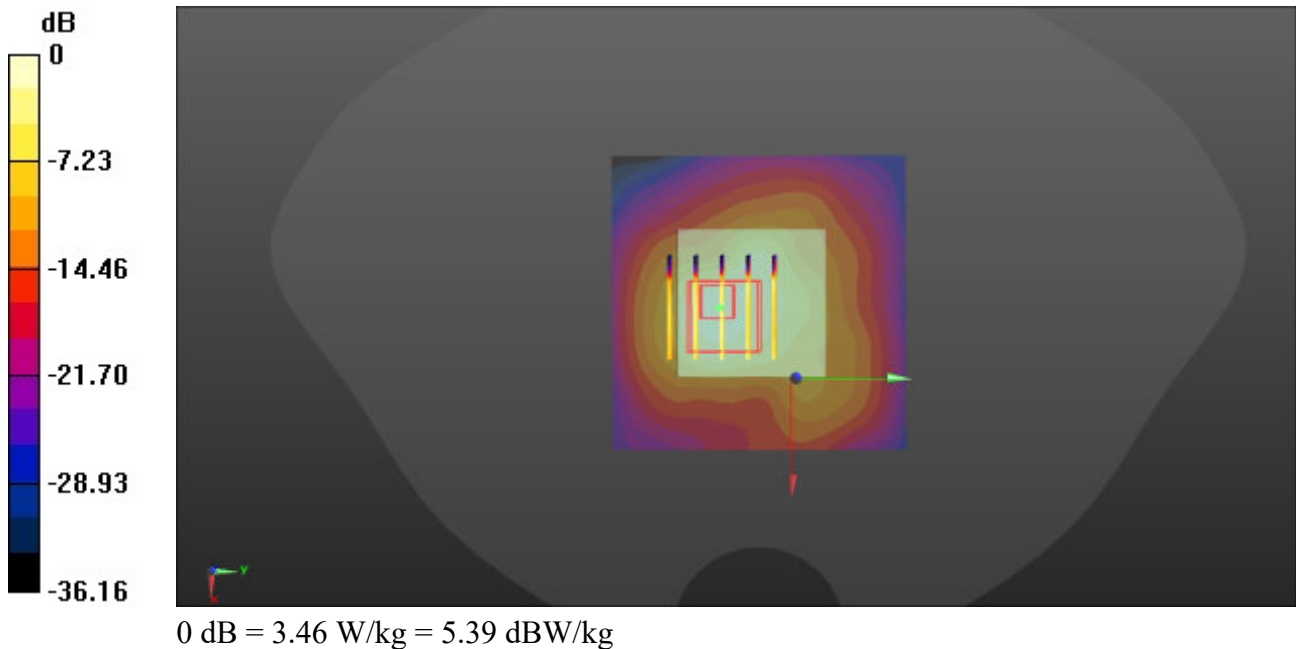

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/3/27

19_WCDMA V_RMC 12.2Kbps_Back_0mm_Ch4182

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1
 Medium: HSL_835_260327 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 42.605$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.01, 8.65, 8.19) @ 835 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.856 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.76 V/m; Power Drift = -0.19 dB


Peak SAR (extrapolated) = 2.27 W/kg

SAR(1 g) = 0.572 W/kg; SAR(10 g) = 0.214 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 37.6%

Maximum value of SAR (measured) = 0.785 W/kg

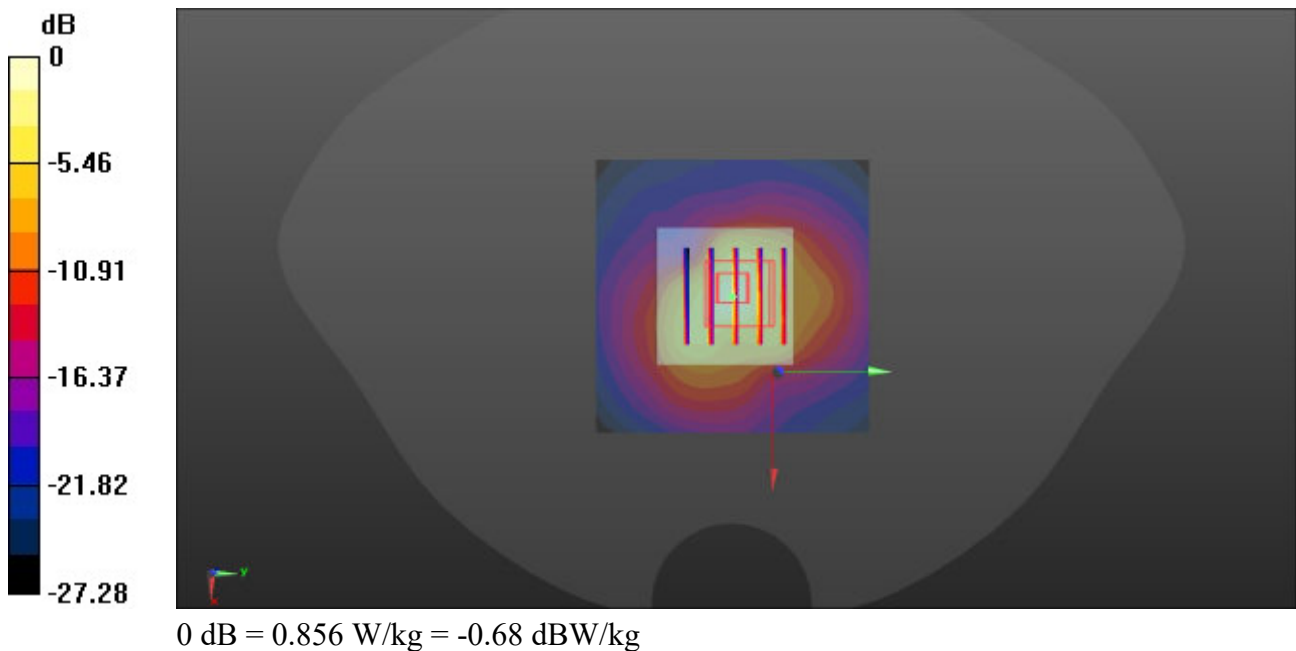

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/4/13

20_LTE Band 7_20M_QPSK_1_49_Back_0mm_Ch21100

Communication System: UID 0, LTE-FDD (0); Frequency: 2535 MHz; Duty Cycle: 1:1
 Medium: HSL_2600_260413 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.869$ S/m; $\epsilon_r = 39.069$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.96, 6.44, 6.09) @ 2600 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x71x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
 Maximum value of SAR (interpolated) = 1.52 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 17.90 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 2.22 W/kg

SAR(1 g) = 1.3 W/kg; SAR(10 g) = 0.581 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 61.3%

Maximum value of SAR (measured) = 1.68 W/kg

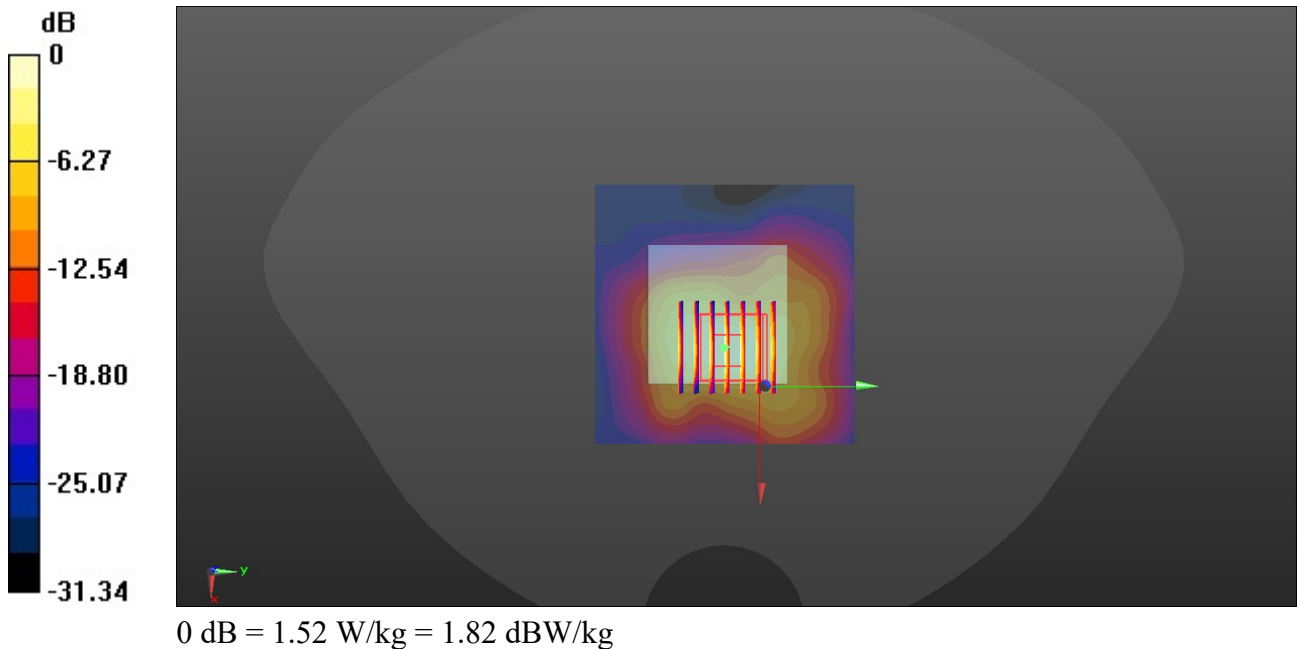

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/3/23

21_LTE Band 12_10M_QPSK_1_0_Back_0mm_Ch23095

Communication System: UID 0, LTE-FDD (0); Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium: HSL_750_260323 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.879$ S/m; $\epsilon_r = 43.163$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36) @ 750 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
 Maximum value of SAR (interpolated) = 1.09 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 30.85 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 3.44 W/kg

SAR(1 g) = 0.474 W/kg; SAR(10 g) = 0.184 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 51%

Maximum value of SAR (measured) = 0.914 W/kg

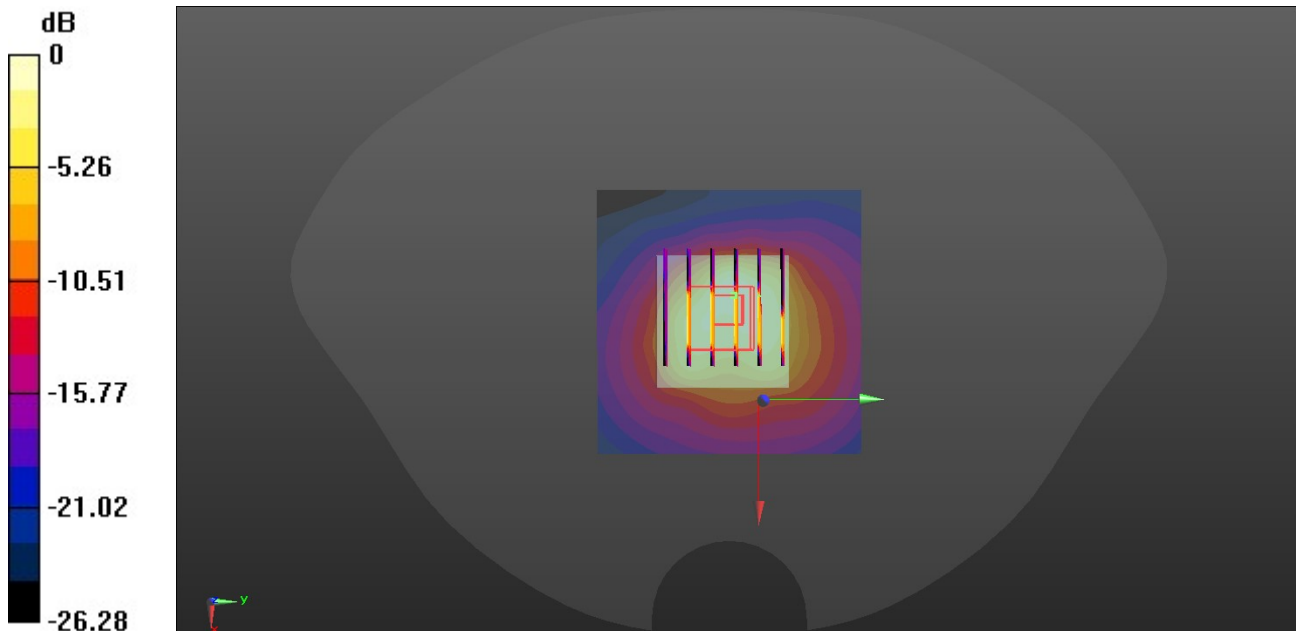

0 dB = 1.09 W/kg = 0.37 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/3/23

22_LTE Band 13_10M_QPSK_1_0_Back_0mm_Ch23230

Communication System: UID 0, LTE-FDD (0); Frequency: 782 MHz; Duty Cycle: 1:1
 Medium: HSL_750_260323 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.905 \text{ S/m}$; $\epsilon_r = 42.896$; $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.7 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.18, 8.84, 8.36) @ 750 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x61x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.688 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.47 V/m ; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 1.42 W/kg

SAR(1 g) = 0.382 W/kg ; SAR(10 g) = 0.164 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.3%

Maximum value of SAR (measured) = 0.781 W/kg

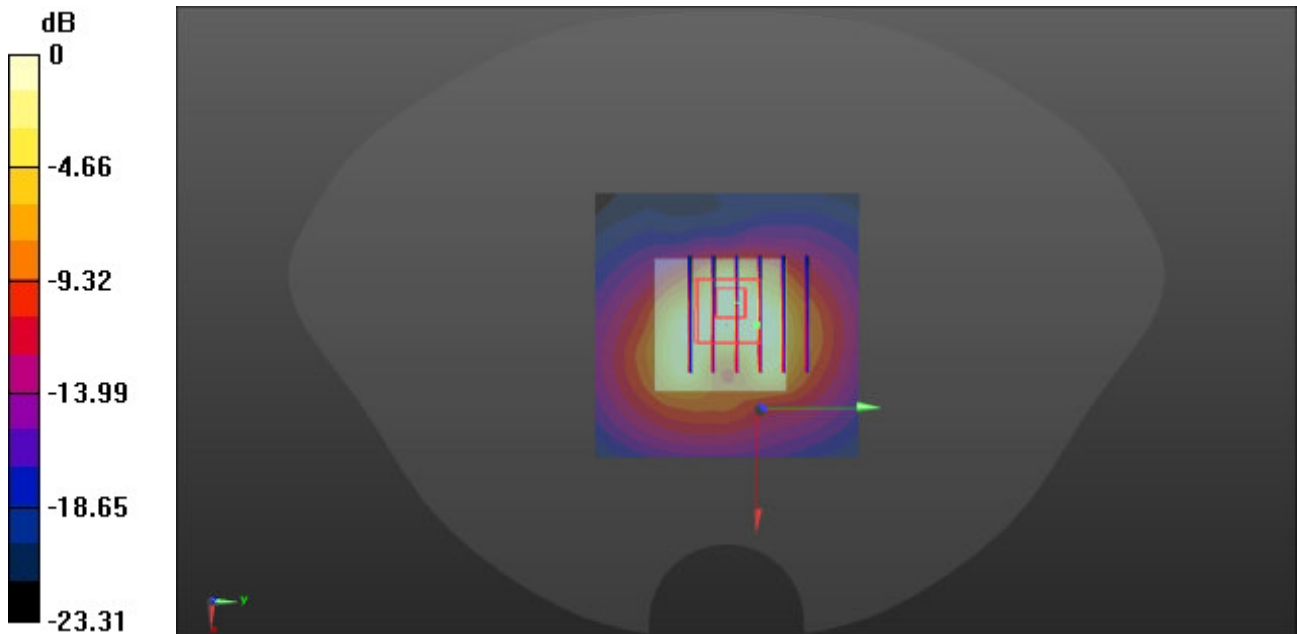

0 dB = 0.688 W/kg = -1.62 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/4/9

23_LTE Band 2_20M_QPSK_1_0_Back_0mm_Ch18900

Communication System: UID 0, LTE-FDD (0); Frequency: 1880 MHz; Duty Cycle: 1:1
 Medium: HSL_1900_260409 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 39.331$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.1 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.64, 7.17, 6.79) @ 1900 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
 Maximum value of SAR (interpolated) = 4.45 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 43.40 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 6.05 W/kg

SAR(1 g) = 3.18 W/kg; SAR(10 g) = 1.41 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 60.9%

Maximum value of SAR (measured) = 3.93 W/kg

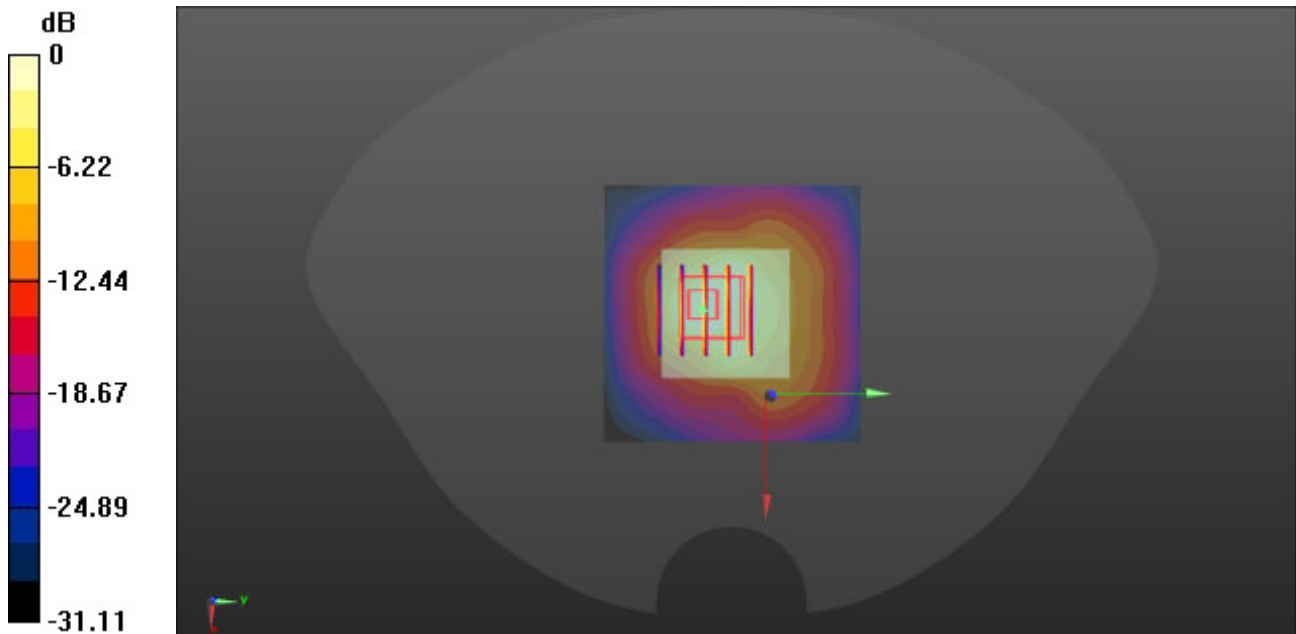

0 dB = 4.45 W/kg = 6.48 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/3/27

24_LTE Band 26_15M_QPSK_1_0_Back_0mm_Ch26865

Communication System: UID 0, LTE-FDD (0); Frequency: 831.5 MHz; Duty Cycle: 1:1
 Medium: HSL_835_260327 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.923$ S/m; $\epsilon_r = 42.494$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.3 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(8.01, 8.65, 8.19) @ 835 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
 Maximum value of SAR (interpolated) = 0.869 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 35.38 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.29 W/kg

SAR(1 g) = 0.376 W/kg; SAR(10 g) = 0.153 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 59.1%

Maximum value of SAR (measured) = 0.742 W/kg

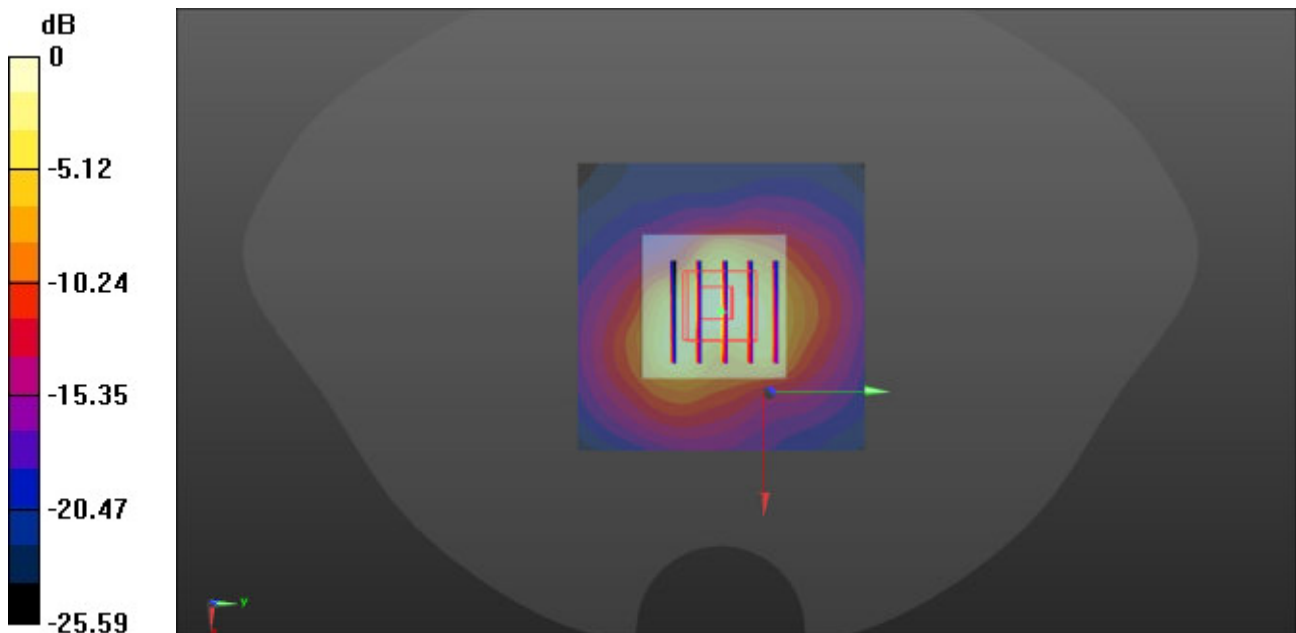

0 dB = 0.869 W/kg = -0.61 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/4/4

25_LTE Band 66_20M_QPSK_1_49_Back_0mm_Ch132572

Communication System: UID 0, LTE-FDD (0); Frequency: 1770 MHz; Duty Cycle: 1:1
 Medium: HSL_1750_260404 Medium parameters used: $f = 1770$ MHz; $\sigma = 1.396$ S/m; $\epsilon_r = 40.638$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.86, 7.4, 7.01) @ 1750 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (61x61x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
 Maximum value of SAR (interpolated) = 2.63 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 32.13 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 3.93 W/kg

SAR(1 g) = 2.09 W/kg; SAR(10 g) = 1.02 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 60.8%

Maximum value of SAR (measured) = 2.86 W/kg

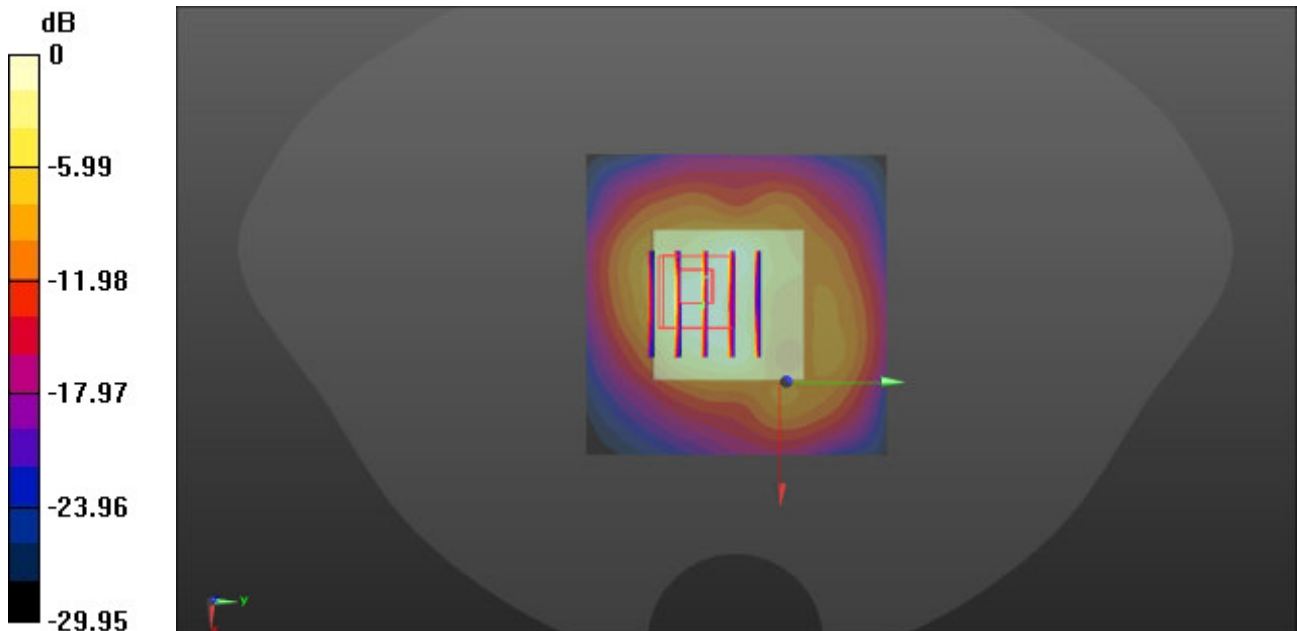

0 dB = 2.63 W/kg = 4.20 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/4/13

26_LTE Band 41_20M_QPSK_1_0_Back_0mm_Ch40620

Communication System: UID 0, LTE-TDD (0); Frequency: 2593 MHz; Duty Cycle: 1:1.59
 Medium: HSL_2600_260413 Medium parameters used: $f = 2593$ MHz; $\sigma = 1.924$ S/m; $\epsilon_r = 38.545$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(5.96, 6.44, 6.09) @ 2600 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x71x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
 Maximum value of SAR (interpolated) = 1.22 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 22.96 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.856 W/kg; SAR(10 g) = 0.382 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 56.6%

Maximum value of SAR (measured) = 1.10 W/kg

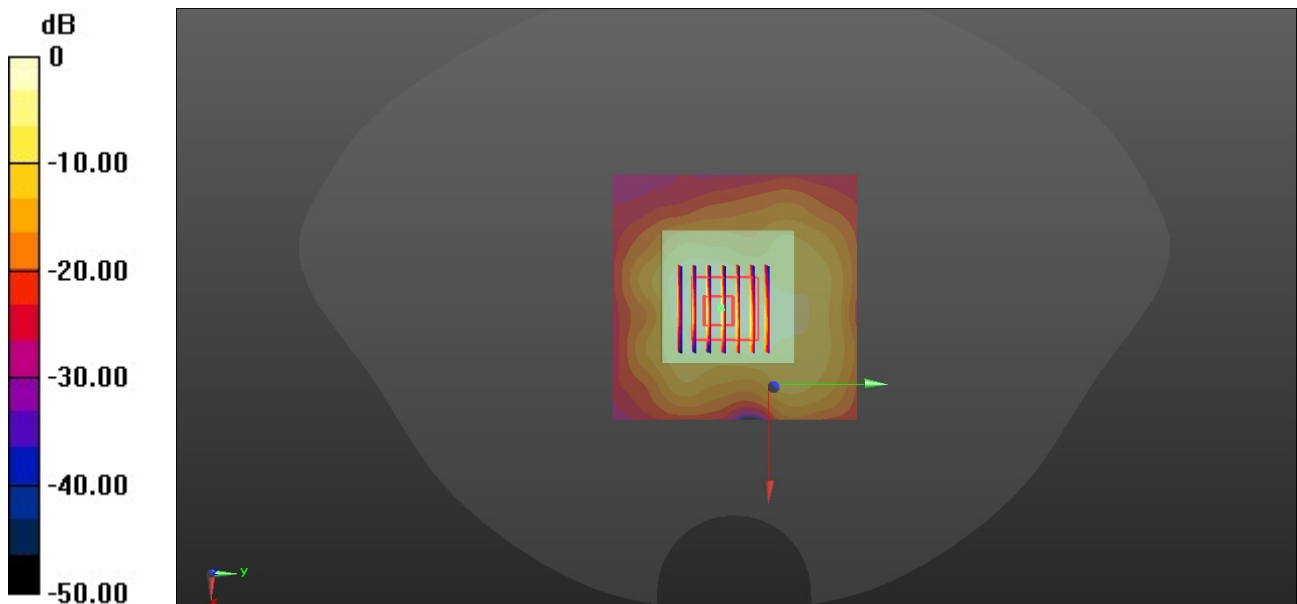

0 dB = 1.22 W/kg = 0.86 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/4/11

27_WLAN2.4GHz_802.11b 1Mbps_Back_0mm_Ch11

Communication System: UID 0, WLAN2.4GHz (0); Frequency: 2462 MHz; Duty Cycle: 1:1.011
 Medium: HSL_2450_260411 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.77$ S/m; $\epsilon_r = 38.942$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23) @ 2450 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x71x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 1.12 W/kg

Zoom Scan (7x8x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 24.25 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.692 W/kg; SAR(10 g) = 0.319 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 58.5%

Maximum value of SAR (measured) = 1.06 W/kg

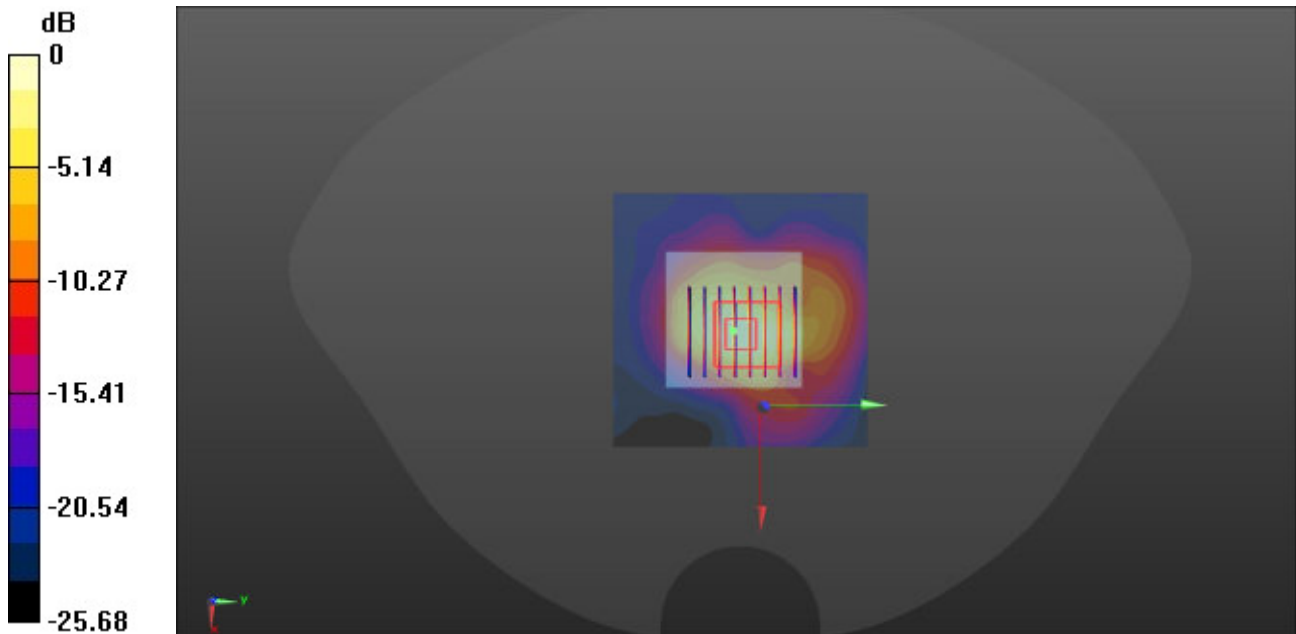

0 dB = 1.12 W/kg = 0.49 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/4/15

28_WLAN5GHz_802.11a 6Mbps_Back_0mm_Ch48

Communication System: UID 0, WLAN5GHz (0); Frequency: 5240 MHz; Duty Cycle: 1:1.021

Medium: HSL_5250_260415 Medium parameters used: $f = 5240$ MHz; $\sigma = 4.654$ S/m; $\epsilon_r = 36.48$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(4.79, 5.18, 4.9) @ 5250 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.03 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 15.04 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 2.21 W/kg

SAR(1 g) = 0.509 W/kg; SAR(10 g) = 0.166 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 65.5%

Maximum value of SAR (measured) = 1.17 W/kg

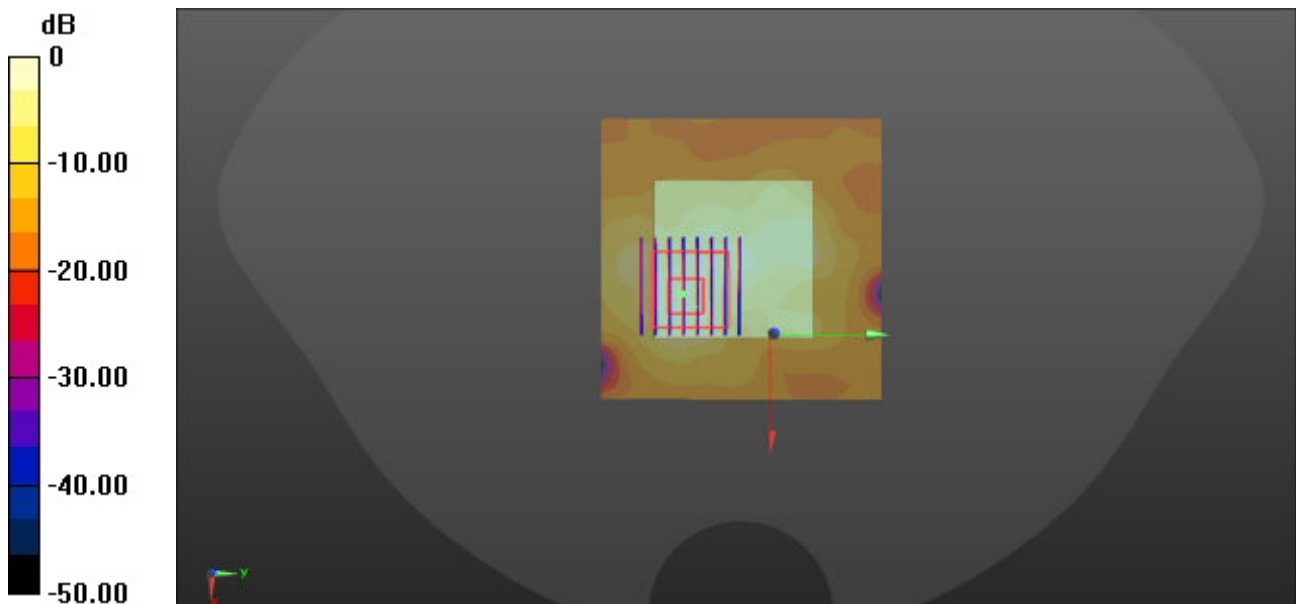

0 dB = 1.03 W/kg = 0.13 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/4/15

29_WLAN5GHz_802.11a 6Mbps_Back_0mm_Ch56

Communication System: UID 0, WLAN5GHz (0); Frequency: 5280 MHz; Duty Cycle: 1:1.021

Medium: HSL_5250_260415 Medium parameters used: $f = 5280$ MHz; $\sigma = 4.767$ S/m; $\epsilon_r = 36.263$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(4.79, 5.18, 4.9) @ 5250 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.51 W/kg

Zoom Scan (10x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 11.82 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 2.36 W/kg

SAR(1 g) = 0.556 W/kg; SAR(10 g) = 0.203 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 67.7%

Maximum value of SAR (measured) = 1.37 W/kg

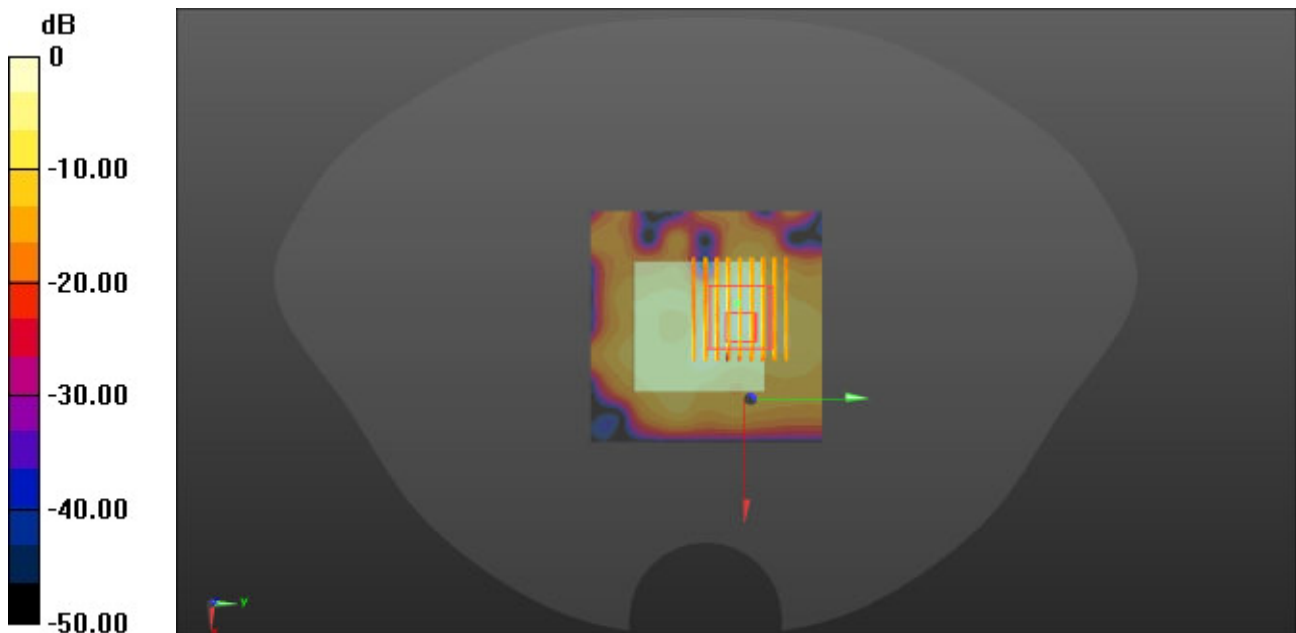

0 dB = 1.51 W/kg = 1.79 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/4/17

30_WLAN5GHz_802.11a 6Mbps_Back_0mm_Ch140

Communication System: UID 0, WLAN5GHz (0); Frequency: 5700 MHz; Duty Cycle: 1:1.021

Medium: HSL_5800_260417 Medium parameters used: $f = 5700$ MHz; $\sigma = 5.189$ S/m; $\epsilon_r = 35.648$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(4.49, 4.85, 4.59) @ 5800 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.14 W/kg

Zoom Scan (10x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 15.95 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 4.22 W/kg

SAR(1 g) = 0.832 W/kg; SAR(10 g) = 0.291 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 64%

Maximum value of SAR (measured) = 2.23 W/kg

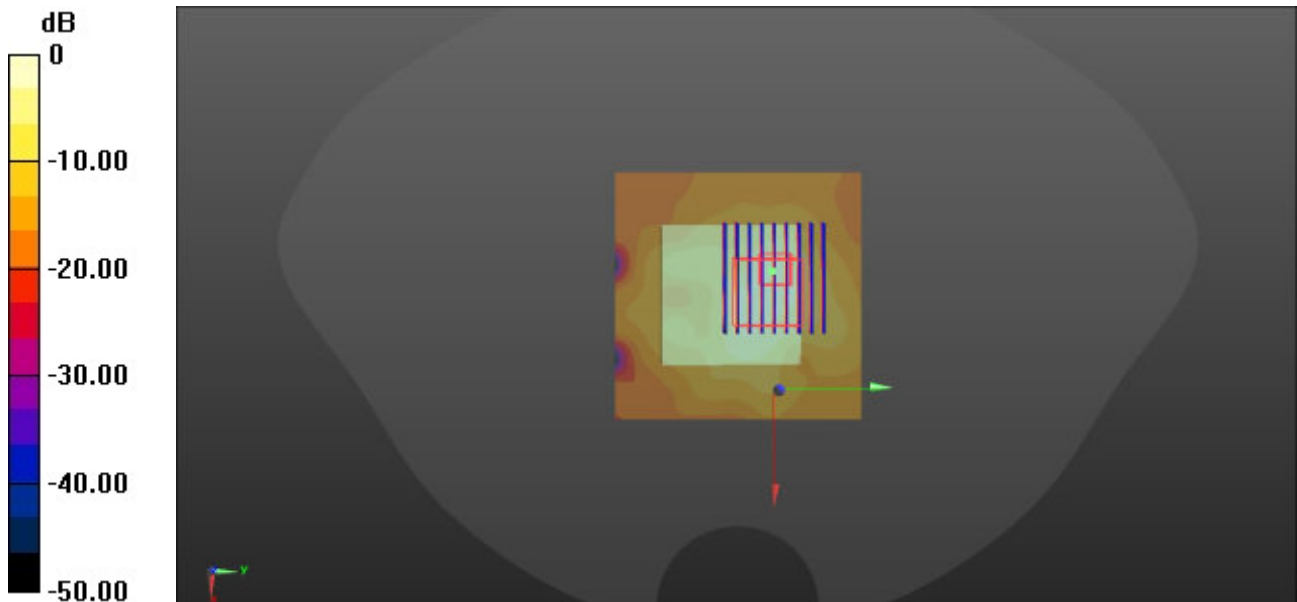

0 dB = 2.14 W/kg = 3.30 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/4/17

31_WLAN5GHz_802.11a 6Mbps_Back_0mm_Ch149

Communication System: UID 0, WLAN5GHz (0); Frequency: 5745 MHz; Duty Cycle: 1:1.021

Medium: HSL_5800_260417 Medium parameters used: $f = 5745$ MHz; $\sigma = 5.245$ S/m; $\epsilon_r = 35.639$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(4.49, 4.85, 4.59) @ 5800 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (81x81x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 2.92 W/kg

Zoom Scan (10x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 19.54 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 5.62 W/kg

SAR(1 g) = 1.15 W/kg; SAR(10 g) = 0.373 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 62.2%

Maximum value of SAR (measured) = 3.12 W/kg

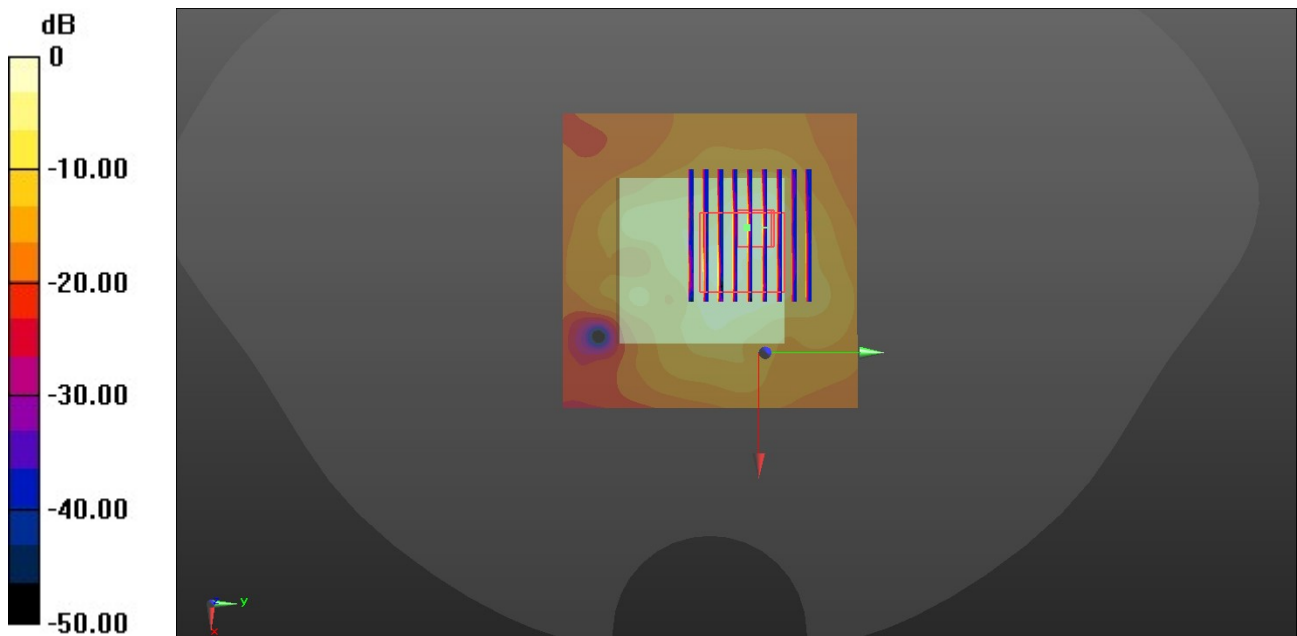

0 dB = 2.92 W/kg = 4.65 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/4/11

32_Bluetooth_1Mbps_Back_0mm_Ch78

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz; Duty Cycle: 1:1.3
 Medium: HSL_2450_260411 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.822$ S/m; $\epsilon_r = 39.025$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.2 °C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7774; ConvF(6.09, 6.58, 6.23) @ 2450 MHz; Calibrated: 2025/7/25
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: SAM Twin Phantom; Type: SAM Twin; Serial: TP-1754
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (71x71x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
 Maximum value of SAR (interpolated) = 0.502 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 12.58 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.673 W/kg

SAR(1 g) = 0.360 W/kg; SAR(10 g) = 0.160 W/kg

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 55.4%

Maximum value of SAR (measured) = 0.478 W/kg

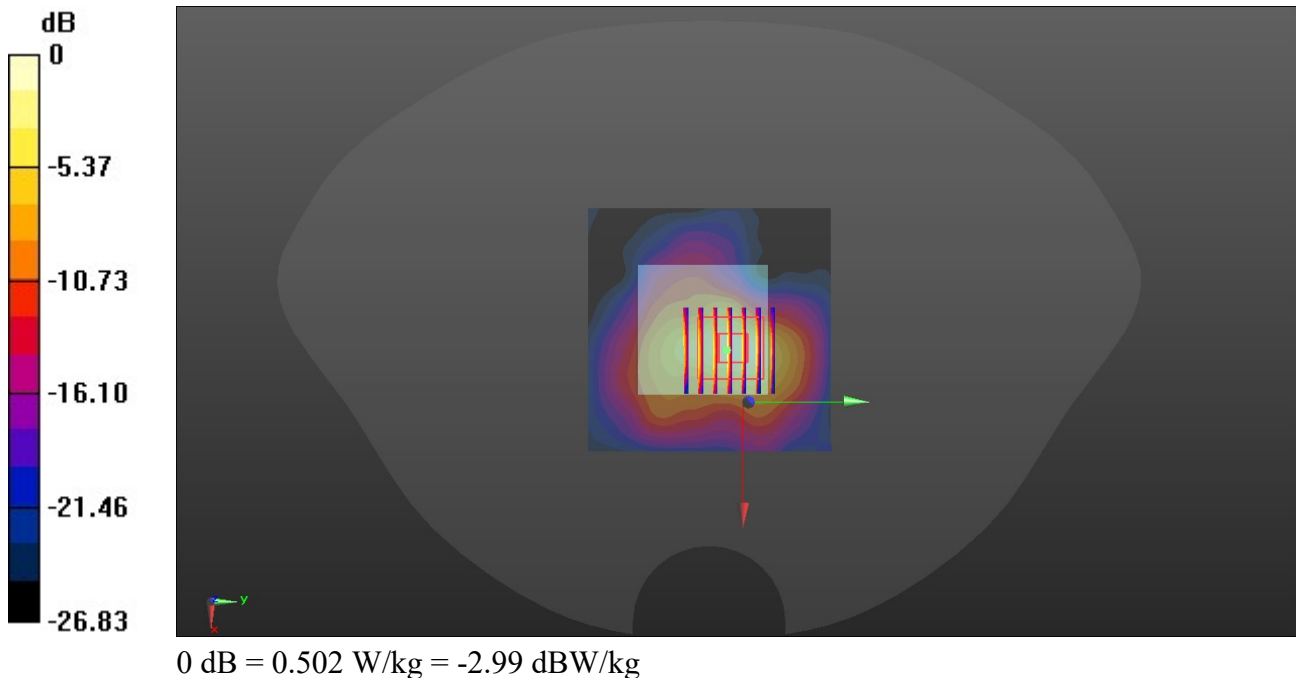

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/4/8

33_NFC_ASK_Back_0mm

Communication System: UID 0, NFC (0); Frequency: 13.56 MHz; Duty Cycle: 1:1

Medium: HSL_13 Medium parameters used: $f = 13.56$ MHz; $\sigma = 0.728$ S/m; $\epsilon_r = 54.491$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1°C; Liquid Temperature : 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN7706; ConvF(17.74, 18.15, 17.41); Calibrated: 2026-02-24
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1649; Calibrated: 2025/8/27
- Phantom: ELI4 Phantom; Type: ELI4; Serial: TP-1201
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.14 (7501)

Area Scan (51x51x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0 W/kg

