

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/2/26

134_WLAN5GHz_802.11ax-HE40 MCS0_Right Side_0mm_Ch142

Communication System: UID 0, WIFI (0); Frequency: 5710 MHz; Duty Cycle: 1:1

Medium: HSL_5800 Medium parameters used: $f = 5710$ MHz; $\sigma = 5.05$ S/m; $\epsilon_r = 34.223$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(4.64, 4.47, 4.63); Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2025/9/15
- Phantom: Twin-SAM V5.0 (Front); Type: QD 000 P40 CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.13 (7474)

Area Scan (51x181x1): Interpolated grid: $dx=1.000$ mm, $dy=1.000$ mm

Maximum value of SAR (interpolated) = 21.3 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=1.4$ mm

Reference Value = 6.354 V/m; Power Drift = -0.10 dB


Peak SAR (extrapolated) = 65.0 W/kg

SAR(1 g) = 6.33 W/kg; SAR(10 g) = 1.7 W/kg

Smallest distance from peaks to all points 3 dB below = 4.2 mm

Ratio of SAR at M2 to SAR at M1 = 46.8%

Maximum value of SAR (measured) = 23.0 W/kg

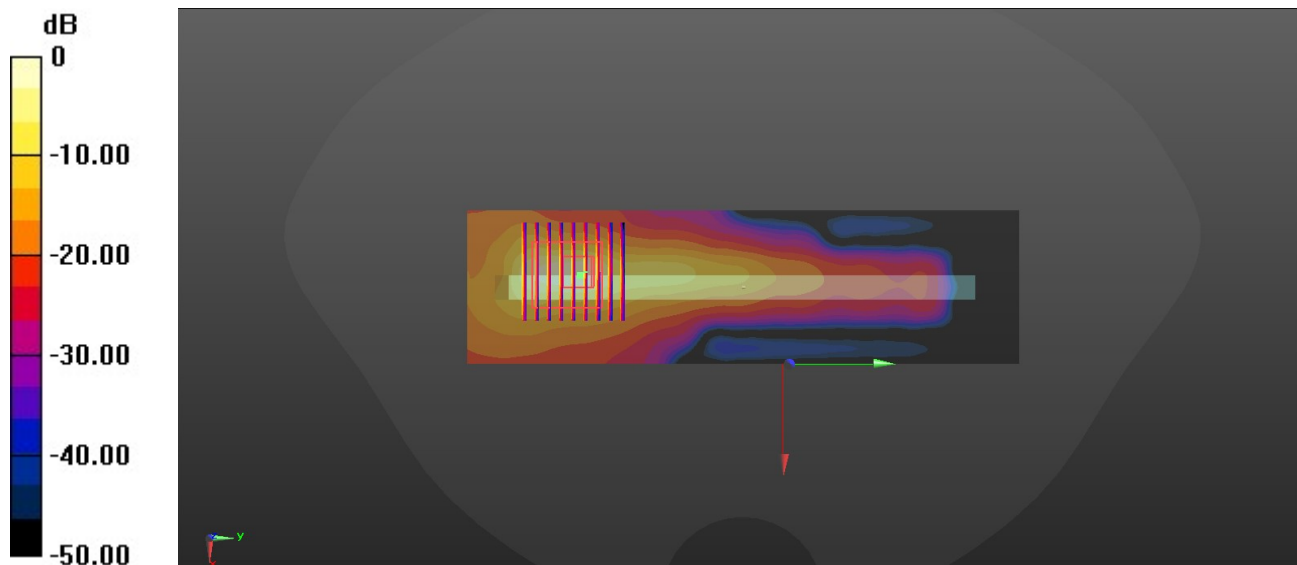

0 dB = 23.0 W/kg = 13.62 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/2/26

135_WLAN5GHz_802.11ax-HE40 MCS0_Right Side_0mm_Ch151

Communication System: UID 0, WIFI (0); Frequency: 5755 MHz; Duty Cycle: 1:1

Medium: HSL_5800 Medium parameters used: $f = 5755$ MHz; $\sigma = 5.104$ S/m; $\epsilon_r = 34.186$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(4.64, 4.47, 4.63); Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2025/9/15
- Phantom: Twin-SAM V5.0 (Front); Type: QD 000 P40 CD; Serial: 1671
- Measurement SW: DASY52, Version 52.10 (4); SEMCAD X Version 14.6.13 (7474)

Area Scan (51x181x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 27.1 W/kg

Zoom Scan (9x9x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 15.63 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 76.6 W/kg

SAR(1 g) = 7.15 W/kg; SAR(10 g) = 1.97 W/kg

Smallest distance from peaks to all points 3 dB below = 4.2 mm

Ratio of SAR at M2 to SAR at M1 = 46.6%

Maximum value of SAR (measured) = 28.3 W/kg

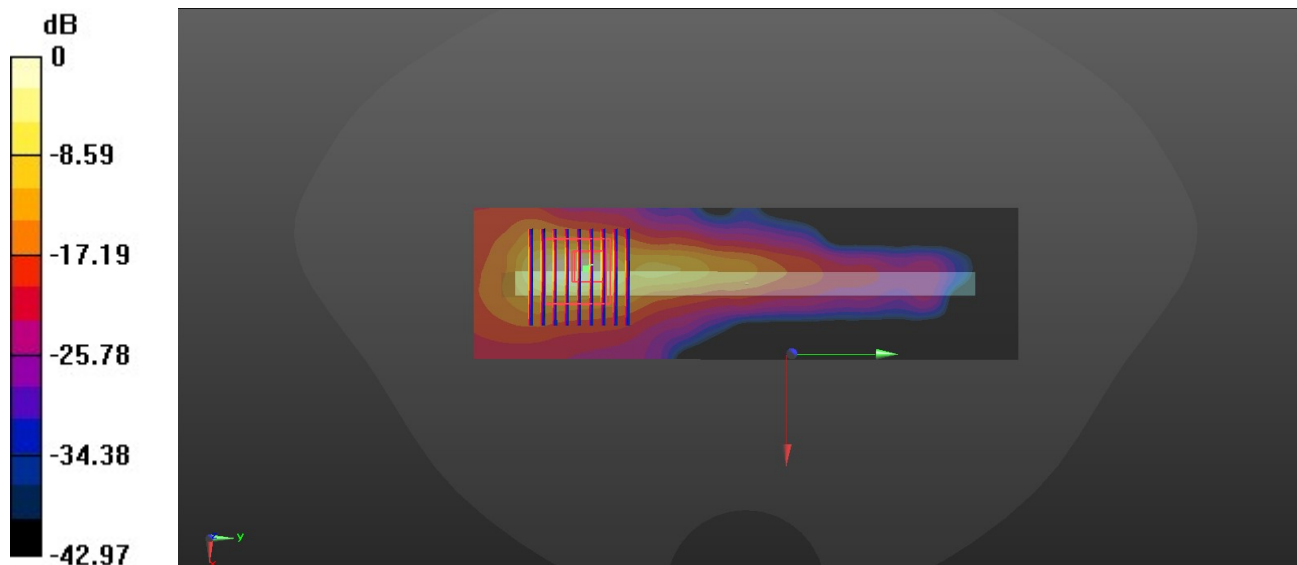

0 dB = 28.3 W/kg = 14.52 dBW/kg

Date: 2026/2/27

136_WLAN6GHz_802.11ax-HE80 MCS0_Right Side_0mm_Ch7


Communication System: IEEE 802.11ax (80MHz, MCS0, 90pc duty cycle); Frequency: 5985.000 MHz; Duty Cycle: 1:1
Medium: Medium parameters used: $f = 5985.000$ MHz; $\sigma = 5.56$ S/m; $\epsilon_r = 35.3$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(5.68, 5.58, 5.6); Calibrated: 2025/06/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10719-AAC

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.5 mm x 8.5 mm
SAR (1g) = 1.81 W/kg; SAR (10g) = 0.381 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm
Power Drift = -0.10 dB
SAR (1g) = 1.75 W/kg; SAR (10g) = 0.372 W/kg
Smallest distance from peaks to all points 3 dB below = 3.6 mm
Ratio of SAR at M2 to SAR at M1 = 50.8 %
psAPD (4.0cm², sq) = 9.05 [W/m²]

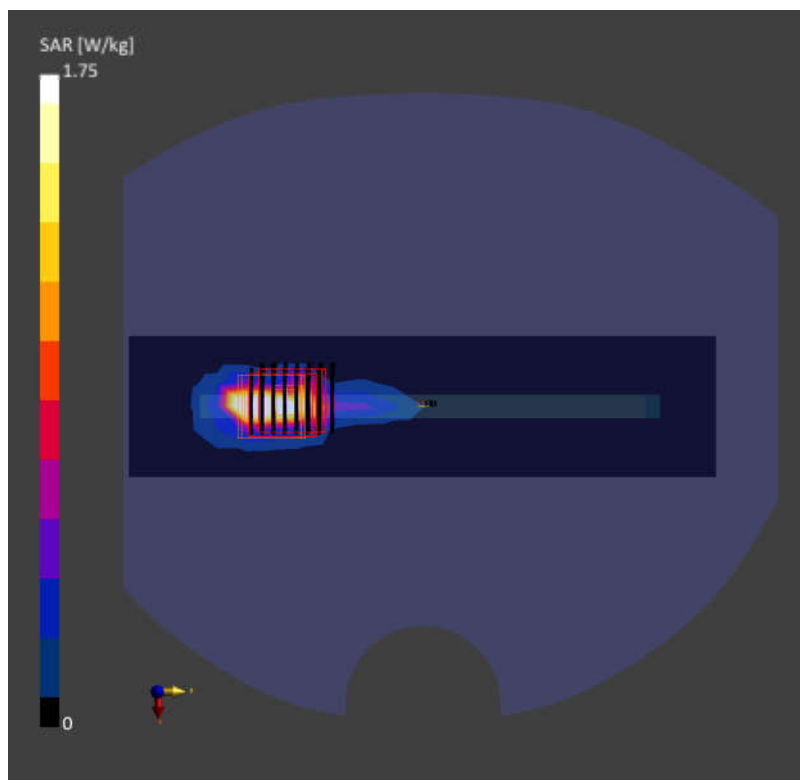

01_WLAN6GHz_802.11ax-HE80 MCS0_Front_2mm_Ch7

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	152.0 x 72.0 x 8.0		Phone

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	FRONT, 2.00	U-NII-5	WLAN, 10731-AAC	5985.0, 7	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air -	EUmmWV4 - SN9461_F1-55GHz, 2025-10-15	DAE4 Sn715, 2025-11-28

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

Scan Type	5G Scan
Date	2026-03-14
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	1.64
psPDtot+ [W/m ²]	2.92
psPDmod+ [W/m ²]	4.24
E _{max} [V/m]	57.5
Power Drift [dB]	0.02

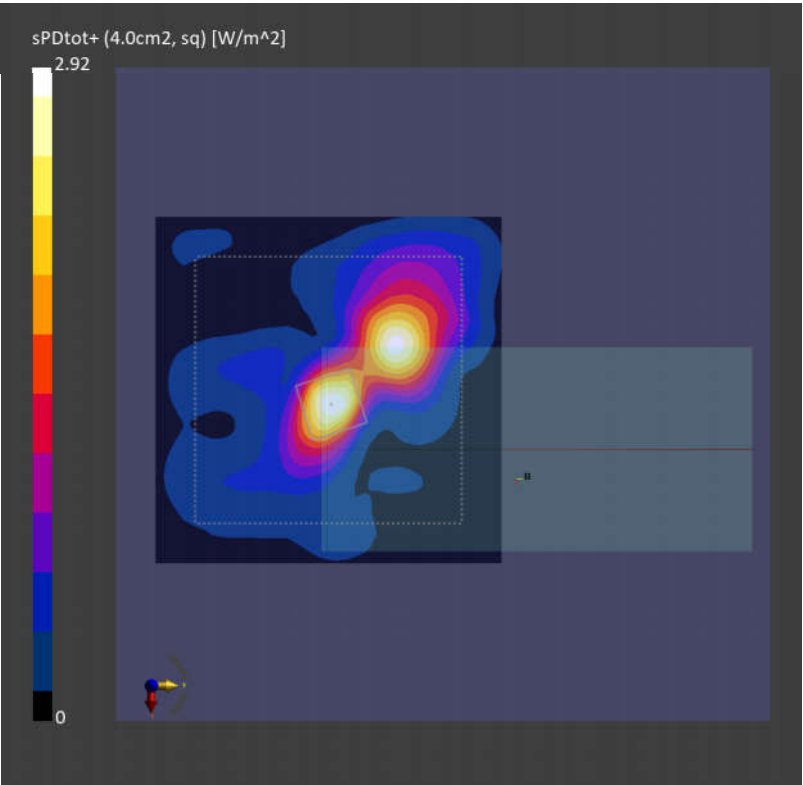

02_WLAN6GHz_802.11ax-HE80 MCS0_Right Side_2mm_Ch7

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	IMEI	DUT Type
Device,	152.0 x 72.0 x 8.0		Phone

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Band	Group, UID	Frequency [MHz], Channel Number	Conversion Factor
5G	EDGE RIGHT, 2.00	U-NII-5	WLAN, 10731-AAC	5985.0, 7	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave	Air –	EUmmWV4 – SN9461_F1-55GHz, 2025-10-15	DAE4 Sn715, 2025-11-28

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0
MAIA	N/A

Measurement Results

Scan Type	5G Scan
Date	2026-03-14
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	2.51
psPDtot+ [W/m ²]	3.28
psPDmod+ [W/m ²]	5.84
E _{max} [V/m]	88.5
Power Drift [dB]	0.01

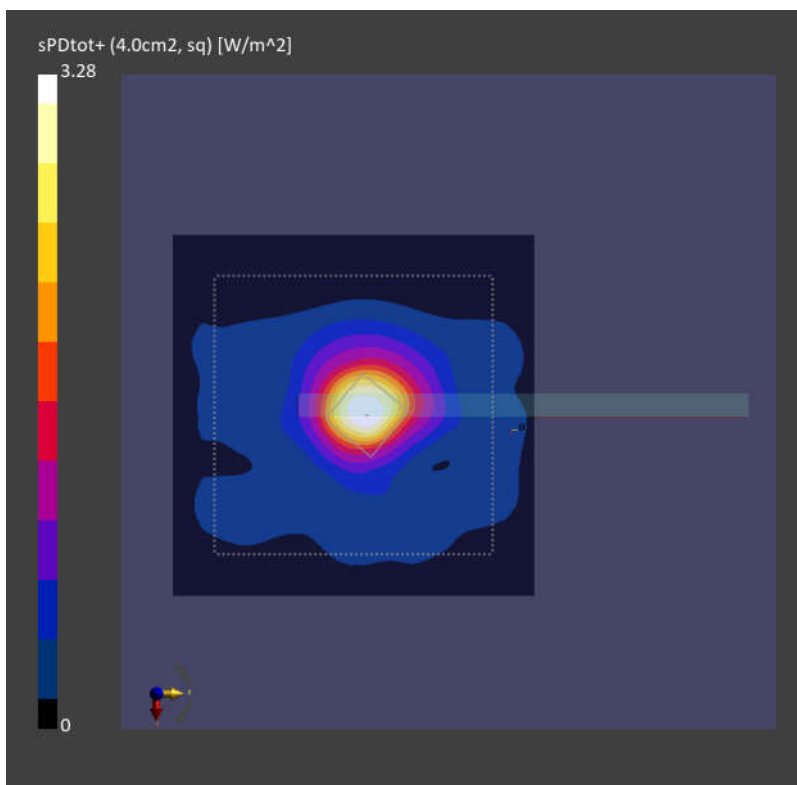

Volume Scan SAR

Date: 2026/3/10

LTE Band 26_15M_QPSK_1RB_0Offset_Right Cheek_0mm_Ch26965

Communication System: LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK) RBPosition:Mid
AntennaCfg:SISO; Frequency: 841.5 MHz; Duty Cycle: 1:1
Medium: Medium parameters used: $f = 841.5$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 42.5$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.23, 10.04, 10.08); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF


Zoom Scan (88.0 mm x 96.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.08 dB

SAR (1g) = 0.585 W/kg; SAR (10g) = 0.373 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 76.8 %

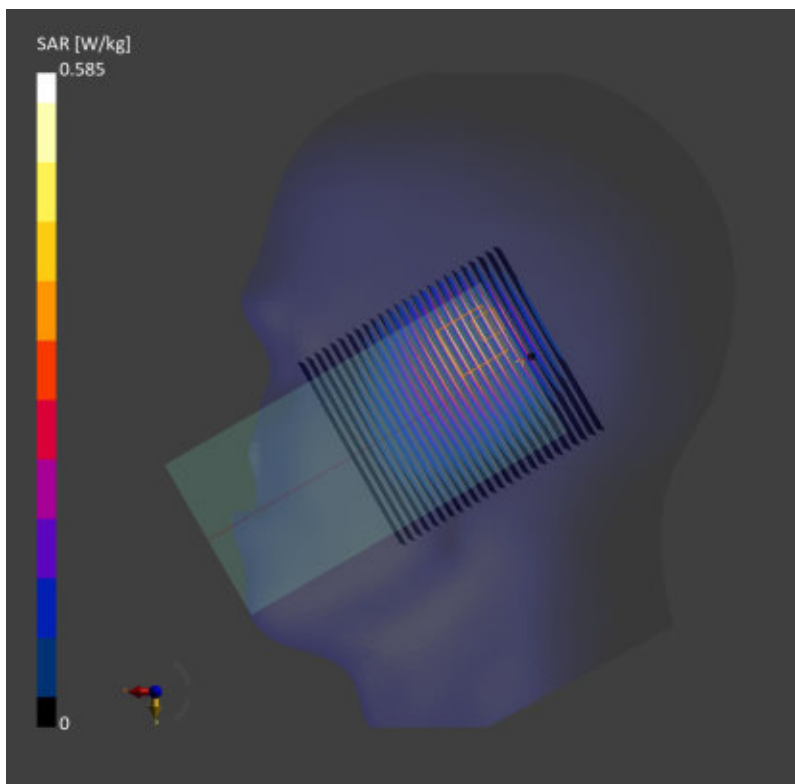

Date: 2026/3/11

WLAN2.4GHz_802.11b 1Mbps_Right Cheek_0mm_Ch11

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Frequency: 2462.0 MHz;

Duty Cycle: 1:1

Medium: Medium parameters used: $f = 2462.0$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.87, 7.72, 7.76); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB


Zoom Scan (88.0 mm x 96.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.15 dB

SAR (1g) = 0.115 W/kg; SAR (10g) = 0.058 W/kg

Smallest distance from peaks to all points 3 dB below = 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 89.2 %

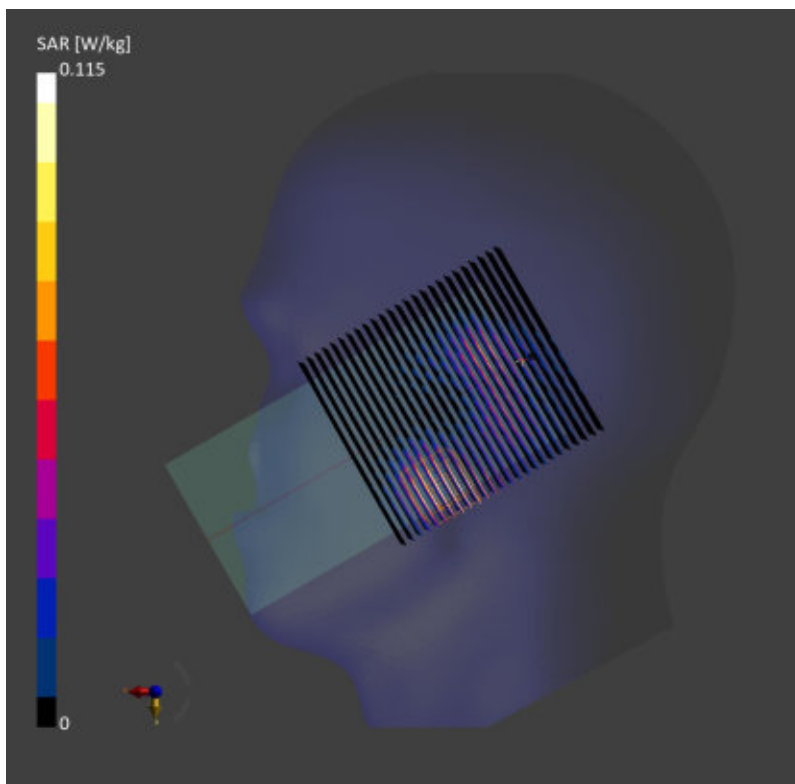

Date: 2026/2/21

WLAN5GHz_802.11ac-VHT80 MCS0_Right Cheek_0mm_Ch58

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle); Frequency: 5290.0 MHz; Duty Cycle: 1:1

Medium: Medium parameters used: $f = 5290.0$ MHz; $\sigma = 4.76$ S/m; $\epsilon_r = 36.5$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.08, 5.97, 6.0); Calibrated: 2025/06/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAC


Zoom Scan (88.0 mm x 96.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.19 dB

SAR (1g) = 0.161 W/kg; SAR (10g) = 0.132 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 67.6 %

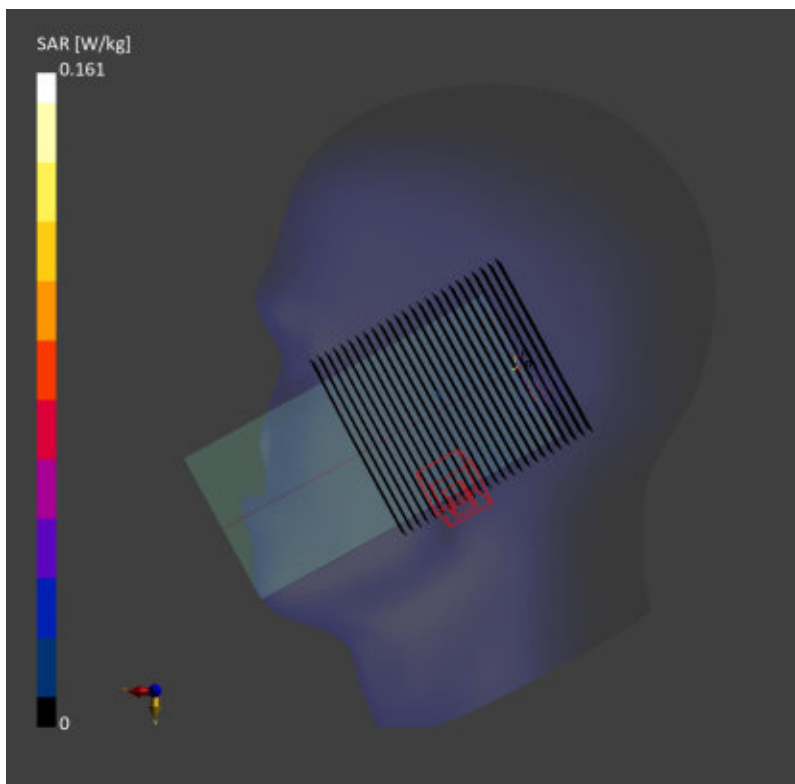

Date: 2026/3/10

LTE Band 26_15M_QPSK_1RB_0Offset_Right Cheek_0mm_Ch26965

Communication System: LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK) RBPosition:Mid
AntennaCfg:SISO; Frequency: 841.5 MHz; Duty Cycle: 1:1
Medium: Medium parameters used: $f = 841.5$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 42.5$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.23, 10.04, 10.08); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF


Zoom Scan (88.0 mm x 96.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.08 dB

SAR (1g) = 0.585 W/kg; SAR (10g) = 0.373 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 76.8 %

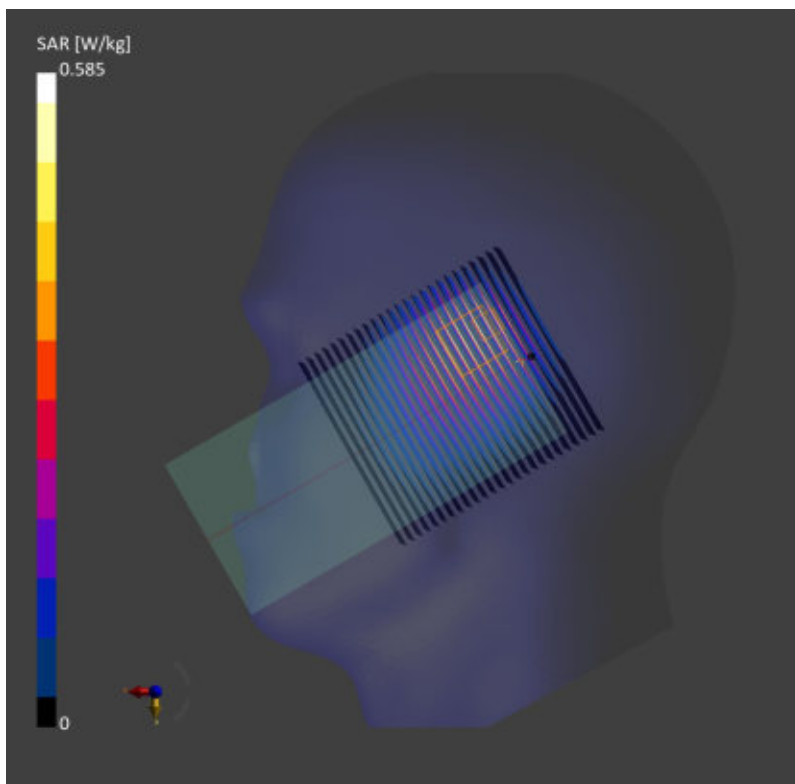

Date: 2026/2/21

WLAN5GHz_802.11ac-VHT80 MCS0_Right Cheek_0mm_Ch58

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle); Frequency: 5290.0 MHz; Duty Cycle: 1:1

Medium: Medium parameters used: $f = 5290.0$ MHz; $\sigma = 4.76$ S/m; $\epsilon_r = 36.5$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.08, 5.97, 6.0); Calibrated: 2025/06/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAC


Zoom Scan (88.0 mm x 96.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.19 dB

SAR (1g) = 0.161 W/kg; SAR (10g) = 0.132 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 67.6 %

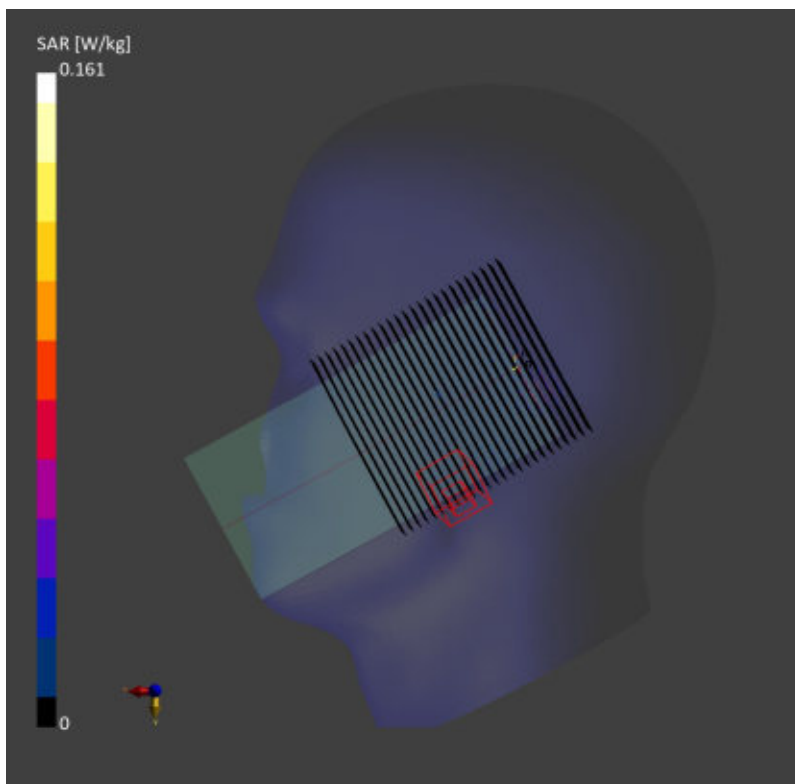

Date: 2026/3/11

Bluetooth_DH5 1Mbps_Right Cheek_0mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth (GFSK, DH5); Frequency: 2441.0 MHz; Duty Cycle: 1:1.085

Medium: Medium parameters used: $f = 2441.0$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.87, 7.72, 7.76); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA


Zoom Scan (88.0 mm x 96.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.19 dB

SAR (1g) = 0.051 W/kg; SAR (10g) = 0.027 W/kg

Smallest distance from peaks to all points 3 dB below = 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 91.0 %

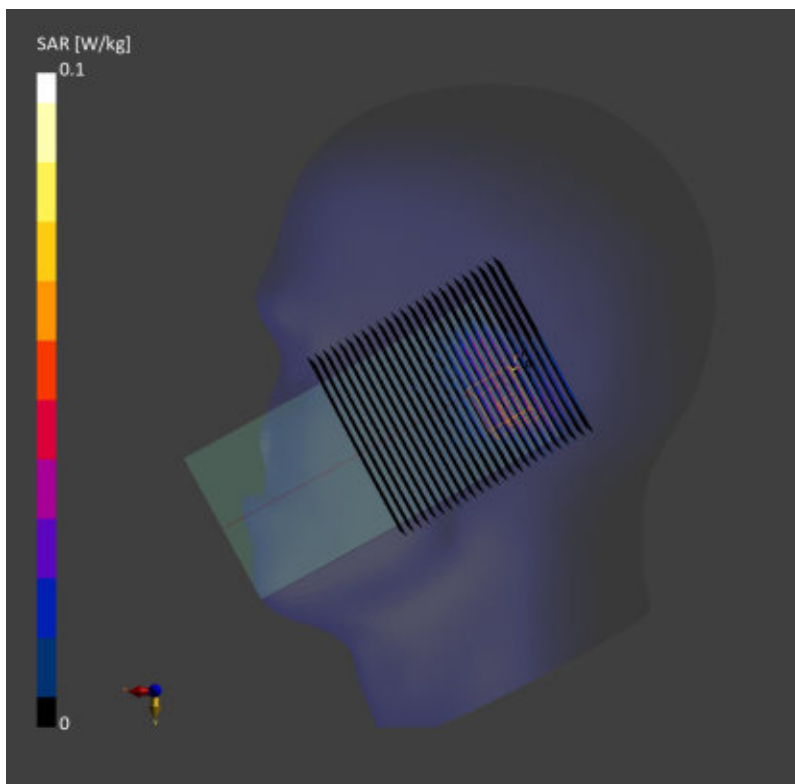

Date: 2026/2/15

FR1 n48_40M_QPSK_1RB_1Offset_Right Cheek_0mm_Ch641666

Communication System: 5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)
RBPosition:Mid AntennaCfg:SISO; Frequency: 3625.0 MHz; Duty Cycle: 1:1
Medium: Medium parameters used: $f = 3625.0$ MHz; $\sigma = 2.92$ S/m; $\epsilon_r = 39.1$
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.85, 6.72, 6.76); Calibrated: 2025/06/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10903-AAD


Zoom Scan (88.0 mm x 96.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.10 dB

SAR (1g) = 0.571 W/kg; SAR (10g) = 0.227 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 72.5 %

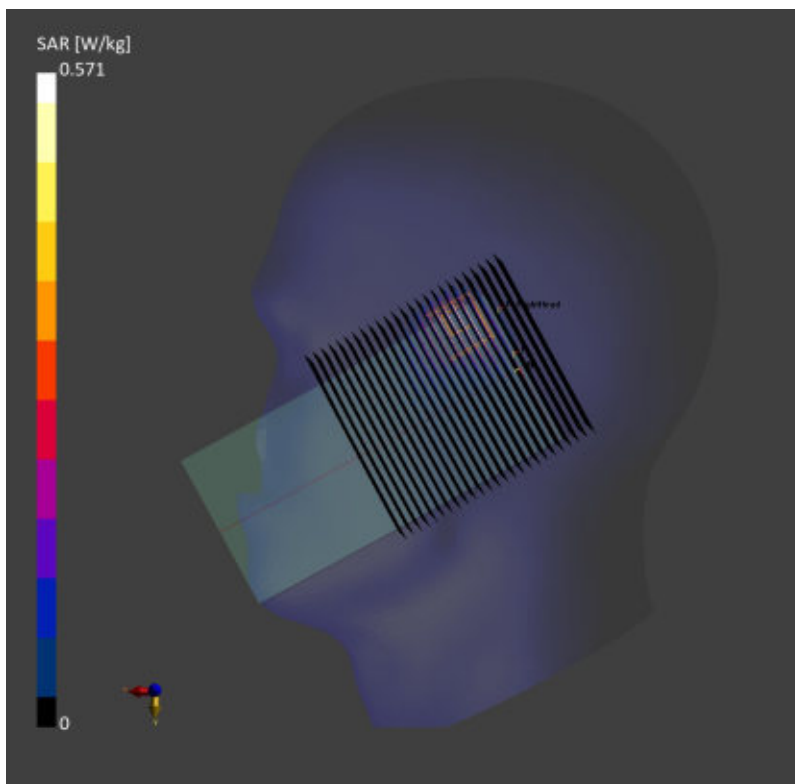

Date: 2026/3/11

WLAN2.4GHz_802.11b 1Mbps_Right Cheek_0mm_Ch11

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Frequency: 2462.0 MHz;

Duty Cycle: 1:1

Medium: Medium parameters used: $f = 2462.0$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.87, 7.72, 7.76); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB


Zoom Scan (88.0 mm x 96.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.15 dB

SAR (1g) = 0.115 W/kg; SAR (10g) = 0.058 W/kg

Smallest distance from peaks to all points 3 dB below = 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 89.2 %

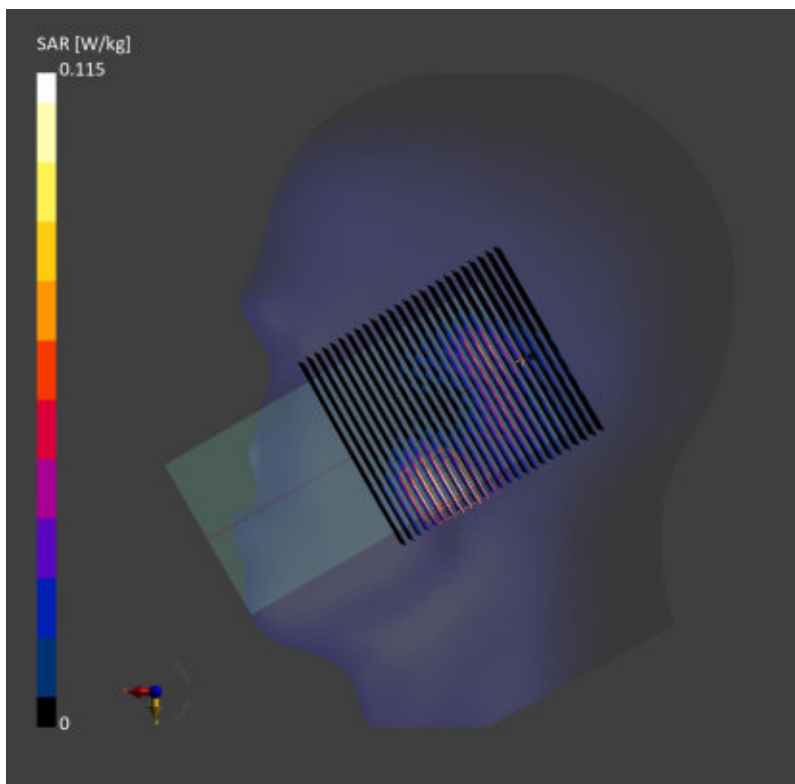

Date: 2026/2/21

WLAN5GHz_802.11ac-VHT80 MCS0_Right Cheek_0mm_Ch58

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle); Frequency: 5290.0 MHz; Duty Cycle: 1:1

Medium: Medium parameters used: $f = 5290.0$ MHz; $\sigma = 4.76$ S/m; $\epsilon_r = 36.5$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.08, 5.97, 6.0); Calibrated: 2025/06/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAC


Zoom Scan (88.0 mm x 96.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.19 dB

SAR (1g) = 0.161 W/kg; SAR (10g) = 0.132 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 67.6 %

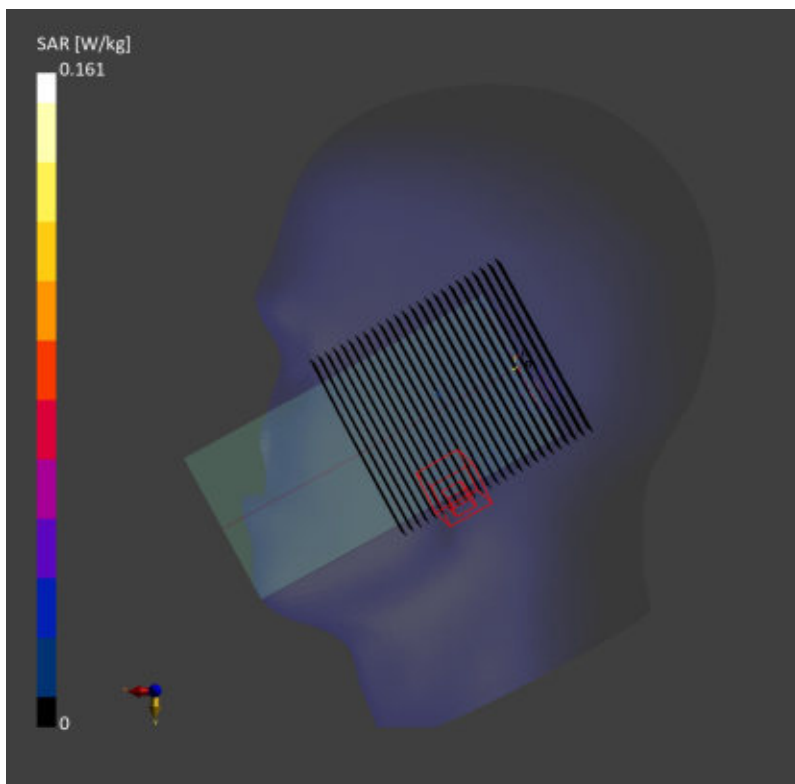

Date: 2026/2/15

FR1 n48_40M_QPSK_1RB_1Offset_Right Cheek_0mm_Ch641666

Communication System: 5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)
RBPosition:Mid AntennaCfg:SISO; Frequency: 3625.0 MHz; Duty Cycle: 1:1
Medium: Medium parameters used: $f = 3625.0$ MHz; $\sigma = 2.92$ S/m; $\epsilon_r = 39.1$
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.85, 6.72, 6.76); Calibrated: 2025/06/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10903-AAD


Zoom Scan (88.0 mm x 96.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.10 dB

SAR (1g) = 0.571 W/kg; SAR (10g) = 0.227 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 72.5 %

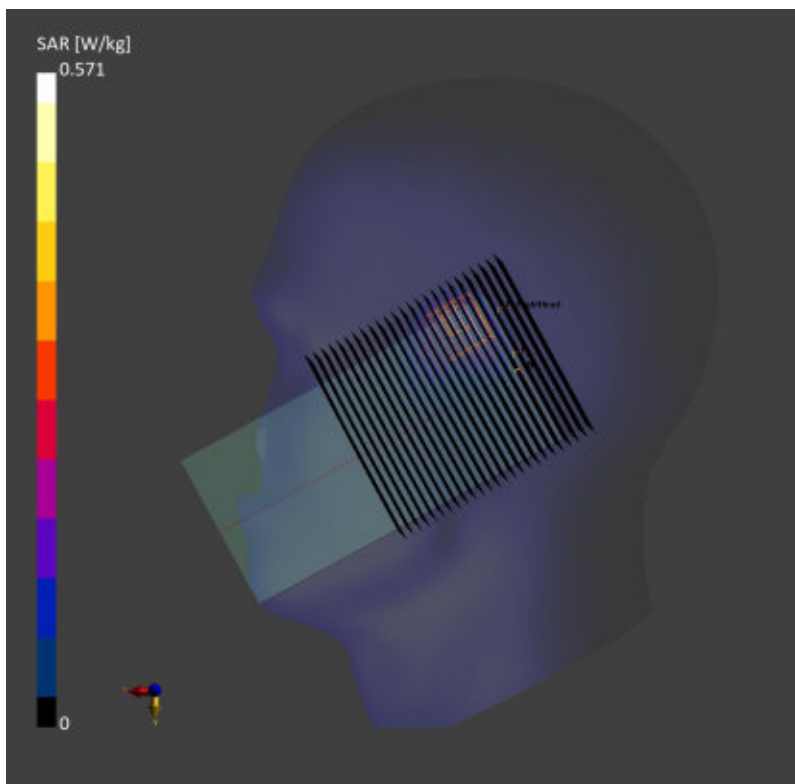

Date: 2026/2/21

WLAN5GHz_802.11ac-VHT80 MCS0_Right Cheek_0mm_Ch58

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle); Frequency: 5290.0 MHz; Duty Cycle: 1:1

Medium: Medium parameters used: $f = 5290.0$ MHz; $\sigma = 4.76$ S/m; $\epsilon_r = 36.5$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.08, 5.97, 6.0); Calibrated: 2025/06/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAC


Zoom Scan (88.0 mm x 96.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.19 dB

SAR (1g) = 0.161 W/kg; SAR (10g) = 0.132 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 67.6 %

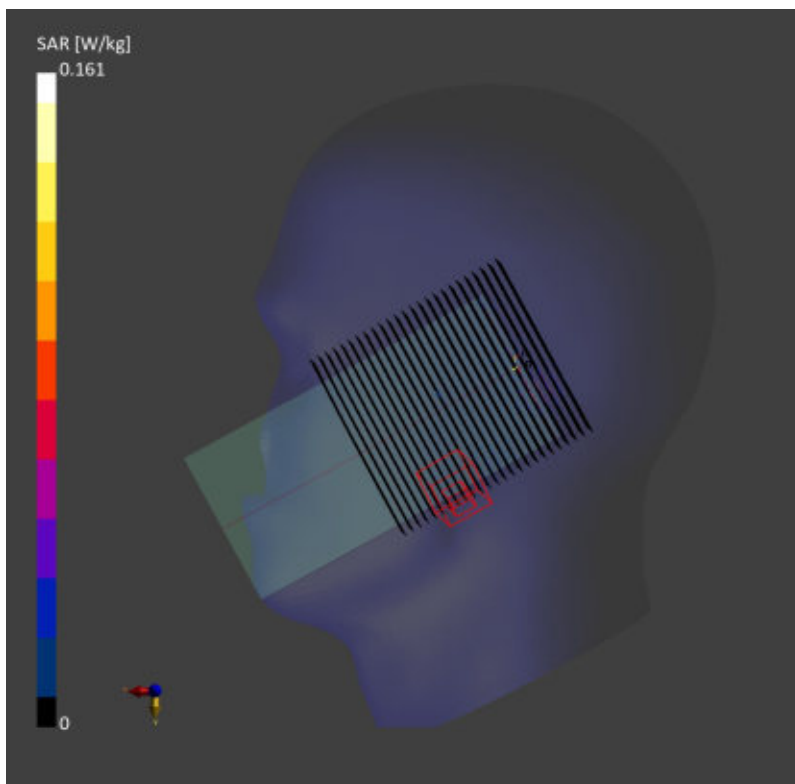

Date: 2026/3/11

Bluetooth_DH5 1Mbps_Right Cheek_0mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth (GFSK, DH5); Frequency: 2441.0 MHz; Duty Cycle: 1:1.085

Medium: Medium parameters used: $f = 2441.0$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.87, 7.72, 7.76); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA


Zoom Scan (88.0 mm x 96.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.19 dB

SAR (1g) = 0.051 W/kg; SAR (10g) = 0.027 W/kg

Smallest distance from peaks to all points 3 dB below = 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 91.0 %

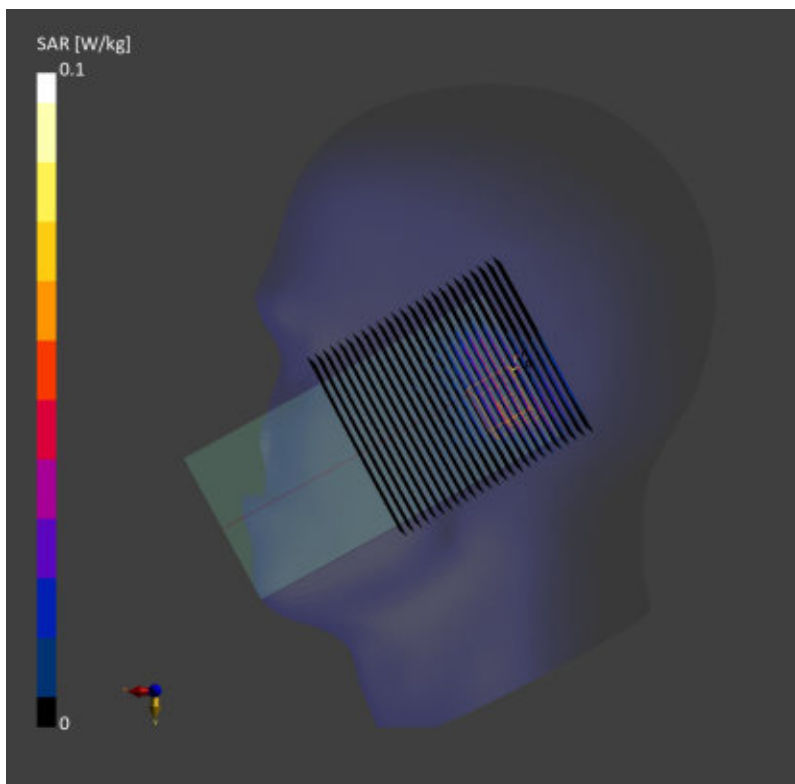

Date: 2026/3/12

FR1 n41_100M_QPSK_135RB_69Offset_Right Cheek_0mm_Ch518598

Communication System: 5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)
RBPosition:MidAntennaCfg:SISO; Frequency: 2593.0 MHz; Duty Cycle: 1:1
Medium: Medium parameters used: $f = 2593.0$ MHz; $\sigma = 1.99$ S/m; $\epsilon_r = 39.4$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.90, 7.75, 7.79); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF


Zoom Scan (88.0 mm x 96.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.03 dB

SAR (1g) = 0.630 W/kg; SAR (10g) = 0.291 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 79.5 %

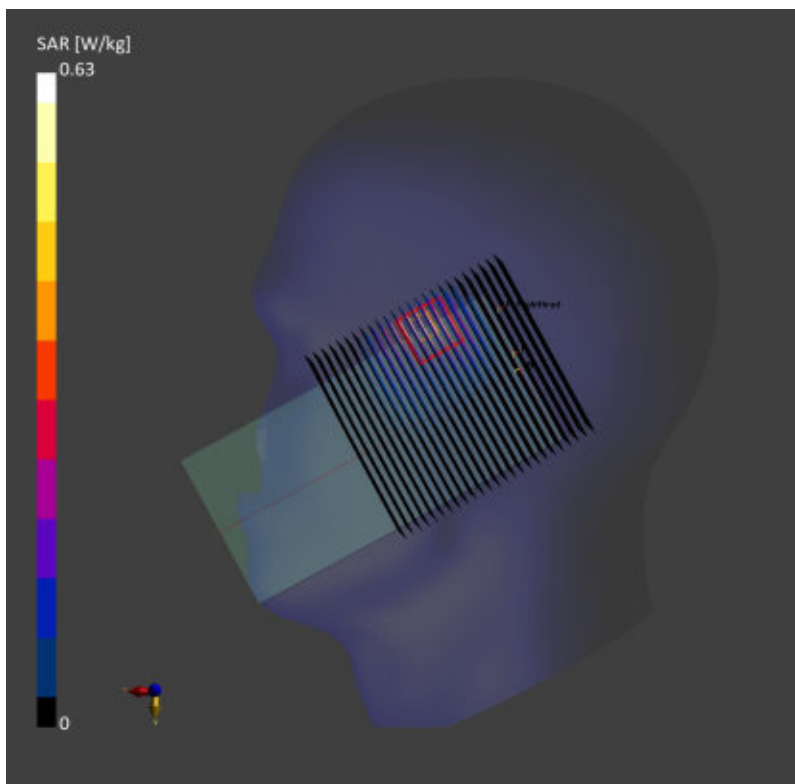

Date: 2026/3/11

WLAN2.4GHz_802.11b 1Mbps_Right Cheek_0mm_Ch11

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Frequency: 2462.0 MHz;

Duty Cycle: 1:1

Medium: Medium parameters used: $f = 2462.0$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.87, 7.72, 7.76); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB


Zoom Scan (88.0 mm x 96.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.15 dB

SAR (1g) = 0.115 W/kg; SAR (10g) = 0.058 W/kg

Smallest distance from peaks to all points 3 dB below = 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 89.2 %

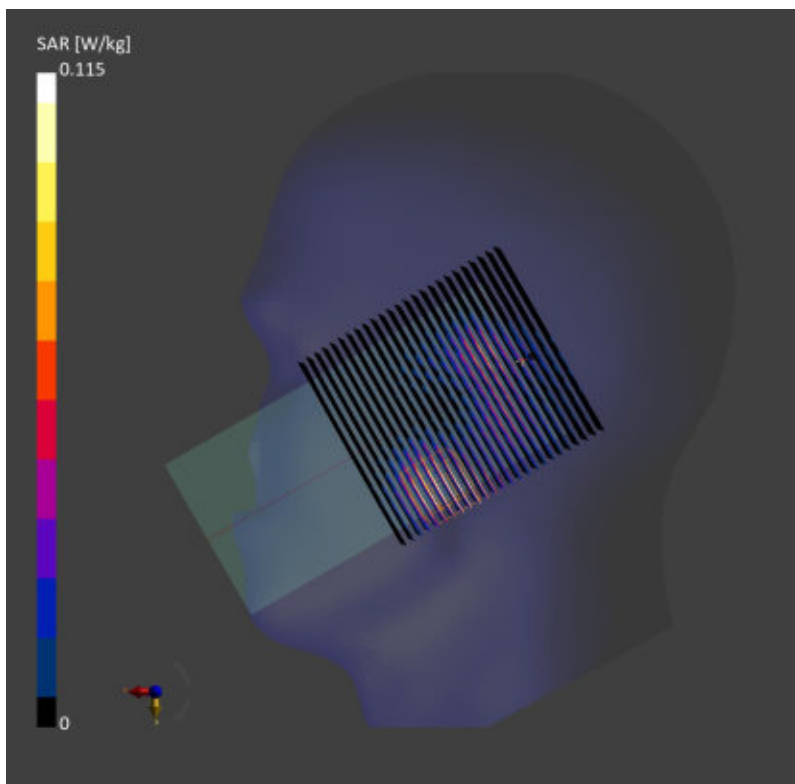

Date: 2026/2/21

WLAN5GHz_802.11ac-VHT80 MCS0_Right Cheek_0mm_Ch58

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle); Frequency: 5290.0 MHz; Duty Cycle: 1:1

Medium: Medium parameters used: $f = 5290.0$ MHz; $\sigma = 4.76$ S/m; $\epsilon_r = 36.5$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.08, 5.97, 6.0); Calibrated: 2025/06/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAC


Zoom Scan (88.0 mm x 96.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.19 dB

SAR (1g) = 0.161 W/kg; SAR (10g) = 0.132 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 67.6 %

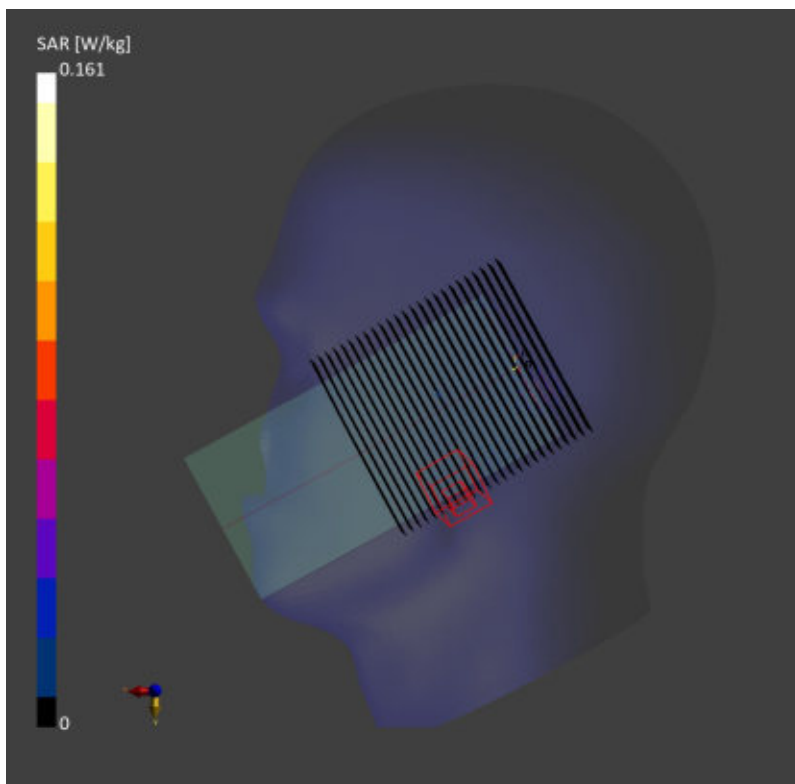

Date: 2026/3/12

FR1 n41_100M_QPSK_135RB_69Offset_Right Cheek_0mm_Ch518598

Communication System: 5G NR (DFT-s-OFDM, 1 RB, 40 MHz, QPSK, 30 kHz)
RBPosition:MidAntennaCfg:SISO; Frequency: 2593.0 MHz; Duty Cycle: 1:1
Medium: Medium parameters used: $f = 2593.0$ MHz; $\sigma = 1.99$ S/m; $\epsilon_r = 39.4$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.90, 7.75, 7.79); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF


Zoom Scan (88.0 mm x 96.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.03 dB

SAR (1g) = 0.630 W/kg; SAR (10g) = 0.291 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 79.5 %

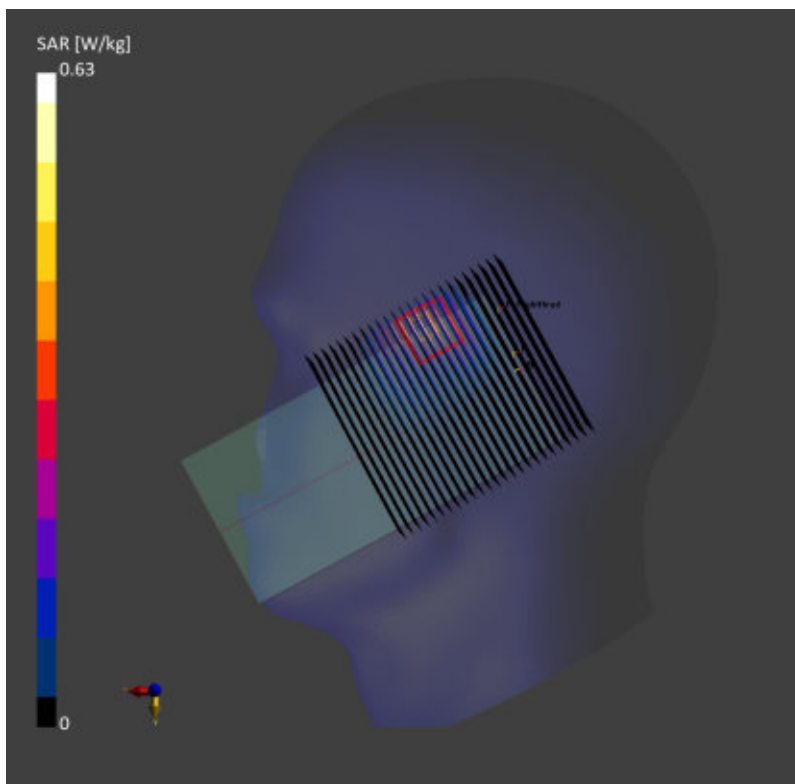

Date: 2026/2/21

WLAN5GHz_802.11ac-VHT80 MCS0_Right Cheek_0mm_Ch58

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle); Frequency: 5290.0 MHz; Duty Cycle: 1:1

Medium: Medium parameters used: $f = 5290.0$ MHz; $\sigma = 4.76$ S/m; $\epsilon_r = 36.5$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.08, 5.97, 6.0); Calibrated: 2025/06/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAC


Zoom Scan (88.0 mm x 96.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.19 dB

SAR (1g) = 0.161 W/kg; SAR (10g) = 0.132 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 67.6 %

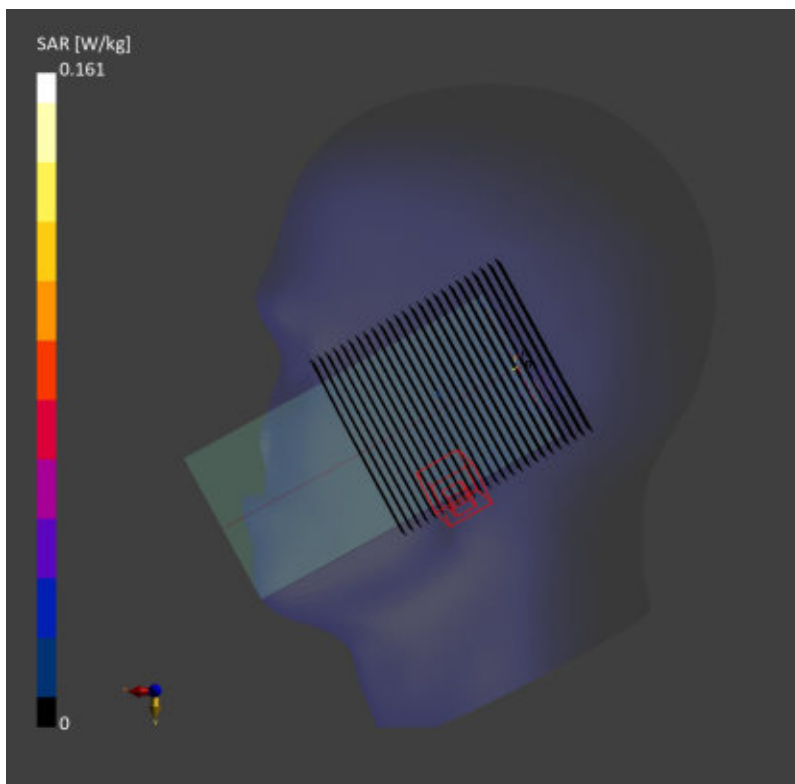

Date: 2026/3/11

Bluetooth_DH5 1Mbps_Right Cheek_0mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth (GFSK, DH5); Frequency: 2441.0 MHz; Duty Cycle: 1:1.085

Medium: Medium parameters used: $f = 2441.0$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.87, 7.72, 7.76); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA


Zoom Scan (88.0 mm x 96.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.19 dB

SAR (1g) = 0.051 W/kg; SAR (10g) = 0.027 W/kg

Smallest distance from peaks to all points 3 dB below = 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 91.0 %

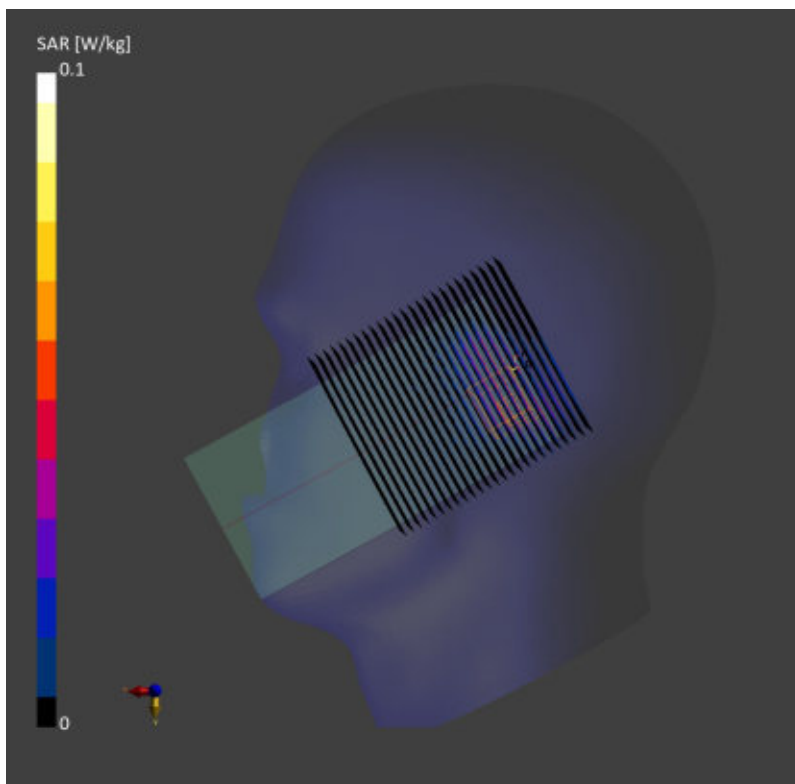

Date: 2026/3/10

LTE Band 26_15M_QPSK_1RB_0Offset_Left Cheek_0mm_Ch26865

Communication System: LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK) RBPosition:Mid
AntennaCfg:SISO; Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 42.5$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.23, 10.04, 10.08); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF


Zoom Scan (88.0 mm x 96.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.11 dB

SAR (1g) = 0.385 W/kg; SAR (10g) = 0.268 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 79.2 %

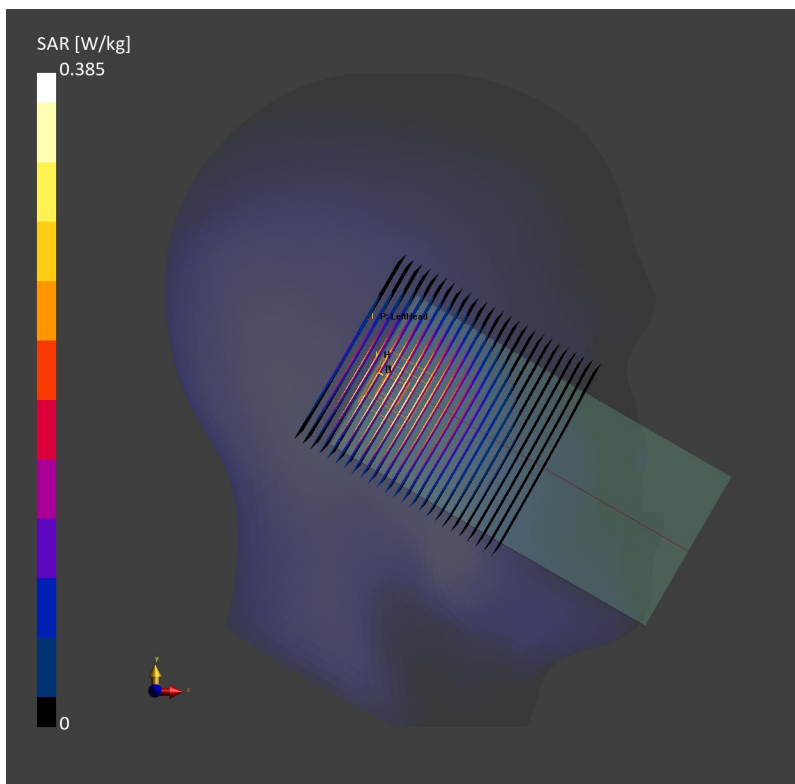

Date: 2026/3/11

WLAN2.4GHz_802.11b 1Mbps_Left Cheek_0mm_Ch11

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Frequency: 2462.0 MHz;

Duty Cycle: 1:1

Medium: Medium parameters used: $f = 2462.0$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.87, 7.72, 7.76); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB


Zoom Scan (88.0 mm x 96.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.12 dB

SAR (1g) = 0.244 W/kg; SAR (10g) = 0.108 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 79.3 %

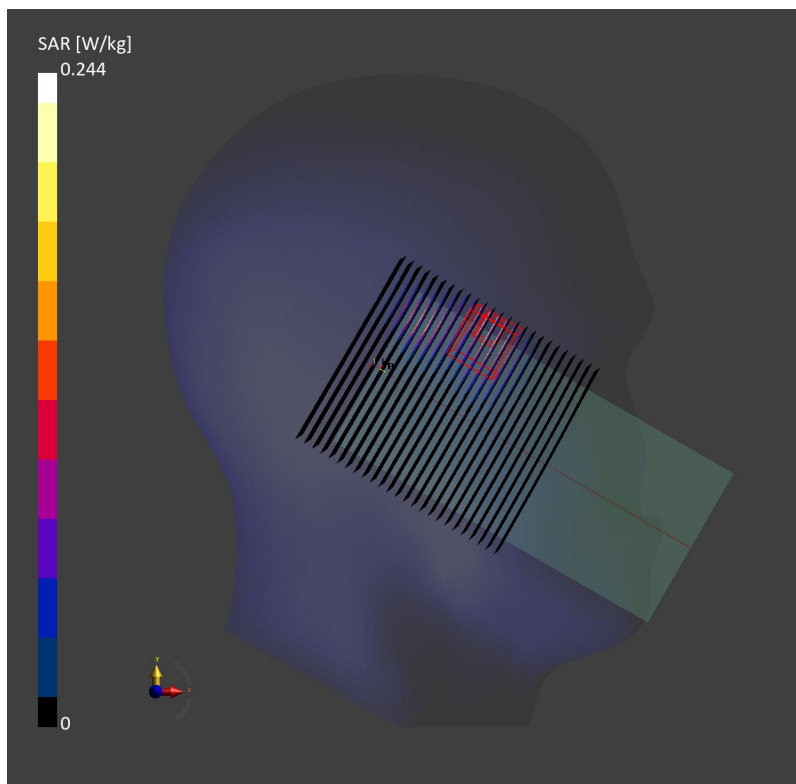

Date: 2026/2/22

WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch106

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle); Frequency: 5530.0 MHz; Duty Cycle: 1:1

Medium: Medium parameters used: $f = 5530.0$ MHz; $\sigma = 5.03$ S/m; $\epsilon_r = 36.1$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(5.54, 5.44, 5.47); Calibrated: 2025/06/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAC


Zoom Scan (88.0 mm x 80.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.10 dB

SAR (1g) = 0.229 W/kg; SAR (10g) = 0.062 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.9 %

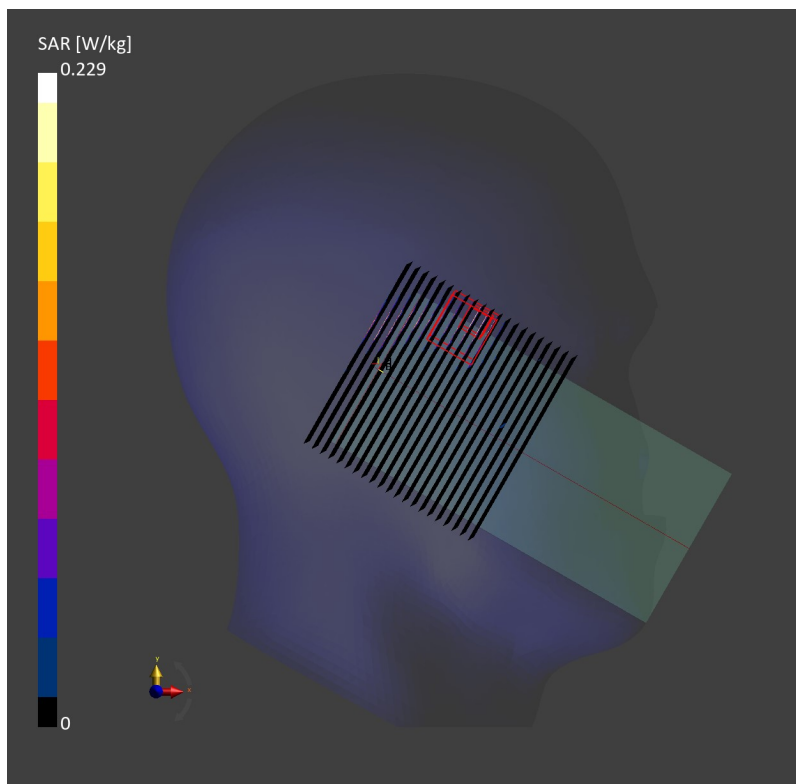

Date: 2026/3/10

LTE Band 26_15M_QPSK_1RB_0Offset_Left Cheek_0mm_Ch26865

Communication System: LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK) RBPosition:Mid
 AntennaCfg:SISO; Frequency: 831.5 MHz; Duty Cycle: 1:1
 Medium: Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.932$ S/m; $\epsilon_r = 42.5$
 Ambient Temperature: 23.5°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.23, 10.04, 10.08); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF


Zoom Scan (88.0 mm x 96.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.11 dB

SAR (1g) = 0.385 W/kg; SAR (10g) = 0.268 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 79.2 %

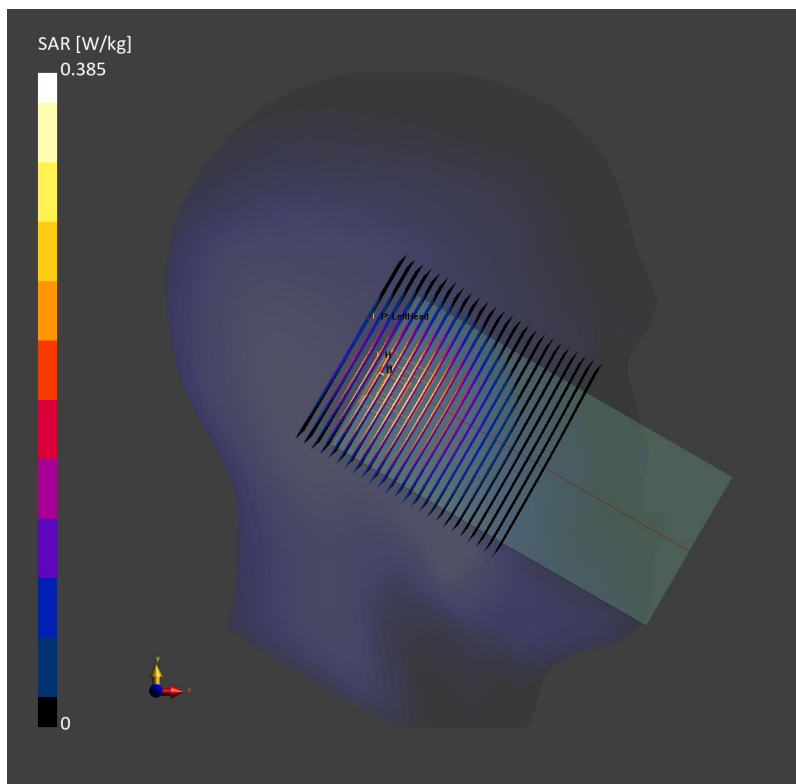

Date: 2026/2/22

WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch106

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle); Frequency: 5530.0 MHz; Duty Cycle: 1:1

Medium: Medium parameters used: $f = 5530.0$ MHz; $\sigma = 5.03$ S/m; $\epsilon_r = 36.1$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(5.54, 5.44, 5.47); Calibrated: 2025/06/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAC


Zoom Scan (88.0 mm x 80.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.10 dB

SAR (1g) = 0.229 W/kg; SAR (10g) = 0.062 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.9 %

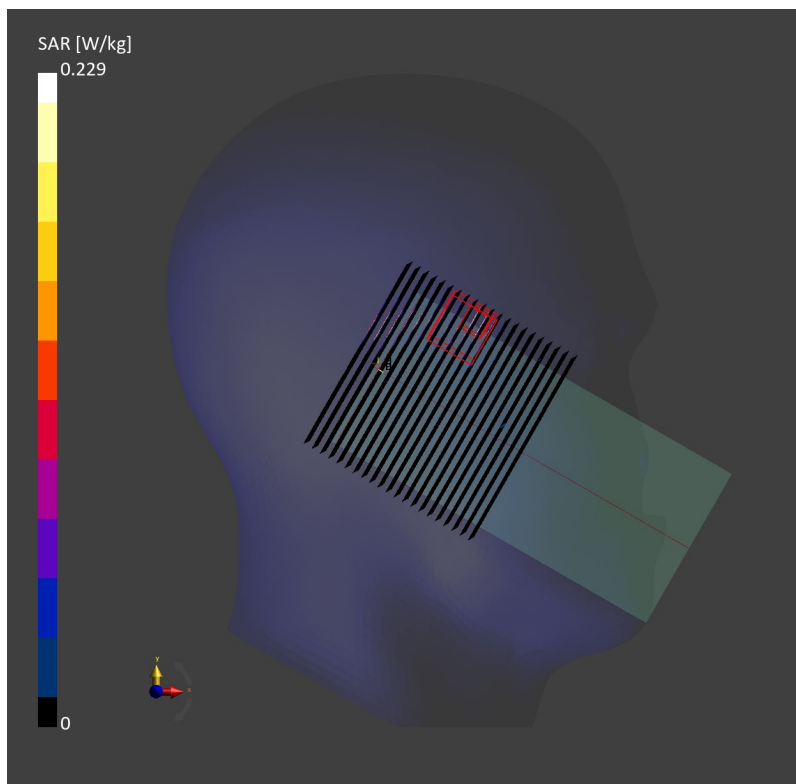

Date: 2026/3/11

Bluetooth_DH5 1Mbps_Left Cheek_0mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth (GFSK, DH5); Frequency: 2441.0 MHz; Duty Cycle: 1:1.085

Medium: Medium parameters used: $f = 2441.0$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.87, 7.72, 7.76); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA


Zoom Scan (88.0 mm x 96.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.03 dB

SAR (1g) = 0.125 W/kg; SAR (10g) = 0.053 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 79.0 %

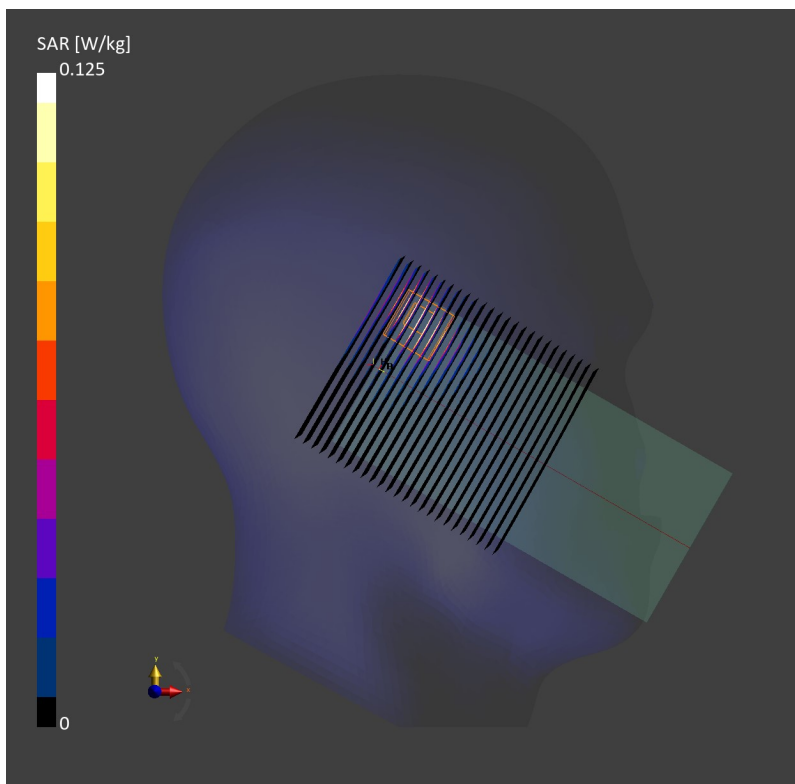

Date: 2026/2/19

FR1 n77_100M_QPSK_135RB_69Offset_Left Cheek_0mm_Ch656000

Communication System: 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)

RBPosition:Mid AntennaCfg:SISO; Frequency: 3840.0 MHz; Duty Cycle: 1:1

Medium: Medium parameters used: $f = 3840.0$ MHz; $\sigma = 3.10$ S/m; $\epsilon_r = 38.8$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.88, 6.76, 6.79); Calibrated: 2025/06/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF


Zoom Scan (88.0 mm x 88.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.02 dB

SAR (1g) = 0.452 W/kg; SAR (10g) = 0.158 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 69.4 %

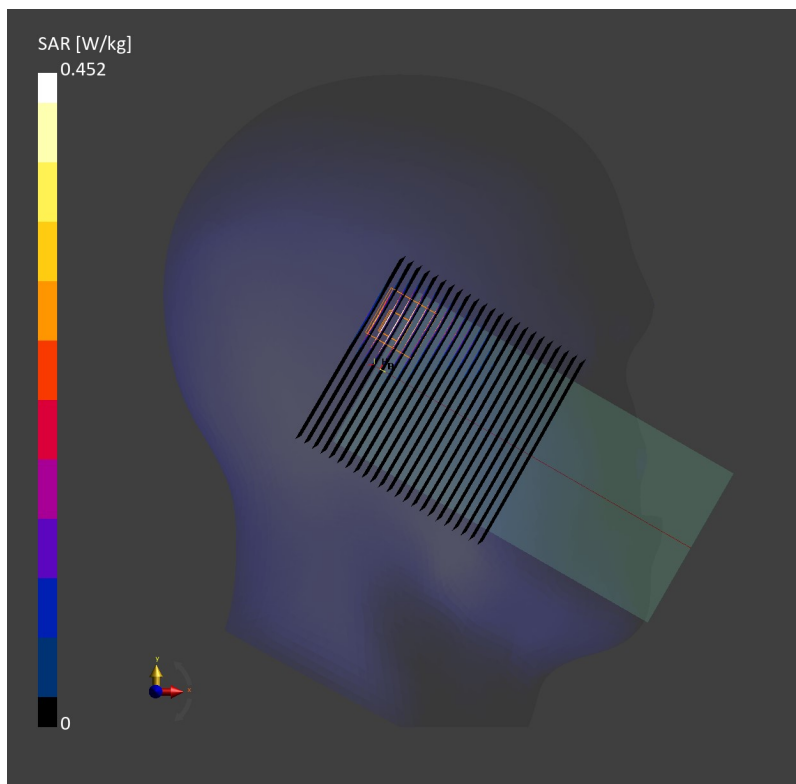

Date: 2026/3/11

WLAN2.4GHz_802.11b 1Mbps_Left Cheek_0mm_Ch11

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Frequency: 2462.0 MHz;

Duty Cycle: 1:1

Medium: Medium parameters used: $f = 2462.0$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.87, 7.72, 7.76); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB


Zoom Scan (88.0 mm x 96.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.12 dB

SAR (1g) = 0.244 W/kg; SAR (10g) = 0.108 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 79.3 %

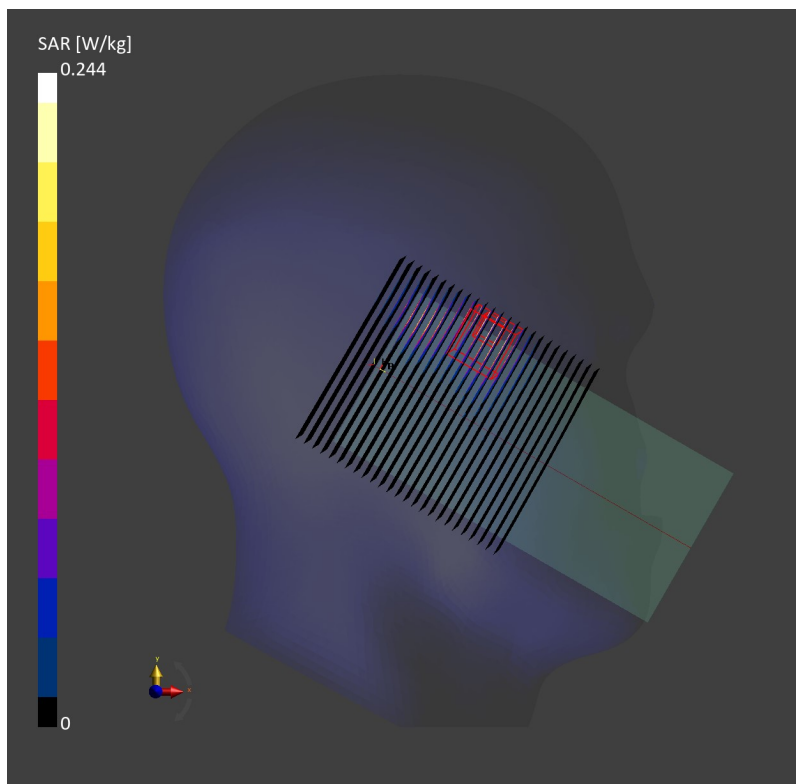

Date: 2026/2/22

WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch106

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle); Frequency: 5530.0 MHz; Duty Cycle: 1:1

Medium: Medium parameters used: $f = 5530.0$ MHz; $\sigma = 5.03$ S/m; $\epsilon_r = 36.1$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(5.54, 5.44, 5.47); Calibrated: 2025/06/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAC


Zoom Scan (88.0 mm x 80.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.10 dB

SAR (1g) = 0.229 W/kg; SAR (10g) = 0.062 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.9 %

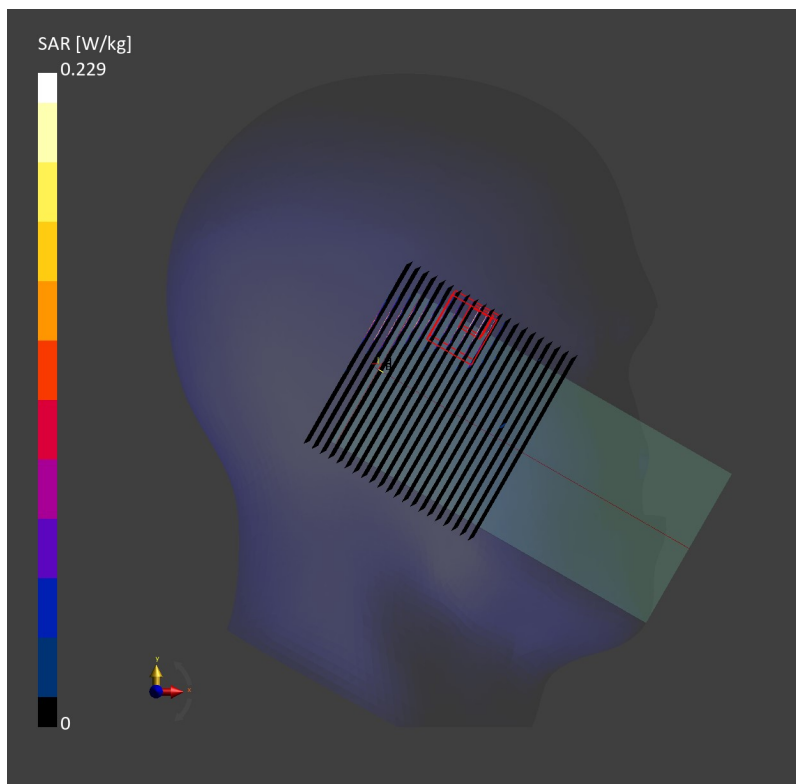

Date: 2026/3/11

Bluetooth_DH5 1Mbps_Left Cheek_0mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth (GFSK, DH5); Frequency: 2441.0 MHz; Duty Cycle: 1:1.085

Medium: Medium parameters used: $f = 2441.0$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.87, 7.72, 7.76); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA


Zoom Scan (88.0 mm x 96.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.03 dB

SAR (1g) = 0.125 W/kg; SAR (10g) = 0.053 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 79.0 %

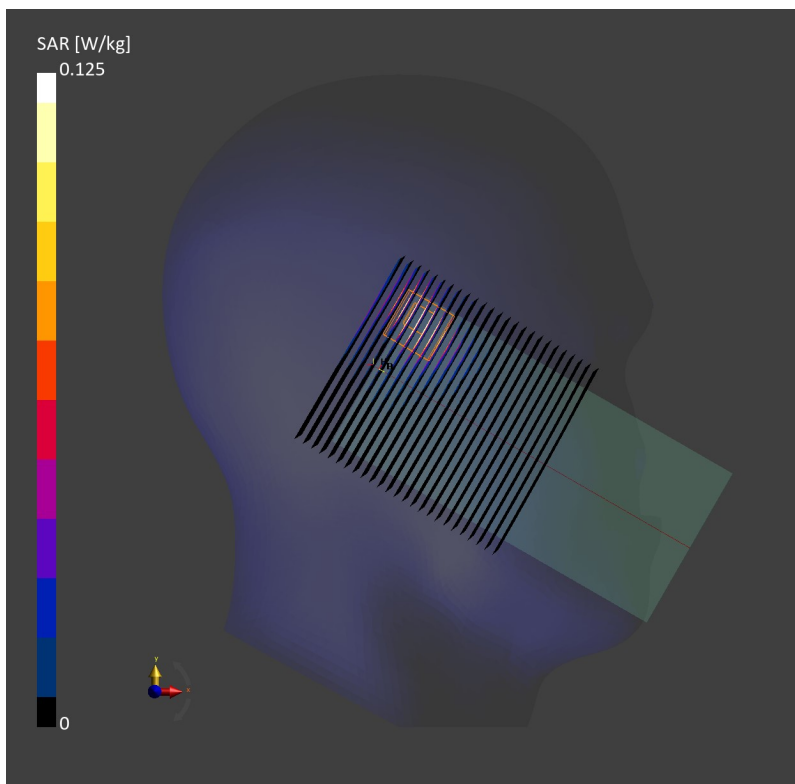

Date: 2026/2/19

FR1 n77_100M_QPSK_135RB_69Offset_Left Cheek_0mm_Ch656000

Communication System: 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)
RBPosition:Mid AntennaCfg:SISO; Frequency: 3840.0 MHz; Duty Cycle: 1:1
Medium: Medium parameters used: $f = 3840.0$ MHz; $\sigma = 3.10$ S/m; $\epsilon_r = 38.8$
Ambient Temperature: 23.7°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.88, 6.76, 6.79); Calibrated: 2025/06/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF


Zoom Scan (88.0 mm x 88.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.02 dB

SAR (1g) = 0.452 W/kg; SAR (10g) = 0.158 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 69.4 %

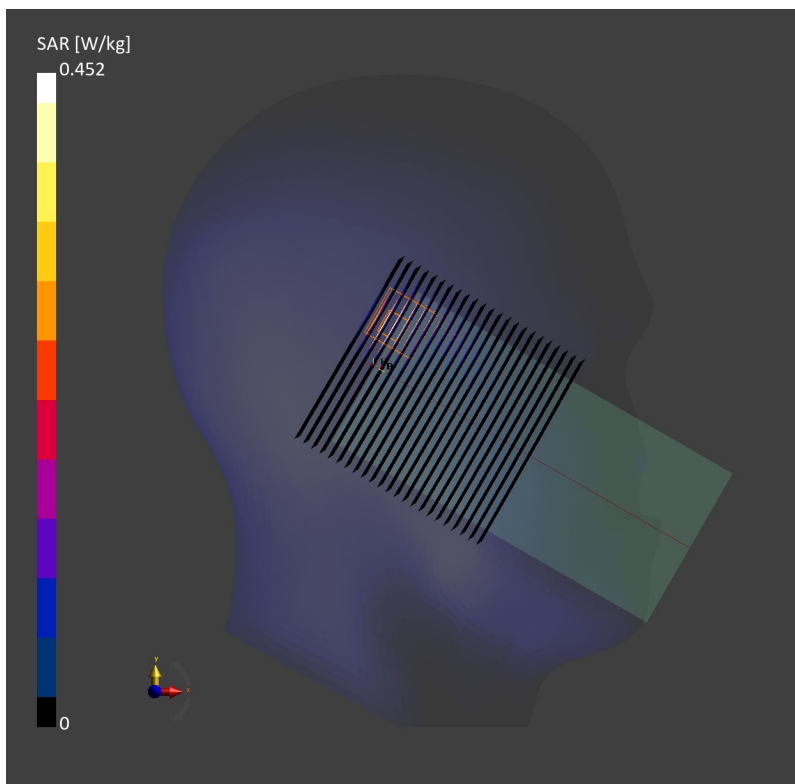

Date: 2026/2/22

WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch106

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle); Frequency: 5530.0 MHz; Duty Cycle: 1:1

Medium: Medium parameters used: $f = 5530.0$ MHz; $\sigma = 5.03$ S/m; $\epsilon_r = 36.1$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(5.54, 5.44, 5.47); Calibrated: 2025/06/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAC


Zoom Scan (88.0 mm x 80.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.10 dB

SAR (1g) = 0.229 W/kg; SAR (10g) = 0.062 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.9 %

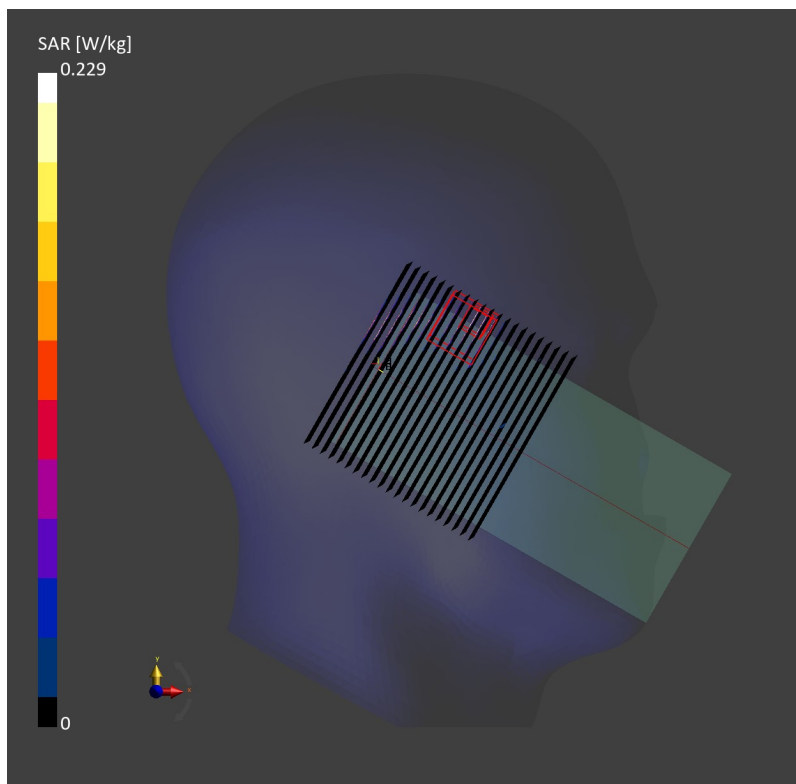

Date: 2026/2/15

LTE Band 48_20M_QPSK_1RB_0Offset_Left Cheek_0mm_Ch56640

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK,) RBPosition:Mid
AntennaCfg:SISO; Frequency: 3690.0 MHz; Duty Cycle: 1:1.59
Medium: Medium parameters used: $f = 3690.0$ MHz; $\sigma = 2.97$ S/m; $\epsilon_r = 39.0$
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.85, 6.72, 6.76); Calibrated: 2025/06/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH


Zoom Scan (88.0 mm x 88.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.08dB

SAR (1g) = 0.566 W/kg; SAR (10g) = 0.229 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 76.8 %

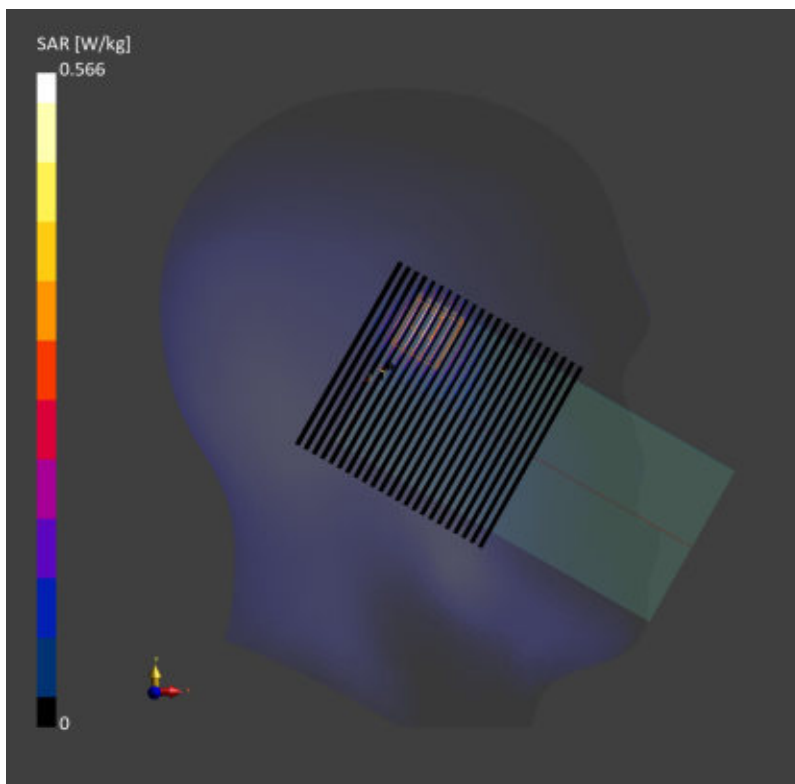

Date: 2026/3/11

WLAN2.4GHz_802.11b 1Mbps_Left Cheek_0mm_Ch11

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Frequency: 2462.0 MHz;

Duty Cycle: 1:1

Medium: Medium parameters used: $f = 2462.0$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.87, 7.72, 7.76); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10012-CAB


Zoom Scan (88.0 mm x 96.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.12 dB

SAR (1g) = 0.244 W/kg; SAR (10g) = 0.108 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 79.3 %

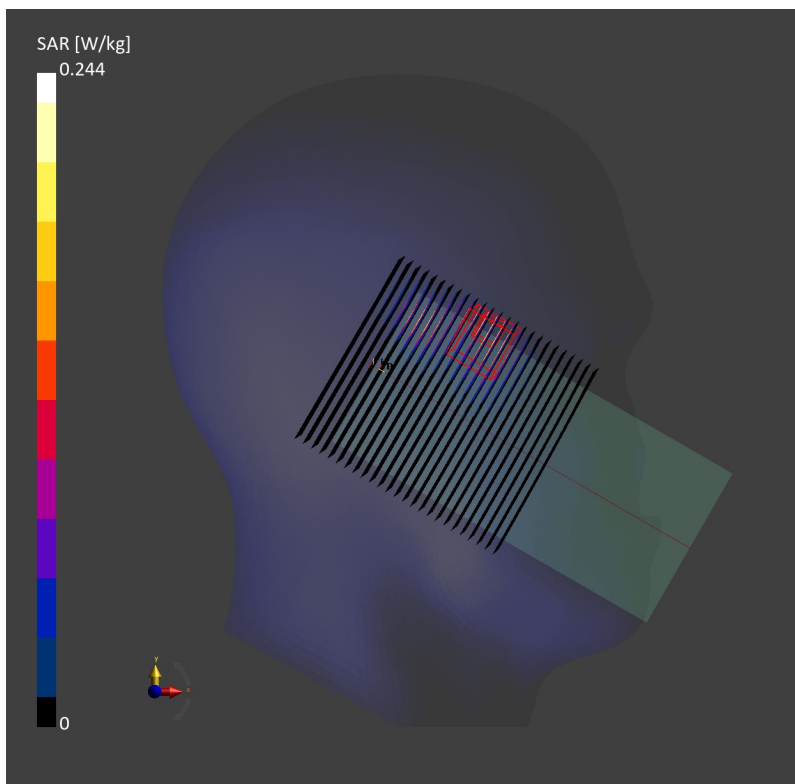

Date: 2026/2/22

WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch106

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle); Frequency: 5530.0 MHz; Duty Cycle: 1:1

Medium: Medium parameters used: $f = 5530.0$ MHz; $\sigma = 5.03$ S/m; $\epsilon_r = 36.1$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(5.54, 5.44, 5.47); Calibrated: 2025/06/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAC


Zoom Scan (88.0 mm x 80.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.10 dB

SAR (1g) = 0.229 W/kg; SAR (10g) = 0.062 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.9 %

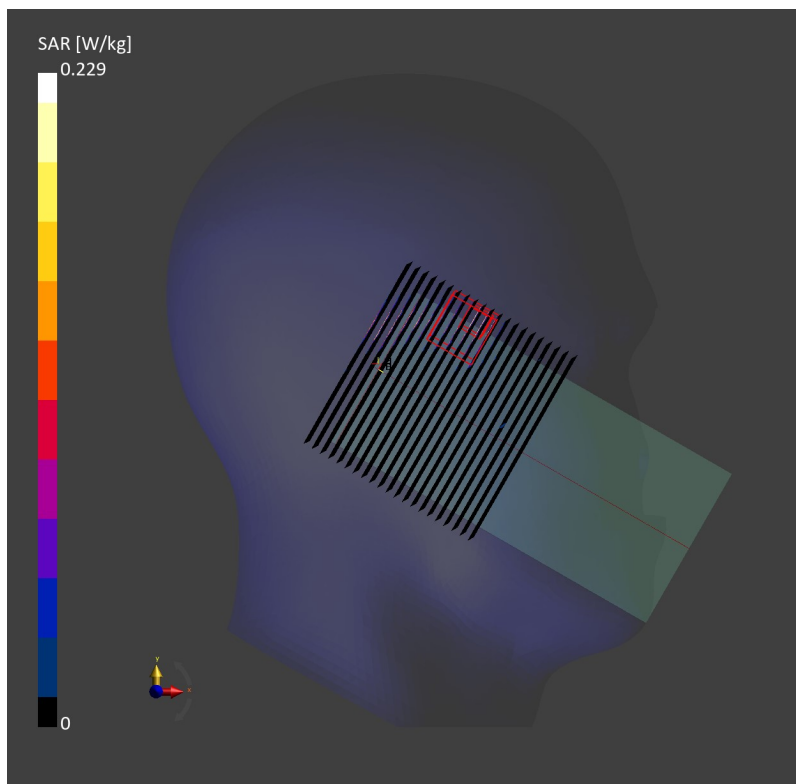

Date: 2026/2/15

LTE Band 48_20M_QPSK_1RB_0Offset_Left Cheek_0mm_Ch56640

Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK,) RBPosition:Mid
AntennaCfg:SISO; Frequency: 3690.0 MHz; Duty Cycle: 1:1.59
Medium: Medium parameters used: $f = 3690.0$ MHz; $\sigma = 2.97$ S/m; $\epsilon_r = 39.0$
Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.85, 6.72, 6.76); Calibrated: 2025/06/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10172-CAH


Zoom Scan (88.0 mm x 88.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.08dB

SAR (1g) = 0.566 W/kg; SAR (10g) = 0.229 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 76.8 %

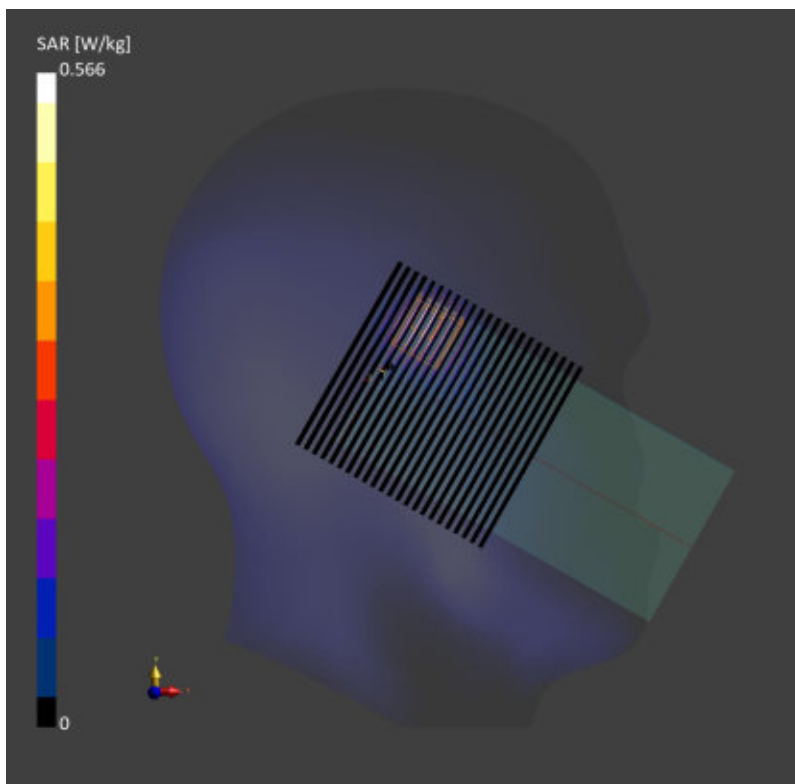

Date: 2026/2/22

WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch106

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle); Frequency: 5530.0 MHz; Duty Cycle: 1:1

Medium: Medium parameters used: $f = 5530.0$ MHz; $\sigma = 5.03$ S/m; $\epsilon_r = 36.1$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(5.54, 5.44, 5.47); Calibrated: 2025/06/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAC


Zoom Scan (88.0 mm x 80.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.10 dB

SAR (1g) = 0.229 W/kg; SAR (10g) = 0.062 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 56.9 %

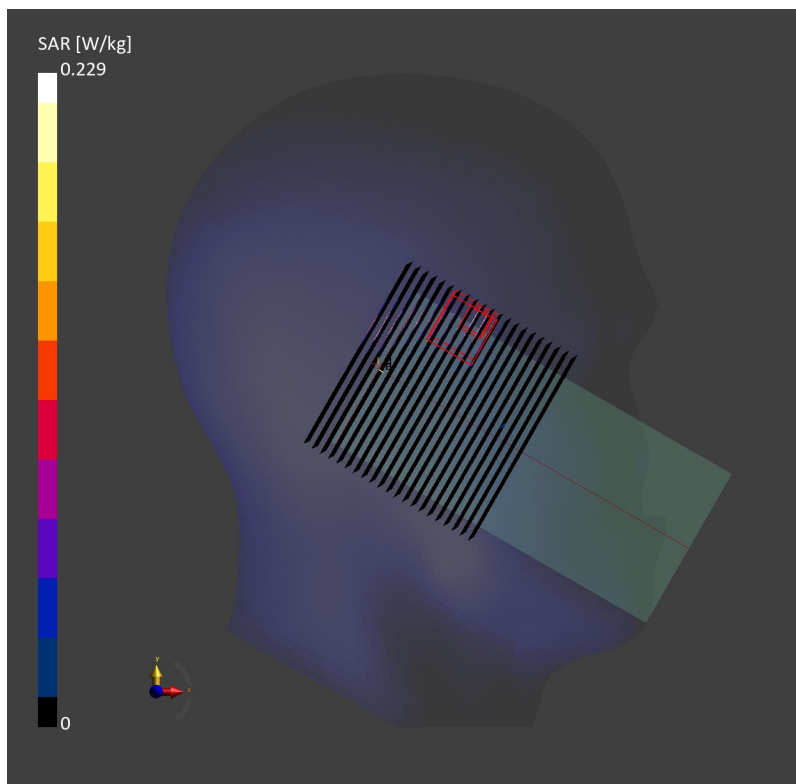

Date: 2026/3/11

Bluetooth_DH5 1Mbps_Left Cheek_0mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth (GFSK, DH5); Frequency: 2441.0 MHz; Duty Cycle: 1:1.085

Medium: Medium parameters used: $f = 2441.0$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.87, 7.72, 7.76); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1210; Calibrated: 2025/11/28
- Phantom: Twin-SAM V5.0 (30deg probe tilt); Serial: 1670; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA


Zoom Scan (88.0 mm x 96.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.03 dB

SAR (1g) = 0.125 W/kg; SAR (10g) = 0.053 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 79.0 %

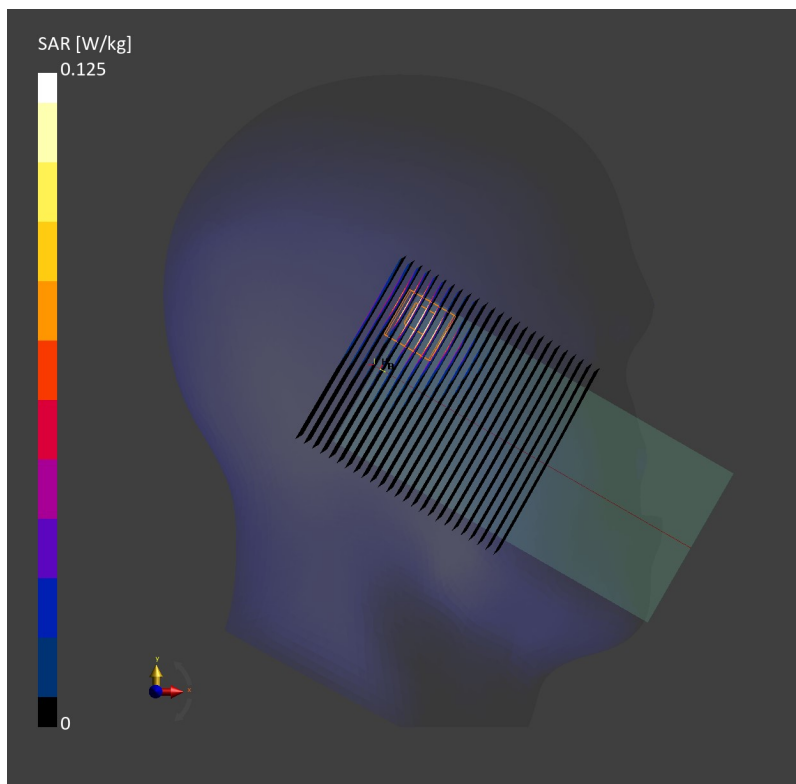

Case 1_Measurement Report for Multi-TX Evaluator

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	152.0 x 72.0 x 8.0	Phone

Exposure Conditions


Phantom Section	Position	Test Distance [mm]	Band	Group	UID	Rev	Frequency [MHz]	Channel Number
Right Head HSL	CHEEK	0.00	WLAN 2.4GHz	WLAN	10012	CAB	2462.000	11
Right Head HSL	CHEEK	0.00	WLAN 5GHz	WLAN	10544	AAC	5290.000	58
Right Head HSL	CHEEK	0.00	Band 26	LTE-FDD	10181	CAF	841.500	26965
Right Head HSL	CHEEK	0.00	WLAN 2.4GHz / Band 26	WLAN / LTE-FDD	10012 / 10181	CAB / CAF	2462.000 / 841.500	11 / 26965

Hardware Setup

Phantom	Probe	Calibration Date	DAE	Calibration Date
Twin-SAM V8.0 (30deg probe tilt)	EX3DV4 - SN7641	2025-06-26	DAE4 Sn1210	2025-11-28

SAR Measurement Results

Scan Name	psSAR1g [W/kg]	psSAR10g [W/kg]
Combined Zoom Scan	0.988	0.538

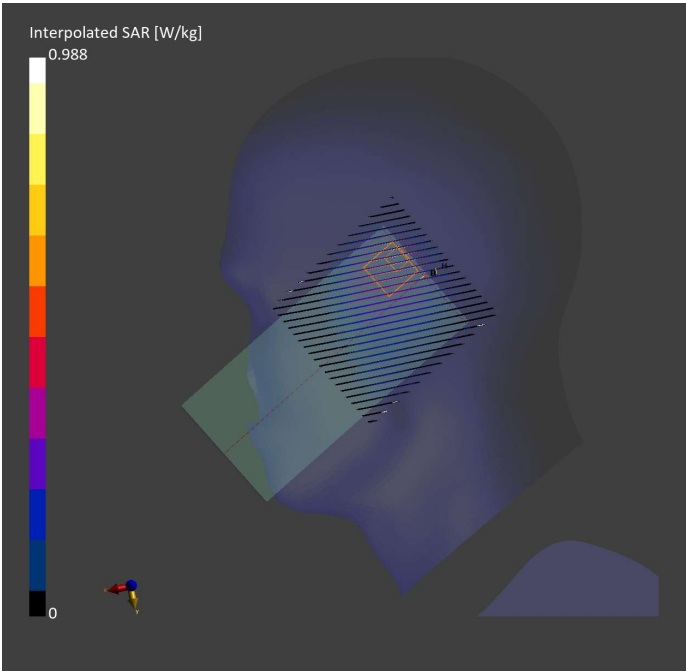

Case 2_Measurement Report for Multi-TX Evaluator

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	152.0 x 72.0 x 8.0	Phone

Exposure Conditions


Phantom Section	Position	Test Distance [mm]	Band	Group	UID	Rev	Frequency [MHz]	Channel Number
Right Head HSL	CHEEK	0.00	WLAN 5GHz	WLAN	105 44	AAC	5290.000	58
Right Head HSL	CHEEK	0.00	Band 26	LTE-FDD	101 81	CAF	841.500	26965
Right Head HSL	CHEEK	0.00	ISM 2.4 GHz Band	Bluetooth	100 32	CAA	2441.000	39
Right Head HSL	CHEEK	0.00	ISM 2.4 GHz Band / WLAN 5GHz	Bluetooth / WLAN	100 32 / 105 44	CAA / AAC	2441.000 / 5290.000	39 / 58

Hardware Setup

Phantom	Probe	Calibration Date	DAE	Calibration Date
Twin-SAM V8.0 (30deg probe tilt)	EX3DV4 - SN7641	2025-06-26	DAE4 Sn1210	2025-11-28

SAR Measurement Results

Scan Name	psSAR1g [W/kg]	psSAR10g [W/kg]
Combined Zoom Scan	0.967	0.517

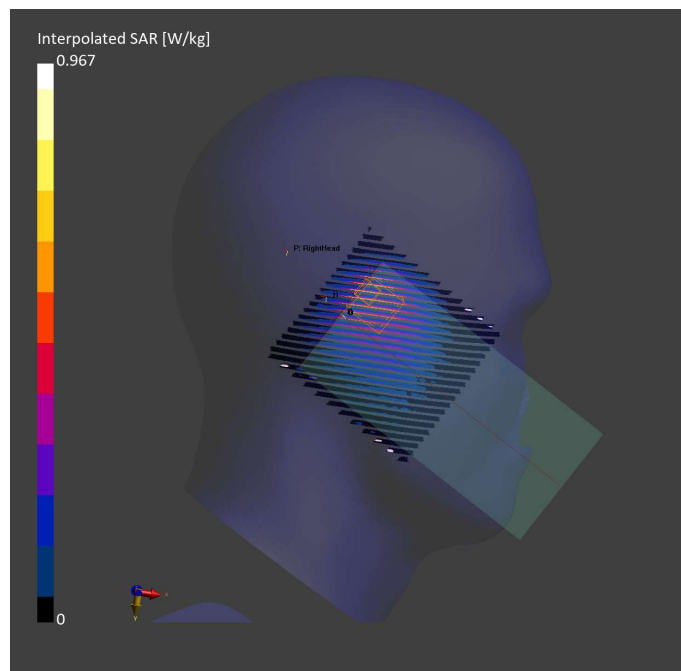

Case 3_Measurement Report for Multi-TX Evaluator

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	152.0 x 72.0 x 8.0	Phone

Exposure Conditions


Phantom Section	Position	Test Distance [mm]	Band	Group	UID	Rev	Frequency [MHz]	Channel Number
Right Head HSL	CHEEK	0.00	WLAN 2.4GHz	WLAN	10012	CAB	2462.000	11
Right Head HSL	CHEEK	0.00	WLAN 5GHz	WLAN	10544	AAC	5290.000	58
Right Head HSL	CHEEK	0.00	Band n48	5G NR FR1 TDD	10903	AAD	3624.985	641666
Right Head HSL	CHEEK	0.00	WLAN 5GHz / WLAN 2.4GHz	WLAN / WLAN	10544 / 10012	AAC / CAB	5290.000 / 2462.000	58 / 11

Hardware Setup

Phantom	Probe	Calibration Date	DAE	Calibration Date
Twin-SAM V8.0 (30deg probe tilt)	EX3DV4 - SN7641	2025-06-26	DAE4 Sn1210	2025-11-28

SAR Measurement Results

Scan Name	psSAR1g [W/kg]	psSAR10g [W/kg]
Combined Zoom Scan	0.923	0.381

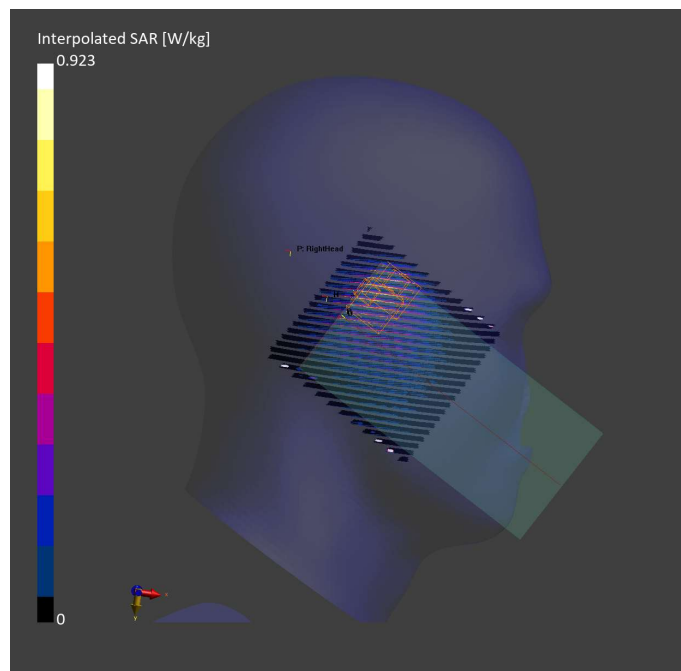

Case 4_Measurement Report for Multi-TX Evaluator

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	152.0 x 72.0 x 8.0	Phone

Exposure Conditions


Phantom Section	Position	Test Distance [mm]	Band	Group	UID	Rev	Frequency [MHz]	Channel Number
Right Head HSL	CHEEK	0.00	WLAN 5GHz	WLAN	10544	AAC	5290.000	58
Right Head HSL	CHEEK	0.00	Band n48	5G NR FR1 TDD	10903	AAD	3624.985	641666
Right Head HSL	CHEEK	0.00	ISM 2.4 GHz Band	Bluetooth	10032	CAA	2441.000	39
Right Head HSL	CHEEK	0.00	ISM 2.4 GHz Band / WLAN 5GHz	Bluetooth / WLAN	10032 / 10544	CAA / AAC	2441.000 / 5290.000	39 / 58

Hardware Setup

Phantom	Probe	Calibration Date	DAE	Calibration Date
Twin-SAM V8.0 (30deg probe tilt)	EX3DV4 - SN7641	2025-06-26	DAE4 Sn1210	2025-11-28

SAR Measurement Results

Scan Name	psSAR1g [W/kg]	psSAR10g [W/kg]
Combined Zoom Scan	0.934	0.381

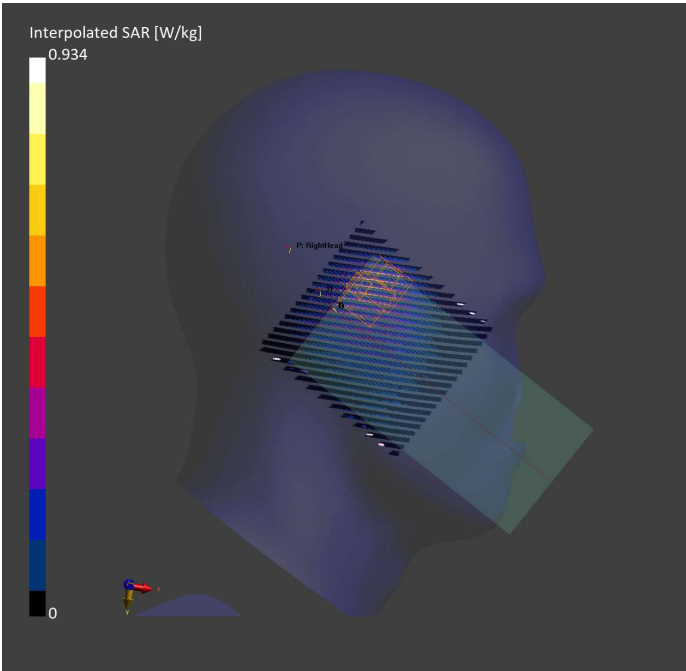

Case 5_Measurement Report for Multi-TX Evaluator

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	152.0 x 72.0 x 8.0	Phone

Exposure Conditions


Phantom Section	Position	Test Distance [mm]	Band	Group	UID	Rev	Frequency [MHz]	Channel Number
Right Head HSL	CHEEK	0.00	WLAN 2.4GHz	WLAN	10012	CAB	2462.000	11
Right Head HSL	CHEEK	0.00	WLAN 5GHz	WLAN	10544	AAC	5290.000	58
Right Head HSL	CHEEK	0.00	Band n41	5G NR FR1 TDD	10866	AAF	2592.990	518598
Right Head HSL	CHEEK	0.00	WLAN 5GHz / Band n41	WLAN / 5G NR FR1 TDD	10544 / 10866	AAC / AAF	5290.000 / 2592.990	58 / 518598

Hardware Setup

Phantom	Probe	Calibration Date	DAE	Calibration Date
Twin-SAM V8.0 (30deg probe tilt)	EX3DV4 - SN7641	2025-06-26	DAE4 Sn1210	2025-11-28

SAR Measurement Results

Scan Name	psSAR1g [W/kg]	psSAR10g [W/kg]
Combined Zoom Scan	0.911	0.422

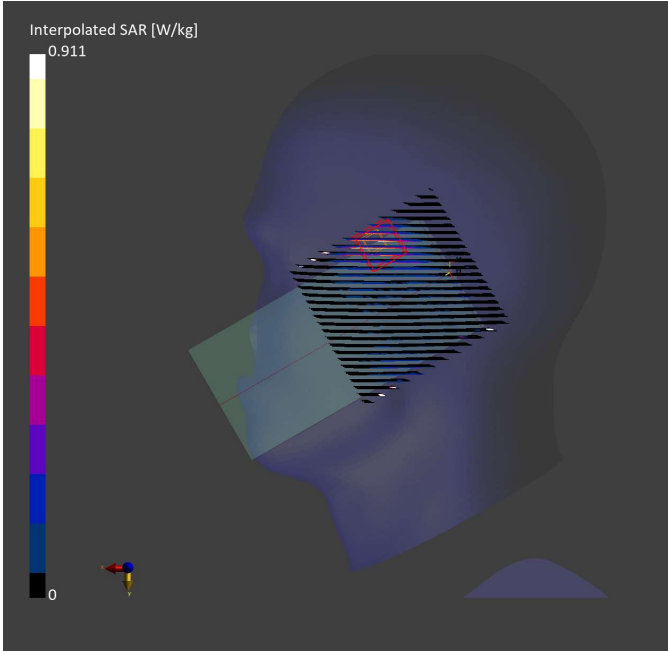

Case 6_Measurement Report for Multi-TX Evaluator

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	152.0 x 72.0 x 8.0	Phone

Exposure Conditions


Phantom Section	Position	Test Distance [mm]	Band	Group	UID	Rev	Frequency [MHz]	Channel Number
Right Head HSL	CHEEK	0.00	WLAN 5GHz	WLAN	10544	AAC	5290.000	58
Right Head HSL	CHEEK	0.00	Band n41	5G NR FR1 TDD	10866	AAF	2592.990	518598
Right Head HSL	CHEEK	0.00	ISM 2.4 GHz Band	Bluetooth	10032	CAA	2441.000	39
Right Head HSL	CHEEK	0.00	WLAN 5GHz / ISM 2.4 GHz Band	WLAN / Bluetooth	10544 / 10032	AAC / CAA	5290.000 / 2441.000	58 / 39

Hardware Setup

Phantom	Probe	Calibration Date	DAE	Calibration Date
Twin-SAM V8.0 (30deg probe tilt)	EX3DV4 - SN7641	2025-06-26	DAE4 Sn1210	2025-11-28

SAR Measurement Results

Scan Name	psSAR1g [W/kg]	psSAR10g [W/kg]
Combined Zoom Scan	0.917	0.421

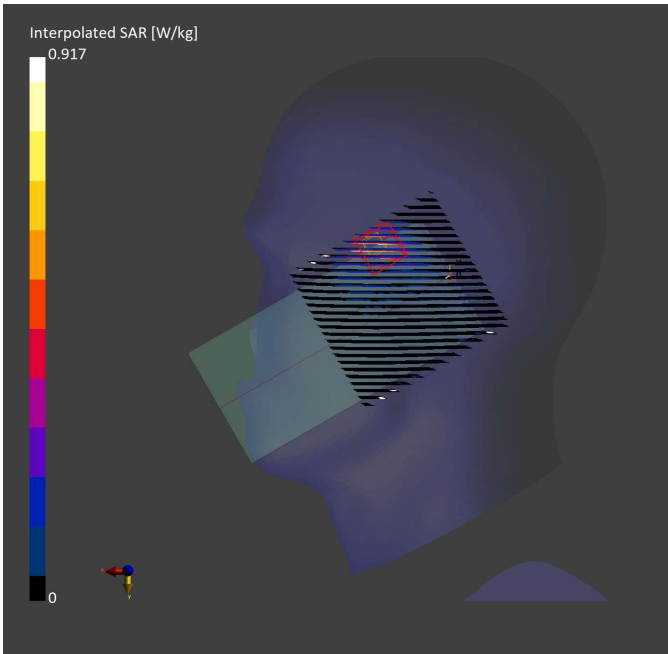

Case 7_Measurement Report for Multi-TX Evaluator

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	152.0 x 72.0 x 8.0	Phone

Exposure Conditions


Phantom Section	Position	Test Distance [mm]	Band	Group	UID	Rev	Frequency [MHz]	Channel Number
Left Head HSL	CHEEK	0.00	WLAN 2.4GHz	WLAN	10012	CAB	2462.000	11
Left Head HSL	CHEEK	0.00	WLAN 5GHz	WLAN	10544	AAC	5530.000	106
Left Head HSL	CHEEK	0.00	Band 26	LTE-FDD	10181	CAF	831.500	26865
Left Head HSL	CHEEK	0.00	WLAN 5GHz / Band 26	WLAN / LTE-FDD	10544 / 10181	AAC / CAF	5530.000 / 831.500	106 / 26865

Hardware Setup

Phantom	Probe	Calibration Date	DAE	Calibration Date
Twin-SAM V8.0 (30deg probe tilt)	EX3DV4 - SN7641	2025-06-26	DAE4 Sn1210	2025-11-28

SAR Measurement Results

Scan Name	psSAR1g [W/kg]	psSAR10g [W/kg]
Combined Zoom Scan	0.638	0.441

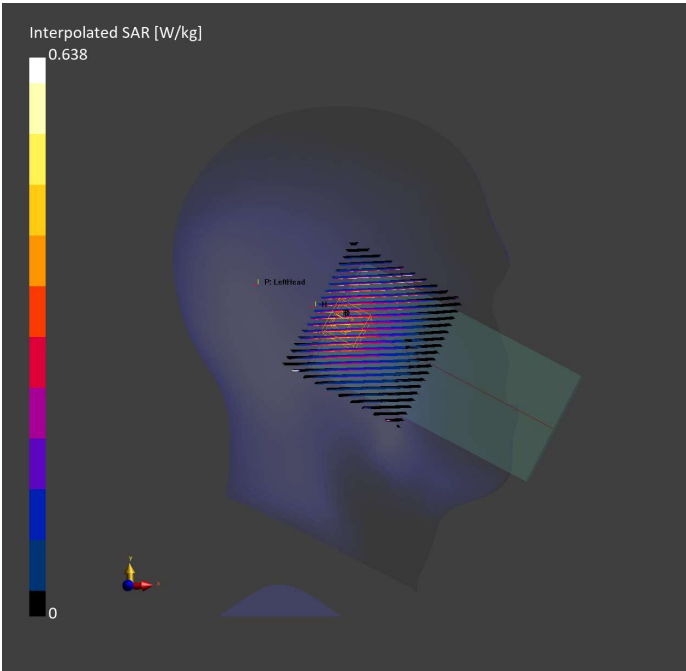

Case 8_Measurement Report for Multi-TX Evaluator

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	152.0 x 72.0 x 8.0	Phone

Exposure Conditions


Phantom Section	Position	Test Distance [mm]	Band	Group	UID	Rev	Frequency [MHz]	Channel Number
Left Head HSL	CHEEK	0.00	WLAN 5GHz	WLAN	10544	AAC	5530.000	106
Left Head HSL	CHEEK	0.00	Band 26	LTE-FDD	10181	CAF	831.500	26865
Left Head HSL	CHEEK	0.00	ISM 2.4 GHz Band	Bluetooth	10032	CAA	2441.000	39
Left Head HSL	CHEEK	0.00	ISM 2.4 GHz Band / WLAN 5GHz	Bluetooth / WLAN	10032 / 10544	CAA / AAC	2441.000 / 5530.000	39 / 106

Hardware Setup

Phantom	Probe	Calibration Date	DAE	Calibration Date
Twin-SAM V8.0 (30deg probe tilt)	EX3DV4 - SN7641	2025-06-26	DAE4 Sn1210	2025-11-28

SAR Measurement Results

Scan Name	psSAR1g [W/kg]	psSAR10g [W/kg]
Combined Zoom Scan	0.644	0.442

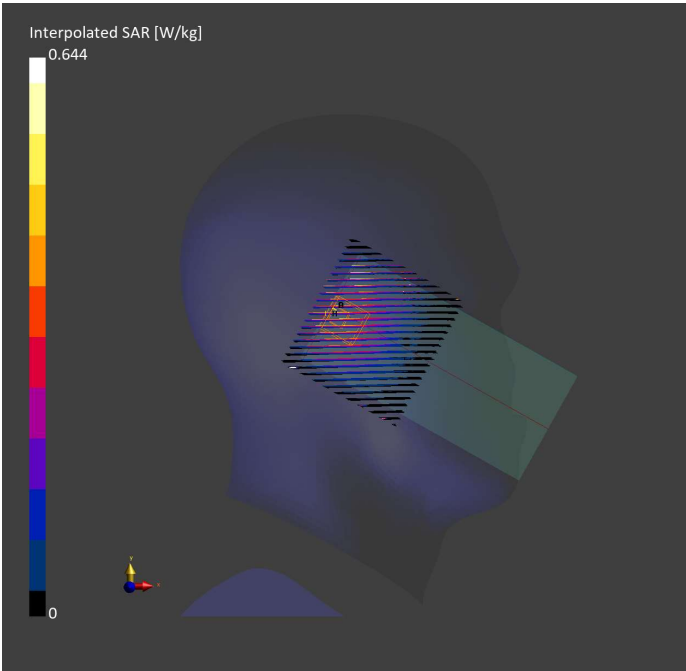

Case 9_Measurement Report for Multi-TX Evaluator

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	152.0 x 72.0 x 8.0	Phone

Exposure Conditions


Phantom Section	Position	Test Distance [mm]	Band	Group	UID	Rev	Frequency [MHz]	Channel Number
Left Head HSL	CHEEK	0.00	WLAN 2.4GHz	WLAN	10012	CAB	2462.000	11
Left Head HSL	CHEEK	0.00	WLAN 5GHz	WLAN	10544	AAC	5530.000	106
Left Head HSL	CHEEK	0.00	Band n77	5G NR FR1 TDD	10866	AAF	3840.000	656000
Left Head HSL	CHEEK	0.00	WLAN 5GHz / Band n77	WLAN / 5G NR FR1 TDD	10544 / 10866	AAC / AAF	5530.000 / 3840.000	106 / 656000

Hardware Setup

Phantom	Probe	Calibration Date	DAE	Calibration Date
Twin-SAM V8.0 (30deg probe tilt)	EX3DV4 - SN7641	2025-06-26	DAE4 Sn1210	2025-11-28

SAR Measurement Results

Scan Name	psSAR1g [W/kg]	psSAR10g [W/kg]
Combined Zoom Scan	0.755	0.374

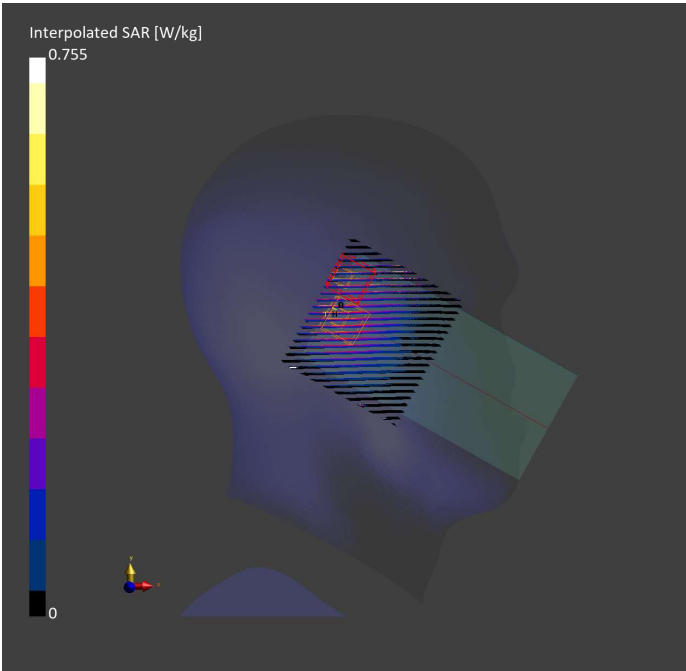

Case 10_Measurement Report for Multi-TX Evaluator

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	152.0 x 72.0 x 8.0	Phone

Exposure Conditions


Phantom Section	Position	Test Distance [mm]	Band	Group	UID	Rev	Frequency [MHz]	Channel Number
Left Head HSL	CHEEK	0.00	WLAN 5GHz	WLAN	10544	AAC	5530.000	106
Left Head HSL	CHEEK	0.00	ISM 2.4 GHz	Bluetooth	10032	CAA	2441.000	39
Left Head HSL	CHEEK	0.00	Band n77	5G NR FR1	10866	AAF	3840.000	656000
Left Head HSL	CHEEK	0.00	ISM 2.4 GHz	Bluetooth /	10032 /	CAA / AAC	2441.000 /	39 / 106
			Band / WLAN	WLAN	10544		5530.000	
			5GHz					

Hardware Setup

Phantom	Probe	Calibration Date	DAE	Calibration Date
Twin-SAM V8.0 (30deg probe tilt)	EX3DV4 - SN7641	2025-06-26	DAE4 Sn1210	2025-11-28

SAR Measurement Results

Scan Name	psSAR1g [W/kg]	psSAR10g [W/kg]
Combined Zoom Scan	0.763	0.375

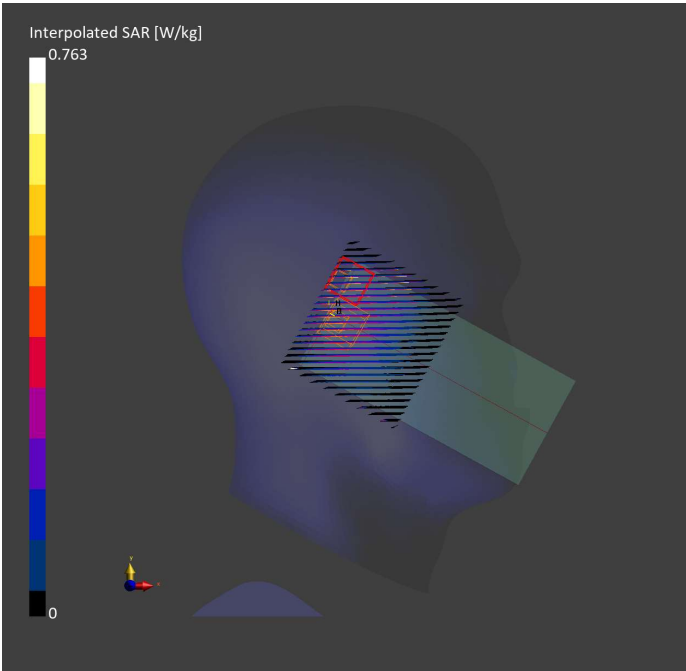

Case 11_Measurement Report for Multi-TX Evaluator

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	152.0 x 72.0 x 8.0	Phone

Exposure Conditions


Phantom Section	Position	Test Distance [mm]	Band	Group	UID	Rev	Frequency [MHz]	Channel Number
Left Head HSL	CHEEK	0.00	WLAN 2.4GHz	WLAN	10012	CAB	2462.000	11
Left Head HSL	CHEEK	0.00	WLAN 5GHz	WLAN	10544	AAC	5530.000	106
Left Head HSL	CHEEK	0.00	Band 48	LTE-TDD	10435	AAG	3690.000	56640
Left Head HSL	CHEEK	0.00	WLAN 5GHz / WLAN 2.4GHz	WLAN / WLAN	10544 / 10012	AAC / CAB	5530.000 / 2462.000	106 / 11

Hardware Setup

Phantom	Probe	Calibration Date	DAE	Calibration Date
Twin-SAM V8.0 (30deg probe tilt)	EX3DV4 - SN7641	2025-06-26	DAE4 Sn1210	2025-11-28

SAR Measurement Results

Scan Name	psSAR1g [W/kg]	psSAR10g [W/kg]
Combined Zoom Scan	0.947	0.393

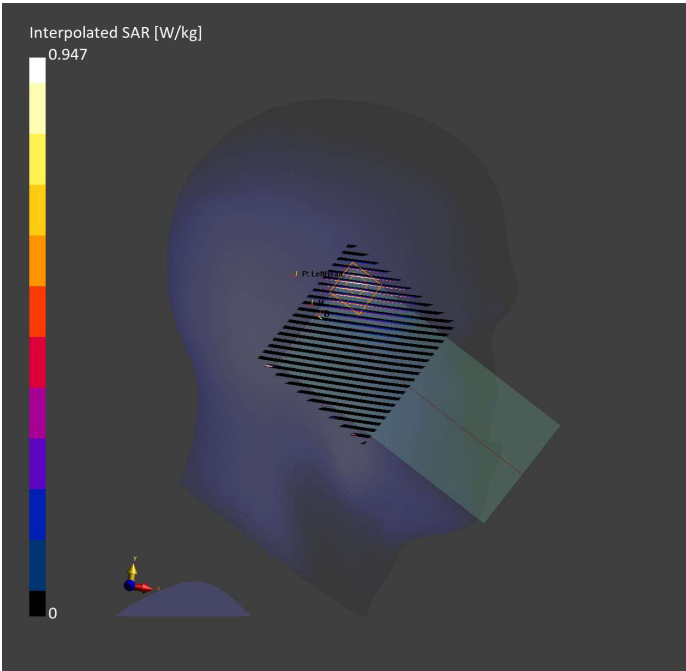

Case 12_Measurement Report for Multi-TX Evaluator

Device under Test Properties

Model, Manufacturer	Dimensions [mm]	DUT Type
Device,	152.0 x 72.0 x 8.0	Phone

Exposure Conditions

Phantom Section	Position	Test Distance [mm]	Band	Group	UID	Rev	Frequency [MHz]	Channel Number
Left Head HSL	CHEEK	0.00	WLAN 5GHz	WLAN	105	AAC	5530.000	106
					44			
Left Head HSL	CHEEK	0.00	ISM 2.4 GHz	Bluetooth	100	CAA	2441.000	39
			Band		32			
Left Head HSL	CHEEK	0.00	Band 48	LTE-TDD	104	AAG	3690.000	56640
					35			
Left Head HSL	CHEEK	0.00	WLAN 5GHz /	WLAN / 5G	105	AAC / AAF	5530.000 /	106 / 56640
			Band n77	NR FR1	44 /		3690.000	
				TDD	108			
					66			

Hardware Setup

Phantom	Probe	Calibration Date	DAE	Calibration Date
Twin-SAM V8.0 (30deg probe tilt)	EX3DV4 - SN7641	2025-06-26	DAE4 Sn1210	2025-11-28

SAR Measurement Results

Scan Name	psSAR1g [W/kg]	psSAR10g [W/kg]
Combined Zoom Scan	0.924	0.381

