

01_GSM850_GPRS 4 Tx slots_Left Cheek_0mm_Ch189

Communication System: GPRS-FDD; Frequency: 836.400 MHz

Medium: HSL_600-7200_260703 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.883$ S/m; $\epsilon_r = 43.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(9.51, 10.14, 9.57); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.287 W/kg; SAR (10g) = 0.197 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.07 dB

SAR (1g) = 0.323 W/kg; SAR (8g) = 0.262 W/kg; SAR (10g) = 0.253 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 93.7 %

TSL Correction: Positive only

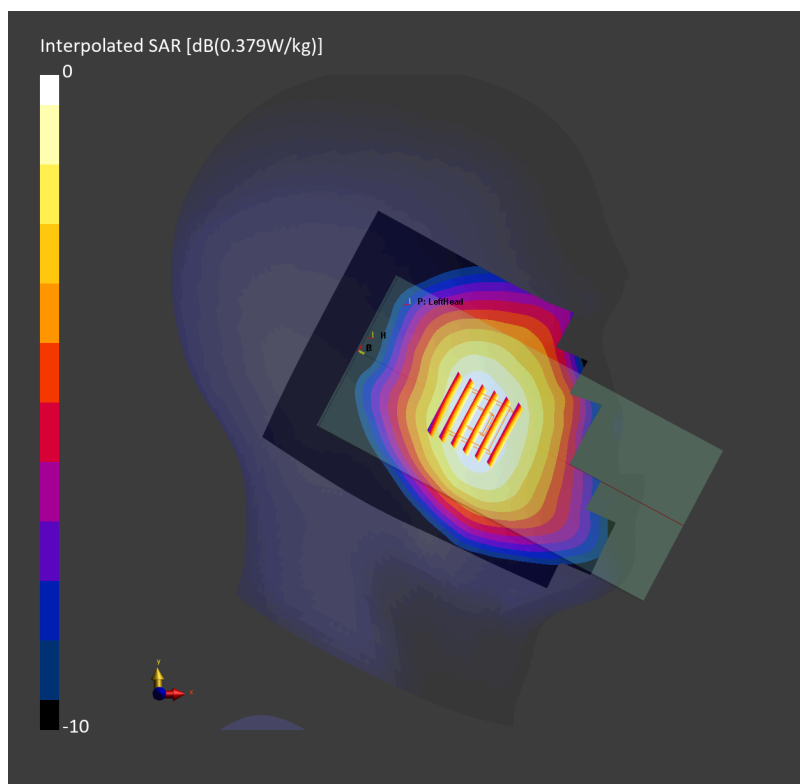

02_GSM1900_GPRS 4 Tx slots_Right Cheek_0mm_Ch661

Communication System: GPRS-FDD; Frequency: 1850.200 MHz

Medium: HSL_600-7200_260702 Medium parameters used: $f = 1850.200$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 41.2$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.64, 8.14, 7.69); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.153 W/kg; SAR (10g) = 0.088 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.11 dB

SAR (1g) = 0.175 W/kg; SAR (8g) = 0.118 W/kg; SAR (10g) = 0.111 W/kg

Smallest distance from peaks to all points 3 dB below = 12.7 mm

Ratio of SAR at M2 to SAR at M1 = 89.7 %

TSL Correction: Positive only

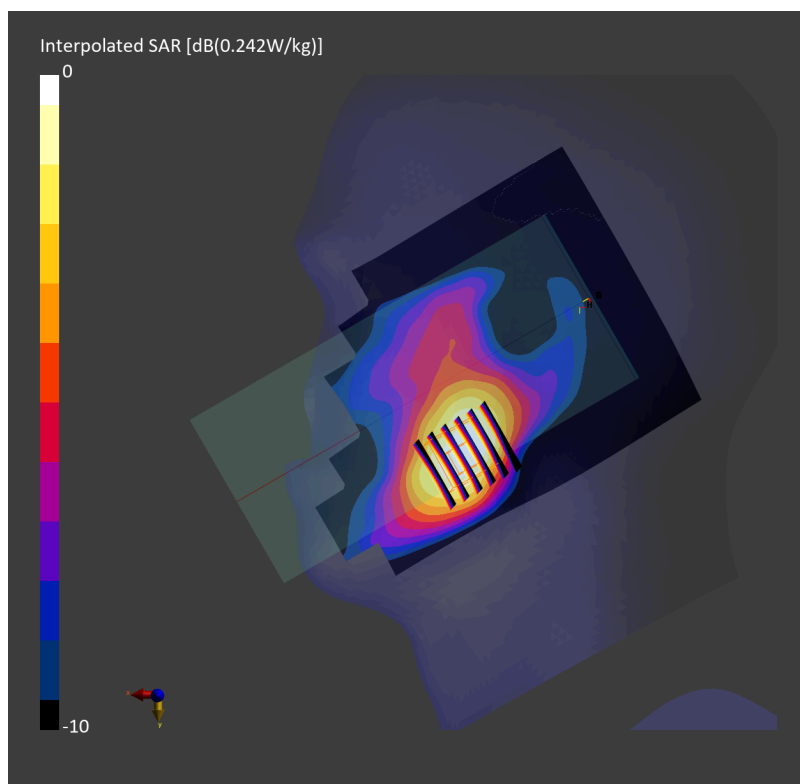

03_WCDMA II_RMC 12.2Kbps_Left Cheek_0mm_Ch9400

Communication System: UMTS-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260702 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 41.2$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.64, 8.14, 7.69); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.109 W/kg; SAR (10g) = 0.065 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.02 dB

SAR (1g) = 0.121 W/kg; SAR (8g) = 0.083 W/kg; SAR (10g) = 0.078 W/kg

Smallest distance from peaks to all points 3 dB below = 16.6 mm

Ratio of SAR at M2 to SAR at M1 = 88.8 %

TSL Correction: Positive only

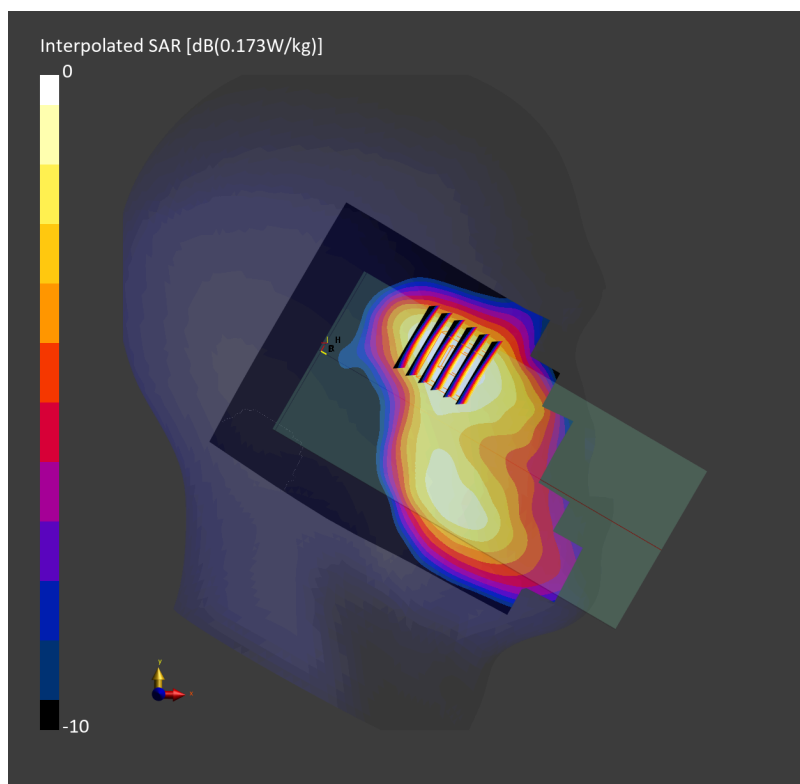

04_WCDMA IV_RMC 12.2Kbps_Right Cheek_0mm_Ch1413

Communication System: UMTS-FDD; Frequency: 1732.600 MHz

Medium: HSL_600-7200_260702 Medium parameters used: $f = 1732.600$ MHz; $\sigma = 1.29$ S/m; $\epsilon_r = 41.4$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.89, 8.41, 7.94); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.158 W/kg; SAR (10g) = 0.092 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.15 dB

SAR (1g) = 0.178 W/kg; SAR (8g) = 0.119 W/kg; SAR (10g) = 0.112 W/kg

Smallest distance from peaks to all points 3 dB below = 13.1 mm

Ratio of SAR at M2 to SAR at M1 = 88.4 %

TSL Correction: Positive only

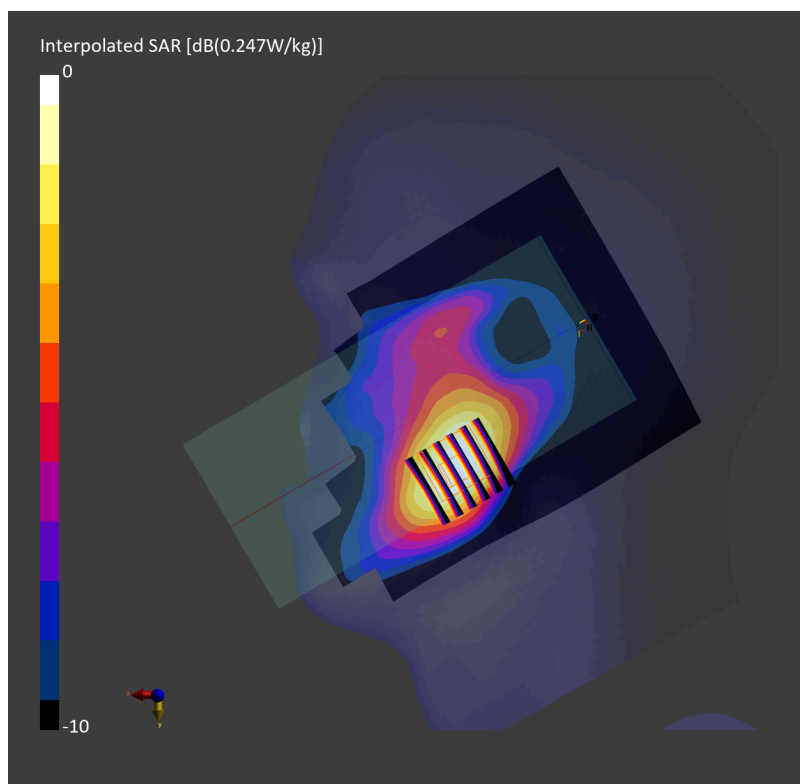

05_WCDMA V_RMC 12.2Kbps_Right Cheek_0mm_Ch4182

Communication System: UMTS-FDD; Frequency: 836.400 MHz

Medium: HSL_600-7200_260703 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.883$ S/m; $\epsilon_r = 43.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(9.51, 10.14, 9.57); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.204 W/kg; SAR (10g) = 0.139 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.07 dB

SAR (1g) = 0.224 W/kg; SAR (8g) = 0.181 W/kg; SAR (10g) = 0.176 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 92.9 %

TSL Correction: Positive only

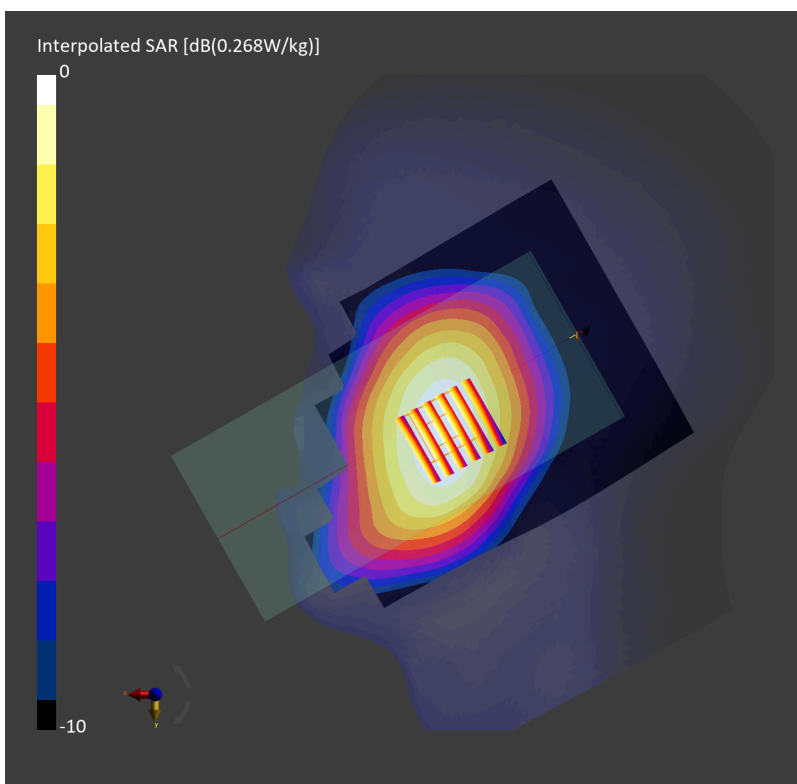

06_LTE Band 2_20M_QPSK_1_0_Right Cheek_0mm_Ch18900

Communication System: LTE-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260702 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 41.2$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.64, 8.14, 7.69); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.132 W/kg; SAR (10g) = 0.076 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.05 dB

SAR (1g) = 0.145 W/kg; SAR (8g) = 0.096 W/kg; SAR (10g) = 0.090 W/kg

Smallest distance from peaks to all points 3 dB below = 13.0 mm

Ratio of SAR at M2 to SAR at M1 = 88.1 %

TSL Correction: Positive only

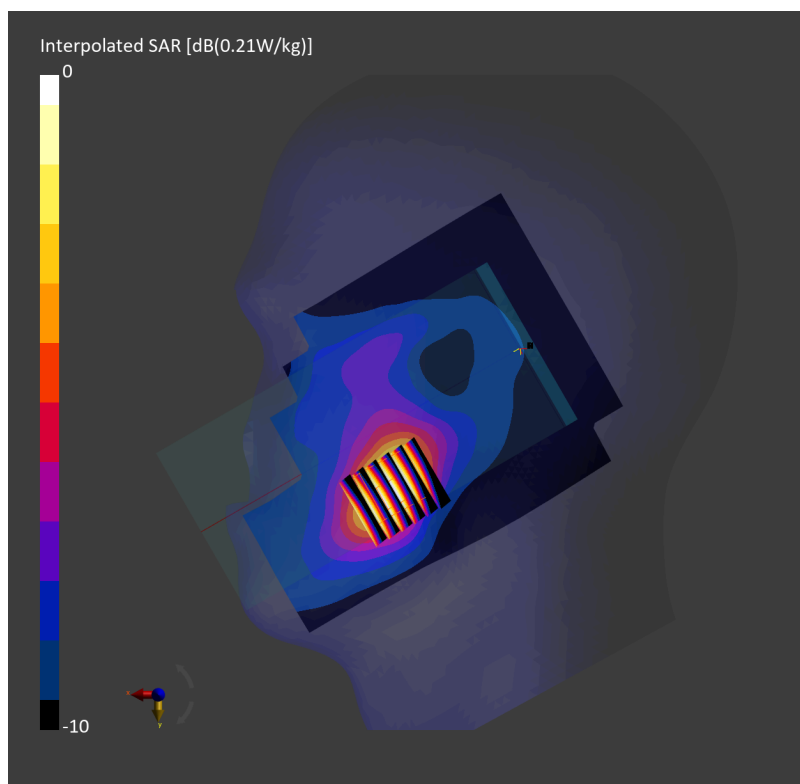

07_LTE Band 4_20M_QPSK_50_0_Right Tilted_0mm_Ch20175

Communication System: LTE-FDD; Frequency: 1732.500 MHz

Medium: HSL_600-7200_260702 Medium parameters used: $f = 1732.500$ MHz; $\sigma = 1.29$ S/m; $\epsilon_r = 41.4$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.89, 8.41, 7.94); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10297-AAE

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.670 W/kg; SAR (10g) = 0.336 W/kg;

TSL Correction: Positive only

Zoom Scan (36.8 mm x 36.8 mm x 33.4 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm


Power Drift = -0.02 dB

SAR (1g) = 0.803 W/kg; SAR (8g) = 0.401 W/kg; SAR (10g) = 0.363 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 85.7 %

TSL Correction: Positive only

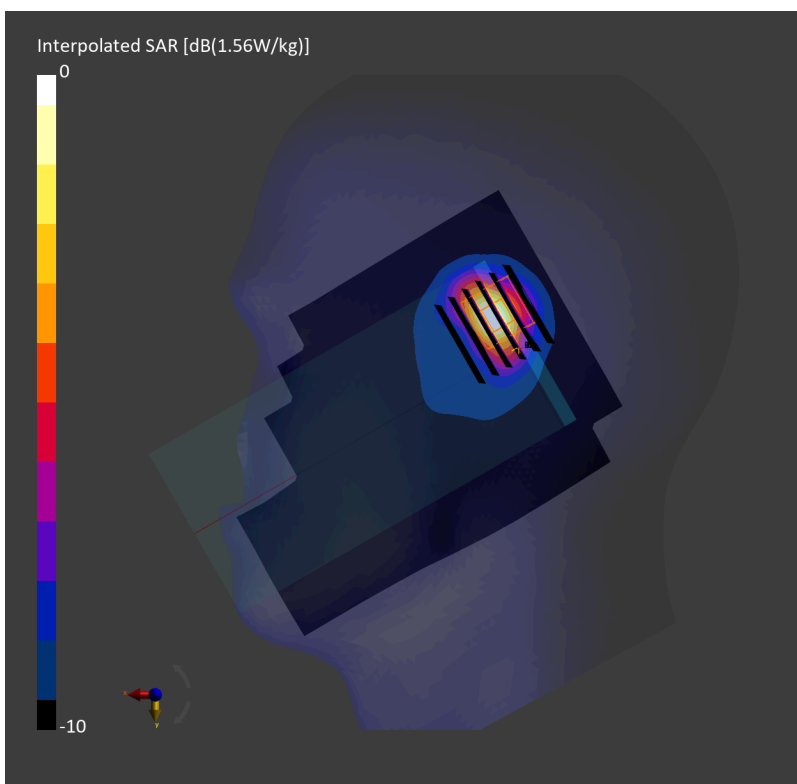

08_LTE Band 7_20M_QPSK_1_0_Right Tilted_0mm_Ch20850

Communication System: LTE-FDD; Frequency: 2510.000 MHz

Medium: HSL_600-7200_260701 Medium parameters used: $f = 2510.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 40.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.15, 7.62, 7.2); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.578 W/kg; SAR (10g) = 0.241 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.00 dB

SAR (1g) = 0.583 W/kg; SAR (8g) = 0.269 W/kg; SAR (10g) = 0.241 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.5 %

TSL Correction: Positive only

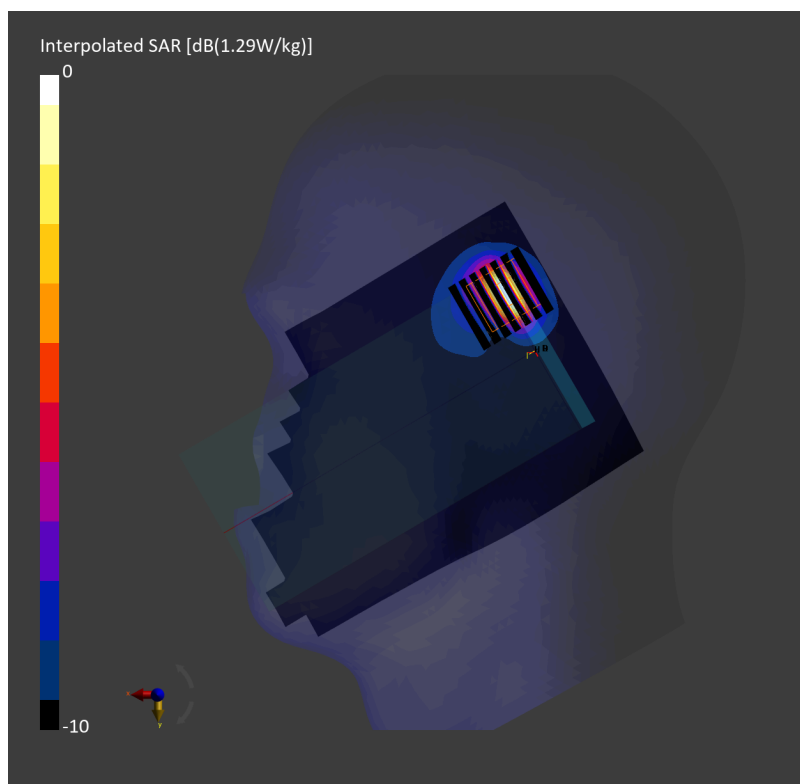

09_LTE Band 12_10M_QPSK_1_0_Right Cheek_0mm_Ch23095

Communication System: LTE-FDD; Frequency: 707.500 MHz

Medium: HSL_600-7200_260703 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.843$ S/m; $\epsilon_r = 43.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(9.53, 10.16, 9.59); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.123 W/kg; SAR (10g) = 0.085 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.02 dB

SAR (1g) = 0.134 W/kg; SAR (8g) = 0.110 W/kg; SAR (10g) = 0.106 W/kg

Smallest distance from peaks to all points 3 dB below = > 15.0 mm

Ratio of SAR at M2 to SAR at M1 = 94.2 %

TSL Correction: Positive only

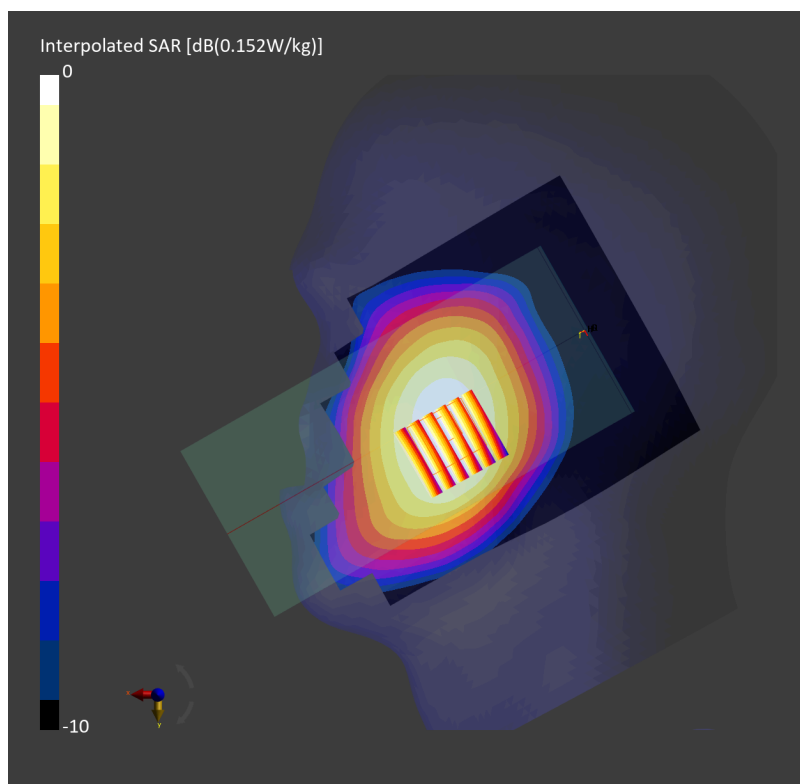

10_LTE Band 13_10M_QPSK_1_0_Right Cheek_0mm_Ch23230

Communication System: LTE-FDD; Frequency: 782.000 MHz

Medium: HSL_600-7200_260826 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.891$ S/m; $\epsilon_r = 42.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(9.98, 9.68, 9.75); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE3 Sn577; Calibrated: 2026-03-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2055; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.484 W/kg; SAR (10g) = 0.326 W/kg;

TSL Correction: Positive only

Zoom Scan (48.0 mm x 48.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.00 dB

SAR (1g) = 0.488 W/kg; SAR (8g) = 0.347 W/kg; SAR (10g) = 0.330 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 81.6 %

TSL Correction: Positive only

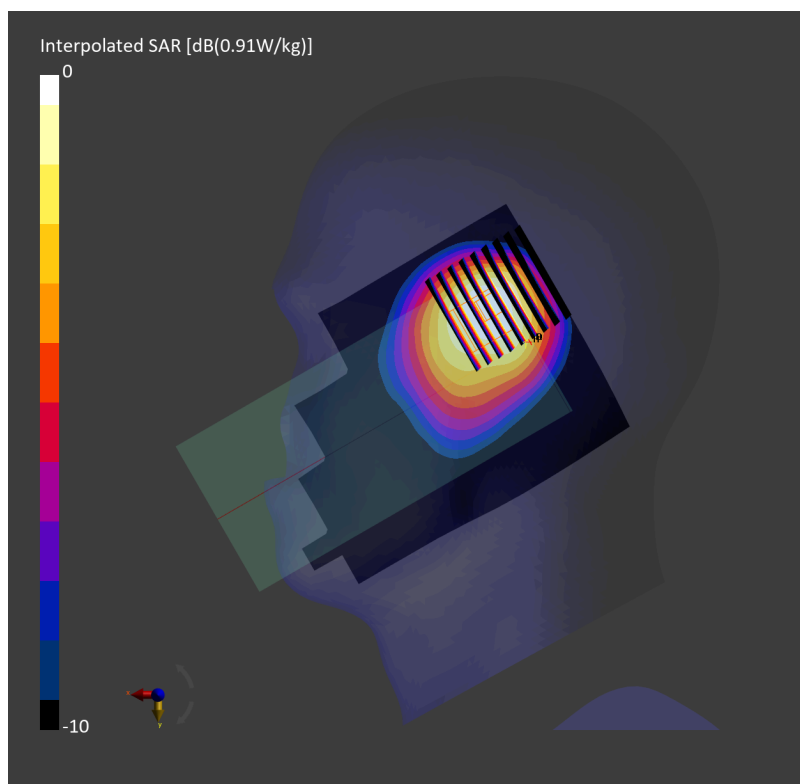

11_LTE Band 25_20M_QPSK_1_0_Right Tilted_0mm_Ch26590

Communication System: LTE-FDD; Frequency: 1905.000 MHz

Medium: HSL_600-7200_260702 Medium parameters used: $f = 1905.000$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 41.3$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.64, 8.14, 7.69); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.643 W/kg; SAR (10g) = 0.300 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 33.4 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.01 dB

SAR (1g) = 0.807 W/kg; SAR (8g) = 0.406 W/kg; SAR (10g) = 0.367 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 85.7 %

TSL Correction: Positive only

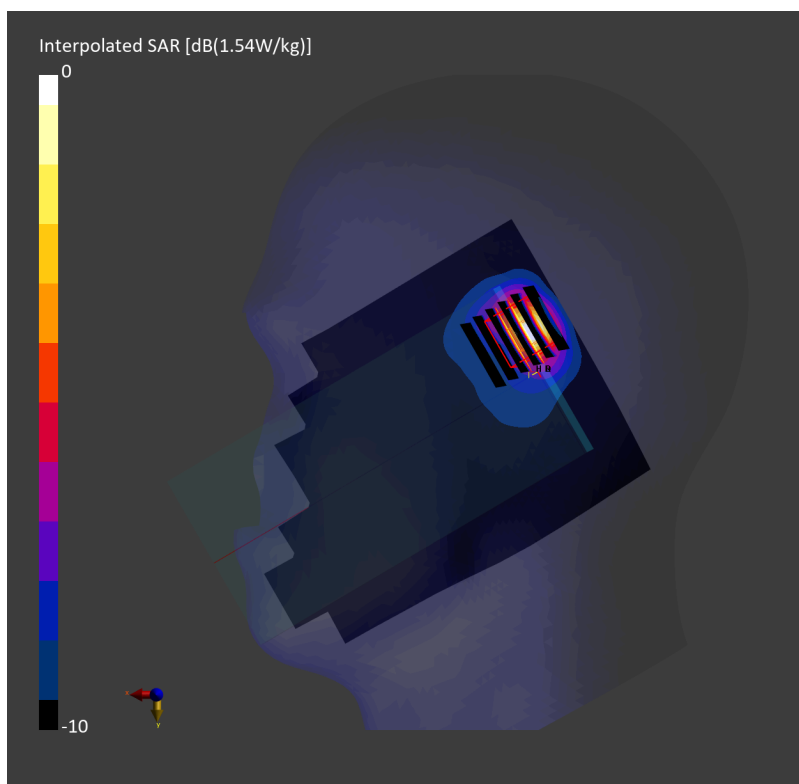

12_LTE Band 26_15M_QPSK_1_0_Right Cheek_0mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz

Medium: HSL_600-7200_260703 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.881$ S/m; $\epsilon_r = 43.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(9.51, 10.14, 9.57); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.552 W/kg; SAR (10g) = 0.364 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.533 W/kg; SAR (8g) = 0.346 W/kg; SAR (10g) = 0.319 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 87.6 %

TSL Correction: Positive only

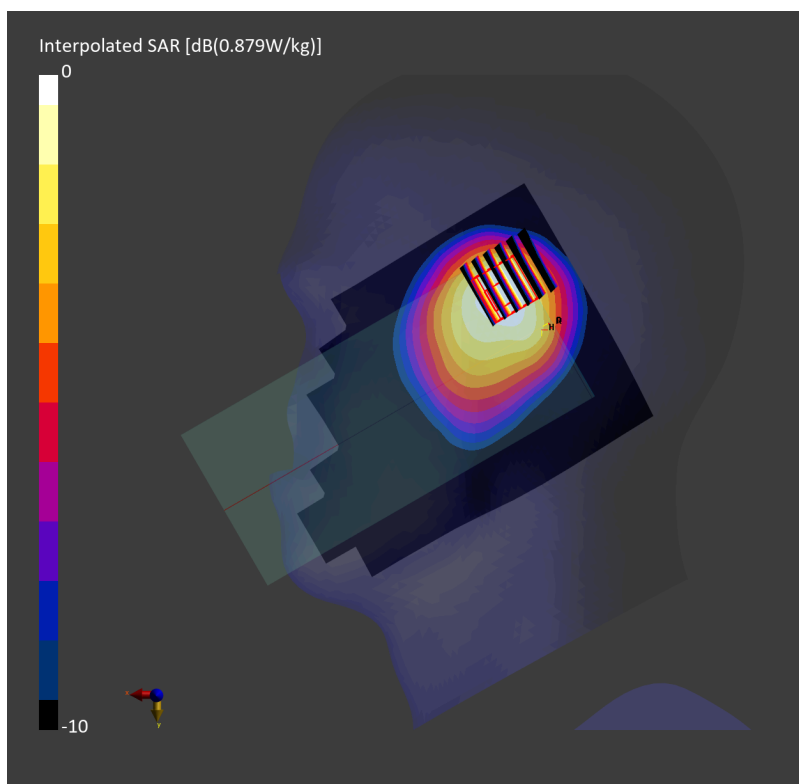

13_LTE Band 66_20M_QPSK_1_0_Right Tilted_0mm_Ch132322

Communication System: LTE-FDD; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260702 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.30$ S/m; $\epsilon_r = 41.4$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.89, 8.41, 7.94); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.396 W/kg; SAR (10g) = 0.214 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.548 W/kg; SAR (8g) = 0.278 W/kg; SAR (10g) = 0.253 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 82.2 %

TSL Correction: Positive only

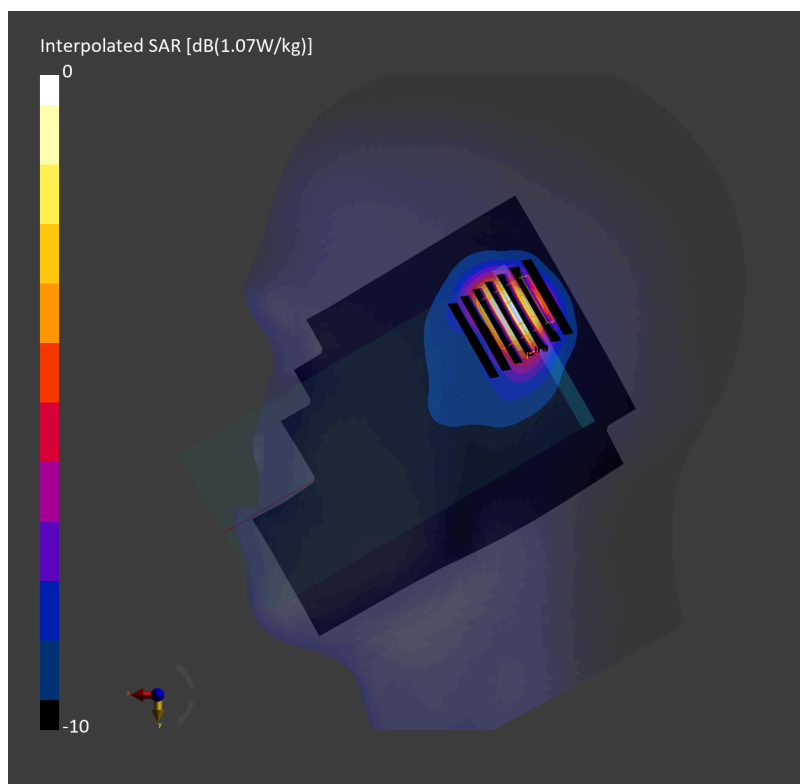

14_LTE Band 38_20M_QPSK_1_0_Left Cheek_0mm_Ch38000

Communication System: LTE-TDD; Frequency: 2595.000 MHz

Medium: HSL_600-7200_260706 Medium parameters used: $f = 2595.000$ MHz; $\sigma = 2.01$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.32, 6.8, 7.27); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.214 W/kg; SAR (10g) = 0.107 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.16 dB

SAR (1g) = 0.221 W/kg; SAR (8g) = 0.125 W/kg; SAR (10g) = 0.115 W/kg

Smallest distance from peaks to all points 3 dB below = 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 83.9 %

TSL Correction: Positive only

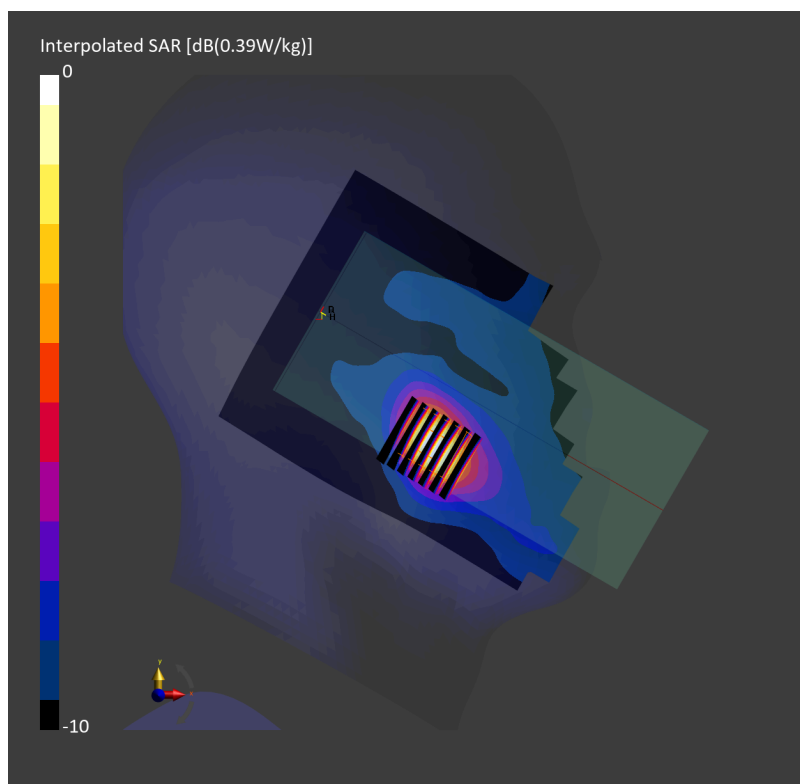

15_LTE Band 41_20M_QPSK_1_0_Right Tilted_0mm_Ch39750

Communication System: LTE-TDD; Frequency: 2506.000 MHz

Medium: HSL_600-7200_260701 Medium parameters used: $f = 2506.000$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 40.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.15, 7.62, 7.2); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.550 W/kg; SAR (10g) = 0.247 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.06 dB

SAR (1g) = 0.586 W/kg; SAR (8g) = 0.271 W/kg; SAR (10g) = 0.243 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 80.5 %

TSL Correction: Positive only

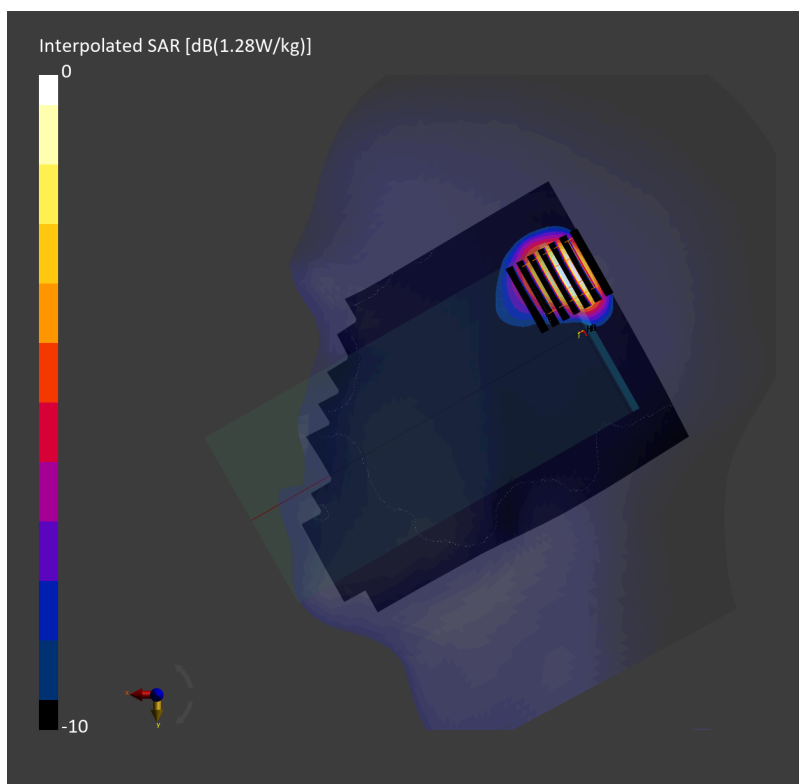

16_LTE Band 42_20M_QPSK_1_0_Left Tilted_0mm_Ch42590

Communication System: LTE-TDD; Frequency: 3500.000 MHz

Medium: HSL_600-7200_260701 Medium parameters used: $f = 3500.000$ MHz; $\sigma = 2.68$ S/m; $\epsilon_r = 38.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(6.54, 6.97, 6.58); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.637 W/kg; SAR (10g) = 0.255 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.01 dB

SAR (1g) = 0.598 W/kg; SAR (8g) = 0.272 W/kg; SAR (10g) = 0.245 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 74.7 %

TSL Correction: Positive only

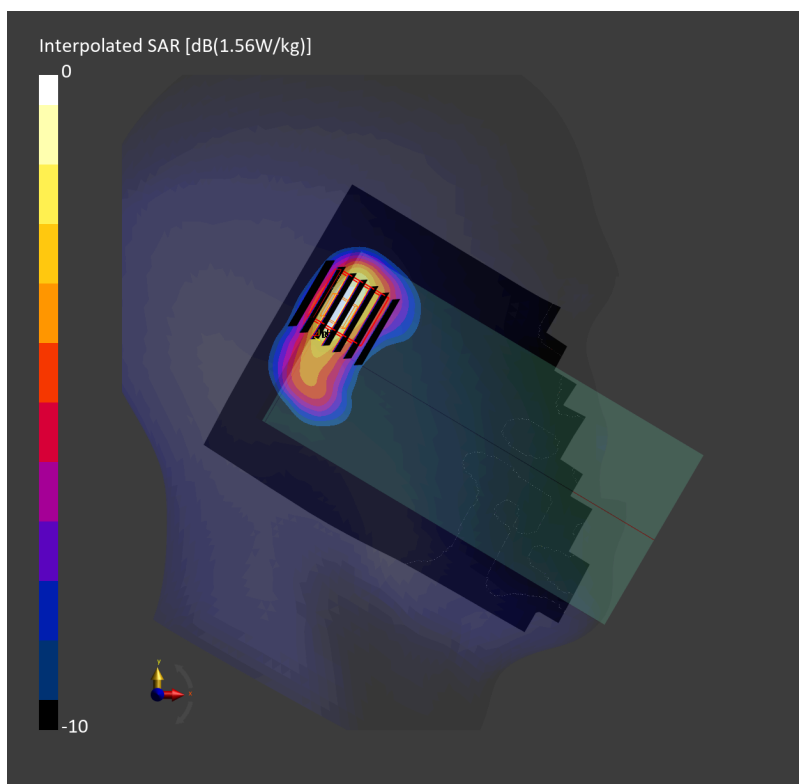

107_LTE Band 48_20M_QPSK_1_0_Left Tilted_0mm_Ch56640

Communication System: LTE-TDD; Frequency: 3690.000 MHz

Medium: HSL_600-7200_260826 Medium parameters used: $f = 3690.000$ MHz; $\sigma = 2.85$ S/m; $\epsilon_r = 37.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7700; ConvF(6.87, 6.66, 6.71); Calibrated: 2026-01-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE3 Sn577; Calibrated: 2026-03-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2055; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.570 W/kg; SAR (10g) = 0.215 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.03 dB

SAR (1g) = 0.568 W/kg; SAR (8g) = 0.242 W/kg; SAR (10g) = 0.215 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 73.5 %

TSL Correction: Positive only

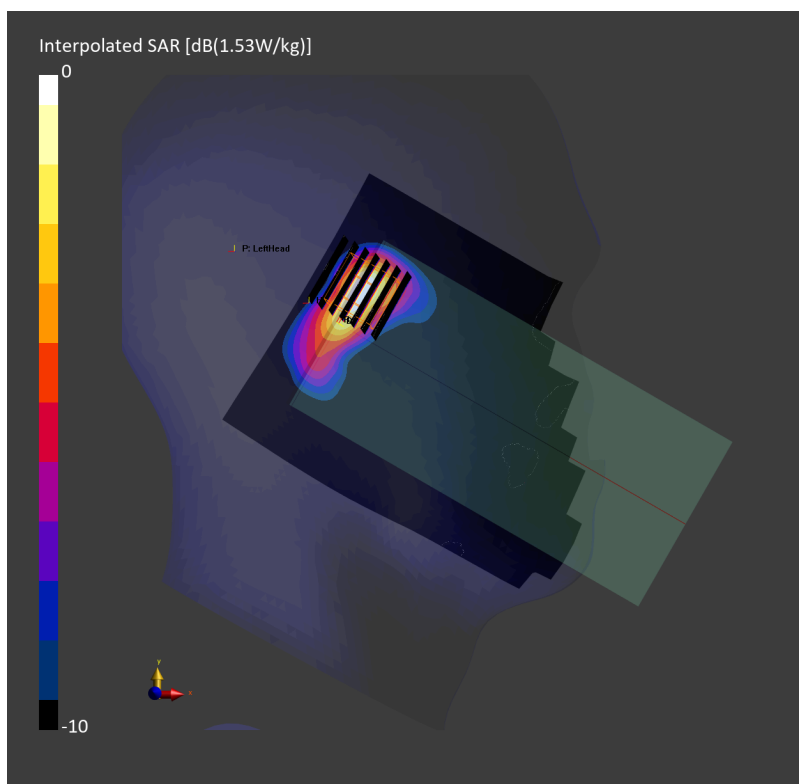

17_FR1 n2_40M_BPSK_108_54_Right Tilted_0mm_Ch376000

Communication System: 5G NR; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260702 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 41.2$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.64, 8.14, 7.69); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0 W/kg; SAR (10g) = 0 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 33.4 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.03 dB

SAR (1g) = 0.593 W/kg; SAR (8g) = 0.293 W/kg; SAR (10g) = 0.264 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 82.1 %

TSL Correction: Positive only

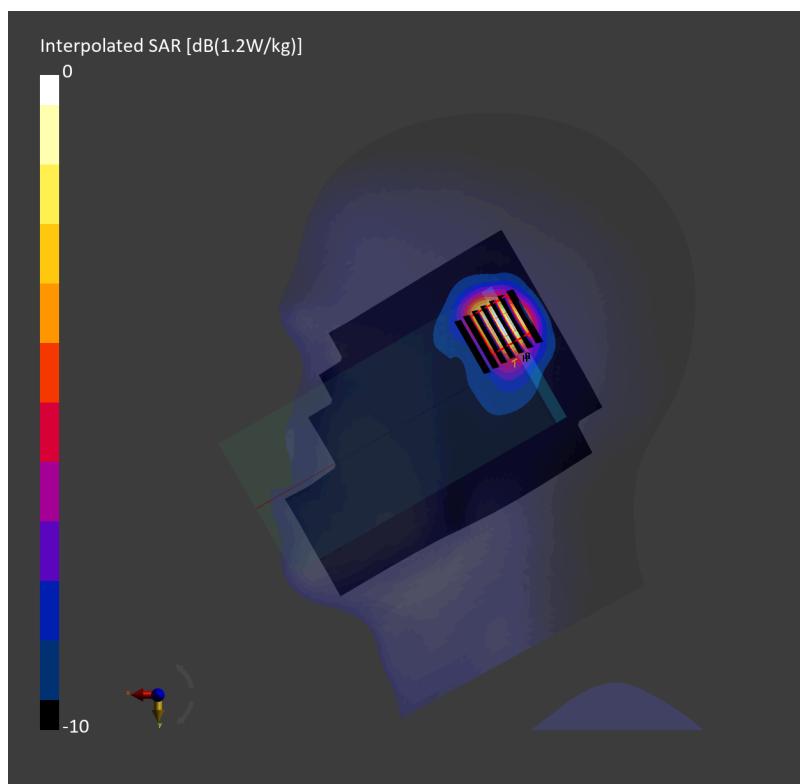

18_FR1 n7_50M_BPSK_1_1_Right Tilted_0mm_Ch507000

Communication System: 5G NR; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260701 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 40.3$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.15, 7.62, 7.2); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10943-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.671 W/kg; SAR (10g) = 0.274 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.667 W/kg; SAR (8g) = 0.301 W/kg; SAR (10g) = 0.269 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 77.7 %

TSL Correction: Positive only

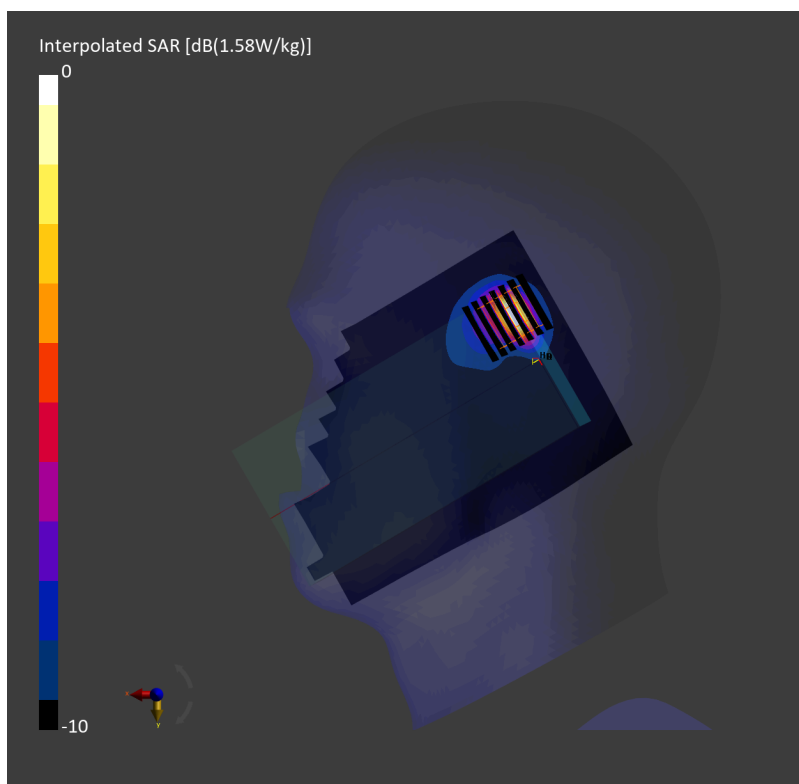

19_FR1 n26_20M_BPSK_50_28_Right Cheek_0mm_Ch166300

Communication System: 5G NR; Frequency: 831.500 MHz

Medium: HSL_600-7200_260703 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.881$ S/m; $\epsilon_r = 43.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(9.51, 10.14, 9.57); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.597 W/kg; SAR (10g) = 0.386 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.02 dB

SAR (1g) = 0.555 W/kg; SAR (8g) = 0.360 W/kg; SAR (10g) = 0.329 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 85.0 %

TSL Correction: Positive only

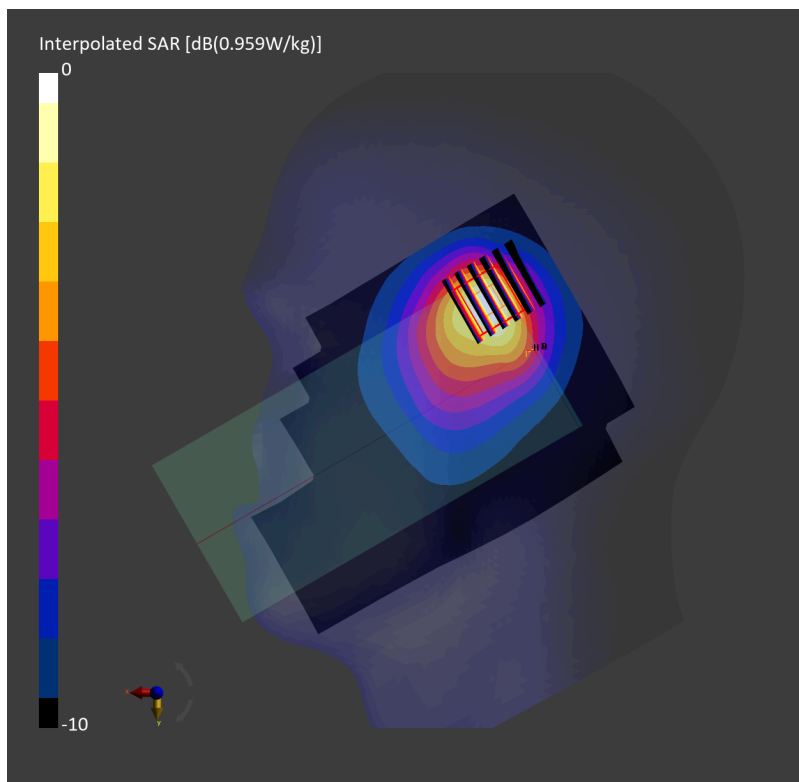

20_FR1 n66_45M_BPSK_120_60_Right Cheek_0mm_Ch349000

Communication System: 5G NR; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260702 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.30$ S/m; $\epsilon_r = 41.4$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.89, 8.41, 7.94); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.278 W/kg; SAR (10g) = 0.154 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.406 W/kg; SAR (8g) = 0.207 W/kg; SAR (10g) = 0.188 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 82.7 %

TSL Correction: Positive only

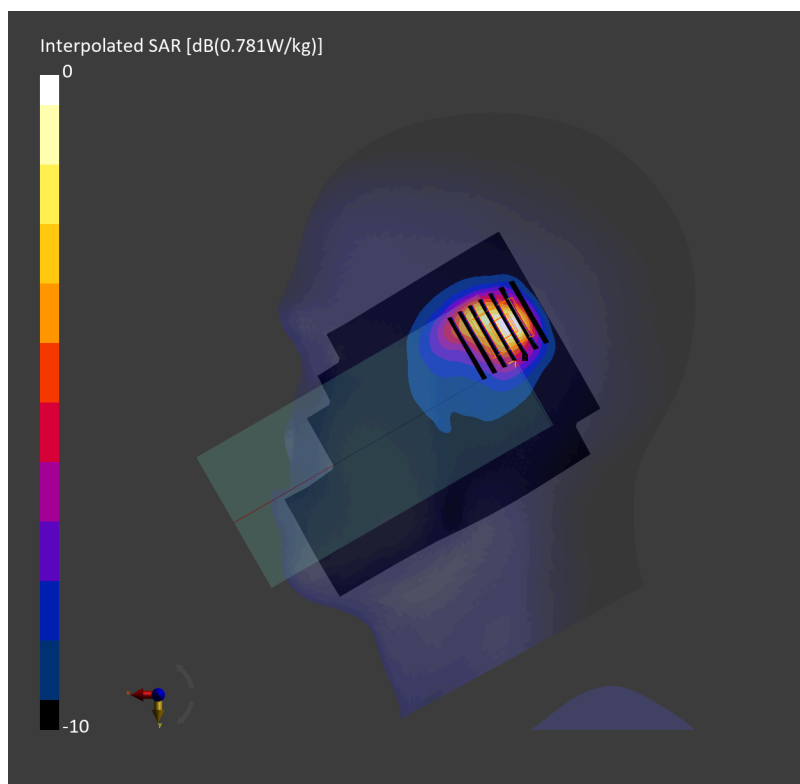

21_FR1 n41_100M_BPSK_1_1_Right Tilted_0mm_Ch518598

Communication System: 5G NR; Frequency: 2592.990 MHz

Medium: HSL_600-7200_260701 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.90$ S/m; $\epsilon_r = 40.2$

Ambient Temperature: 23.2°C; Liquid Temperature: 22.2°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.15, 7.62, 7.2); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.458 W/kg; SAR (10g) = 0.202 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.11 dB

SAR (1g) = 0.475 W/kg; SAR (8g) = 0.218 W/kg; SAR (10g) = 0.196 W/kg

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 77.1 %

TSL Correction: Positive only

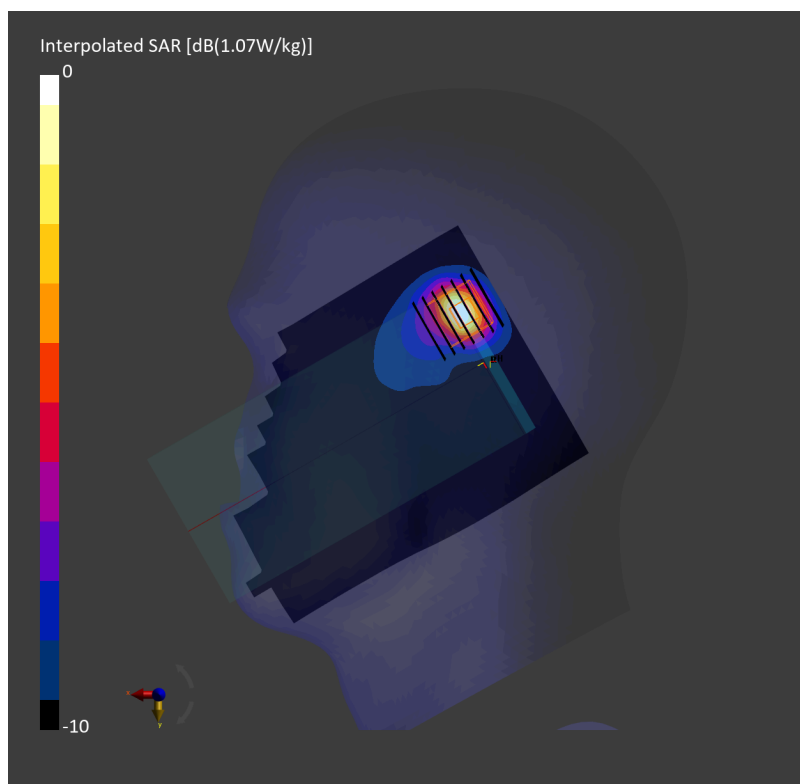

22_FR1 n77_100M_BPSK_135_69_Left Cheek_0mm_Ch656000

Communication System: 5G NR; Frequency: 3840.000 MHz

Medium: HSL_600-7200_260701 Medium parameters used: $f = 3840.000$ MHz; $\sigma = 2.99$ S/m; $\epsilon_r = 37.9$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(6.46, 6.89, 6.5); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10917-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.388 W/kg; SAR (10g) = 0.153 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.05 dB

SAR (1g) = 0.383 W/kg; SAR (8g) = 0.169 W/kg; SAR (10g) = 0.151 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 75.8 %

TSL Correction: Positive only

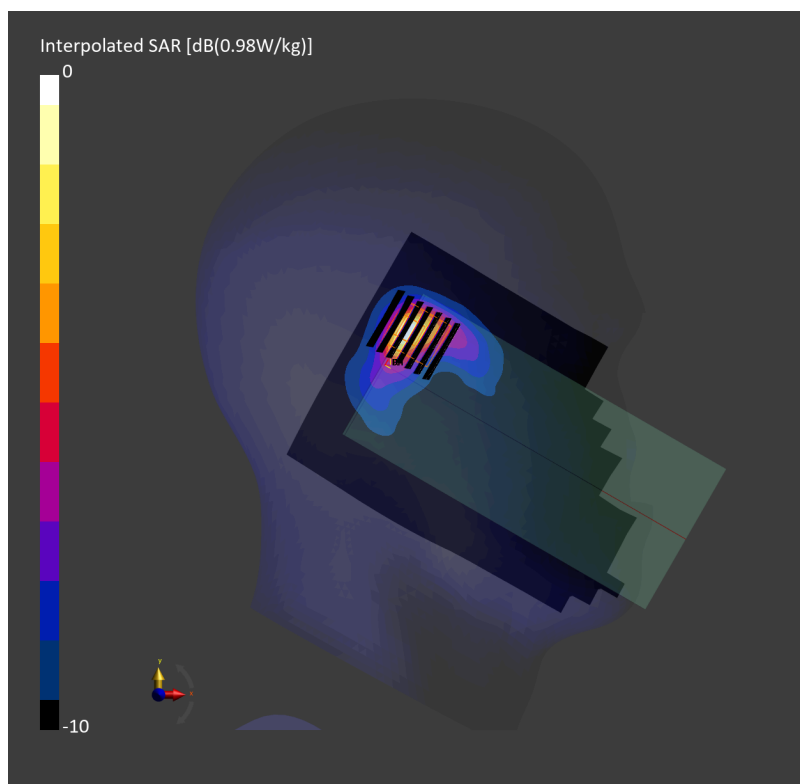

23_WLAN2.4GHz_802.11b 1Mbps_Left Cheek_0mm_Ch1

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2412.000 MHz

Medium: HSL_600-7200_260705 Medium parameters used: $f=2412.000$ MHz; $\sigma=1.75$ S/m; $\epsilon_r=40.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.08, 7.54, 7.12); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10415-AAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.280 W/kg; SAR (10g) = 0.153 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.04 dB

SAR (1g) = 0.285 W/kg; SAR (8g) = 0.153 W/kg; SAR (10g) = 0.140 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 78.6 %

TSL Correction: Positive only

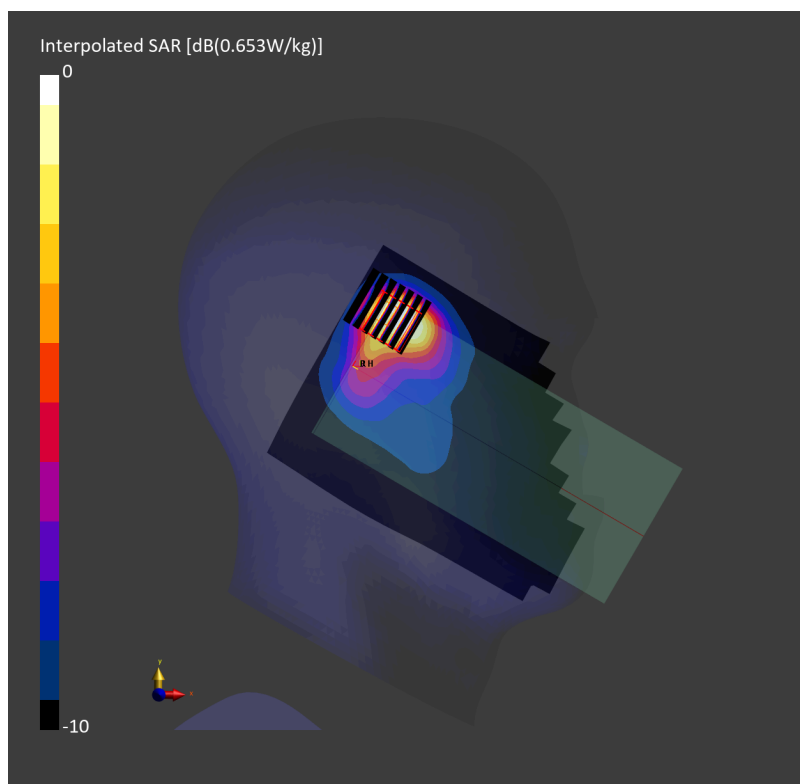

24_WLAN5GHz_802.11n-HT40 MCS0_Left Tilted_0mm_Ch54

Communication System: IEEE 802.11n; Frequency: 5270.000 MHz

Medium: HSL_600-7200_260705 Medium parameters used: $f = 5270.000$ MHz; $\sigma = 4.55$ S/m; $\epsilon_r = 35.3$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(5.4, 5.76, 5.43); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10599-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.468 W/kg; SAR (10g) = 0.143 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.12 dB

SAR (1g) = 0.568 W/kg; SAR (8g) = 0.167 W/kg; SAR (10g) = 0.138 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 61.7 %

TSL Correction: Positive only

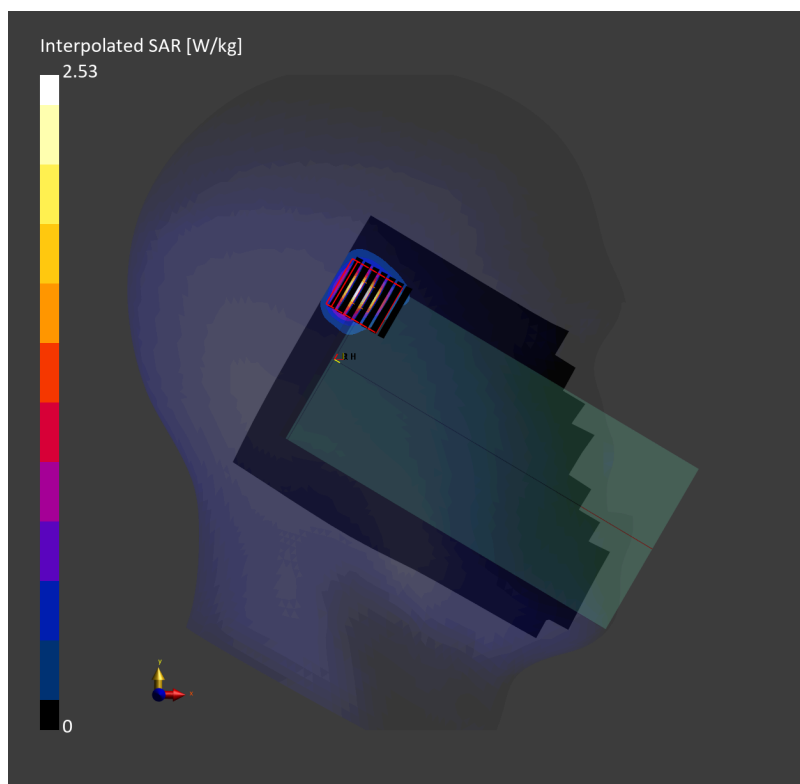

25_WLAN5GHz_802.11ac-VHT80 MCS0_Left Tilted_0mm_Ch122

Communication System: IEEE 802.11ac WiFi; Frequency: 5610.000 MHz

Medium: HSL_600-7200_260705 Medium parameters used: $f = 5610.000$ MHz; $\sigma = 4.93$ S/m; $\epsilon_r = 34.6$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(4.92, 5.24, 4.95); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10626-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.386 W/kg; SAR (10g) = 0.124 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.14 dB

SAR (1g) = 0.488 W/kg; SAR (8g) = 0.146 W/kg; SAR (10g) = 0.122 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 58.2 %

TSL Correction: Positive only

