

Appendix B

Detailed Test Results

1. GSM
GSM850
GSM1900
2. WCDMA
WCDMA Band II
WCDMA Band IV
WCDMA Band V
3. LTE
LTE Band 2
LTE Band 4
LTE Band 7
LTE Band 12
LTE Band 26
LTE Band 38
LTE Band 41
LTE Band 42
4. NR
n77
5. WIFI
WIFI 2.4G
WIFI 5G
6. BT
BT

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) GSM850 GPRS 3TS 190CH Right cheek Ant0

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019647

Communication System: UID 0, GPRS/EGPRS Mode(3up) Communication System (0); Frequency: 836.6 MHz; Duty Cycle: 1:2.77013

Medium: HSL; Medium parameters used: $f = 836.6$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 43.104$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.33, 10.91, 11.04); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.458 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.216 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.508 W/kg

SAR(1 g) = 0.408 W/kg; SAR(10 g) = 0.317 W/kg

Smallest distance from peaks to all points 3 dB below = 21.8 mm

Ratio of SAR at M2 to SAR at M1 = 81.2%

Maximum value of SAR (measured) = 0.476 W/kg

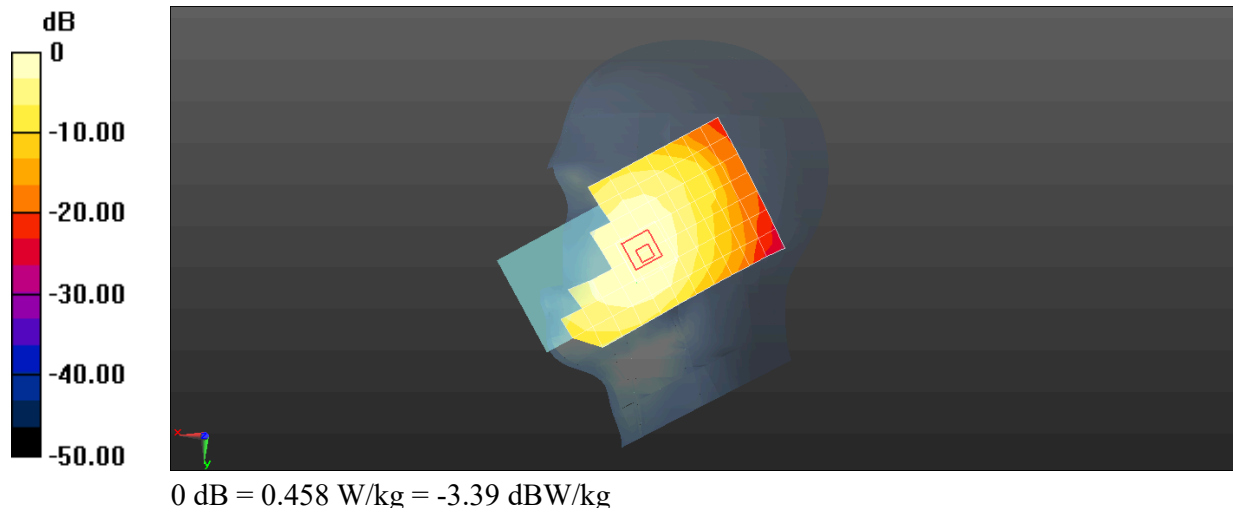

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) GSM850 GPRS 3TS 128CH Back side 5mm Ant0

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019647

Communication System: UID 0, GPRS/EGPRS Mode(3up) Communication System (0); Frequency: 824.2 MHz; Duty Cycle: 1:2.77013


Medium: HSL; Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 43.183$; $\rho = 1000$ kg/m³
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.33, 10.91, 11.04); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 1.30 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 13.39 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 1.87 W/kg
SAR(1 g) = 0.827 W/kg; SAR(10 g) = 0.440 W/kg
Smallest distance from peaks to all points 3 dB below = 9.1 mm
Ratio of SAR at M2 to SAR at M1 = 42.6%
Maximum value of SAR (measured) = 1.45 W/kg

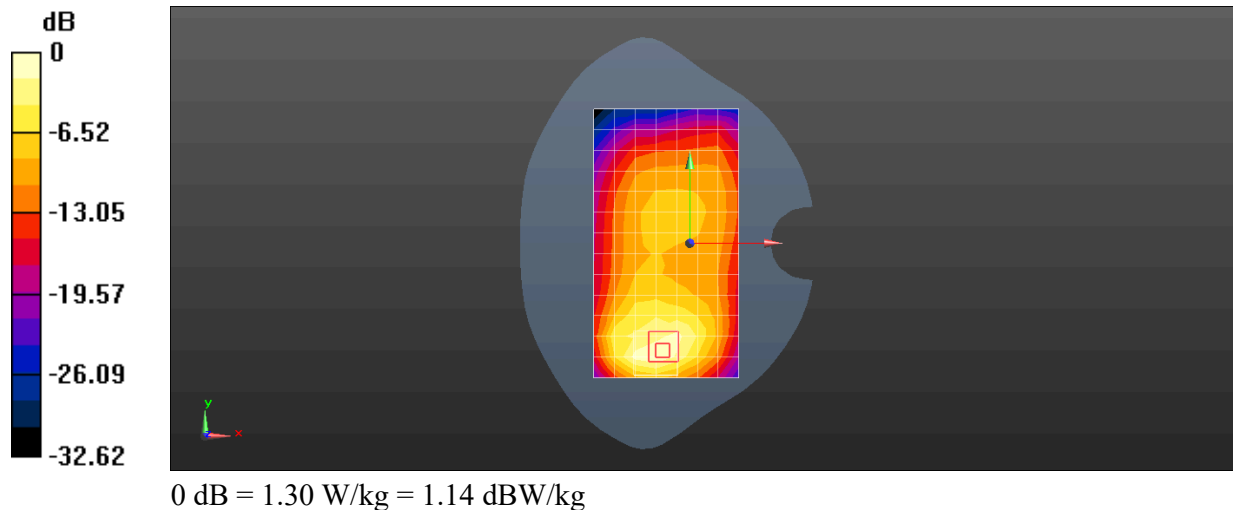

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) GSM850 GPRS 3TS 128CH Bottom side 0mm Ant0

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019647

Communication System: UID 0, GPRS/EGPRS Mode(3up) Communication System (0); Frequency: 824.2 MHz; Duty Cycle: 1:2.77013

Medium: HSL; Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.907$ S/m; $\epsilon_r = 43.184$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.33, 10.91, 11.04); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 3.87 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 47.95 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 17.7 W/kg

SAR(1 g) = 4.91 W/kg; SAR(10 g) = 1.98 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 26.4%

Maximum value of SAR (measured) = 10.5 W/kg

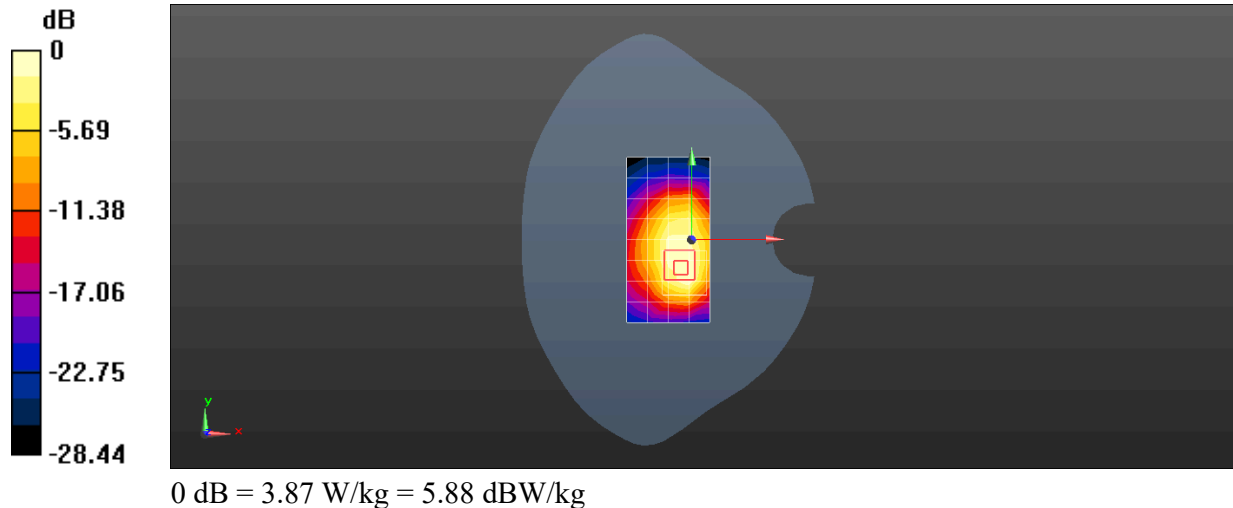

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) GSM1900 GPRS 4TS 661CH Right cheek Ant0

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019647

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 1880 MHz; Duty Cycle: 1:2.07491

Medium: HSL; Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.441 \text{ S/m}$; $\epsilon_r = 40.73$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.11, 8.57, 8.67); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.207 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.449 V/m ; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.266 W/kg

SAR(1 g) = 0.176 W/kg ; SAR(10 g) = 0.111 W/kg

Smallest distance from peaks to all points 3 dB below = 14 mm

Ratio of SAR at M2 to SAR at M1 = 66.8%

Maximum value of SAR (measured) = 0.236 W/kg

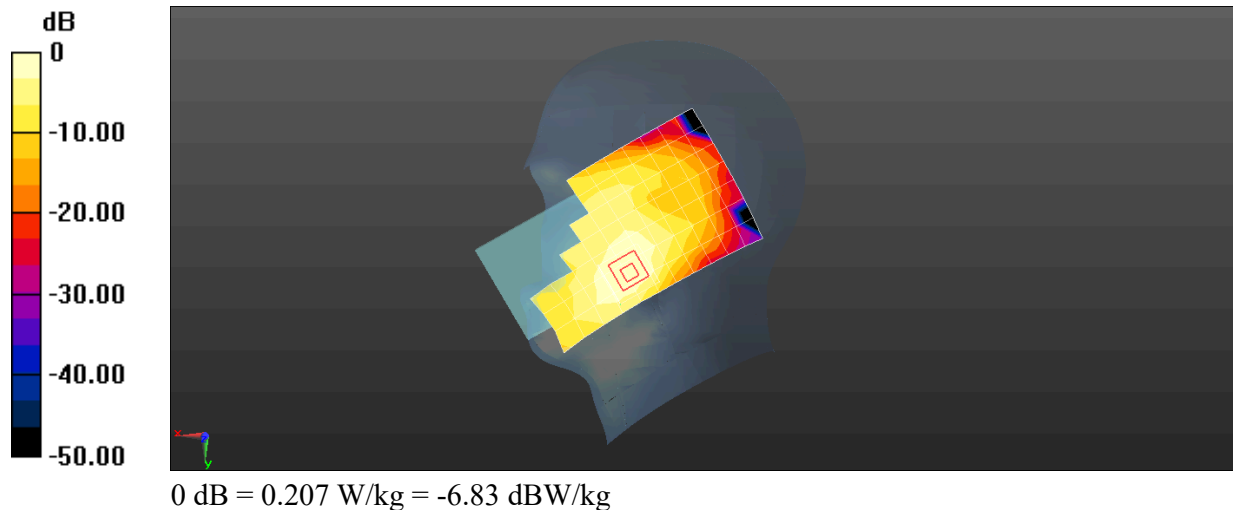

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) GSM1900 GPRS 4TS 810CH Back side 5mm Ant0

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019647

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.07491

Medium: HSL; Medium parameters used: $f = 1909.8$ MHz; $\sigma = 1.441$ S/m; $\epsilon_r = 40.726$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.11, 8.57, 8.67); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.06 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.764 V/m; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 1.37 W/kg

SAR(1 g) = 0.665 W/kg; SAR(10 g) = 0.337 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 48.5%

Maximum value of SAR (measured) = 1.13 W/kg

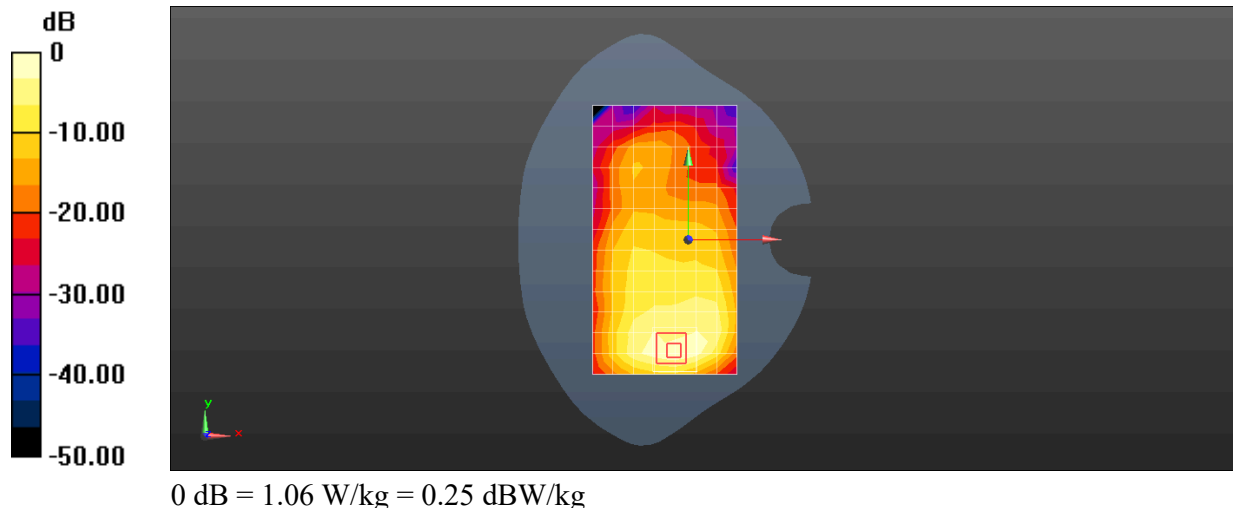

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) GSM1900 GPRS 4TS 512CH Bottom side 0mm Ant0

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019647

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 1850.2 MHz;Duty Cycle: 1:2.07491


Medium: HSL;Medium parameters used (interpolated): $f = 1850.2 \text{ MHz}$; $\sigma = 1.44 \text{ S/m}$; $\epsilon_r = 40.735$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.11, 8.57, 8.67); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (5x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 3.60 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 40.61 V/m; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 10.9 W/kg
SAR(1 g) = 4.84 W/kg; SAR(10 g) = 2.12 W/kg
Smallest distance from peaks to all points 3 dB below = 10.4 mm
Ratio of SAR at M2 to SAR at M1 = 43.7%
Maximum value of SAR (measured) = 8.86 W/kg

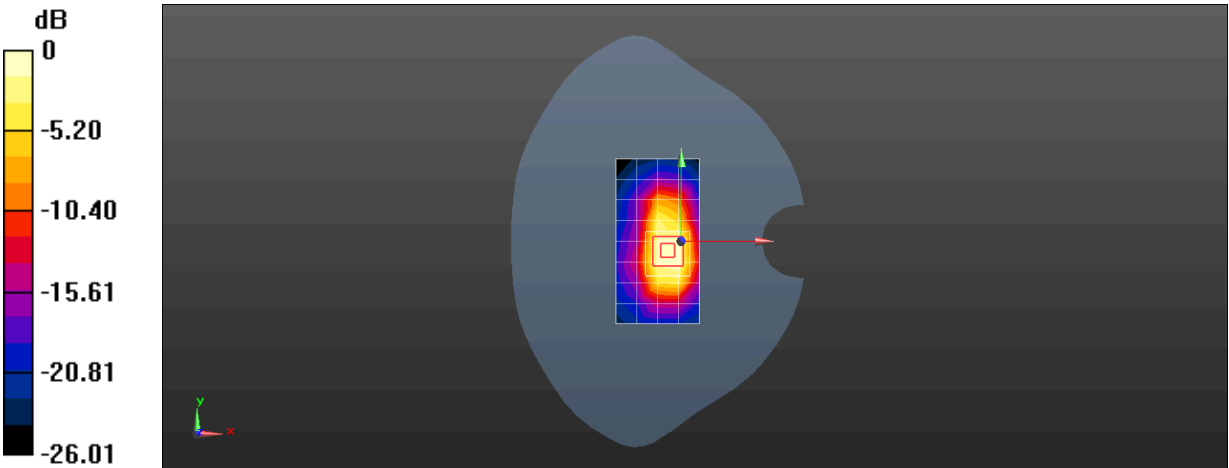

0 dB = 3.60 W/kg = 5.56 dBW/kg

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) GSM1900 GPRS 4TS 810CH Bottom side 5mm Ant0

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019647

Communication System: UID 0, GPRS/EGPRS Mode(4up) Communication System (0); Frequency: 1909.8 MHz;Duty Cycle: 1:2.07491

Medium: HSL;Medium parameters used: $f = 1909.8 \text{ MHz}$; $\sigma = 1.441 \text{ S/m}$; $\epsilon_r = 40.726$; $\rho = 1000 \text{ kg/m}^3$


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.11, 8.57, 8.67); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (5x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.822 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 20.78 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 1.44 W/kg
SAR(1 g) = 0.727 W/kg; SAR(10 g) = 0.355 W/kg
Smallest distance from peaks to all points 3 dB below = 10 mm
Ratio of SAR at M2 to SAR at M1 = 52.9%
Maximum value of SAR (measured) = 1.10 W/kg

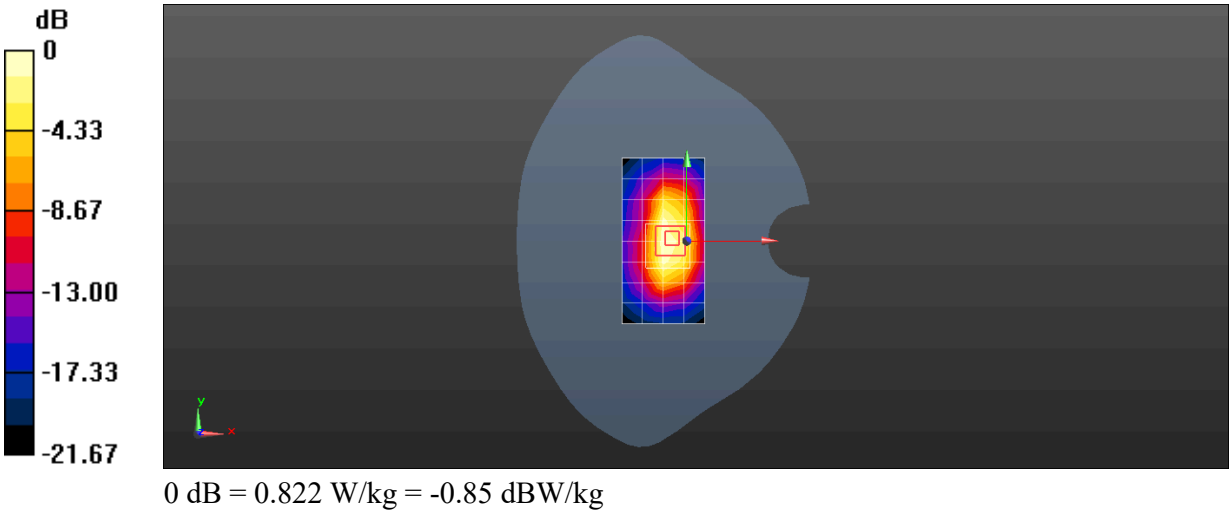

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) WCDMA Band II RMC 9400CH Right cheek Ant0

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019647

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL; Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.441 \text{ S/m}$; $\epsilon_r = 40.73$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.11, 8.57, 8.67); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.216 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 2.399 V/m ; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 0.252 W/kg

SAR(1 g) = 0.166 W/kg ; SAR(10 g) = 0.103 W/kg

Smallest distance from peaks to all points 3 dB below = 13.2 mm

Ratio of SAR at M2 to SAR at M1 = 66.2%

Maximum value of SAR (measured) = 0.217 W/kg

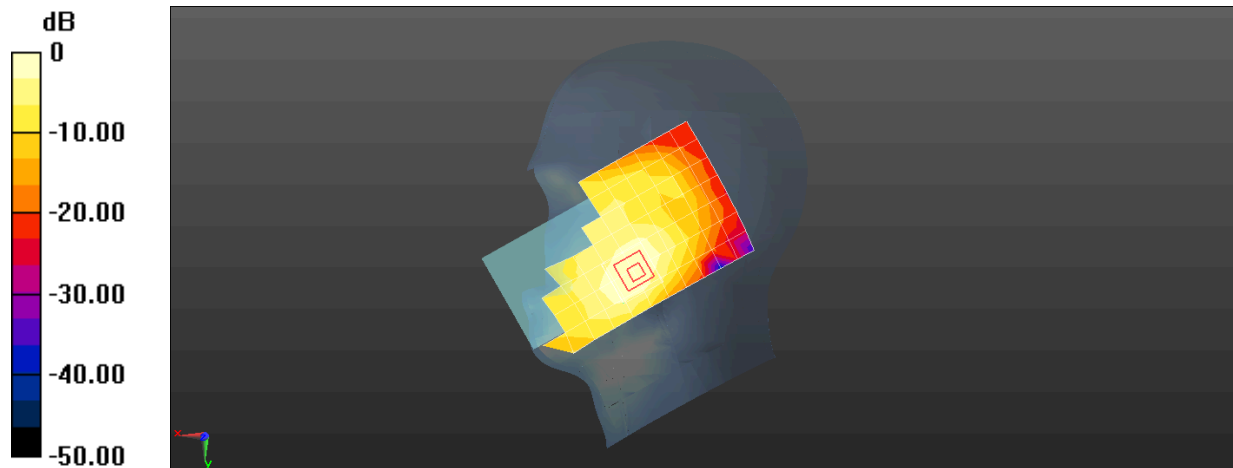

$0 \text{ dB} = 0.216 \text{ W/kg} = -6.65 \text{ dBW/kg}$

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) WCDMA Band II RMC 9400CH Back side 5mm Ant0

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019639

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz;Duty Cycle: 1:1


Medium: HSL;Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.441 \text{ S/m}$; $\epsilon_r = 40.73$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.11, 8.57, 8.67); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 6; Type: SAM Twin; Serial: 1438
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 1.11 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 6.156 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 1.45 W/kg
SAR(1 g) = 0.714 W/kg; SAR(10 g) = 0.356 W/kg
Smallest distance from peaks to all points 3 dB below = 8.3 mm
Ratio of SAR at M2 to SAR at M1 = 49.7%
Maximum value of SAR (measured) = 1.21 W/kg

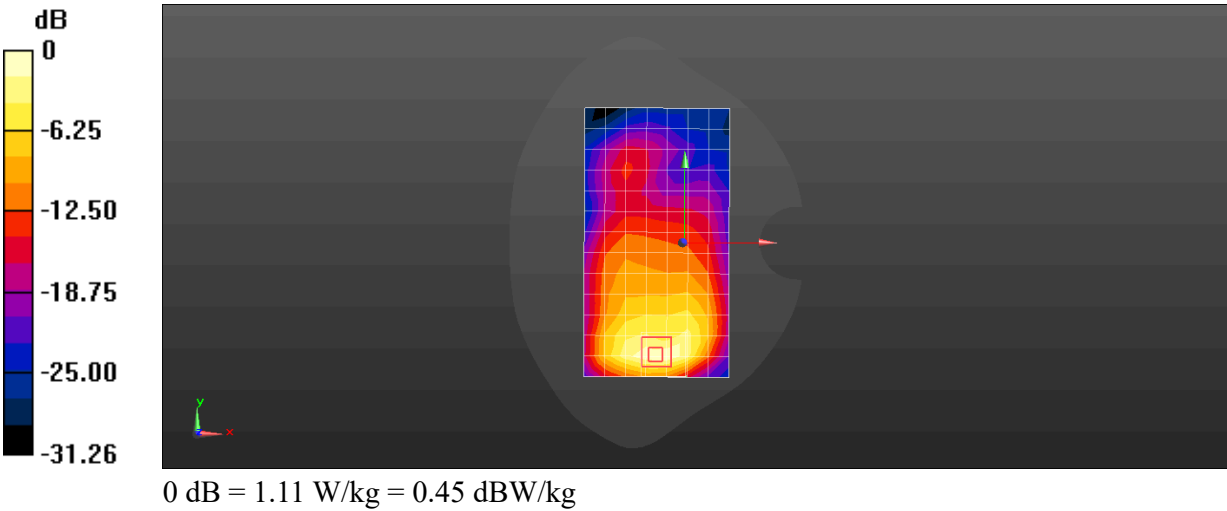

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) WCDMA Band II RMC 9400CH Back side 0mm Ant0

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019647

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz;Duty Cycle: 1:1


Medium: HSL;Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.441 \text{ S/m}$; $\epsilon_r = 40.73$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.11, 8.57, 8.67); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 4.08 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 7.623 V/m; Power Drift = -0.18 dB
Peak SAR (extrapolated) = 11.9 W/kg
SAR(1 g) = 4.76 W/kg; SAR(10 g) = 2.03 W/kg
Smallest distance from peaks to all points 3 dB below = 10.4 mm
Ratio of SAR at M2 to SAR at M1 = 43%
Maximum value of SAR (measured) = 9.06 W/kg

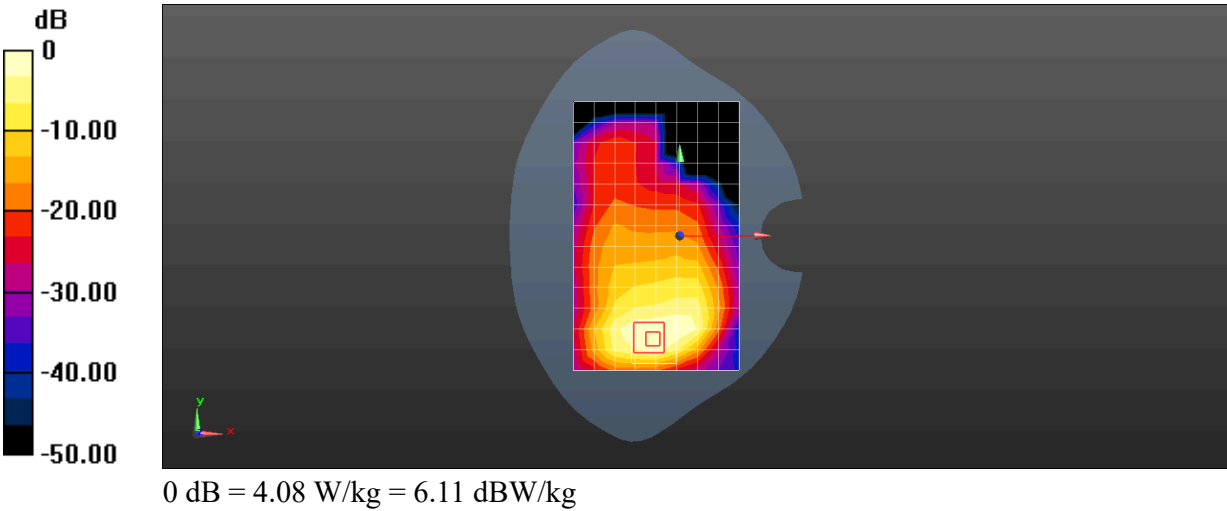

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) WCDMA Band II RMC 9400CH Bottom side 5mm Ant0

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019639

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz;Duty Cycle: 1:1


Medium: HSL;Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.441 \text{ S/m}$; $\epsilon_r = 40.73$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.11, 8.57, 8.67); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 6; Type: SAM Twin; Serial: 1438
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (5x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 1.03 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 22.43 V/m ; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 1.24 W/kg
SAR(1 g) = 0.637 W/kg ; SAR(10 g) = 0.314 W/kg
Smallest distance from peaks to all points 3 dB below = 10 mm
Ratio of SAR at M2 to SAR at M1 = 52.6%
Maximum value of SAR (measured) = 1.03 W/kg

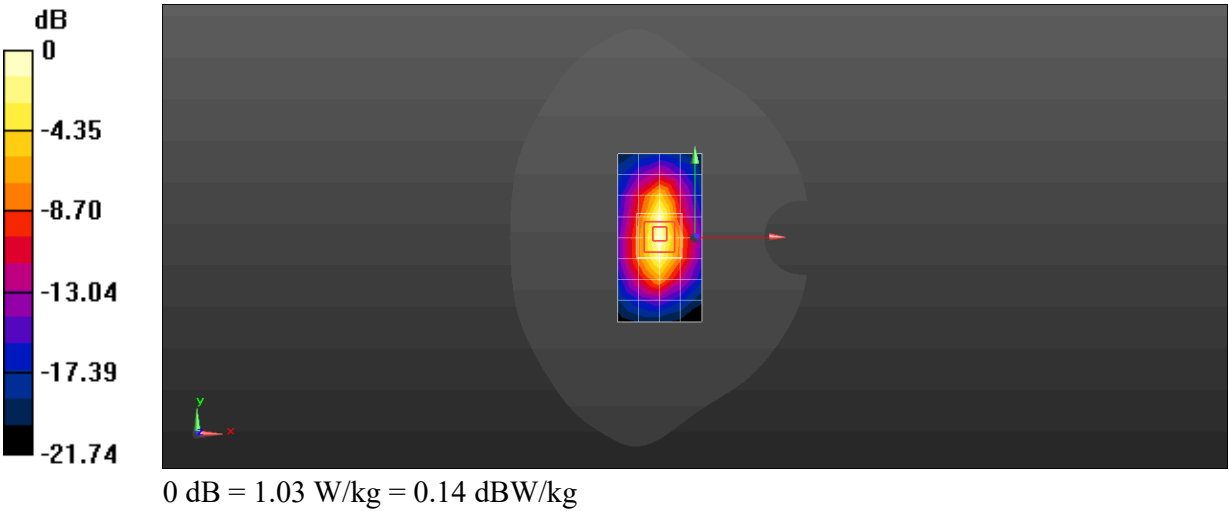

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) WCDMA Band IV RMC 1412CH Right cheek Ant0

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019647

Communication System: UID 0, WCDMA (0); Frequency: 1732.4 MHz; Duty Cycle: 1:1

Medium: HSL; Medium parameters used (interpolated): $f = 1732.4$ MHz; $\sigma = 1.311$ S/m; $\epsilon_r = 38.782$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.34, 8.81, 8.91); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.161 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.752 V/m; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 0.187 W/kg

SAR(1 g) = 0.122 W/kg; SAR(10 g) = 0.077 W/kg

Smallest distance from peaks to all points 3 dB below = 11 mm

Ratio of SAR at M2 to SAR at M1 = 68.3%

Maximum value of SAR (measured) = 0.157 W/kg

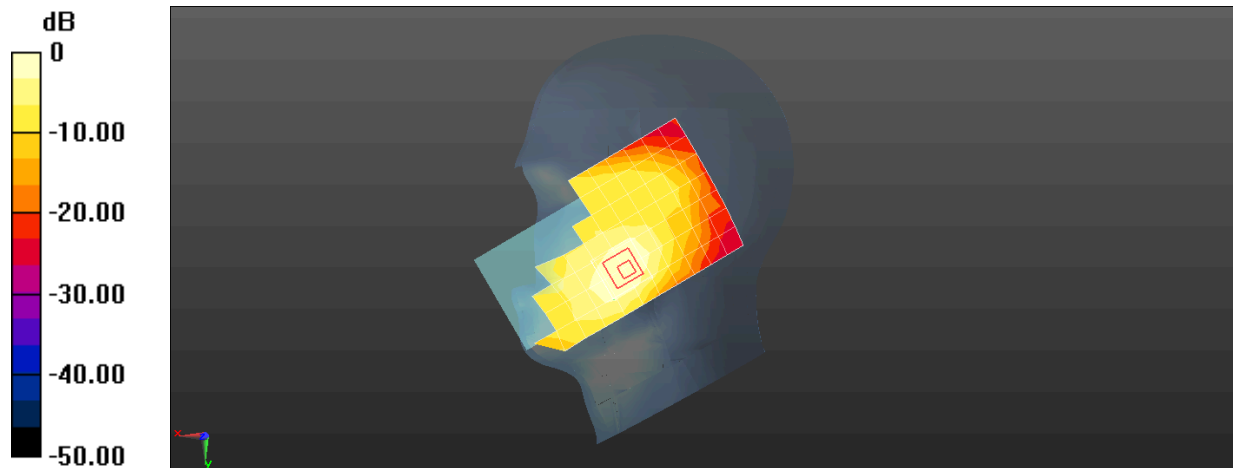

0 dB = 0.161 W/kg = -7.94 dBW/kg

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) WCDMA Band IV RMC 1513CH Back side 5mm Ant0

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019639

Communication System: UID 0, WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: HSL; Medium parameters used (interpolated): $f = 1752.6$ MHz; $\sigma = 1.29$ S/m; $\epsilon_r = 38.858$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.34, 8.81, 8.91); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.08 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.741 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 1.35 W/kg

SAR(1 g) = 0.768 W/kg; SAR(10 g) = 0.413 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 56.6%

Maximum value of SAR (measured) = 1.17 W/kg

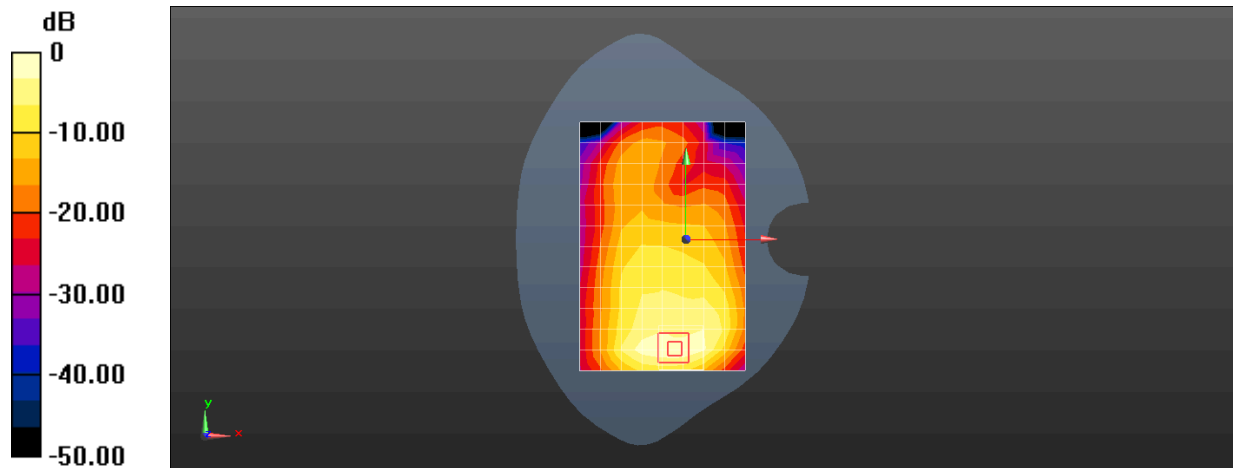

0 dB = 1.08 W/kg = 0.34 dBW/kg

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) WCDMA Band IV RMC 1312CH Bottom side 5mm Ant0

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019639

Communication System: UID 0, WCDMA (0); Frequency: 1712.4 MHz; Duty Cycle: 1:1

Medium: HSL; Medium parameters used (interpolated): $f = 1712.4$ MHz; $\sigma = 1.29$ S/m; $\epsilon_r = 38.858$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.34, 8.81, 8.91); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (5x9x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 0.903 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 19.61 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.748 W/kg; SAR(10 g) = 0.356 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 56.5%

Maximum value of SAR (measured) = 1.30 W/kg

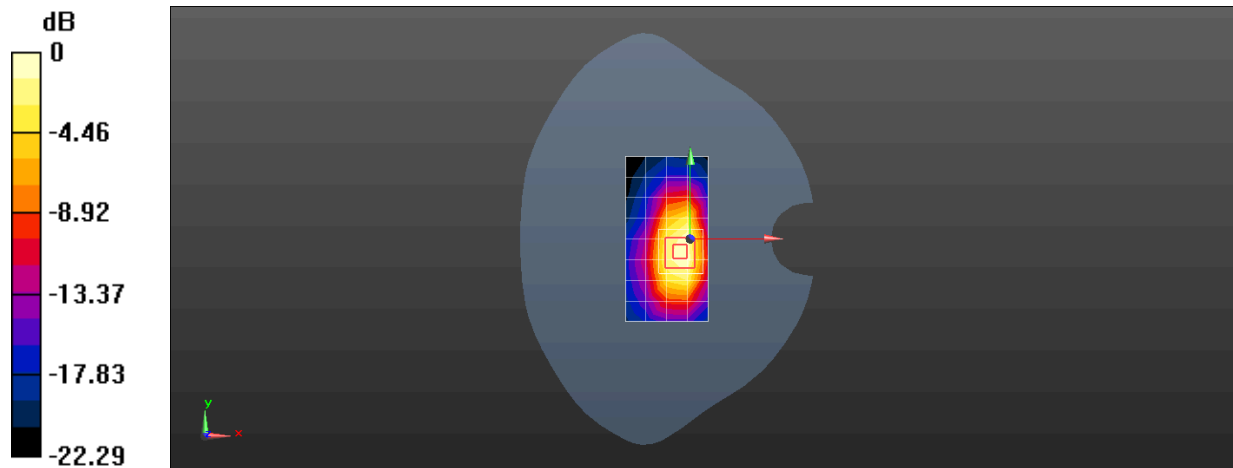

0 dB = 0.903 W/kg = -0.44 dBW/kg

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) WCDMA Band IV RMC 1513CH Bottom side 0mm Ant0

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019639

Communication System: UID 0, WCDMA (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1

Medium: HSL; Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.329$ S/m; $\epsilon_r = 38.667$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.34, 8.81, 8.91); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 3.57 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 45.43 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 8.75 W/kg

SAR(1 g) = 4.22 W/kg; SAR(10 g) = 1.91 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 52.1%

Maximum value of SAR (measured) = 6.34 W/kg

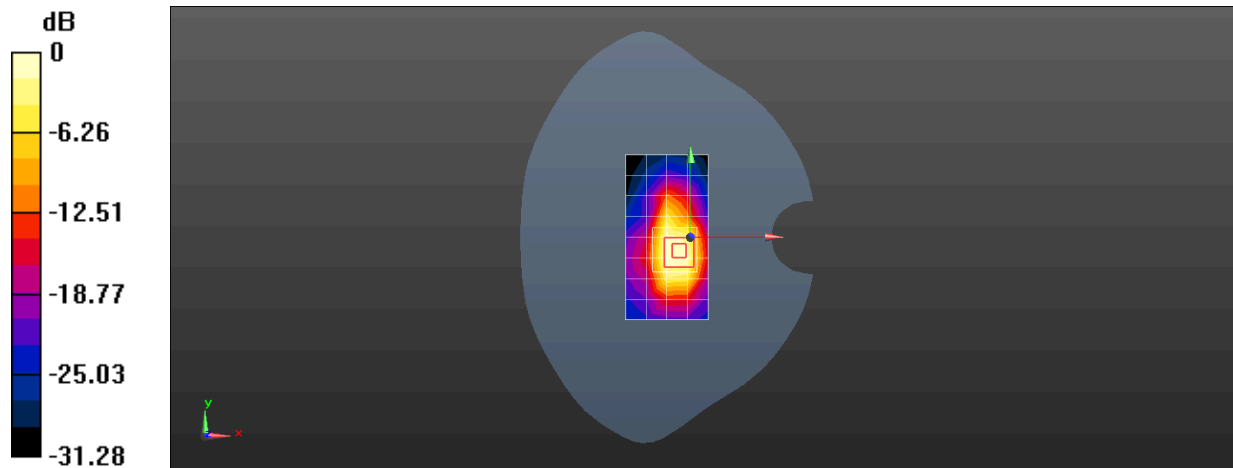

0 dB = 3.57 W/kg = 5.53 dBW/kg

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) WCDMA Band V RMC 4182CH Right cheek Ant0

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019639

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL; Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 43.107$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.33, 10.91, 11.04); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.289 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.507 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.312 W/kg

SAR(1 g) = 0.254 W/kg; SAR(10 g) = 0.198 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm grid

Ratio of SAR at M2 to SAR at M1 = 83.1%

Maximum value of SAR (measured) = 0.293 W/kg

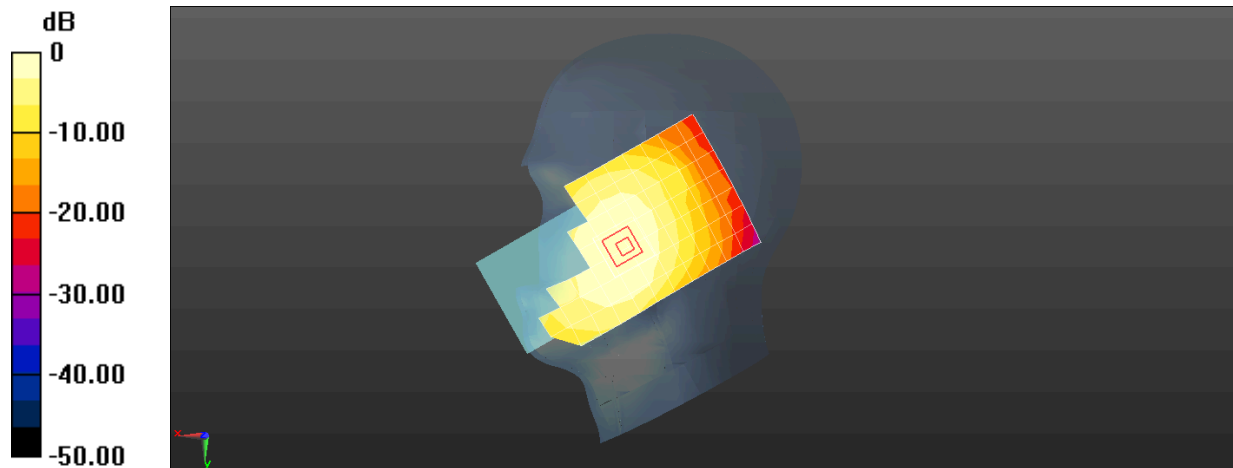

0 dB = 0.289 W/kg = -5.40 dBW/kg

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) WCDMA Band V RMC 4182CH Back side 5mm Ant0

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019647

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL; Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 43.107$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.33, 10.91, 11.04); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x14x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 1.28 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 1.96 W/kg

SAR(1 g) = 0.846 W/kg; SAR(10 g) = 0.442 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 42.1%

Maximum value of SAR (measured) = 1.51 W/kg

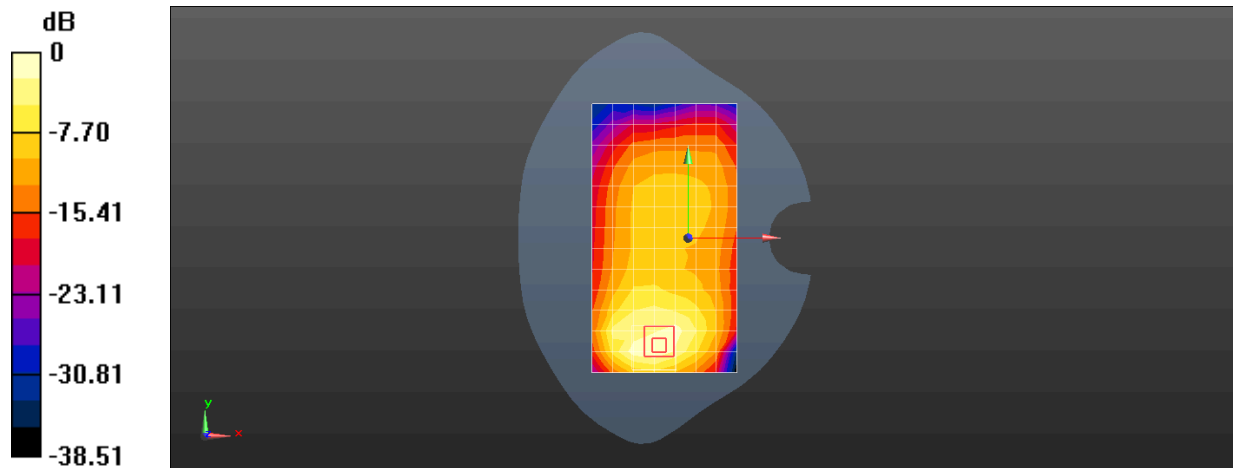

0 dB = 1.28 W/kg = 1.08 dBW/kg

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) WCDMA Band V RMC 4182CH Bottom side 0mm Ant0

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019647

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL; Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 43.107$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.33, 10.91, 11.04); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 4.92 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 44.78 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 14.4 W/kg

SAR(1 g) = 3.82 W/kg; SAR(10 g) = 1.5 W/kg

Smallest distance from peaks to all points 3 dB below = 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 37.9%

Maximum value of SAR (measured) = 6.84 W/kg

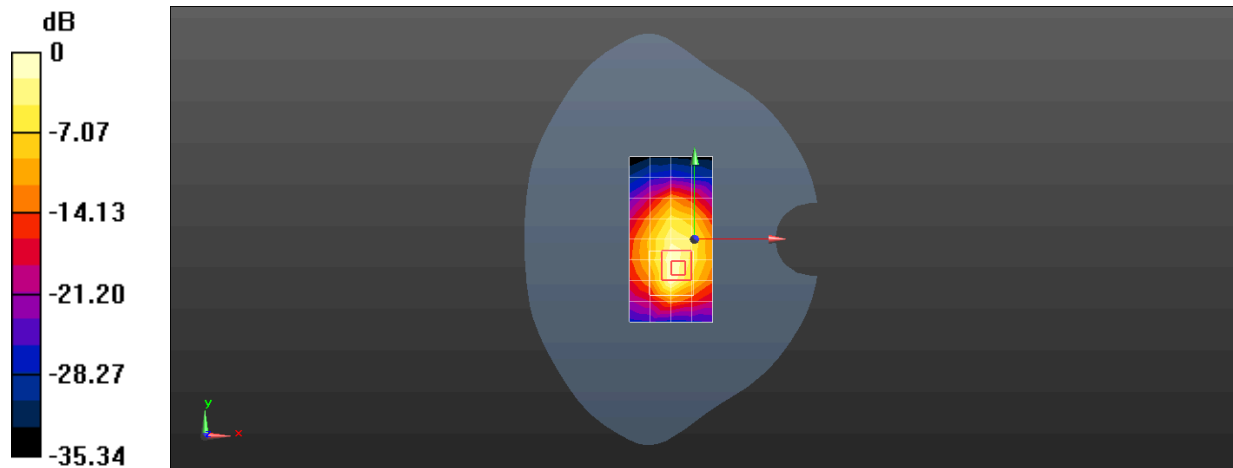

0 dB = 4.92 W/kg = 6.92 dBW/kg

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) LTE Band 2 20M QPSK 1RB0 18900CH Left cheek Ant0

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019647

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1880 MHz;Duty Cycle: 1:1


Medium: HSL;Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.441 \text{ S/m}$; $\epsilon_r = 40.73$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(7.6, 7.6, 7.6); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.214 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 2.263 V/m ; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.211 W/kg
SAR(1 g) = 0.145 W/kg ; SAR(10 g) = 0.093 W/kg
Smallest distance from peaks to all points 3 dB below = 18.3 mm
Ratio of SAR at M2 to SAR at M1 = 65.5%
Maximum value of SAR (measured) = 0.183 W/kg

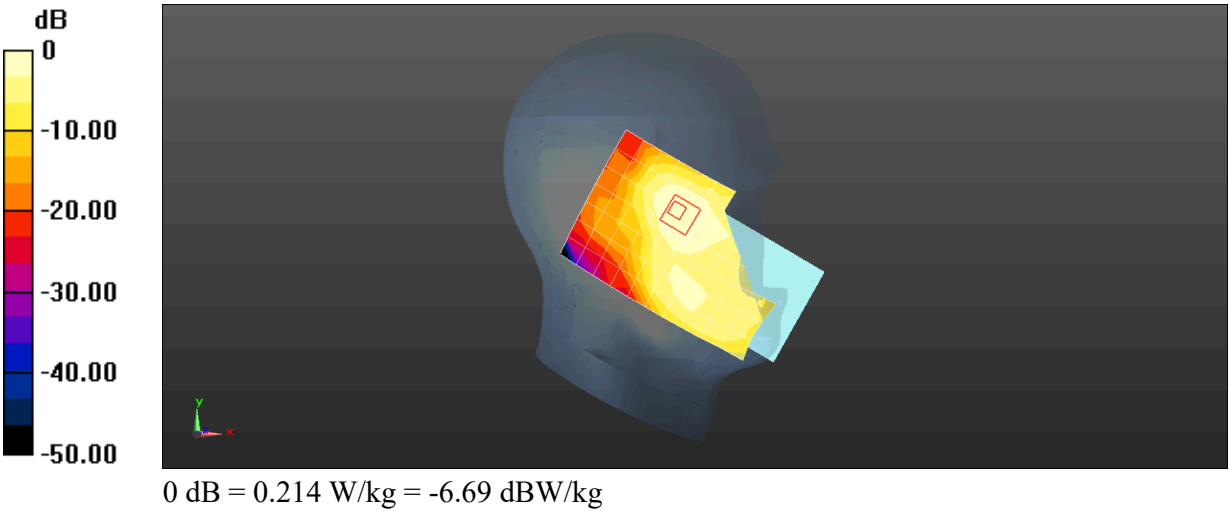

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) LTE Band 2 20M QPSK 1RB0 18700CH Back side 5mm Ant0

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019639

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1860 MHz;Duty Cycle: 1:1

Medium: HSL;Medium parameters used: $f = 1860 \text{ MHz}$; $\sigma = 1.44 \text{ S/m}$; $\epsilon_r = 40.733$; $\rho = 1000 \text{ kg/m}^3$


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.11, 8.57, 8.67); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 1.29 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 7.149 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 1.65 W/kg
SAR(1 g) = 0.850 W/kg; SAR(10 g) = 0.430 W/kg
Smallest distance from peaks to all points 3 dB below = 8.2 mm
Ratio of SAR at M2 to SAR at M1 = 51.7%
Maximum value of SAR (measured) = 1.38 W/kg

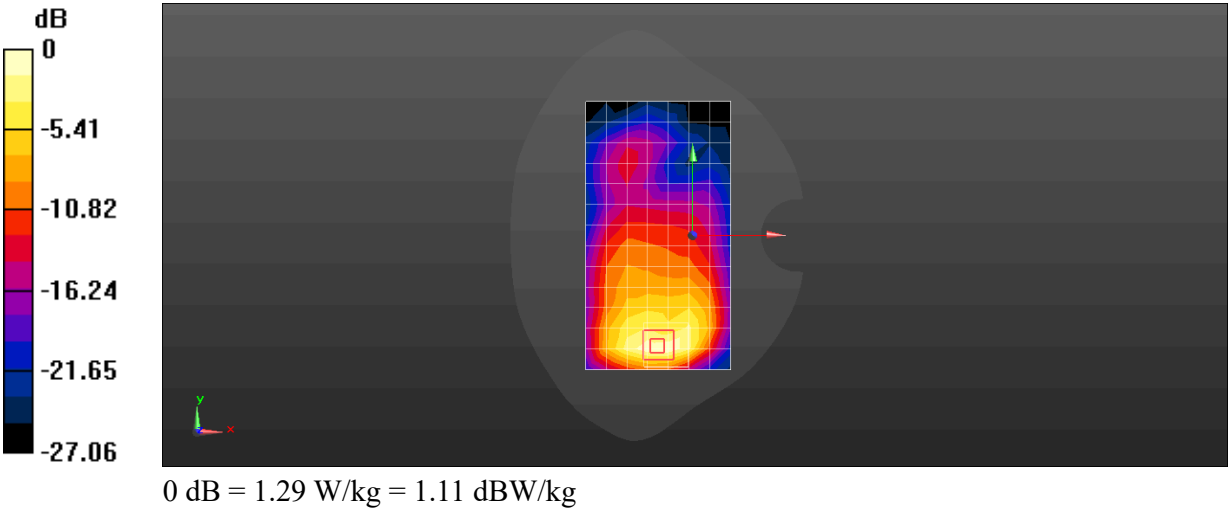

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) LTE Band 2 20M QPSK 1RB0 19100CH Back side 0mm Ant0

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019647

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL; Medium parameters used: $f = 1900$ MHz; $\sigma = 1.441$ S/m; $\epsilon_r = 40.727$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.11, 8.57, 8.67); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 5.24 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.409 V/m; Power Drift = 0.13 dB


Peak SAR (extrapolated) = 13.8 W/kg

SAR(1 g) = 4.89 W/kg; SAR(10 g) = 2.16 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 32.5%

Maximum value of SAR (measured) = 10.8 W/kg

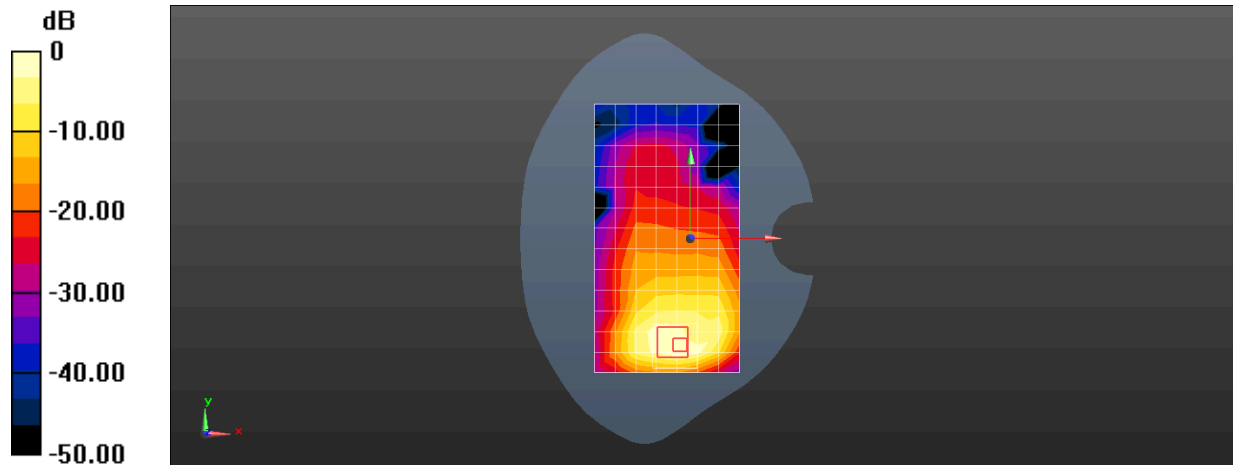

0 dB = 5.24 W/kg = 7.19 dBW/kg

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) LTE Band 2 20M QPSK 1RB0 18700CH Bottom side 5mm Ant0

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019639

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1860 MHz;Duty Cycle: 1:1

Medium: HSL;Medium parameters used: $f = 1860 \text{ MHz}$; $\sigma = 1.44 \text{ S/m}$; $\epsilon_r = 40.733$; $\rho = 1000 \text{ kg/m}^3$


Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.11, 8.57, 8.67); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (5x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 1.51 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 27.17 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 1.62 W/kg
SAR(1 g) = 0.686 W/kg; SAR(10 g) = 0.415 W/kg
Smallest distance from peaks to all points 3 dB below = 9.5 mm
Ratio of SAR at M2 to SAR at M1 = 52.5%
Maximum value of SAR (measured) = 1.35 W/kg

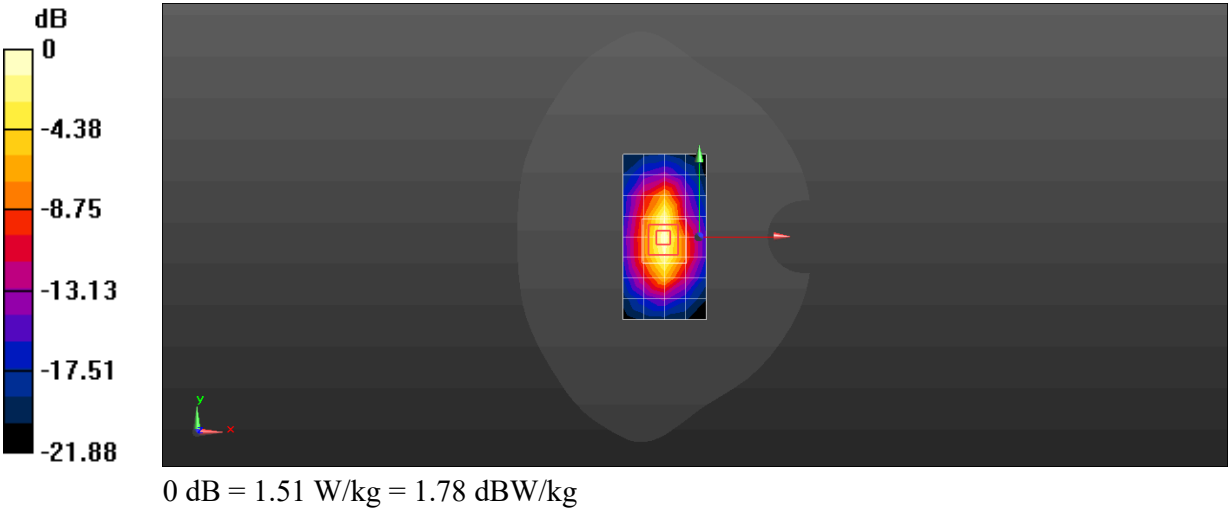

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) LTE Band 4 20M QPSK 1RB0 20175CH Right cheek Ant0

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019647

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1732.5 MHz; Duty Cycle: 1:1

Medium: HSL; Medium parameters used: $f = 1732.5$ MHz; $\sigma = 1.31$ S/m; $\epsilon_r = 38.778$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.34, 8.81, 8.91); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.254 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.753 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 0.310 W/kg

SAR(1 g) = 0.206 W/kg; SAR(10 g) = 0.131 W/kg

Smallest distance from peaks to all points 3 dB below = 14 mm

Ratio of SAR at M2 to SAR at M1 = 67.1%

Maximum value of SAR (measured) = 0.275 W/kg

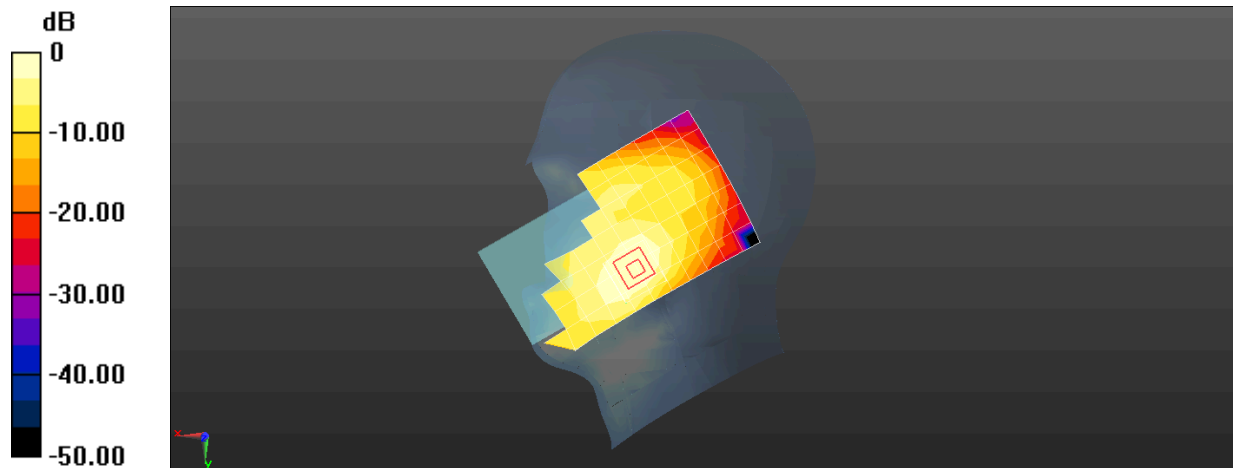

0 dB = 0.254 W/kg = -5.95 dBW/kg

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) LTE Band 4 20M QPSK 1RB0 20175CH Back side 5mm Ant0

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019639

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1

Medium: HSL;Medium parameters used (interpolated): $f = 1732.5 \text{ MHz}$; $\sigma = 1.31 \text{ S/m}$; $\epsilon_r = 38.778$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.34, 8.81, 8.91); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.947 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8.4\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.306 V/m; Power Drift = -0.05 dB


Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.804 W/kg; SAR(10 g) = 0.403 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 53.4%

Maximum value of SAR (measured) = 1.30 W/kg

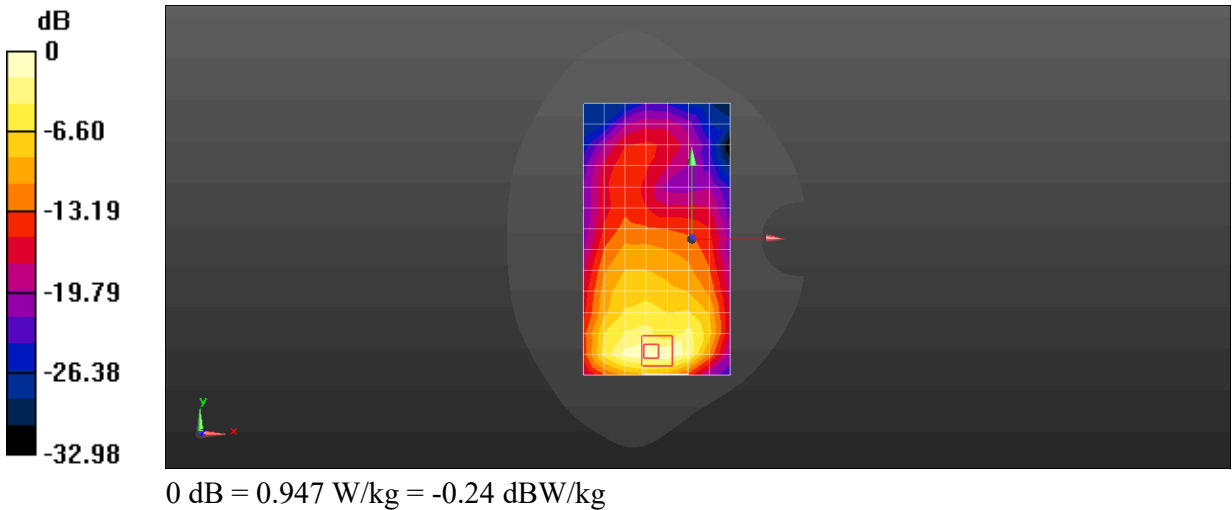

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) LTE Band 4 20M QPSK 1RB0 20175CH Bottom side 5mm Ant0

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019639

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1

Medium: HSL;Medium parameters used (interpolated): $f = 1732.5 \text{ MHz}$; $\sigma = 1.31 \text{ S/m}$; $\epsilon_r = 38.778$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.34, 8.81, 8.91); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (5x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 1.01 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 23.60 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.667 W/kg; SAR(10 g) = 0.336 W/kg

Smallest distance from peaks to all points 3 dB below = 10.2 mm

Ratio of SAR at M2 to SAR at M1 = 53.5%

Maximum value of SAR (measured) = 1.06 W/kg

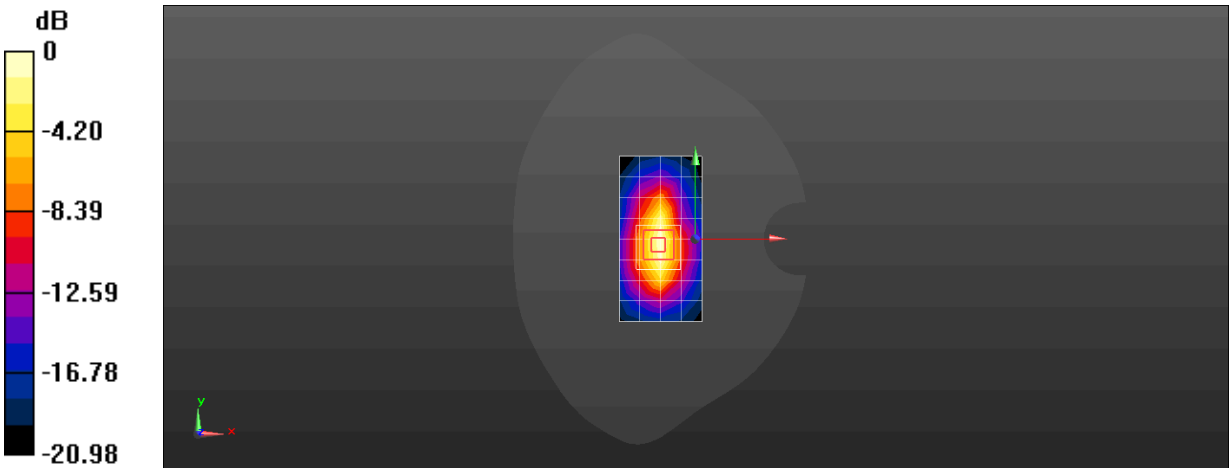

0 dB = 1.01 W/kg = 0.06 dBW/kg

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) LTE Band 4 20M QPSK 1RB0 20175CH Bottom side 0mm Ant0

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019647

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1732.5 MHz;Duty Cycle: 1:1

Medium: HSL;Medium parameters used (interpolated): $f = 1732.5 \text{ MHz}$; $\sigma = 1.31 \text{ S/m}$; $\epsilon_r = 38.778$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(8.34, 8.81, 8.91); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (5x9x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 4.54 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 47.03 V/m; Power Drift = -0.01 dB


Peak SAR (extrapolated) = 10.5 W/kg

SAR(1 g) = 4.56 W/kg; SAR(10 g) = 2 W/kg

Smallest distance from peaks to all points 3 dB below = 10.4 mm

Ratio of SAR at M2 to SAR at M1 = 43.7%

Maximum value of SAR (measured) = 8.47 W/kg

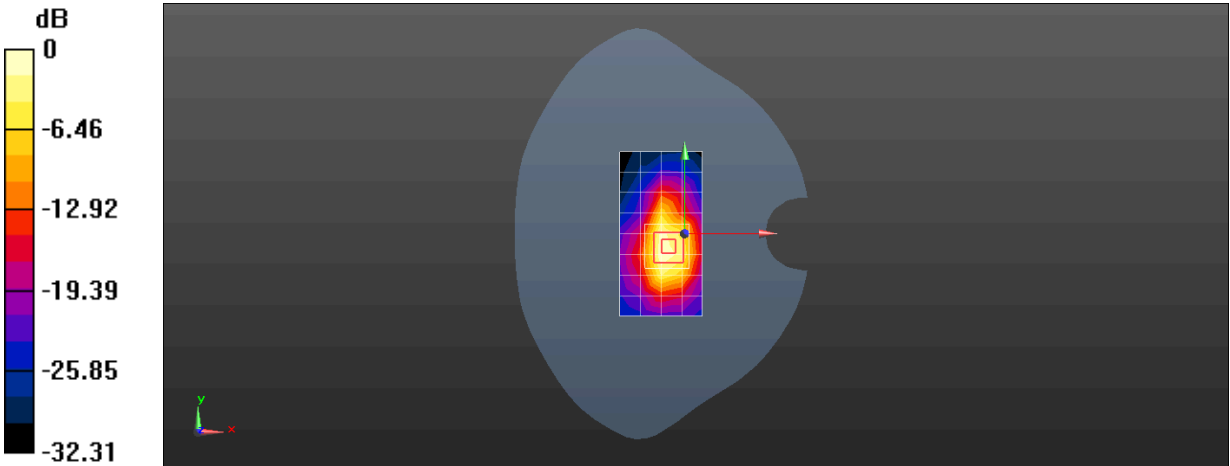

0 dB = 4.54 W/kg = 6.57 dBW/kg

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) LTE Band 7 20M QPSK 1RB0 21100CH Left cheek Ant1

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019639

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2535 MHz;Duty Cycle: 1:1


Medium: HSL;Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.897 \text{ S/m}$; $\epsilon_r = 39.932$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(7.47, 7.89, 7.98); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (10x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
Maximum value of SAR (measured) = 0.439 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 3.199 V/m ; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 0.518 W/kg
SAR(1 g) = 0.296 W/kg ; SAR(10 g) = 0.158 W/kg
Smallest distance from peaks to all points 3 dB below = 11.3 mm
Ratio of SAR at M2 to SAR at M1 = 58.5%
Maximum value of SAR (measured) = 0.439 W/kg

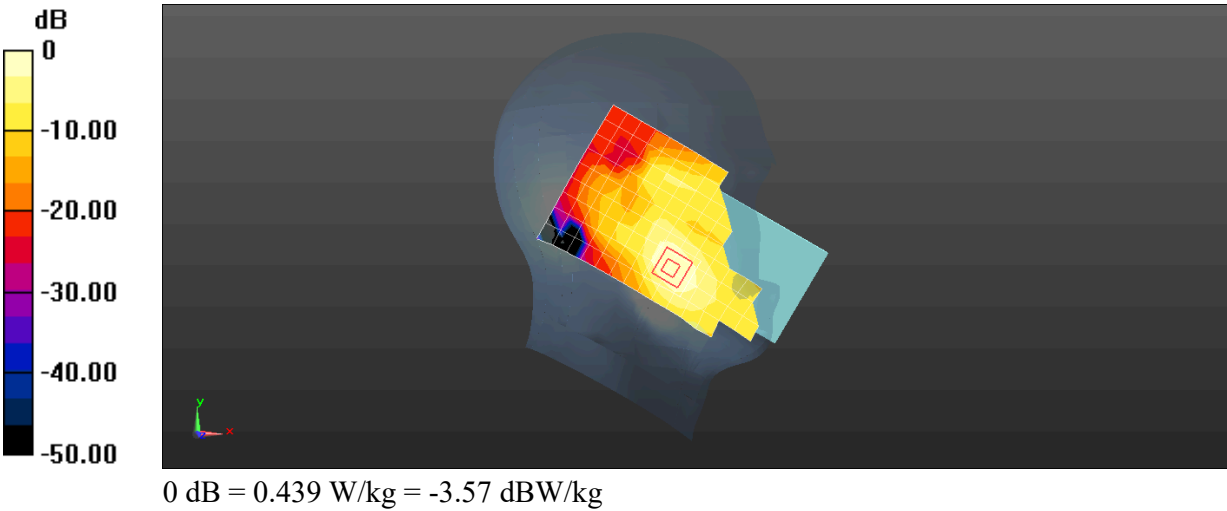

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) LTE Band 7 20M QPSK 1RB0 21350CH Back side 5mm Ant1

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019647

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL; Medium parameters used: $f = 2560$ MHz; $\sigma = 1.927$ S/m; $\epsilon_r = 39.853$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(7.47, 7.89, 7.98); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.16 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.980 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.705 W/kg; SAR(10 g) = 0.347 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 44.5%

Maximum value of SAR (measured) = 1.16 W/kg

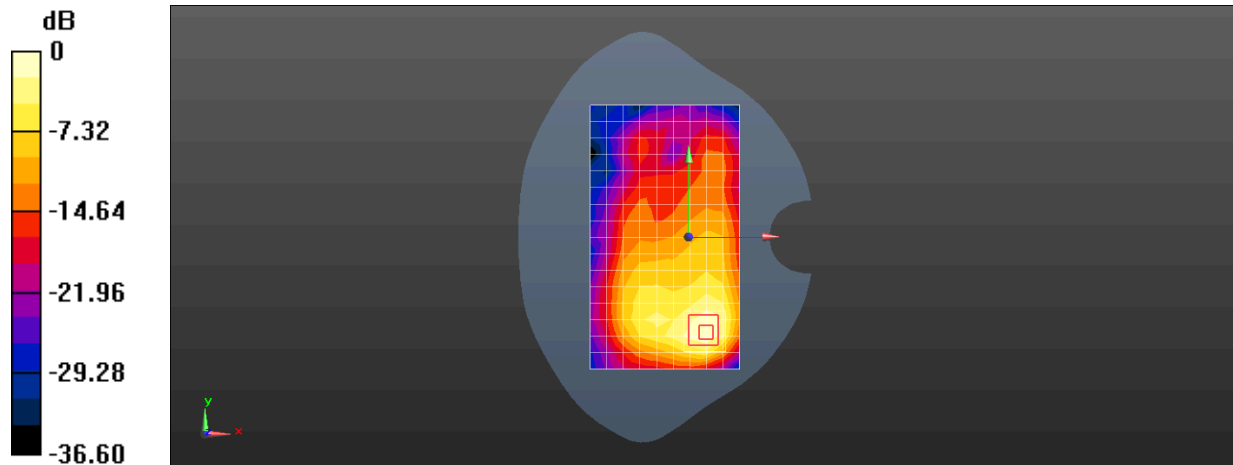

0 dB = 1.16 W/kg = 0.66 dBW/kg

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) LTE Band 7 20M QPSK 1RB0 21350CH Back side 0mm Ant1

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019647

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2560 MHz; Duty Cycle: 1:1

Medium: HSL; Medium parameters used: $f = 2560$ MHz; $\sigma = 1.927$ S/m; $\epsilon_r = 39.853$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(7.47, 7.89, 7.98); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 10.5 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.811 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 14.8 W/kg

SAR(1 g) = 5.16 W/kg; SAR(10 g) = 2.06 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 39.8%

Maximum value of SAR (measured) = 9.98 W/kg

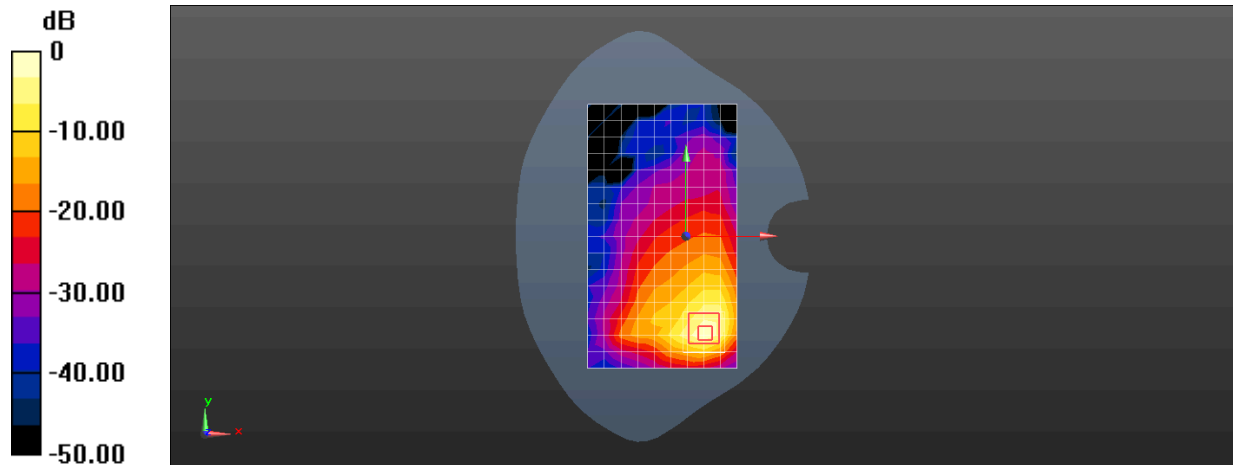

0 dB = 10.5 W/kg = 10.20 dBW/kg

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) LTE Band 12 10M QPSK 1RB0 23095CH Right cheek Ant0

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019639

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL; Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.865$ S/m; $\epsilon_r = 42.696$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.5, 11.1, 11.23); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.149 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.190 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 0.212 W/kg

SAR(1 g) = 0.149 W/kg; SAR(10 g) = 0.113 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 84.8%

Maximum value of SAR (measured) = 0.157 W/kg

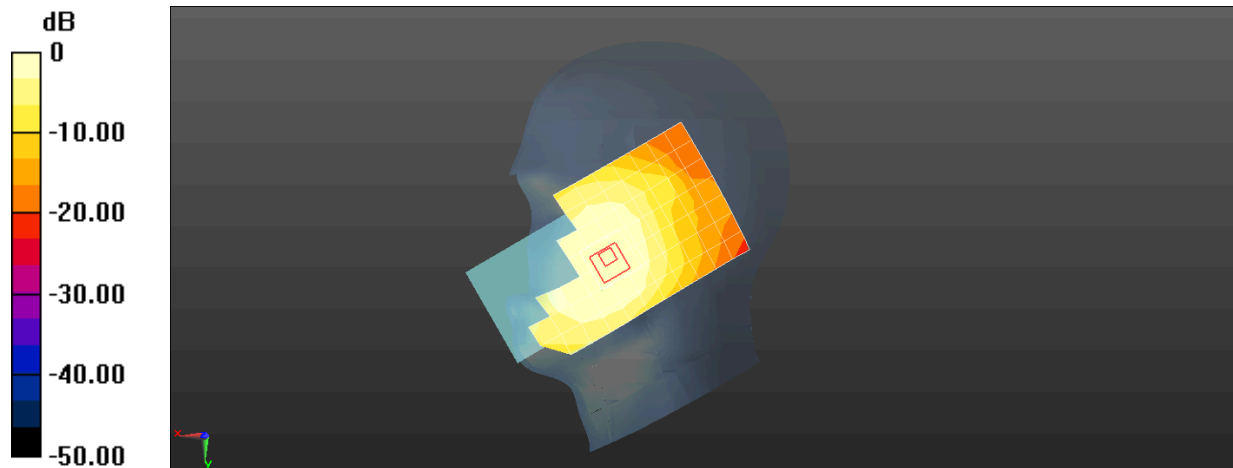

0 dB = 0.149 W/kg = -8.27 dBW/kg

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) LTE Band 12 10M QPSK 1RB0 23095CH Back side 5mm Ant0

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019639

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL; Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.86$ S/m; $\epsilon_r = 42.611$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.5, 11.1, 11.23); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.828 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.42 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.38 W/kg

SAR(1 g) = 0.613 W/kg; SAR(10 g) = 0.341 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 41.3%

Maximum value of SAR (measured) = 1.04 W/kg

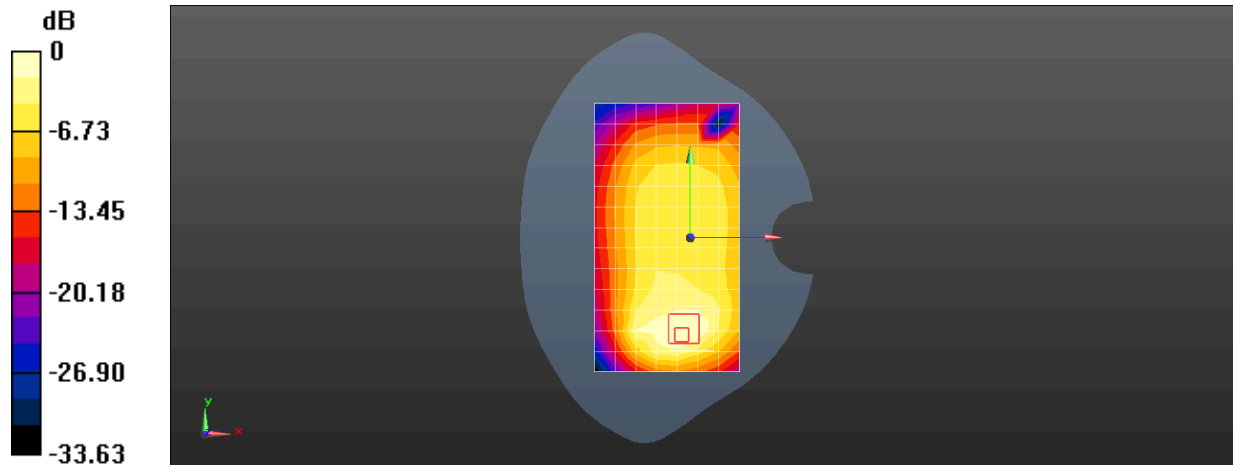

0 dB = 0.828 W/kg = -0.82 dBW/kg

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) LTE Band 26 15M QPSK 1RB0 26865CH Right cheek Ant0

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019639

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL; Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 43.138$; $\rho = 1000$ kg/m³

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.33, 10.91, 11.04); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.226 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.982 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.246 W/kg

SAR(1 g) = 0.199 W/kg; SAR(10 g) = 0.156 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 82.7%

Maximum value of SAR (measured) = 0.230 W/kg

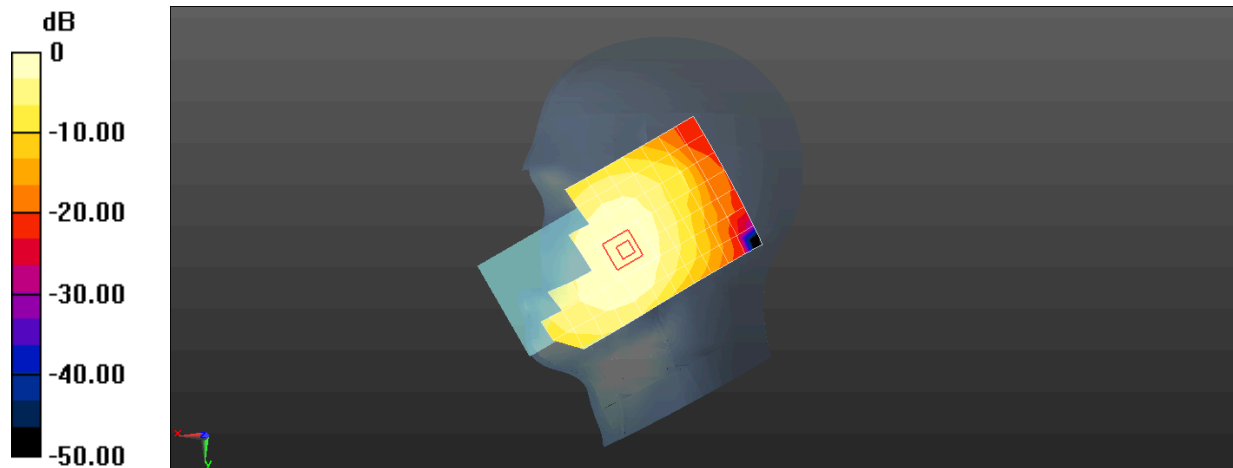

0 dB = 0.226 W/kg = -6.45 dBW/kg

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) LTE Band 26 15M QPSK 1RB0 26865CH Back side 5mm Ant0

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019647

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL; Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 43.138$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.33, 10.91, 11.04); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (8x14x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.24 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.95 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 2.12 W/kg

SAR(1 g) = 0.924 W/kg; SAR(10 g) = 0.490 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 42.6%

Maximum value of SAR (measured) = 1.59 W/kg

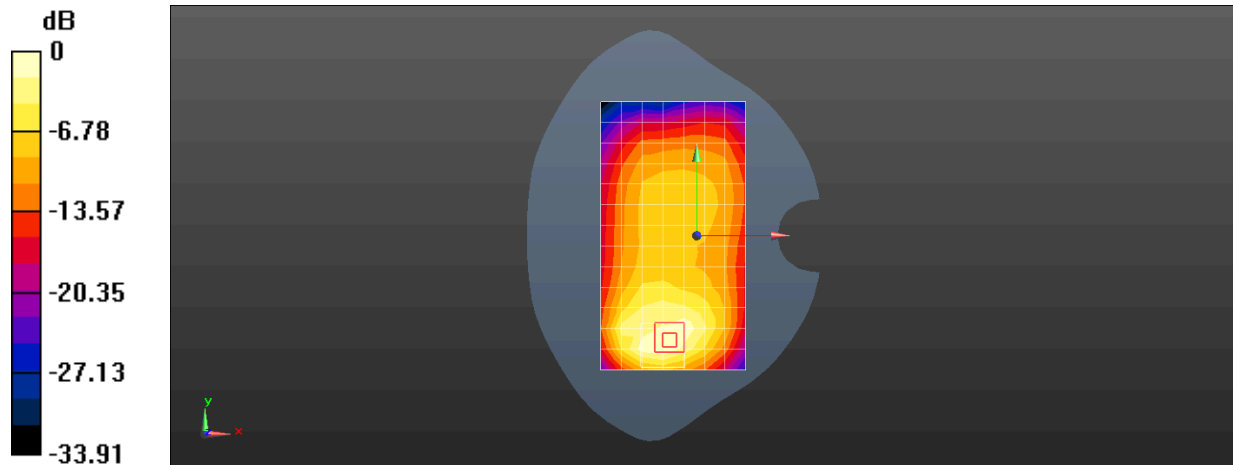

0 dB = 1.24 W/kg = 0.94 dBW/kg

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) LTE Band 26 15M QPSK 1RB0 26865CH Bottom side 0mm Ant0

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019647

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL; Medium parameters used (interpolated): $f = 831.5$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 43.138$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(10.33, 10.91, 11.04); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (5x9x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 4.52 W/kg

Configuration/Scan/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 47.25 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 19.0 W/kg

SAR(1 g) = 4.86 W/kg; SAR(10 g) = 1.88 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 54.7%

Maximum value of SAR (measured) = 10.5 W/kg

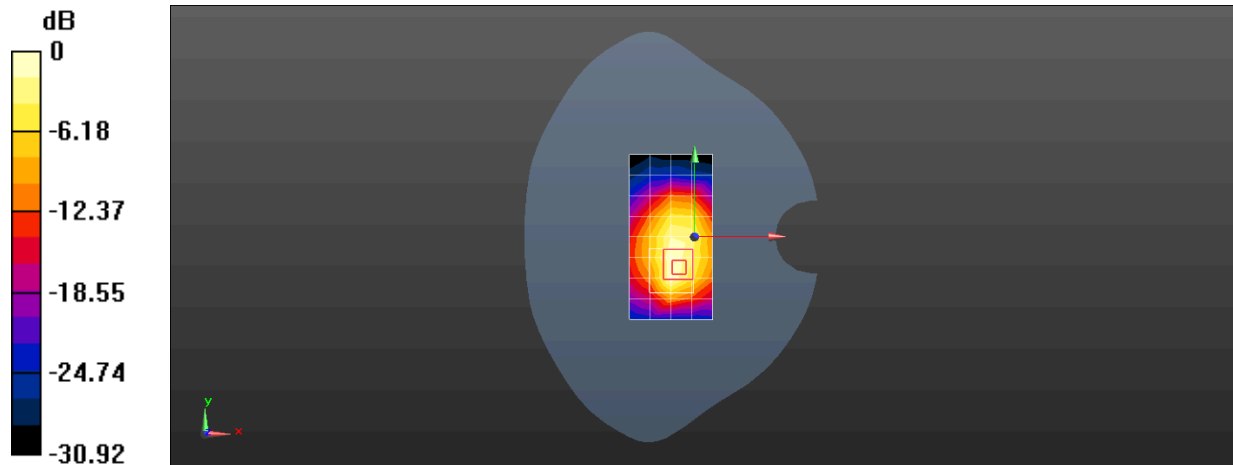

0 dB = 4.52 W/kg = 6.55 dBW/kg

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) LTE Band 38 20M QPSK 1RB0 38000CH Right tilted Ant4

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019647

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2595 MHz;Duty Cycle: 1:1.58016

Medium: HSL;Medium parameters used: $f = 2595 \text{ MHz}$; $\sigma = 1.962 \text{ S/m}$; $\epsilon_r = 39.746$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(7.47, 7.89, 7.98); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (10x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.955 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 4.814 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 1.56 W/kg

SAR(1 g) = 0.606 W/kg; SAR(10 g) = 0.250 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 37.7%

Maximum value of SAR (measured) = 1.11 W/kg

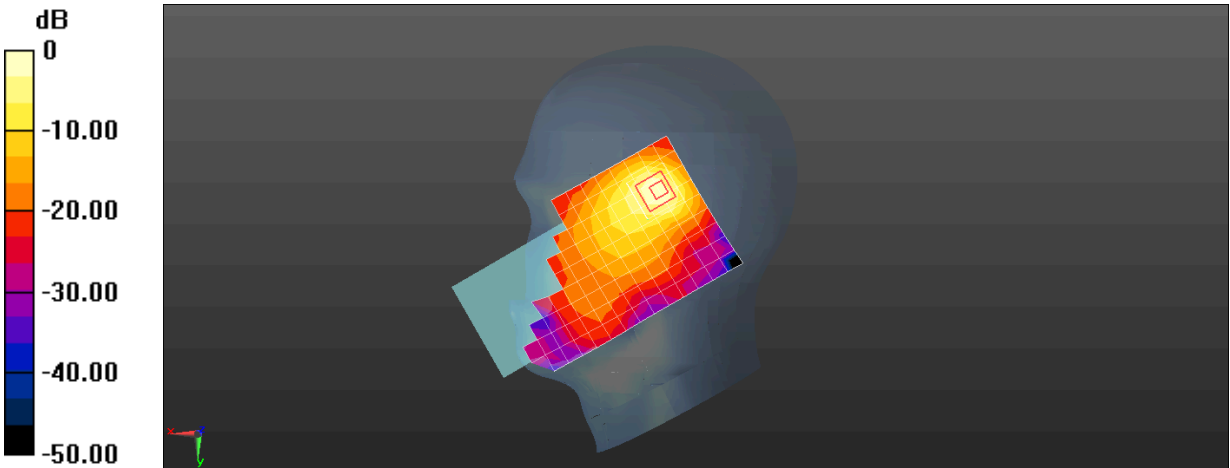

0 dB = 0.955 W/kg = -0.20 dBW/kg

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) LTE Band 38 20M QPSK 1RB0 38000CH Back side 5mm Ant4

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019647

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58016

Medium: HSL; Medium parameters used: $f = 2595$ MHz; $\sigma = 1.962$ S/m; $\epsilon_r = 39.746$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(7.47, 7.89, 7.98); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.705 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.533 V/m; Power Drift = 0.04 dB


Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.448 W/kg; SAR(10 g) = 0.179 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 40.2%

Maximum value of SAR (measured) = 0.802 W/kg

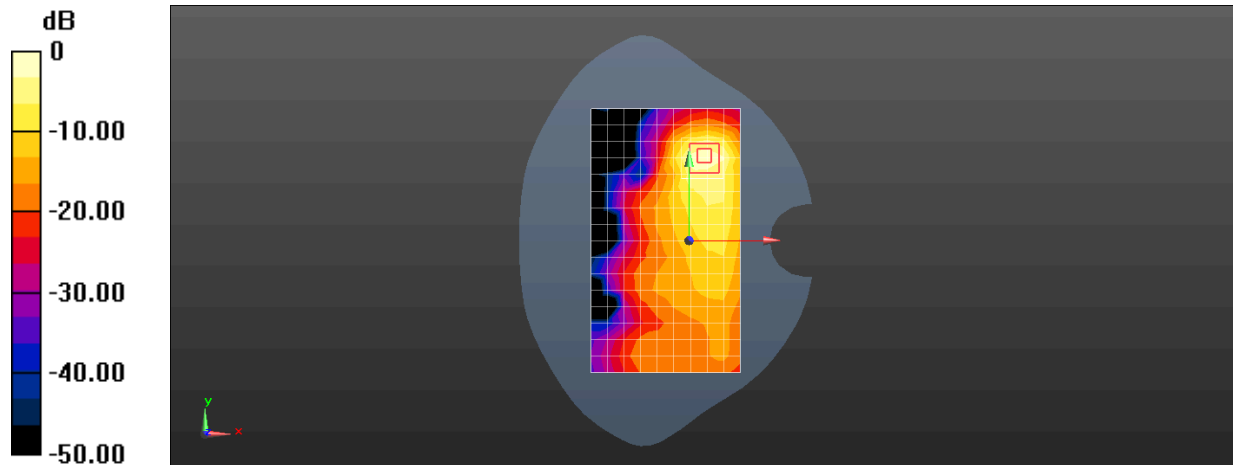

0 dB = 0.705 W/kg = -1.52 dBW/kg

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) LTE Band 38 20M QPSK 1RB0 38000CH Back side 5mm Ant4

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019647

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58016

Medium: HSL; Medium parameters used: $f = 2595$ MHz; $\sigma = 1.962$ S/m; $\epsilon_r = 39.746$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(7.47, 7.89, 7.98); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.512 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.056 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.804 W/kg

SAR(1 g) = 0.317 W/kg; SAR(10 g) = 0.127 W/kg

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 42.7%

Maximum value of SAR (measured) = 0.598 W/kg

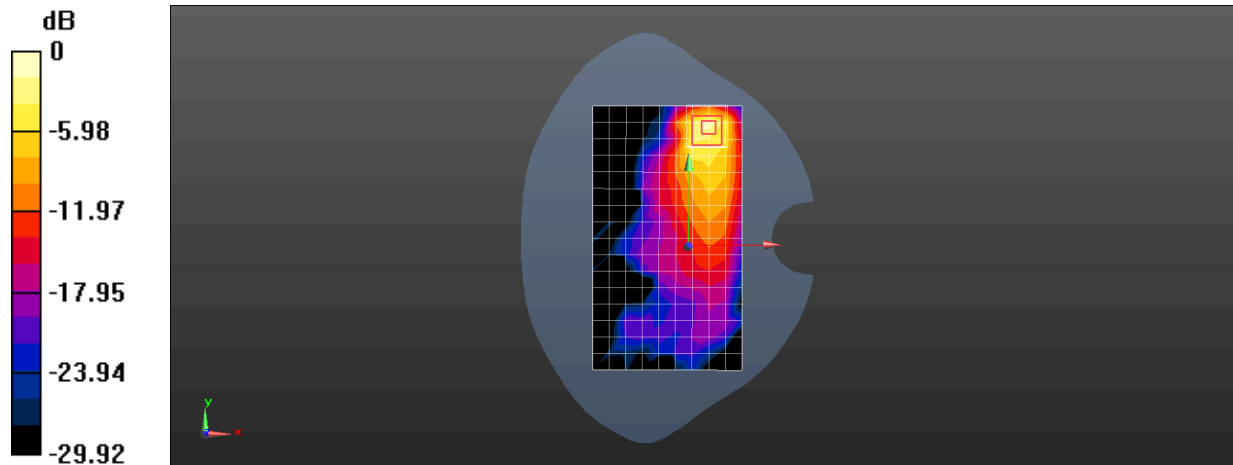

0 dB = 0.512 W/kg = -2.23 dBW/kg

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) LTE Band 38 20M QPSK 1RB0 38000CH Top side 0mm Ant4

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019647

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2595 MHz; Duty Cycle: 1:1.58016

Medium: HSL; Medium parameters used: $f = 2595$ MHz; $\sigma = 1.971$ S/m; $\epsilon_r = 39.776$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(7.47, 7.89, 7.98); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (6x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 3.11 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.49 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 14.6 W/kg

SAR(1 g) = 4.19 W/kg; SAR(10 g) = 1.29 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 36.5%

Maximum value of SAR (measured) = 9.66 W/kg

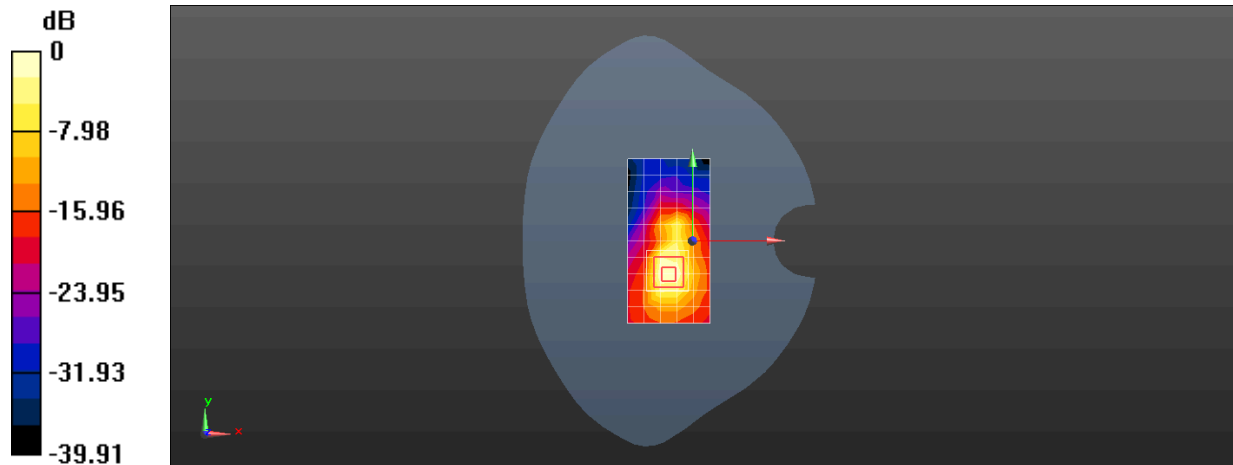

0 dB = 3.11 W/kg = 4.93 dBW/kg

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) LTE Band 41 20M QPSK 1RB0 41055CH Right tilted Ant4

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019647

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2636.5 MHz;Duty Cycle: 1:1.58016

Medium: HSL;Medium parameters used: $f = 2636.5 \text{ MHz}$; $\sigma = 1.985 \text{ S/m}$; $\epsilon_r = 39.398$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(7.47, 7.89, 7.98); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (10x16x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 1.06 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.326 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.80 W/kg

SAR(1 g) = 0.722 W/kg; SAR(10 g) = 0.302 W/kg

Smallest distance from peaks to all points 3 dB below = 7 mm

Ratio of SAR at M2 to SAR at M1 = 42.4%

Maximum value of SAR (measured) = 1.32 W/kg

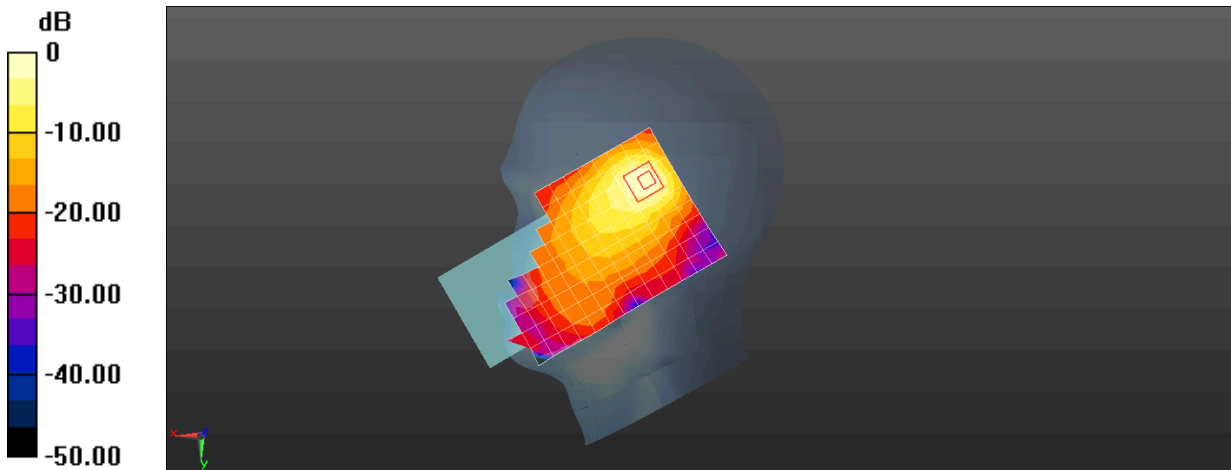

0 dB = 1.06 W/kg = 0.24 dBW/kg

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) LTE Band 41 20M QPSK 1RB50 41490CH Back side 5mm Ant1

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019639

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2680 MHz; Duty Cycle: 1:1.58016

Medium: HSL; Medium parameters used: $f = 2680$ MHz; $\sigma = 2.037$ S/m; $\epsilon_r = 39.249$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(7.47, 7.89, 7.98); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 1.24 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.470 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 1.82 W/kg

SAR(1 g) = 0.834 W/kg; SAR(10 g) = 0.377 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 45.5%

Maximum value of SAR (measured) = 1.40 W/kg

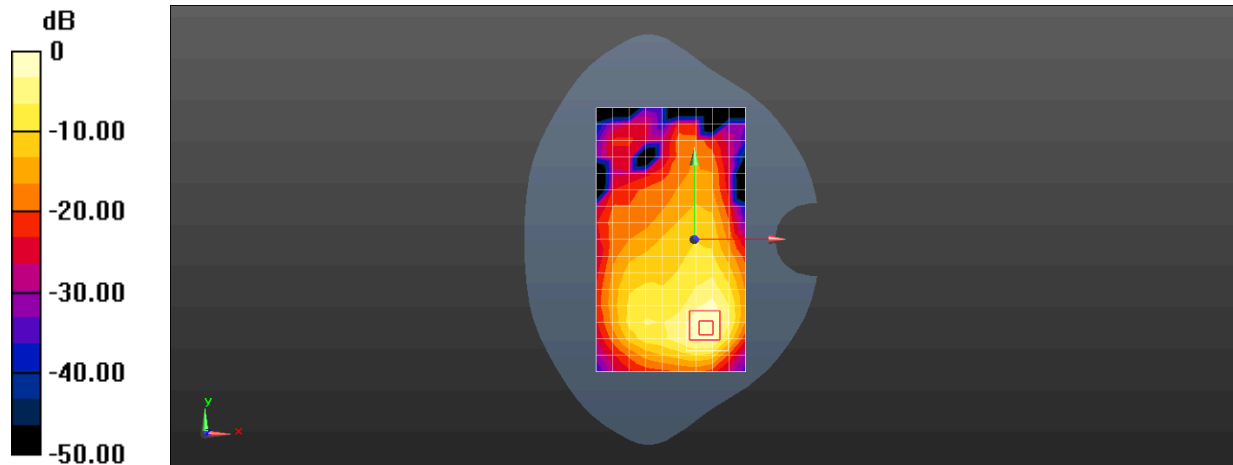

0 dB = 1.24 W/kg = 0.93 dBW/kg

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) LTE Band 41 20M QPSK 1RB50 41490CH Back side 0mm Ant1

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019639

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2680 MHz; Duty Cycle: 1:1.58016

Medium: HSL; Medium parameters used: $f = 2680$ MHz; $\sigma = 2.037$ S/m; $\epsilon_r = 39.249$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(7.47, 7.89, 7.98); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (10x17x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 8.72 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.030 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 14.0 W/kg

SAR(1 g) = 5.05 W/kg; SAR(10 g) = 1.92 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 38.5%

Maximum value of SAR (measured) = 9.92 W/kg

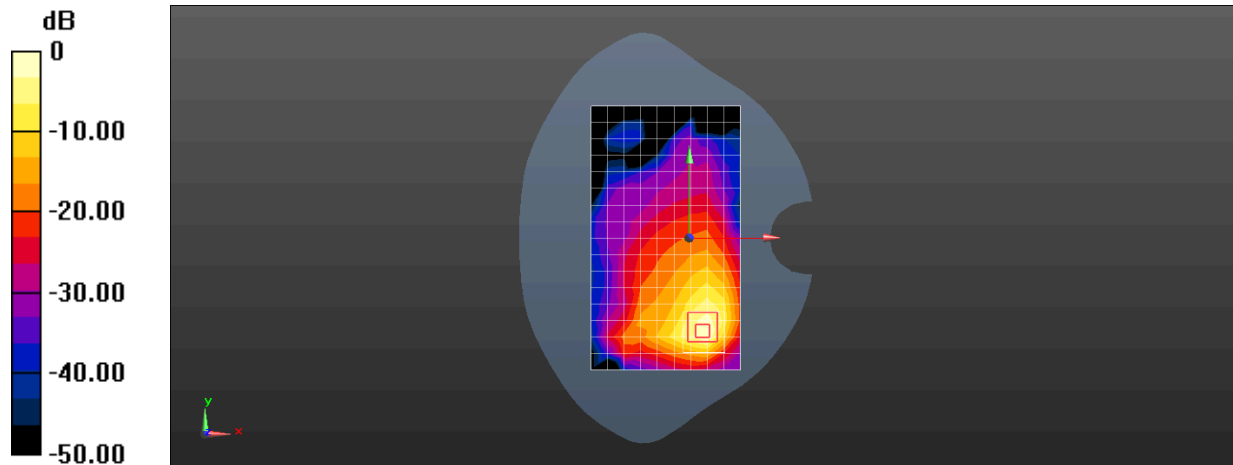

0 dB = 8.72 W/kg = 9.41 dBW/kg

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) LTE Band 42 20M QPSK 1RB99 42990CH Left tilted Ant5

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019647

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 3540 MHz; Duty Cycle: 1:1.58016

Medium: HSL; Medium parameters used: $f = 3540$ MHz; $\sigma = 3.022$ S/m; $\epsilon_r = 38.314$; $\rho = 1000$ kg/m³

Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(6.62, 6.62, 6.62); Calibrated: 2025/12/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2025/8/29
- Phantom: SAM 5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (11x20x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 1.07 W/kg

Configuration/Scan/Zoom Scan (7x7x11)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=3$ mm

Reference Value = 12.63 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 2.15 W/kg

SAR(1 g) = 0.733 W/kg; SAR(10 g) = 0.281 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 52.2%

Maximum value of SAR (measured) = 1.53 W/kg

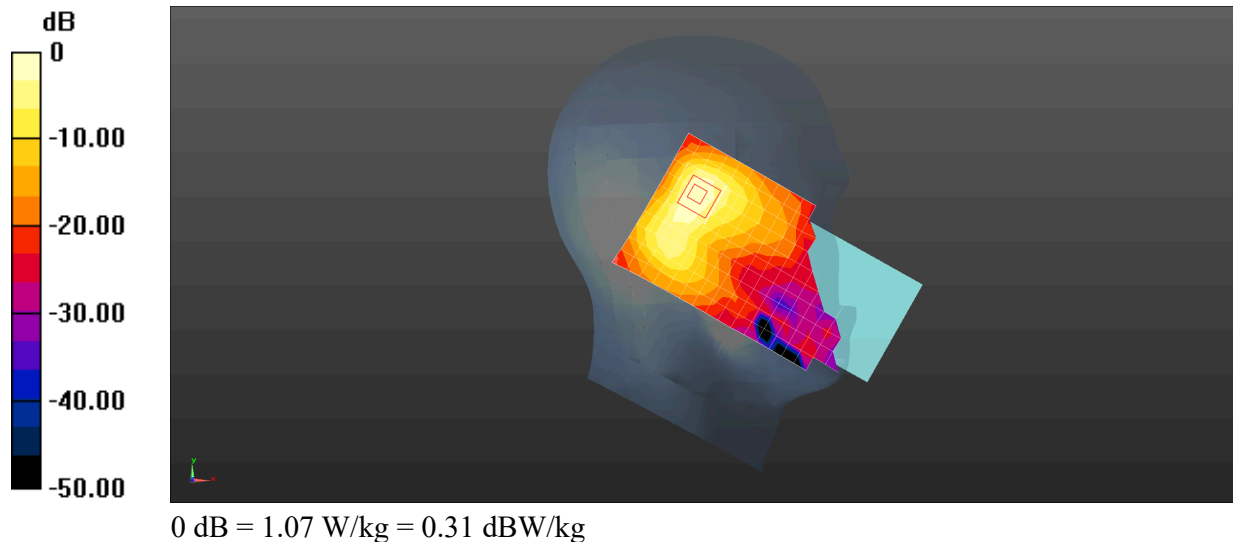

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) LTE Band 42 20M QPSK 1RB99 42990CH Back side 5mm Ant5

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019647

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 3540 MHz; Duty Cycle: 1:1.58016

Medium: HSL; Medium parameters used: $f = 3540$ MHz; $\sigma = 3.022$ S/m; $\epsilon_r = 38.314$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(6.62, 6.62, 6.62); Calibrated: 2025/12/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2025/8/29
- Phantom: SAM 5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (12x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.932 W/kg

Configuration/Scan/Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 3.838 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 0.498 W/kg; SAR(10 g) = 0.208 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 47.7%

Maximum value of SAR (measured) = 1.03 W/kg

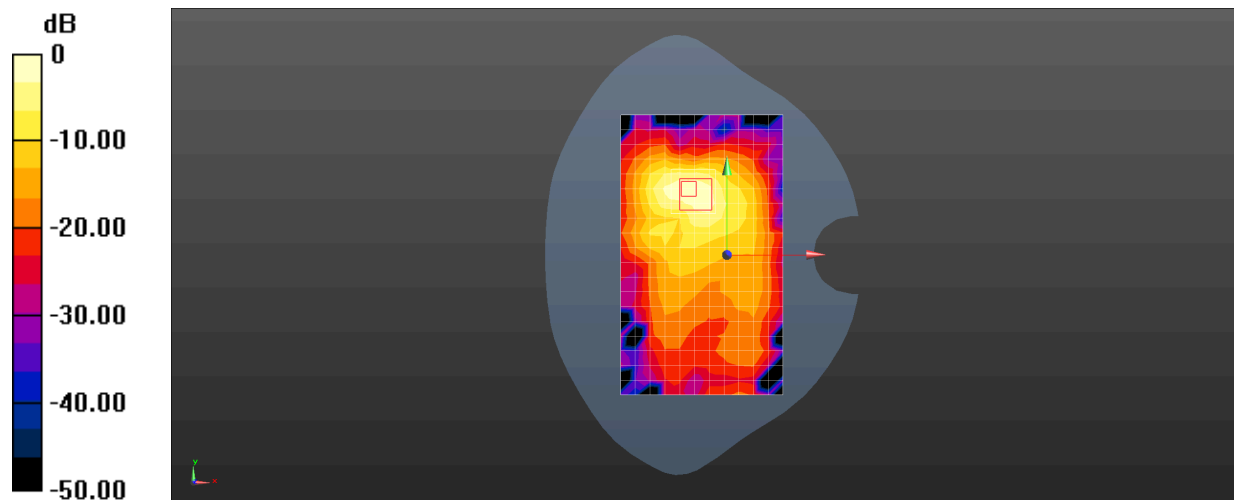

0 dB = 0.932 W/kg = -0.31 dBW/kg

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) LTE Band 42 20M QPSK 1RB99 42990CH Back side 5mm Ant5

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019647

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 3540 MHz; Duty Cycle: 1:1.58016

Medium: HSL; Medium parameters used: $f = 3540$ MHz; $\sigma = 3.022$ S/m; $\epsilon_r = 38.314$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(6.62, 6.62, 6.62); Calibrated: 2025/12/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2025/8/29
- Phantom: SAM 5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (12x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.637 W/kg

Configuration/Scan/Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 1.871 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.369 W/kg; SAR(10 g) = 0.152 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 46.1%

Maximum value of SAR (measured) = 0.779 W/kg

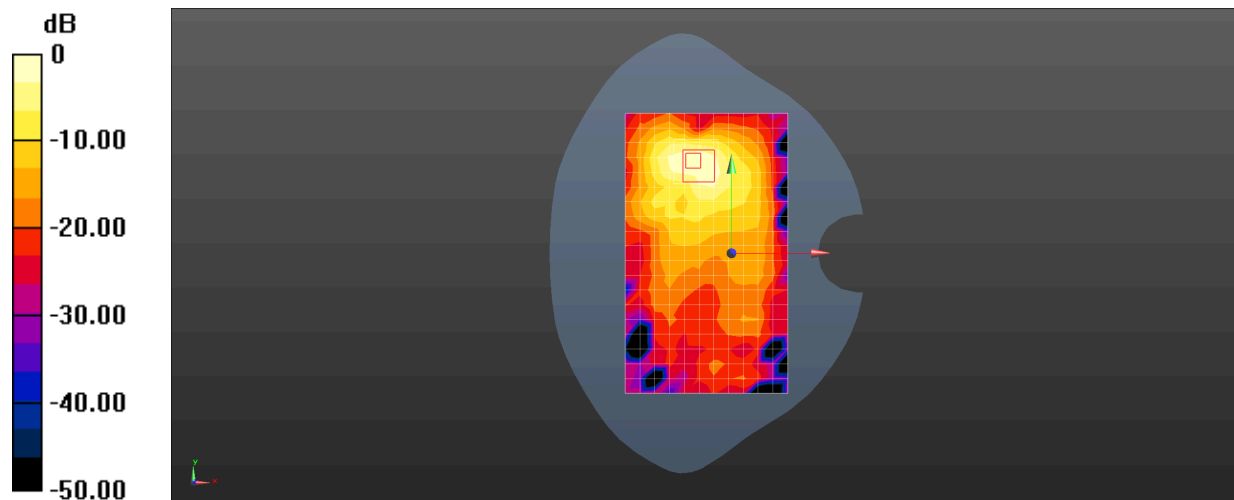

0 dB = 0.637 W/kg = -1.96 dBW/kg

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) LTE Band 42 20M QPSK 1RB99 42990CH Back side 0mm Ant5

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019647

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 3540 MHz; Duty Cycle: 1:1.58016

Medium: HSL; Medium parameters used: $f = 3540$ MHz; $\sigma = 3.022$ S/m; $\epsilon_r = 38.314$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(6.62, 6.62, 6.62); Calibrated: 2025/12/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2025/8/29
- Phantom: SAM 5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (12x20x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 5.31 W/kg

Configuration/Scan/Zoom Scan (7x7x11)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=3mm

Reference Value = 4.442 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 9.70 W/kg

SAR(1 g) = 2.94 W/kg; SAR(10 g) = 1.19 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 46.7%

Maximum value of SAR (measured) = 6.37 W/kg

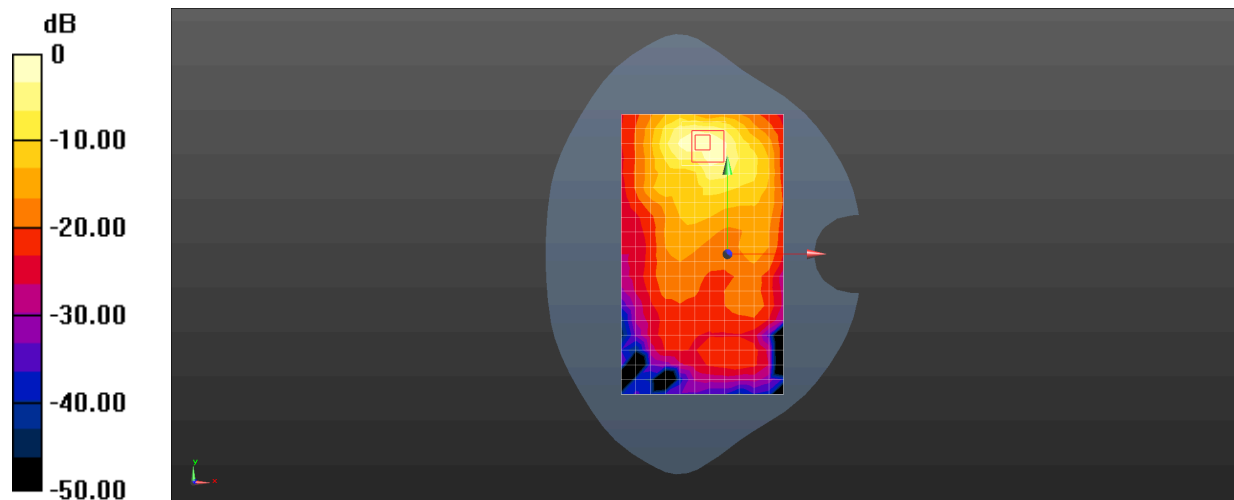

0 dB = 5.31 W/kg = 7.25 dBW/kg

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) 5G NR N77 100M QPSK 135RB69 657200CH Left tilted Ant5

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019639

Communication System: UID 0, NR (0); Frequency: 3858 MHz;Duty Cycle: 1:1

Medium: HSL;Medium parameters used: $f = 3858 \text{ MHz}$; $\sigma = 3.342 \text{ S/m}$; $\epsilon_r = 37.119$; $\rho = 1000 \text{ kg/m}^3$


Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(6.32, 6.32, 6.32); Calibrated: 2025/12/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2025/8/29
- Phantom: SAM 5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (11x20x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 1.15 W/kg

Configuration/Scan/Zoom Scan (7x7x11)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$
Reference Value = 8.437 V/m; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 2.13 W/kg
SAR(1 g) = 0.724 W/kg; SAR(10 g) = 0.255 W/kg
Smallest distance from peaks to all points 3 dB below = 7.3 mm
Ratio of SAR at M2 to SAR at M1 = 53.1%
Maximum value of SAR (measured) = 1.52 W/kg

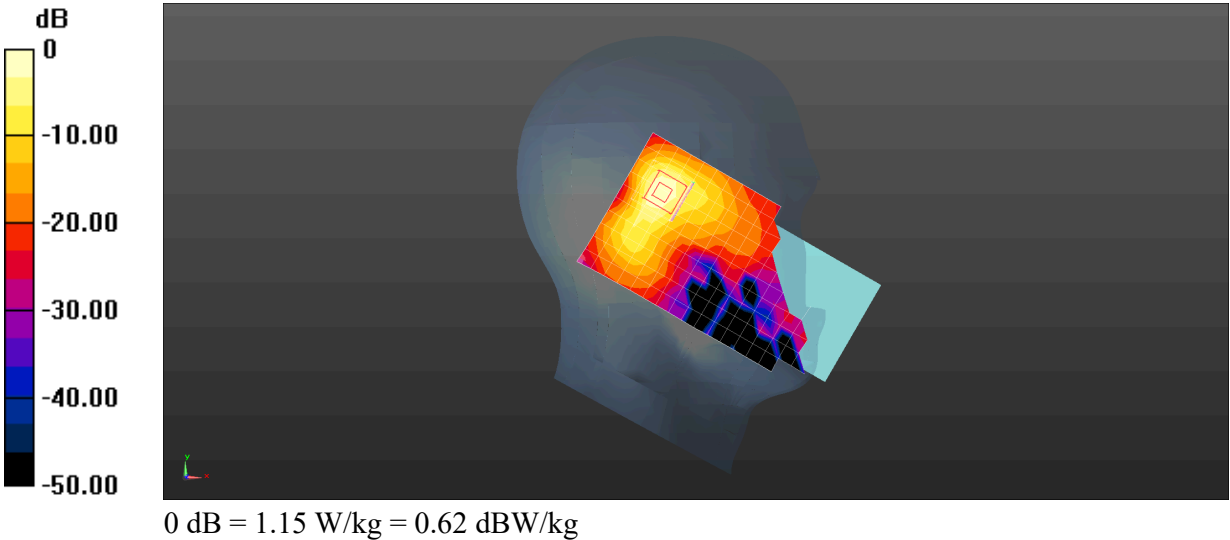

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) 5G NR N77 100M QPSK 1RB271 633334CH Back side 5mm Ant1

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019639

Communication System: UID 0, NR (0); Frequency: 3500 MHz;Duty Cycle: 1:1

Medium: HSL;Medium parameters used: $f = 3500 \text{ MHz}$; $\sigma = 2.97 \text{ S/m}$; $\epsilon_r = 38.395$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(6.62, 6.62, 6.62); Calibrated: 2025/12/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2025/8/29
- Phantom: SAM 5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (12x20x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.45 W/kg

Configuration/Scan/Zoom Scan (7x7x11)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$

Reference Value = 5.634 V/m; Power Drift = -0.02 dB


Peak SAR (extrapolated) = 2.14 W/kg

SAR(1 g) = 0.843 W/kg; SAR(10 g) = 0.384 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 55.4%

Maximum value of SAR (measured) = 1.57 W/kg

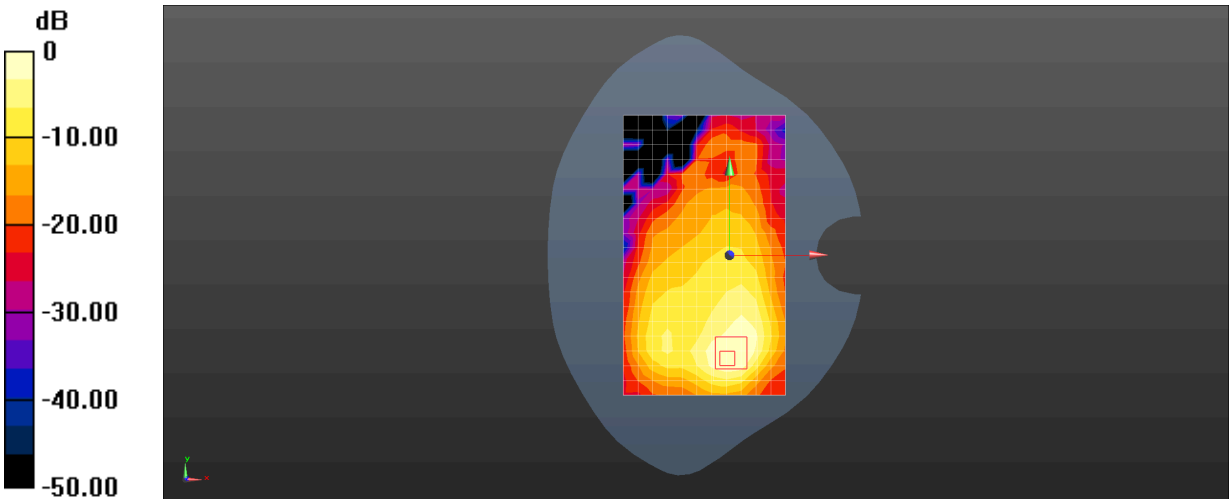

0 dB = 1.45 W/kg = 1.63 dBW/kg

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) 5G NR N77 100M QPSK 1RB137 657200CH Top side 0mm Ant5

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019639

Communication System: UID 0, NR (0); Frequency: 3858 MHz; Duty Cycle: 1:1

Medium: HSL; Medium parameters used: $f = 3858 \text{ MHz}$; $\sigma = 3.342 \text{ S/m}$; $\epsilon_r = 37.119$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(6.32, 6.32, 6.32); Calibrated: 2025/12/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2025/8/29
- Phantom: SAM 5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (7x12x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 14.3 W/kg

Configuration/Scan/Zoom Scan (7x7x11)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$

Reference Value = 30.09 V/m ; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 22.1 W/kg

SAR(1 g) = 5.93 W/kg ; SAR(10 g) = 1.8 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 44.1%

Maximum value of SAR (measured) = 14.2 W/kg

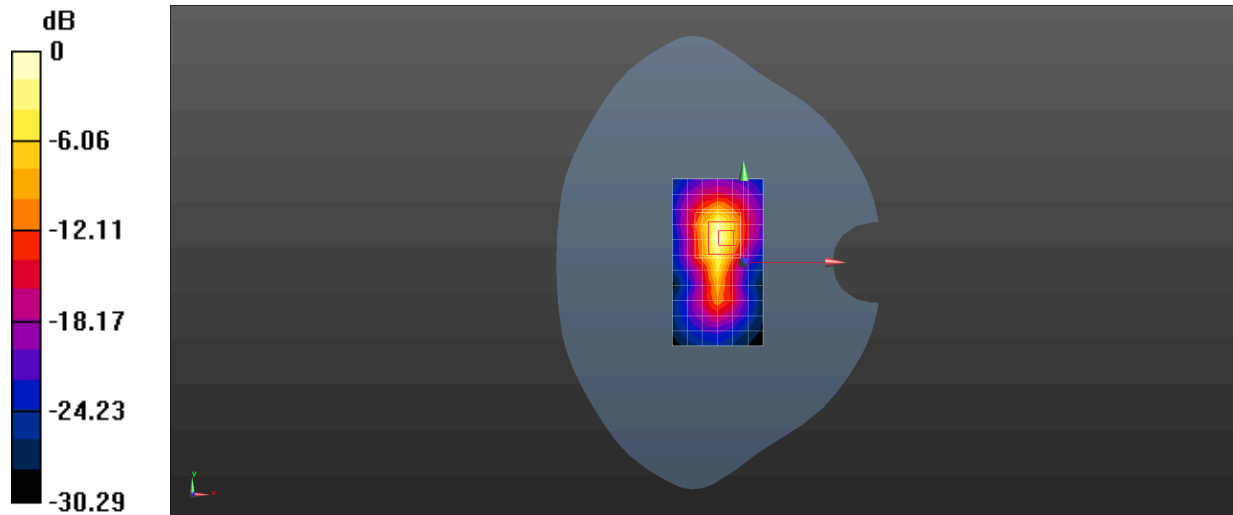

0 dB = 14.3 W/kg = 11.56 dBW/kg

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) 5G NR N77 100M QPSK 135RB69 633334CH Bottom side 5mm Ant1

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019639

Communication System: UID 0, NR (0); Frequency: 3500 MHz;Duty Cycle: 1:1

Medium: HSL;Medium parameters used: $f = 3500 \text{ MHz}$; $\sigma = 2.97 \text{ S/m}$; $\epsilon_r = 38.395$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(6.62, 6.62, 6.62); Calibrated: 2025/12/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2025/8/29
- Phantom: SAM 5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (7x12x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 1.52 W/kg

Configuration/Scan/Zoom Scan (7x7x11)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$

Reference Value = 10.36 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 2.25 W/kg

SAR(1 g) = 0.759 W/kg; SAR(10 g) = 0.308 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 54.5%

Maximum value of SAR (measured) = 1.64 W/kg

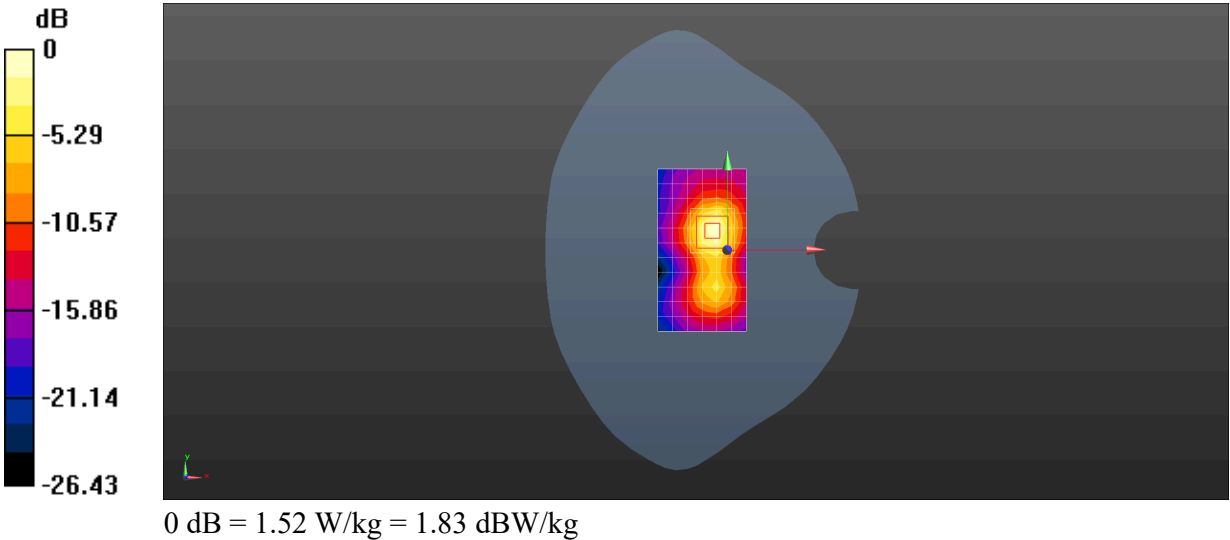

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) WIFI 2.4G 802.11b 1CH Left tilted Ant6

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019639

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2412 MHz;Duty Cycle: 1:1.004


Medium: HSL;Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.808 \text{ S/m}$; $\epsilon_r = 38.835$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(7.28, 7.69, 7.78); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
Maximum value of SAR (measured) = 0.787 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 14.84 V/m ; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 1.25 W/kg
SAR(1 g) = 0.570 W/kg ; SAR(10 g) = 0.267 W/kg
Smallest distance from peaks to all points 3 dB below = 6.4 mm
Ratio of SAR at M2 to SAR at M1 = 48%
Maximum value of SAR (measured) = 1.01 W/kg

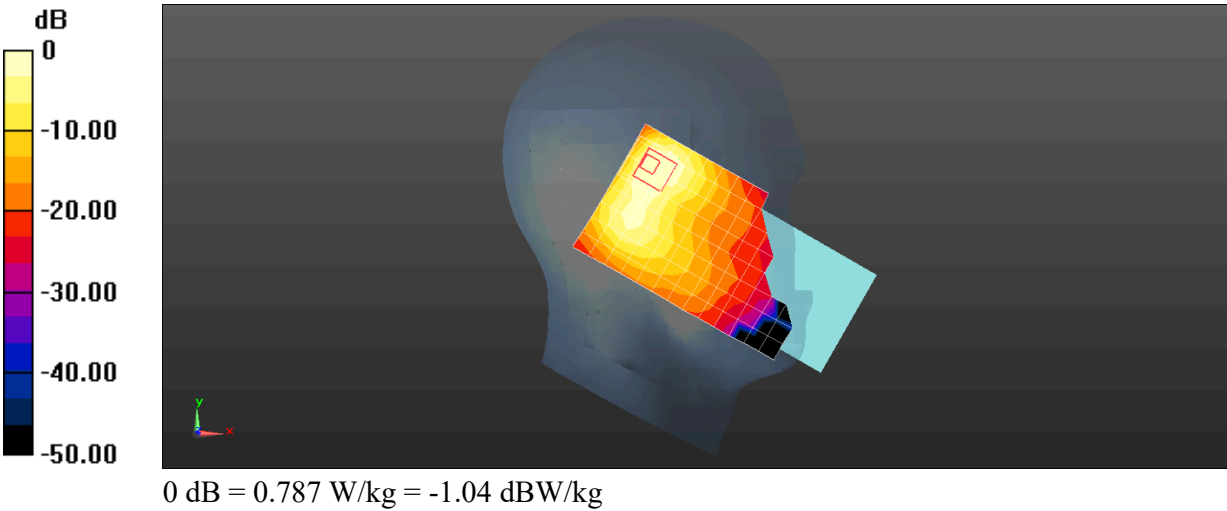

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) WIFI 2.4G 802.11b 1CH Back side 5mm Ant6

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019639

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2412 MHz;Duty Cycle: 1:1.004


Medium: HSL;Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.808 \text{ S/m}$; $\epsilon_r = 38.835$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(7.28, 7.69, 7.78); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
Maximum value of SAR (measured) = 0.469 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 3.152 V/m ; Power Drift = -0.04 dB
Peak SAR (extrapolated) = 0.799 W/kg
SAR(1 g) = 0.332 W/kg ; SAR(10 g) = 0.152 W/kg
Smallest distance from peaks to all points 3 dB below = 9.1 mm
Ratio of SAR at M2 to SAR at M1 = 42.3%
Maximum value of SAR (measured) = 0.601 W/kg

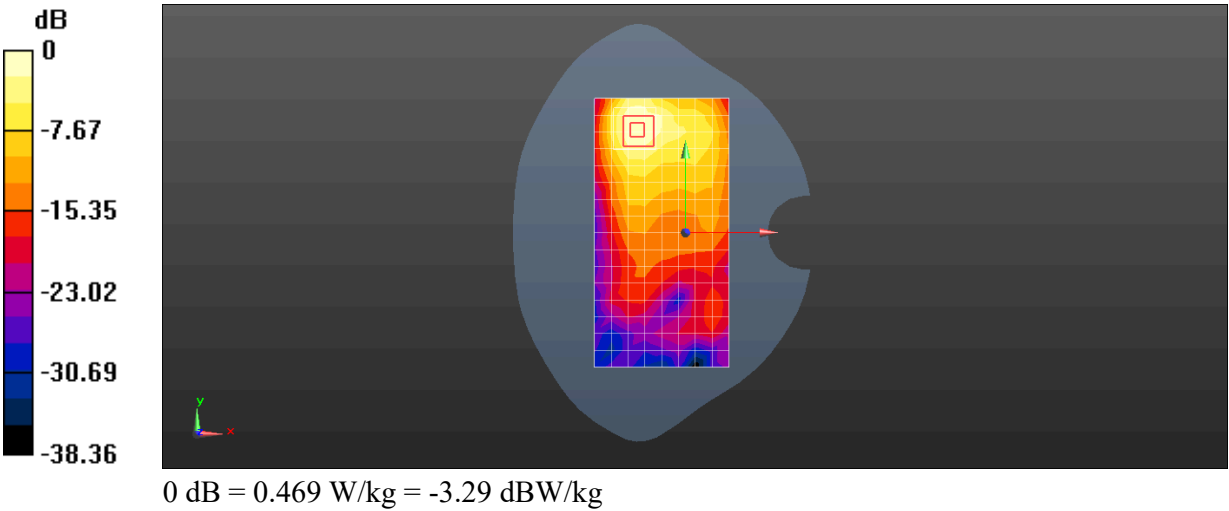

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) WIFI 2.4G 802.11b 1CH Back side 5mm Ant6

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019639

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2412 MHz;Duty Cycle: 1:1.004


Medium: HSL;Medium parameters used: $f = 2412 \text{ MHz}$; $\sigma = 1.808 \text{ S/m}$; $\epsilon_r = 38.835$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(7.28, 7.69, 7.78); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
Maximum value of SAR (measured) = 1.33 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 5.099 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 1.82 W/kg
SAR(1 g) = 0.782 W/kg; SAR(10 g) = 0.358 W/kg
Smallest distance from peaks to all points 3 dB below = 10 mm
Ratio of SAR at M2 to SAR at M1 = 39.7%
Maximum value of SAR (measured) = 1.37 W/kg

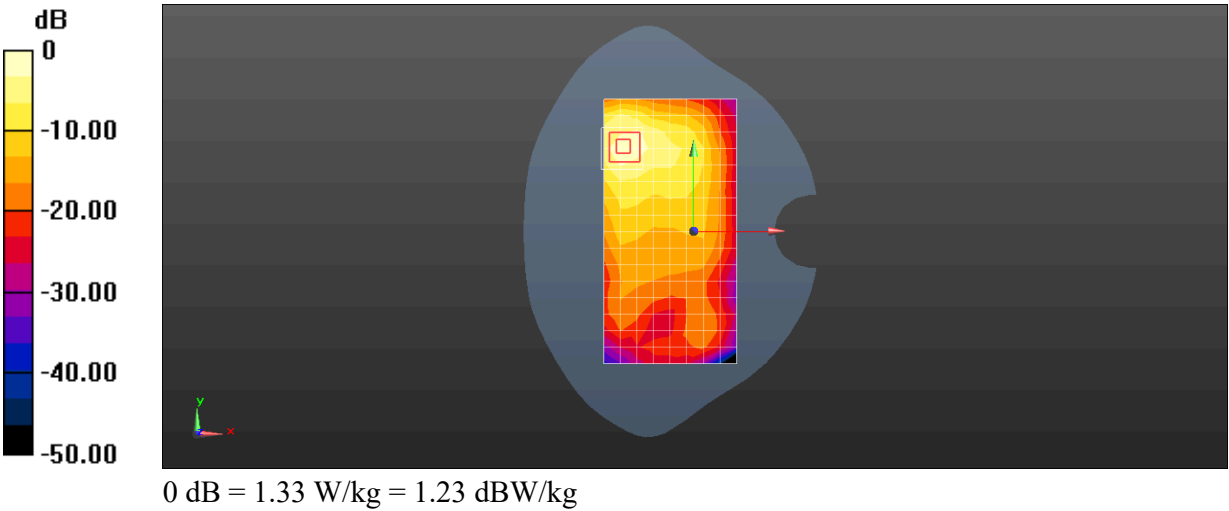

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) WIFI 5G 802.11a 60CH Left tilted Ant6

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019753

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5300 MHz;Duty Cycle: 1:1.026


Medium: HSL;Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 4.858 \text{ S/m}$; $\epsilon_r = 36.888$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(5.22, 5.22, 5.22); Calibrated: 2025/12/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2025/8/29
- Phantom: SAM 5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (11x20x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 1.11 W/kg

Configuration/Scan/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 0.4890 V/m; Power Drift = 0.08 dB
Peak SAR (extrapolated) = 3.42 W/kg
SAR(1 g) = 0.731 W/kg; SAR(10 g) = 0.186 W/kg
Smallest distance from peaks to all points 3 dB below = 5.1 mm
Ratio of SAR at M2 to SAR at M1 = 53.1%
Maximum value of SAR (measured) = 1.89 W/kg

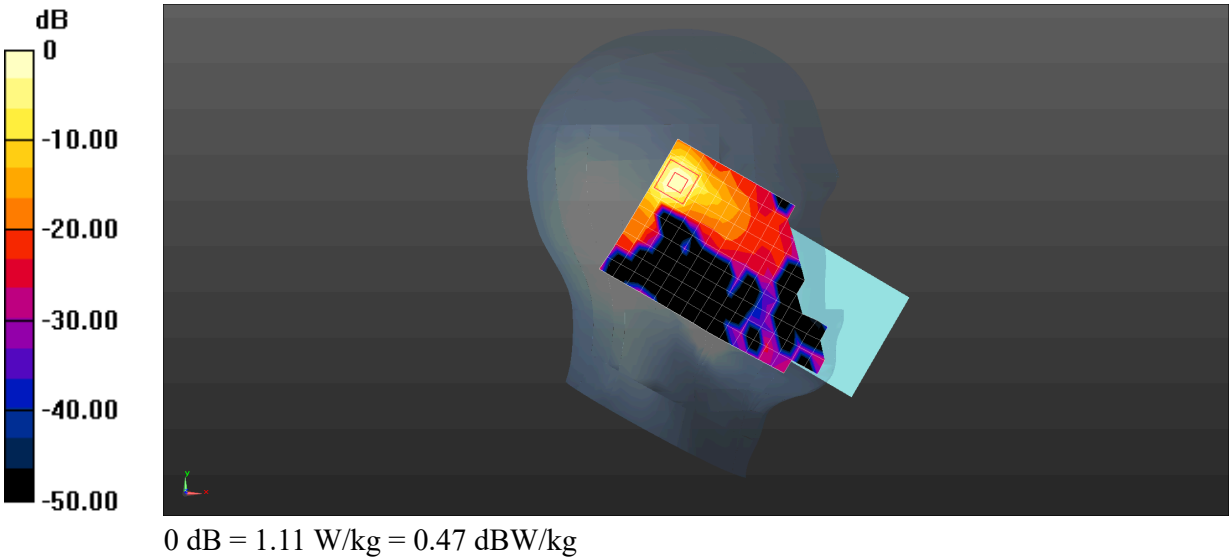

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) WIFI 5G 802.11a 60CH Back side 5mm Ant6

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019647

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5300 MHz;Duty Cycle: 1:1.026


Medium: HSL;Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 4.858 \text{ S/m}$; $\epsilon_r = 36.888$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(5.22, 5.22, 5.22); Calibrated: 2025/12/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2025/8/29
- Phantom: SAM 5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (11x21x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 2.24 W/kg

Configuration/Scan/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 0 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 3.67 W/kg
SAR(1 g) = 0.742 W/kg; SAR(10 g) = 0.201 W/kg
Smallest distance from peaks to all points 3 dB below = 6.1 mm
Ratio of SAR at M2 to SAR at M1 = 54.5%
Maximum value of SAR (measured) = 2.26 W/kg

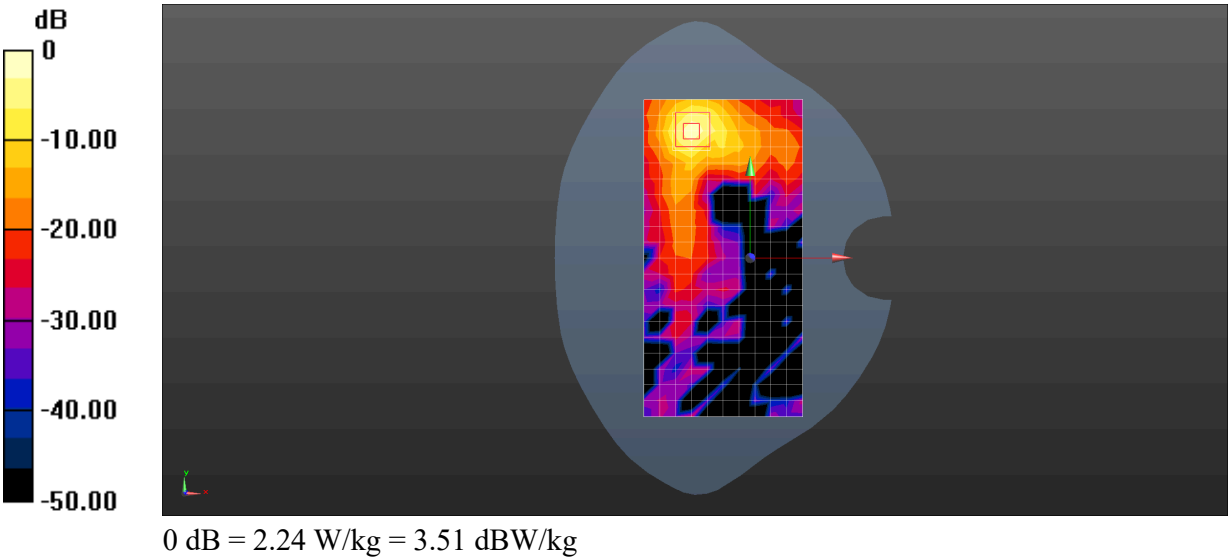

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) WIFI 5G 802.11a 60CH Top side 0mm Ant6

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019639

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5300 MHz;Duty Cycle: 1:1.026

Medium: HSL;Medium parameters used: $f = 5300 \text{ MHz}$; $\sigma = 4.858 \text{ S/m}$; $\epsilon_r = 36.888$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(5.22, 5.22, 5.22); Calibrated: 2025/12/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2025/8/29
- Phantom: SAM 5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (7x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 20.4 W/kg

Configuration/Scan/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 9.353 V/m ; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 40.9 W/kg

SAR(1 g) = 6.82 W/kg ; SAR(10 g) = 1.47 W/kg

Smallest distance from peaks to all points 3 dB below = 4.3 mm

Ratio of SAR at M2 to SAR at M1 = 47.8%

Maximum value of SAR (measured) = 20.6 W/kg

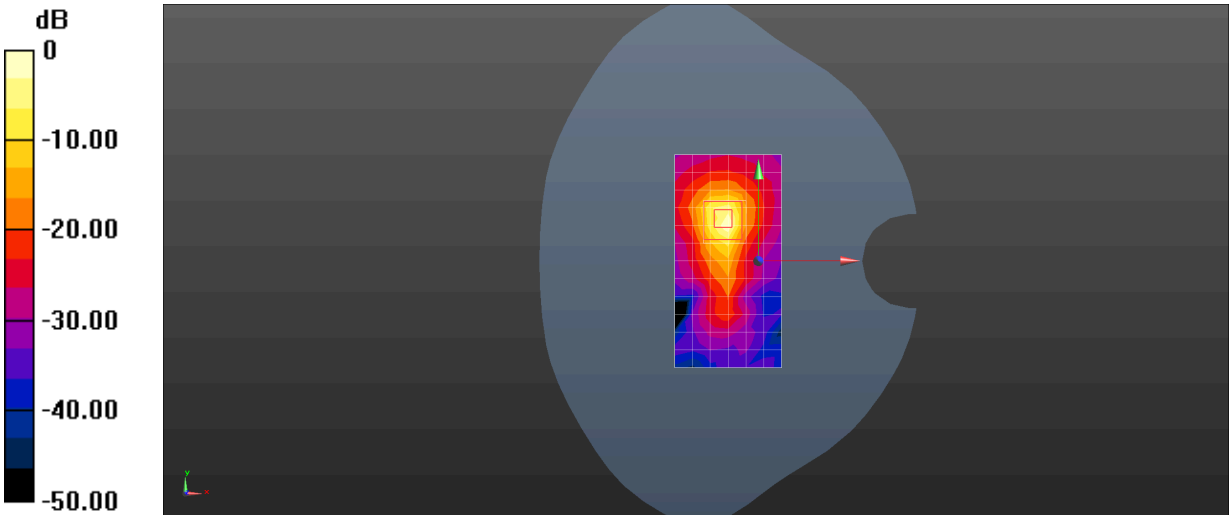

0 dB = 20.4 W/kg = 13.10 dBW/kg

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) WIFI 5G 802.11ac VHT20 40CH Top side 5mm Ant6

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019647

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5200 MHz;Duty Cycle: 1:1.026

Medium: HSL;Medium parameters used: $f = 5200 \text{ MHz}$; $\sigma = 4.684 \text{ S/m}$; $\epsilon_r = 37.193$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3836; ConvF(5.22, 5.22, 5.22); Calibrated: 2025/12/19
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn760; Calibrated: 2025/8/29
- Phantom: SAM 5; Type: SAM Twin; Serial: 1673
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (7x13x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 0.940 W/kg

Configuration/Scan/Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 2.159 V/m ; Power Drift = 0.05 dB


Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 0.359 W/kg ; SAR(10 g) = 0.095 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 52.9%

Maximum value of SAR (measured) = 0.945 W/kg

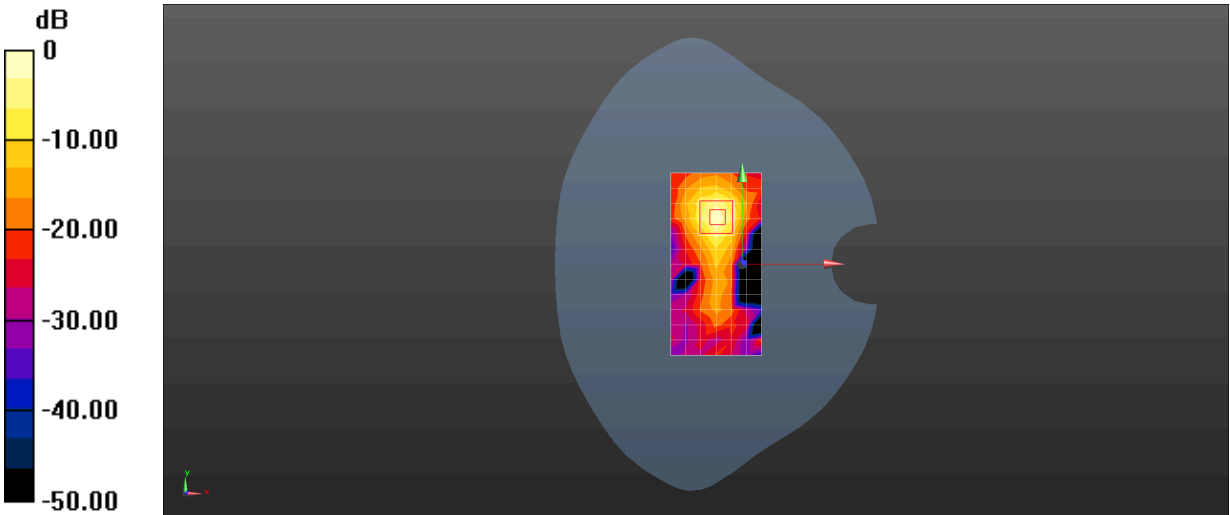

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) Bluetooth DH5 78CH Left tilted Ant6

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019753

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz;Duty Cycle: 1:1.295


Medium: HSL;Medium parameters used: $f = 2480 \text{ MHz}$; $\sigma = 1.852 \text{ S/m}$; $\epsilon_r = 38.696$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Left Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(7.28, 7.69, 7.78) ; Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
Maximum value of SAR (measured) = 0.130 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 4.701 V/m ; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.215 W/kg
SAR(1 g) = 0.091 W/kg ; SAR(10 g) = 0.038 W/kg
Smallest distance from peaks to all points 3 dB below = 6.1 mm
Ratio of SAR at M2 to SAR at M1 = 45.2%
Maximum value of SAR (measured) = 0.172 W/kg

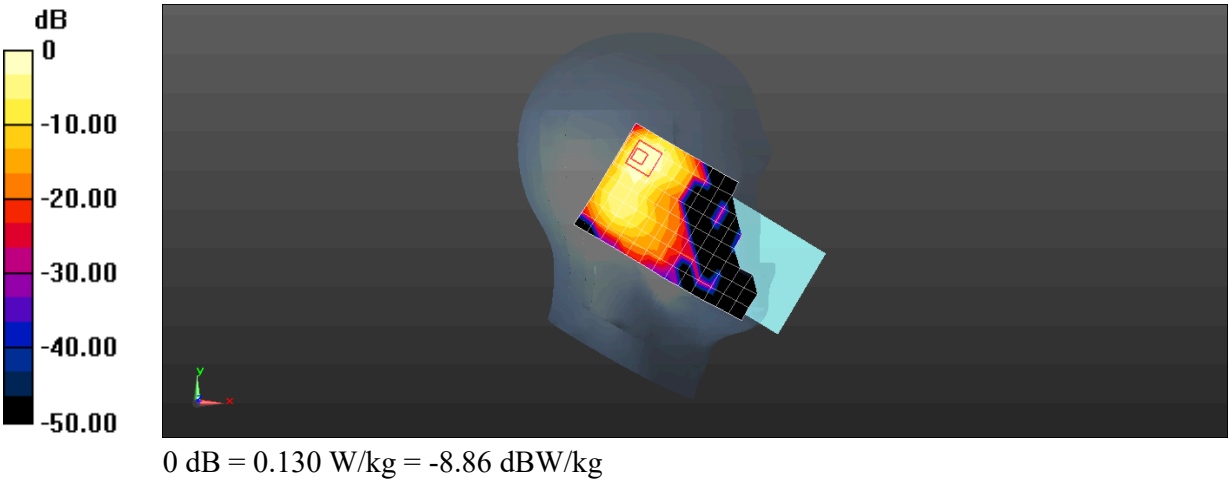

Test Laboratory: SGS-SAR Lab

XT2625-8 (SB) / XT2625-9 (Retail) Bluetooth DH5 78CH Back side 5mm Ant6

DUT: XT2625-8 (SB) / XT2625-9 (Retail); Type: Mobile Cellular Phone; Serial: 355777680019753

Communication System: UID 0, Bluetooth (0); Frequency: 2480 MHz;Duty Cycle: 1:1.295

Medium: HSL;Medium parameters used: $f = 2480 \text{ MHz}$; $\sigma = 1.852 \text{ S/m}$; $\epsilon_r = 38.696$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN7620; ConvF(7.28, 7.69, 7.78); Calibrated: 2025/10/22
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn867; Calibrated: 2026/2/2
- Phantom: SAM 1; Type: SAM; Serial: 1912
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Scan/Area Scan (9x17x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.191 W/kg

Configuration/Scan/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 1.106 V/m ; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.262 W/kg

SAR(1 g) = 0.110 W/kg ; SAR(10 g) = 0.049 W/kg

Smallest distance from peaks to all points 3 dB below = 9 mm

Ratio of SAR at M2 to SAR at M1 = 40.5%

Maximum value of SAR (measured) = 0.196 W/kg

