

Date: 2026/2/6

01_LTE Band 71_20M_QPSK_1RB_0Offset_Left Cheek_Ch133297


Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)
AntennaCfg:SISO; Frequency: 680.5 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.869$ S/m; $\epsilon_r = 44.0$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.53, 10.34, 10.38); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: LeftHead
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.322 W/kg; SAR (10g) = 0.196 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.03 dB
SAR (1g) = 0.323 W/kg; SAR (10g) = 0.181 W/kg
Smallest distance from peaks to all points 3 dB below = 7.7 mm
Ratio of SAR at M2 to SAR at M1 = 88.0 %

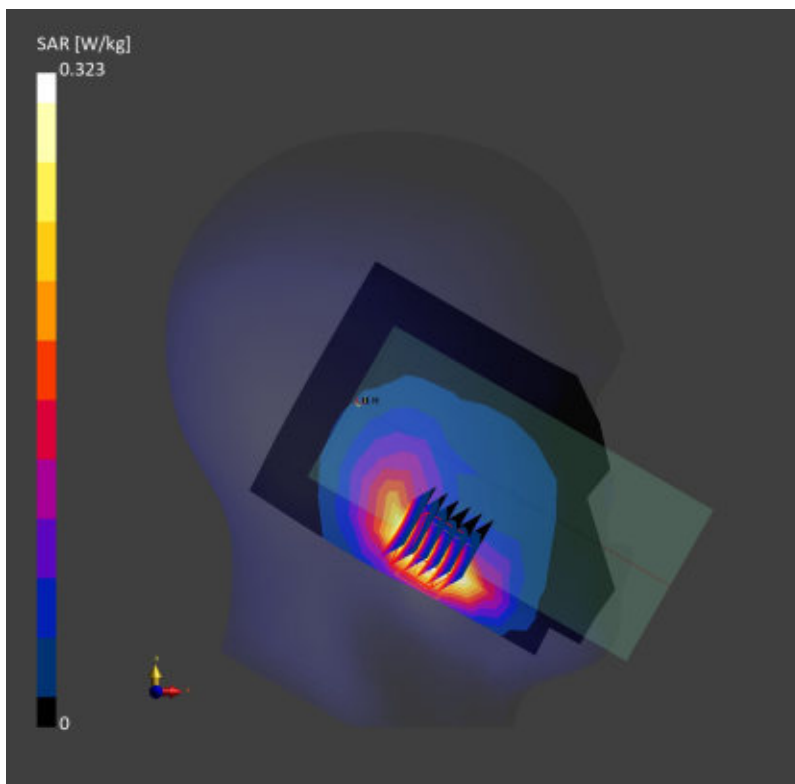

Date: 2026/2/6

02_LTE Band 12_10M_QPSK_1RB_0Offset_Left Cheek_Ch23095


Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)
AntennaCfg:SISO; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.869$ S/m; $\epsilon_r = 44.0$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.53, 10.34, 10.38); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: LeftHead
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.440 W/kg; SAR (10g) = 0.265 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.05 dB
SAR (1g) = 0.424 W/kg; SAR (10g) = 0.241 W/kg
Smallest distance from peaks to all points 3 dB below = 7.7 mm
Ratio of SAR at M2 to SAR at M1 = 85.4 %

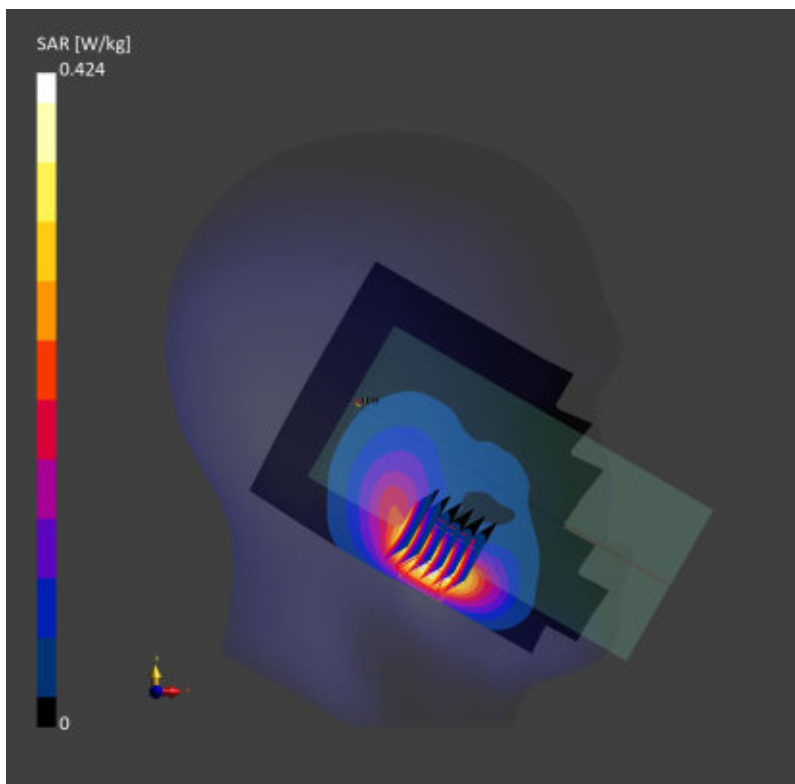

Date: 2026/2/6

03_LTE Band 13_10M_QPSK_1RB_0Offset_Left Cheek_Ch23230


Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)
AntennaCfg:SISO; Frequency: 782.0 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 782.0$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 43.7$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.53, 10.34, 10.38); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: LeftHead
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.599 W/kg; SAR (10g) = 0.356 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.17 dB
SAR (1g) = 0.586 W/kg; SAR (10g) = 0.334 W/kg
Smallest distance from peaks to all points 3 dB below = 7.5 mm
Ratio of SAR at M2 to SAR at M1 = 83.5 %

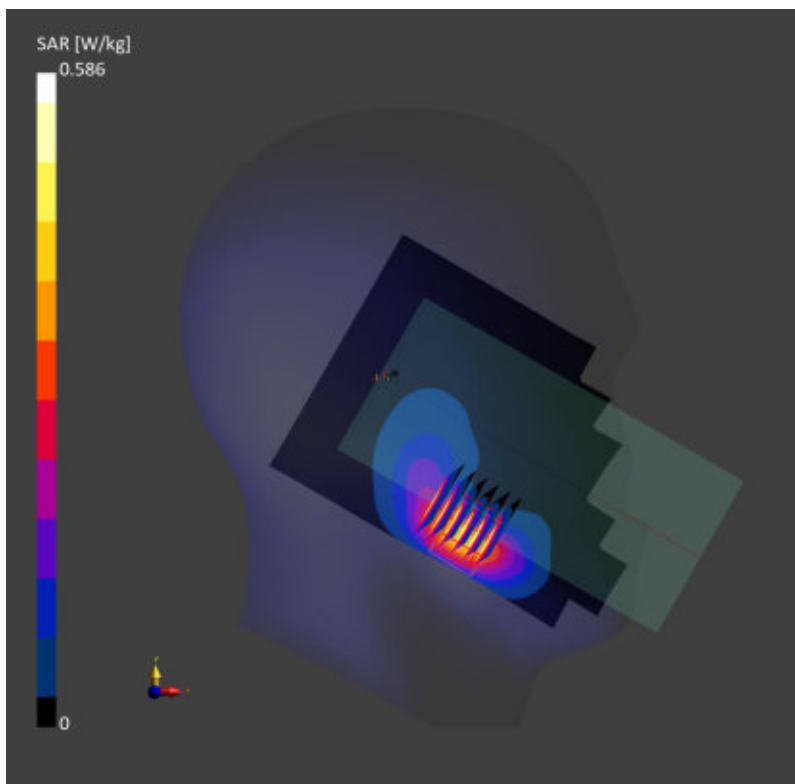

Date: 2026/2/6

04_FR1 n71_20M_QPSK_1RB_1Offset_DFT-15_Left Cheek_Ch136100


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)
RBPosition:Mid AntennaCfg:SISO; Frequency: 680.5 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.869$ S/m; $\epsilon_r = 44.0$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.53, 10.34, 10.38); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: LeftHead
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.304 W/kg; SAR (10g) = 0.185 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.01 dB
SAR (1g) = 0.317 W/kg; SAR (10g) = 0.176 W/kg
Smallest distance from peaks to all points 3 dB below = 7.7 mm
Ratio of SAR at M2 to SAR at M1 = 87.5 %

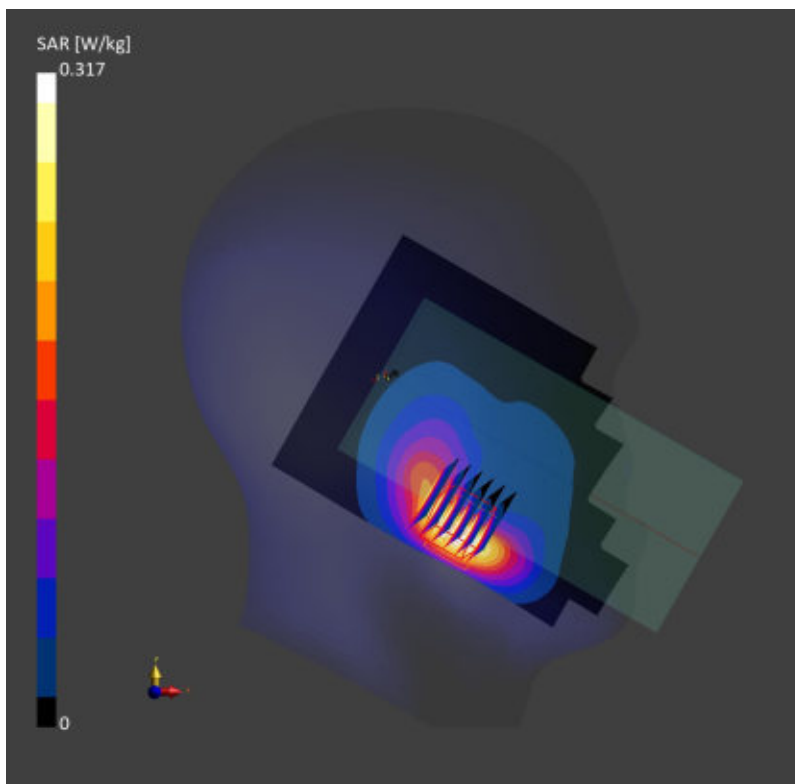

Date: 2026/2/8

05_GSM850_GPRS 4TX Slot_Left Cheek_Ch189


Communication System: GPRS-FDD (TDMA, GMSK, TN 0-1-2-3); Frequency: 836.4 MHz;
 Duty Cycle: 1:2.08
 Medium: HSL Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 43.6$
 Ambient Temperature: 23.6°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.23, 10.04, 10.08); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: LeftHead
- Measurement Software: 16.2.2.1588
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
 SAR (1g) = 0.289 W/kg; SAR (10g) = 0.195 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
 Power Drift = -0.05 dB
 SAR (1g) = 0.302 W/kg; SAR (10g) = 0.228 W/kg
 Smallest distance from peaks to all points 3 dB below = 18.5 mm
 Ratio of SAR at M2 to SAR at M1 = 96.9 %

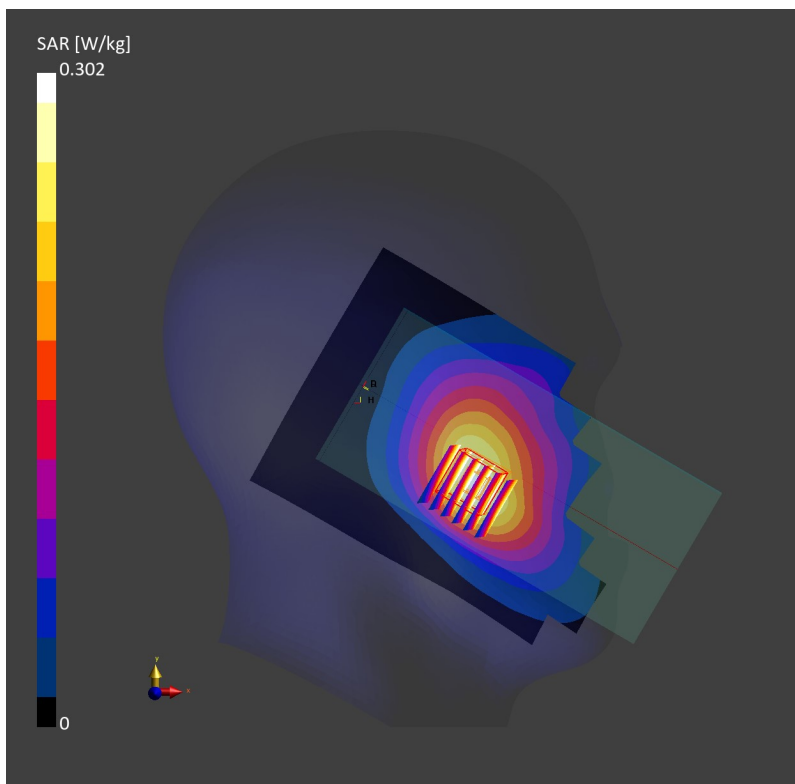

Date: 2026/2/8

06_WCDMA V_RMC 12.2Kbps_Left Cheek_Ch4182


Communication System: UMTS-FDD (WCDMA); Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 43.6$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.23, 10.04, 10.08); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: LeftHead
- Measurement Software: 16.2.2.1588
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.194 W/kg; SAR (10g) = 0.132 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.16 dB
SAR (1g) = 0.203 W/kg; SAR (10g) = 0.155 W/kg
Smallest distance from peaks to all points 3 dB below = 20.1 mm
Ratio of SAR at M2 to SAR at M1 = 97.1 %

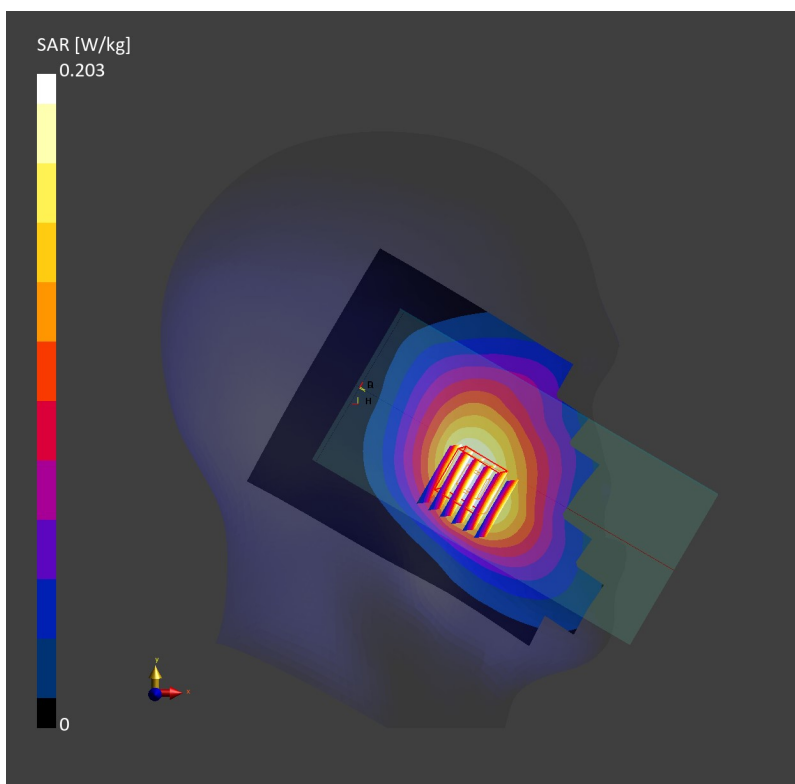

Date: 2026/2/8

07_LTE Band 26_15M_QPSK_1RB_0Offset_Left Cheek_Ch26865


Communication System: LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)
AntennaCfg:SISO; Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 43.6$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.23, 10.04, 10.08); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: LeftHead
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10181-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.459 W/kg; SAR (10g) = 0.273 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.05 dB
SAR (1g) = 0.473 W/kg; SAR (10g) = 0.264 W/kg
Smallest distance from peaks to all points 3 dB below = 6.9 mm
Ratio of SAR at M2 to SAR at M1 = 80.4 %

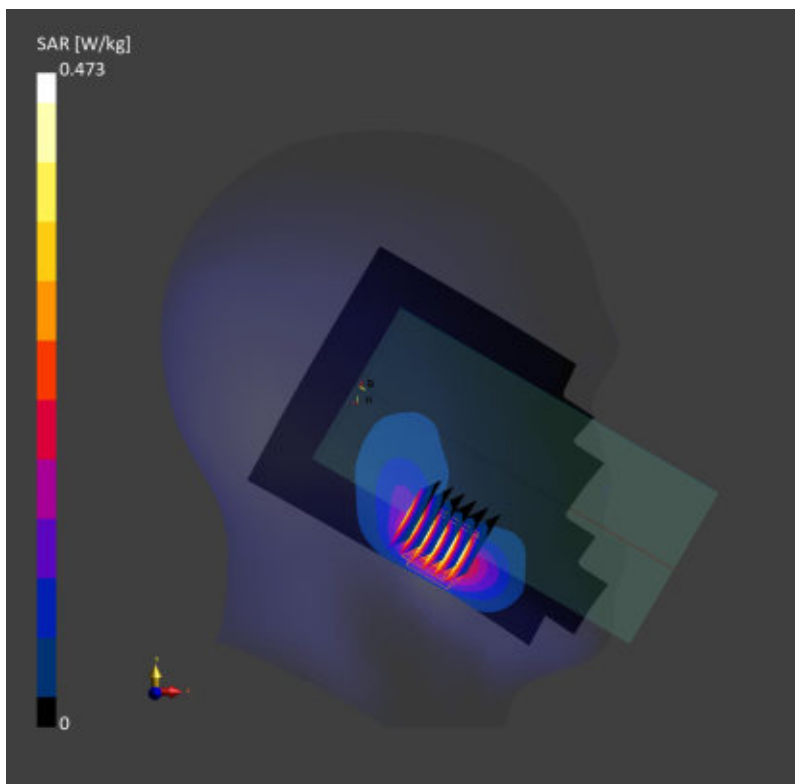

Date: 2026/2/8

08_FR1 n26_20M_QPSK_1RB_1Offset_DFT-15_Left Cheek_Ch166300


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 831.5 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 43.6$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.23, 10.04, 10.08); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: LeftHead
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.376 W/kg; SAR (10g) = 0.221 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.12 dB
SAR (1g) = 0.376 W/kg; SAR (10g) = 0.213 W/kg
Smallest distance from peaks to all points 3 dB below = 6.3 mm
Ratio of SAR at M2 to SAR at M1 = 89.1 %

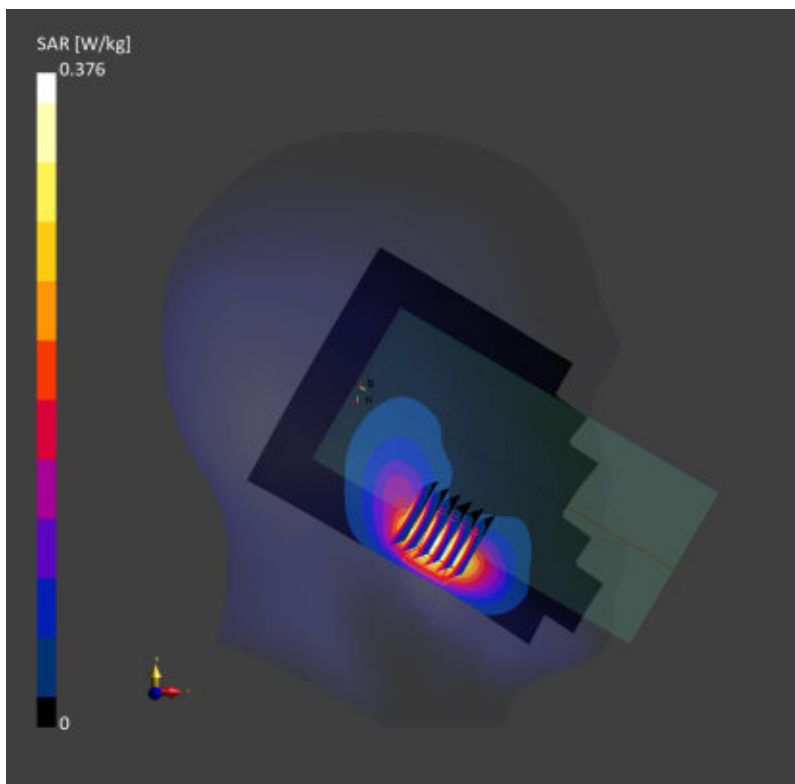

Date: 2026/2/9

09_WCDMA IV_RMC 12.2Kbps_Right Cheek_Ch1413


Communication System: UMTS-FDD (WCDMA); Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1732.6$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.9$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.61, 8.45, 8.49); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: RightHead
- Measurement Software: 16.2.2.1588
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.240 W/kg; SAR (10g) = 0.143 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.12 dB
SAR (1g) = 0.251 W/kg; SAR (10g) = 0.163 W/kg
Smallest distance from peaks to all points 3 dB below = 12.8 mm
Ratio of SAR at M2 to SAR at M1 = 92.0 %

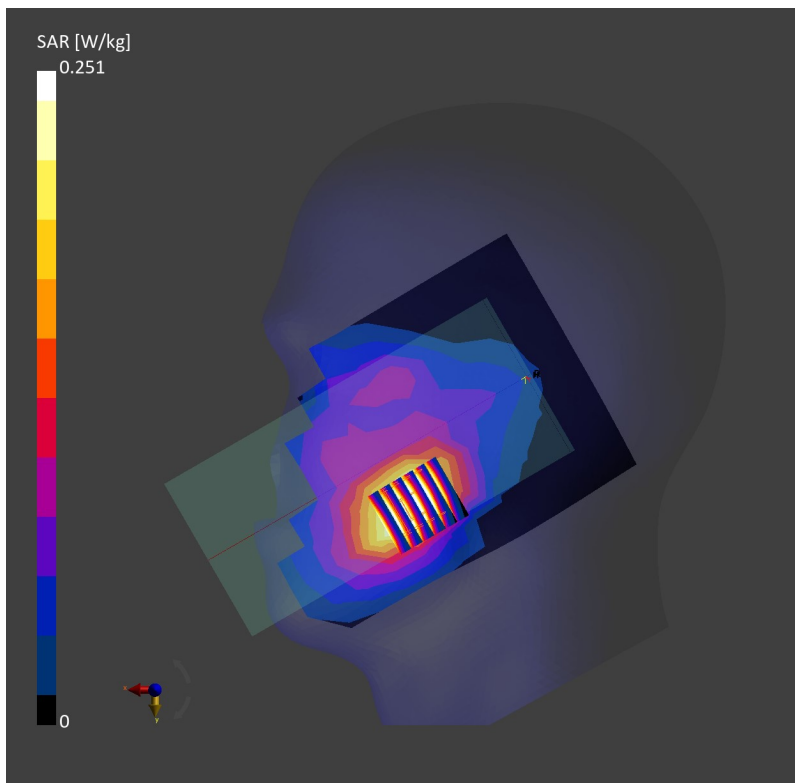

Date: 2026/2/9

10_LTE Band 66_20M_QPSK_1RB_0Offset_Right Cheek_Ch132072


Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)
AntennaCfg:SISO; Frequency: 1720.0 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f=1720.0$ MHz; $\sigma=1.32$ S/m; $\epsilon_r=42.0$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.61, 8.45, 8.49); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: RightHead
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.728 W/kg; SAR (10g) = 0.407 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.13 dB
SAR (1g) = 0.742 W/kg; SAR (10g) = 0.406 W/kg
Smallest distance from peaks to all points 3 dB below = 10.8 mm
Ratio of SAR at M2 to SAR at M1 = 88.0 %

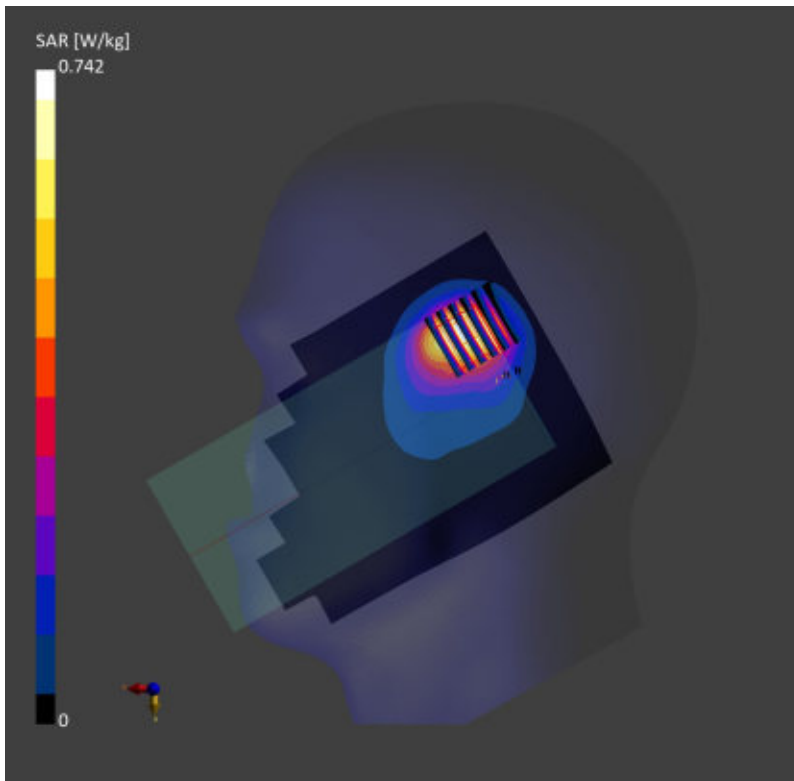

Date: 2026/2/9

11_FR1 n66_45M_QPSK_1RB_1Offset_DFT-15_Right Cheek_Ch349000


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 45 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 1745.0 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1745.0$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.9$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.61, 8.45, 8.49); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: RightHead
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.549 W/kg; SAR (10g) = 0.304 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm
Power Drift = -0.07 dB
SAR (1g) = 0.685 W/kg; SAR (10g) = 0.327 W/kg
Smallest distance from peaks to all points 3 dB below = 7.0 mm
Ratio of SAR at M2 to SAR at M1 = 84.9 %

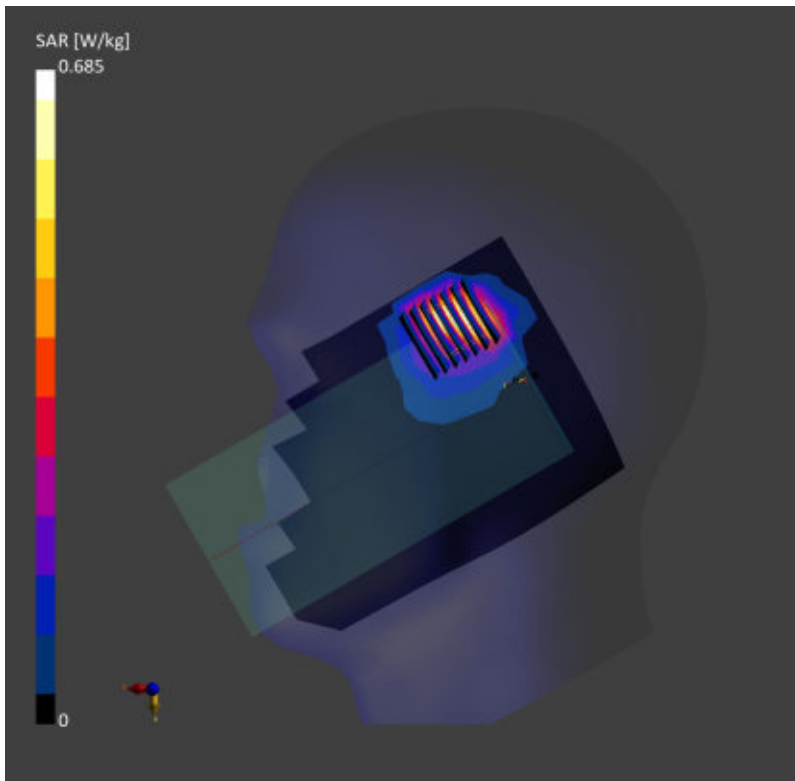

Date: 2026/2/11

12_GSM1900_GPRS 4TX Slot_Right Cheek_Ch661

Communication System: GPRS-FDD (TDMA, GMSK, TN 0-1-2-3); Frequency: 1880.0 MHz;

Duty Cycle: 1:2.08

Medium: HSL Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 41.7$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.33, 8.18, 8.21); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: RightHead
- Measurement Software: 16.2.2.1588
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.272 W/kg; SAR (10g) = 0.159 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.10 dB

SAR (1g) = 0.282 W/kg; SAR (10g) = 0.179 W/kg

Smallest distance from peaks to all points 3 dB below = 11.0 mm

Ratio of SAR at M2 to SAR at M1 = 92.4 %

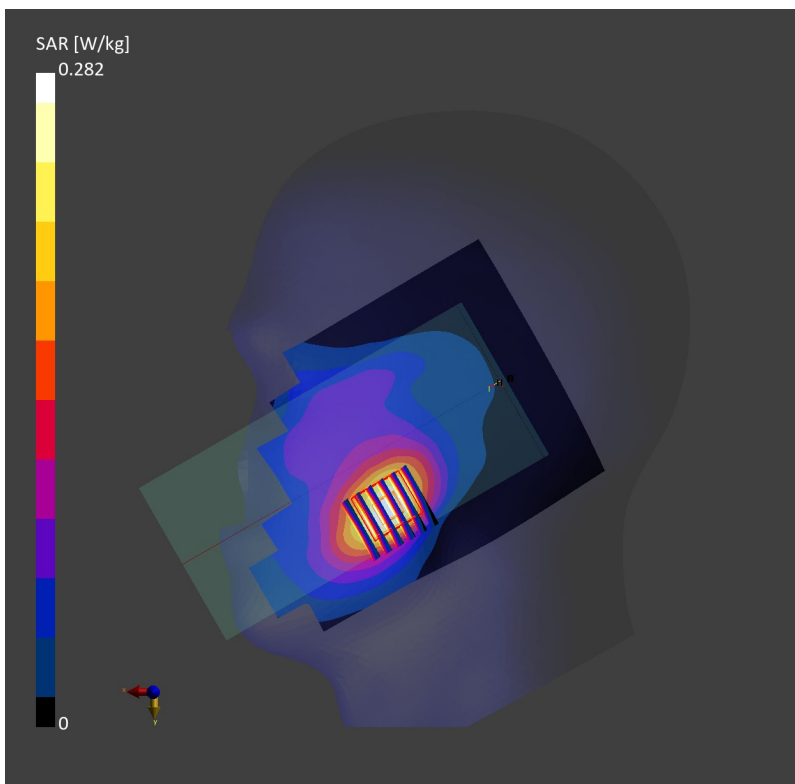

Date: 2026/2/11

13_WCDMA II_RMC 12.2Kbps_Right Cheek_Ch9400


Communication System: UMTS-FDD (WCDMA); Frequency: 1880.0 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 41.7$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.33, 8.18, 8.21); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: RightHead
- Measurement Software: 16.2.2.1588
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.358 W/kg; SAR (10g) = 0.209 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.11 dB
SAR (1g) = 0.375 W/kg; SAR (10g) = 0.239 W/kg
Smallest distance from peaks to all points 3 dB below = 12.8 mm
Ratio of SAR at M2 to SAR at M1 = 92.5 %

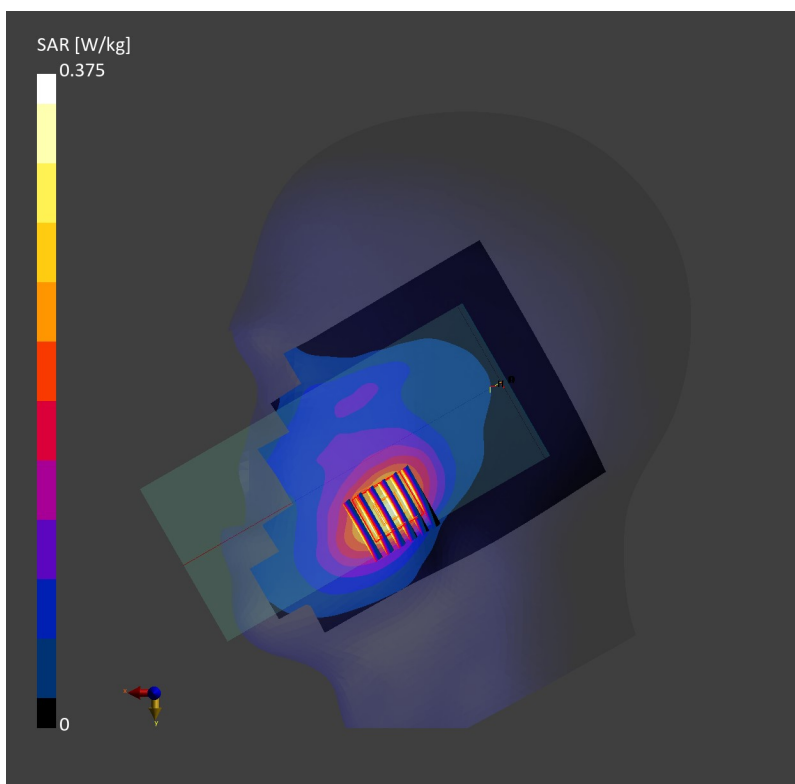

Date: 2026/2/11

14_LTE Band 25_20M_QPSK_1RB_0Offset_Right Cheek_Ch26590

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 1905.0 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1905.0$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 41.7$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.33, 8.18, 8.21); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: RightHead
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.767 W/kg; SAR (10g) = 0.415 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.12 dB

SAR (1g) = 0.764 W/kg; SAR (10g) = 0.420 W/kg

Smallest distance from peaks to all points 3 dB below = 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 85.5 %

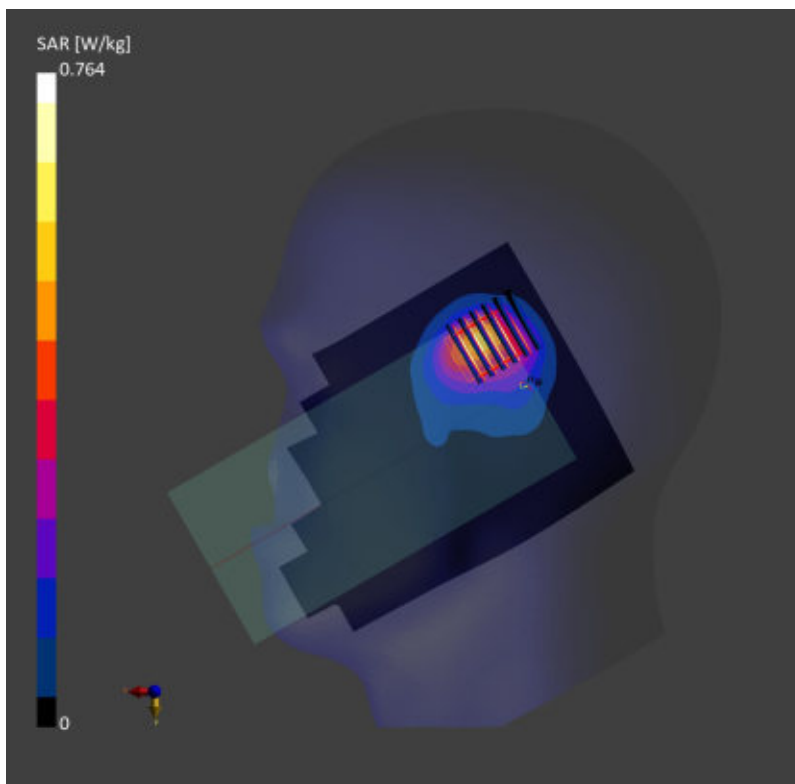

Date: 2026/2/11

15_FR1 n2_40M_QPSK_1RB_1Offset_DFT-15_Right Cheek_Ch376000


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 1880.0 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 41.7$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.33, 8.18, 8.21); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: RightHead
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.690 W/kg; SAR (10g) = 0.377 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.12 dB
SAR (1g) = 0.728 W/kg; SAR (10g) = 0.400 W/kg
Smallest distance from peaks to all points 3 dB below = 9.2 mm
Ratio of SAR at M2 to SAR at M1 = 82.2 %

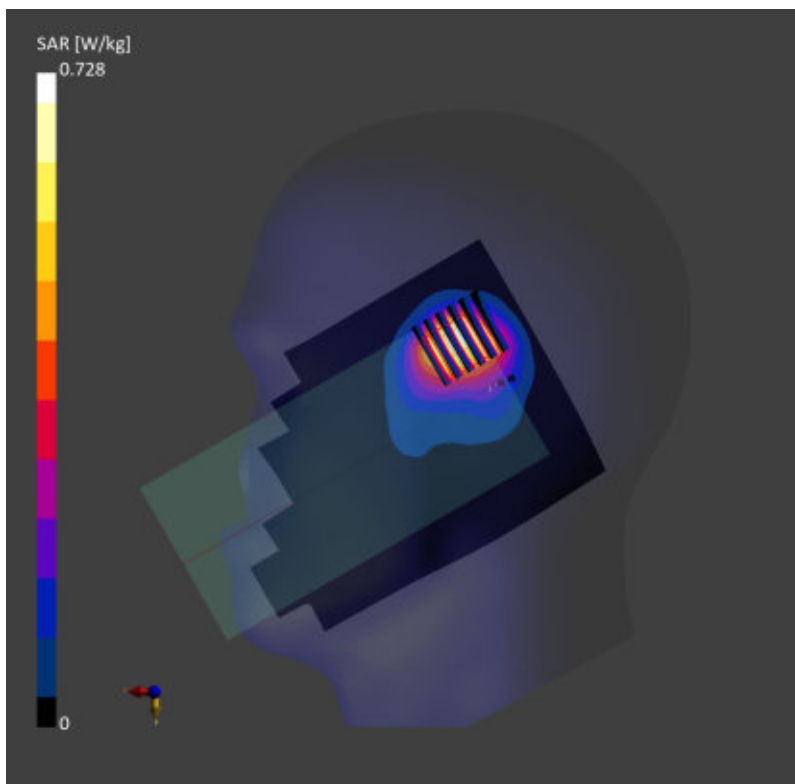

Date: 2026/2/14

16_LTE Band 7_20M_QPSK_1RB_0Offset_Right Cheek_Ch21350


Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)
AntennaCfg:SISO; Frequency: 2560.0 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 2560.0$ MHz; $\sigma = 1.90$ S/m; $\epsilon_r = 40.8$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.9, 7.75, 7.79); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: RightHead
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.662 W/kg; SAR (10g) = 0.305 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.11 dB
SAR (1g) = 0.675 W/kg; SAR (10g) = 0.301 W/kg
Smallest distance from peaks to all points 3 dB below = 5.9 mm
Ratio of SAR at M2 to SAR at M1 = 75.8 %

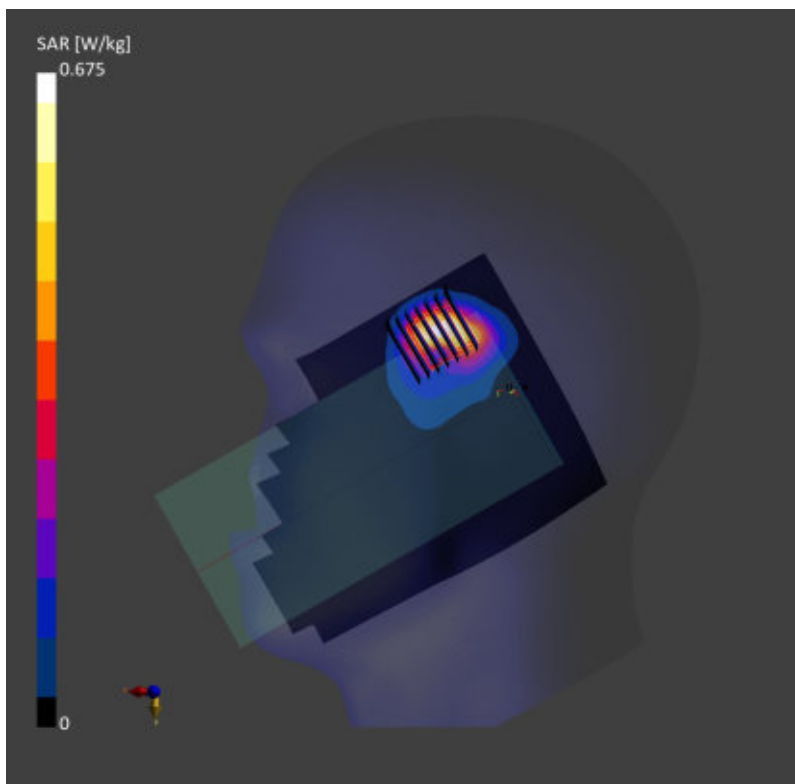

Date: 2026/2/14

17_LTE Band 41_20M_QPSK_1RB_0Offset_Right Tilted_Ch40620


Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)
AntennaCfg:SISO; Frequency: 2593.0 MHz; Duty Cycle: 1:2.331
Medium: HSL Medium parameters used: $f = 2593.0$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 40.7$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.9, 7.75, 7.79); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: RightHead
- Measurement Software: 16.2.2.1588
- UID: LTE-TDD, 10172-CAH

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.690 W/kg; SAR (10g) = 0.287 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.13 dB
SAR (1g) = 0.726 W/kg; SAR (10g) = 0.297 W/kg
Smallest distance from peaks to all points 3 dB below = 6.4 mm
Ratio of SAR at M2 to SAR at M1 = 78.1 %

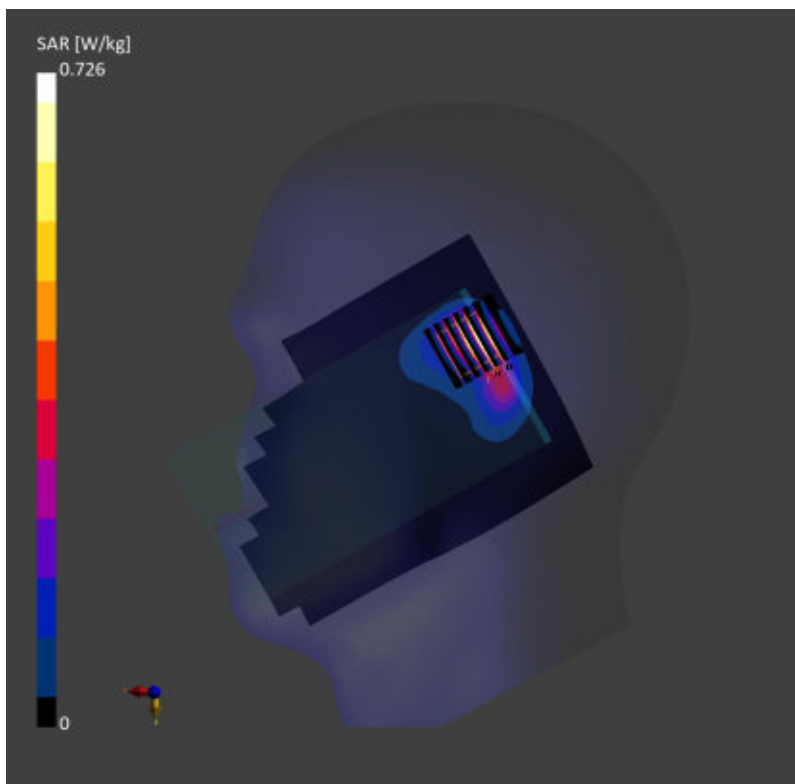

Date: 2026/2/14

18_FR1 n7_50M_QPSK_135RB_68Offset_DFT-15_Right Cheek_Ch507000


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 50 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 2535.0 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 2535.0$ MHz; $\sigma = 1.90$ S/m; $\epsilon_r = 40.8$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.9, 7.75, 7.79); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: RightHead
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 FDD, 10935-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.651 W/kg; SAR (10g) = 0.297 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.02 dB
SAR (1g) = 0.648 W/kg; SAR (10g) = 0.290 W/kg
Smallest distance from peaks to all points 3 dB below = 5.9 mm
Ratio of SAR at M2 to SAR at M1 = 77.6 %

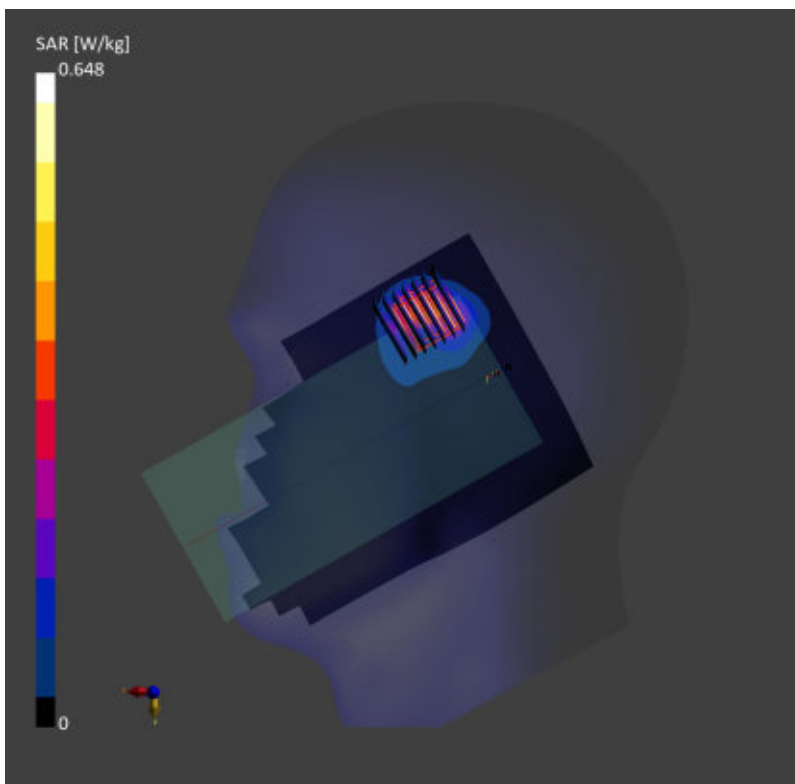

Date: 2026/2/14

19_FR1 n41_100M_QPSK_1RB_1Offset_DFT-30_Left Cheek_Ch518598


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)
AntennaCfg:SISO; Frequency: 2593.0 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 2593.0$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 40.7$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.9, 7.75, 7.79); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: LeftHead
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.636 W/kg; SAR (10g) = 0.258 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm
Power Drift = -0.08 dB
SAR (1g) = 0.654 W/kg; SAR (10g) = 0.250 W/kg
Smallest distance from peaks to all points 3 dB below = 5.4 mm
Ratio of SAR at M2 to SAR at M1 = 78.7 %

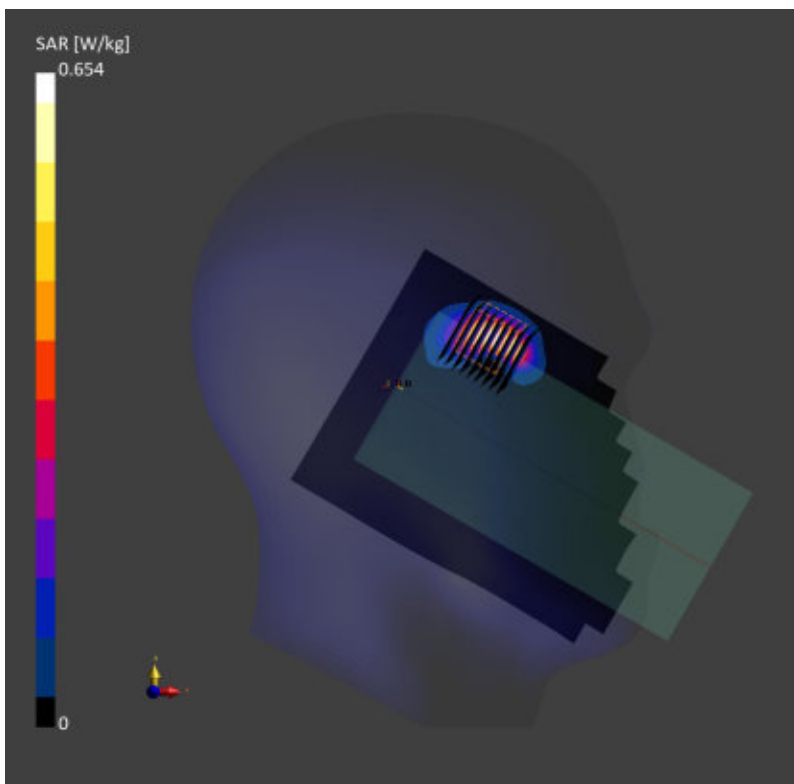

Date: 2026/2/15

20_LTE Band 42_20M_QPSK_1RB_0Offset_Left Cheek_Ch42190


Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)
AntennaCfg:SISO; Frequency: 3460.0 MHz; Duty Cycle: 1:1.59
Medium: HSL Medium parameters used: $f = 3460.0$ MHz; $\sigma = 2.67$ S/m; $\epsilon_r = 39.3$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.99, 6.86, 6.89); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: LeftHead
- Measurement Software: 16.2.2.1588
- UID: LTE-TDD, 10172-CAH

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.612 W/kg; SAR (10g) = 0.269 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm
Power Drift = 0.12 dB
SAR (1g) = 0.667 W/kg; SAR (10g) = 0.267 W/kg
Smallest distance from peaks to all points 3 dB below = 7.3 mm
Ratio of SAR at M2 to SAR at M1 = 71.4 %

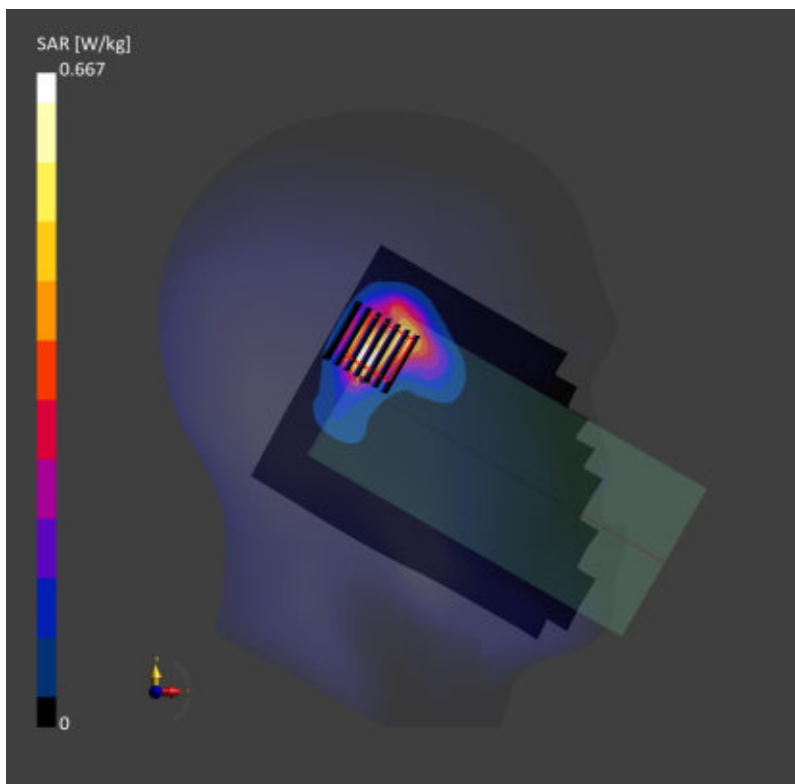

Date: 2026/2/17

21_FR1 n77_100M_QPSK_1RB_1Offset_DFT-30_Left Tilted_Ch656000

Communication System: 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)

AntennaCfg:SISO; Frequency: 3840.000 MHz; Duty Cycle: 1:1

Medium: Head Simulating Liquid Medium parameters used: $f=3840.000$ MHz; $\sigma=3.05$ S/m; $\epsilon_r=38.6$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.88, 6.76, 6.79); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- hantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.730 W/kg; SAR (10g) = 0.241 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm

Power Drift = 0.17 dB

SAR (1g) = 0.792 W/kg; SAR (10g) = 0.247 W/kg

Smallest distance from peaks to all points 3 dB below = 6.9 mm

Ratio of SAR at M2 to SAR at M1 = 70.7 %

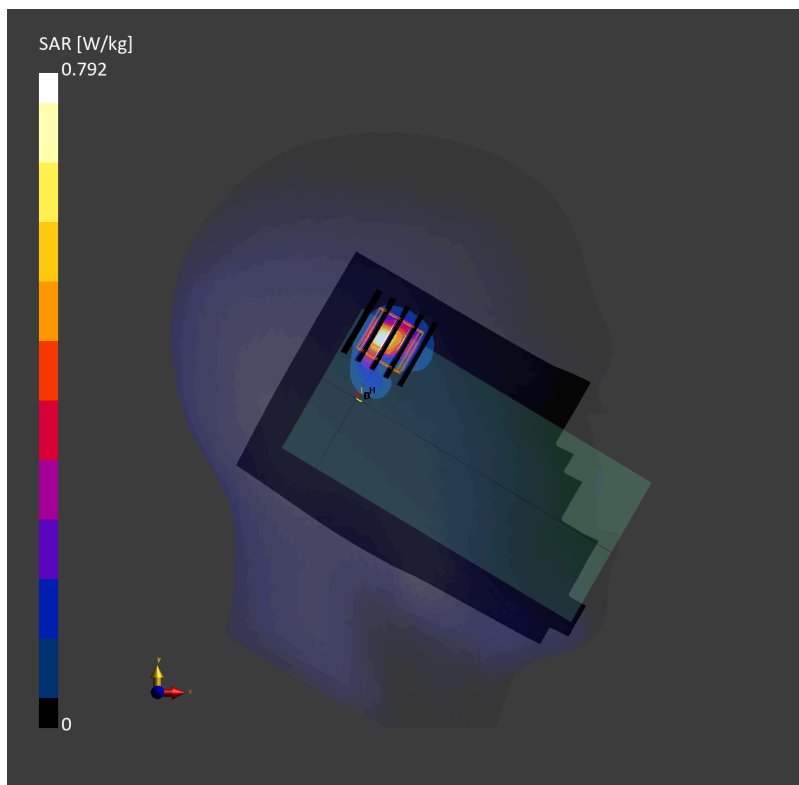

Date: 2026/2/4

22_Bluetooth_DH5 1Mbps_Left Cheek_Ch39

Communication System: IEEE 802.15.1 Bluetooth (GFSK, DH5); Frequency: 2441.0 MHz; Duty Cycle: 1:1.305

Medium: HSL Medium parameters used: $f = 2441.0$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 41.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.87, 7.72, 7.76); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: LeftHead
- Measurement Software: 16.2.2.1588
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.264 W/kg; SAR (10g) = 0.096 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.262 W/kg; SAR (10g) = 0.100 W/kg

Smallest distance from peaks to all points 3 dB below = 9.0 mm

Ratio of SAR at M2 to SAR at M1 = 88.4 %

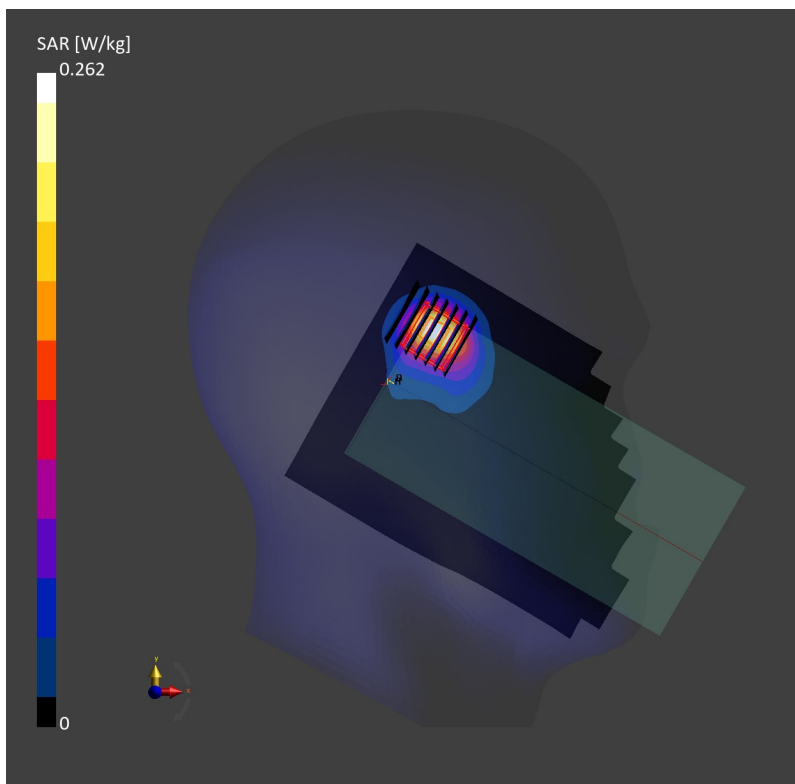

Date: 2026/2/4

23_WLAN2.4GHz_802.11b 1Mbps_Left Cheek_Ch6


Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Frequency: 2437.0 MHz; Duty Cycle: 1:1.016
Medium: HSL Medium parameters used: $f = 2437.0$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 41.0$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.87, 7.72, 7.76); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: LeftHead
- Measurement Software: 16.2.2.1588
- UID: WLAN, 10012-CAB

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.807 W/kg; SAR (10g) = 0.377 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.13 dB
SAR (1g) = 0.828 W/kg; SAR (10g) = 0.389 W/kg
Smallest distance from peaks to all points 3 dB below = 9.0 mm
Ratio of SAR at M2 to SAR at M1 = 89.4 %

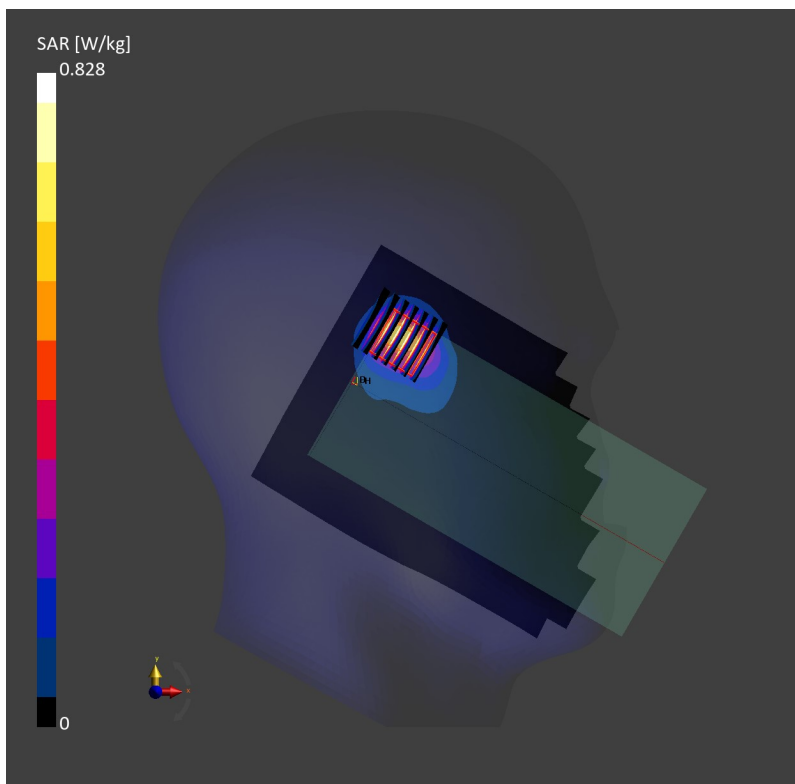

Date: 2026/2/19

24_WLAN5GHz_802.11ac-VHT80 MCS0_Left Tilted_Ch58

Communication System: IEEE 802.11ax (80MHz, MCS0, 99pc duty cycle); Frequency: 5290.0

MHz; Duty Cycle: 1:1.077

Medium: HSL Medium parameters used: $f = 5290.0$ MHz; $\sigma = 4.65$ S/m; $\epsilon_r = 36.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.08, 5.97, 6.0); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: LeftHead
- Measurement Software: 16.2.2.1588
- UID: WLAN, 10731-AAC

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.734 W/kg; SAR (10g) = 0.244 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.7 mm x 3.7 mm x 1.4 mm

Power Drift = 0.14 dB

SAR (1g) = 0.824 W/kg; SAR (10g) = 0.231 W/kg

Smallest distance from peaks to all points 3 dB below = 5.0 mm

Ratio of SAR at M2 to SAR at M1 = 62.5 %

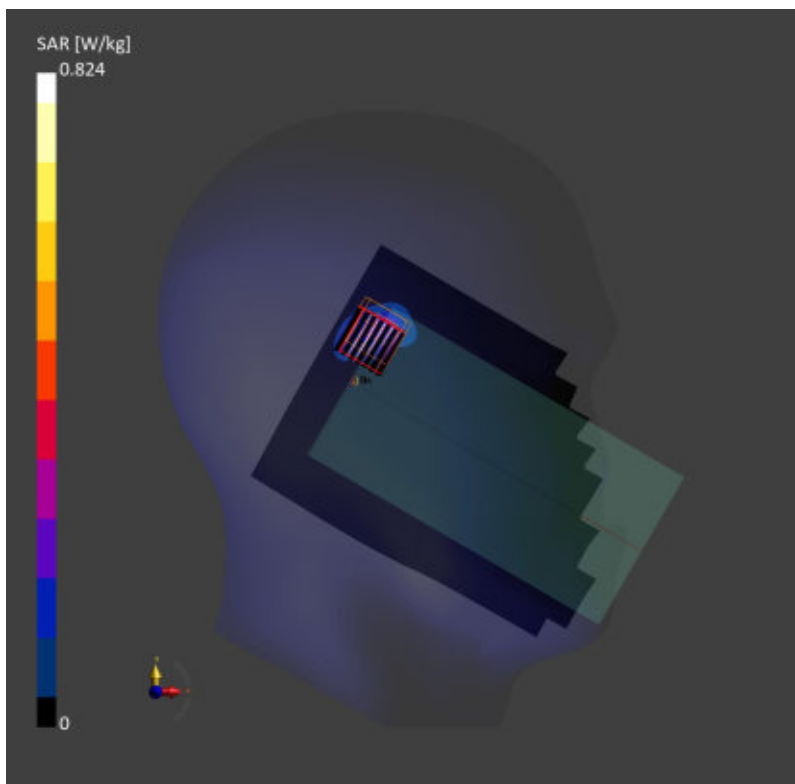

Date: 2026/2/20

25_WLAN5GHz_802.11ac-VHT80 MCS0_Left Tilted_Ch122

Communication System: IEEE 802.11ax (80MHz, MCS0, 99pc duty cycle); Frequency: 5610.0 MHz; Duty Cycle: 1:1.077

Medium: HSL Medium parameters used: $f = 5610.0$ MHz; $\sigma = 5.00$ S/m; $\epsilon_r = 35.6$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(5.54, 5.44, 5.47); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: LeftHead
- Measurement Software: 16.2.2.1588
- UID: WLAN, 10731-AAC

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.772 W/kg; SAR (10g) = 0.265 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.17 dB

SAR (1g) = 0.804 W/kg; SAR (10g) = 0.261 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 60.4 %

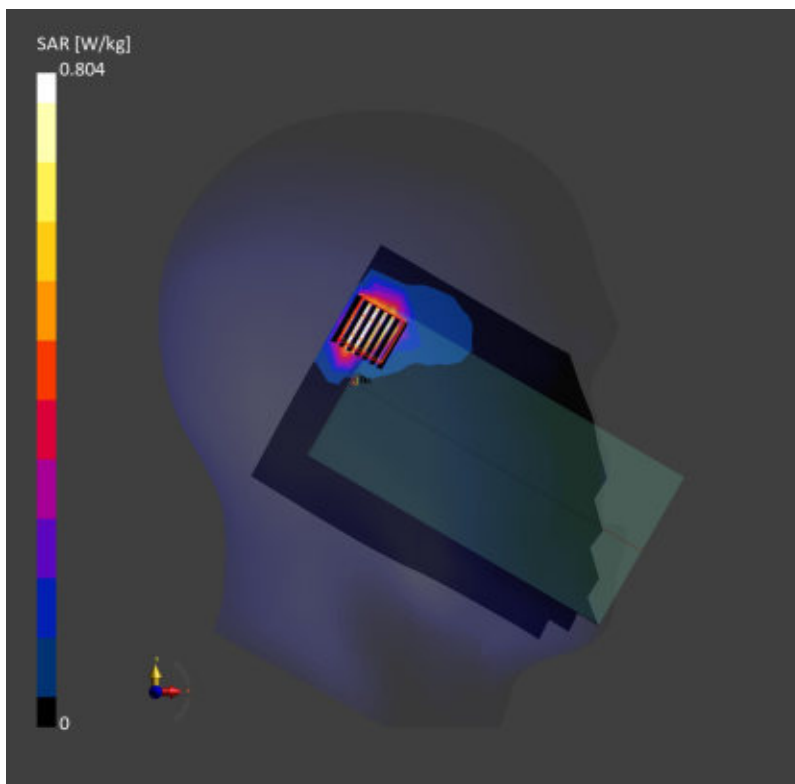

Date: 2026/2/22

26_WLAN5GHz_802.11ac-VHT80 MCS0_Left Tilted_Ch155

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle); Frequency:

5775.0 MHz; Duty Cycle: 1:1.077

Medium: HSL Medium parameters used: $f = 5775.0$ MHz; $\sigma = 5.17$ S/m; $\epsilon_r = 35.3$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(5.52, 5.42, 5.44); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: LeftHead
- Measurement Software: 16.2.2.1588
- UID: WLAN, 10544-AAC

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.687 W/kg; SAR (10g) = 0.241 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = 0.14 dB

SAR (1g) = 0.776 W/kg; SAR (10g) = 0.243 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 60.8 %

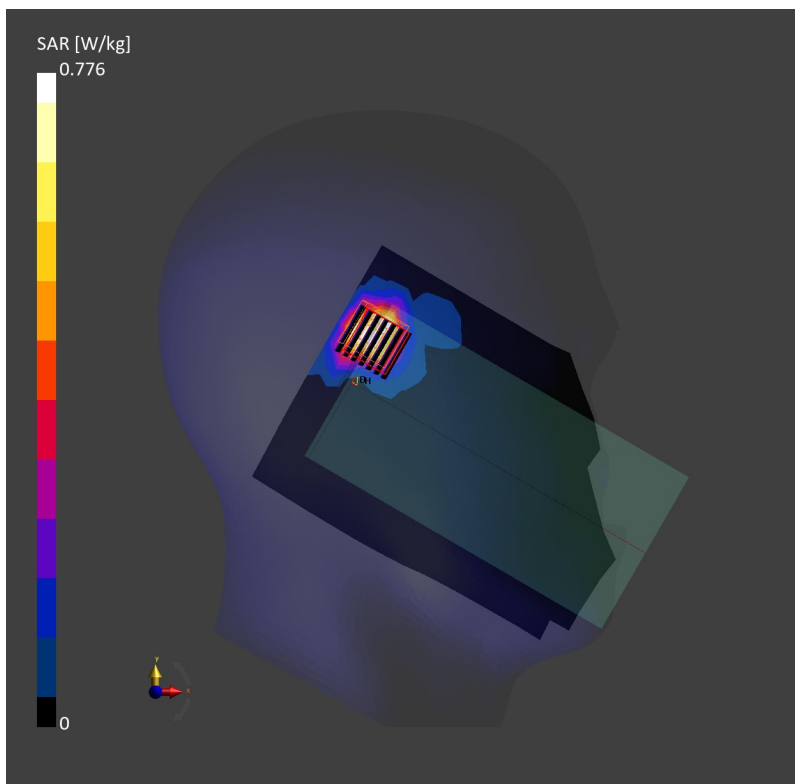

Date: 2026/2/23

27_WLAN6GHz_802.11ax-HE80 MCS0_Left Tilted_Ch7


Communication System: IEEE 802.11ax (80MHz, MCS0, 99pc duty cycle); Frequency: 5985.0 MHz; Duty Cycle: 1:1.103
Medium: HSL Medium parameters used: $f = 5985.0$ MHz; $\sigma = 5.46$ S/m; $\epsilon_r = 34.9$
Ambient Temperature: 23.2°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(5.68, 5.58, 5.6); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: LeftHead
- Measurement Software: 16.2.2.1588
- UID: WLAN, 10731-AAC

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.619 W/kg; SAR (10g) = 0.198 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.05 dB
SAR (1g) = 0.693 W/kg; SAR (10g) = 0.209 W/kg
Smallest distance from peaks to all points 3 dB below = 6.5 mm
Ratio of SAR at M2 to SAR at M1 = 53.8 %
psAPD (4.0cm², sq) = 4.79 [W/m²]

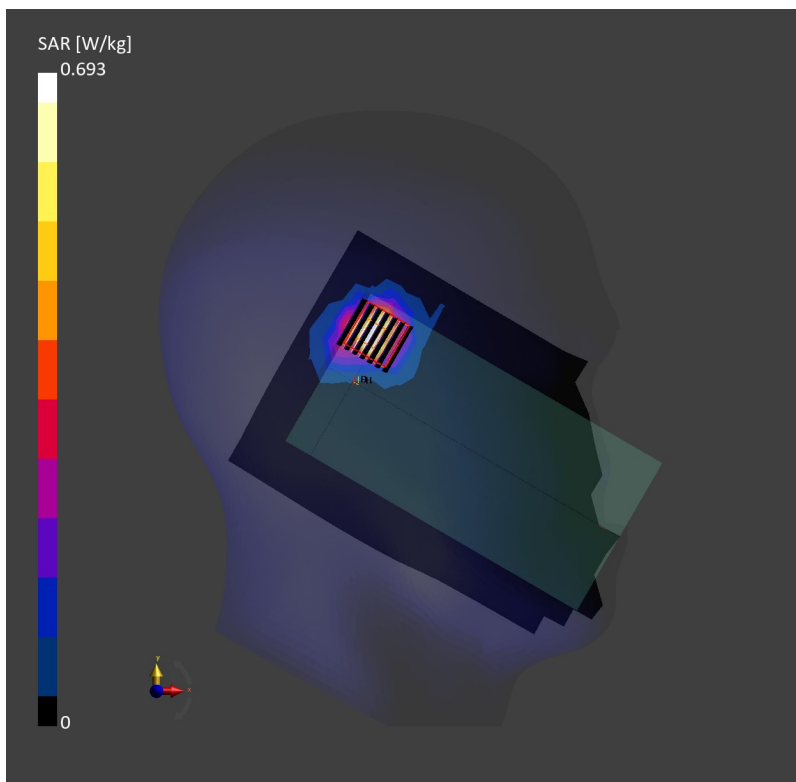

Date: 2026/2/6

28_LTE Band 71_20M_QPSK_1RB_0Offset_Left Side_5mm_Ch133297


Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)
AntennaCfg:SISO; Frequency: 680.5 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.869$ S/m; $\epsilon_r = 44.0$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.53, 10.34, 10.38); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10169-CAF

Area Scan (42.0 mm x 210.0 mm): Measurement Grid: 7.0 mm x 15.0 mm
SAR (1g) = 0.487 W/kg; SAR (10g) = 0.274 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.13 dB
SAR (1g) = 0.474 W/kg; SAR (10g) = 0.260 W/kg
Smallest distance from peaks to all points 3 dB below = 7.2 mm
Ratio of SAR at M2 to SAR at M1 = 82.7 %

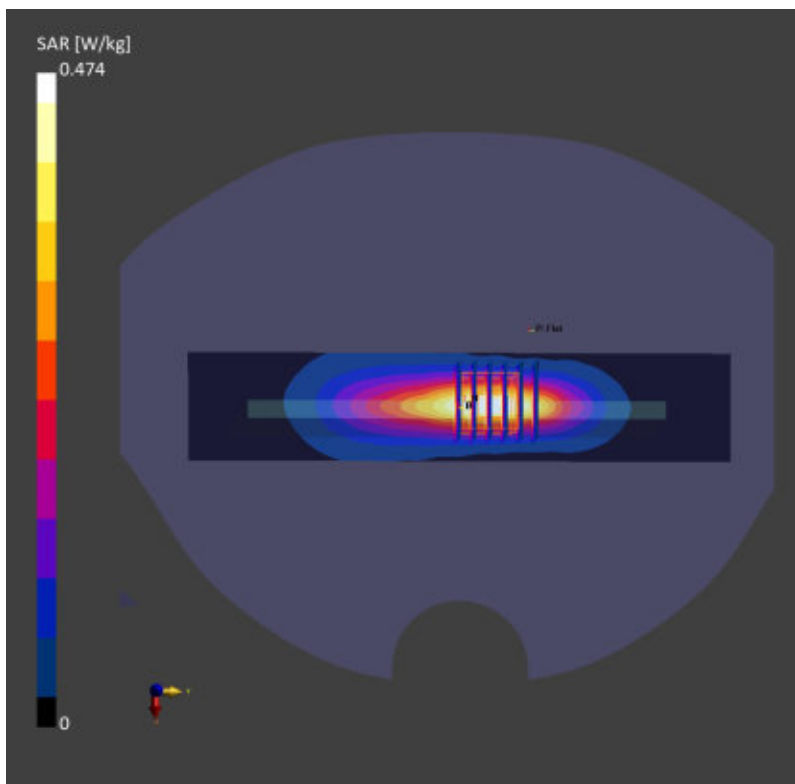

Date: 2026/2/6

29_LTE Band 12_10M_QPSK_1RB_0Offset_Left Side_5mm_Ch23095


Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)
 AntennaCfg:SISO; Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium: HSL Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.869$ S/m; $\epsilon_r = 44.0$
 Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.53, 10.34, 10.38); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (42.0 mm x 210.0 mm): Measurement Grid: 7.0 mm x 15.0 mm
 SAR (1g) = 0.406 W/kg; SAR (10g) = 0.226 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
 Power Drift = -0.16 dB
 SAR (1g) = 0.388 W/kg; SAR (10g) = 0.209 W/kg
 Smallest distance from peaks to all points 3 dB below = 7.2 mm
 Ratio of SAR at M2 to SAR at M1 = 82.5 %

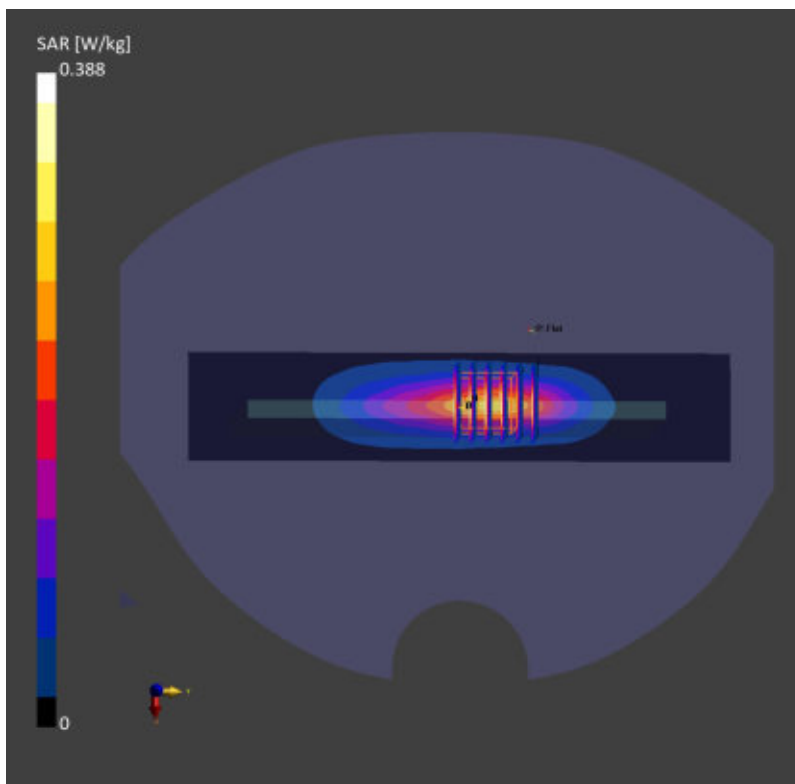

Date: 2026/2/6

30_LTE Band 13_10M_QPSK_1RB_0Offset_Left Side_5mm_Ch23230


Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)
 AntennaCfg:SISO; Frequency: 782.0 MHz; Duty Cycle: 1:1
 Medium: HSL Medium parameters used: $f = 782.0$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 43.7$
 Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.53, 10.34, 10.38); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (42.0 mm x 210.0 mm): Measurement Grid: 7.0 mm x 15.0 mm
 SAR (1g) = 0.400 W/kg; SAR (10g) = 0.226 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
 Power Drift = 0.06 dB
 SAR (1g) = 0.378 W/kg; SAR (10g) = 0.206 W/kg
 Smallest distance from peaks to all points 3 dB below = 8.4 mm
 Ratio of SAR at M2 to SAR at M1 = 82.8 %

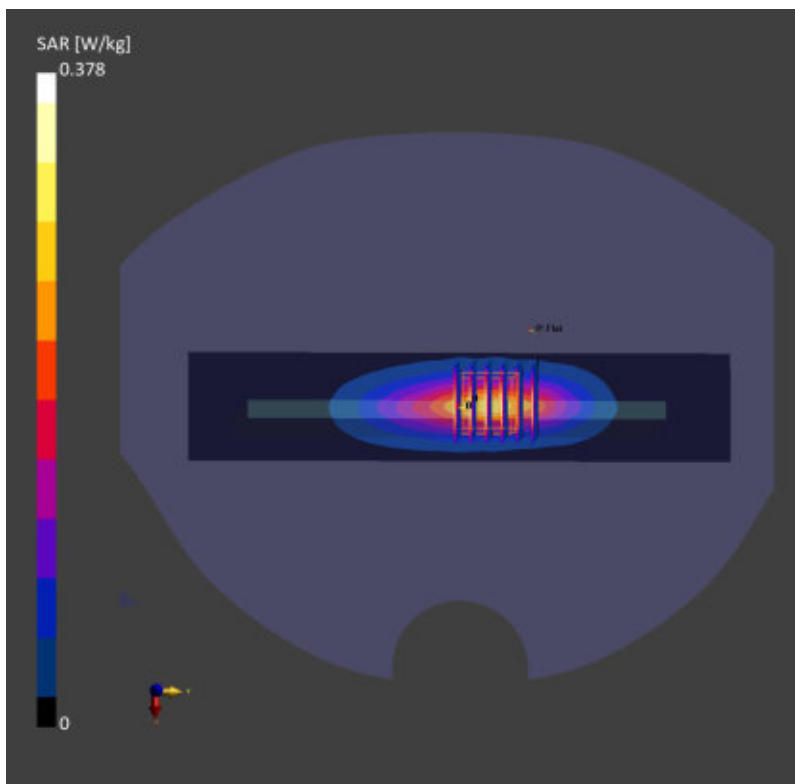

Date: 2026/2/6

31_FR1 n71_20M_QPSK_1RB_1Offset_DFT-15_Left Side_5mm_Ch136100


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)
AntennaCfg:SISO; Frequency: 680.5 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.869$ S/m; $\epsilon_r = 44.0$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.53, 10.34, 10.38); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (42.0 mm x 210.0 mm): Measurement Grid: 7.0 mm x 15.0 mm
SAR (1g) = 0.456 W/kg; SAR (10g) = 0.260 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.12 dB
SAR (1g) = 0.441 W/kg; SAR (10g) = 0.246 W/kg
Smallest distance from peaks to all points 3 dB below = 7.2 mm
Ratio of SAR at M2 to SAR at M1 = 83.6 %

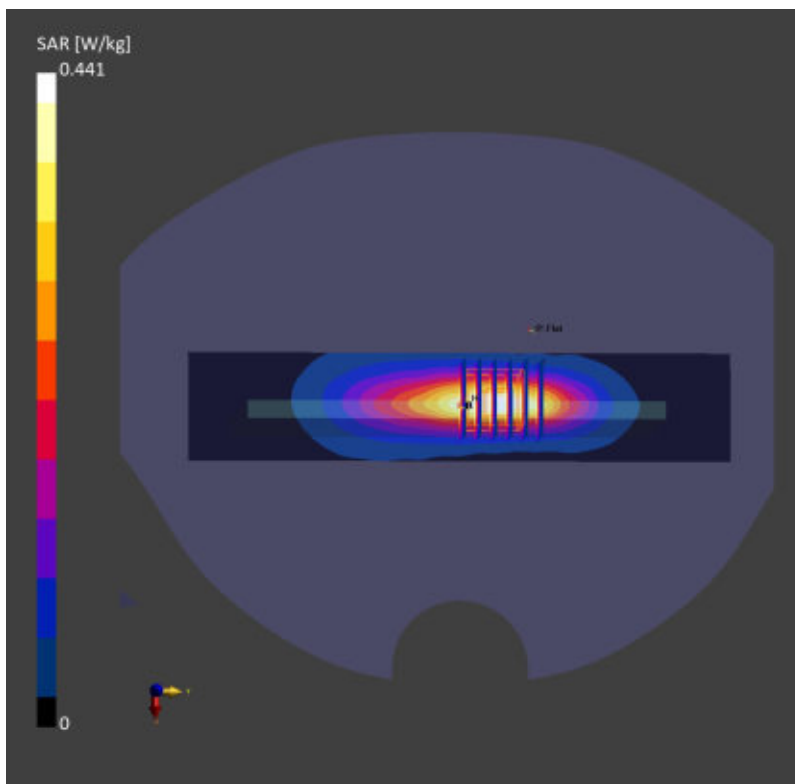

Date: 2026/2/8

32_GSM850_GPRS 4TX Slot_Back_5mm_Ch189

Communication System: GPRS-FDD (TDMA, GMSK, TN 0-1-2-3); Frequency: 836.4 MHz;

Duty Cycle: 1:2.08

Medium: HSL Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 43.6$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.23, 10.04, 10.08); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.878 W/kg; SAR (10g) = 0.577 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.15 dB

SAR (1g) = 0.852 W/kg; SAR (10g) = 0.559 W/kg

Smallest distance from peaks to all points 3 dB below = 15.7 mm

Ratio of SAR at M2 to SAR at M1 = 87.2 %

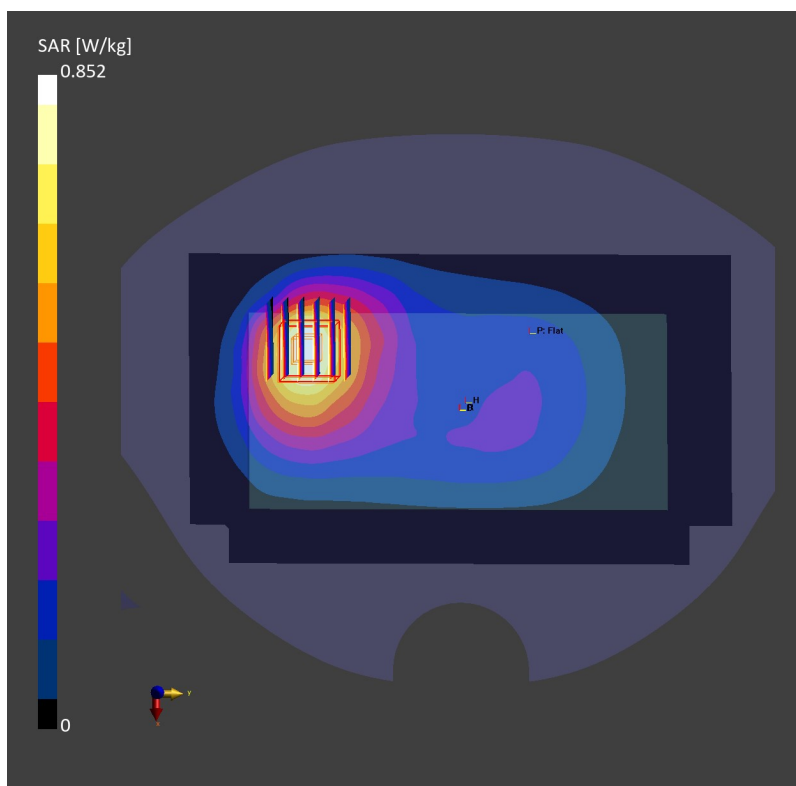

Date: 2026/2/8

33_WCDMA V_RMC 12.2Kbps_Back_5mm_Ch4182


Communication System: UMTS-FDD (WCDMA); Frequency: 836.4 MHz; Duty Cycle: 1:1
 Medium: HSL Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 43.6$
 Ambient Temperature: 23.6°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.23, 10.04, 10.08); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
 SAR (1g) = 0.597 W/kg; SAR (10g) = 0.394 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
 Power Drift = -0.04 dB
 SAR (1g) = 0.581 W/kg; SAR (10g) = 0.383 W/kg
 Smallest distance from peaks to all points 3 dB below = 16.2 mm
 Ratio of SAR at M2 to SAR at M1 = 87.7 %

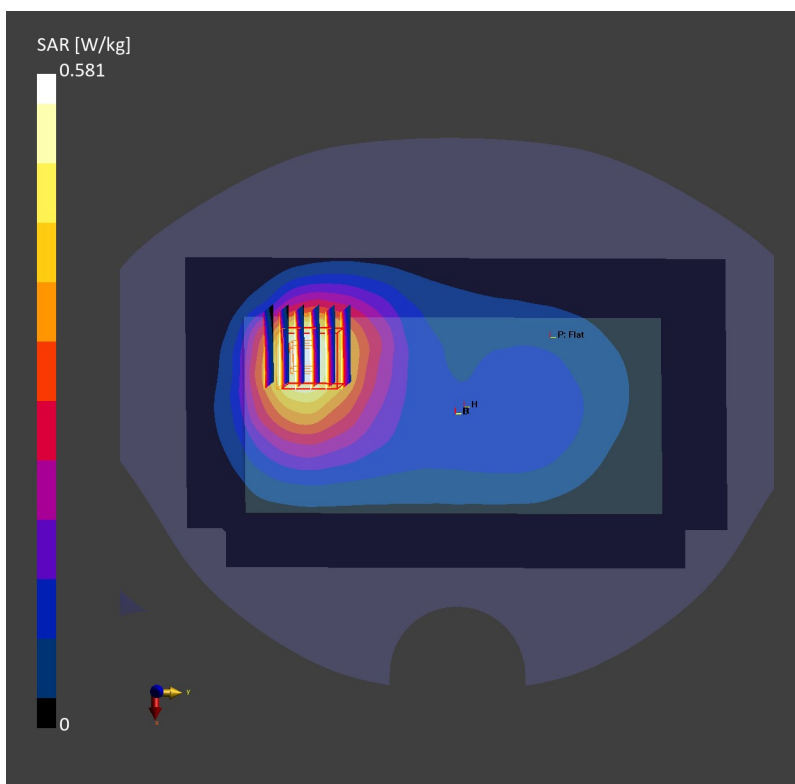

Date: 2026/2/8

34_LTE Band 26_15M_QPSK_1RB_0Offset_Back_5mm_Ch26865


Communication System: LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)
 AntennaCfg:SISO; Frequency: 831.5 MHz; Duty Cycle: 1:1
 Medium: HSL Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 43.6$
 Ambient Temperature: 23.6°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.23, 10.04, 10.08); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10181-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
 SAR (1g) = 0.487 W/kg; SAR (10g) = 0.324 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
 Power Drift = 0.03 dB
 SAR (1g) = 0.490 W/kg; SAR (10g) = 0.317 W/kg
 Smallest distance from peaks to all points 3 dB below = 15.4 mm
 Ratio of SAR at M2 to SAR at M1 = 89.1 %

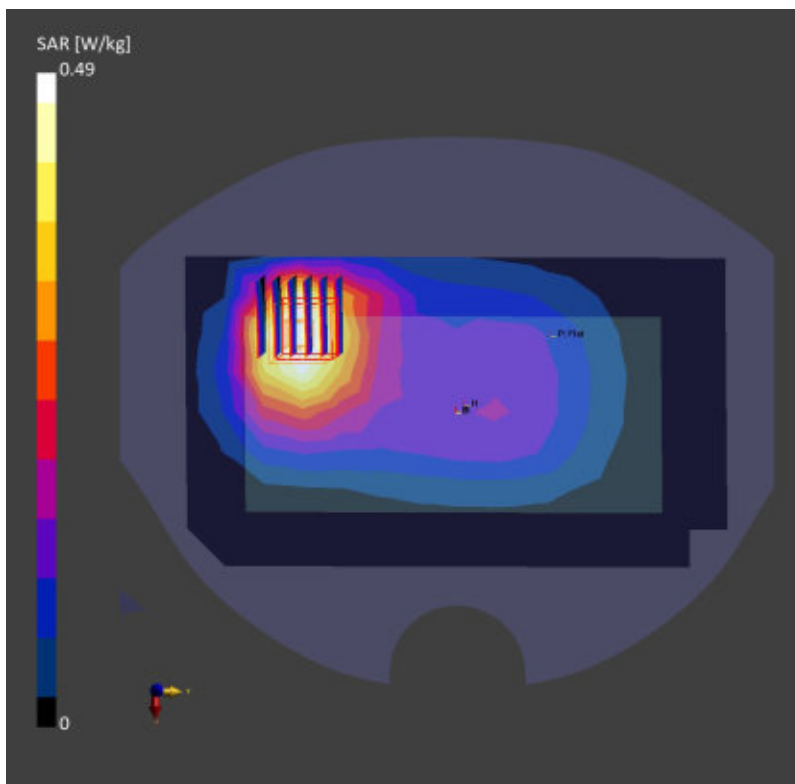

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/1/23

35_FR1 n26_20M_QPSK_1RB_1Offset_DFT-15_Left Side_5mm_Ch166300

Communication System: UID 0, 5G NR (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL_835 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.947$ S/m; $\epsilon_r = 42.542$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.1,8.76, 9.09); Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2025/9/15
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: 1795
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (41x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.582 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.25 V/m; Power Drift = -0.13 dB


Peak SAR (extrapolated) = 0.835 W/kg

SAR(1 g) = 0.452 W/kg; SAR(10 g) = 0.239 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 55.2%

Maximum value of SAR (measured) = 0.588 W/kg

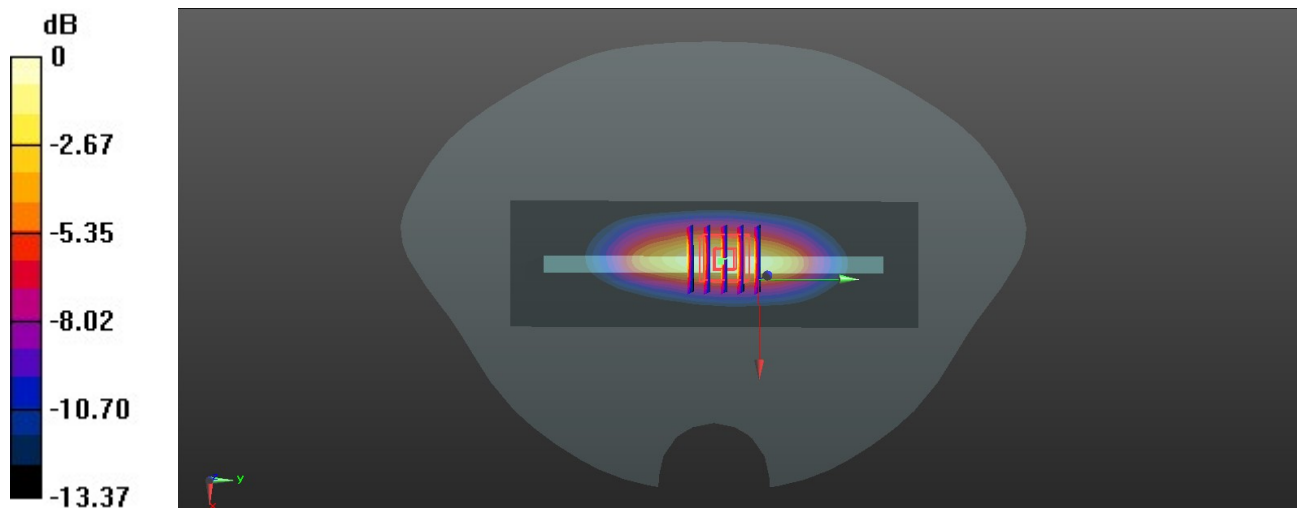

0 dB = 0.588 W/kg = -2.31 dBW/kg

Date: 2026/2/9

36_WCDMA IV_RMC 12.2Kbps_Bottom Side_5mm_Ch1513


Communication System: UMTS-FDD (WCDMA); Frequency: 1752.6 MHz; Duty Cycle: 1:1
 Medium: HSL Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.9$
 Ambient Temperature: 23.3°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.61, 8.45, 8.49); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WCDMA, 10011-CAC

Area Scan (42.0 mm x 120.0 mm): Measurement Grid: 7.0 mm x 15.0 mm
 SAR (1g) = 0.658 W/kg; SAR (10g) = 0.316 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm
 Power Drift = 0.06 dB
 SAR (1g) = 0.691 W/kg; SAR (10g) = 0.334 W/kg
 Smallest distance from peaks to all points 3 dB below = 7.7 mm
 Ratio of SAR at M2 to SAR at M1 = 83.2 %

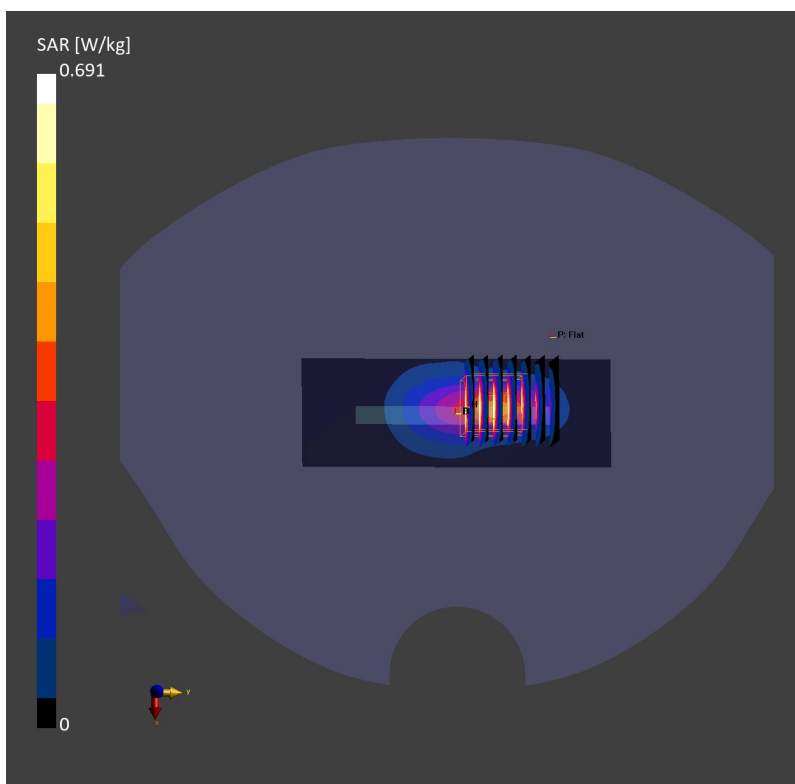

Date: 2026/2/9

37_LTE Band 66_20M_QPSK_1RB_0Offset_Bottom Side_5mm_Ch132572

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 1770.0 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1770.0$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.61, 8.45, 8.49); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10169-CAF

Area Scan (42.0 mm x 120.0 mm): Measurement Grid: 7.0 mm x 15.0 mm

SAR (1g) = 0.942 W/kg; SAR (10g) = 0.460 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.03 dB

SAR (1g) = 0.952 W/kg; SAR (10g) = 0.465 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 84.5 %

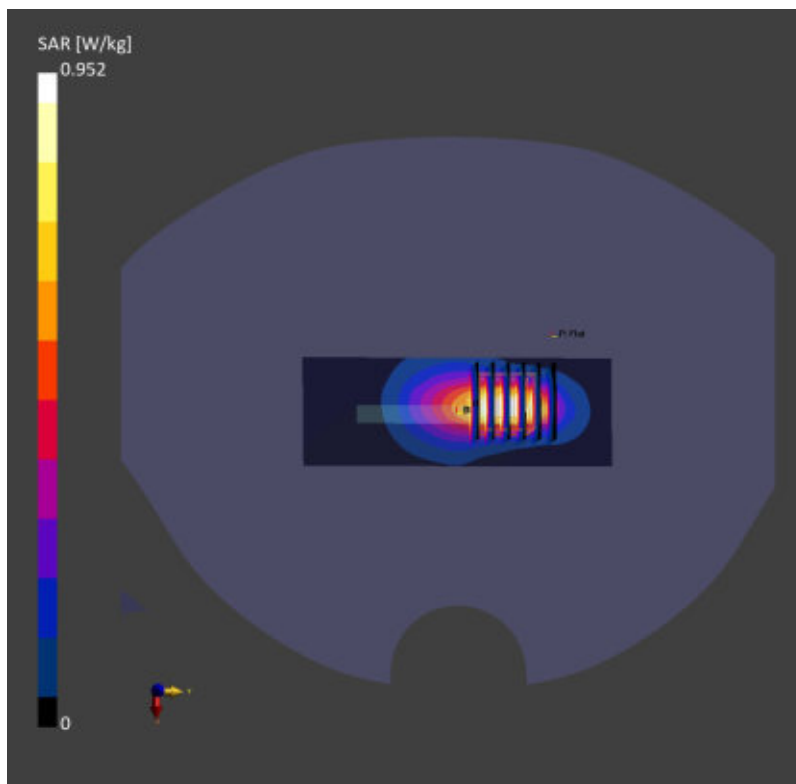

Date: 2026/2/9

38_FR1 n66_45M_QPSK_1RB_1Offset_DFT-15_Bottom Side_5mm_Ch349000

Communication System: 5G NR (DFT-s-OFDM, 1 RB, 45 MHz, QPSK, 15 kHz)

AntennaCfg:SISO; Frequency: 1745.0 MHz; Duty Cycle: 1:1Medium: HSL

Medium parameters used: $f = 1745.0$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.61, 8.45, 8.49); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (42.0 mm x 120.0 mm): Measurement Grid: 7.0 mm x 15.0 mm

SAR (1g) = 0.875 W/kg; SAR (10g) = 0.432 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.05 dB

SAR (1g) = 0.865 W/kg; SAR (10g) = 0.435 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 86.1 %

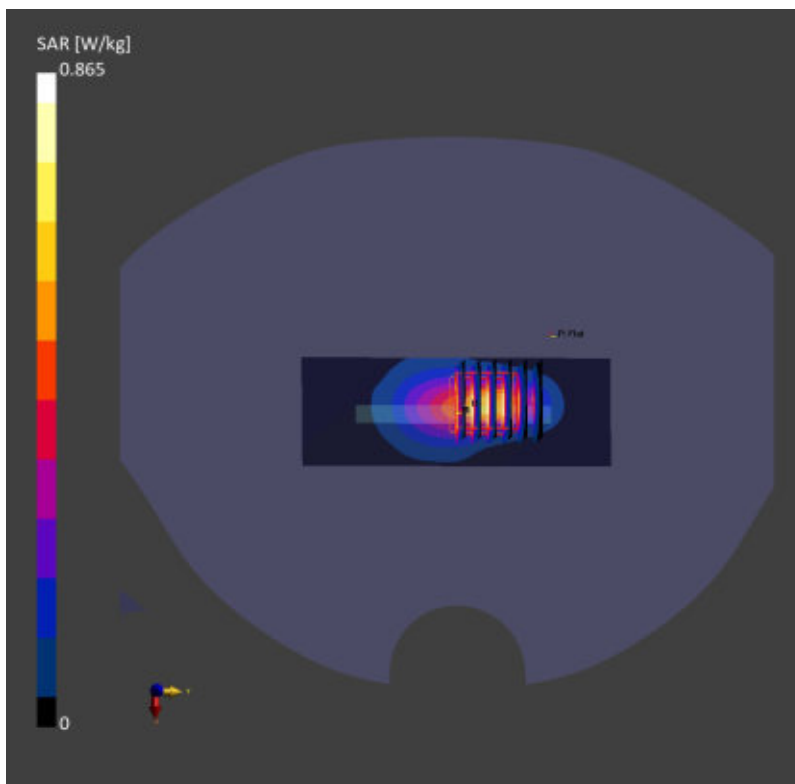

Date: 2026/2/11

39_GSM1900_GPRS 4TX Slot_Bottom Side_5mm_Ch512

Communication System: GPRS-FDD (TDMA, GMSK, TN 0-1-2-3); Frequency: 1850.2 MHz;

Duty Cycle: 1:2.08

Medium: HSL Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 41.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.33, 8.18, 8.21); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: GSM, 10028-DAC

Area Scan (42.0 mm x 120.0 mm): Measurement Grid: 7.0 mm x 15.0 mm

SAR (1g) = 0.990 W/kg; SAR (10g) = 0.486 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.02 dB

SAR (1g) = 0.983 W/kg; SAR (10g) = 0.484 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 85.6 %

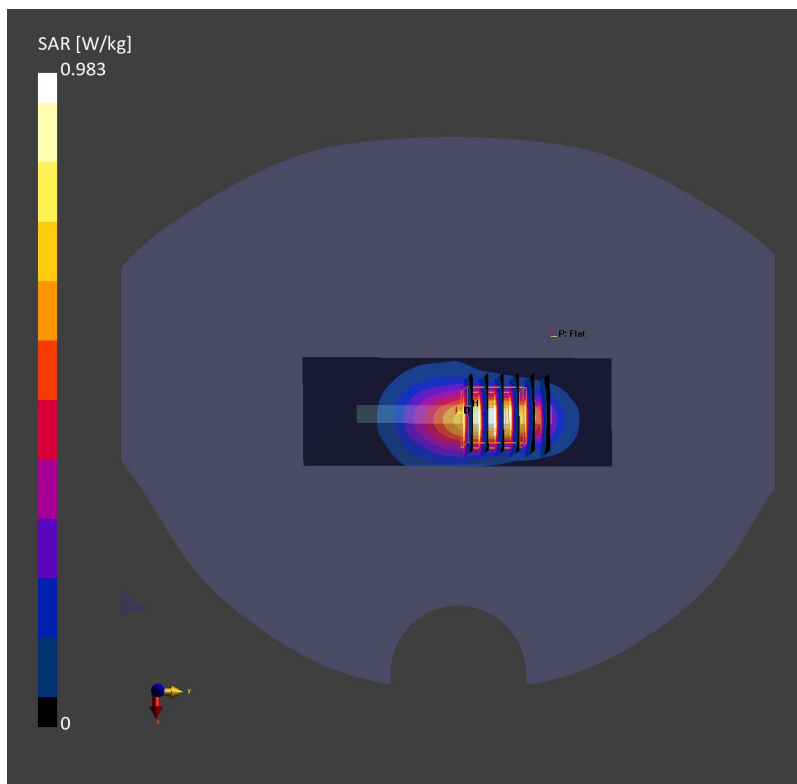

Date: 2026/2/11

40_WCDMA II_RMC 12.2Kbps_Bottom Side_5mm_Ch9538


Communication System: UMTS-FDD (WCDMA); Frequency: 1907.6 MHz; Duty Cycle: 1:1
 Medium: HSL Medium parameters used: $f = 1907.6$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 41.7$
 Ambient Temperature: 23.3°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.33, 8.18, 8.21); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WCDMA, 10011-CAC

Area Scan (42.0 mm x 120.0 mm): Measurement Grid: 7.0 mm x 15.0 mm
 SAR (1g) = 0.724 W/kg; SAR (10g) = 0.336 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.6 mm x 5.6 mm x 1.5 mm
 Power Drift = 0.03 dB
 SAR (1g) = 0.725 W/kg; SAR (10g) = 0.339 W/kg
 Smallest distance from peaks to all points 3 dB below = 6.8 mm
 Ratio of SAR at M2 to SAR at M1 = 84.1 %

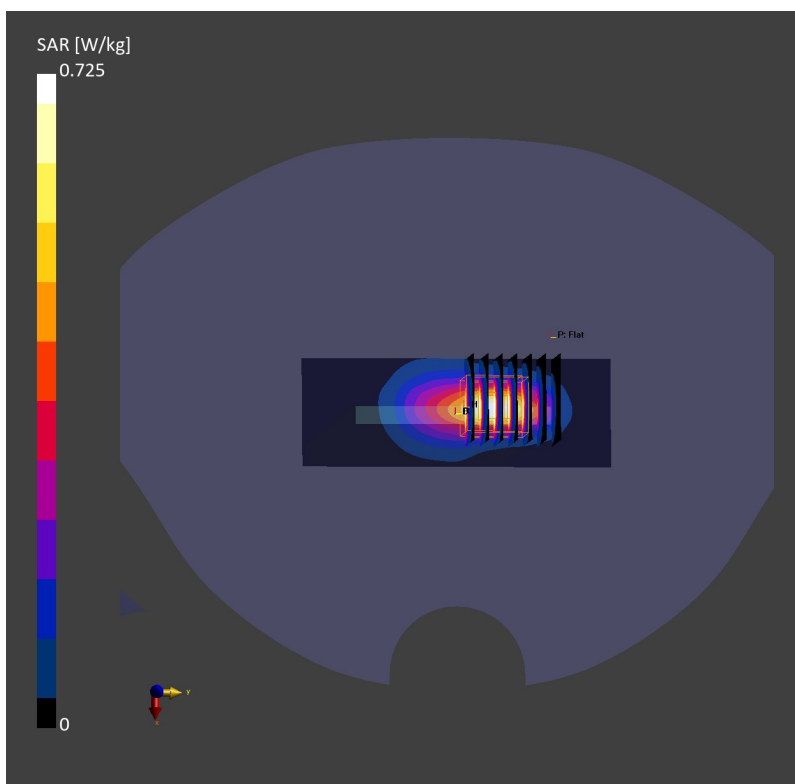

Date: 2026/2/11

41_LTE Band 25_20M_QPSK_1RB_0Offset_Bottom Side_5mm_Ch26340


Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)
AntennaCfg:SISO; Frequency: 1880.0 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 41.7$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.33, 8.18, 8.21); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10169-CAF

Area Scan (42.0 mm x 120.0 mm): Measurement Grid: 7.0 mm x 15.0 mm
SAR (1g) = 0.913 W/kg; SAR (10g) = 0.440 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm
Power Drift = -0.14 dB
SAR (1g) = 0.918 W/kg; SAR (10g) = 0.443 W/kg
Smallest distance from peaks to all points 3 dB below = 7.1 mm
Ratio of SAR at M2 to SAR at M1 = 85.8 %

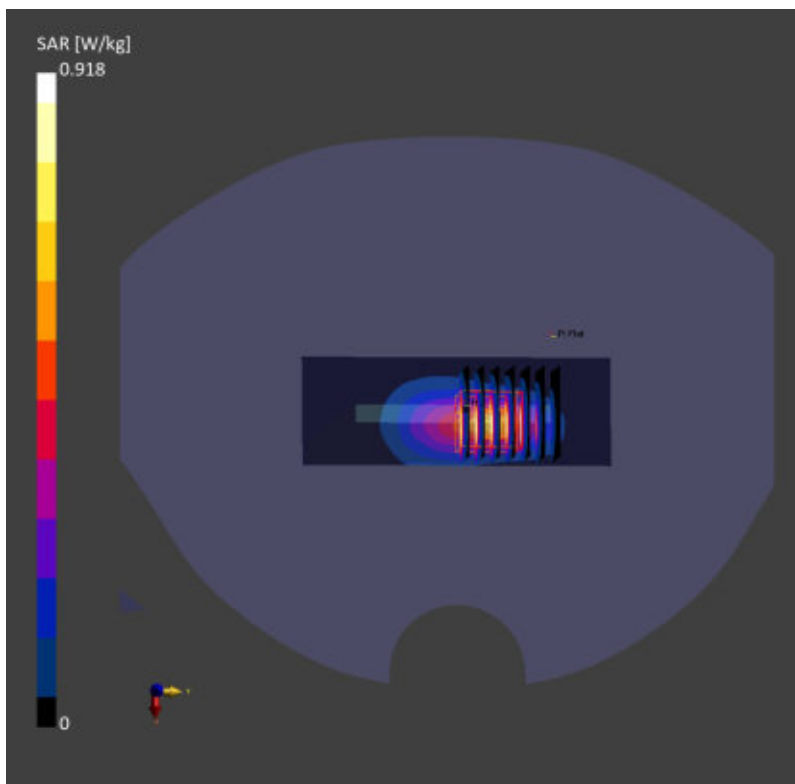

Date: 2026/2/11

42_FR1 n2_40M_QPSK_1RB_1Offset_DFT-15_Bottom Side_5mm_Ch376000


Communication System: 5G NR (DFT-s-OFDM, 1 RB, 20 MHz, QPSK, 15 kHz)
 AntennaCfg:SISO; Frequency: 1880.0 MHz; Duty Cycle: 1:1
 Medium: HSL Medium parameters used: $f = 1880.0$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 41.7$
 Ambient Temperature: 23.3°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.33, 8.18, 8.21); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (42.0 mm x 120.0 mm): Measurement Grid: 7.0 mm x 15.0 mm
 SAR (1g) = 0.932 W/kg; SAR (10g) = 0.450 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm
 Power Drift = -0.09 dB
 SAR (1g) = 0.931 W/kg; SAR (10g) = 0.453 W/kg
 Smallest distance from peaks to all points 3 dB below = 7.2 mm
 Ratio of SAR at M2 to SAR at M1 = 85.6 %

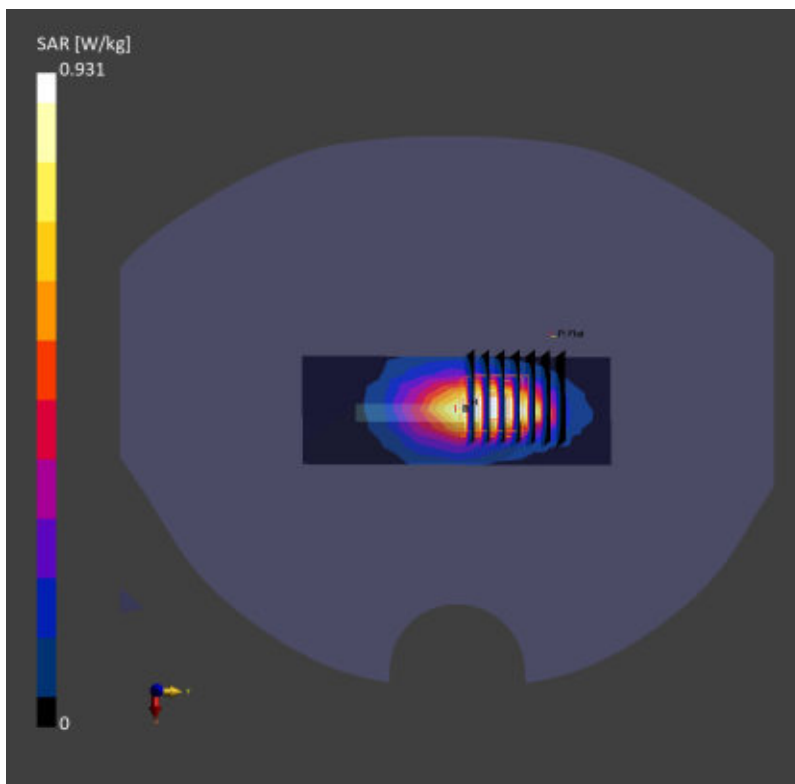

Date: 2026/2/14

43_LTE Band 7_20M_QPSK_1RB_0Offset_Bottom Side_5mm_Ch21350

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 2560.0 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 2560.0$ MHz; $\sigma = 1.90$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.9, 7.75, 7.79); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10169-CAF

Area Scan (42.0 mm x 120.0 mm): Measurement Grid: 7.0 mm x 10.0 mm

SAR (1g) = 0.900 W/kg; SAR (10g) = 0.361 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.08 dB

SAR (1g) = 0.915 W/kg; SAR (10g) = 0.357 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 78.7 %

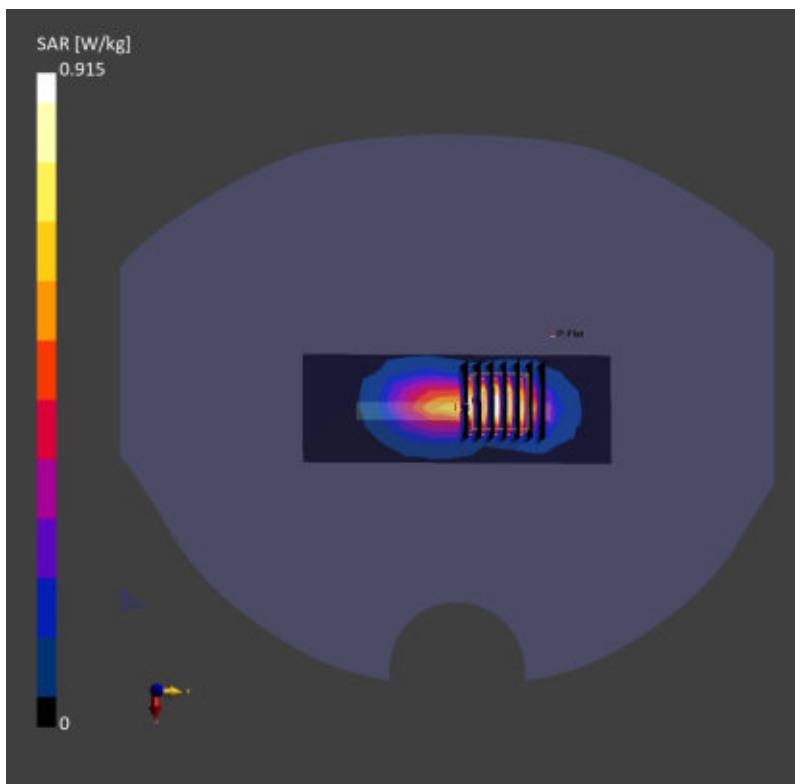

Date: 2026/2/14

44_LTE Band 41_20M_QPSK_1RB_0Offset_Bottom Side_5mm_Ch41055


Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)
AntennaCfg:SISO; Frequency: 2636.5 MHz; Duty Cycle: 1:1.59
Medium: HSL Medium parameters used: $f = 2636.5$ MHz; $\sigma = 1.99$ S/m; $\epsilon_r = 40.7$
Ambient Temperature: 23.5°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.9, 7.75, 7.79); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-TDD, 10172-CAH

Area Scan (42.0 mm x 120.0 mm): Measurement Grid: 7.0 mm x 10.0 mm
SAR (1g) = 0.867 W/kg; SAR (10g) = 0.343 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.08 dB
SAR (1g) = 0.894 W/kg; SAR (10g) = 0.349 W/kg
Smallest distance from peaks to all points 3 dB below = 6.0 mm
Ratio of SAR at M2 to SAR at M1 = 78.1 %

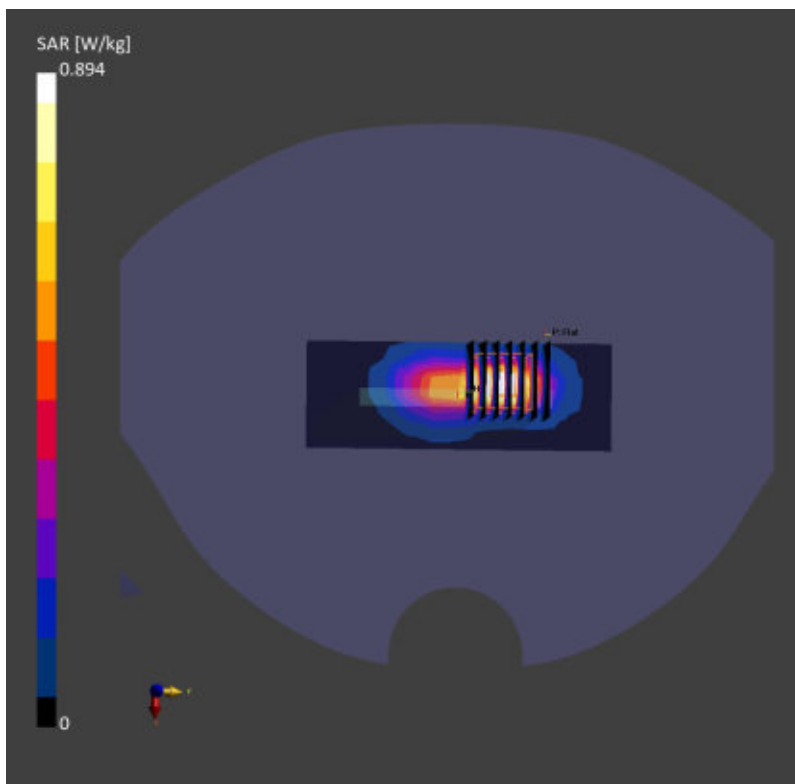

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/1/30

45_FR1 n7_50M_QPSK_1RB_1Offset_DFT-15_Bottom Side_5mm_Ch507000

Communication System: UID 0, 5G NR (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL_2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.913$ S/m; $\epsilon_r = 39.517$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.06,6.80, 7.05); Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2025/9/15
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: 1795
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (41x101x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.10 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 19.13 V/m; Power Drift = 0.09 dB


Peak SAR (extrapolated) = 2.00 W/kg

SAR(1 g) = 0.827 W/kg; SAR(10 g) = 0.329 W/kg

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 46.2%

Maximum value of SAR (measured) = 1.19 W/kg

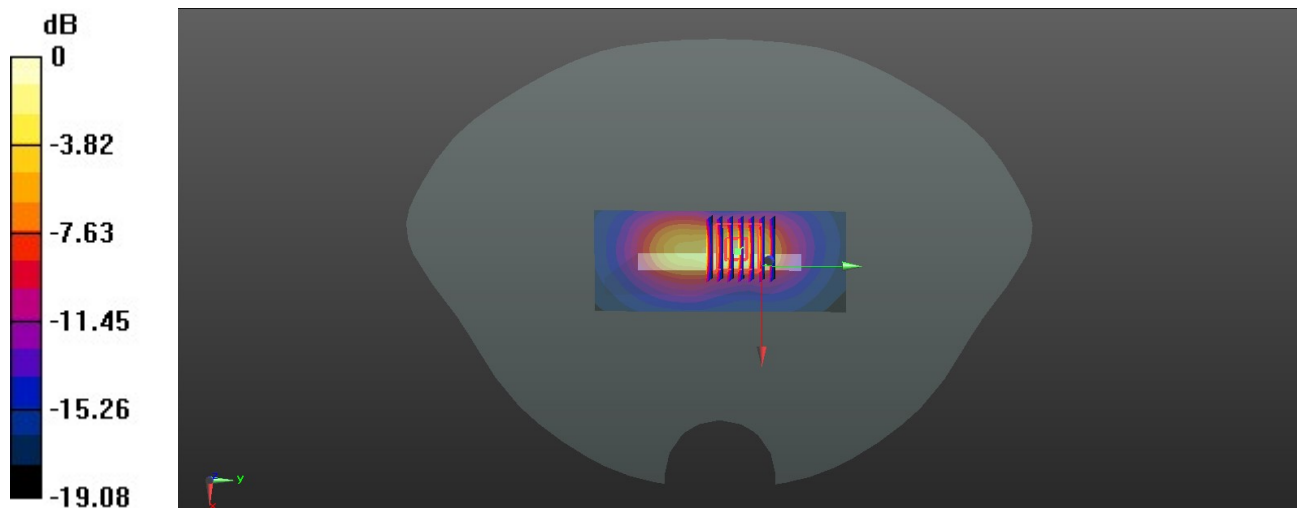

0 dB = 1.19 W/kg = 0.76 dBW/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/1/30

46_FR1 n41_100M_QPSK_1RB_1Offset_DFT-30_Bottom Side_5mm_Ch518598

Communication System: UID 0, 5G NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1
 Medium: HSL_2600 Medium parameters used: $f = 2592.99$ MHz; $\sigma = 1.959$ S/m; $\epsilon_r = 39.427$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.3 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.06,6.80, 7.05); Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2025/9/15
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: 1795
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (41x101x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
 Maximum value of SAR (interpolated) = 1.16 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 19.84 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 2.35 W/kg

SAR(1 g) = 0.959 W/kg; SAR(10 g) = 0.375 W/kg

Smallest distance from peaks to all points 3 dB below = 6 mm

Ratio of SAR at M2 to SAR at M1 = 45.7%

Maximum value of SAR (measured) = 1.39 W/kg

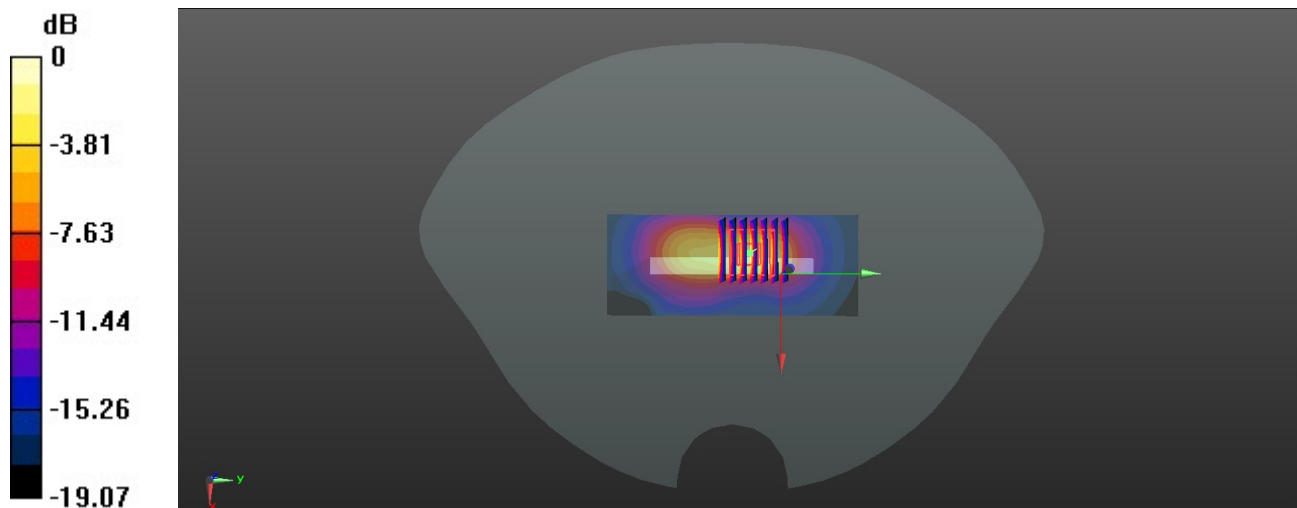

0 dB = 1.39 W/kg = 1.43 dBW/kg

Date: 2026/2/15

47_LTE Band 42_20M_QPSK_1RB_0Offset_Back_5mm_Ch42590


Communication System: LTE-TDD (SC-FDMA, 1 RB, 20 MHz, QPSK)
AntennaCfg:SISO; Frequency: 3500.0 MHz; Duty Cycle: 1:1.59
Medium: HSL Medium parameters used: $f = 3500.0$ MHz; $\sigma = 2.74$ S/m; $\epsilon_r = 39.2$
Ambient Temperature: 23.6°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.99, 6.86, 6.89); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-TDD, 10172-CAH

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.468 W/kg; SAR (10g) = 0.177 W/kg;

Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.5 mm x 4.5 mm x 1.4 mm
Power Drift = 0.01 dB
SAR (1g) = 0.455 W/kg; SAR (10g) = 0.159 W/kg
Smallest distance from peaks to all points 3 dB below = 5.8 mm
Ratio of SAR at M2 to SAR at M1 = 73.3 %

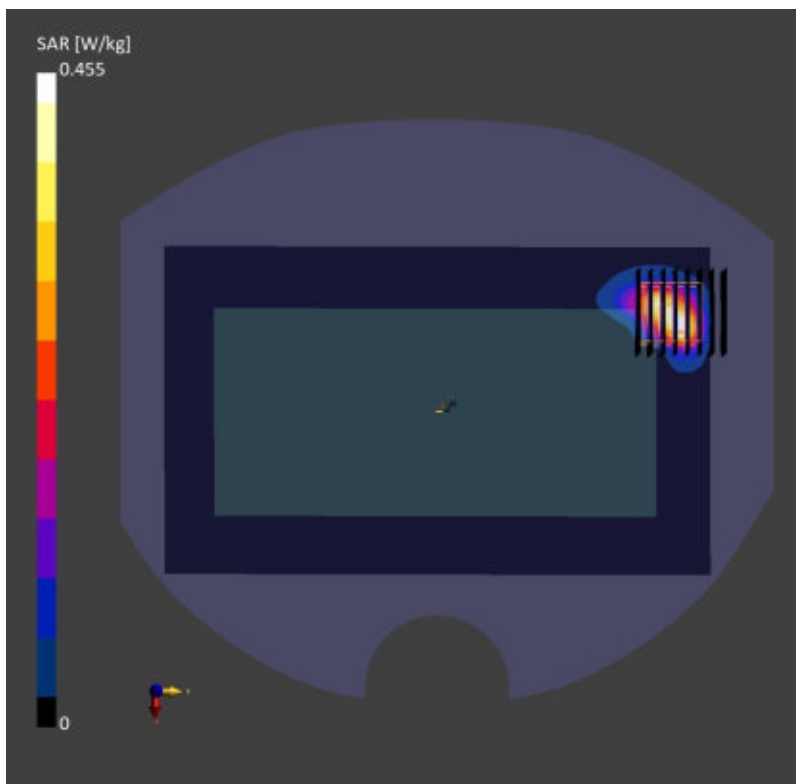

Date: 2026/2/17

48_FR1 n77_100M_QPSK_1RB_1Offset_DFT-30_Back_5mm_Ch656000

Communication System: 5G NR (DFT-s-OFDM, 1 RB, 100 MHz, QPSK, 30 kHz)

AntennaCfg:SISO; Frequency: 3840.0 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 3840.0$ MHz; $\sigma = 3.05$ S/m; $\epsilon_r = 38.6$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.7°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.88, 6.76, 6.79); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.433 W/kg; SAR (10g) = 0.123 W/kg;


Zoom Scan (28.0 mm x 28.0 mm x 28.0 mm): Measurement Grid: 4.2 mm x 4.2 mm x 1.4 mm

Power Drift = -0.16 dB

SAR (1g) = 0.519 W/kg; SAR (10g) = 0.133 W/kg

Smallest distance from peaks to all points 3 dB below = 4.2 mm

Ratio of SAR at M2 to SAR at M1 = 71.4 %

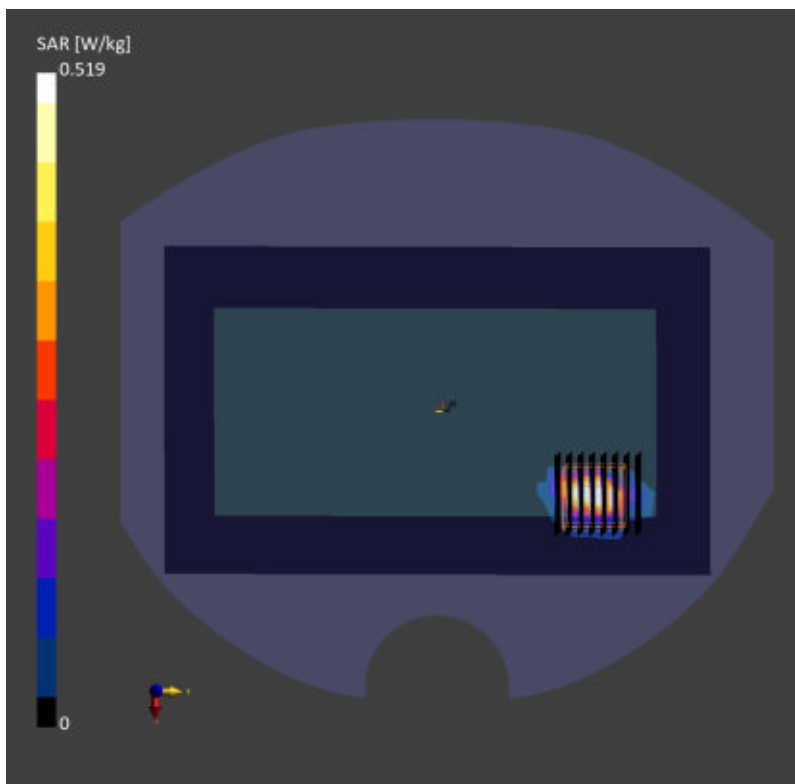

Date: 2026/2/4

49_Bluetooth_DH5 1Mbps_Top Side_5mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth (GFSK, DH5); Frequency: 2441.0 MHz; Duty Cycle: 1:1.305

Medium: HSL Medium parameters used: $f = 2441.0$ MHz; $\sigma = 1.82$ S/m; $\epsilon_r = 41.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.87, 7.72, 7.76); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: Bluetooth, 10032-CAA

Area Scan (42.0 mm x 120.0 mm): Measurement Grid: 7.0 mm x 10.0 mm

SAR (1g) = 0.185 W/kg; SAR (10g) = 0.080 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.04 dB

SAR (1g) = 0.188 W/kg; SAR (10g) = 0.081 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 81.9 %

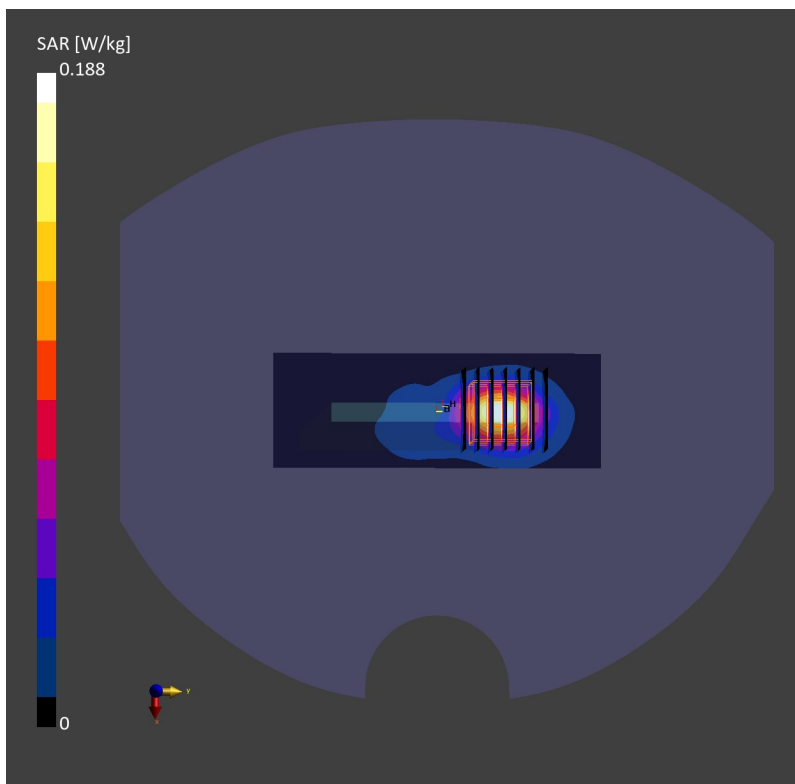

Date: 2026/2/4

50_WLAN2.4GHz_802.11b 1Mbps_Right Side_5mm_Ch1

Communication System: IEEE 802.11b WiFi 2.4 GHz (DSSS, 1 Mbps); Frequency: 2412.0 MHz;

Duty Cycle: 1:1.016

Medium: HSL Medium parameters used: $f = 2412.0$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 41.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(7.87, 7.72, 7.76); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WLAN, 10012-CAB

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.465 W/kg; SAR (10g) = 0.196 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = 0.13 dB

SAR (1g) = 0.441 W/kg; SAR (10g) = 0.181 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.2 %

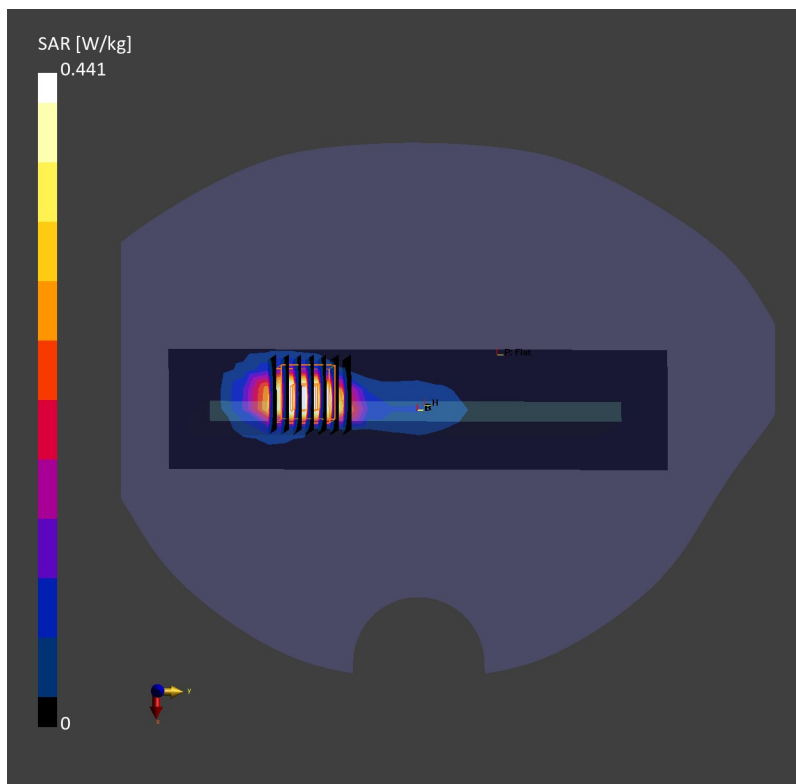

Date: 2026/2/19

51_WLAN5GHz_802.11ac-VHT80 MCS0_Top Side_5mm_Ch42

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle); Frequency: 5210.0 MHz; Duty Cycle: 1:1.077

Medium: HSL Medium parameters used: $f = 5210.0$ MHz; $\sigma = 4.54$ S/m; $\epsilon_r = 36.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.3°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(6.08, 5.97, 6.0); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WLAN, 10544-AAC

Area Scan (42.0 mm x 120.0 mm): Measurement Grid: 7.0 mm x 10.0 mm

SAR (1g) = 0.360 W/kg; SAR (10g) = 0.113 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.16 dB

SAR (1g) = 0.381 W/kg; SAR (10g) = 0.114 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 63.4 %

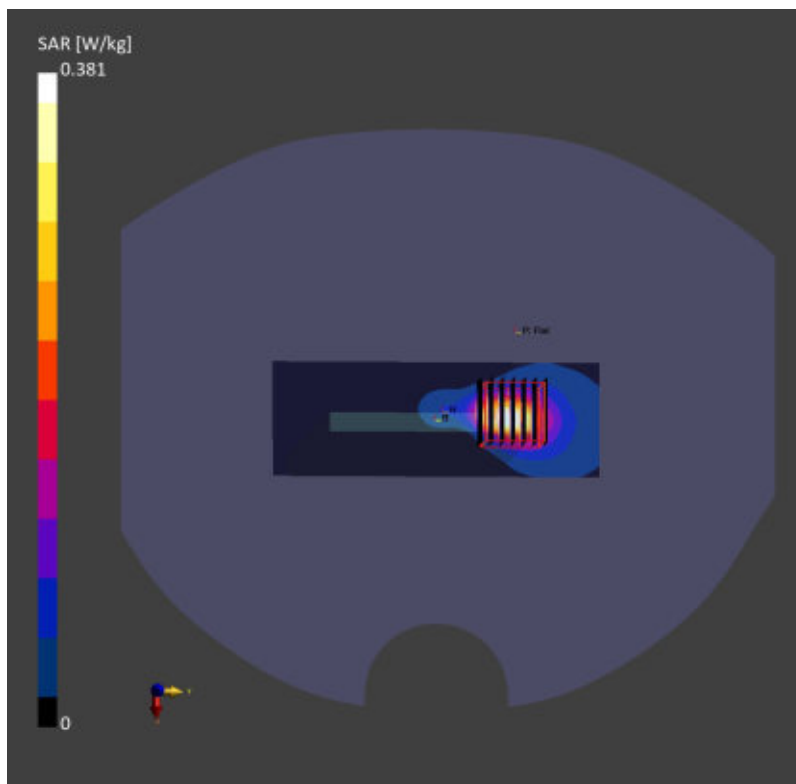

Date: 2026/2/22

52_WLAN5GHz_802.11ac-VHT80 MCS0_Top Side_5mm_Ch155

Communication System: IEEE 802.11ac WiFi (80MHz, MCS0, 99pc duty cycle); Frequency:

5775.0 MHz; Duty Cycle: 1:1.077

Medium: HSL Medium parameters used: $f = 5775.0$ MHz; $\sigma = 5.17$ S/m; $\epsilon_r = 35.3$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(5.52, 5.42, 5.44); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WLAN, 10544-AAC

Area Scan (42.0 mm x 120.0 mm): Measurement Grid: 7.0 mm x 10.0 mm

SAR (1g) = 0.370 W/kg; SAR (10g) = 0.114 W/kg;


Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.11 dB

SAR (1g) = 0.397 W/kg; SAR (10g) = 0.118 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 58.1 %

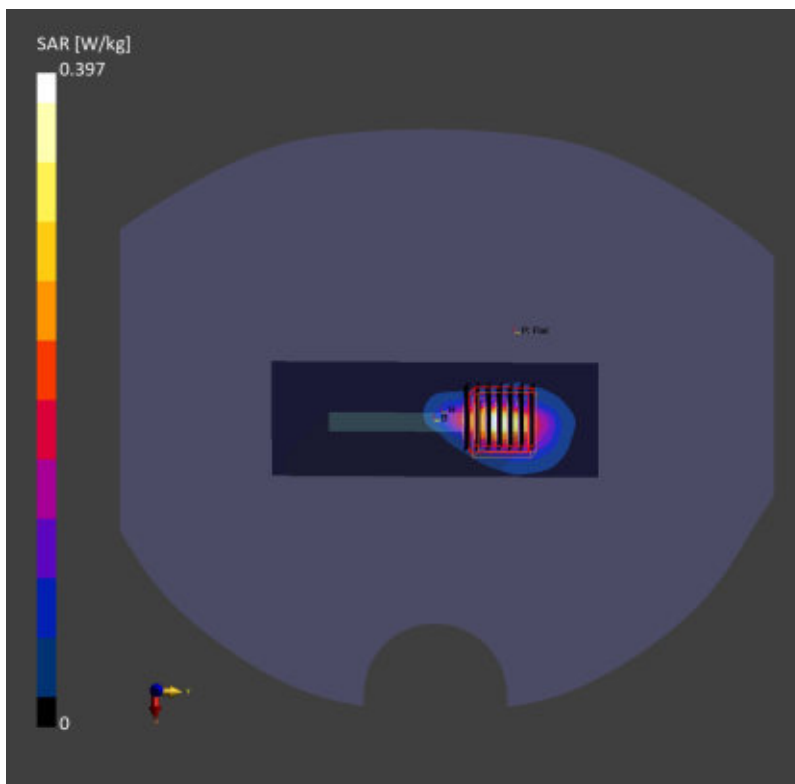

Date: 2026/2/6

53_LTE Band 71_20M_QPSK_1RB_0Offset_Back_5mm_Ch133297


Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)
AntennaCfg:SISO; Frequency: 680.5 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.869$ S/m; $\epsilon_r = 44.0$
Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.53, 10.34, 10.38); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.524 W/kg; SAR (10g) = 0.327 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = -0.16 dB
SAR (1g) = 0.495 W/kg; SAR (10g) = 0.284 W/kg
Smallest distance from peaks to all points 3 dB below = 7.2 mm
Ratio of SAR at M2 to SAR at M1 = 86.2 %

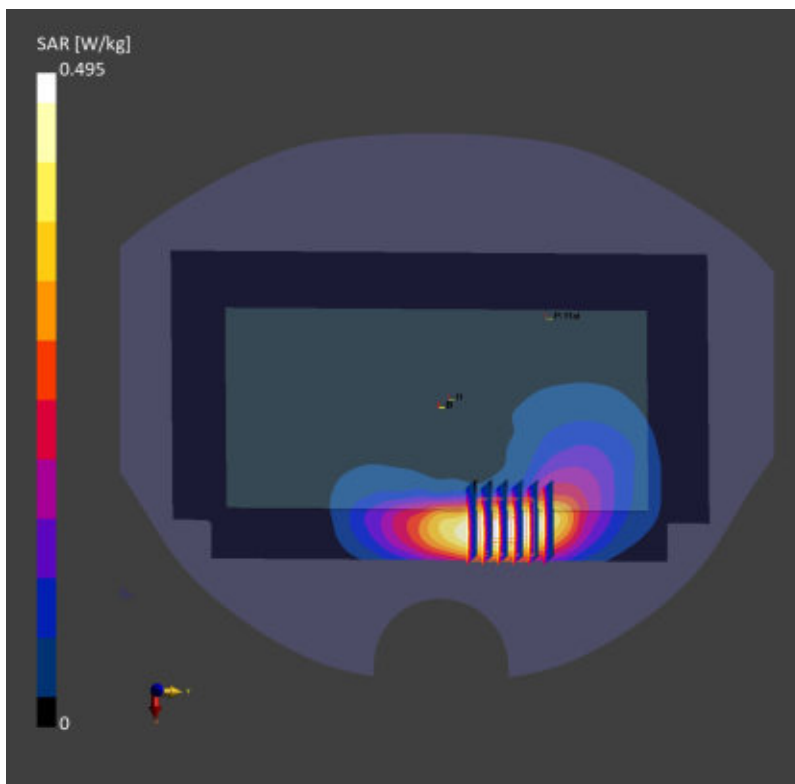

Date: 2026/2/6

54_LTE Band 12_10M_QPSK_1RB_0Offset_Back_5mm_Ch23095


Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)
 AntennaCfg:SISO; Frequency: 707.5 MHz; Duty Cycle: 1:1
 Medium: HSL Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.869$ S/m; $\epsilon_r = 44.0$
 Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.53, 10.34, 10.38); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
 SAR (1g) = 0.601 W/kg; SAR (10g) = 0.372 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
 Power Drift = -0.14 dB
 SAR (1g) = 0.580 W/kg; SAR (10g) = 0.329 W/kg
 Smallest distance from peaks to all points 3 dB below = 7.2 mm
 Ratio of SAR at M2 to SAR at M1 = 85.9 %

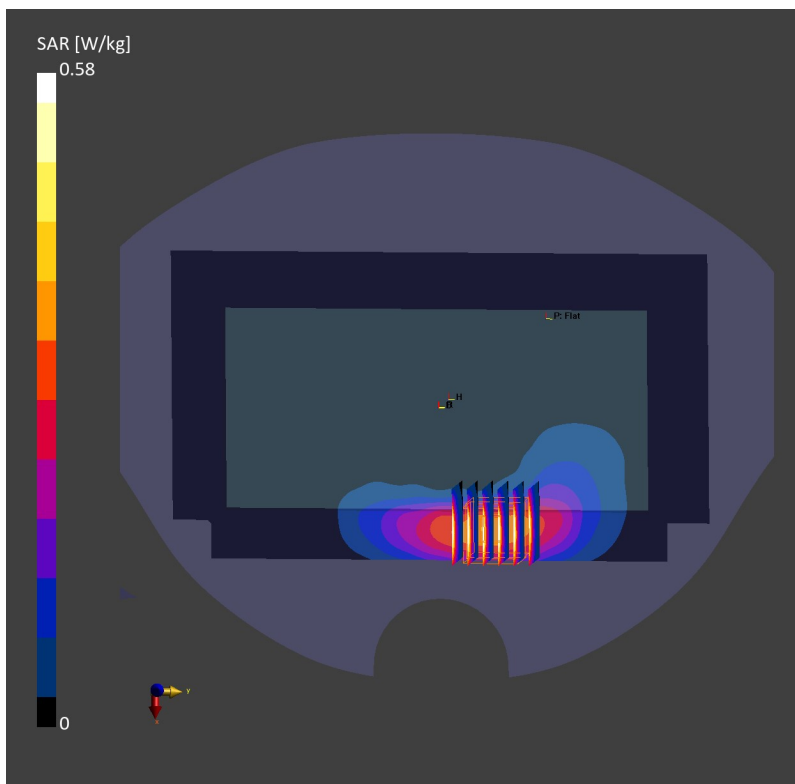

Date: 2026/2/6

55_LTE Band 13_10M_QPSK_1RB_0Offset_Back_5mm_Ch23230


Communication System: LTE-FDD (SC-FDMA, 1 RB, 10 MHz, QPSK)
 AntennaCfg:SISO; Frequency: 782.0 MHz; Duty Cycle: 1:1
 Medium: HSL Medium parameters used: $f = 782.0$ MHz; $\sigma = 0.902$ S/m; $\epsilon_r = 43.7$
 Ambient Temperature: 23.4°C; Liquid Temperature: 22.8°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.53, 10.34, 10.38); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
 SAR (1g) = 0.576 W/kg; SAR (10g) = 0.346 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm
 Power Drift = 0.05 dB
 SAR (1g) = 0.552 W/kg; SAR (10g) = 0.313 W/kg
 Smallest distance from peaks to all points 3 dB below = 7.1 mm
 Ratio of SAR at M2 to SAR at M1 = 86.9 %

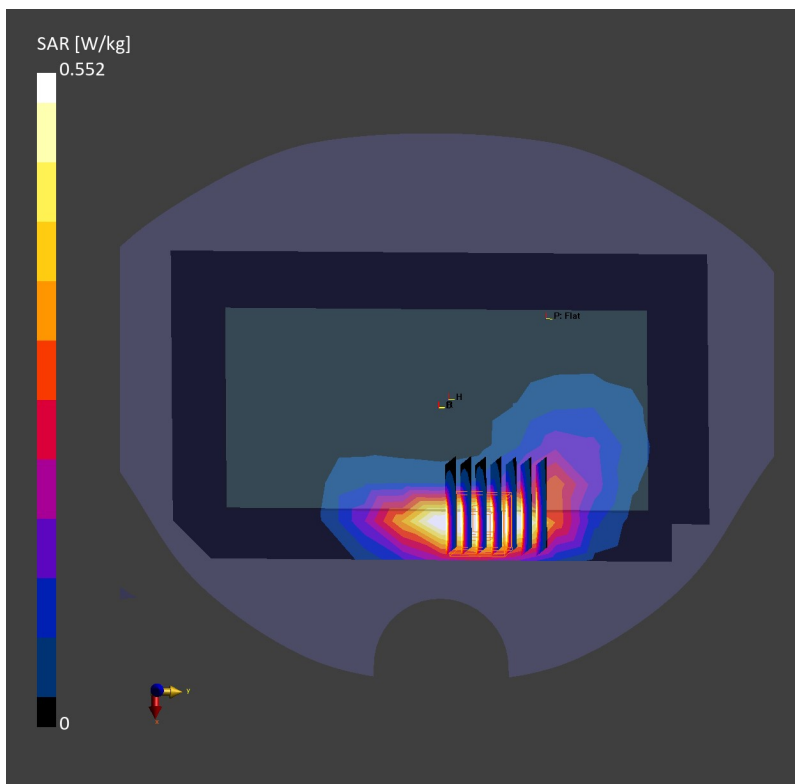

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/1/21

56_FR1 n71_20M_QPSK_1RB_1Offset_Back_DFT-15_5mm_Ch136100

Communication System: UID 0, 5G NR (0); Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: HSL_750 Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.894$ S/m; $\epsilon_r = 43.142$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.21,8.87, 9.20); Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2025/9/15
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: 1795
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.615 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 2.915 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.908 W/kg

SAR(1 g) = 0.515 W/kg; SAR(10 g) = 0.296 W/kg

Smallest distance from peaks to all points 3 dB below = 8 mm

Ratio of SAR at M2 to SAR at M1 = 62.8%

Maximum value of SAR (measured) = 0.603 W/kg

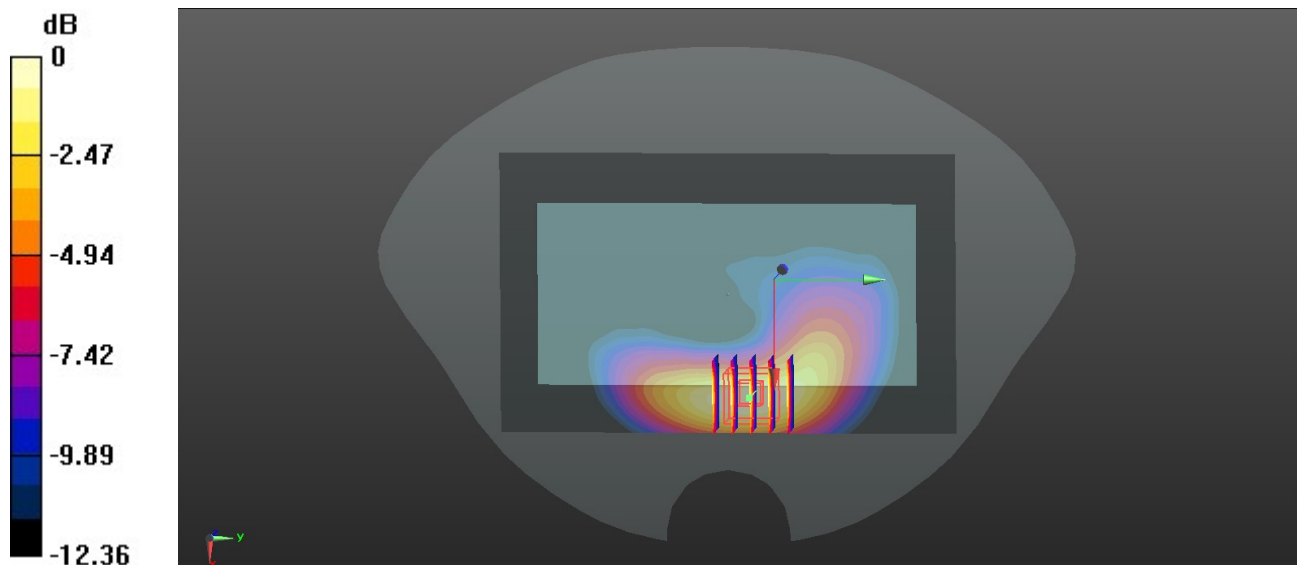

0 dB = 0.603 W/kg = -2.20 dBW/kg

Date: 2026/2/8

57_GSM850_GPRS 4TX Slot_Back_5mm_Ch189

Communication System: GPRS-FDD (TDMA, GMSK, TN 0-1-2-3); Frequency: 836.4 MHz;

Duty Cycle: 1:2.08

Medium: HSL Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 43.6$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.23, 10.04, 10.08); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.878 W/kg; SAR (10g) = 0.577 W/kg;


Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = 0.15 dB

SAR (1g) = 0.852 W/kg; SAR (10g) = 0.559 W/kg

Smallest distance from peaks to all points 3 dB below = 15.7 mm

Ratio of SAR at M2 to SAR at M1 = 87.2 %

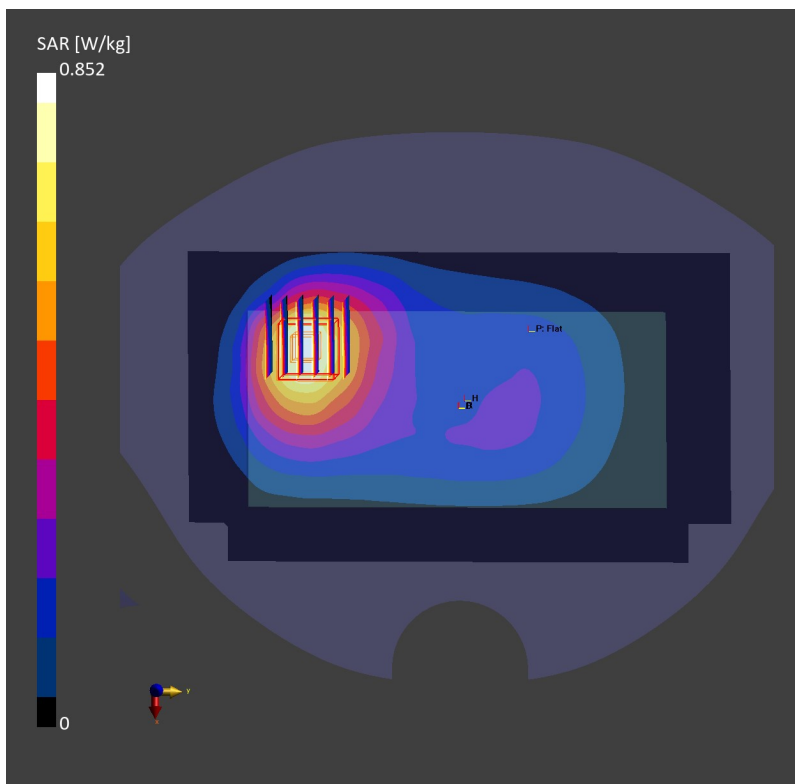

Date: 2026/2/8

58_WCDMA V_RMC 12.2Kbps_Back_5mm_Ch4182


Communication System: UMTS-FDD (WCDMA); Frequency: 836.4 MHz; Duty Cycle: 1:1
 Medium: HSL Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 43.6$
 Ambient Temperature: 23.6°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.23, 10.04, 10.08); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
 SAR (1g) = 0.597 W/kg; SAR (10g) = 0.394 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
 Power Drift = -0.11 dB
 SAR (1g) = 0.581 W/kg; SAR (10g) = 0.383 W/kg
 Smallest distance from peaks to all points 3 dB below = 16.2 mm
 Ratio of SAR at M2 to SAR at M1 = 87.7 %

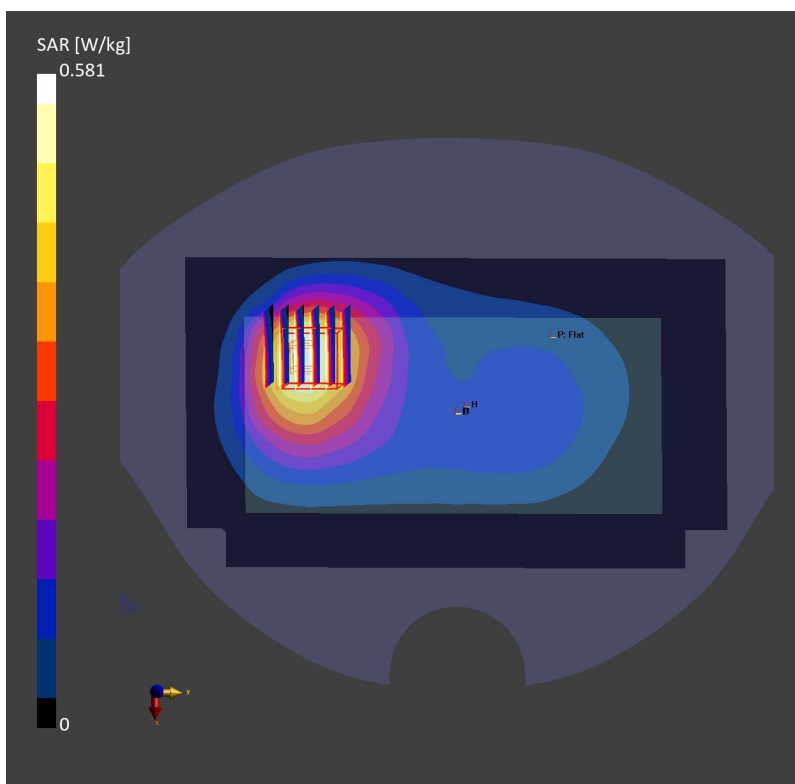

Date: 2026/2/8

59_LTE Band 26_15M_QPSK_1RB_0Offset_Back_5mm_Ch26865


Communication System: LTE-FDD (SC-FDMA, 1 RB, 15 MHz, QPSK)
 AntennaCfg:SISO; Frequency: 831.5 MHz; Duty Cycle: 1:1
 Medium: HSL Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.919$ S/m; $\epsilon_r = 43.6$
 Ambient Temperature: 23.6°C; Liquid Temperature: 22.4°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(10.23, 10.04, 10.08); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10181-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
 SAR (1g) = 0.444 W/kg; SAR (10g) = 0.267 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
 Power Drift = -0.13 dB
 SAR (1g) = 0.428 W/kg; SAR (10g) = 0.241 W/kg
 Smallest distance from peaks to all points 3 dB below = 9.2 mm
 Ratio of SAR at M2 to SAR at M1 = 87.1 %

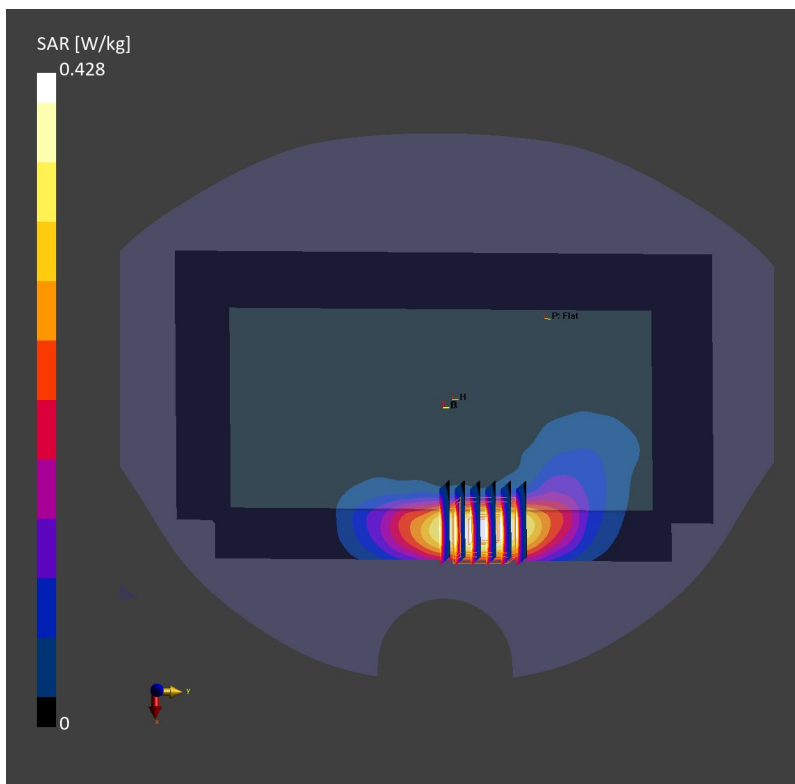

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2026/1/23

60_FR1 n26_20M_QPSK_1RB_1Offset_DFT-15_Back_5mm_Ch166300

Communication System: UID 0, 5G NR (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL_835 Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.947$ S/m; $\epsilon_r = 42.542$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.1,8.76, 9.09); Calibrated: 2025/9/11
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1386; Calibrated: 2025/9/15
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: 1795
- Measurement SW: DASY52, Version 52.10 (3); SEMCAD X Version 14.6.13 (7474)

Area Scan (81x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.621 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.601 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.962 W/kg

SAR(1 g) = 0.547 W/kg; SAR(10 g) = 0.306 W/kg

Smallest distance from peaks to all points 3 dB below = 9.4 mm

Ratio of SAR at M2 to SAR at M1 = 65%

Maximum value of SAR (measured) = 0.619 W/kg

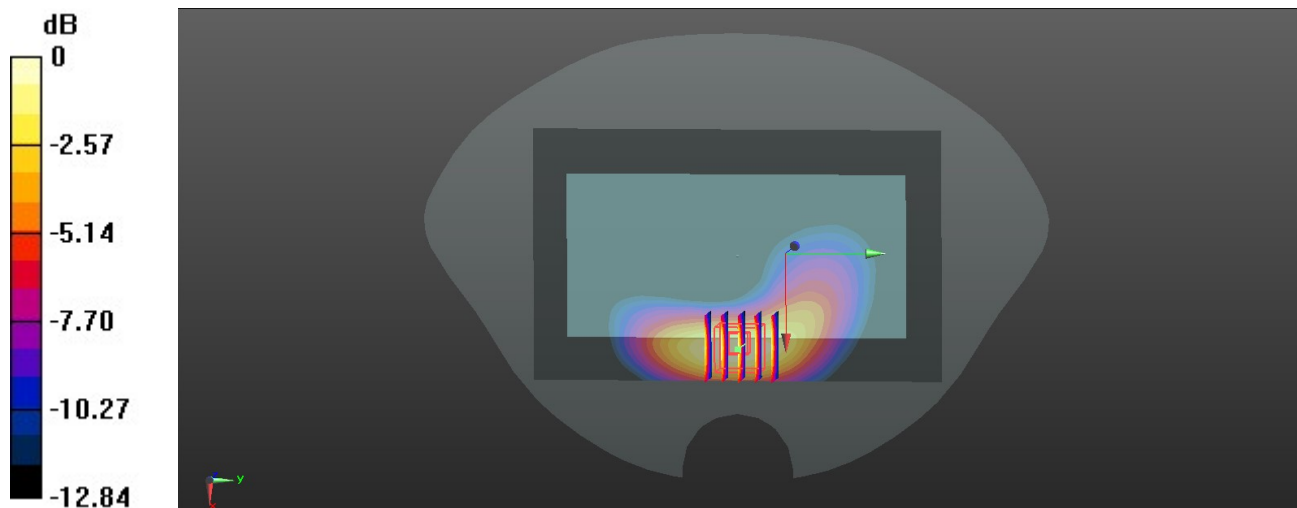

0 dB = 0.619 W/kg = -2.08 dBW/kg

Date: 2026/2/9

61_WCDMA IV_RMC 12.2Kbps_Back_5mm_Ch1513


Communication System: UMTS-FDD (DC-HSDPA); Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium: HSL Medium parameters used: $f = 1752.6$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.9$
Ambient Temperature: 23.3°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.61, 8.45, 8.49); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: WCDMA, 10457-AAB

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm
SAR (1g) = 0.739 W/kg; SAR (10g) = 0.350 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm
Power Drift = 0.17 dB
SAR (1g) = 0.751 W/kg; SAR (10g) = 0.357 W/kg
Smallest distance from peaks to all points 3 dB below = 8.1 mm
Ratio of SAR at M2 to SAR at M1 = 85.9 %

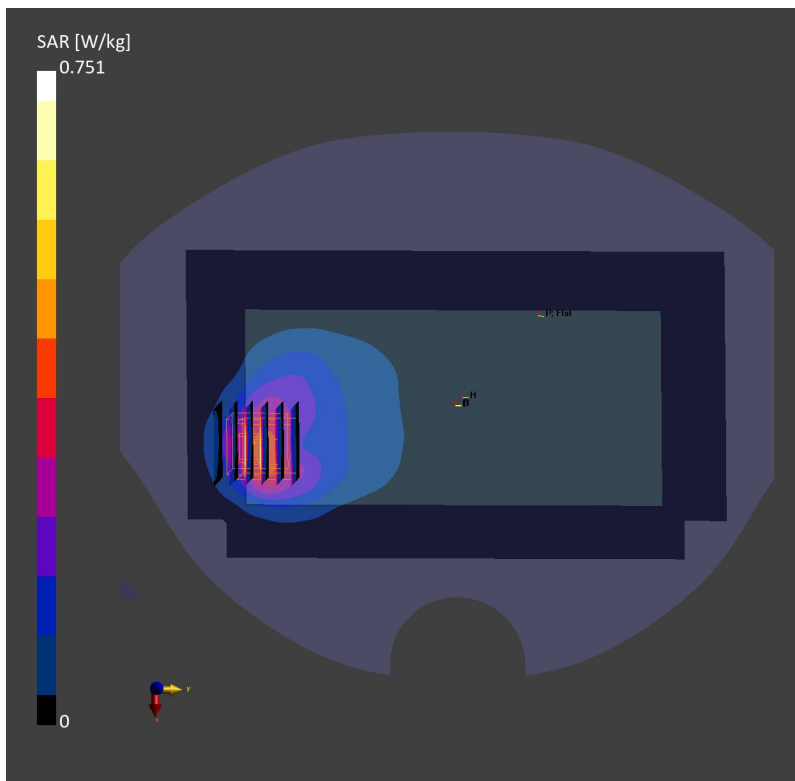

Date: 2026/2/9

62_LTE Band 66_20M_QPSK_1RB_0Offset_Back_5mm_Ch132572

Communication System: LTE-FDD (SC-FDMA, 1 RB, 20 MHz, QPSK)

AntennaCfg:SISO; Frequency: 1770.0 MHz; Duty Cycle: 1:1

Medium: HSL Medium parameters used: $f = 1770.0$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 41.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.5°C

DASY6 Configuration:

- Probe: EX3DV4 - SN7641; ConvF(8.61, 8.45, 8.49); Calibrated: 2025/6/26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1326; Calibrated: 2025/7/11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2033; Section: Flat
- Measurement Software: 16.2.2.1588
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.829 W/kg; SAR (10g) = 0.462 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm

Power Drift = -0.12 dB

SAR (1g) = 0.931 W/kg; SAR (10g) = 0.467 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 86.5 %

