

01_GSM1900_GPRS 3 Tx slots_Left Tilted_0mm_Ch661

Communication System: GPRS-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260624 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.25, 7.12, 7.34); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: GSM, 10027-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.613 W/kg; SAR (10g) = 0.341 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.809 W/kg; SAR (8g) = 0.435 W/kg; SAR (10g) = 0.395 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 87.3 %

TSL Correction: Positive only

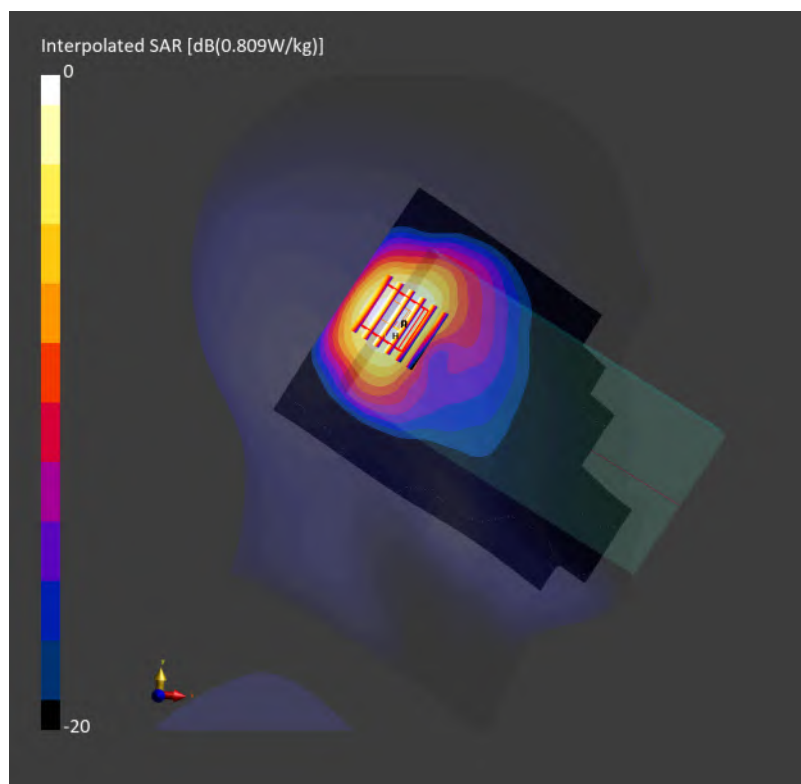

02_WCDMA II_RMC 12.2Kbps_Left Tilted_0mm_Ch9400

Communication System: UMTS-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260627 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 43.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.64, 8.14, 7.69); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.810 W/kg; SAR (10g) = 0.444 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 1.10 W/kg; SAR (8g) = 0.585 W/kg; SAR (10g) = 0.532 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 86.2 %

TSL Correction: Positive only

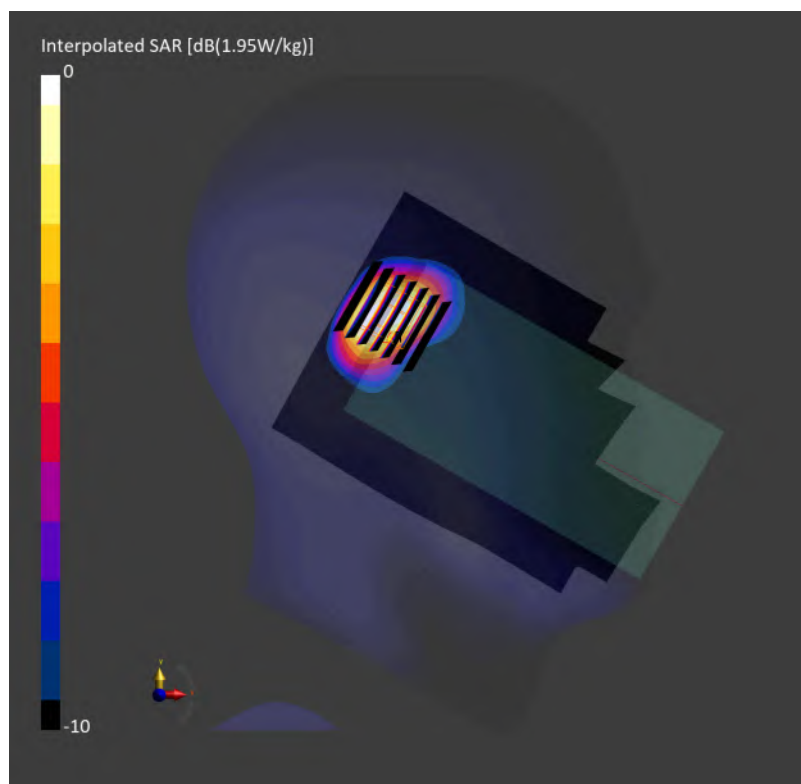

03_WCDMA IV_RMC 12.2Kbps_Right Tilted_0mm_Ch1513

Communication System: UMTS-FDD; Frequency: 1752.600 MHz

Medium: HSL_600-7200_260627 Medium parameters used: $f = 1752.600$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 42.7$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.44, 7.3, 7.52); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.930 W/kg; SAR (10g) = 0.494 W/kg;

TSL Correction: Positive only

Zoom Scan (35.7 mm x 35.7 mm x 31.2 mm): Measurement Grid: 5.1 mm x 5.1 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 1.15 W/kg; SAR (8g) = 0.603 W/kg; SAR (10g) = 0.549 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 84.3 %

TSL Correction: Positive only

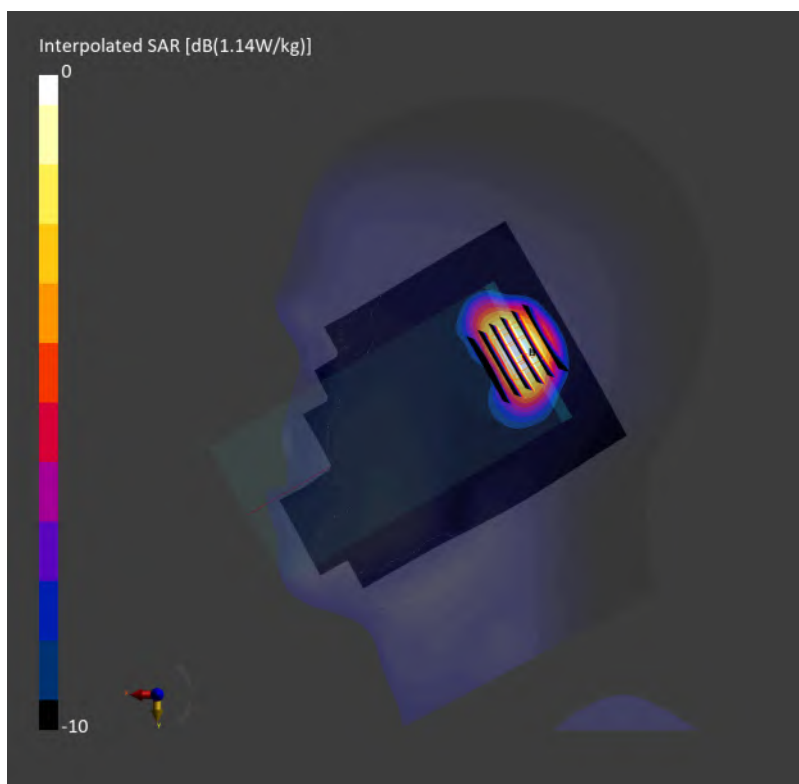

04_LTE Band 7_20M_QPSK_1_0_Left Tilted_0mm_Ch21100

Communication System: LTE-FDD; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260629 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 41.3$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.66, 6.54, 6.74); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.984 W/kg; SAR (10g) = 0.362 W/kg;

TSL Correction: Positive only

Zoom Scan (34.3 mm x 34.3 mm x 31.2 mm): Measurement Grid: 4.9 mm x 4.9 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.961 W/kg; SAR (8g) = 0.410 W/kg; SAR (10g) = 0.361 W/kg

Smallest distance from peaks to all points 3 dB below = 5.9 mm

Ratio of SAR at M2 to SAR at M1 = 79.4 %

TSL Correction: Positive only

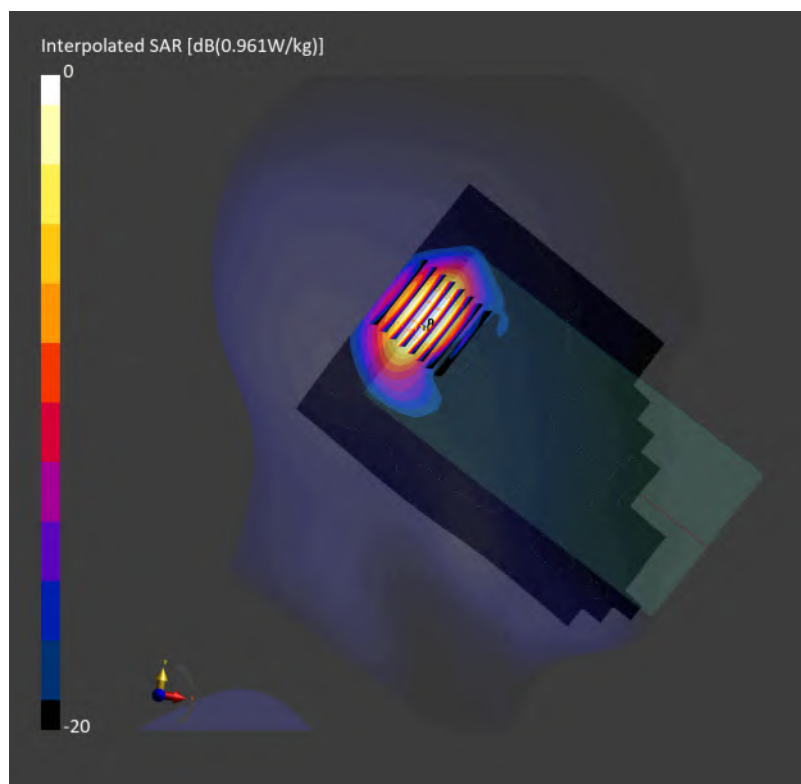

05_LTE Band 25_20M_QPSK_1_0_Left Tilted_0mm_Ch26340

Communication System: LTE-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260624 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.25, 7.12, 7.34); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.584 W/kg; SAR (10g) = 0.327 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.02 dB

SAR (1g) = 0.802 W/kg; SAR (8g) = 0.433 W/kg; SAR (10g) = 0.394 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 87.4 %

TSL Correction: Positive only

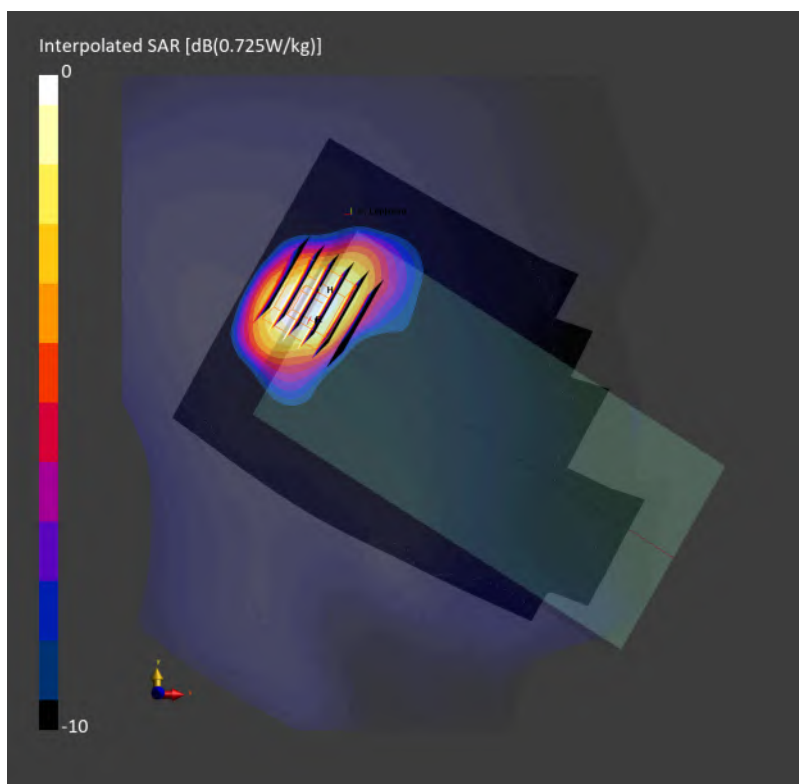

06_LTE Band 66_20M_QPSK_1_0_Left Tilted_0mm_Ch132572

Communication System: LTE-FDD; Frequency: 1770.000 MHz

Medium: HSL_600-7200_260628 Medium parameters used: $f = 1770.000$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(7.42, 8.01, 7.32); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.734 W/kg; SAR (10g) = 0.404 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 33.4 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.01 dB

SAR (1g) = 1.00 W/kg; SAR (8g) = 0.526 W/kg; SAR (10g) = 0.477 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 83.0 %

TSL Correction: Positive only

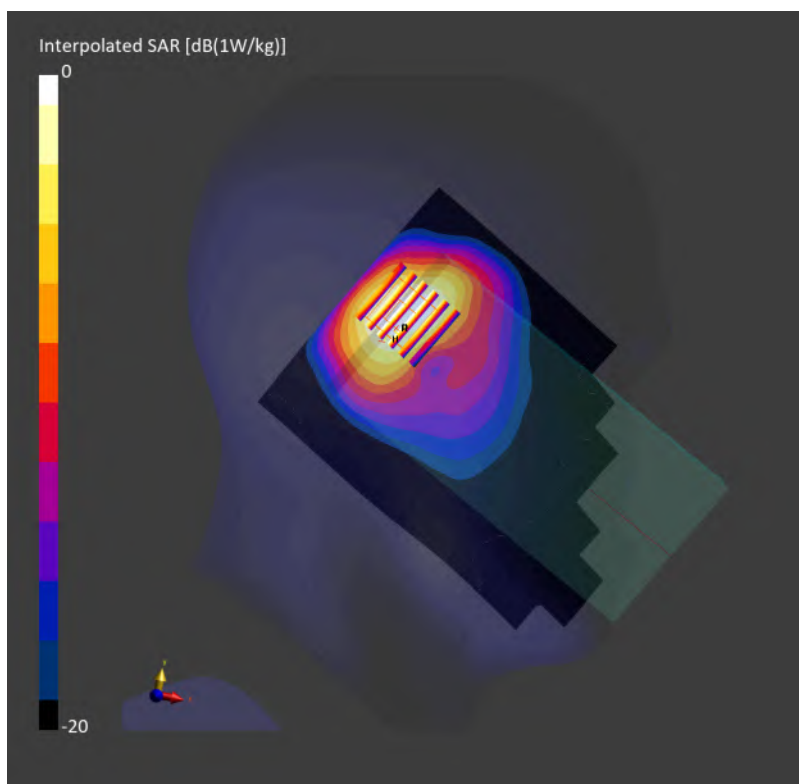

07_LTE Band 41_20M_QPSK_1_0_Right Tilted_0mm_Ch40185

Communication System: LTE-TDD; Frequency: 2549.500 MHz

Medium: HSL_600-7200_260629 Medium parameters used: $f = 2549.500$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 39.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.73, 7.27, 6.64); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.814 W/kg; SAR (10g) = 0.300 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.02 dB

SAR (1g) = 0.787 W/kg; SAR (8g) = 0.342 W/kg; SAR (10g) = 0.301 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.6 %

TSL Correction: Positive only

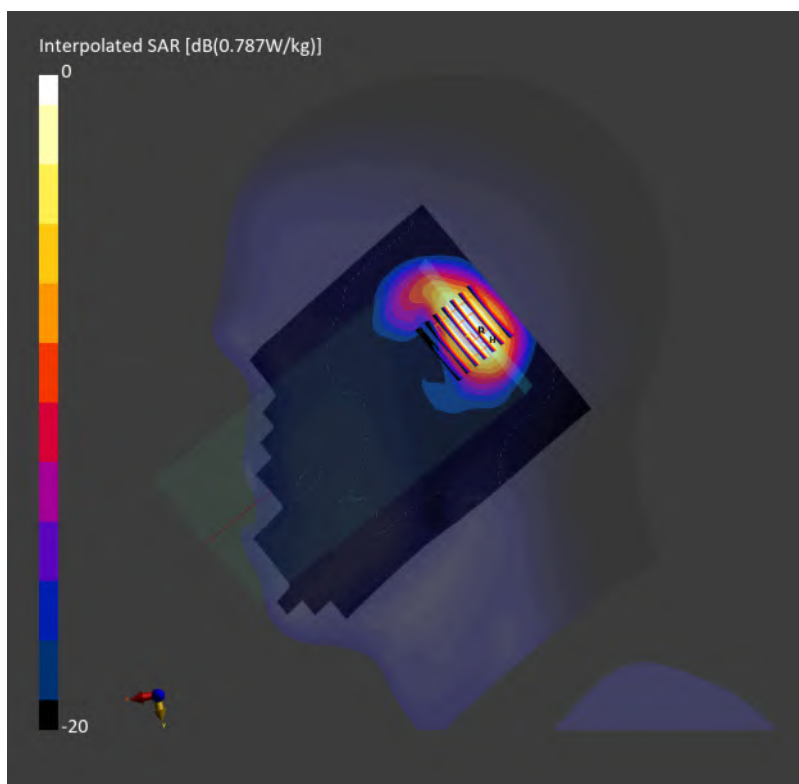

08_LTE Band 42_20M_QPSK_1_0_Right Cheek_0mm_Ch42590

Communication System: LTE-TDD; Frequency: 3500.000 MHz

Medium: HSL_600-7200_260625 Medium parameters used: $f = 3500.000$ MHz; $\sigma = 2.71$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.96, 6.44, 5.88); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.524 W/kg; SAR (10g) = 0.240 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.01 dB

SAR (1g) = 0.545 W/kg; SAR (8g) = 0.256 W/kg; SAR (10g) = 0.231 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 77.8 %

TSL Correction: Positive only

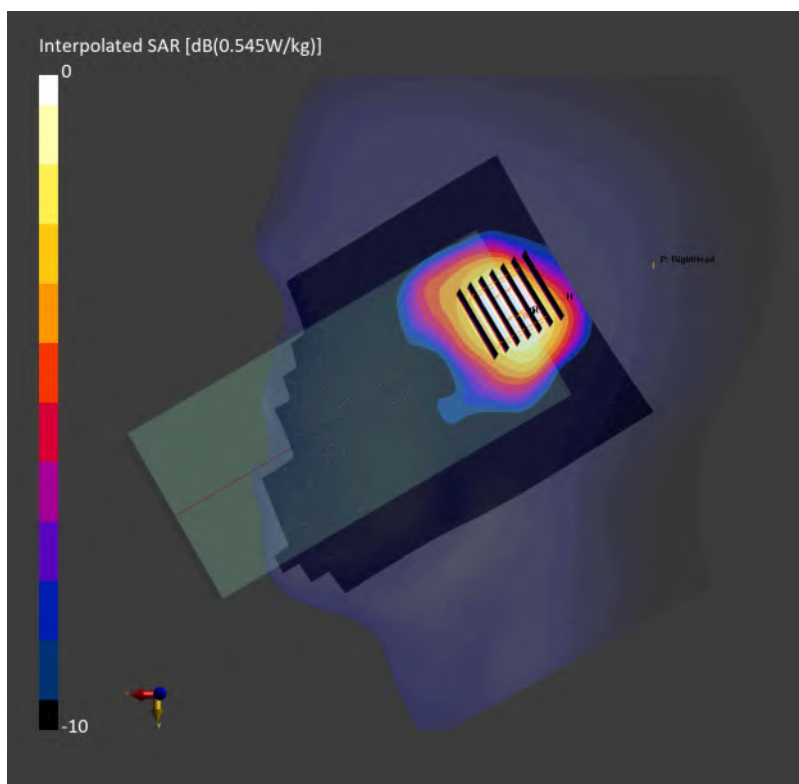

09_LTE Band 48_20M_QPSK_1_0_Right Tilted_0mm_Ch55830

Communication System: LTE-TDD; Frequency: 3609.000 MHz

Medium: HSL_600-7200_260702 Medium parameters used: $f = 3609.000$ MHz; $\sigma = 2.83$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.88, 6.35, 5.8); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.483 W/kg; SAR (10g) = 0.191 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.01 dB

SAR (1g) = 0.499 W/kg; SAR (8g) = 0.208 W/kg; SAR (10g) = 0.184 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 80.1 %

TSL Correction: Positive only

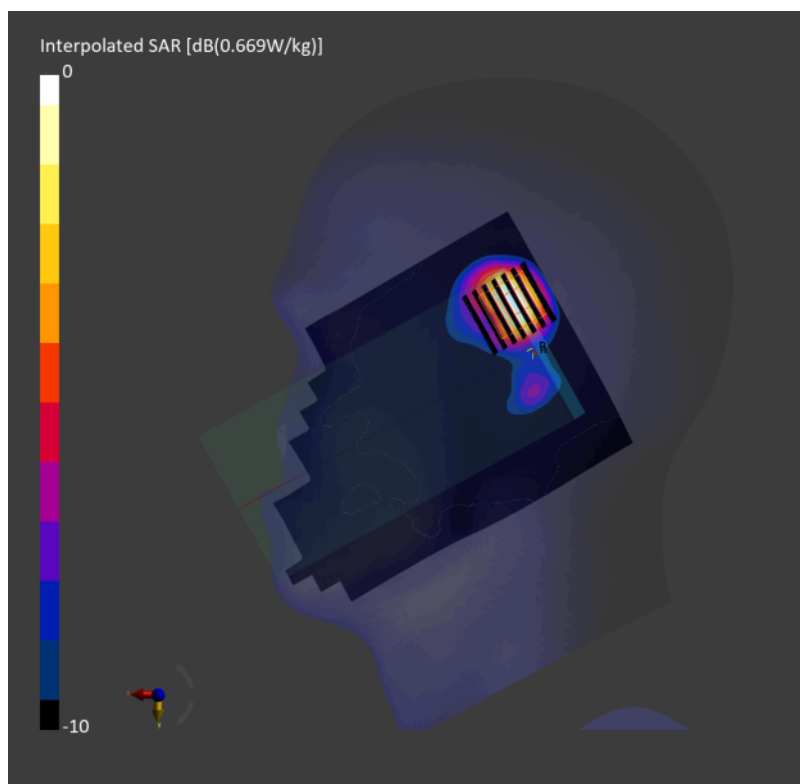

10_FR1 n7_50M_BPSK_135_68_Left Tilted_0mm_Ch507000

Communication System: 5G NR; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260629 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 39.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.73, 7.27, 6.64); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10943-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.702 W/kg; SAR (10g) = 0.268 W/kg;

TSL Correction: Positive only

Zoom Scan (36.8 mm x 36.8 mm x 31.2 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.5 mm


Power Drift = 0.00 dB

SAR (1g) = 0.757 W/kg; SAR (8g) = 0.315 W/kg; SAR (10g) = 0.277 W/kg

Smallest distance from peaks to all points 3 dB below = 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 74.5 %

TSL Correction: Positive only

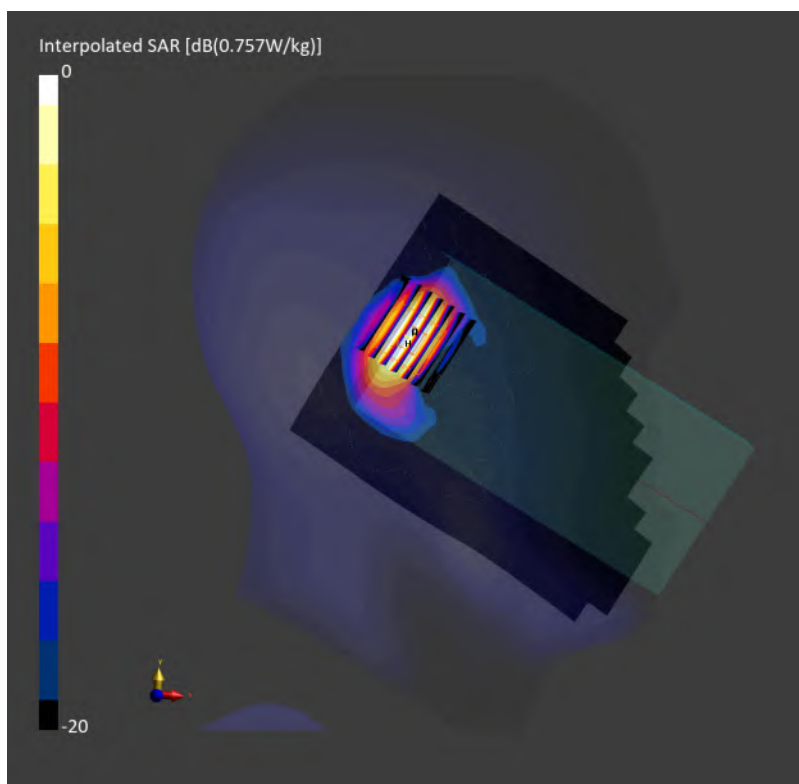

11_FR1 n25_40M_BPSK_216_0_Left Tilted_0mm_Ch376500

Communication System: 5G NR; Frequency: 1882.500 MHz

Medium: HSL_600-7200_260624 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.25, 7.12, 7.34); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10950-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.627 W/kg; SAR (10g) = 0.351 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.10 dB

SAR (1g) = 0.828 W/kg; SAR (8g) = 0.443 W/kg; SAR (10g) = 0.403 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 88.3 %

TSL Correction: Positive only

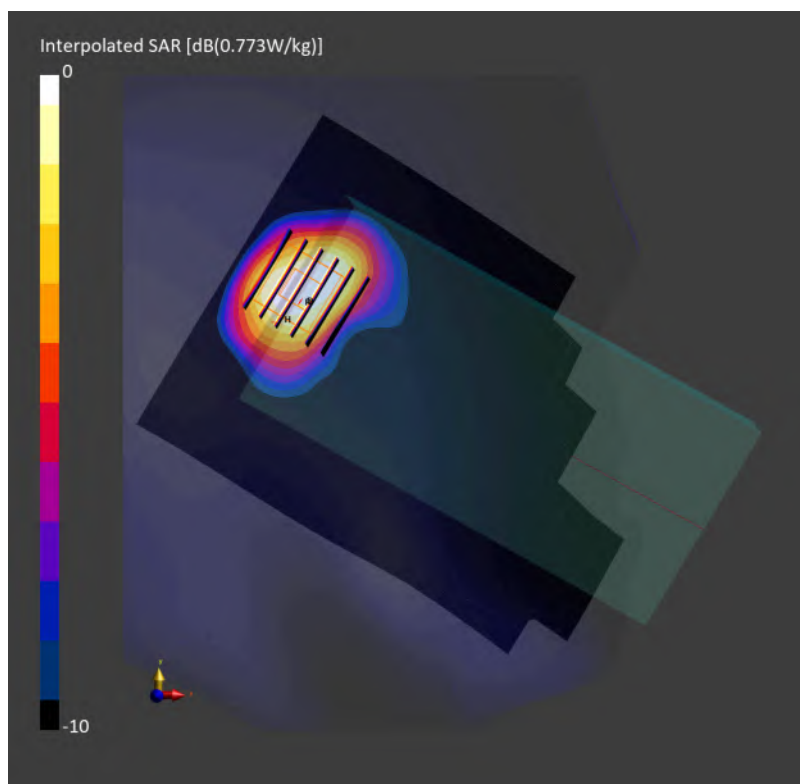

12_FR1 n66_45M_BPSK_240_0_Left Tilted_0mm_Ch349000

Communication System: 5G NR; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260624 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 41.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.44, 7.3, 7.52); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10950-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.661 W/kg; SAR (10g) = 0.345 W/kg;

TSL Correction: Positive only

Zoom Scan (39.2 mm x 39.2 mm x 31.2 mm): Measurement Grid: 5.6 mm x 5.6 mm x 1.5 mm


Power Drift = -0.04 dB

SAR (1g) = 0.864 W/kg; SAR (8g) = 0.452 W/kg; SAR (10g) = 0.411 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 83.7 %

TSL Correction: Positive only

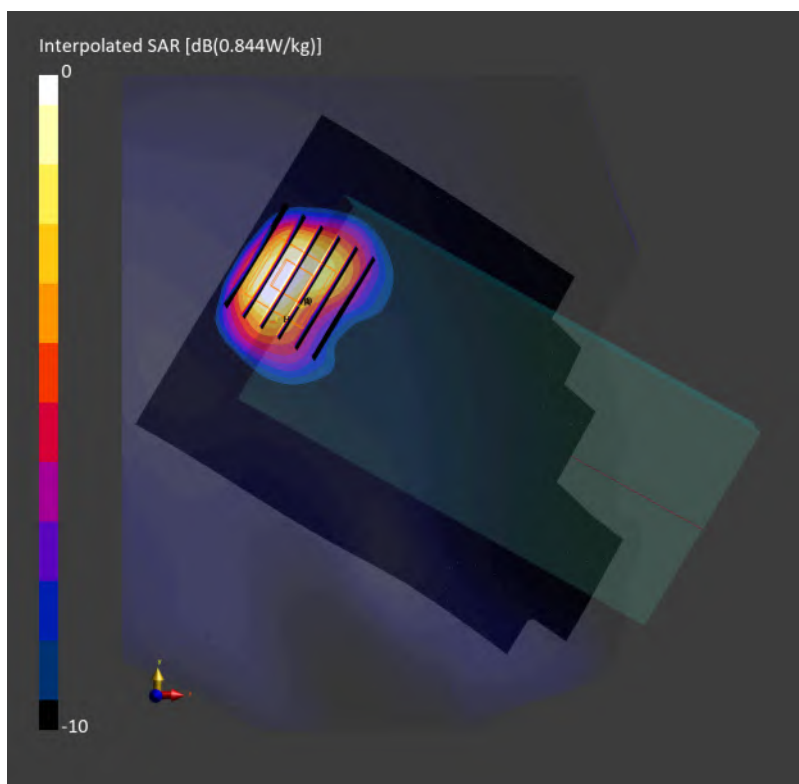

13_FR1 n41_100M_BPSK_1_1_Right Tilted_0mm_Ch518598

Communication System: 5G NR; Frequency: 2592.990 MHz

Medium: HSL_600-7200_260623 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 39.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.66, 6.54, 6.74); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.869 W/kg; SAR (10g) = 0.327 W/kg;

TSL Correction: Positive only

Zoom Scan (32.9 mm x 32.9 mm x 31.2 mm): Measurement Grid: 4.7 mm x 4.7 mm x 1.5 mm


Power Drift = -0.00 dB

SAR (1g) = 0.852 W/kg; SAR (8g) = 0.370 W/kg; SAR (10g) = 0.327 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 82.2 %

TSL Correction: Positive only

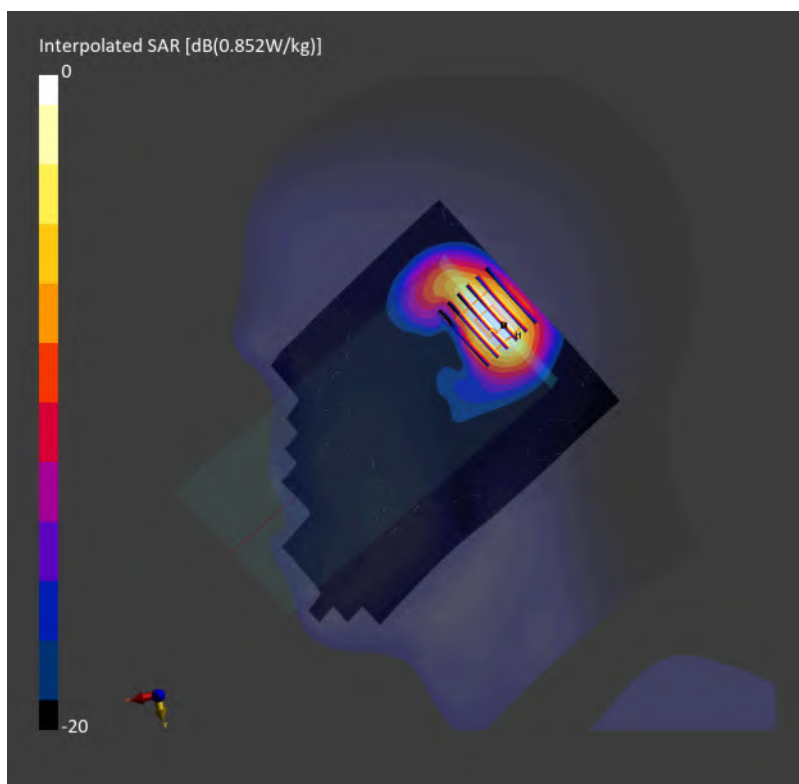

14_FR1 n48_40M_BPSK_50_28_Right Tilted_0mm_Ch645332

Communication System: 5G NR; Frequency: 3679.980 MHz

Medium: HSL_600-7200_260625 Medium parameters used: $f = 3679.975$ MHz; $\sigma = 2.88$ S/m; $\epsilon_r = 40.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.88, 6.35, 5.8); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10913-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.703 W/kg; SAR (10g) = 0.289 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.06 dB

SAR (1g) = 0.773 W/kg; SAR (8g) = 0.321 W/kg; SAR (10g) = 0.285 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 75.6 %

TSL Correction: Positive only

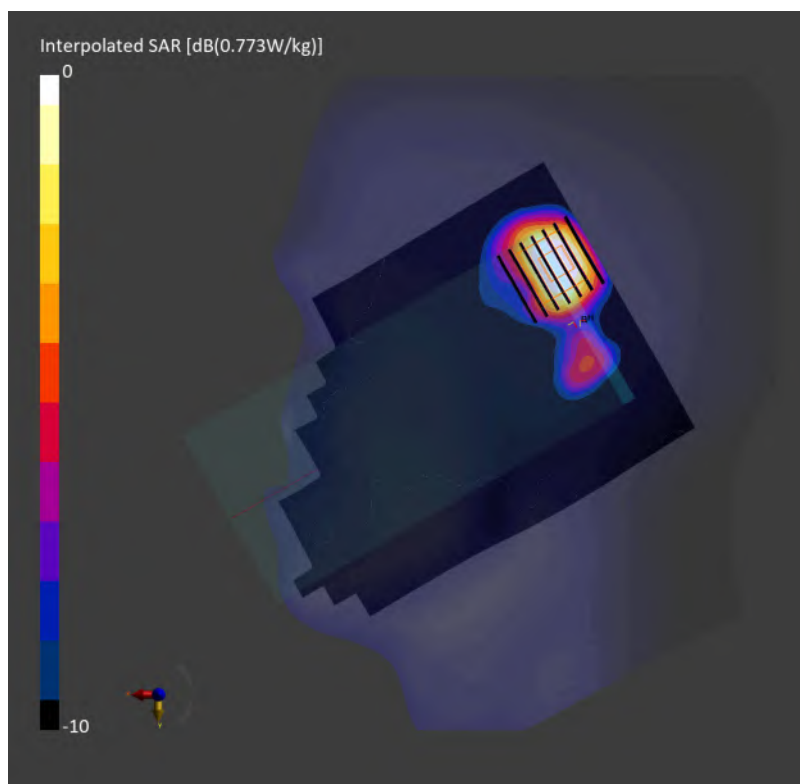

15_FR1 n77_100M_BPSK_1_1_Right Tilted_0mm_Ch633332

Communication System: 5G NR; Frequency: 3499.980 MHz

Medium: HSL_600-7200_260625 Medium parameters used: $f = 3499.980$ MHz; $\sigma = 2.71$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.96, 6.44, 5.88); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.09 W/kg; SAR (10g) = 0.423 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.00 dB

SAR (1g) = 1.11 W/kg; SAR (8g) = 0.463 W/kg; SAR (10g) = 0.411 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 75.6 %

TSL Correction: Positive only

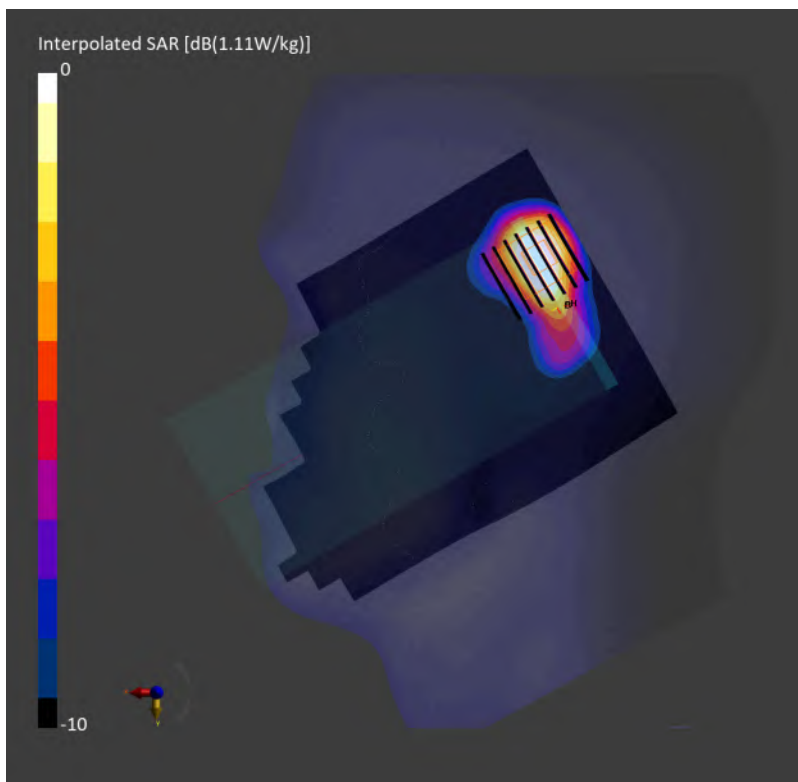

16_LTE Band 71_20M_QPSK_1_0_Right Cheek_0mm_Ch133297

Communication System: LTE-FDD; Frequency: 680.500 MHz

Medium: HSL_600-7200_260618 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.859$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(9.08, 8.91, 9.18); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.150 W/kg; SAR (10g) = 0.091 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.14 dB

SAR (1g) = 0.150 W/kg; SAR (8g) = 0.093 W/kg; SAR (10g) = 0.087 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 86.4 %

TSL Correction: Positive only

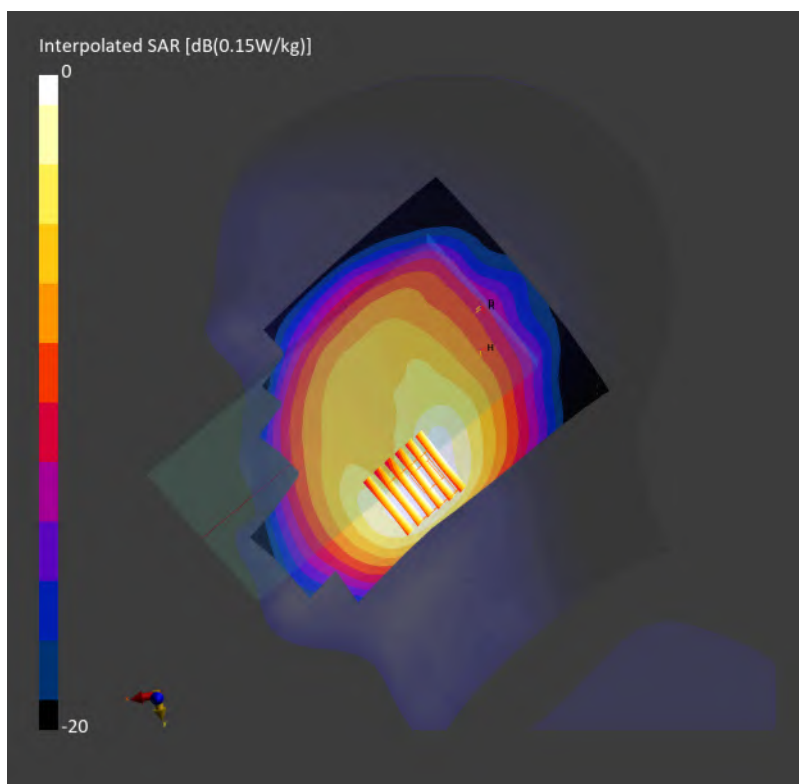

17_LTE Band 12_10M_QPSK_1_0_Right Cheek_0mm_Ch23095

Communication System: LTE-FDD; Frequency: 707.500 MHz

Medium: HSL_600-7200_260618 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.862$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(9.08, 8.91, 9.18); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.158 W/kg; SAR (10g) = 0.095 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.14 dB

SAR (1g) = 0.145 W/kg; SAR (8g) = 0.091 W/kg; SAR (10g) = 0.086 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 67.6 %

TSL Correction: Positive only

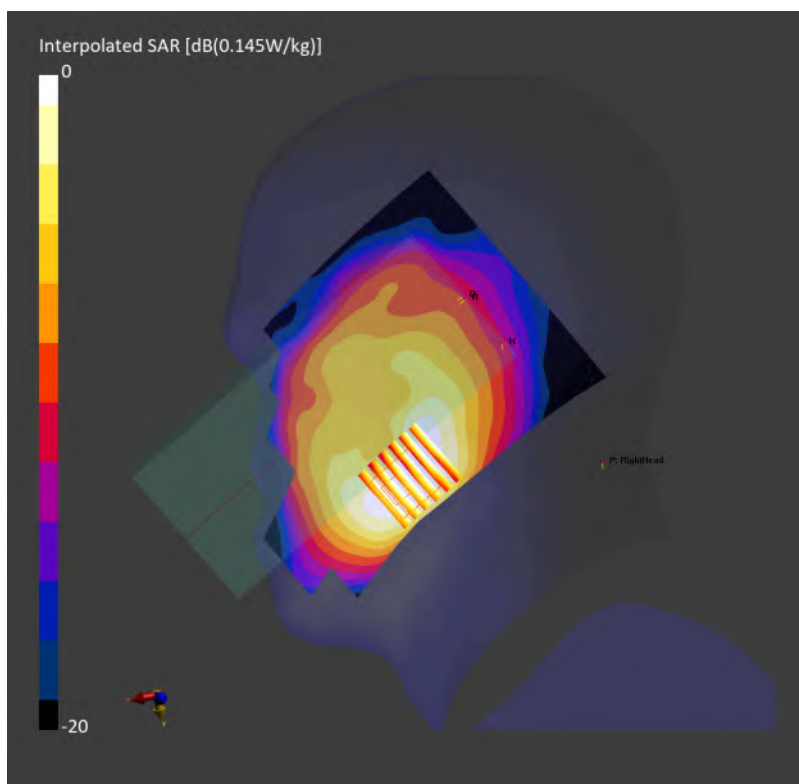

18_LTE Band 13_10M_QPSK_1_0_Right Cheek_0mm_Ch23230

Communication System: LTE-FDD; Frequency: 782.000 MHz

Medium: HSL_600-7200_260618 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 42.3$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(9.08, 8.91, 9.18); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.134 W/kg; SAR (10g) = 0.082 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.19 dB

SAR (1g) = 0.138 W/kg; SAR (8g) = 0.086 W/kg; SAR (10g) = 0.081 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 88.3 %

TSL Correction: Positive only

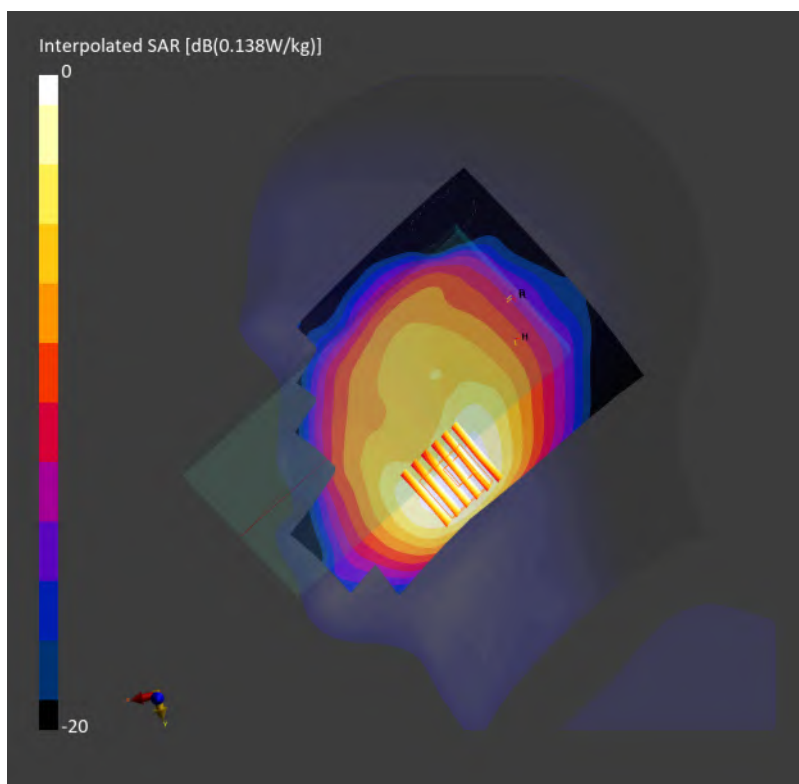

19_LTE Band 14_10M_QPSK_1_0_Right Cheek_0mm_Ch23330

Communication System: LTE-FDD; Frequency: 793.000 MHz

Medium: HSL_600-7200_260618 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.891$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(9.08, 8.91, 9.18); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.130 W/kg; SAR (10g) = 0.079 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.11 dB

SAR (1g) = 0.132 W/kg; SAR (8g) = 0.082 W/kg; SAR (10g) = 0.077 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 86.9 %

TSL Correction: Positive only

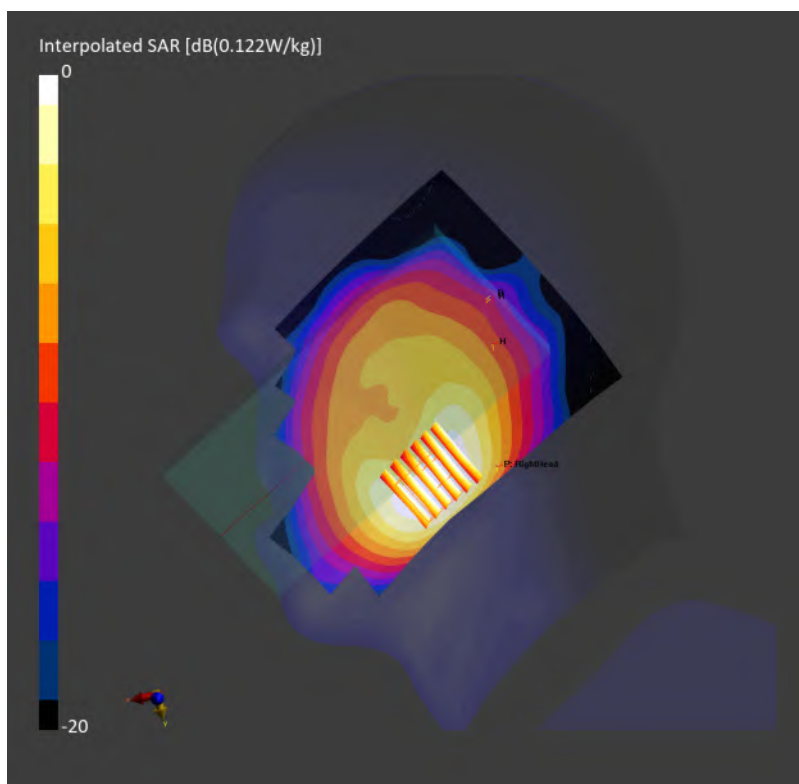

20_FR1 71_35M_BPSK_90_45_Right Cheek_0mm_Ch136100

Communication System: 5G NR; Frequency: 680.500 MHz

Medium: HSL_600-7200_260618 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.853$ S/m; $\epsilon_r = 44.7$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.9, 9.61, 8.78); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.148 W/kg; SAR (10g) = 0.088 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.02 dB

SAR (1g) = 0.141 W/kg; SAR (8g) = 0.086 W/kg; SAR (10g) = 0.080 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 81.6 %

TSL Correction: Positive only

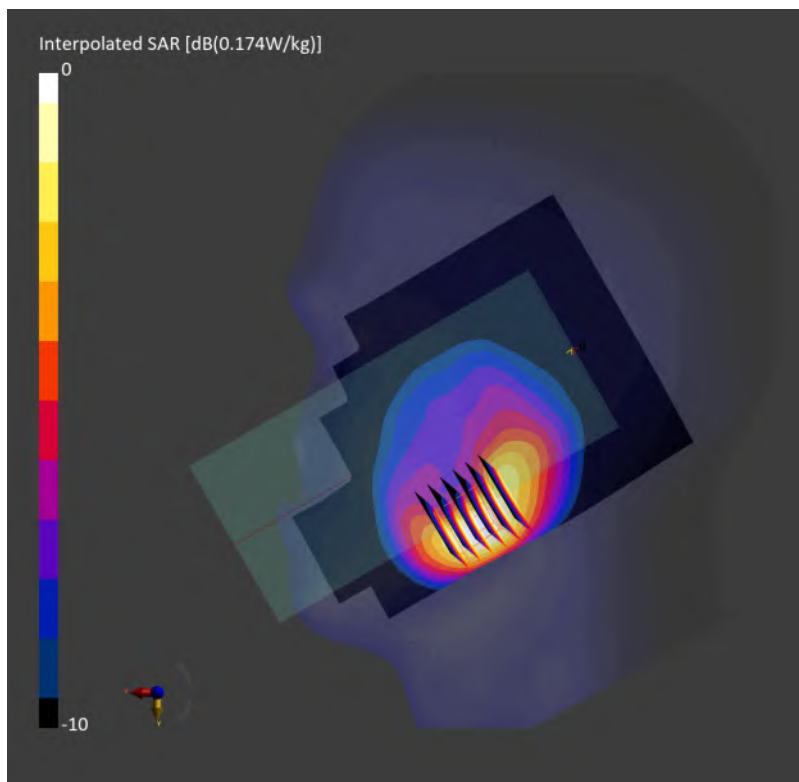

21_FR1 12_15M_BPSK_36_22_Right Cheek_0mm_Ch141500

Communication System: 5G NR; Frequency: 707.500 MHz

Medium: HSL_600-7200_260618 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.862$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.9, 9.61, 8.78); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10938-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.142 W/kg; SAR (10g) = 0.087 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.13 dB

SAR (1g) = 0.149 W/kg; SAR (8g) = 0.090 W/kg; SAR (10g) = 0.084 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 83.0 %

TSL Correction: Positive only

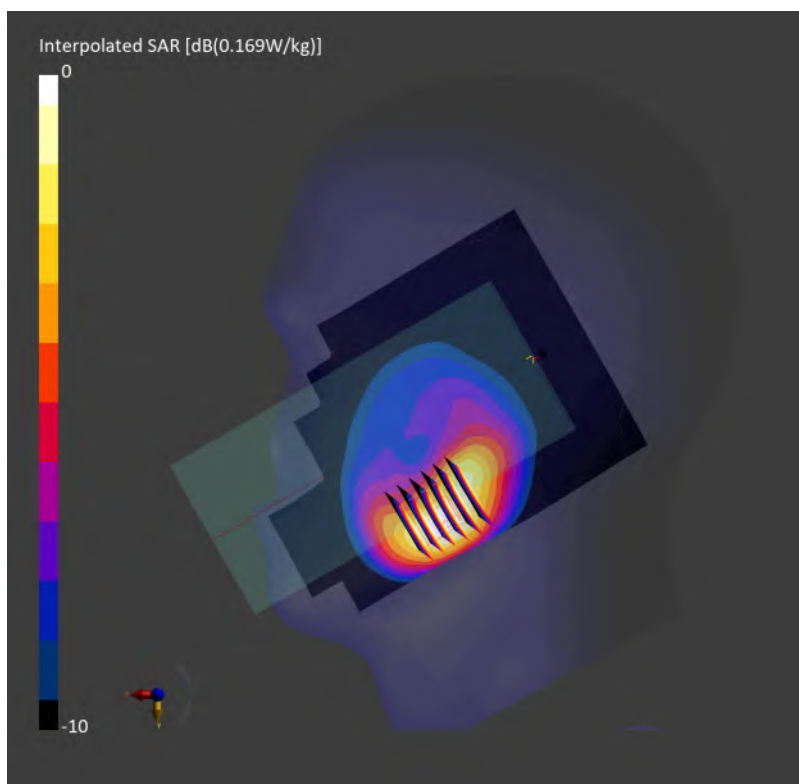

22_FR1 13_10M_BPSK_25_14_Right Cheek_0mm_Ch156400

Communication System: 5G NR; Frequency: 782.000 MHz

Medium: HSL_600-7200_260618 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 42.3$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(9.08, 8.91, 9.18); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.087 W/kg; SAR (10g) = 0.053 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.10 dB

SAR (1g) = 0.087 W/kg; SAR (8g) = 0.051 W/kg; SAR (10g) = 0.047 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 88.3 %

TSL Correction: Positive only

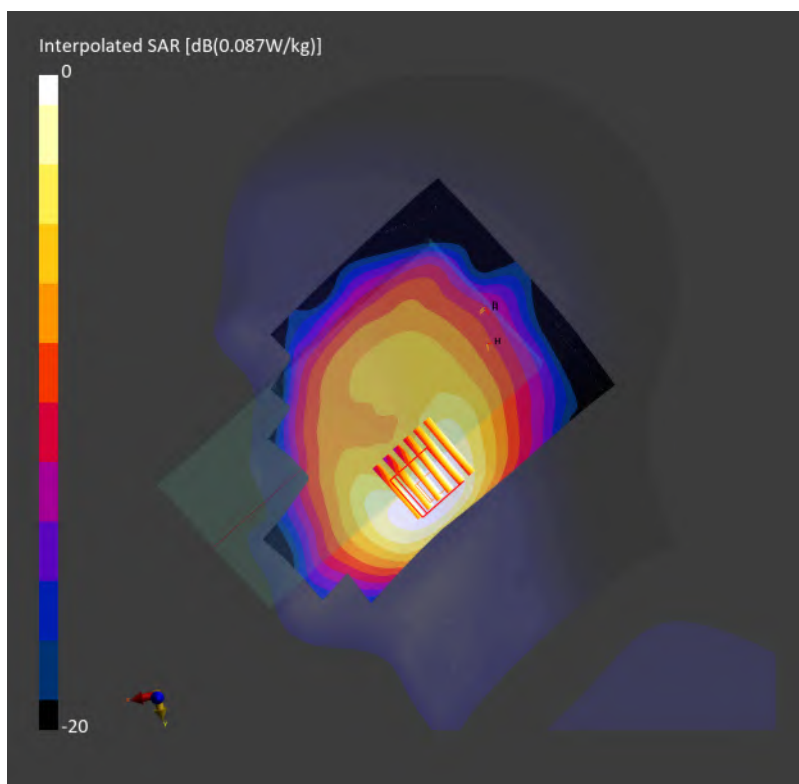

23_FR1 14_10M_BPSK_1_1_Right Cheek_0mm_Ch158600

Communication System: 5G NR; Frequency: 793.000 MHz

Medium: HSL_600-7200_260618 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.891$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.9, 9.61, 8.78); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.151 W/kg; SAR (10g) = 0.094 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.05 dB

SAR (1g) = 0.168 W/kg; SAR (8g) = 0.104 W/kg; SAR (10g) = 0.097 W/kg

Smallest distance from peaks to all points 3 dB below = 9.1 mm

Ratio of SAR at M2 to SAR at M1 = 85.2 %

TSL Correction: Positive only

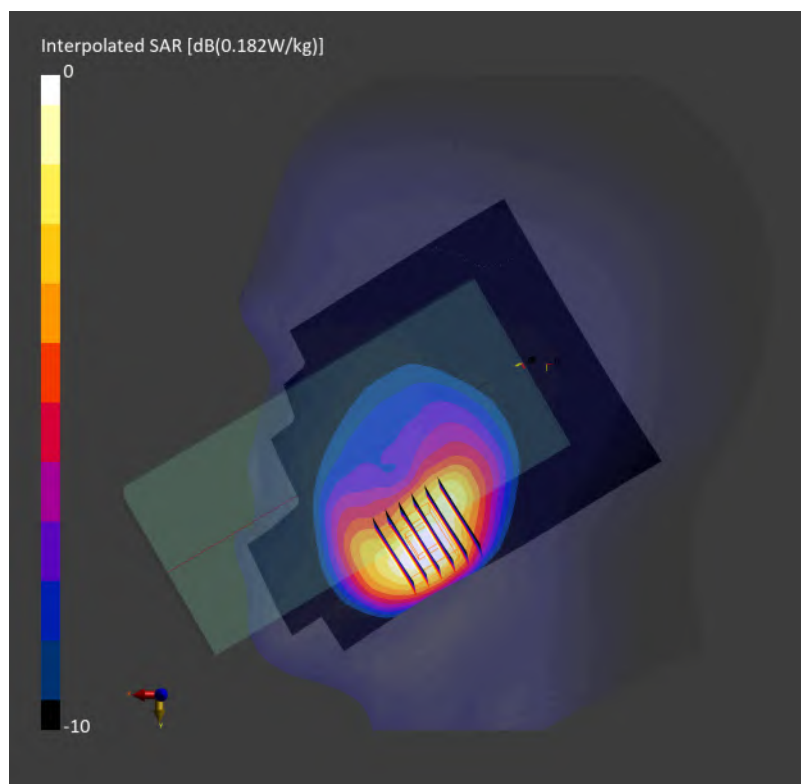

24_GSM850_GPRS 3 Tx slots_Right Cheek_0mm_Ch189

Communication System: GPRS-FDD; Frequency: 836.400 MHz

Medium: HSL_600-7200_260618 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.909$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(8.84, 8.67, 8.94); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.168 W/kg; SAR (10g) = 0.105 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.14 dB

SAR (1g) = 0.185 W/kg; SAR (8g) = 0.113 W/kg; SAR (10g) = 0.105 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 81.1 %

TSL Correction: Positive only

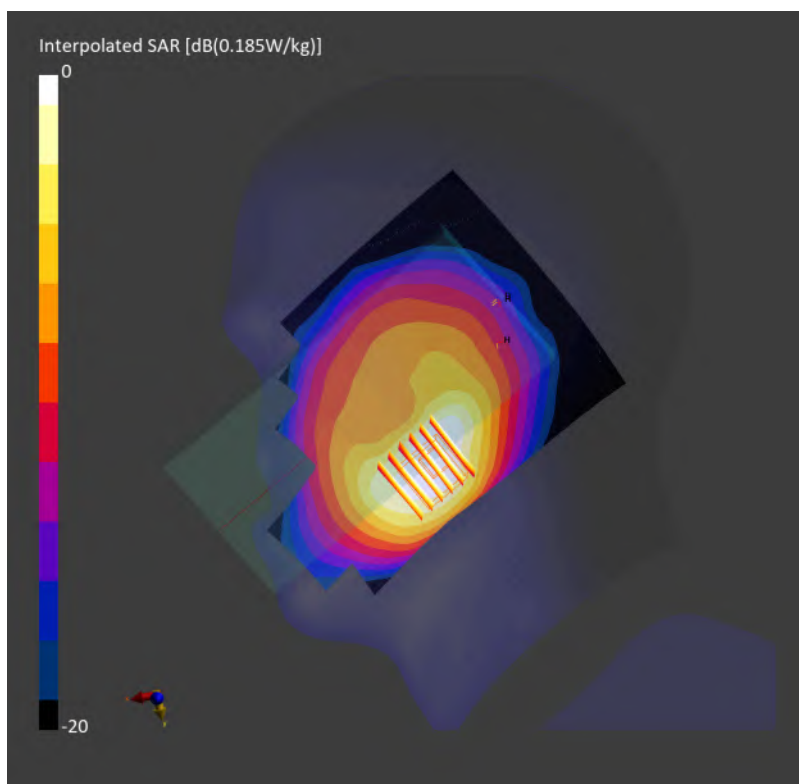

25_WCDMA V_RMC 12.2Kbps_Right Cheek_0mm_Ch4182

Communication System: UMTS-FDD; Frequency: 836.400 MHz

Medium: HSL_600-7200_260618 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.909$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(8.84, 8.67, 8.94); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.226 W/kg; SAR (10g) = 0.143 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.04 dB

SAR (1g) = 0.258 W/kg; SAR (8g) = 0.158 W/kg; SAR (10g) = 0.147 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 85.5 %

TSL Correction: Positive only

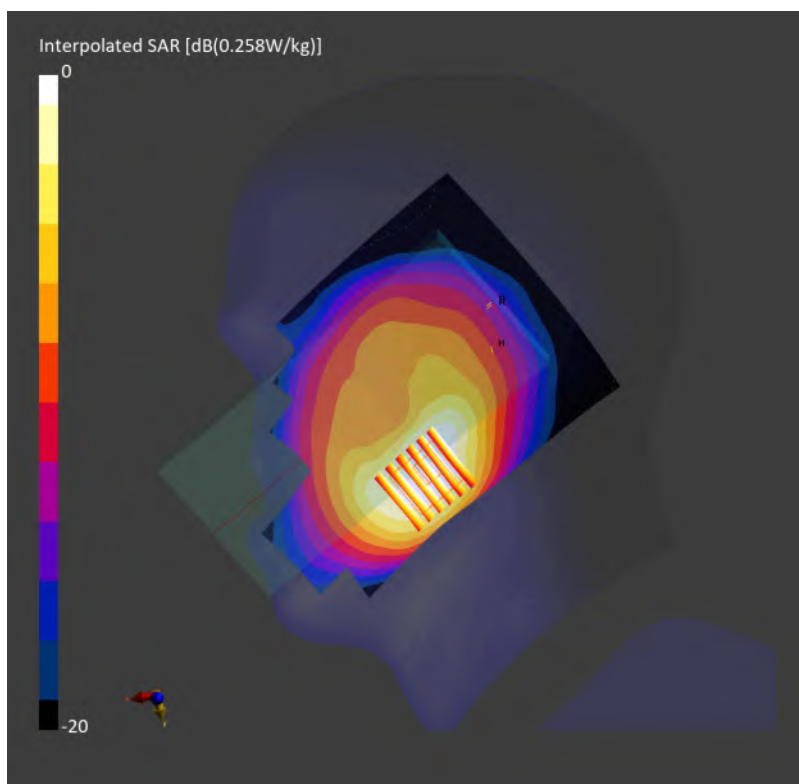

26_LTE Band 26_15M_QPSK_1_0_Right Cheek_0mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz

Medium: HSL_600-7200_260618 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.909$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(8.84, 8.67, 8.94); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.170 W/kg; SAR (10g) = 0.103 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.03 dB

SAR (1g) = 0.174 W/kg; SAR (8g) = 0.108 W/kg; SAR (10g) = 0.101 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 83.0 %

TSL Correction: Positive only

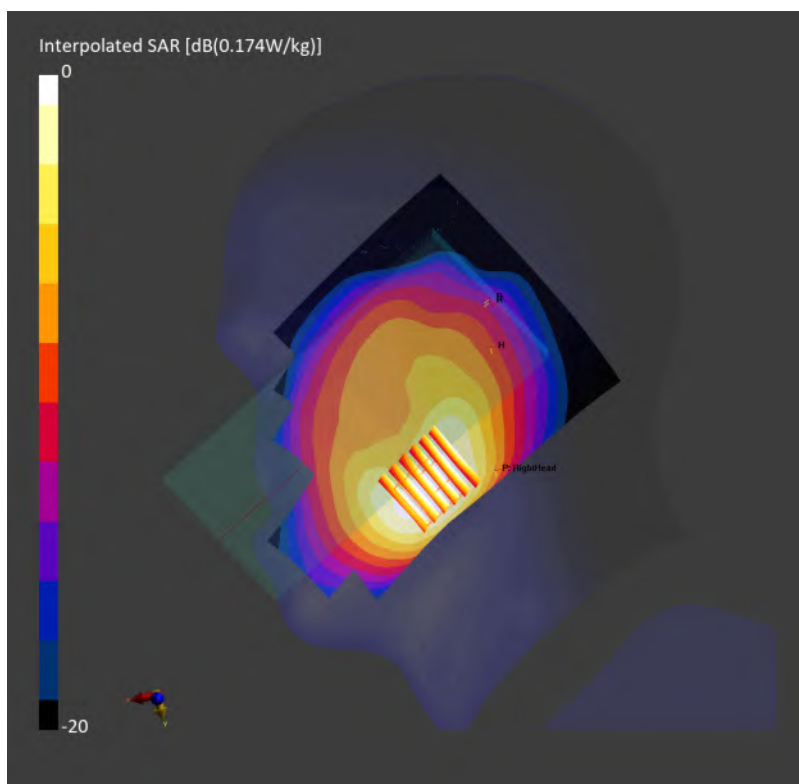

27_FR1 26_20M_BPSK_50_28_Right Cheek_0mm_Ch166300

Communication System: 5G NR; Frequency: 831.500 MHz

Medium: HSL_600-7200_260618 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.909$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.74, 9.44, 8.62); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.166 W/kg; SAR (10g) = 0.106 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.09 dB

SAR (1g) = 0.190 W/kg; SAR (8g) = 0.116 W/kg; SAR (10g) = 0.109 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 80.9 %

TSL Correction: Positive only

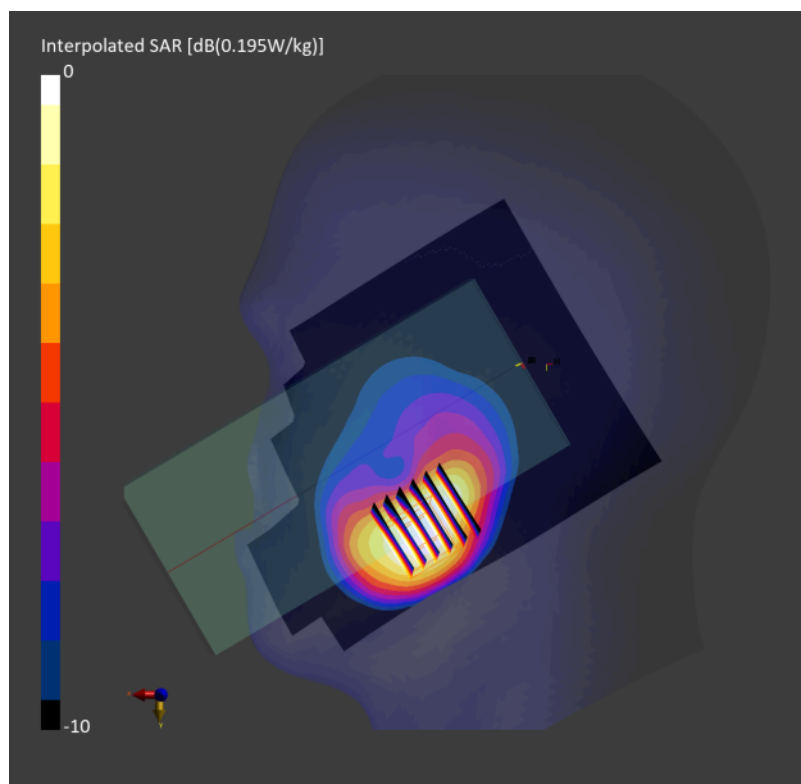

28_WLAN2.4GHz_802.11b 1Mbps_Right Tilted_0mm_Ch11

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2462.000 MHz

Medium: HSL_600-7200_260701 Medium parameters used: $f = 2462.000$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 39.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.56, 7.09, 6.47); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10415-AAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.560 W/kg; SAR (10g) = 0.242 W/kg;

TSL Correction: Positive only

Zoom Scan (32.9 mm x 32.9 mm x 31.2 mm): Measurement Grid: 4.7 mm x 4.7 mm x 1.5 mm


Power Drift = 0.15 dB

SAR (1g) = 0.609 W/kg; SAR (8g) = 0.259 W/kg; SAR (10g) = 0.229 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 78.6 %

TSL Correction: Positive only

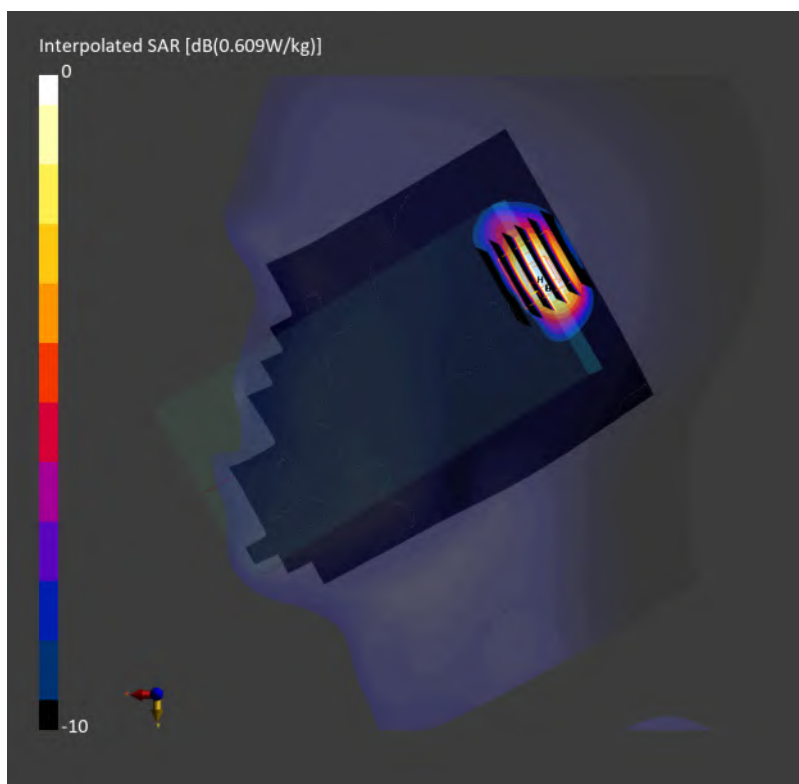

29_WLAN5GHz_802.11ac-VHT40 MCS0_Left Tilted_0mm_Ch54

Communication System: IEEE 802.11ac WiFi; Frequency: 5270.000 MHz

Medium: HSL_600-7200_260701 Medium parameters used: $f = 5270.000$ MHz; $\sigma = 4.46$ S/m; $\epsilon_r = 34.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.03, 5.43, 4.96); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10534-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.280 W/kg; SAR (10g) = 0.100 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.17 dB

SAR (1g) = 0.324 W/kg; SAR (8g) = 0.110 W/kg; SAR (10g) = 0.095 W/kg

Smallest distance from peaks to all points 3 dB below = 5.0 mm

Ratio of SAR at M2 to SAR at M1 = 62.3 %

TSL Correction: Positive only

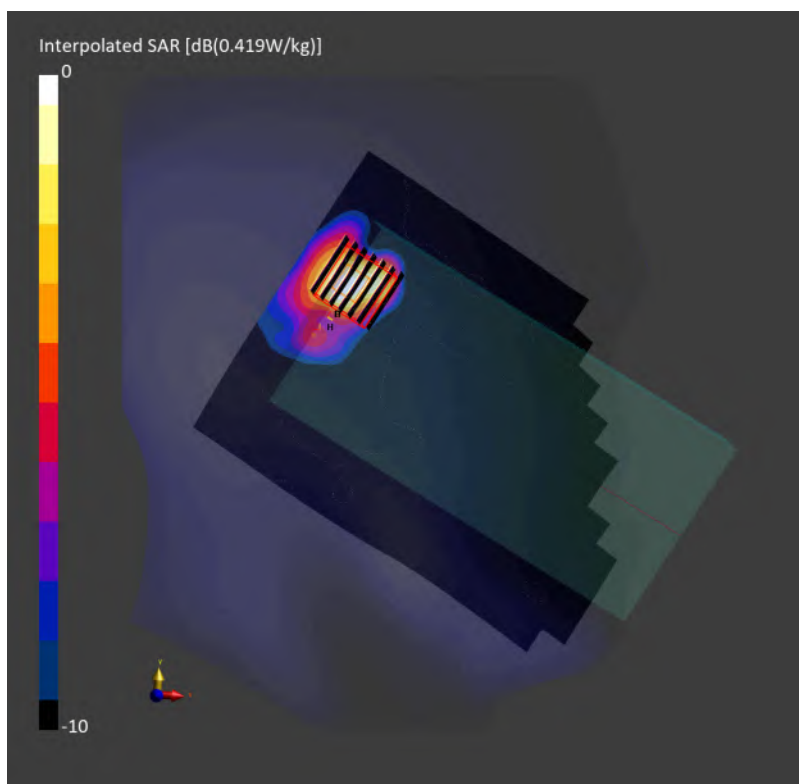

30_WLAN5GHz_802.11ac-VHT80 MCS0_Right Tilted_0mm_Ch138

Communication System: IEEE 802.11ac WiFi; Frequency: 5690.000 MHz

Medium: HSL_600-7200_260701 Medium parameters used: $f = 5690.000$ MHz; $\sigma = 4.90$ S/m; $\epsilon_r = 33.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(4.61, 4.98, 4.54); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.220 W/kg; SAR (10g) = 0.074 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.17 dB

SAR (1g) = 0.216 W/kg; SAR (8g) = 0.074 W/kg; SAR (10g) = 0.062 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 57.7 %

TSL Correction: Positive only

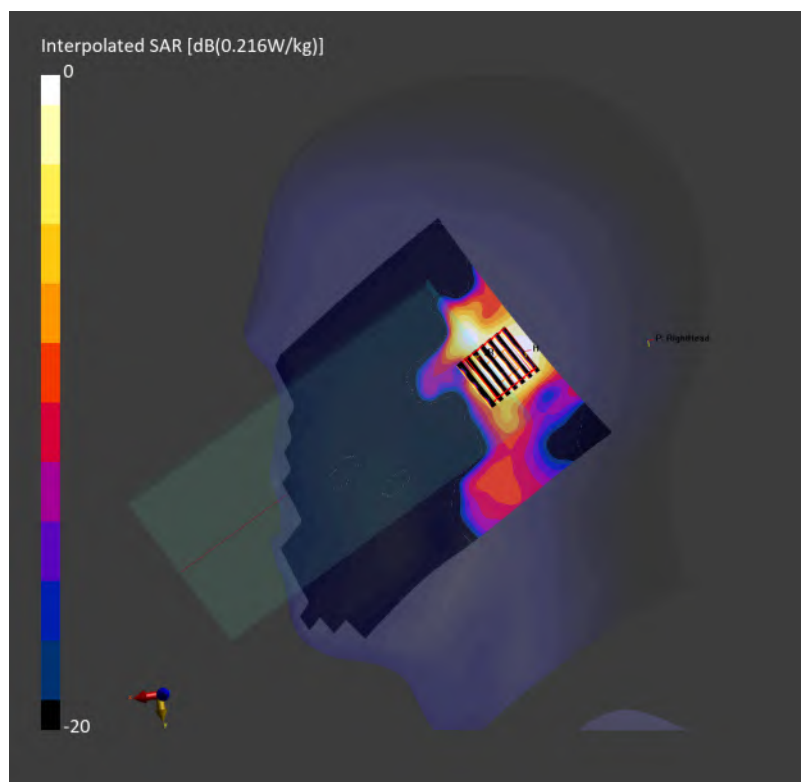

31_WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch155

Communication System: IEEE 802.11ac WiFi; Frequency: 5775.000 MHz

Medium: HSL_600-7200_260701 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.06$ S/m; $\epsilon_r = 33.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(4.54, 4.9, 4.48); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.306 W/kg; SAR (10g) = 0.102 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.10 dB

SAR (1g) = 0.325 W/kg; SAR (8g) = 0.102 W/kg; SAR (10g) = 0.087 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 55.2 %

TSL Correction: Positive only

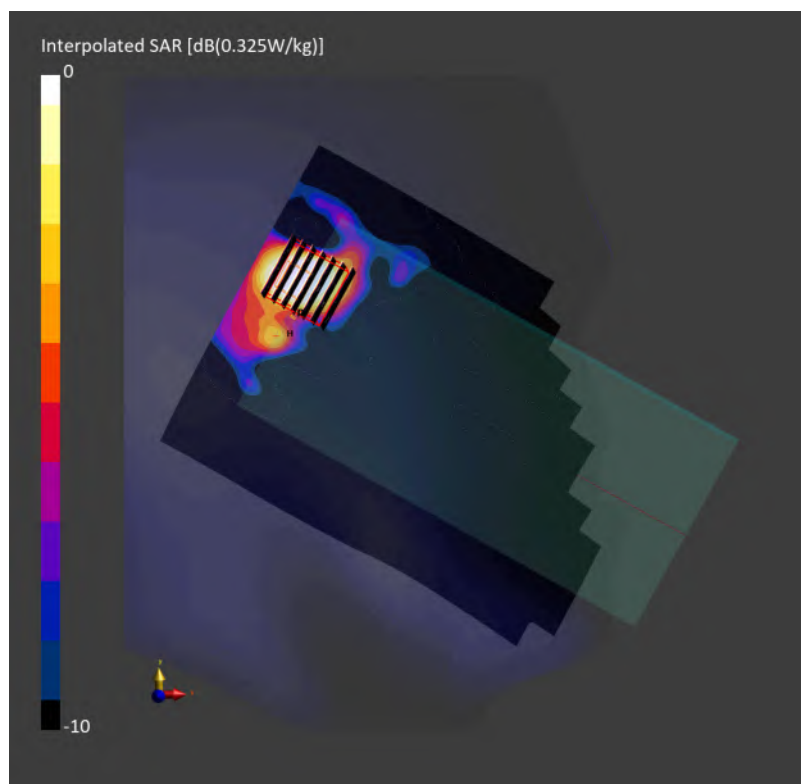

32_Bluetooth_1Mbps_Left Cheek_0mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2441.000 MHz

Medium: HSL_600-7200_260702 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.79, 6.67, 6.87); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: LeftHead
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.142 W/kg; SAR (10g) = 0.065 W/kg;

TSL Correction: Positive only

Zoom Scan (34.4 mm x 34.4 mm x 31.2 mm): Measurement Grid: 4.3 mm x 4.3 mm x 1.5 mm


Power Drift = -0.04 dB

SAR (1g) = 0.158 W/kg; SAR (8g) = 0.073 W/kg; SAR (10g) = 0.066 W/kg

Smallest distance from peaks to all points 3 dB below = 5.0 mm

Ratio of SAR at M2 to SAR at M1 = 76.9 %

TSL Correction: Positive only

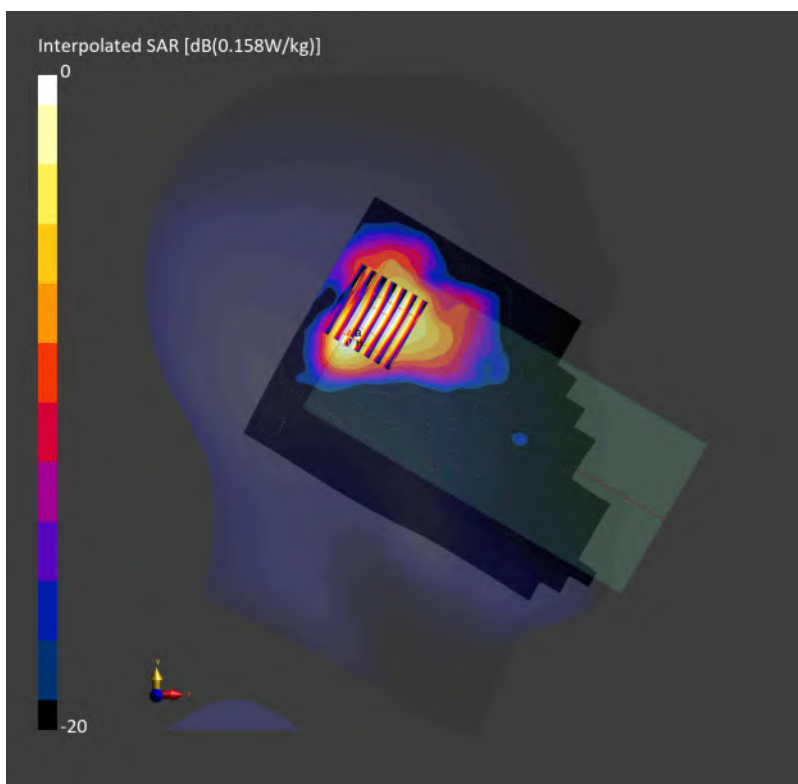

33_WLAN6GHz_802.11ax-HE160 MCS0_Right Tilted_0mm_Ch207

Communication System: IEEE 802.11ax; Frequency: 6985.000 MHz

Medium: HSL_600-7200_260703 Medium parameters used: $f = 6985.000$ MHz; $\sigma = 6.50$ S/m; $\epsilon_r = 31.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(4.76, 5.14, 4.7); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: RightHead
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10755-AAC

Area Scan (119.0 mm x 136.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.130 W/kg; SAR (10g) = 0.045 W/kg;

TSL Correction: Positive only

Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.09 dB

SAR (1g) = 0.010 W/kg; SAR (8g) = 0.003 W/kg; SAR (10g) = 0.002 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 33.3 %

psAPD (1.0cm², sq) = 0.104 [W/m²]; psAPD (4.0cm², sq) = 0.058 [W/m²]

TSL Correction: Positive only

Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.09 dB


SAR (1g) = 0.136 W/kg; SAR (8g) = 0.047 W/kg; SAR (10g) = 0.041 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 33.3 %

psAPD (1.0cm², sq) = 0.935 [W/m²]; psAPD (4.0cm², sq) = 0.742 [W/m²]

TSL Correction: Positive only

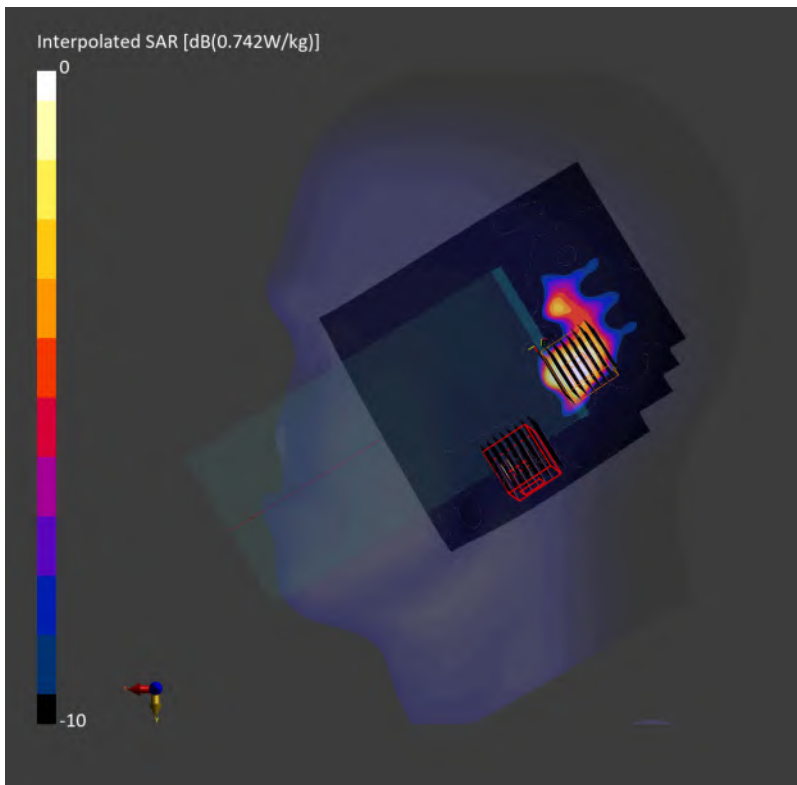

34_GSM1900_GPRS 3 Tx slots_Top Side_5mm_Ch661

Communication System: GPRS-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260627 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.25, 7.12, 7.34); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10027-DAC

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.08 W/kg; SAR (10g) = 0.492 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = 0.08 dB

SAR (1g) = 1.14 W/kg; SAR (8g) = 0.580 W/kg; SAR (10g) = 0.525 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 80.4 %

TSL Correction: Positive only

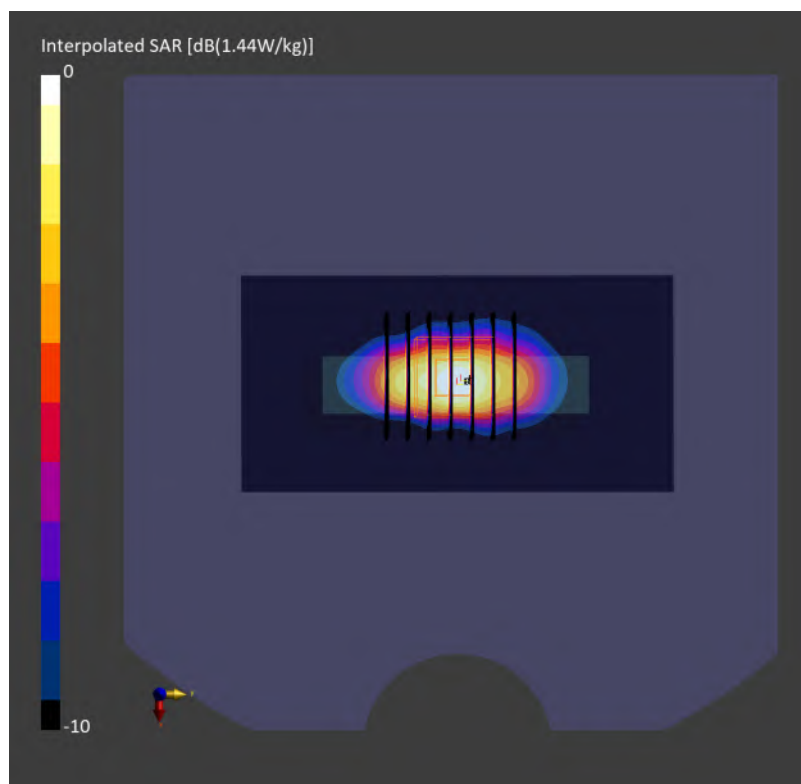

35_WCDMA II_RMC 12.2Kbps_Top Side_5mm_Ch9262

Communication System: UMTS-FDD; Frequency: 1852.400 MHz

Medium: HSL_600-7200_260624 Medium parameters used: $f = 1852.400$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.25, 7.12, 7.34); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.763 W/kg; SAR (10g) = 0.349 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = -0.03 dB

SAR (1g) = 0.792 W/kg; SAR (8g) = 0.406 W/kg; SAR (10g) = 0.368 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 81.1 %

TSL Correction: Positive only

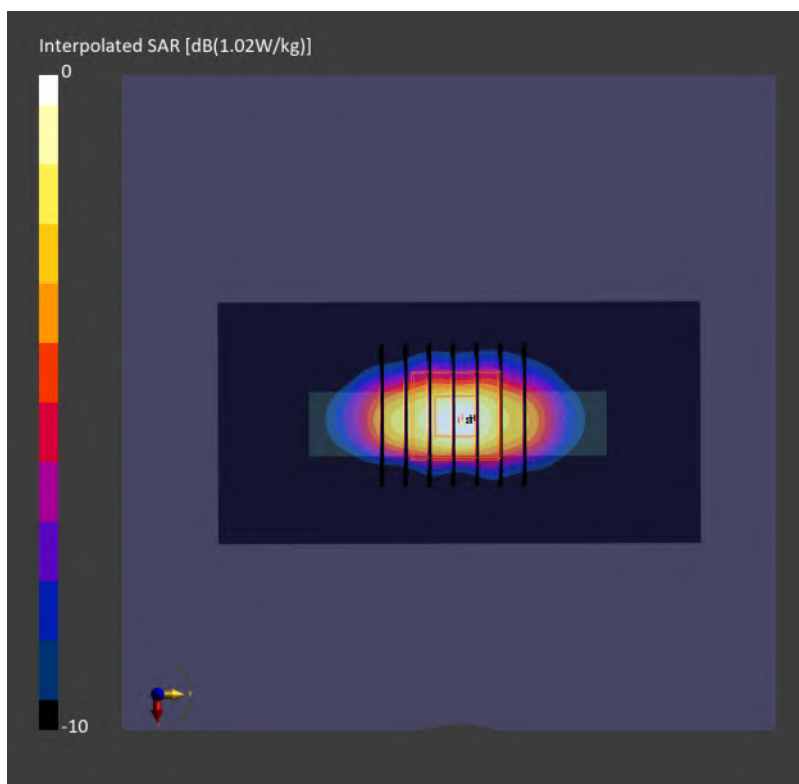

36_WCDMA IV_RMC 12.2Kbps_Right Side_5mm_Ch1312

Communication System: UMTS-FDD; Frequency: 1712.400 MHz

Medium: HSL_600-7200_260626 Medium parameters used: $f = 1712.400$ MHz; $\sigma = 1.30$ S/m; $\epsilon_r = 42.0$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.89, 8.41, 7.94); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (60.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.904 W/kg; SAR (10g) = 0.401 W/kg;

TSL Correction: Positive only

Zoom Scan (33.0 mm x 33.0 mm x 31.2 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm


Power Drift = -0.07 dB

SAR (1g) = 0.976 W/kg; SAR (8g) = 0.474 W/kg; SAR (10g) = 0.427 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 78.5 %

TSL Correction: Positive only

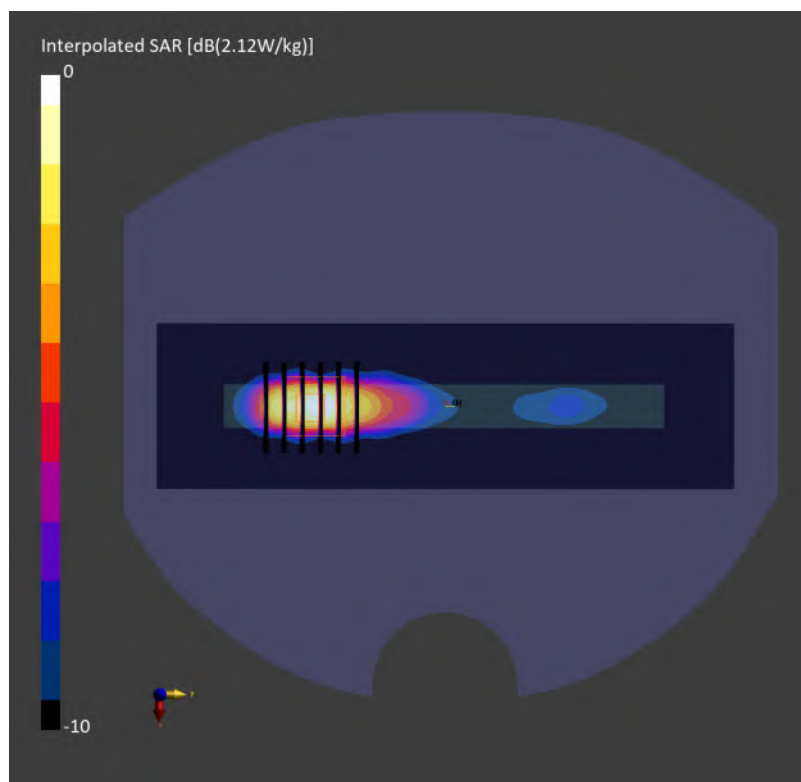

37_LTE Band 7_20M_QPSK_1_0_Back Right_5mm_Ch21350

Communication System: LTE-FDD; Frequency: 2560.000 MHz

Medium: HSL_600-7200_260626 Medium parameters used: $f = 2560.000$ MHz; $\sigma = 1.96$ S/m; $\epsilon_r = 41.3$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.66, 6.54, 6.74); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (60.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.836 W/kg; SAR (10g) = 0.319 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.10 dB

SAR (1g) = 0.842 W/kg; SAR (8g) = 0.369 W/kg; SAR (10g) = 0.327 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 78.7 %

TSL Correction: Positive only

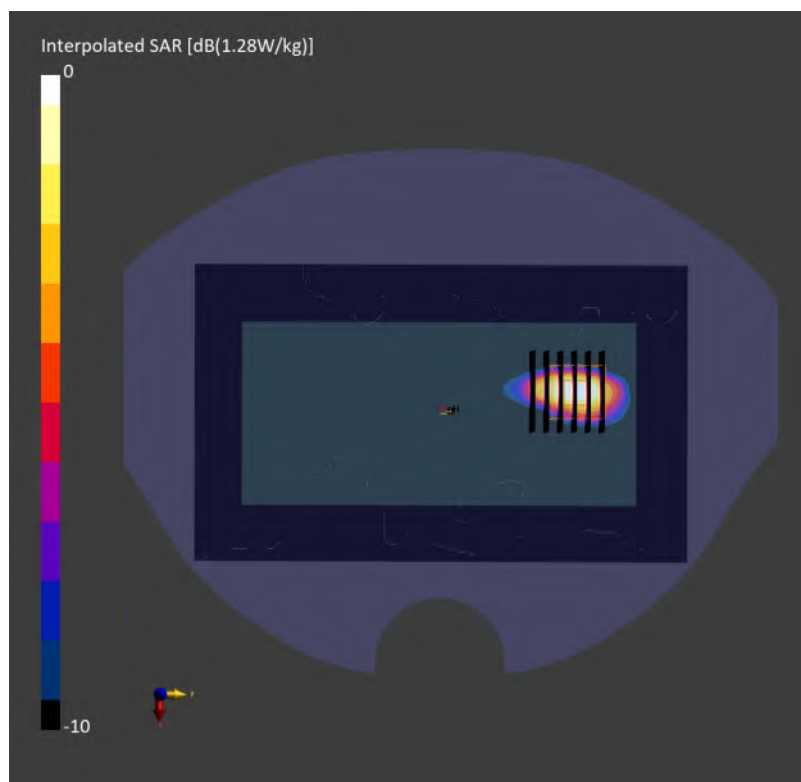

38_LTE Band 25_20M_QPSK_1_0_Back Top_5mm_Ch26340

Communication System: LTE-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260703 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 40.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.25, 7.12, 7.34); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.856 W/kg; SAR (10g) = 0.403 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = -0.05 dB

SAR (1g) = 0.929 W/kg; SAR (8g) = 0.473 W/kg; SAR (10g) = 0.428 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 80.3 %

TSL Correction: Positive only

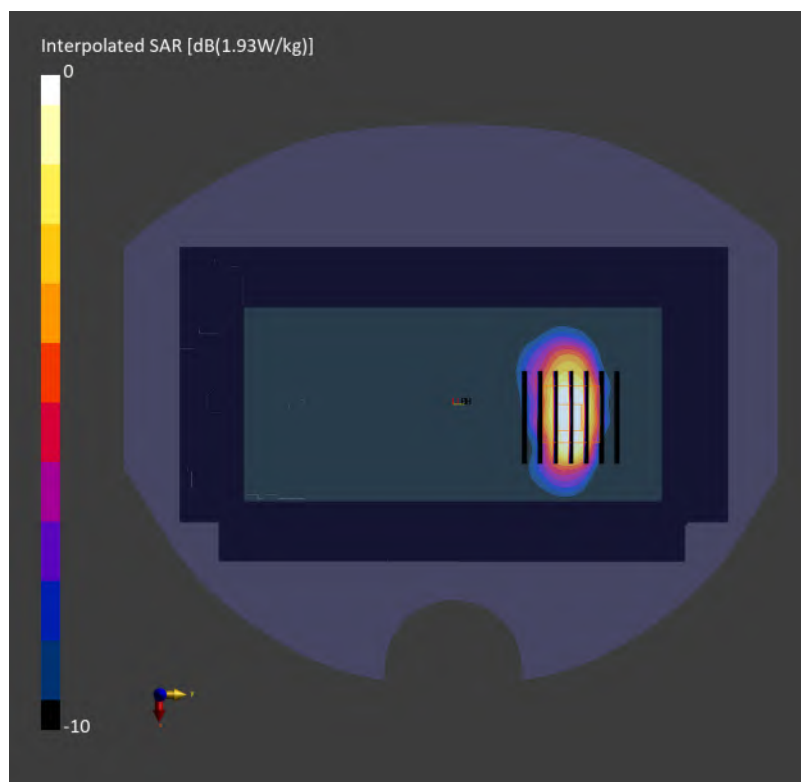

39_LTE Band 66_20M_QPSK_1_0_Top Side_5mm_Ch132322

Communication System: LTE-FDD; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260624 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 41.0$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.44, 7.3, 7.52); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.952 W/kg; SAR (10g) = 0.438 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 0.983 W/kg; SAR (8g) = 0.503 W/kg; SAR (10g) = 0.455 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 82.0 %

TSL Correction: Positive only

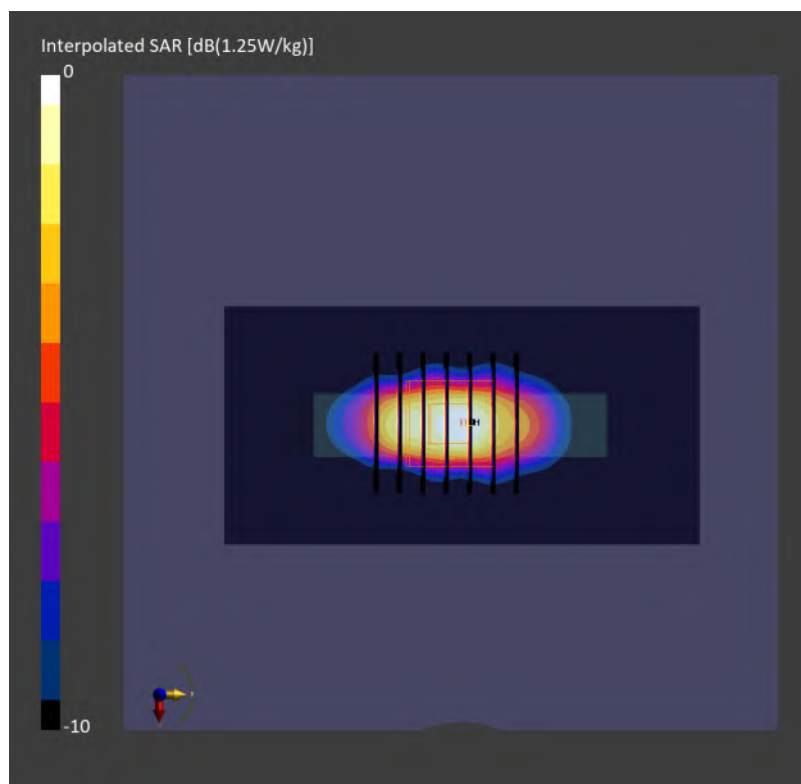

40_LTE Band 42_20M_QPSK_1_0_Back Right_5mm_Ch42190

Communication System: LTE-TDD; Frequency: 3460.000 MHz

Medium: HSL_600-7200_260626 Medium parameters used: $f = 3460.000$ MHz; $\sigma = 2.72$ S/m; $\epsilon_r = 38.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.96, 6.44, 5.88); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.769 W/kg; SAR (10g) = 0.316 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 35.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.05 dB

SAR (1g) = 0.870 W/kg; SAR (8g) = 0.355 W/kg; SAR (10g) = 0.318 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 71.8 %

TSL Correction: Positive only

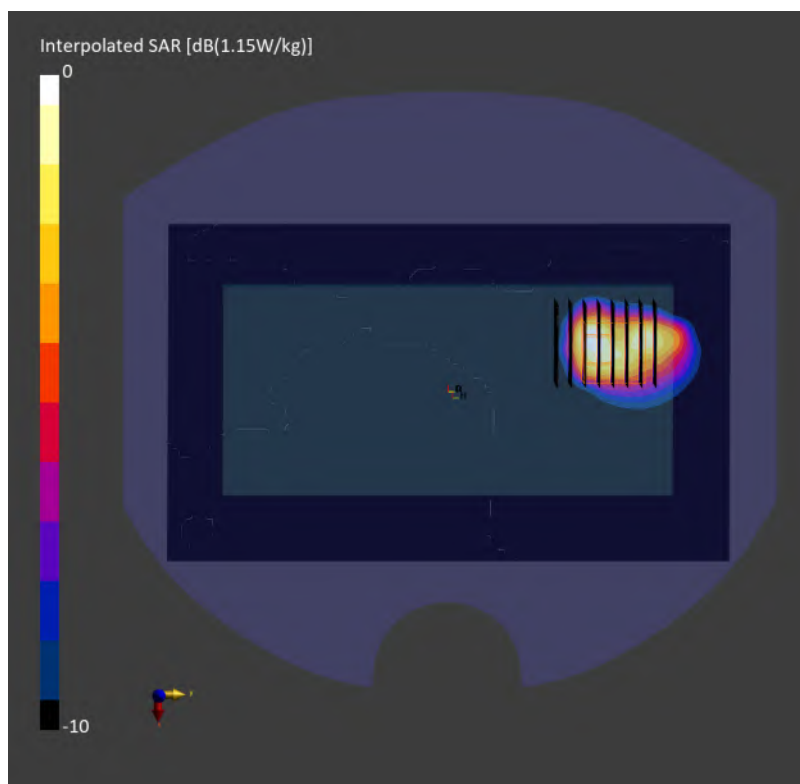

41_FR1 n7_50M_BPSK_135_68_Top Side_5mm_Ch507000

Communication System: 5G NR; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260626 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 41.4$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.66, 6.54, 6.74); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10943-AAD

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.839 W/kg; SAR (10g) = 0.346 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.00 dB

SAR (1g) = 0.875 W/kg; SAR (8g) = 0.394 W/kg; SAR (10g) = 0.351 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 77.8 %

TSL Correction: Positive only

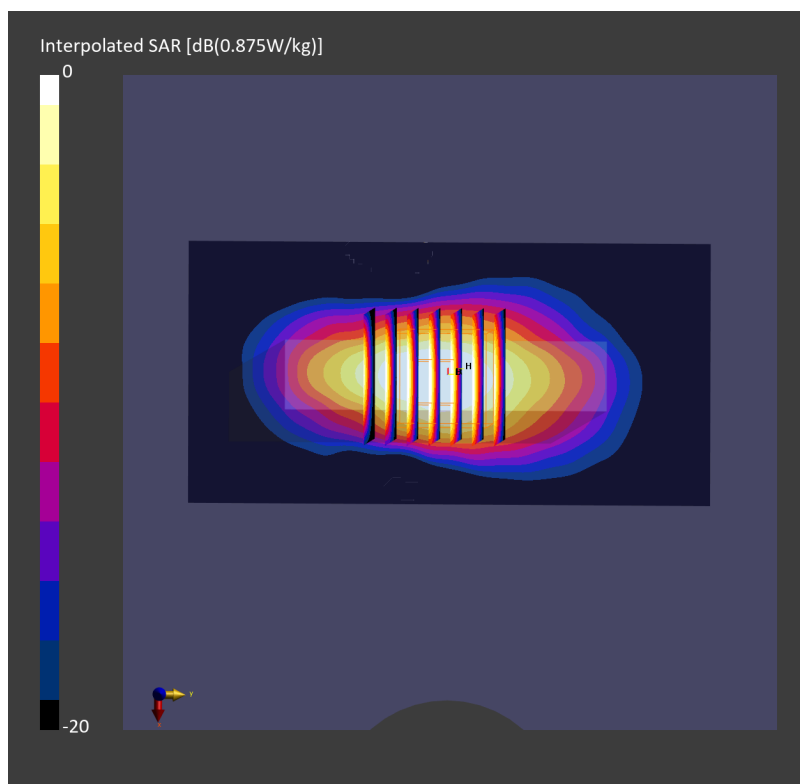

42_FR1 n25_40M_BPSK_1_1_Top Side_5mm_Ch376500

Communication System: 5G NR; Frequency: 1882.500 MHz

Medium: HSL_600-7200_260624 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.25, 7.12, 7.34); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.895 W/kg; SAR (10g) = 0.409 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = -0.03 dB

SAR (1g) = 0.897 W/kg; SAR (8g) = 0.462 W/kg; SAR (10g) = 0.419 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 81.7 %

TSL Correction: Positive only

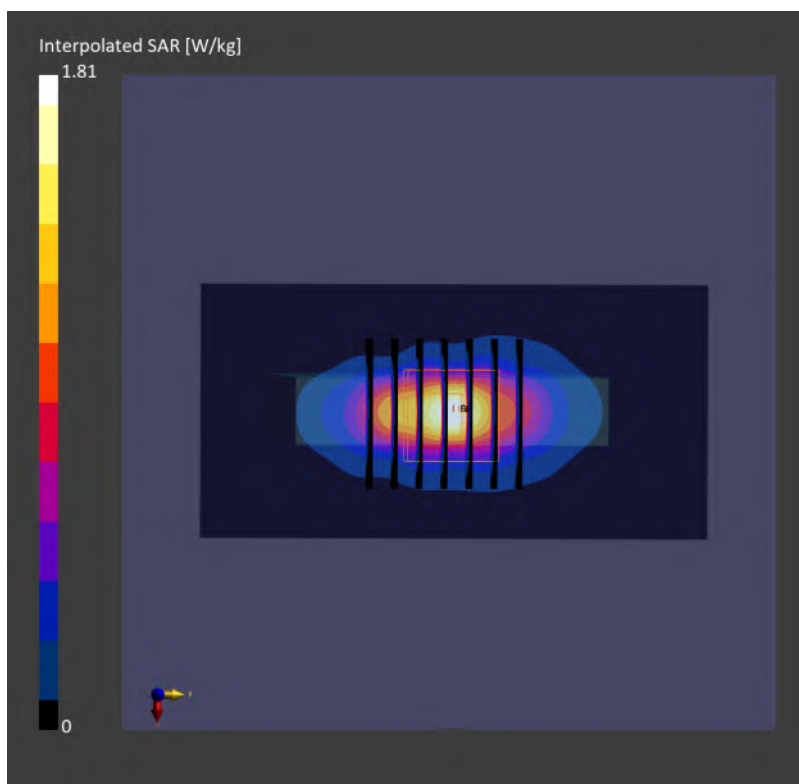

43_FR1 n66_45M_BPSK_120_60_Top Side_5mm_Ch349000

Communication System: 5G NR; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260701 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 41.9$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.44, 7.3, 7.52); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.928 W/kg; SAR (10g) = 0.421 W/kg;

TSL Correction: Positive only

Zoom Scan (33.0 mm x 33.0 mm x 31.2 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm


Power Drift = 0.08 dB

SAR (1g) = 0.967 W/kg; SAR (8g) = 0.494 W/kg; SAR (10g) = 0.448 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 81.5 %

TSL Correction: Positive only

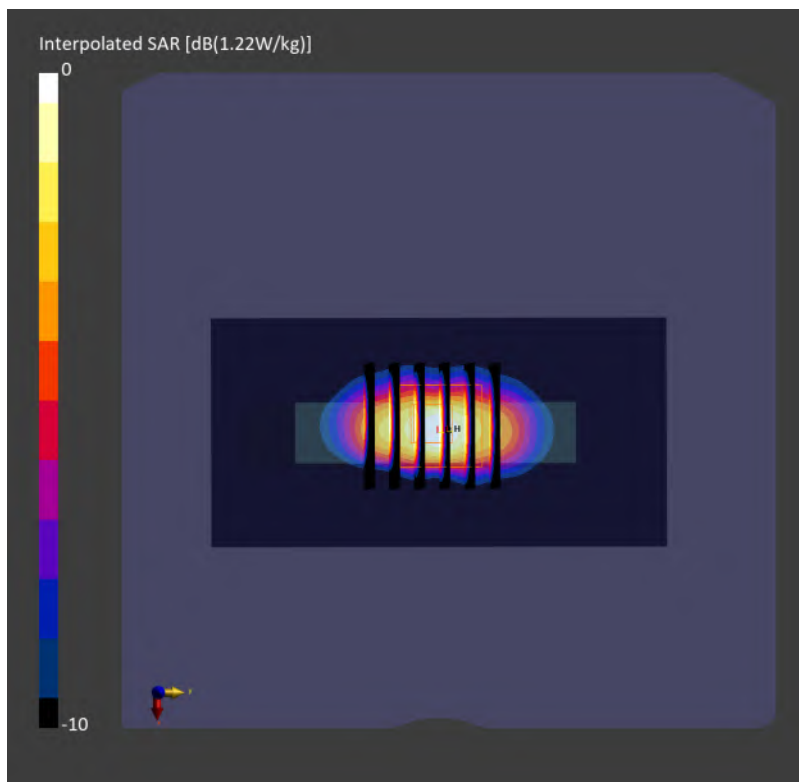

44_FR1 n41_100M_BPSK_270_0_Back Right_5mm_Ch518598

Communication System: 5G NR; Frequency: 2592.990 MHz

Medium: HSL_600-7200_260626 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.98$ S/m; $\epsilon_r = 41.3$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.66, 6.54, 6.74); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10868-AAF

Area Scan (60.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.834 W/kg; SAR (10g) = 0.327 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.08 dB

SAR (1g) = 0.869 W/kg; SAR (8g) = 0.382 W/kg; SAR (10g) = 0.338 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 77.9 %

TSL Correction: Positive only

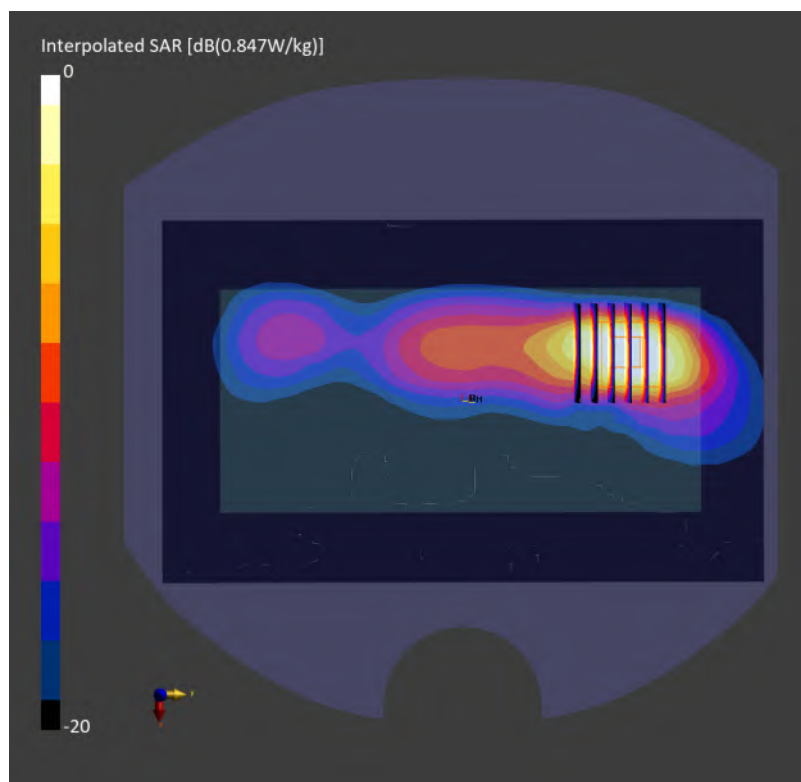

45_FR1 n48_40M_BPSK_50_28_Back Right_5mm_Ch645332

Communication System: 5G NR; Frequency: 3679.980 MHz

Medium: HSL_600-7200_260625 Medium parameters used: $f = 3679.975$ MHz; $\sigma = 2.88$ S/m; $\epsilon_r = 40.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.88, 6.35, 5.8); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10913-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.844 W/kg; SAR (10g) = 0.322 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.11 dB

SAR (1g) = 0.876 W/kg; SAR (8g) = 0.365 W/kg; SAR (10g) = 0.323 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 73.4 %

TSL Correction: Positive only

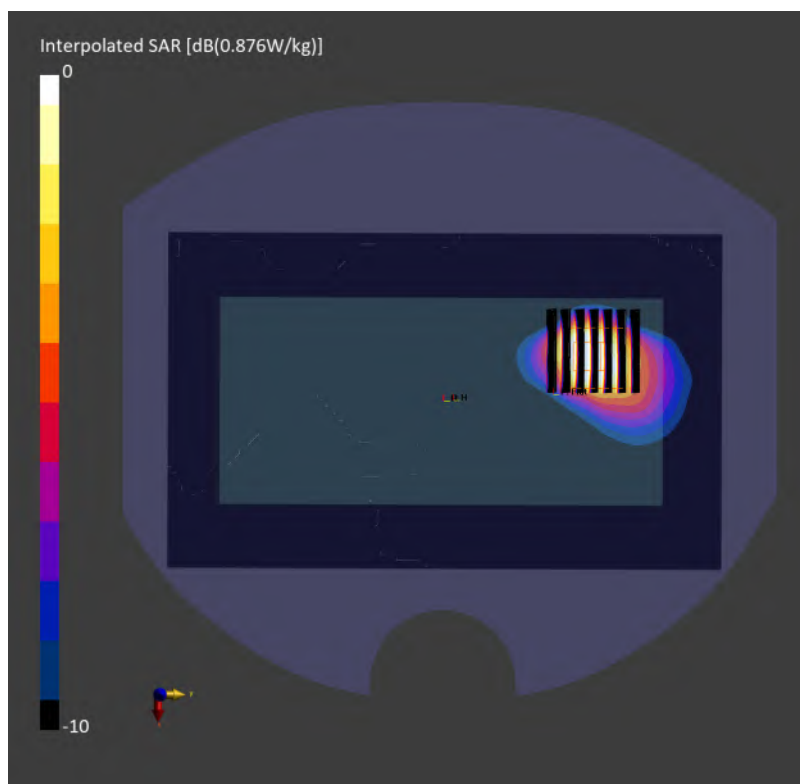

46_FR1 n77_100M_BPSK_1_1_Top Side_5mm_Ch656000

Communication System: 5G NR; Frequency: 3840.000 MHz

Medium: HSL_600-7200_260630 Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.02$ S/m; $\epsilon_r = 37.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.79, 6.25, 5.71); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.921 W/kg; SAR (10g) = 0.338 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.12 dB

SAR (1g) = 0.957 W/kg; SAR (8g) = 0.390 W/kg; SAR (10g) = 0.344 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 74.3 %

TSL Correction: Positive only

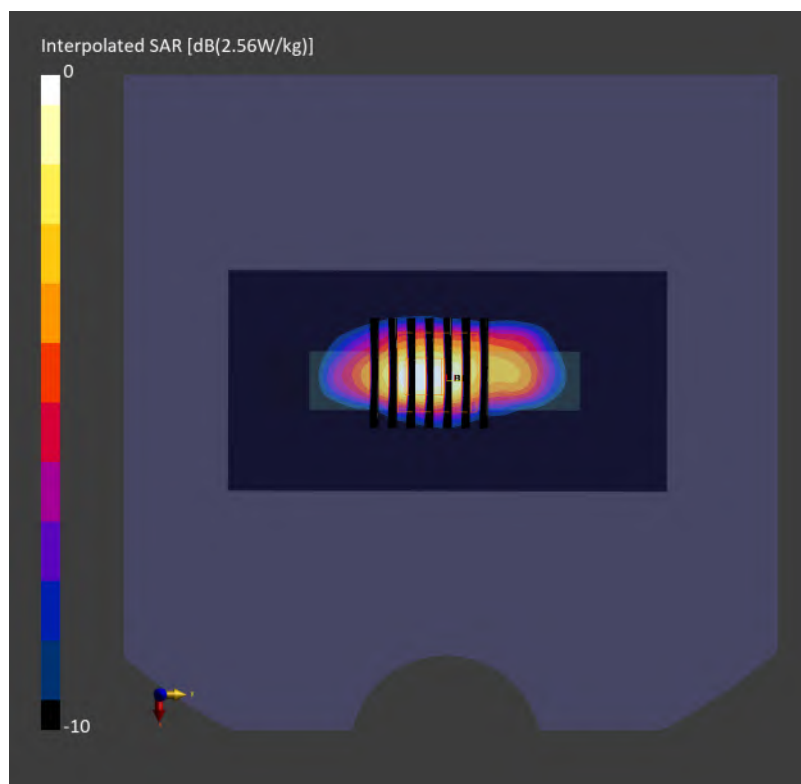

47_LTE Band 71_20M_QPSK_1_0_Back Right_5mm_Ch133297

Communication System: LTE-FDD; Frequency: 680.500 MHz

Medium: HSL_600-7200_260622 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.875$ S/m; $\epsilon_r = 43.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(9.08, 8.91, 9.18); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.161 W/kg; SAR (10g) = 0.091 W/kg;

TSL Correction: Positive only

Zoom Scan (33.0 mm x 33.0 mm x 31.2 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm


Power Drift = -0.05 dB

SAR (1g) = 0.178 W/kg; SAR (8g) = 0.10 W/kg; SAR (10g) = 0.092 W/kg

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 76.5 %

TSL Correction: Positive only

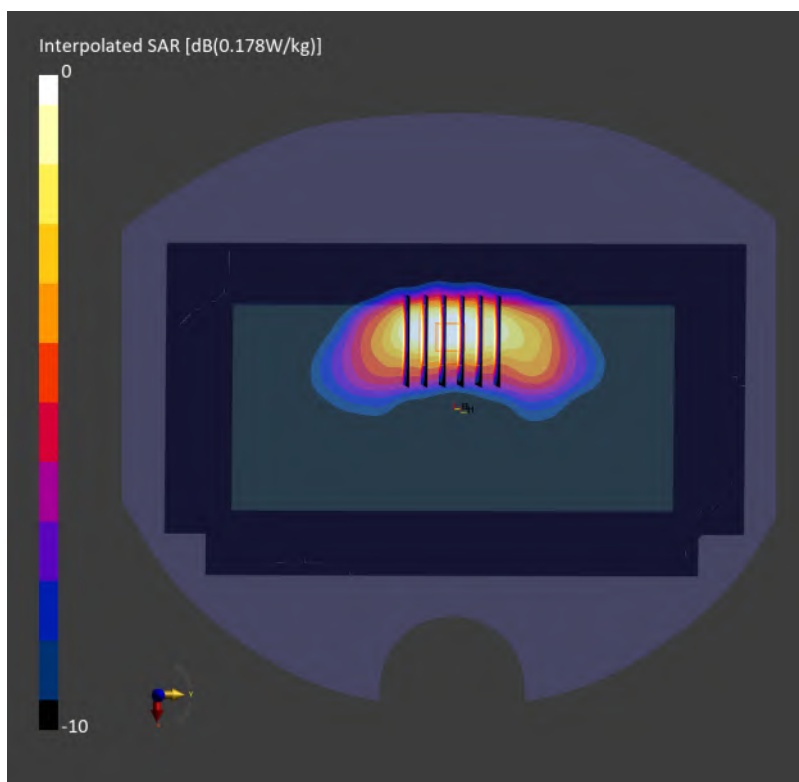

48_LTE Band 12_10M_QPSK_1_0_Back Right_5mm_Ch23095

Communication System: LTE-FDD; Frequency: 707.500 MHz

Medium: HSL_600-7200_260622 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 43.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(9.08, 8.91, 9.18); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.215 W/kg; SAR (10g) = 0.126 W/kg;

TSL Correction: Positive only

Zoom Scan (35.7 mm x 35.7 mm x 31.2 mm): Measurement Grid: 5.1 mm x 5.1 mm x 1.5 mm


Power Drift = 0.16 dB

SAR (1g) = 0.240 W/kg; SAR (8g) = 0.136 W/kg; SAR (10g) = 0.126 W/kg

Smallest distance from peaks to all points 3 dB below = 7.8 mm

Ratio of SAR at M2 to SAR at M1 = 77.5 %

TSL Correction: Positive only

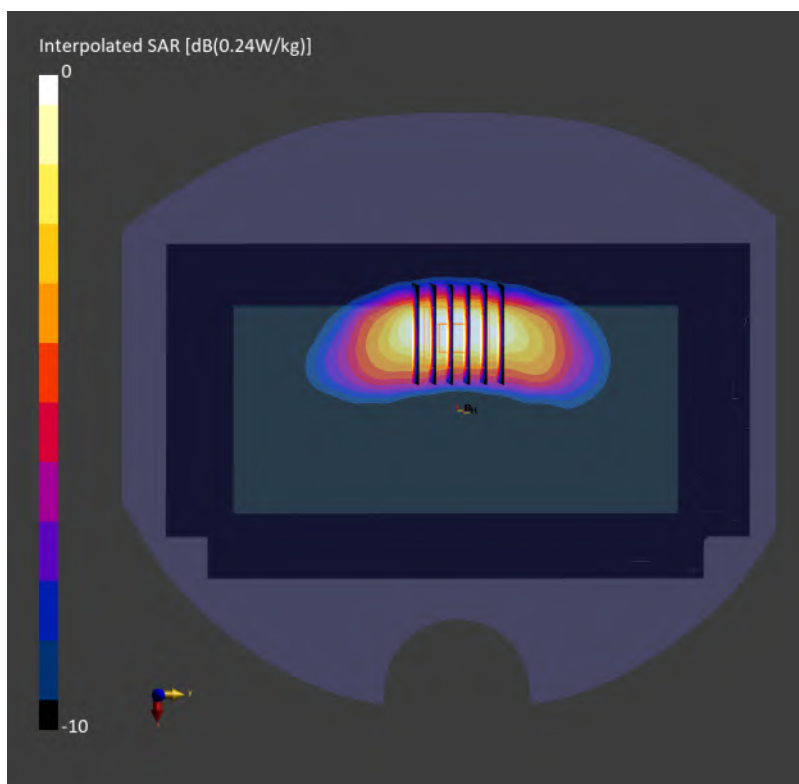

49_LTE Band 13_10M_QPSK_1_0_Back Right_5mm_Ch23230

Communication System: LTE-FDD; Frequency: 782.000 MHz

Medium: HSL_600-7200_260622 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(9.08, 8.91, 9.18); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.240 W/kg; SAR (10g) = 0.142 W/kg;

TSL Correction: Positive only

Zoom Scan (33.0 mm x 33.0 mm x 31.2 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm


Power Drift = 0.15 dB

SAR (1g) = 0.258 W/kg; SAR (8g) = 0.149 W/kg; SAR (10g) = 0.138 W/kg

Smallest distance from peaks to all points 3 dB below = 7.8 mm

Ratio of SAR at M2 to SAR at M1 = 79.0 %

TSL Correction: Positive only

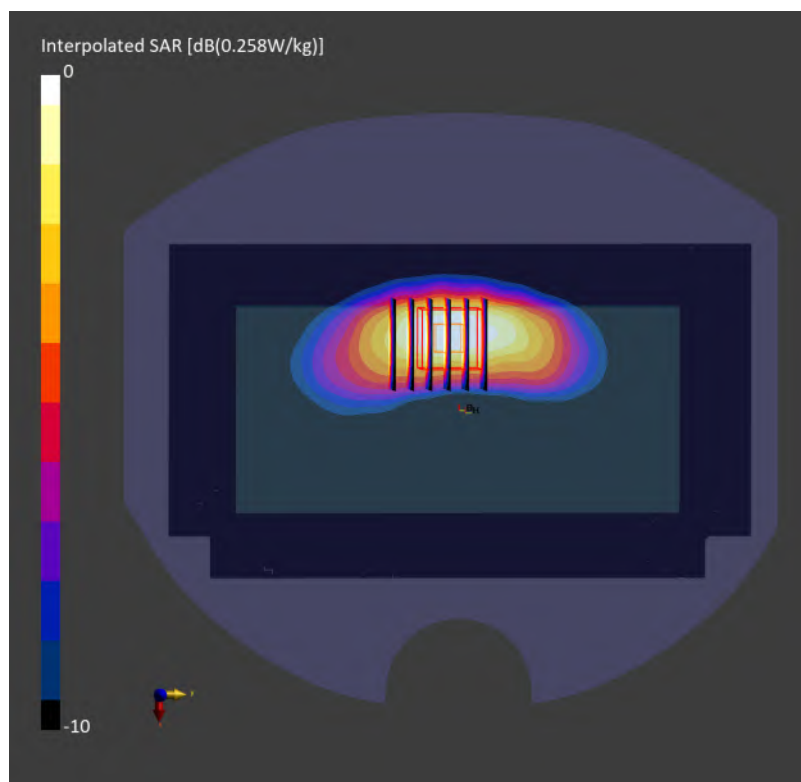

50_LTE Band 14_10M_QPSK_1_0_Back Right_5mm_Ch23330

Communication System: LTE-FDD; Frequency: 793.000 MHz

Medium: HSL_600-7200_260618 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.891$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.9, 9.61, 8.78); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.230 W/kg; SAR (10g) = 0.135 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = 0.12 dB

SAR (1g) = 0.265 W/kg; SAR (8g) = 0.151 W/kg; SAR (10g) = 0.139 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 78.4 %

TSL Correction: Positive only

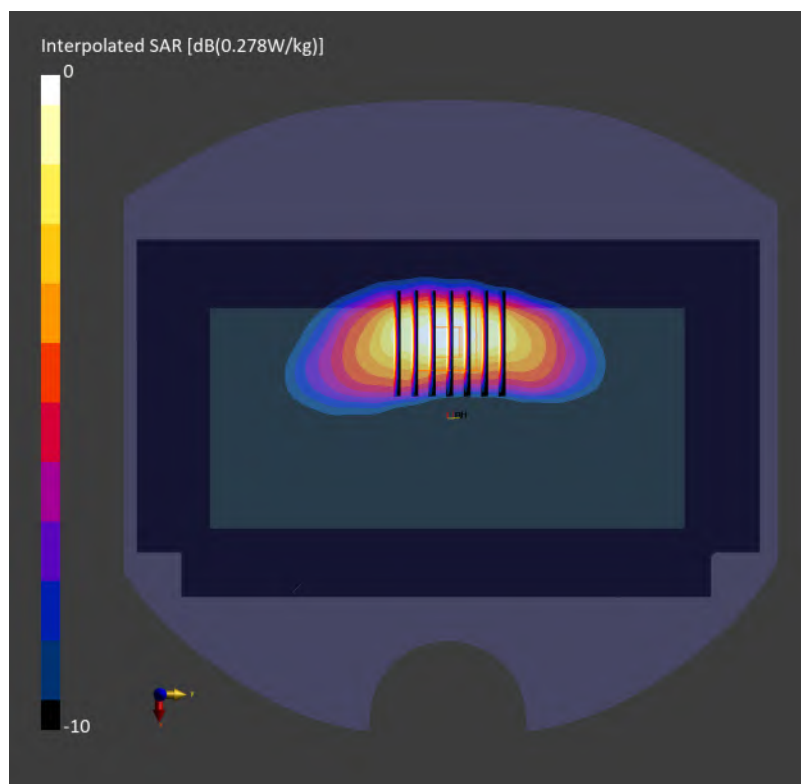

51_FR1 n71_35M_BPSK_90_45_Back Right_5mm_Ch136100

Communication System: 5G NR; Frequency: 680.500 MHz

Medium: HSL_600-7200_260627 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.869$ S/m; $\epsilon_r = 42.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.9, 9.61, 8.78); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.259 W/kg; SAR (10g) = 0.142 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = -0.15 dB

SAR (1g) = 0.256 W/kg; SAR (8g) = 0.142 W/kg; SAR (10g) = 0.131 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 77.3 %

TSL Correction: Positive only

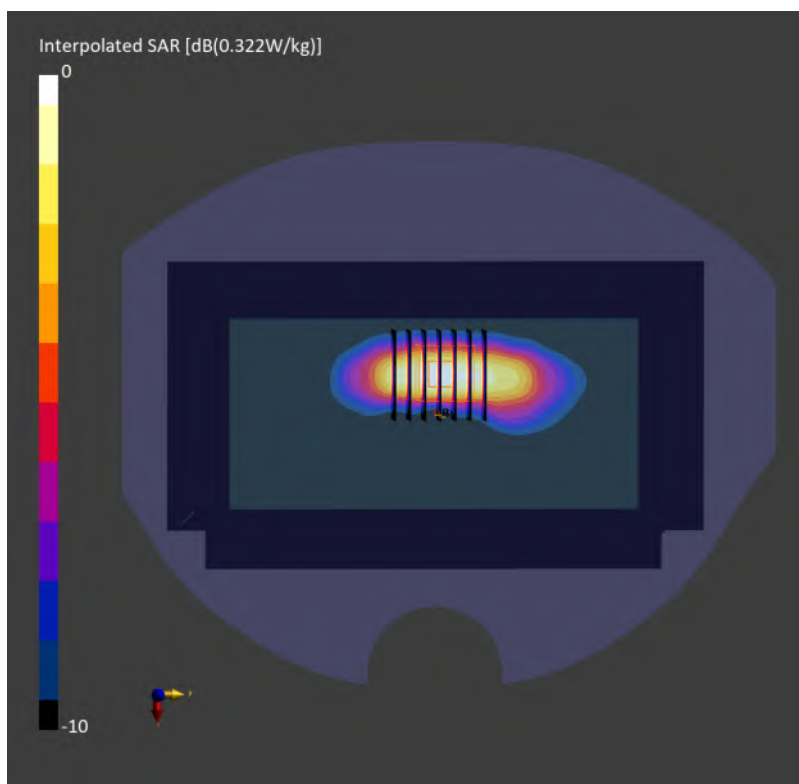

52_FR1 n12_15M_BPSK_36_22_Back Right_5mm_Ch141500

Communication System: 5G NR; Frequency: 707.500 MHz

Medium: HSL_600-7200_260627 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.881$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.9, 9.61, 8.78); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10938-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.247 W/kg; SAR (10g) = 0.137 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = -0.10 dB

SAR (1g) = 0.250 W/kg; SAR (8g) = 0.141 W/kg; SAR (10g) = 0.130 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 78.8 %

TSL Correction: Positive only

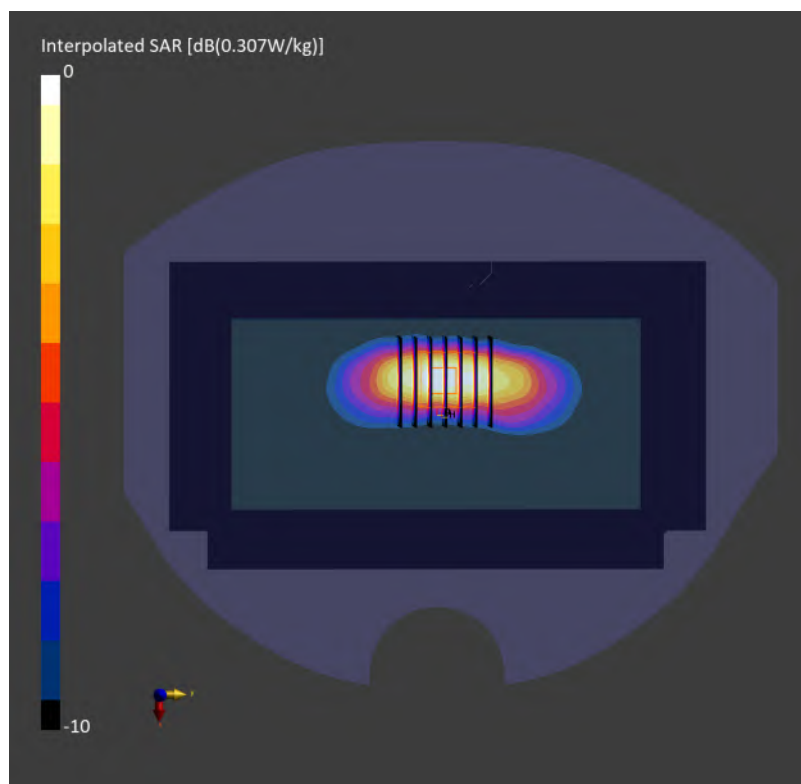

53_FR1 n13_10M_BPSK_25_14_Back Right_5mm_Ch156400

Communication System: 5G NR; Frequency: 782.000 MHz

Medium: HSL_600-7200_260618 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 42.3$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(9.08, 8.91, 9.18); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (60.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.285 W/kg; SAR (10g) = 0.163 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.04 dB

SAR (1g) = 0.281 W/kg; SAR (8g) = 0.165 W/kg; SAR (10g) = 0.153 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 80.9 %

TSL Correction: Positive only

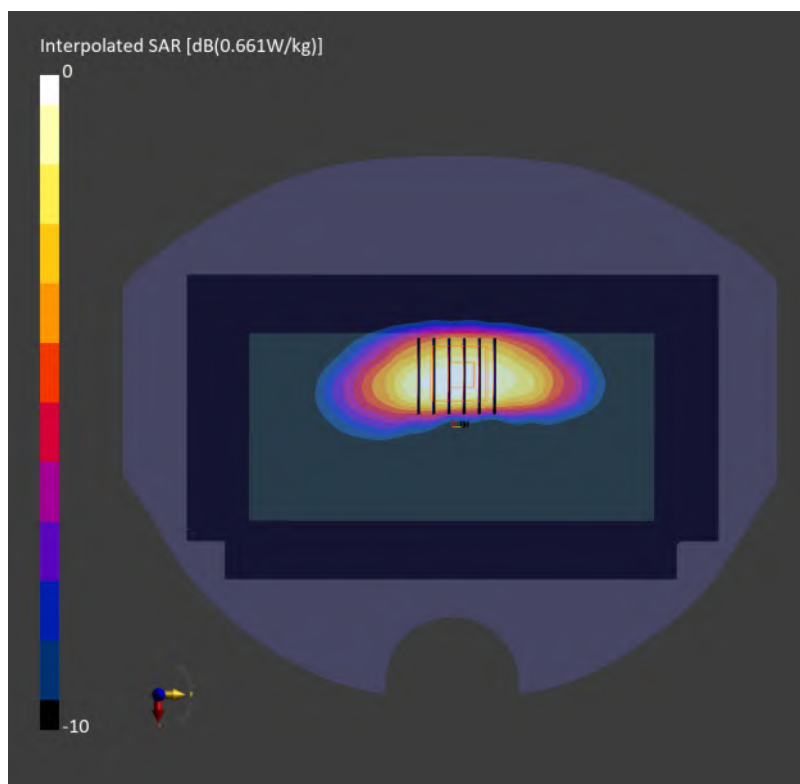

54_FR1 n14_10M_BPSK_1_1_Back Right_5mm_Ch158600

Communication System: 5G NR; Frequency: 793.000 MHz

Medium: HSL_600-7200_260618 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.891$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.9, 9.61, 8.78); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10937-AAD

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.242 W/kg; SAR (10g) = 0.141 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = -0.04 dB

SAR (1g) = 0.277 W/kg; SAR (8g) = 0.156 W/kg; SAR (10g) = 0.144 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 78.5 %

TSL Correction: Positive only

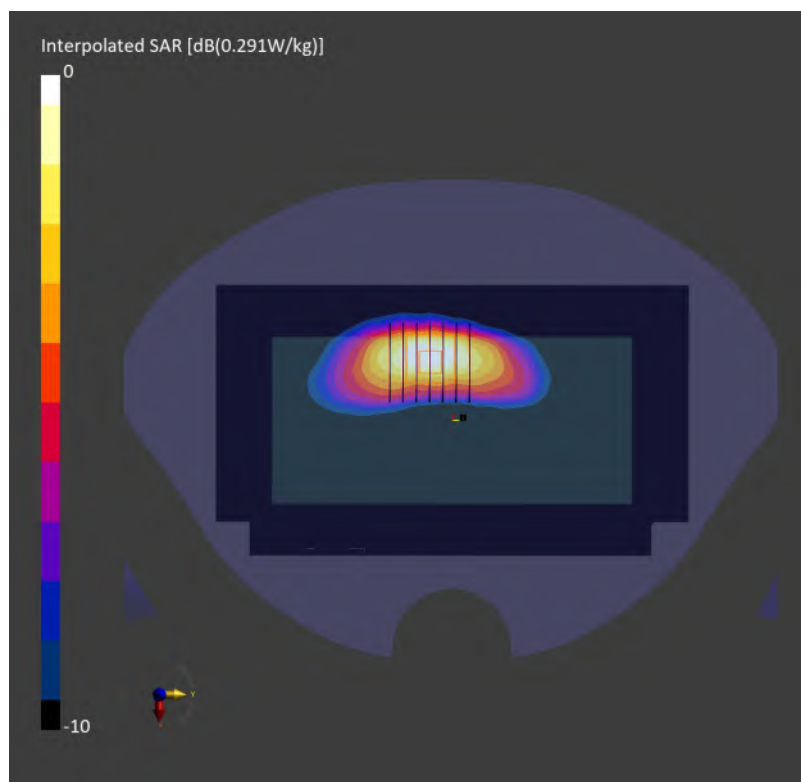

55_GSM850_GPRS 4 Tx slots_Back Right_5mm_Ch189

Communication System: GPRS-FDD; Frequency: 836.400 MHz

Medium: HSL_600-7200_260627 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 42.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.74, 9.44, 8.62); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (180.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.144 W/kg; SAR (10g) = 0.083 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = -0.10 dB

SAR (1g) = 0.159 W/kg; SAR (8g) = 0.087 W/kg; SAR (10g) = 0.080 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 78.4 %

TSL Correction: Positive only

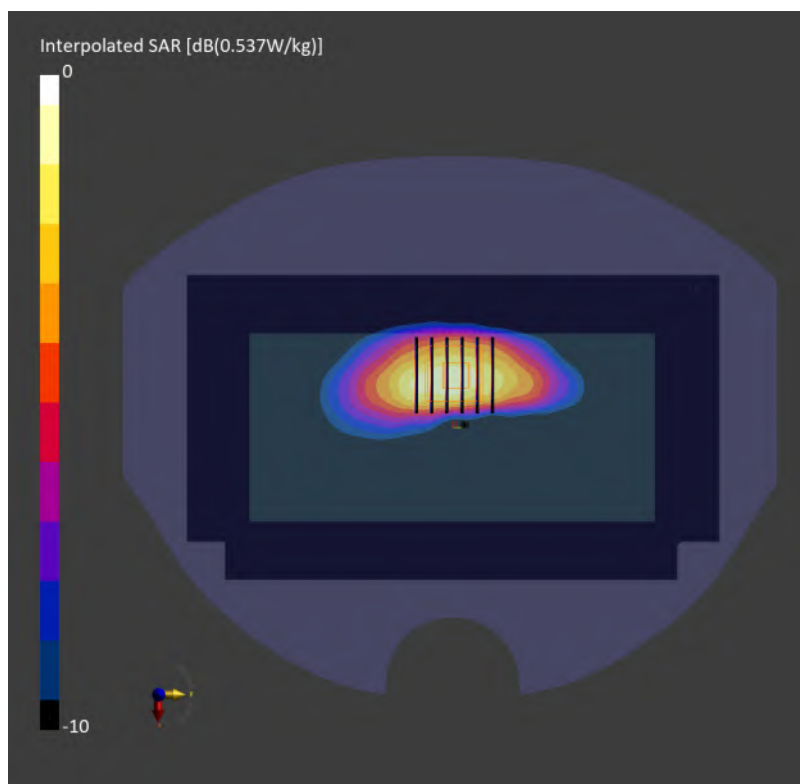

56_WCDMA V_RMC 12.2Kbps_Back Right_5mm_Ch4182

Communication System: UMTS-FDD; Frequency: 836.400 MHz

Medium: HSL_600-7200_260627 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 42.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.74, 9.44, 8.62); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (180.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.222 W/kg; SAR (10g) = 0.129 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.13 dB

SAR (1g) = 0.243 W/kg; SAR (8g) = 0.137 W/kg; SAR (10g) = 0.126 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 82.3 %

TSL Correction: Positive only

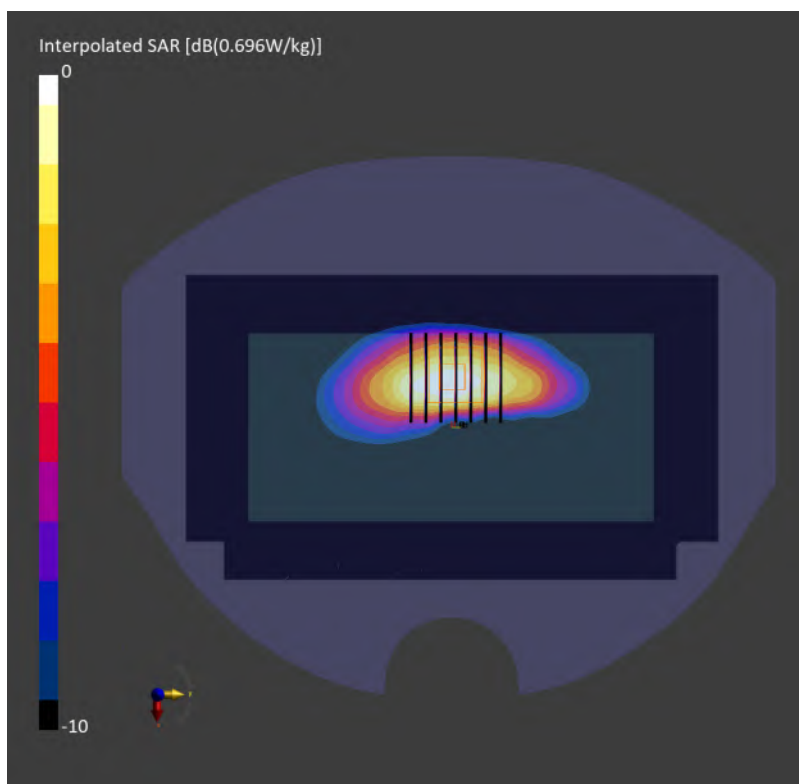

57_LTE Band 26_15M_QPSK_1_0_Back Right_5mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz

Medium: HSL_600-7200_260622 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.944$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(8.84, 8.67, 8.94); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.229 W/kg; SAR (10g) = 0.132 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = -0.13 dB

SAR (1g) = 0.238 W/kg; SAR (8g) = 0.133 W/kg; SAR (10g) = 0.122 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 75.6 %

TSL Correction: Positive only

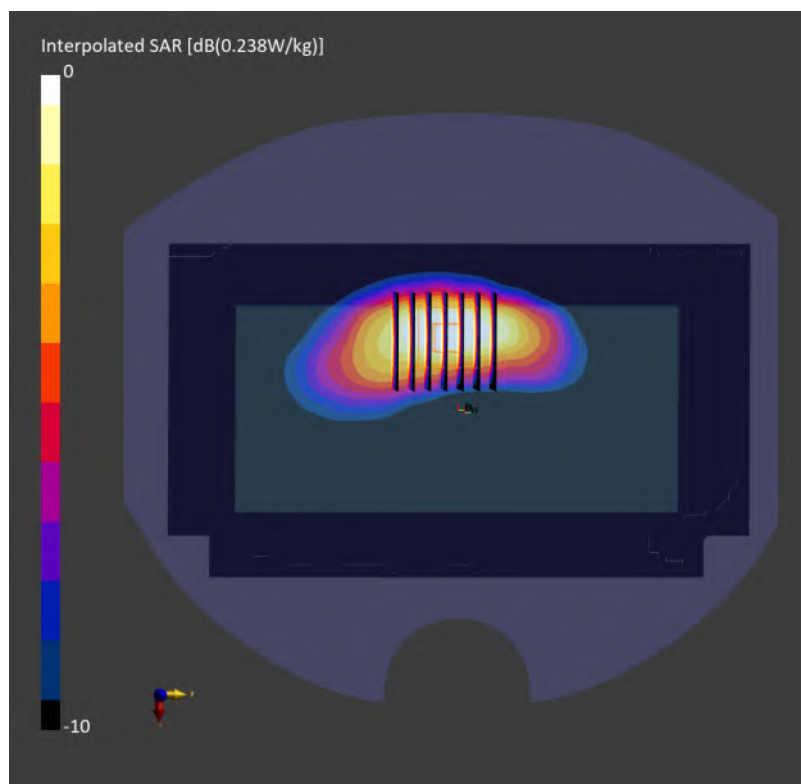

58_FR1 n26_20M_BPSK_1_1_Back Right_5mm_Ch166300

Communication System: 5G NR; Frequency: 831.500 MHz

Medium: HSL_600-7200_260627 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.74, 9.44, 8.62); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.178 W/kg; SAR (10g) = 0.106 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.17 dB

SAR (1g) = 0.215 W/kg; SAR (8g) = 0.121 W/kg; SAR (10g) = 0.111 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 78.8 %

TSL Correction: Positive only

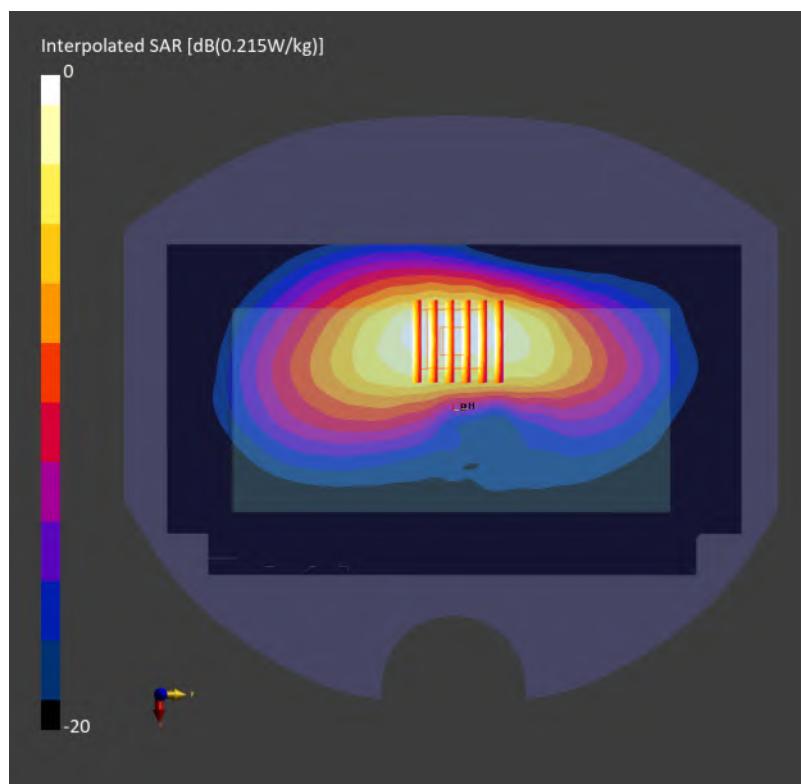

59_WLAN2.4GHz_802.11b 1Mbps_Back Top_5mm_Ch11

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2462.000 MHz

Medium: HSL_600-7200_260701 Medium parameters used: $f = 2462.000$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 39.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.56, 7.09, 6.47); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10315-AAB

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.490 W/kg; SAR (10g) = 0.255 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.04 dB

SAR (1g) = 0.562 W/kg; SAR (8g) = 0.282 W/kg; SAR (10g) = 0.257 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 81.5 %

TSL Correction: Positive only

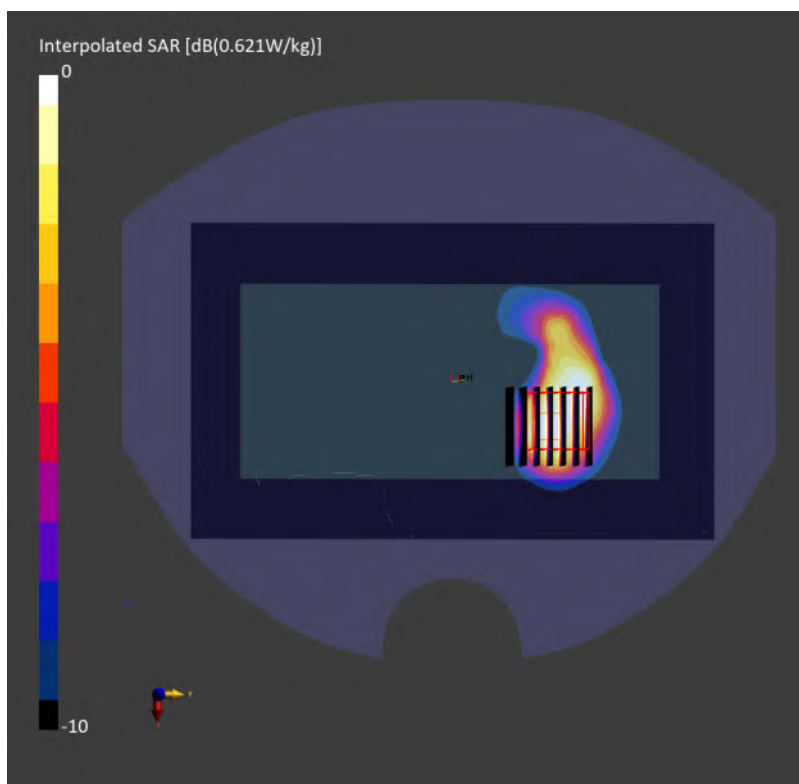

60_WLAN5GHz_802.11ac-VHT80 MCS0_Back Right_5mm_Ch42

Communication System: IEEE 802.11ac WiFi; Frequency: 5210.000 MHz

Medium: HSL_600-7200_260701 Medium parameters used: $f = 5210.000$ MHz; $\sigma = 4.47$ S/m; $\epsilon_r = 34.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.03, 5.43, 4.96); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.633 W/kg; SAR (10g) = 0.197 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.09 dB

SAR (1g) = 0.377 W/kg; SAR (8g) = 0.121 W/kg; SAR (10g) = 0.104 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 64.9 %

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.09 dB

SAR (1g) = 0.798 W/kg; SAR (8g) = 0.254 W/kg; SAR (10g) = 0.217 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 64.9 %

TSL Correction: Positive only

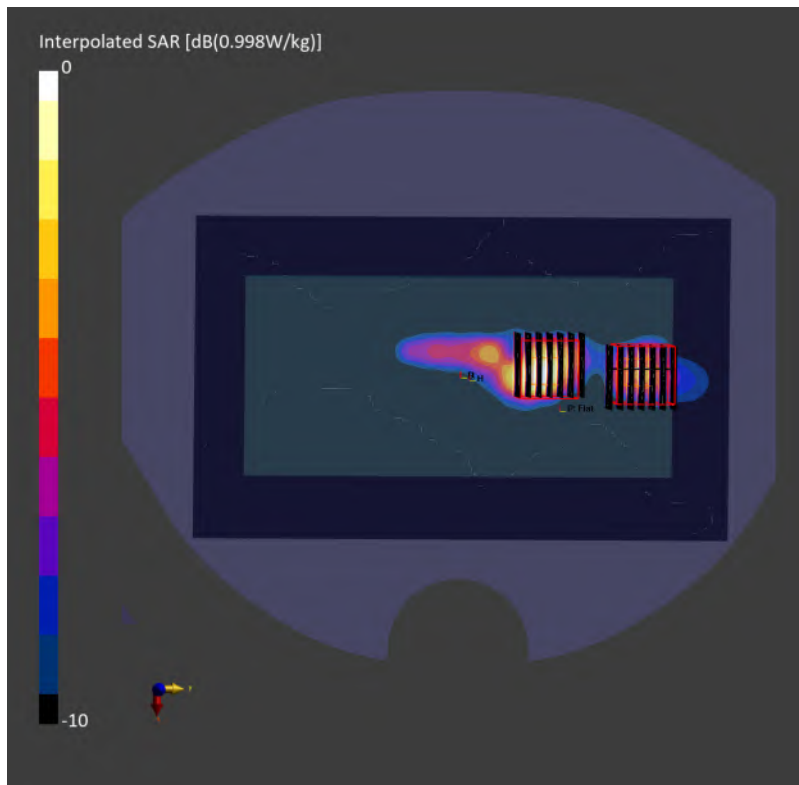

61_WLAN5GHz_802.11ac-VHT80 MCS0_Back Right_5mm_Ch155

Communication System: IEEE 802.11ac WiFi; Frequency: 5775.000 MHz

Medium: HSL_600-7200_260701 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.06$ S/m; $\epsilon_r = 33.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(4.54, 4.9, 4.48); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.402 W/kg; SAR (10g) = 0.138 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 0.144 W/kg; SAR (8g) = 0.064 W/kg; SAR (10g) = 0.058 W/kg

Smallest distance from peaks to all points 3 dB below = 18.9 mm

Ratio of SAR at M2 to SAR at M1 = 61.2 %

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.01 dB

SAR (1g) = 0.447 W/kg; SAR (8g) = 0.168 W/kg; SAR (10g) = 0.147 W/kg

Smallest distance from peaks to all points 3 dB below = 18.9 mm

Ratio of SAR at M2 to SAR at M1 = 61.2 %

TSL Correction: Positive only

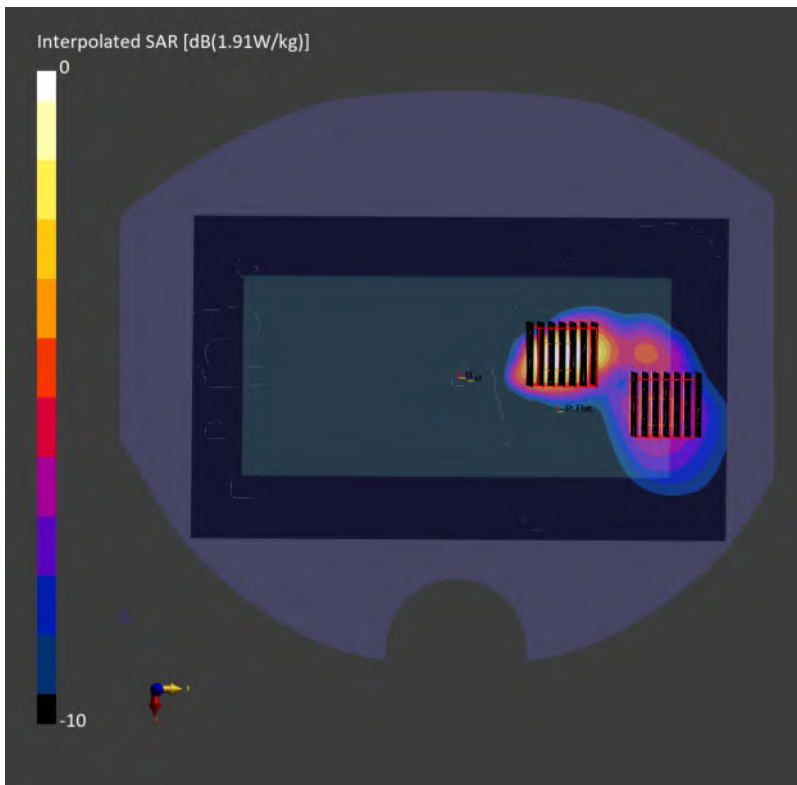

62_Bluetooth_1Mbps_Back Top_5mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2441.000 MHz

Medium: HSL_600-7200_260702 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.79, 6.67, 6.87); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 60.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.155 W/kg; SAR (10g) = 0.063 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.19 dB

SAR (1g) = 0.157 W/kg; SAR (8g) = 0.068 W/kg; SAR (10g) = 0.060 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 75.8 %

TSL Correction: Positive only

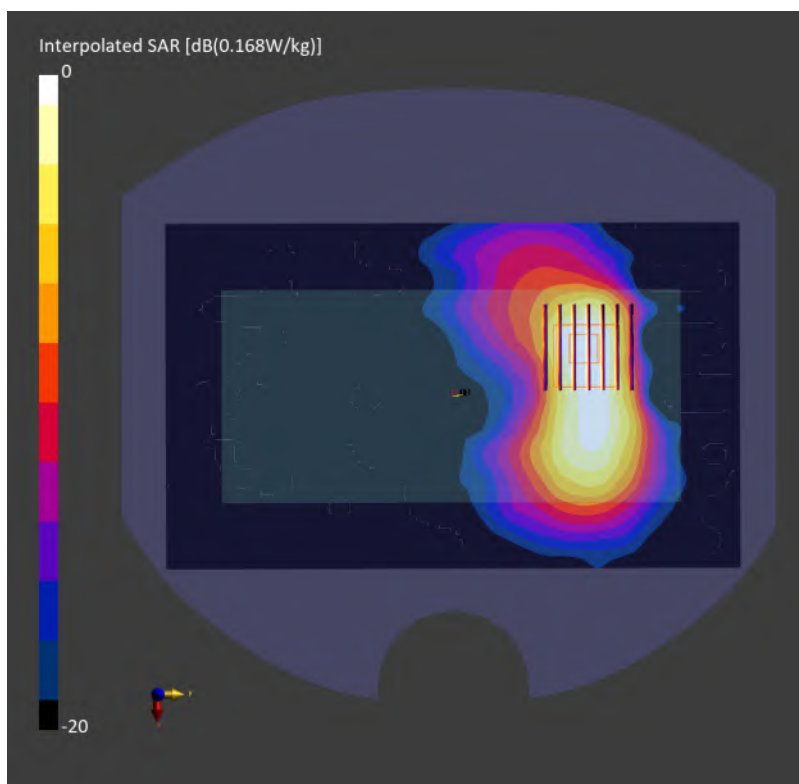

63_LTE Band 41_20M_QPSK_1_0_Bottom Side_5mm_Ch40185

Communication System: LTE-TDD; Frequency: 2549.500 MHz

Medium: HSL_600-7200_260618 Medium parameters used: $f = 2549.500$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.66, 6.54, 6.74); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.07 W/kg; SAR (10g) = 0.418 W/kg;

TSL Correction: Positive only

Zoom Scan (34.3 mm x 34.3 mm x 31.2 mm): Measurement Grid: 4.9 mm x 4.9 mm x 1.5 mm


Power Drift = -0.00 dB

SAR (1g) = 1.13 W/kg; SAR (8g) = 0.485 W/kg; SAR (10g) = 0.429 W/kg

Smallest distance from peaks to all points 3 dB below = 5.9 mm

Ratio of SAR at M2 to SAR at M1 = 77.5 %

TSL Correction: Positive only

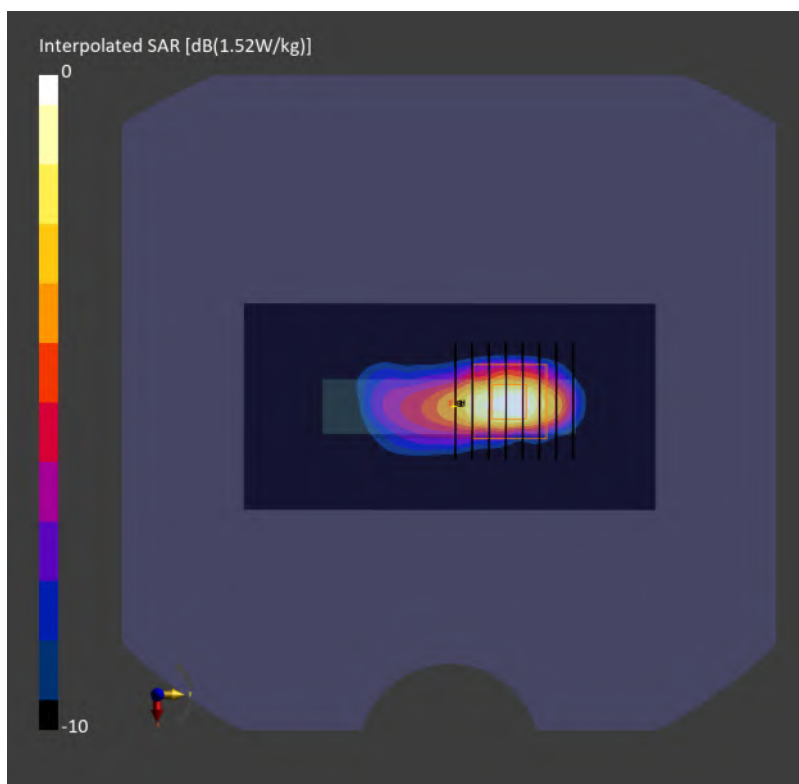

64_LTE Band 48_20M_QPSK_1_0_Bottom Side_5mm_Ch55340

Communication System: LTE-TDD; Frequency: 3560.000 MHz

Medium: HSL_600-7200_260702 Medium parameters used: $f = 3560.000$ MHz; $\sigma = 2.85$ S/m; $\epsilon_r = 39.7$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.96, 6.44, 5.88); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.937 W/kg; SAR (10g) = 0.319 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.00 dB

SAR (1g) = 0.977 W/kg; SAR (8g) = 0.379 W/kg; SAR (10g) = 0.332 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 71.3 %

TSL Correction: Positive only

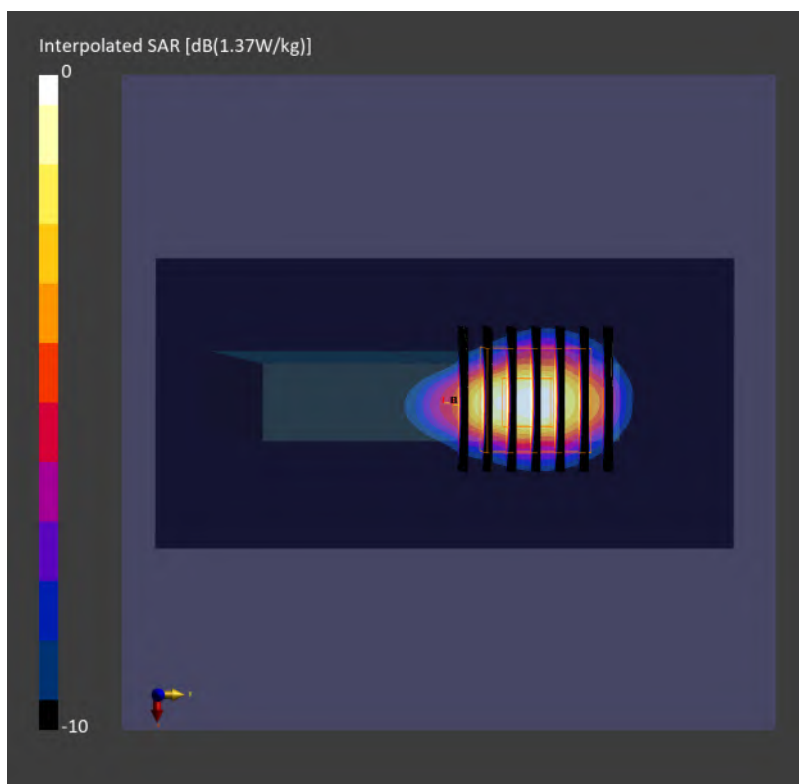

65_GSM1900_GPRS 3 Tx slots_Back Top_5mm_Ch661

Communication System: GPRS-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260624 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.25, 7.12, 7.34); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10027-DAC

Area Scan (120.0 mm x 60.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.05 W/kg; SAR (10g) = 0.475 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = -0.06 dB

SAR (1g) = 1.05 W/kg; SAR (8g) = 0.529 W/kg; SAR (10g) = 0.478 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 79.5 %

TSL Correction: Positive only

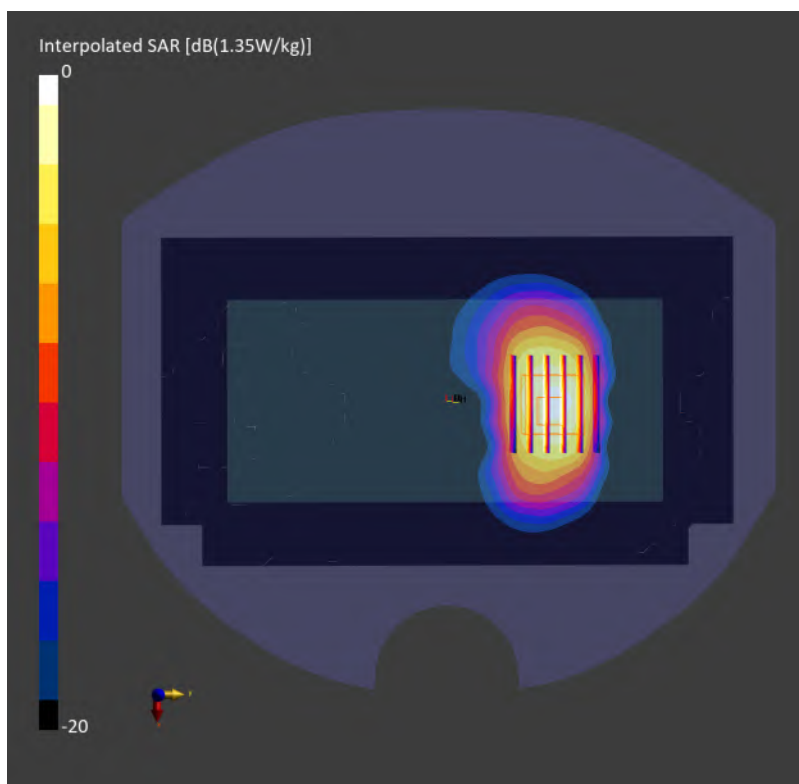

66_WCDMA II_RMC 12.2Kbps_Back Top_5mm_Ch9262

Communication System: UMTS-FDD; Frequency: 1852.400 MHz

Medium: HSL_600-7200_260627 Medium parameters used: $f = 1852.400$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 43.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.64, 8.14, 7.69); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (120.0 mm x 60.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.622 W/kg; SAR (10g) = 0.303 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.04 dB

SAR (1g) = 0.719 W/kg; SAR (8g) = 0.370 W/kg; SAR (10g) = 0.337 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 81.7 %

TSL Correction: Positive only

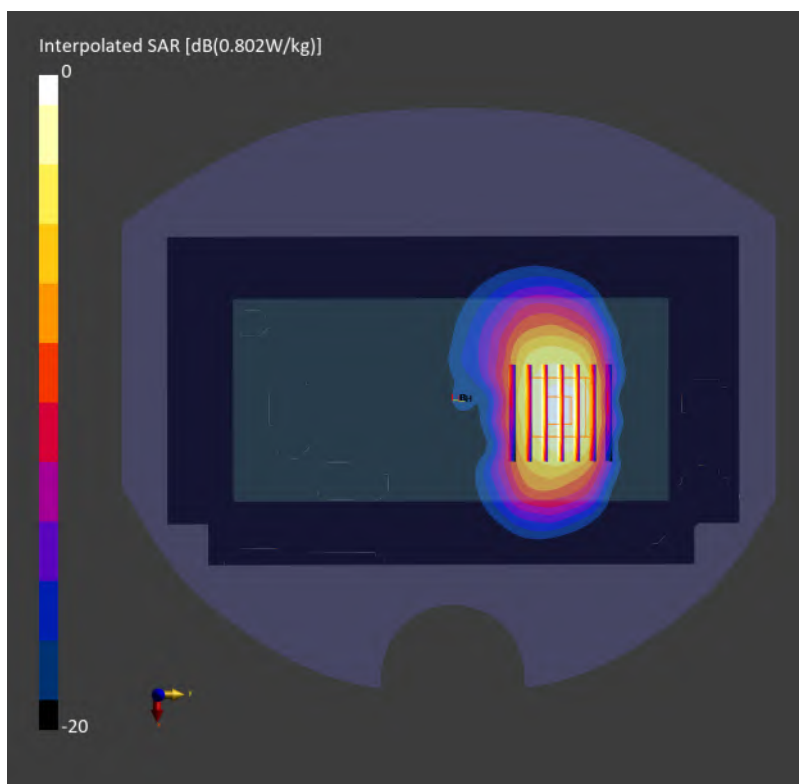

68_WCDMA IV_RMC 12.2Kbps_Back Right_5mm_Ch1312

Communication System: UMTS-FDD; Frequency: 1712.400 MHz

Medium: HSL_600-7200_260626 Medium parameters used: $f = 1712.400$ MHz; $\sigma = 1.30$ S/m; $\epsilon_r = 42.0$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.89, 8.41, 7.94); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (60.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.936 W/kg; SAR (10g) = 0.432 W/kg;

TSL Correction: Positive only

Zoom Scan (33.0 mm x 33.0 mm x 31.2 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm


Power Drift = -0.07 dB

SAR (1g) = 0.988 W/kg; SAR (8g) = 0.478 W/kg; SAR (10g) = 0.431 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 78.7 %

TSL Correction: Positive only

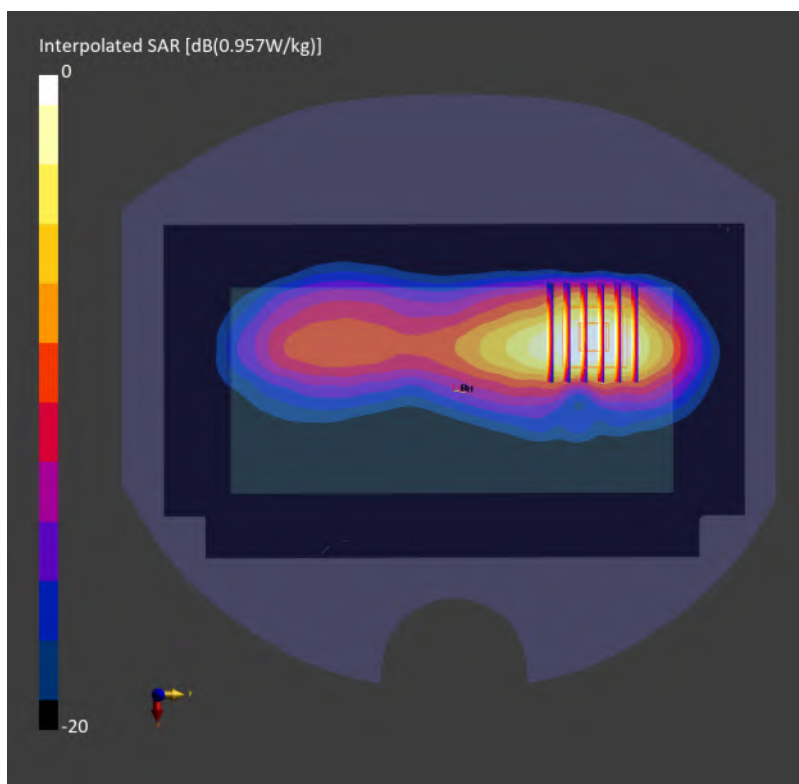

68_LTE Band 7_20M_QPSK_1_0_Back Right_5mm_Ch21350

Communication System: LTE-FDD; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260629 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 39.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.73, 7.27, 6.64); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.912 W/kg; SAR (10g) = 0.382 W/kg;

TSL Correction: Positive only

Zoom Scan (38.4 mm x 38.4 mm x 31.2 mm): Measurement Grid: 4.8 mm x 4.8 mm x 1.5 mm


Power Drift = -0.17 dB

SAR (1g) = 1.03 W/kg; SAR (8g) = 0.443 W/kg; SAR (10g) = 0.391 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 77.6 %

TSL Correction: Positive only

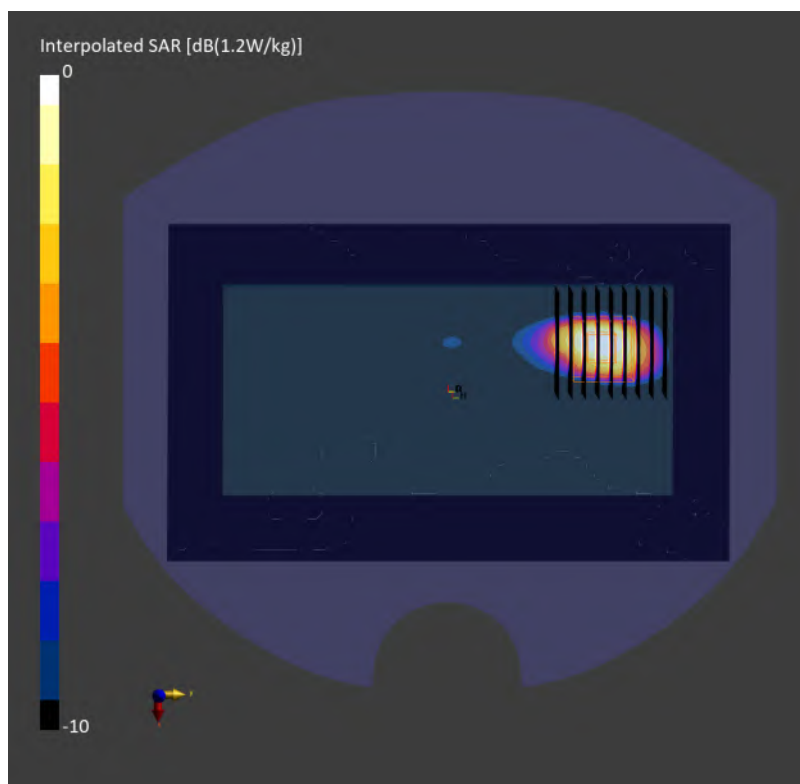

69_LTE Band 25_20M_QPSK_1_0_Back Right_5mm_Ch26340

Communication System: LTE-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260628 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(7.02, 7.58, 6.92); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.821 W/kg; SAR (10g) = 0.400 W/kg;

TSL Correction: Positive only

Zoom Scan (33.0 mm x 33.0 mm x 31.2 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm


Power Drift = -0.03 dB

SAR (1g) = 0.938 W/kg; SAR (8g) = 0.474 W/kg; SAR (10g) = 0.429 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 75.7 %

TSL Correction: Positive only

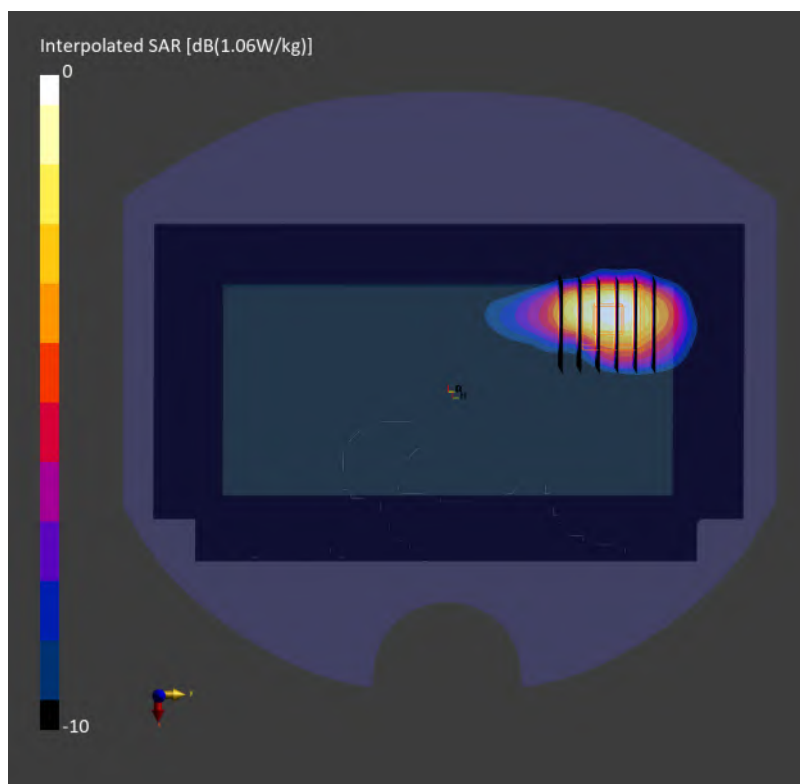

70_LTE Band 66_20M_QPSK_1_0_Back Right_5mm_Ch132322

Communication System: LTE-FDD; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260628 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(7.42, 8.01, 7.32); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.678 W/kg; SAR (10g) = 0.336 W/kg;

TSL Correction: Positive only

Zoom Scan (35.7 mm x 35.7 mm x 31.2 mm): Measurement Grid: 5.1 mm x 5.1 mm x 1.5 mm


Power Drift = -0.08 dB

SAR (1g) = 0.884 W/kg; SAR (8g) = 0.432 W/kg; SAR (10g) = 0.390 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 77.9 %

TSL Correction: Positive only

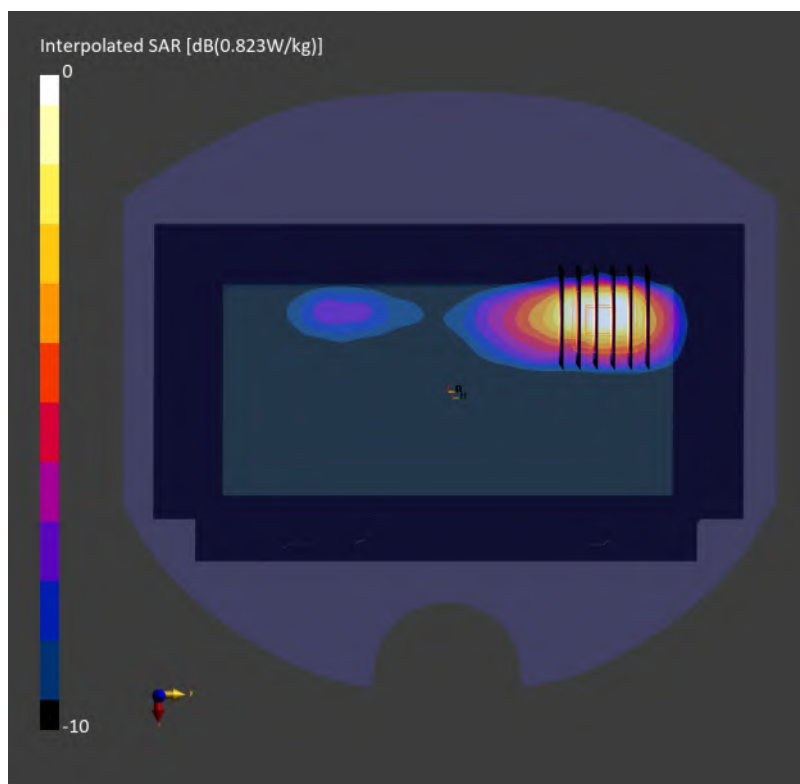

71_LTE Band 41_20M_QPSK_1_0_Back Right_5mm_Ch40185

Communication System: LTE-TDD; Frequency: 2549.500 MHz

Medium: HSL_600-7200_260629 Medium parameters used: $f = 2549.500$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 39.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.73, 7.27, 6.64); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.915 W/kg; SAR (10g) = 0.382 W/kg;

TSL Correction: Positive only

Zoom Scan (38.4 mm x 38.4 mm x 31.2 mm): Measurement Grid: 4.8 mm x 4.8 mm x 1.5 mm


Power Drift = -0.03 dB

SAR (1g) = 1.01 W/kg; SAR (8g) = 0.435 W/kg; SAR (10g) = 0.384 W/kg

Smallest distance from peaks to all points 3 dB below = 5.9 mm

Ratio of SAR at M2 to SAR at M1 = 77.7 %

TSL Correction: Positive only

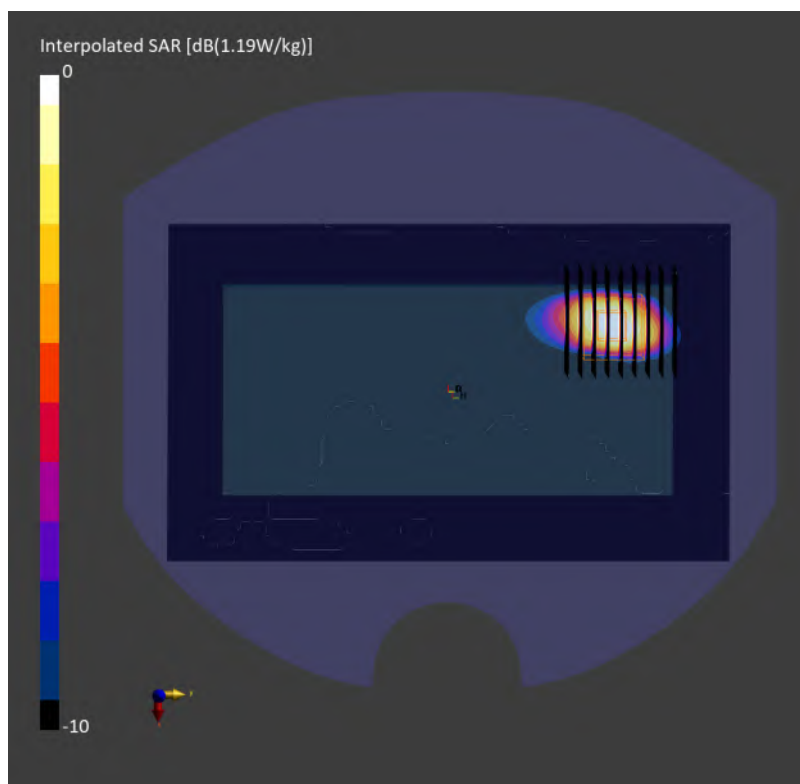

72_LTE Band 42_20M_QPSK_1_0_Back Top_5mm_Ch42590

Communication System: LTE-TDD; Frequency: 3500.000 MHz

Medium: HSL_600-7200_260702 Medium parameters used: $f = 3500.000$ MHz; $\sigma = 2.75$ S/m; $\epsilon_r = 37.9$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.96, 6.44, 5.88); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.753 W/kg; SAR (10g) = 0.266 W/kg;

TSL Correction: Positive only

Zoom Scan (36.8 mm x 36.8 mm x 29.1 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm


Power Drift = -0.00 dB

SAR (1g) = 0.829 W/kg; SAR (8g) = 0.314 W/kg; SAR (10g) = 0.274 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 70.2 %

TSL Correction: Positive only

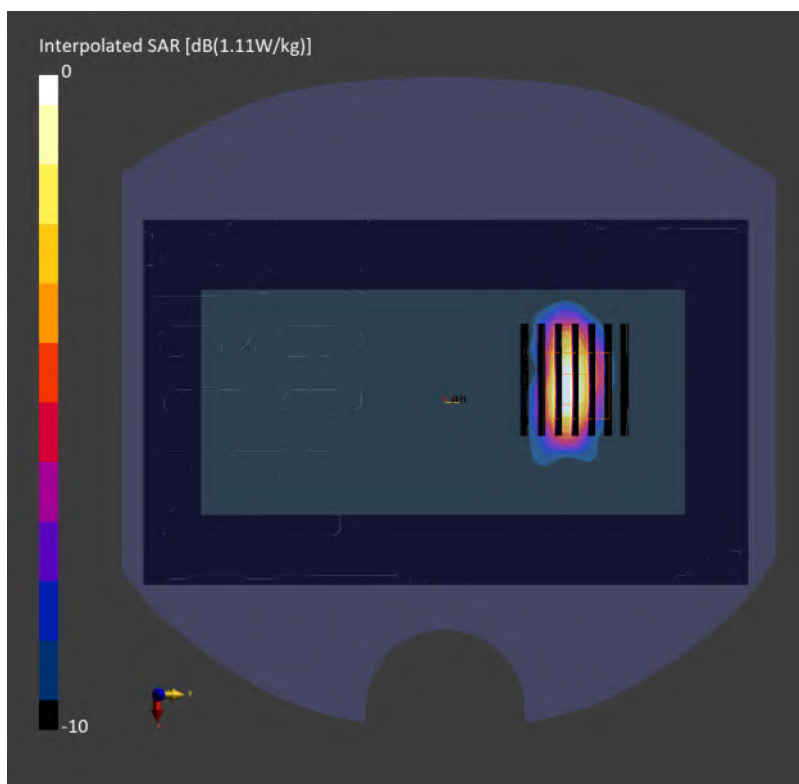

73_FR1 n7_50M_BPSK_135_68_Back Right_5mm_Ch507000

Communication System: 5G NR; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260626 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 41.4$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.66, 6.54, 6.74); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10943-AAD

Area Scan (60.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.661 W/kg; SAR (10g) = 0.279 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.03 dB

SAR (1g) = 0.717 W/kg; SAR (8g) = 0.321 W/kg; SAR (10g) = 0.284 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 78.8 %

TSL Correction: Positive only

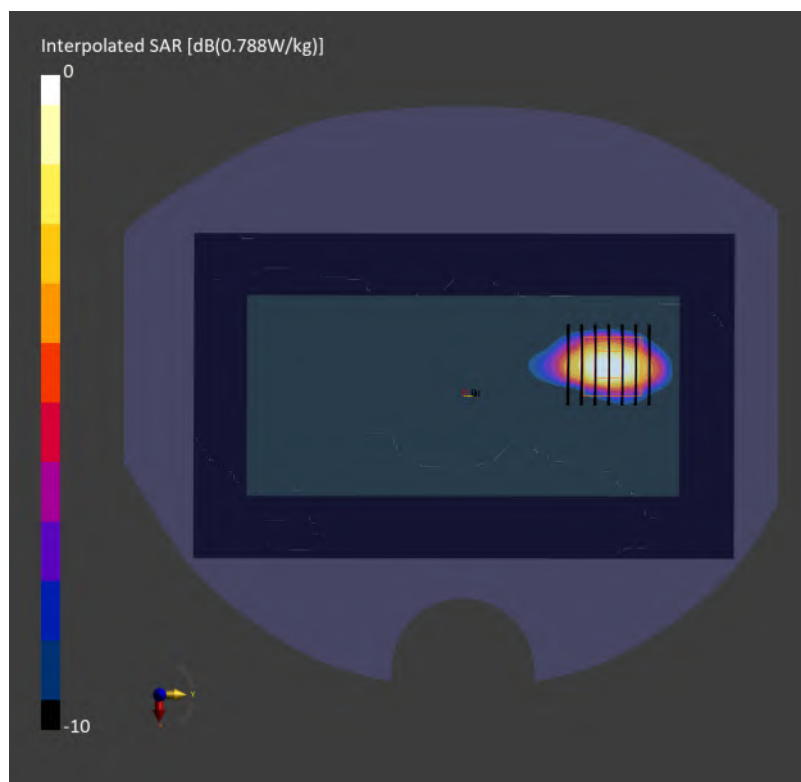

74_FR1 n25_40M_BPSK_1_1_Back Top_5mm_Ch376500

Communication System: 5G NR; Frequency: 1882.500 MHz

Medium: HSL_600-7200_260624 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.25, 7.12, 7.34); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (120.0 mm x 60.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.767 W/kg; SAR (10g) = 0.365 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = -0.05 dB

SAR (1g) = 0.873 W/kg; SAR (8g) = 0.445 W/kg; SAR (10g) = 0.402 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 80.4 %

TSL Correction: Positive only

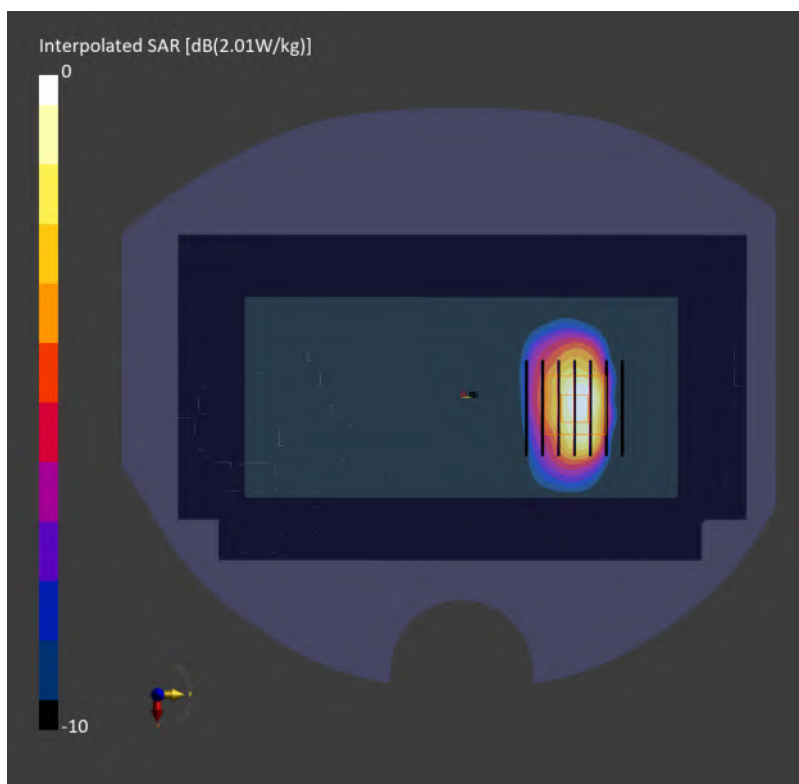

75_FR1 n66_45M_BPSK_120_60_Back Top_5mm_Ch349000

Communication System: 5G NR; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260701 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 41.9$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.44, 7.3, 7.52); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (120.0 mm x 60.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.875 W/kg; SAR (10g) = 0.422 W/kg;

TSL Correction: Positive only

Zoom Scan (33.0 mm x 33.0 mm x 31.2 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm


Power Drift = 0.06 dB

SAR (1g) = 0.962 W/kg; SAR (8g) = 0.486 W/kg; SAR (10g) = 0.439 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 81.7 %

TSL Correction: Positive only

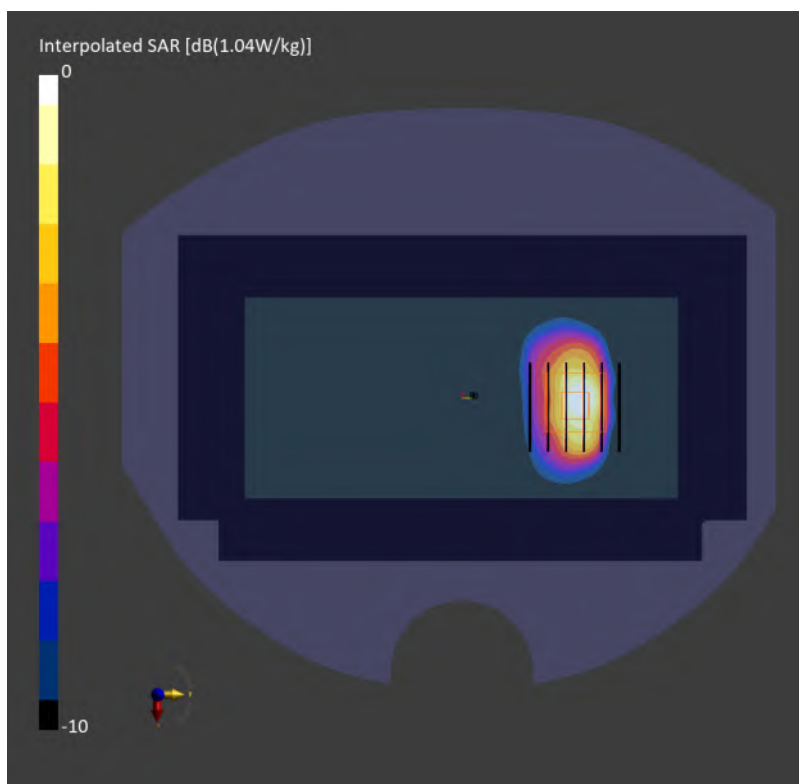

76_FR1 n41_100M_BPSK_1_1_Back Top_5mm_Ch518598

Communication System: 5G NR; Frequency: 2592.990 MHz

Medium: HSL_600-7200_260629 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.73, 7.27, 6.64); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.933 W/kg; SAR (10g) = 0.374 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.959 W/kg; SAR (8g) = 0.435 W/kg; SAR (10g) = 0.387 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 77.1 %

TSL Correction: Positive only

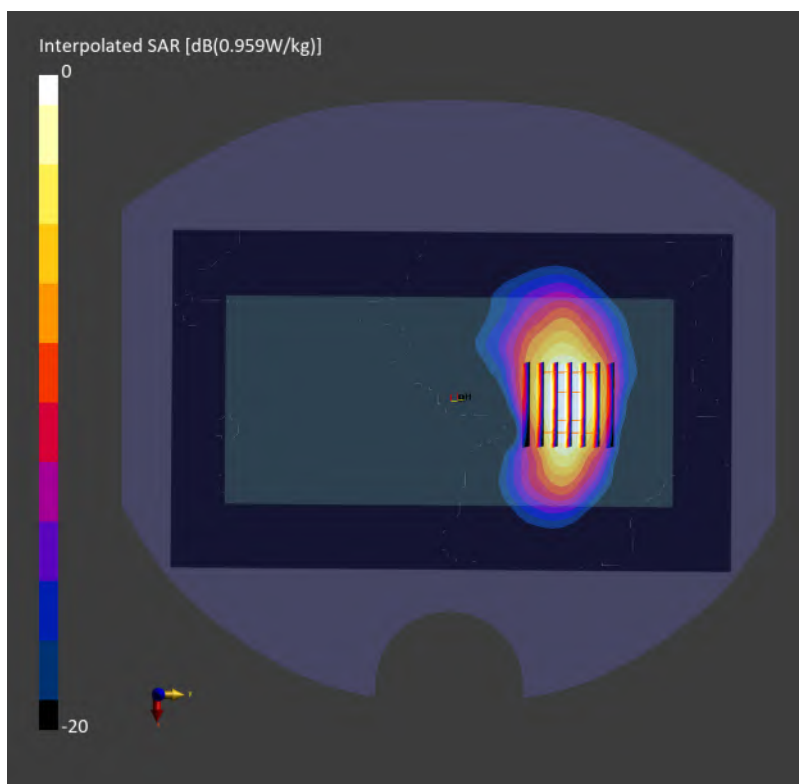

77_FR1 n48_40M_BPSK_50_28_Back Top_5mm_Ch638000

Communication System: 5G NR; Frequency: 3570.000 MHz

Medium: HSL_600-7200_260702 Medium parameters used: $f = 3569.995$ MHz; $\sigma = 2.79$ S/m; $\epsilon_r = 37.6$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.96, 6.44, 5.88); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10913-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.721 W/kg; SAR (10g) = 0.296 W/kg;

TSL Correction: Positive only

Zoom Scan (31.5 mm x 31.5 mm x 29.1 mm): Measurement Grid: 4.5 mm x 4.5 mm x 1.4 mm


Power Drift = -0.11 dB

SAR (1g) = 0.901 W/kg; SAR (8g) = 0.357 W/kg; SAR (10g) = 0.315 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 75.0 %

TSL Correction: Positive only

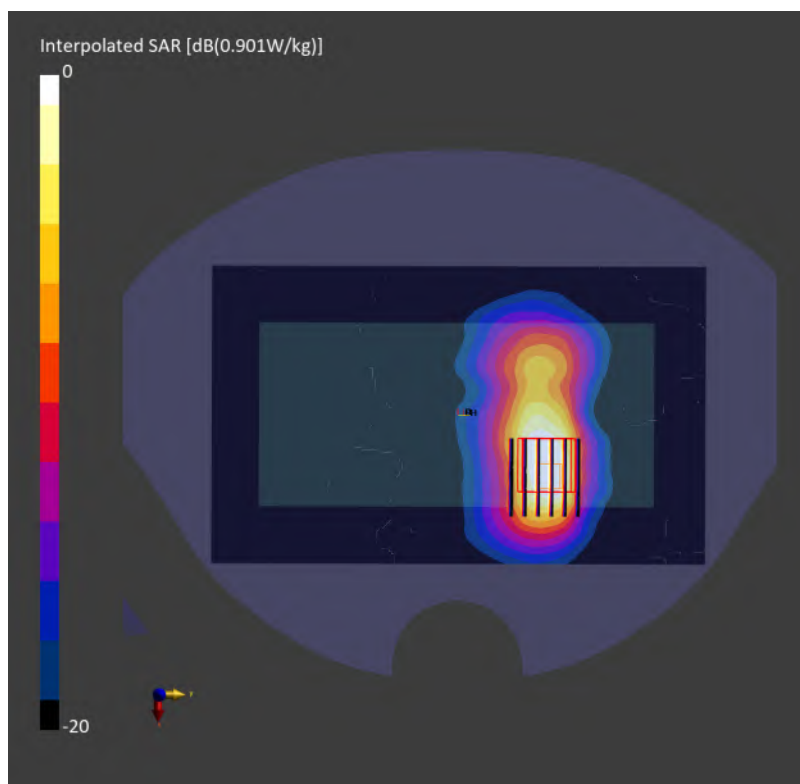

78_FR1 n77_100M_BPSK_1_1_Back Top_5mm_Ch633332

Communication System: 5G NR; Frequency: 3499.980 MHz

Medium: HSL_600-7200_260626 Medium parameters used: $f = 3499.980$ MHz; $\sigma = 2.75$ S/m; $\epsilon_r = 37.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.96, 6.44, 5.88); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (120.0 mm x 60.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.770 W/kg; SAR (10g) = 0.282 W/kg;

TSL Correction: Positive only

Zoom Scan (36.8 mm x 36.8 mm x 29.1 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm


Power Drift = 0.06 dB

SAR (1g) = 0.850 W/kg; SAR (8g) = 0.334 W/kg; SAR (10g) = 0.294 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 75.8 %

TSL Correction: Positive only

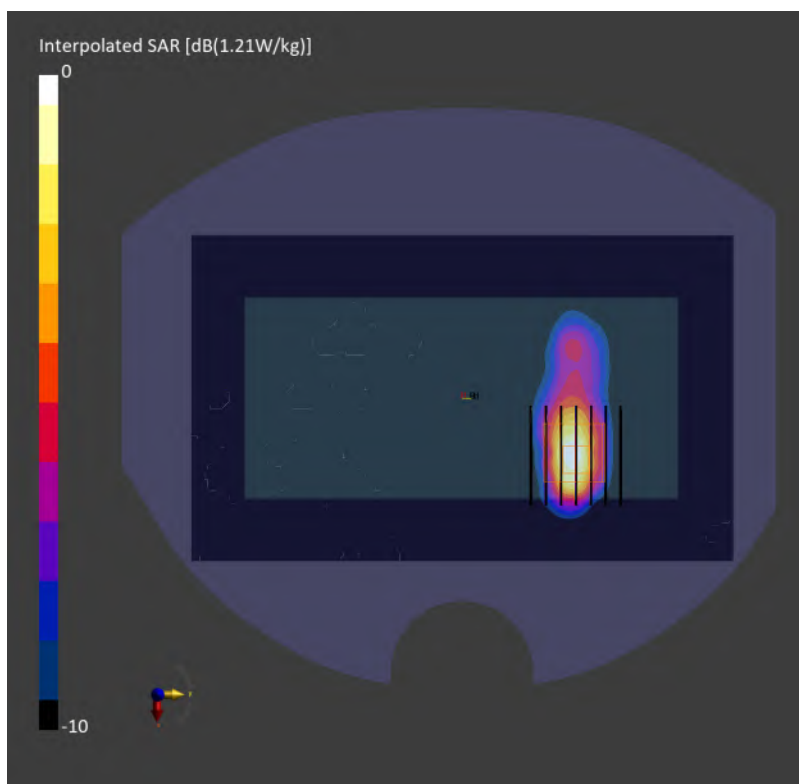

79_LTE Band 71_20M_QPSK_1_0_Back Right_5mm_Ch133297

Communication System: LTE-FDD; Frequency: 680.500 MHz

Medium: HSL_600-7200_260622 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.875$ S/m; $\epsilon_r = 43.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(9.08, 8.91, 9.18); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.161 W/kg; SAR (10g) = 0.091 W/kg;

TSL Correction: Positive only

Zoom Scan (33.0 mm x 33.0 mm x 31.2 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm


Power Drift = -0.05 dB

SAR (1g) = 0.178 W/kg; SAR (8g) = 0.10 W/kg; SAR (10g) = 0.092 W/kg

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 76.5 %

TSL Correction: Positive only

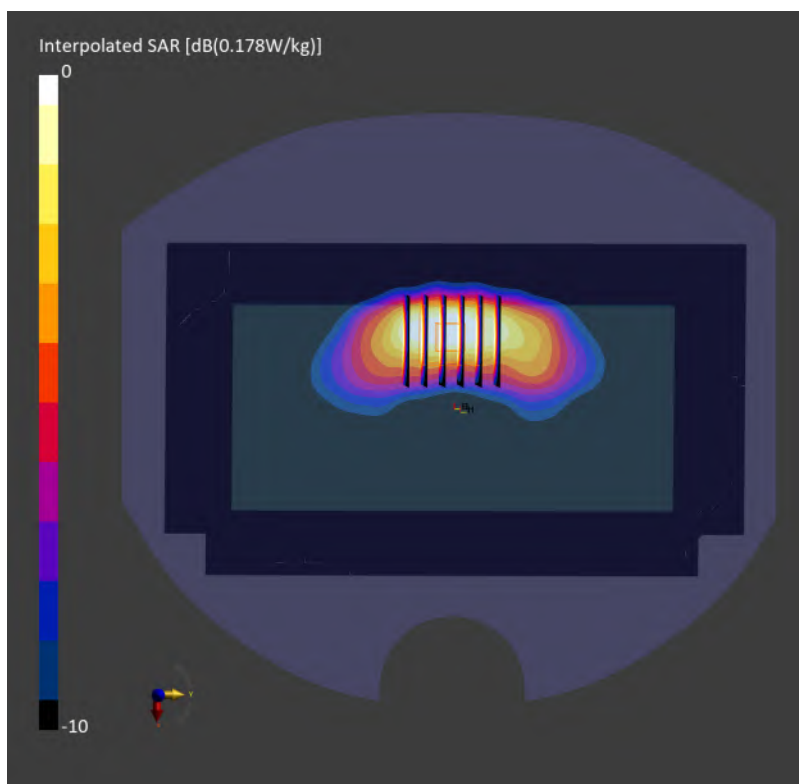

80_LTE Band 12_10M_QPSK_1_0_Back Right_5mm_Ch23095

Communication System: LTE-FDD; Frequency: 707.500 MHz

Medium: HSL_600-7200_260622 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 43.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(9.08, 8.91, 9.18); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.215 W/kg; SAR (10g) = 0.126 W/kg;

TSL Correction: Positive only

Zoom Scan (35.7 mm x 35.7 mm x 31.2 mm): Measurement Grid: 5.1 mm x 5.1 mm x 1.5 mm


Power Drift = 0.16 dB

SAR (1g) = 0.240 W/kg; SAR (8g) = 0.136 W/kg; SAR (10g) = 0.126 W/kg

Smallest distance from peaks to all points 3 dB below = 7.8 mm

Ratio of SAR at M2 to SAR at M1 = 77.5 %

TSL Correction: Positive only

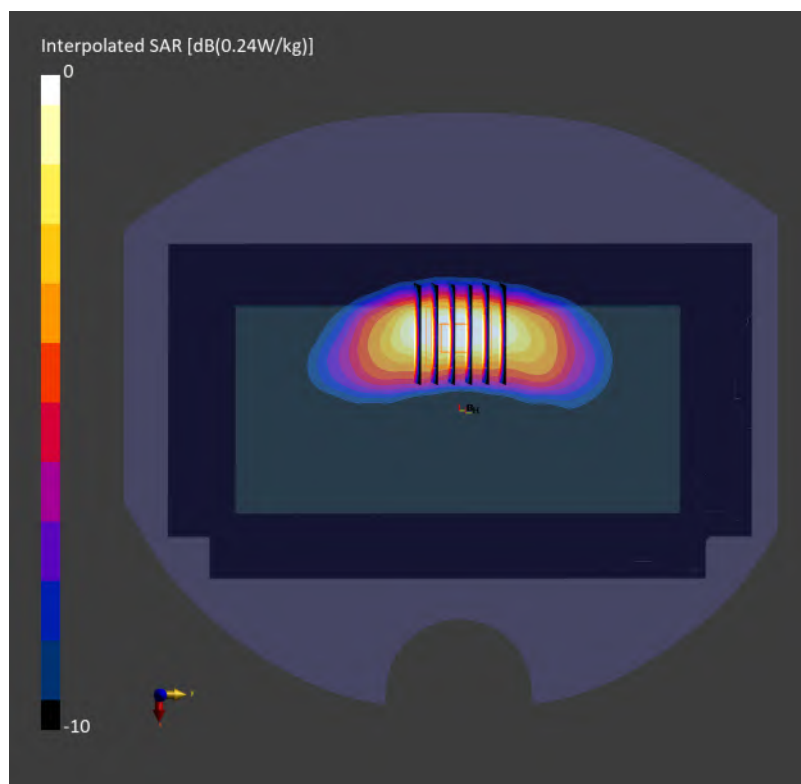

81_LTE Band 13_10M_QPSK_1_0_Back Right_5mm_Ch23230

Communication System: LTE-FDD; Frequency: 782.000 MHz

Medium: HSL_600-7200_260622 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(9.08, 8.91, 9.18); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.240 W/kg; SAR (10g) = 0.142 W/kg;

TSL Correction: Positive only

Zoom Scan (33.0 mm x 33.0 mm x 31.2 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm


Power Drift = 0.15 dB

SAR (1g) = 0.258 W/kg; SAR (8g) = 0.149 W/kg; SAR (10g) = 0.138 W/kg

Smallest distance from peaks to all points 3 dB below = 7.8 mm

Ratio of SAR at M2 to SAR at M1 = 79.0 %

TSL Correction: Positive only

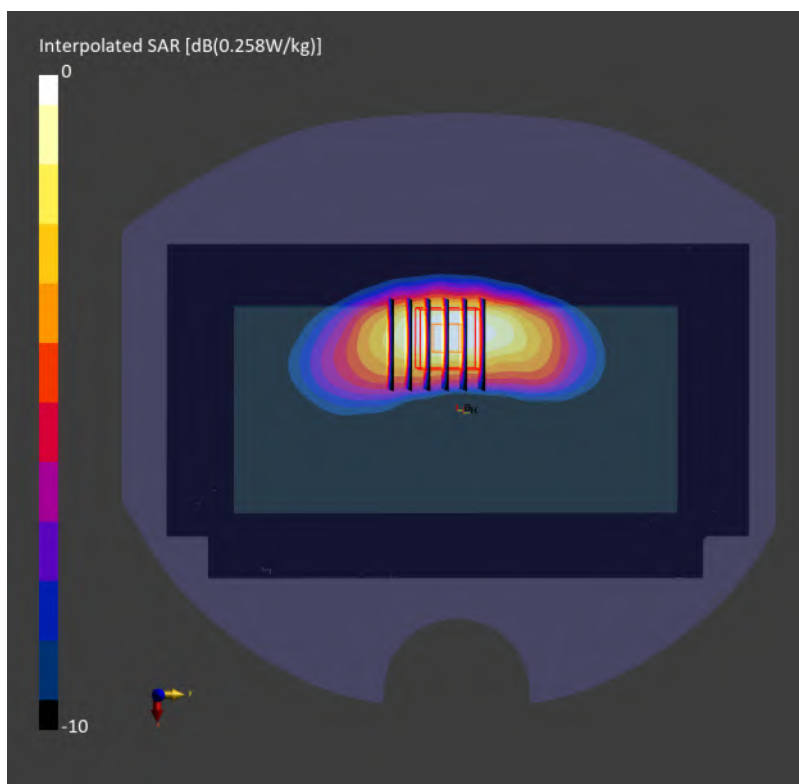

82_LTE Band 14_10M_QPSK_1_0_Back Right_5mm_Ch23330

Communication System: LTE-FDD; Frequency: 793.000 MHz

Medium: HSL_600-7200_260618 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.891$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.9, 9.61, 8.78); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.230 W/kg; SAR (10g) = 0.135 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = 0.12 dB

SAR (1g) = 0.265 W/kg; SAR (8g) = 0.151 W/kg; SAR (10g) = 0.139 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 78.4 %

TSL Correction: Positive only

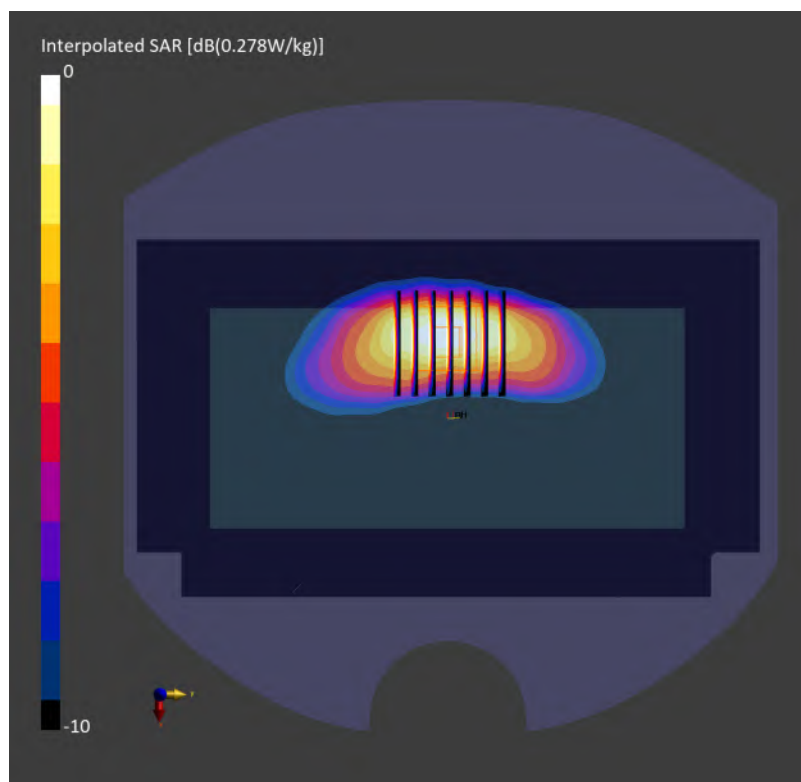

83_FR1 n71_35M_BPSK_90_45_Back Right_5mm_Ch136100

Communication System: 5G NR; Frequency: 680.500 MHz

Medium: HSL_600-7200_260627 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.869$ S/m; $\epsilon_r = 42.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.9, 9.61, 8.78); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.259 W/kg; SAR (10g) = 0.142 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = -0.15 dB

SAR (1g) = 0.256 W/kg; SAR (8g) = 0.142 W/kg; SAR (10g) = 0.131 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 77.3 %

TSL Correction: Positive only

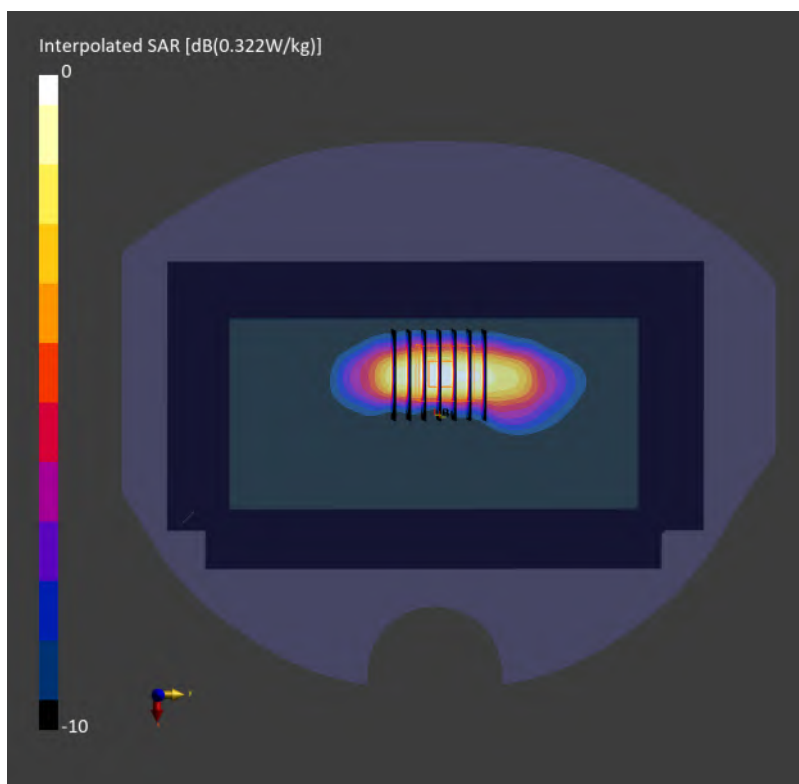

84_FR1 n12_15M_BPSK_36_22_Back Right_5mm_Ch141500

Communication System: 5G NR; Frequency: 707.500 MHz

Medium: HSL_600-7200_260627 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.881$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.9, 9.61, 8.78); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10938-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.247 W/kg; SAR (10g) = 0.137 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = -0.10 dB

SAR (1g) = 0.250 W/kg; SAR (8g) = 0.141 W/kg; SAR (10g) = 0.130 W/kg

Smallest distance from peaks to all points 3 dB below = 8.3 mm

Ratio of SAR at M2 to SAR at M1 = 78.8 %

TSL Correction: Positive only

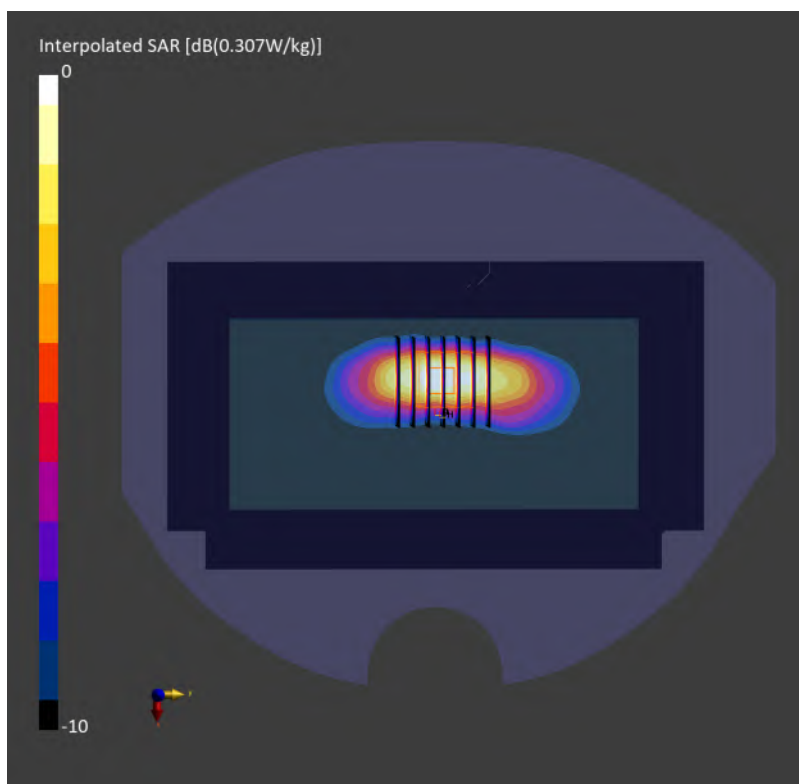

85_FR1 13_10M_BPSK_25_14_Back Right_5mm_Ch156400

Communication System: 5G NR; Frequency: 782.000 MHz

Medium: HSL_600-7200_260618 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 42.3$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(9.08, 8.91, 9.18); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (60.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.285 W/kg; SAR (10g) = 0.163 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.04 dB

SAR (1g) = 0.281 W/kg; SAR (8g) = 0.165 W/kg; SAR (10g) = 0.153 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 80.9 %

TSL Correction: Positive only

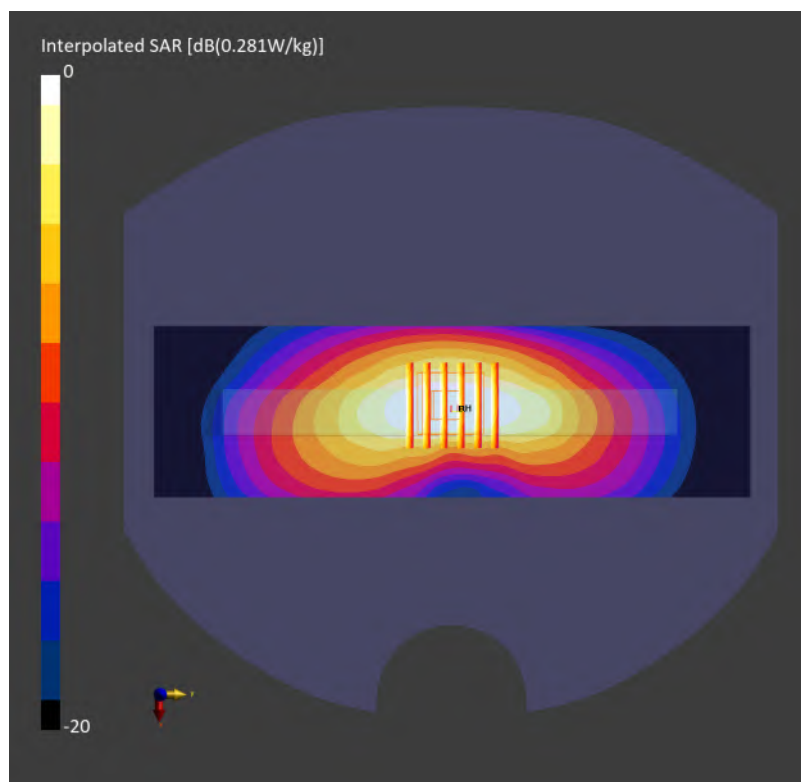

86_FR1 n14_10M_BPSK_1_1_Back Right_5mm_Ch158600

Communication System: 5G NR; Frequency: 793.000 MHz

Medium: HSL_600-7200_260618 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.891$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.9, 9.61, 8.78); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10937-AAD

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.242 W/kg; SAR (10g) = 0.141 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = -0.04 dB

SAR (1g) = 0.277 W/kg; SAR (8g) = 0.156 W/kg; SAR (10g) = 0.144 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 78.5 %

TSL Correction: Positive only

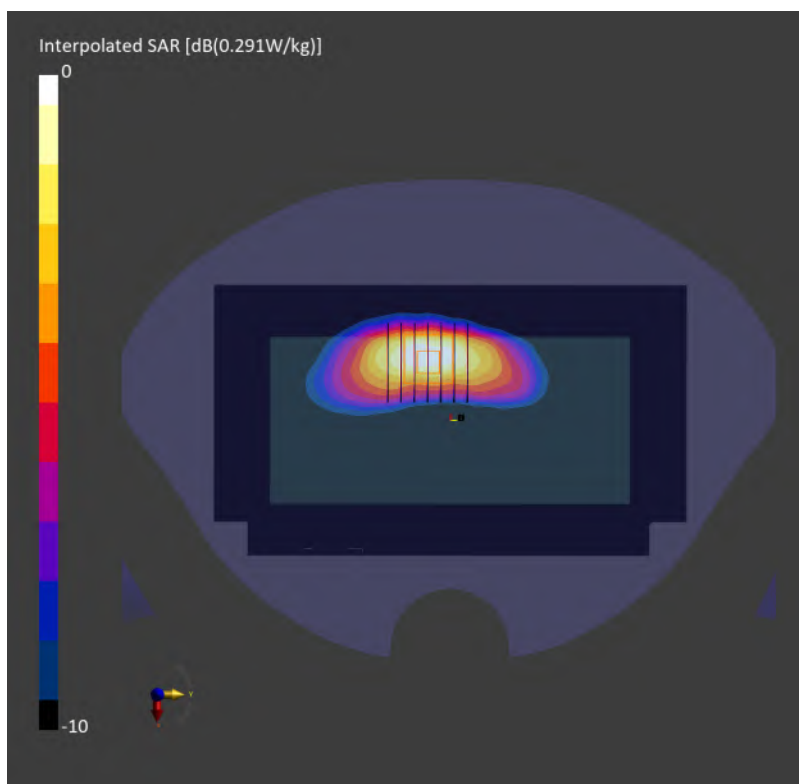

87_GSM850_GPRS 4 Tx slots_Back Right_5mm_Ch189

Communication System: GPRS-FDD; Frequency: 836.400 MHz

Medium: HSL_600-7200_260627 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 42.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.74, 9.44, 8.62); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (180.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.144 W/kg; SAR (10g) = 0.083 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = -0.10 dB

SAR (1g) = 0.159 W/kg; SAR (8g) = 0.087 W/kg; SAR (10g) = 0.080 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 78.4 %

TSL Correction: Positive only

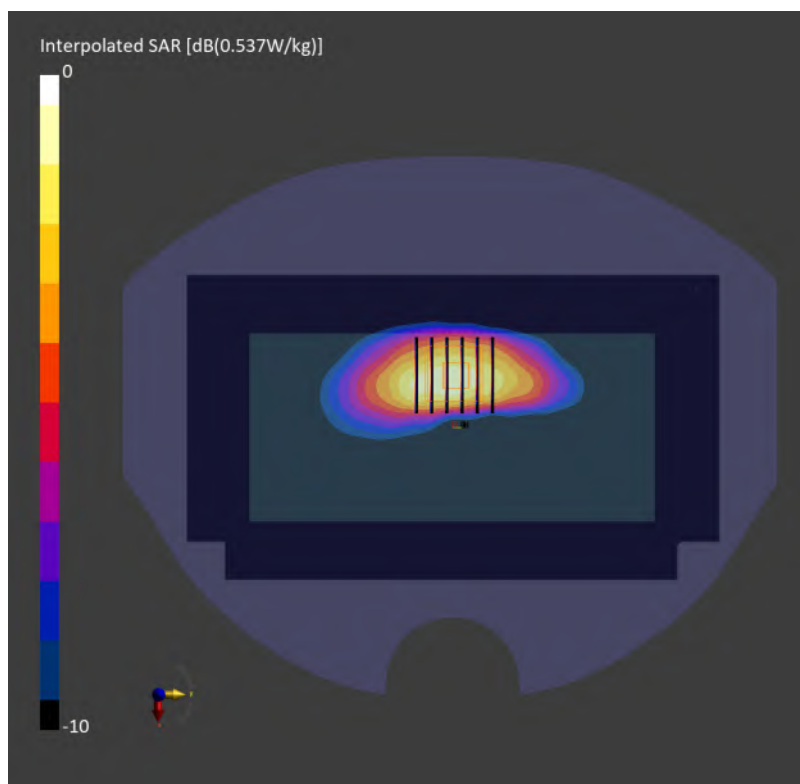

88_WCDMA V_RMC 12.2Kbps_Back Right_5mm_Ch4182

Communication System: UMTS-FDD; Frequency: 836.400 MHz

Medium: HSL_600-7200_260627 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 42.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.74, 9.44, 8.62); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (180.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.222 W/kg; SAR (10g) = 0.129 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.13 dB

SAR (1g) = 0.243 W/kg; SAR (8g) = 0.137 W/kg; SAR (10g) = 0.126 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 82.3 %

TSL Correction: Positive only

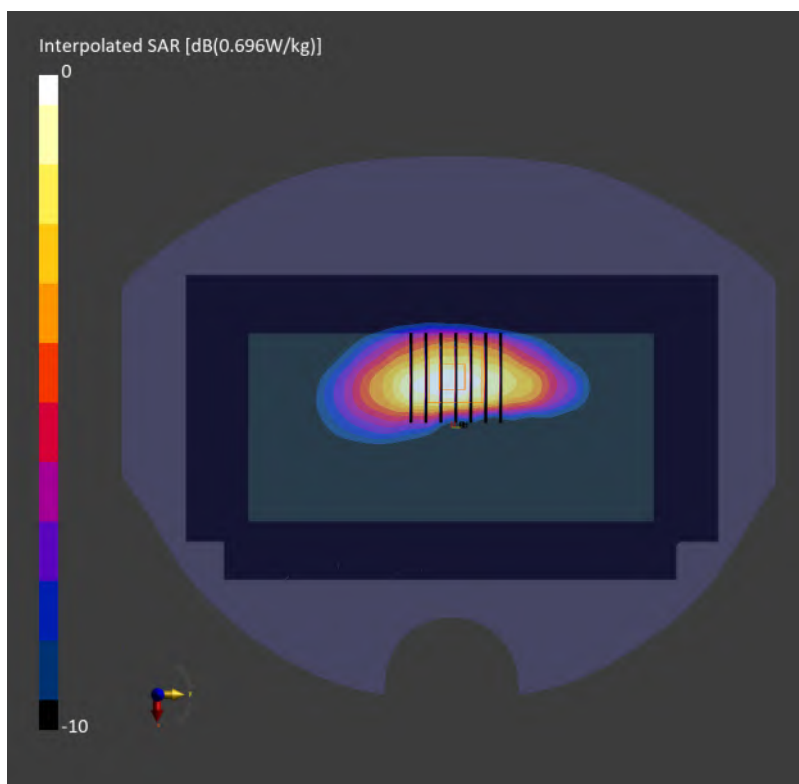

89_LTE Band 26_15M_QPSK_1_0_Back Right_5mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz

Medium: HSL_600-7200_260622 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.944$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(8.84, 8.67, 8.94); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.229 W/kg; SAR (10g) = 0.132 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = -0.13 dB

SAR (1g) = 0.238 W/kg; SAR (8g) = 0.133 W/kg; SAR (10g) = 0.122 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 75.6 %

TSL Correction: Positive only

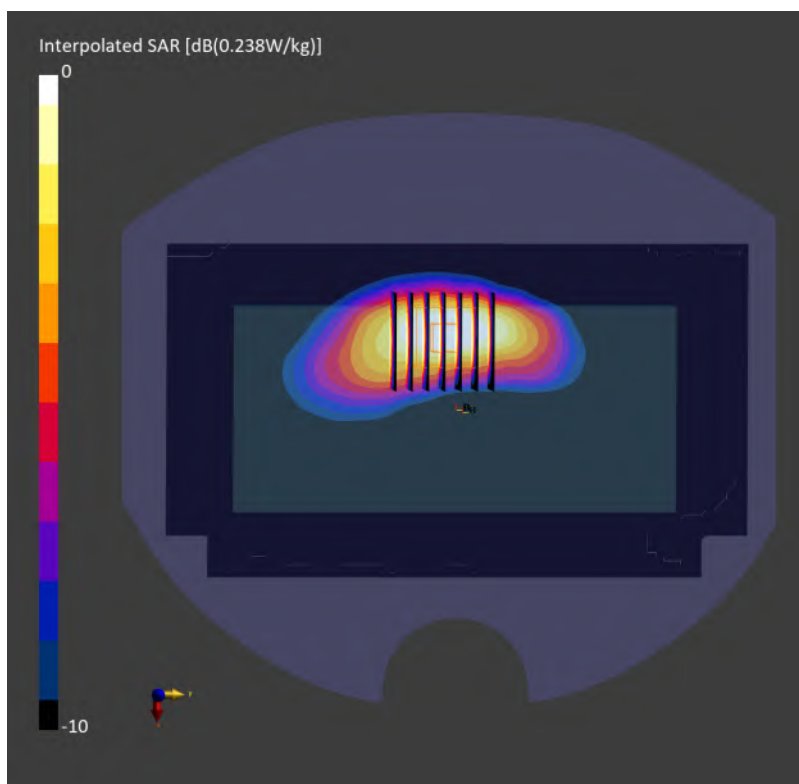

90_FR1 n26_20M_BPSK_1_1_Back Right_5mm_Ch166300

Communication System: 5G NR; Frequency: 831.500 MHz

Medium: HSL_600-7200_260627 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.74, 9.44, 8.62); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10939-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.178 W/kg; SAR (10g) = 0.106 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.17 dB

SAR (1g) = 0.215 W/kg; SAR (8g) = 0.121 W/kg; SAR (10g) = 0.111 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 78.8 %

TSL Correction: Positive only

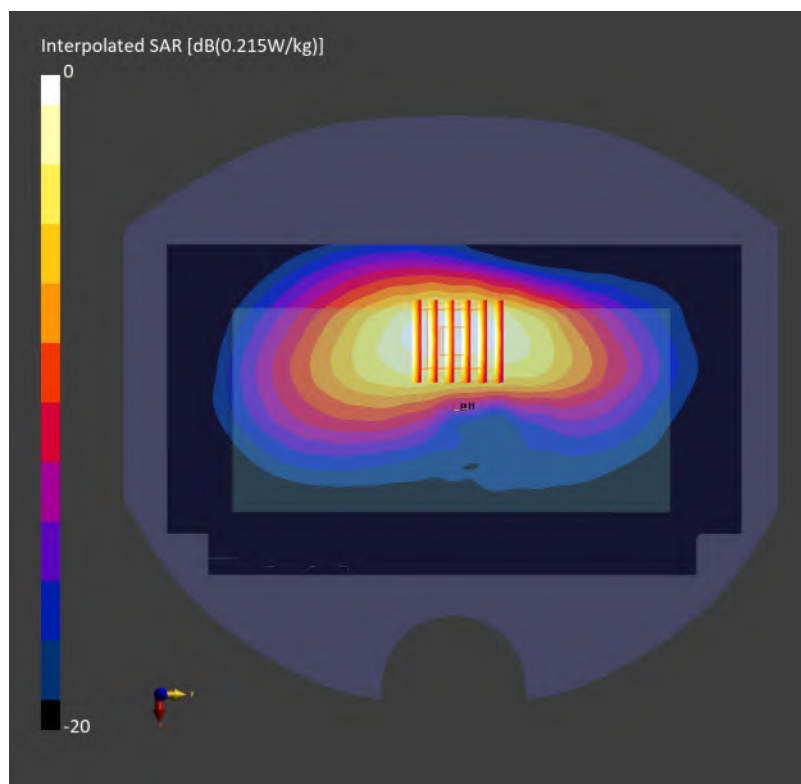

91_WLAN2.4GHz_802.11b 1Mbps_Back Top_5mm_Ch11

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2462.000 MHz

Medium: HSL_600-7200_260701 Medium parameters used: $f = 2462.000$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 39.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.56, 7.09, 6.47); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10315-AAB

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.490 W/kg; SAR (10g) = 0.255 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.04 dB

SAR (1g) = 0.562 W/kg; SAR (8g) = 0.282 W/kg; SAR (10g) = 0.257 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 81.5 %

TSL Correction: Positive only

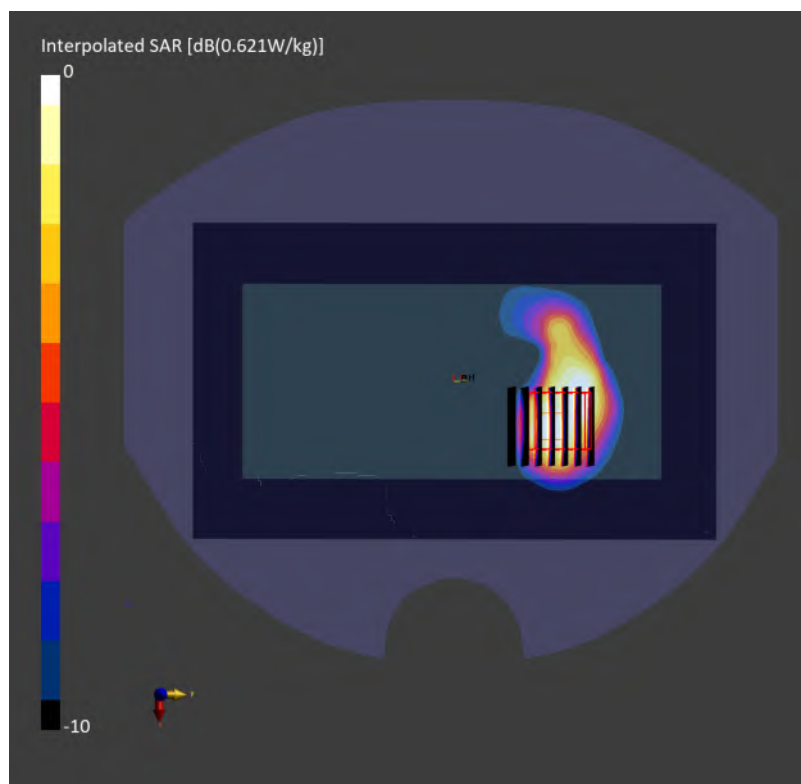

92_WLAN5GHz_802.11ac-VHT160 MCS0_Back Right_5mm_Ch50

Communication System: IEEE 802.11ac WiFi; Frequency: 5250.000 MHz

Medium: HSL_600-7200_260701 Medium parameters used: $f = 5250.000$ MHz; $\sigma = 4.50$ S/m; $\epsilon_r = 34.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.03, 5.43, 4.96); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10554-AAE

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.633 W/kg; SAR (10g) = 0.208 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.11 dB

SAR (1g) = 0.339 W/kg; SAR (8g) = 0.109 W/kg; SAR (10g) = 0.093 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 64.3 %

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.11 dB

SAR (1g) = 0.825 W/kg; SAR (8g) = 0.263 W/kg; SAR (10g) = 0.226 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 64.3 %

TSL Correction: Positive only

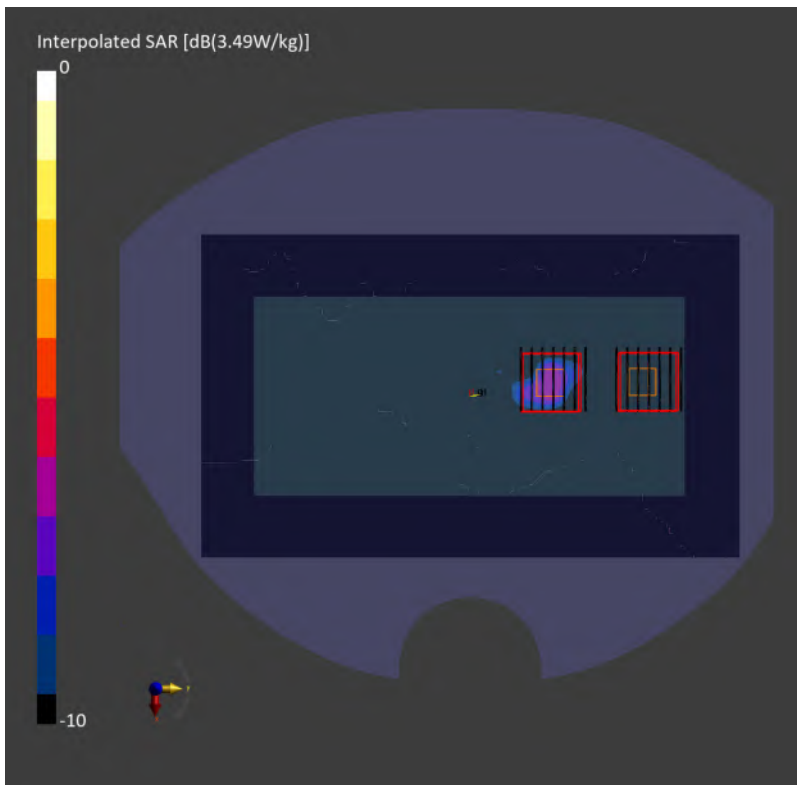

93_WLAN5GHz_802.11ac-VHT160 MCS0_Back Top_5mm_Ch114

Communication System: IEEE 802.11ac WiFi; Frequency: 5570.000 MHz

Medium: HSL_600-7200_260701 Medium parameters used: $f = 5570.000$ MHz; $\sigma = 4.84$ S/m; $\epsilon_r = 34.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(4.61, 4.98, 4.54); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10554-AAE

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.664 W/kg; SAR (10g) = 0.211 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.03 dB

SAR (1g) = 0.827 W/kg; SAR (8g) = 0.263 W/kg; SAR (10g) = 0.226 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 59.7 %

TSL Correction: Positive only

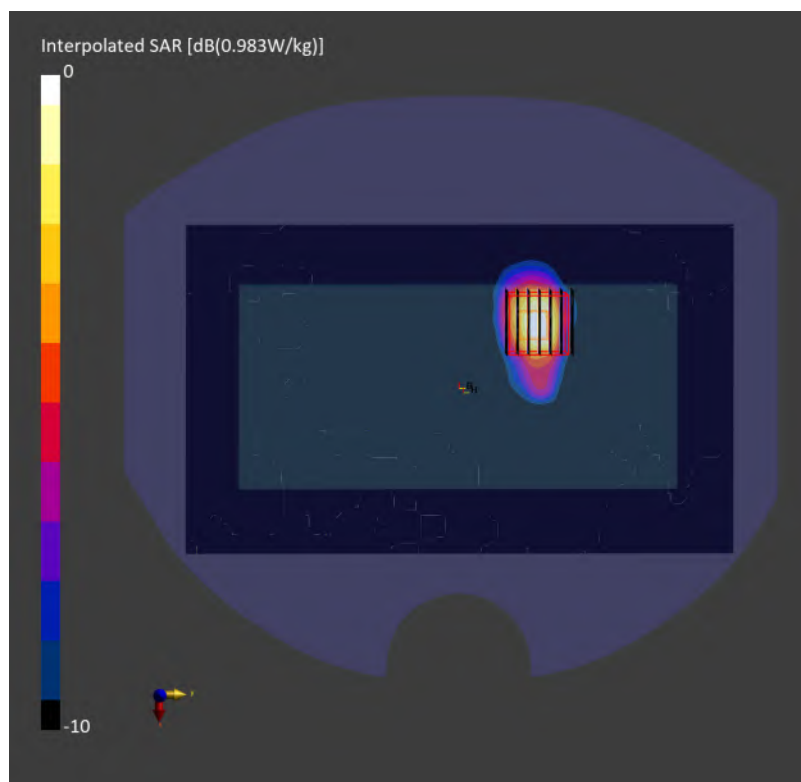

94_WLAN5GHz_802.11ac-VHT80 MCS0_Back Right_5mm_Ch155

Communication System: IEEE 802.11ac WiFi; Frequency: 5775.000 MHz

Medium: HSL_600-7200_260701 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.06$ S/m; $\epsilon_r = 33.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(4.54, 4.9, 4.48); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.402 W/kg; SAR (10g) = 0.138 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm

Power Drift = -0.01 dB

SAR (1g) = 0.144 W/kg; SAR (8g) = 0.064 W/kg; SAR (10g) = 0.058 W/kg

Smallest distance from peaks to all points 3 dB below = 18.9 mm

Ratio of SAR at M2 to SAR at M1 = 61.2 %

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.01 dB

SAR (1g) = 0.447 W/kg; SAR (8g) = 0.168 W/kg; SAR (10g) = 0.147 W/kg

Smallest distance from peaks to all points 3 dB below = 18.9 mm

Ratio of SAR at M2 to SAR at M1 = 61.2 %

TSL Correction: Positive only

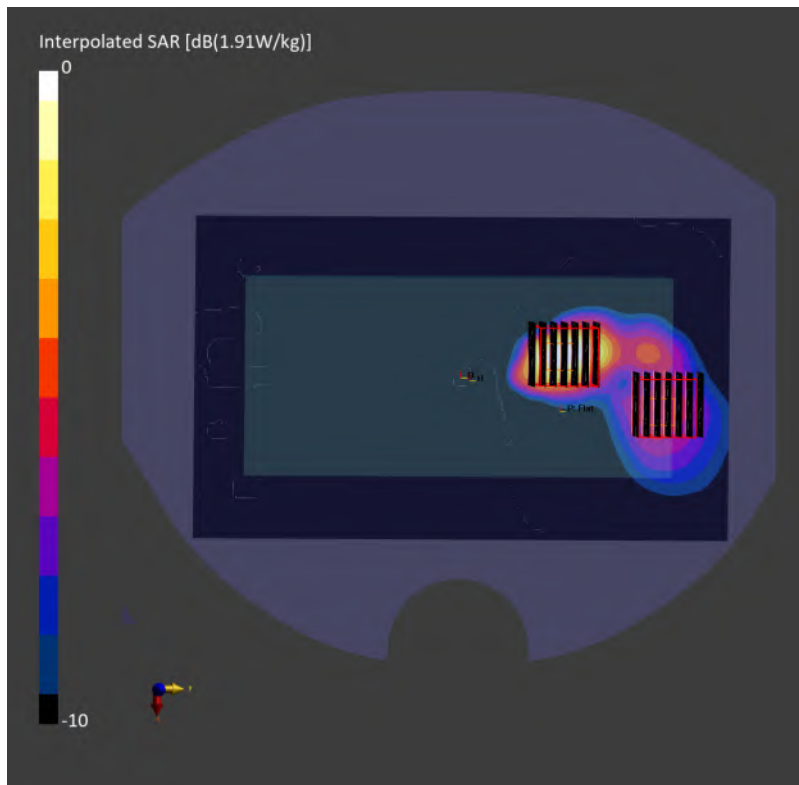

95_Bluetooth_1Mbps_Back Top_5mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2441.000 MHz

Medium: HSL_600-7200_260702 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.79, 6.67, 6.87); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (120.0 mm x 60.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.155 W/kg; SAR (10g) = 0.063 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.19 dB

SAR (1g) = 0.157 W/kg; SAR (8g) = 0.068 W/kg; SAR (10g) = 0.060 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 75.8 %

TSL Correction: Positive only

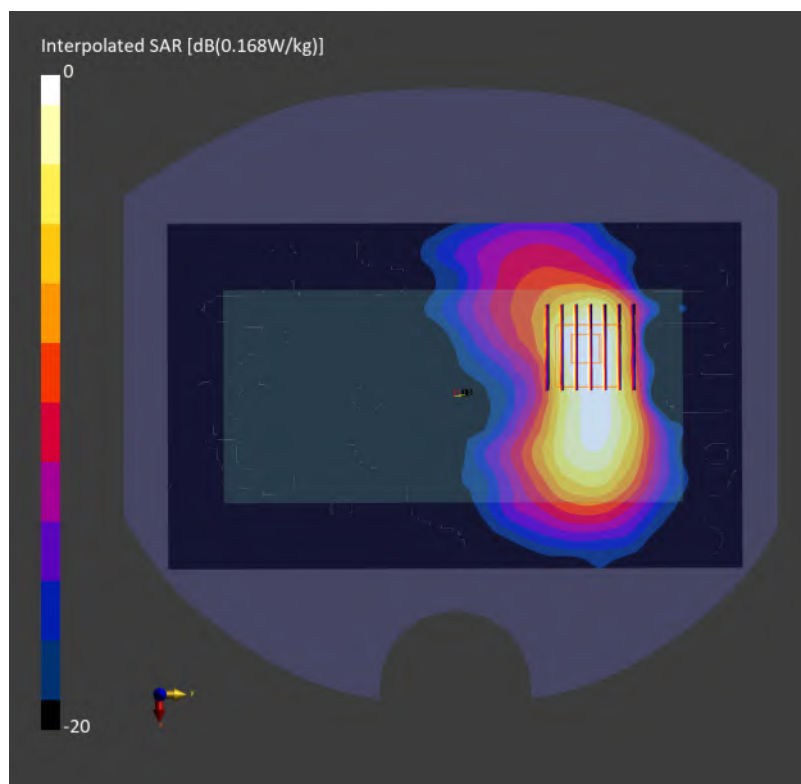

96_WLAN6GHz_802.11be-EHT320 MCS0_Back Top_5mm_Ch159

Communication System: IEEE 802.11be; Frequency: 6745.000 MHz

Medium: HSL_600-7200_260703 Medium parameters used: $f = 6745.000$ MHz; $\sigma = 6.20$ S/m; $\epsilon_r = 32.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(4.76, 5.14, 4.7); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 11026-AAB

Area Scan (119.0 mm x 204.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.287 W/kg; SAR (10g) = 0.081 W/kg;

TSL Correction: Positive only

Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.05 dB


SAR (1g) = 0.400 W/kg; SAR (8g) = 0.111 W/kg; SAR (10g) = 0.094 W/kg

Smallest distance from peaks to all points 3 dB below = 5.5 mm

Ratio of SAR at M2 to SAR at M1 = 50.3 %

psAPD (1.0cm², sq) = 4.00 [W/m²]; psAPD (4.0cm², sq) = 2.23 [W/m²]

TSL Correction: Positive only

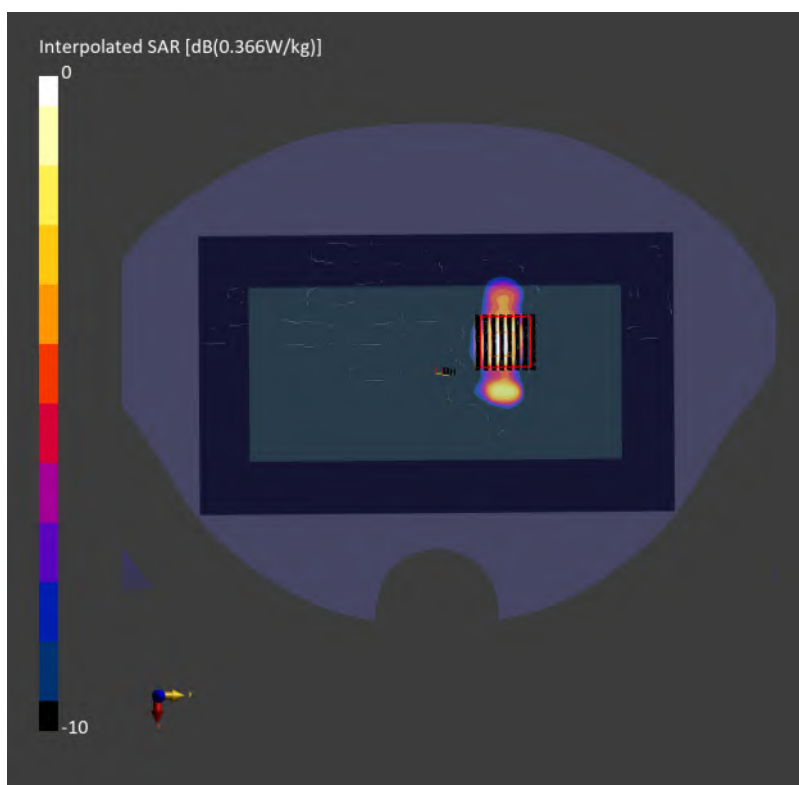

97_LTE Band 43_20M_QPSK_1_0_Back_5mm_Ch43690

Communication System: LTE-TDD; Frequency: 3610.000 MHz

Medium: HSL_600-7200_260625 Medium parameters used: $f = 3610.000$ MHz; $\sigma = 2.82$ S/m; $\epsilon_r = 40.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.88, 6.35, 5.8); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.702 W/kg; SAR (10g) = 0.269 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.02 dB

SAR (1g) = 0.818 W/kg; SAR (8g) = 0.324 W/kg; SAR (10g) = 0.285 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 75.1 %

TSL Correction: Positive only

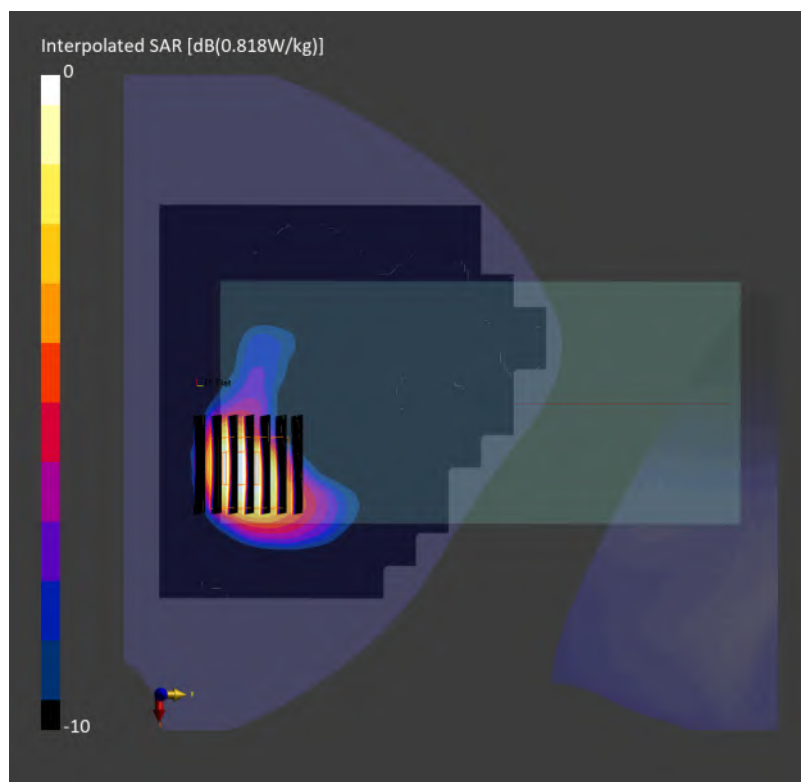

98_LTE Band 48_20M_QPSK_1_0_Back_5mm_Ch55340

Communication System: LTE-TDD; Frequency: 3560.000 MHz

Medium: HSL_600-7200_260619 Medium parameters used: $f = 3560.000$ MHz; $\sigma = 2.85$ S/m; $\epsilon_r = 39.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.96, 6.44, 5.88); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.885 W/kg; SAR (10g) = 0.317 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.19 dB

SAR (1g) = 0.905 W/kg; SAR (8g) = 0.366 W/kg; SAR (10g) = 0.322 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 74.1 %

TSL Correction: Positive only

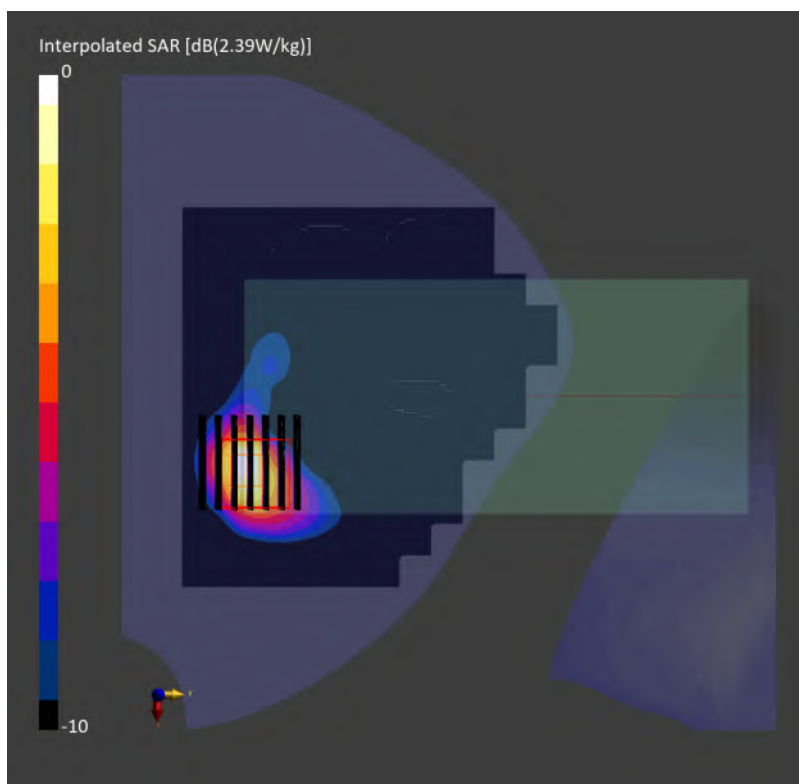

99_GSM1900_GPRS 4 Tx slots_Back Top_0mm_Ch661

Communication System: GPRS-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260701 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 41.7$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.25, 7.12, 7.34); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (180.0 mm x 60.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.901 W/kg; SAR (10g) = 0.387 W/kg;

TSL Correction: Positive only

Zoom Scan (31.9 mm x 31.9 mm x 31.2 mm): Measurement Grid: 2.9 mm x 2.9 mm x 1.2 mm


Power Drift = 0.02 dB

SAR (1g) = 0.918 W/kg; SAR (8g) = 0.388 W/kg; SAR (10g) = 0.346 W/kg

Smallest distance from peaks to all points 3 dB below = 4.3 mm

Ratio of SAR at M2 to SAR at M1 = 73.9 %

TSL Correction: Positive only

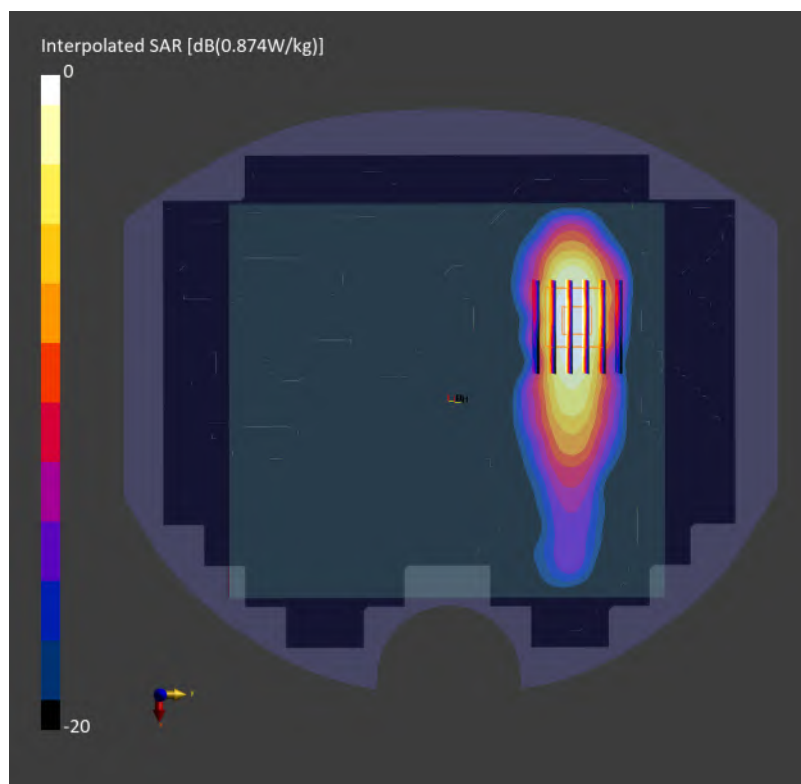

100_WCDMA II_RMC 12.2Kbps_Top Side_0mm_Ch9400

Communication System: UMTS-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260627 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 43.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.64, 8.14, 7.69); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.662 W/kg; SAR (10g) = 0.289 W/kg;

TSL Correction: Positive only

Zoom Scan (31.9 mm x 31.9 mm x 31.2 mm): Measurement Grid: 2.9 mm x 2.9 mm x 1.2 mm


Power Drift = -0.01 dB

SAR (1g) = 0.829 W/kg; SAR (8g) = 0.333 W/kg; SAR (10g) = 0.296 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 63.9 %

TSL Correction: Positive only

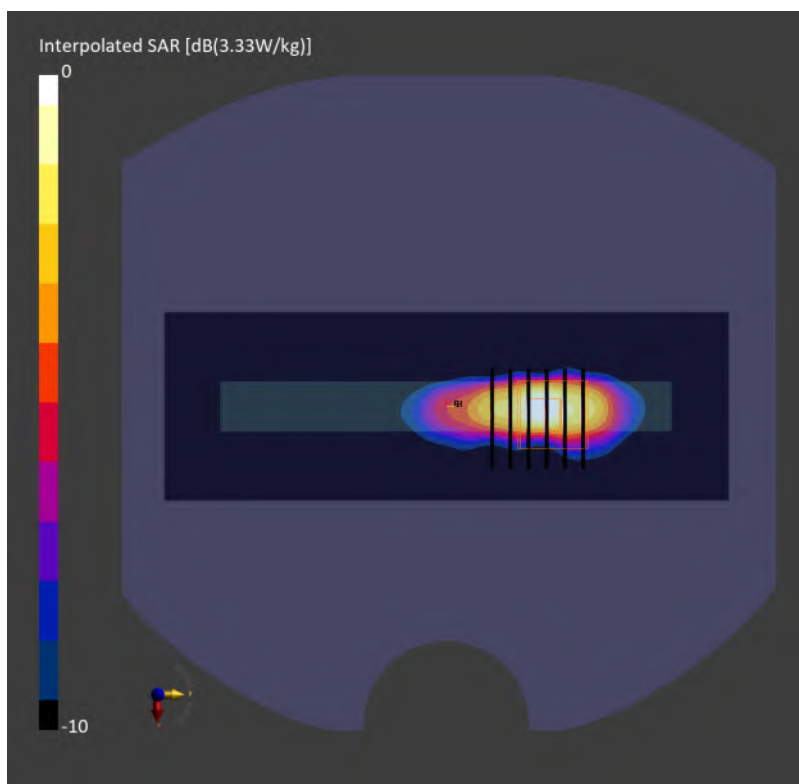

101_WCDMA IV_RMC 12.2Kbps_Top Side_0mm_Ch1413

Communication System: UMTS-FDD; Frequency: 1732.600 MHz

Medium: HSL_600-7200_260626 Medium parameters used: $f = 1732.600$ MHz; $\sigma = 1.31$ S/m; $\epsilon_r = 42.0$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.89, 8.41, 7.94); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144_Gap; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.774 W/kg; SAR (10g) = 0.337 W/kg;

TSL Correction: Positive only

Zoom Scan (31.9 mm x 31.9 mm x 31.2 mm): Measurement Grid: 2.9 mm x 2.9 mm x 1.2 mm


Power Drift = -0.02 dB

SAR (1g) = 0.962 W/kg; SAR (8g) = 0.378 W/kg; SAR (10g) = 0.336 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 66.6 %

TSL Correction: Positive only

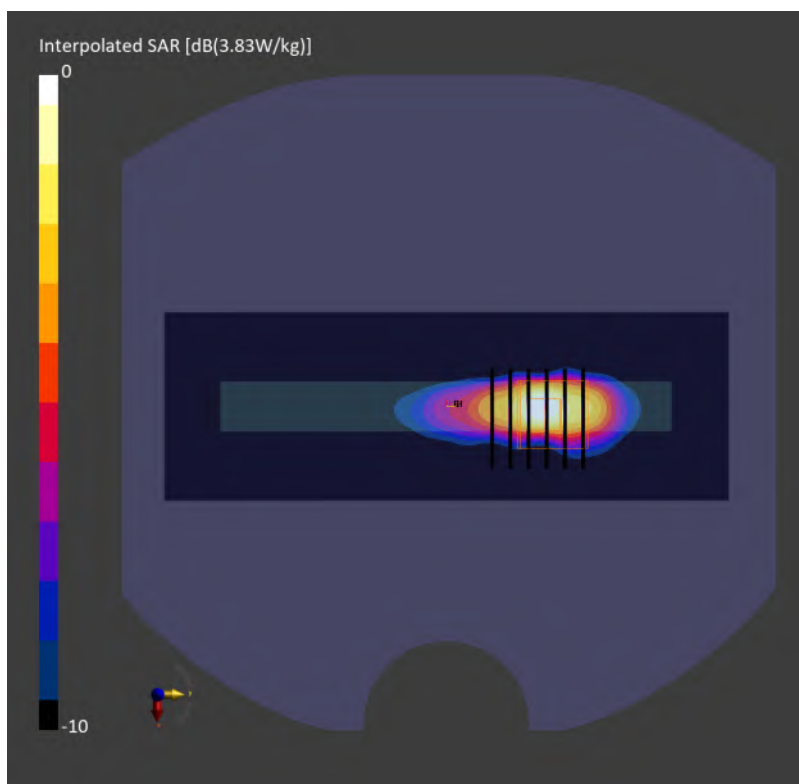

102_LTE Band 7_20M_QPSK_1_0_Top Side_0mm_Ch21350

Communication System: LTE-FDD; Frequency: 2560.000 MHz

Medium: HSL_600-7200_260626 Medium parameters used: $f = 2560.000$ MHz; $\sigma = 1.96$ S/m; $\epsilon_r = 41.3$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.66, 6.54, 6.74); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.944 W/kg; SAR (10g) = 0.350 W/kg;

TSL Correction: Positive only

Zoom Scan (36.0 mm x 36.0 mm x 33.4 mm): Measurement Grid: 3.6 mm x 3.6 mm x 1.4 mm


Power Drift = -0.07 dB

SAR (1g) = 1.03 W/kg; SAR (8g) = 0.397 W/kg; SAR (10g) = 0.347 W/kg

Smallest distance from peaks to all points 3 dB below = 4.4 mm

Ratio of SAR at M2 to SAR at M1 = 70.0 %

TSL Correction: Positive only

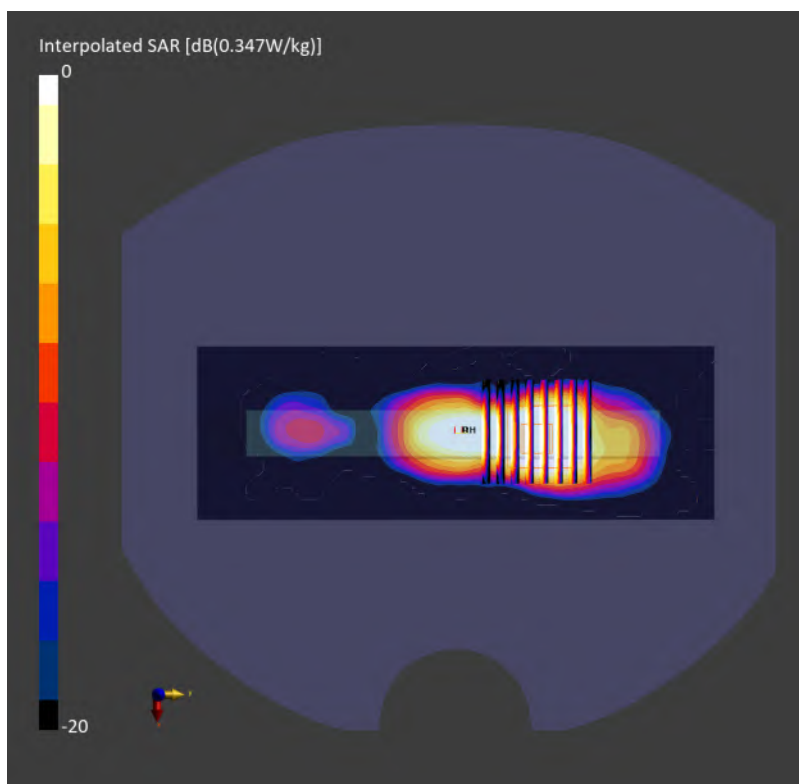

103_LTE Band 25_20M_QPSK_1_0_Top Side_0mm_Ch26140

Communication System: LTE-FDD; Frequency: 1860.000 MHz

Medium: HSL_600-7200_260627 Medium parameters used: $f = 1860.000$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.25, 7.12, 7.34); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.906 W/kg; SAR (10g) = 0.392 W/kg;

TSL Correction: Positive only

Zoom Scan (34.2 mm x 34.2 mm x 33.4 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm


Power Drift = -0.04 dB

SAR (1g) = 0.907 W/kg; SAR (8g) = 0.378 W/kg; SAR (10g) = 0.336 W/kg

Smallest distance from peaks to all points 3 dB below = 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 68.4 %

TSL Correction: Positive only

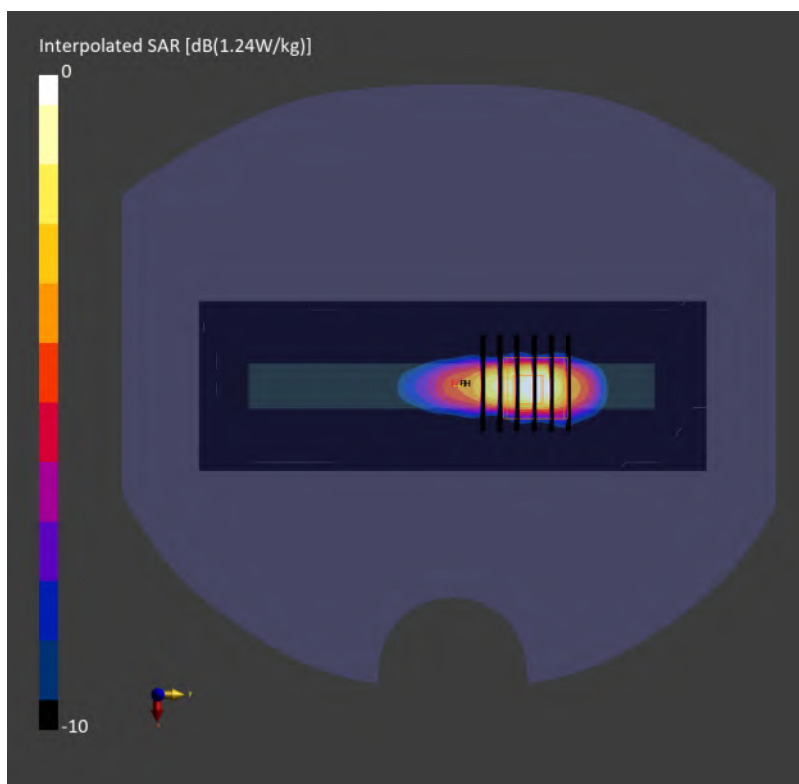

104_LTE Band 66_20M_QPSK_1_0_Top Side_0mm_Ch132072

Communication System: LTE-FDD; Frequency: 1720.000 MHz

Medium: HSL_600-7200_260627 Medium parameters used: $f = 1720.000$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.44, 7.3, 7.52); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.02 W/kg; SAR (10g) = 0.438 W/kg;

TSL Correction: Positive only

Zoom Scan (34.2 mm x 34.2 mm x 33.4 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm


Power Drift = -0.08 dB

SAR (1g) = 1.02 W/kg; SAR (8g) = 0.418 W/kg; SAR (10g) = 0.372 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 66.6 %

TSL Correction: Positive only

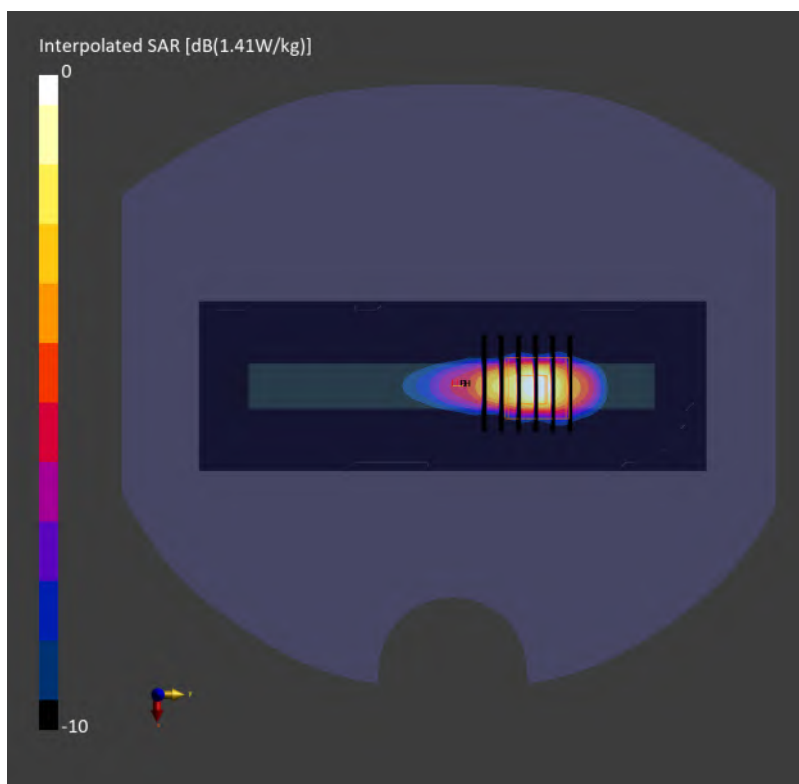

105_LTE Band 41_20M_QPSK_1_0_Top Side_0mm_Ch40185

Communication System: LTE-TDD; Frequency: 2549.500 MHz

Medium: HSL_600-7200_260626 Medium parameters used: $f = 2549.500$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 41.4$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.66, 6.54, 6.74); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.829 W/kg; SAR (10g) = 0.308 W/kg;

TSL Correction: Positive only

Zoom Scan (31.5 mm x 31.5 mm x 33.4 mm): Measurement Grid: 3.5 mm x 3.5 mm x 1.4 mm


Power Drift = 0.11 dB

SAR (1g) = 0.911 W/kg; SAR (8g) = 0.347 W/kg; SAR (10g) = 0.303 W/kg

Smallest distance from peaks to all points 3 dB below = 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 69.7 %

TSL Correction: Positive only

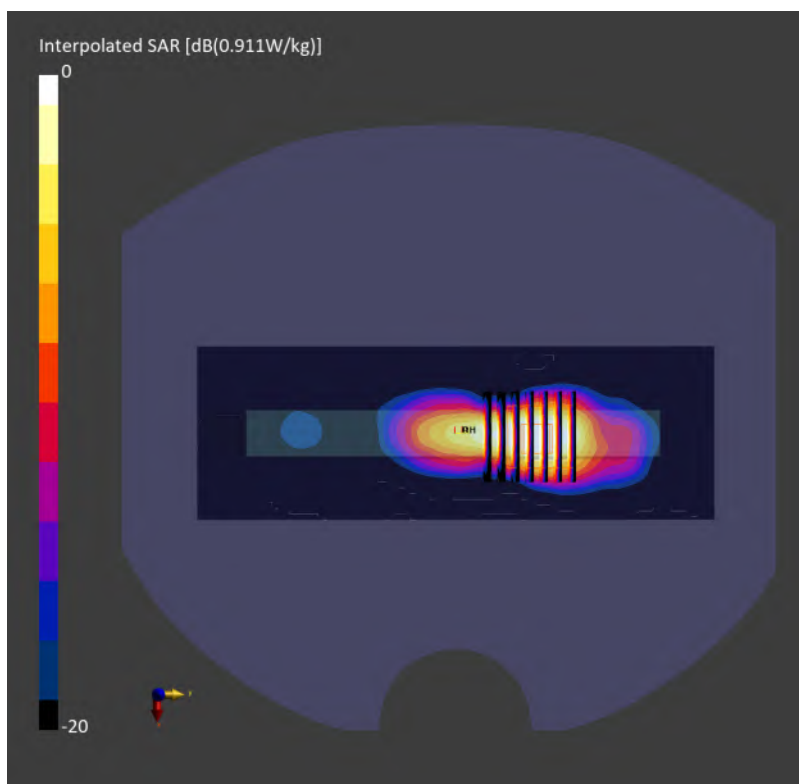

106_LTE Band 48_20M_QPSK_1_0_Top Side_0mm_Ch55830

Communication System: LTE-TDD; Frequency: 3609.000 MHz

Medium: HSL_600-7200_260702 Medium parameters used: $f = 3609.000$ MHz; $\sigma = 2.83$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.88, 6.35, 5.8); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.905 W/kg; SAR (10g) = 0.315 W/kg;

TSL Correction: Positive only

Zoom Scan (31.2 mm x 31.2 mm x 31.2 mm): Measurement Grid: 2.6 mm x 2.6 mm x 1.2 mm


Power Drift = -0.13 dB

SAR (1g) = 0.941 W/kg; SAR (8g) = 0.334 W/kg; SAR (10g) = 0.298 W/kg

Smallest distance from peaks to all points 3 dB below = 4.2 mm

Ratio of SAR at M2 to SAR at M1 = 65.9 %

TSL Correction: Positive only

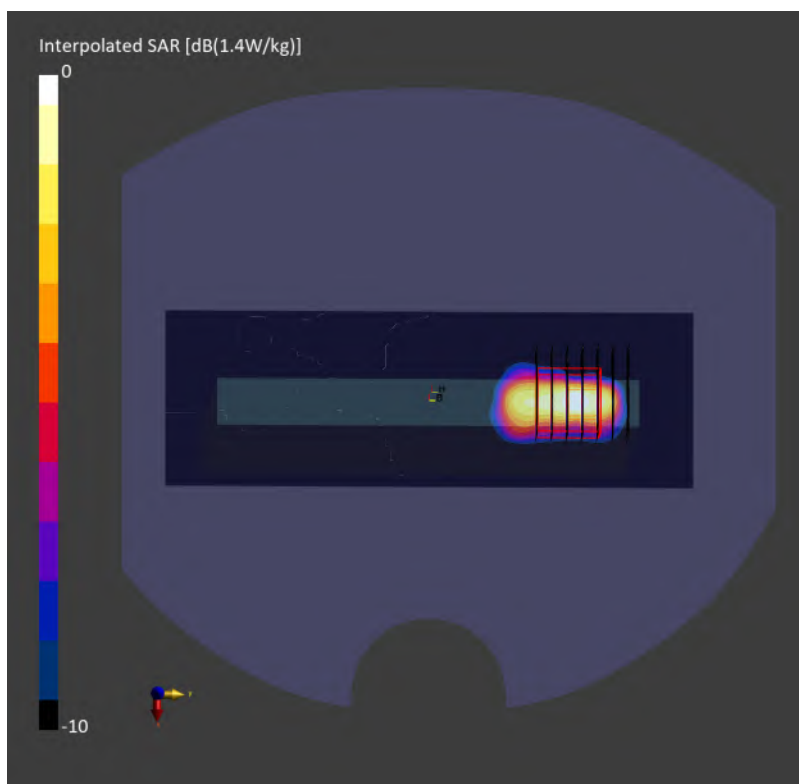

107_FR1 n7_50M_BPSK_135_68_Back Right_0mm_Ch507000

Communication System: 5G NR; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260629 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 41.3$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.66, 6.54, 6.74); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10943-AAD

Area Scan (60.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.910 W/kg; SAR (10g) = 0.384 W/kg;

TSL Correction: Positive only

Zoom Scan (30.6 mm x 34.0 mm x 33.4 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm


Power Drift = -0.05 dB

SAR (1g) = 0.994 W/kg; SAR (8g) = 0.422 W/kg; SAR (10g) = 0.375 W/kg

Smallest distance from peaks to all points 3 dB below = 3.5 mm

Ratio of SAR at M2 to SAR at M1 = 65.3 %

TSL Correction: Positive only

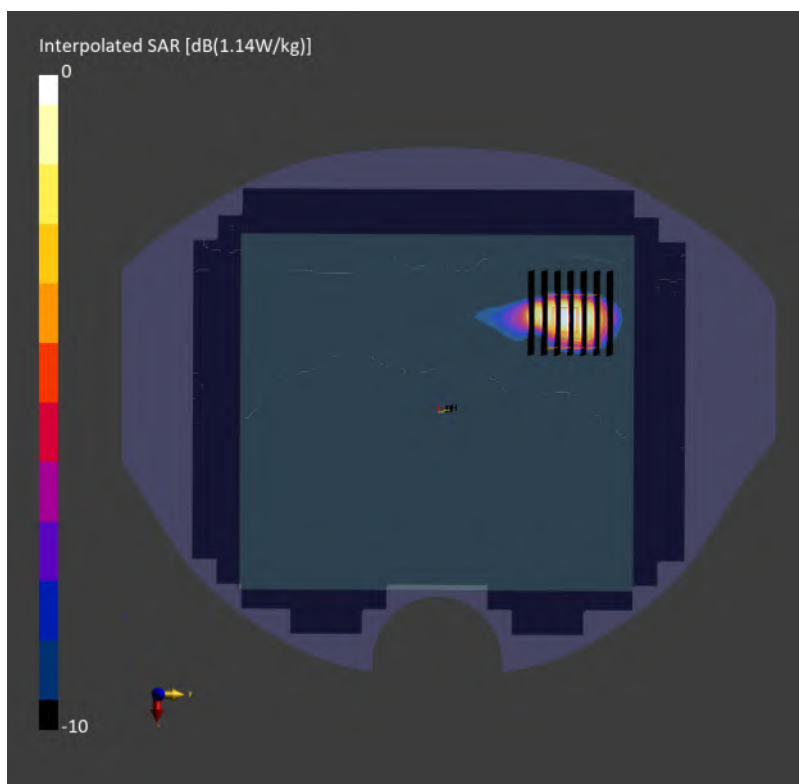

108_FR1 n25_40M_BPSK_108_54_Back Top_0mm_Ch376500

Communication System: 5G NR; Frequency: 1882.500 MHz

Medium: HSL_600-7200_260628 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(7.02, 7.58, 6.92); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10942-AAC

Area Scan (180.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.561 W/kg; SAR (10g) = 0.294 W/kg;

TSL Correction: Positive only

Zoom Scan (31.9 mm x 31.9 mm x 31.2 mm): Measurement Grid: 2.9 mm x 2.9 mm x 1.2 mm


Power Drift = -0.19 dB

SAR (1g) = 1.10 W/kg; SAR (8g) = 0.462 W/kg; SAR (10g) = 0.411 W/kg

Smallest distance from peaks to all points 3 dB below = 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 71.7 %

TSL Correction: Positive only

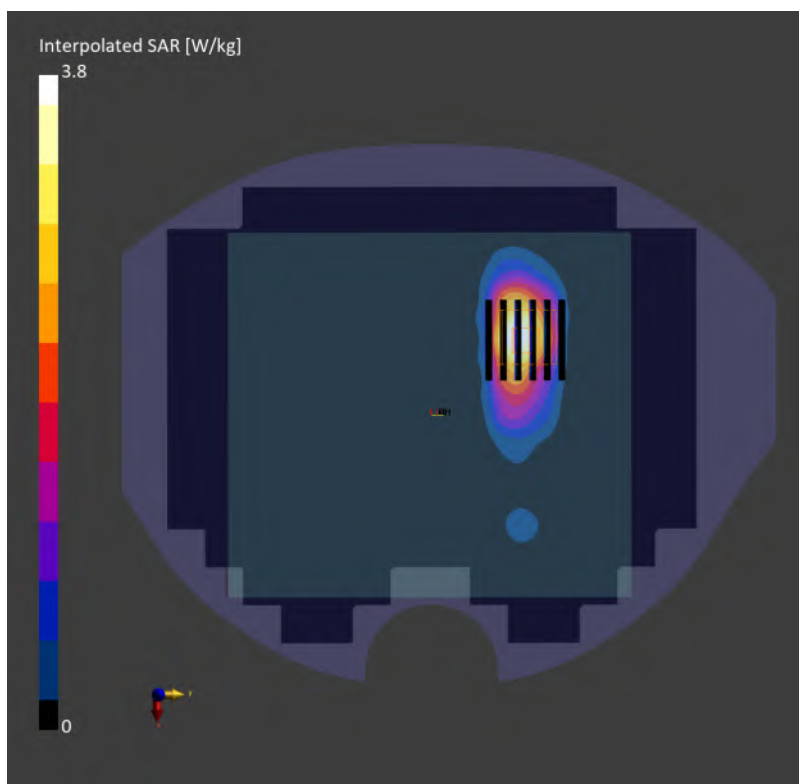

109_FR1 n66_45M_BPSK_1_1_Back Top_0mm_Ch349000

Communication System: 5G NR; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260701 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 41.9$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.44, 7.3, 7.52); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (180.0 mm x 60.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.634 W/kg; SAR (10g) = 0.299 W/kg;

TSL Correction: Positive only

Zoom Scan (34.2 mm x 34.2 mm x 33.4 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm


Power Drift = 0.15 dB

SAR (1g) = 0.930 W/kg; SAR (8g) = 0.380 W/kg; SAR (10g) = 0.339 W/kg

Smallest distance from peaks to all points 3 dB below = 3.8 mm

Ratio of SAR at M2 to SAR at M1 = 67.2 %

TSL Correction: Positive only

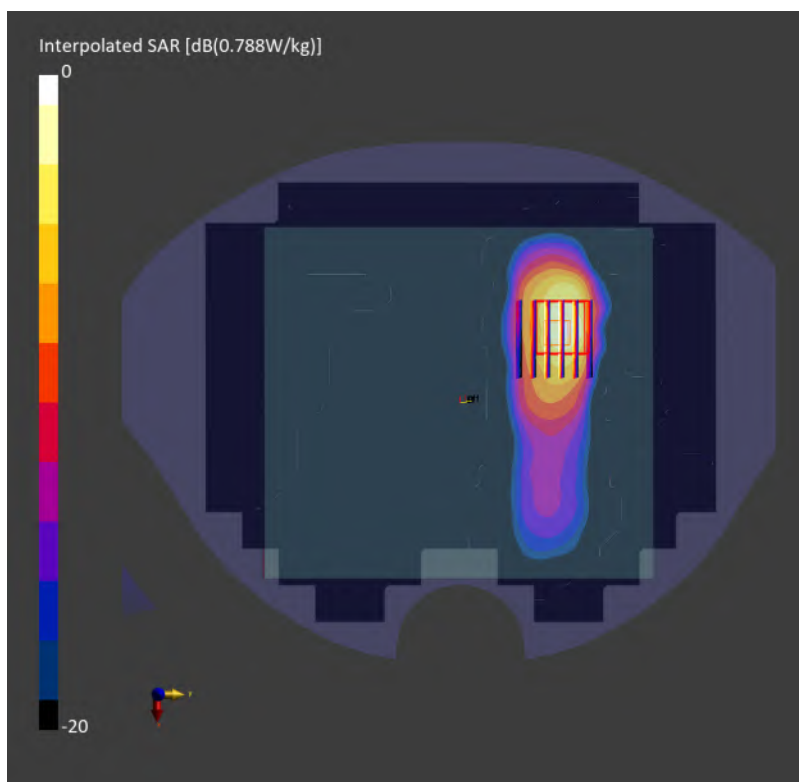

110_FR1 n41_100M_BPSK_1_1_Back Top_0mm_Ch518598

Communication System: 5G NR; Frequency: 2592.990 MHz

Medium: HSL_600-7200_260629 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.73, 7.27, 6.64); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (180.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.828 W/kg; SAR (10g) = 0.321 W/kg;

TSL Correction: Positive only

Zoom Scan (33.6 mm x 33.6 mm x 31.2 mm): Measurement Grid: 4.2 mm x 4.2 mm x 1.5 mm


Power Drift = 0.14 dB

SAR (1g) = 0.936 W/kg; SAR (8g) = 0.362 W/kg; SAR (10g) = 0.316 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 67.5 %

TSL Correction: Positive only

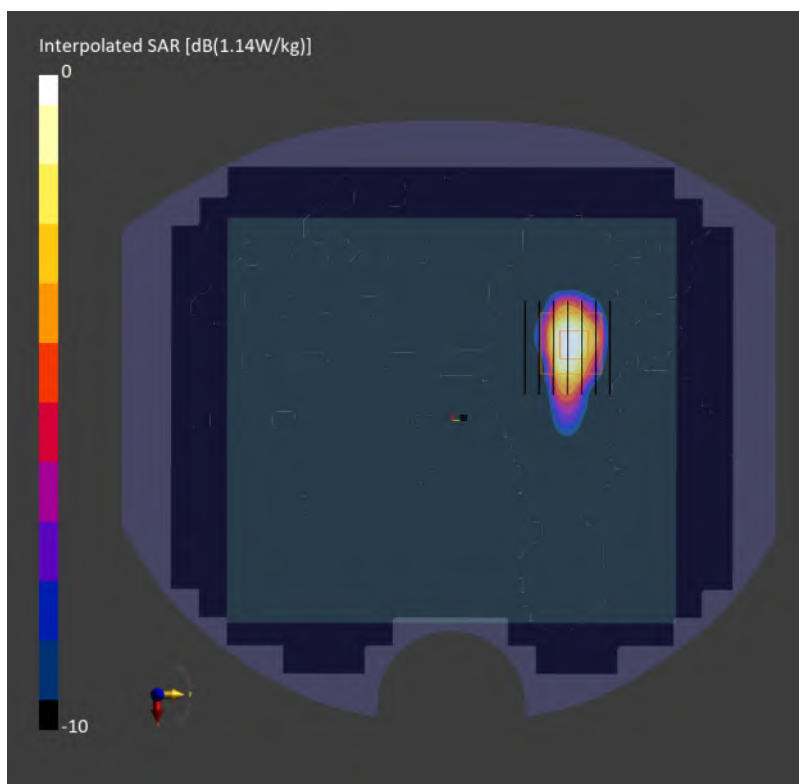

111_FR1 n48_40M_BPSK_1_1_Back Right_0mm_Ch638000

Communication System: 5G NR; Frequency: 3569.995 MHz

Medium: HSL_600-7200_260626 Medium parameters used: $f = 3569.995$ MHz; $\sigma = 2.81$ S/m; $\epsilon_r = 37.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.96, 6.44, 5.88); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10903-AAD

Area Scan (60.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.722 W/kg; SAR (10g) = 0.227 W/kg;

TSL Correction: Positive only

Zoom Scan (34.2 mm x 34.2 mm x 33.4 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm


Power Drift = -0.15 dB

SAR (1g) = 0.871 W/kg; SAR (8g) = 0.258 W/kg; SAR (10g) = 0.218 W/kg

Smallest distance from peaks to all points 3 dB below = 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 66.5 %

TSL Correction: Positive only

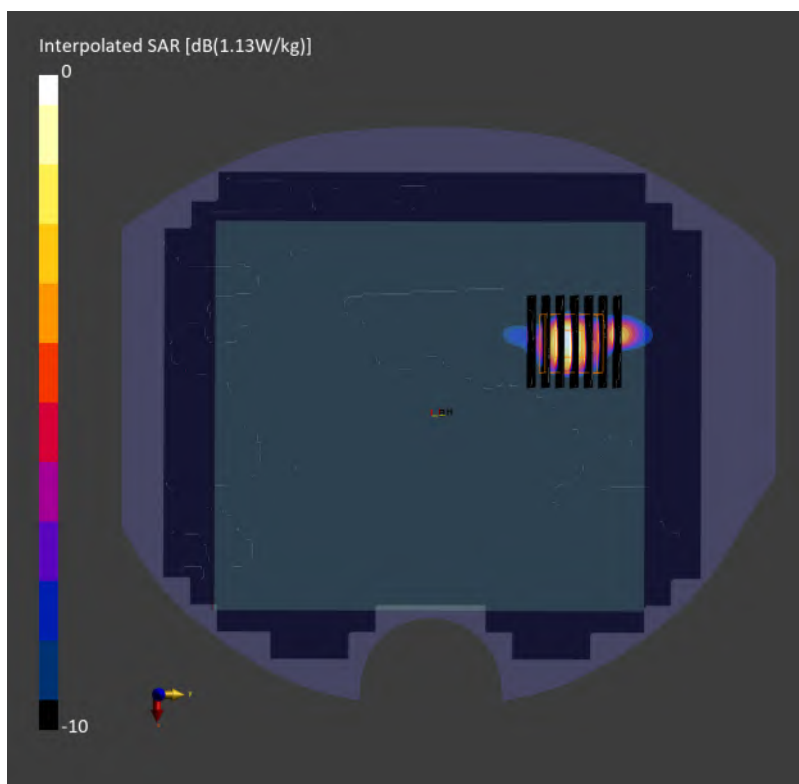

112_FR1 n77_100M_BPSK_1_1_Back Top_0mm_Ch656000

Communication System: 5G NR; Frequency: 3840.000 MHz

Medium: HSL_600-7200_260702 Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.04$ S/m; $\epsilon_r = 37.2$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.79, 6.25, 5.71); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (180.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.727 W/kg; SAR (10g) = 0.254 W/kg;

TSL Correction: Positive only

Zoom Scan (29.0 mm x 29.0 mm x 31.2 mm): Measurement Grid: 2.9 mm x 2.9 mm x 1.2 mm


Power Drift = 0.08 dB

SAR (1g) = 1.14 W/kg; SAR (8g) = 0.340 W/kg; SAR (10g) = 0.291 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 65.2 %

TSL Correction: Positive only

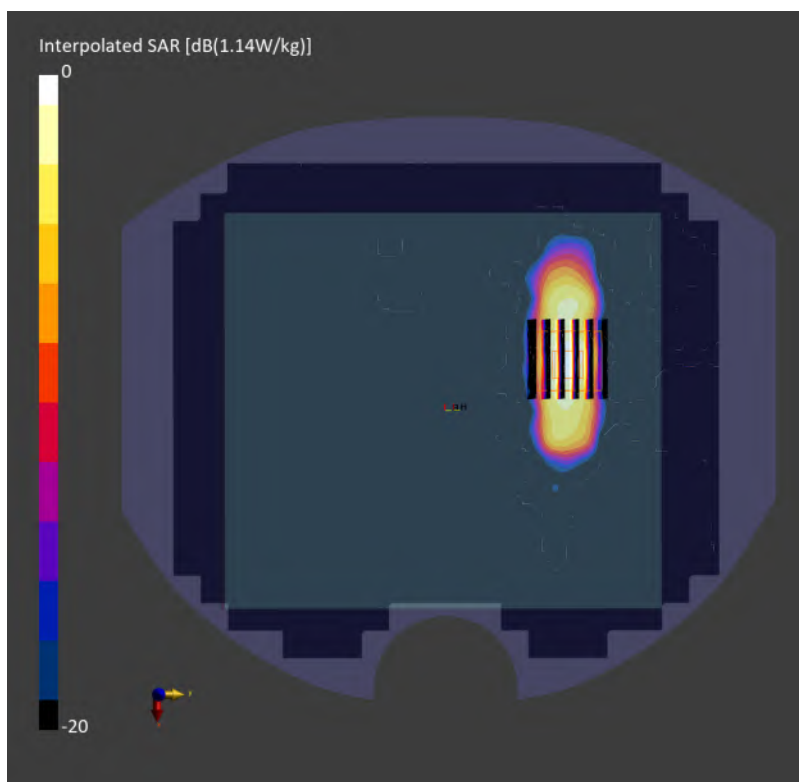

113_LTE Band 71_20M_QPSK_1_0_Back Right_0mm_Ch133297

Communication System: LTE-FDD; Frequency: 680.500 MHz

Medium: HSL_600-7200_260627 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.881$ S/m; $\epsilon_r = 42.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.9, 9.61, 8.78); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (180.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.463 W/kg; SAR (10g) = 0.253 W/kg;

TSL Correction: Positive only

Zoom Scan (33.6 mm x 33.6 mm x 33.4 mm): Measurement Grid: 4.2 mm x 4.2 mm x 1.4 mm


Power Drift = -0.17 dB

SAR (1g) = 0.559 W/kg; SAR (8g) = 0.247 W/kg; SAR (10g) = 0.225 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 49.0 %

TSL Correction: Positive only

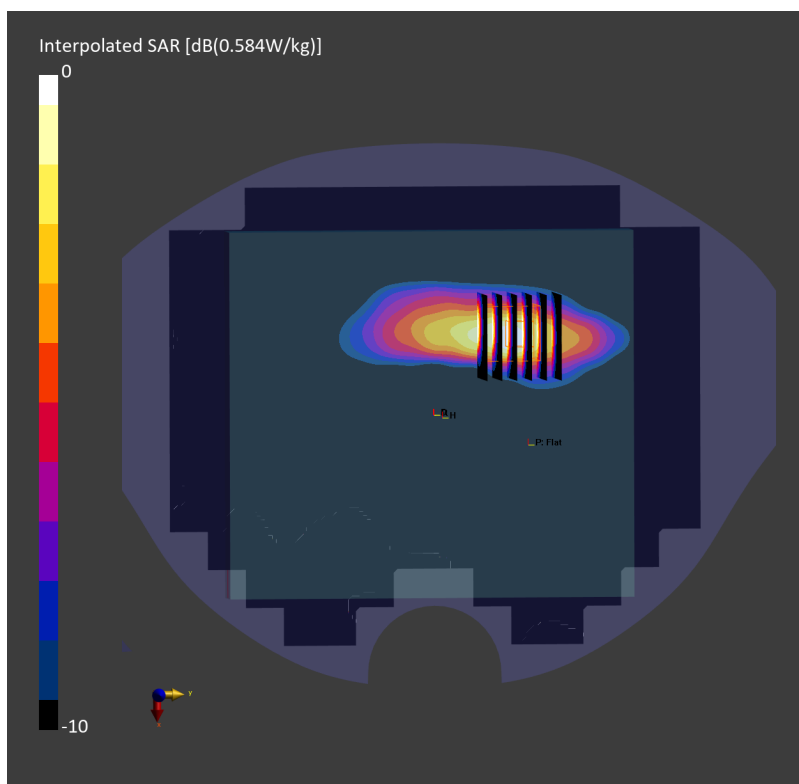

114_LTE Band 12_10M_QPSK_1_0_Back Right_0mm_Ch23095

Communication System: LTE-FDD; Frequency: 707.500 MHz

Medium: HSL_600-7200_260623 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.860$ S/m; $\epsilon_r = 45.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.9, 9.61, 8.78); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (180.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.599 W/kg; SAR (10g) = 0.317 W/kg;

TSL Correction: Positive only

Zoom Scan (38.0 mm x 38.0 mm x 33.4 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm


Power Drift = -0.07 dB

SAR (1g) = 0.731 W/kg; SAR (8g) = 0.307 W/kg; SAR (10g) = 0.279 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 48.5 %

TSL Correction: Positive only

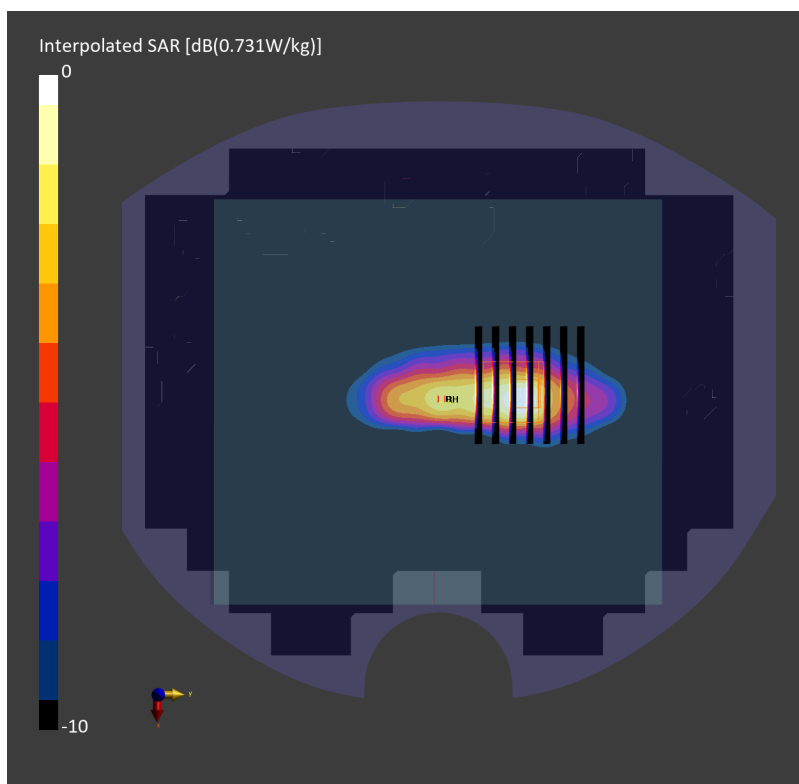

115_LTE Band 13_10M_QPSK_1_0_Back Right_0mm_Ch23230

Communication System: LTE-FDD; Frequency: 782.000 MHz

Medium: HSL_600-7200_260623 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 45.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.9, 9.61, 8.78); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (180.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.600 W/kg; SAR (10g) = 0.328 W/kg;

TSL Correction: Positive only

Zoom Scan (38.0 mm x 38.0 mm x 33.4 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm


Power Drift = 0.01 dB

SAR (1g) = 0.726 W/kg; SAR (8g) = 0.317 W/kg; SAR (10g) = 0.289 W/kg

Smallest distance from peaks to all points 3 dB below = 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 47.8 %

TSL Correction: Positive only

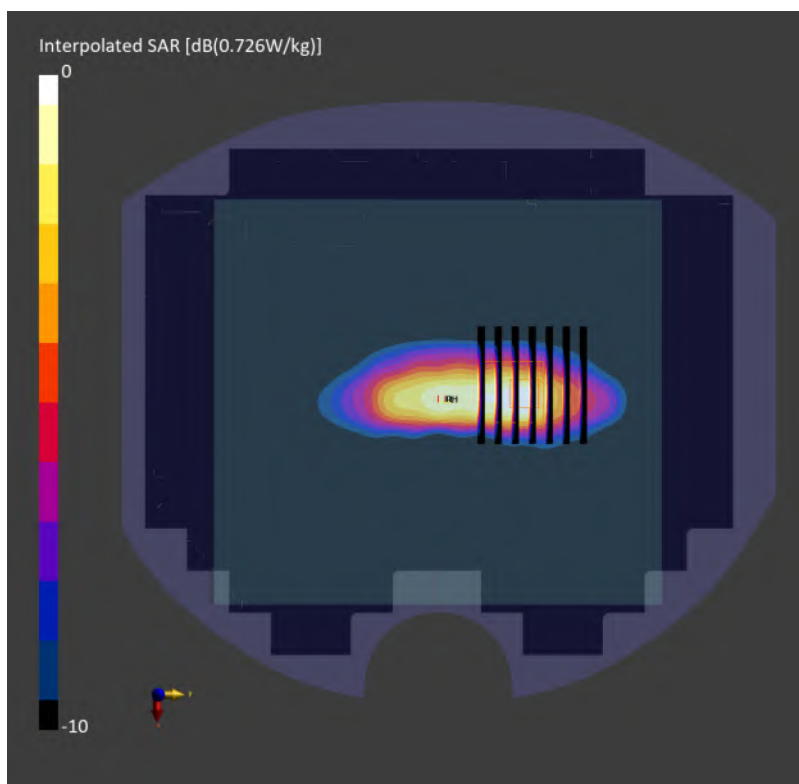

116_LTE Band 14_10M_QPSK_1_0_Back Right_0mm_Ch23330

Communication System: LTE-FDD; Frequency: 793.000 MHz

Medium: HSL_600-7200_260628 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 42.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.9, 9.61, 8.78); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (180.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.483 W/kg; SAR (10g) = 0.262 W/kg;

TSL Correction: Positive only

Zoom Scan (31.5 mm x 31.5 mm x 33.4 mm): Measurement Grid: 4.5 mm x 4.5 mm x 1.4 mm


Power Drift = 0.07 dB

SAR (1g) = 0.575 W/kg; SAR (8g) = 0.255 W/kg; SAR (10g) = 0.231 W/kg

Smallest distance from peaks to all points 3 dB below = 5.3 mm

Ratio of SAR at M2 to SAR at M1 = 58.7 %

TSL Correction: Positive only

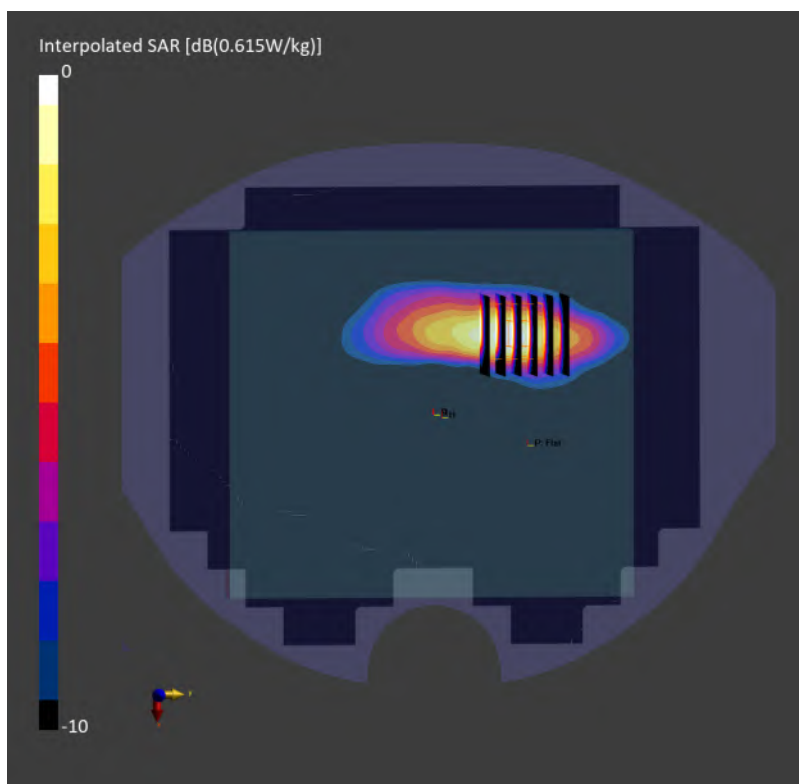

117_FR1 n71_35M_BPSK_1_1_Right Side_0mm_Ch136100

Communication System: 5G NR; Frequency: 680.500 MHz

Medium: HSL_600-7200_260622 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.875$ S/m; $\epsilon_r = 43.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(9.08, 8.91, 9.18); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (60.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.824 W/kg; SAR (10g) = 0.456 W/kg;

TSL Correction: Positive only

Zoom Scan (36.0 mm x 39.6 mm x 33.4 mm): Measurement Grid: 3.6 mm x 3.6 mm x 1.4 mm


Power Drift = 0.02 dB

SAR (1g) = 0.717 W/kg; SAR (8g) = 0.360 W/kg; SAR (10g) = 0.331 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 61.5 %

TSL Correction: Positive only

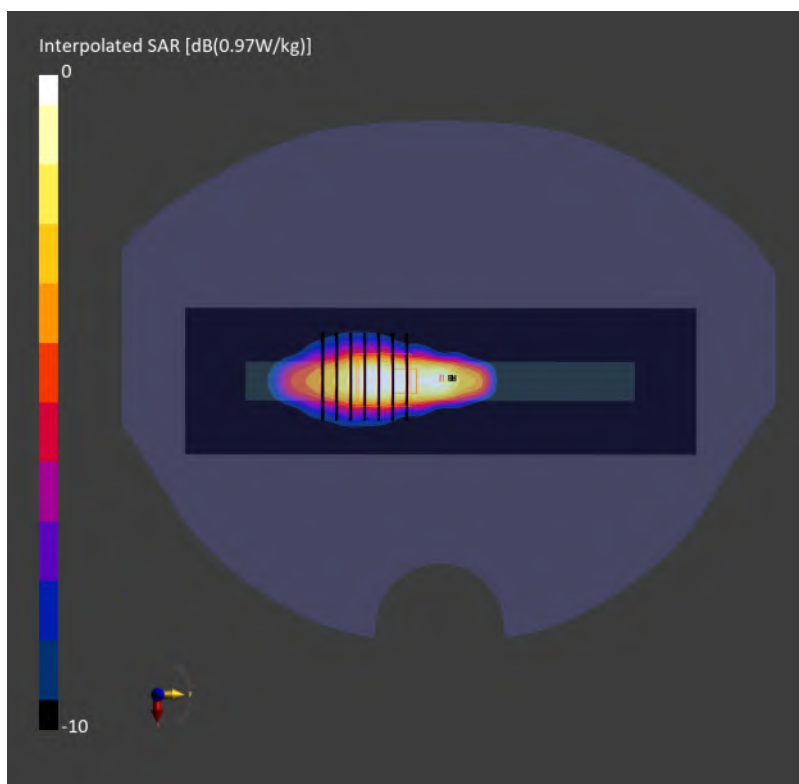

118_FR1 12_15M_BPSK_1_1_Back Right_0mm_Ch141500

Communication System: 5G NR; Frequency: 707.500 MHz

Medium: HSL_600-7200_260623 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.862$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(9.08, 8.91, 9.18); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10930-AAC

Area Scan (60.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.491 W/kg; SAR (10g) = 0.268 W/kg;

TSL Correction: Positive only

Zoom Scan (30.6 mm x 30.6 mm x 33.4 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm


Power Drift = -0.03 dB

SAR (1g) = 0.480 W/kg; SAR (8g) = 0.231 W/kg; SAR (10g) = 0.211 W/kg

Smallest distance from peaks to all points 3 dB below = 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 71.7 %

TSL Correction: Positive only

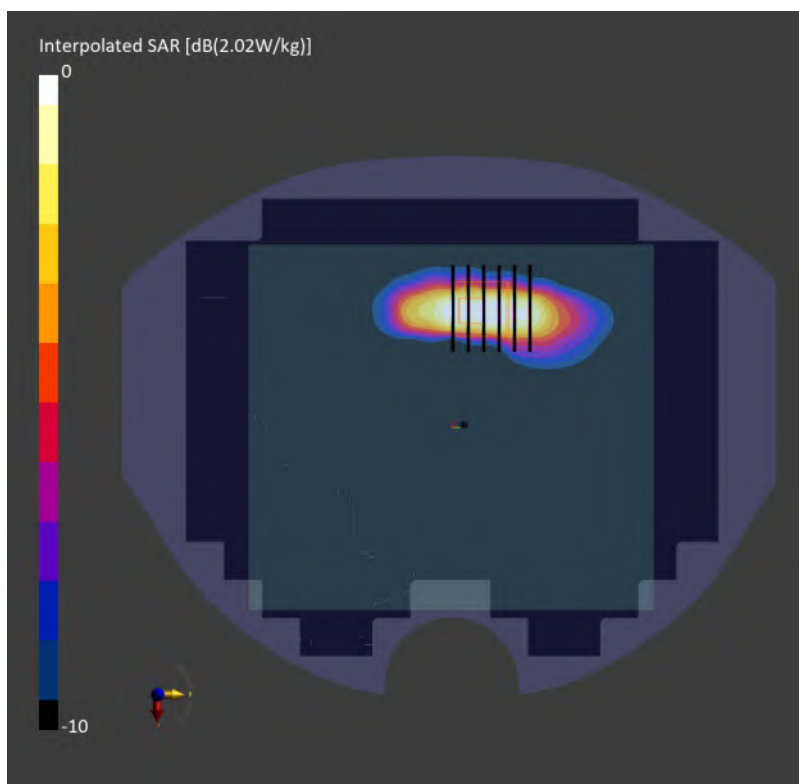

119_FR1 n13_10M_BPSK_1_1_Back Right_0mm_Ch156400

Communication System: 5G NR; Frequency: 782.000 MHz

Medium: HSL_600-7200_260627 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.9, 9.61, 8.78); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10929-AAD

Area Scan (180.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.482 W/kg; SAR (10g) = 0.271 W/kg;

TSL Correction: Positive only

Zoom Scan (30.6 mm x 30.6 mm x 33.4 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm


Power Drift = 0.03 dB

SAR (1g) = 0.642 W/kg; SAR (8g) = 0.311 W/kg; SAR (10g) = 0.283 W/kg

Smallest distance from peaks to all points 3 dB below = 4.0 mm

Ratio of SAR at M2 to SAR at M1 = 53.8 %

TSL Correction: Positive only

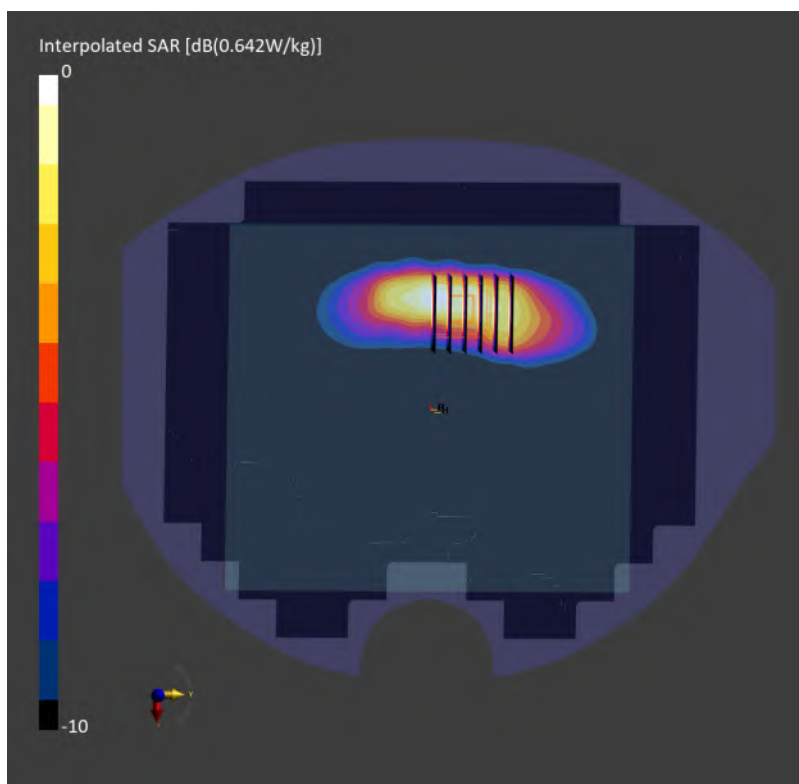

120_FR1 n14_10M_BPSK_25_14_Back Right_0mm_Ch158600

Communication System: 5G NR; Frequency: 793.000 MHz

Medium: HSL_600-7200_260627 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.909$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.9, 9.61, 8.78); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10937-AAD

Area Scan (180.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.352 W/kg; SAR (10g) = 0.217 W/kg;

TSL Correction: Positive only

Zoom Scan (30.6 mm x 30.6 mm x 33.4 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm


Power Drift = 0.02 dB

SAR (1g) = 0.496 W/kg; SAR (8g) = 0.246 W/kg; SAR (10g) = 0.225 W/kg

Smallest distance from peaks to all points 3 dB below = 4.4 mm

Ratio of SAR at M2 to SAR at M1 = 57.5 %

TSL Correction: Positive only

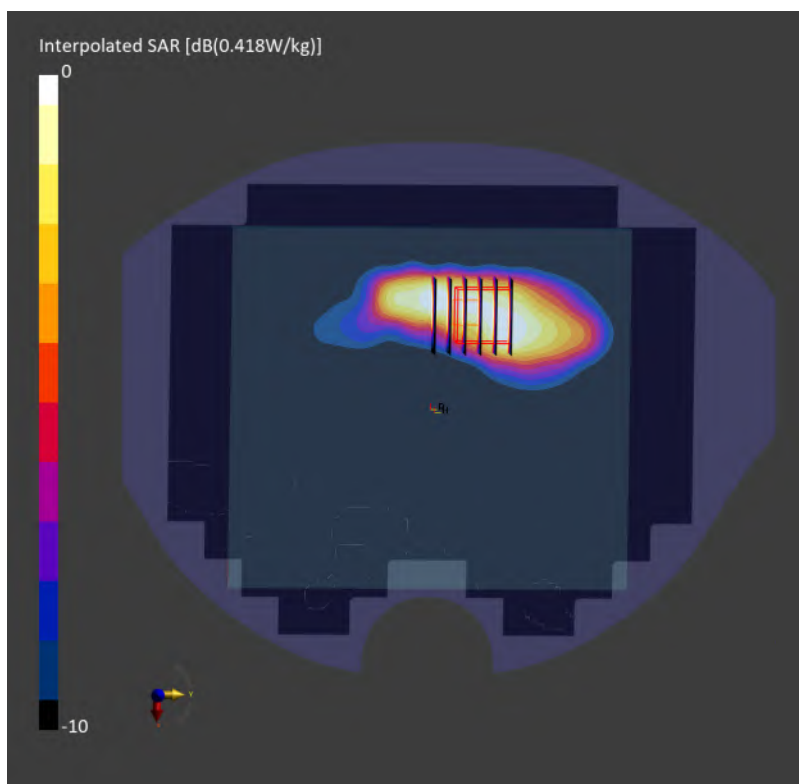

121_GSM850_GPRS 4 Tx slots_Right Side_0mm_Ch189

Communication System: GPRS-FDD; Frequency: 836.400 MHz

Medium: HSL_600-7200_260623 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 45.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.74, 9.44, 8.62); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10028-DAC

Area Scan (60.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.964 W/kg; SAR (10g) = 0.515 W/kg;

TSL Correction: Positive only

Zoom Scan (30.6 mm x 30.6 mm x 33.4 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm


Power Drift = 0.03 dB

SAR (1g) = 0.893 W/kg; SAR (8g) = 0.416 W/kg; SAR (10g) = 0.379 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 60.2 %

TSL Correction: Positive only

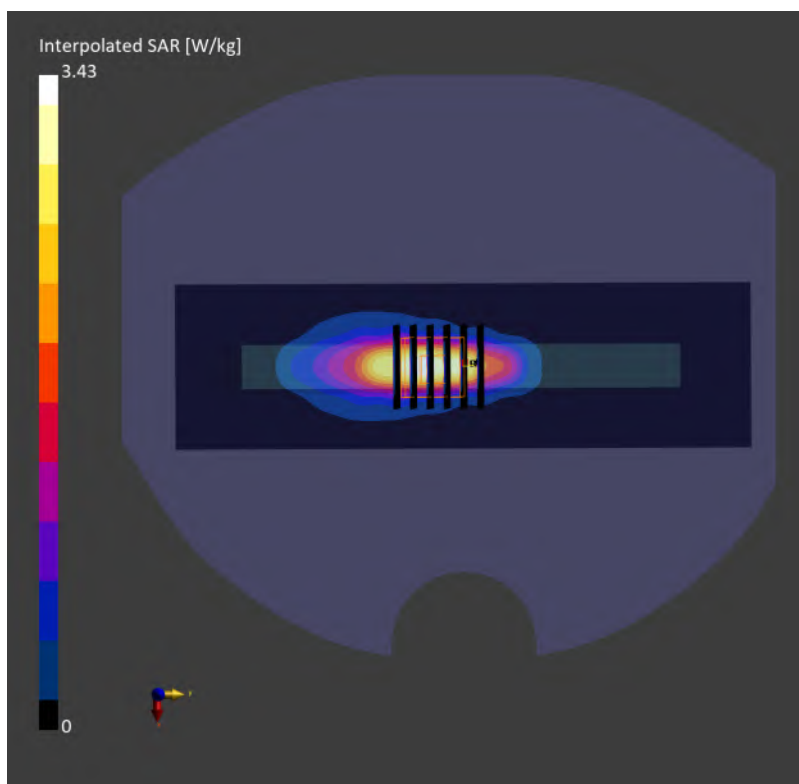

122_WCDMA V_RMC 12.2Kbps_Back Right_0mm_Ch4182

Communication System: UMTS-FDD; Frequency: 836.400 MHz

Medium: HSL_600-7200_260623 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 45.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.74, 9.44, 8.62); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (60.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.818 W/kg; SAR (10g) = 0.431 W/kg;

TSL Correction: Positive only

Zoom Scan (34.2 mm x 34.2 mm x 33.4 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm


Power Drift = 0.05 dB

SAR (1g) = 0.789 W/kg; SAR (8g) = 0.373 W/kg; SAR (10g) = 0.356 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 52.9 %

TSL Correction: Positive only

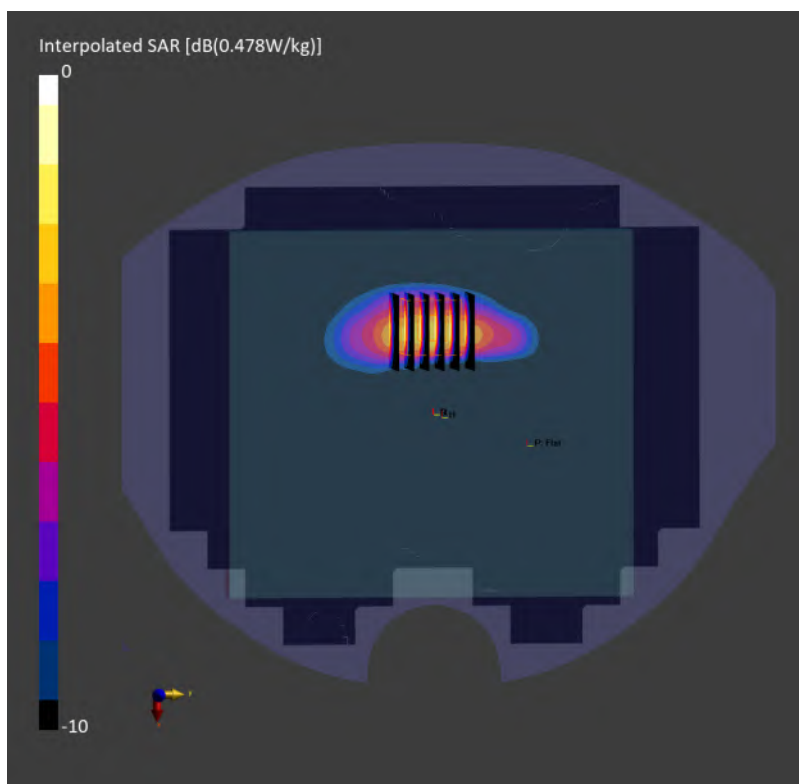

123_FR1 n26_20M_BPSK_1_1_Back Right_0mm_Ch166300

Communication System: 5G NR; Frequency: 831.500 MHz

Medium: HSL_600-7200_260627 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.925$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.74, 9.44, 8.62); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10931-AAC

Area Scan (180.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.366 W/kg; SAR (10g) = 0.230 W/kg;

TSL Correction: Positive only

Zoom Scan (31.5 mm x 31.5 mm x 33.4 mm): Measurement Grid: 3.5 mm x 3.5 mm x 1.4 mm


Power Drift = -0.02 dB

SAR (1g) = 0.555 W/kg; SAR (8g) = 0.269 W/kg; SAR (10g) = 0.247 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 58.6 %

TSL Correction: Positive only

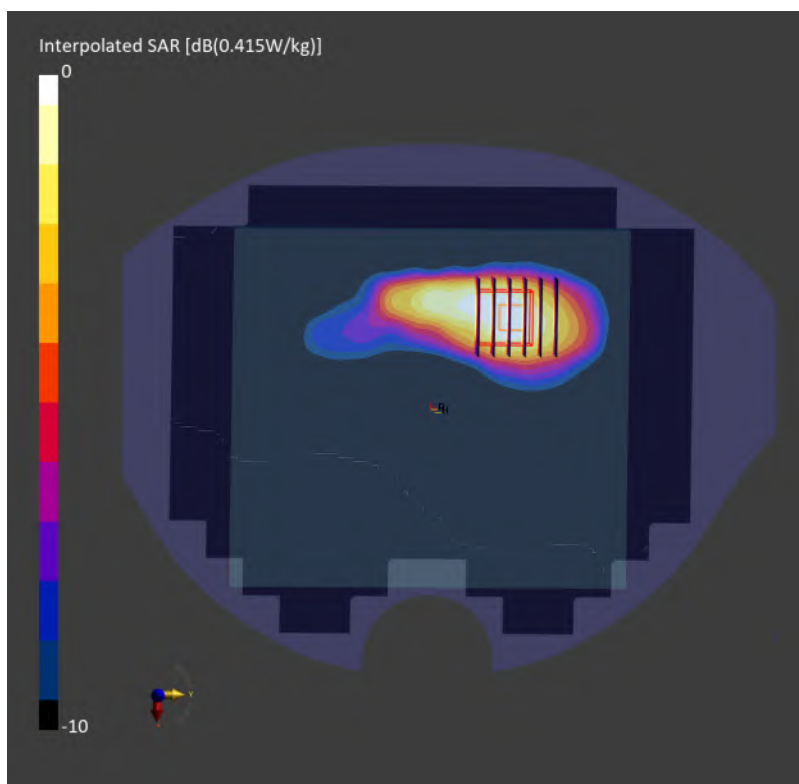

124_WLAN2.4GHz_802.11b 1Mbps_Back Top_0mm_Ch6

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2437.000 MHz

Medium: HSL_600-7200_260701 Medium parameters used: $f = 2437.000$ MHz; $\sigma = 1.80$ S/m; $\epsilon_r = 39.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.56, 7.09, 6.47); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10315-AAB

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.916 W/kg; SAR (10g) = 0.346 W/kg;

TSL Correction: Positive only

Zoom Scan (33.6 mm x 33.6 mm x 33.4 mm): Measurement Grid: 4.2 mm x 4.2 mm x 1.4 mm


Power Drift = -0.11 dB

SAR (1g) = 1.03 W/kg; SAR (8g) = 0.406 W/kg; SAR (10g) = 0.355 W/kg

Smallest distance from peaks to all points 3 dB below = 5.9 mm

Ratio of SAR at M2 to SAR at M1 = 68.0 %

TSL Correction: Positive only

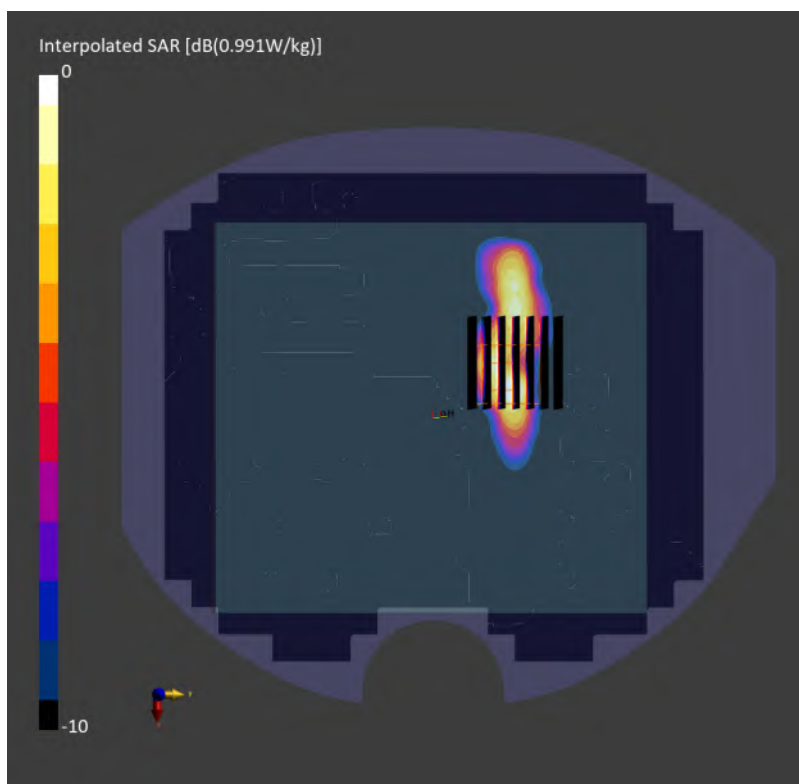

125_WLAN5GHz_802.11ac-VHT160 MCS0_Back Top_0mm_Ch50

Communication System: IEEE 802.11ac WiFi; Frequency: 5250.000 MHz

Medium: HSL_600-7200_260701 Medium parameters used: $f = 5250.000$ MHz; $\sigma = 4.50$ S/m; $\epsilon_r = 34.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.03, 5.43, 4.96); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10554-AAE

Area Scan (180.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.639 W/kg; SAR (10g) = 0.153 W/kg;

TSL Correction: Positive only

Zoom Scan (25.2 mm x 25.2 mm x 25.0 mm): Measurement Grid: 2.8 mm x 2.8 mm x 1.2 mm


Power Drift = -0.09 dB

SAR (1g) = 0.672 W/kg; SAR (8g) = 0.174 W/kg; SAR (10g) = 0.145 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 63.9 %

TSL Correction: Positive only

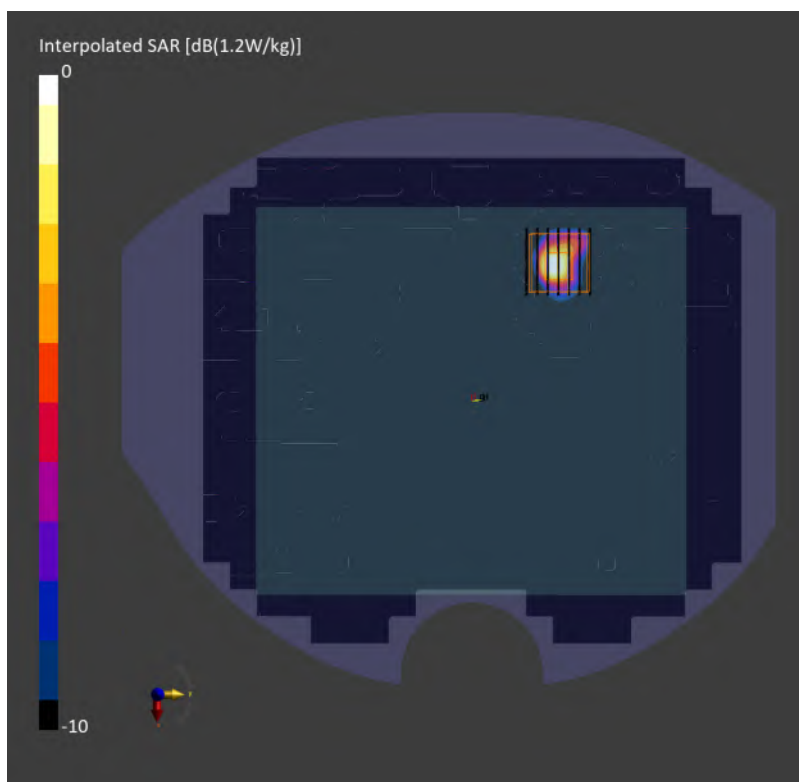

126_WLAN5GHz_802.11ac-VHT160 MCS0_Back Top_0mm_Ch114

Communication System: IEEE 802.11ac WiFi; Frequency: 5570.000 MHz

Medium: HSL_600-7200_260701 Medium parameters used: $f = 5570.000$ MHz; $\sigma = 4.84$ S/m; $\epsilon_r = 34.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(4.61, 4.98, 4.54); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10554-AAE

Area Scan (180.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.482 W/kg; SAR (10g) = 0.115 W/kg;

TSL Correction: Positive only

Zoom Scan (23.4 mm x 23.4 mm x 25.0 mm): Measurement Grid: 2.6 mm x 2.6 mm x 1.2 mm


Power Drift = 0.06 dB

SAR (1g) = 0.642 W/kg; SAR (8g) = 0.157 W/kg; SAR (10g) = 0.130 W/kg

Smallest distance from peaks to all points 3 dB below = 3.2 mm

Ratio of SAR at M2 to SAR at M1 = 62.7 %

TSL Correction: Positive only

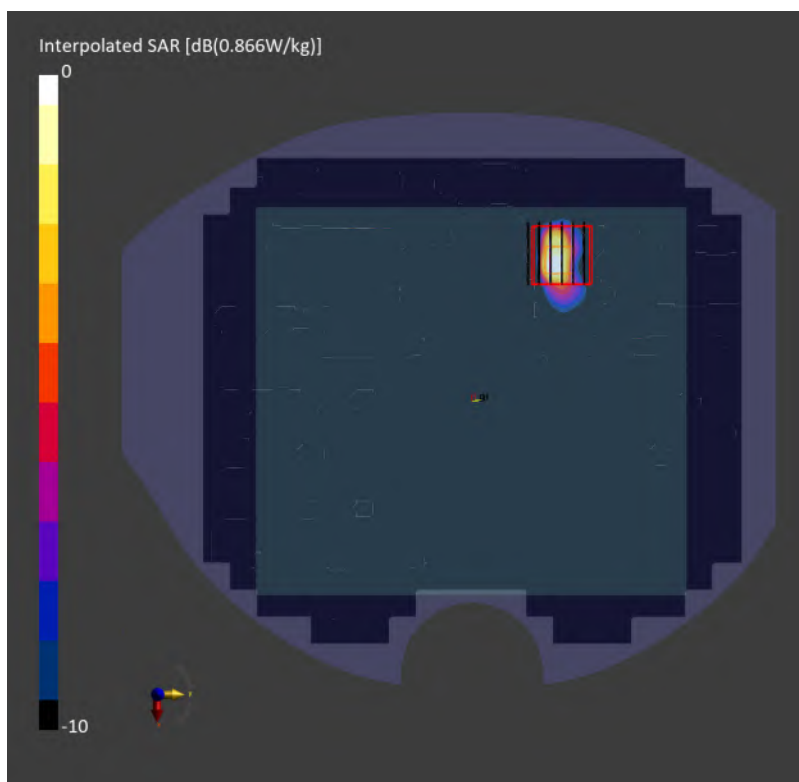

127_WLAN5GHz_802.11ac-VHT80 MCS0_Back Top_0mm_Ch155

Communication System: IEEE 802.11ac WiFi; Frequency: 5775.000 MHz

Medium: HSL_600-7200_260701 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.06$ S/m; $\epsilon_r = 33.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(4.54, 4.9, 4.48); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (180.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.239 W/kg; SAR (10g) = 0.071 W/kg;

TSL Correction: Positive only

Zoom Scan (23.2 mm x 23.2 mm x 25.0 mm): Measurement Grid: 2.9 mm x 2.9 mm x 1.2 mm


Power Drift = 0.07 dB

SAR (1g) = 0.522 W/kg; SAR (8g) = 0.133 W/kg; SAR (10g) = 0.111 W/kg

Smallest distance from peaks to all points 3 dB below = 2.9 mm

Ratio of SAR at M2 to SAR at M1 = 66.0 %

TSL Correction: Positive only

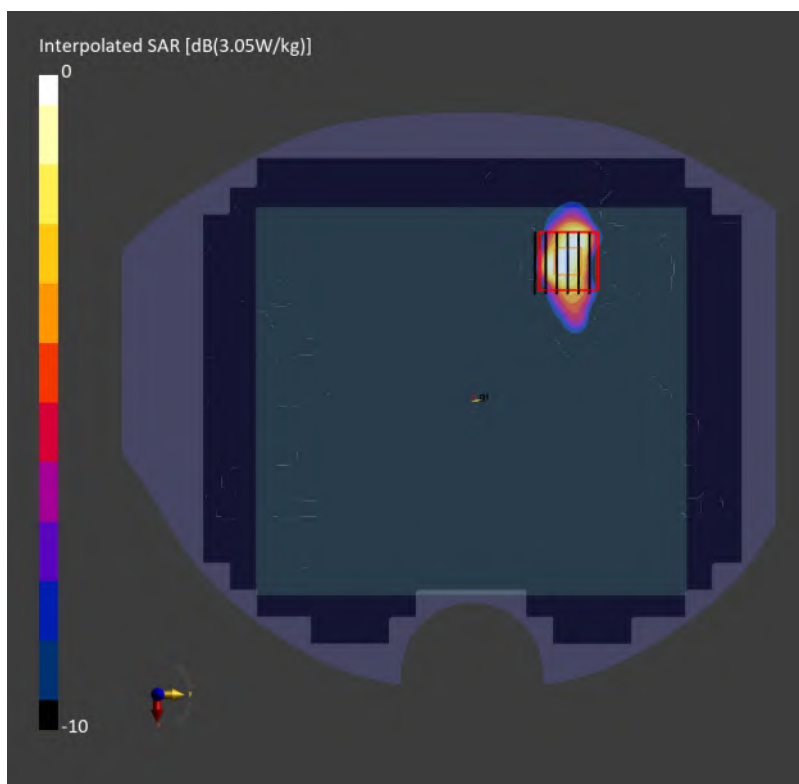

128_Bluetooth_1Mbps_Back Top_0mm_Ch39

Communication System: IEEE 802.15.1 Bluetooth; Frequency: 2441.000 MHz

Medium: HSL_600-7200_260713 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.56, 7.09, 6.47); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: Bluetooth, 10032-CAA

Area Scan (180.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.945 W/kg; SAR (10g) = 0.328 W/kg;

TSL Correction: Positive only

Zoom Scan (32.4 mm x 32.4 mm x 31.2 mm): Measurement Grid: 2.7 mm x 2.7 mm x 1.2 mm


Power Drift = 0.13 dB

SAR (1g) = 0.942 W/kg; SAR (8g) = 0.349 W/kg; SAR (10g) = 0.304 W/kg

Smallest distance from peaks to all points 3 dB below = 4.0 mm

Ratio of SAR at M2 to SAR at M1 = 69.0 %

TSL Correction: Positive only

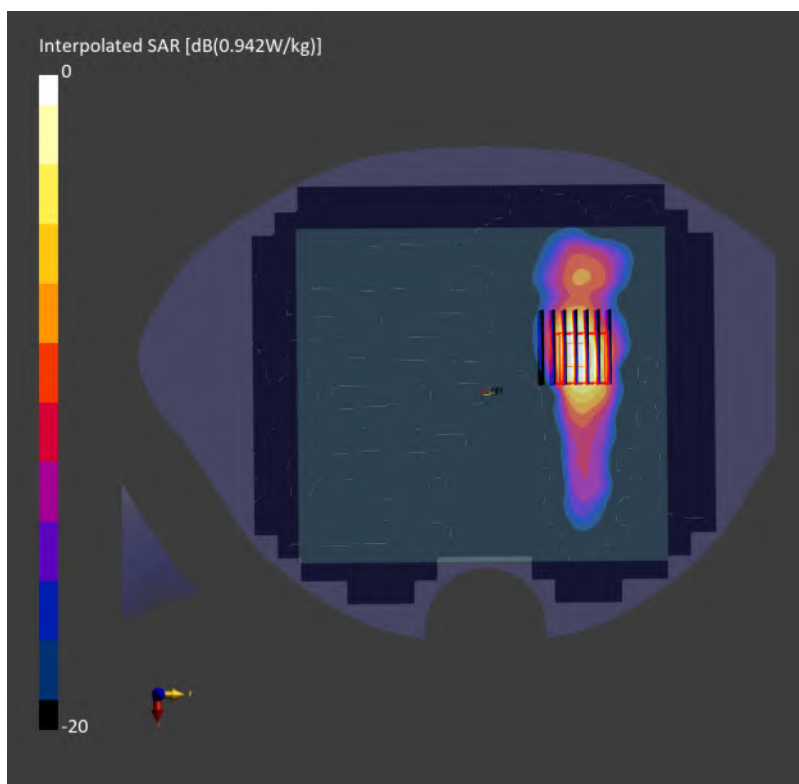

129_WLAN6GHz_802.11be-EHT320 MCS0_Top Side_0mm_Ch127

Communication System: IEEE 802.11be; Frequency: 6585.000 MHz

Medium: HSL_600-7200_260703 Medium parameters used: $f = 6585.000$ MHz; $\sigma = 6.00$ S/m; $\epsilon_r = 32.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(4.76, 5.14, 4.7); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126_0mm; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 11026-AAB

Area Scan (51.0 mm x 187.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.567 W/kg; SAR (10g) = 0.118 W/kg;

TSL Correction: Positive only

Zoom Scan (22.0 mm x 22.0 mm x 25.0 mm): Measurement Grid: 2.2 mm x 2.2 mm x 1.2 mm


Power Drift = -0.19 dB

SAR (1g) = 0.526 W/kg; SAR (8g) = 0.121 W/kg; SAR (10g) = 0.101 W/kg

Smallest distance from peaks to all points 3 dB below = 3.6 mm

Ratio of SAR at M2 to SAR at M1 = 49.2 %

TSL Correction: Positive only

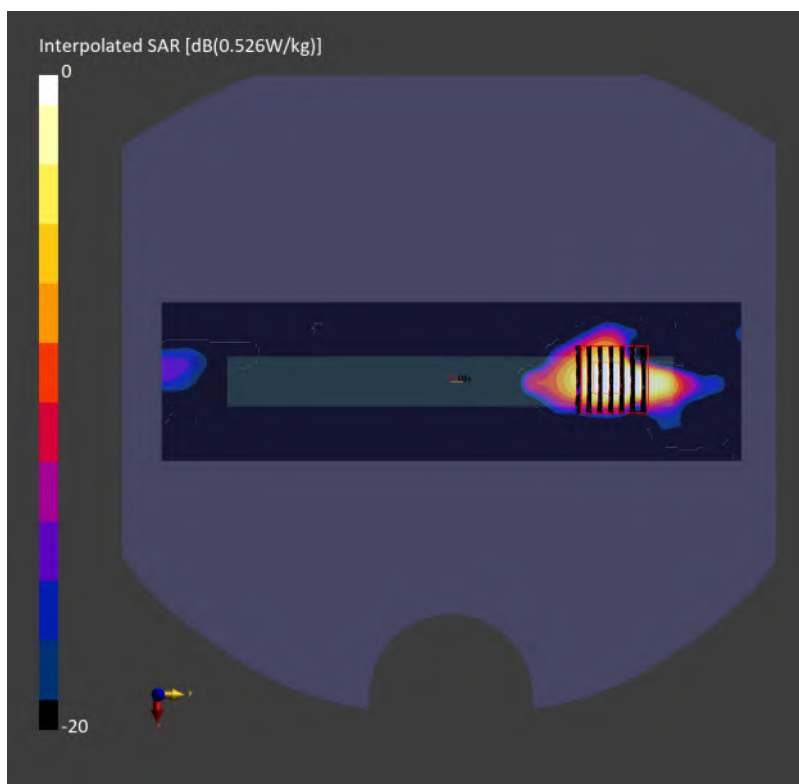

130_NFC_ASK_Back_0mm

Communication System: CW; Frequency: 13.600 MHz

Medium: HSL_600-7200_260707 Medium parameters used: $f = 13.600$ MHz; $\sigma = 0.748$ S/m; $\epsilon_r = 55.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(17.55, 17.18, 17.51); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2205; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Area Scan (180.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.044 W/kg; SAR (10g) = 0.025 W/kg;

TSL Correction: Positive only

Zoom Scan (33.6 mm x 33.6 mm x 31.2 mm): Measurement Grid: 2.8 mm x 2.8 mm x 1.2 mm


Power Drift = -0.10 dB

SAR (1g) = 0.051 W/kg; SAR (8g) = 0.020 W/kg; SAR (10g) = 0.018 W/kg

Smallest distance from peaks to all points 3 dB below = 4.0 mm

Ratio of SAR at M2 to SAR at M1 = 62.6 %

TSL Correction: Positive only

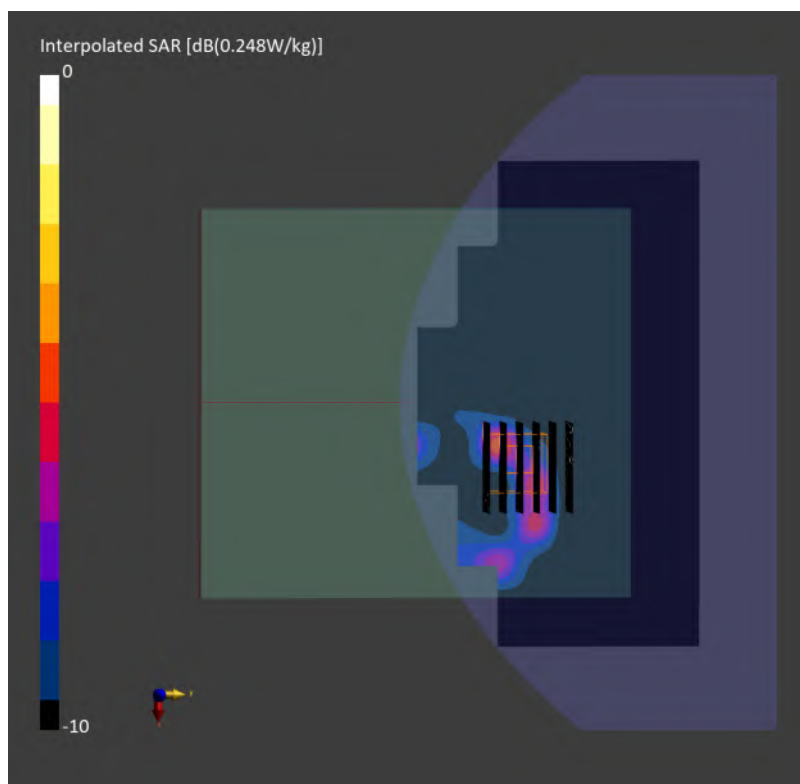

131_LTE Band 26_15M_QPSK_1_0_Back_0mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz

Medium: HSL_600-7200_260623 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.903$ S/m; $\epsilon_r = 45.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.74, 9.44, 8.62); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126_0mm; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10181-CAF

Area Scan (180.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.669 W/kg; SAR (10g) = 0.406 W/kg;

TSL Correction: Positive only

Zoom Scan (32.4 mm x 32.4 mm x 31.2 mm): Measurement Grid: 5.4 mm x 5.4 mm x 1.5 mm


Power Drift = 0.07 dB

SAR (1g) = 0.620 W/kg; SAR (8g) = 0.331 W/kg; SAR (10g) = 0.307 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 75.7 %

TSL Correction: Positive only

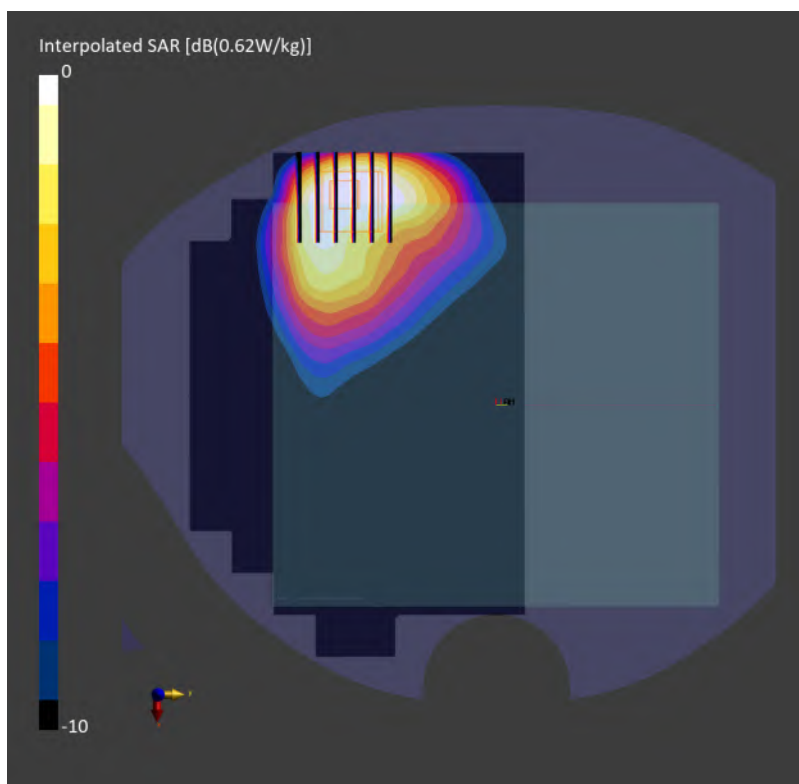

132_LTE Band 42_20M_QPSK_1_0_Back_0mm_Ch42190

Communication System: LTE-TDD; Frequency: 3460.000 MHz

Medium: HSL_600-7200_260624 Medium parameters used: $f = 3460.000$ MHz; $\sigma = 2.63$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.96, 6.44, 5.88); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (180.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.942 W/kg; SAR (10g) = 0.294 W/kg;

TSL Correction: Positive only

Zoom Scan (32.4 mm x 32.4 mm x 33.4 mm): Measurement Grid: 3.6 mm x 3.6 mm x 1.4 mm


Power Drift = 0.06 dB

SAR (1g) = 0.960 W/kg; SAR (8g) = 0.327 W/kg; SAR (10g) = 0.283 W/kg

Smallest distance from peaks to all points 3 dB below = 4.2 mm

Ratio of SAR at M2 to SAR at M1 = 68.2 %

TSL Correction: Positive only

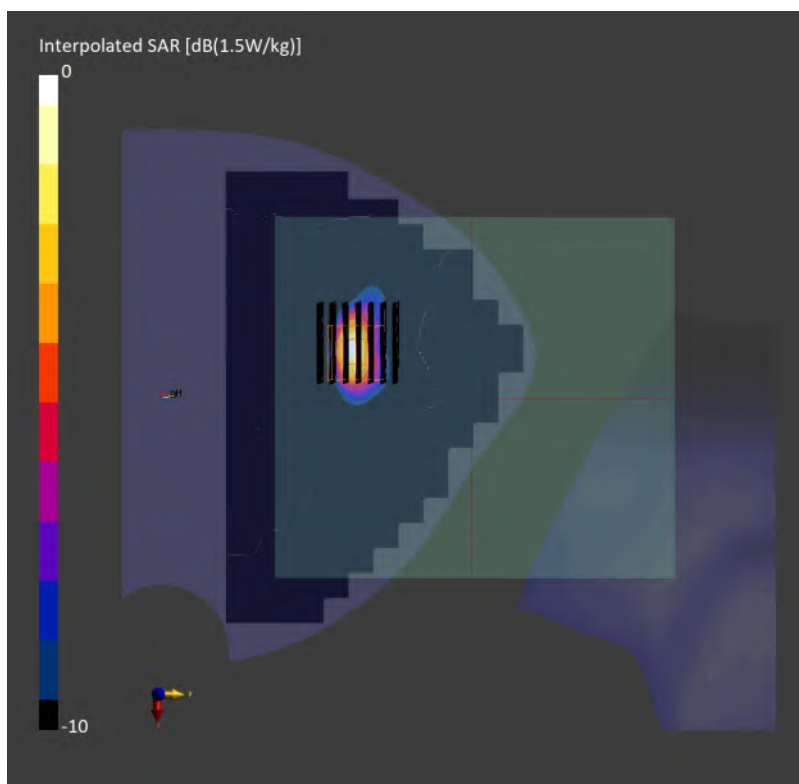

133_GSM1900_GPRS 3 Tx slots_Top Side_0mm_Ch661

Communication System: GPRS-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260628 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(7.02, 7.58, 6.92); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: GSM, 10027-DAC

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 3.37 W/kg; SAR (10g) = 1.41 W/kg;

TSL Correction: Positive only

Zoom Scan (30.6 mm x 30.6 mm x 33.4 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm


Power Drift = -0.06 dB

SAR (1g) = 3.22 W/kg; SAR (8g) = 1.36 W/kg; SAR (10g) = 1.21 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 67.9 %

TSL Correction: Positive only

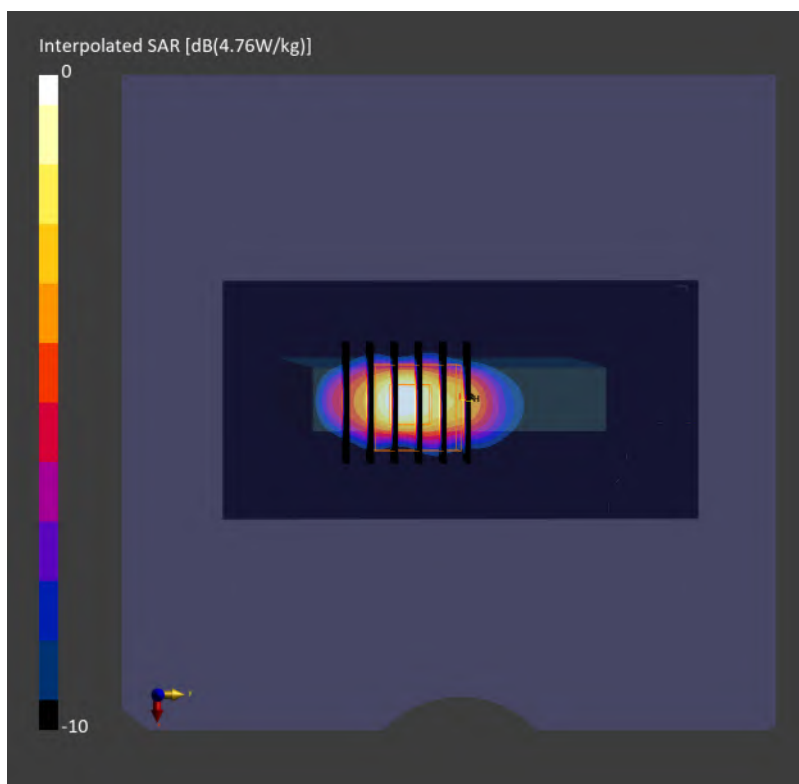

134_WCDMA II_RMC 12.2Kbps_Back Right_0mm_Ch9400

Communication System: UMTS-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260627 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 43.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.64, 8.14, 7.69); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (60.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 4.72 W/kg; SAR (10g) = 2.18 W/kg;

TSL Correction: Positive only

Zoom Scan (34.4 mm x 34.4 mm x 33.4 mm): Measurement Grid: 4.3 mm x 4.3 mm x 1.4 mm


Power Drift = -0.11 dB

SAR (1g) = 4.88 W/kg; SAR (8g) = 2.21 W/kg; SAR (10g) = 1.99 W/kg

Smallest distance from peaks to all points 3 dB below = 5.2 mm

Ratio of SAR at M2 to SAR at M1 = 69.9 %

TSL Correction: Positive only

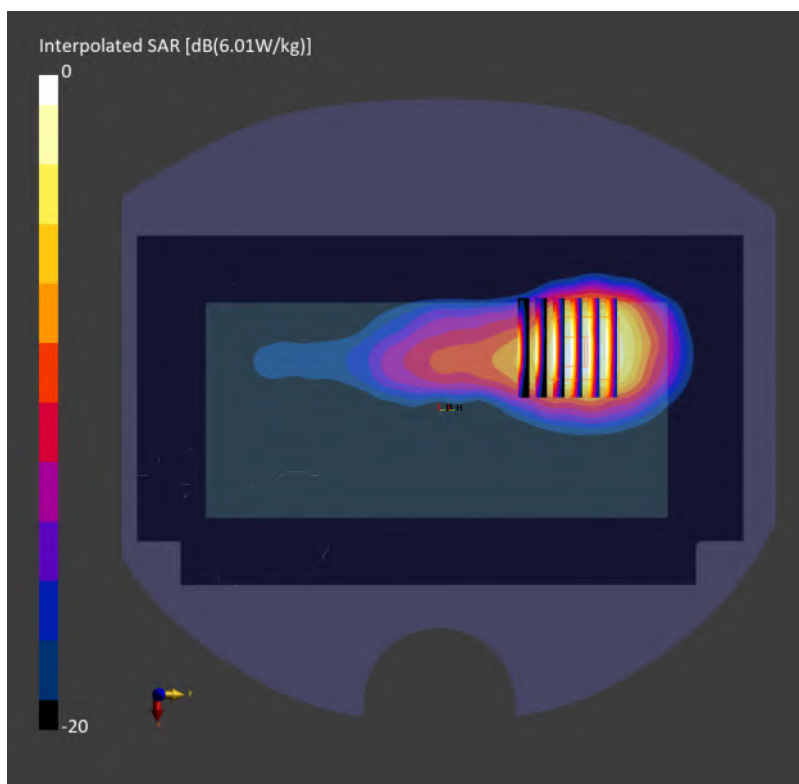

135_WCDMA IV_RMC 12.2Kbps_Top Side_0mm_Ch1413

Communication System: UMTS-FDD; Frequency: 1732.600 MHz

Medium: HSL_600-7200_260626 Medium parameters used: $f = 1732.600$ MHz; $\sigma = 1.31$ S/m; $\epsilon_r = 42.0$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.89, 8.41, 7.94); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WCDMA, 10011-CAC

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 5.28 W/kg; SAR (10g) = 2.38 W/kg;

TSL Correction: Positive only

Zoom Scan (34.2 mm x 34.2 mm x 33.4 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm


Power Drift = -0.04 dB

SAR (1g) = 6.03 W/kg; SAR (8g) = 2.55 W/kg; SAR (10g) = 2.28 W/kg

Smallest distance from peaks to all points 3 dB below = 3.8 mm

Ratio of SAR at M2 to SAR at M1 = 62.2 %

TSL Correction: Positive only

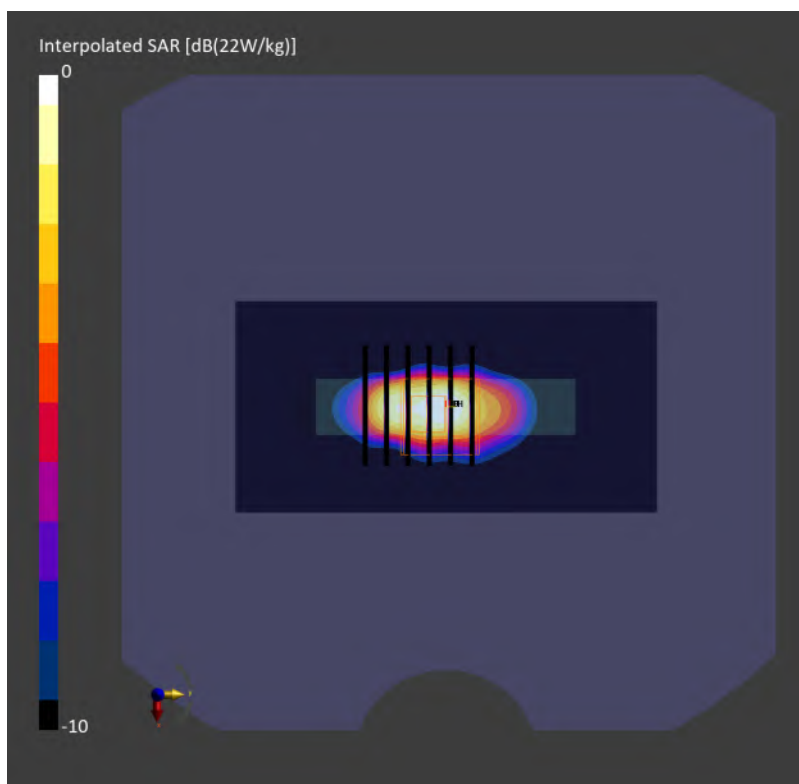

136_LTE Band 7_20M_QPSK_1_0_Back Top_0mm_Ch21100

Communication System: LTE-FDD; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260704 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.66, 6.54, 6.74); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 5.73 W/kg; SAR (10g) = 2.35 W/kg;

TSL Correction: Positive only

Zoom Scan (34.2 mm x 34.2 mm x 33.4 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm


Power Drift = 0.02 dB

SAR (1g) = 6.59 W/kg; SAR (8g) = 2.68 W/kg; SAR (10g) = 2.36 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 72.3 %

TSL Correction: Positive only

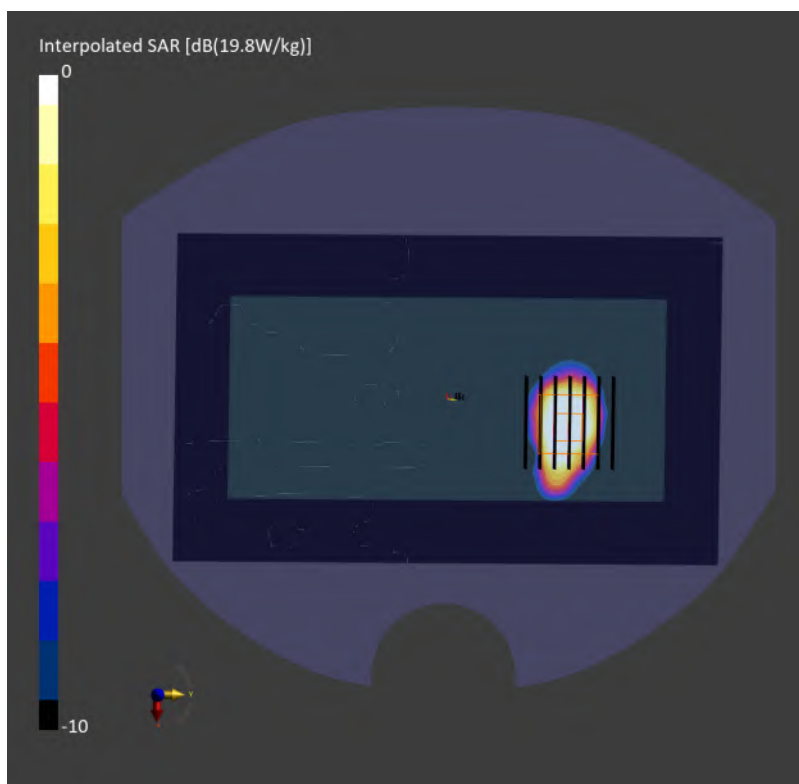

137_LTE Band 25_20M_QPSK_1_0_Top Side_0mm_Ch26140

Communication System: LTE-FDD; Frequency: 1860.000 MHz

Medium: HSL_600-7200_260627 Medium parameters used: $f = 1860.000$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.25, 7.12, 7.34); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 5.67 W/kg; SAR (10g) = 2.51 W/kg;

TSL Correction: Positive only

Zoom Scan (30.6 mm x 30.6 mm x 33.4 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm


Power Drift = 0.04 dB

SAR (1g) = 5.37 W/kg; SAR (8g) = 2.34 W/kg; SAR (10g) = 2.09 W/kg

Smallest distance from peaks to all points 3 dB below = 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 69.2 %

TSL Correction: Positive only

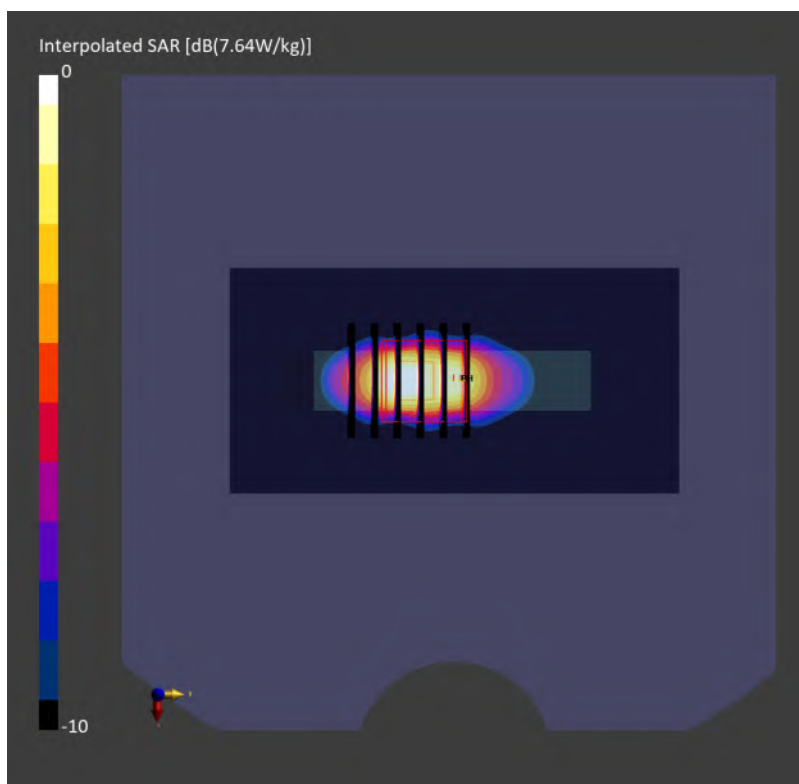

138_LTE Band 66_20M_QPSK_1_0_Top Side_0mm_Ch132322

Communication System: LTE-FDD; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260627 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 42.7$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.44, 7.3, 7.52); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 6.42 W/kg; SAR (10g) = 2.92 W/kg;

TSL Correction: Positive only

Zoom Scan (33.8 mm x 33.8 mm x 31.2 mm): Measurement Grid: 2.6 mm x 2.6 mm x 1.2 mm


Power Drift = 0.12 dB

SAR (1g) = 6.30 W/kg; SAR (8g) = 2.72 W/kg; SAR (10g) = 2.43 W/kg

Smallest distance from peaks to all points 3 dB below = 4.2 mm

Ratio of SAR at M2 to SAR at M1 = 69.4 %

TSL Correction: Positive only

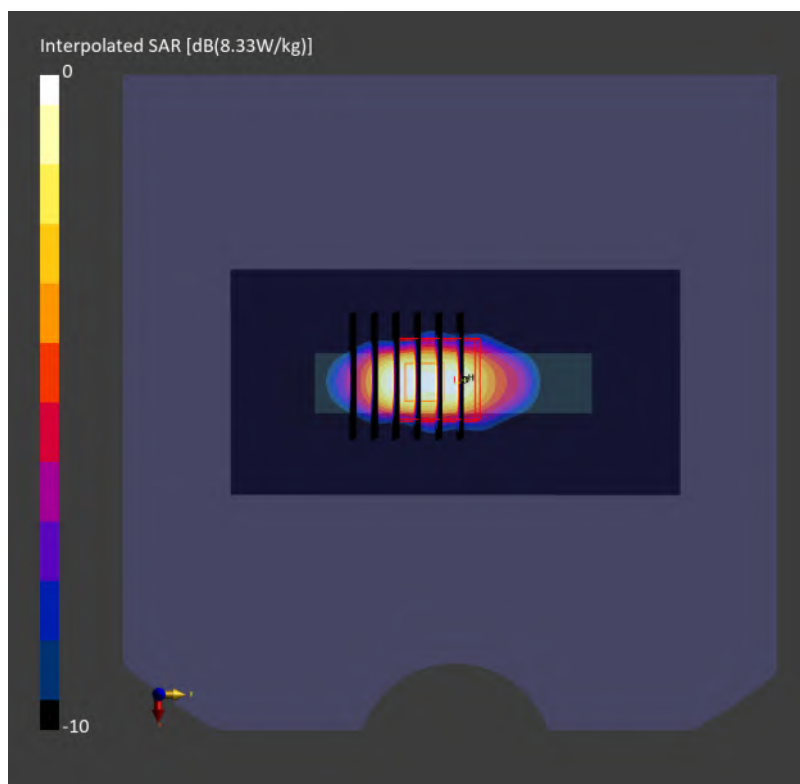

139_LTE Band 41_20M_QPSK_1_0_Back Top_0mm_Ch40620

Communication System: LTE-TDD; Frequency: 2593.000 MHz

Medium: HSL_600-7200_260704 Medium parameters used: $f = 2593.000$ MHz; $\sigma = 1.98$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.66, 6.54, 6.74); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 5.86 W/kg; SAR (10g) = 2.42 W/kg;

TSL Correction: Positive only

Zoom Scan (30.8 mm x 30.8 mm x 31.2 mm): Measurement Grid: 4.4 mm x 4.4 mm x 1.5 mm


Power Drift = -0.08 dB

SAR (1g) = 6.48 W/kg; SAR (8g) = 2.73 W/kg; SAR (10g) = 2.41 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 72.1 %

TSL Correction: Positive only

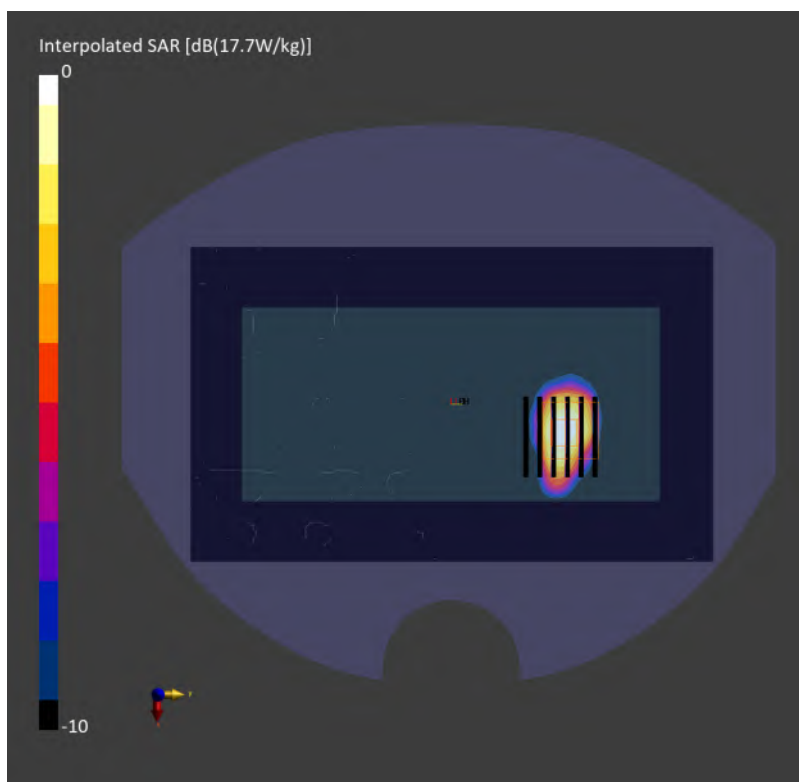

140_LTE Band 42_20M_QPSK_1_0_Back Top_0mm_Ch42590

Communication System: LTE-TDD; Frequency: 3500.000 MHz

Medium: HSL_600-7200_260702 Medium parameters used: $f = 3500.000$ MHz; $\sigma = 2.73$ S/m; $\epsilon_r = 37.7$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.96, 6.44, 5.88); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 7.17 W/kg; SAR (10g) = 2.30 W/kg;

TSL Correction: Positive only

Zoom Scan (34.2 mm x 34.2 mm x 33.4 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm


Power Drift = -0.18 dB

SAR (1g) = 9.87 W/kg; SAR (8g) = 2.97 W/kg; SAR (10g) = 2.54 W/kg

Smallest distance from peaks to all points 3 dB below = 3.8 mm

Ratio of SAR at M2 to SAR at M1 = 67.2 %

TSL Correction: Positive only

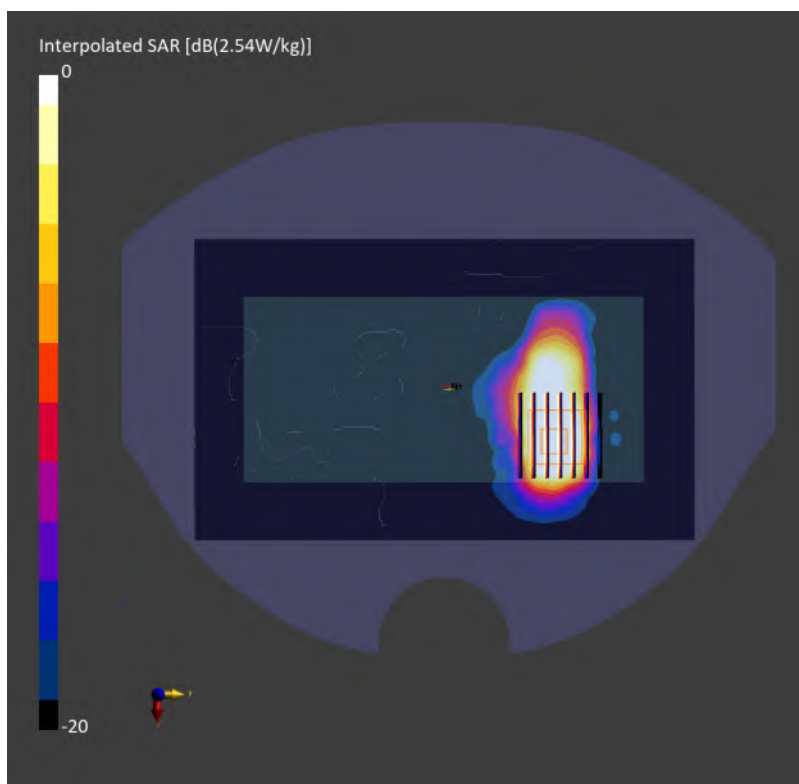

141_LTE Band 48_20M_QPSK_1_0_Back Top_0mm_Ch55830

Communication System: LTE-TDD; Frequency: 3609.000 MHz

Medium: HSL_600-7200_260702 Medium parameters used: $f = 3609.000$ MHz; $\sigma = 2.83$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.88, 6.35, 5.8); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 7.35 W/kg; SAR (10g) = 2.34 W/kg;

TSL Correction: Positive only

Zoom Scan (29.4 mm x 29.4 mm x 29.1 mm): Measurement Grid: 4.2 mm x 4.2 mm x 1.4 mm


Power Drift = -0.12 dB

SAR (1g) = 10.0 W/kg; SAR (8g) = 3.00 W/kg; SAR (10g) = 2.57 W/kg

Smallest distance from peaks to all points 3 dB below = 4.2 mm

Ratio of SAR at M2 to SAR at M1 = 64.1 %

TSL Correction: Positive only

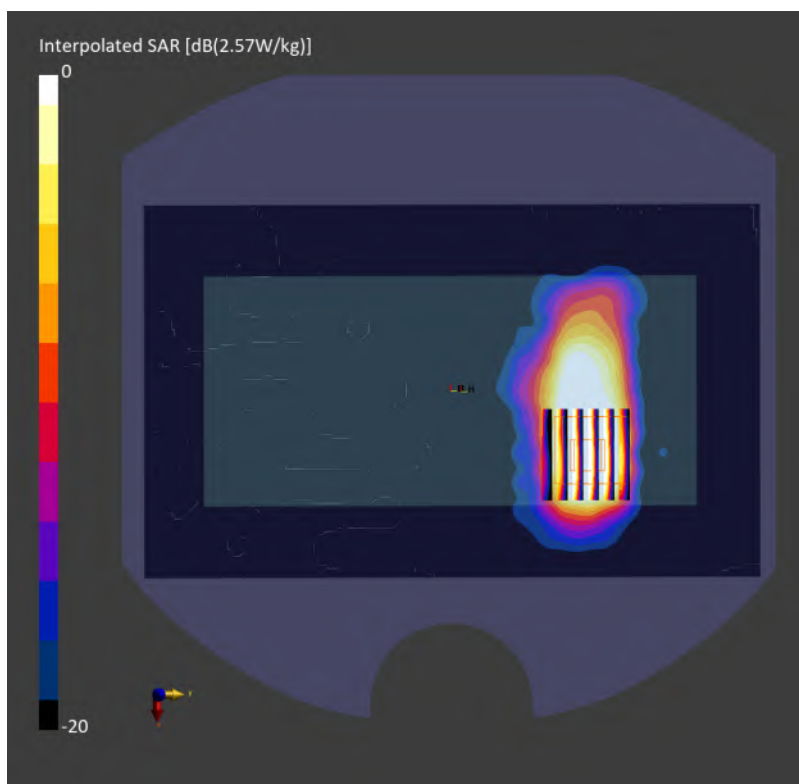

142_FR1 n7_50M_BPSK_135_68_Back Right_0mm_Ch507000

Communication System: 5G NR; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260623 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.83$ S/m; $\epsilon_r = 39.4$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.66, 6.54, 6.74); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10943-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 4.93 W/kg; SAR (10g) = 2.13 W/kg;

TSL Correction: Positive only

Zoom Scan (34.2 mm x 34.2 mm x 33.4 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm


Power Drift = -0.09 dB

SAR (1g) = 5.43 W/kg; SAR (8g) = 2.29 W/kg; SAR (10g) = 2.04 W/kg

Smallest distance from peaks to all points 3 dB below = 3.9 mm

Ratio of SAR at M2 to SAR at M1 = 63.1 %

TSL Correction: Positive only

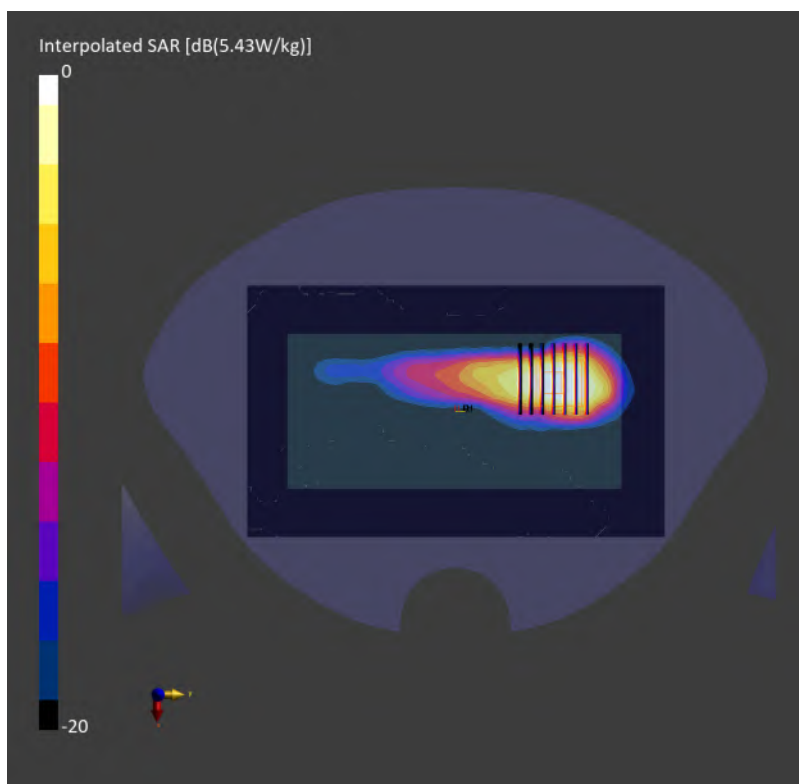

143_FR1 n25_40M_BPSK_1_1_Back Top_0mm_Ch376500

Communication System: 5G NR; Frequency: 1882.500 MHz

Medium: HSL_600-7200_260703 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 40.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.25, 7.12, 7.34); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10934-AAC

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 6.16 W/kg; SAR (10g) = 2.77 W/kg;

TSL Correction: Positive only

Zoom Scan (34.2 mm x 34.2 mm x 33.4 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm


Power Drift = -0.09 dB

SAR (1g) = 6.24 W/kg; SAR (8g) = 2.76 W/kg; SAR (10g) = 2.47 W/kg

Smallest distance from peaks to all points 3 dB below = 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 71.3 %

TSL Correction: Positive only

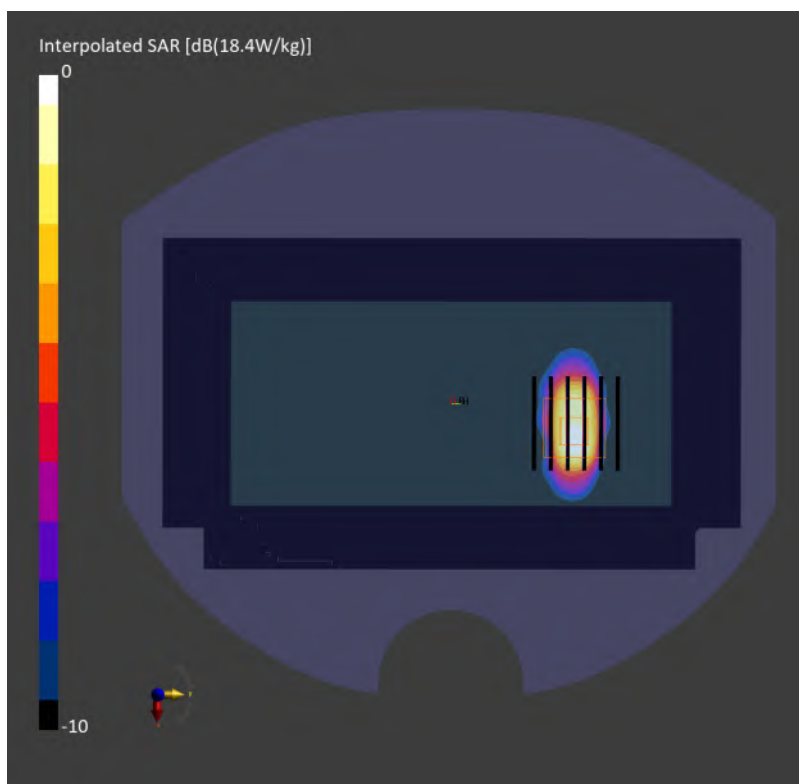

144_FR1 n66_45M_BPSK_240_0_Top Side_0mm_Ch349000

Communication System: 5G NR; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260624 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.44, 7.3, 7.52); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 FDD, 10950-AAC

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 6.15 W/kg; SAR (10g) = 2.71 W/kg;

TSL Correction: Positive only

Zoom Scan (34.2 mm x 34.2 mm x 33.4 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm


Power Drift = -0.08 dB

SAR (1g) = 5.91 W/kg; SAR (8g) = 2.59 W/kg; SAR (10g) = 2.32 W/kg

Smallest distance from peaks to all points 3 dB below = 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 68.2 %

TSL Correction: Positive only

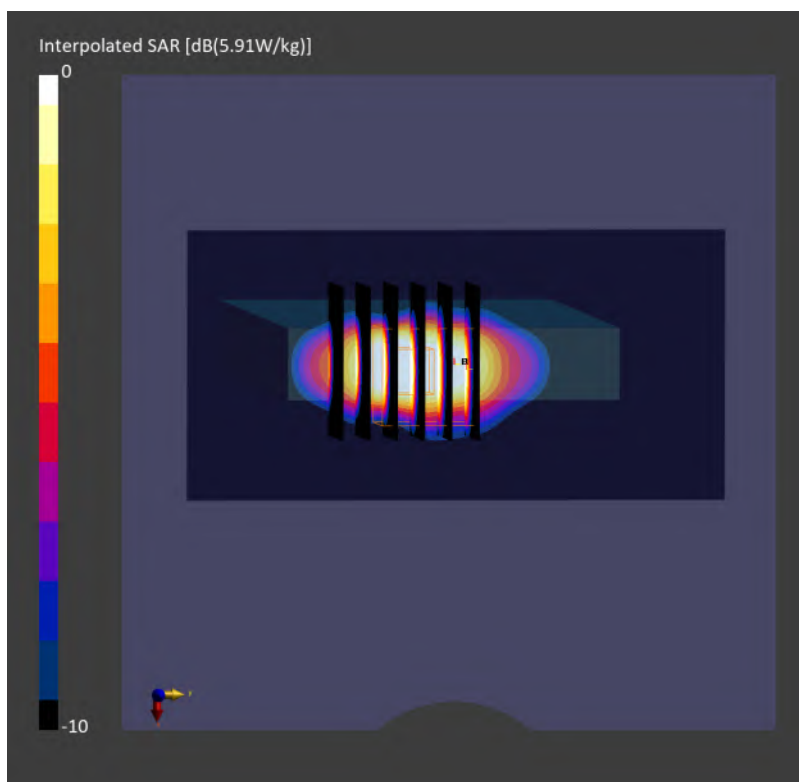

145_FR1 n41_100M_BPSK_1_1_Back Right_0mm_Ch518598

Communication System: 5G NR; Frequency: 2592.990 MHz

Medium: HSL_600-7200_260629 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.97$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.73, 7.27, 6.64); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 5.72 W/kg; SAR (10g) = 2.23 W/kg;

TSL Correction: Positive only

Zoom Scan (33.8 mm x 33.8 mm x 31.2 mm): Measurement Grid: 2.6 mm x 2.6 mm x 1.2 mm


Power Drift = 0.01 dB

SAR (1g) = 5.63 W/kg; SAR (8g) = 2.28 W/kg; SAR (10g) = 2.03 W/kg

Smallest distance from peaks to all points 3 dB below = 3.5 mm

Ratio of SAR at M2 to SAR at M1 = 64.7 %

TSL Correction: Positive only

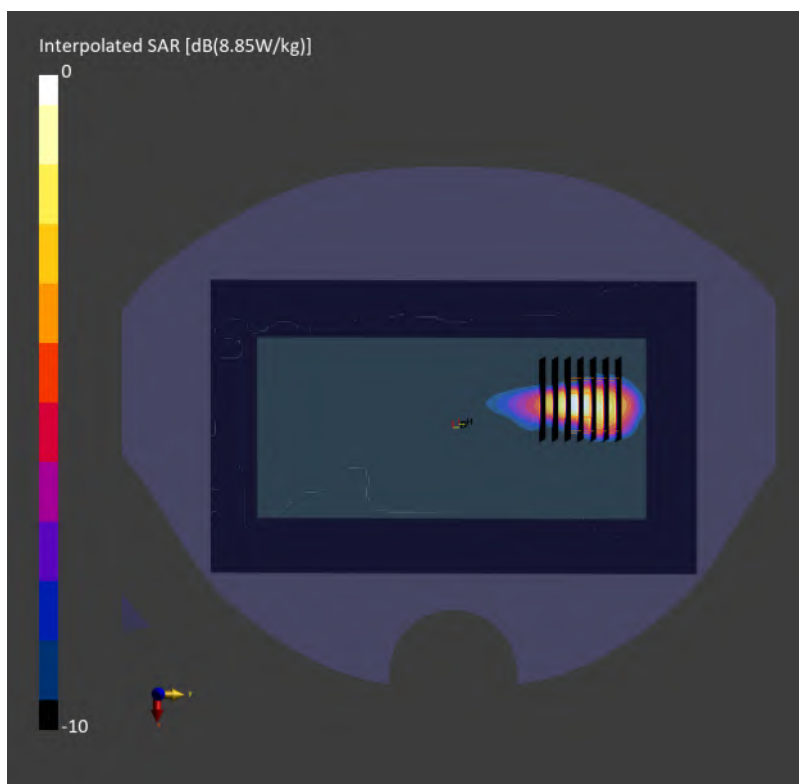

146_FR1 n48_40M_BPSK_1_1_Back Top_0mm_Ch645332

Communication System: 5G NR; Frequency: 3679.980 MHz

Medium: HSL_600-7200_260626 Medium parameters used: $f = 3679.975$ MHz; $\sigma = 2.91$ S/m; $\epsilon_r = 37.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.88, 6.35, 5.8); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10903-AAD

Area Scan (120.0 mm x 60.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 5.28 W/kg; SAR (10g) = 1.74 W/kg;

TSL Correction: Positive only

Zoom Scan (31.2 mm x 31.2 mm x 31.2 mm): Measurement Grid: 2.6 mm x 2.6 mm x 1.2 mm


Power Drift = -0.14 dB

SAR (1g) = 8.29 W/kg; SAR (8g) = 2.42 W/kg; SAR (10g) = 2.06 W/kg

Smallest distance from peaks to all points 3 dB below = 4.2 mm

Ratio of SAR at M2 to SAR at M1 = 69.3 %

TSL Correction: Positive only

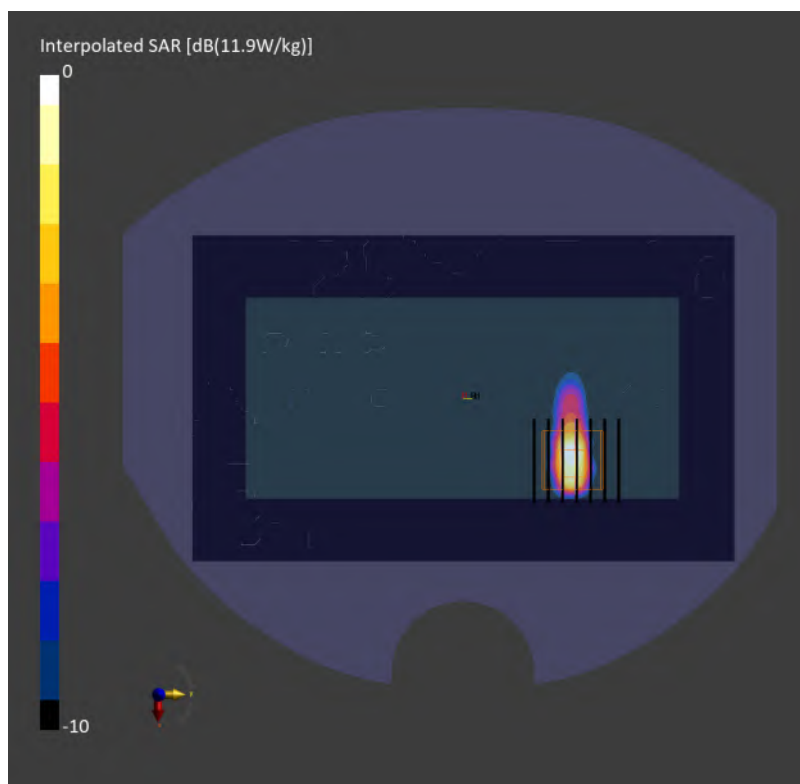

147_FR1 n77_100M_BPSK_1_1_Back Top_0mm_Ch656000

Communication System: 5G NR; Frequency: 3840.000 MHz

Medium: HSL_600-7200_260626 Medium parameters used: $f = 3840.000$ MHz; $\sigma = 3.07$ S/m; $\epsilon_r = 37.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.79, 6.25, 5.71); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: 5G NR FR1 TDD, 10866-AAF

Area Scan (120.0 mm x 60.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 6.73 W/kg; SAR (10g) = 2.18 W/kg;

TSL Correction: Positive only

Zoom Scan (30.8 mm x 30.8 mm x 31.2 mm): Measurement Grid: 2.8 mm x 2.8 mm x 1.2 mm


Power Drift = -0.07 dB

SAR (1g) = 10.0 W/kg; SAR (8g) = 2.94 W/kg; SAR (10g) = 2.50 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 67.9 %

TSL Correction: Positive only

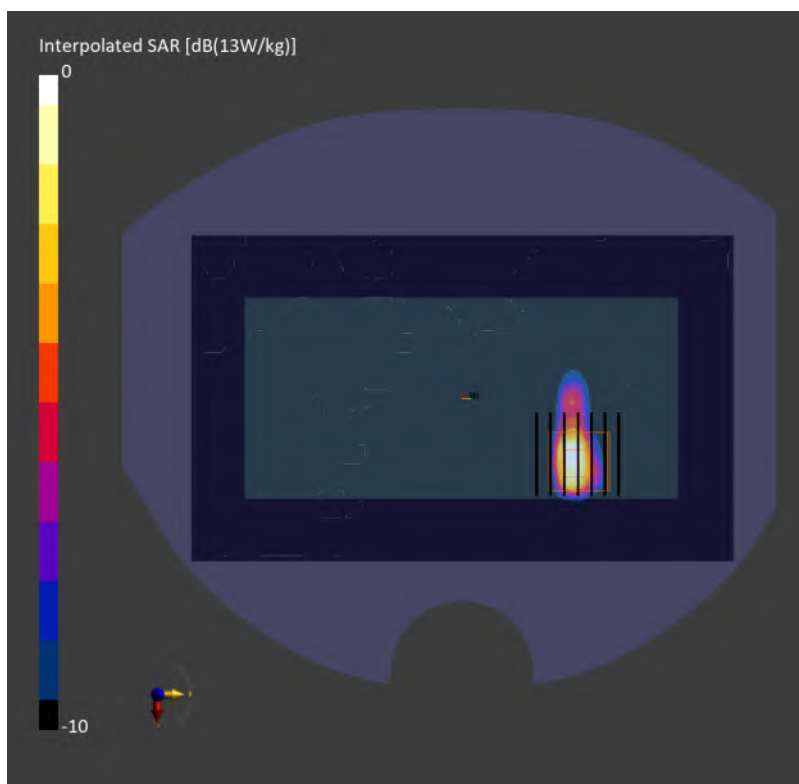

148_WLAN2.4GHz_802.11b 1Mbps_Back Top_0mm_Ch11

Communication System: IEEE 802.11b WiFi 2.4 GHz; Frequency: 2462.000 MHz

Medium: HSL_600-7200_260701 Medium parameters used: $f = 2462.000$ MHz; $\sigma = 1.79$ S/m; $\epsilon_r = 39.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.56, 7.09, 6.47); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10315-AAB

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 3.58 W/kg; SAR (10g) = 1.38 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm

Power Drift = -0.14 dB

SAR (1g) = 3.77 W/kg; SAR (8g) = 1.51 W/kg; SAR (10g) = 1.29 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 70.4 %

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.14 dB

SAR (1g) = 3.53 W/kg; SAR (8g) = 1.46 W/kg; SAR (10g) = 1.25 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 70.4 %

TSL Correction: Positive only

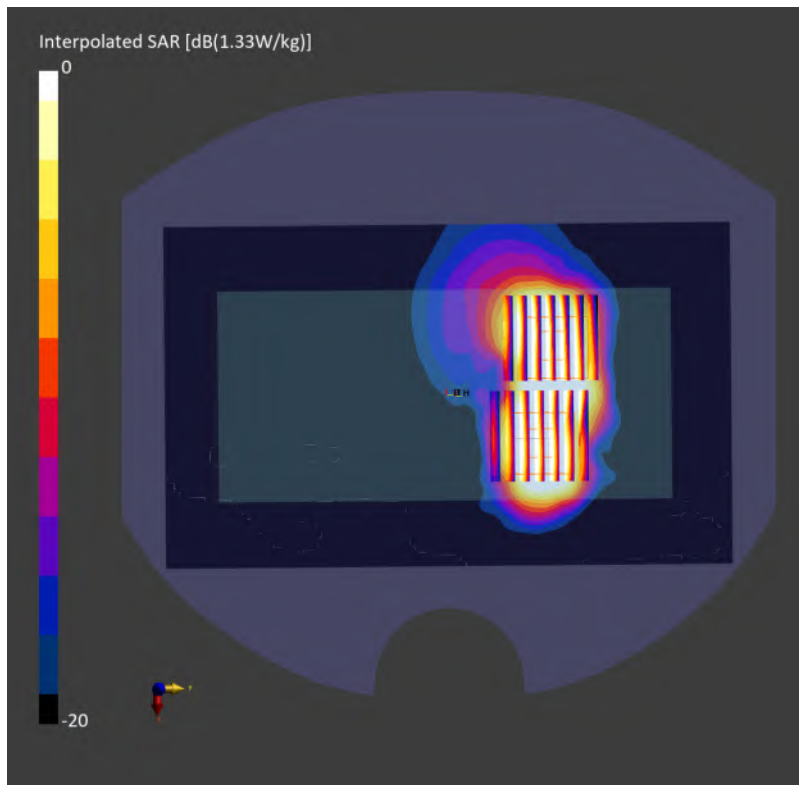

149_WLAN5GHz_802.11ac-VHT40 MCS0_Back Top_0mm_Ch54

Communication System: IEEE 802.11ac WiFi; Frequency: 5270.000 MHz

Medium: HSL_600-7200_260701 Medium parameters used: $f = 5270.000$ MHz; $\sigma = 4.46$ S/m; $\epsilon_r = 34.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.03, 5.43, 4.96); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10534-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 3.56 W/kg; SAR (10g) = 1.06 W/kg;

TSL Correction: Positive only

Zoom Scan (22.5 mm x 22.5 mm x 25.0 mm): Measurement Grid: 2.5 mm x 2.5 mm x 1.2 mm


Power Drift = -0.09 dB

SAR (1g) = 4.95 W/kg; SAR (8g) = 1.34 W/kg; SAR (10g) = 1.13 W/kg

Smallest distance from peaks to all points 3 dB below = 3.3 mm

Ratio of SAR at M2 to SAR at M1 = 63.3 %

TSL Correction: Positive only

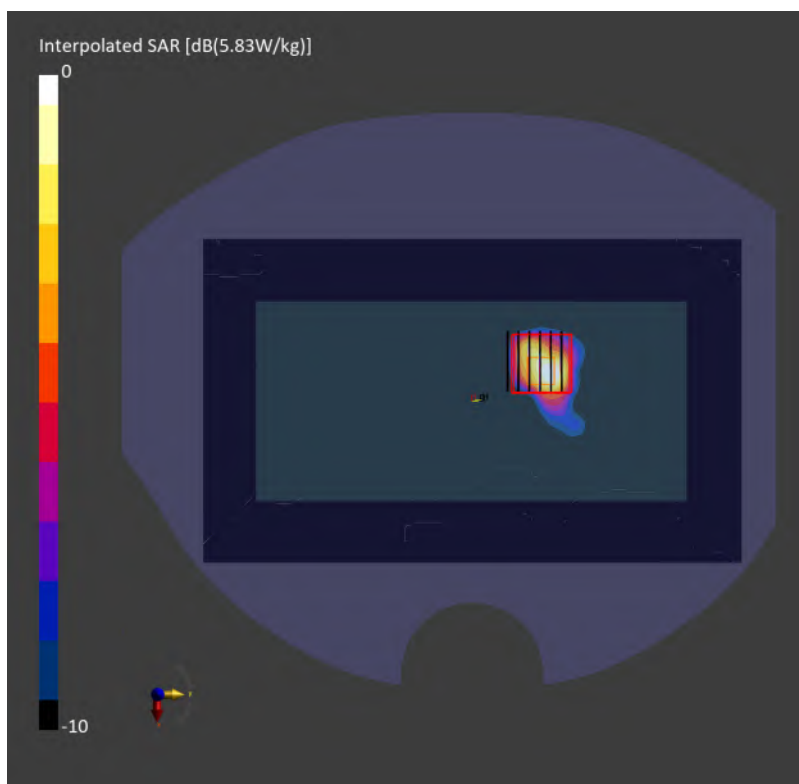

150_WLAN5GHz_802.11ac-VHT80 MCS0_Back Right_0mm_Ch138

Communication System: IEEE 802.11ac WiFi; Frequency: 5690.000 MHz

Medium: HSL_600-7200_260701 Medium parameters used: $f = 5690.000$ MHz; $\sigma = 4.90$ S/m; $\epsilon_r = 33.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(4.61, 4.98, 4.54); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.48 W/kg; SAR (10g) = 0.467 W/kg;

TSL Correction: Positive only

Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm


Power Drift = 0.13 dB

SAR (1g) = 2.14 W/kg; SAR (8g) = 0.604 W/kg; SAR (10g) = 0.509 W/kg

Smallest distance from peaks to all points 3 dB below = 3.4 mm

Ratio of SAR at M2 to SAR at M1 = 51.2 %

TSL Correction: Positive only

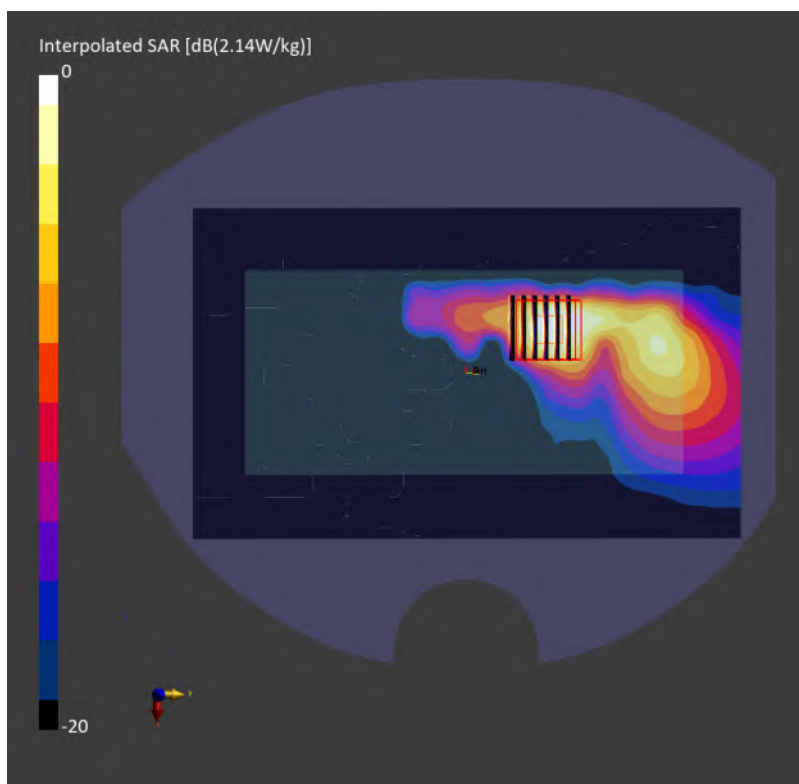

151_WLAN5GHz_802.11ac-VHT80 MCS0_Back Top_0mm_Ch155

Communication System: IEEE 802.11ac WiFi; Frequency: 5775.000 MHz

Medium: HSL_600-7200_260701 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.06$ S/m; $\epsilon_r = 33.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(4.54, 4.9, 4.48); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 10544-AAD

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 7.56 W/kg; SAR (10g) = 1.86 W/kg;

TSL Correction: Positive only

Zoom Scan (23.2 mm x 23.2 mm x 25.0 mm): Measurement Grid: 2.9 mm x 2.9 mm x 1.2 mm


Power Drift = 0.16 dB

SAR (1g) = 7.13 W/kg; SAR (8g) = 1.93 W/kg; SAR (10g) = 1.63 W/kg

Smallest distance from peaks to all points 3 dB below = 2.9 mm

Ratio of SAR at M2 to SAR at M1 = 61.7 %

TSL Correction: Positive only

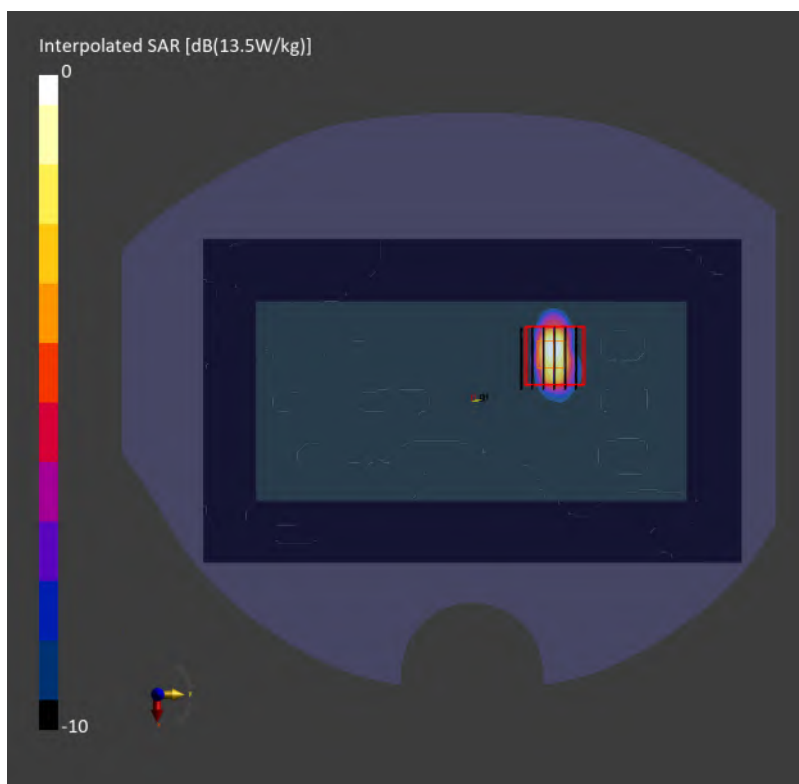

152_WLAN6GHz_802.11be-EHT320 MCS0_Top Side_0mm_Ch159

Communication System: IEEE 802.11be; Frequency: 6745.000 MHz

Medium: HSL_600-7200_260703 Medium parameters used: $f = 6745.000$ MHz; $\sigma = 6.20$ S/m; $\epsilon_r = 32.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(4.76, 5.14, 4.7); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: WLAN, 11026-AAB

Area Scan (51.0 mm x 119.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.509 W/kg; SAR (10g) = 0.134 W/kg;

TSL Correction: Positive only

Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.11 dB


SAR (1g) = 0.686 W/kg; SAR (8g) = 0.167 W/kg; SAR (10g) = 0.141 W/kg

Smallest distance from peaks to all points 3 dB below = 4.0 mm

Ratio of SAR at M2 to SAR at M1 = 51.4 %

psAPD (1.0cm², sq) = 6.86 [W/m²]; psAPD (4.0cm², sq) = 3.34 [W/m²]

TSL Correction: Positive only

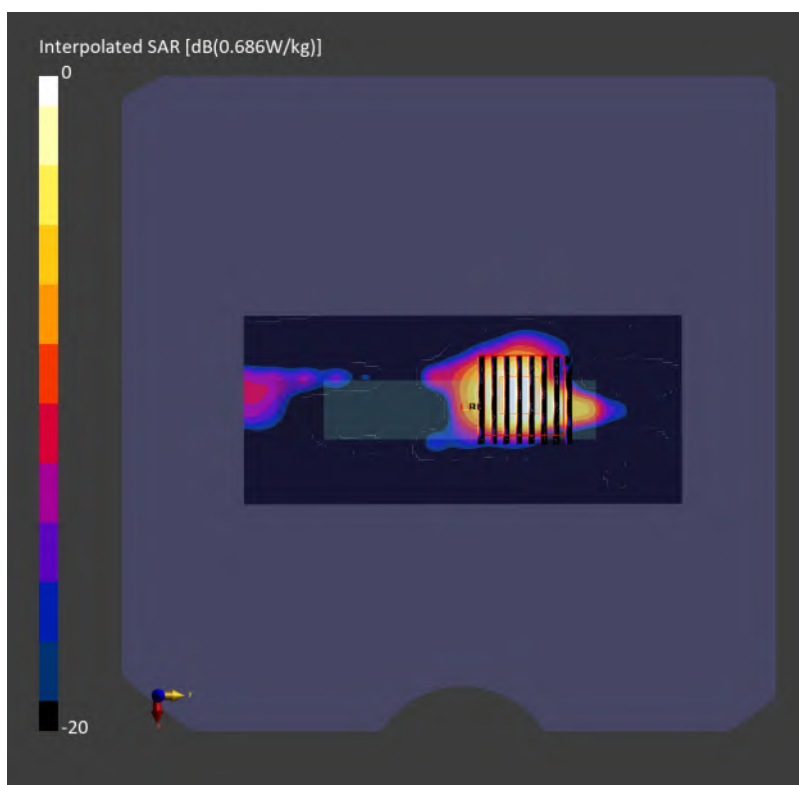

153_NFC_ASK_Back_0mm

Communication System: CW; Frequency: 13.600 MHz

Medium: HSL_600-7200_260707 Medium parameters used: $f = 13.600$ MHz; $\sigma = 0.748$ S/m; $\epsilon_r = 55.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3931; ConvF(17.55, 17.18, 17.51); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2205; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.037 W/kg; SAR (10g) = 0.021 W/kg;

TSL Correction: Positive only

Zoom Scan (33.8 mm x 33.8 mm x 31.2 mm): Measurement Grid: 2.6 mm x 2.6 mm x 1.2 mm


Power Drift = -0.10 dB

SAR (1g) = 0.051 W/kg; SAR (8g) = 0.020 W/kg; SAR (10g) = 0.018 W/kg

Smallest distance from peaks to all points 3 dB below = 4.2 mm

Ratio of SAR at M2 to SAR at M1 = 61.4 %

TSL Correction: Positive only

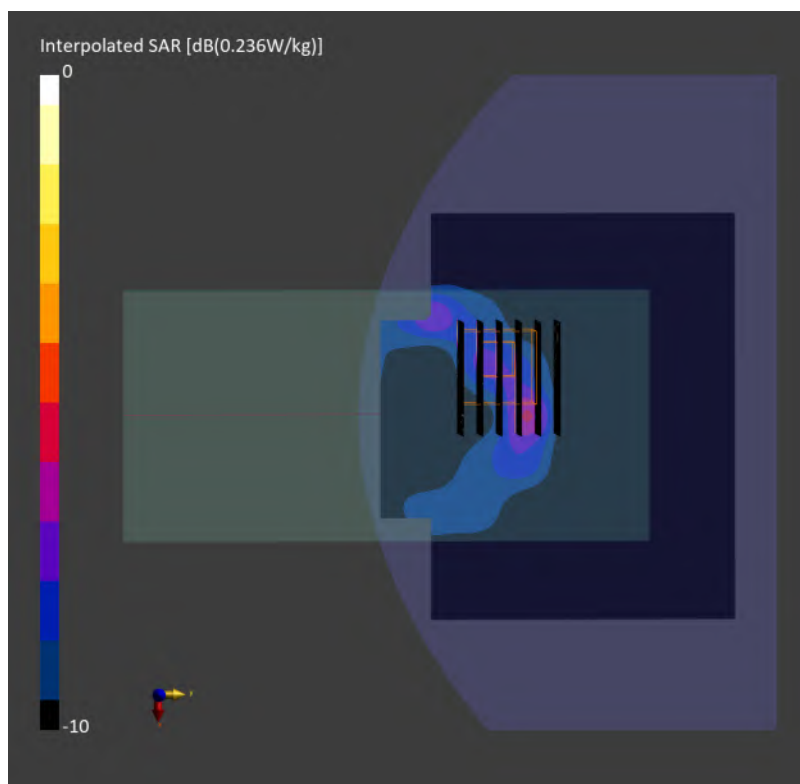

154_LTE Band 43_20M_QPSK_1_0_Back_0mm_Ch43690

Communication System: LTE-TDD; Frequency: 3610.000 MHz

Medium: HSL_600-7200_260619 Medium parameters used: $f = 3610.000$ MHz; $\sigma = 2.90$ S/m; $\epsilon_r = 39.6$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.88, 6.35, 5.8); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-TDD, 10435-AAG

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 6.53 W/kg; SAR (10g) = 2.11 W/kg;

TSL Correction: Positive only

Zoom Scan (29.0 mm x 29.0 mm x 31.2 mm): Measurement Grid: 2.9 mm x 2.9 mm x 1.2 mm


Power Drift = -0.01 dB

SAR (1g) = 7.32 W/kg; SAR (8g) = 2.40 W/kg; SAR (10g) = 2.06 W/kg

Smallest distance from peaks to all points 3 dB below = 4.7 mm

Ratio of SAR at M2 to SAR at M1 = 70.0 %

TSL Correction: Positive only

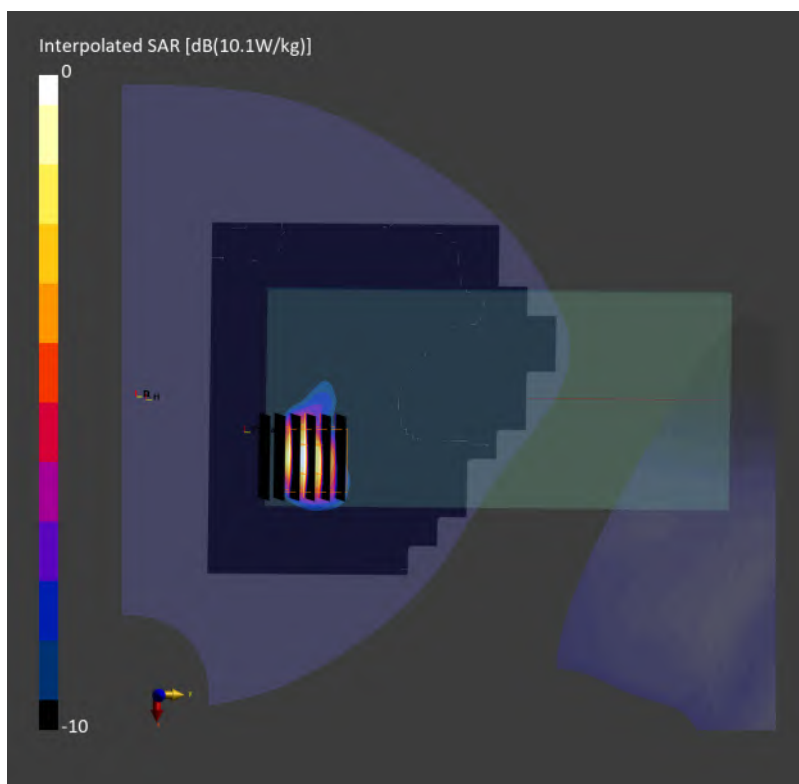

01
Measurement Report for Device
Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	Software Version	DUT Type
Device,	160.0 x 74.0 x 16.0	3.2.0.1840	Phone

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz]	Conversion Factor
5G	EDGE TOP, 2.00	6745.0	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1044	Air –	EUmmWV3 – SN9424_F1–55GHz, 2026–03–12	DAE4 Sn699, 2026–02–13

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	110.0 x 110.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Date	2026–07–08
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	2.76
psPDtot+ [W/m ²]	3.14
H _{max} [A/m]	0.183
E _{max} [V/m]	59.8
max _(Stot) [W/m ²]	4.52
Power Drift [dB]	–0.19
IPDn	8.19

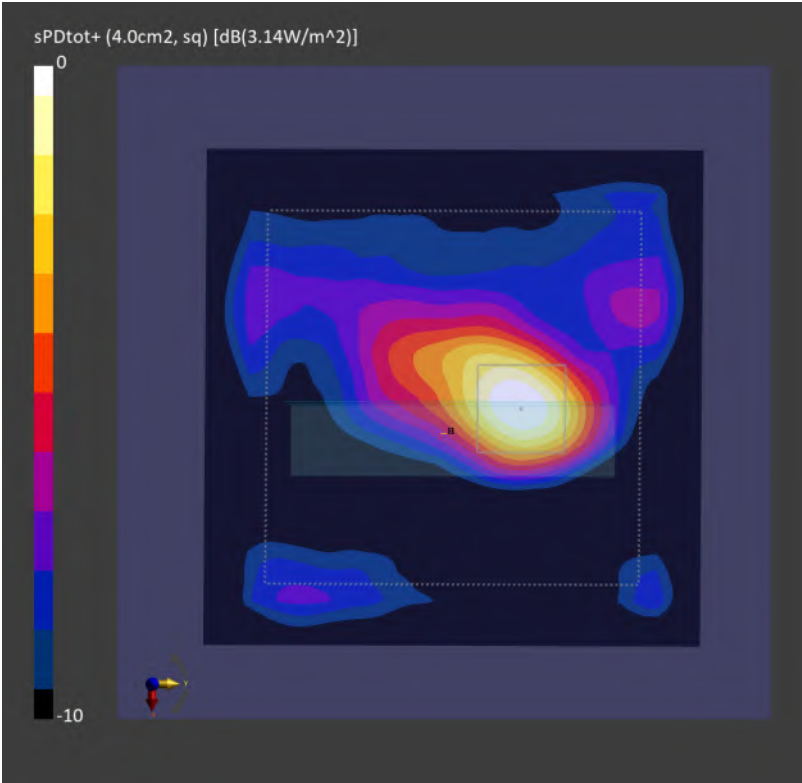

Volume Scan SAR

Date: 2026-06-29

LTE Band 7_20M_QPSK_1_0_Right Side_0mm_Ch21350;V

Communication System: LTE-FDD; Frequency: 2560.000 MHz

Medium: HSL_600-7200_260629 Medium parameters used: $f = 2560.000$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.73, 7.27, 6.64); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10169-CAF

Area Scan (60.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.776 W/kg; SAR (10g) = 0.318 W/kg;

TSL Correction: Positive only

Zoom Scan (70.0 mm x 200.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.16 dB

SAR (1g) = 0.829 W/kg; SAR (8g) = 0.343 W/kg; SAR (10g) = 0.304 W/kg

Smallest distance from peaks to all points 3 dB below = 5.0 mm

Ratio of SAR at M2 to SAR at M1 = 70.6 %

TSL Correction: Positive only

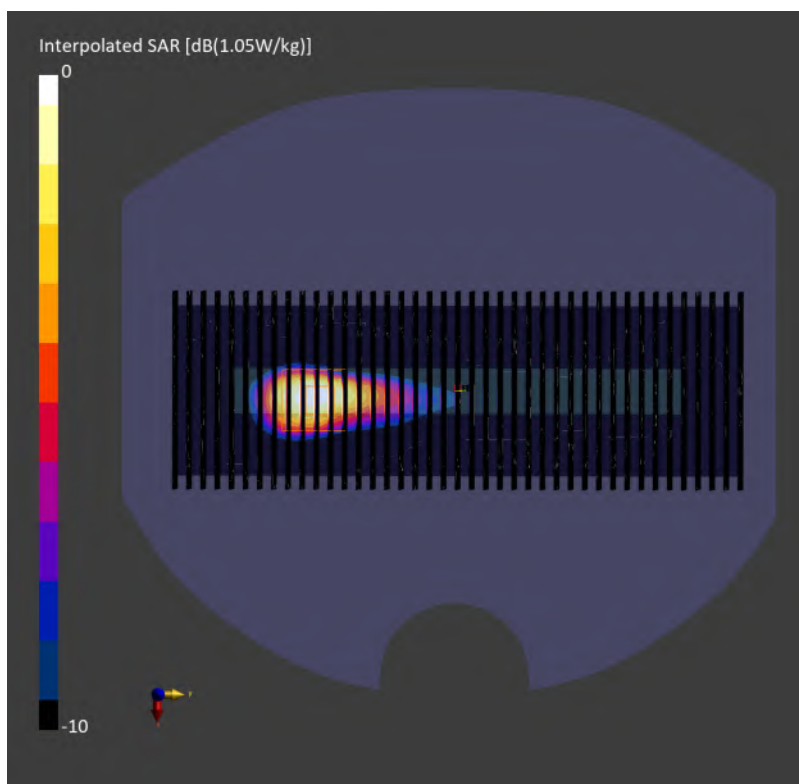

LTE Band 12_10M_QPSK_1_0_Right Side_0mm_Ch23095;V

Communication System: LTE-FDD; Frequency: 707.500 MHz

Medium: HSL_600-7200_260627 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.864$ S/m; $\epsilon_r = 42.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.9, 9.61, 8.78); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: LTE-FDD, 10175-CAH

Area Scan (60.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.07 W/kg; SAR (10g) = 0.579 W/kg;

TSL Correction: Positive only

Zoom Scan (72.0 mm x 204.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.05 dB

SAR (1g) = 0.947 W/kg; SAR (8g) = 0.455 W/kg; SAR (10g) = 0.415 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 58.6 %

TSL Correction: Positive only

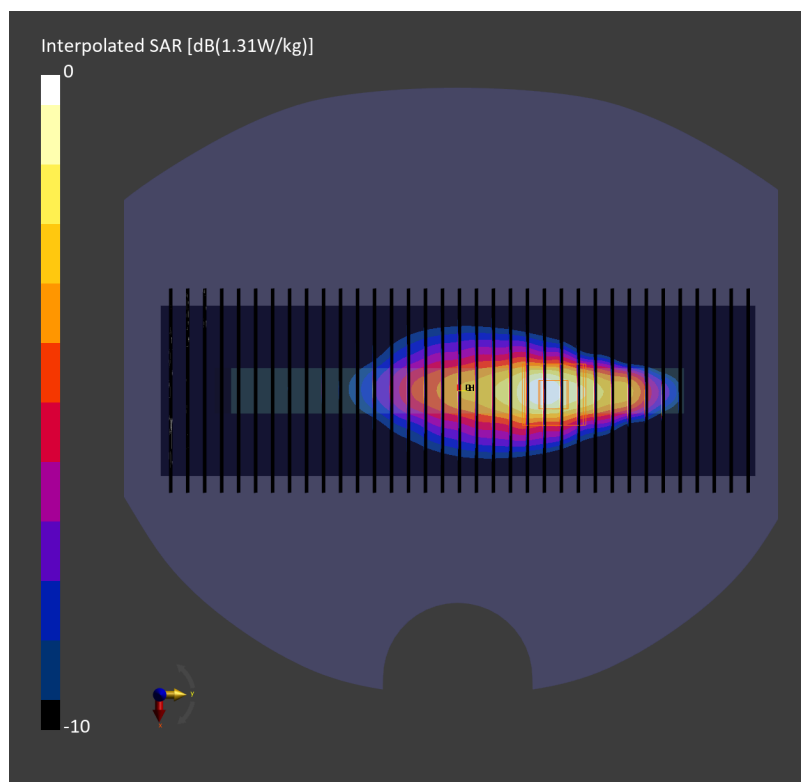

Case1
Measurement Report for Multi-TX Evaluator

Exposure Conditions

Phantom Section	Position	Test Distance [mm]	Band	Group	UID	Frequency [MHz]	Channel Number
Flat HSL	EDGE RIGHT	0.00	Band 12	LTE-FDD	101 75	707.500	23095
Flat HSL	EDGE RIGHT	0.00	Band 7	LTE-FDD	101 69	2560.000	21350
Flat HSL	EDGE RIGHT	0.00	Band 7 / Band 12	LTE-FDD / LTE-FDD	101 69 / 101 75	2560.000 / 707.500	21350 / 23095

Hardware Setup

Phantom	TSL	Probe	Calibration Date	DAE	Calibration Date
Twin-SAM V8.0 (30deg probe tilt)	HBBL-600-10000	EX3DV4 - SN7791	2026-02-20	DAE4 Sn1399	2026-03-11

SAR Measurement Results

Date	Scan Name	psSAR1g [W/kg]	psSAR10g [W/kg]	Drift [dB]
2026-07-20, 21:48	Combined Zoom Scan	1.42	0.539	N/A

