



FCC RADIO TEST REPORT

FCC ID : IHDT56AX5
Equipment : Mobile Cellular Phone
Brand Name : Motorola
Model Name : XT2651V
Applicant : Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA
Manufacturer : Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA
Standard : FCC Part 15 Subpart C §15.247

The product was received on Jun. 16, 2026 and testing was performed from Jun. 16, 2026 to Jul. 23, 2026. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory

No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333



Table of Contents

History of this test report	3
Summary of Test Result	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	7
1.3 Testing Location	7
1.4 Applicable Standards.....	7
2 Test Configuration of Equipment Under Test	8
2.1 Carrier Frequency and Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	9
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	10
3 Test Result	11
3.1 6dB and 99% Bandwidth Measurement	11
3.2 Output Power Measurement.....	12
3.3 Power Spectral Density Measurement	13
3.4 Conducted Band Edges and Spurious Emission Measurement	15
3.5 Radiated Band Edges and Spurious Emission Measurement	16
3.6 AC Conducted Emission Measurement.....	21
3.7 Antenna Requirements	23
4 List of Measuring Equipment.....	24
5 Measurement Uncertainty	25
Appendix A. Radiated Spurious Emission	
Appendix B. Duty Cycle Plots	
Appendix C. Spot Check Evaluation on IHDT56AX5	
Appendix D. Original Report	



History of this test report

Report No.	Version	Description	Issue Date
FR660814C	01	Initial issue of report	Aug. 04, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	Note
3.1	2.1049	99% Occupied Bandwidth	Pass	Note
3.2	15.247(b)(3) 15.247(b)(4)	Power Output Measurement	Pass	Note
3.3	15.247(e)	Power Spectral Density	Pass	Note
3.4	15.247(d)	Conducted Band Edges	Pass	Note
		Conducted Spurious Emission	Pass	Note
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	Pass	-
3.6	15.207	AC Conducted Emission	Pass	Note
3.7	15.203	Antenna Requirement	Pass	-

Note:

- The differences between the parent device (FCC ID: IHDT56AW3) and the variant device (FCC ID: IHDT56AX5) are detailed in the ECR document.
- All radiated tests were performed as full tests.
- All conducted test results were referenced from FCC ID: IHDT56AW3 (Sporton Test Report FR5N1310C). In accordance with FCC KDB 484596 D01 Referencing Test Data v03, conducted power spot-check measurements were performed on the variant device to verify the applicability of the referenced conducted test data. The spot-check results demonstrate comparable RF performance between the parent and variant devices and support the validity of the referenced conducted test data. Detailed results are provided in Appendix C.
- The referenced data, FCC ID: IHDT56AW3 (Sporton Test Report FR5N1310C), are not covered by TAF accreditation and are not considered TAF-accredited results.

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng
Report Producer: Yuri Huang



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs	GSM/WCDMA/LTE/5G NR/mmW, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ax/be, Wi-Fi 5GHz 802.11a/n/ac/ax/be, Wi-Fi 6GHz 802.11a/ax/be, GNSS, NFC,WPT and UWB.
Antenna Type subject to this standard	WLAN 2.4G : IFA Antenna

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	<Ant. 7>: -6.9
		<Ant. 11>: -6.9

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

EUT Information List	
IMEI	Performed Test Item
352595240017072 352595240017080	RF conducted measurement
352595240017312 352595240017320	Radiated Emission

1.1.1 Antenna Directional Gain

<For CDD Mode>

Follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)f)ii)

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows:

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

G_{ANT} is set equal to the gain of the antenna having the highest gain.

For PSD measurements, the directional gain calculation.

Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k/20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

As minimum $N_{SS}=1$ is supported by EUT, the formula can be simplified as:

Directional gain = $10 \cdot \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$ dBi

Where $G_1, G_2, \dots, G_N$ denote single antenna gain.

The directional gain "DG" is calculated as following table.

			DG	DG	Power	PSD
			for	for	Limit	Limit
	Ant 7	Ant 11	Power	PSD	Reduction	Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
2.4GHz	-6.90	-6.90	-6.90	-3.89	0.00	0.00



1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

The test location is accredited based on TAF code 1190 designated by NCC (National Communication Commission).

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333

FCC designation No.: TW1190

Note: The test site complies with ANSI C63.4 2014 requirement.

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ FCC KDB 484596 D01 Referencing Test Data v03
- ♦ FCC Part 15 Subpart C §15.247
- ♦ ANSI C63.10-2020 + Cor.1-2023

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437		

2.2 Test Mode

The device supports WLAN MIMO CDD mode only.

For 802.11ax/11be modes, the complete evaluation assessed only 802.11be EHT20 and EHT40 modes by referring to their higher output power.

802.11ax/be supports OFDMA Full RU tone and Partial RU tone. The evaluated Partial RU configurations include Partial RU-Left (for low channel) and Partial RU-Right (for high channel). Since the output power and PSD of Full RU are higher than those of Partial RU, Full RU was subjected to the complete evaluation, while Partial RU was evaluated for Band Edge and Spurious Emissions.

802.11be supports OFDMA small size RU configurations, including 52 Tone + 26 Tone and 106 Tone + 26 Tone combinations. The evaluated combinations are listed below:


a. For low channel: 52Tone_Index38 + 26Tone_Index1 and 106Tone_Index53 + 26Tone_Index4

b. For high channel: 52Tone_Index39 + 26Tone_Index7 and 106Tone_Index54 + 26Tone_Index4

The worst-case RSE results for Partial RU and Small Size RU configurations are presented in this report.

In this report, the conducted output power was measured and compared with the referenced report to confirm consistency. Since the verification results met the acceptance criteria, please refer to the referenced report for the conducted-related test results and AC conducted emission results. The radiated emission tests were fully re-evaluated in this report, and the detailed radiated test modes are shown in Appendix A.

2.3 Connection Diagram of Test System

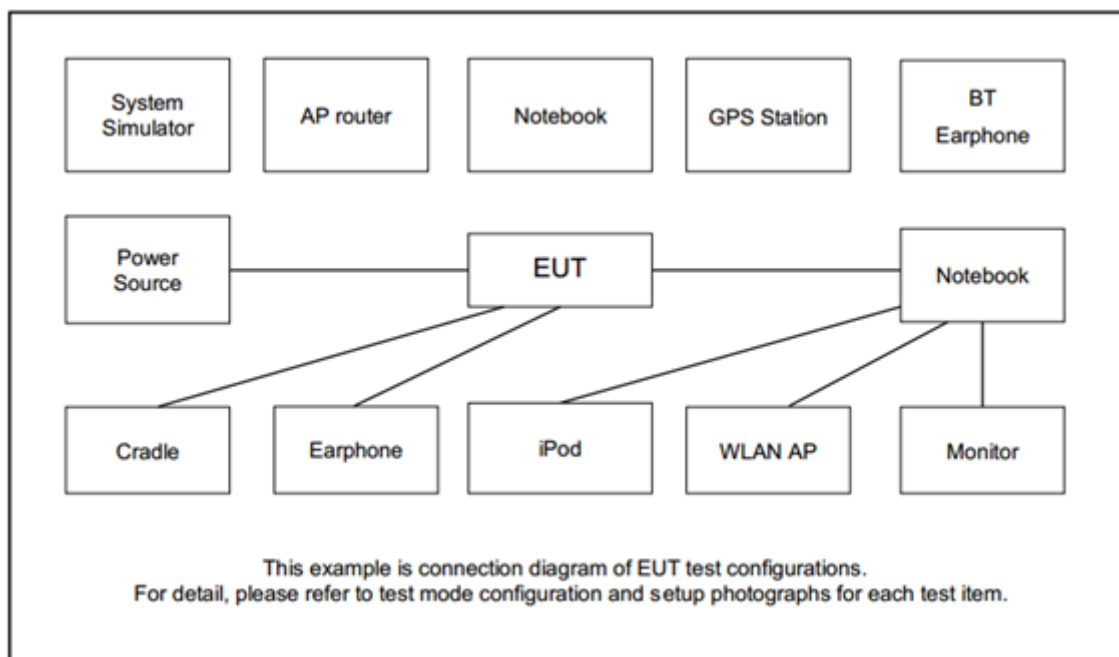



2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Earphone	Apple	A3046	FCC DoC	N/A	Unshielded, 1.2m

2.5 EUT Operation Test Setup

The RF test items, utility “QRCT v4.1 Version4.0.193.1” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 1% to 5% of the OBW but not less than 100 kHz. Set the Video bandwidth VBW $\geq 3 * RBW$. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth, and set the Video bandwidth (VBW) $\geq 3 * RBW$.
6. Measure and record the results in the test report.

3.1.4 Test Setup



3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to FCC ID: IHDT56AW3 (Sporton Test Report FR5N1310C).

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna with directional gain greater than 6 dBi is used, the output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

3.2.2 Measuring Instruments


Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures

<CDD Modes>

1. For Peak Power, the testing follows ANSI C63.10 Section 11.9.1.2 PKPM1
2. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
3. The RF output of EUT is connected to the power meter by RF cable and attenuator. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.
6. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

3.2.4 Test Setup

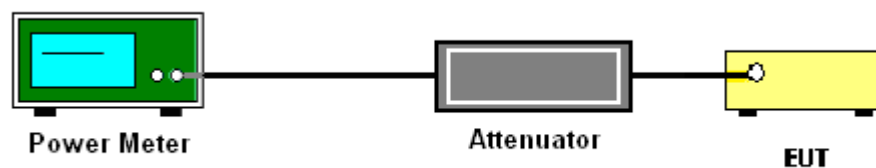

3.2.5 Test Result of Peak Output Power (Reporting Only)

Please refer to FCC ID: IHDT56AW3 (Sporton Test Report FR5N1310C).

3.2.6 Test Result of Average Output Power

Please refer to FCC ID: IHDT56AW3 (Sporton Test Report FR5N1310C).

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

<CDD Modes>

Method AVGPSD-2

1. The testing follows the ANSI C63.10 Section 11.10.5 Method AVGPSD-2.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 10 kHz. Video bandwidth VBW = 30 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW).
5. Number of points in sweep $\geq 2 \text{ Span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins).
6. Detector = RMS, Sweep time = auto couple.
7. Trace average at least 100 traces in power averaging mode.
8. Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6 \text{ dB}$ if the duty cycle is 25 percent.
9. Measure and record the results in the test report.
10. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (c): Measure and add $10 \log(N_{\text{ANT}})$ dB.


With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity $10 \log(N_{\text{ANT}})$ dB is added to each spectrum value before comparing to the emission limit. The addition of $10 \log(N_{\text{ANT}})$ dB serves to apportion the emission limit among the N_{ANT} outputs so that each output is permitted to contribute no more than $1/N_{\text{ANT}}^{\text{th}}$ of the PSD limit .

<TXBF Modes>**Method AVGPDS-3**

1. The testing follows the ANSI C63.10 Section 11.10.7 Method AVGPDS-3.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 10 kHz. Video bandwidth VBW = 30 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW).
5. Number of points in sweep $\geq 2 \text{ Span} / \text{RBW}$. (This ensures that bin-to-bin spacing is $\leq \text{RBW}/2$, so that narrowband signals are not lost between frequency bins).
6. Detector = RMS, Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow max hold to run for at least 60 seconds, or longer as needed to allow the trace to stabilize.
9. Measure and record the results in the test report.
10. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01

Method (c): Measure and add $10 \log(N_{\text{ANT}})$ dB.

With this technique, spectrum measurements are performed at each output of the device, but rather than summing the spectra or the spectral peaks across the outputs, the quantity $10 \log(N_{\text{ANT}})$ dB is added to each spectrum value before comparing to the emission limit. The addition of $10 \log(N_{\text{ANT}})$ dB serves to apportion the emission limit among the N_{ANT} outputs so that each output is permitted to contribute no more than $1/N_{\text{ANT}}^{\text{th}}$ of the PSD limit .

3.3.4 Test Setup**3.3.5 Test Result of Power Spectral Density**

Please refer to FCC ID: IHDT56AW3 (Sporton Test Report FR5N1310C).

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement.


3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup



3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Please refer to FCC ID: IHDT56AW3 (Sporton Test Report FR5N1310C).

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.




3.5.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW = RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW = 3 MHz for $f > 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


3.5.4 Test Setup

For radiated emissions below 30MHz

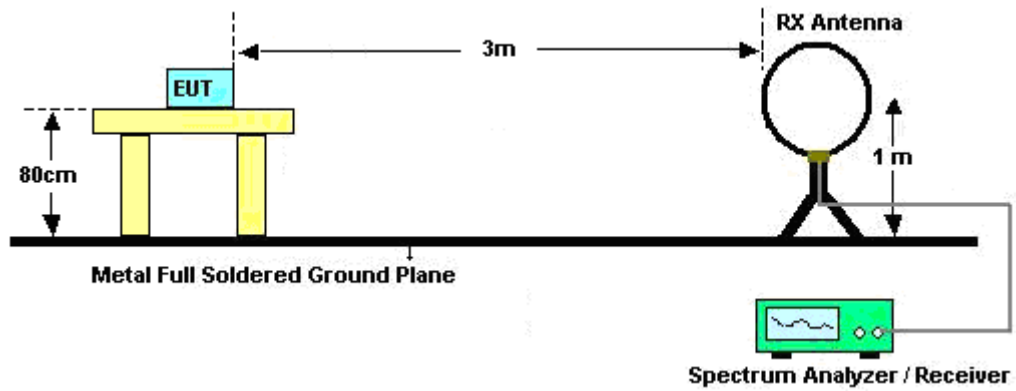


For radiated emissions from 30MHz to 1GHz

<CDD Mode>

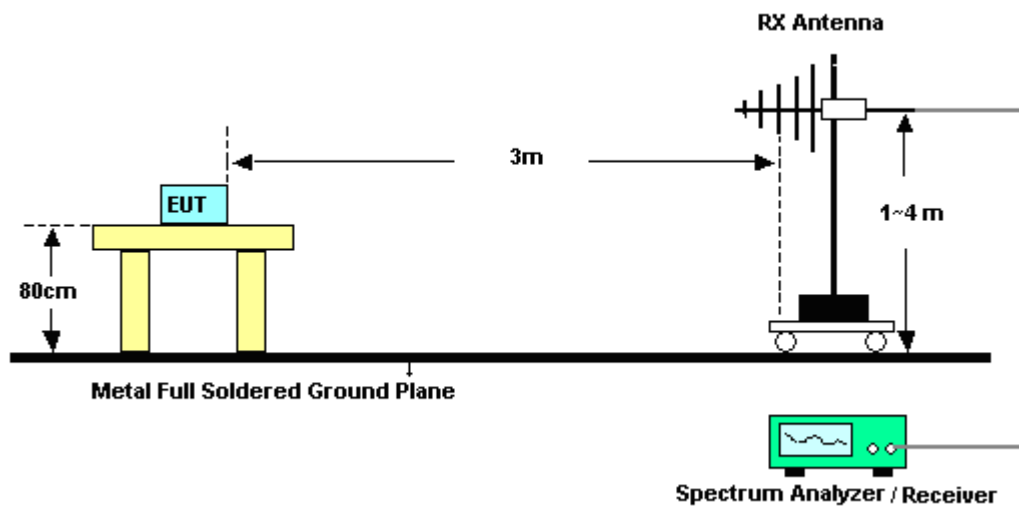


For radiated test from 1GHz to 18GHz

<CDD Mode>

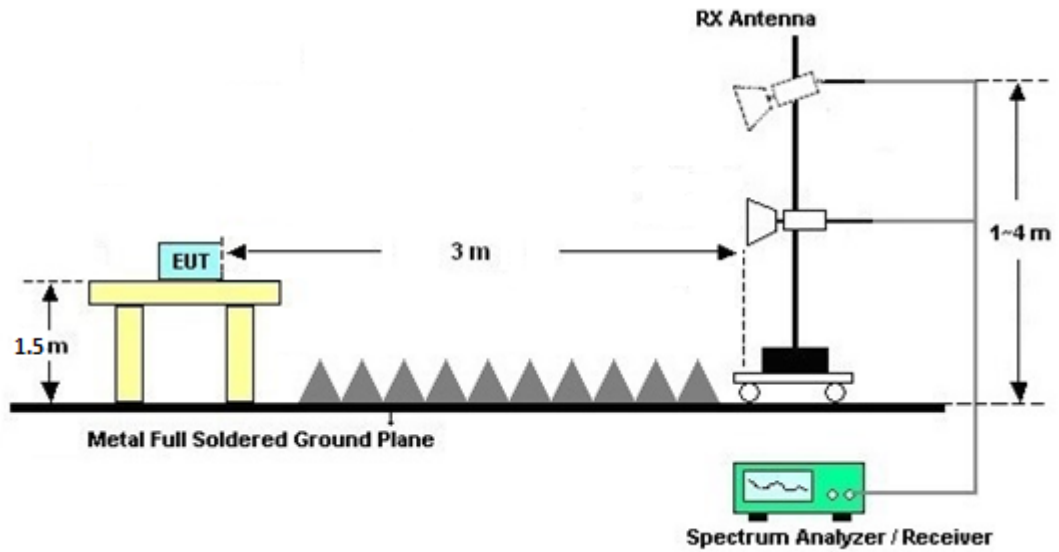

For radiated test above 18GHz

<CDD Mode>

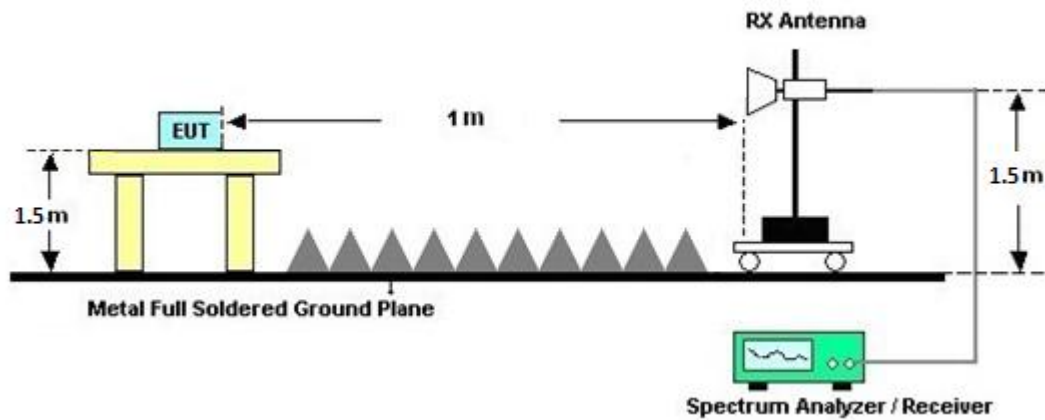

**3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix A.

3.5.7 Duty Cycle

Please refer to Appendix B.

3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix A.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dB μ V)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.6.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
6. The frequency range from 150 kHz to 30 MHz is scanned.
7. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF bandwidth = 9 kHz) with Maximum Hold Mode.

3.6.4 Test Setup

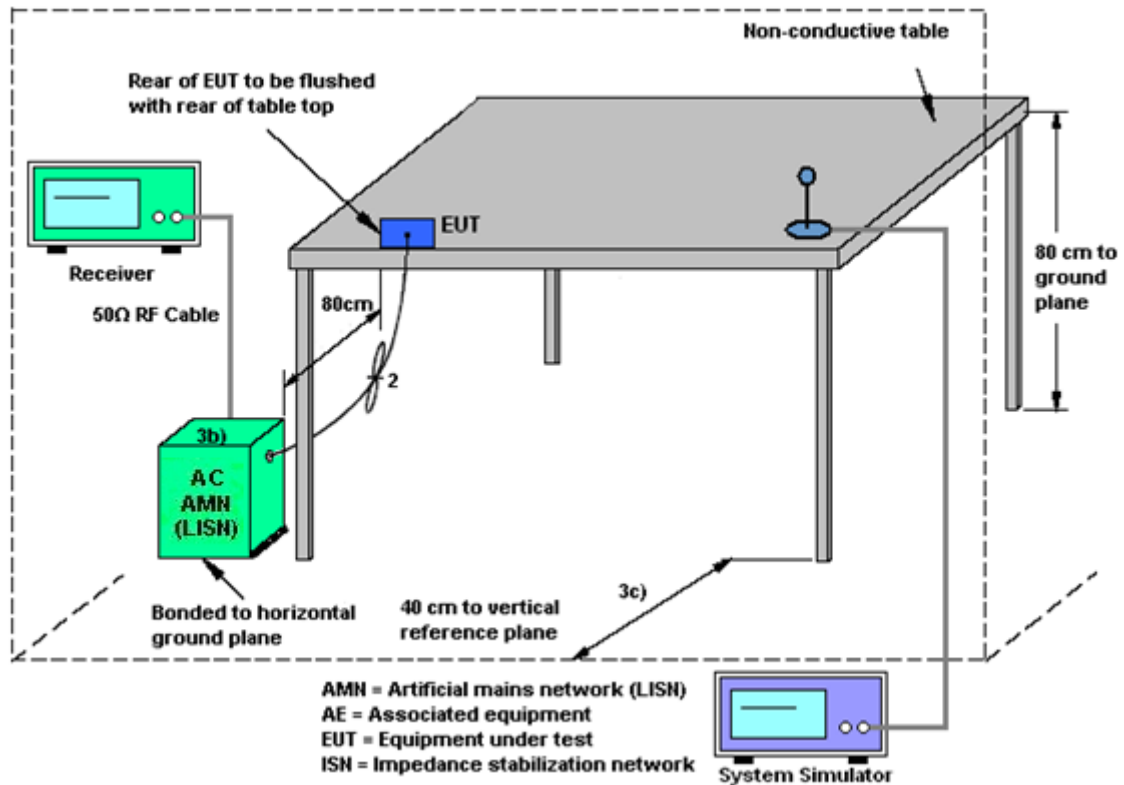

3.6.5 Test Result of AC Conducted Emission

Please refer to FCC ID: IHDT56AW3 (Sporton Test Report FR5N1310C).



3.7 Antenna Requirements

3.7.1 Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of § 15.211, 15.213, 15.217, 15.219, 15.221, or § 15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with § 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.7.2 Antenna Anti-Replacement Construction

Antenna permanently attached.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Bilog Antenna	TESEQ	CBL 6111D & 00800N1D01N-06	35419 & 03	30MHz~1GHz	Mar. 21,2026	Jun. 16, 2026 ~ Jul. 23, 2026	Mar. 20,2027	Radiation (03CH07-HY)
Double Ridged Guide Horn Antenna	ETS-Lindgren	3117	00075962	1GHz ~ 18GHz	Dec. 09,2025	Jun. 16, 2026 ~ Jul. 23, 2026	Dec. 08,2026	Radiation (03CH07-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100315	9 kHz~30 MHz	Mar. 16,2026	Jun. 16, 2026 ~ Jul. 23, 2026	Mar. 15,2027	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-00101 800-30-10P	1590075	1GHz~18GHz	Apr. 17,2026	Jun. 16, 2026 ~ Jul. 23, 2026	Apr. 16,2027	Radiation (03CH07-HY)
Preamplifier	COM-POWER	PA-103A	161241	10MHz~1GHz	Sep. 30,2025	Jun. 16, 2026 ~ Jul. 23, 2026	Sep. 29,2026	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~26.5GHz	Mar. 21,2026	Jun. 16, 2026 ~ Jul. 23, 2026	Mar. 20,2027	Radiation (03CH07-HY)
Preamplifier	EMEC	EM18G40G	0600789	18-40GHz	Aug. 08,2025	Jun. 16, 2026 ~ Jul. 23, 2026	Aug. 07,2026	Radiation (03CH07-HY)
Signal Analyzer	Agilent	N9030A	MY52350276	3Hz~44GHz	Apr. 09,2026	Jun. 16, 2026 ~ Jul. 23, 2026	Apr. 08,2027	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4 MY24971/4 MY15682/4	30MHz to 18GHz	Feb. 19,2026	Jun. 16, 2026 ~ Jul. 23, 2026	Feb. 18,2027	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4 MY24971/4	9kHz to 30MHz	Feb. 19,2026	Jun. 16, 2026 ~ Jul. 23, 2026	Feb. 18,2027	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126	532078/126E	30MHz~18GHz	Sep. 13,2025	Jun. 16, 2026 ~ Jul. 23, 2026	Sep. 12,2026	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2858/2	18GHz~40GHz	Feb. 19,2026	Jun. 16, 2026 ~ Jul. 23, 2026	Feb. 18,2027	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801606/2	9KHz ~ 40GHz	Apr. 22,2026	Jun. 16, 2026 ~ Jul. 23, 2026	Apr. 21,2027	Radiation (03CH07-HY)
Controller	EMEC	EM1000	N/A	Control Ant Mast	N/A	Jun. 16, 2026 ~ Jul. 23, 2026	N/A	Radiation (03CH07-HY)
Controller	MF	MF-7802	N/A	Control Turn table	N/A	Jun. 16, 2026 ~ Jul. 23, 2026	N/A	Radiation (03CH07-HY)
Antenna Mast	EMEC	AM-BS-4500E	N/A	Boresight mast 1M~4M	N/A	Jun. 16, 2026 ~ Jul. 23, 2026	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Jun. 16, 2026 ~ Jul. 23, 2026	N/A	Radiation (03CH07-HY)
Software	Audix	E3	RK-002396	N/A	N/A	Jun. 16, 2026 ~ Jul. 23, 2026	N/A	Radiation (03CH07-HY)
USB Data Logger	TECPEL	TR-32	HE17XB2495	N/A	Mar. 02,2026	Jun. 16, 2026 ~ Jul. 23, 2026	Mar. 01,2027	Radiation (03CH07-HY)
Horn Antenna	SCHWARZBECK	BBHA 9170	00991	18GHz~40GHz	Jun. 03,2026	Jun. 16, 2026 ~ Jul. 23, 2026	Jun. 02,2027	Radiation (03CH07-HY)



5 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.30 dB
--	---------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.70 dB
--	---------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.50 dB
--	---------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.90 dB
--	---------



Appendix A. Radiated Spurious Emission Test Data

Test Engineer :	Jesse Wang, Stan Hsieh, Ken Wu	Temperature :	18.2~21.3°C
		Relative Humidity :	56.4~68.6%

Note symbol

-L	Low channel location
-R	High channel location

A1.Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 84	2400-2483.5	7+11	802.11b	01	2412	1Mbps	-	-
Mode 85	2400-2483.5	7+11	802.11b	06	2437	1Mbps	-	-
Mode 86	2400-2483.5	7+11	802.11b	11	2462	1Mbps	-	-
Mode 87	2400-2483.5	7+11	802.11g	01	2412	6Mbps	-	-
Mode 88	2400-2483.5	7+11	802.11g	06	2437	6Mbps	-	-
Mode 89	2400-2483.5	7+11	802.11g	11	2462	6Mbps	-	-
Mode 90	2400-2483.5	7+11	802.11be EHT20	01	2412	MCS0	Full RU	-
Mode 91	2400-2483.5	7+11	802.11be EHT20	06	2437	MCS0	Full RU	-
Mode 92	2400-2483.5	7+11	802.11be EHT20	11	2462	MCS0	Full RU	-
Mode 93	2400-2483.5	7+11	802.11be EHT20	01	2412	MCS0	Single_ RU26/0	-
Mode 94	2400-2483.5	7+11	802.11be EHT20	01	2412	MCS0	Single_ RU52/37	-



Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 95	2400-2483.5	7+11	802.11be EHT20	01	2412	MCS0	Single_RU106/53	-
Mode 96	2400-2483.5	7+11	802.11be EHT20	11	2462	MCS0	Single _RU26/8	-
Mode 97	2400-2483.5	7+11	802.11be EHT20	11	2462	MCS0	Single_RU52/40	-
Mode 98	2400-2483.5	7+11	802.11be EHT20	11	2462	MCS0	Single_RU106/54	-
Mode 99	2400-2483.5	7+11	802.11be EHT20	01	2412	MCS0	Small RU 52+26_Index 38+1	-
Mode 100	2400-2483.5	7+11	802.11be EHT20	01	2412	MCS0	Small RU 106+26_Index 53+4	-
Mode 101	2400-2483.5	7+11	802.11be EHT20	11	2462	MCS0	Small RU 52+26_Index 39+7	-
Mode 102	2400-2483.5	7+11	802.11be EHT20	11	2462	MCS0	Small RU 106+26_Index 54+4	-
Mode 103	2400-2483.5	7+11	802.11be EHT40	03	2422	MCS0	Full RU	-
Mode 104	2400-2483.5	7+11	802.11be EHT40	06	2437	MCS0	Full RU	-
Mode 105	2400-2483.5	7+11	802.11be EHT40	09	2452	MCS0	Full RU	-



FCC RADIO TEST REPORT

Report No. : FR660814C

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 106	2400-2483.5	7+11	802.11be EHT20	11	2462	MCS0	Full RU	LF
Mode 107	2400-2483.5	7+11	802.11be EHT20	11	2462	MCS0	Full RU	SHF

A2.Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
84	802.11b	01	2389.95	45.26	54.00	-8.74	H	Avg.	Pass	-	Band Edge
	802.11b	01	4824.00	42.89	74.00	-31.11	H	Peak	Pass	-	Harmonic
85	802.11b	06	-	-	-	-	-	-	-	-	Band Edge
	802.11b	06	7311.00	44.52	74.00	-29.48	V	Peak	Pass	-	Harmonic
86	802.11b	11	2483.51	47.98	54.00	-6.02	H	Avg.	Pass	-	Band Edge
	802.11b	11	4924.00	43.20	74.00	-30.80	H	Peak	Pass	-	Harmonic
87	802.11g	01	2389.95	47.39	54.00	-6.61	H	Avg.	Pass	-	Band Edge
	802.11g	01	4824.00	43.48	74.00	-30.52	H	Peak	Pass	-	Harmonic
88	802.11g	06	-	-	-	-	-	-	-	-	Band Edge
	802.11g	06	7311.00	37.62	54.00	-16.38	V	Avg.	Pass	-	Harmonic
89	802.11g	11	2483.51	50.90	54.00	-3.10	H	Avg.	Pass	-	Band Edge

**FCC RADIO TEST REPORT**

Report No. : FR660814C

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
89	802.11g	11	4924.00	43.45	74.00	-30.55	H	Peak	Pass	-	Harmonic
90	802.11be EHT20	01	2389.95	49.57	54.00	-4.43	H	Avg.	Pass	Full RU	Band Edge
	802.11be EHT20	01	4830.00	42.88	74.00	-31.12	H	Peak	Pass	Full RU	Harmonic
91	802.11be EHT20	06	-	-	-	-	-	-	-	Full RU	Band Edge
	802.11be EHT20	06	7311.00	39.87	54.00	-14.13	V	Avg.	Pass	Full RU	Harmonic
92	802.11be EHT20	11	2483.51	50.97	54.00	-3.03	H	Avg.	Pass	Full RU	Band Edge
	802.11be EHT20	11	4924.00	43.25	74.00	-30.75	H	Peak	Pass	Full RU	Harmonic
93	802.11be EHT20	01	2389.95	44.96	54.00	-9.04	H	Avg.	Pass	Single_ RU26/0	Band Edge
	802.11be EHT20	01	-	-	-	-	-	-	-	Single_ RU26/0	Harmonic
94	802.11be EHT20	01	2389.95	44.98	54.00	-9.02	H	Avg.	Pass	Single_ RU52/37	Band Edge
	802.11be EHT20	01	-	-	-	-	-	-	-	Single_ RU52/37	Harmonic



FCC RADIO TEST REPORT

Report No. : FR660814C

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
95	802.11be EHT20	01	2389.95	46.06	54.00	-7.94	V	Avg.	Pass	Single_RU106/53	Band Edge
	802.11be EHT20	01	-	-	-	-	-	-	-	Single_RU106/53	Harmonic
96	802.11be EHT20	11	2483.51	46.16	54.00	-7.84	H	Avg.	Pass	Single_RU26/8	Band Edge
	802.11be EHT20	11	-	-	-	-	-	-	-	Single_RU26/8	Harmonic
97	802.11be EHT20	11	2483.51	46.70	54.00	-7.30	H	Avg.	Pass	Single_RU52/40	Band Edge
	802.11be EHT20	11	-	-	-	-	-	-	-	Single_RU52/40	Harmonic
98	802.11be EHT20	11	2483.51	48.30	54.00	-5.70	H	Avg.	Pass	Single_RU106/54	Band Edge
	802.11be EHT20	11	-	-	-	-	-	-	-	Single_RU106/54	Harmonic
99	802.11be EHT20	01	2389.95	45.19	54.00	-8.81	V	Avg.	Pass	Small RU 52+26_Index 38+1	Band Edge
	802.11be EHT20	01	-	-	-	-	-	-	-	Small RU 52+26_Index 38+1	Harmonic
100	802.11be EHT20	01	2389.95	46.08	54.00	-7.92	H	Avg.	Pass	Small RU 106+26_Index 53+4	Band Edge

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
100	802.11be EHT20	01	-	-	-	-	-	-	-	Small RU 106+26_Index 53+4	Harmonic
101	802.11be EHT20	11	2484.04	46.27	54.00	-7.73	H	Avg.	Pass	Small RU 52+26_Index 39+7	Band Edge
	802.11be EHT20	11	-	-	-	-	-	-	-	Small RU 52+26_Index 39+7	Harmonic
102	802.11be EHT20	11	2483.51	47.22	54.00	-6.78	H	Avg.	Pass	Small RU 106+26_Index 54+4	Band Edge
	802.11be EHT20	11	-	-	-	-	-	-	-	Small RU 106+26_Index 54+4	Harmonic
103	802.11be EHT40	03	2389.97	48.94	54.00	-5.06	H	Avg.	Pass	Full RU	Band Edge
	802.11be EHT40	03	7266.00	36.96	54.00	-17.04	H	Avg.	Pass	Full RU	Harmonic
104	802.11be EHT40	06	2483.56	49.44	54.00	-4.56	H	Avg.	Pass	Full RU	Band Edge
	802.11be EHT40	06	7311.00	43.13	54.00	-10.87	V	Avg.	Pass	Full RU	Harmonic

**FCC RADIO TEST REPORT**

Report No. : FR660814C

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
105	802.11be EHT40	09	2483.54	50.77	54.00	-3.23	H	Avg.	Pass	Full RU	Band Edge
	802.11be EHT40	09	7356.00	40.93	54.00	-13.07	V	Avg.	Pass	Full RU	Harmonic
106	802.11be EHT20	11	30.00	33.60	40.00	-6.40	V	Peak	Pass	-	LF
107	802.11be EHT20	11	24997.40	38.48	74.00	-35.52	H	Peak	Pass	-	SHF





Mode	84																																																																																																													
	Band Edge																																																																																																													
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																													
ANT	7+11																																																																																																													
Pol.	Horizontal																																																																																																													
Peak	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.04</td><td>56.01</td><td>74.00</td><td>-17.99</td><td>39.79</td><td>32.10</td><td>8.67</td><td>34.59</td><td>10.04</td><td>228 14 Peak</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.04	56.01	74.00	-17.99	39.79	32.10	8.67	34.59	10.04	228 14 Peak	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>108.21</td><td>-----</td><td>-----</td><td>91.85</td><td>32.22</td><td>8.71</td><td>34.60</td><td>10.03</td><td>228 14 Peak</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	108.21	-----	-----	91.85	32.22	8.71	34.60	10.03	228 14 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2389.04	56.01	74.00	-17.99	39.79	32.10	8.67	34.59	10.04	228 14 Peak																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2412.00	108.21	-----	-----	91.85	32.22	8.71	34.60	10.03	228 14 Peak																																																																																																				
Avg	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>45.26</td><td>54.00</td><td>-8.74</td><td>29.04</td><td>32.10</td><td>8.67</td><td>34.59</td><td>10.04</td><td>228 14 Average</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	45.26	54.00	-8.74	29.04	32.10	8.67	34.59	10.04	228 14 Average	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>105.00</td><td>-----</td><td>-----</td><td>88.64</td><td>32.22</td><td>8.71</td><td>34.60</td><td>10.03</td><td>228 14 Average</td></tr></tbody></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	105.00	-----	-----	88.64	32.22	8.71	34.60	10.03	228 14 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																				
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2389.95	45.26	54.00	-8.74	29.04	32.10	8.67	34.59	10.04	228 14 Average																																																																																																				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1	2412.00	105.00	-----	-----	88.64	32.22	8.71	34.60	10.03	228 14 Average																																																																																																				



Mode	84																																																																																								
	Band Edge																																																																																								
	2400-2483.5_802.11b_CH01_2412MHz																																																																																								
ANT	7+11																																																																																								
Pol.	Vertical					Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level</th><th>Line Margin</th><th>Level Factor</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2330.93</td><td>56.28</td><td>74.00 -17.72</td><td>40.15</td><td>32.10</td><td>8.57</td><td>34.55</td><td>10.01</td><td>160</td><td>3 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level	Line Margin	Level Factor	Level Factor	Loss Factor	Factor	Factor				MHz dBuV/m dBuV/m dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1 2330.93	56.28	74.00 -17.72	40.15	32.10	8.57	34.55	10.01	160	3 Peak	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level</th><th>Line Margin</th><th>Level Factor</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2412.00</td><td>106.15 -----</td><td>89.79</td><td>32.22</td><td>8.71</td><td>34.60</td><td>10.03</td><td>160</td><td>3 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level	Line Margin	Level Factor	Level Factor	Loss Factor	Factor	Factor				MHz dBuV/m dBuV/m dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1 2412.00	106.15 -----	89.79	32.22	8.71	34.60	10.03	160	3 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq Level	Line Margin	Level Factor	Level Factor	Loss Factor	Factor	Factor																																																																																			
MHz dBuV/m dBuV/m dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																	
1 2330.93	56.28	74.00 -17.72	40.15	32.10	8.57	34.55	10.01	160	3 Peak																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq Level	Line Margin	Level Factor	Level Factor	Loss Factor	Factor	Factor																																																																																			
MHz dBuV/m dBuV/m dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																	
1 2412.00	106.15 -----	89.79	32.22	8.71	34.60	10.03	160	3 Peak																																																																																	
Avg	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level</th><th>Line Margin</th><th>Level Factor</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2389.95</td><td>44.89</td><td>54.00 -9.11</td><td>28.67</td><td>32.10</td><td>8.67</td><td>34.59</td><td>10.04</td><td>160</td><td>3 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level	Line Margin	Level Factor	Level Factor	Loss Factor	Factor	Factor				MHz dBuV/m dBuV/m dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1 2389.95	44.89	54.00 -9.11	28.67	32.10	8.67	34.59	10.04	160	3 Average	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level</th><th>Line Margin</th><th>Level Factor</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz dBuV/m dBuV/m dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2412.00</td><td>103.01 -----</td><td>86.62</td><td>32.24</td><td>8.72</td><td>34.60</td><td>10.03</td><td>160</td><td>3 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq Level	Line Margin	Level Factor	Level Factor	Loss Factor	Factor	Factor				MHz dBuV/m dBuV/m dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg		1 2412.00	103.01 -----	86.62	32.24	8.72	34.60	10.03	160	3 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq Level	Line Margin	Level Factor	Level Factor	Loss Factor	Factor	Factor																																																																																			
MHz dBuV/m dBuV/m dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																	
1 2389.95	44.89	54.00 -9.11	28.67	32.10	8.67	34.59	10.04	160	3 Average																																																																																
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq Level	Line Margin	Level Factor	Level Factor	Loss Factor	Factor	Factor																																																																																			
MHz dBuV/m dBuV/m dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg																																																																																	
1 2412.00	103.01 -----	86.62	32.24	8.72	34.60	10.03	160	3 Average																																																																																	

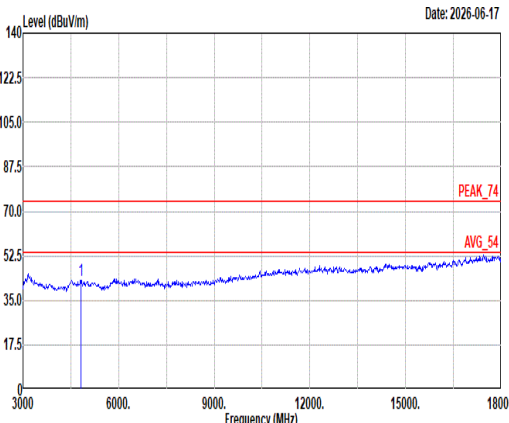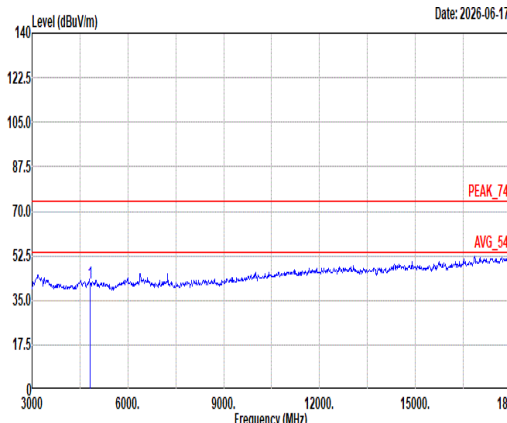

Mode	84																																																																																																
	Harmonic																																																																																																
	2400-2483.5_802.11b_CH01_2412MHz																																																																																																
ANT	7+11																																																																																																
Pol.	Horizontal						Vertical																																																																																										
Peak Avg																																																																																																	
	Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL						Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>42.89</td><td>74.00</td><td>-31.11</td><td>53.20</td><td>34.50</td><td>12.35</td><td>58.06</td><td>0.90</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	42.89	74.00	-31.11	53.20	34.50	12.35	58.06	0.90	--	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4824.00</td><td>41.97</td><td>74.00</td><td>-32.03</td><td>52.30</td><td>34.50</td><td>12.34</td><td>58.07</td><td>0.90</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	41.97	74.00	-32.03	52.30	34.50	12.34	58.07	0.90	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	4824.00	42.89	74.00	-31.11	53.20	34.50	12.35	58.06	0.90	--	Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	4824.00	41.97	74.00	-32.03	52.30	34.50	12.34	58.07	0.90	--	Peak																																																																																						



Mode	84	
	Harmonic	
	2400-2483.5_802.11b_CH01_2412MHz	
ANT	7+11	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL



Mode	85																																																																																																																								
	Harmonic																																																																																																																								
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																								
ANT	7+11																																																																																																																								
Pol.	Horizontal						Vertical																																																																																																																		
Peak Avg	Level (dBuV/m) Date: 2026-06-17 PEAK_74 AVG_54 300060009000120001500018000 Frequency (MHz) Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>42.18</td><td>74.00</td><td>-31.82</td><td>52.44</td><td>34.45</td><td>12.40</td><td>58.00</td><td>0.89</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>43.52</td><td>74.00</td><td>-30.48</td><td>49.49</td><td>36.00</td><td>14.93</td><td>57.85</td><td>0.95</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	42.18	74.00	-31.82	52.44	34.45	12.40	58.00	0.89	--	Peak	2	7311.00	43.52	74.00	-30.48	49.49	36.00	14.93	57.85	0.95	--	Peak	Level (dBuV/m) Date: 2026-06-17 PEAK_74 AVG_54 300060009000120001500018000 Frequency (MHz) Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>41.98</td><td>74.00</td><td>-32.02</td><td>52.24</td><td>34.45</td><td>12.40</td><td>58.00</td><td>0.89</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>44.52</td><td>74.00</td><td>-29.48</td><td>50.49</td><td>36.00</td><td>14.93</td><td>57.85</td><td>0.95</td><td>--</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	41.98	74.00	-32.02	52.24	34.45	12.40	58.00	0.89	--	Peak	2	7311.00	44.52	74.00	-29.48	50.49	36.00	14.93	57.85	0.95	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	4874.00	42.18	74.00	-31.82	52.44	34.45	12.40	58.00	0.89	--	Peak																																																																																																														
2	7311.00	43.52	74.00	-30.48	49.49	36.00	14.93	57.85	0.95	--	Peak																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	4874.00	41.98	74.00	-32.02	52.24	34.45	12.40	58.00	0.89	--	Peak																																																																																																														
2	7311.00	44.52	74.00	-29.48	50.49	36.00	14.93	57.85	0.95	--	Peak																																																																																																														



Mode	85	
	Harmonic	
	2400-2483.5_802.11b_CH06_2437MHz	
ANT	7+11	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL





Mode	86																																																																																	
	Band Edge																																																																																	
	2400-2483.5_802.11b_CH11_2462MHz																																																																																	
ANT	7+11																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2486.81</td><td>58.79</td><td>74.00 -15.21</td><td>41.85</td><td>32.77</td><td>8.85</td><td>34.65</td><td>9.97</td><td>303</td><td>30 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2486.81	58.79	74.00 -15.21	41.85	32.77	8.85	34.65	9.97	303	30 Peak	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2462.00</td><td>109.81</td><td>-----</td><td>93.04</td><td>32.62</td><td>8.80</td><td>34.64</td><td>9.99</td><td>303</td><td>30 Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2462.00	109.81	-----	93.04	32.62	8.80	34.64	9.99	303	30 Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2486.81	58.79	74.00 -15.21	41.85	32.77	8.85	34.65	9.97	303	30 Peak																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2462.00	109.81	-----	93.04	32.62	8.80	34.64	9.99	303	30 Peak																																																																									
Avg	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2483.51</td><td>47.98</td><td>54.00 -6.02</td><td>31.08</td><td>32.74</td><td>8.84</td><td>34.65</td><td>9.97</td><td>303</td><td>30 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2483.51	47.98	54.00 -6.02	31.08	32.74	8.84	34.65	9.97	303	30 Average	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2462.00</td><td>106.65</td><td>-----</td><td>89.85</td><td>32.64</td><td>8.81</td><td>34.64</td><td>9.99</td><td>303</td><td>30 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2462.00	106.65	-----	89.85	32.64	8.81	34.64	9.99	303	30 Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2483.51	47.98	54.00 -6.02	31.08	32.74	8.84	34.65	9.97	303	30 Average																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 2462.00	106.65	-----	89.85	32.64	8.81	34.64	9.99	303	30 Average																																																																									







Mode	86																																																	
	Band Edge																																																	
	2400-2483.5_802.11b_CH11_2462MHz																																																	
ANT	7+11																																																	
Pol.	Vertical																																																	
Peak	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Level Factor</th><th>Cable Loss Factor</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2485.41</td><td>58.23</td><td>74.00</td><td>-15.77</td><td>41.31</td><td>32.75</td><td>8.85</td><td>34.65</td><td>9.97</td><td>150</td><td>360</td><td>Peak</td></tr></table>												Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2485.41	58.23	74.00	-15.77	41.31	32.75	8.85	34.65	9.97	150	360	Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Factor	Aux Factor	APos	TPos	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1	2485.41	58.23	74.00	-15.77	41.31	32.75	8.85	34.65	9.97	150	360	Peak																																						
Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Level Factor</th><th>Cable Loss Factor</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2462.00</td><td>104.46</td><td>-----</td><td>-----</td><td>87.69</td><td>32.62</td><td>8.80</td><td>34.64</td><td>9.99</td><td>150</td><td>360</td><td>Peak</td></tr></table>												Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2462.00	104.46	-----	-----	87.69	32.62	8.80	34.64	9.99	150	360	Peak	
	Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Factor	Aux Factor	APos	TPos	Remark																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1	2462.00	104.46	-----	-----	87.69	32.62	8.80	34.64	9.99	150	360	Peak																																						
Avg	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Level Factor</th><th>Cable Loss Factor</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2483.51</td><td>46.28</td><td>54.00</td><td>-7.72</td><td>29.38</td><td>32.74</td><td>8.84</td><td>34.65</td><td>9.97</td><td>150</td><td>360</td><td>Average</td></tr></table>												Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2483.51	46.28	54.00	-7.72	29.38	32.74	8.84	34.65	9.97	150	360	Average
		Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Factor	Aux Factor	APos	TPos	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1	2483.51	46.28	54.00	-7.72	29.38	32.74	8.84	34.65	9.97	150	360	Average																																						
Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Level Factor</th><th>Cable Loss Factor</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2462.00</td><td>101.36</td><td>-----</td><td>-----</td><td>84.56</td><td>32.64</td><td>8.81</td><td>34.64</td><td>9.99</td><td>150</td><td>360</td><td>Average</td></tr></table>												Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2462.00	101.36	-----	-----	84.56	32.64	8.81	34.64	9.99	150	360	Average	
	Freq	Level	Limit	Line Margin	Read Level	Ant Level Factor	Cable Loss Factor	Preamp Factor	Aux Factor	APos	TPos	Remark																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																							
1	2462.00	101.36	-----	-----	84.56	32.64	8.81	34.64	9.99	150	360	Average																																						

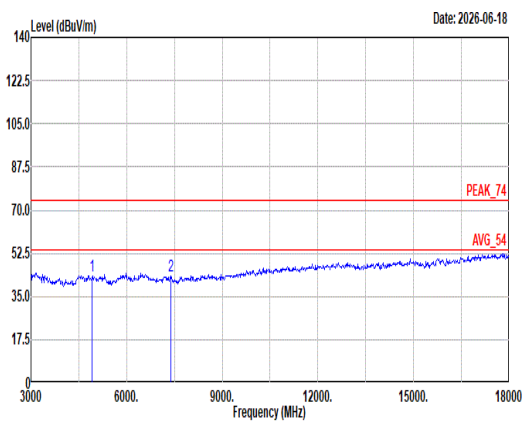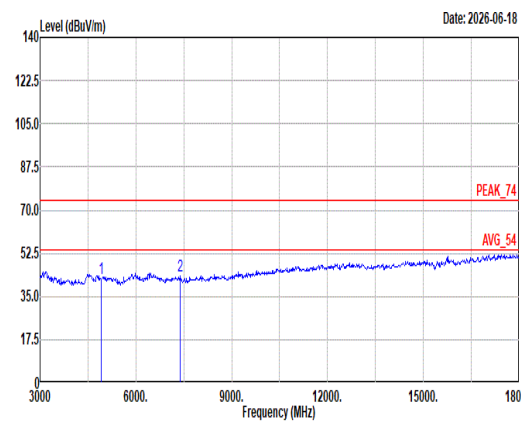

Mode	86																																																																																																																								
	Harmonic																																																																																																																								
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																								
ANT	7+11																																																																																																																								
Pol.	Horizontal						Vertical																																																																																																																		
Peak Avg	 Level (dBuV/m) vs Frequency (MHz). Date: 2026-06-18. Peaks at 4924.00 MHz and 7386.00 MHz. Limits: PEAK_74, AVG_54.						 Level (dBuV/m) vs Frequency (MHz). Date: 2026-06-18. Peaks at 4924.00 MHz and 7386.00 MHz. Limits: PEAK_74, AVG_54.																																																																																																																		
	Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL						Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL																																																																																																																		
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>43.20</td><td>74.00</td><td>-30.80</td><td>53.33</td><td>34.45</td><td>12.46</td><td>57.93</td><td>0.89</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>43.16</td><td>74.00</td><td>-30.84</td><td>49.24</td><td>36.00</td><td>14.98</td><td>57.98</td><td>0.92</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	43.20	74.00	-30.80	53.33	34.45	12.46	57.93	0.89	--	Peak	2	7386.00	43.16	74.00	-30.84	49.24	36.00	14.98	57.98	0.92	--	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>4924.00</td><td>42.23</td><td>74.00</td><td>-31.77</td><td>52.36</td><td>34.45</td><td>12.46</td><td>57.93</td><td>0.89</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>43.18</td><td>74.00</td><td>-30.82</td><td>49.26</td><td>36.00</td><td>14.98</td><td>57.98</td><td>0.92</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	42.23	74.00	-31.77	52.36	34.45	12.46	57.93	0.89	--	Peak	2	7386.00	43.18	74.00	-30.82	49.26	36.00	14.98	57.98	0.92	--
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	4924.00	43.20	74.00	-30.80	53.33	34.45	12.46	57.93	0.89	--	Peak																																																																																																														
2	7386.00	43.16	74.00	-30.84	49.24	36.00	14.98	57.98	0.92	--	Peak																																																																																																														
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	4924.00	42.23	74.00	-31.77	52.36	34.45	12.46	57.93	0.89	--	Peak																																																																																																														
2	7386.00	43.18	74.00	-30.82	49.26	36.00	14.98	57.98	0.92	--	Peak																																																																																																														

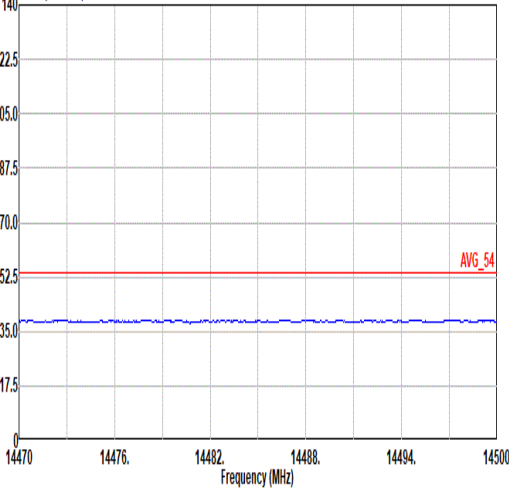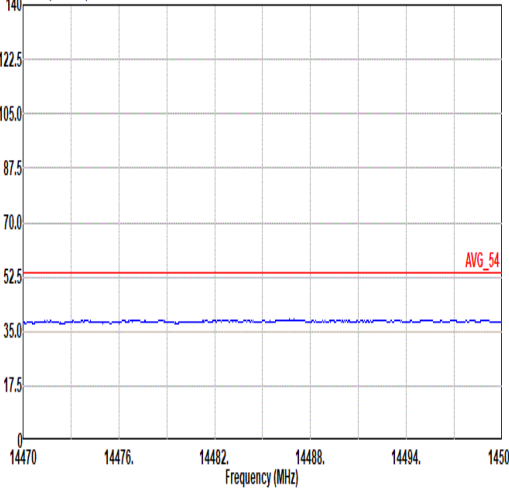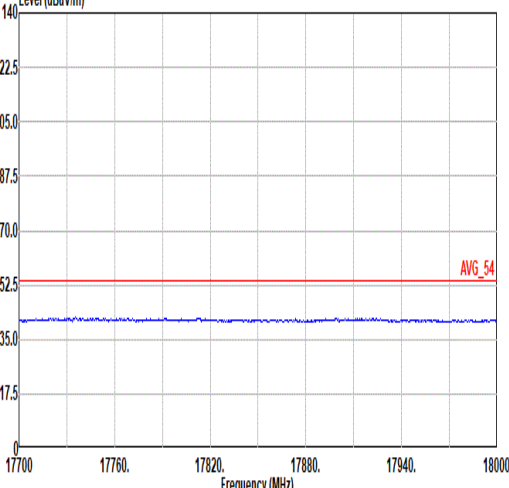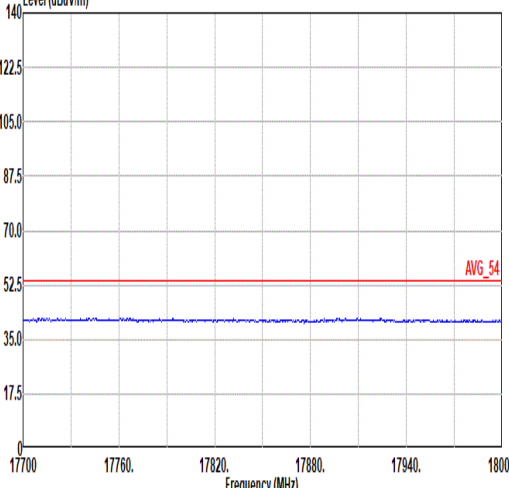

Mode	86	
	Harmonic	
	2400-2483.5_802.11b_CH11_2462MHz	
ANT	7+11	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-06-18  Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	Level (dBuV/m) Date: 2026-06-18  Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
	Level (dBuV/m) Date: 2026-06-18  Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	Level (dBuV/m) Date: 2026-06-18  Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL





Mode	87																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11g_CH01_2412MHz																																																																																									
ANT	7+11																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2309.56</td><td>59.87</td><td>74.00</td><td>-14.13</td><td>43.65</td><td>32.10</td><td>8.67</td><td>34.59</td><td>10.04</td><td>122 3 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2309.56	59.87	74.00	-14.13	43.65	32.10	8.67	34.59	10.04	122 3 Peak	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2412.00</td><td>109.52</td><td>-----</td><td>-----</td><td>93.21</td><td>32.18</td><td>8.70</td><td>34.60</td><td>10.03</td><td>122 3 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2412.00	109.52	-----	-----	93.21	32.18	8.70	34.60	10.03	122 3 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2309.56	59.87	74.00	-14.13	43.65	32.10	8.67	34.59	10.04	122 3 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2412.00	109.52	-----	-----	93.21	32.18	8.70	34.60	10.03	122 3 Peak																																																																																	
Avg	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2309.95</td><td>47.39</td><td>54.00</td><td>-6.61</td><td>31.17</td><td>32.10</td><td>8.67</td><td>34.59</td><td>10.04</td><td>122 3 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2309.95	47.39	54.00	-6.61	31.17	32.10	8.67	34.59	10.04	122 3 Average	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2412.00</td><td>103.76</td><td>-----</td><td>-----</td><td>87.45</td><td>32.18</td><td>8.70</td><td>34.60</td><td>10.03</td><td>122 3 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2412.00	103.76	-----	-----	87.45	32.18	8.70	34.60	10.03	122 3 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2309.95	47.39	54.00	-6.61	31.17	32.10	8.67	34.59	10.04	122 3 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2412.00	103.76	-----	-----	87.45	32.18	8.70	34.60	10.03	122 3 Average																																																																																	



Mode	87																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11g_CH01_2412MHz																																																																																									
ANT	7+11																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>59.12</td><td>74.00</td><td>-14.88</td><td>42.90</td><td>32.10</td><td>8.67</td><td>34.59</td><td>10.04</td><td>230</td><td></td><td>54 Peak</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.95	59.12	74.00	-14.88	42.90	32.10	8.67	34.59	10.04	230		54 Peak	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>106.59</td><td>-----</td><td>-----</td><td>90.28</td><td>32.18</td><td>8.70</td><td>34.60</td><td>10.03</td><td>230</td><td></td><td>54 Peak</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2412.00	106.59	-----	-----	90.28	32.18	8.70	34.60	10.03	230		54 Peak
		Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2389.95	59.12	74.00	-14.88	42.90	32.10	8.67	34.59	10.04	230		54 Peak																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2412.00	106.59	-----	-----	90.28	32.18	8.70	34.60	10.03	230		54 Peak																																																																														
Avg	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>46.75</td><td>54.00</td><td>-7.25</td><td>30.53</td><td>32.10</td><td>8.67</td><td>34.59</td><td>10.04</td><td>230</td><td></td><td>54 Average</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.95	46.75	54.00	-7.25	30.53	32.10	8.67	34.59	10.04	230		54 Average	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>99.25</td><td>-----</td><td>-----</td><td>82.94</td><td>32.18</td><td>8.70</td><td>34.60</td><td>10.03</td><td>230</td><td></td><td>54 Average</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2412.00	99.25	-----	-----	82.94	32.18	8.70	34.60	10.03	230		54 Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2389.95	46.75	54.00	-7.25	30.53	32.10	8.67	34.59	10.04	230		54 Average																																																																														
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	2412.00	99.25	-----	-----	82.94	32.18	8.70	34.60	10.03	230		54 Average																																																																														

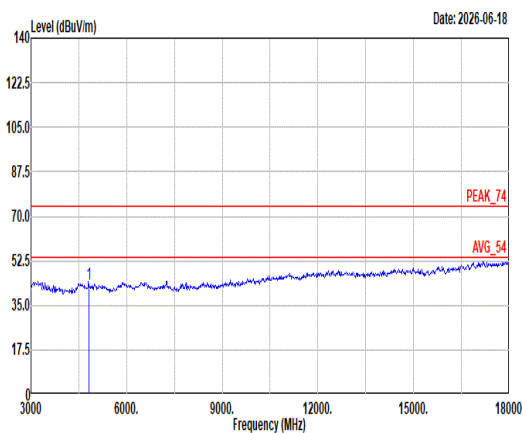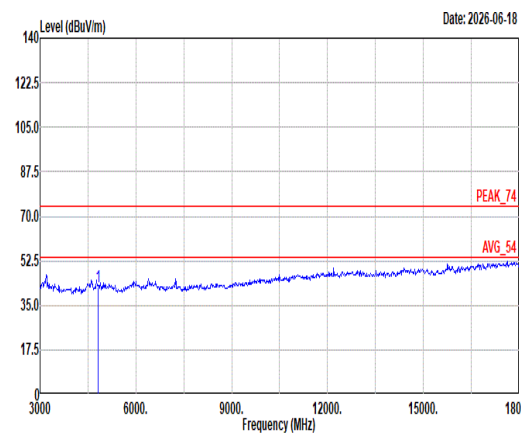

Mode	87																																																										
	Harmonic																																																										
	2400-2483.5_802.11g_CH01_2412MHz																																																										
ANT	7+11																																																										
Pol.	Horizontal						Vertical																																																				
Peak Avg																																																											
	Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL						Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL																																																				
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th colspan="3"></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4824.00</td><td>43.48</td><td>74.00</td><td>-30.52</td><td>53.81</td><td>34.50</td><td>12.34</td><td>58.07</td><td>0.90</td><td>--</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4824.00	43.48	74.00	-30.52	53.81	34.50	12.34	58.07	0.90	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	4824.00	43.48	74.00	-30.52	53.81	34.50	12.34	58.07	0.90	--	Peak																																																
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="3">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th colspan="3"></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4824.00</td><td>42.49</td><td>74.00</td><td>-31.51</td><td>52.82</td><td>34.50</td><td>12.34</td><td>58.07</td><td>0.90</td><td>--</td><td>Peak</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark			Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor							MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4824.00	42.49	74.00	-31.51	52.82	34.50	12.34	58.07	0.90	--	Peak
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																	
1	4824.00	42.49	74.00	-31.51	52.82	34.50	12.34	58.07	0.90	--	Peak																																																







Mode	87	
	Harmonic	
	2400-2483.5_802.11g_CH01_2412MHz	
ANT	7+11	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-06-18 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	Level (dBuV/m) Date: 2026-06-18 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
	Level (dBuV/m) Date: 2026-06-18 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	Level (dBuV/m) Date: 2026-06-18 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL







Mode	88																																																																																																																																																							
	Harmonic																																																																																																																																																							
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																																																																							
ANT	7+11																																																																																																																																																							
Pol.	Horizontal						Vertical																																																																																																																																																	
Peak Avg	Level (dBuV/m) Date: 2026-06-18 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>42.56</td><td>74.00</td><td>-31.44</td><td>52.82</td><td>34.45</td><td>12.40</td><td>58.00</td><td>0.89</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>46.03</td><td>74.00</td><td>-27.97</td><td>52.00</td><td>36.00</td><td>14.93</td><td>57.85</td><td>0.95</td><td>400</td><td>294</td><td>Peak</td></tr><tr><td>3</td><td>7311.00</td><td>35.81</td><td>54.00</td><td>-18.19</td><td>41.78</td><td>36.00</td><td>14.93</td><td>57.85</td><td>0.95</td><td>400</td><td>294</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	42.56	74.00	-31.44	52.82	34.45	12.40	58.00	0.89	--	--	Peak	2	7311.00	46.03	74.00	-27.97	52.00	36.00	14.93	57.85	0.95	400	294	Peak	3	7311.00	35.81	54.00	-18.19	41.78	36.00	14.93	57.85	0.95	400	294	Average	Level (dBuV/m) Date: 2026-06-18 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4874.00</td><td>43.00</td><td>74.00</td><td>-31.00</td><td>53.26</td><td>34.45</td><td>12.40</td><td>58.00</td><td>0.89</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7311.00</td><td>48.42</td><td>74.00</td><td>-25.58</td><td>54.39</td><td>36.00</td><td>14.93</td><td>57.85</td><td>0.95</td><td>100</td><td>16</td><td>Peak</td></tr><tr><td>3</td><td>7311.00</td><td>37.62</td><td>54.00</td><td>-16.38</td><td>43.59</td><td>36.00</td><td>14.93</td><td>57.85</td><td>0.95</td><td>100</td><td>16</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	43.00	74.00	-31.00	53.26	34.45	12.40	58.00	0.89	--	--	Peak	2	7311.00	48.42	74.00	-25.58	54.39	36.00	14.93	57.85	0.95	100	16	Peak	3	7311.00	37.62	54.00	-16.38	43.59	36.00	14.93	57.85	0.95	100	16	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																														
1	4874.00	42.56	74.00	-31.44	52.82	34.45	12.40	58.00	0.89	--	--	Peak																																																																																																																																												
2	7311.00	46.03	74.00	-27.97	52.00	36.00	14.93	57.85	0.95	400	294	Peak																																																																																																																																												
3	7311.00	35.81	54.00	-18.19	41.78	36.00	14.93	57.85	0.95	400	294	Average																																																																																																																																												
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																														
1	4874.00	43.00	74.00	-31.00	53.26	34.45	12.40	58.00	0.89	--	--	Peak																																																																																																																																												
2	7311.00	48.42	74.00	-25.58	54.39	36.00	14.93	57.85	0.95	100	16	Peak																																																																																																																																												
3	7311.00	37.62	54.00	-16.38	43.59	36.00	14.93	57.85	0.95	100	16	Average																																																																																																																																												

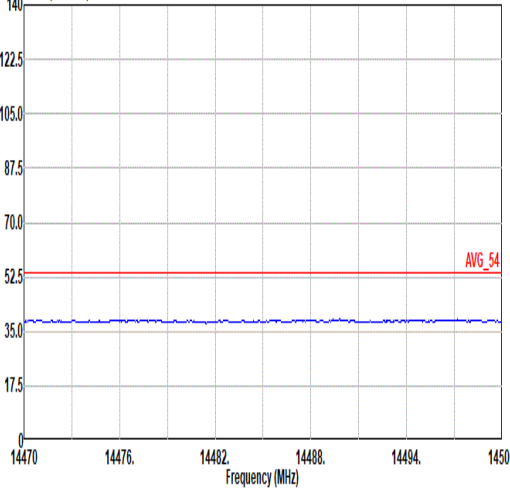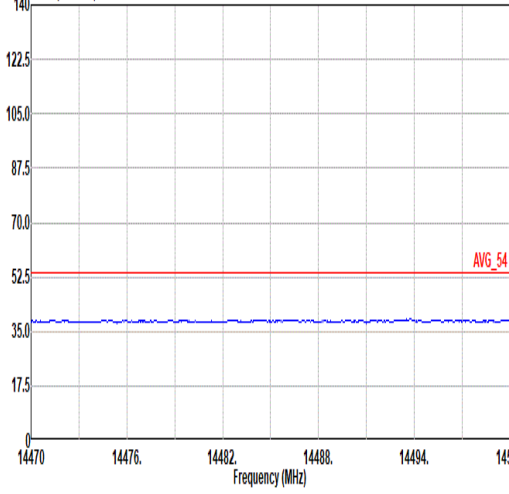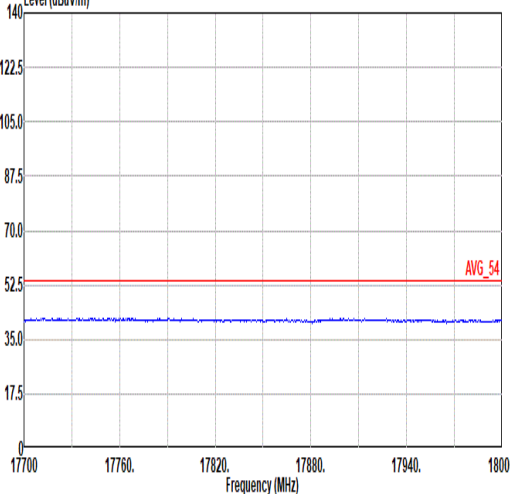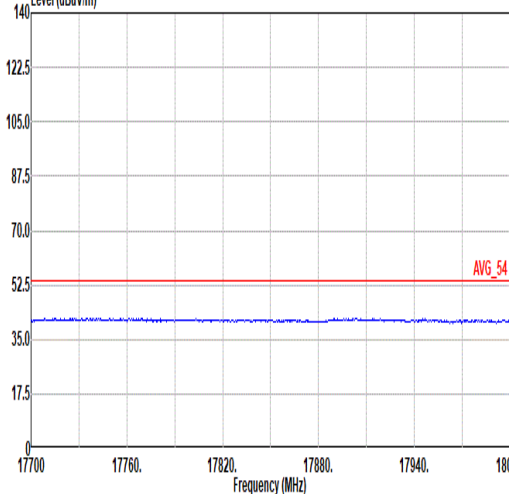

Mode	88	
	Harmonic	
	2400-2483.5_802.11g_CH06_2437MHz	
ANT	7+11	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-06-18  Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	Level (dBuV/m) Date: 2026-06-18  Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
	Level (dBuV/m) Date: 2026-06-18  Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	Level (dBuV/m) Date: 2026-06-18  Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL

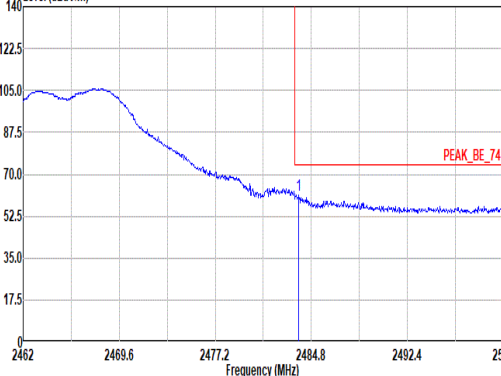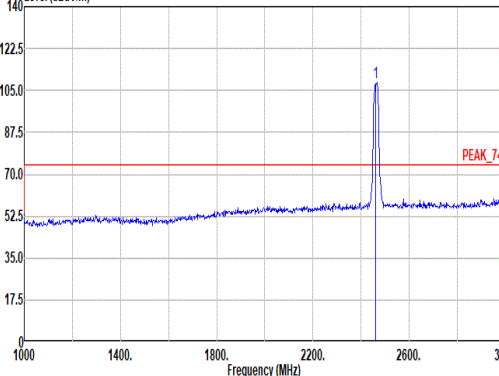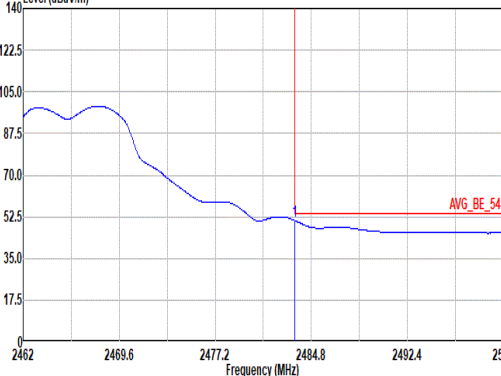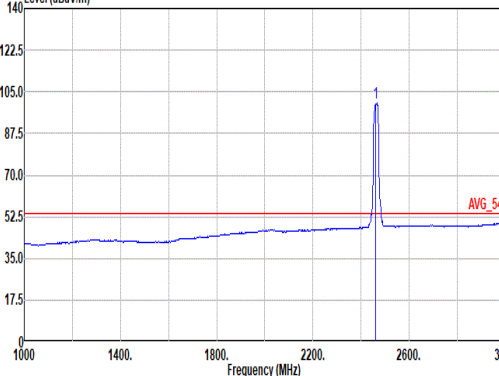

Mode	89																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																	
ANT	7+11																																																																																																	
Pol.	Horizontal					Fundamental																																																																																												
Peak	Level (dBuV/m) Date: 2026-06-17  140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 24622469.62477.22484.82492.42500 Frequency (MHz) Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.81</td><td>61.16</td><td>74.00</td><td>-12.84</td><td>44.25</td><td>32.74</td><td>8.85</td><td>34.65</td><td>9.97</td><td>372</td><td>30</td><td>Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.81	61.16	74.00	-12.84	44.25	32.74	8.85	34.65	9.97	372	30	Peak	Level (dBuV/m) Date: 2026-06-17  140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 100014001800220026003000 Frequency (MHz) Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>100.39</td><td>-----</td><td>-----</td><td>91.54</td><td>32.68</td><td>8.82</td><td>34.64</td><td>9.99</td><td>372</td><td>30</td><td>Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2462.00	100.39	-----	-----	91.54	32.68	8.82	34.64	9.99	372	30	Peak	
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2483.81	61.16	74.00	-12.84	44.25	32.74	8.85	34.65	9.97	372	30	Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																								
1	2462.00	100.39	-----	-----	91.54	32.68	8.82	34.64	9.99	372	30	Peak																																																																																						
Avg	Level (dBuV/m) Date: 2026-06-17  140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 24622469.62477.22484.82492.42500 Frequency (MHz) Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.51</td><td>50.90</td><td>54.00</td><td>-3.10</td><td>34.00</td><td>32.74</td><td>8.84</td><td>34.65</td><td>9.97</td><td>372</td><td>30</td><td>Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2483.51	50.90	54.00	-3.10	34.00	32.74	8.84	34.65	9.97	372	30	Average	Level (dBuV/m) Date: 2026-06-17  140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 100014001800220026003000 Frequency (MHz) Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2462.00</td><td>100.58</td><td>-----</td><td>-----</td><td>83.73</td><td>32.68</td><td>8.82</td><td>34.64</td><td>9.99</td><td>372</td><td>30</td><td>Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2462.00	100.58	-----	-----	83.73	32.68	8.82	34.64	9.99	372	30	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																								
1	2483.51	50.90	54.00	-3.10	34.00	32.74	8.84	34.65	9.97	372	30	Average																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																								
1	2462.00	100.58	-----	-----	83.73	32.68	8.82	34.64	9.99	372	30	Average																																																																																						







Mode	89																																																																																																				
	Band Edge																																																																																																				
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																				
ANT	7+11																																																																																																				
Pol.	Vertical						Fundamental																																																																																														
Peak	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.77</td><td>60.42</td><td>74.00</td><td>-13.58</td><td>43.52</td><td>32.74</td><td>8.84</td><td>34.65</td><td>9.97</td><td>221</td><td>85 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.77	60.42	74.00	-13.58	43.52	32.74	8.84	34.65	9.97	221	85 Peak	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>105.21</td><td>-----</td><td>-----</td><td>88.41</td><td>32.64</td><td>8.81</td><td>34.64</td><td>9.99</td><td>221</td><td>85 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	105.21	-----	-----	88.41	32.64	8.81	34.64	9.99	221	85 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2483.77	60.42	74.00	-13.58	43.52	32.74	8.84	34.65	9.97	221	85 Peak																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2462.00	105.21	-----	-----	88.41	32.64	8.81	34.64	9.99	221	85 Peak																																																																																										
Avg	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>49.35</td><td>54.00</td><td>-4.65</td><td>32.45</td><td>32.74</td><td>8.84</td><td>34.65</td><td>9.97</td><td>221</td><td>85 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	49.35	54.00	-4.65	32.45	32.74	8.84	34.65	9.97	221	85 Average	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th colspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>97.75</td><td>-----</td><td>-----</td><td>80.99</td><td>32.60</td><td>8.80</td><td>34.63</td><td>9.99</td><td>221</td><td>85 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	97.75	-----	-----	80.99	32.60	8.80	34.63	9.99	221	85 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2483.51	49.35	54.00	-4.65	32.45	32.74	8.84	34.65	9.97	221	85 Average																																																																																										
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																											
1	2462.00	97.75	-----	-----	80.99	32.60	8.80	34.63	9.99	221	85 Average																																																																																										



Mode	89																																																																																																					
	Harmonic																																																																																																					
	2400-2483.5_802.11g_CH11_2462MHz																																																																																																					
ANT	7+11																																																																																																					
Pol.	Horizontal	Vertical																																																																																																				
Peak Avg	Level (dBuV/m) Date: 2026-06-18 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>43.45</td><td>74.00</td><td>-30.55</td><td>53.58</td><td>34.45</td><td>12.46</td><td>57.93</td><td>0.89 -- -- Peak</td></tr><tr><td>2</td><td>7386.00</td><td>42.67</td><td>74.00</td><td>-31.33</td><td>48.75</td><td>36.00</td><td>14.98</td><td>57.98</td><td>0.92 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	4924.00	43.45	74.00	-30.55	53.58	34.45	12.46	57.93	0.89 -- -- Peak	2	7386.00	42.67	74.00	-31.33	48.75	36.00	14.98	57.98	0.92 -- -- Peak	Level (dBuV/m) Date: 2026-06-18 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>4924.00</td><td>42.00</td><td>74.00</td><td>-32.00</td><td>52.13</td><td>34.45</td><td>12.46</td><td>57.93</td><td>0.89 -- -- Peak</td></tr><tr><td>2</td><td>7386.00</td><td>42.82</td><td>74.00</td><td>-31.18</td><td>48.90</td><td>36.00</td><td>14.98</td><td>57.98</td><td>0.92 -- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	4924.00	42.00	74.00	-32.00	52.13	34.45	12.46	57.93	0.89 -- -- Peak	2	7386.00	42.82	74.00	-31.18	48.90	36.00	14.98	57.98	0.92 -- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																														
1	4924.00	43.45	74.00	-30.55	53.58	34.45	12.46	57.93	0.89 -- -- Peak																																																																																													
2	7386.00	42.67	74.00	-31.33	48.75	36.00	14.98	57.98	0.92 -- -- Peak																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																														
1	4924.00	42.00	74.00	-32.00	52.13	34.45	12.46	57.93	0.89 -- -- Peak																																																																																													
2	7386.00	42.82	74.00	-31.18	48.90	36.00	14.98	57.98	0.92 -- -- Peak																																																																																													

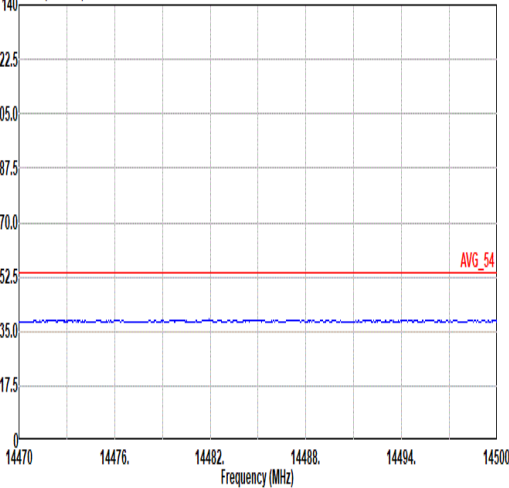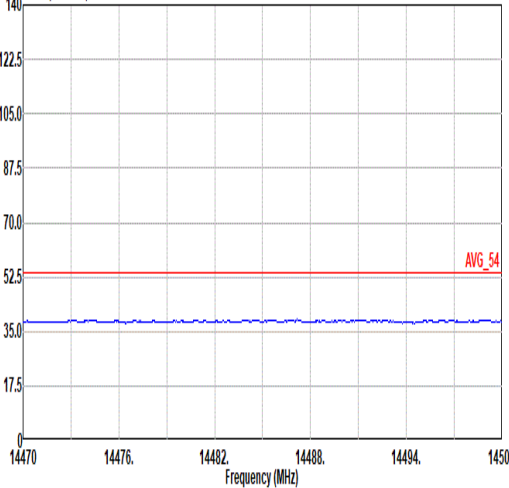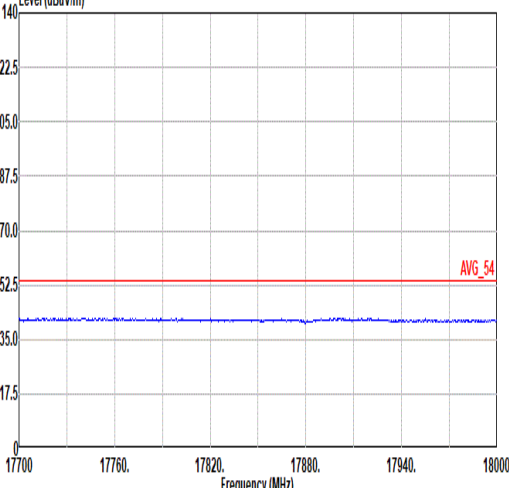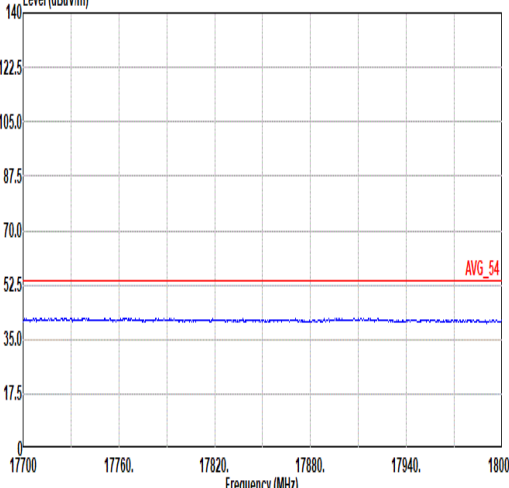

Mode	89	
	Harmonic	
	2400-2483.5_802.11g_CH11_2462MHz	
ANT	7+11	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-06-18  Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	Level (dBuV/m) Date: 2026-06-18  Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
	Level (dBuV/m) Date: 2026-06-18  Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	Level (dBuV/m) Date: 2026-06-18  Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL



Mode	90																																																																																													
	Band Edge																																																																																													
	2400-2483.5_802.11be EHT20_CH01_Full RU_2412MHz																																																																																													
ANT	7+11																																																																																													
Pol.	Horizontal					Fundamental																																																																																								
Peak	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>61.11</td><td>74.00</td><td>-12.89</td><td>44.89</td><td>32.10</td><td>8.67</td><td>34.59</td><td>10.04</td><td>155</td><td>1 Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	61.11	74.00	-12.89	44.89	32.10	8.67	34.59	10.04	155	1 Peak	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>110.41</td><td>-----</td><td>-----</td><td>93.99</td><td>32.28</td><td>8.72</td><td>34.61</td><td>10.03</td><td>155</td><td>1 Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	110.41	-----	-----	93.99	32.28	8.72	34.61	10.03	155	1 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2389.95	61.11	74.00	-12.89	44.89	32.10	8.67	34.59	10.04	155	1 Peak																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2412.00	110.41	-----	-----	93.99	32.28	8.72	34.61	10.03	155	1 Peak																																																																																			
Avg	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>49.57</td><td>54.00</td><td>-4.43</td><td>33.35</td><td>32.10</td><td>8.67</td><td>34.59</td><td>10.04</td><td>155</td><td>1 Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	49.57	54.00	-4.43	33.35	32.10	8.67	34.59	10.04	155	1 Average	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>102.07</td><td>-----</td><td>-----</td><td>85.65</td><td>32.28</td><td>8.72</td><td>34.61</td><td>10.03</td><td>155</td><td>1 Average</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	102.07	-----	-----	85.65	32.28	8.72	34.61	10.03	155	1 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2389.95	49.57	54.00	-4.43	33.35	32.10	8.67	34.59	10.04	155	1 Average																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	2412.00	102.07	-----	-----	85.65	32.28	8.72	34.61	10.03	155	1 Average																																																																																			



Mode	90																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_802.11be EHT20_CH01_Full RU_2412MHz																																																																																																	
ANT	7+11																																																																																																	
Pol.	Vertical					Fundamental																																																																																												
Peak	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>58.50</td><td>74.00</td><td>-15.50</td><td>42.28</td><td>32.10</td><td>8.67</td><td>34.59</td><td>10.04</td><td>233</td><td>82</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	58.50	74.00	-15.50	42.28	32.10	8.67	34.59	10.04	233	82	Peak	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>107.22</td><td>-----</td><td>-----</td><td>90.00</td><td>32.28</td><td>8.72</td><td>34.61</td><td>10.03</td><td>233</td><td>82</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2412.00	107.22	-----	-----	90.00	32.28	8.72	34.61	10.03	233	82	Peak	
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	2389.95	58.50	74.00	-15.50	42.28	32.10	8.67	34.59	10.04	233	82	Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																								
1	2412.00	107.22	-----	-----	90.00	32.28	8.72	34.61	10.03	233	82	Peak																																																																																						
Avg	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>47.16</td><td>54.00</td><td>-6.84</td><td>30.94</td><td>32.10</td><td>8.67</td><td>34.59</td><td>10.04</td><td>233</td><td>82</td><td>Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2389.95	47.16	54.00	-6.84	30.94	32.10	8.67	34.59	10.04	233	82	Average	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>97.65</td><td>-----</td><td>-----</td><td>81.23</td><td>32.28</td><td>8.72</td><td>34.61</td><td>10.03</td><td>233</td><td>82</td><td>Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	2412.00	97.65	-----	-----	81.23	32.28	8.72	34.61	10.03	233	82	Average
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																								
1	2389.95	47.16	54.00	-6.84	30.94	32.10	8.67	34.59	10.04	233	82	Average																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																								
1	2412.00	97.65	-----	-----	81.23	32.28	8.72	34.61	10.03	233	82	Average																																																																																						



Mode	90																																																																																							
	Harmonic																																																																																							
	2400-2483.5_802.11be EHT20_CH01_Full RU_2412MHz																																																																																							
ANT	7+11																																																																																							
Pol.	Horizontal	Vertical																																																																																						
Peak Avg	Level (dBuV/m) Date: 2026-06-18 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4830.00</td><td>42.88</td><td>74.00</td><td>-31.12</td><td>53.19</td><td>34.50</td><td>12.35</td><td>58.06</td><td>0.90</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4830.00	42.88	74.00	-31.12	53.19	34.50	12.35	58.06	0.90	--	Peak	Level (dBuV/m) Date: 2026-06-18 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4830.00</td><td>42.63</td><td>74.00</td><td>-31.37</td><td>52.94</td><td>34.50</td><td>12.35</td><td>58.06</td><td>0.90</td><td>--</td><td>Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4830.00	42.63	74.00	-31.37	52.94	34.50	12.35	58.06	0.90	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	4830.00	42.88	74.00	-31.12	53.19	34.50	12.35	58.06	0.90	--	Peak																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																														
1	4830.00	42.63	74.00	-31.37	52.94	34.50	12.35	58.06	0.90	--	Peak																																																																													



Mode	90	
	Harmonic	
	2400-2483.5_802.11be EHT20_CH01_Full RU_2412MHz	
ANT	7+11	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-06-18 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	Level (dBuV/m) Date: 2026-06-18 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
	Level (dBuV/m) Date: 2026-06-18 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	Level (dBuV/m) Date: 2026-06-18 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL



Mode	91																																																																																																																									
	Harmonic																																																																																																																									
	2400-2483.5_802.11be EHT20_CH06_Full RU_2437MHz																																																																																																																									
ANT	7+11																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	Level (dBuV/m) Date: 2026-06-18 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 4874.00</td><td>42.83</td><td>74.00</td><td>-31.17</td><td>53.09</td><td>34.45</td><td>12.40</td><td>58.00</td><td>0.89</td><td>-- -- Peak</td></tr><tr><td>2 7311.00</td><td>47.83</td><td>74.00</td><td>-26.17</td><td>53.00</td><td>36.00</td><td>14.93</td><td>57.85</td><td>0.95</td><td>35 292 Peak</td></tr><tr><td>3 7311.00</td><td>38.71</td><td>54.00</td><td>-15.29</td><td>44.68</td><td>36.00</td><td>14.93</td><td>57.85</td><td>0.95</td><td>35 292 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 4874.00	42.83	74.00	-31.17	53.09	34.45	12.40	58.00	0.89	-- -- Peak	2 7311.00	47.83	74.00	-26.17	53.00	36.00	14.93	57.85	0.95	35 292 Peak	3 7311.00	38.71	54.00	-15.29	44.68	36.00	14.93	57.85	0.95	35 292 Average	Level (dBuV/m) Date: 2026-06-18 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 4874.00</td><td>42.41</td><td>74.00</td><td>-31.59</td><td>52.67</td><td>34.45</td><td>12.40</td><td>58.00</td><td>0.89</td><td>-- -- Peak</td></tr><tr><td>2 7311.00</td><td>50.90</td><td>74.00</td><td>-23.10</td><td>56.87</td><td>36.00</td><td>14.93</td><td>57.85</td><td>0.95</td><td>100 348 Peak</td></tr><tr><td>3 7311.00</td><td>39.87</td><td>54.00</td><td>-14.13</td><td>45.84</td><td>36.00</td><td>14.93</td><td>57.85</td><td>0.95</td><td>100 348 Average</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 4874.00	42.41	74.00	-31.59	52.67	34.45	12.40	58.00	0.89	-- -- Peak	2 7311.00	50.90	74.00	-23.10	56.87	36.00	14.93	57.85	0.95	100 348 Peak	3 7311.00	39.87	54.00	-14.13	45.84	36.00	14.93	57.85	0.95	100 348 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 4874.00	42.83	74.00	-31.17	53.09	34.45	12.40	58.00	0.89	-- -- Peak																																																																																																																	
2 7311.00	47.83	74.00	-26.17	53.00	36.00	14.93	57.85	0.95	35 292 Peak																																																																																																																	
3 7311.00	38.71	54.00	-15.29	44.68	36.00	14.93	57.85	0.95	35 292 Average																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 4874.00	42.41	74.00	-31.59	52.67	34.45	12.40	58.00	0.89	-- -- Peak																																																																																																																	
2 7311.00	50.90	74.00	-23.10	56.87	36.00	14.93	57.85	0.95	100 348 Peak																																																																																																																	
3 7311.00	39.87	54.00	-14.13	45.84	36.00	14.93	57.85	0.95	100 348 Average																																																																																																																	



Mode	91	
	Harmonic	
	2400-2483.5_802.11be EHT20_CH06_Full RU_2437MHz	
ANT	7+11	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-06-18 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	Level (dBuV/m) Date: 2026-06-18 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
	Level (dBuV/m) Date: 2026-06-18 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	Level (dBuV/m) Date: 2026-06-18 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL



Mode	92																																																																																																	
	Band Edge																																																																																																	
	2400-2483.5_802.11be EHT20_CH11_Full RU_2462MHz																																																																																																	
ANT	7+11																																																																																																	
Pol.	Horizontal						Fundamental																																																																																											
Peak	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.55</td><td>63.12</td><td>74.00</td><td>-10.88</td><td>46.22</td><td>32.74</td><td>8.84</td><td>34.65</td><td>9.97</td><td>300</td><td>30 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.55	63.12	74.00	-10.88	46.22	32.74	8.84	34.65	9.97	300	30 Peak	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>108.94</td><td>-----</td><td>-----</td><td>92.12</td><td>32.66</td><td>8.81</td><td>34.64</td><td>9.99</td><td>300</td><td>30 Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	108.94	-----	-----	92.12	32.66	8.81	34.64	9.99	300	30 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2483.55	63.12	74.00	-10.88	46.22	32.74	8.84	34.65	9.97	300	30 Peak																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2462.00	108.94	-----	-----	92.12	32.66	8.81	34.64	9.99	300	30 Peak																																																																																							
Avg	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.51</td><td>50.97</td><td>54.00</td><td>-3.03</td><td>34.07</td><td>32.74</td><td>8.84</td><td>34.65</td><td>9.97</td><td>300</td><td>30 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.51	50.97	54.00	-3.03	34.07	32.74	8.84	34.65	9.97	300	30 Average	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2462.00</td><td>100.13</td><td>-----</td><td>-----</td><td>83.31</td><td>32.66</td><td>8.81</td><td>34.64</td><td>9.99</td><td>300</td><td>30 Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	100.13	-----	-----	83.31	32.66	8.81	34.64	9.99	300	30 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2483.51	50.97	54.00	-3.03	34.07	32.74	8.84	34.65	9.97	300	30 Average																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	2462.00	100.13	-----	-----	83.31	32.66	8.81	34.64	9.99	300	30 Average																																																																																							



Mode	92																																														
	Band Edge																																														
	2400-2483.5_802.11be EHT20_CH11_Full RU_2462MHz																																														
ANT	7+11																																														
Pol.	Vertical																																														
Peak	Level (dBuV/m) Date: 2026-06-17 PEAK_BE_74 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.58</td><td>59.77</td><td>74.00</td><td>-14.23</td><td>42.87</td><td>32.74</td><td>8.84</td><td>34.65</td><td>9.97</td><td>200</td><td>81</td><td>Peak</td></tr></table>											Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2483.58	59.77	74.00	-14.23	42.87	32.74	8.84	34.65	9.97	200	81	Peak
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																					
1 2483.58	59.77	74.00	-14.23	42.87	32.74	8.84	34.65	9.97	200	81	Peak																																				
Level (dBuV/m) Date: 2026-06-17 PEAK_74 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2462.00</td><td>104.50</td><td>-----</td><td>-----</td><td>87.82</td><td>32.52</td><td>8.79</td><td>34.63</td><td>10.00</td><td>200</td><td>81</td><td>Peak</td></tr></table>											Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2462.00	104.50	-----	-----	87.82	32.52	8.79	34.63	10.00	200	81	Peak	
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																					
1 2462.00	104.50	-----	-----	87.82	32.52	8.79	34.63	10.00	200	81	Peak																																				
Avg	Level (dBuV/m) Date: 2026-06-17 AVG_BE_54 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2483.55</td><td>48.06</td><td>54.00</td><td>-5.94</td><td>31.16</td><td>32.74</td><td>8.84</td><td>34.65</td><td>9.97</td><td>200</td><td>81</td><td>Average</td></tr></table>											Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2483.55	48.06	54.00	-5.94	31.16	32.74	8.84	34.65	9.97	200	81	Average
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																					
1 2483.55	48.06	54.00	-5.94	31.16	32.74	8.84	34.65	9.97	200	81	Average																																				
Level (dBuV/m) Date: 2026-06-17 AVG_54 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 2462.00</td><td>95.82</td><td>-----</td><td>-----</td><td>78.97</td><td>32.68</td><td>8.82</td><td>34.64</td><td>9.99</td><td>200</td><td>81</td><td>Average</td></tr></table>											Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 2462.00	95.82	-----	-----	78.97	32.68	8.82	34.64	9.99	200	81	Average	
Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																					
1 2462.00	95.82	-----	-----	78.97	32.68	8.82	34.64	9.99	200	81	Average																																				



Mode	92																																																																																																																									
	Harmonic																																																																																																																									
	2400-2483.5_802.11be EHT20_CH11_Full RU_2462MHz																																																																																																																									
ANT	7+11																																																																																																																									
Pol.	Horizontal						Vertical																																																																																																																			
Peak Avg	Level (dBuV/m) Date: 2026-06-18 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>43.25</td><td>74.00</td><td>-30.75</td><td>53.38</td><td>34.45</td><td>12.46</td><td>57.93</td><td>0.89</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>42.56</td><td>74.00</td><td>-31.44</td><td>48.64</td><td>36.00</td><td>14.98</td><td>57.98</td><td>0.92</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	43.25	74.00	-30.75	53.38	34.45	12.46	57.93	0.89	--	Peak	2	7386.00	42.56	74.00	-31.44	48.64	36.00	14.98	57.98	0.92	--	Peak	Level (dBuV/m) Date: 2026-06-18 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4924.00</td><td>42.85</td><td>74.00</td><td>-31.15</td><td>52.98</td><td>34.45</td><td>12.46</td><td>57.93</td><td>0.89</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7386.00</td><td>42.66</td><td>74.00</td><td>-31.34</td><td>48.74</td><td>36.00</td><td>14.98</td><td>57.98</td><td>0.92</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	42.85	74.00	-31.15	52.98	34.45	12.46	57.93	0.89	--	Peak	2	7386.00	42.66	74.00	-31.34	48.74	36.00	14.98	57.98	0.92	--	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	4924.00	43.25	74.00	-30.75	53.38	34.45	12.46	57.93	0.89	--	Peak																																																																																																															
2	7386.00	42.56	74.00	-31.44	48.64	36.00	14.98	57.98	0.92	--	Peak																																																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	4924.00	42.85	74.00	-31.15	52.98	34.45	12.46	57.93	0.89	--	Peak																																																																																																															
2	7386.00	42.66	74.00	-31.34	48.74	36.00	14.98	57.98	0.92	--	Peak																																																																																																															



Mode	92	
	Harmonic	
	2400-2483.5_802.11be EHT20_CH11_Full RU_2462MHz	
ANT	7+11	
Pol.	Horizontal	Vertical
14.47G ~14.5G Avg	Level (dBuV/m) Date: 2026-06-18 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	Level (dBuV/m) Date: 2026-06-18 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL
	Level (dBuV/m) Date: 2026-06-18 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL	Level (dBuV/m) Date: 2026-06-18 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL



Mode	93																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11be EHT20_CH01_Single_RU26/0_2412MHz																																																																																									
ANT	7+11																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2389.95</td><td>63.25</td><td>74.00</td><td>-10.75</td><td>47.03</td><td>32.10</td><td>8.67</td><td>34.59</td><td>10.04</td><td>360 350 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2389.95	63.25	74.00	-10.75	47.03	32.10	8.67	34.59	10.04	360 350 Peak	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2412.00</td><td>115.14</td><td>-----</td><td>-----</td><td>98.09</td><td>32.12</td><td>8.69</td><td>34.60</td><td>10.04</td><td>360 350 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2412.00	115.14	-----	-----	98.09	32.12	8.69	34.60	10.04	360 350 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2389.95	63.25	74.00	-10.75	47.03	32.10	8.67	34.59	10.04	360 350 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2412.00	115.14	-----	-----	98.09	32.12	8.69	34.60	10.04	360 350 Peak																																																																																	
Avg	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2389.95</td><td>44.96</td><td>54.00</td><td>-9.04</td><td>28.74</td><td>32.10</td><td>8.67</td><td>34.59</td><td>10.04</td><td>360 350 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2389.95	44.96	54.00	-9.04	28.74	32.10	8.67	34.59	10.04	360 350 Average	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2412.00</td><td>108.23</td><td>-----</td><td>-----</td><td>91.95</td><td>32.14</td><td>8.70</td><td>34.60</td><td>10.04</td><td>360 350 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2412.00	108.23	-----	-----	91.95	32.14	8.70	34.60	10.04	360 350 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2389.95	44.96	54.00	-9.04	28.74	32.10	8.67	34.59	10.04	360 350 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2412.00	108.23	-----	-----	91.95	32.14	8.70	34.60	10.04	360 350 Average																																																																																	



Mode	93																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11be EHT20_CH01_Single_RU26/0_2412MHz																																																																																									
ANT	7+11																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2366.55</td><td>56.18</td><td>74.00 -17.82</td><td>39.96</td><td>32.13</td><td>8.63</td><td>34.57</td><td>10.03</td><td>400</td><td>292 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2366.55	56.18	74.00 -17.82	39.96	32.13	8.63	34.57	10.03	400	292 Peak	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2412.00</td><td>109.44</td><td>-----</td><td>93.19</td><td>32.12</td><td>8.69</td><td>34.60</td><td>10.04</td><td>400</td><td>292 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2412.00	109.44	-----	93.19	32.12	8.69	34.60	10.04	400	292 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2366.55	56.18	74.00 -17.82	39.96	32.13	8.63	34.57	10.03	400	292 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2412.00	109.44	-----	93.19	32.12	8.69	34.60	10.04	400	292 Peak																																																																																	
Avg	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2389.56</td><td>44.68</td><td>54.00 -9.32</td><td>28.46</td><td>32.10</td><td>8.67</td><td>34.59</td><td>10.04</td><td>400</td><td>292 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2389.56	44.68	54.00 -9.32	28.46	32.10	8.67	34.59	10.04	400	292 Average	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2412.00</td><td>102.60</td><td>-----</td><td>86.32</td><td>32.14</td><td>8.70</td><td>34.60</td><td>10.04</td><td>400</td><td>292 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2412.00	102.60	-----	86.32	32.14	8.70	34.60	10.04	400	292 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2389.56	44.68	54.00 -9.32	28.46	32.10	8.67	34.59	10.04	400	292 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2412.00	102.60	-----	86.32	32.14	8.70	34.60	10.04	400	292 Average																																																																																	







Mode	94																																																																																																			
	Band Edge																																																																																																			
	2400-2483.5_802.11be EHT20_CH01_Single_RU52/37_2412MHz																																																																																																			
ANT	7+11																																																																																																			
Pol.	Horizontal						Fundamental																																																																																													
Peak	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>60.82</td><td>74.00</td><td>-13.18</td><td>44.60</td><td>32.10</td><td>8.67</td><td>34.59</td><td>10.04</td><td>360</td><td>348</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	60.82	74.00	-13.18	44.60	32.10	8.67	34.59	10.04	360	348	Peak	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>113.03</td><td>-----</td><td>-----</td><td>96.75</td><td>32.14</td><td>8.70</td><td>34.60</td><td>10.04</td><td>360</td><td>348</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	113.03	-----	-----	96.75	32.14	8.70	34.60	10.04	360	348	Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.95	60.82	74.00	-13.18	44.60	32.10	8.67	34.59	10.04	360	348	Peak																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2412.00	113.03	-----	-----	96.75	32.14	8.70	34.60	10.04	360	348	Peak																																																																																								
Avg	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2389.95</td><td>44.98</td><td>54.00</td><td>-9.02</td><td>28.76</td><td>32.10</td><td>8.67</td><td>34.59</td><td>10.04</td><td>360</td><td>348</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	44.98	54.00	-9.02	28.76	32.10	8.67	34.59	10.04	360	348	Average	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2412.00</td><td>105.52</td><td>-----</td><td>-----</td><td>89.24</td><td>32.14</td><td>8.70</td><td>34.60</td><td>10.04</td><td>360</td><td>348</td><td>Average</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	105.52	-----	-----	89.24	32.14	8.70	34.60	10.04	360	348	Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2389.95	44.98	54.00	-9.02	28.76	32.10	8.67	34.59	10.04	360	348	Average																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	2412.00	105.52	-----	-----	89.24	32.14	8.70	34.60	10.04	360	348	Average																																																																																								



Mode	94																																																																																									
	Band Edge																																																																																									
	2400-2483.5_802.11be EHT20_CH01_Single_RU52/37_2412MHz																																																																																									
ANT	7+11																																																																																									
Pol.	Vertical					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2389.69</td><td>57.36</td><td>74.00</td><td>-16.64</td><td>41.14</td><td>32.10</td><td>8.67</td><td>34.59</td><td>10.04</td><td>255 252 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2389.69	57.36	74.00	-16.64	41.14	32.10	8.67	34.59	10.04	255 252 Peak	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2412.00</td><td>111.29</td><td>-----</td><td>-----</td><td>95.01</td><td>32.14</td><td>8.70</td><td>34.60</td><td>10.04</td><td>255 252 Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2412.00	111.29	-----	-----	95.01	32.14	8.70	34.60	10.04	255 252 Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2389.69	57.36	74.00	-16.64	41.14	32.10	8.67	34.59	10.04	255 252 Peak																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2412.00	111.29	-----	-----	95.01	32.14	8.70	34.60	10.04	255 252 Peak																																																																																	
Avg	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2389.95</td><td>44.76</td><td>54.00</td><td>-9.24</td><td>28.54</td><td>32.10</td><td>8.67</td><td>34.59</td><td>10.04</td><td>255 252 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2389.95	44.76	54.00	-9.24	28.54	32.10	8.67	34.59	10.04	255 252 Average	Level (dBuV/m) Date: 2026-06-17 Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2412.00</td><td>103.46</td><td>-----</td><td>-----</td><td>87.18</td><td>32.14</td><td>8.70</td><td>34.60</td><td>10.04</td><td>255 252 Average</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 2412.00	103.46	-----	-----	87.18	32.14	8.70	34.60	10.04	255 252 Average
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2389.95	44.76	54.00	-9.24	28.54	32.10	8.67	34.59	10.04	255 252 Average																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss	Factor	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 2412.00	103.46	-----	-----	87.18	32.14	8.70	34.60	10.04	255 252 Average																																																																																	

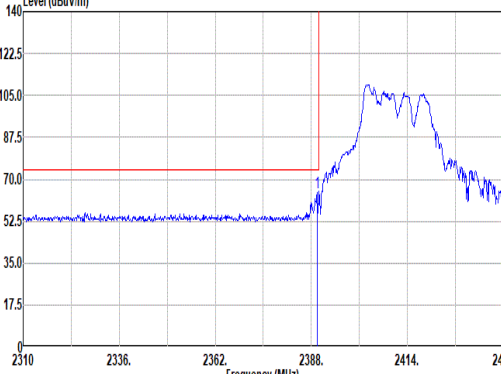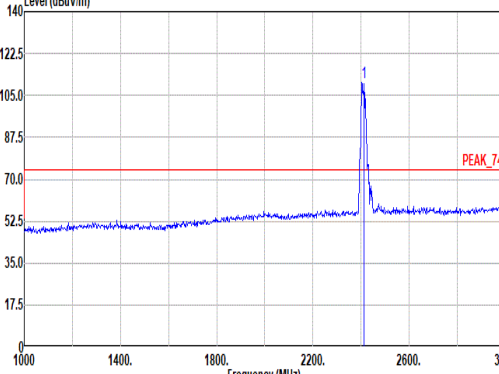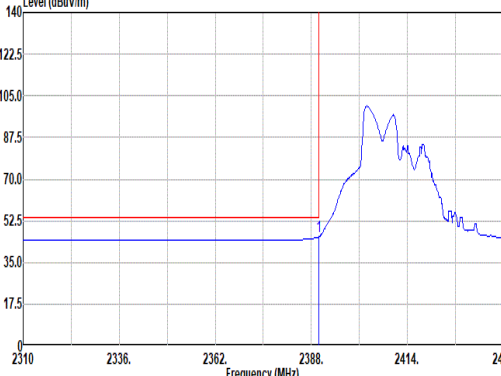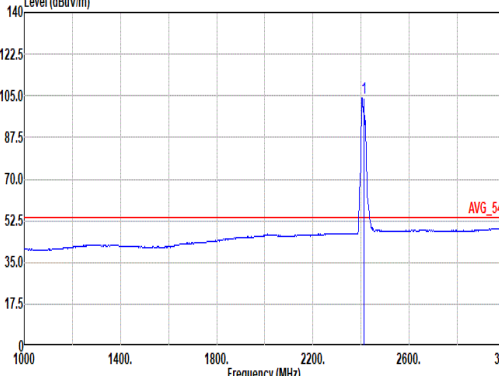

Mode	95																																																																																								
	Band Edge																																																																																								
	2400-2483.5_802.11be EHT20_CH01_Single_RU106/53_2412MHz																																																																																								
ANT	7+11																																																																																								
Pol.	Horizontal						Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2026-06-17 						Level (dBuV/m) Date: 2026-06-17 																																																																																		
	Site : 03CH07-HY Condition: PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.56</td><td>64.19</td><td>74.00</td><td>-9.81</td><td>47.97</td><td>32.10</td><td>8.67</td><td>34.59</td><td>10.04</td><td>363</td><td>349</td><td>Peak</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.56	64.19	74.00	-9.81	47.97	32.10	8.67	34.59	10.04	363	349	Peak	Site : 03CH07-HY Condition: PEAK_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>110.21</td><td>-----</td><td>-----</td><td>93.96</td><td>32.12</td><td>8.69</td><td>34.60</td><td>10.04</td><td>363</td><td>349</td><td>Peak</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2412.00	110.21	-----	-----	93.96	32.12	8.69	34.60	10.04	363	349
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2389.56	64.19	74.00	-9.81	47.97	32.10	8.67	34.59	10.04	363	349	Peak																																																																													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2412.00	110.21	-----	-----	93.96	32.12	8.69	34.60	10.04	363	349	Peak																																																																													
Avg	Level (dBuV/m) Date: 2026-06-17 						Level (dBuV/m) Date: 2026-06-17 																																																																																		
	Site : 03CH07-HY Condition: AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2389.95</td><td>45.77</td><td>54.00</td><td>-8.23</td><td>29.55</td><td>32.10</td><td>8.67</td><td>34.59</td><td>10.04</td><td>363</td><td>349</td><td>Average</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2389.95	45.77	54.00	-8.23	29.55	32.10	8.67	34.59	10.04	363	349	Average	Site : 03CH07-HY Condition: AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SMT:Auto <table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read Level</th><th>Ant Factor</th><th>Cable Loss</th><th>Preamp Factor</th><th>Aux Factor</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>2412.00</td><td>104.18</td><td>-----</td><td>-----</td><td>87.90</td><td>32.14</td><td>8.70</td><td>34.60</td><td>10.04</td><td>363</td><td>349</td><td>Average</td></tr></tbody></table>							Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2412.00	104.18	-----	-----	87.90	32.14	8.70	34.60	10.04	363	349
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2389.95	45.77	54.00	-8.23	29.55	32.10	8.67	34.59	10.04	363	349	Average																																																																													
	Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																														
1	2412.00	104.18	-----	-----	87.90	32.14	8.70	34.60	10.04	363	349	Average																																																																													