



FCC TRANSMIT SIMULTANEOUSLY TEST REPORT

FCC ID : IHDT56AX5
Equipment : Mobile Cellular Phone
Brand Name : Motorola
Model Name : XT2651V
Applicant : Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA
Manufacturer : Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA
Standard : FCC Part 15 Subpart E §15.407

The product was received on Jun. 16, 2026 and testing was performed from Jun. 23, 2026 to Jul. 23, 2026. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory
No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Test Mode.....	7
2.2 Connection Diagram of Test System.....	8
2.3 Support Unit used in test configuration and system	8
2.4 EUT Operation Test Setup	8
3 Test Result	9
3.1 Unwanted Emissions Measurement.....	9
4 List of Measuring Equipment.....	14
5 Measurement Uncertainty	15
Appendix A. Radiated Spurious Emission Test Result	
Appendix B. Duty Cycle Plots	

History of this test report

Report No.	Version	Description	Issue Date
FR660814J	01	Initial issue of report	Aug. 05, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.407(b)	Unwanted Emissions	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturee who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng

Report Producer: Shiori Chen

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs	GSM/WCDMA/LTE/5G NR/ mmW, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ax/be, Wi-Fi 5GHz 802.11a/n/ac/ax/be, Wi-Fi 6GHz 802.11a/ax/be, GNSS, NFC,WPT and UWB
Antenna Type subject to this standard	Bluetooth / WLAN: IFA Antenna UWB:: PIFA Antenna

Antenna information		
2400 MHz ~ 2483.5 MHz	Peak Gain (dBi)	<Ant. 7>: -6.9 <Ant. 11>: -6.9
5470 MHz ~ 5725 MHz	Peak Gain (dBi)	<Ant. 1>-5.4 <Ant. 6>-7.6
CH05 6489.6 MHz / CH09 7987.2 MHz	Peak Gain (dBi)	<ANT10>: <CH05> : -2.9 dBi <CH09> : -4.1 dBi

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

EUT Information List	
IMEI	Performed Test Item
352595240017932	Radiated Spurious Emission

Specification of Accessory				
Battery 1	Brand Name	Motorola	Model Name	SH29
Battery 2	Brand Name	Motorola	Model Name	SH31
USB Cable 1	Brand Name	Motorola(SAIBAO)	Model Name	SC18D86731
USB Cable 2	Brand Name	Motorola(Luxshare)	Model Name	SC18E08103

1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

The test location is accredited based on TAF code 3786 designated by NCC (National Communication Commission).

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010

FCC designation No.: TW3786

Note: The test site complies with ANSI C63.4 2014 requirement.

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ FCC Part 15 Subpart E
- ♦ ANSI C63.10-2020 + Cor.1-2023

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.




2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.

2.1 Test Mode

The detailed Radiated test modes are shown in Appendix A

2.2 Connection Diagram of Test System

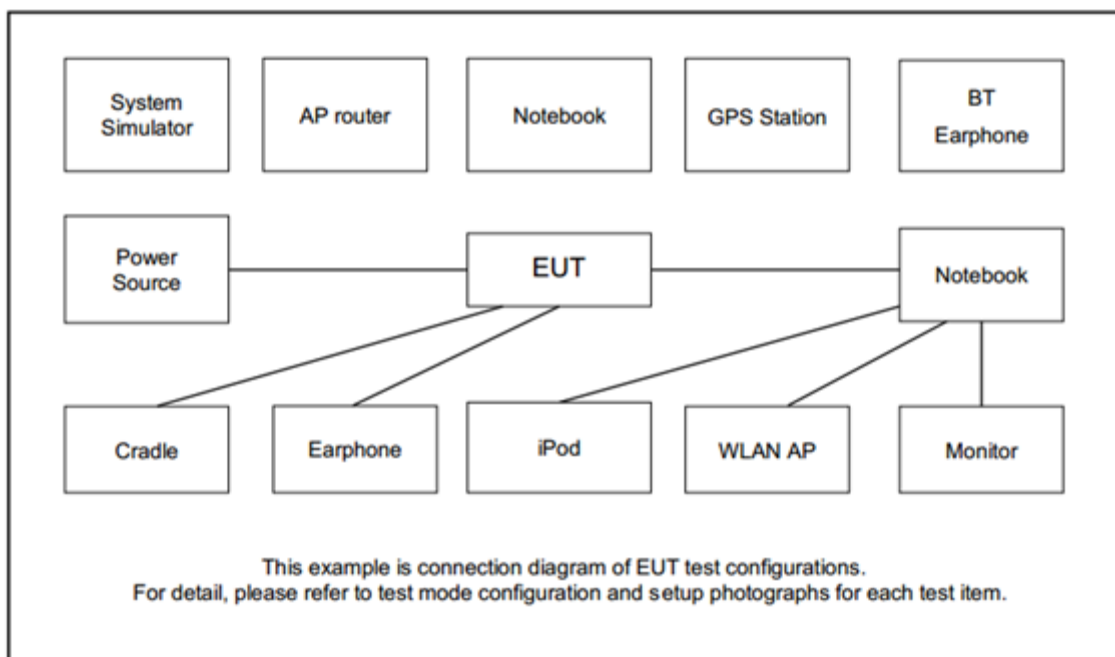

2.3 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	Lenovo	L570	NA	NA	NA

2.4 EUT Operation Test Setup

The RF test items, utility "QRCT v4.1 Version4.0.193.1" was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

3 Test Result

3.1 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.1.1 Limit of Unwanted Emissions

- (1)
- (2) Unwanted spurious emissions falls in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

- (3) KDB789033 D02 v02r01 G)2)c)
 - (i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.
 - (ii) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are based on the use of a peak detector.

3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
Section G) Unwanted emissions measurement.
 - (1) Procedure for Unwanted Emissions Measurements Below 1000 MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold
 - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold
 - (3) Procedures for Average Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
3. The EUT is set 3 meters away from the receiving antenna which is mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT is arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.


6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.

3.1.4 Test Setup


For radiated emissions below 30MHz

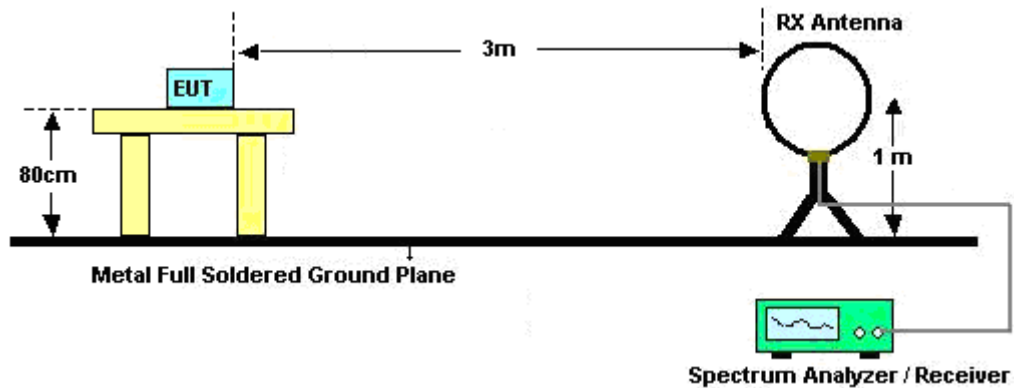


For radiated emissions from 30MHz to 1GHz

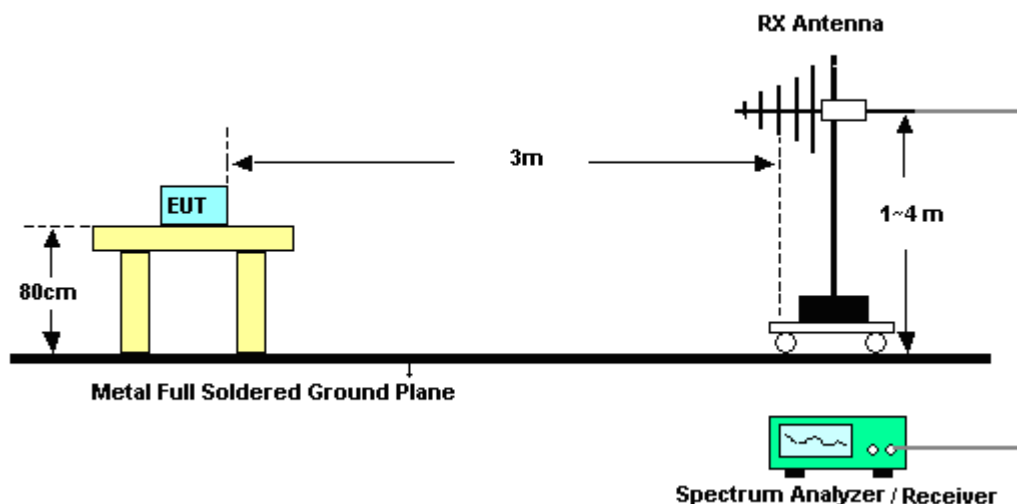

For radiated test from 1GHz to 18GHz

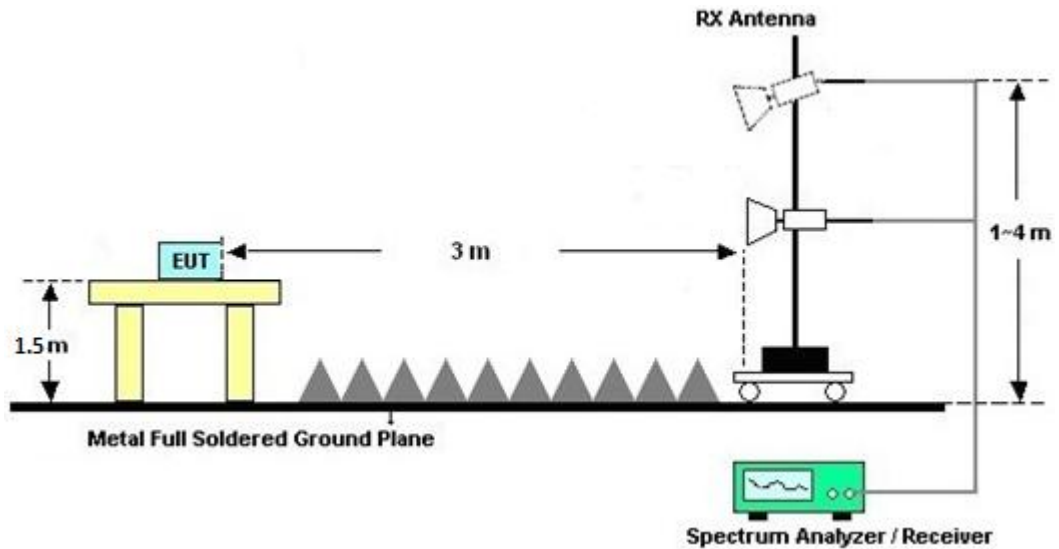

For radiated test above 18GHz

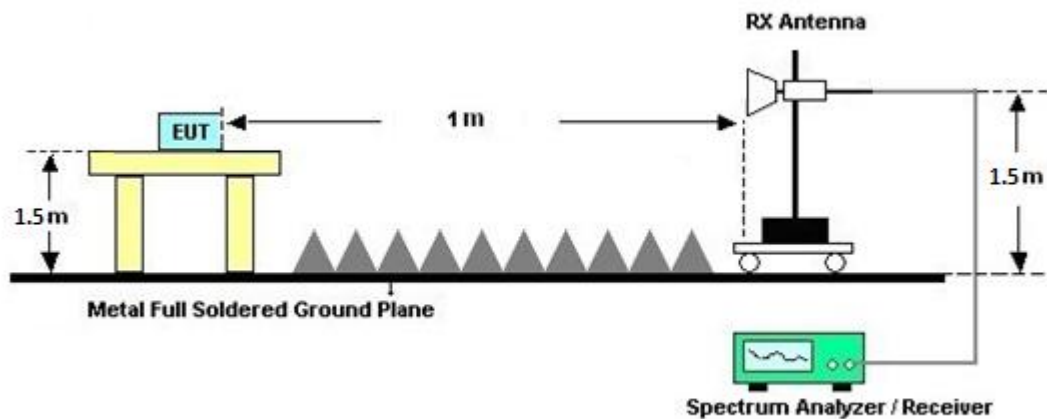

**3.1.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.1.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix A.

3.1.7 Duty Cycle

Please refer to Appendix B.

3.1.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix A.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Loop Antenna	Rohde & Schwarz	HFH2-Z2E	101108	9kHz~30MHz	Dec. 11, 2025	Jun. 23, 2026~ Jul. 23, 2026	Dec. 10, 2026	Radiation (03CH16-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA9170	1230	18GHz~40GHz	Nov. 05, 2026	Jun. 23, 2026~ Jul. 23, 2026	Nov. 04, 2026	Radiation (03CH16-HY)
Spectrum Analyzer	Keysight	N9010B	MY64320114	10Hz~44GHz	Oct. 07, 2025	Jun. 23, 2026~ Jul. 23, 2026	Oct. 06, 2026	Radiation (03CH16-HY)
EMI Test Receiver	Keysight	N9038A(MXE)	MY57290111	3Hz~26.5GHz	Nov. 26, 2025	Jun. 23, 2026~ Jul. 23, 2026	Nov. 25, 2026	Radiation (03CH16-HY)
Bilog Antenna	TESEQ	CBL 6111D & 00802N1D01N-0 6	47020 & 06	30MHz to 1GHz	Oct. 04, 2025	Jun. 23, 2026~ Jul. 23, 2026	Oct. 03, 2026	Radiation (03CH16-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	9120D-1522	1GHz~18GHz	Mar. 26, 2026	Jun. 23, 2026~ Jul. 23, 2026	Mar. 25, 2027	Radiation (03CH16-HY)
Amplifier	SONOMA	310N	371607	9kHz~1GHz	Jun. 30, 2025	Jun. 23, 2026~ Jul. 23, 2026	Jun. 29, 2026	Radiation (03CH16-HY)
Amplifier	SONOMA	310N	371607	9kHz~1GHz	Jun. 29, 2026		Jun. 28, 2027	Radiation (03CH16-HY)
Preamplifier	Keysight	83017A	MY53270264	1GHz~26.5GHz	Sep. 12, 2025	Jun. 23, 2026~ Jul. 23, 2026	Sep. 11, 2026	Radiation (03CH16-HY)
Preamplifier	EMEC	EM1G18G	060812	1GHz~18GHz	Dec. 22, 2025	Jun. 23, 2026~ Jul. 23, 2026	Dec. 21, 2026	Radiation (03CH16-HY)
Preamplifier	EMEC	EM18G40G	060801	18GHz~40GHz	Jun. 08, 2026	Jun. 23, 2026~ Jul. 23, 2026	Jun. 07, 2027	Radiation (03CH16-HY)
Filter	Wainwright	WLK4-1000-153 0-8000-40SS	SN17	1.53GHz Low Pass Filter	Jan. 13, 2026	Jun. 23, 2026~ Jul. 23, 2026	Jan. 12, 2027	Radiation (03CH16-HY)
Filter	Wainwright	WHKX12-2700-3 000-18000-60ST	SN3	3GHz High Pass Filter	Jun. 26, 2025	Jun. 23, 2026~ Jul. 23, 2026	Jun. 25, 2026	Radiation (03CH16-HY)
Filter	Wainwright	WHKX12-2700-3 000-18000-60ST	SN3	3GHz High Pass Filter	Jun. 25, 2026		Jun. 24, 2027	Radiation (03CH16-HY)
Filter	Wainwright	WHKX8-5872.5- 6750-18000-40S T	SN27	6.75GHz High Pass Filter	Dec. 22, 2025	Jun. 23, 2026~ Jul. 23, 2026	Dec. 21, 2026	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	801606/2	9KHz ~ 40GHz	May 13, 2026	Jun. 23, 2026~ Jul. 23, 2026	May 12, 2027	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102/SUCOFLEX 104	EC-A5-300-57 57,805935/4,8 02434/4	30MHz~18GHz	Aug. 06, 2025	Jun. 23, 2026~ Jul. 23, 2026	Aug. 05, 2026	Radiation (03CH16-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804011/2,8040 12/2	18-40GHz	Dec. 18, 2025	Jun. 23, 2026~ Jul. 23, 2026	Dec. 17, 2026	Radiation (03CH16-HY)
Software	Audix	E3 230621 V9	RK-002393	N/A	N/A	Jun. 23, 2026~ Jul. 23, 2026	N/A	Radiation (03CH16-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Jun. 23, 2026~ Jul. 23, 2026	N/A	Radiation (03CH16-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Jun. 23, 2026~ Jul. 23, 2026	N/A	Radiation (03CH16-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Jun. 23, 2026~ Jul. 23, 2026	N/A	Radiation (03CH16-HY)

5 Measurement Uncertainty

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.50 dB
---	---------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.60 dB
---	---------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.60 dB
---	---------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.20 dB
---	---------

Appendix A. Radiated Spurious Emission Test Data

Test Engineer :	Jerry Lan 、 Gary Guo 、 Steven Wu	Temperature :	22.8~25.2°C
		Relative Humidity :	48.2~54.3%

A1-1.Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation/Configuration	Channel	Frequency	Data Rate	RU
Mode 105	-	-	-	FR2 (n261, BW100M, 2CC)	-	-	-	-
	U-NII-2C	5.47-5.725	6+1	802.11be EHT40	102	5510	MCS0	Full
	-	2400-2483.5	7+11	802.11be EHT20	11	2462	MCS0	Full
	-	-	10	UWB1	05	-	-	-
Mode 106	-	-	-	FR2 (n261, BW100M, 2CC)	-	-	-	-
	U-NII-2C	5.47-5.725	6+1	802.11be EHT40	102	5510	MCS0	Full
	-	2400-2483.5	7+11	802.11be EHT20	11	2462	MCS0	Full
	-	-	10	UWB2	09	-	-	-
Mode 103	-	-	-	FR2 (n261, BW100M, 2CC)	-	-	-	-
	U-NII-2C	5.47-5.725	6+1	802.11be EHT40	102	5510	MCS0	Full
	-	2400-2483.5	7+11	Bluetooth BR_GFSK	78	2480	1Mbps	-
	-	-	10	UWB1	05	-	-	-



Mode	Band	Band (GHz)	Antenna	Modulation/Configuration	Channel	Frequency	Data Rate	RU
Mode 104	-	-	-	FR2 (n261, BW100M, 2CC)	-	-	-	-
	U-NII-2C	5.47-5.725	6+1	802.11be EHT40	102	5510	MCS0	Full
	-	2400-2483.5	7+11	Bluetooth BR_GFSK	78	2480	1Mbps	-
	-	-	10	UWB2	09	-	-	-

Note:

FR2 configuration:

Band n261, BW=100 MHz, 2CC;

CC1=2071667, CC2=2073323;

DFT_BPSK_Outer-Full RB.

A1-2.Summary of each worse mode

Mode	Modulation	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak/ Avg.	Result	RU	Remark
105	FR2 (n261, BW100M, 2CC) + 802.11be EHT40 + 802.11be EHT20 + UWB1	-	-	-	-	-	-	-	Full	Band Edge
		7386	48.58	54	-5.42	H	Avg	Pass	Full	Harmonic
106	FR2 (n261, BW100M, 2CC) + 802.11be EHT40 + 802.11be EHT20 + UWB2	-	-	-	-	-	-	-	Full	Band Edge
		7386	48.55	54	-5.45	V	Avg	Pass	Full	Harmonic
103	FR2 (n261, BW100M, 2CC) + 802.11be EHT40 + Bluetooth BR_GFSK + UWB1	-	-	-	-	-	-	-	Full	Band Edge
		7440	58.97	74	-15.03	V	Peak	Pass	Full	Harmonic
104	FR2 (n261, BW100M, 2CC) + 802.11be EHT40 + Bluetooth BR_GFSK + UWB2	-	-	-	-	-	-	-	Full	Band Edge
		7440	58.35	74	-15.65	V	Peak	Pass	Full	Harmonic



Mode	105																																																																																																																																																																																																																																																																					
	Harmonic																																																																																																																																																																																																																																																																					
	FR2 (n261, BW100M, 2CC) + 5GHz_ 802.11be EHT40_ CH102_ 5510MHz + 2.4GHz_ 802.11be EHT20_ CH11_ 2462 MHz + UWB1_ CH05																																																																																																																																																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																																																																																																																																																				
Peak Avg	Level (dBuV/m) Date: 2026-07-23 Site : 03CH16-HY Condition: PEAK(UNII) 1m BBH9170_1230_251105 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2462.00</td><td>103.05</td><td>-----</td><td>93.09</td><td>27.68</td><td>8.29</td><td>36.11</td><td>9.92</td><td>--</td><td>-- Peak</td></tr><tr><td>2 4924.00</td><td>52.04</td><td>74.00 -21.96</td><td>43.20</td><td>32.80</td><td>11.31</td><td>36.17</td><td>0.90</td><td>199</td><td>332 Peak</td></tr><tr><td>3 4924.00</td><td>41.86</td><td>54.00 -12.14</td><td>33.03</td><td>32.79</td><td>11.31</td><td>36.17</td><td>0.90</td><td>199</td><td>332 Average</td></tr><tr><td>4 5510.00</td><td>101.01</td><td>-----</td><td>91.60</td><td>32.98</td><td>11.82</td><td>36.23</td><td>0.84</td><td>--</td><td>-- Peak</td></tr><tr><td>5 7386.00</td><td>59.81</td><td>74.00 -14.19</td><td>45.67</td><td>36.56</td><td>13.68</td><td>36.91</td><td>0.81</td><td>297</td><td>311 Peak</td></tr><tr><td>6 7386.00</td><td>48.58</td><td>54.00 -5.42</td><td>34.44</td><td>36.56</td><td>13.68</td><td>36.91</td><td>0.81</td><td>297</td><td>311 Average</td></tr><tr><td>7 11020.00</td><td>47.89</td><td>74.00 -26.11</td><td>57.93</td><td>38.80</td><td>16.63</td><td>65.88</td><td>0.41</td><td>--</td><td>-- Peak</td></tr><tr><td>8 16530.00</td><td>48.12</td><td>68.20 -20.08</td><td>56.02</td><td>38.42</td><td>20.52</td><td>67.08</td><td>0.24</td><td>--</td><td>-- Peak</td></tr><tr><td>9 27498.00</td><td>82.26</td><td>-----</td><td>98.27</td><td>39.70</td><td>6.83</td><td>53.00</td><td>-9.54</td><td>--</td><td>-- Peak</td></tr><tr><td>10 27596.00</td><td>81.28</td><td>-----</td><td>97.62</td><td>39.49</td><td>6.83</td><td>53.12</td><td>-9.54</td><td>--</td><td>-- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2462.00	103.05	-----	93.09	27.68	8.29	36.11	9.92	--	-- Peak	2 4924.00	52.04	74.00 -21.96	43.20	32.80	11.31	36.17	0.90	199	332 Peak	3 4924.00	41.86	54.00 -12.14	33.03	32.79	11.31	36.17	0.90	199	332 Average	4 5510.00	101.01	-----	91.60	32.98	11.82	36.23	0.84	--	-- Peak	5 7386.00	59.81	74.00 -14.19	45.67	36.56	13.68	36.91	0.81	297	311 Peak	6 7386.00	48.58	54.00 -5.42	34.44	36.56	13.68	36.91	0.81	297	311 Average	7 11020.00	47.89	74.00 -26.11	57.93	38.80	16.63	65.88	0.41	--	-- Peak	8 16530.00	48.12	68.20 -20.08	56.02	38.42	20.52	67.08	0.24	--	-- Peak	9 27498.00	82.26	-----	98.27	39.70	6.83	53.00	-9.54	--	-- Peak	10 27596.00	81.28	-----	97.62	39.49	6.83	53.12	-9.54	--	-- Peak	Level (dBuV/m) Date: 2026-07-23 Site : 03CH16-HY Condition: PEAK(UNII) 1m BBH9170_1230_251105 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 2462.00</td><td>102.96</td><td>-----</td><td>93.10</td><td>27.68</td><td>8.27</td><td>36.11</td><td>9.92</td><td>--</td><td>-- Peak</td></tr><tr><td>2 4924.00</td><td>53.11</td><td>74.00 -20.89</td><td>44.27</td><td>32.80</td><td>11.31</td><td>36.17</td><td>0.90</td><td>351</td><td>242 Peak</td></tr><tr><td>3 4924.00</td><td>42.00</td><td>54.00 -11.92</td><td>33.25</td><td>32.79</td><td>11.31</td><td>36.17</td><td>0.90</td><td>351</td><td>242 Average</td></tr><tr><td>4 5510.00</td><td>101.00</td><td>-----</td><td>91.62</td><td>32.96</td><td>11.81</td><td>36.23</td><td>0.84</td><td>--</td><td>-- Peak</td></tr><tr><td>5 7386.00</td><td>59.97</td><td>74.00 -14.03</td><td>45.83</td><td>36.56</td><td>13.68</td><td>36.91</td><td>0.81</td><td>400</td><td>140 Peak</td></tr><tr><td>6 7386.00</td><td>48.53</td><td>54.00 -5.47</td><td>34.39</td><td>36.56</td><td>13.68</td><td>36.91</td><td>0.81</td><td>400</td><td>140 Average</td></tr><tr><td>7 11020.00</td><td>47.86</td><td>74.00 -26.14</td><td>57.90</td><td>38.80</td><td>16.63</td><td>65.88</td><td>0.41</td><td>100</td><td>249 Peak</td></tr><tr><td>8 16530.00</td><td>47.62</td><td>68.20 -20.58</td><td>55.52</td><td>38.42</td><td>20.52</td><td>67.08</td><td>0.24</td><td>200</td><td>330 Peak</td></tr><tr><td>9 27498.00</td><td>81.25</td><td>-----</td><td>97.26</td><td>39.70</td><td>6.83</td><td>53.00</td><td>-9.54</td><td>--</td><td>-- Peak</td></tr><tr><td>10 27596.00</td><td>82.56</td><td>-----</td><td>98.90</td><td>39.49</td><td>6.83</td><td>53.12</td><td>-9.54</td><td>--</td><td>-- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor				MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 2462.00	102.96	-----	93.10	27.68	8.27	36.11	9.92	--	-- Peak	2 4924.00	53.11	74.00 -20.89	44.27	32.80	11.31	36.17	0.90	351	242 Peak	3 4924.00	42.00	54.00 -11.92	33.25	32.79	11.31	36.17	0.90	351	242 Average	4 5510.00	101.00	-----	91.62	32.96	11.81	36.23	0.84	--	-- Peak	5 7386.00	59.97	74.00 -14.03	45.83	36.56	13.68	36.91	0.81	400	140 Peak	6 7386.00	48.53	54.00 -5.47	34.39	36.56	13.68	36.91	0.81	400	140 Average	7 11020.00	47.86	74.00 -26.14	57.90	38.80	16.63	65.88	0.41	100	249 Peak	8 16530.00	47.62	68.20 -20.58	55.52	38.42	20.52	67.08	0.24	200	330 Peak	9 27498.00	81.25	-----	97.26	39.70	6.83	53.00	-9.54	--	-- Peak	10 27596.00	82.56	-----	98.90	39.49	6.83	53.12	-9.54	--	-- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																																																																																																																																																																
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																													
1 2462.00	103.05	-----	93.09	27.68	8.29	36.11	9.92	--	-- Peak																																																																																																																																																																																																																																																													
2 4924.00	52.04	74.00 -21.96	43.20	32.80	11.31	36.17	0.90	199	332 Peak																																																																																																																																																																																																																																																													
3 4924.00	41.86	54.00 -12.14	33.03	32.79	11.31	36.17	0.90	199	332 Average																																																																																																																																																																																																																																																													
4 5510.00	101.01	-----	91.60	32.98	11.82	36.23	0.84	--	-- Peak																																																																																																																																																																																																																																																													
5 7386.00	59.81	74.00 -14.19	45.67	36.56	13.68	36.91	0.81	297	311 Peak																																																																																																																																																																																																																																																													
6 7386.00	48.58	54.00 -5.42	34.44	36.56	13.68	36.91	0.81	297	311 Average																																																																																																																																																																																																																																																													
7 11020.00	47.89	74.00 -26.11	57.93	38.80	16.63	65.88	0.41	--	-- Peak																																																																																																																																																																																																																																																													
8 16530.00	48.12	68.20 -20.08	56.02	38.42	20.52	67.08	0.24	--	-- Peak																																																																																																																																																																																																																																																													
9 27498.00	82.26	-----	98.27	39.70	6.83	53.00	-9.54	--	-- Peak																																																																																																																																																																																																																																																													
10 27596.00	81.28	-----	97.62	39.49	6.83	53.12	-9.54	--	-- Peak																																																																																																																																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																													
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																																																																																																																																																																																																
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																													
1 2462.00	102.96	-----	93.10	27.68	8.27	36.11	9.92	--	-- Peak																																																																																																																																																																																																																																																													
2 4924.00	53.11	74.00 -20.89	44.27	32.80	11.31	36.17	0.90	351	242 Peak																																																																																																																																																																																																																																																													
3 4924.00	42.00	54.00 -11.92	33.25	32.79	11.31	36.17	0.90	351	242 Average																																																																																																																																																																																																																																																													
4 5510.00	101.00	-----	91.62	32.96	11.81	36.23	0.84	--	-- Peak																																																																																																																																																																																																																																																													
5 7386.00	59.97	74.00 -14.03	45.83	36.56	13.68	36.91	0.81	400	140 Peak																																																																																																																																																																																																																																																													
6 7386.00	48.53	54.00 -5.47	34.39	36.56	13.68	36.91	0.81	400	140 Average																																																																																																																																																																																																																																																													
7 11020.00	47.86	74.00 -26.14	57.90	38.80	16.63	65.88	0.41	100	249 Peak																																																																																																																																																																																																																																																													
8 16530.00	47.62	68.20 -20.58	55.52	38.42	20.52	67.08	0.24	200	330 Peak																																																																																																																																																																																																																																																													
9 27498.00	81.25	-----	97.26	39.70	6.83	53.00	-9.54	--	-- Peak																																																																																																																																																																																																																																																													
10 27596.00	82.56	-----	98.90	39.49	6.83	53.12	-9.54	--	-- Peak																																																																																																																																																																																																																																																													



Mode	105	
	Harmonic	
	FR2 (n261, BW100M, 2CC) + 5GHz_802.11be EHT40_CH102_5510MHz + 2.4GHz_802.11be EHT20_CH11_2462 MHz + UWB1_CH05	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-07-23 Frequency (MHz) Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_260326 HORIZONTAL	Level (dBuV/m) Date: 2026-07-23 Frequency (MHz) Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_260326 VERTICAL



Mode	106																																																																																																																																																																																																																																																																																																																																									
	Harmonic																																																																																																																																																																																																																																																																																																																																									
	FR2 (n261, BW100M, 2CC) + 5GHz_802.11be EHT40_CH102_5510MHz + 2.4GHz_802.11be EHT20_CH11_2462 MHz + UWB2_CH09																																																																																																																																																																																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																																																																																																																																																																																								
Peak Avg	Level (dBuV/m) Date: 2026-07-23 Site : 03CH16-HY Condition: PEAK(UNII) 1m BBH9170_1230_251105 HORIZONTAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2462.00</td><td>103.12</td><td>-----</td><td>93.23</td><td>27.62</td><td>8.28</td><td>36.11</td><td>9.92</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4924.00</td><td>53.22</td><td>74.00</td><td>-20.78</td><td>44.38</td><td>32.00</td><td>11.31</td><td>36.17</td><td>0.90</td><td>200</td><td>330</td><td>Peak</td></tr><tr><td>3</td><td>4924.00</td><td>42.19</td><td>54.00</td><td>-11.81</td><td>33.36</td><td>32.79</td><td>11.31</td><td>36.17</td><td>0.90</td><td>200</td><td>330</td><td>Average</td></tr><tr><td>4</td><td>5510.00</td><td>101.02</td><td>-----</td><td>91.63</td><td>32.96</td><td>11.82</td><td>36.23</td><td>0.84</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>7386.00</td><td>60.02</td><td>74.00</td><td>-13.98</td><td>45.08</td><td>36.56</td><td>13.68</td><td>36.91</td><td>0.81</td><td>301</td><td>257</td><td>Peak</td></tr><tr><td>6</td><td>7386.00</td><td>48.53</td><td>54.00</td><td>-5.47</td><td>34.39</td><td>36.56</td><td>13.68</td><td>36.91</td><td>0.81</td><td>301</td><td>257</td><td>Average</td></tr><tr><td>7</td><td>11020.00</td><td>47.92</td><td>74.00</td><td>-26.08</td><td>57.96</td><td>38.00</td><td>16.63</td><td>65.88</td><td>0.41</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>8</td><td>16530.00</td><td>48.91</td><td>68.20</td><td>-19.29</td><td>56.81</td><td>38.42</td><td>20.52</td><td>67.08</td><td>0.24</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>9</td><td>27498.00</td><td>81.85</td><td>-----</td><td>97.06</td><td>39.70</td><td>6.83</td><td>53.00</td><td>-9.54</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>10</td><td>27596.00</td><td>82.10</td><td>-----</td><td>98.44</td><td>39.49</td><td>6.83</td><td>53.12</td><td>-9.54</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2462.00	103.12	-----	93.23	27.62	8.28	36.11	9.92	--	--	--	--	Peak	2	4924.00	53.22	74.00	-20.78	44.38	32.00	11.31	36.17	0.90	200	330	Peak	3	4924.00	42.19	54.00	-11.81	33.36	32.79	11.31	36.17	0.90	200	330	Average	4	5510.00	101.02	-----	91.63	32.96	11.82	36.23	0.84	--	--	--	--	Peak	5	7386.00	60.02	74.00	-13.98	45.08	36.56	13.68	36.91	0.81	301	257	Peak	6	7386.00	48.53	54.00	-5.47	34.39	36.56	13.68	36.91	0.81	301	257	Average	7	11020.00	47.92	74.00	-26.08	57.96	38.00	16.63	65.88	0.41	--	--	--	Peak	8	16530.00	48.91	68.20	-19.29	56.81	38.42	20.52	67.08	0.24	--	--	--	Peak	9	27498.00	81.85	-----	97.06	39.70	6.83	53.00	-9.54	--	--	--	--	Peak	10	27596.00	82.10	-----	98.44	39.49	6.83	53.12	-9.54	--	--	--	--	Peak	Level (dBuV/m) Date: 2026-07-23 Site : 03CH16-HY Condition: PEAK(UNII) 1m BBH9170_1230_251105 VERTICAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2462.00</td><td>103.09</td><td>-----</td><td>93.22</td><td>27.60</td><td>8.28</td><td>36.11</td><td>9.92</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4924.00</td><td>53.26</td><td>74.00</td><td>-20.74</td><td>44.42</td><td>32.00</td><td>11.31</td><td>36.17</td><td>0.90</td><td>400</td><td>239</td><td>Peak</td></tr><tr><td>3</td><td>4924.00</td><td>42.26</td><td>54.00</td><td>-11.74</td><td>33.43</td><td>32.79</td><td>11.31</td><td>36.17</td><td>0.90</td><td>400</td><td>239</td><td>Average</td></tr><tr><td>4</td><td>5510.00</td><td>100.96</td><td>-----</td><td>91.62</td><td>32.90</td><td>11.84</td><td>36.24</td><td>0.84</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>7386.00</td><td>59.17</td><td>74.00</td><td>-14.83</td><td>45.03</td><td>36.56</td><td>13.68</td><td>36.91</td><td>0.81</td><td>100</td><td>217</td><td>Peak</td></tr><tr><td>6</td><td>7386.00</td><td>48.55</td><td>54.00</td><td>-5.45</td><td>34.41</td><td>36.56</td><td>13.68</td><td>36.91</td><td>0.81</td><td>100</td><td>217</td><td>Average</td></tr><tr><td>7</td><td>11020.00</td><td>47.83</td><td>74.00</td><td>-26.17</td><td>57.87</td><td>38.00</td><td>16.63</td><td>65.88</td><td>0.41</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>8</td><td>16530.00</td><td>48.38</td><td>68.20</td><td>-19.82</td><td>56.28</td><td>38.42</td><td>20.52</td><td>67.08</td><td>0.24</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>9</td><td>27498.00</td><td>82.61</td><td>-----</td><td>98.62</td><td>39.70</td><td>6.83</td><td>53.00</td><td>-9.54</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>10</td><td>27596.00</td><td>83.19</td><td>-----</td><td>99.53</td><td>39.49</td><td>6.83</td><td>53.12</td><td>-9.54</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2462.00	103.09	-----	93.22	27.60	8.28	36.11	9.92	--	--	--	--	Peak	2	4924.00	53.26	74.00	-20.74	44.42	32.00	11.31	36.17	0.90	400	239	Peak	3	4924.00	42.26	54.00	-11.74	33.43	32.79	11.31	36.17	0.90	400	239	Average	4	5510.00	100.96	-----	91.62	32.90	11.84	36.24	0.84	--	--	--	--	Peak	5	7386.00	59.17	74.00	-14.83	45.03	36.56	13.68	36.91	0.81	100	217	Peak	6	7386.00	48.55	54.00	-5.45	34.41	36.56	13.68	36.91	0.81	100	217	Average	7	11020.00	47.83	74.00	-26.17	57.87	38.00	16.63	65.88	0.41	--	--	--	Peak	8	16530.00	48.38	68.20	-19.82	56.28	38.42	20.52	67.08	0.24	--	--	--	Peak	9	27498.00	82.61	-----	98.62	39.70	6.83	53.00	-9.54	--	--	--	--	Peak	10	27596.00	83.19	-----	99.53	39.49	6.83	53.12	-9.54	--	--	--	--	Peak
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																																																																																														
1	2462.00	103.12	-----	93.23	27.62	8.28	36.11	9.92	--	--	--	--	Peak																																																																																																																																																																																																																																																																																																																													
2	4924.00	53.22	74.00	-20.78	44.38	32.00	11.31	36.17	0.90	200	330	Peak																																																																																																																																																																																																																																																																																																																														
3	4924.00	42.19	54.00	-11.81	33.36	32.79	11.31	36.17	0.90	200	330	Average																																																																																																																																																																																																																																																																																																																														
4	5510.00	101.02	-----	91.63	32.96	11.82	36.23	0.84	--	--	--	--	Peak																																																																																																																																																																																																																																																																																																																													
5	7386.00	60.02	74.00	-13.98	45.08	36.56	13.68	36.91	0.81	301	257	Peak																																																																																																																																																																																																																																																																																																																														
6	7386.00	48.53	54.00	-5.47	34.39	36.56	13.68	36.91	0.81	301	257	Average																																																																																																																																																																																																																																																																																																																														
7	11020.00	47.92	74.00	-26.08	57.96	38.00	16.63	65.88	0.41	--	--	--	Peak																																																																																																																																																																																																																																																																																																																													
8	16530.00	48.91	68.20	-19.29	56.81	38.42	20.52	67.08	0.24	--	--	--	Peak																																																																																																																																																																																																																																																																																																																													
9	27498.00	81.85	-----	97.06	39.70	6.83	53.00	-9.54	--	--	--	--	Peak																																																																																																																																																																																																																																																																																																																													
10	27596.00	82.10	-----	98.44	39.49	6.83	53.12	-9.54	--	--	--	--	Peak																																																																																																																																																																																																																																																																																																																													
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																																																																																														
1	2462.00	103.09	-----	93.22	27.60	8.28	36.11	9.92	--	--	--	--	Peak																																																																																																																																																																																																																																																																																																																													
2	4924.00	53.26	74.00	-20.74	44.42	32.00	11.31	36.17	0.90	400	239	Peak																																																																																																																																																																																																																																																																																																																														
3	4924.00	42.26	54.00	-11.74	33.43	32.79	11.31	36.17	0.90	400	239	Average																																																																																																																																																																																																																																																																																																																														
4	5510.00	100.96	-----	91.62	32.90	11.84	36.24	0.84	--	--	--	--	Peak																																																																																																																																																																																																																																																																																																																													
5	7386.00	59.17	74.00	-14.83	45.03	36.56	13.68	36.91	0.81	100	217	Peak																																																																																																																																																																																																																																																																																																																														
6	7386.00	48.55	54.00	-5.45	34.41	36.56	13.68	36.91	0.81	100	217	Average																																																																																																																																																																																																																																																																																																																														
7	11020.00	47.83	74.00	-26.17	57.87	38.00	16.63	65.88	0.41	--	--	--	Peak																																																																																																																																																																																																																																																																																																																													
8	16530.00	48.38	68.20	-19.82	56.28	38.42	20.52	67.08	0.24	--	--	--	Peak																																																																																																																																																																																																																																																																																																																													
9	27498.00	82.61	-----	98.62	39.70	6.83	53.00	-9.54	--	--	--	--	Peak																																																																																																																																																																																																																																																																																																																													
10	27596.00	83.19	-----	99.53	39.49	6.83	53.12	-9.54	--	--	--	--	Peak																																																																																																																																																																																																																																																																																																																													



Mode	106	
	Harmonic	
	FR2 (n261, BW100M, 2CC) + 5GHz_802.11be EHT40_CH102_5510MHz + 2.4GHz_802.11be EHT20_CH11_2462 MHz + UWB2_CH09	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-07-22 Frequency (MHz) Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_268326 HORIZONTAL	Level (dBuV/m) Date: 2026-07-22 Frequency (MHz) Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_268326 VERTICAL



Mode	103																																																																																																																																																																																																																																																																																																																																																	
	Harmonic																																																																																																																																																																																																																																																																																																																																																	
	FR2 (n261, BW100M, 2CC) + 5GHz_802.11be EHT40_CH102_5510MHz + Bluetooth BR_GFSK_CH78_2480 MHz + UWB1_CH05																																																																																																																																																																																																																																																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																																																																																																																																																																																																																																																
Peak Avg	Level (dBuV/m) Date: 2026-07-23 Site : 03CH16-HY Condition: PEAK(UNII) 1m BBH9170_1230_251105 HORIZONTAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2480.00</td><td>104.67</td><td>-----</td><td>94.68</td><td>27.70</td><td>8.30</td><td>36.11</td><td>9.92</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4960.00</td><td>53.38</td><td>74.00</td><td>-20.62</td><td>44.35</td><td>33.02</td><td>11.30</td><td>36.17</td><td>0.88</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>4960.00</td><td>28.62</td><td>54.00</td><td>-25.38</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>4</td><td>5510.00</td><td>101.03</td><td>-----</td><td>91.68</td><td>32.92</td><td>11.83</td><td>36.24</td><td>0.84</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>7440.00</td><td>58.79</td><td>74.00</td><td>-15.21</td><td>44.79</td><td>36.42</td><td>13.73</td><td>36.93</td><td>0.78</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>7440.00</td><td>34.03</td><td>54.00</td><td>-19.97</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>7</td><td>11020.00</td><td>47.88</td><td>74.00</td><td>-26.12</td><td>57.92</td><td>38.80</td><td>16.63</td><td>65.88</td><td>0.41</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>8</td><td>16530.00</td><td>49.13</td><td>68.20</td><td>-19.07</td><td>57.03</td><td>38.42</td><td>20.52</td><td>67.08</td><td>0.24</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>9</td><td>27490.00</td><td>79.67</td><td>-----</td><td>95.68</td><td>39.70</td><td>6.83</td><td>53.00</td><td>-9.54</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>10</td><td>27596.00</td><td>82.22</td><td>-----</td><td>98.56</td><td>39.49</td><td>6.83</td><td>53.12</td><td>-9.54</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2480.00	104.67	-----	94.68	27.70	8.30	36.11	9.92	--	--	--	--	Peak	2	4960.00	53.38	74.00	-20.62	44.35	33.02	11.30	36.17	0.88	--	--	--	Peak	3	4960.00	28.62	54.00	-25.38	--	--	--	--	--	--	--	--	Average	4	5510.00	101.03	-----	91.68	32.92	11.83	36.24	0.84	--	--	--	--	Peak	5	7440.00	58.79	74.00	-15.21	44.79	36.42	13.73	36.93	0.78	--	--	--	Peak	6	7440.00	34.03	54.00	-19.97	--	--	--	--	--	--	--	--	Average	7	11020.00	47.88	74.00	-26.12	57.92	38.80	16.63	65.88	0.41	--	--	--	Peak	8	16530.00	49.13	68.20	-19.07	57.03	38.42	20.52	67.08	0.24	--	--	--	Peak	9	27490.00	79.67	-----	95.68	39.70	6.83	53.00	-9.54	--	--	--	--	Peak	10	27596.00	82.22	-----	98.56	39.49	6.83	53.12	-9.54	--	--	--	--	Peak	Level (dBuV/m) Date: 2026-07-23 Site : 03CH16-HY Condition: PEAK(UNII) 1m BBH9170_1230_251105 VERTICAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>2480.00</td><td>104.38</td><td>-----</td><td>94.39</td><td>27.70</td><td>8.30</td><td>36.11</td><td>9.92</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>4960.00</td><td>53.13</td><td>74.00</td><td>-20.87</td><td>44.10</td><td>33.02</td><td>11.30</td><td>36.17</td><td>0.88</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>4960.00</td><td>28.37</td><td>54.00</td><td>-25.63</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>4</td><td>5510.00</td><td>99.28</td><td>-----</td><td>89.88</td><td>32.98</td><td>11.81</td><td>36.23</td><td>0.84</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>7440.00</td><td>58.97</td><td>74.00</td><td>-15.03</td><td>44.97</td><td>36.42</td><td>13.73</td><td>36.93</td><td>0.78</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>7440.00</td><td>34.21</td><td>54.00</td><td>-19.79</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Average</td></tr><tr><td>7</td><td>11020.00</td><td>47.93</td><td>74.00</td><td>-26.07</td><td>57.97</td><td>38.80</td><td>16.63</td><td>65.88</td><td>0.41</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>8</td><td>16530.00</td><td>48.62</td><td>68.20</td><td>-19.58</td><td>56.52</td><td>38.42</td><td>20.52</td><td>67.08</td><td>0.24</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>9</td><td>27490.00</td><td>80.27</td><td>-----</td><td>96.28</td><td>39.70</td><td>6.83</td><td>53.00</td><td>-9.54</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>10</td><td>27596.00</td><td>82.45</td><td>-----</td><td>98.79</td><td>39.49</td><td>6.83</td><td>53.12</td><td>-9.54</td><td>--</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	2480.00	104.38	-----	94.39	27.70	8.30	36.11	9.92	--	--	--	--	Peak	2	4960.00	53.13	74.00	-20.87	44.10	33.02	11.30	36.17	0.88	--	--	--	Peak	3	4960.00	28.37	54.00	-25.63	--	--	--	--	--	--	--	--	Average	4	5510.00	99.28	-----	89.88	32.98	11.81	36.23	0.84	--	--	--	--	Peak	5	7440.00	58.97	74.00	-15.03	44.97	36.42	13.73	36.93	0.78	--	--	--	Peak	6	7440.00	34.21	54.00	-19.79	--	--	--	--	--	--	--	--	Average	7	11020.00	47.93	74.00	-26.07	57.97	38.80	16.63	65.88	0.41	--	--	--	Peak	8	16530.00	48.62	68.20	-19.58	56.52	38.42	20.52	67.08	0.24	--	--	--	Peak	9	27490.00	80.27	-----	96.28	39.70	6.83	53.00	-9.54	--	--	--	--	Peak	10	27596.00	82.45	-----	98.79	39.49	6.83	53.12	-9.54	--	--	--	--	Peak
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																																																																																																						
1	2480.00	104.67	-----	94.68	27.70	8.30	36.11	9.92	--	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																					
2	4960.00	53.38	74.00	-20.62	44.35	33.02	11.30	36.17	0.88	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																					
3	4960.00	28.62	54.00	-25.38	--	--	--	--	--	--	--	--	Average																																																																																																																																																																																																																																																																																																																																					
4	5510.00	101.03	-----	91.68	32.92	11.83	36.24	0.84	--	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																					
5	7440.00	58.79	74.00	-15.21	44.79	36.42	13.73	36.93	0.78	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																					
6	7440.00	34.03	54.00	-19.97	--	--	--	--	--	--	--	--	Average																																																																																																																																																																																																																																																																																																																																					
7	11020.00	47.88	74.00	-26.12	57.92	38.80	16.63	65.88	0.41	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																					
8	16530.00	49.13	68.20	-19.07	57.03	38.42	20.52	67.08	0.24	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																					
9	27490.00	79.67	-----	95.68	39.70	6.83	53.00	-9.54	--	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																					
10	27596.00	82.22	-----	98.56	39.49	6.83	53.12	-9.54	--	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																					
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																																																																																																																																																																																						
1	2480.00	104.38	-----	94.39	27.70	8.30	36.11	9.92	--	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																					
2	4960.00	53.13	74.00	-20.87	44.10	33.02	11.30	36.17	0.88	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																					
3	4960.00	28.37	54.00	-25.63	--	--	--	--	--	--	--	--	Average																																																																																																																																																																																																																																																																																																																																					
4	5510.00	99.28	-----	89.88	32.98	11.81	36.23	0.84	--	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																					
5	7440.00	58.97	74.00	-15.03	44.97	36.42	13.73	36.93	0.78	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																					
6	7440.00	34.21	54.00	-19.79	--	--	--	--	--	--	--	--	Average																																																																																																																																																																																																																																																																																																																																					
7	11020.00	47.93	74.00	-26.07	57.97	38.80	16.63	65.88	0.41	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																					
8	16530.00	48.62	68.20	-19.58	56.52	38.42	20.52	67.08	0.24	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																					
9	27490.00	80.27	-----	96.28	39.70	6.83	53.00	-9.54	--	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																					
10	27596.00	82.45	-----	98.79	39.49	6.83	53.12	-9.54	--	--	--	--	Peak																																																																																																																																																																																																																																																																																																																																					



Mode	103	
	Harmonic	
	FR2 (n261, BW100M, 2CC) + 5GHz_802.11be EHT40_CH102_5510MHz + Bluetooth BR_GFSK_CH78_2480 MHz + UWB1_CH05	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-06-25 Frequency (MHz) Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_260326 HORIZONTAL	Level (dBuV/m) Date: 2026-06-25 Frequency (MHz) Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_260326 VERTICAL



Mode	104																																																																																																																																																																																																																																																																					
	Harmonic																																																																																																																																																																																																																																																																					
	FR2 (n261, BW100M, 2CC) + 5GHz_802.11be EHT40_CH102_5510MHz + Bluetooth BR_GFSK_CH78_2480 MHz + UWB2_CH09																																																																																																																																																																																																																																																																					
Pol.	Horizontal	Vertical																																																																																																																																																																																																																																																																				
Peak Avg	Level (dBuV/m) Date: 2026-07-23 Site : 03CH16-HY Condition: PEAK(UNII) 1m BBH9170_1230_251105 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2480.00</td><td>104.59</td><td>-----</td><td>94.60</td><td>27.70</td><td>8.30</td><td>36.11</td><td>9.92</td><td>--</td><td>-- Peak</td></tr><tr><td>2 4960.00</td><td>54.74</td><td>74.00</td><td>-19.26</td><td>45.71</td><td>33.02</td><td>11.30</td><td>36.17</td><td>0.88</td><td>-- -- Peak</td></tr><tr><td>3 4960.00</td><td>29.98</td><td>54.00</td><td>-24.02</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>-- -- Average</td></tr><tr><td>4 5510.00</td><td>101.96</td><td>-----</td><td>92.56</td><td>32.98</td><td>11.81</td><td>36.23</td><td>0.84</td><td>--</td><td>-- -- Peak</td></tr><tr><td>5 7440.00</td><td>58.41</td><td>74.00</td><td>-15.59</td><td>44.41</td><td>36.42</td><td>13.73</td><td>36.93</td><td>0.78</td><td>-- -- Peak</td></tr><tr><td>6 7440.00</td><td>33.65</td><td>54.00</td><td>-20.35</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>-- -- Average</td></tr><tr><td>7 11020.00</td><td>47.88</td><td>74.00</td><td>-26.12</td><td>57.92</td><td>38.80</td><td>16.63</td><td>65.88</td><td>0.41</td><td>-- -- Peak</td></tr><tr><td>8 16530.00</td><td>47.99</td><td>68.20</td><td>-20.21</td><td>55.89</td><td>38.42</td><td>20.52</td><td>67.08</td><td>0.24</td><td>-- -- Peak</td></tr><tr><td>9 27490.00</td><td>81.96</td><td>-----</td><td>97.97</td><td>39.70</td><td>6.83</td><td>53.00</td><td>-9.54</td><td>--</td><td>-- -- Peak</td></tr><tr><td>10 27596.00</td><td>83.81</td><td>-----</td><td>100.15</td><td>39.49</td><td>6.83</td><td>53.12</td><td>-9.54</td><td>--</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2480.00	104.59	-----	94.60	27.70	8.30	36.11	9.92	--	-- Peak	2 4960.00	54.74	74.00	-19.26	45.71	33.02	11.30	36.17	0.88	-- -- Peak	3 4960.00	29.98	54.00	-24.02	--	--	--	--	--	-- -- Average	4 5510.00	101.96	-----	92.56	32.98	11.81	36.23	0.84	--	-- -- Peak	5 7440.00	58.41	74.00	-15.59	44.41	36.42	13.73	36.93	0.78	-- -- Peak	6 7440.00	33.65	54.00	-20.35	--	--	--	--	--	-- -- Average	7 11020.00	47.88	74.00	-26.12	57.92	38.80	16.63	65.88	0.41	-- -- Peak	8 16530.00	47.99	68.20	-20.21	55.89	38.42	20.52	67.08	0.24	-- -- Peak	9 27490.00	81.96	-----	97.97	39.70	6.83	53.00	-9.54	--	-- -- Peak	10 27596.00	83.81	-----	100.15	39.49	6.83	53.12	-9.54	--	-- -- Peak	Level (dBuV/m) Date: 2026-07-23 Site : 03CH16-HY Condition: PEAK(UNII) 1m BBH9170_1230_251105 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 2480.00</td><td>104.21</td><td>-----</td><td>94.22</td><td>27.70</td><td>8.30</td><td>36.11</td><td>9.92</td><td>--</td><td>-- Peak</td></tr><tr><td>2 4960.00</td><td>53.35</td><td>74.00</td><td>-20.65</td><td>44.32</td><td>33.02</td><td>11.30</td><td>36.17</td><td>0.88</td><td>-- -- Peak</td></tr><tr><td>3 4960.00</td><td>28.59</td><td>54.00</td><td>-25.41</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>-- -- Average</td></tr><tr><td>4 5510.00</td><td>100.93</td><td>-----</td><td>91.58</td><td>32.92</td><td>11.83</td><td>36.24</td><td>0.84</td><td>--</td><td>-- -- Peak</td></tr><tr><td>5 7440.00</td><td>58.35</td><td>74.00</td><td>-15.65</td><td>44.35</td><td>36.42</td><td>13.73</td><td>36.93</td><td>0.78</td><td>-- -- Peak</td></tr><tr><td>6 7440.00</td><td>33.59</td><td>54.00</td><td>-20.41</td><td>--</td><td>--</td><td>--</td><td>--</td><td>--</td><td>-- -- Average</td></tr><tr><td>7 11020.00</td><td>47.91</td><td>74.00</td><td>-26.09</td><td>57.95</td><td>38.80</td><td>16.63</td><td>65.88</td><td>0.41</td><td>-- -- Peak</td></tr><tr><td>8 16530.00</td><td>48.26</td><td>68.20</td><td>-19.94</td><td>56.16</td><td>38.42</td><td>20.52</td><td>67.08</td><td>0.24</td><td>-- -- Peak</td></tr><tr><td>9 27490.00</td><td>82.99</td><td>-----</td><td>99.00</td><td>39.70</td><td>6.83</td><td>53.00</td><td>-9.54</td><td>--</td><td>-- -- Peak</td></tr><tr><td>10 27596.00</td><td>81.89</td><td>-----</td><td>98.23</td><td>39.49</td><td>6.83</td><td>53.12</td><td>-9.54</td><td>--</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 2480.00	104.21	-----	94.22	27.70	8.30	36.11	9.92	--	-- Peak	2 4960.00	53.35	74.00	-20.65	44.32	33.02	11.30	36.17	0.88	-- -- Peak	3 4960.00	28.59	54.00	-25.41	--	--	--	--	--	-- -- Average	4 5510.00	100.93	-----	91.58	32.92	11.83	36.24	0.84	--	-- -- Peak	5 7440.00	58.35	74.00	-15.65	44.35	36.42	13.73	36.93	0.78	-- -- Peak	6 7440.00	33.59	54.00	-20.41	--	--	--	--	--	-- -- Average	7 11020.00	47.91	74.00	-26.09	57.95	38.80	16.63	65.88	0.41	-- -- Peak	8 16530.00	48.26	68.20	-19.94	56.16	38.42	20.52	67.08	0.24	-- -- Peak	9 27490.00	82.99	-----	99.00	39.70	6.83	53.00	-9.54	--	-- -- Peak	10 27596.00	81.89	-----	98.23	39.49	6.83	53.12	-9.54	--	-- -- Peak
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																																																																																																													
1 2480.00	104.59	-----	94.60	27.70	8.30	36.11	9.92	--	-- Peak																																																																																																																																																																																																																																																													
2 4960.00	54.74	74.00	-19.26	45.71	33.02	11.30	36.17	0.88	-- -- Peak																																																																																																																																																																																																																																																													
3 4960.00	29.98	54.00	-24.02	--	--	--	--	--	-- -- Average																																																																																																																																																																																																																																																													
4 5510.00	101.96	-----	92.56	32.98	11.81	36.23	0.84	--	-- -- Peak																																																																																																																																																																																																																																																													
5 7440.00	58.41	74.00	-15.59	44.41	36.42	13.73	36.93	0.78	-- -- Peak																																																																																																																																																																																																																																																													
6 7440.00	33.65	54.00	-20.35	--	--	--	--	--	-- -- Average																																																																																																																																																																																																																																																													
7 11020.00	47.88	74.00	-26.12	57.92	38.80	16.63	65.88	0.41	-- -- Peak																																																																																																																																																																																																																																																													
8 16530.00	47.99	68.20	-20.21	55.89	38.42	20.52	67.08	0.24	-- -- Peak																																																																																																																																																																																																																																																													
9 27490.00	81.96	-----	97.97	39.70	6.83	53.00	-9.54	--	-- -- Peak																																																																																																																																																																																																																																																													
10 27596.00	83.81	-----	100.15	39.49	6.83	53.12	-9.54	--	-- -- Peak																																																																																																																																																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																																																																																																																																																													
1 2480.00	104.21	-----	94.22	27.70	8.30	36.11	9.92	--	-- Peak																																																																																																																																																																																																																																																													
2 4960.00	53.35	74.00	-20.65	44.32	33.02	11.30	36.17	0.88	-- -- Peak																																																																																																																																																																																																																																																													
3 4960.00	28.59	54.00	-25.41	--	--	--	--	--	-- -- Average																																																																																																																																																																																																																																																													
4 5510.00	100.93	-----	91.58	32.92	11.83	36.24	0.84	--	-- -- Peak																																																																																																																																																																																																																																																													
5 7440.00	58.35	74.00	-15.65	44.35	36.42	13.73	36.93	0.78	-- -- Peak																																																																																																																																																																																																																																																													
6 7440.00	33.59	54.00	-20.41	--	--	--	--	--	-- -- Average																																																																																																																																																																																																																																																													
7 11020.00	47.91	74.00	-26.09	57.95	38.80	16.63	65.88	0.41	-- -- Peak																																																																																																																																																																																																																																																													
8 16530.00	48.26	68.20	-19.94	56.16	38.42	20.52	67.08	0.24	-- -- Peak																																																																																																																																																																																																																																																													
9 27490.00	82.99	-----	99.00	39.70	6.83	53.00	-9.54	--	-- -- Peak																																																																																																																																																																																																																																																													
10 27596.00	81.89	-----	98.23	39.49	6.83	53.12	-9.54	--	-- -- Peak																																																																																																																																																																																																																																																													



Mode	104	
	Harmonic	
	FR2 (n261, BW100M, 2CC) + 5GHz_802.11be EHT40_CH102_5510MHz + Bluetooth BR_GFSK_CH78_2480 MHz + UWB2_CH09	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	Level (dBuV/m) Date: 2026-07-22 Frequency (MHz) Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_260326 HORIZONTAL	Level (dBuV/m) Date: 2026-07-22 Frequency (MHz) Site : 03CH16-HY Condition: AVG_54 3m 91280-1522_260326 VERTICAL



Appendix B. Duty Cycle Plot

Antenna	Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
6+1	5GHz 802.11be EHT40 Full RU	99.73	-	-	10Hz

<Ant. 6+1>

