



FCC RADIO TEST REPORT

FCC ID : IHDT56AX5
Equipment : Mobile Cellular Phone
Brand Name : Motorola
Model Name : XT2651V
Applicant : Motorola Mobility LLC
222 W,Merchandise Mart Plaza,
Chicago IL 60654 USA
Manufacturer : Motorola Mobility LLC
222 W,Merchandise Mart Plaza,
Chicago IL 60654 USA
Standard : 47 CFR FCC Part 15.519

The product was received on Jun. 16, 2026, and testing was performed from Jun. 22, 2026 to Jul. 22, 2026. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test	5
1.2 Modification of EUT	5
1.3 Type of EUT	6
1.4 Testing Applied Standards	6
1.5 Testing Location Information	6
1.6 Measurement Uncertainty	7
2 Test Configuration of EUT	8
2.1 Test Mode.....	8
2.2 The Worst Case Measurement Configuration.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	10
3 Transmitter Test Result	11
3.1 AC Power-line Conducted Emissions	11
3.2 UWB bandwidth.....	12
3.3 Peak Power Measurement	17
3.4 Radiated Emissions.....	22
4 Test Equipment and Calibration Data	111
Appendix A. Conducted Emissions Test Results	



History of this test report

Report No.	Version	Description	Issue Date
FR660814I	01	Initial issue of report	Aug. 04, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
1.2	15.203	Antenna Requirement	PASS	15.203
3.1	15.207	AC Power-line Conducted Emissions	PASS	15.207
3.2	15.503	UWB Bandwidth	PASS	≥ 500MHz
3.3	15.519(e)	Peak Power Measurement	PASS	≤ 0 dBm/50MHz
3.4	15.519(c) /15.519(d)	Radiated Emissions	PASS	UWB Emissions: 15.519(c) GPS Emissions: 15.519(d) Digital Emissions: 15.209

Remark:

- ECR inquiry for data referencing from FCC ID: IHDT56AW3 has been approved by TCB. The ECR inquiry and the associated document are submitted in the confidential exhibit.
- The difference between FCC ID: IHDT56AW3 and FCC ID: IHDT56AX5 are Main board Schematic, Some key components of BOM and RF bandings support.
- The UWB function was fully re-tested.

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Keven Cheng
Report Producer: Aya Yang

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs	GSM/WCDMA/LTE/5G NR/mmW, Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ax/be, Wi-Fi 5GHz 802.11a/n/ac/ax/be, Wi-Fi 6GHz 802.11a/ax/be, GNSS, NFC,WPT and UWB.
UWB Frequency Range	CH05: 6489.6 MHz CH09: 7987.2 MHz
Antenna Type subject to this standard	UWB: <ANT8>: LOOP Antenna <ANT10>: PIFA Antenna

Antenna information		
CH05 6489.6 MHz / CH09 7987.2 MHz	Peak Gain (dBi)	<ANT8>: <CH05> : -4.8 dBi <CH09> : -4.9 dBi <ANT10>: <CH05> : -2.9 dBi <CH09> : -4.1 dBi

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

EUT Information List	
IMEI	Performed Test Item
352595240017619/352595240017627	Conducted Emission
352595240017452/352595240017460	Radiated Spurious Emission

Specification of Accessory				
Battery 1	Brand Name	Motorola	Model Name	SH29
Battery 2	Brand Name	Motorola	Model Name	SH31
USB Cable 1	Brand Name	Motorola(SAIBAO)	Model Name	SC18D86731
USB Cable 2	Brand Name	Motorola(Luxshare)	Model Name	SC18E08103

1.2 Modification of EUT

No modifications are made to the EUT during all test items.

1.3 Type of EUT

Operational Condition	
EUT Power Type	AC mains: AC voltage 120 V
Type of EUT	
☒	Stand-alone
☐	Combined (EUT where the radio part is fully integrated within another device) Combined Equipment - Brand Name / Model No.: ...
☐	Plug-in radio (EUT intended for a variety of host systems) Host System - Brand Name / Model No.: ...
☐	Other:

1.4 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR FCC Part 15
- ♦ ANSI C63.10-2020 + Cor.1-2023
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01

Remark: The TAF code is not including all the FCC KDB listed without accreditation.

1.5 Testing Location Information

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333 TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. CO05-HY (TAF Code: 1190)
Remark	The Conducted Emission test item subcontracted to Sporton International Inc. EMC & Wireless Communications Laboratory

Note: The test site complies with ANSI C63.4 2014 requirement.



Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010 TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	03CH20-HY

Note: The test site complies with ANSI C63.4 2014 requirement.
FCC designation No.: TW1190 and TW3786

Test Condition	Test Site No.	Test Engineer	Test Environment	Test Date
Conduction	CO05-HY	Brian Chen	23 ~ 26 °C 45 ~ 55 %	Jun. 26, 2026
Radiated	03CH20-HY	John Chuang · David Dai · Sam Chou	18.9 ~20.6 °C 63.8 ~70.6 %	Jun. 22, 2026 ~ Jul. 22, 2026

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2))

Test Items	Uncertainty	Remark
AC Conduction (150kHz ~ 30MHz)	3.7dB	Confidence levels of 95%
Radiated Emission (30MHz ~ 1000MHz)	6.5 dB	Confidence levels of 95%
Radiated Emission (1GHz ~ 6GHz)	4.7 dB	Confidence levels of 95%
Radiated Emission (6GHz ~ 18GHz)	5.7 dB	Confidence levels of 95%
Radiated Emission (18GHz ~ 40GHz)	5.2 dB	Confidence levels of 95%



2 Test Configuration of EUT

2.1 Test Mode


Test Configuration						
Mode	Antenna	Channel	preamble_cidx	rx_sts_mode	packet_length	QRCT Parameter SET
9	Antenna 8	5	25	1	127	HPRF_12
14	Antenna 8	9	25	3	0	HPRF_20
19	Antenna 10	5	10	1	127	BPRF_3
29	Antenna 10	9	25	1	127	HPRF_12
43	Antenna 8	5	27	1	127	HPRF_12
48	Antenna 8	9	27	3	0	HPRF_20
51	Antenna 10	5	10	1	127	BPRF_3
61	Antenna 10	9	25	1	127	HPRF_12

2.2 The Worst Case Measurement Configuration

The Worst Case Mode for Following Conformance Tests	
Tests Item	AC power-line conducted emissions
Condition	AC power-line conducted measurement for line and neutral Test Voltage: 120Vac / 60Hz
Operating Mode	CTX
1	Adapter Mode
Remark: 1. Please refer to 15.207 which states, "Measurements to demonstrate compliance with the conducted limits are not required for devices employ Battery for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines". 2. For Conducted Emission Test Cases, the tests were performed with Adapter 1 and USB Cable 1.	

The Worst Case Mode for Following Conformance Tests			
Tests Item	UWB Bandwidth, Peak Power Measurement, Radiated Emissions		
Test Condition	Radiated measurement		
Operating Mode	CTX		
1	Adapter Mode		
Mode 1 configuration was tested and found to be the worst case and measured during the test.			
Operating Mode > 1GHz	CTX		
Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			
Plane of all Test Modes		V	
Remark: 1. The measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape) and accessory (Adapter or Earphone), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and find as worst plane, and recorded in this report. 2. For Radiated Test Cases, the tests were performed with Adapter and USB Cable. 3. During the preliminary test, both charging modes (Adapter mode and WPC Rx mode) were verified. It is determined that the adaptor mode is the worst case for official test			

2.3 Connection Diagram of Test System

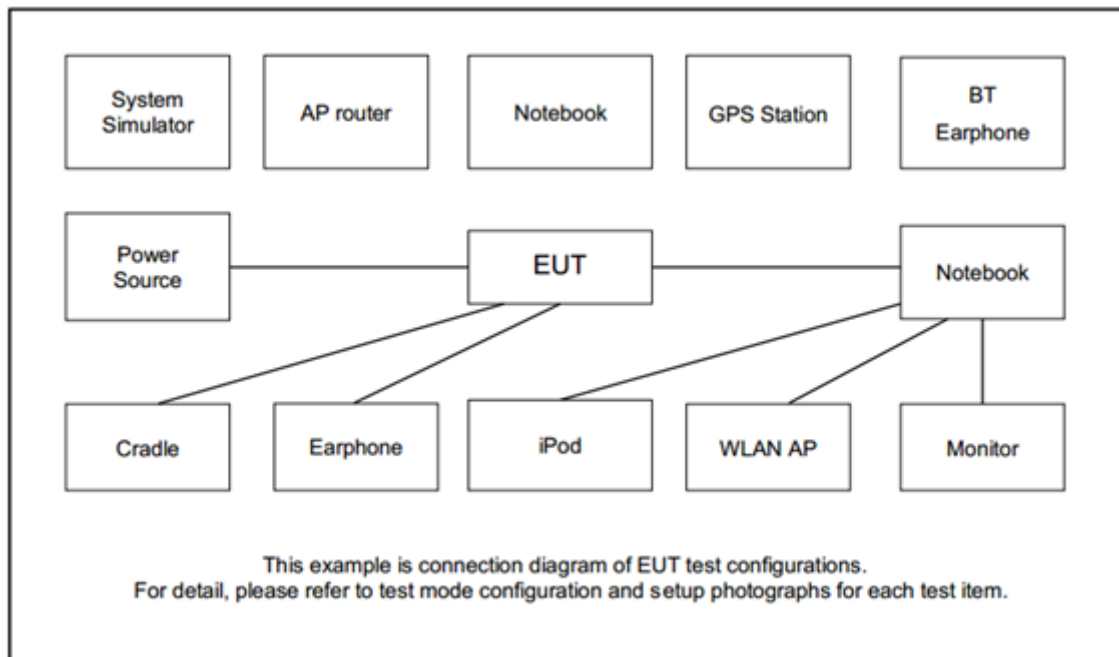

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Notebook	DELL	Latitude3410	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m

3 Transmitter Test Result

3.1 AC Power-line Conducted Emissions

3.1.1 AC Power-line Conducted Emissions Limit

AC Power-line Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.


3.1.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.1.3 Test Procedures

Test Method
■ Refer as ANSI C63.10-2013, clause 6.2 for AC power-line conducted emissions.

3.1.4 Test Setup

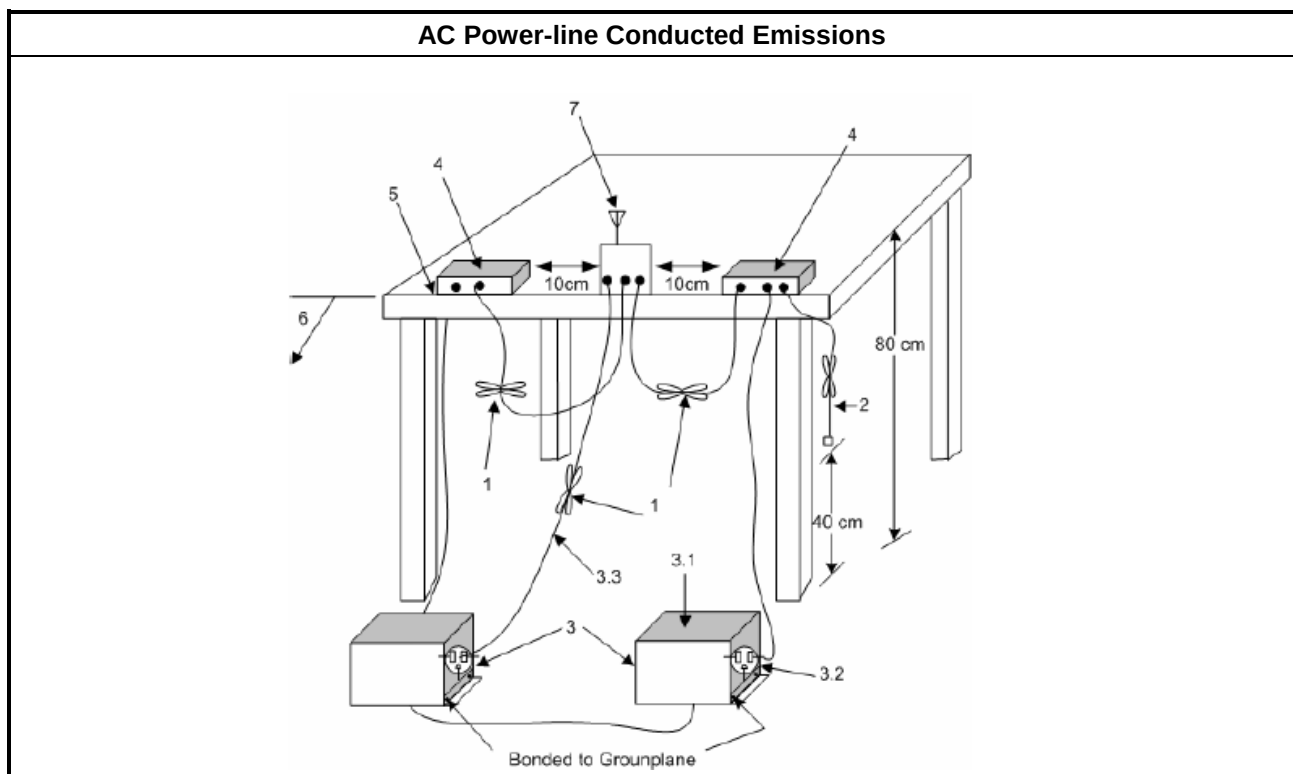

3.1.5 Test Result

Please refer to Appendix A.

3.2 UWB bandwidth

3.2.1 UWB bandwidth Limit

UWB bandwidth Limit
UWB bandwidth ≥ 500 MHz or Fractional bandwidth ≥ 0.2 ; Fractional bandwidth = $2(f_H - f_L) / (f_H + f_L)$


3.2.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

Test Procedures

Test Method
■ For the UWB bandwidth shall be measured using one of the options below:
■ Refer as ANSI C63.10, clause 6.9.2 and clause 10.1 for UWB bandwidth testing.

Test Setup

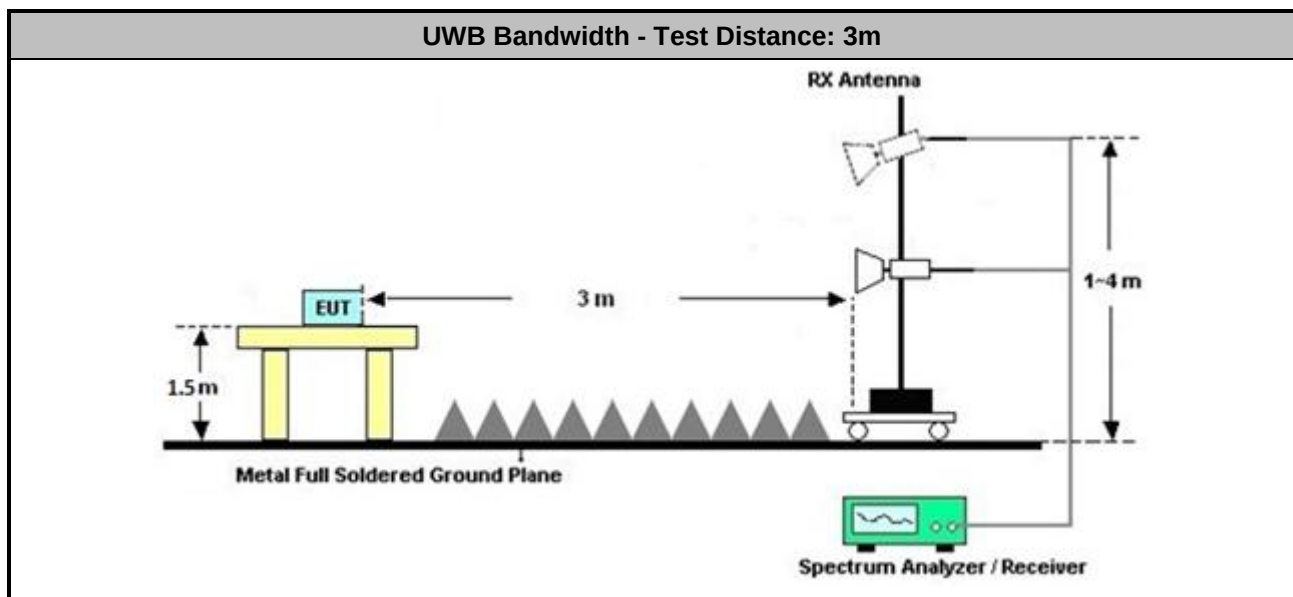


3.2.5 Test Result of UWB Bandwidth

Test mode	F _L (MHz)	F _H (MHz)	UWB Bandwidth (MHz)	Bandwidth limit (MHz)	Result	Pol [H/V]
9	6216	6764	548	≥ 500	Pass	H
14	7713	8261	548	≥ 500	Pass	V
19	6216	6764	548	≥ 500	Pass	H
29	7700	8286	586	≥ 500	Pass	H
43	6210	6718	508	≥ 500	Pass	H
48	7713	8261	548	≥ 500	Pass	V
51	6216	6764	548	≥ 500	Pass	H
61	7712	8261	549	≥ 500	Pass	H



UWB Bandwidth


Mode 9

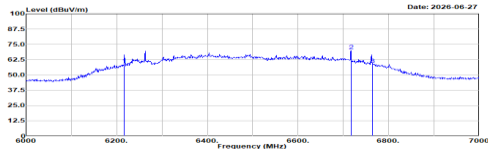

Site : 03CH20-HV
Condition : 3m HP_91280_02360_251105 Horizontal
Project : BU5-1000.000kHz VNU:3000.000kHz Suf:3.000sec
Detector : Peak
Channel : 05
Preamble_code : 25
Preamble_mode : 3
Packet_length : 127
Parameter_Set : nmp_12
Setting : 24

Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
6210.00	58.51			49.33	44.46	12.68	37.76	0.00	--	--	Peak
6717.00	69.65			59.37	55.07	13.23	37.81	0.00	--	--	Peak
6764.00	58.63			47.35	35.83	13.28	37.83	0.00	--	--	Peak


Mode 14

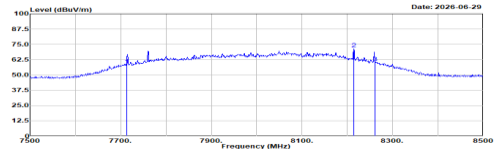

Site : 03CH20-HV
Condition : 3m HP_91280_02360_251105 Vertical
Project : BU5-1000.000kHz VNU:3000.000kHz Suf:3.000sec
Detector : Peak
Channel : 05
Preamble_code : 25
Preamble_mode : 3
Packet_length : 0
Parameter_Set : nmp_20
Setting : 23

Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
7713.00	59.21			46.83	35.63	14.17	38.62	0.00	--	--	Peak
8214.00	71.18			58.65	37.93	14.60	39.16	0.00	--	--	Peak
8261.00	60.87			47.50	37.10	14.62	39.15	0.00	--	--	Peak

Mode 19

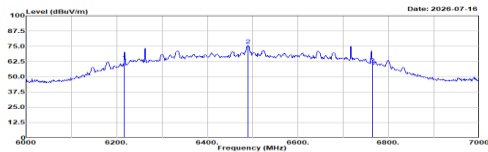


Site : 03CH20-HV
Condition : 2m HP_91280_02360_251105 Horizontal
Project : BU5-1000.000kHz VNU:3000.000kHz Suf:3.000sec
Detector : Peak
Channel : 05
Preamble_code : 18
Preamble_mode : 3
Packet_length : 127
Parameter_Set : nmp_3
Setting : 22

Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
6210.00	62.69			51.46	44.46	12.68	37.76	0.00	--	--	Peak
6499.00	79.58			65.38	35.86	12.97	37.73	0.00	--	--	Peak
6764.00	60.21			48.93	35.83	13.28	37.83	0.00	--	--	Peak



UWB Bandwidth


Mode 29

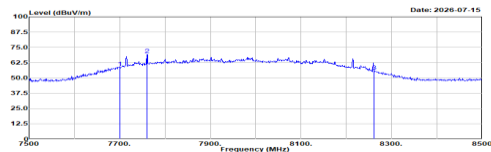

Site : 83CH28-HV
Condition : 3m HF_91280_82368_251105 Horizontal
Project : BU5-1000.000kHz VBI 3000.000kHz Suf:3.000sec
Detector : Peak
Channel : 00
Preamble_code : 25
Preamble_mode : 1
Packet_length : 127
Parameter_Set : WWP_12
Setting : 10

Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
1	7700.00	58.15	-----	58.15	0.00	14.16	38.63	0.00	--	--	Peak
2	7700.00	59.86	-----	59.86	16.74	14.18	38.66	0.00	--	--	Peak
3	8261.00	55.40	-----	55.40	37.16	14.62	39.15	0.00	--	--	Peak


Mode 43

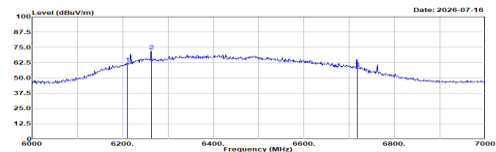

Site : 83CH28-HV
Condition : 3m HF_91280_82368_251105 Horizontal
Project : BU5-1000.000kHz VBI 3000.000kHz Suf:3.000sec
Detector : Peak
Channel : 00
Preamble_code : 27
Preamble_mode : 1
Packet_length : 127
Parameter_Set : WWP_12
Setting : 25

Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
1	6210.00	61.49	-----	61.49	14.24	12.67	37.76	0.00	--	--	Peak
2	6210.00	72.16	-----	72.16	14.40	12.72	37.75	0.00	--	--	Peak
3	6716.00	57.69	-----	57.69	35.86	13.23	37.81	0.00	--	--	Peak

Mode 48

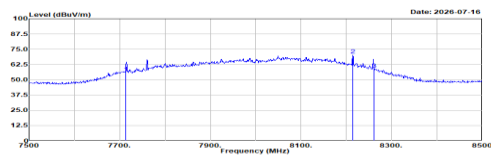

Site : 83CH28-HV
Condition : 3m HF_91280_82368_251105 Vertical
Project : BU5-1000.000kHz VBI 3000.000kHz Suf:3.000sec
Detector : Peak
Channel : 00
Preamble_code : 27
Preamble_mode : 1
Packet_length : 0
Parameter_Set : WWP_30
Setting : 25

Freq	Level	Limit	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark
1	7710.00	58.41	-----	58.41	0.00	14.17	38.62	0.00	--	--	Peak
2	8214.00	58.31	-----	58.31	37.03	14.08	39.10	0.00	--	--	Peak
3	8261.00	58.10	-----	58.10	37.10	14.62	39.15	0.00	--	--	Peak



UWB Bandwidth

Mode 51

100Level (dBuV/m)

Date: 2026-07-16

Site : 03CH20-HV
Condition : 3m HF_91280_02360_251105 Horizontal
Project : BU5-1000_0000Hz_VBW:3000.000kHz_Suff:3.000sec
Detector : SENSE14
Channel : 00
Preamble_side: 10
cs_att_mode : 1
Packet_length: 127
Parameter_Set: 00P_3
Setting : 23

Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1 6210.00	62.18	-----	-----	53.00	34.26	12.68	37.76	0.00	--	--	Peak
2 6400.00	74.09	-----	-----	64.00	35.06	12.97	37.73	0.00	--	--	Peak
3 6760.00	59.97	-----	-----	60.00	35.83	13.28	37.83	0.00	--	--	Peak

Mode 61

100Level (dBuV/m)

Date: 2026-07-17

Site : 03CH20-HV
Condition : 3m HF_91280_02360_251105 Horizontal
Project : BU5-1000_0000Hz_VBW:3000.000kHz_Suff:3.000sec
Detector : SENSE14
Channel : 00
Preamble_side: 25
cs_att_mode : 1
Packet_length: 127
Parameter_Set: 00P_12
Setting : 20

Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1 7710.00	60.46	-----	-----	48.30	36.62	14.16	38.62	0.00	--	--	Peak
2 7760.00	70.76	-----	-----	58.50	36.74	14.18	38.66	0.00	--	--	Peak
3 8261.00	57.77	-----	-----	44.08	37.10	14.62	39.15	0.00	--	--	Peak

3.3 Peak Power Measurement

3.3.1 Peak Power Measurement Limit

Peak Power Measurement Limit
$P_{eip} = 0 \text{ dBm/50MHz}$


3.3.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.3.3 Test Procedures

Test Method
Peak Power Measurement
- Refer as ANSI C63.10, clause 10.3.1 for radiated measurement procedure testing. - Refer as ANSI C63.10, clause 10.3.2 for measurement distance is 3m. - Refer as ANSI C63.10, clause 10.3.5 for peak detector procedure testing. - Refer as ANSI C63.10, clause 10.3.6 for bandwidth conversion of peak power.
- Frequency of max peak power is pre-located: The span bandwidth is continuously reduced to find the worst frequency. Once the worst frequency is found, the setting of spectrum analyzer is set as below: - Central frequency: Worst frequency point - Span: Zero span - RBW: 50MHz - VBW: 80MHz - Detector: Peak detector - Trace: Max hold

3.3.4 Test Setup

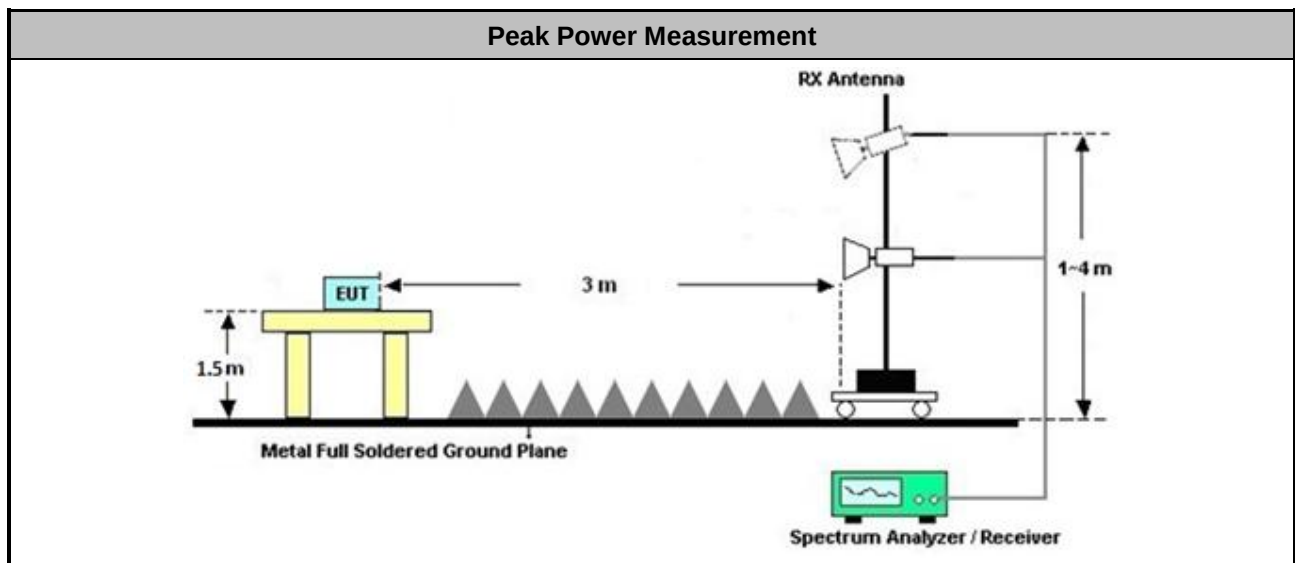


3.3.5 Test Result of Peak Power Measurement

Peak Measurement Result							
Test Mode	Freq. (MHz)	E-Field (dBuV/m)	ERIP _{50MHz} (dBm)	ERIP _{50MHz} Limit (dBm)	Margin (dB)	Result	Pol [H/V]
9	6615	83.62	-11.61	0	-11.61	Pass	H
14	8112	82.37	-12.86	0	-12.86	Pass	V
19	6490	94.1	-1.13	0	-1.13	Pass	H
29	7868	84.11	-11.12	0	-11.12	Pass	H
43	6364	86.51	-8.72	0	-8.72	Pass	H
48	8112	82.45	-12.78	0	-12.78	Pass	V
51	6491	93.26	-1.97	0	-1.97	Pass	H
61	7987	85.38	-9.85	0	-9.85	Pass	H
Note 1: EIRP [dBm] = E-Field [dBuV/m] - 95.23; Note 2: Measurement worst emissions of receive antenna polarization.							



Pre-located worst frequency Plots


Mode 9

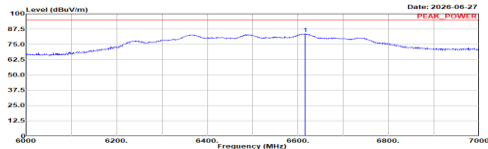

Site : 83CH28-HV
Condition : PEAK_POWER 3m HF_91280_82368_251185 Horizontal
Project : BU5-10000_00000_V001 00000_00000Hz 3u7/1.000sec
Detector : Peak
Channel : 65
Preamble_code : 25
Preamble_mode : 1
Packet_length : 127
Parameter_Set : SMP_12
Setting : 24

Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
Hz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	dB	dB	dB	dB	deg
1	6615.00	83.42	95.23	-11.81	72.46	35.68	13.13	37.77	0.00	--	--	Peak


Mode 14

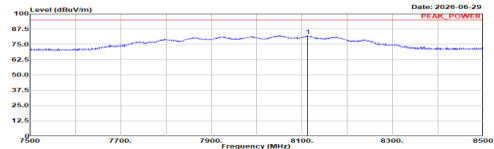

Site : 83CH28-HV
Condition : PEAK_POWER 3m HF_91280_82368_251185 Vertical
Project : BU5-10000_00000_V001 00000_00000Hz 3u7/1.000sec
Detector : Peak
Channel : 65
Preamble_code : 25
Preamble_mode : 1
Packet_length : 0
Parameter_Set : SMP_20
Setting : 23

Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
Hz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	dB	dB	dB	dB	deg
1	8112.00	82.17	95.23	-13.06	69.13	37.08	14.53	35.99	0.00	--	--	Peak

Mode 19

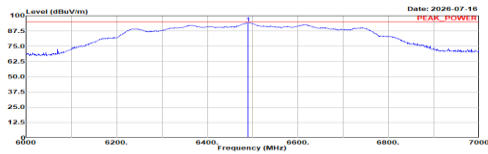


Site : 83CH28-HV
Condition : PEAK_POWER 3m HF_91280_82368_251185 Horizontal
Project : BU5-10000_00000_V001 00000_00000Hz 3u7/1.000sec
Detector : Peak
Channel : 65
Preamble_code : 18
Preamble_mode : 1
Packet_length : 127
Parameter_Set : SMP_3
Setting : 22

Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
Hz	dBuV/m	dBuV/m	dB	dB	dB	dB	dB	dB	dB	dB	dB	deg
1	6490.00	94.10	95.23	-1.13	85.00	35.00	12.97	37.75	0.00	--	--	Peak



Pre-located worst frequency Plots


Mode 29

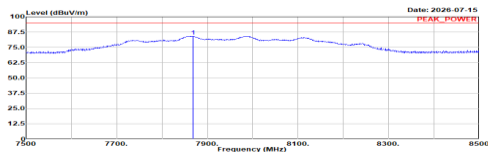

Site : 83CH28-HV
Condition : PEAK_POWER 3m HF_91280_82368_251185 Horizontal
Project : BU5-15000_00000_V001 00000_000000 Hz 3u71.000sec
Detector : Peak
Channel : 89
Preamble_code : 25
Packet_length : 127
Parameter_Set : WWP_12
Setting : 10

Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
Hz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	
1 7862.00	84.11	95.23	-11.12	71.49	37.18	14.28	38.76	0.00	--	--	--	Peak


Mode 43

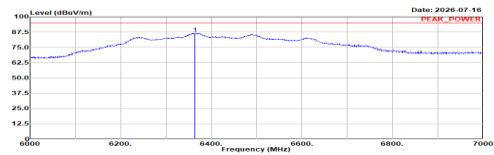

Site : 83CH28-HV
Condition : PEAK_POWER 3m HF_91280_82368_251185 Horizontal
Project : BU5-15000_00000_V001 00000_000000 Hz 3u71.000sec
Detector : Peak
Channel : 89
Preamble_code : 27
Packet_length : 127
Parameter_Set : WWP_12
Setting : 25

Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
Hz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	
1 6364.00	86.11	95.23	-9.12	76.77	34.66	12.82	37.74	0.00	--	--	--	Peak

Mode 48

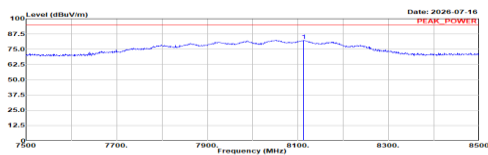


Site : 83CH28-HV
Condition : PEAK_POWER 3m HF_91280_82368_251185 Vertical
Project : BU5-15000_00000_V001 00000_000000 Hz 3u71.000sec
Detector : Peak
Channel : 89
Preamble_code : 27
Packet_length : 0
Parameter_Set : WWP_30
Setting : 25

Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
Hz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	dB	cm	deg	
1 8112.00	82.45	95.23	-12.78	69.71	37.28	14.53	38.99	0.00	--	--	--	Peak



Mode 61

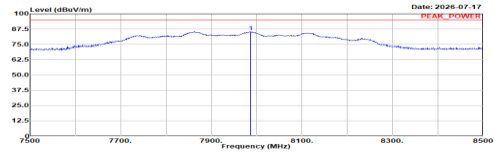

```
Site      : 03K20-HV
Condition : PEAK_POWER 3m HF_91200_02360_251105 Horizontal
Project   : RBU150000_000KHz VBU180000_000KHz SWT13.000sec
Detector  : 600k14
Channel   : 009
Preamble_cidx: 25
rx_status_mode: 1
Packet_length: 127
Parameter_SET: HPRP_12
Setting   : 20
```

	Freq	Level	LSat Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Factor	Aux Factor	APos	TPos	Remark	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	7987.00	85.38	95.23	-9.85	72.61	37.20	14.43	38.86	0.00	--	--	Peak

3.4 Radiated Emissions

3.4.1 Radiated Emissions Limit

Radiated Emissions below 960MHz and Emissions from Digital Circuitry Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1: Test distance for frequencies at or above 30 MHz, measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

Note 2: Test distance for frequencies at below 30 MHz, measurements may be performed at a distance closer than the EUT limit distance; however, an attempt should be made to avoid making measurements in the near field. When performing measurements below 30 MHz at a closer distance than the limit distance, the results shall be extrapolated to the specified distance by either making measurements at a minimum of two or more distances on at least one radial to determine the proper extrapolation factor or by using the square of an inverse linear distance extrapolation factor (40 dB/decade). The test report shall specify the extrapolation method used to determine compliance of the EUT.

Radiated Emissions above 960MHz Limit	
Frequency Range (MHz)	EIRP (dBm), RBW = 1MHz
960-1610	-75.3
1610-1990	-63.3
1990-3100	-61.3
3100-10600	-41.3
Above 10600	-61.3

Note: Distance extrapolation factor = 20 log (test distance [X m]/specific distance [3 m]) (dB)

Radiated Emissions in GPS Bands Limit	
Frequency Range (MHz)	EIRP (dBm), RBW ≥ 1kHz
1164-1240	-85.3
1559-1610	-85.3

Note E (dBuV/m) = EIRP (dBm) + 95.23, example, E(dBuV/m) = -85.3 + 95.23 = 9.93dBuV/m

3.4.2 Measuring Instruments




Refer a test equipment and calibration data table in this test report.

3.4.3 Test Procedures


Test Method for Radiated Emissions above 960MHz	
■ Radiated Emissions above 960MHz	
■	Refer as ANSI C63.10, clause 10.3.1 for radiated measurement procedure testing.
■	Refer as ANSI C63.10, clause 10.3.2 for measurement distance is 3m. In some cases, it may be necessary to measure the radiated UWB emissions at a closer distance to obtain enough signal and margin to overcome the measurement system noise floor. Distance extrapolation factor = 20 log (test distance [X m]/specific distance [3 m]) (dB)
■	Refer as ANSI C63.10, clause 10.3.4 for rms detector procedure testing.
■	Refer as ANSI C63.10, clause 10.3.7 for evaluating AVG-PSD (RBW=1MHz).
■	Refer as ANSI C63.10, clause 10.3.10 for evaluating AVG-PSD in GPS Band (RBW≥1kHz).
■ For radiated measurement.	
■	Refer as ANSI C63.10, clause 10.3.8 following eirp can be used radiated test configuration.
■	Refer as ANSI C63.10, clause 10.3.9 following eirp can be directly determined using the field strength.

Test Method for Radiated Emissions below 960MHz and Emissions from Digital Circuitry	
■ Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements) for above 30MHz-960MHz; 40dB/decade for frequency below 30MHz.	
■ For the transmitter unwanted emissions shall be measured using following options below:	
■	Refer as ANSI C63.10, clause 4.1.5 Detector functions and selection of bandwidth
□	Refer as ANSI C63.10, clause 4.1.5.2.4 average value of pulsed emissions. Adjusted by a “duty cycle correction factor”, derived from 20log (dwell time/100 ms). Average emission = peak emission + 20 log (duty cycle).
■	Refer as ANSI C63.10, clause 4.1.5.2.2 measurement procedure peak limit.
■ For radiated measurement.	
■	Refer as ANSI C63.10, clause 6.4 for radiated emissions below 30 MHz and test distance is 3m.
■	Refer as ANSI C63.10, clause 6.5 for radiated emissions 30 MHz to 1 GHz and test distance is 3m.
■	Refer as ANSI C63.10, clause 6.6 for radiated emissions above 1 GHz and test distance is 3m.
■	If the noise floor can't meet the limit, the test distance will be shorten and described in the report.
■ Any unwanted emissions level shall not exceed the fundamental emission level.	


3.4.4 Test Setup

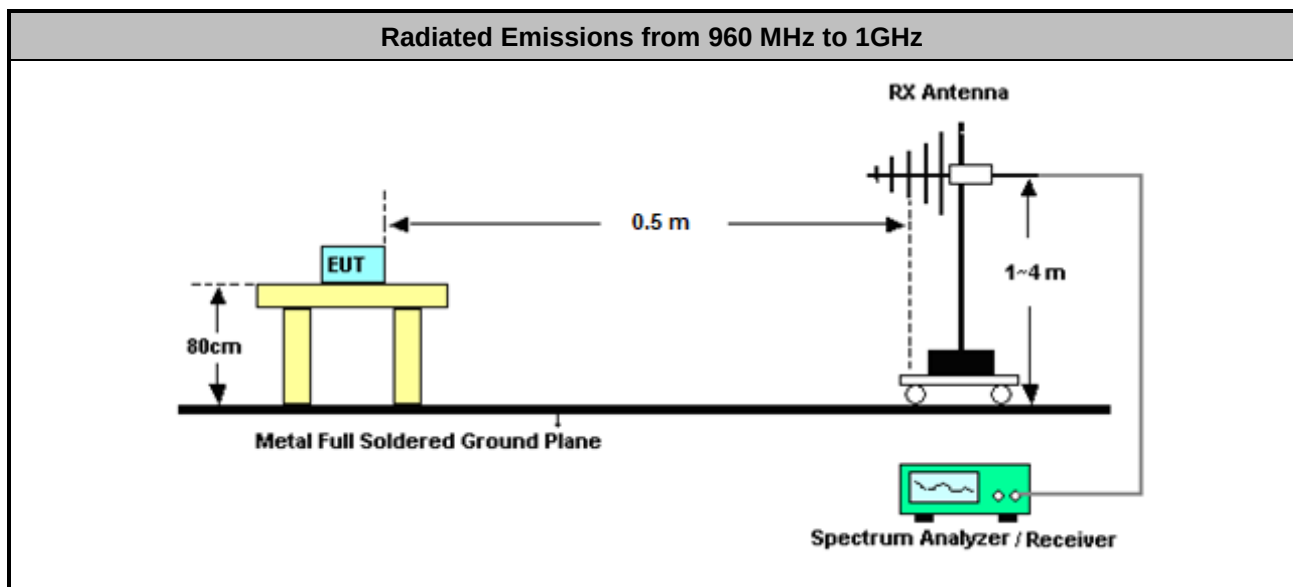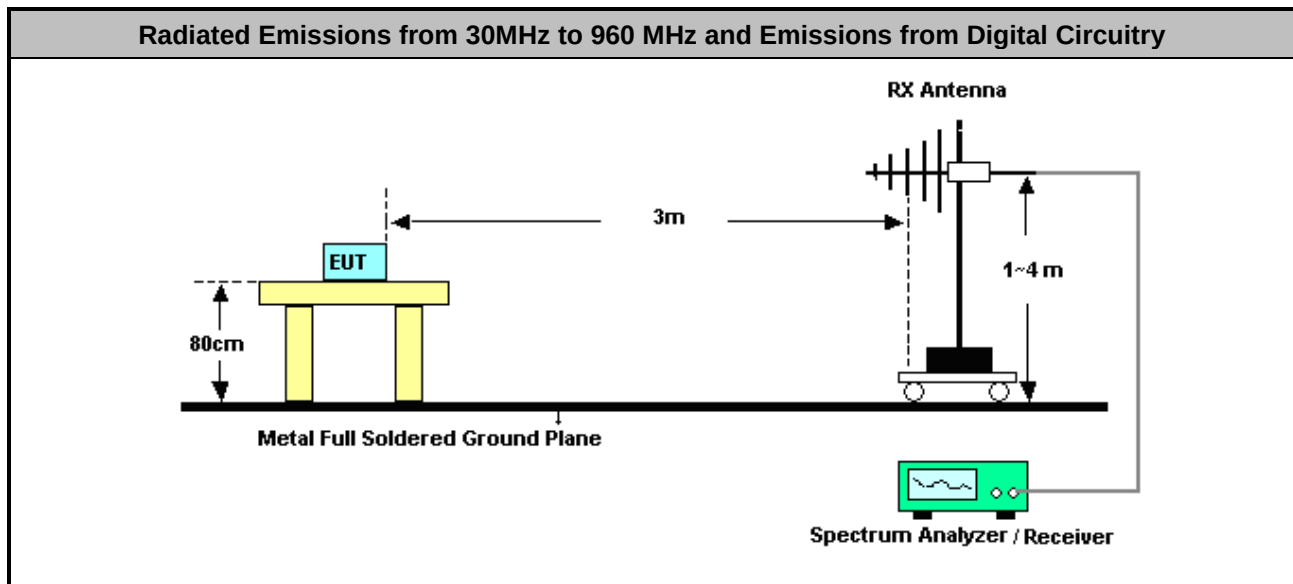
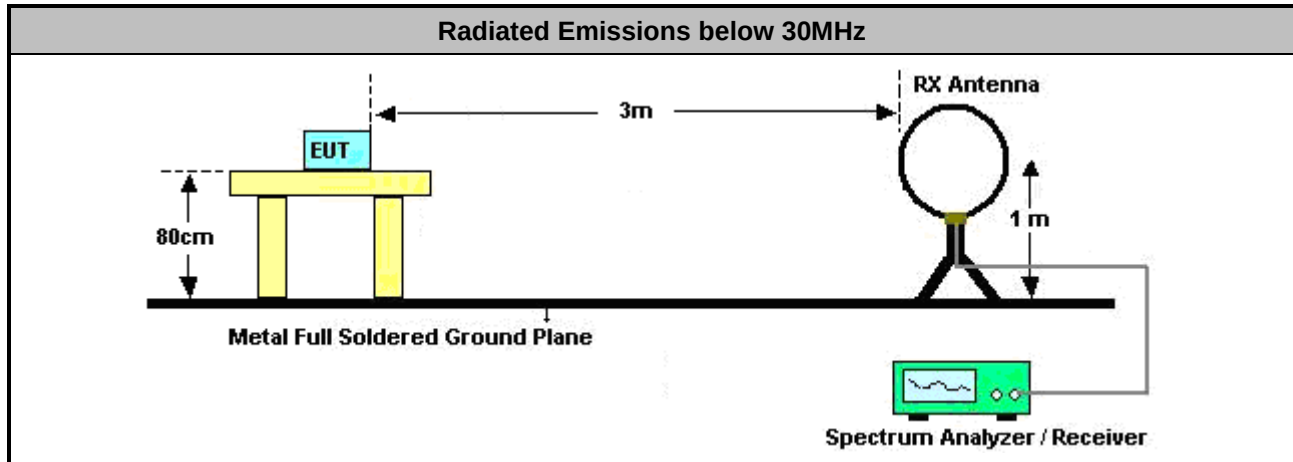


Radiated Emissions from 1GHz to 1.61 GHz

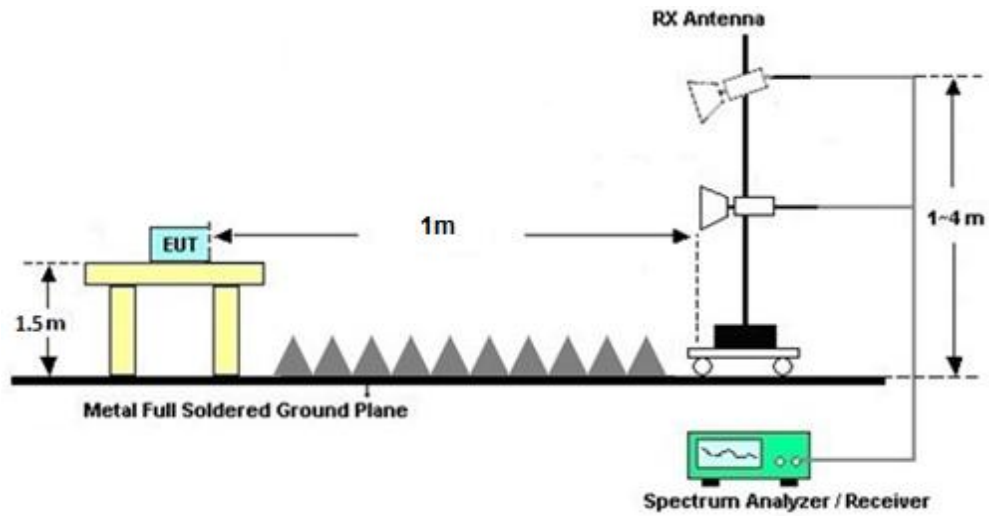

Radiated Emissions from 1.61 GHz to 10.60 GHz

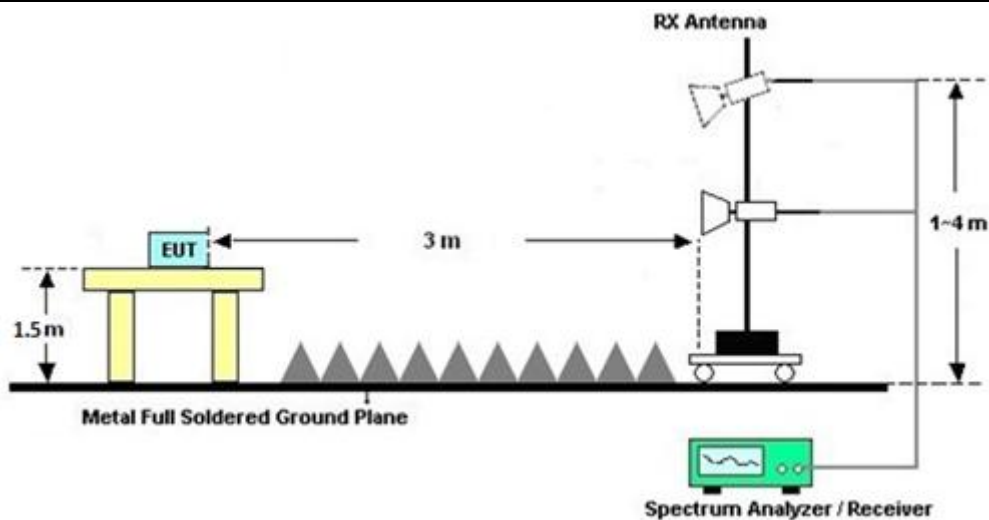

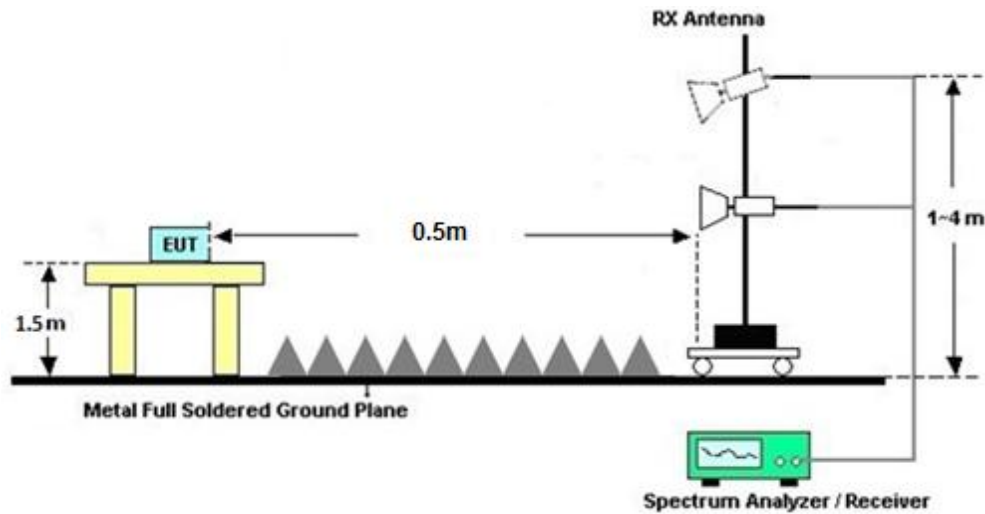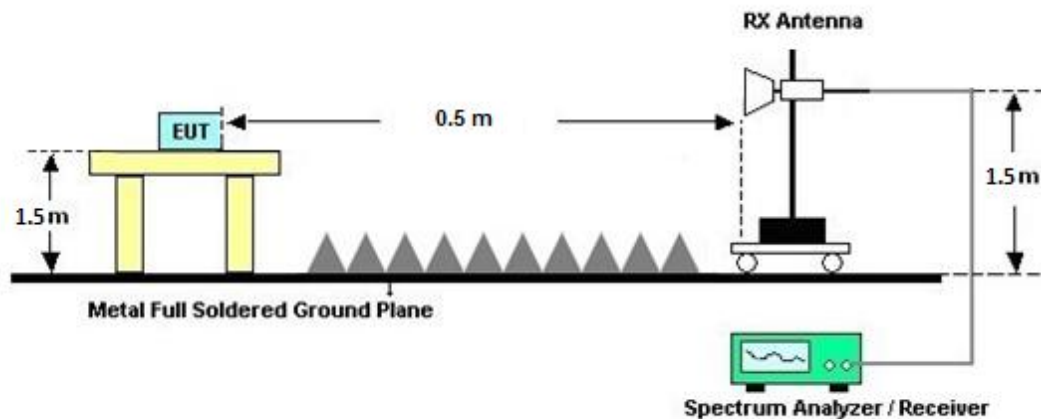Radiated Emissions from 10.60 GHz to 18GHz

Radiated Emissions above 18GHz


Note 1: Magnetic field tests shall be performed in the frequency range of 9 kHz to 30 MHz using a calibrated loop antenna. Electric field tests shall be performed in the frequency range of 30 MHz to 1000 MHz using a calibrated bi-log antenna and the frequency range of 1 GHz to 40 GHz using a calibrated horn antenna.

Note 2: If test distance other than 3m is used, the used test distance will be recorded in test result.

3.4.5 Radiated Emissions (Below 30MHz)




All amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.4.6 Average Power Spectral Density

Test mode	Frequency (MHz)	Emission Level (dBuV/m)	Emission Limit (dBm/MHz)	Emission Limit (dBuV/m)	Margin (dB)	Result	Pol [H/V]
9	6407	52.28	-41.3	53.93	-1.65	Pass	H
14	8072	52.35	-41.3	53.93	-1.58	Pass	V
19	6613	53.27	-41.3	53.93	-0.66	Pass	H
29	7887	51.51	-41.3	53.93	-2.42	Pass	H
43	6411	53.12	-41.3	53.93	-0.81	Pass	H
48	8068	52.24	-41.3	53.93	-1.69	Pass	V
51	6613	52.42	-41.3	53.93	-1.51	Pass	H
61	7974	52.37	-41.3	53.93	-1.56	Pass	H

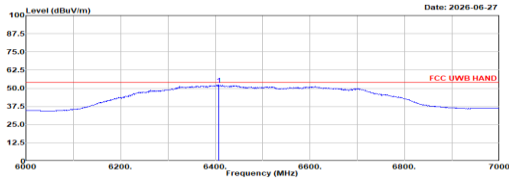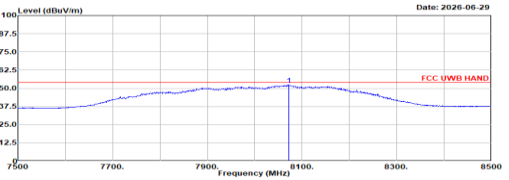
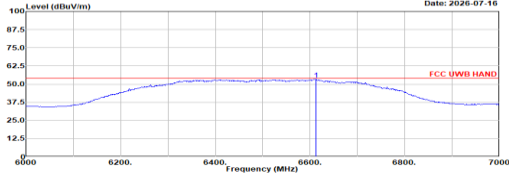


Radiated Emissions (Fundamental)																																																																																															
Operating Function	Adapter Mode	Polarization	H																																																																																												
		Test Distance	3m																																																																																												
Mode 9					Mode 14																																																																																										
100 Level (dBuV/m) Date: 2026-06-27  Site : 03CH20-HY Condition : FCC UWB HAND 3m HF_91200_02360_251105 Horizontal Project : 660814 Detector : Average Channel : 05 Preamble_cid: 25 rx_sts_Node : 1 Packet_length: 127 Parameter_SET: HPRF_12 Setting : 24 <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>Apos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><td>1 6487.00 52.28 53.93 -1.65</td><td>42.34</td><td>34.61</td><td>12.87</td><td>37.74</td><td>0.00</td><td>--</td><td>--</td><td>Average</td></tr></table> 100 Level (dBuV/m) Date: 2026-06-29  Site : 03CH20-HY Condition : FCC UWB HAND 3m HF_91200_02360_251105 Vertical Project : 660814 Detector : Average Channel : 09 Preamble_cid: 25 rx_sts_Node : 3 Packet_length: 0 Parameter_SET: HPRF_20 Setting : 23 <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>Apos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><td>1 8072.00 52.55 53.93 -1.58</td><td>39.68</td><td>37.28</td><td>14.50</td><td>38.95</td><td>0.00</td><td>--</td><td>--</td><td>Average</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark	Freq Level Line Margin	dB	dBuV	dB/m	Loss	Factor	Factor	cm	deg	1 6487.00 52.28 53.93 -1.65	42.34	34.61	12.87	37.74	0.00	--	--	Average	Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark	Freq Level Line Margin	dB	dBuV	dB/m	Loss	Factor	Factor	cm	deg	1 8072.00 52.55 53.93 -1.58	39.68	37.28	14.50	38.95	0.00	--	--	Average	100 Level (dBuV/m) Date: 2026-07-16  Site : 03CH20-HY Condition : FCC UWB HAND 3m HF_91200_02360_251105 Horizontal Project : 660814 Detector : Average Channel : 05 Preamble_cid: 10 rx_sts_Node : 1 Packet_length: 127 Parameter_SET: HPRF_3 Setting : 22 <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>Apos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq Level Line Margin</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><td>1 6613.00 53.27 53.93 -0.66</td><td>42.12</td><td>35.08</td><td>13.12</td><td>37.77</td><td>0.00</td><td>--</td><td>--</td><td>Average</td></tr></table>					Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark	Freq Level Line Margin	dB	dBuV	dB/m	Loss	Factor	Factor	cm	deg	1 6613.00 53.27 53.93 -0.66	42.12	35.08	13.12	37.77	0.00	--	--	Average					
Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark																																																																																							
Freq Level Line Margin	dB	dBuV	dB/m	Loss	Factor	Factor	cm	deg																																																																																							
1 6487.00 52.28 53.93 -1.65	42.34	34.61	12.87	37.74	0.00	--	--	Average																																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark																																																																																							
Freq Level Line Margin	dB	dBuV	dB/m	Loss	Factor	Factor	cm	deg																																																																																							
1 8072.00 52.55 53.93 -1.58	39.68	37.28	14.50	38.95	0.00	--	--	Average																																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark																																																																																							
Freq Level Line Margin	dB	dBuV	dB/m	Loss	Factor	Factor	cm	deg																																																																																							
1 6613.00 53.27 53.93 -0.66	42.12	35.08	13.12	37.77	0.00	--	--	Average																																																																																							




Radiated Emissions (Fundamental)										
Operating Function	Adapter Mode	Polarization	H							
		Test Distance	3m							
Mode 29					Mode 43					
<										

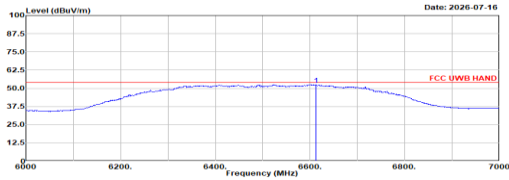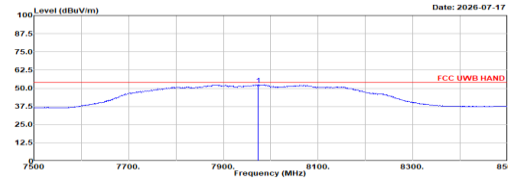

Radiated Emissions (Fundamental)																																																																																												
Operating Function	Adapter Mode		Polarization	H																																																																																								
			Test Distance	3m																																																																																								
Mode 51			Mode 61																																																																																									
 Site : 03CH20-HY Condition : FCC UWB HAND 3m HF_91280_02360_251105 Horizontal Project : 660814 Detector : Average Channel : 05 Preamble_cid: 10 rx_sts_Node : 1 Packet_length: 127 Parameter_SET: HPRF_3 Setting : 25 <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>6613.00</td><td>52.42</td><td>53.93</td><td>-1.51</td><td>41.27</td><td>35.08</td><td>13.12</td><td>37.77</td><td>0.00</td><td>--</td><td>--</td><td>Average</td></tr></table>			Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	6613.00	52.42	53.93	-1.51	41.27	35.08	13.12	37.77	0.00	--	--	Average	 Site : 03CH20-HY Condition : FCC UWB HAND 3m HF_91280_02360_251105 Horizontal Project : 660814 Detector : Average Channel : 09 Preamble_cid: 25 rx_sts_Node : 1 Packet_length: 127 Parameter_SET: HPRF_12 Setting : 20 <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>7974.00</td><td>52.37</td><td>53.93</td><td>-1.56</td><td>39.68</td><td>37.28</td><td>14.42</td><td>38.85</td><td>0.00</td><td>--</td><td>--</td><td>Average</td></tr></table>										Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	7974.00	52.37	53.93	-1.56	39.68	37.28	14.42	38.85	0.00	--	--	Average
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1	6613.00	52.42	53.93	-1.51	41.27	35.08	13.12	37.77	0.00	--	--	Average																																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1	7974.00	52.37	53.93	-1.56	39.68	37.28	14.42	38.85	0.00	--	--	Average																																																																																




3.4.7 Radiated Emissions (30MHz – 1GHz)

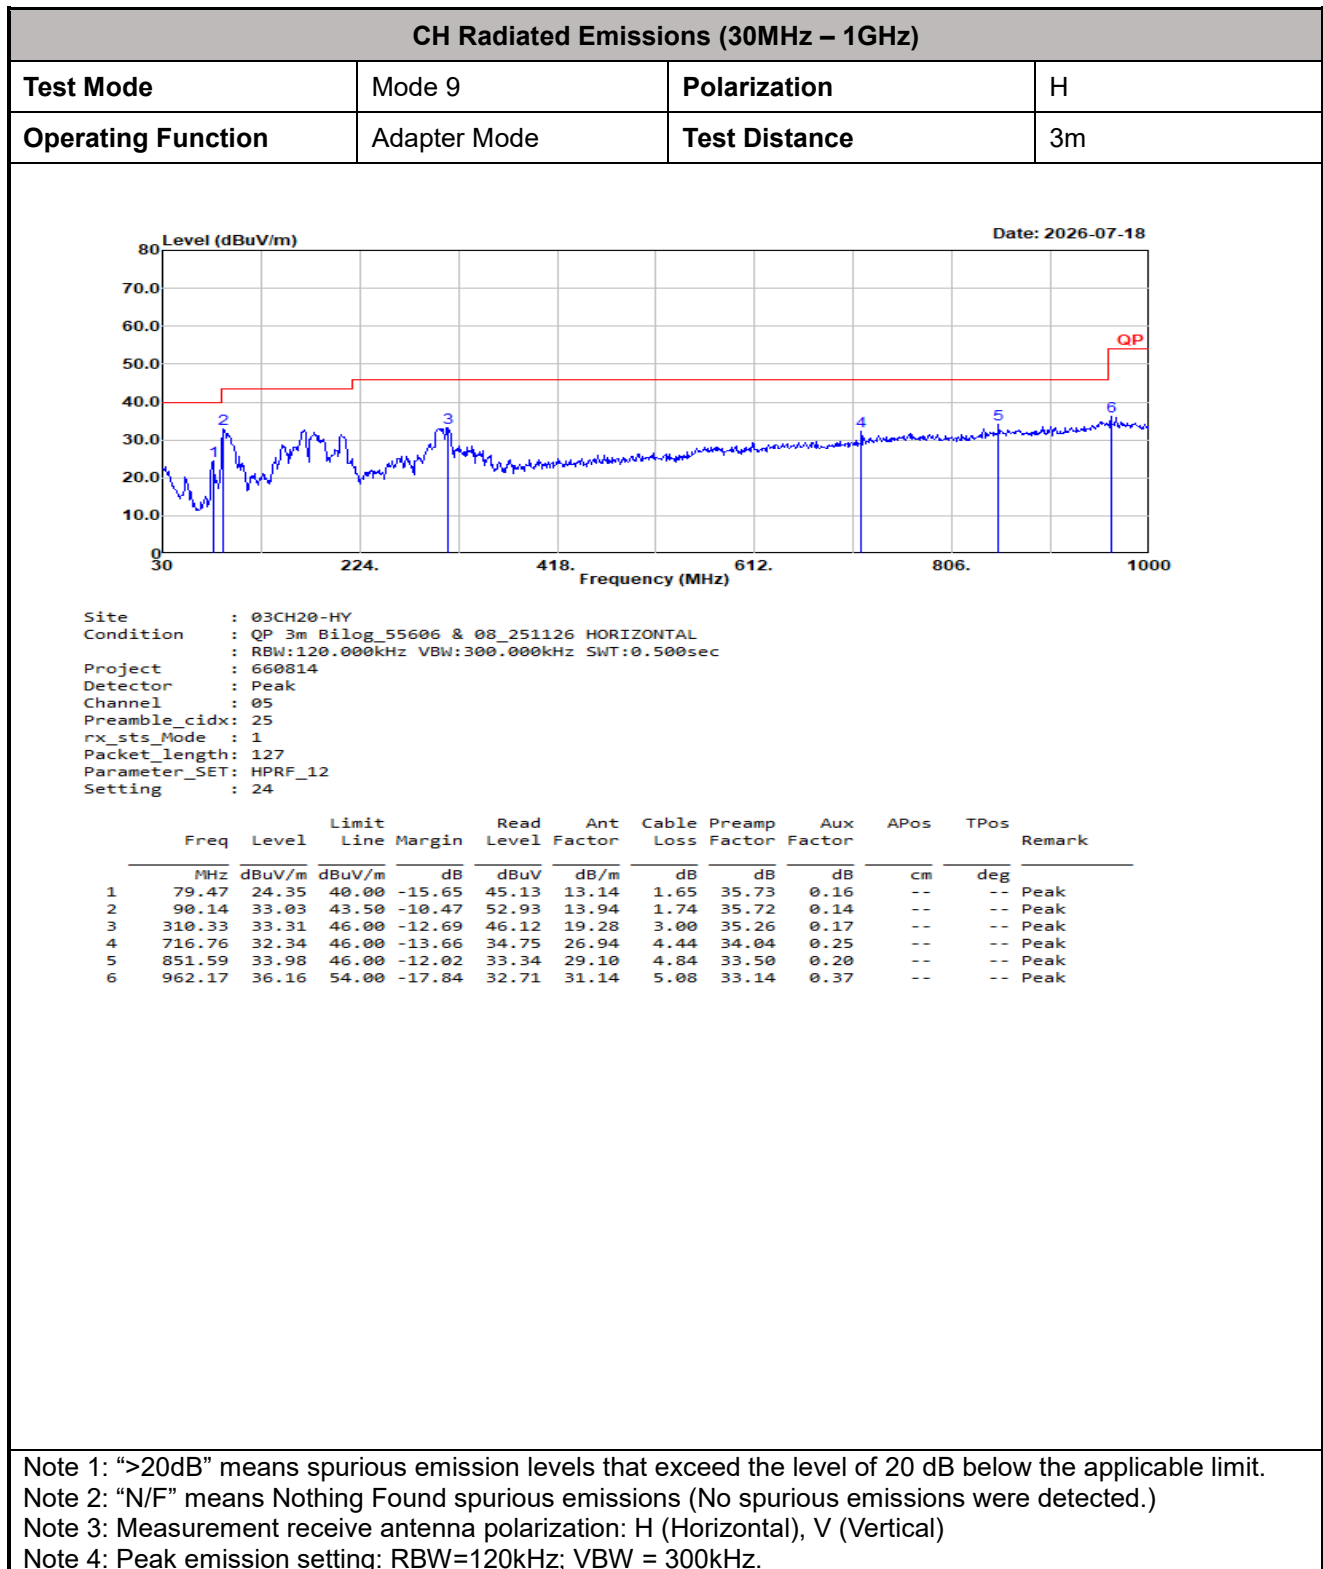



CH Radiated Emissions (30MHz – 1GHz)

Test Mode	Mode 9	Polarization	V
Operating Function	Adapter Mode	Test Distance	3m

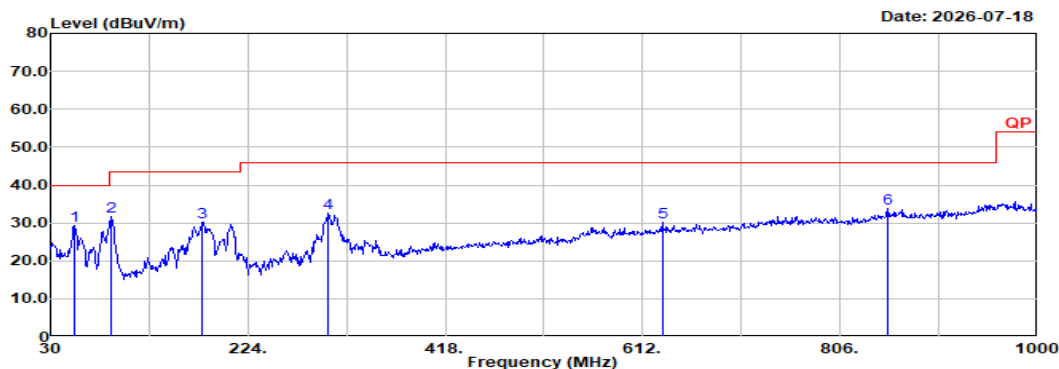

Site : 03CH20-HY
Condition : QP 3m Bilog_55606 & 08_251126 VERTICAL
RBW:120.000kHz VBW:300.000kHz SWT:0.500sec
Project : 660814
Detector : Peak
Channel : 05
Preamble_cidx: 25
rx_sts_Mode : 1
Packet_length: 127
Parameter_SET: HPRF_12
Setting : 24

	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	53.28	29.28	40.00	-10.72	50.15	13.31	1.40	35.76	0.18	--	--	Peak
2	89.17	31.72	43.50	-11.78	51.77	13.80	1.73	35.72	0.14	--	--	Peak
3	179.38	30.32	43.50	-13.18	48.13	15.19	2.34	35.55	0.21	--	--	Peak
4	302.57	32.49	46.00	-13.51	45.35	19.28	2.97	35.28	0.17	--	--	Peak
5	631.40	30.20	46.00	-15.80	33.74	26.37	4.19	34.34	0.24	--	--	Peak
6	852.56	33.70	46.00	-12.30	33.03	29.11	4.85	33.49	0.20	--	--	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: Peak emission setting: RBW=120kHz; VBW = 300kHz.



CH Radiated Emissions (30MHz – 1GHz)

Test Mode	Mode 14	Polarization	H
Operating Function	Adapter Mode	Test Distance	3m

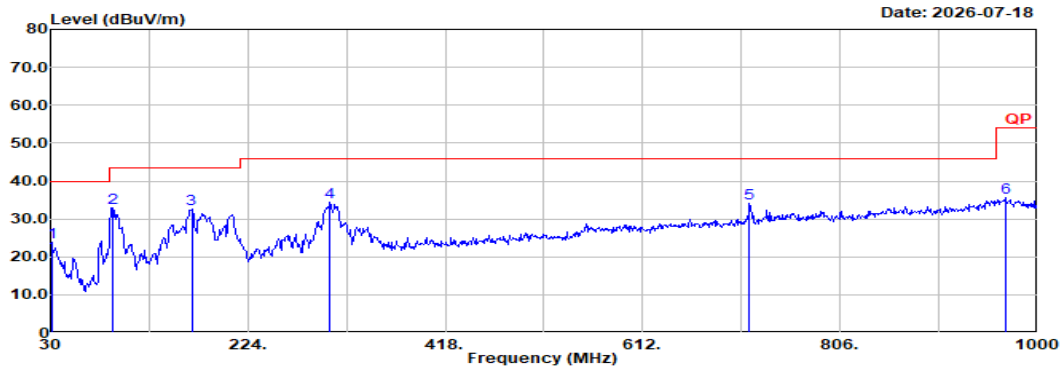

Site : 03CH20-HY
Condition : QP 3m Bilog_55606 & 08_251126 HORIZONTAL
RBW:120.000kHz VBW:300.000kHz SWT:0.500sec
Project : 660814
Detector : Peak
Channel : 09
Preamble_cidx: 25
rx_sts_Mode : 3
Packet_length: 0
Parameter_SET: HPRF_20
Setting : 23

	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	30.97	23.72	40.00	-16.28	34.22	23.98	1.17	35.81	0.16	--	--	Peak
2	91.11	32.98	43.50	-10.52	52.77	14.04	1.75	35.72	0.14	--	--	Peak
3	168.71	32.65	43.50	-10.85	49.91	15.83	2.28	35.58	0.21	--	--	Peak
4	304.51	34.51	46.00	-11.49	47.34	19.30	2.98	35.28	0.17	--	--	Peak
5	716.76	34.09	46.00	-11.91	36.50	26.94	4.44	34.04	0.25	--	--	Peak
6	967.99	35.72	54.00	-18.28	32.13	31.24	5.09	33.12	0.38	--	--	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.


Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: Peak emission setting: RBW=120kHz; VBW = 300kHz.

**CH Radiated Emissions (30MHz – 1GHz)**

Test Mode	Mode 14	Polarization	V
Operating Function	Adapter Mode	Test Distance	3m

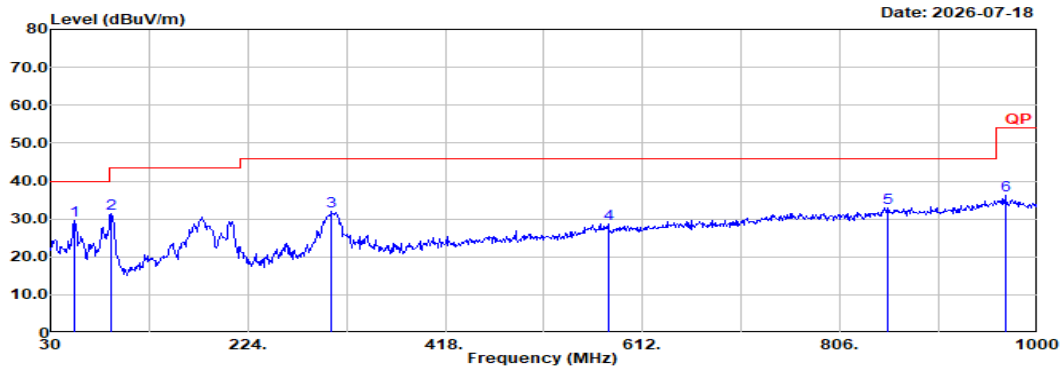

Site : 03CH20-HY
Condition : QP 3m Bilog_55606 & 08_251126 VERTICAL
RBW:120.000kHz VBW:300.000kHz SWT:0.500sec
Project : 660814
Detector : Peak
Channel : 09
Preamble_cidx: 25
rx_sts_Mode : 3
Packet_length: 0
Parameter_SET: HPRF_20
Setting : 23

	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	54.25	29.61	40.00	-10.39	50.70	13.08	1.41	35.76	0.18	--	--	Peak
2	90.14	31.51	43.50	-11.99	51.41	13.94	1.74	35.72	0.14	--	--	Peak
3	306.45	31.91	46.00	-14.09	44.71	19.31	2.99	35.27	0.17	--	--	Peak
4	578.05	28.78	46.00	-17.22	33.19	25.87	4.02	34.52	0.22	--	--	Peak
5	852.56	32.97	46.00	-13.03	32.30	29.11	4.85	33.49	0.20	--	--	Peak
6	967.99	36.13	54.00	-17.87	32.54	31.24	5.09	33.12	0.38	--	--	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: Peak emission setting: RBW=120kHz; VBW = 300kHz.



CH Radiated Emissions (30MHz – 1GHz)

Test Mode	Mode 19	Polarization	H
Operating Function	Adapter Mode	Test Distance	3m

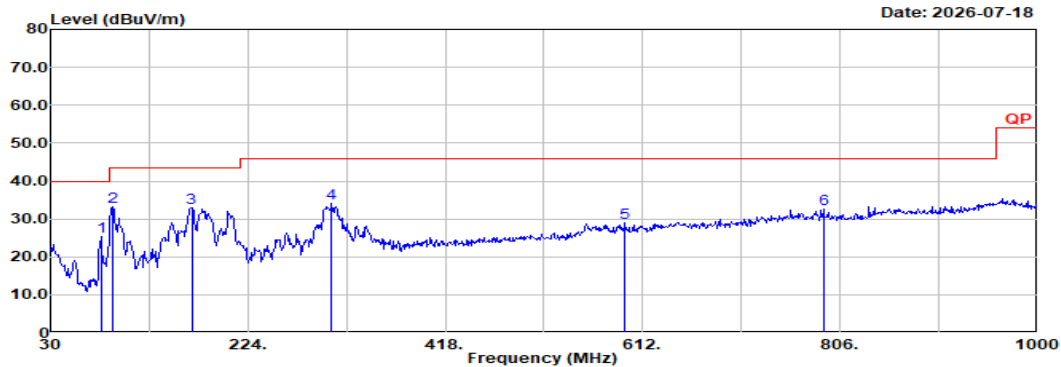

Site : 03CH20-HY
Condition : QP 3m Bilog_55606 & 08_251126 HORIZONTAL
RBW:120.000kHz VBW:300.000kHz SWT:0.500sec
Project : 660814
Detector : Peak
Channel : 05
Preamble_cidx: 10
rx_sts_Mode : 1
Packet_length: 127
Parameter_SET: BPRF_3
Setting : 22

	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	79.47	25.29	40.00	-14.71	46.07	13.14	1.65	35.73	0.16	--	--	Peak
2	91.11	33.21	43.50	-10.29	53.00	14.04	1.75	35.72	0.14	--	--	Peak
3	168.71	33.04	43.50	-10.46	50.30	15.83	2.28	35.58	0.21	--	--	Peak
4	306.45	34.15	46.00	-11.85	46.95	19.31	2.99	35.27	0.17	--	--	Peak
5	594.54	29.10	46.00	-16.90	33.37	25.90	4.08	34.48	0.23	--	--	Peak
6	789.51	32.57	46.00	-13.43	33.20	28.22	4.63	33.78	0.30	--	--	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: Peak emission setting: RBW=120kHz; VBW = 300kHz.



CH Radiated Emissions (30MHz – 1GHz)

Test Mode	Mode 19	Polarization	V
Operating Function	Adapter Mode	Test Distance	3m

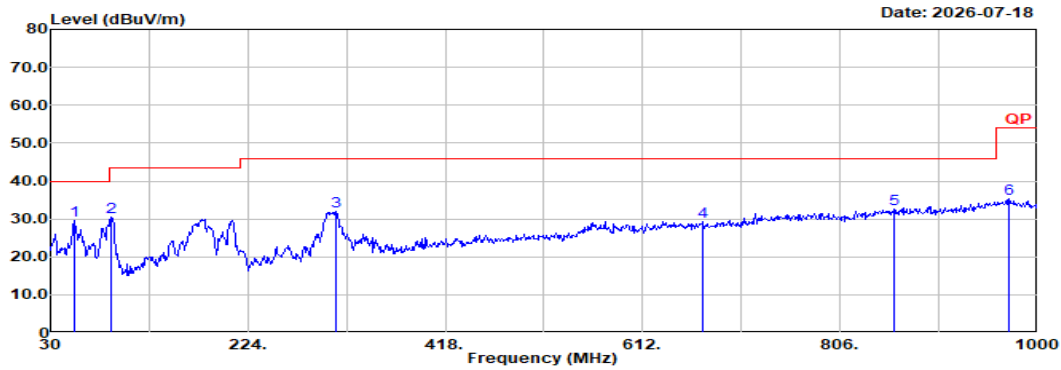

Site : 03CH20-HY
Condition : QP 3m Bilog_55606 & 08_251126 VERTICAL
RBW:120.000kHz VBW:300.000kHz SWT:0.500sec
Project : 660814
Detector : Peak
Channel : 05
Preamble_cidx: 10
rx_sts_Mode : 1
Packet_length: 127
Parameter_SET: BPRF_3
Setting : 22

	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	54.25	29.60	40.00	-10.40	50.69	13.08	1.41	35.76	0.18	--	--	Peak
2	89.17	30.51	43.50	-12.99	50.56	13.80	1.73	35.72	0.14	--	--	Peak
3	310.33	32.02	46.00	-13.98	44.83	19.28	3.00	35.26	0.17	--	--	Peak
4	671.17	29.28	46.00	-16.72	32.45	26.48	4.30	34.20	0.25	--	--	Peak
5	859.35	32.71	46.00	-13.29	31.98	29.13	4.86	33.47	0.21	--	--	Peak
6	971.87	35.35	54.00	-18.65	31.90	31.06	5.11	33.10	0.38	--	--	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: Peak emission setting: RBW=120kHz; VBW = 300kHz.



CH Radiated Emissions (30MHz – 1GHz)

Test Mode	Mode 29	Polarization	H
Operating Function	Adapter Mode	Test Distance	3m

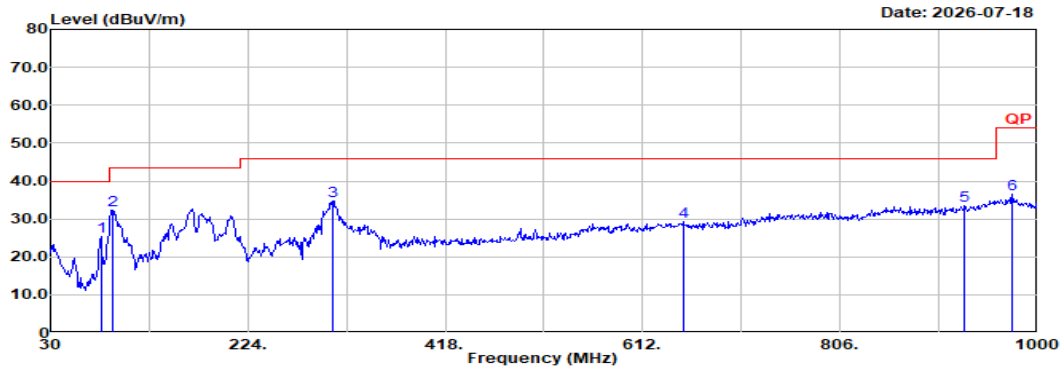

Site : 03CH20-HY
Condition : QP 3m Bilog_55606 & 08_251126 HORIZONTAL
RBW:120.000kHz VBW:300.000kHz SWT:0.500sec
Project : 660814
Detector : Peak
Channel : 09
Preamble_cidx: 25
rx_sts_Mode : 1
Packet_length: 127
Parameter_SET: HPRF_12
Setting : 19

	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	79.47	25.36	40.00	-14.64	46.14	13.14	1.65	35.73	0.16	--	--	Peak
2	91.11	32.27	43.50	-11.23	52.06	14.04	1.75	35.72	0.14	--	--	Peak
3	307.42	34.82	46.00	-11.18	47.63	19.30	2.99	35.27	0.17	--	--	Peak
4	651.77	29.36	46.00	-16.64	32.70	26.42	4.25	34.26	0.25	--	--	Peak
5	928.22	33.43	46.00	-12.57	31.99	29.38	5.01	33.26	0.31	--	--	Peak
6	974.78	36.44	54.00	-17.56	33.16	30.88	5.11	33.09	0.38	--	--	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)


Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: Peak emission setting: RBW=120kHz; VBW = 300kHz.



CH Radiated Emissions (30MHz – 1GHz)

Test Mode	Mode 29	Polarization	V
Operating Function	Adapter Mode	Test Distance	3m

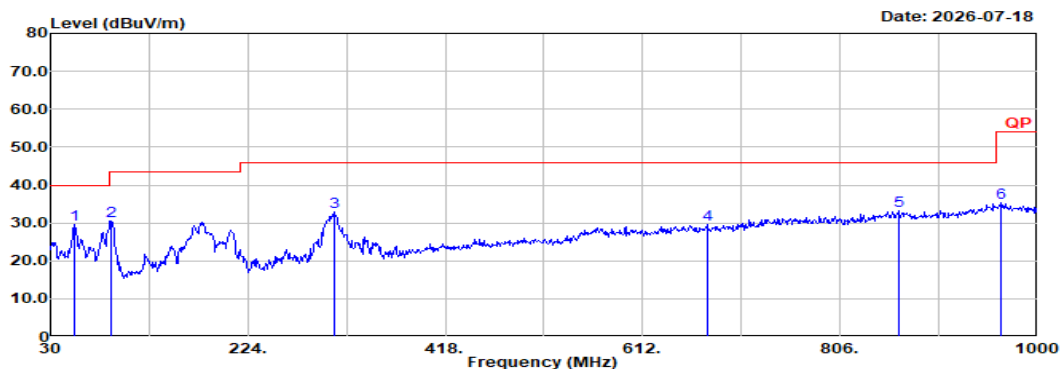

Site : 03CH20-HY
Condition : QP 3m Bilog_55606 & 08_251126 VERTICAL
RBW:120.000kHz VBW:300.000kHz SWT:0.500sec
Project : 660814
Detector : Peak
Channel : 09
Preamble_cidx: 25
rx_sts_Mode : 1
Packet_length: 127
Parameter_SET: HPRF_12
Setting : 19

	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	
1	54.25	29.51	40.00	-10.49	50.60	13.08	1.41	35.76	0.18	--	--	Peak
2	89.17	30.59	43.50	-12.91	50.64	13.80	1.73	35.72	0.14	--	--	Peak
3	308.39	32.92	46.00	-13.08	45.71	19.30	3.00	35.26	0.17	--	--	Peak
4	675.05	29.61	46.00	-16.39	32.70	26.53	4.32	34.18	0.24	--	--	Peak
5	863.23	33.20	46.00	-12.80	32.42	29.15	4.87	33.46	0.22	--	--	Peak
6	964.11	35.20	54.00	-18.80	31.63	31.25	5.08	33.13	0.37	--	--	Peak

Note 1: ">20dB" means spurious emission levels that exceed the level of 20 dB below the applicable limit.

Note 2: "N/F" means Nothing Found spurious emissions (No spurious emissions were detected.)

Note 3: Measurement receive antenna polarization: H (Horizontal), V (Vertical)

Note 4: Peak emission setting: RBW=120kHz; VBW = 300kHz.