FCC RF Test Report

APPLICANT	:	Motorola Mobility LLC
EQUIPMENT	:	Mobile Cellular Phone
BRAND NAME	:	Motorola
MODEL NAME	:	XT2651-1, XT2651-2, XT2651-3
FCC ID	:	IHDT56AW3
STANDARD	:	FCC Part 15 Subpart C §15.209
CLASSIFICATION	:	(DCD) Part 15 Low Power Transmitter Below 1705 kHz
TEST DATE(S)	:	Jan. 06, 2026 ~ Jan. 20, 2026

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia

ACCREDITED
Cert #5145.02

Sporton International Inc. (Kunshan)
No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China

Table of Contents

History of this test report **3**
Summary of Test Result **4**
1 General Description **5**
1.1 Applicant 5
1.2 Manufacturer 5
1.3 Product Feature of Equipment Under Test 5
1.4 Modification of EUT 5
1.5 Test Location 6
1.6 Test Software 6
1.7 Applied Standards 6
1.8 Specification of Accessory 7
2 Test Configuration of Equipment Under Test **8**
2.1 Test Mode 8
2.2 Connection Diagram of Test System 9
2.3 Support Unit used in test configuration and system 9
3 Test Result **10**
3.1 20dB and 99% Occupied Bandwidth Measurement 10
3.2 Radiated Emission Measurement 12
3.3 AC Conducted Emission Measurement 21
3.4 Antenna Requirements 25
4 List of Measuring Equipment **26**
5 Measurement Uncertainty **27**
Appendix A. Setup Photographs

History of this test report

Report No.	Version	Description	Issued Date
FR5N1310E	01	Initial issue of report	Feb. 11, 2026

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	2.1049	20dB Bandwidth	Reporting Only	-
3.1	2.1049	99% Occupied Bandwidth	Reporting Only	-
3.2	15.209	Radiated Emission	Pass	Under limit 8.41 dB at 60.07 MHz
3.3	15.207	AC Conducted Emission	Pass	Under limit 12.34 dB at 0.166 MHz
3.4	15.203	Antenna Requirements	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section “Measurement Uncertainty”

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2651-1, XT2651-2, XT2651-3
FCC ID	IHDT56AW3
IMEI / SN Code	Radiation : 351108230030799/351108230030807 Conducted: N2HT230112 Conduction: 350158880024015/350158880024023
WPT Frequency Range	110kHz~145kHz
WPT Type of Modulation	ASK
WPT Antenna Type	Coil Antenna
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Test Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	**Sporton Site No.**	**FCC Designation No.**	**FCC Test Firm Registration No.**
	CO01-KS 03CH02-KS TH01-KS	CN1257	314309

1.6 Test Software

Item	Site	Manufacture	Name	Version
1.	03CH02-KS	AUDIX	E3	6.2009-8-24al
2.	CO01-KS	AUDIX	E3	6.2009-8-24

1.7 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15 Subpart C §15.209, §15.207
- FCC KDB 414788 D01 Radiated Test Site v01r01.
- ANSI C63.10-2020+Cor.1-2023

Remark: All test items were verified and recorded according to the standards and without any deviation during the test.

1.8 Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	**Brand Name**	Motorola(Salcomp)	**Model Name**	MC-901
AC Adapter 1(EU)	**Brand Name**	Motorola(Salcomp)	**Model Name**	MC-902
AC Adapter 1(UK)	**Brand Name**	Motorola(Salcomp)	**Model Name**	MC-903
AC Adapter 1(AU)	**Brand Name**	Motorola(Salcomp)	**Model Name**	MC-905
AC Adapter 1(AR)	**Brand Name**	Motorola(Salcomp)	**Model Name**	MC-906
AC Adapter 1(BR)	**Brand Name**	Motorola(Salcomp)	**Model Name**	MC-907
AC Adapter 1(Chile)	**Brand Name**	Motorola(Salcomp)	**Model Name**	MC-909
AC Adapter 2(IN)	**Brand Name**	Motorola(Salcomp)	**Model Name**	MC-904
AC Adapter 2(IN Local)	**Brand Name**	Motorola(Salcomp)	**Model Name**	MC-904
AC Adapter 3(US)	**Brand Name**	Motorola(AOHAI)	**Model Name**	MC-901
AC Adapter 3(EU)	**Brand Name**	Motorola(AOHAI)	**Model Name**	MC-902
AC Adapter 3(UK)	**Brand Name**	Motorola(AOHAI)	**Model Name**	MC-903
AC Adapter 3(AR)	**Brand Name**	Motorola(AOHAI)	**Model Name**	MC-906
AC Adapter 3(BR)	**Brand Name**	Motorola(AOHAI)	**Model Name**	MC-907
AC Adapter 3(Chile)	**Brand Name**	Motorola(AOHAI)	**Model Name**	MC-909
AC Adapter 4(IN)	**Brand Name**	Motorola(AOHAI)	**Model Name**	MC-904
AC Adapter 4(IN Local)	**Brand Name**	Motorola(AOHAI)	**Model Name**	MC-904
Battery 1	**Brand Name**	Motorola(ATL)	**Model Name**	SH29
Battery 2	**Brand Name**	Motorola(ATL)	**Model Name**	SH31
USB Cable 1	**Brand Name**	Motorola(SAIBAO)	**Model Name**	SC18D71644
USB Cable 2	**Brand Name**	Motorola(Luxshare)	**Model Name**	SC18E08104
USB Cable 3	**Brand Name**	Motorola(SAIBAO)	**Model Name**	SC18D86731
USB Cable 4	**Brand Name**	Motorola(Luxshare)	**Model Name**	SC18E08103
USB Cable 5	**Brand Name**	Motorola(SAIBAO)	**Model Name**	SC18E46326
USB Cable 6	**Brand Name**	Motorola(SAIBAO)	**Model Name**	SC18E59082
Stylus	**Brand Name**	Motorola(Maxeye)	**Model Name**	XT2604-1

2 Test Configuration of Equipment Under Test

2.1 Test Mode

a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 1000 MHz).

b. AC power line Conducted Emission was tested under maximum output power.

Test Items	Function Type
AC Conducted Emission	Mode 1: WPT Charging + Battery Level < 10% (Load) + Charging distance:0 mm + Tx(Reverse charging) With Phone Mode 2: WPT Charging + Battery Level 50% (40%`60% ) ( Load) + Charging distance:0 mm + Tx(Reverse charging) With Phone Mode 3: WPT Charging + Battery Level >90% ( Load)+ Charging distance:0 mm + Tx(Reverse charging) With Phone Mode 4: WPT Charging + Battery Level 50% ( 40%`60%) (Load) + Charging distance:2 mm + Tx(Reverse charging) With Phone Mode 5: WPT Charging + Battery Level 50% (40%`60%) (Load) + Charging distance:2 mm + Tx(Reverse charging) With Stylus
Radiated Emission	Mode 1: WPT Charging + Battery Level < 10% (Load) + Charging distance:0 mm + Tx(Reverse charging) With Phone Mode 2: WPT Charging + Battery Level 50% (40%`60% ) ( Load)+ Charging distance:0 mm + Tx(Reverse charging) With Phone Mode 3: WPT Charging + Battery Level >90%( Load)+ Charging distance: 0 mm + Tx(Reverse charging) With Phone Mode 4: WPT Charging + Battery Level 50% ( 40%`60%) (Load)+ Charging distance:2 mm + Tx(Reverse charging) With Phone Mode 5: WPT Charging + Battery Level 50% (40%`60%) (Load)+ Charging distance:0 mm + Tx(Reverse charging) With Stylus
Remark: **1.** The worst case of conducted emission is mode 4; only the test data of it was reported. **2.** The worst case of radiated emission is mode 2; only the test data of it was reported. **3.** The tests were performed with Adapter1 and USB Cable1.	

2.2 Connection Diagram of Test System

This example is connection diagram of EUT test configurations.

. For detail, please refer to test mode configuration and setup photographs for each test item.

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Mobile Phone	Motorola	N/A	N/A	N/A	N/A

3 Test Result

3.1 20dB and 99% Occupied Bandwidth Measurement

3.1.1 Limit of 20dB and 99% Occupied Bandwidth

Reporting only, 99% OBW shall not located within 15.205 restricted bands.

3.1.2 Measuring Instruments

See list of measuring equipment of this test report.

3.1.3 Test Procedures

1. The 20dB bandwidth is measured with a spectrum analyzer connected via a receiver antenna placed near the EUT while wirelessly charging a charging board.
2. Use the following spectrum analyzer settings for 99 % Bandwidth measurement.
3. Measure and record the results in the test report.

3.1.4 Test Setup

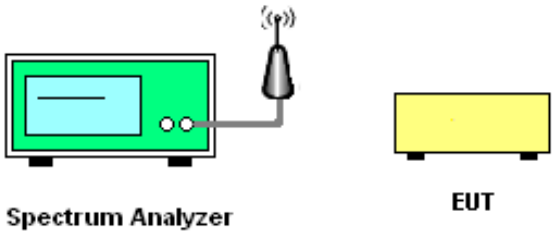

3.1.5 Test Result of 20dB and 99% Bandwidth

Test Engineer :	Smile	**Temperature :**	22~24℃
		Relative Humidity :	53~55%

Occupied Bandwidth (kHz)	Frequency (kHz)
20dB Bandwidth(KHz)	0.742
99% Bandwidth(KHz)	0.630

Remark: Because the measured signal is CW adjusting the RBW per C63.10 would not be practical since measured bandwidth will always follow the RBW and the result will be approximately twice the RBW

20 dB Bandwidth Plot

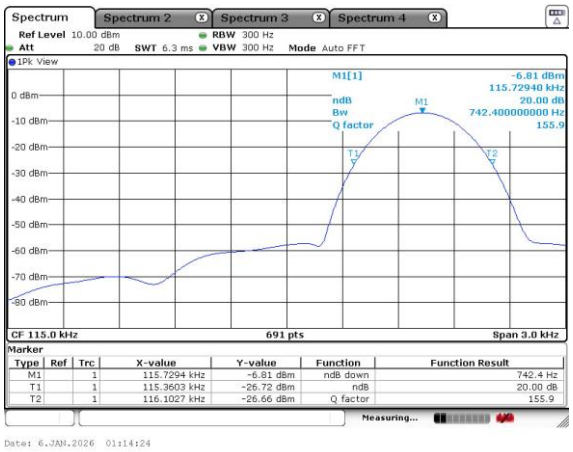

99% Occupied Bandwidth Plot

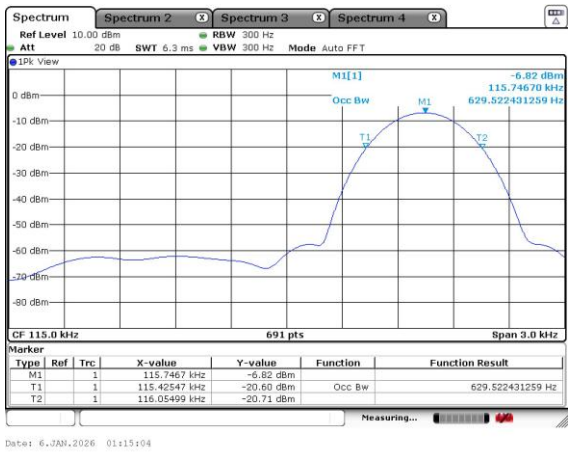

3.2 Radiated Emission Measurement

3.2.1 Limit of Radiated Emission

The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Receiver Parameter	Setting
Frequency Range: 9kHz~150kHz	RBW 200Hz for QP
Frequency Range: 150kHz~30MHz	RBW 9kHz for QP
Frequency Range: 30MHz~1000MHz	RBW 120kHz for Peak

Note: The emission limits shown in the above table are based on measurements employing a CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz. Radiated emission limits in these two bands are based on measurements employing an average detector.

For radiated emissions from 9kHz to 1GHz test distance is 3m

For 9kHz ~ 30MHz

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Distance extrapolation factor = 40 log (specific distance / test distance) (dB);
3. specific line (dBμV/m) = 20 log Emission level (μV/m)
4. Limit line = specific limits (dBμV/m) + distance extrapolation factor.

3.2.2 Measuring Instruments

See list of measuring equipment of this test report.

3.2.3 Measuring Instrument Setting

Follow the guidelines in C63.10 with respect to maximizing the emission by rotating the EUT, measuring the emission for three EUT orthogonal planes, and adjusting the measurement antenna height and polarization. A pre-amp and a high pass filter are used for this test in order to get the good signal level.

3.2.4 Test Setup of Radiated Emission

For radiated emissions below 30MHz

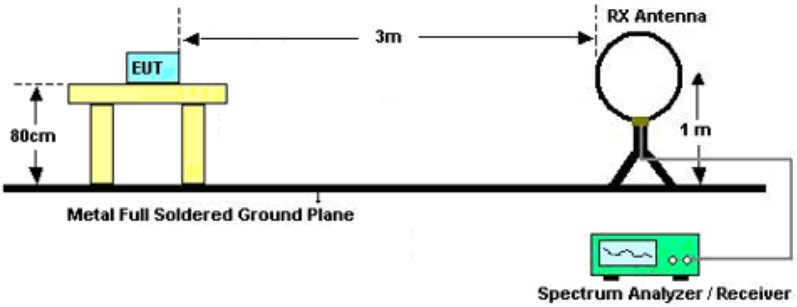

Note:

1. There is a comparison data of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.
2. Tested for radiated below 30 MHz using a loop antenna in accordance with C63.10, the antenna was positioned in three antenna orientations: horizontal, vertical, and ground-parallel three polarization's, the worst case is horizontal & vertical polarization, test data of two mode was reported.

For radiated emissions above 30MHz

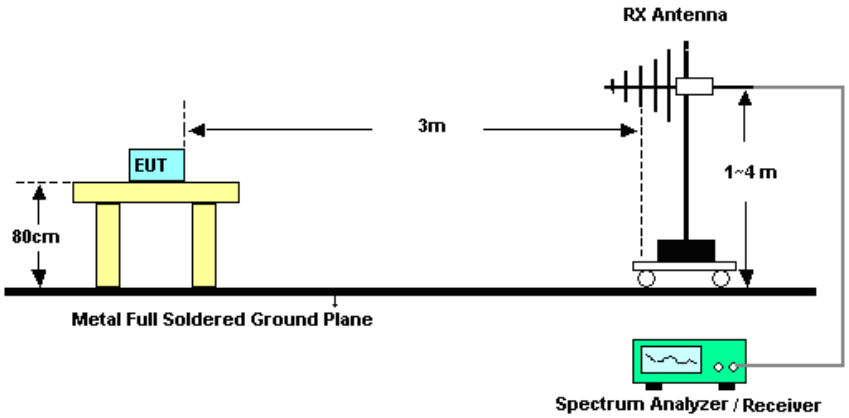

3.2.5 Test Result of Fundamental Emission

Frequency (MHz)	Level (dBuV/m) @3m	Distance Factor (dB)	Corrected level @300m (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Remark	Pol/Phase
0.1155	84.81	80	4.81	26.35	-21.54	64.89	19.84	0.08	AV	Perpendicular
0.1151	79.38	80	-0.62	26.38	-27	59.46	19.84	0.08	AV	Parallel

Note: The field strength is tested at 3m distance then convert to 300m by adding distance factor 40*log(d1/d2)

Test Engineer :	Moon	Temperature :	21~22°C
Polarization :	Horizontal	Relative Humidity :	45~46%

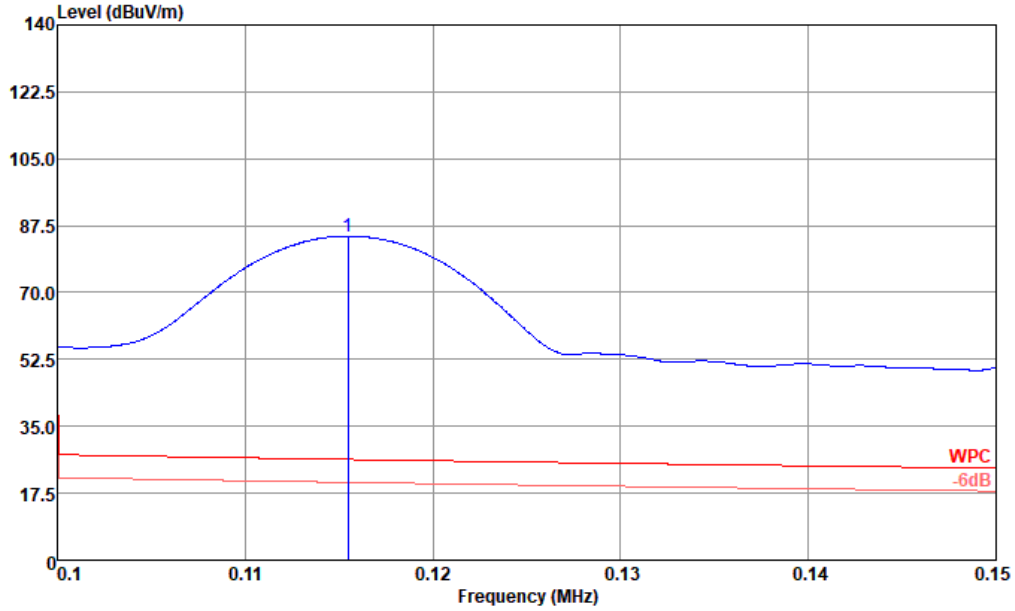

Site : 03CH02-KS
Condition : WPC 3m HFH2-Z2E-101125-2 1 HORIZONTAL

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	
1 a	0.1155	84.81	58.46	26.35	64.89	19.84	0.08	---	---	Average

Test Engineer :	Moon	Temperature :	21~22°C
Polarization :	Vertical	Relative Humidity :	45~46%

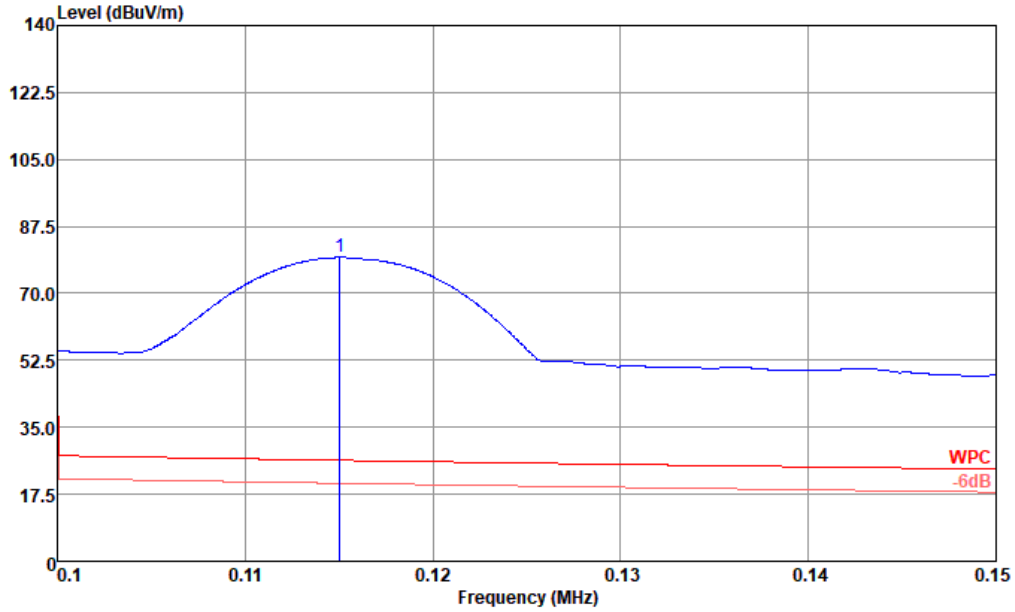

Site : 03CH02-KS
Condition : WPC 3m HFH2-Z2E-101125-2 1 VERTICAL

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	A/Pos	T/Pos	Remark
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	
1 a	0.1151	79.38	53.00	26.38	59.46	19.84	0.08	---	---	Average

3.2.6 Test Result of Radiated Emission (9kHz ~ 30MHz)

Frequency (MHz)	Level 3m (dBuV/m)	Distance Factor(dB)	Corrected Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Remark	Pol/Phase
0.0299	57.02	80	-22.98	38.09	-61.07	36.97	19.99	0.06	Average	Horizontal
0.0495	50.11	80	-29.89	33.71	-63.6	30.06	19.99	0.06	Average	Horizontal
0.5774	53.12	40	13.12	32.37	-19.25	33.26	19.77	0.09	QP	Horizontal
6.648	32.7	40	-7.3	29.5	-36.8	12.76	19.78	0.16	QP	Horizontal
8.468	34.25	40	-5.75	29.5	-35.25	14.25	19.82	0.18	QP	Horizontal
29.524	31.45	40	-8.55	29.5	-38.05	10.43	20.56	0.46	QP	Horizontal
0.0207	57.9	80	-22.1	41.27	-63.37	37.67	20.18	0.05	Average	Vertical
0.043	51.48	80	-28.52	34.93	-63.45	31.43	19.99	0.06	Average	Vertical
0.5774	48.82	40	8.82	32.37	-23.55	28.96	19.77	0.09	QP	Vertical
7.040	33.89	40	-6.11	29.5	-35.61	13.91	19.81	0.17	QP	Vertical
8.440	34.76	40	-5.24	29.5	-34.74	14.76	19.82	0.18	QP	Vertical
29.496	31.32	40	-8.68	29.5	-38.18	10.3	20.56	0.46	QP	Vertical

Note:

1. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
2. Distance extrapolation factor = 40 log (specific distance / test distance) (dB);
3. Corrected Level = Level @3m (dBμV/m) - distance extrapolation factor.

Test Engineer :	Moon	Temperature :	21~22°C
Polarization :	Horizontal	Relative Humidity :	45~46%

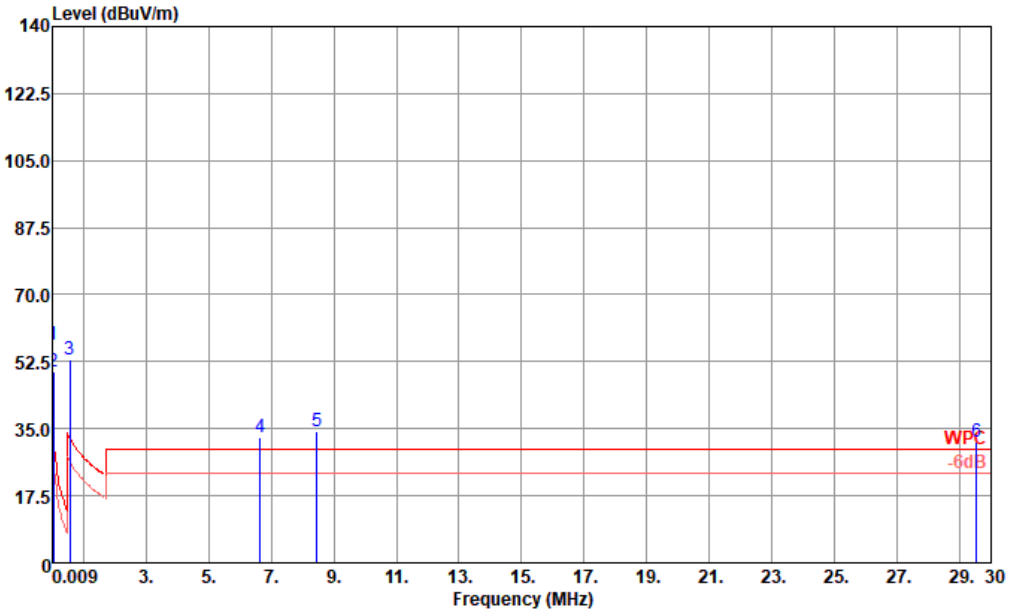

Site : 03CH02-KS
Condition : WPC 3m HFH2-Z2E-101125-2 1 HORIZONTAL

		Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	A/Pos	T/Pos	Remark
		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	
1	a	0.0299	57.02		38.09	36.97	19.99	0.06	---	---	Average
2	*	0.0495	50.11		33.71	30.06	19.99	0.06	---	---	Average
3	q	0.5774	53.12		32.37	33.26	19.77	0.09	---	---	QP
4	*	6.6480	32.70		29.50	12.76	19.78	0.16	---	---	QP
5	*	8.4680	34.25		29.50	14.25	19.82	0.18	---	---	QP
6	*	29.5240	31.45		29.50	10.43	20.56	0.46	---	---	QP

Test Engineer :	Moon	Temperature :	21~22°C
Polarization :	Vertical	Relative Humidity :	45~46%

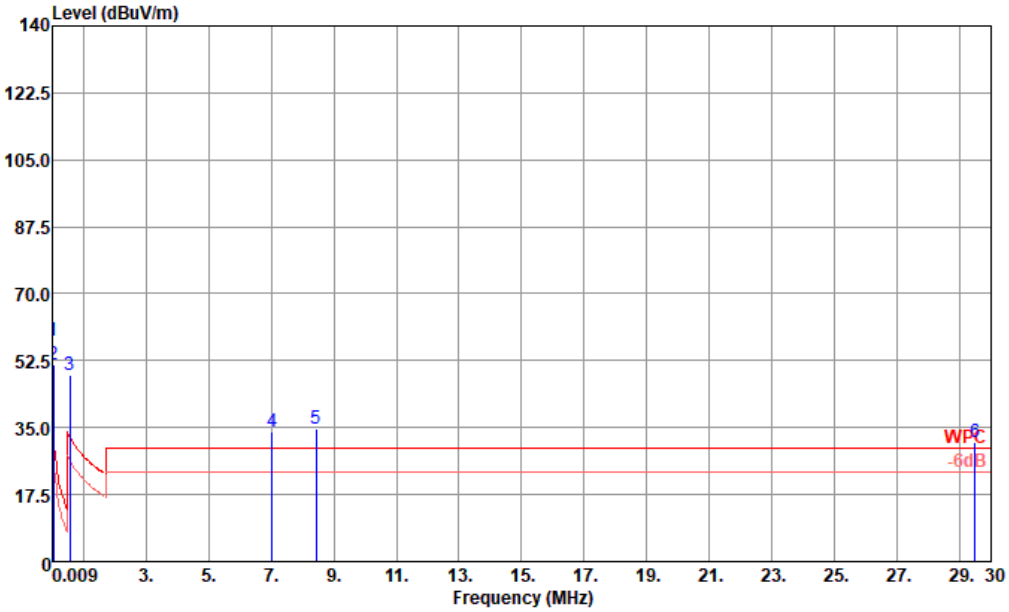

Site : 03CH02-KS
Condition : WPC 3m HFH2-Z2E-101125-2 1 VERTICAL

		Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	A/Pos	T/Pos	Remark
		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	
1	a	0.0207	57.90		41.27	37.67	20.18	0.05	---	---	Average
2	*	0.0430	51.48		34.93	31.43	19.99	0.06	---	---	Average
3	q	0.5774	48.82		32.37	28.96	19.77	0.09	---	---	QP
4	*	7.0400	33.89		29.50	13.91	19.81	0.17	---	---	QP
5	*	8.4400	34.76		29.50	14.76	19.82	0.18	---	---	QP
6	*	29.4960	31.32		29.50	10.30	20.56	0.46	---	---	QP

3.2.7 Test Result of Radiated Emission (30MHz ~ 1000MHz)

Test Engineer :	Moon	Temperature :	21~22°C
Polarization :	Horizontal	Relative Humidity :	45~46%

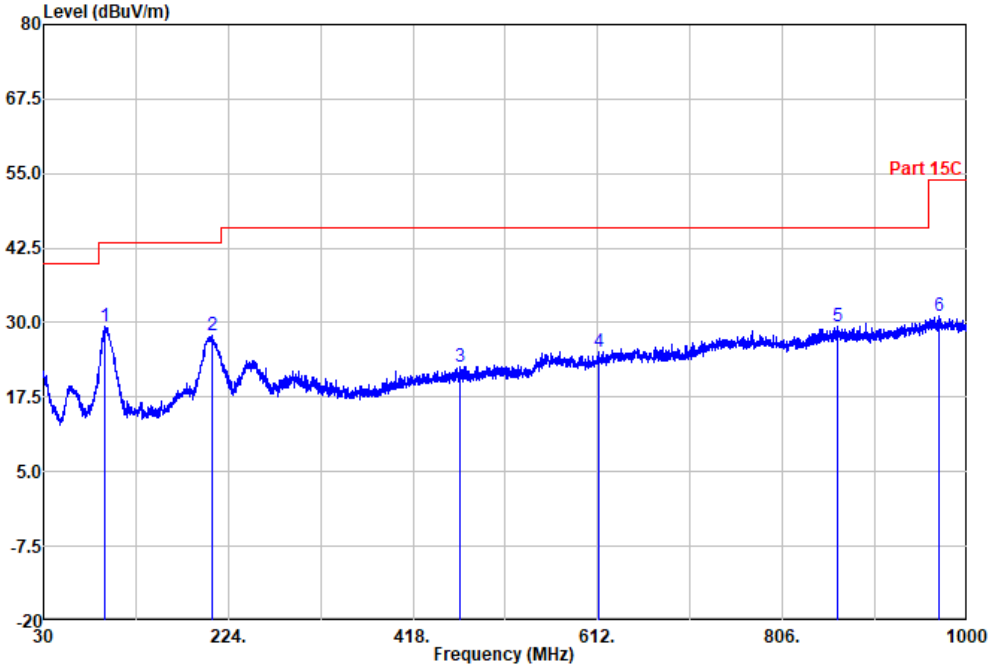

Site : 03CH02-KS
Condition: Part 15C 3m CBL6111D SN 59915 Horizontal

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	93.78	29.34	43.50	-14.16	45.82	15.42	1.02	32.92	---	---	Peak
2	207.51	27.97	43.50	-15.53	43.85	15.28	1.60	32.76	---	---	Peak
3	467.96	22.59	46.00	-23.41	29.97	23.57	2.37	33.32	---	---	Peak
4	612.24	25.16	46.00	-20.84	29.76	26.22	2.69	33.51	---	---	Peak
5	864.20	29.30	46.00	-16.70	29.07	29.87	3.18	32.82	---	---	Peak
6	970.42	31.13	54.00	-22.87	28.14	31.25	3.37	31.63	---	---	Peak

Test Engineer :	Moon	Temperature :	21~22°C
Polarization :	Vertical	Relative Humidity :	45~46%

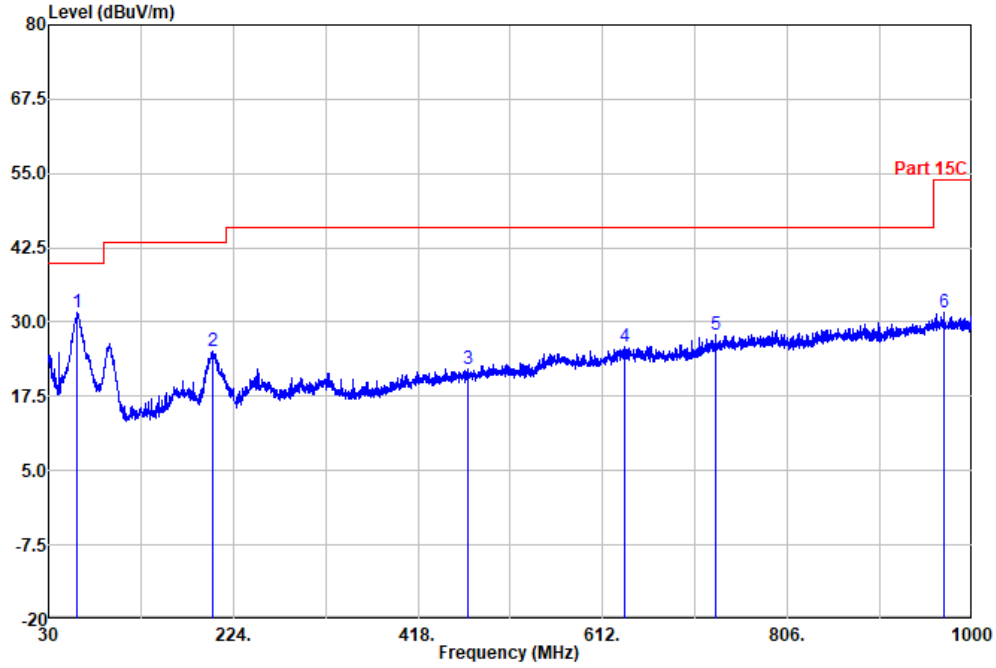

Site : 03CH02-KS
Condition: Part 15C 3m CBL6111D SN 59915 Vertical

	Freq	Level	Limit Line	Over Limit	Read Level	Ant Factor	Cable Loss	Preamp Factor	APos	TPos	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	
1	60.07	31.59	40.00	-8.41	51.66	12.13	0.66	32.86	---	---	Peak
2	201.69	25.17	43.50	-18.33	41.11	15.22	1.58	32.74	---	---	Peak
3	470.87	22.21	46.00	-23.79	29.53	23.64	2.37	33.33	---	---	Peak
4	634.31	25.84	46.00	-20.16	29.69	26.93	2.74	33.52	---	---	Peak
5	730.34	27.96	46.00	-18.04	30.37	28.20	2.93	33.54	---	---	Peak
6	969.69	31.56	54.00	-22.44	28.58	31.25	3.37	31.64	---	---	Peak

3.3 AC Conducted Emission Measurement

3.3.1 Limits of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of Emission (MHz)	Conducted Limit (dBµV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.3.2 Measuring Instruments

See list of measuring equipment of this test report.

3.3.3 Test Procedure

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.3.4 Test Setup

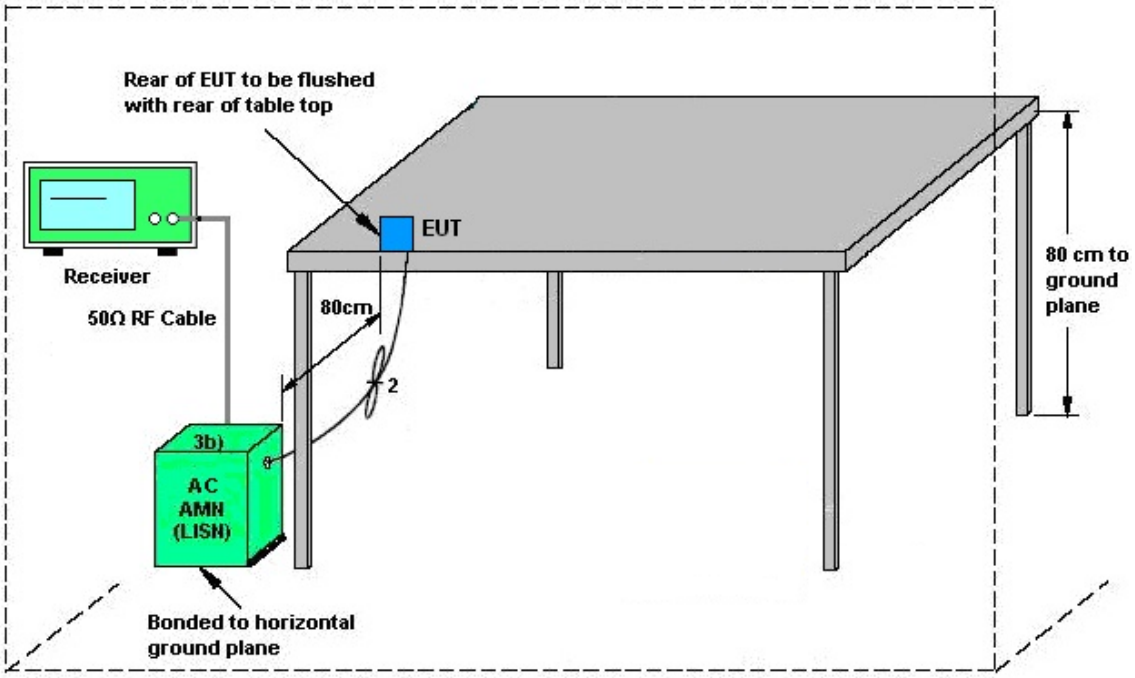

AMN = Artificial mains network (LISN)
AE = Associated equipment
EUT = Equipment under test
ISN = Impedance stabilization network

3.3.5 Test Result of AC Conducted Emission

Test Engineer :	Buck	**Temperature :**	25.3~26.2℃
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	**Phase :**	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

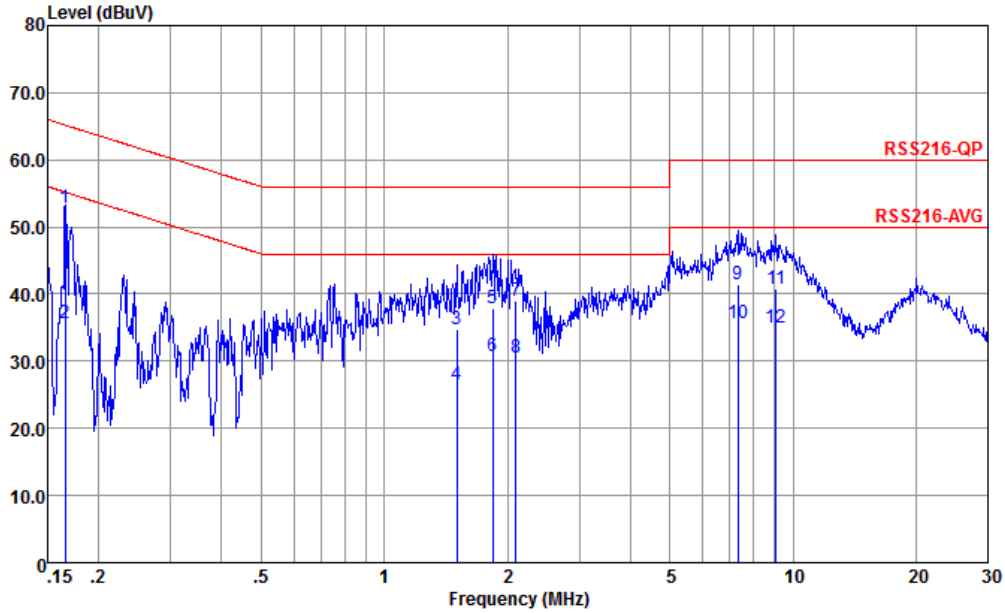

Site : CO01-KS
Condition : RSS216-QP LISN-100334-L 2025 LINE

		Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
		MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	*	0.166	52.82	-12.34	65.16	32.80	9.55	10.47	QP
2		0.166	35.62	-19.54	55.16	15.60	9.55	10.47	Average
3		1.503	34.75	-21.25	56.00	14.60	9.60	10.55	QP
4		1.503	26.45	-19.55	46.00	6.30	9.60	10.55	Average
5		1.839	37.94	-18.06	56.00	17.80	9.60	10.54	QP
6		1.839	30.64	-15.36	46.00	10.50	9.60	10.54	Average
7		2.099	39.04	-16.96	56.00	18.90	9.60	10.54	QP
8		2.099	30.64	-15.36	46.00	10.50	9.60	10.54	Average
9		7.329	41.50	-18.50	60.00	21.20	9.74	10.56	QP
10		7.329	35.60	-14.40	50.00	15.30	9.74	10.56	Average
11		9.107	40.86	-19.14	60.00	20.50	9.82	10.54	QP
12		9.107	34.96	-15.04	50.00	14.60	9.82	10.54	Average

Test Engineer :	Buck	**Temperature :**	25.3~26.2℃
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	**Phase :**	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

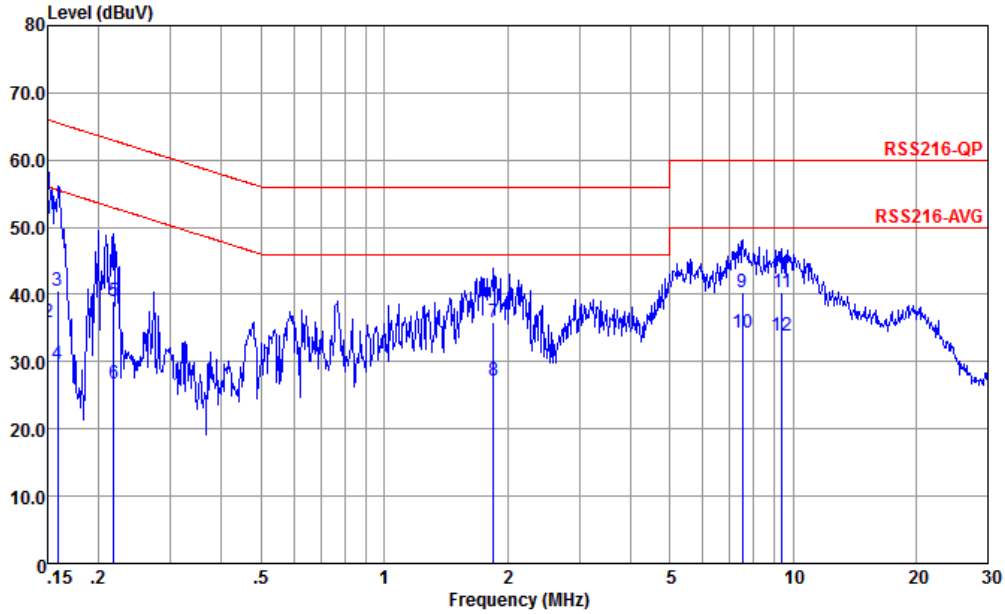

Site : CO01-KS
Condition : RSS216-QP LISN-100334-N 2025 NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.150	51.23	-14.77	66.00	31.20	9.56	10.47	QP
2	0.150	35.93	-20.07	56.00	15.90	9.56	10.47	Average
3	0.159	40.52	-25.00	65.52	20.50	9.55	10.47	QP
4	0.159	29.62	-25.90	55.52	9.60	9.55	10.47	Average
5	0.217	38.90	-24.02	62.92	18.80	9.62	10.48	QP
6	0.217	26.70	-26.22	52.92	6.60	9.62	10.48	Average
7	1.848	35.88	-20.12	56.00	15.50	9.84	10.54	QP
8	1.848	27.28	-18.72	46.00	6.90	9.84	10.54	Average
9	7.526	40.42	-19.58	60.00	20.20	9.66	10.56	QP
10	7.526	34.42	-15.58	50.00	14.20	9.66	10.56	Average
11	9.401	40.42	-19.58	60.00	20.20	9.68	10.54	QP
12	9.401	33.82	-16.18	50.00	13.60	9.68	10.54	Average

Note:

1. Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
2. Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)

3.4 Antenna Requirements

3.4.1 Standard Applicable

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited.

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.4.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 10, 2025	Jan. 13, 2026	Oct. 09, 2026	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2E	101125	9kHz~30MHz	Aug. 10, 2025	Jan. 13, 2026	Aug. 09, 2026	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6111D	59915	30MHz-1GHz	Aug. 12, 2025	Jan. 13, 2026	Aug. 11, 2026	Radiation (03CH02-KS)
Amplifier	SONOMA	310N	413740	9KHz-1GHz	Dec. 25, 2025	Jan. 13, 2026	Dec. 24, 2026	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	616010002473	N/A	NCR	Jan. 13, 2026	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Jan. 13, 2026	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Jan. 13, 2026	NCR	Radiation (03CH02-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 16, 2025	Jan. 20, 2026	Apr. 15, 2026	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Jul. 03, 2025	Jan. 20, 2026	Jul. 02, 2026	Conduction (CO01-KS)
AC LISN	MessTec	AN3016	060105	9kHz~30MHz	Dec. 24, 2025	Jan. 20, 2026	Dec. 23, 2026	Conduction (CO01-KS)
AC Power Source	Ouhan	APW-130NYT	`202201040060	AC 0V~300V,45Hz~1000Hz	Apr. 16, 2025	Jan. 20, 2026	Apr. 15, 2026	Conduction (CO01-KS)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Jul. 07, 2025	Jan. 06, 2026	Jul. 06, 2026	Conducted (TH01-KS)
Pulse Power Senor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2026	Jan. 06, 2026	Jan. 01, 2027	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2026	Jan. 06, 2026	Jan. 01, 2027	Conducted (TH01-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

Uncertainty of Conducted Measurement

Occupied Channel Bandwidth	**±0.384%**

Uncertainty of AC Conducted Emission Measurement (150 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	**2.84dB**

Uncertainty of Radiated Emission Measurement (9 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	**3.30dB**

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	**6.18dB**

---------- THE END ----------