

01_GSM850_GPRS 3 Tx slots_Right Cheek_0mm_Ch189

Communication System: GSM; Frequency: 836.400 MHz

Medium: HSL_600-7200_260818 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 43.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(9.82, 9.12, 9.75); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: GSM, 10027

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.245 W/kg; SAR (10g) = 0.163 W/kg;

TSL Correction: Positive only

Zoom Scan (42.0 mm x 42.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.10 dB

SAR (1g) = 0.267 W/kg; SAR (8g) = 0.194 W/kg; SAR (10g) = 0.186 W/kg

Smallest distance from peaks to all points 3 dB below = 16.4 mm

Ratio of SAR at M2 to SAR at M1 = 82.4 %

TSL Correction: Positive only

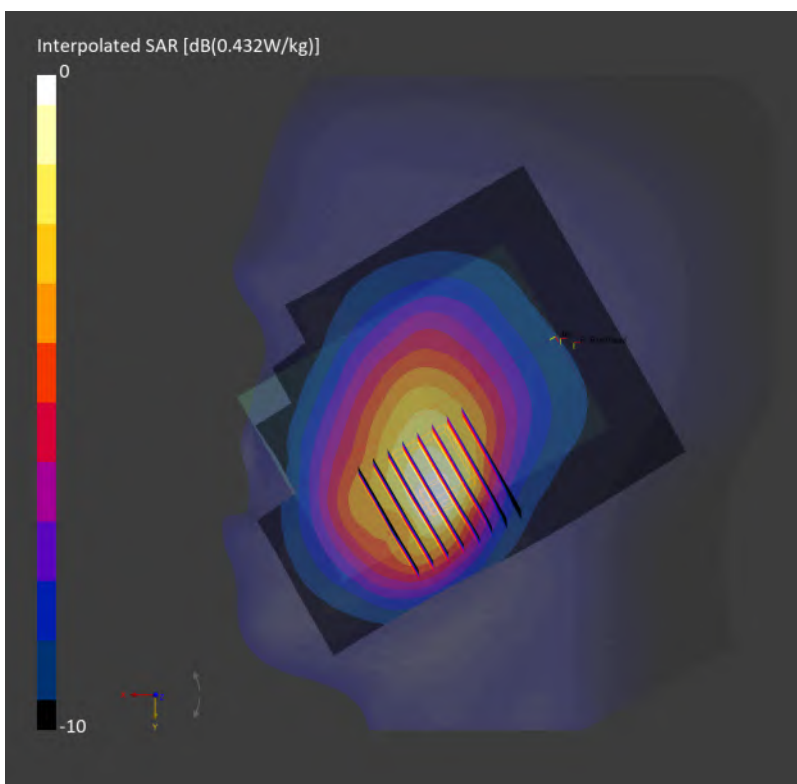

02_GSM1900_GPRS 4 Tx slots_Left Tilted_0mm_Ch661

Communication System: GSM; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260819 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.47$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(7.02, 7.58, 6.92); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: GSM, 10028

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.634 W/kg; SAR (10g) = 0.326 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 0.714 W/kg; SAR (8g) = 0.385 W/kg; SAR (10g) = 0.351 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 86.3 %

TSL Correction: Positive only

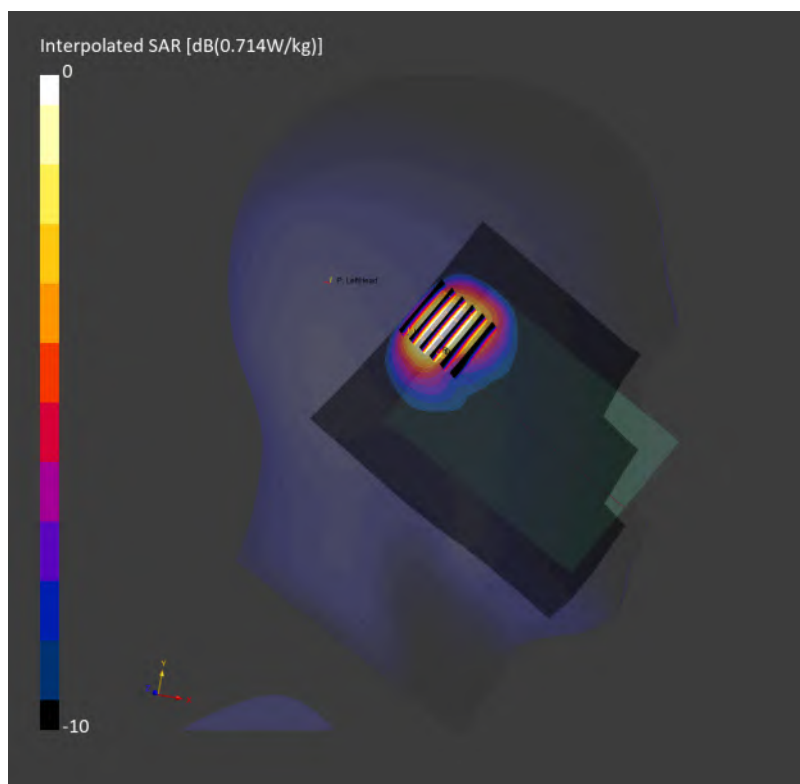

03_WCDMA II_RMC 12.2Kbps_Left Tilted_0mm_Ch9538

Communication System: UMTS-FDD; Frequency: 1907.600 MHz

Medium: HSL_600-7200_260901 Medium parameters used: $f = 1907.600$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 40.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.97, 7.4, 7.91); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: UMTS-FDD, 10011

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.929 W/kg; SAR (10g) = 0.476 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.978 W/kg; SAR (8g) = 0.529 W/kg; SAR (10g) = 0.482 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 82.8 %

TSL Correction: Positive only

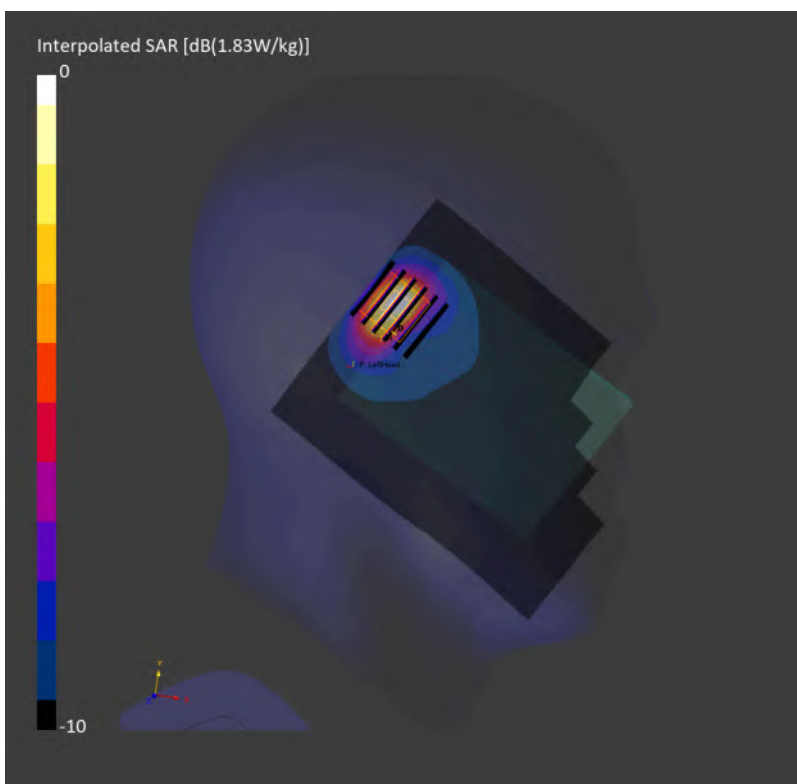

04_WCDMA IV_RMC 12.2Kbps_Left Tilted_0mm_Ch1513

Communication System: UMTS-FDD; Frequency: 1752.600 MHz

Medium: HSL_600-7200_260819 Medium parameters used: $f = 1752.600$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(8.25, 7.66, 8.19); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: UMTS-FDD, 10457

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.913 W/kg; SAR (10g) = 0.484 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.04 dB

SAR (1g) = 1.01 W/kg; SAR (8g) = 0.554 W/kg; SAR (10g) = 0.507 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 82.7 %

TSL Correction: Positive only

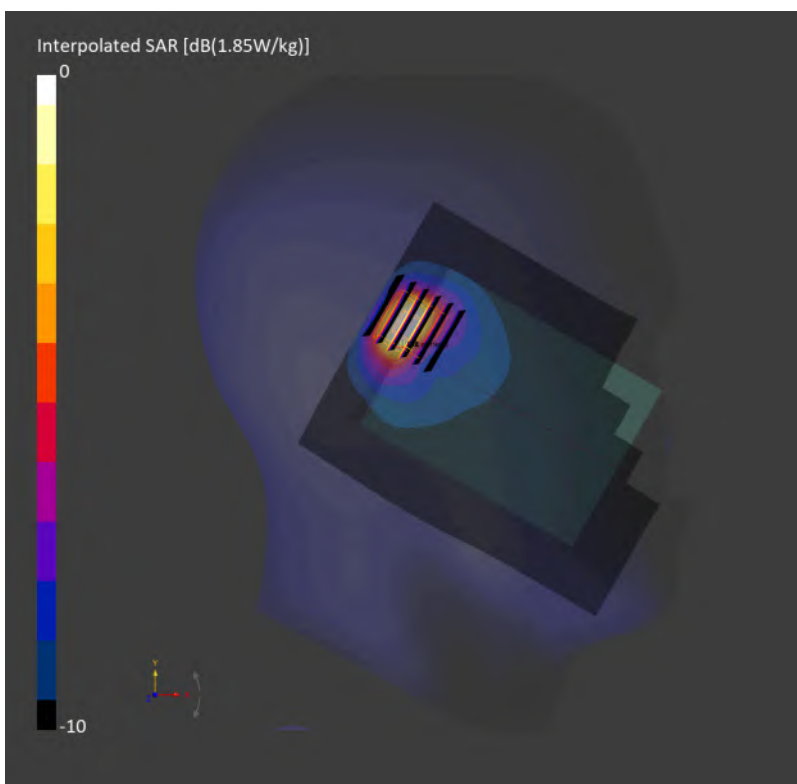

05_WCDMA V_RMC 12.2Kbps_Left Cheek_0mm_Ch4182

Communication System: UMTS-FDD; Frequency: 836.400 MHz

Medium: HSL_600-7200_260818 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.912$ S/m; $\epsilon_r = 43.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(9.82, 9.12, 9.75); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: UMTS-FDD, 10011

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.277 W/kg; SAR (10g) = 0.193 W/kg;

TSL Correction: Positive only

Zoom Scan (42.0 mm x 42.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.04 dB

SAR (1g) = 0.286 W/kg; SAR (8g) = 0.196 W/kg; SAR (10g) = 0.187 W/kg

Smallest distance from peaks to all points 3 dB below = 12.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.9 %

TSL Correction: Positive only

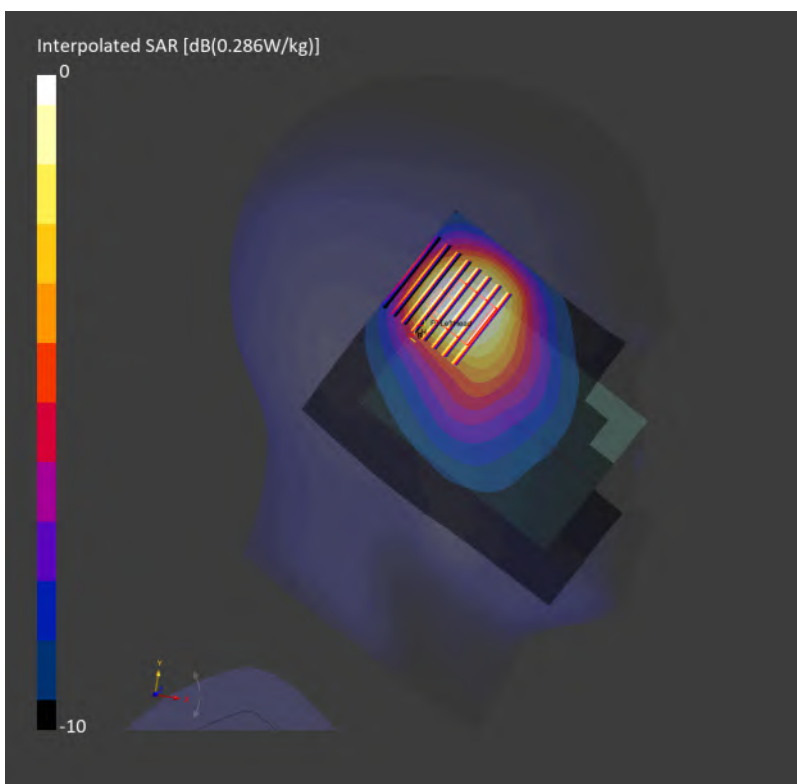

06_LTE Band 7_20M_QPSK_1_0_Left Tilted_0mm_Ch21100

Communication System: LTE-FDD; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260905 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.90$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.15, 7.62, 7.2); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.783 W/kg; SAR (10g) = 0.324 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.03 dB

SAR (1g) = 0.776 W/kg; SAR (8g) = 0.378 W/kg; SAR (10g) = 0.339 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 81.1 %

TSL Correction: Positive only

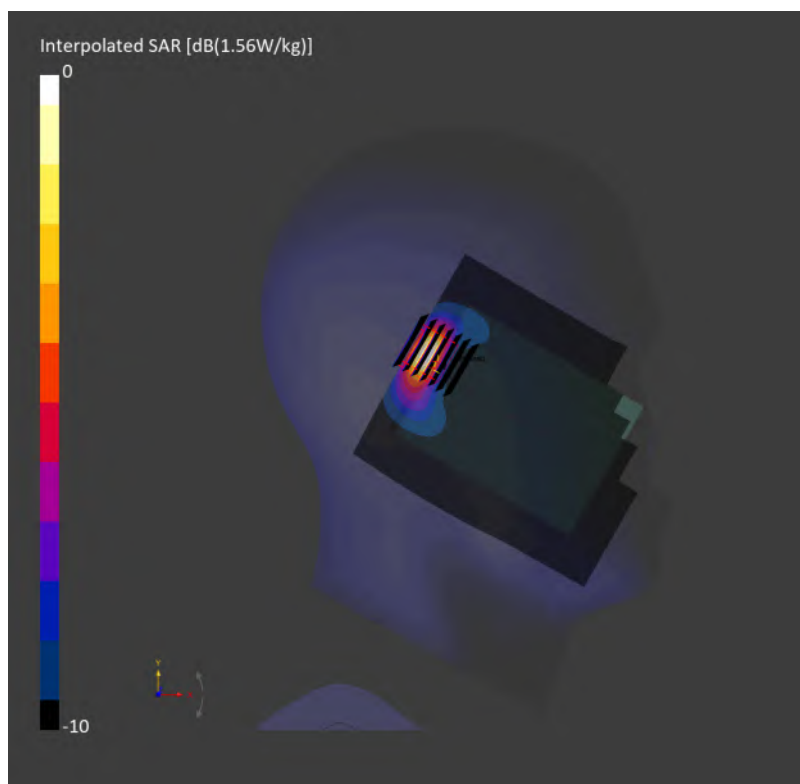

07_LTE Band 12_10M_QPSK_1_0_Left Tilted_0mm_Ch23095

Communication System: LTE-FDD; Frequency: 707.500 MHz

Medium: HSL_600-7200_260818 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.871$ S/m; $\epsilon_r = 43.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(10.04, 9.32, 9.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10175

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.308 W/kg; SAR (10g) = 0.188 W/kg;

TSL Correction: Positive only

Zoom Scan (38.0 mm x 38.0 mm x 33.4 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm


Power Drift = 0.08 dB

SAR (1g) = 0.387 W/kg; SAR (8g) = 0.195 W/kg; SAR (10g) = 0.181 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 61.8 %

TSL Correction: Positive only

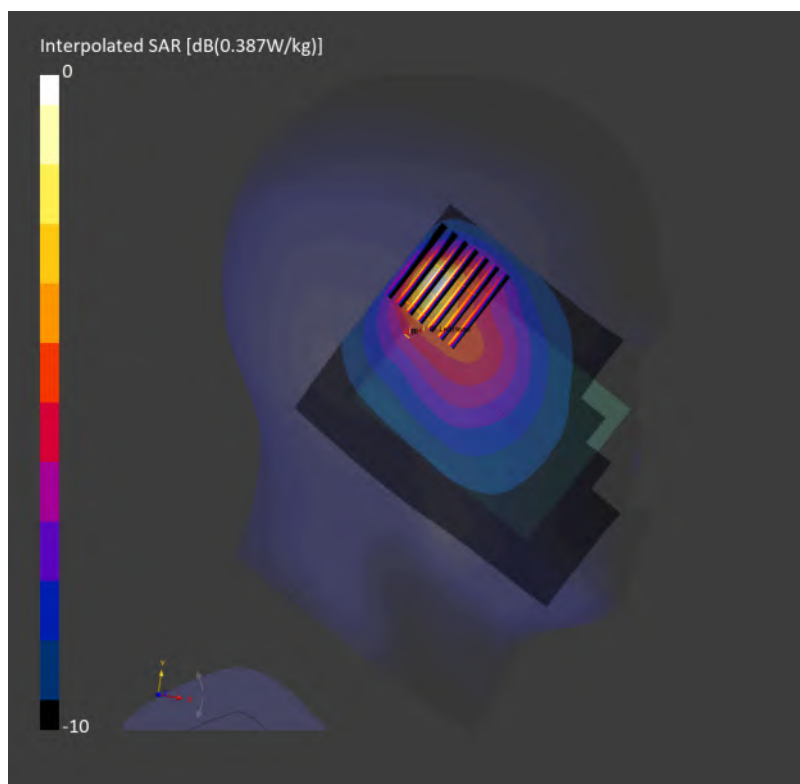

08_LTE Band 13_10M_QPSK_1_0_Left Tilted_0mm_Ch23230

Communication System: LTE-FDD; Frequency: 782.000 MHz

Medium: HSL_600-7200_260818 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.895$ S/m; $\epsilon_r = 43.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(10.04, 9.32, 9.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10175

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.235 W/kg; SAR (10g) = 0.148 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.227 W/kg; SAR (8g) = 0.141 W/kg; SAR (10g) = 0.132 W/kg

Smallest distance from peaks to all points 3 dB below = 11.8 mm

Ratio of SAR at M2 to SAR at M1 = 83.1 %

TSL Correction: Positive only

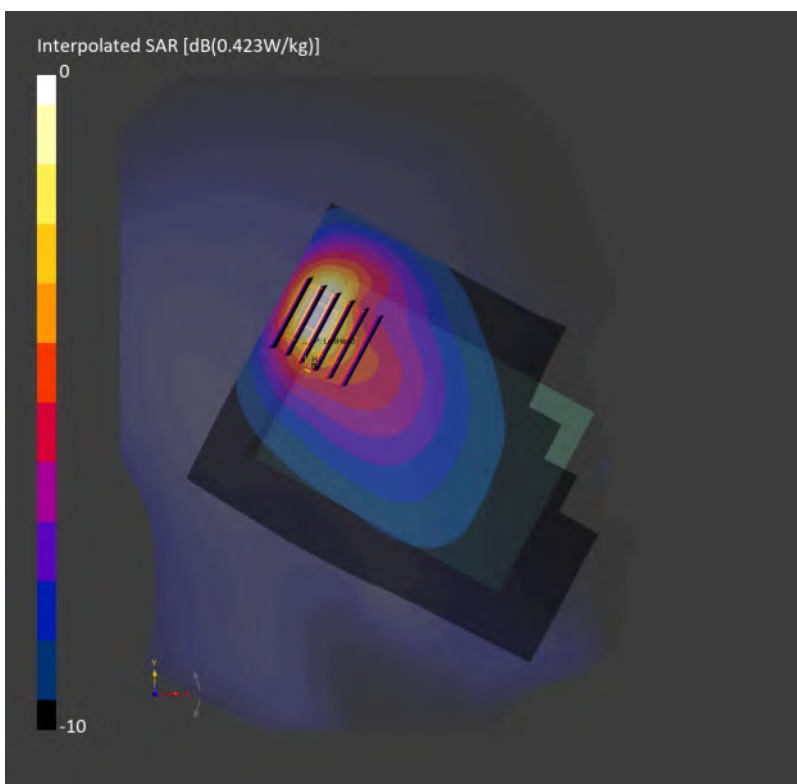

09_LTE Band 14_10M_QPSK_1_0_Left Tilted_0mm_Ch23330

Communication System: LTE-FDD; Frequency: 793.000 MHz

Medium: HSL_600-7200_260818 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 43.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(10.04, 9.32, 9.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10175

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.311 W/kg; SAR (10g) = 0.196 W/kg;

TSL Correction: Positive only

Zoom Scan (42.0 mm x 42.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.06 dB

SAR (1g) = 0.305 W/kg; SAR (8g) = 0.190 W/kg; SAR (10g) = 0.178 W/kg

Smallest distance from peaks to all points 3 dB below = 11.8 mm

Ratio of SAR at M2 to SAR at M1 = 82.9 %

TSL Correction: Positive only

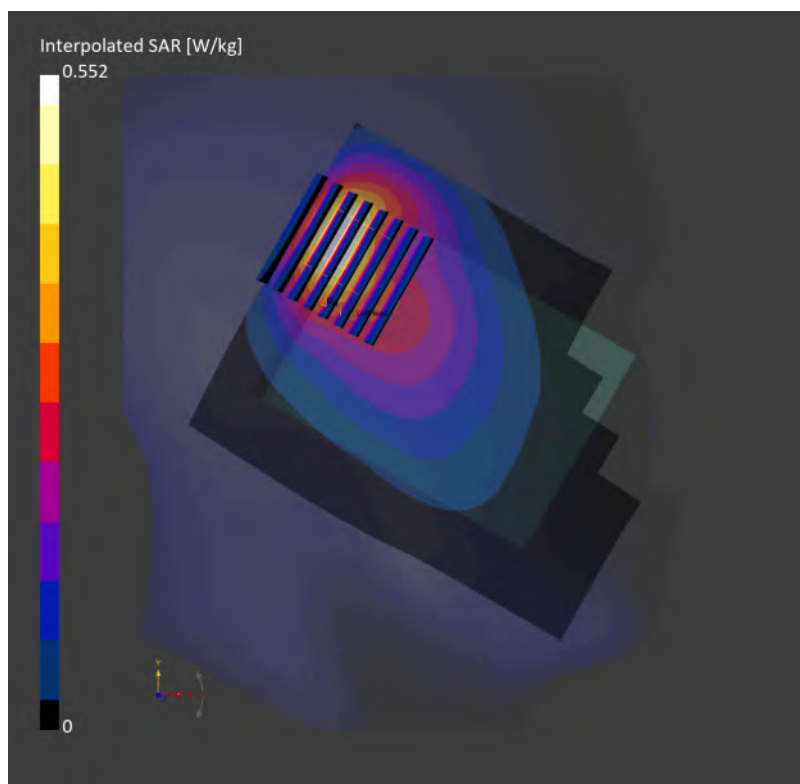

10_LTE Band 25_20M_QPSK_1_0_Left Tilted_0mm_Ch26590

Communication System: LTE-FDD; Frequency: 1905.000 MHz

Medium: HSL_600-7200_260830 Medium parameters used: $f = 1905.000$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.97, 7.4, 7.91); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.882 W/kg; SAR (10g) = 0.455 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.03 dB

SAR (1g) = 1.02 W/kg; SAR (8g) = 0.548 W/kg; SAR (10g) = 0.500 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 83.0 %

TSL Correction: Positive only

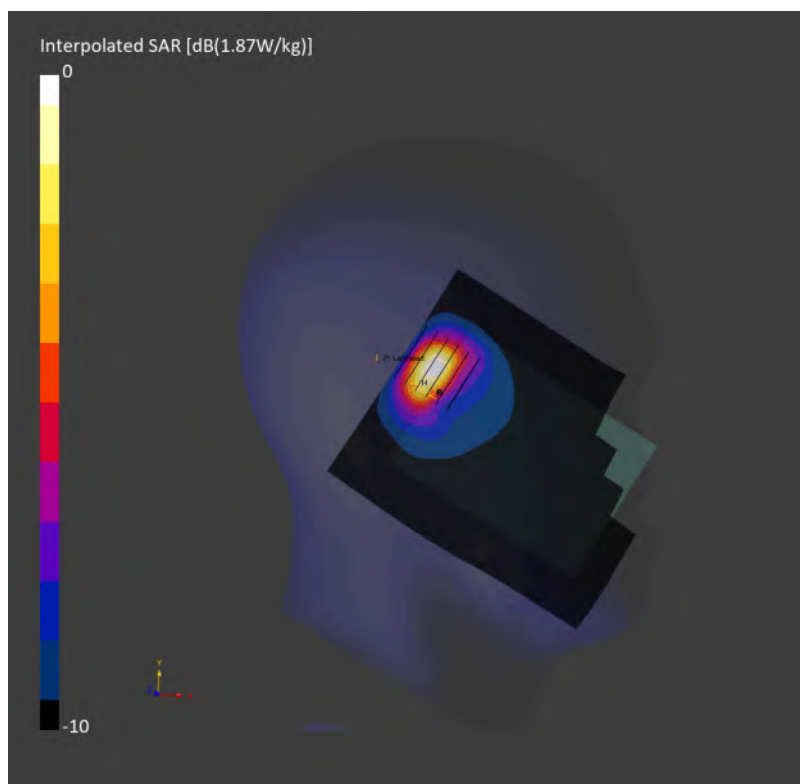

11_LTE Band 26_15M_QPSK_1_0_Left Cheek_0mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz

Medium: HSL_600-7200_260818 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.916$ S/m; $\epsilon_r = 43.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(9.82, 9.12, 9.75); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10181

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.332 W/kg; SAR (10g) = 0.225 W/kg;

TSL Correction: Positive only

Zoom Scan (42.0 mm x 42.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.334 W/kg; SAR (8g) = 0.229 W/kg; SAR (10g) = 0.219 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 78.6 %

TSL Correction: Positive only

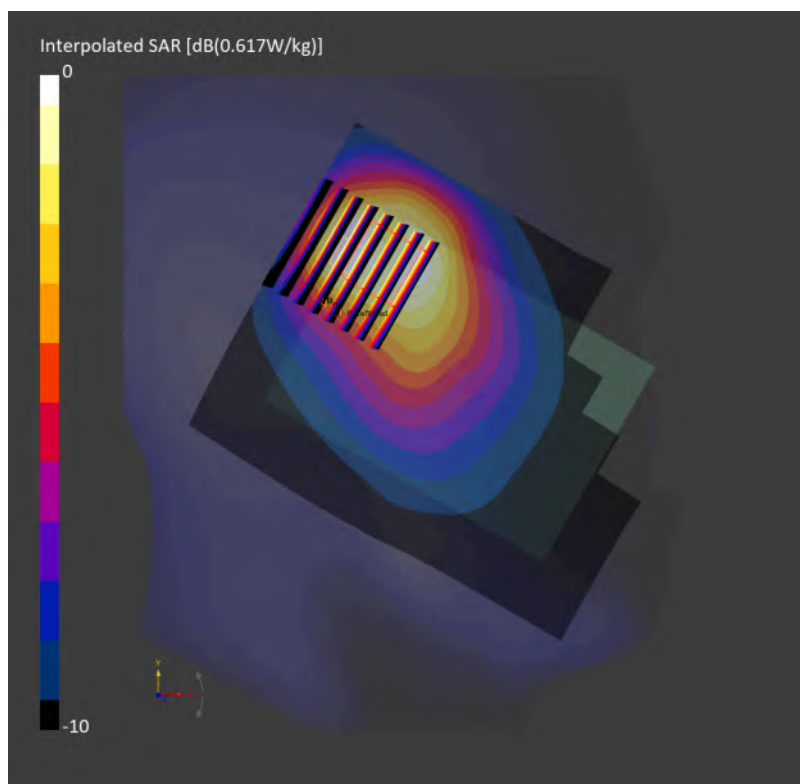

12_LTE Band 30_10M_QPSK_1_0_Left Cheek_0mm_Ch27710

Communication System: LTE-FDD; Frequency: 2310.000 MHz

Medium: HSL_600-7200_260831 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.76$ S/m; $\epsilon_r = 41.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.6, 7.06, 7.54); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10175

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.12 W/kg; SAR (10g) = 0.518 W/kg;

TSL Correction: Positive only

Zoom Scan (32.9 mm x 32.9 mm x 31.2 mm): Measurement Grid: 4.7 mm x 4.7 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 1.14 W/kg; SAR (8g) = 0.591 W/kg; SAR (10g) = 0.535 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 83.6 %

TSL Correction: Positive only

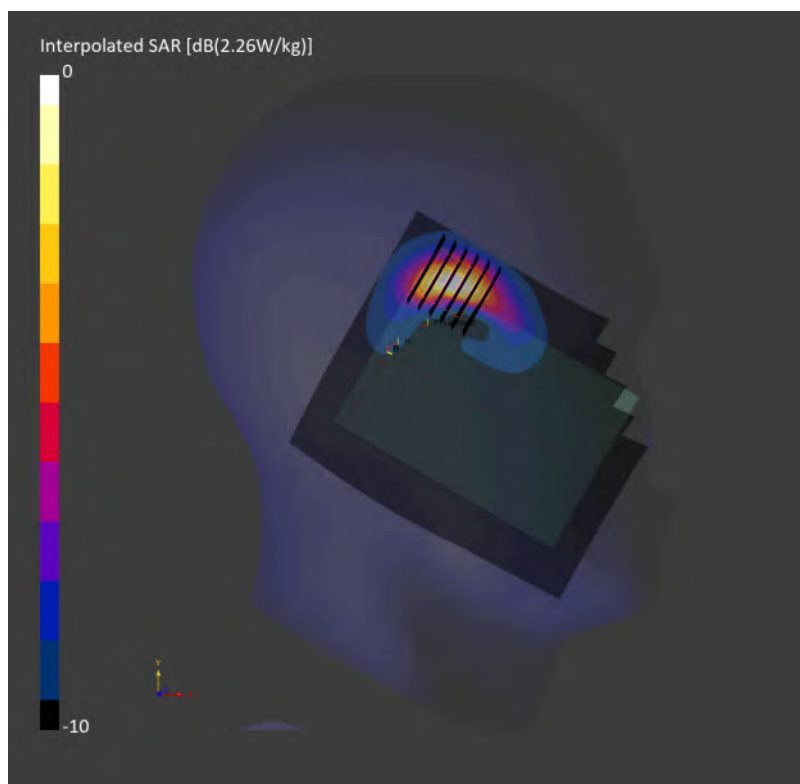

13_LTE Band 66_20M_QPSK_1_0_Left Tilted_0mm_Ch132572

Communication System: LTE-FDD; Frequency: 1770.000 MHz

Medium: HSL_600-7200_260830 Medium parameters used: $f = 1770.000$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(8.25, 7.66, 8.19); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.04 W/kg; SAR (10g) = 0.531 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.03 dB

SAR (1g) = 1.11 W/kg; SAR (8g) = 0.608 W/kg; SAR (10g) = 0.556 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 83.7 %

TSL Correction: Positive only

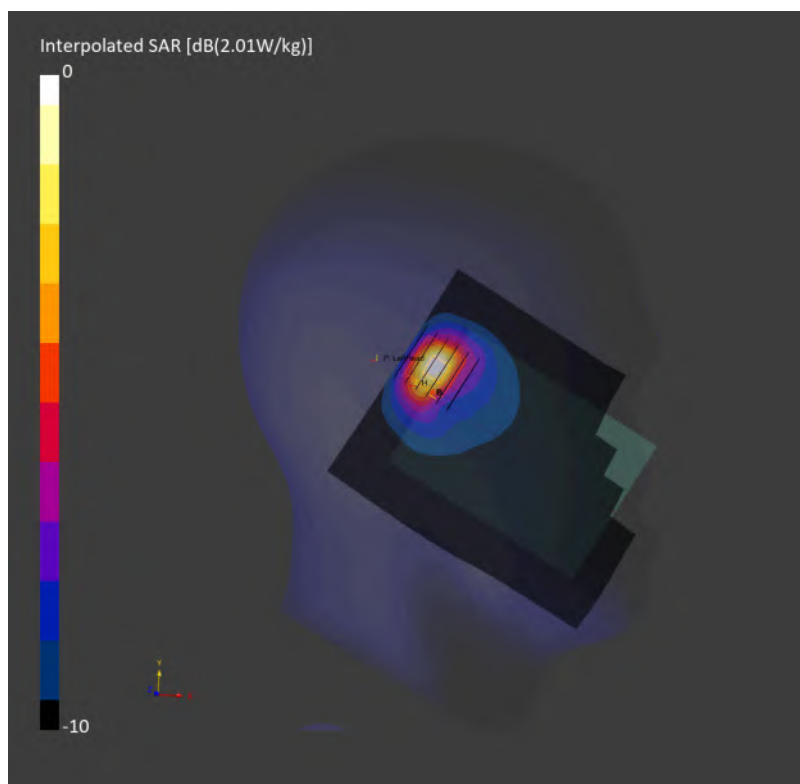

14_LTE Band 71_20M_QPSK_1_0_Left Cheek_0mm_Ch133297

Communication System: LTE-FDD; Frequency: 680.500 MHz

Medium: HSL_600-7200_260818 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r = 43.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(10.04, 9.32, 9.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.191 W/kg; SAR (10g) = 0.128 W/kg;

TSL Correction: Positive only

Zoom Scan (42.0 mm x 42.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.05 dB

SAR (1g) = 0.202 W/kg; SAR (8g) = 0.144 W/kg; SAR (10g) = 0.137 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 82.7 %

TSL Correction: Positive only

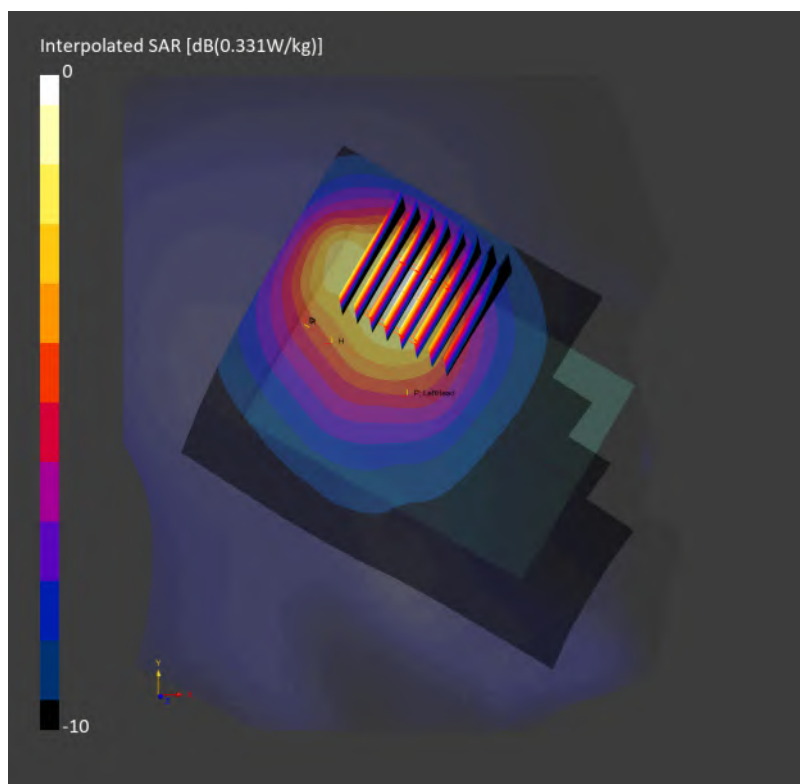

15_LTE Band 41_HPUE_20M_QPSK_1_0_Left Tilted_0mm_Ch40620

Communication System: LTE-TDD; Frequency: 2593.000 MHz

Medium: HSL_600-7200_260905 Medium parameters used: $f = 2593.000$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.15, 7.62, 7.2); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: LTE-TDD, 10172

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.670 W/kg; SAR (10g) = 0.280 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.00 dB

SAR (1g) = 0.669 W/kg; SAR (8g) = 0.322 W/kg; SAR (10g) = 0.290 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 80.7 %

TSL Correction: Positive only

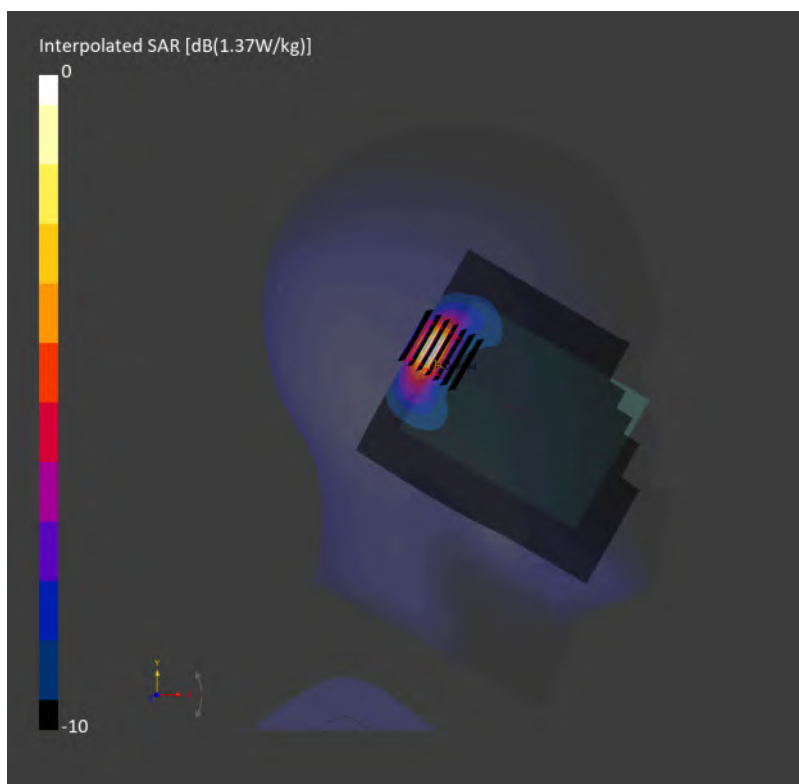

16_LTE Band 42_20M_QPSK_1_0_Right Tilted_0mm_Ch42190

Communication System: LTE-TDD; Frequency: 3460.000 MHz

Medium: HSL_600-7200_260905 Medium parameters used: $f = 3460.000$ MHz; $\sigma = 2.63$ S/m; $\epsilon_r = 38.3$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(6.54, 6.97, 6.58); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: LTE-TDD, 10435

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.704 W/kg; SAR (10g) = 0.272 W/kg;

TSL Correction: Positive only

Zoom Scan (29.4 mm x 29.4 mm x 29.1 mm): Measurement Grid: 4.2 mm x 4.2 mm x 1.4 mm


Power Drift = 0.01 dB

SAR (1g) = 1.02 W/kg; SAR (8g) = 0.362 W/kg; SAR (10g) = 0.315 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 75.3 %

TSL Correction: Positive only

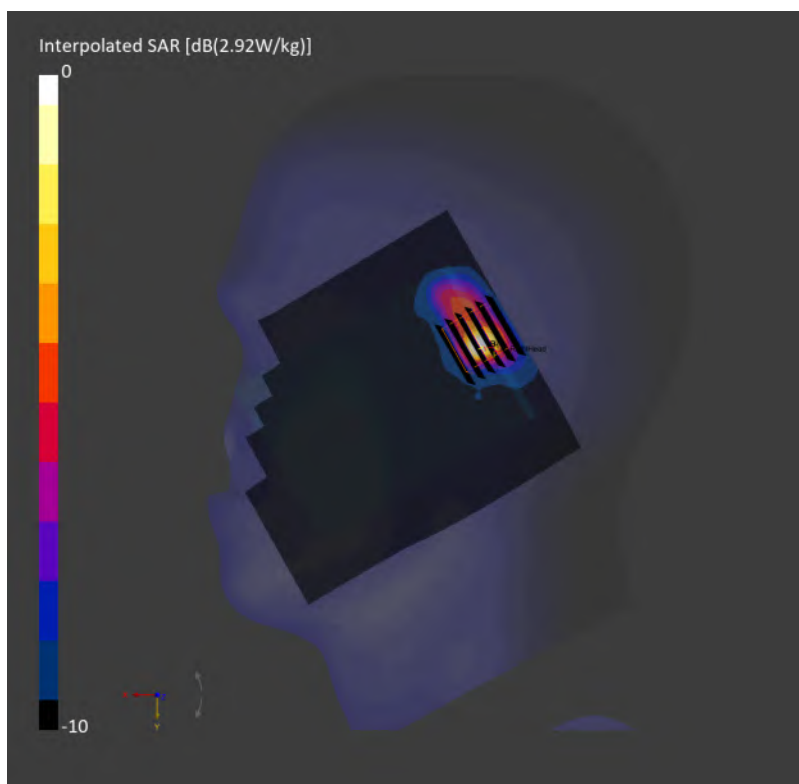

18_LTE Band 48_20M_QPSK_1_0_Right Tilted_0mm_Ch55340

Communication System: LTE-TDD; Frequency: 3560.000 MHz

Medium: HSL_600-7200_260828 Medium parameters used: $f = 3560.000$ MHz; $\sigma = 2.80$ S/m; $\epsilon_r = 38.1$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(6.54, 6.97, 6.58); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: LTE-TDD, 10435

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.591 W/kg; SAR (10g) = 0.222 W/kg;

TSL Correction: Positive only

Zoom Scan (28.0 mm x 28.0 mm x 33.4 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.04 dB

SAR (1g) = 0.818 W/kg; SAR (8g) = 0.290 W/kg; SAR (10g) = 0.252 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 77.8 %

TSL Correction: Positive only

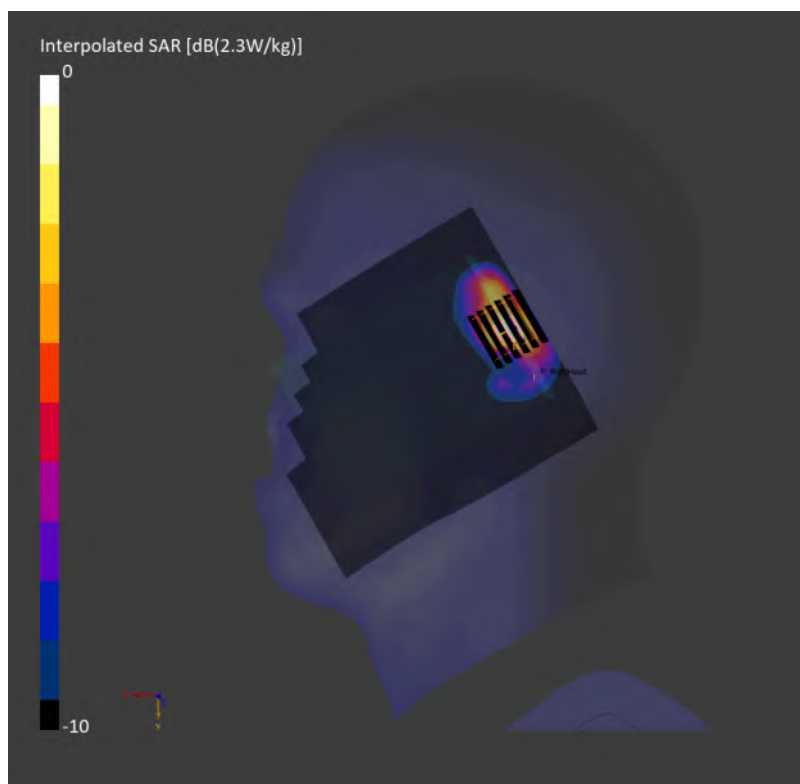

19_FR1 n7_50M_BPSK_135_68_Left Tilted_0mm_Ch507000

Communication System: NR FR1 FDD; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260904 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.32, 6.8, 7.27); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000371

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.899 W/kg; SAR (10g) = 0.371 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.920 W/kg; SAR (8g) = 0.434 W/kg; SAR (10g) = 0.387 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 80.7 %

TSL Correction: Positive only

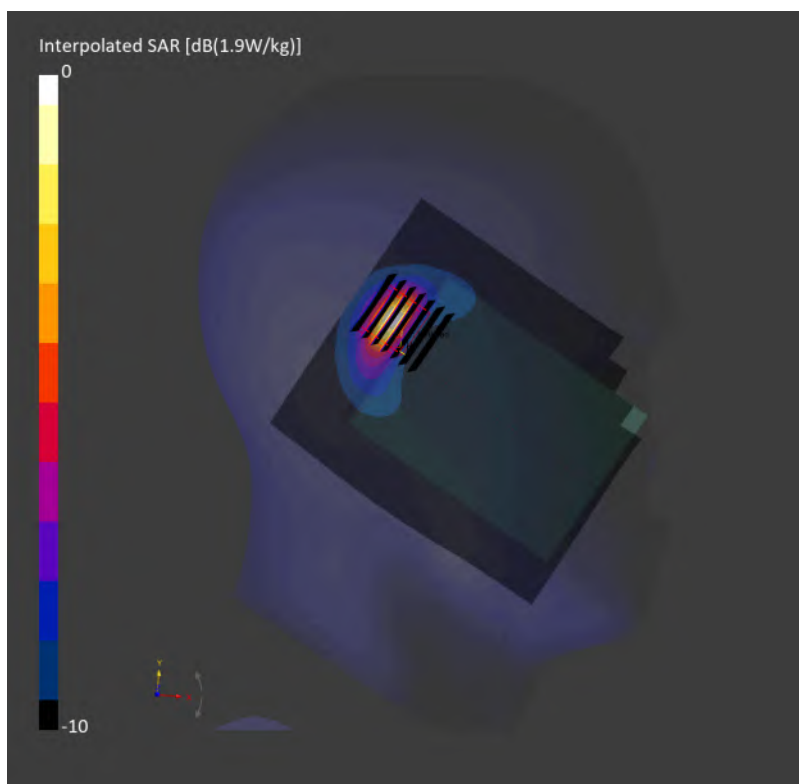

20_FR1 n12_15M_BPSK_36_22_Right Cheek_0mm_CH141500

Communication System: NR FR1 FDD; Frequency: 707.500 MHz

Medium: HSL_600-7200_260821 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.887$ S/m; $\epsilon_r = 45.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(9.53, 10.16, 9.59); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000071

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.130 W/kg; SAR (10g) = 0.087 W/kg;

TSL Correction: Positive only

Zoom Scan (54.0 mm x 54.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.09 dB

SAR (1g) = 0.138 W/kg; SAR (8g) = 0.097 W/kg; SAR (10g) = 0.093 W/kg

Smallest distance from peaks to all points 3 dB below = 12.4 mm

Ratio of SAR at M2 to SAR at M1 = 85.2 %

TSL Correction: Positive only

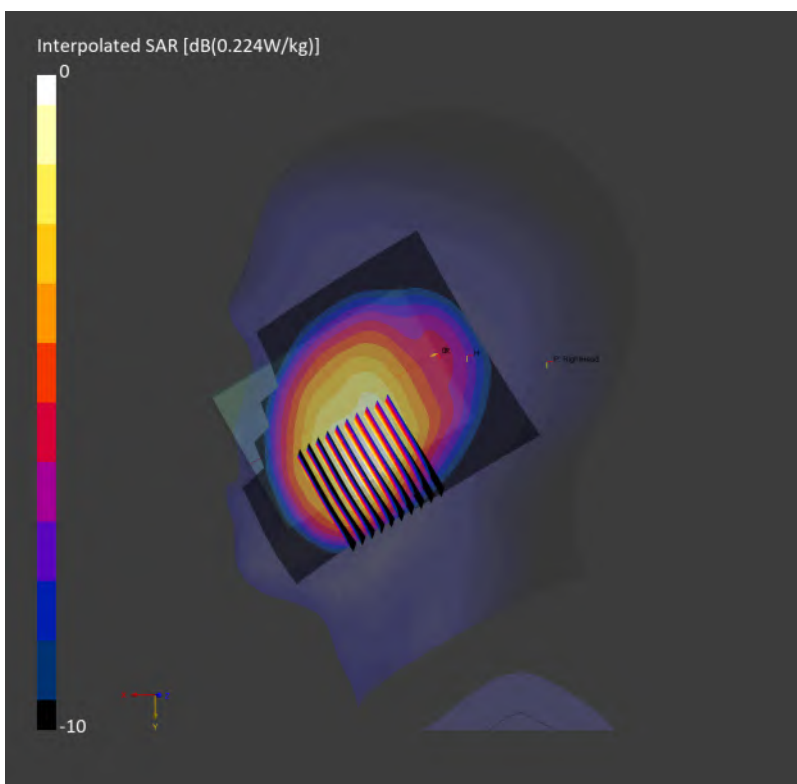

21_FR1 n13_10M_BPSK_25_14_Left Tilted_0mm_Ch156400

Communication System: NR FR1 FDD; Frequency: 782.000 MHz

Medium: HSL_600-7200_260821 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.908$ S/m; $\epsilon_r = 44.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(9.53, 10.16, 9.59); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000029

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.178 W/kg; SAR (10g) = 0.113 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 0.183 W/kg; SAR (8g) = 0.114 W/kg; SAR (10g) = 0.107 W/kg

Smallest distance from peaks to all points 3 dB below = 10.3 mm

Ratio of SAR at M2 to SAR at M1 = 77.7 %

TSL Correction: Positive only

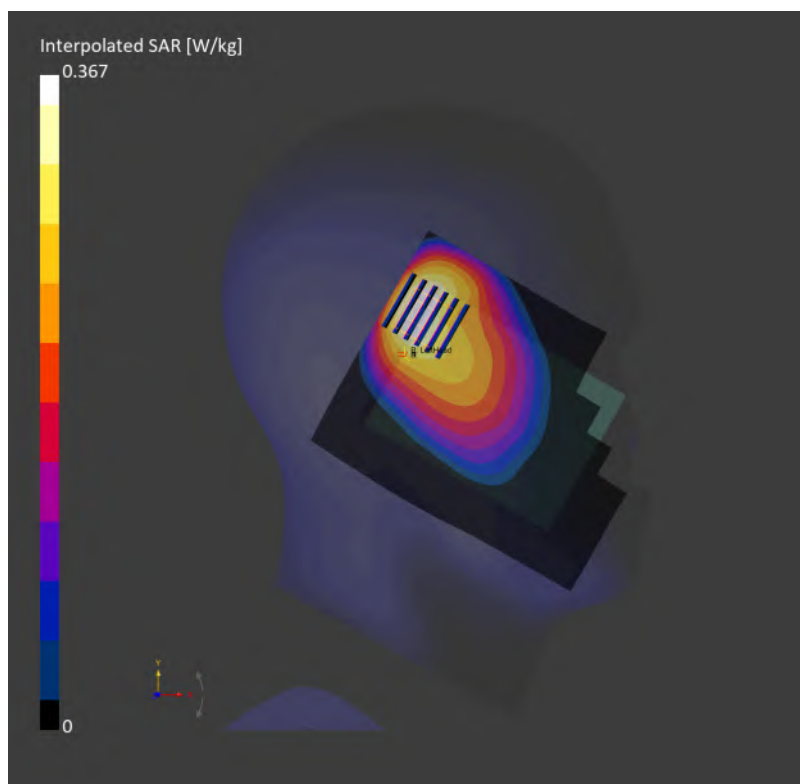

22_FR1 n14_HPUE_10M_BPSK_25_14_Left Tilted_0mm_Ch158600

Communication System: NR FR1 FDD; Frequency: 793.000 MHz

Medium: HSL_600-7200_260902 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(10.04, 9.32, 9.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000029

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.424 W/kg; SAR (10g) = 0.268 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 0.424 W/kg; SAR (8g) = 0.264 W/kg; SAR (10g) = 0.248 W/kg

Smallest distance from peaks to all points 3 dB below = 11.3 mm

Ratio of SAR at M2 to SAR at M1 = 81.4 %

TSL Correction: Positive only

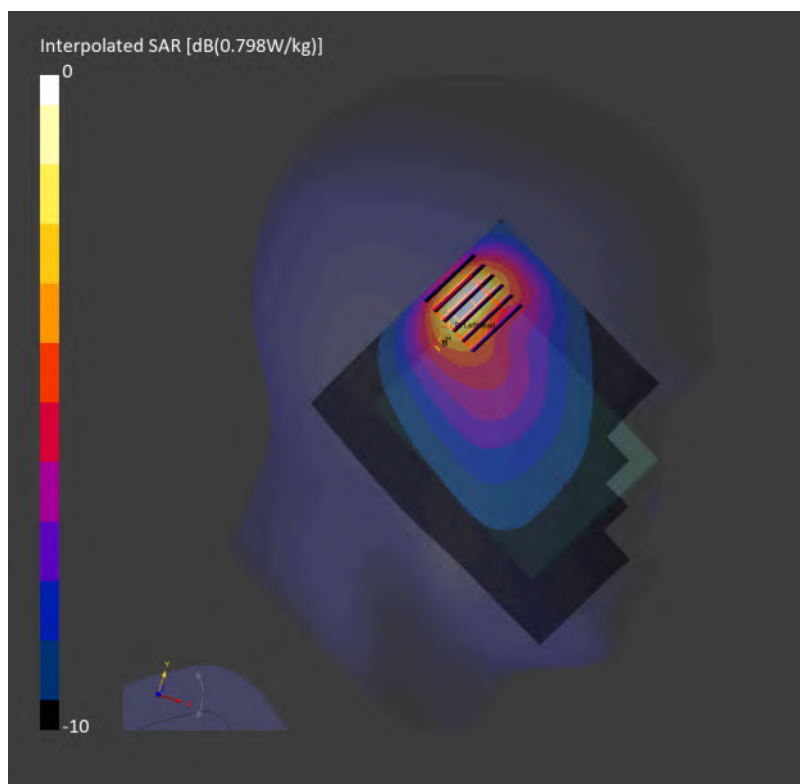

23_FR1 n25_40M_BPSK_108_54_Left Cheek_0mm_Ch376500

Communication System: NR FR1 FDD; Frequency: 1882.500 MHz

Medium: HSL_600-7200_260819 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.46$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.97, 7.4, 7.91); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000287

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.800 W/kg; SAR (10g) = 0.394 W/kg;

TSL Correction: Positive only

Zoom Scan (31.5 mm x 31.5 mm x 33.4 mm): Measurement Grid: 4.5 mm x 4.5 mm x 1.4 mm


Power Drift = 0.06 dB

SAR (1g) = 0.952 W/kg; SAR (8g) = 0.506 W/kg; SAR (10g) = 0.461 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 85.0 %

TSL Correction: Positive only

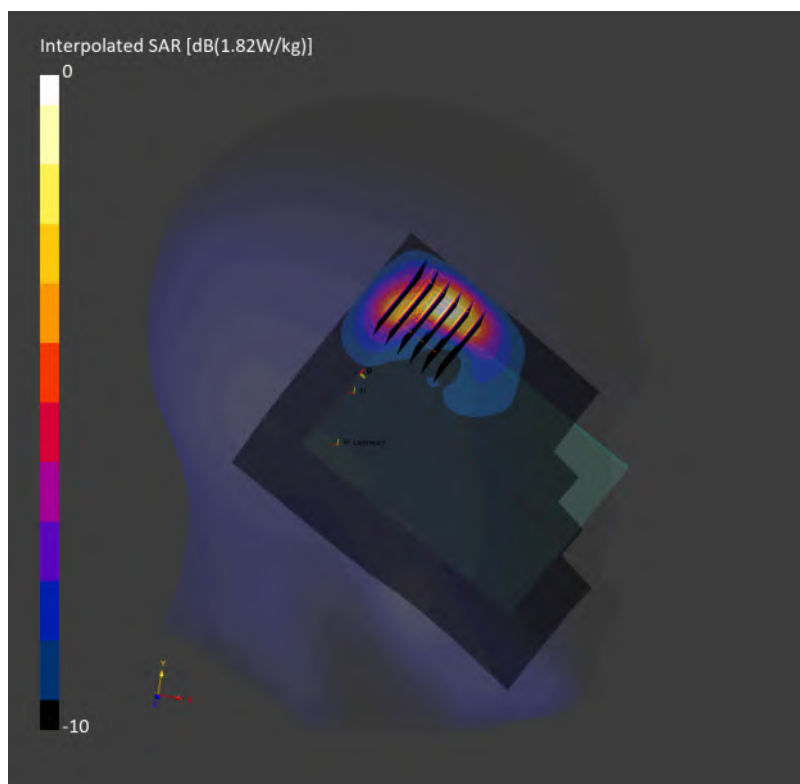

24_FR1 n26_HPUE_20M_BPSK_1_1_Left Cheek_0mm_Ch166300

Communication System: NR FR1 FDD; Frequency: 831.500 MHz

Medium: HSL_600-7200_260902 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.948$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(9.82, 9.12, 9.75); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000130

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.530 W/kg; SAR (10g) = 0.362 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.05 dB

SAR (1g) = 0.534 W/kg; SAR (8g) = 0.360 W/kg; SAR (10g) = 0.341 W/kg

Smallest distance from peaks to all points 3 dB below = 13.0 mm

Ratio of SAR at M2 to SAR at M1 = 84.1 %

TSL Correction: Positive only

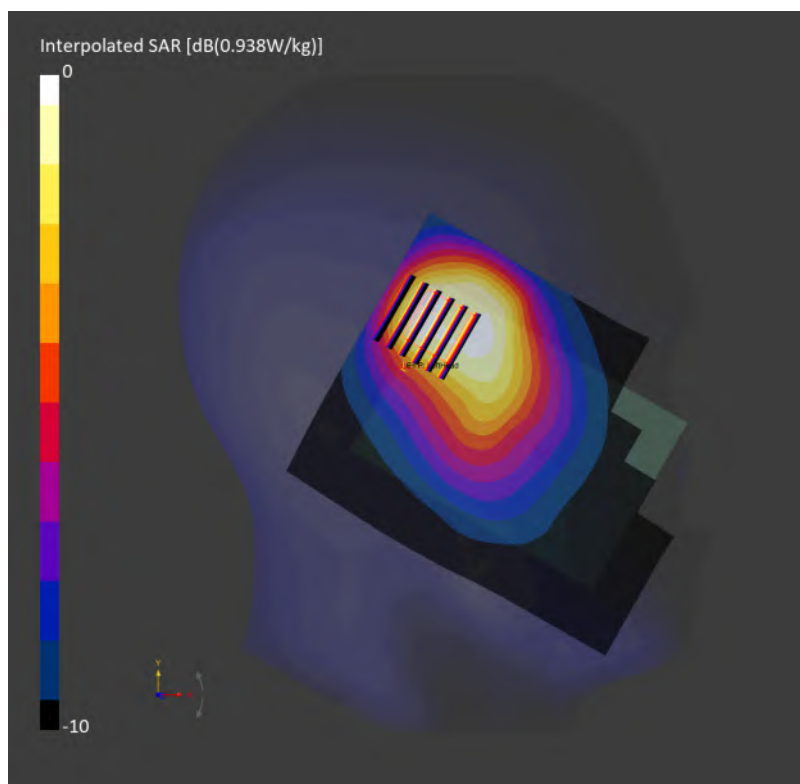

25_FR1 n30_10M_BPSK_25_14_Right Cheek_0mm_Ch462000

Communication System: NR FR1 FDD; Frequency: 2310.000 MHz

Medium: HSL_600-7200_260823 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.74$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.35, 7.83, 7.39); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000029

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.919 W/kg; SAR (10g) = 0.350 W/kg;

TSL Correction: Positive only

Zoom Scan (34.3 mm x 34.3 mm x 31.2 mm): Measurement Grid: 4.9 mm x 4.9 mm x 1.5 mm


Power Drift = -0.17 dB

SAR (1g) = 1.02 W/kg; SAR (8g) = 0.482 W/kg; SAR (10g) = 0.429 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 86.7 %

TSL Correction: Positive only

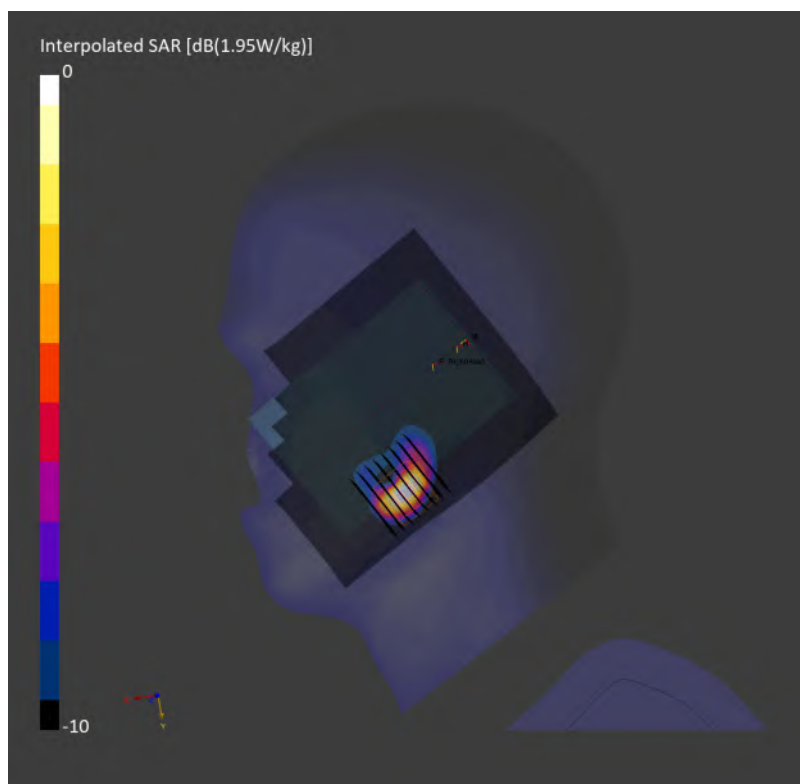

26_FR1 n66_45M_BPSK_120_60_Left Tilted_0mm_Ch349000

Communication System: NR FR1 FDD; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260822 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.89, 8.41, 7.94); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000326

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.924 W/kg; SAR (10g) = 0.473 W/kg;

TSL Correction: Positive only

Zoom Scan (42.0 mm x 42.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.08 dB

SAR (1g) = 0.954 W/kg; SAR (8g) = 0.536 W/kg; SAR (10g) = 0.491 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 85.5 %

TSL Correction: Positive only

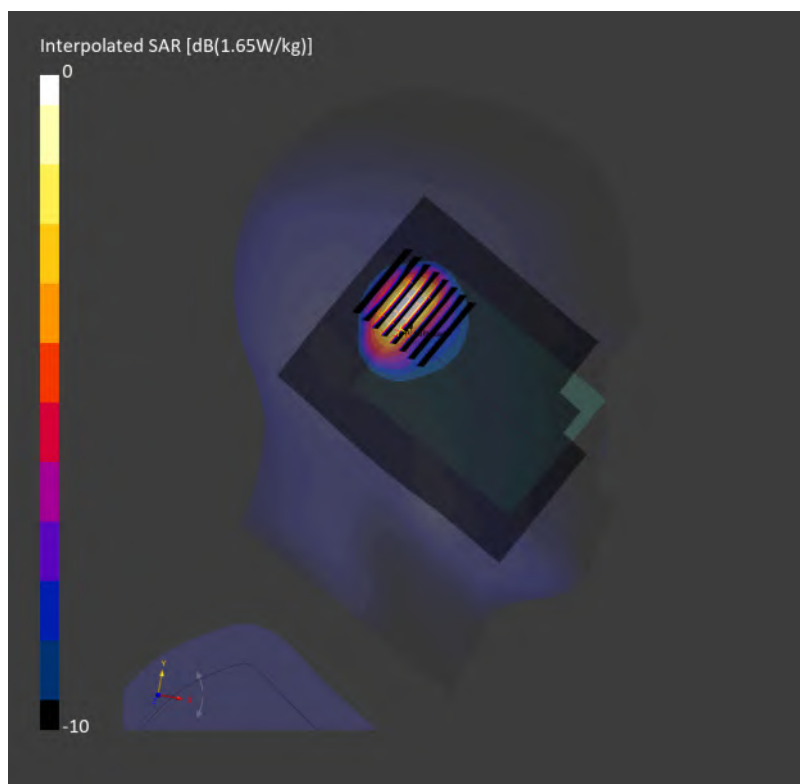

27_FR1 n70_15M_BPSK_36_0_Left Tilted_0mm_Ch340500

Communication System: NR FR1 FDD; Frequency: 1702.500 MHz

Medium: HSL_600-7200_260822 Medium parameters used: $f = 1702.500$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.89, 8.41, 7.94); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000071

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.947 W/kg; SAR (10g) = 0.481 W/kg;

TSL Correction: Positive only

Zoom Scan (42.0 mm x 42.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.10 dB

SAR (1g) = 0.970 W/kg; SAR (8g) = 0.541 W/kg; SAR (10g) = 0.495 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 85.2 %

TSL Correction: Positive only

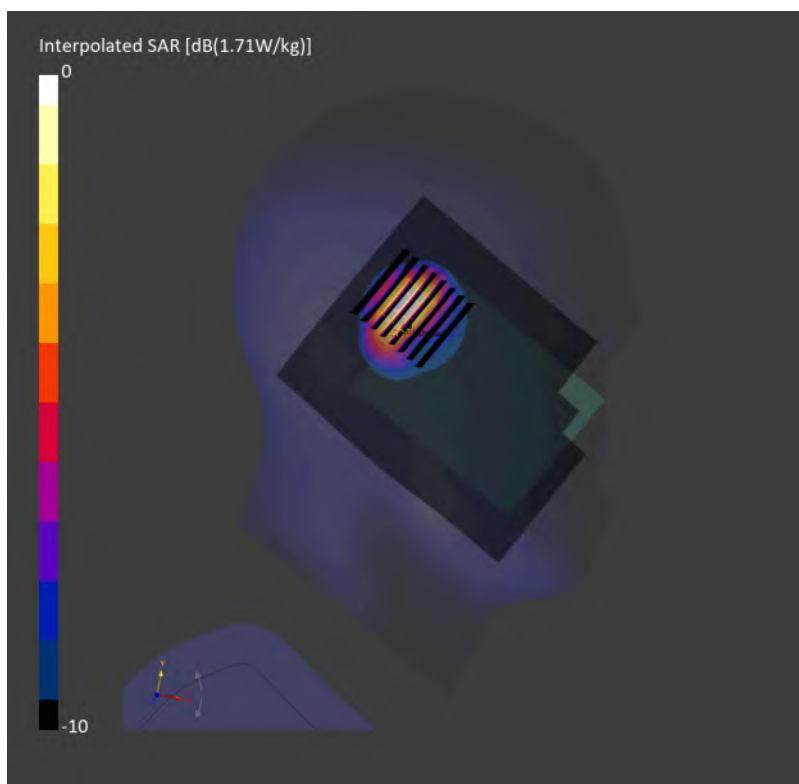

28_FR1 n71_HPUE_35M_BPSK_1_1_Left Cheek_0mm_Ch136100

Communication System: NR FR1 FDD; Frequency: 680.500 MHz

Medium: HSL_600-7200_260902 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 42.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(10.04, 9.32, 9.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000238

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.250 W/kg; SAR (10g) = 0.171 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.09 dB

SAR (1g) = 0.270 W/kg; SAR (8g) = 0.190 W/kg; SAR (10g) = 0.180 W/kg

Smallest distance from peaks to all points 3 dB below = 10.0 mm

Ratio of SAR at M2 to SAR at M1 = 80.9 %

TSL Correction: Positive only

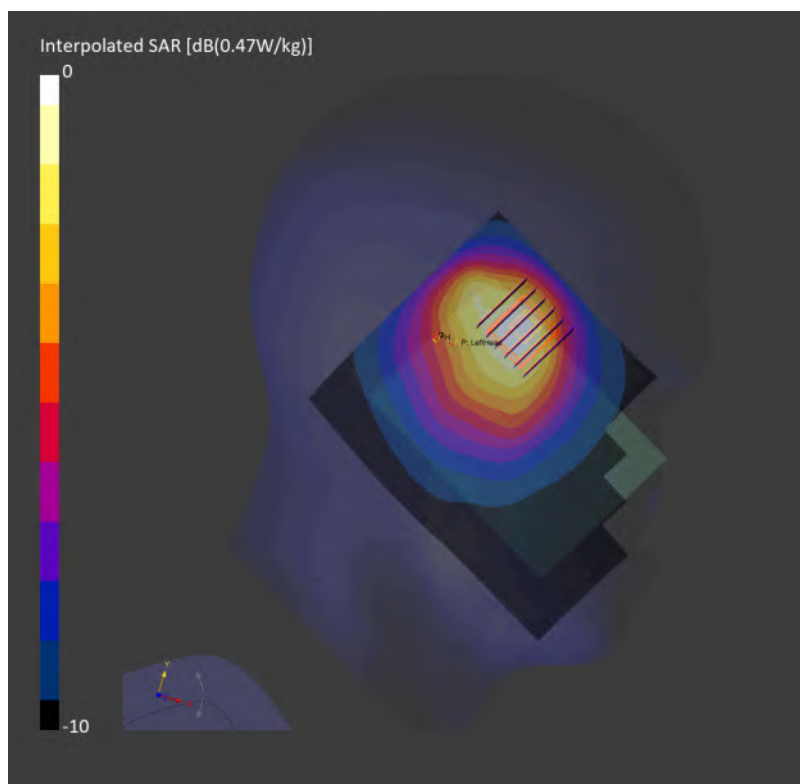

29_FR1 n41_100M_BPSK_135_69_Left Cheek_0mm_Ch518598

Communication System: NR FR1 TDD; Frequency: 2592.990 MHz

Medium: HSL_600-7200_260824 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.94$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.32, 6.8, 7.27); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: NR FR1 TDD, 1003251

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.947 W/kg; SAR (10g) = 0.416 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.14 dB

SAR (1g) = 1.00 W/kg; SAR (8g) = 0.476 W/kg; SAR (10g) = 0.427 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 80.5 %

TSL Correction: Positive only

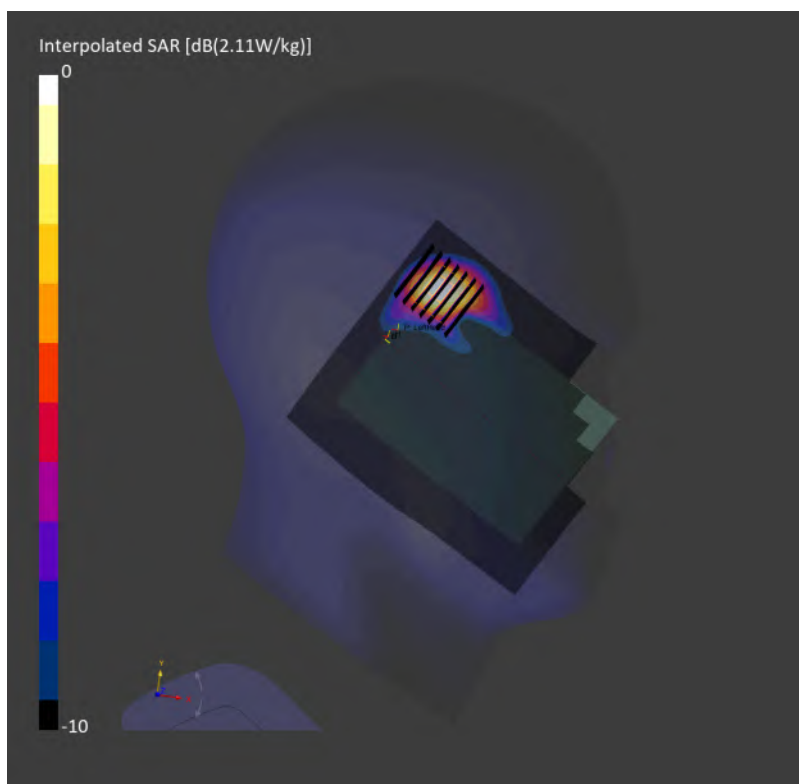

30_FR1 n48_40M_BPSK_1_1_Right Tilted_0mm_Ch638000

Communication System: NR FR1 TDD; Frequency: 3570.000 MHz

Medium: HSL_600-7200_260908 Medium parameters used: $f = 3570.000$ MHz; $\sigma = 2.72$ S/m; $\epsilon_r = 38.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(6.79, 6.3, 6.74); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: NR FR1 TDD, 1002251

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.757 W/kg; SAR (10g) = 0.305 W/kg;

TSL Correction: Positive only

Zoom Scan (29.4 mm x 29.4 mm x 33.4 mm): Measurement Grid: 4.2 mm x 4.2 mm x 1.4 mm


Power Drift = -0.04 dB

SAR (1g) = 0.962 W/kg; SAR (8g) = 0.362 W/kg; SAR (10g) = 0.318 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 74.2 %

TSL Correction: Positive only

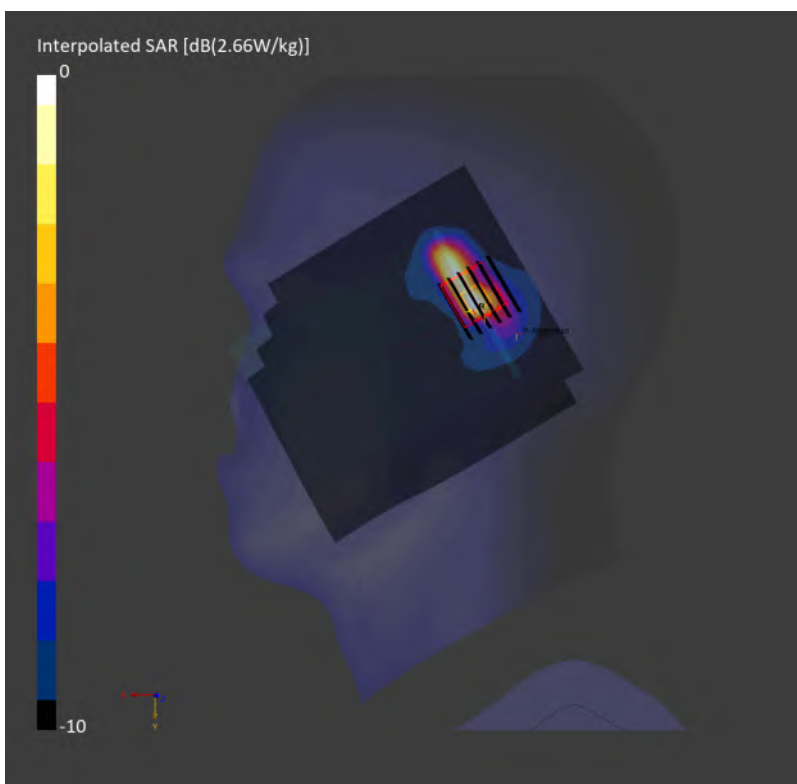

31_FR1 n77_100M_BPSK_1_1_Left Cheek_0mm_Ch633332

Communication System: NR FR1 TDD; Frequency: 3499.980 MHz

Medium: HSL_600-7200_260825 Medium parameters used: $f = 3499.980$ MHz; $\sigma = 2.70$ S/m; $\epsilon_r = 37.7$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(6.79, 6.3, 6.74); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: NR FR1 TDD, 1003247

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.683 W/kg; SAR (10g) = 0.249 W/kg;

TSL Correction: Positive only

Zoom Scan (36.8 mm x 36.8 mm x 29.1 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm


Power Drift = -0.02 dB

SAR (1g) = 0.795 W/kg; SAR (8g) = 0.303 W/kg; SAR (10g) = 0.266 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 75.1 %

TSL Correction: Positive only

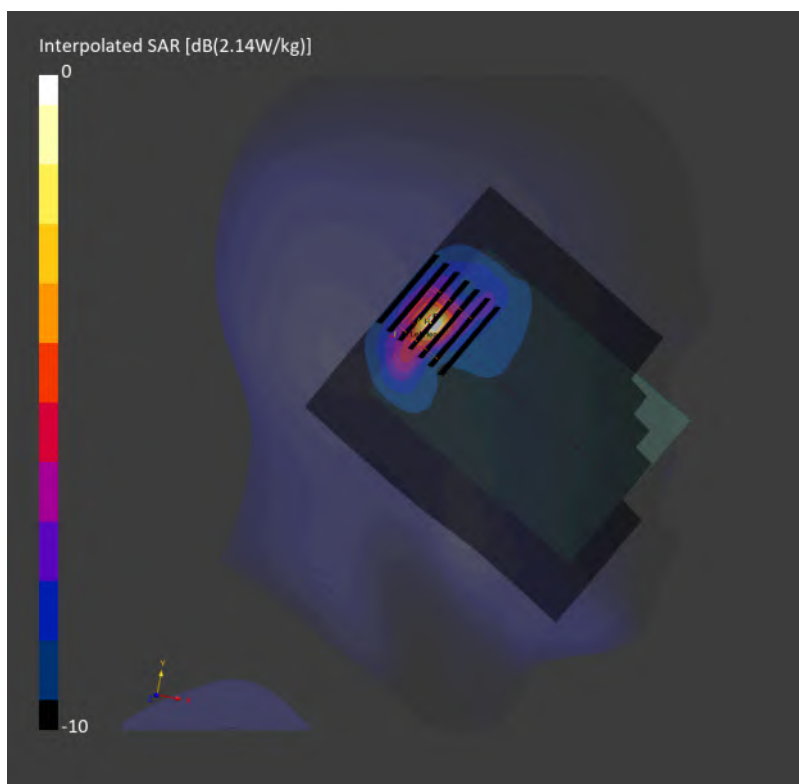

32_WLAN2.4GHz_802.11b 1Mbps_Right Tilted_0mm_Ch6

Communication System: WiFi (802.11b); Frequency: 2437.000 MHz

Medium: HSL_600-7200_260831 Medium parameters used: $f = 2437.000$ MHz; $\sigma = 1.86$ S/m; $\epsilon_r = 41.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.44, 6.91, 7.38); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11b), 10415

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.561 W/kg; SAR (10g) = 0.270 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.04 dB

SAR (1g) = 0.601 W/kg; SAR (8g) = 0.321 W/kg; SAR (10g) = 0.293 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 84.2 %

TSL Correction: Positive only

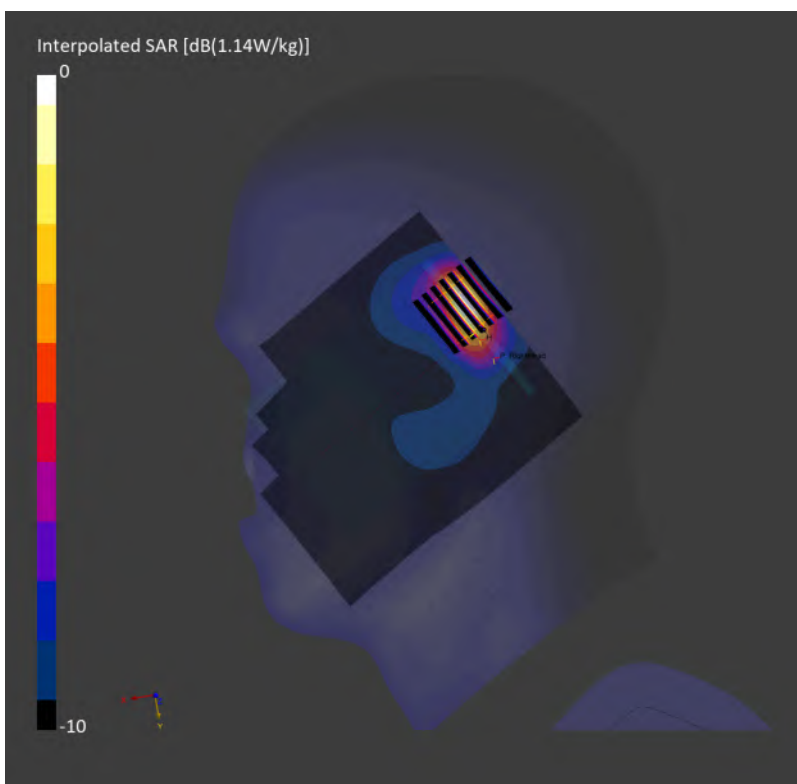

33_WLAN5GHz_802.11n-HT40 MCS0_Right Tilted_0mm_Ch54

Communication System: WiFi (802.11n); Frequency: 5270.000 MHz

Medium: HSL_600-7200_260828 Medium parameters used: $f = 5270.000$ MHz; $\sigma = 4.50$ S/m; $\epsilon_r = 37.1$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(5.8, 5.38, 5.76); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11n), 10599

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.485 W/kg; SAR (10g) = 0.149 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.16 dB

SAR (1g) = 0.520 W/kg; SAR (8g) = 0.191 W/kg; SAR (10g) = 0.167 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 64.7 %

TSL Correction: Positive only

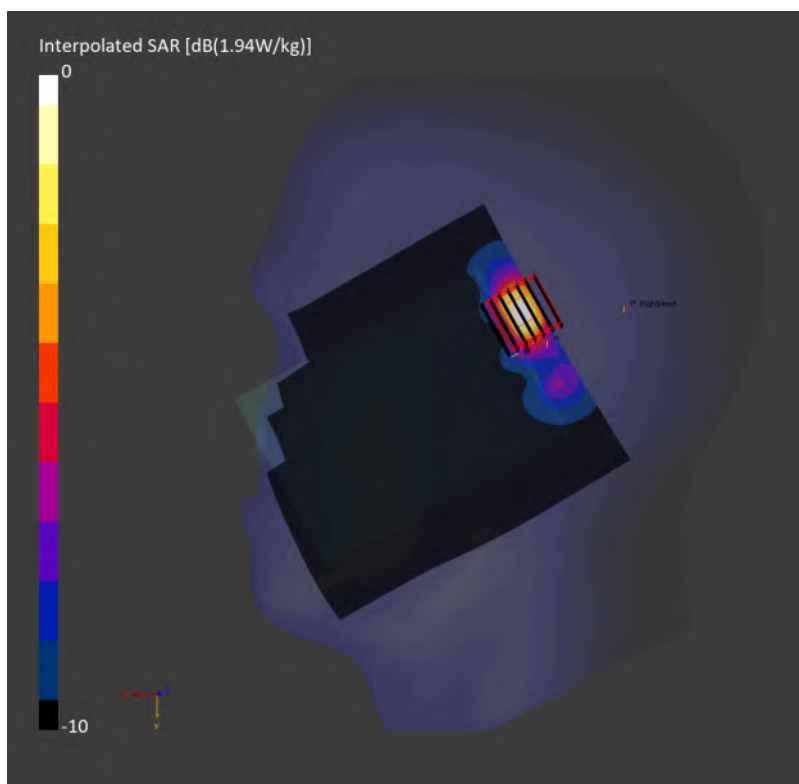

#339_WLAN5GHz_802.11ax-HE40 MCS0_Right Tilted_0mm_Ch102

Communication System: WiFi (802.11ax); Frequency: 5510.000 MHz

Medium: HSL_600-7200_260828 Medium parameters used: $f = 5510.000$ MHz; $\sigma = 4.78$ S/m; $\epsilon_r = 36.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(5.38, 5.0, 5.35); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11ax), 10707

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.513 W/kg; SAR (10g) = 0.163 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.00 dB

SAR (1g) = 0.614 W/kg; SAR (8g) = 0.214 W/kg; SAR (10g) = 0.180 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 62.7 %

TSL Correction: Positive only

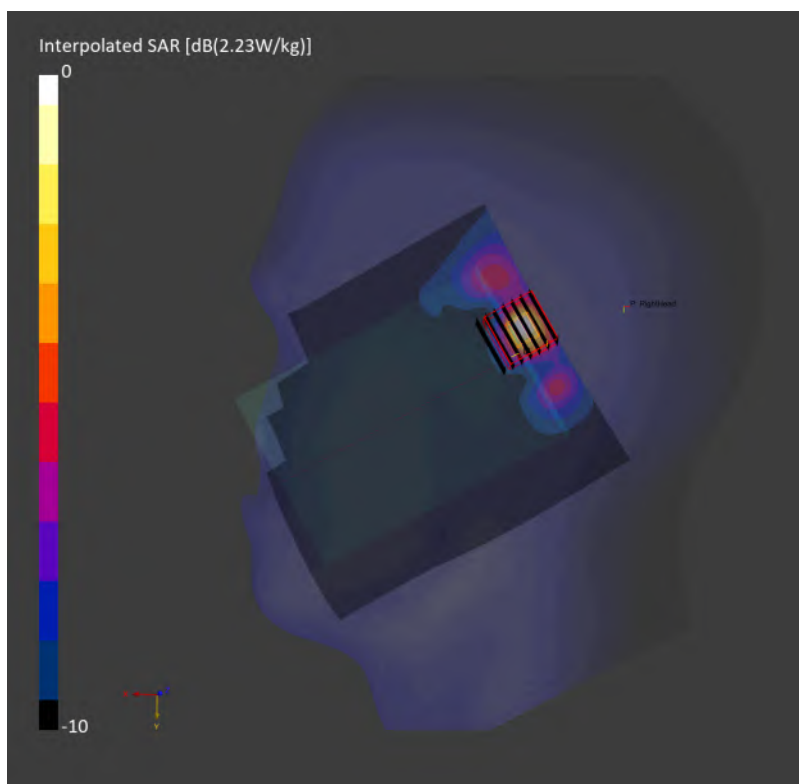

35_WLAN5GHz_802.11a 6Mbps_Right Tilted_0mm_Ch149

Communication System: WiFi (802.11a); Frequency: 5745.000 MHz

Medium: HSL_600-7200_260828 Medium parameters used: $f = 5745.000$ MHz; $\sigma = 5.05$ S/m; $\epsilon_r = 36.2$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(5.23, 4.86, 5.19); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11a), 10417

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.569 W/kg; SAR (10g) = 0.182 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.00 dB

SAR (1g) = 0.640 W/kg; SAR (8g) = 0.238 W/kg; SAR (10g) = 0.208 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 60.5 %

TSL Correction: Positive only

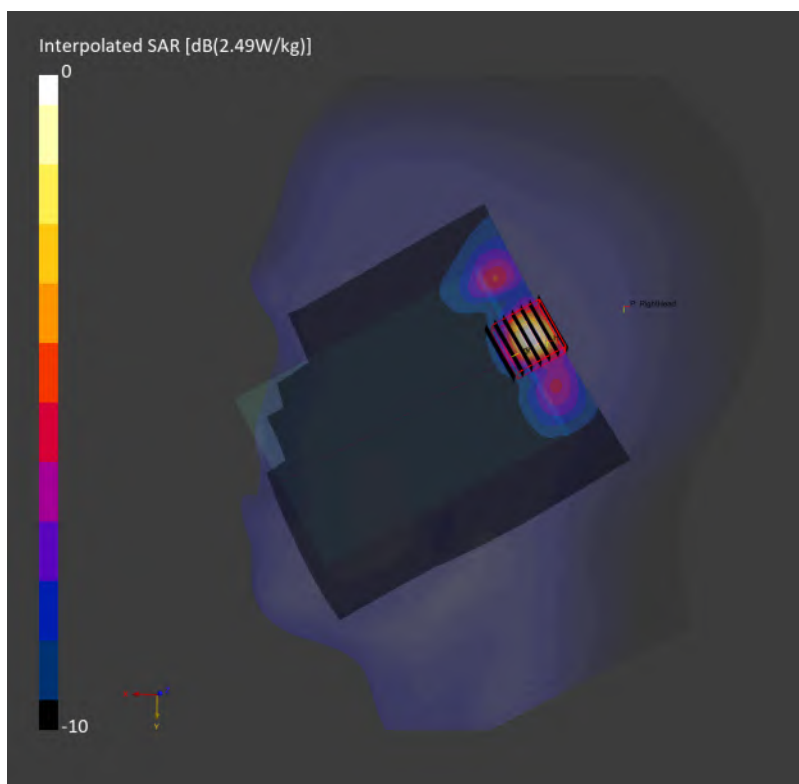

36_WLAN6GHz_802.11be-EHT320 MCS0_Right Tilted _0mm_Ch95

Communication System: WiFi; Frequency: 6425.000 MHz

Medium: HSL_600-7200_260907 Medium parameters used: $f = 6425.000$ MHz; $\sigma = 5.81$ S/m; $\epsilon_r = 33.0$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(5.49, 5.1, 5.45); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11be), 11026-

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.273 W/kg; SAR (10g) = 0.090 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.19 dB


SAR (1g) = 0.251 W/kg; SAR (8g) = 0.100 W/kg; SAR (10g) = 0.088 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 60.3 %

psAPD (1.0cm², sq) = 2.98 [W/m²]; psAPD (4.0cm², sq) = 2.08 [W/m²]

TSL Correction: Positive only

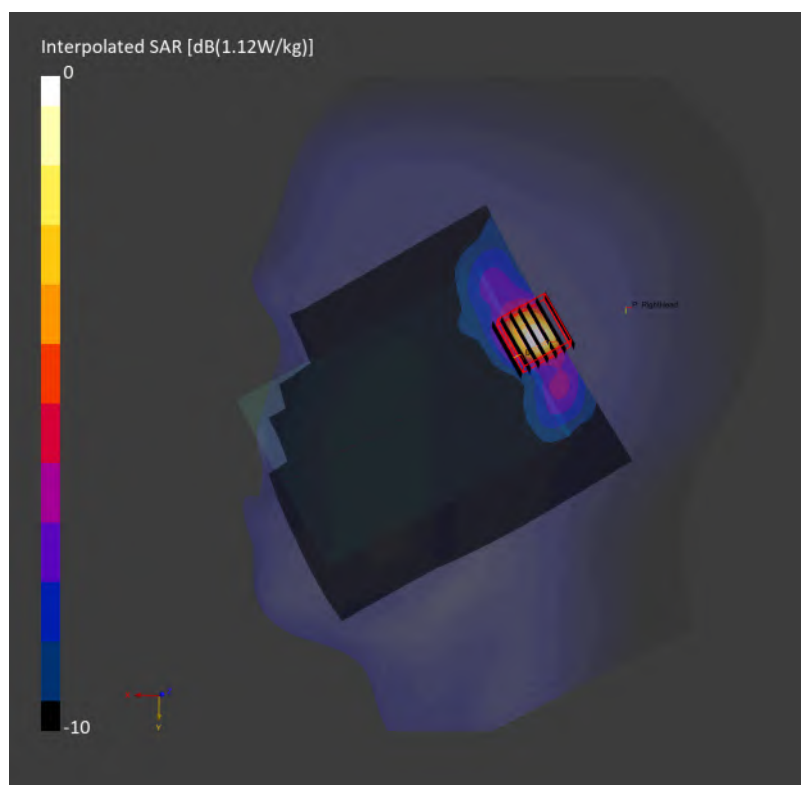

37_Bluetooth_1Mbps_Left Cheek_0mm_Ch39

Communication System: Bluetooth; Frequency: 2441.000 MHz

Medium: HSL_600-7200_260831 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 41.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.44, 6.91, 7.38); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: Bluetooth, 10038

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.130 W/kg; SAR (10g) = 0.065 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.06 dB

SAR (1g) = 0.134 W/kg; SAR (8g) = 0.072 W/kg; SAR (10g) = 0.066 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 80.8 %

TSL Correction: Positive only

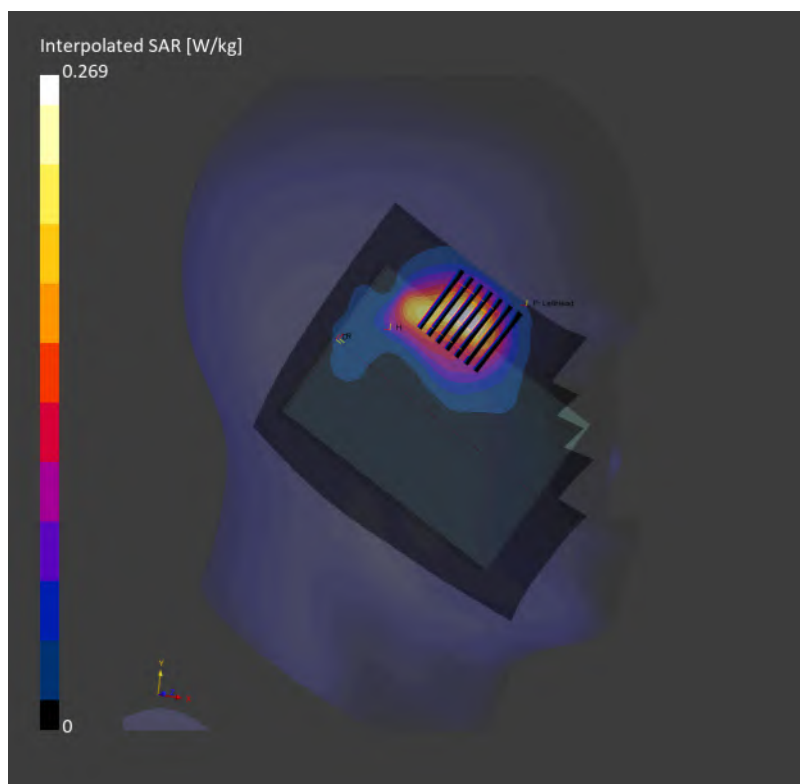

38_GSM850_GPRS 2 Tx slots_Back_5mm_Ch251

Communication System: GSM; Frequency: 848.800 MHz

Medium: HSL_600-7200_260902 Medium parameters used: $f = 848.800$ MHz; $\sigma = 0.954$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(9.82, 9.12, 9.75); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: GSM, 10024

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.604 W/kg; SAR (10g) = 0.384 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.03 dB

SAR (1g) = 0.669 W/kg; SAR (8g) = 0.399 W/kg; SAR (10g) = 0.371 W/kg

Smallest distance from peaks to all points 3 dB below = 12.4 mm

Ratio of SAR at M2 to SAR at M1 = 80.8 %

TSL Correction: Positive only

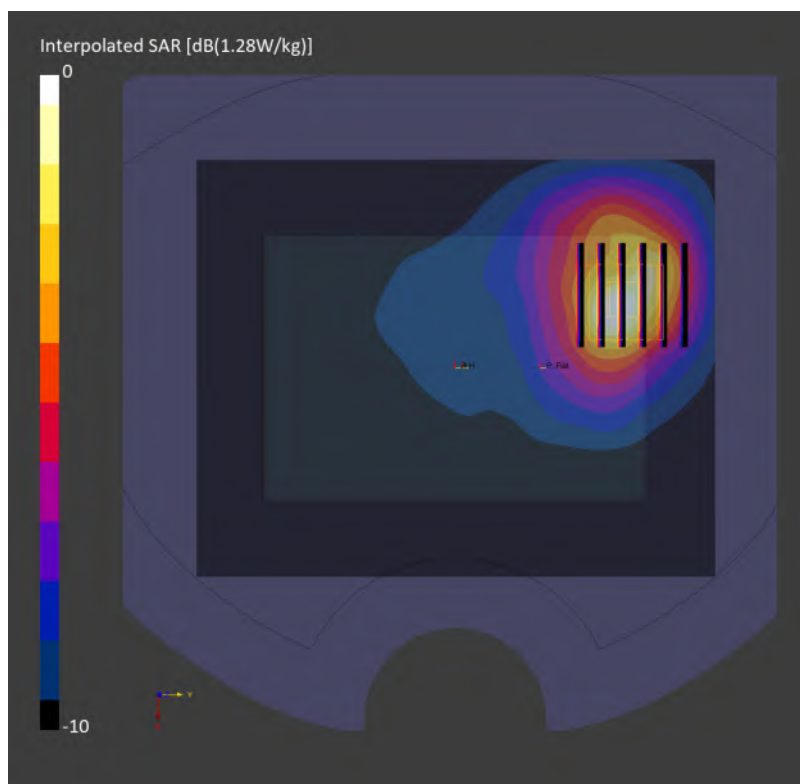

39_GSM1900_GPRS 4 Tx slots_Top Side_5mm_Ch512

Communication System: GSM; Frequency: 1850.200 MHz

Medium: HSL_600-7200_260901 Medium parameters used: $f = 1850.200$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.97, 7.4, 7.91); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: GSM, 10028

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 12.0 mm x 15.0 mm

SAR (1g) = 0.746 W/kg; SAR (10g) = 0.365 W/kg;

TSL Correction: Positive only

Zoom Scan (33.0 mm x 33.0 mm x 31.2 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 0.894 W/kg; SAR (8g) = 0.437 W/kg; SAR (10g) = 0.394 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 78.8 %

TSL Correction: Positive only

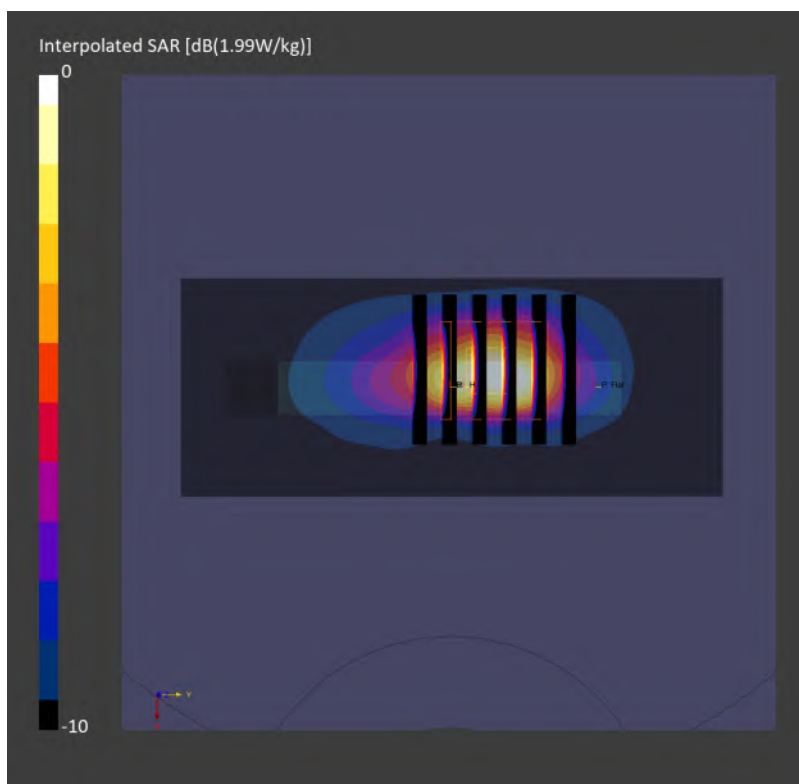

40_WCDMA II_RMC 12.2Kbps_Top Side_5mm_Ch9262

Communication System: UMTS-FDD; Frequency: 1852.400 MHz

Medium: HSL_600-7200_260819 Medium parameters used: $f = 1852.400$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.97, 7.4, 7.91); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: UMTS-FDD, 10457

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 12.0 mm x 15.0 mm

SAR (1g) = 0.922 W/kg; SAR (10g) = 0.405 W/kg;

TSL Correction: Positive only

Zoom Scan (33.0 mm x 33.0 mm x 31.2 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.943 W/kg; SAR (8g) = 0.468 W/kg; SAR (10g) = 0.422 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 79.0 %

TSL Correction: Positive only

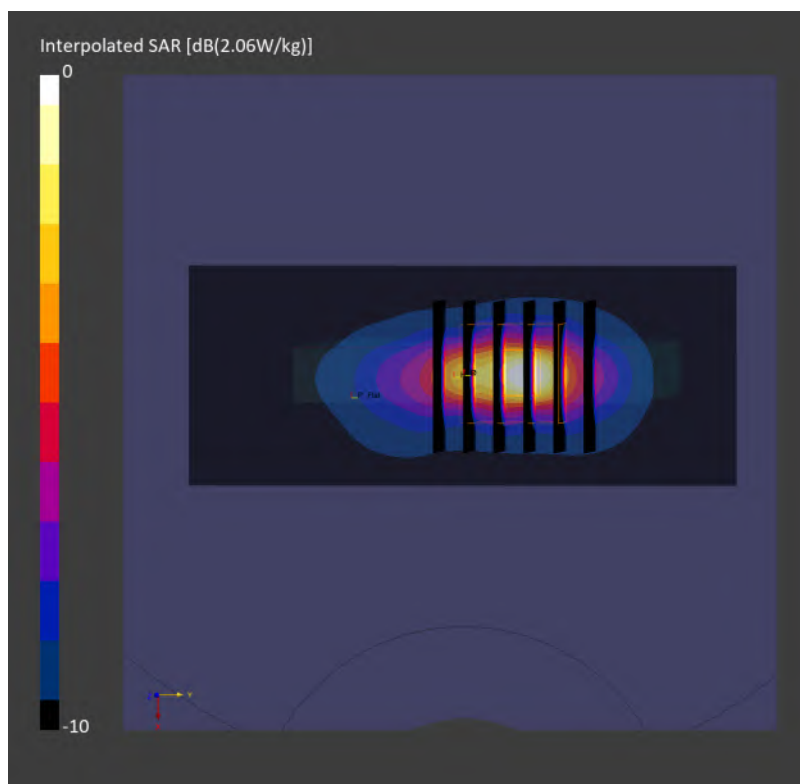

41_WCDMA IV_RMC 12.2Kbps_Bottom Side_5mm_Ch1312

Communication System: UMTS-FDD; Frequency: 1712.400 MHz

Medium: HSL_600-7200_260901 Medium parameters used: $f = 1712.400$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(8.25, 7.66, 8.19); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: UMTS-FDD, 10011

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 12.0 mm x 15.0 mm

SAR (1g) = 0.974 W/kg; SAR (10g) = 0.520 W/kg;

TSL Correction: Positive only

Zoom Scan (33.0 mm x 33.0 mm x 31.2 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm


Power Drift = -0.05 dB

SAR (1g) = 1.08 W/kg; SAR (8g) = 0.579 W/kg; SAR (10g) = 0.529 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 78.1 %

TSL Correction: Positive only

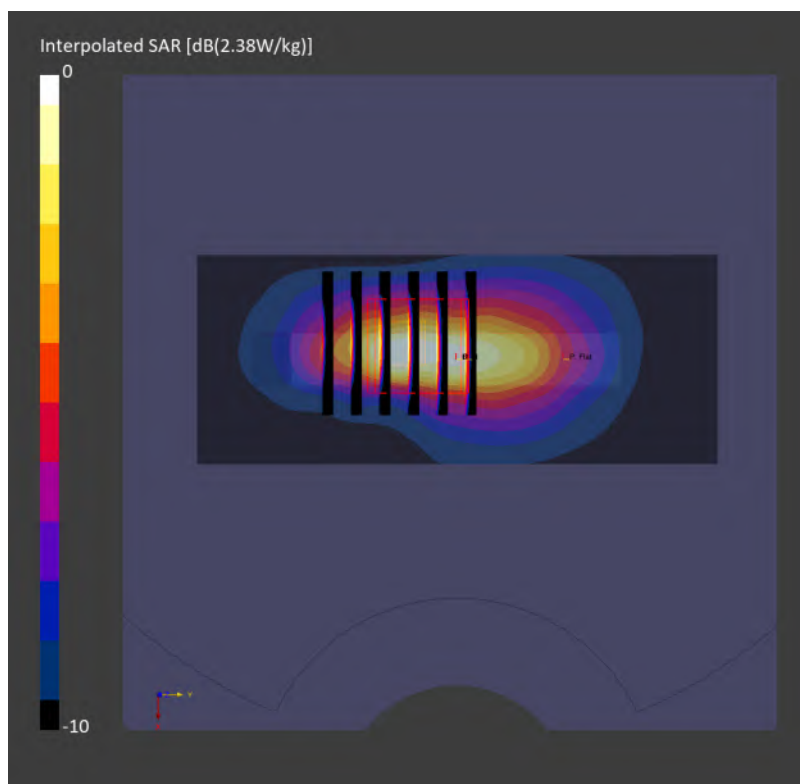

42_WCDMA V_RMC 12.2Kbps_Back_5mm_Ch4132

Communication System: UMTS-FDD; Frequency: 826.400 MHz

Medium: HSL_600-7200_260827 Medium parameters used: $f = 826.400$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(9.82, 9.12, 9.75); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: UMTS-FDD, 10011

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.870 W/kg; SAR (10g) = 0.557 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.908 W/kg; SAR (8g) = 0.545 W/kg; SAR (10g) = 0.508 W/kg

Smallest distance from peaks to all points 3 dB below = 12.4 mm

Ratio of SAR at M2 to SAR at M1 = 79.9 %

TSL Correction: Positive only

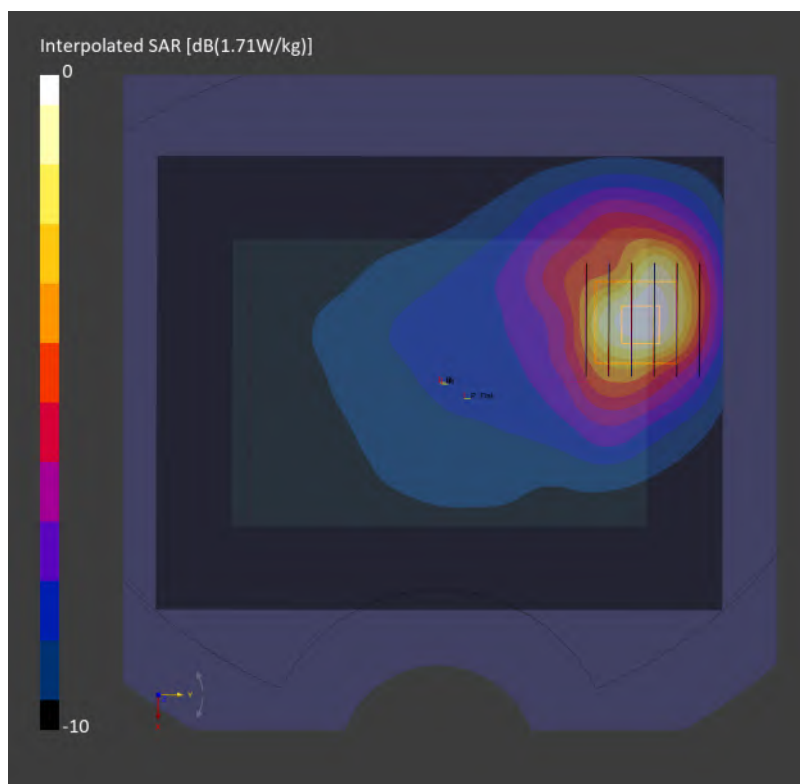

43_LTE Band 7_20M_QPSK_1_0_Right Side_5mm_Ch20850

Communication System: LTE-FDD; Frequency: 2510.000 MHz

Medium: HSL_600-7200_260905 Medium parameters used: $f = 2510.000$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.15, 7.62, 7.2); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (60.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.937 W/kg; SAR (10g) = 0.380 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 1.00 W/kg; SAR (8g) = 0.447 W/kg; SAR (10g) = 0.396 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 79.9 %

TSL Correction: Positive only

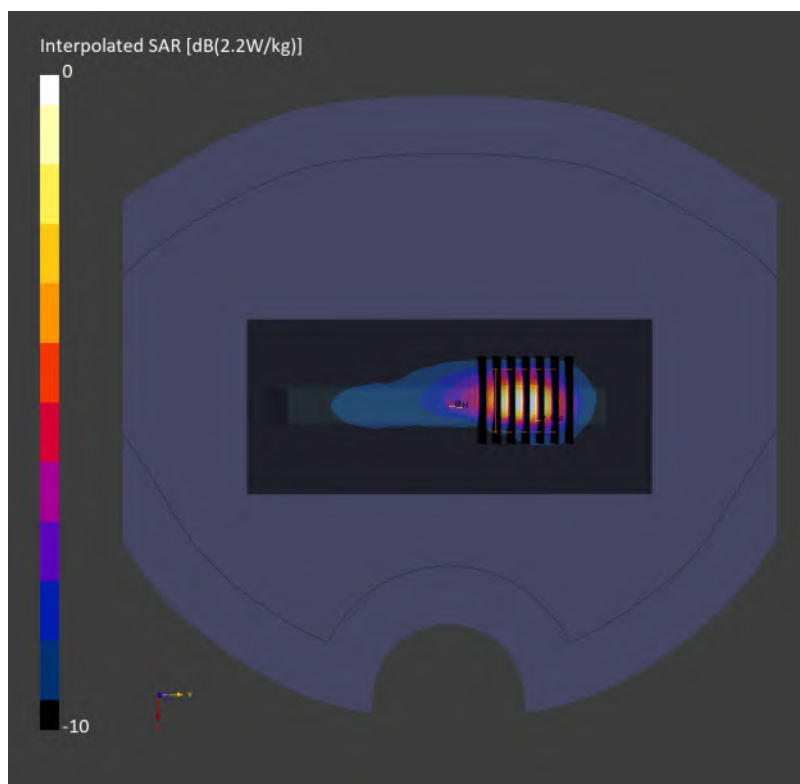

44_LTE Band 12_10M_QPSK_1_0_Back_5mm_Ch23095

Communication System: LTE-FDD; Frequency: 707.500 MHz

Medium: HSL_600-7200_260902 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(10.04, 9.32, 9.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10175

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.621 W/kg; SAR (10g) = 0.412 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.04 dB

SAR (1g) = 0.731 W/kg; SAR (8g) = 0.437 W/kg; SAR (10g) = 0.407 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 76.2 %

TSL Correction: Positive only

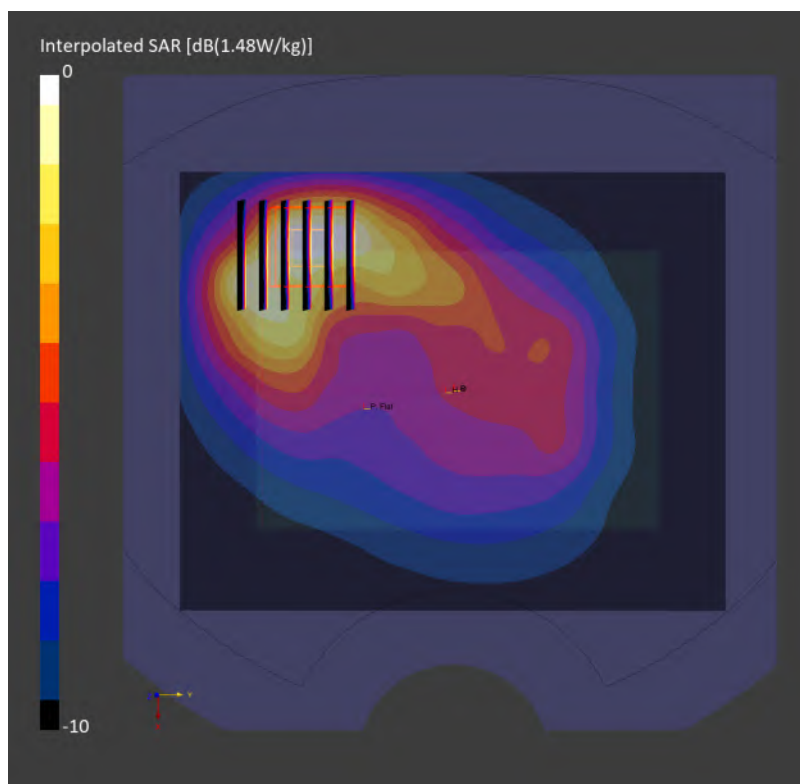

45_LTE Band 13_10M_QPSK_1_0_Back_5mm_Ch23230

Communication System: LTE-FDD; Frequency: 782.000 MHz

Medium: HSL_600-7200_260902 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.930$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(10.04, 9.32, 9.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10175

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.714 W/kg; SAR (10g) = 0.468 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.05 dB

SAR (1g) = 0.841 W/kg; SAR (8g) = 0.495 W/kg; SAR (10g) = 0.461 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 75.2 %

TSL Correction: Positive only

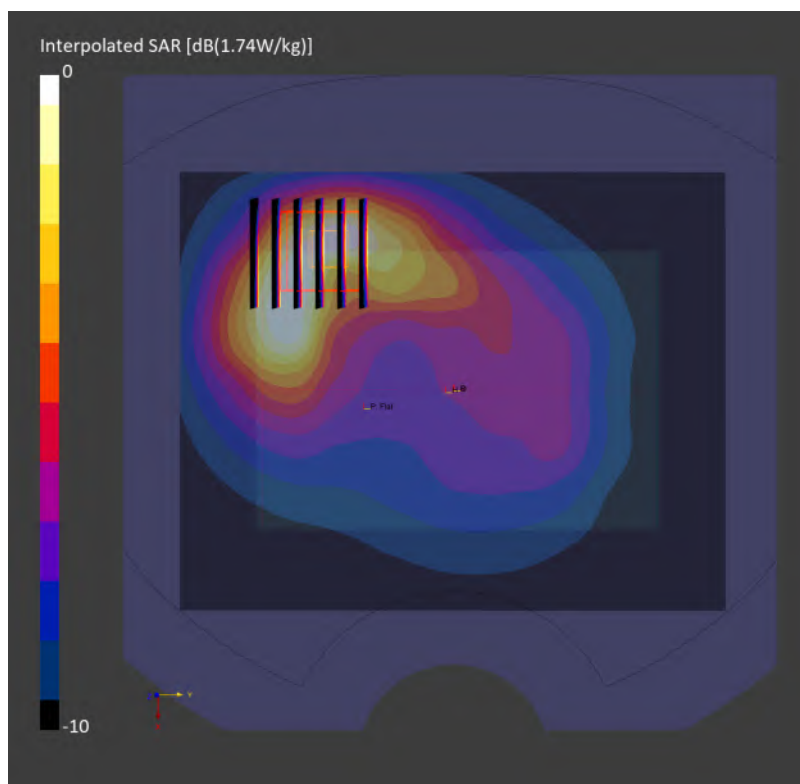

46_LTE Band 14_10M_QPSK_1_0_Back_5mm_Ch23330

Communication System: LTE-FDD; Frequency: 793.000 MHz

Medium: HSL_600-7200_260902 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(10.04, 9.32, 9.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10175

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.827 W/kg; SAR (10g) = 0.515 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.03 dB

SAR (1g) = 0.946 W/kg; SAR (8g) = 0.554 W/kg; SAR (10g) = 0.515 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 77.7 %

TSL Correction: Positive only

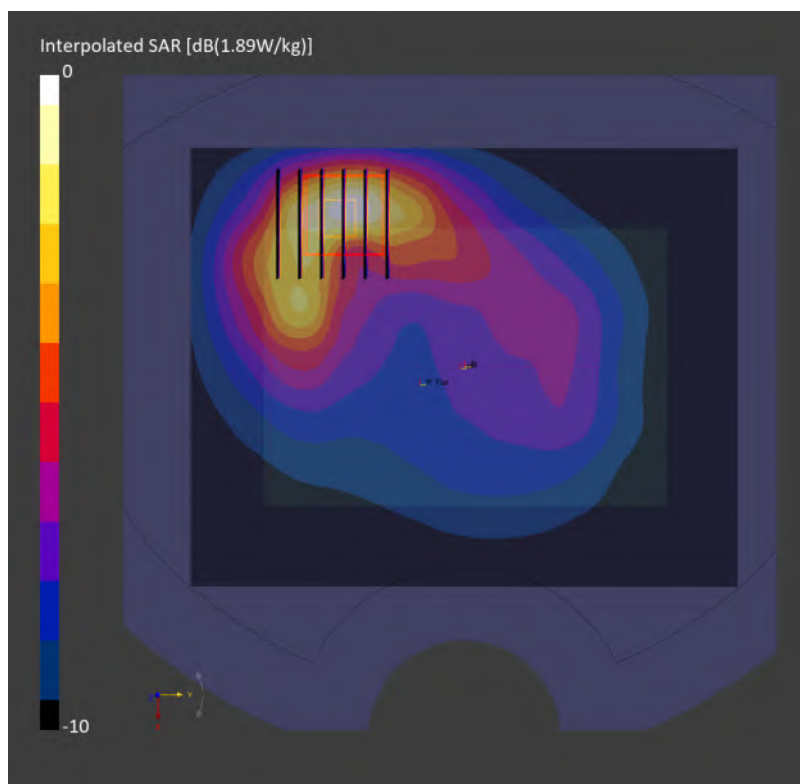

47_LTE Band 25_20M_QPSK_1_0_Back_5mm_Ch26590

Communication System: LTE-FDD; Frequency: 1905.000 MHz

Medium: HSL_600-7200_260903 Medium parameters used: $f = 1905.000$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.64, 8.14, 7.69); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.648 W/kg; SAR (10g) = 0.334 W/kg;

TSL Correction: Positive only

Zoom Scan (34.3 mm x 34.3 mm x 33.4 mm): Measurement Grid: 4.9 mm x 4.9 mm x 1.4 mm


Power Drift = -0.09 dB

SAR (1g) = 0.915 W/kg; SAR (8g) = 0.456 W/kg; SAR (10g) = 0.413 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 79.8 %

TSL Correction: Positive only

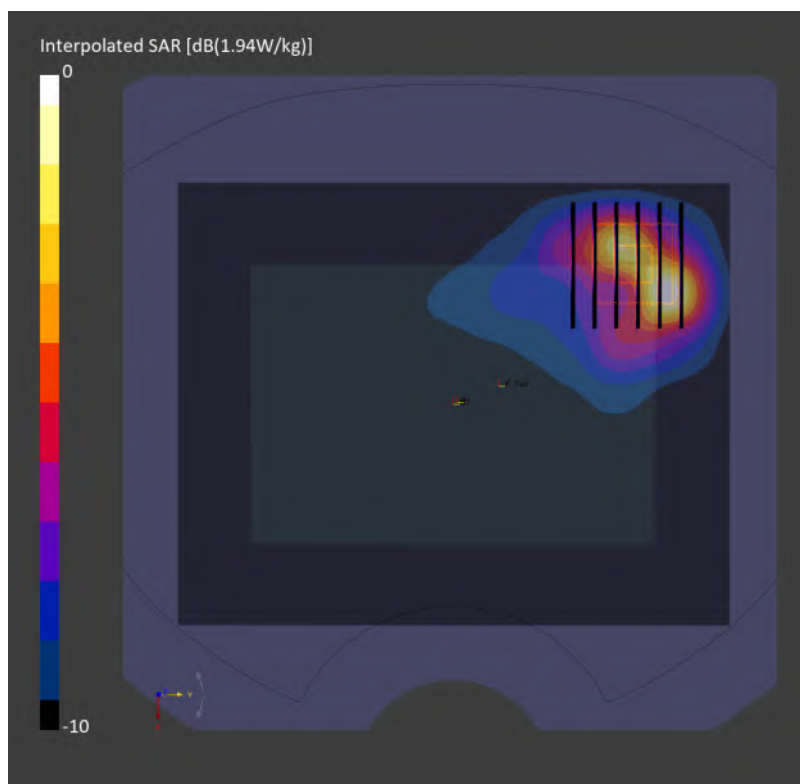

48_LTE Band 26_15M_QPSK_1_0_Back_5mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz

Medium: HSL_600-7200_260827 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 42.1$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(9.82, 9.12, 9.75); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10181

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.10 W/kg; SAR (10g) = 0.706 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.04 dB

SAR (1g) = 1.15 W/kg; SAR (8g) = 0.688 W/kg; SAR (10g) = 0.640 W/kg

Smallest distance from peaks to all points 3 dB below = 12.4 mm

Ratio of SAR at M2 to SAR at M1 = 81.7 %

TSL Correction: Positive only

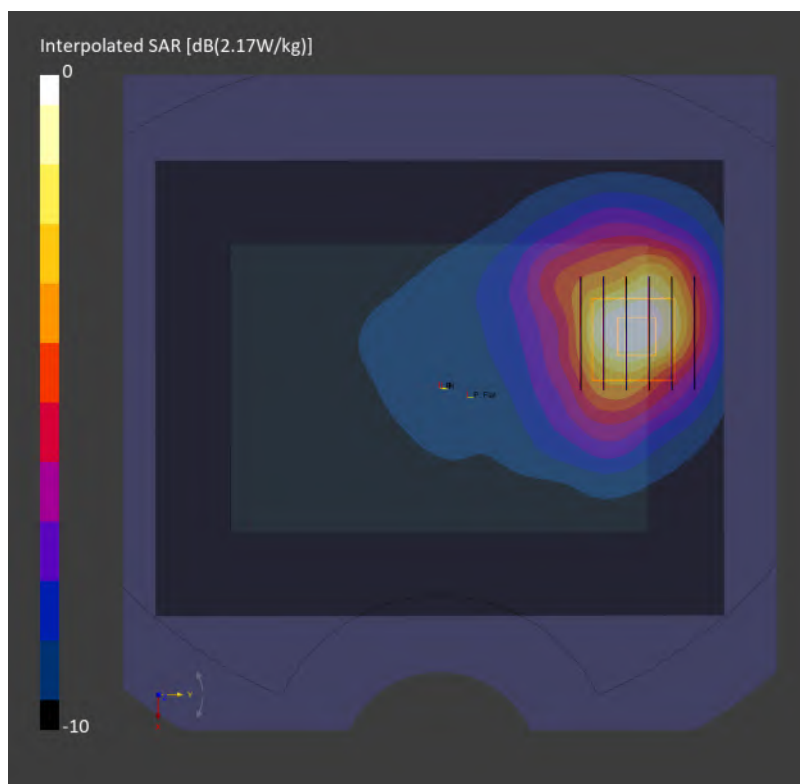

49_LTE Band 30_10M_QPSK_1_0_Top Side_5mm_Ch27710

Communication System: LTE-FDD; Frequency: 2310.000 MHz

Medium: HSL_600-7200_260905 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.73$ S/m; $\epsilon_r = 41.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.35, 7.83, 7.39); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10175

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.973 W/kg; SAR (10g) = 0.434 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.03 dB

SAR (1g) = 1.09 W/kg; SAR (8g) = 0.496 W/kg; SAR (10g) = 0.443 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 76.2 %

TSL Correction: Positive only

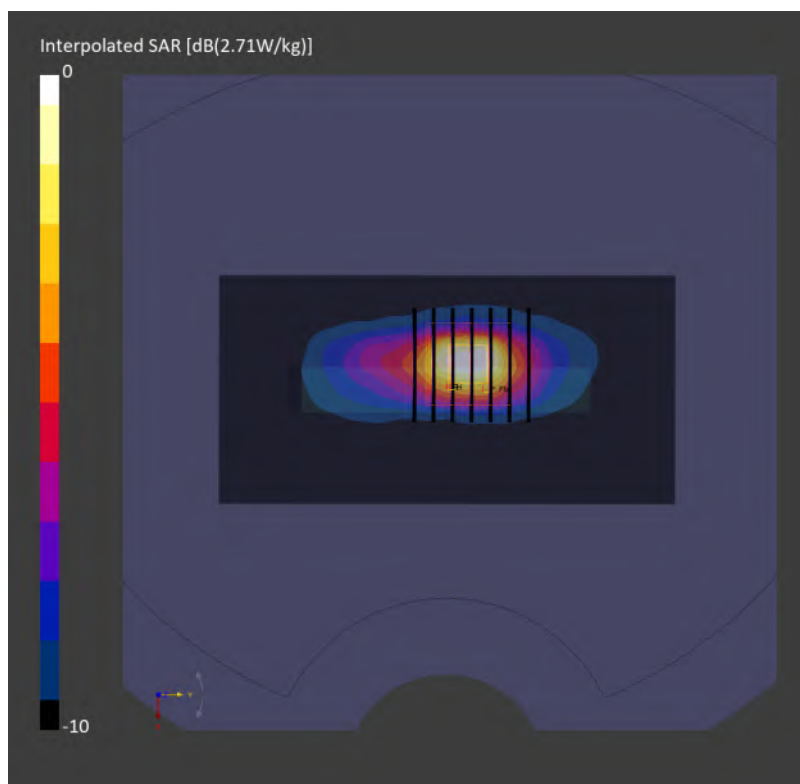

50_LTE Band 66_20M_QPSK_1_0_Bottom Side_5mm_Ch132072

Communication System: LTE-FDD; Frequency: 1720.000 MHz

Medium: HSL_600-7200_260903 Medium parameters used: $f = 1720.000$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.89, 8.41, 7.94); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.767 W/kg; SAR (10g) = 0.429 W/kg;

TSL Correction: Positive only

Zoom Scan (33.0 mm x 33.0 mm x 31.2 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm


Power Drift = 0.02 dB

SAR (1g) = 0.968 W/kg; SAR (8g) = 0.524 W/kg; SAR (10g) = 0.482 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 77.7 %

TSL Correction: Positive only

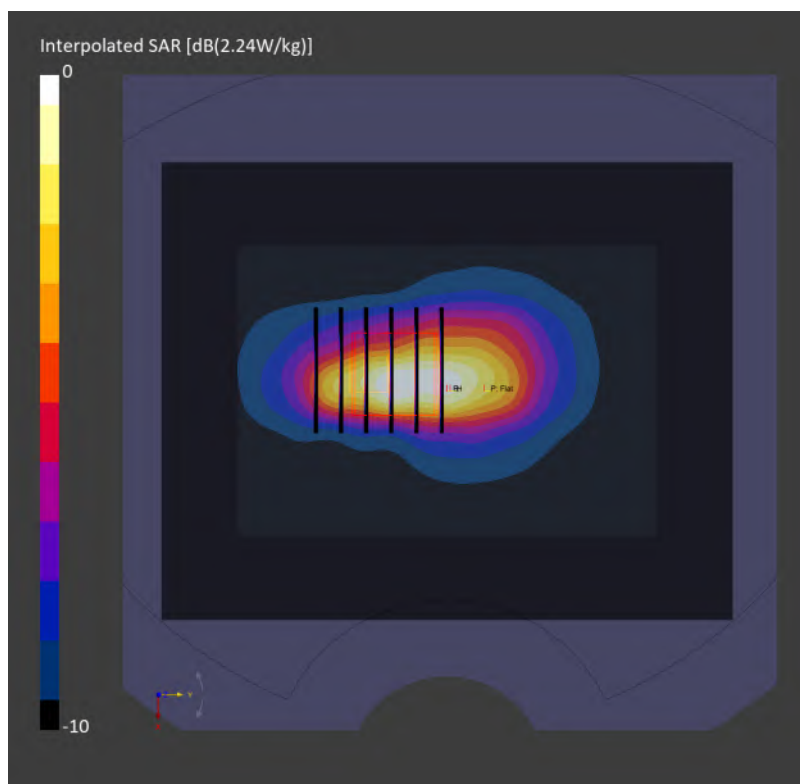

51_LTE Band 71_20M_QPSK_1_0_Back_5mm_Ch133297

Communication System: LTE-FDD; Frequency: 680.500 MHz

Medium: HSL_600-7200_260902 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 42.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(10.04, 9.32, 9.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.581 W/kg; SAR (10g) = 0.388 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.08 dB

SAR (1g) = 0.706 W/kg; SAR (8g) = 0.416 W/kg; SAR (10g) = 0.388 W/kg

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 72.4 %

TSL Correction: Positive only

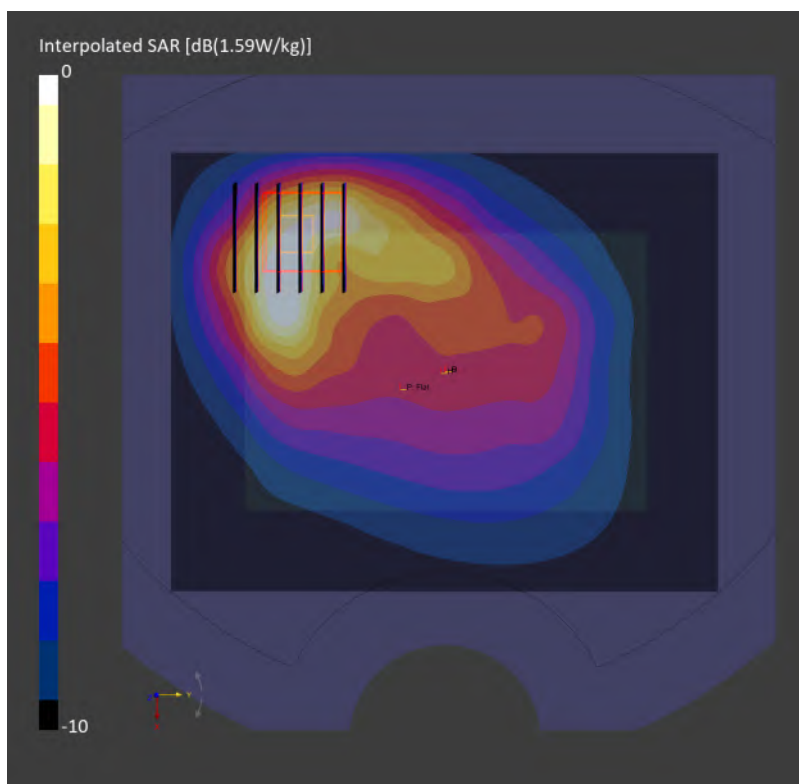

52_LTE Band 41_HPUE_20M_QPSK_1_0_Top Side_5mm_Ch40620

Communication System: LTE-TDD; Frequency: 2593.000 MHz

Medium: HSL_600-7200_260905 Medium parameters used: $f = 2593.000$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.15, 7.62, 7.2); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-TDD, 10435

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.415 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 1.13 W/kg; SAR (8g) = 0.494 W/kg; SAR (10g) = 0.438 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 77.3 %

TSL Correction: Positive only

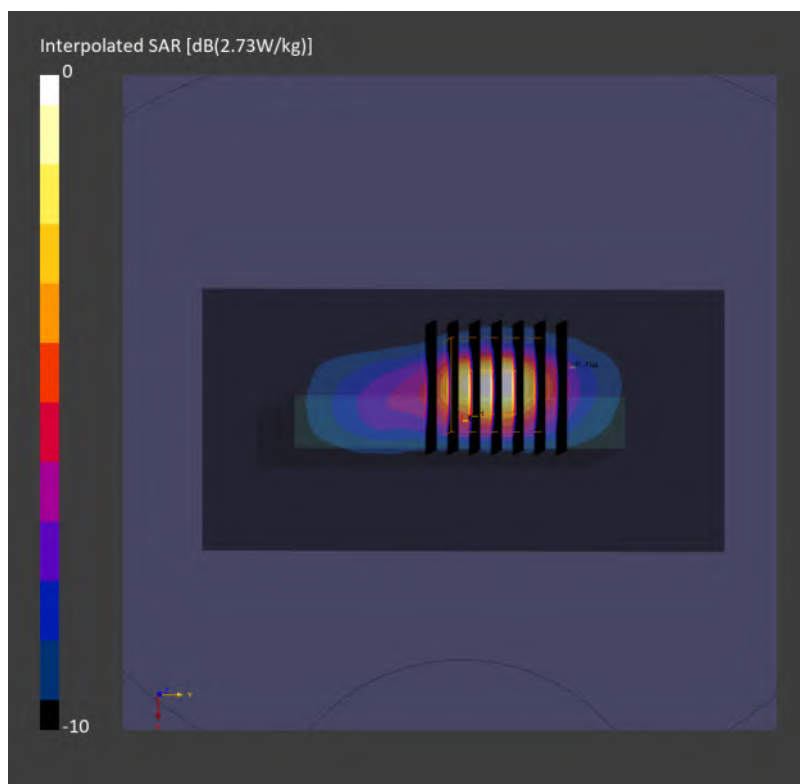

53_LTE Band 42_20M_QPSK_1_0_Top Side_5mm_Ch42590

Communication System: LTE-TDD; Frequency: 3500.000 MHz

Medium: HSL_600-7200_260904 Medium parameters used: $f = 3500.000$ MHz; $\sigma = 2.66$ S/m; $\epsilon_r = 38.2$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(6.54, 6.97, 6.58); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-TDD, 10435

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.08 W/kg; SAR (10g) = 0.372 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.06 dB

SAR (1g) = 1.10 W/kg; SAR (8g) = 0.428 W/kg; SAR (10g) = 0.377 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 73.7 %

TSL Correction: Positive only

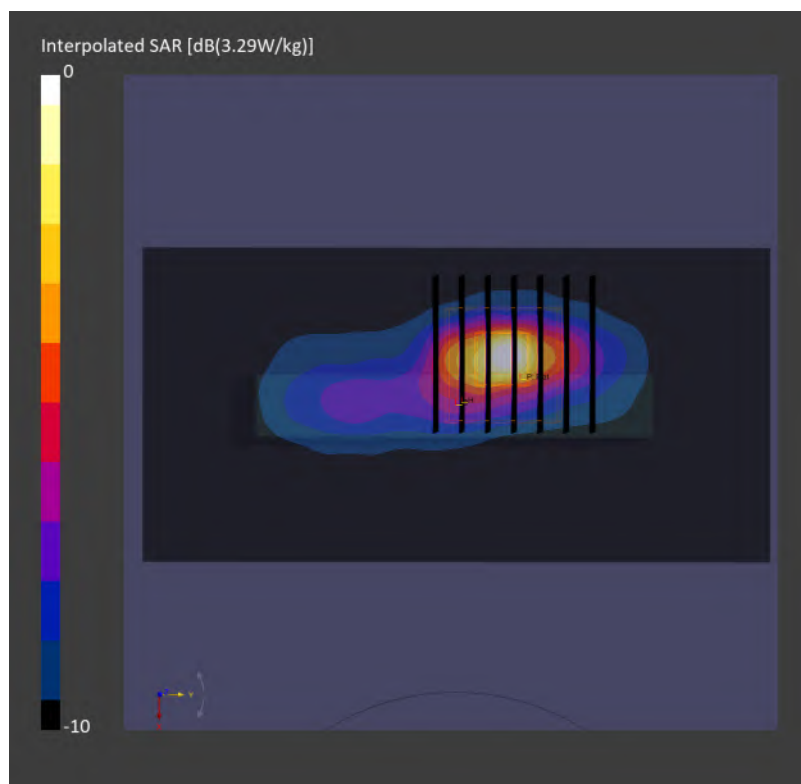

55_LTE Band 48_20M_QPSK_1_0_Right Side_5mm_Ch56640

Communication System: LTE-TDD; Frequency: 3690.000 MHz

Medium: HSL_600-7200_260904 Medium parameters used: $f = 3690.000$ MHz; $\sigma = 2.83$ S/m; $\epsilon_r = 37.9$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(6.68, 7.12, 6.72); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-TDD, 10435

Area Scan (60.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.942 W/kg; SAR (10g) = 0.275 W/kg;

TSL Correction: Positive only

Zoom Scan (29.4 mm x 29.4 mm x 29.1 mm): Measurement Grid: 4.2 mm x 4.2 mm x 1.4 mm


Power Drift = -0.18 dB

SAR (1g) = 1.11 W/kg; SAR (8g) = 0.363 W/kg; SAR (10g) = 0.311 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 73.5 %

TSL Correction: Positive only

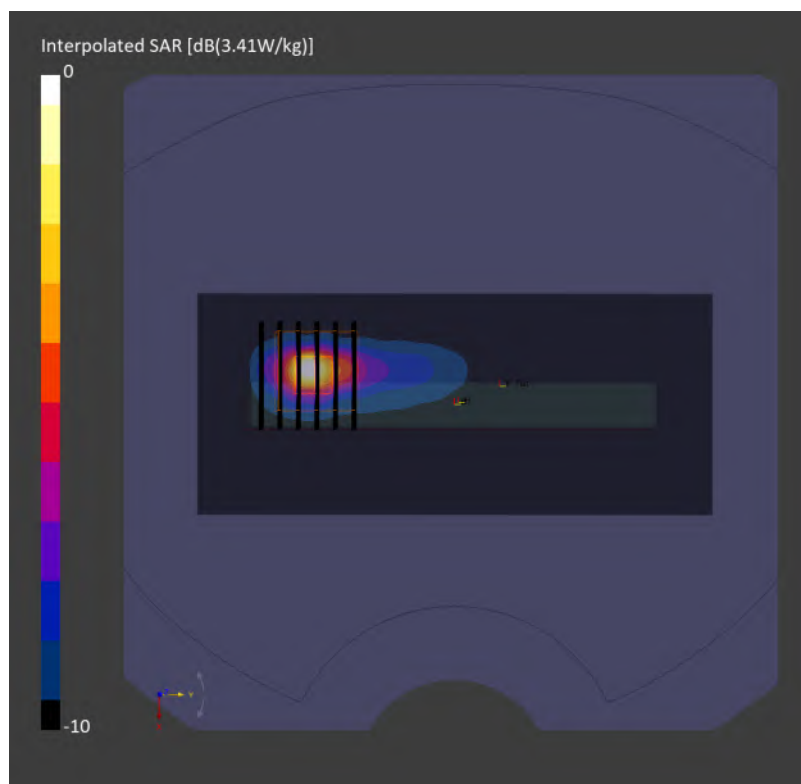

56_FR1 n7_50M_BPSK_135_68_Right Side_5mm_Ch507000

Communication System: NR FR1 FDD; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260823 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.90$ S/m; $\epsilon_r = 39.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.15, 7.62, 7.2); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000371

Area Scan (60.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.907 W/kg; SAR (10g) = 0.364 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.07 dB

SAR (1g) = 0.940 W/kg; SAR (8g) = 0.422 W/kg; SAR (10g) = 0.374 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.4 %

TSL Correction: Positive only

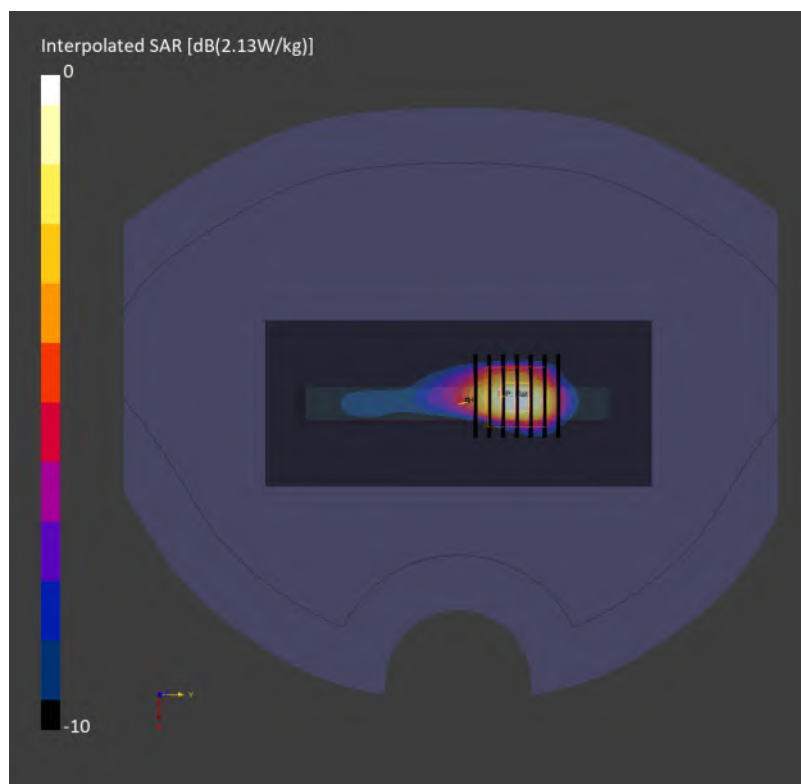

57_FR1 n12_15M_BPSK_36_22_Back_5mm_CH141500

Communication System: NR FR1 FDD; Frequency: 707.500 MHz

Medium: HSL_600-7200_260831 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.870$ S/m; $\epsilon_r = 43.6$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(9.53, 10.16, 9.59); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000071-

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.411 W/kg; SAR (10g) = 0.260 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 0.466 W/kg; SAR (8g) = 0.284 W/kg; SAR (10g) = 0.265 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 77.1 %

TSL Correction: Positive only

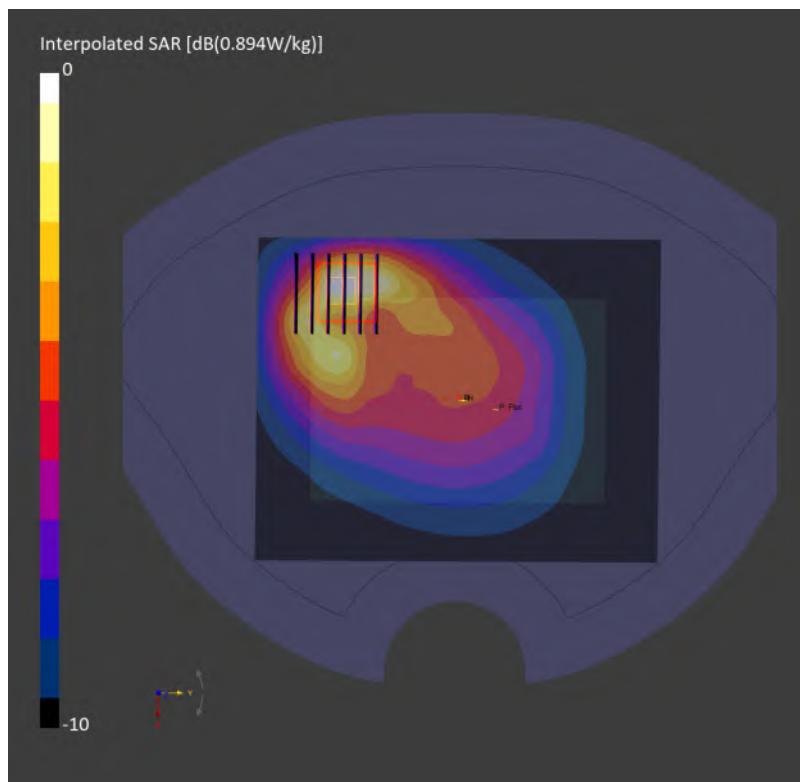

58_FR1 n13 _10M_BPSK_25_14_Back_5mm_Ch156400

Communication System: NR FR1 FDD; Frequency: 782.000 MHz

Medium: HSL_600-7200_260906 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 44.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(9.53, 10.16, 9.59); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000032

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.581 W/kg; SAR (10g) = 0.376 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 0.608 W/kg; SAR (8g) = 0.377 W/kg; SAR (10g) = 0.353 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 82.8 %

TSL Correction: Positive only

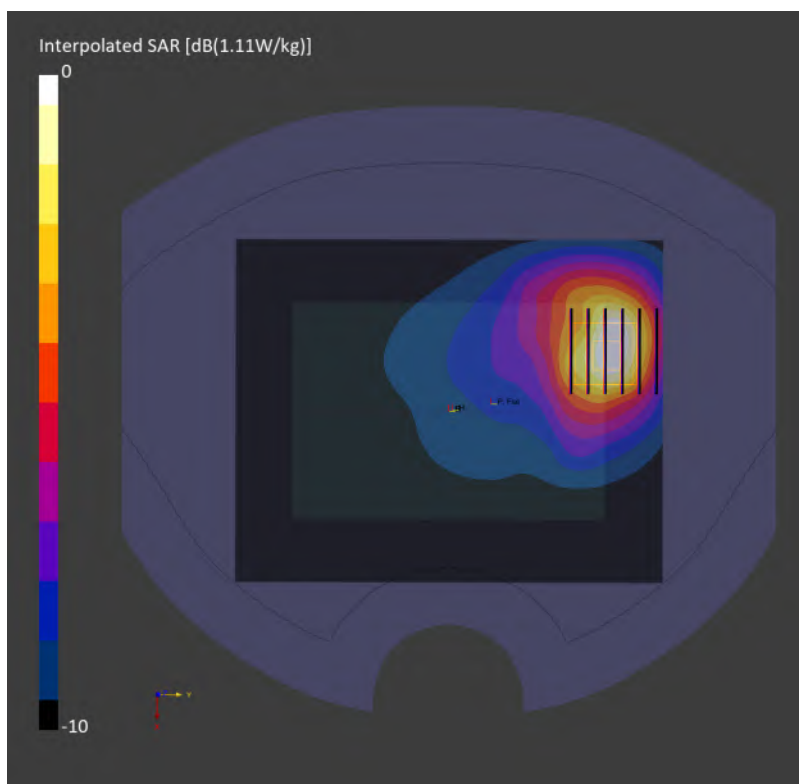

59_FR1 n14_HPUE_10M_BPSK_1_1_Back_5mm_Ch158600

Communication System: NR FR1 FDD; Frequency: 793.000 MHz

Medium: HSL_600-7200_260902 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(10.04, 9.32, 9.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000031

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.807 W/kg; SAR (10g) = 0.500 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.845 W/kg; SAR (8g) = 0.498 W/kg; SAR (10g) = 0.464 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 77.8 %

TSL Correction: Positive only

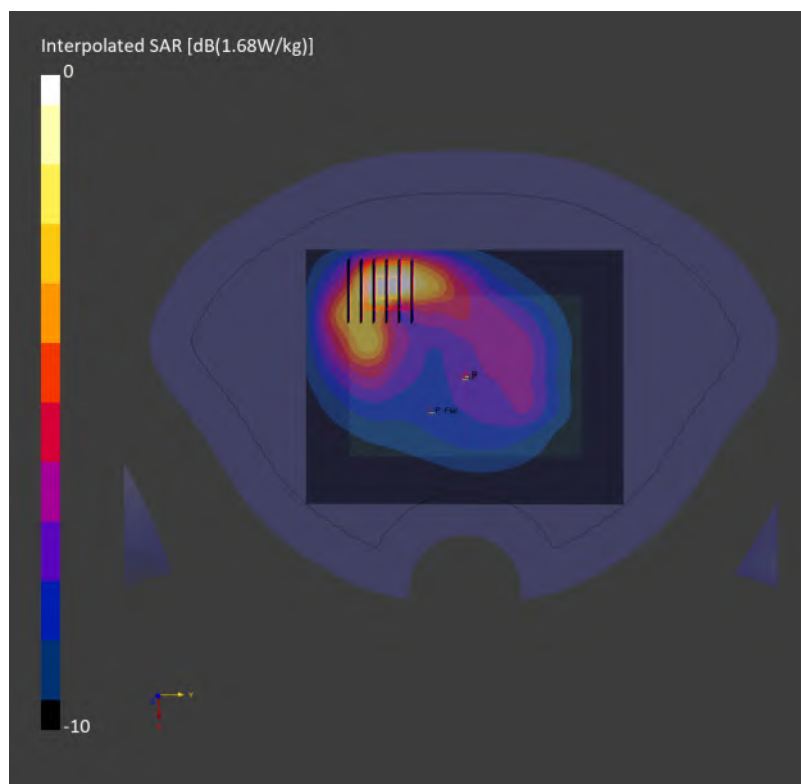

60_FR1 n25_40M_BPSK_108_54_Back_5mm_Ch376500

Communication System: NR FR1 FDD; Frequency: 1882.500 MHz

Medium: HSL_600-7200_260819 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.46$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.97, 7.4, 7.91); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000284

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.720 W/kg; SAR (10g) = 0.355 W/kg;

TSL Correction: Positive only

Zoom Scan (33.0 mm x 33.0 mm x 31.2 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm


Power Drift = -0.19 dB

SAR (1g) = 0.923 W/kg; SAR (8g) = 0.471 W/kg; SAR (10g) = 0.426 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.9 %

TSL Correction: Positive only

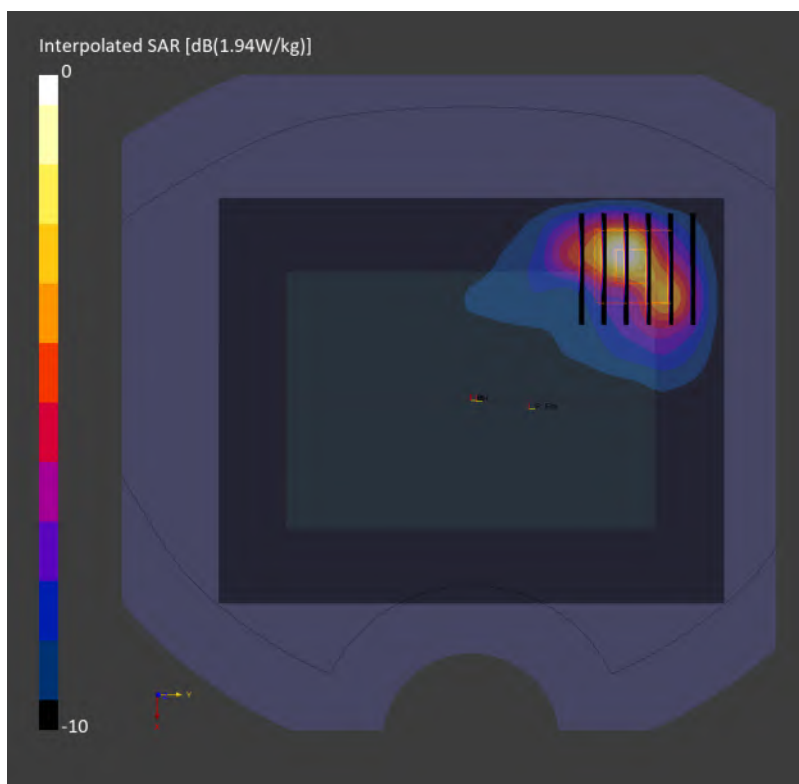

61_FR1 n26_HPUE_20M_BPSK_50_28_Right Side_5mm_Ch166300

Communication System: NR FR1 FDD; Frequency: 831.500 MHz

Medium: HSL_600-7200_260902 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.948$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(9.82, 9.12, 9.75); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000112

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 12.0 mm x 15.0 mm

SAR (1g) = 0.782 W/kg; SAR (10g) = 0.487 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.03 dB

SAR (1g) = 0.851 W/kg; SAR (8g) = 0.526 W/kg; SAR (10g) = 0.492 W/kg

Smallest distance from peaks to all points 3 dB below = 9.9 mm

Ratio of SAR at M2 to SAR at M1 = 77.3 %

TSL Correction: Positive only

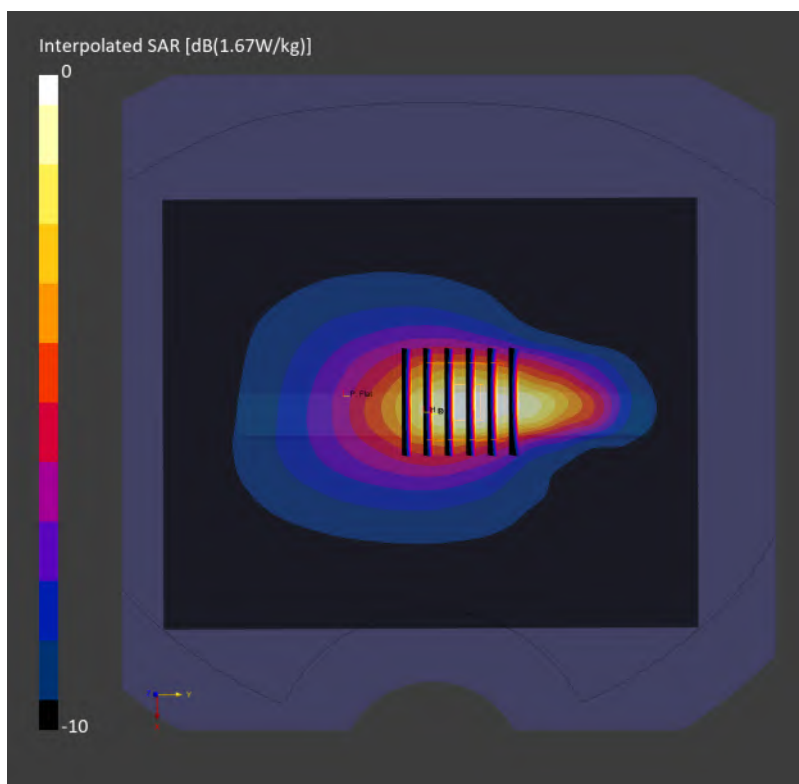

62_FR1 n30_10M_BPSK_25_14_Back_5mm_Ch462000

Communication System: NR FR1 FDD; Frequency: 2310.000 MHz

Medium: HSL_600-7200_260820 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.76$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.6, 7.06, 7.54); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000029

Area Scan (100.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.895 W/kg; SAR (10g) = 0.358 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.18 dB

SAR (1g) = 1.00 W/kg; SAR (8g) = 0.445 W/kg; SAR (10g) = 0.395 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.9 %

TSL Correction: Positive only

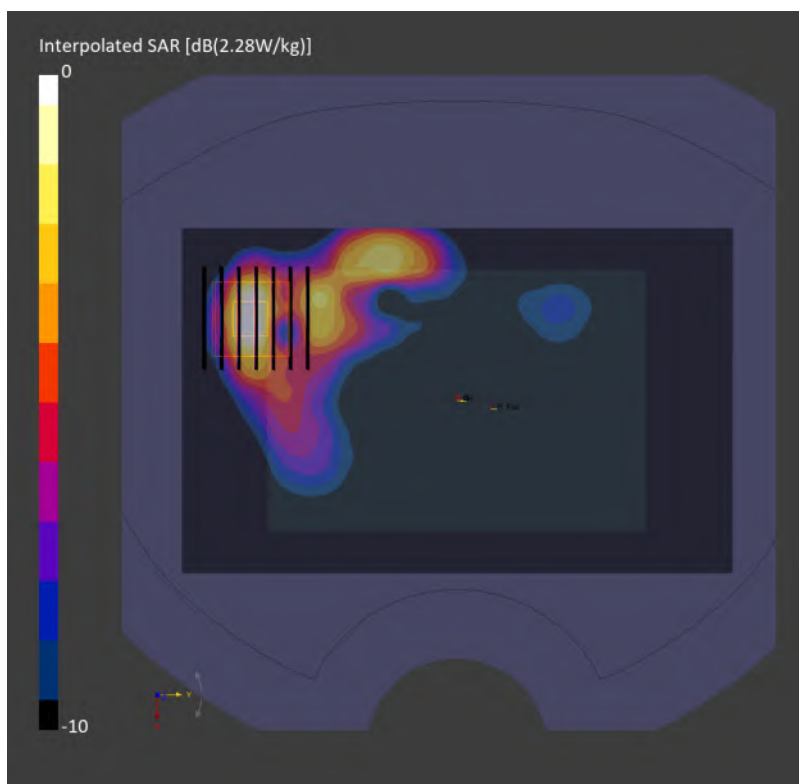

63_FR1 n66_45M_BPSK_120_60_Top Side_5mm_Ch349000

Communication System: NR FR1 FDD; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260822 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.89, 8.41, 7.94); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000332

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 12.0 mm x 15.0 mm

SAR (1g) = 0.870 W/kg; SAR (10g) = 0.428 W/kg;

TSL Correction: Positive only

Zoom Scan (35.7 mm x 35.7 mm x 31.2 mm): Measurement Grid: 5.1 mm x 5.1 mm x 1.5 mm


Power Drift = 0.13 dB

SAR (1g) = 0.994 W/kg; SAR (8g) = 0.479 W/kg; SAR (10g) = 0.432 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 74.4 %

TSL Correction: Positive only

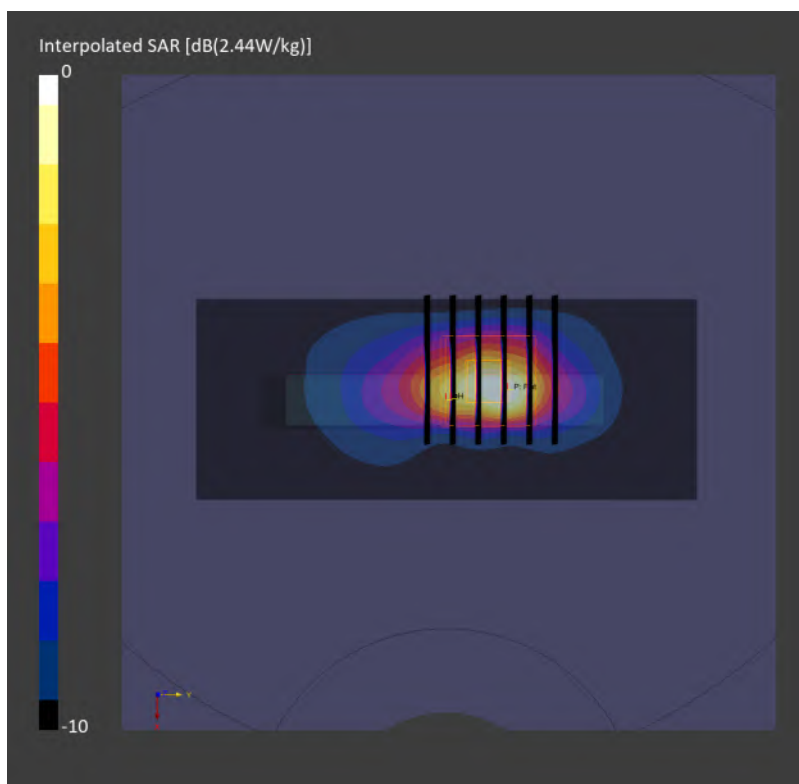

64_FR1 n70_15M_BPSK_36_22_Back_5mm_Ch340500

Communication System: NR FR1 FDD; Frequency: 1702.500 MHz

Medium: HSL_600-7200_260819 Medium parameters used: $f = 1702.500$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 41.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(8.25, 7.66, 8.19); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000071

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.863 W/kg; SAR (10g) = 0.474 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.07 dB

SAR (1g) = 0.905 W/kg; SAR (8g) = 0.507 W/kg; SAR (10g) = 0.467 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 81.3 %

TSL Correction: Positive only

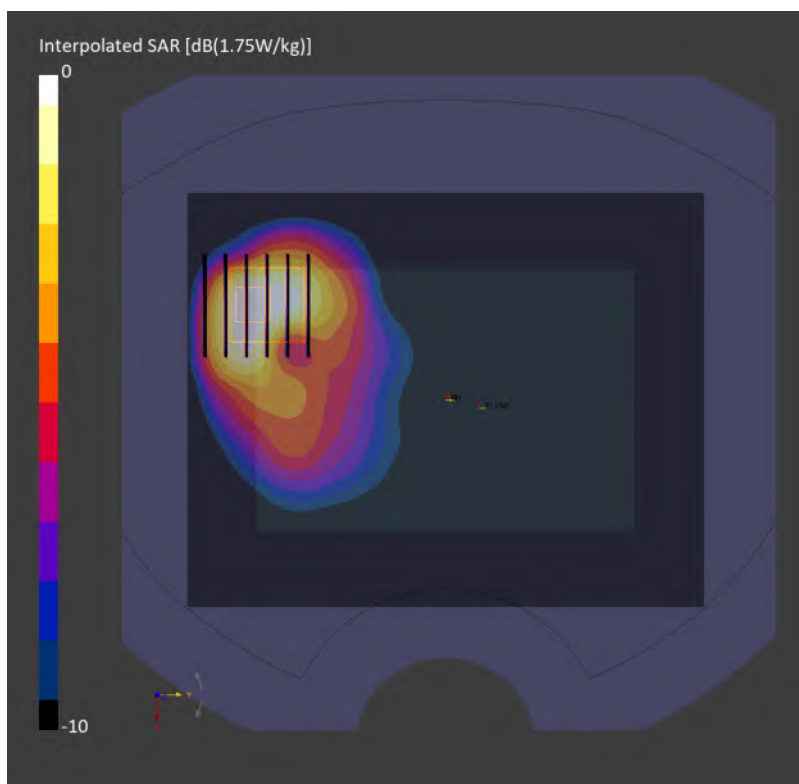

65_FR1 n71_HPUE_35M_BPSK_90_45_Right Side_5mm_Ch136100

Communication System: NR FR1 FDD; Frequency: 680.500 MHz

Medium: HSL_600-7200_260902 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 42.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(10.04, 9.32, 9.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000239

Area Scan (48.0 mm x 150.0 mm): Measurement Grid: 12.0 mm x 15.0 mm

SAR (1g) = 0.240 W/kg; SAR (10g) = 0.136 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.07 dB

SAR (1g) = 0.248 W/kg; SAR (8g) = 0.134 W/kg; SAR (10g) = 0.124 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 63.4 %

TSL Correction: Positive only

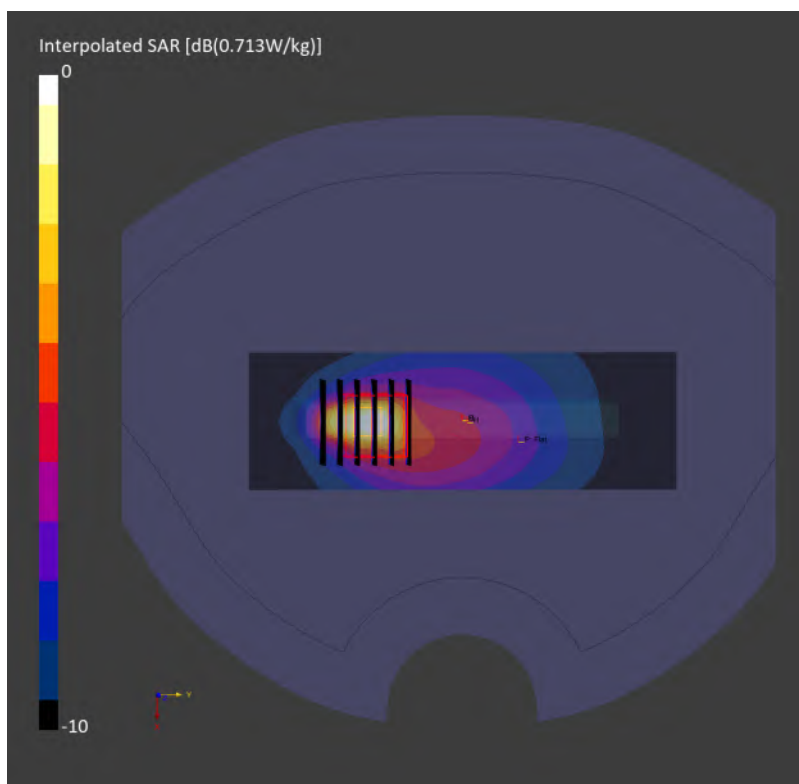

66_FR1 n41_100M_BPSK_135_69_Right Side_5mm_CH518598

Communication System: NR FR1 TDD; Frequency: 2592.990 MHz

Medium: HSL_600-7200_260823 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 39.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.15, 7.62, 7.2); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 TDD, 1003251

Area Scan (60.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.881 W/kg; SAR (10g) = 0.338 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.11 dB

SAR (1g) = 0.934 W/kg; SAR (8g) = 0.399 W/kg; SAR (10g) = 0.353 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 76.0 %

TSL Correction: Positive only

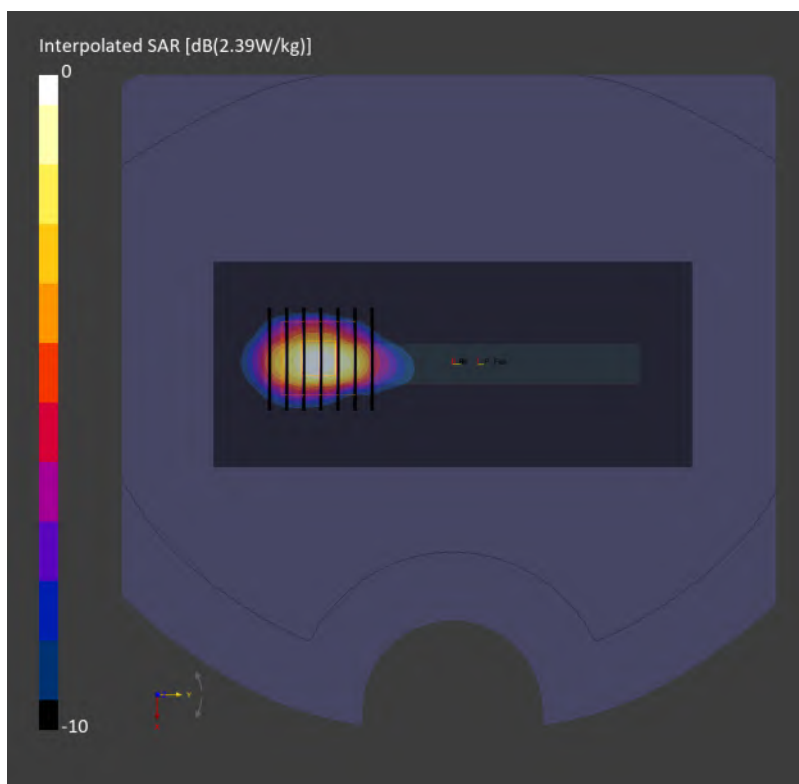

67_FR1 n48_40M_BPSK_1_1_Right Side_5mm_Ch638000

Communication System: NR FR1 TDD; Frequency: 3570.000 MHz

Medium: HSL_600-7200_260908 Medium parameters used: $f = 3570.000$ MHz; $\sigma = 2.72$ S/m; $\epsilon_r = 38.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(6.79, 6.3, 6.74); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 TDD, 1002251

Area Scan (60.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.956 W/kg; SAR (10g) = 0.271 W/kg;

TSL Correction: Positive only

Zoom Scan (28.0 mm x 28.0 mm x 33.4 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.02 dB

SAR (1g) = 1.04 W/kg; SAR (8g) = 0.336 W/kg; SAR (10g) = 0.288 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 72.3 %

TSL Correction: Positive only

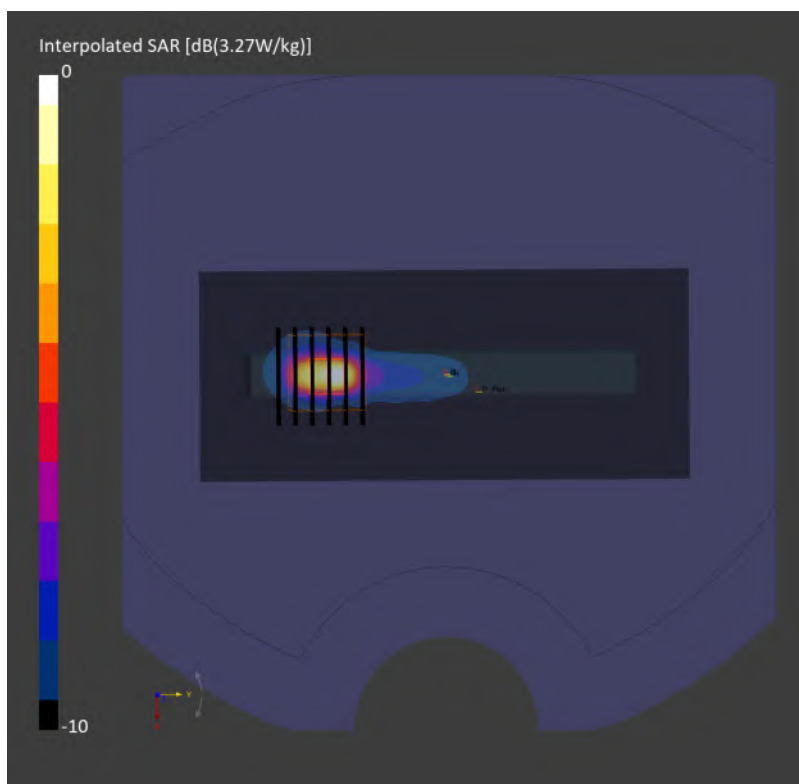

68_FR1 n77_100M_BPSK_1_1_Top Side_5mm_Ch650000

Communication System: NR FR1 TDD; Frequency: 3750.000 MHz

Medium: HSL_600-7200_260821 Medium parameters used: $f = 3750.000$ MHz; $\sigma = 2.99$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(6.74, 6.25, 6.69); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAMV8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 TDD, 1003251

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.563 W/kg; SAR (10g) = 0.181 W/kg;

TSL Correction: Positive only

Zoom Scan (28.0 mm x 28.0 mm x 33.4 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.13 dB

SAR (1g) = 0.785 W/kg; SAR (8g) = 0.253 W/kg; SAR (10g) = 0.221 W/kg

Smallest distance from peaks to all points 3 dB below = 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 72.6 %

TSL Correction: Positive only

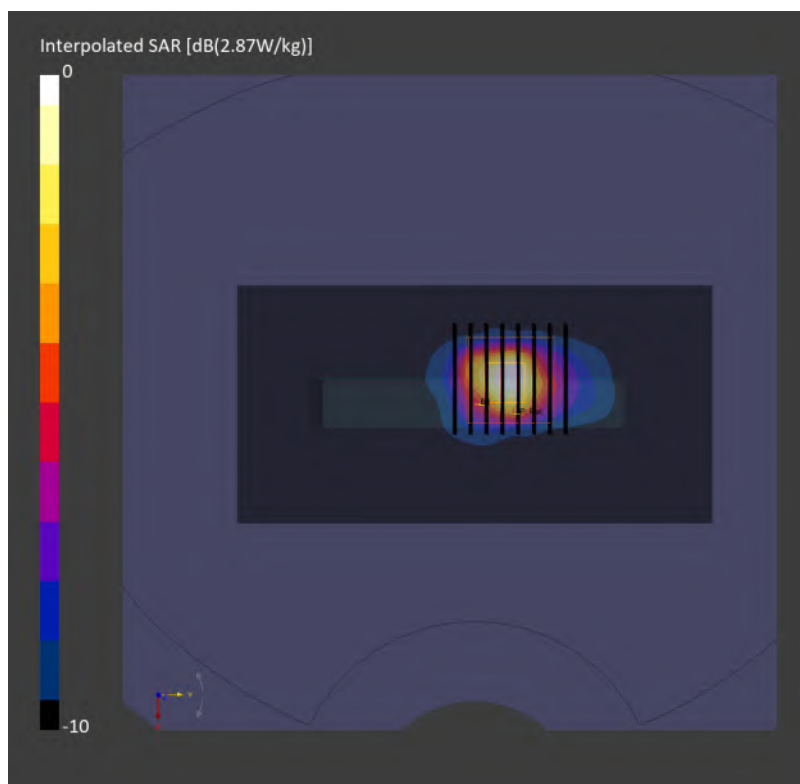

69_WLAN2.4GHz_802.11b 1Mbps_Back_5mm_Ch6

Communication System: WiFi (802.11b); Frequency: 2437.000 MHz

Medium: HSL_600-7200_260904 Medium parameters used: $f = 2437.000$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.44, 6.91, 7.38); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11b), 10415

Area Scan (100.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.787 W/kg; SAR (10g) = 0.361 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.09 dB

SAR (1g) = 0.875 W/kg; SAR (8g) = 0.404 W/kg; SAR (10g) = 0.362 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 79.7 %

TSL Correction: Positive only

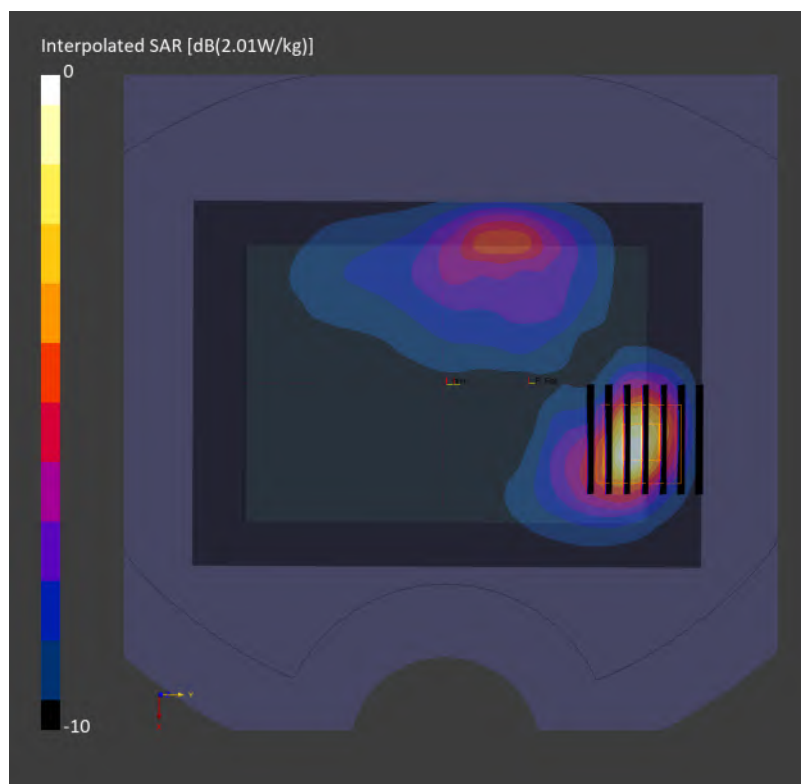

70_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch42

Communication System: WiFi (802.11ac); Frequency: 5210.000 MHz

Medium: HSL_600-7200_260906 Medium parameters used: $f = 5210.000$ MHz; $\sigma = 4.45$ S/m; $\epsilon_r = 35.2$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(5.8, 5.38, 5.76); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11ac), 10554

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.573 W/kg; SAR (10g) = 0.207 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.01 dB

SAR (1g) = 0.755 W/kg; SAR (8g) = 0.265 W/kg; SAR (10g) = 0.230 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 60.9 %

TSL Correction: Positive only

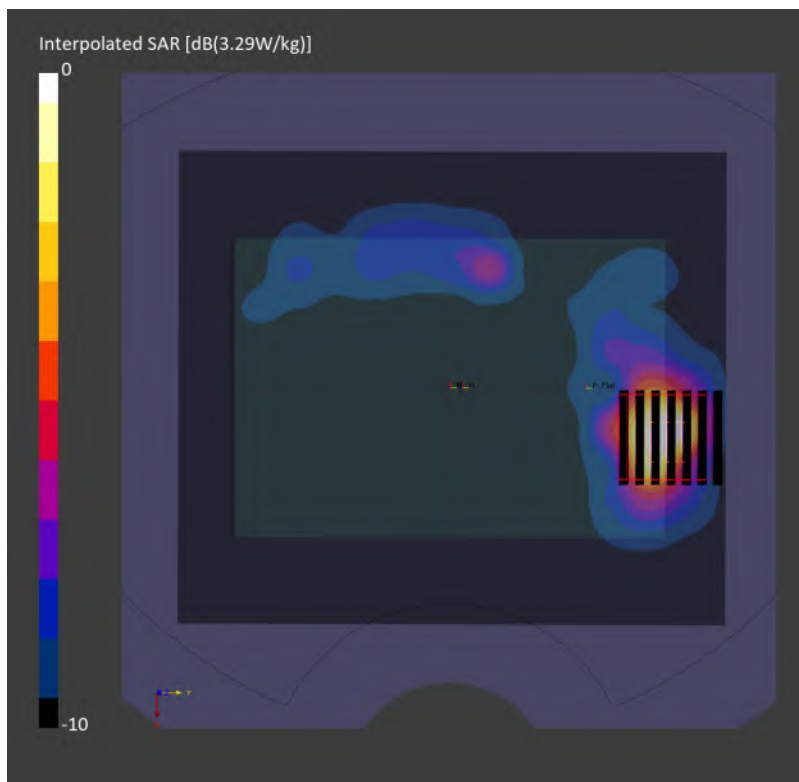

71_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch155

Communication System: WiFi (802.11ac); Frequency: 5775.000 MHz

Medium: HSL_600-7200_260906 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.09$ S/m; $\epsilon_r = 34.2$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(5.23, 4.86, 5.19); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11ac), 10554

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.463 W/kg; SAR (10g) = 0.166 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.11 dB

SAR (1g) = 0.565 W/kg; SAR (8g) = 0.183 W/kg; SAR (10g) = 0.156 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 60.2 %

TSL Correction: Positive only

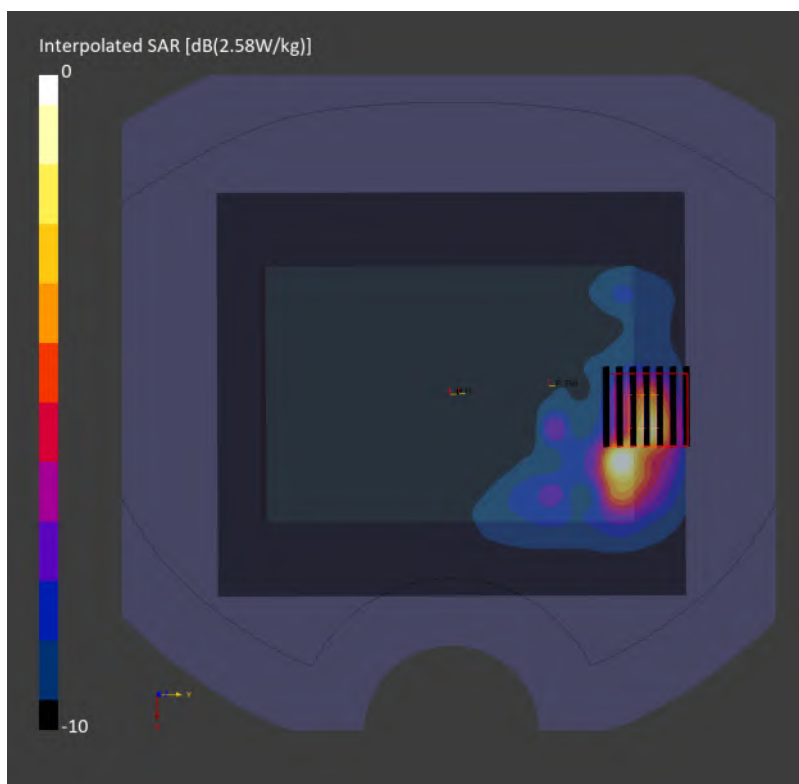

72_Bluetooth_1Mbps_Back_5mm_Ch39

Communication System: Bluetooth; Frequency: 2441.000 MHz

Medium: HSL_600-7200_260831 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 41.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.44, 6.91, 7.38); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: Bluetooth, 10038

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.697 W/kg; SAR (10g) = 0.328 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.18 dB

SAR (1g) = 0.860 W/kg; SAR (8g) = 0.380 W/kg; SAR (10g) = 0.339 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 79.9 %

TSL Correction: Positive only

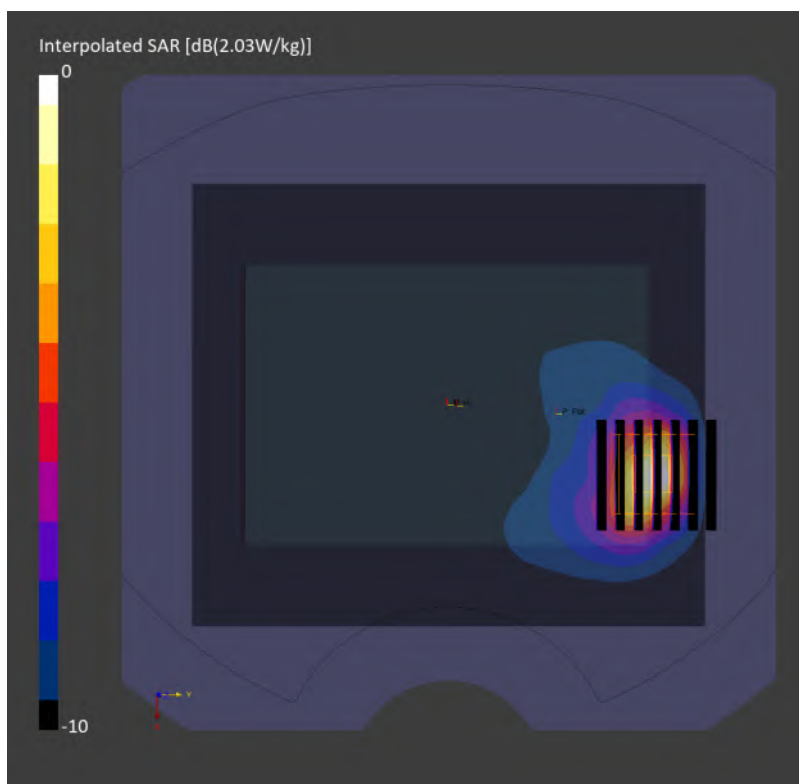

73_GSM850_GPRS 2 Tx slots_Back_5mm_Ch251

Communication System: GSM; Frequency: 848.800 MHz

Medium: HSL_600-7200_260902 Medium parameters used: $f = 848.800$ MHz; $\sigma = 0.954$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(9.82, 9.12, 9.75); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: GSM, 10024

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.604 W/kg; SAR (10g) = 0.384 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.03 dB

SAR (1g) = 0.669 W/kg; SAR (8g) = 0.399 W/kg; SAR (10g) = 0.371 W/kg

Smallest distance from peaks to all points 3 dB below = 12.4 mm

Ratio of SAR at M2 to SAR at M1 = 80.8 %

TSL Correction: Positive only

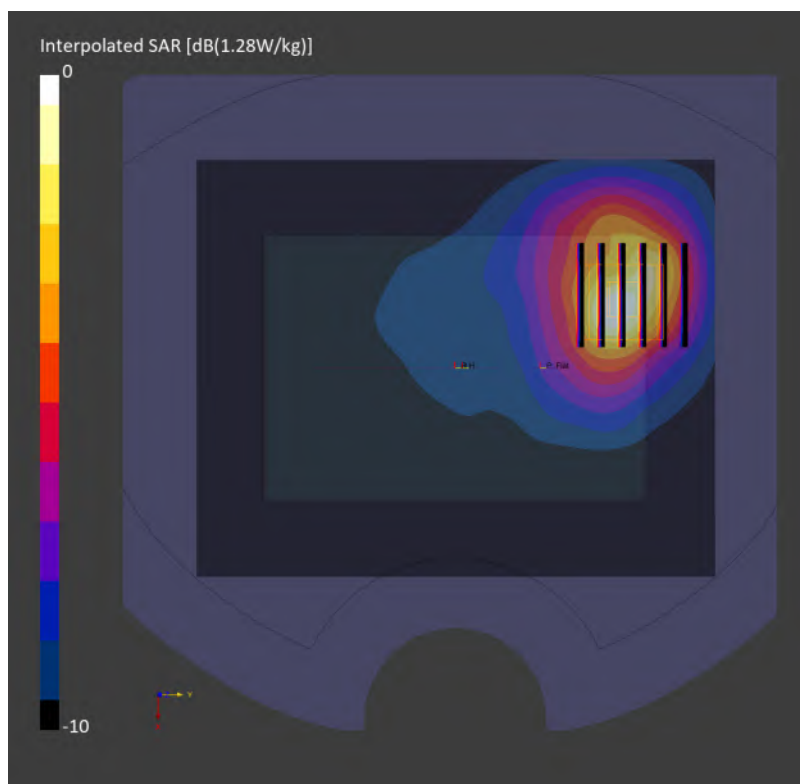

74_GSM1900_GPRS 4 Tx slots_Back_5mm_Ch512

Communication System: GSM; Frequency: 1850.200 MHz

Medium: HSL_600-7200_260901 Medium parameters used: $f = 1850.200$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.97, 7.4, 7.91); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: GSM, 10028

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.755 W/kg; SAR (10g) = 0.378 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.14 dB

SAR (1g) = 0.769 W/kg; SAR (8g) = 0.401 W/kg; SAR (10g) = 0.366 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 80.2 %

TSL Correction: Positive only

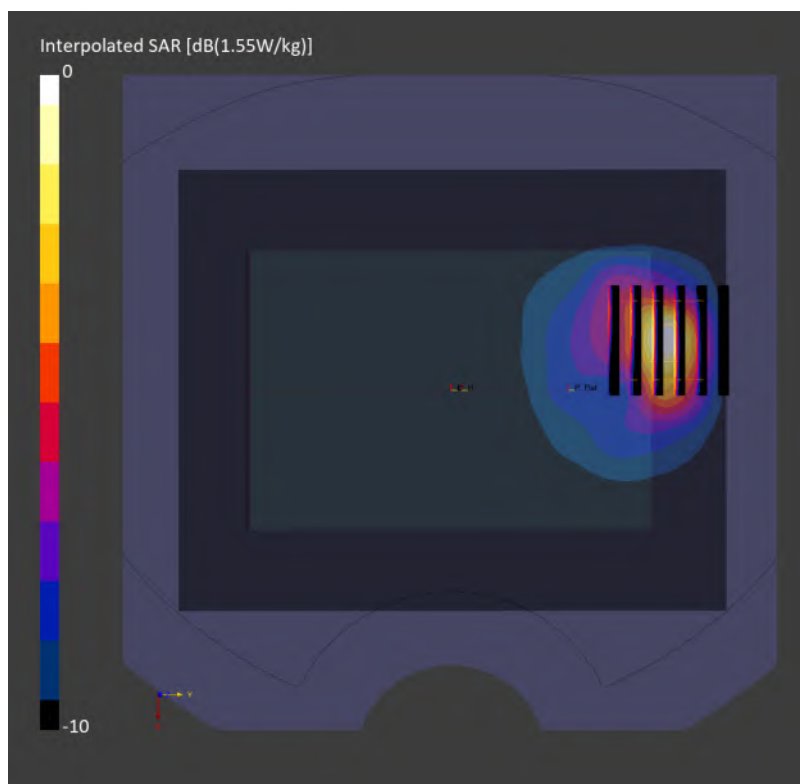

75_WCDMA II_RMC 12.2Kbps_Back_5mm_Ch9262

Communication System: UMTS-FDD; Frequency: 1852.400 MHz

Medium: HSL_600-7200_260901 Medium parameters used: $f = 1852.400$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.97, 7.4, 7.91); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: UMTS-FDD, 10011

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.827 W/kg; SAR (10g) = 0.418 W/kg;

TSL Correction: Positive only

Zoom Scan (34.2 mm x 34.2 mm x 31.2 mm): Measurement Grid: 5.7 mm x 5.7 mm x 1.5 mm


Power Drift = 0.00 dB

SAR (1g) = 0.810 W/kg; SAR (8g) = 0.415 W/kg; SAR (10g) = 0.377 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 79.3 %

TSL Correction: Positive only

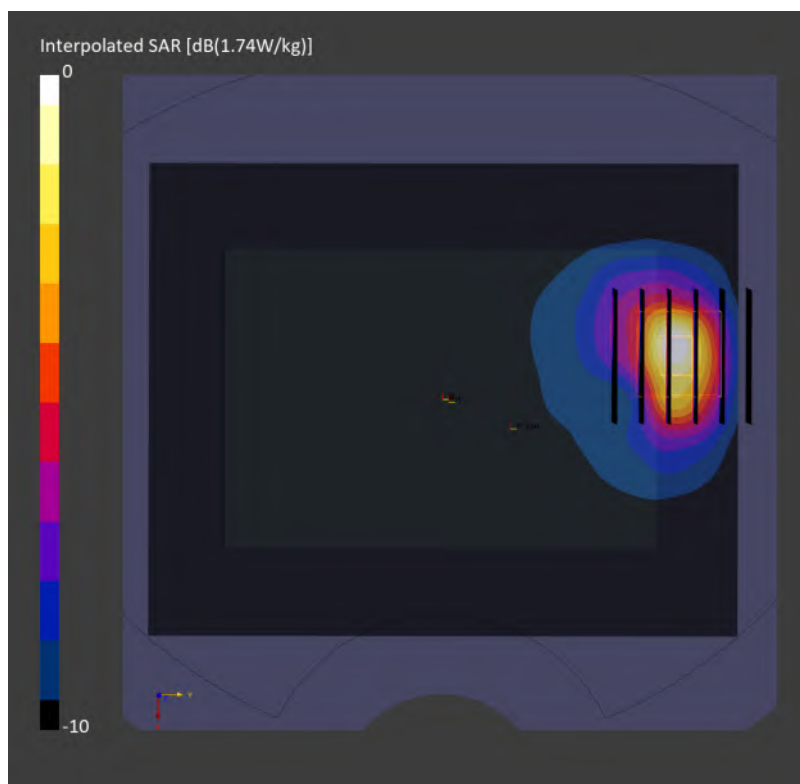

76_WCDMA IV_RMC 12.2Kbps_Back_5mm_Ch1312

Communication System: UMTS-FDD; Frequency: 1712.400 MHz

Medium: HSL_600-7200_260901 Medium parameters used: $f = 1712.400$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(8.25, 7.66, 8.19); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: UMTS-FDD, 10011

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.939 W/kg; SAR (10g) = 0.528 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.02 dB

SAR (1g) = 1.07 W/kg; SAR (8g) = 0.601 W/kg; SAR (10g) = 0.554 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 81.0 %

TSL Correction: Positive only

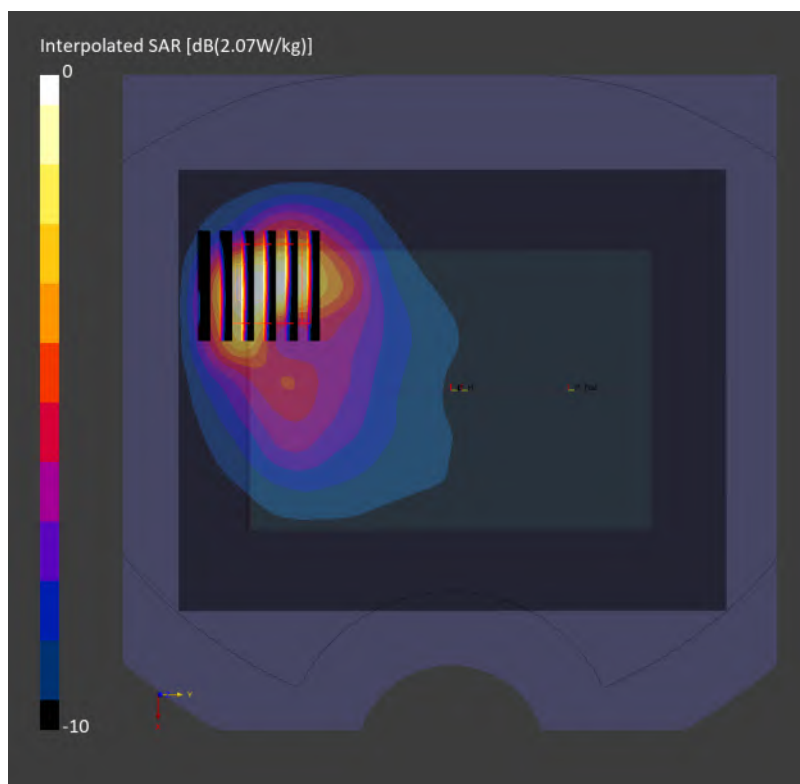

77_WCDMA V_RMC 12.2Kbps_Back_5mm_Ch4132

Communication System: UMTS-FDD; Frequency: 826.400 MHz

Medium: HSL_600-7200_260827 Medium parameters used: $f = 826.400$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(9.82, 9.12, 9.75); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: UMTS-FDD, 10011

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.870 W/kg; SAR (10g) = 0.557 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.908 W/kg; SAR (8g) = 0.545 W/kg; SAR (10g) = 0.508 W/kg

Smallest distance from peaks to all points 3 dB below = 12.4 mm

Ratio of SAR at M2 to SAR at M1 = 79.9 %

TSL Correction: Positive only

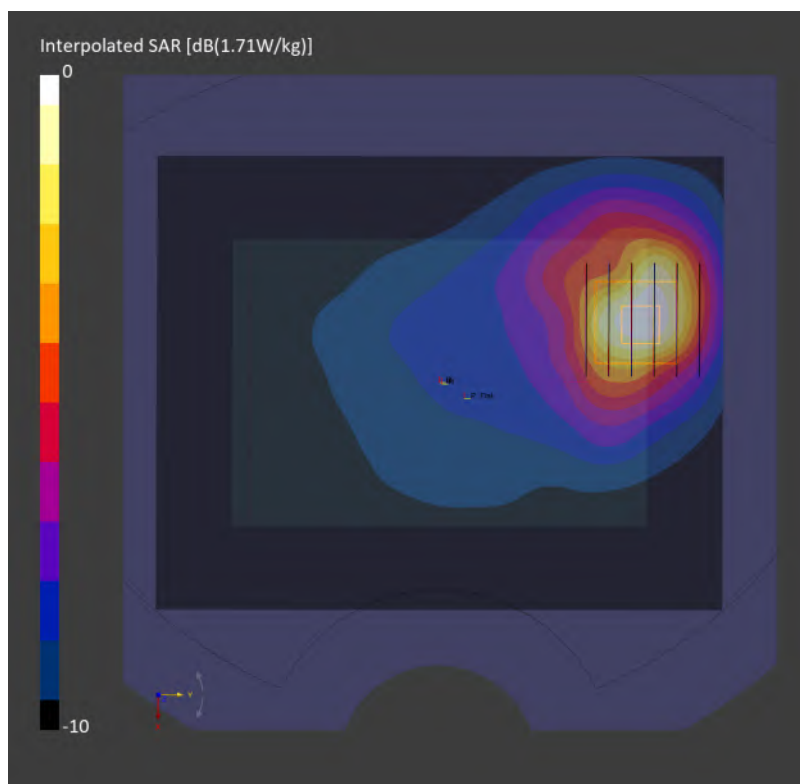

78_LTE Band 7_20M_QPSK_1_0_Back_5mm_Ch21350

Communication System: LTE-FDD; Frequency: 2560.000 MHz

Medium: HSL_600-7200_260831 Medium parameters used: $f = 2560.000$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 41.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.32, 6.8, 7.27); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.965 W/kg; SAR (10g) = 0.419 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.17 dB

SAR (1g) = 1.02 W/kg; SAR (8g) = 0.461 W/kg; SAR (10g) = 0.413 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 78.8 %

TSL Correction: Positive only

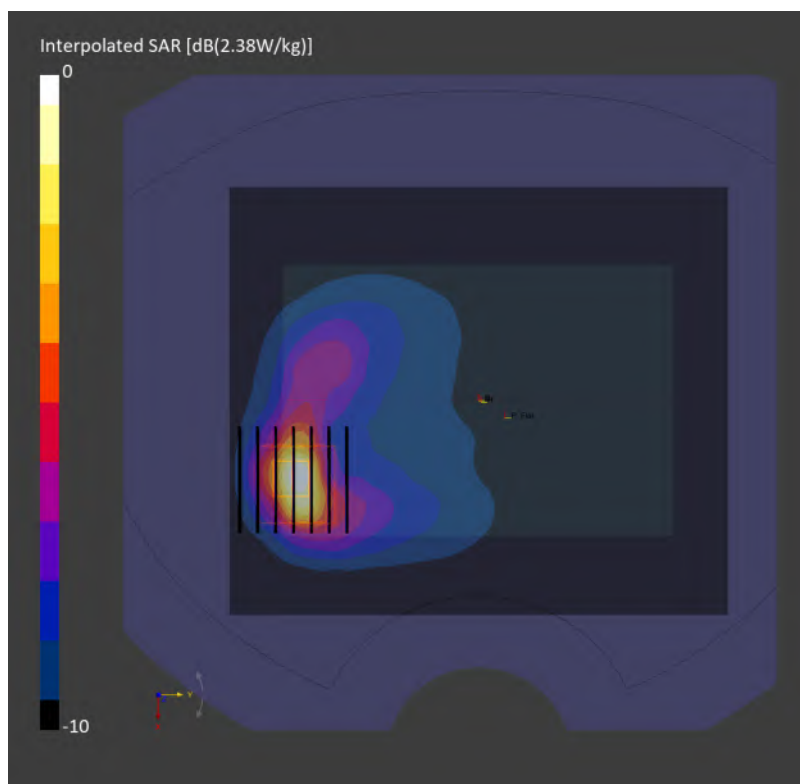

79_LTE Band 12_10M_QPSK_1_0_Back_5mm_Ch23095

Communication System: LTE-FDD; Frequency: 707.500 MHz

Medium: HSL_600-7200_260831 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(10.04, 9.32, 9.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10175

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.621 W/kg; SAR (10g) = 0.412 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.04 dB

SAR (1g) = 0.731 W/kg; SAR (8g) = 0.437 W/kg; SAR (10g) = 0.407 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 76.2 %

TSL Correction: Positive only

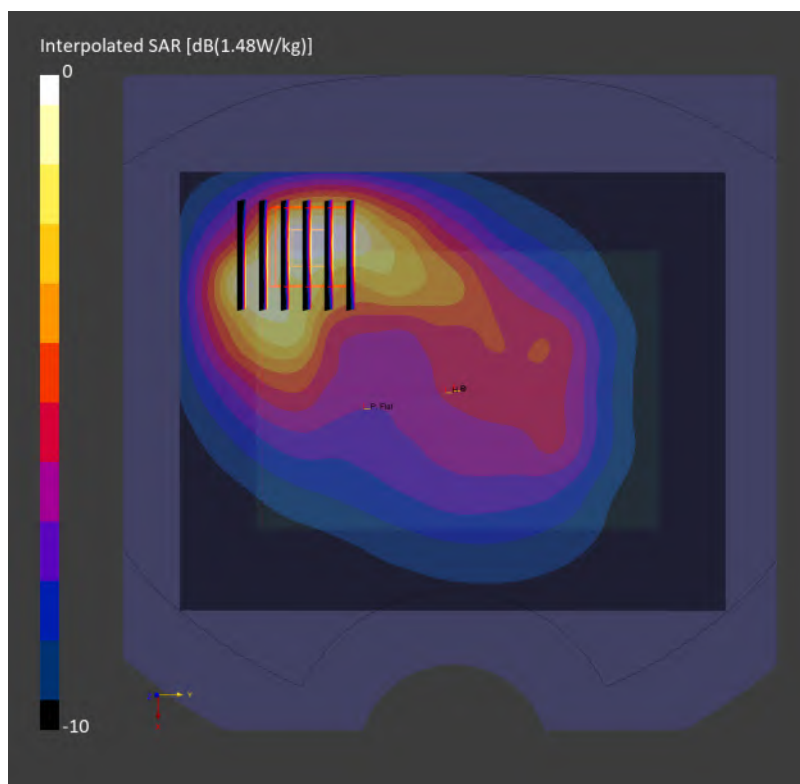

80_LTE Band 13_10M_QPSK_1_0_Back_5mm_Ch23230

Communication System: LTE-FDD; Frequency: 782.000 MHz

Medium: HSL_600-7200_260902 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.930$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(10.04, 9.32, 9.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10175

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.714 W/kg; SAR (10g) = 0.468 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.05 dB

SAR (1g) = 0.841 W/kg; SAR (8g) = 0.495 W/kg; SAR (10g) = 0.461 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 75.2 %

TSL Correction: Positive only

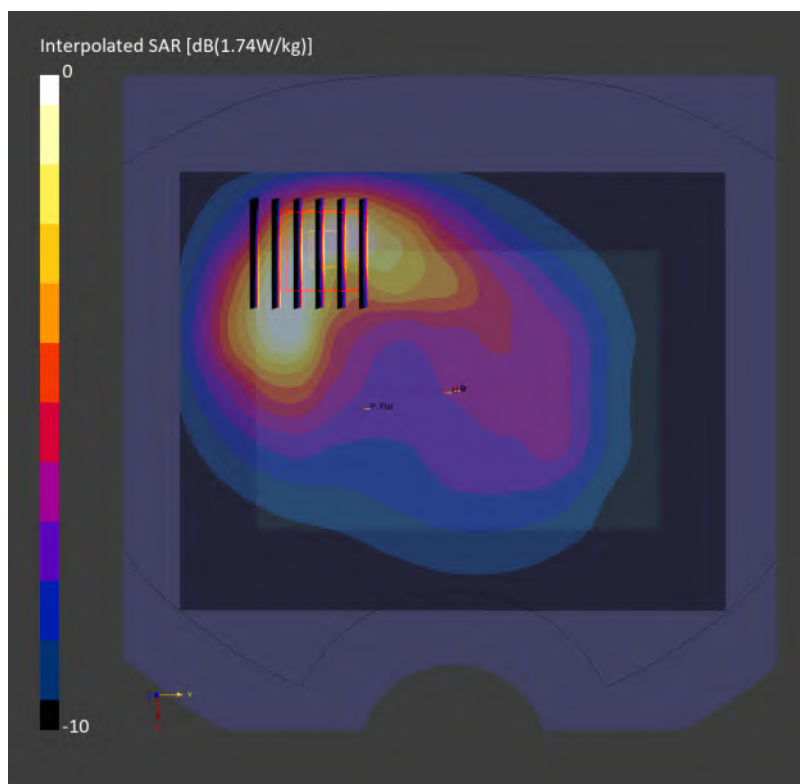

81_LTE Band 14_10M_QPSK_1_0_Back_5mm_Ch23330

Communication System: LTE-FDD; Frequency: 793.000 MHz

Medium: HSL_600-7200_260902 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(10.04, 9.32, 9.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10175

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.827 W/kg; SAR (10g) = 0.515 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.03 dB

SAR (1g) = 0.946 W/kg; SAR (8g) = 0.554 W/kg; SAR (10g) = 0.515 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 77.7 %

TSL Correction: Positive only

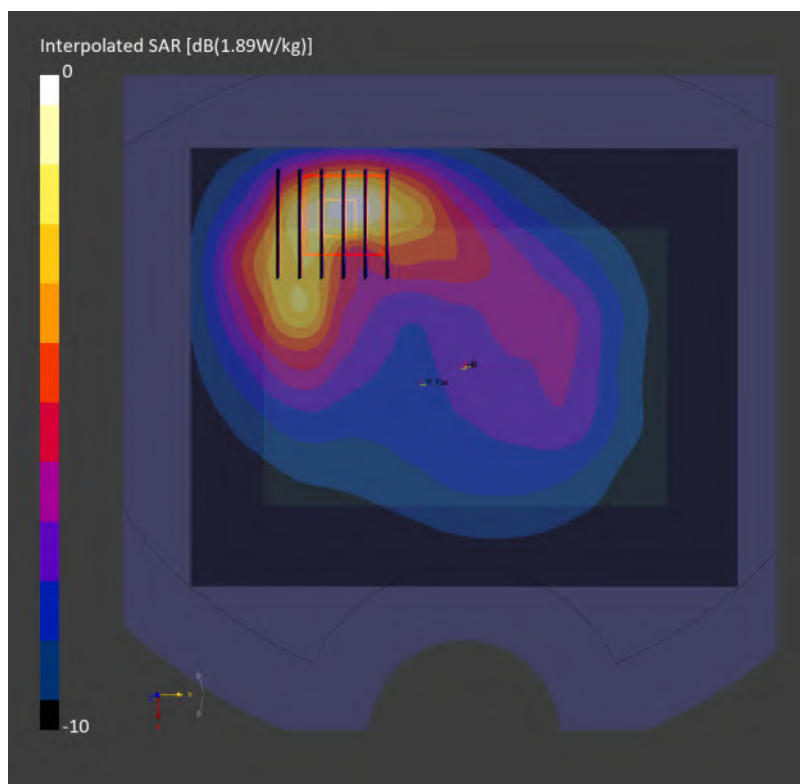

82_LTE Band 25_20M_QPSK_1_0_Back_5mm_Ch26590

Communication System: LTE-FDD; Frequency: 1905.000 MHz

Medium: HSL_600-7200_260903 Medium parameters used: $f = 1905.000$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.64, 8.14, 7.69); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.648 W/kg; SAR (10g) = 0.334 W/kg;

TSL Correction: Positive only

Zoom Scan (34.3 mm x 34.3 mm x 33.4 mm): Measurement Grid: 4.9 mm x 4.9 mm x 1.4 mm


Power Drift = -0.09 dB

SAR (1g) = 0.915 W/kg; SAR (8g) = 0.456 W/kg; SAR (10g) = 0.413 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 79.8 %

TSL Correction: Positive only

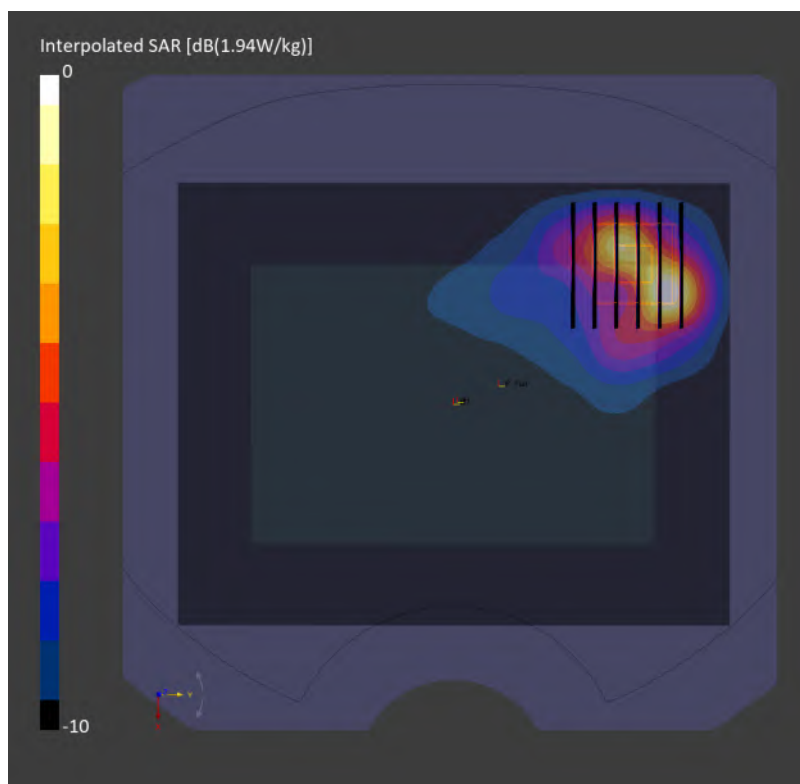

83_LTE Band 26_15M_QPSK_1_0_Back_5mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz

Medium: HSL_600-7200_260827 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.935$ S/m; $\epsilon_r = 42.1$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(9.82, 9.12, 9.75); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10181

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.10 W/kg; SAR (10g) = 0.706 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.04 dB

SAR (1g) = 1.15 W/kg; SAR (8g) = 0.688 W/kg; SAR (10g) = 0.640 W/kg

Smallest distance from peaks to all points 3 dB below = 12.4 mm

Ratio of SAR at M2 to SAR at M1 = 81.7 %

TSL Correction: Positive only

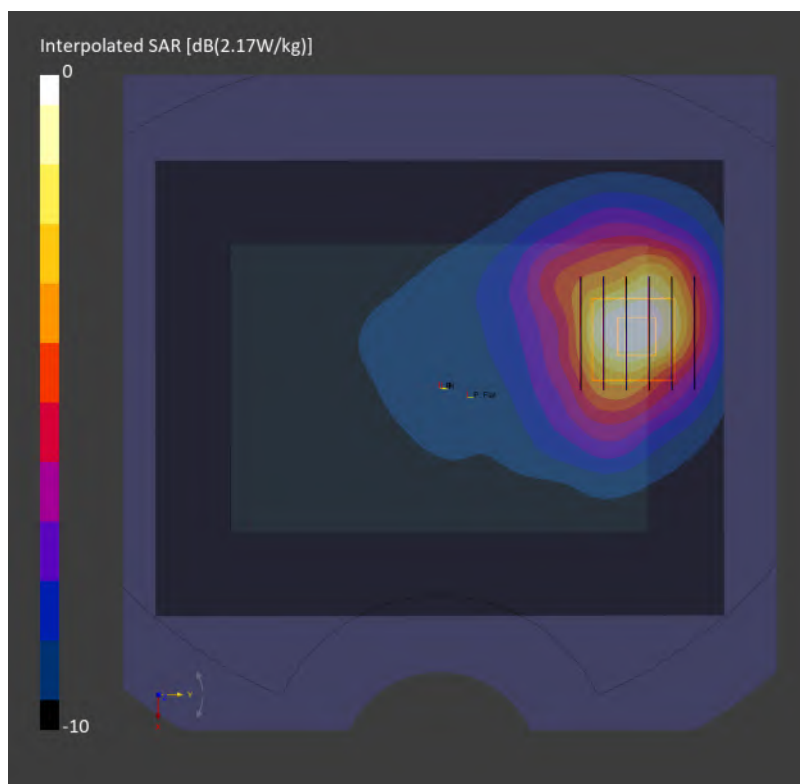

84_LTE Band 30_10M_QPSK_1_0_Back_5mm_Ch27710

Communication System: LTE-FDD; Frequency: 2310.000 MHz

Medium: HSL_600-7200_260904 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.6, 7.06, 7.54); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10175

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.12 W/kg; SAR (10g) = 0.506 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.14 dB

SAR (1g) = 1.10 W/kg; SAR (8g) = 0.538 W/kg; SAR (10g) = 0.488 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.2 %

TSL Correction: Positive only

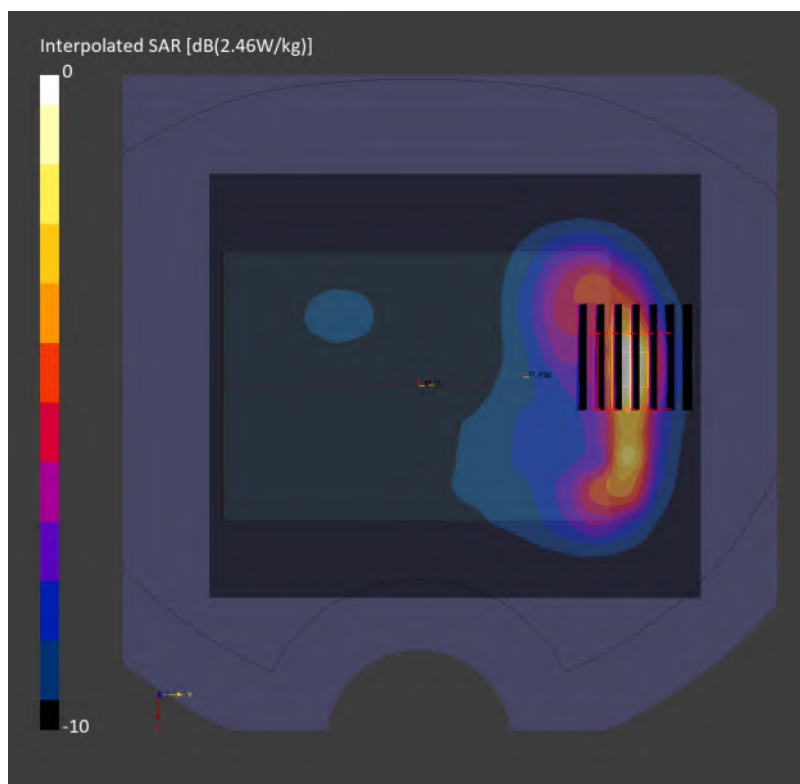

85_LTE Band 66_20M_QPSK_1_0_Back_5mm_Ch132572

Communication System: LTE-FDD; Frequency: 1770.000 MHz

Medium: HSL_600-7200_260901 Medium parameters used: $f = 1770.000$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 41.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(8.25, 7.66, 8.19); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.525 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.08 dB

SAR (1g) = 1.02 W/kg; SAR (8g) = 0.532 W/kg; SAR (10g) = 0.485 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 83.5 %

TSL Correction: Positive only

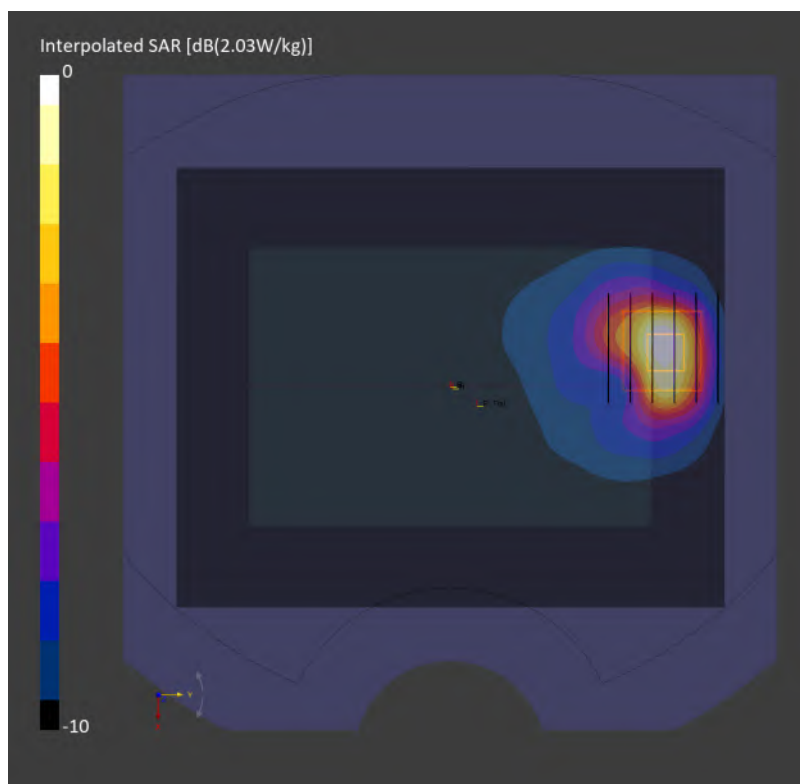

86_LTE Band 71_20M_QPSK_1_0_Back_5mm_Ch133297

Communication System: LTE-FDD; Frequency: 680.500 MHz

Medium: HSL_600-7200_260902 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 42.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(10.04, 9.32, 9.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.581 W/kg; SAR (10g) = 0.388 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.08 dB

SAR (1g) = 0.706 W/kg; SAR (8g) = 0.416 W/kg; SAR (10g) = 0.388 W/kg

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 72.4 %

TSL Correction: Positive only

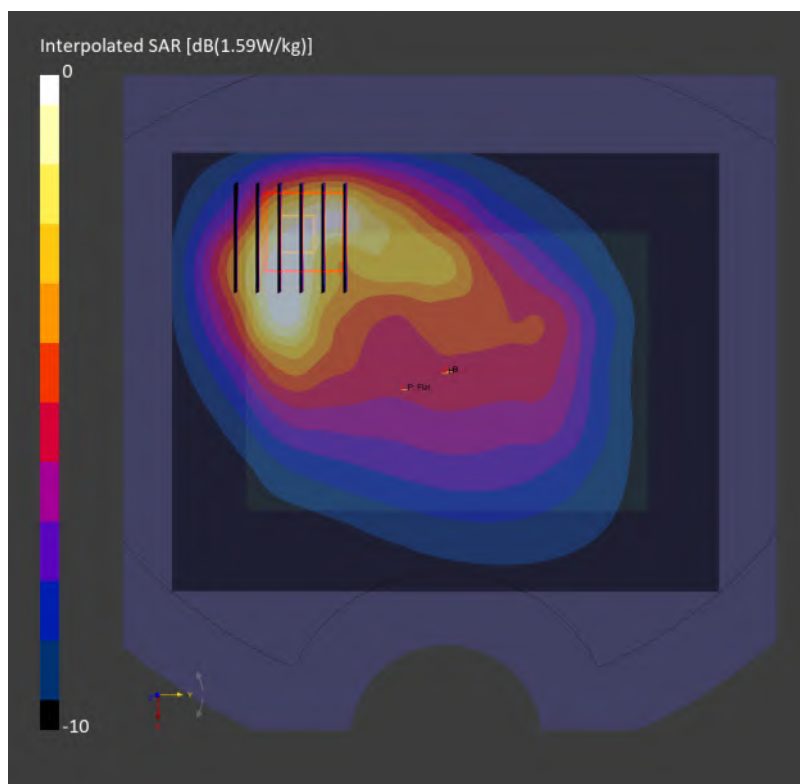

87_LTE Band 41_20M_QPSK_1_0_Back_5mm_Ch40620

Communication System: LTE-TDD; Frequency: 2593.000 MHz

Medium: HSL_600-7200_260829 Medium parameters used: $f = 2593.000$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.32, 6.8, 7.27); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-TDD, 10435

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.947 W/kg; SAR (10g) = 0.440 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.10 dB

SAR (1g) = 1.08 W/kg; SAR (8g) = 0.487 W/kg; SAR (10g) = 0.437 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 78.3 %

TSL Correction: Positive only

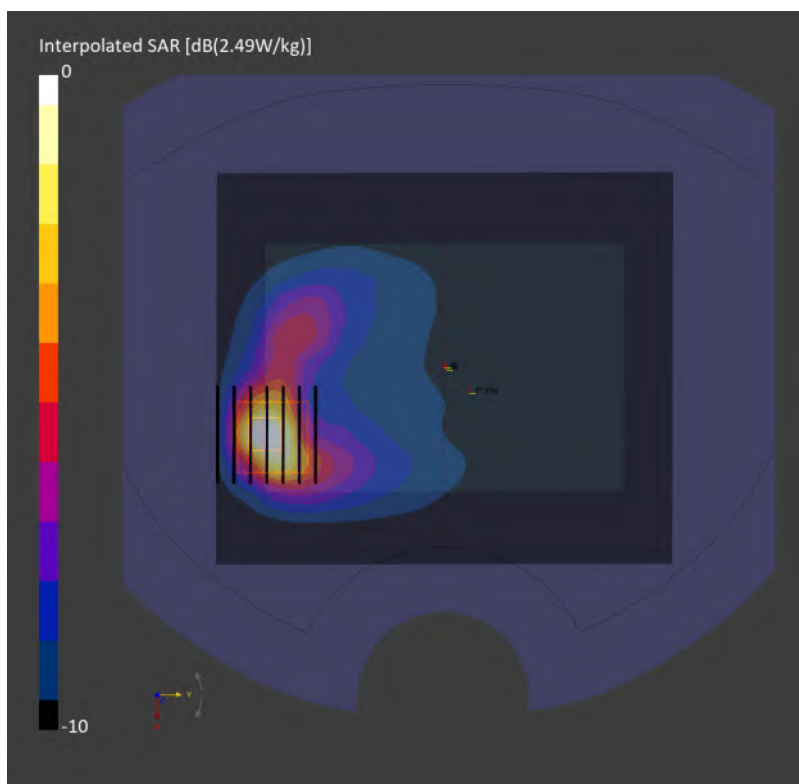

88_LTE Band 42_20M_QPSK_1_0_Back_5mm_Ch42190

Communication System: LTE-TDD; Frequency: 3460.000 MHz

Medium: HSL_600-7200_260904 Medium parameters used: $f = 3460.000$ MHz; $\sigma = 2.63$ S/m; $\epsilon_r = 38.3$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(6.54, 6.97, 6.58); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-TDD, 10435

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.852 W/kg; SAR (10g) = 0.324 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.04 dB

SAR (1g) = 0.920 W/kg; SAR (8g) = 0.388 W/kg; SAR (10g) = 0.345 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 77.9 %

TSL Correction: Positive only

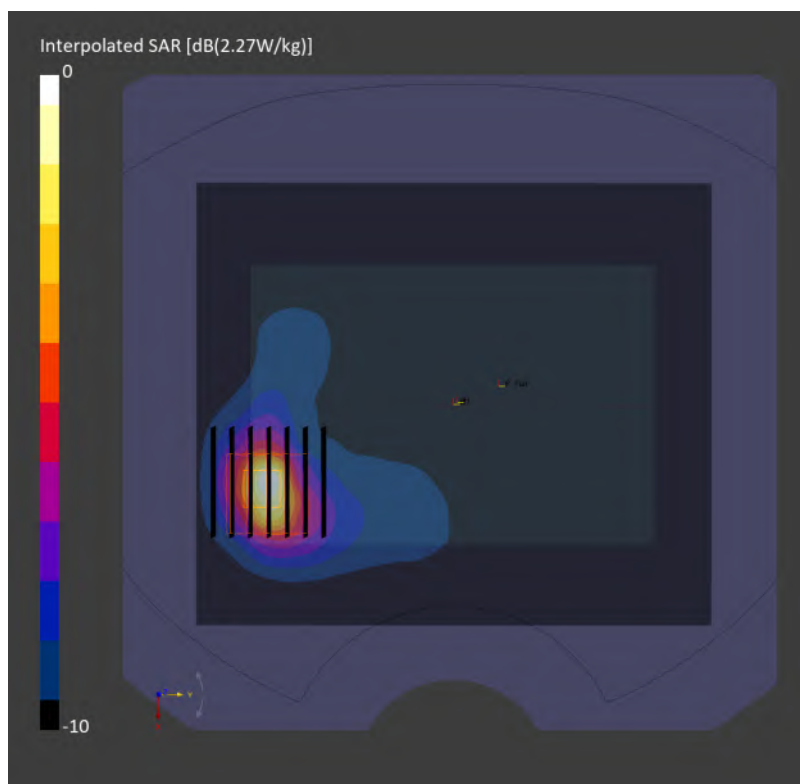

90_LTE Band 48_20M_QPSK_1_0_Back_5mm_Ch55340

Communication System: LTE-TDD; Frequency: 3560.000 MHz

Medium: HSL_600-7200_260904 Medium parameters used: $f = 3560.000$ MHz; $\sigma = 2.72$ S/m; $\epsilon_r = 38.1$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(6.54, 6.97, 6.58); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-TDD, 10435

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.971 W/kg; SAR (10g) = 0.316 W/kg;

TSL Correction: Positive only

Zoom Scan (36.8 mm x 36.8 mm x 29.1 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm


Power Drift = -0.02 dB

SAR (1g) = 1.10 W/kg; SAR (8g) = 0.406 W/kg; SAR (10g) = 0.355 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 80.0 %

TSL Correction: Positive only

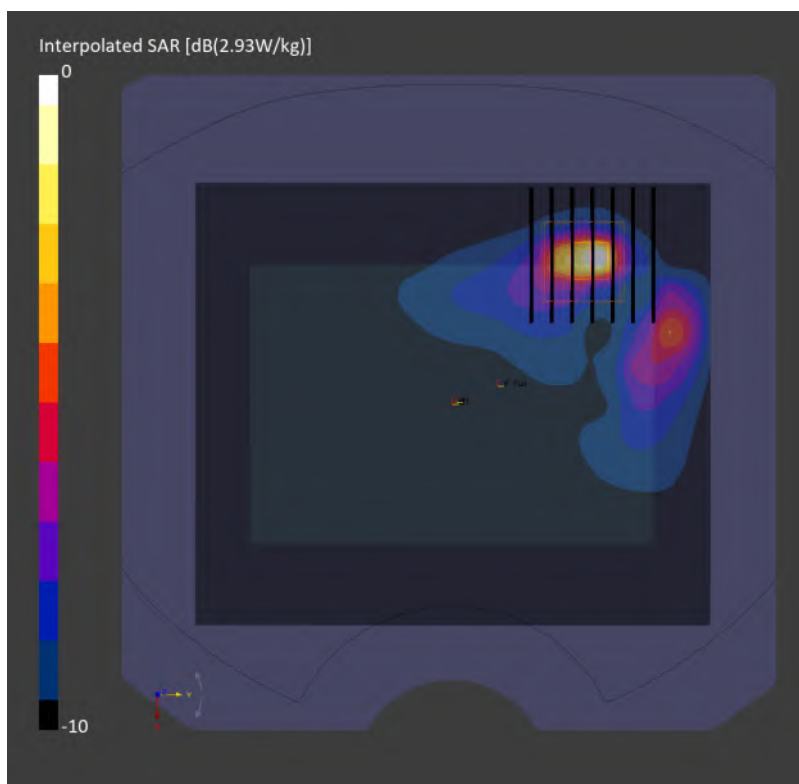

91_FR1 n7_50M_BPSK_135_68_Back_5mm_Ch507000

Communication System: NR FR1 FDD; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260820 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 40.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.32, 6.8, 7.27); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000371

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.892 W/kg; SAR (10g) = 0.421 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.11 dB

SAR (1g) = 1.04 W/kg; SAR (8g) = 0.469 W/kg; SAR (10g) = 0.420 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 77.9 %

TSL Correction: Positive only

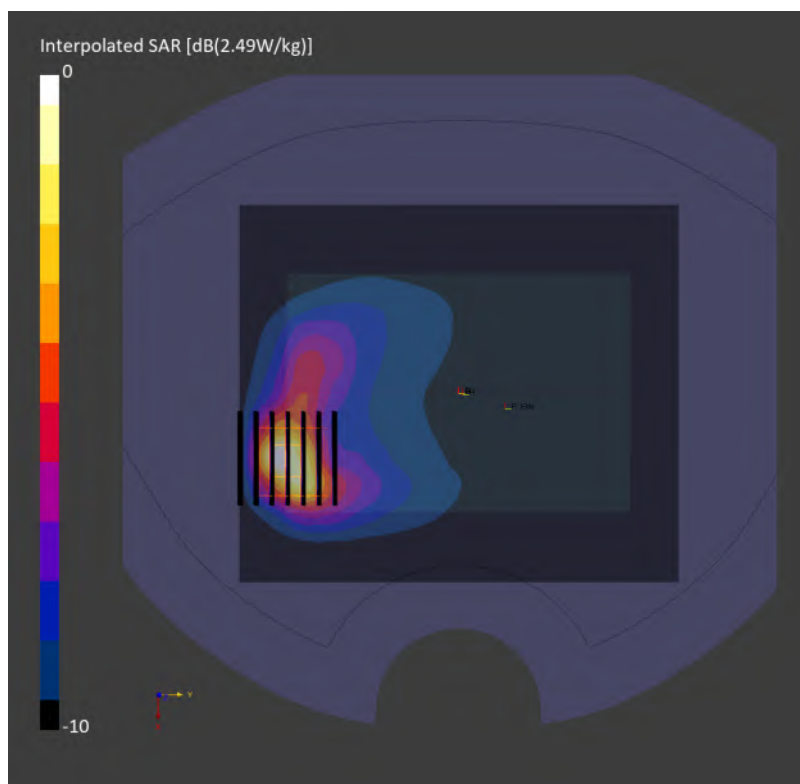

92_FR1 n12_15M_BPSK_36_22_Back_5mm_CH141500

Communication System: NR FR1 FDD: DFT-s-OFDM, 15.0 MHz, pi/2-BPSK, 15 kHz, 50% RB;

Frequency: 707.500 MHz

Medium: HSL_600-7200_260831 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.870$ S/m; $\epsilon_r = 43.6$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(9.53, 10.16, 9.59); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000071-

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.411 W/kg; SAR (10g) = 0.260 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 0.466 W/kg; SAR (8g) = 0.284 W/kg; SAR (10g) = 0.265 W/kg

Smallest distance from peaks to all points 3 dB below = 9.2 mm

Ratio of SAR at M2 to SAR at M1 = 77.1 %

TSL Correction: Positive only

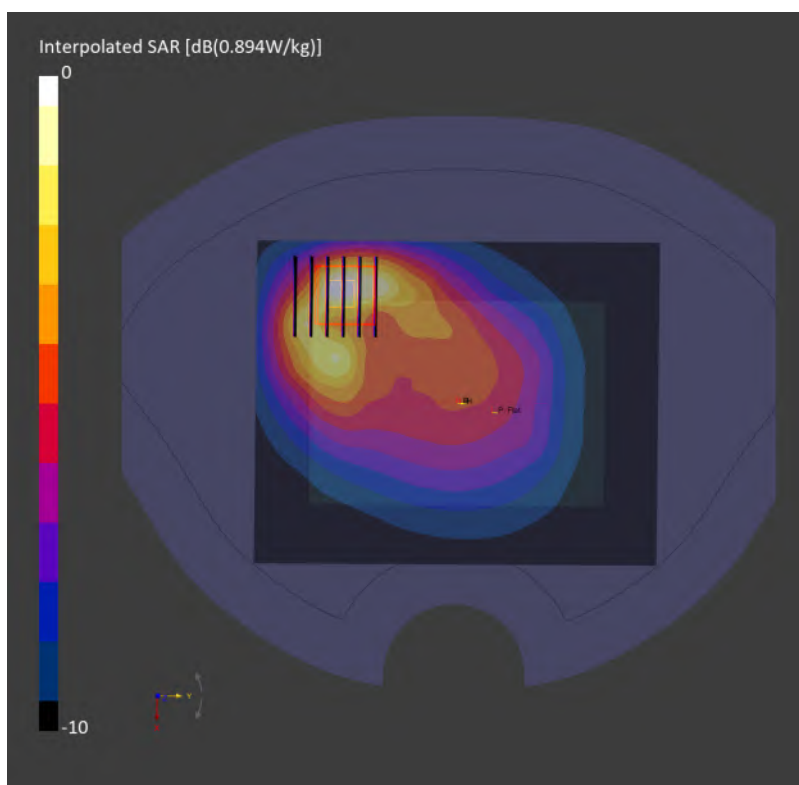

93_FR1 n13 _10M_BPSK_25_14_Back_5mm_Ch156400

Communication System: NR FR1 FDD; Frequency: 782.000 MHz

Medium: HSL_600-7200_260906 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 44.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(9.53, 10.16, 9.59); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000032

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.581 W/kg; SAR (10g) = 0.376 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 0.608 W/kg; SAR (8g) = 0.377 W/kg; SAR (10g) = 0.353 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 82.8 %

TSL Correction: Positive only

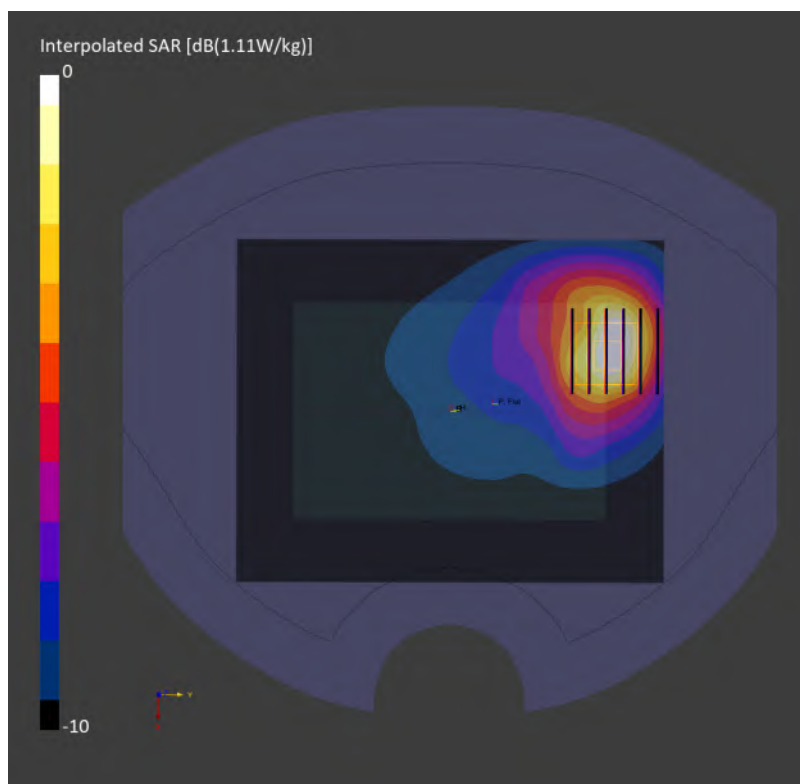

94_FR1 n14_HPUE_10M_BPSK_1_1_Back_5mm_Ch158600

Communication System: NR FR1 FDD; Frequency: 793.000 MHz

Medium: HSL_600-7200_260902 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(10.04, 9.32, 9.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000031

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.807 W/kg; SAR (10g) = 0.500 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.845 W/kg; SAR (8g) = 0.498 W/kg; SAR (10g) = 0.464 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 77.8 %

TSL Correction: Positive only

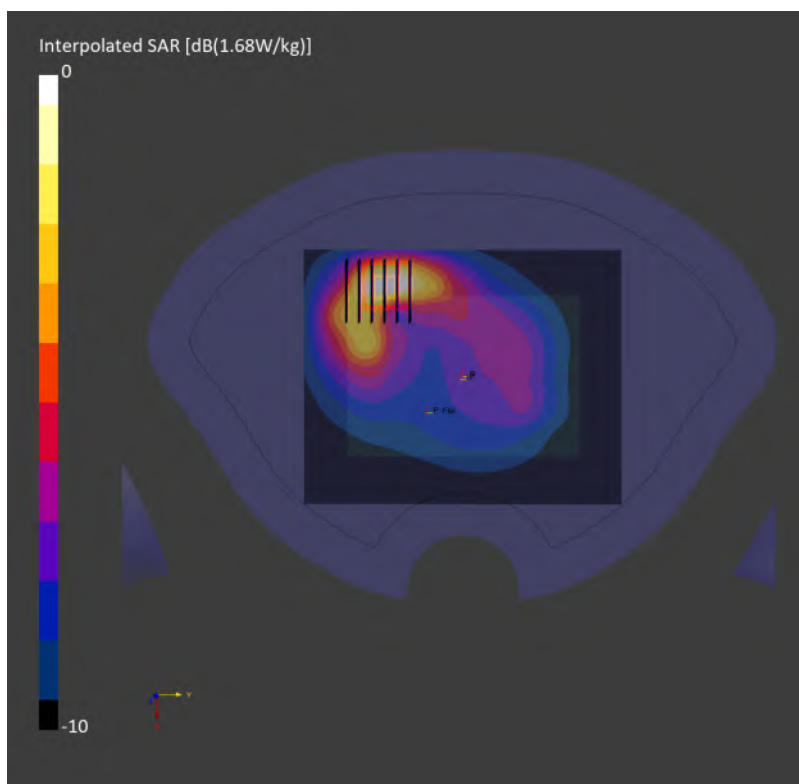

95_FR1 n25_40M_BPSK_108_54_Back_5mm_Ch376500

Communication System: NR FR1 FDD; Frequency: 1882.500 MHz

Medium: HSL_600-7200_260819 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.46$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.97, 7.4, 7.91); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000284

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.720 W/kg; SAR (10g) = 0.355 W/kg;

TSL Correction: Positive only

Zoom Scan (33.0 mm x 33.0 mm x 31.2 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm


Power Drift = -0.19 dB

SAR (1g) = 0.923 W/kg; SAR (8g) = 0.471 W/kg; SAR (10g) = 0.426 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.9 %

TSL Correction: Positive only

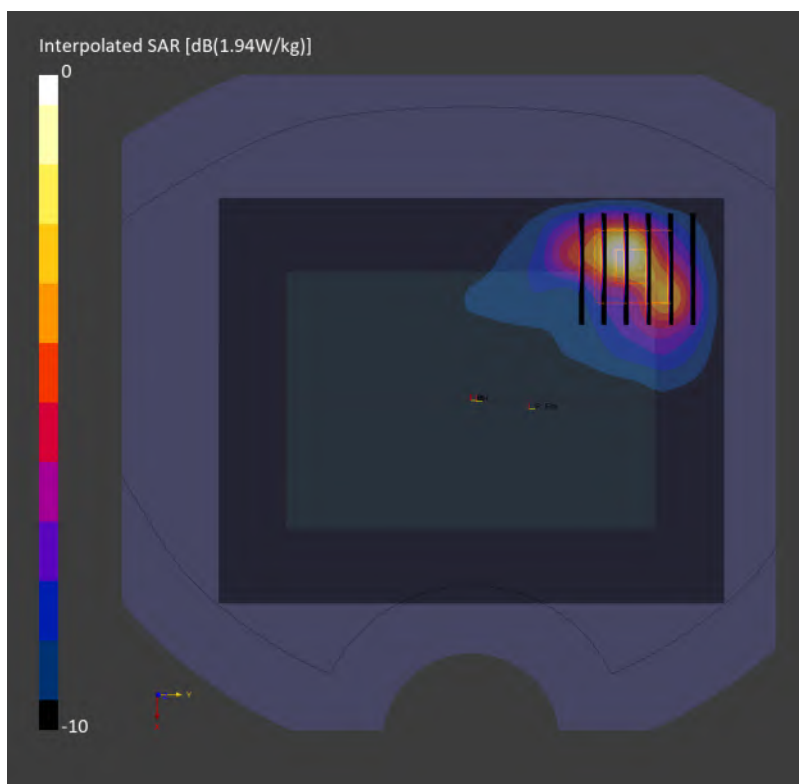

96_FR1 n26_HPUE_20M_BPSK_50_28_Back_5mm_Ch166300

Communication System: NR FR1 FDD; Frequency: 831.500 MHz

Medium: HSL_600-7200_260902 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.948$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(9.82, 9.12, 9.75); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000113

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.831 W/kg; SAR (10g) = 0.514 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.04 dB

SAR (1g) = 0.857 W/kg; SAR (8g) = 0.502 W/kg; SAR (10g) = 0.468 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 76.9 %

TSL Correction: Positive only

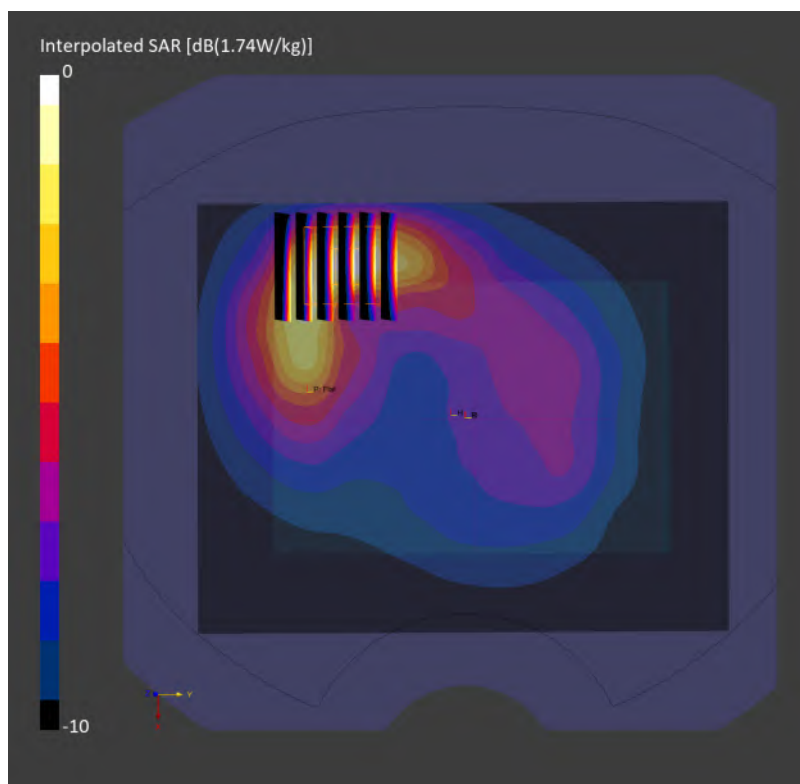

97_FR1 n30_10M_BPSK_25_14_Back_5mm_Ch462000

Communication System: NR FR1 FDD; Frequency: 2310.000 MHz

Medium: HSL_600-7200_260820 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.76$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.6, 7.06, 7.54); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000029

Area Scan (100.0 mm x 160.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.895 W/kg; SAR (10g) = 0.358 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.18 dB

SAR (1g) = 1.00 W/kg; SAR (8g) = 0.445 W/kg; SAR (10g) = 0.395 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.9 %

TSL Correction: Positive only

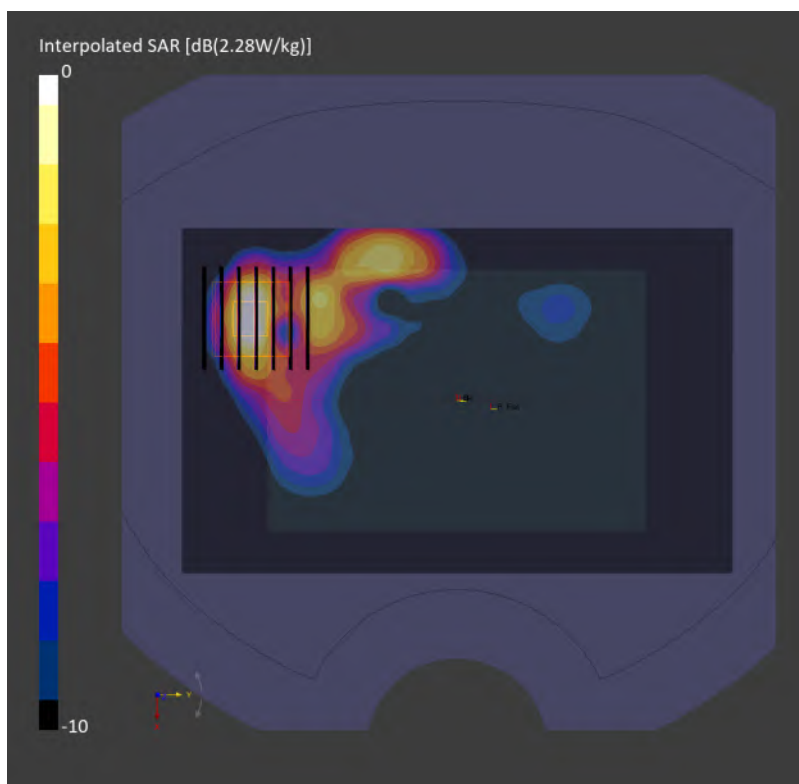

98_FR1 n66_45M_BPSK_120_60_Back_5mm_Ch349000

Communication System: NR FR1 FDD; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260819 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.38$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(8.25, 7.66, 8.19); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000332

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.08 W/kg; SAR (10g) = 0.569 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.14 dB

SAR (1g) = 1.14 W/kg; SAR (8g) = 0.603 W/kg; SAR (10g) = 0.551 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 81.3 %

TSL Correction: Positive only

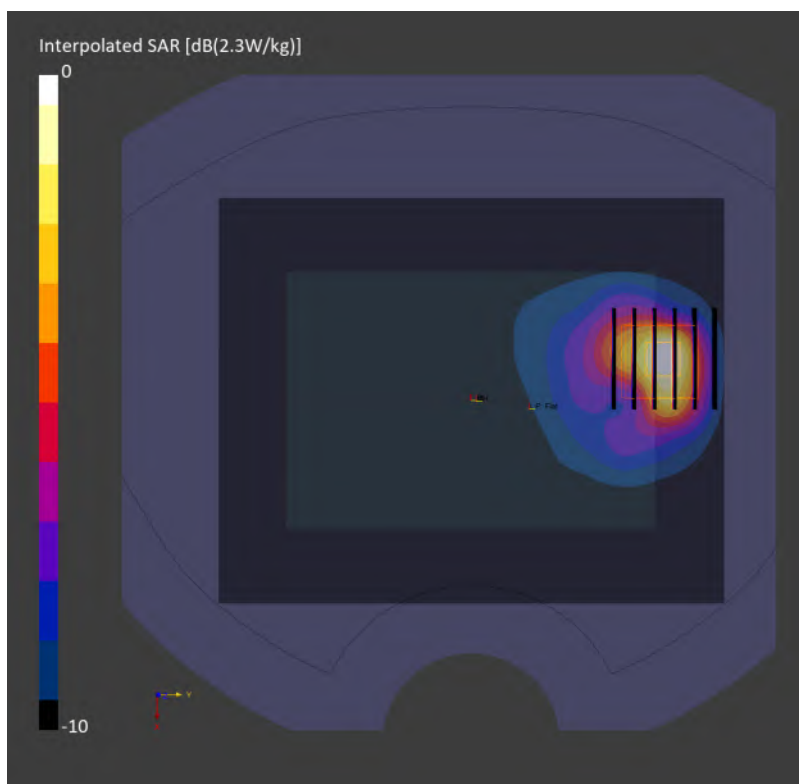

99_FR1 n70_15M_BPSK_36_22_Back_5mm_Ch340500

Communication System: NR FR1 FDD; Frequency: 1702.500 MHz

Medium: HSL_600-7200_260819 Medium parameters used: $f = 1702.500$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 41.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(8.25, 7.66, 8.19); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000071

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.863 W/kg; SAR (10g) = 0.474 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.07 dB

SAR (1g) = 0.905 W/kg; SAR (8g) = 0.507 W/kg; SAR (10g) = 0.467 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 81.3 %

TSL Correction: Positive only

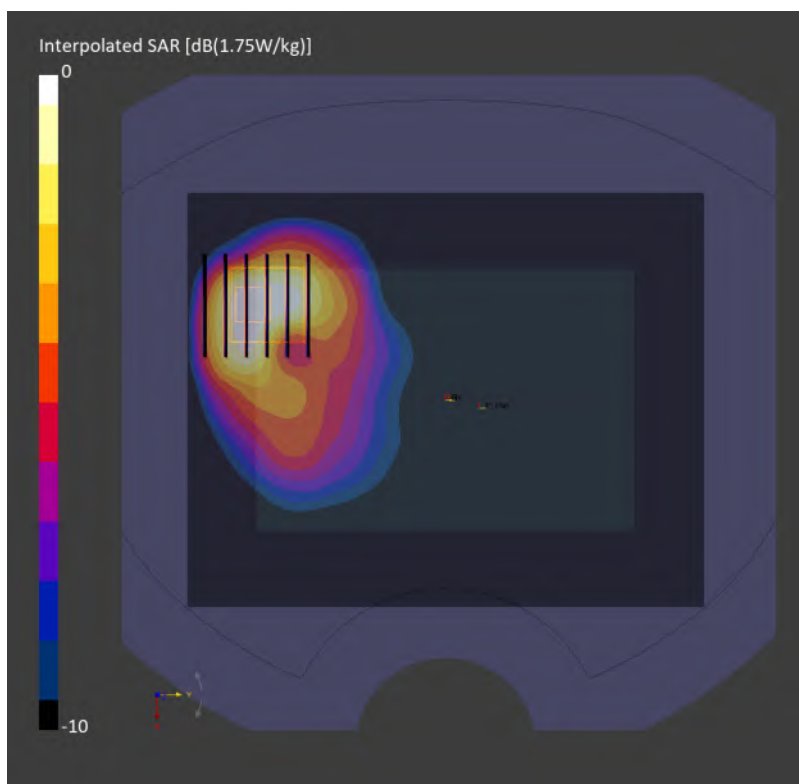

100_FR1 n71_HPUE_35M_BPSK_1_1_Back_5mm_Ch136100

Communication System: NR FR1 FDD; Frequency: 680.500 MHz

Medium: HSL_600-7200_260902 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 42.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(10.04, 9.32, 9.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000238

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.350 W/kg; SAR (10g) = 0.231 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.09 dB

SAR (1g) = 0.355 W/kg; SAR (8g) = 0.221 W/kg; SAR (10g) = 0.207 W/kg

Smallest distance from peaks to all points 3 dB below = 12.0 mm

Ratio of SAR at M2 to SAR at M1 = 78.9 %

TSL Correction: Positive only

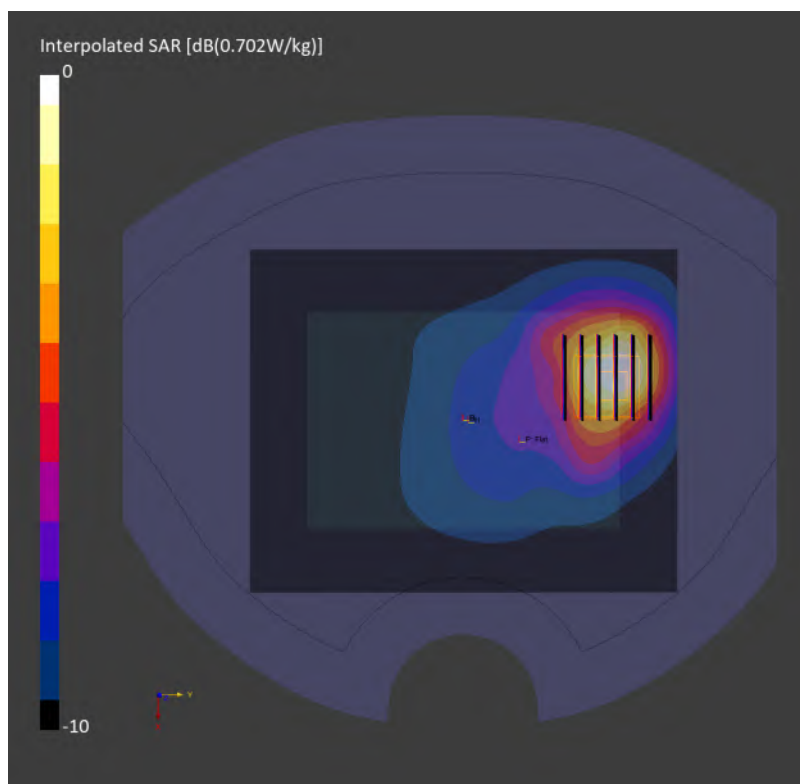

101_FR1 n41_100M_BPSK_135_69_Back_5mm_Ch518598

Communication System: NR FR1 TDD; Frequency: 2592.990 MHz

Medium: HSL_600-7200_260820 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.98$ S/m; $\epsilon_r = 40.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.32, 6.8, 7.27); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 TDD, 1003251

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.963 W/kg; SAR (10g) = 0.398 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.17 dB

SAR (1g) = 0.960 W/kg; SAR (8g) = 0.430 W/kg; SAR (10g) = 0.383 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 77.7 %

TSL Correction: Positive only

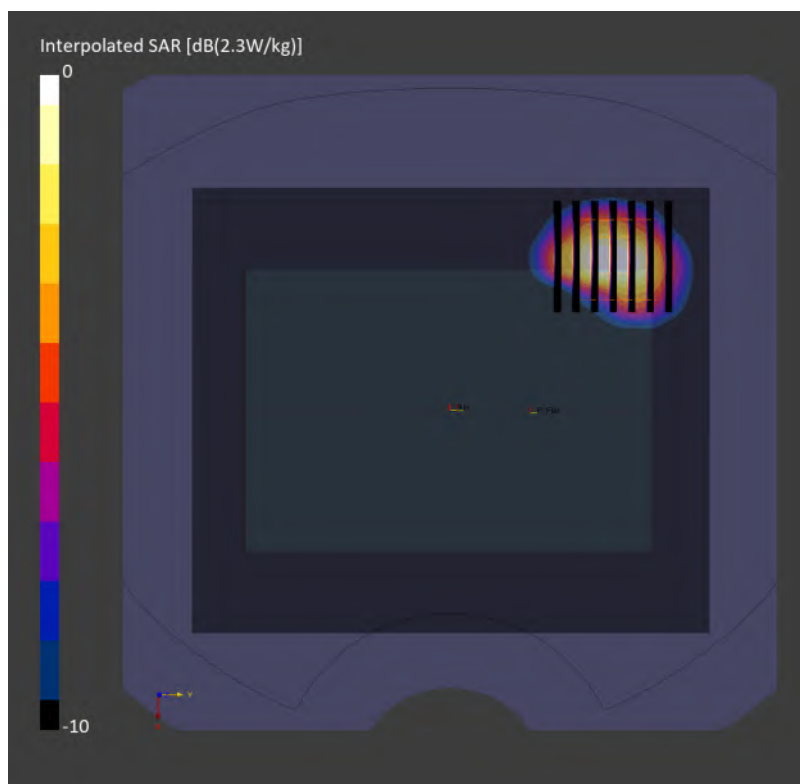

102_FR1 n48_40M_BPSK_1_1_Back_5mm_Ch638000

Communication System: NR FR1 TDD; Frequency: 3570.000 MHz

Medium: HSL_600-7200_260821 Medium parameters used: $f = 3570.000$ MHz; $\sigma = 2.87$ S/m; $\epsilon_r = 39.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(6.79, 6.3, 6.74); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 TDD, 1002251

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.779 W/kg; SAR (10g) = 0.317 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.15 dB

SAR (1g) = 0.870 W/kg; SAR (8g) = 0.363 W/kg; SAR (10g) = 0.322 W/kg

Smallest distance from peaks to all points 3 dB below = 7.7 mm

Ratio of SAR at M2 to SAR at M1 = 75.8 %

TSL Correction: Positive only

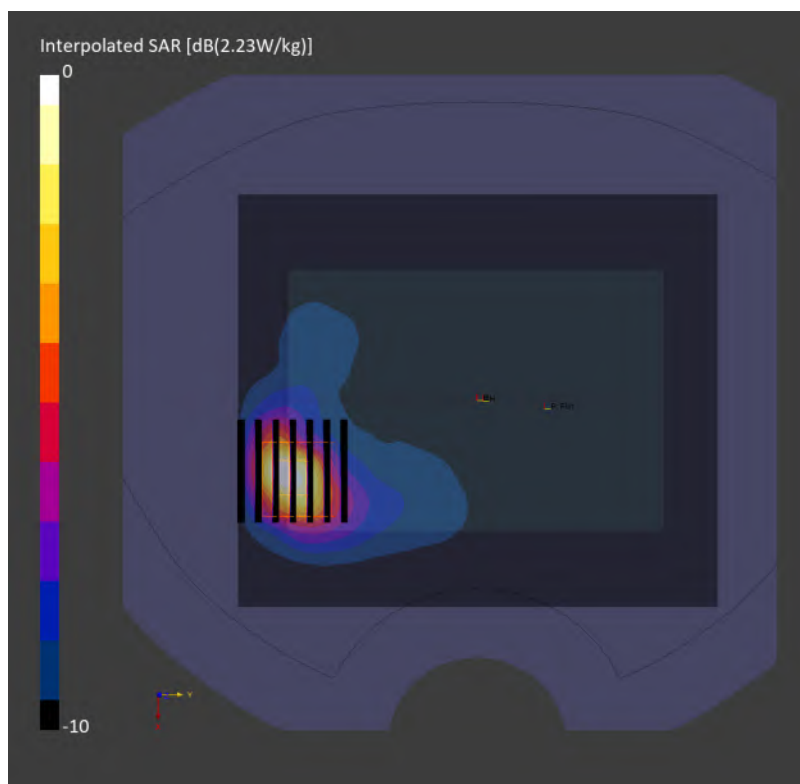

103_FR1 n77_100M_BPSK_1_1_Back_5mm_Ch661334

Communication System: NR FR1 TDD; Frequency: 3920.010 MHz

Medium: HSL_600-7200_261008 Medium parameters used: $f = 3920.010$ MHz; $\sigma = 3.19$ S/m; $\epsilon_r = 39.1$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(6.46, 6.89, 6.5); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAMV8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 TDD, 1003247

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.941 W/kg; SAR (10g) = 0.301 W/kg;

TSL Correction: Positive only

Zoom Scan (28.0 mm x 28.0 mm x 33.4 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.05 dB

SAR (1g) = 0.951 W/kg; SAR (8g) = 0.359 W/kg; SAR (10g) = 0.321 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 70.8 %

TSL Correction: Positive only

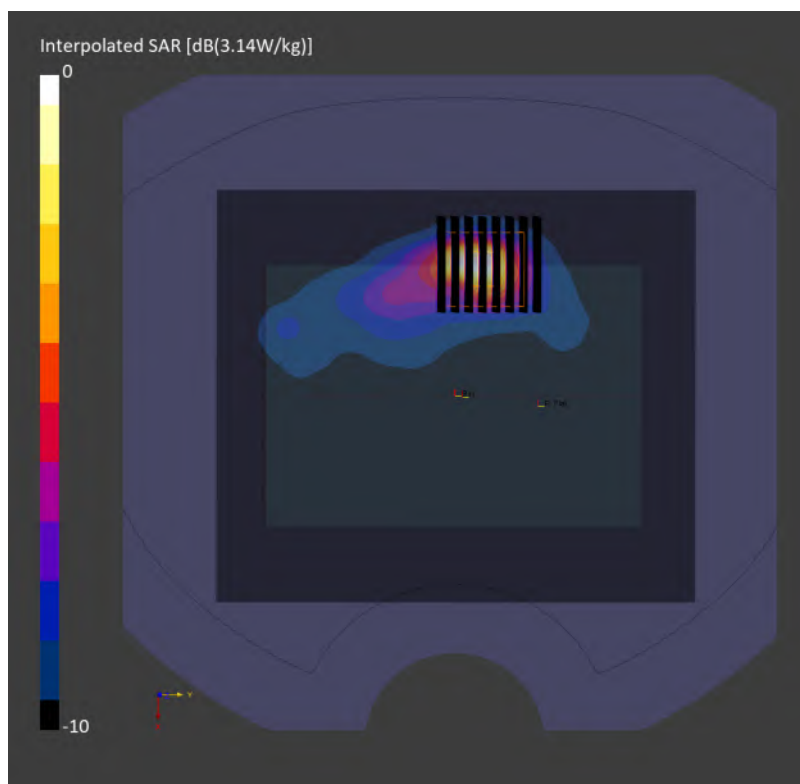

104_WLAN2.4GHz_802.11b 1Mbps_Back_5mm_Ch6

Communication System: WiFi (802.11b); Frequency: 2437.000 MHz

Medium: HSL_600-7200_260904 Medium parameters used: $f = 2437.000$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.44, 6.91, 7.38); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11b), 10415

Area Scan (100.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.787 W/kg; SAR (10g) = 0.361 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.09 dB

SAR (1g) = 0.875 W/kg; SAR (8g) = 0.404 W/kg; SAR (10g) = 0.362 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 79.7 %

TSL Correction: Positive only

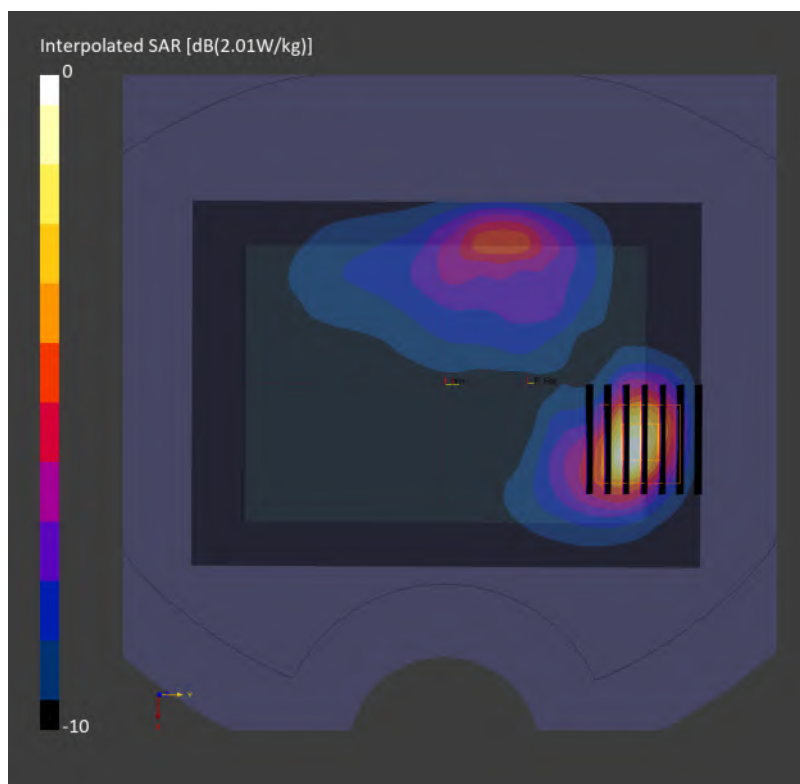

105_WLAN5GHz_802.11ac-VHT160 MCS0_Back_5mm_Ch50

Communication System: WiFi (802.11ac); Frequency: 5250.000 MHz

Medium: HSL_600-7200_260906 Medium parameters used: $f = 5250.000$ MHz; $\sigma = 4.53$ S/m; $\epsilon_r = 35.1$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(5.8, 5.38, 5.76); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11ac), 10554

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.445 W/kg; SAR (10g) = 0.155 W/kg;

TSL Correction: Positive only

Zoom Scan (26.6 mm x 26.6 mm x 22.9 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm


Power Drift = 0.03 dB

SAR (1g) = 0.581 W/kg; SAR (8g) = 0.199 W/kg; SAR (10g) = 0.172 W/kg

Smallest distance from peaks to all points 3 dB below = 4.3 mm

Ratio of SAR at M2 to SAR at M1 = 57.5 %

TSL Correction: Positive only

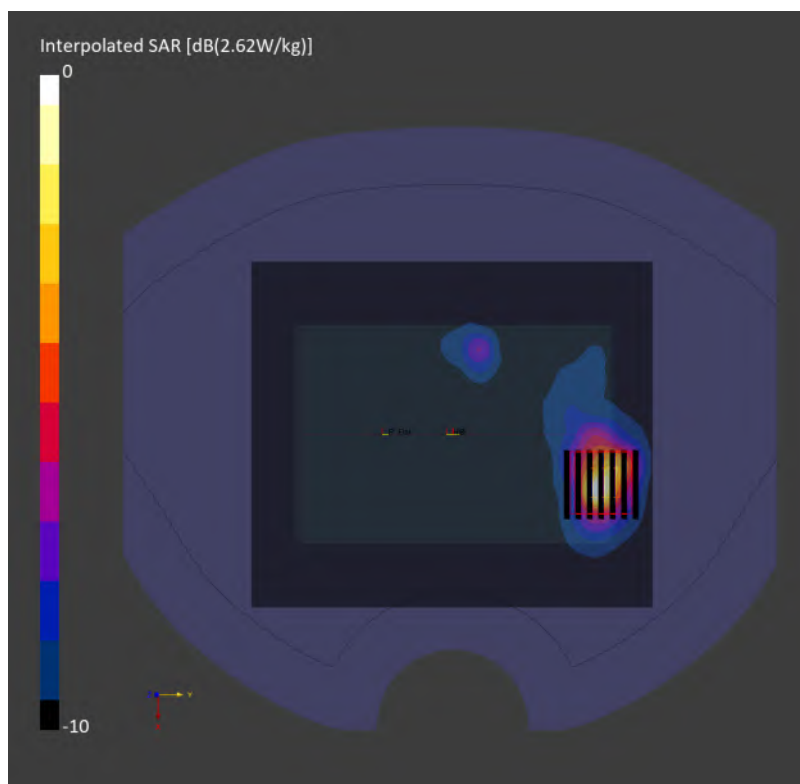

106_WLAN5GHz_802.11ac-VHT160 MCS0_Back_5mm_Ch114

Communication System: WiFi (802.11ac); Frequency: 5570.000 MHz

Medium: HSL_600-7200_260906 Medium parameters used: $f = 5570.000$ MHz; $\sigma = 4.88$ S/m; $\epsilon_r = 34.7$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(5.38, 5.0, 5.35); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11ac), 10554

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.398 W/kg; SAR (10g) = 0.105 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.06 dB

SAR (1g) = 0.677 W/kg; SAR (8g) = 0.148 W/kg; SAR (10g) = 0.121 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 54.1 %

TSL Correction: Positive only

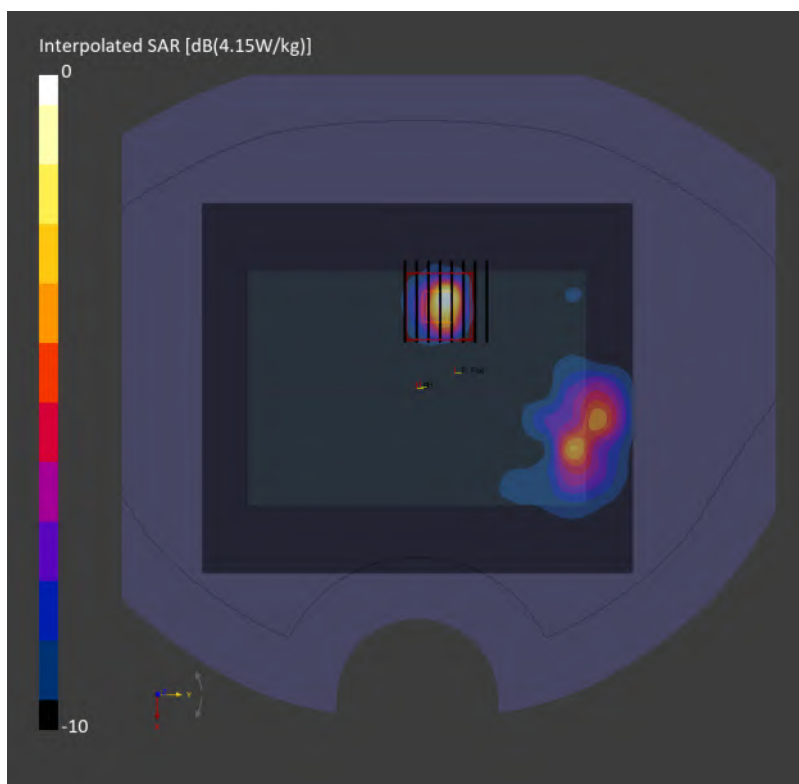

107_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch155

Communication System: WiFi (802.11ac); Frequency: 5775.000 MHz

Medium: HSL_600-7200_260906 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.09$ S/m; $\epsilon_r = 34.2$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(5.23, 4.86, 5.19); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11ac), 10544

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.511 W/kg; SAR (10g) = 0.181 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.01 dB

SAR (1g) = 0.565 W/kg; SAR (8g) = 0.198 W/kg; SAR (10g) = 0.156 W/kg

Smallest distance from peaks to all points 3 dB below = 4.0 mm

Ratio of SAR at M2 to SAR at M1 = 54.1 %

TSL Correction: Positive only

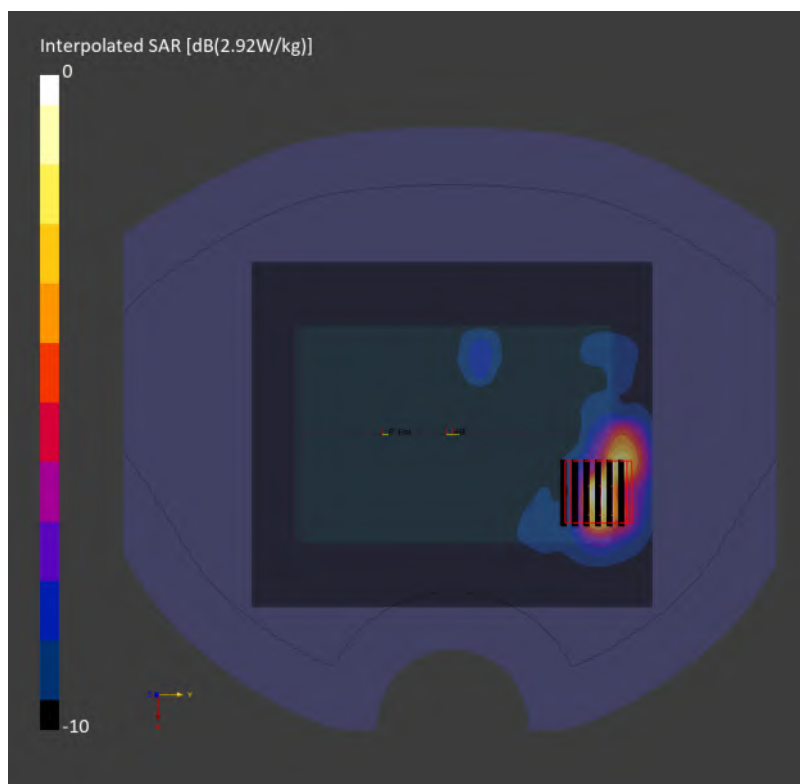

108_WLAN6GHz_802.11be-EHT320 MCS0_Back_5mm_Ch95

Communication System: WiFi; Frequency: 6425.000 MHz

Medium: HSL_600-7200_260907 Medium parameters used: $f = 6105.000$ MHz; $\sigma = 5.81$ S/m; $\epsilon_r = 33.0$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(5.49, 5.1, 5.45); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11be), 11026

Area Scan (102.0 mm x 136.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.195 W/kg; SAR (10g) = 0.063 W/kg;

TSL Correction: Positive only

Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.01 dB


SAR (1g) = 0.219 W/kg; SAR (8g) = 0.067 W/kg; SAR (10g) = 0.057 W/kg

Smallest distance from peaks to all points 3 dB below = 5.0 mm

Ratio of SAR at M2 to SAR at M1 = 51.3 %

psAPD (1.0cm², sq) = 2.19 [W/m²]; psAPD (4.0cm², sq) = 1.33 [W/m²]

TSL Correction: Positive only

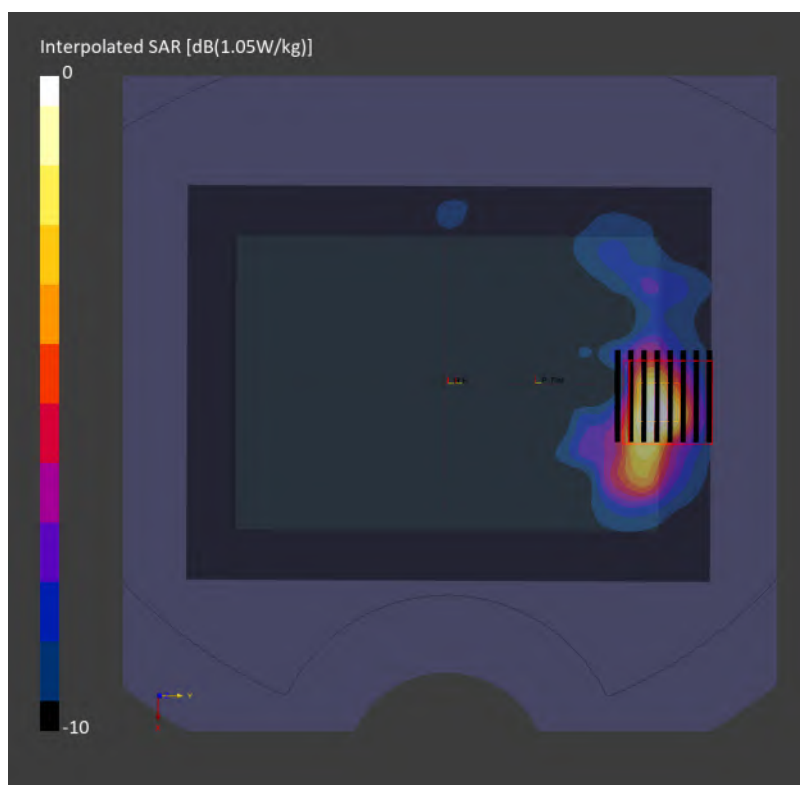

109_Bluetooth_1Mbps_Back_5mm_Ch39

Communication System: Bluetooth; Frequency: 2441.000 MHz

Medium: HSL_600-7200_260831 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 41.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.44, 6.91, 7.38); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: Bluetooth, 10038

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.697 W/kg; SAR (10g) = 0.328 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.18 dB

SAR (1g) = 0.860 W/kg; SAR (8g) = 0.380 W/kg; SAR (10g) = 0.339 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 79.9 %

TSL Correction: Positive only

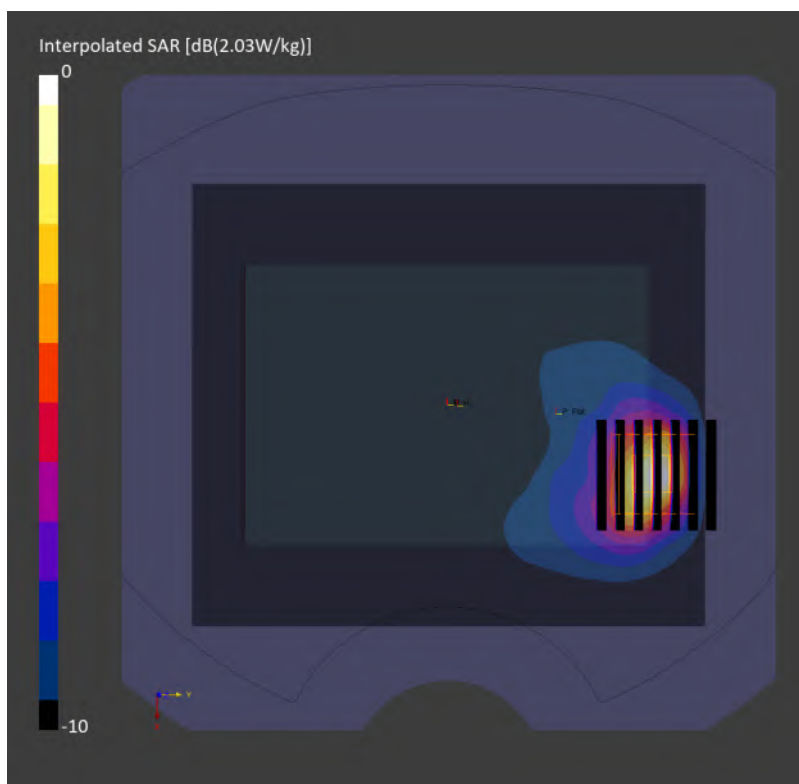

110_GSM850_GPRS 2 Tx slots_Back_5mm_Ch189

Communication System: GSM; Frequency: 836.400 MHz

Medium: HSL_600-7200_260831 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 43.2$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(9.51, 10.14, 9.57); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: GSM, 10024

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.412 W/kg; SAR (10g) = 0.257 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.12 dB

SAR (1g) = 0.402 W/kg; SAR (8g) = 0.250 W/kg; SAR (10g) = 0.234 W/kg

Smallest distance from peaks to all points 3 dB below = 13.5 mm

Ratio of SAR at M2 to SAR at M1 = 83.4 %

TSL Correction: Positive only

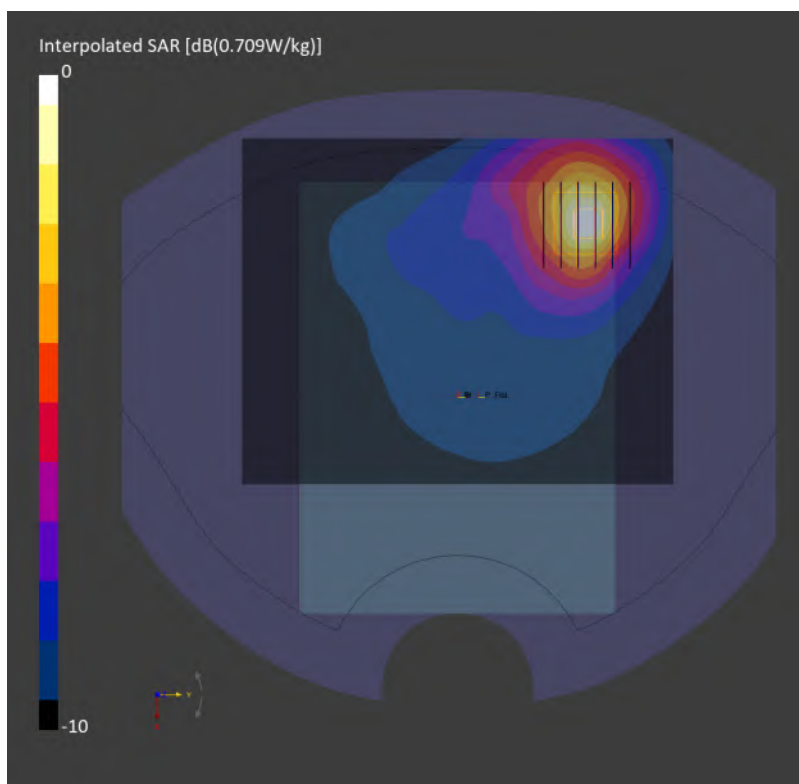

111_GSM1900_GPRS 3 Tx slots_Back_5mm_Ch661

Communication System: GSM; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260903 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.64, 8.14, 7.69); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: GSM, 10027

Area Scan (180.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.899 W/kg; SAR (10g) = 0.492 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.16 dB

SAR (1g) = 0.790 W/kg; SAR (8g) = 0.453 W/kg; SAR (10g) = 0.421 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 84.8 %

TSL Correction: Positive only

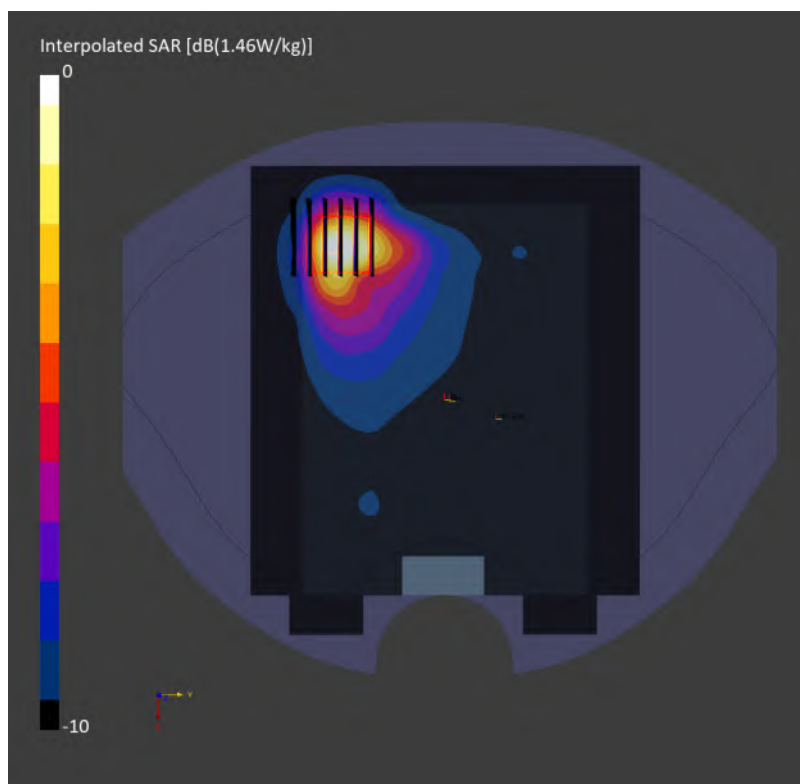

112_WCDMA II_RMC 12.2Kbps_Top Side_5mm_Ch9400

Communication System: UMTS-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260903 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.64, 8.14, 7.69); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: UMTS-FDD, 10457

Area Scan (48.0 mm x 180.0 mm): Measurement Grid: 12.0 mm x 15.0 mm

SAR (1g) = 1.07 W/kg; SAR (10g) = 0.459 W/kg;

TSL Correction: Positive only

Zoom Scan (38.4 mm x 38.4 mm x 33.4 mm): Measurement Grid: 4.8 mm x 4.8 mm x 1.4 mm


Power Drift = -0.03 dB

SAR (1g) = 1.15 W/kg; SAR (8g) = 0.543 W/kg; SAR (10g) = 0.487 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 79.7 %

TSL Correction: Positive only

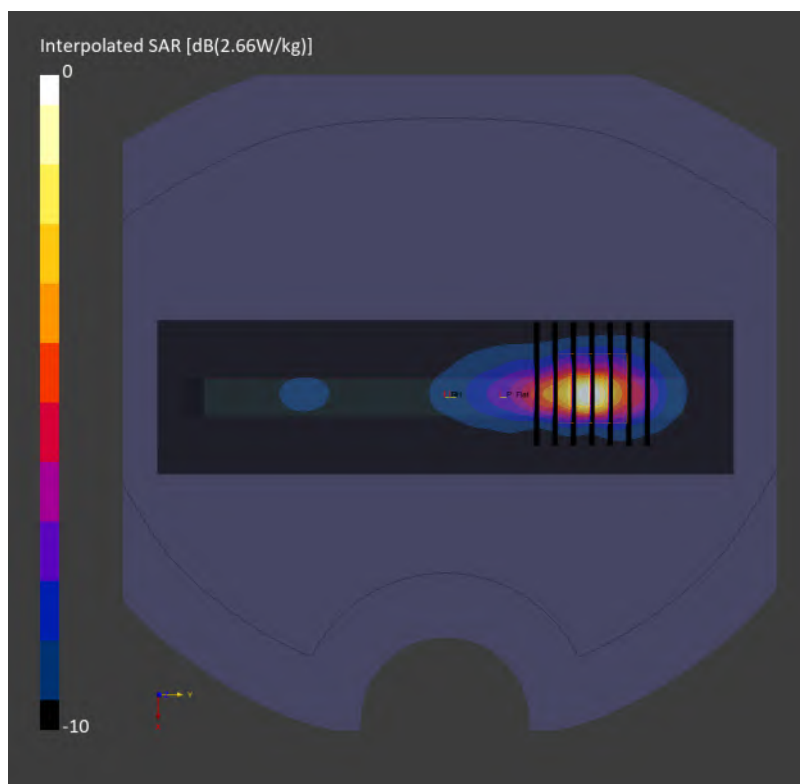

113_WCDMA IV_RMC 12.2Kbps_Back_5mm_Ch1312

Communication System: UMTS-FDD; Frequency: 1712.400 MHz

Medium: HSL_600-7200_260903 Medium parameters used: $f = 1712.400$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 43.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.89, 8.41, 7.94); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: UMTS-FDD, 10457

Area Scan (180.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.891 W/kg; SAR (10g) = 0.503 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.06 dB

SAR (1g) = 0.905 W/kg; SAR (8g) = 0.518 W/kg; SAR (10g) = 0.481 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 83.9 %

TSL Correction: Positive only

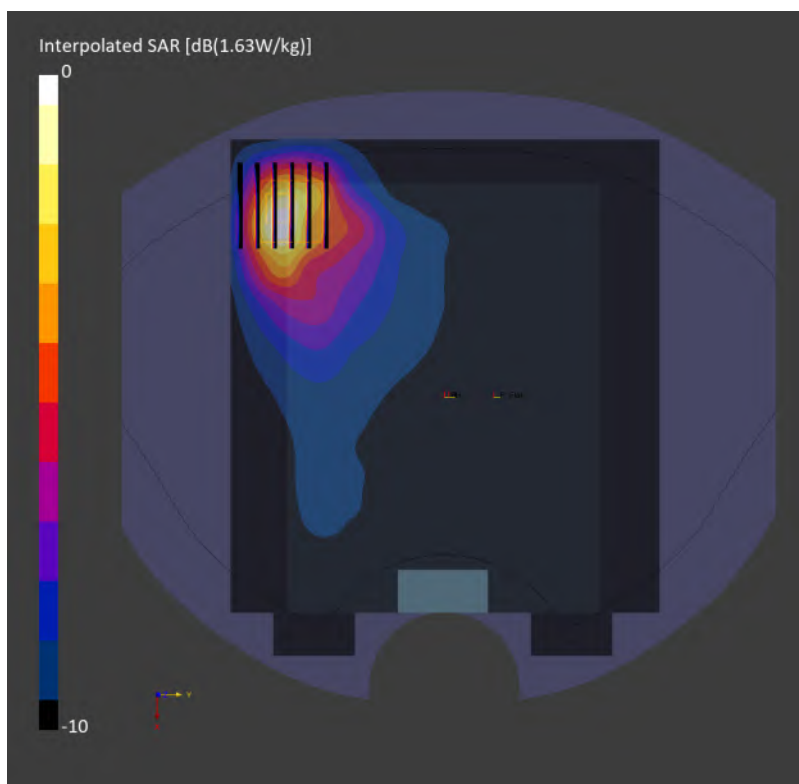

114_WCDMA V_RMC 12.2Kbps_Back_5mm_Ch4132

Communication System: UMTS-FDD; Frequency: 826.400 MHz

Medium: HSL_600-7200_260906 Medium parameters used: $f = 826.400$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 44.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(9.51, 10.14, 9.57); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: UMTS-FDD, 10457

Area Scan (180.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.681 W/kg; SAR (10g) = 0.436 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.717 W/kg; SAR (8g) = 0.444 W/kg; SAR (10g) = 0.416 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 82.6 %

TSL Correction: Positive only

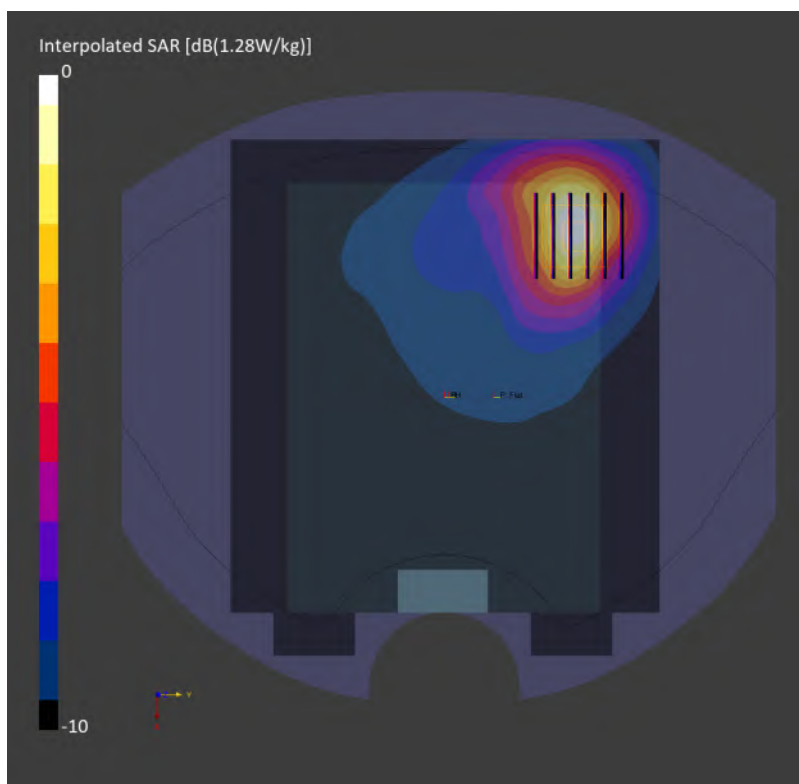

115_LTE Band 7_20M_QPSK_1_0_Bottom Side_5mm_Ch20850

Communication System: LTE-FDD; Frequency: 2510.000 MHz

Medium: HSL_600-7200_260831 Medium parameters used: $f = 2510.000$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 41.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.32, 6.8, 7.27); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.12 W/kg; SAR (10g) = 0.456 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.03 dB

SAR (1g) = 1.15 W/kg; SAR (8g) = 0.524 W/kg; SAR (10g) = 0.468 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 76.5 %

TSL Correction: Positive only

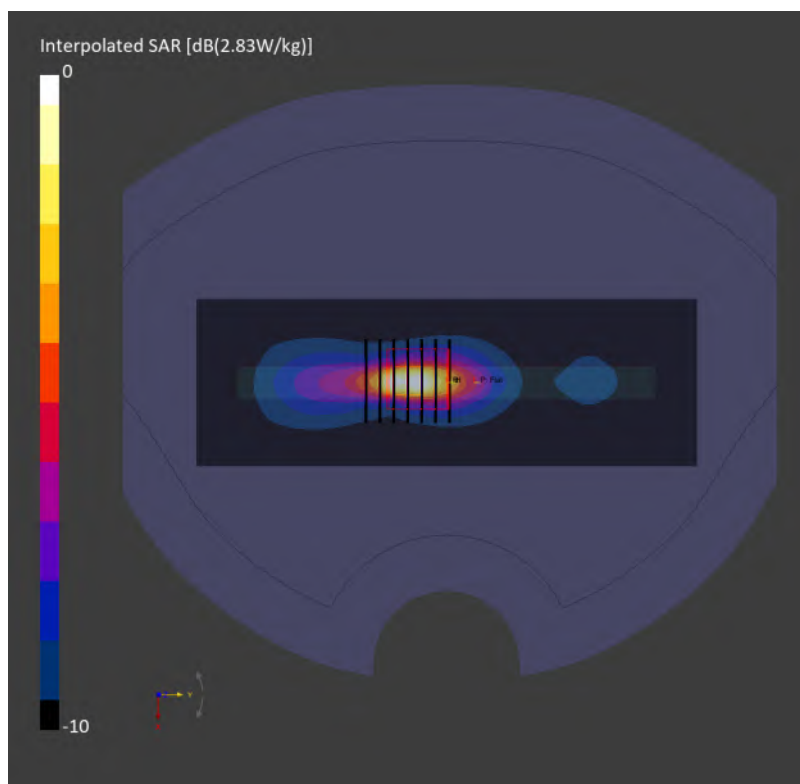

116_LTE Band 12_10M_QPSK_1_0_Back_5mm_Ch23095

Communication System: LTE-FDD; Frequency: 707.500 MHz

Medium: HSL_600-7200_260906 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 44.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(9.53, 10.16, 9.59); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10176

Area Scan (180.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.697 W/kg; SAR (10g) = 0.461 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.07 dB

SAR (1g) = 0.701 W/kg; SAR (8g) = 0.415 W/kg; SAR (10g) = 0.386 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 82.6 %

TSL Correction: Positive only

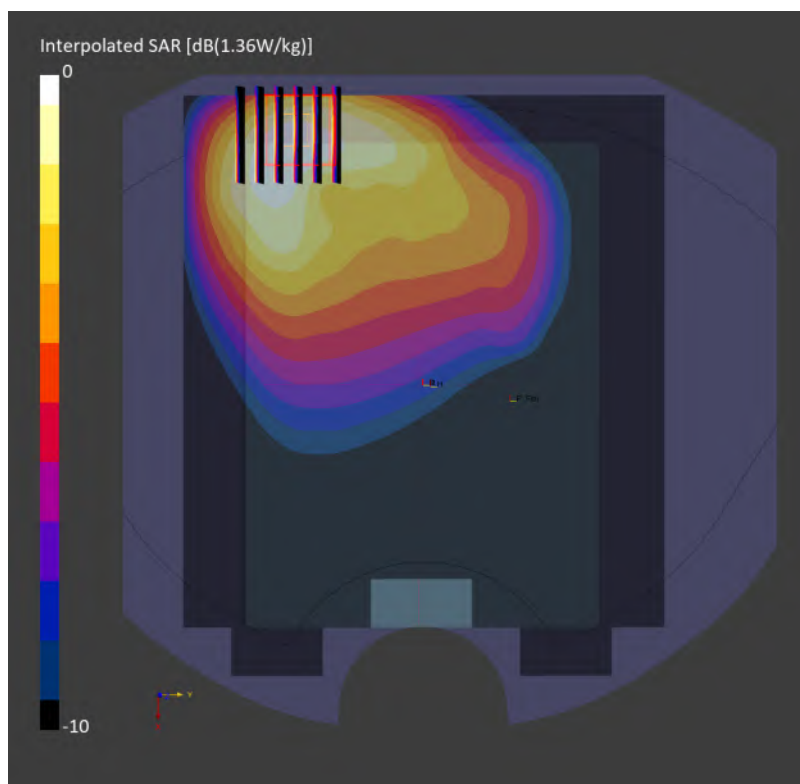

117_LTE Band 13_10M_QPSK_1_0_Back_5mm_Ch23230

Communication System: LTE-FDD; Frequency: 782.000 MHz

Medium: HSL_600-7200_260906 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 44.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(9.53, 10.16, 9.59); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10175

Area Scan (180.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.816 W/kg; SAR (10g) = 0.529 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.12 dB

SAR (1g) = 0.842 W/kg; SAR (8g) = 0.504 W/kg; SAR (10g) = 0.469 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 79.9 %

TSL Correction: Positive only

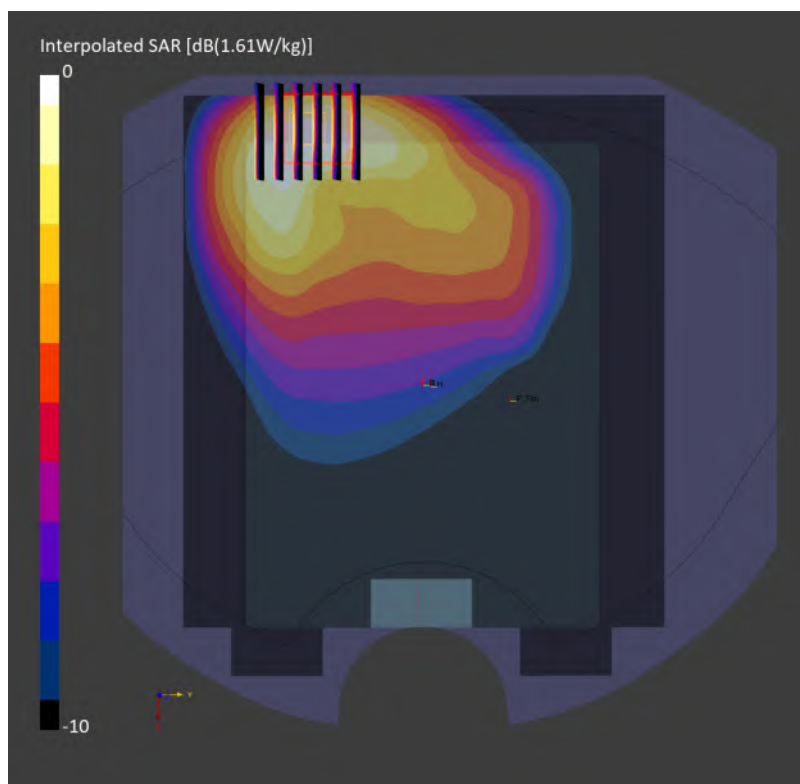

118_LTE Band 14_10M_QPSK_1_0_Back_5mm_Ch23330

Communication System: LTE-FDD; Frequency: 793.000 MHz

Medium: HSL_600-7200_260906 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 44.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(9.53, 10.16, 9.59); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10175

Area Scan (180.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.807 W/kg; SAR (10g) = 0.524 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.11 dB

SAR (1g) = 0.833 W/kg; SAR (8g) = 0.491 W/kg; SAR (10g) = 0.456 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 82.9 %

TSL Correction: Positive only

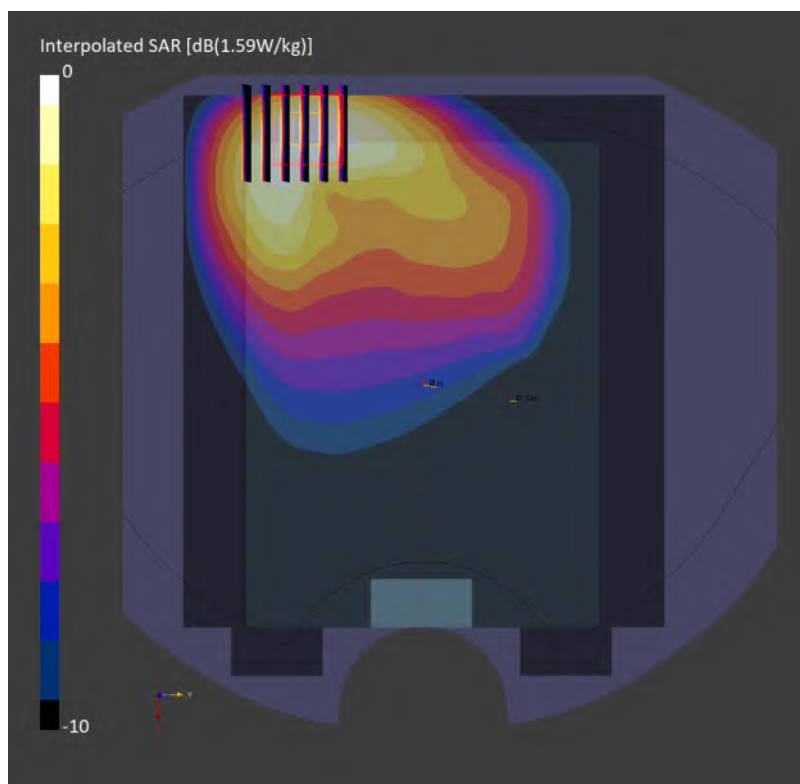

119_LTE Band 25_20M_QPSK_1_0_Back_5mm_Ch26140

Communication System: LTE-FDD; Frequency: 1860.000 MHz

Medium: HSL_600-7200_260830 Medium parameters used: $f = 1860.000$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 40.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.97, 7.4, 7.91); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (180.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.662 W/kg; SAR (10g) = 0.376 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.08 dB

SAR (1g) = 0.863 W/kg; SAR (8g) = 0.462 W/kg; SAR (10g) = 0.424 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 80.8 %

TSL Correction: Positive only

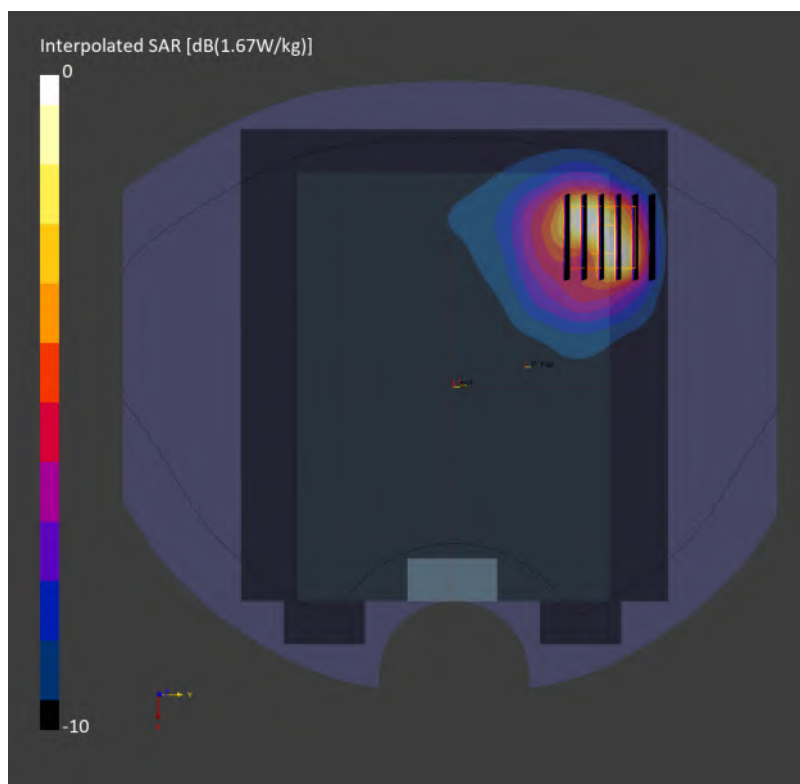

120_LTE Band 26_15M_QPSK_1_0_Back_5mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz

Medium: HSL_600-7200_260906 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 44.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(9.51, 10.14, 9.57); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10181

Area Scan (180.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.964 W/kg; SAR (10g) = 0.625 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.04 dB

SAR (1g) = 1.02 W/kg; SAR (8g) = 0.620 W/kg; SAR (10g) = 0.579 W/kg

Smallest distance from peaks to all points 3 dB below = 12.8 mm

Ratio of SAR at M2 to SAR at M1 = 82.1 %

TSL Correction: Positive only

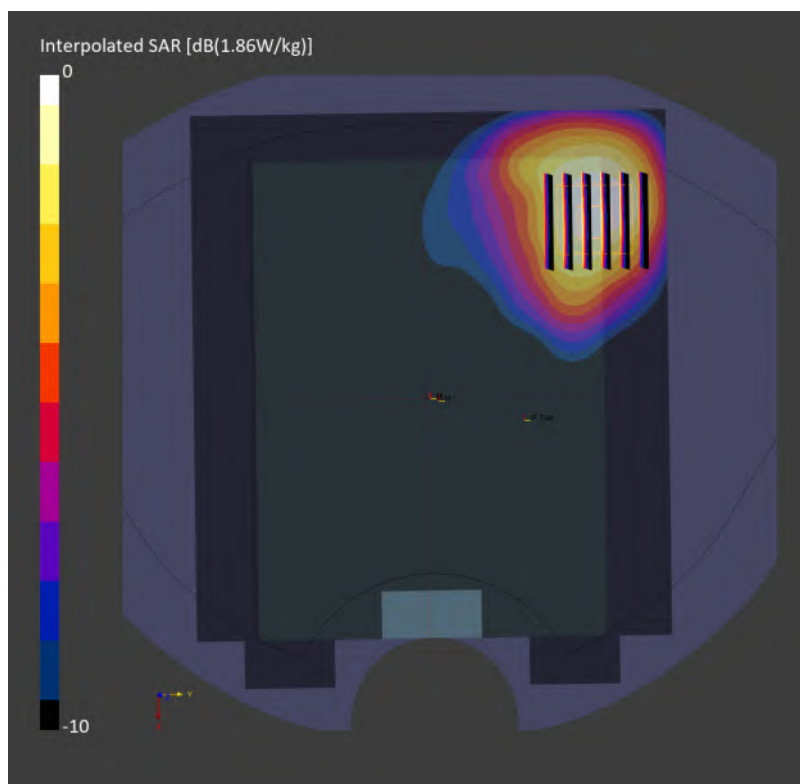

121_LTE Band 30_10M_QPSK_1_0_Bottom Side_5mm_Ch27710

Communication System: LTE-FDD; Frequency: 2310.000 MHz

Medium: HSL_600-7200_260831 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.76$ S/m; $\epsilon_r = 41.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.6, 7.06, 7.54); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10175

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.10 W/kg; SAR (10g) = 0.446 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 1.13 W/kg; SAR (8g) = 0.517 W/kg; SAR (10g) = 0.461 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 77.9 %

TSL Correction: Positive only

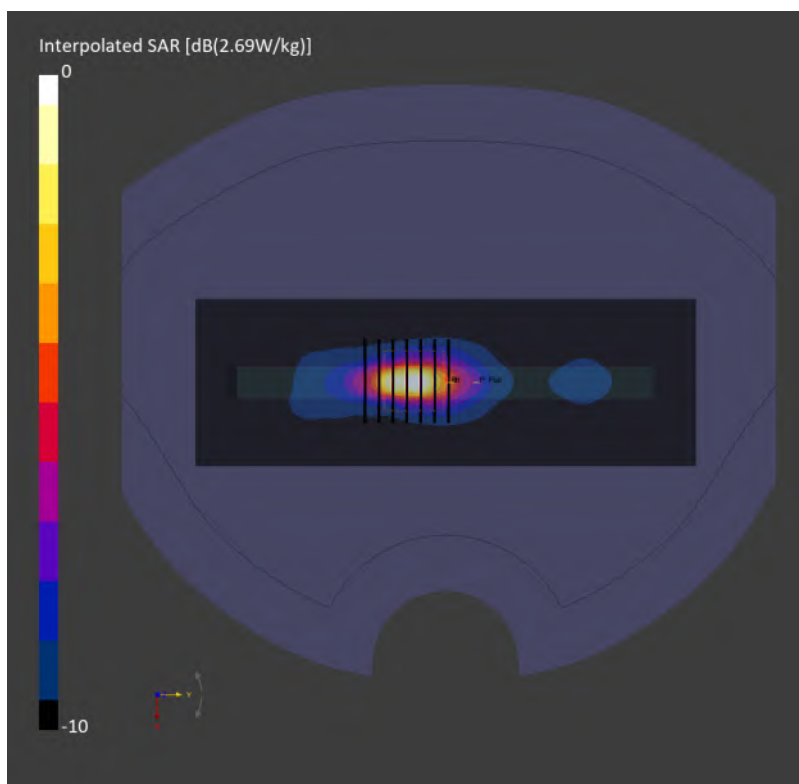

122_LTE Band 66_20M_QPSK_1_0_Back_5mm_Ch132072

Communication System: LTE-FDD; Frequency: 1720.000 MHz

Medium: HSL_600-7200_260830 Medium parameters used: $f = 1720.000$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(8.25, 7.66, 8.19); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.537 W/kg;

TSL Correction: Positive only

Zoom Scan (33.0 mm x 33.0 mm x 31.2 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm


Power Drift = -0.17 dB

SAR (1g) = 1.05 W/kg; SAR (8g) = 0.532 W/kg; SAR (10g) = 0.486 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 83.0 %

TSL Correction: Positive only

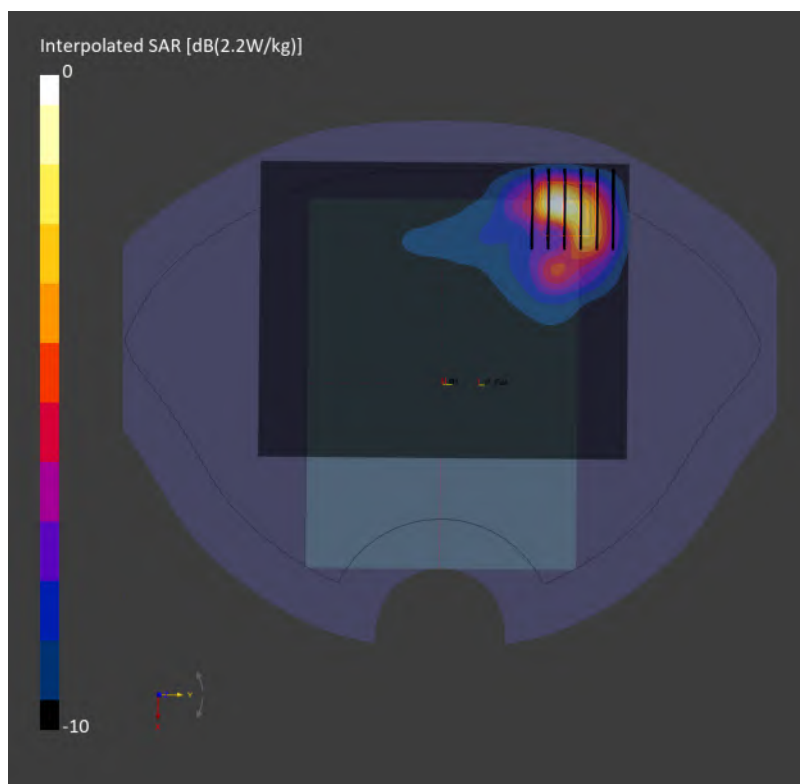

123_LTE Band 71_20M_QPSK_1_0_Back_5mm_Ch133297

Communication System: LTE-FDD; Frequency: 680.500 MHz

Medium: HSL_600-7200_260906 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 45.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(9.53, 10.16, 9.59); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (180.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.517 W/kg; SAR (10g) = 0.348 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.549 W/kg; SAR (8g) = 0.345 W/kg; SAR (10g) = 0.324 W/kg

Smallest distance from peaks to all points 3 dB below = 16.1 mm

Ratio of SAR at M2 to SAR at M1 = 78.2 %

TSL Correction: Positive only

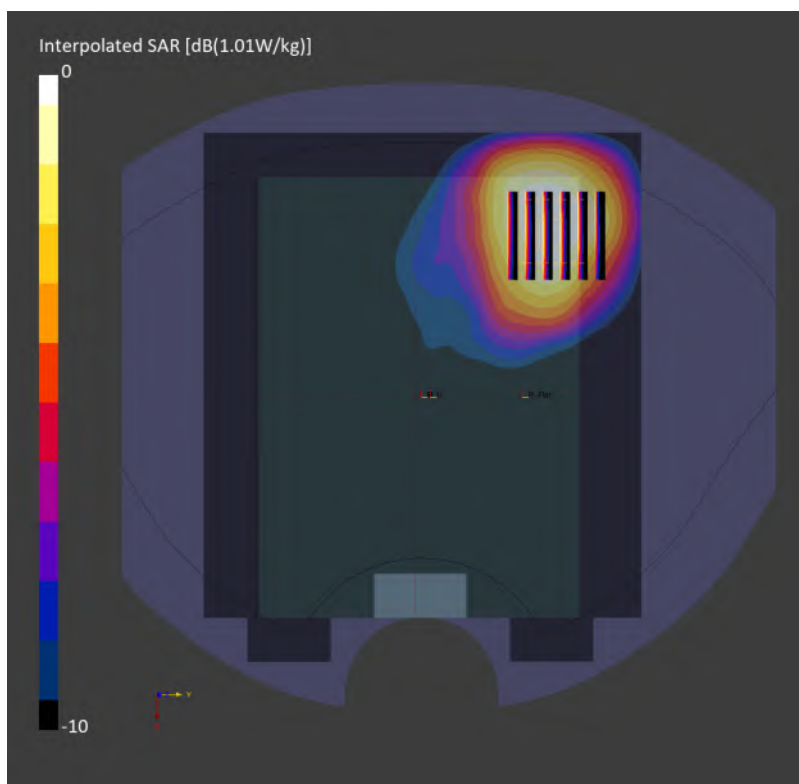

124_LTE Band 41_20M_QPSK_1_0_Right Side_5mm_Ch40620

Communication System: LTE-TDD; Frequency: 2593.000 MHz

Medium: HSL_600-7200_260829 Medium parameters used: $f = 2593.000$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.32, 6.8, 7.27); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-TDD, 10435

Area Scan (60.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.23 W/kg; SAR (10g) = 0.429 W/kg;

TSL Correction: Positive only

Zoom Scan (33.6 mm x 33.6 mm x 31.2 mm): Measurement Grid: 4.2 mm x 4.2 mm x 1.5 mm


Power Drift = 0.02 dB

SAR (1g) = 1.16 W/kg; SAR (8g) = 0.497 W/kg; SAR (10g) = 0.406 W/kg

Smallest distance from peaks to all points 3 dB below = 5.9 mm

Ratio of SAR at M2 to SAR at M1 = 76.4 %

TSL Correction: Positive only

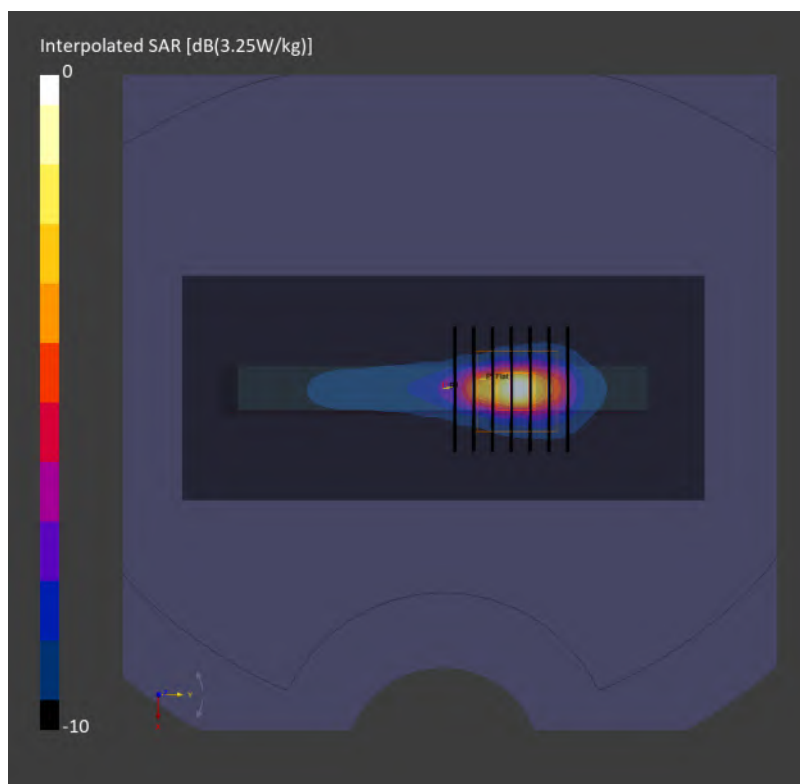

125_LTE Band 42_20M_QPSK_1_0_Top Side_5mm_Ch42190

Communication System: LTE-TDD; Frequency: 3460.000 MHz

Medium: HSL_600-7200_260829 Medium parameters used: $f=3460.000$ MHz; $\sigma=2.70$ S/m; $\epsilon_r=38.1$

Ambient Temperature: 23.9°C; Liquid Temperature: 22.9°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(6.54, 6.97, 6.58); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-TDD, 10435

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.697 W/kg; SAR (10g) = 0.252 W/kg;

TSL Correction: Positive only

Zoom Scan (36.8 mm x 36.8 mm x 29.1 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm


Power Drift = -0.08 dB

SAR (1g) = 0.835 W/kg; SAR (8g) = 0.316 W/kg; SAR (10g) = 0.276 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 75.8 %

TSL Correction: Positive only

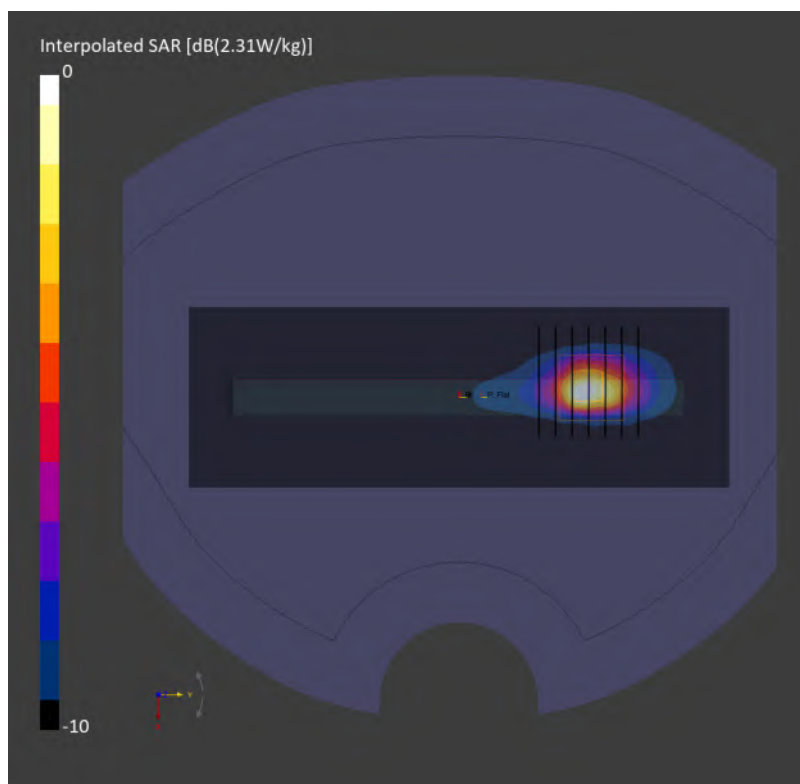

127_LTE Band 48_20M_QPSK_1_0_Top Side_5mm_Ch55340

Communication System: LTE-TDD; Frequency: 3560.000 MHz

Medium: HSL_600-7200_260829 Medium parameters used: $f = 3560.000$ MHz; $\sigma = 2.79$ S/m; $\epsilon_r = 37.9$

Ambient Temperature: 23.9°C; Liquid Temperature: 22.9°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(6.54, 6.97, 6.58); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-TDD, 10435

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.905 W/kg; SAR (10g) = 0.330 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.03 dB

SAR (1g) = 1.08 W/kg; SAR (8g) = 0.415 W/kg; SAR (10g) = 0.363 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 76.5 %

TSL Correction: Positive only

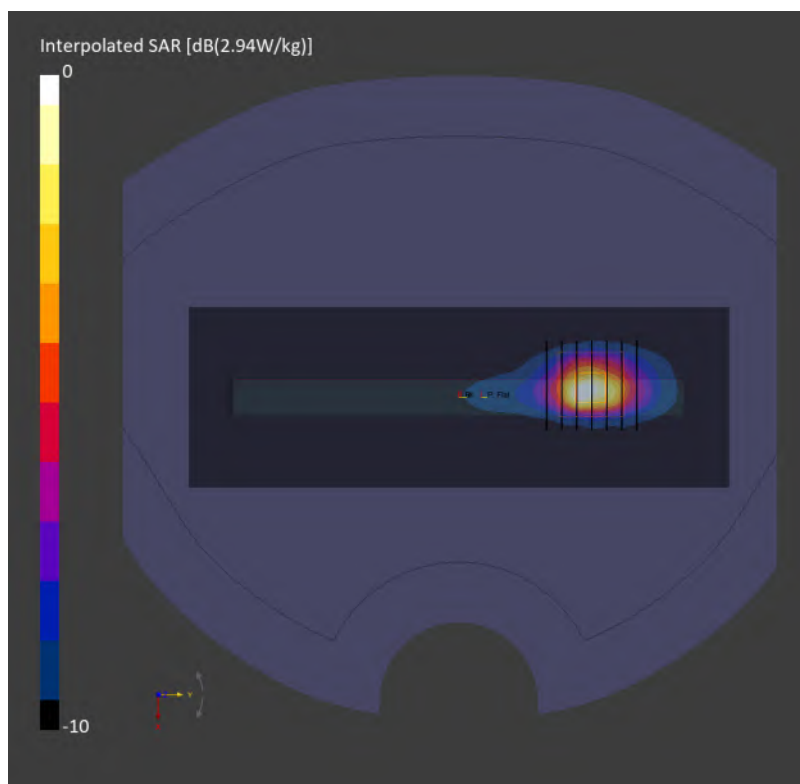

128_FR1 n7_50M_BPSK_135_68_Bottom Side_5mm_Ch507000

Communication System: NR FR1 FDD; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260904 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.95$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.32, 6.8, 7.27); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000371

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.893 W/kg; SAR (10g) = 0.347 W/kg;

TSL Correction: Positive only

Zoom Scan (36.8 mm x 36.8 mm x 31.2 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.5 mm


Power Drift = -0.03 dB

SAR (1g) = 0.913 W/kg; SAR (8g) = 0.394 W/kg; SAR (10g) = 0.350 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 78.4 %

TSL Correction: Positive only

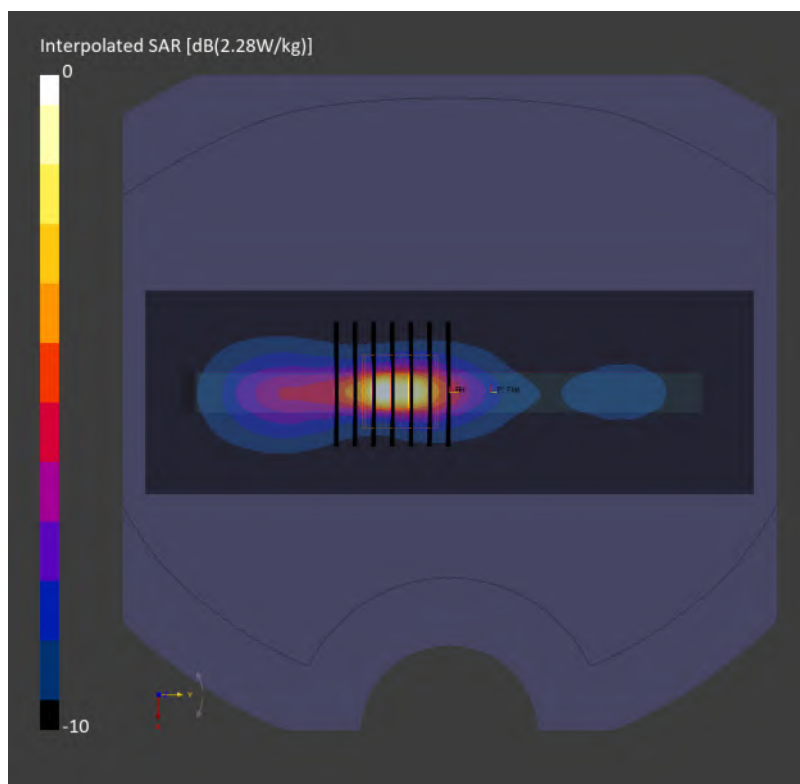

129_FR1 n12 _15M_BPSK_36_22_Back_5mm_Ch141500

Communication System: NR FR1 FDD; Frequency: 707.500 MHz

Medium: HSL_600-7200_260906 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 44.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(9.53, 10.16, 9.59); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000071

Area Scan (180.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.506 W/kg; SAR (10g) = 0.337 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.03 dB

SAR (1g) = 0.493 W/kg; SAR (8g) = 0.306 W/kg; SAR (10g) = 0.288 W/kg

Smallest distance from peaks to all points 3 dB below = 9.7 mm

Ratio of SAR at M2 to SAR at M1 = 79.0 %

TSL Correction: Positive only

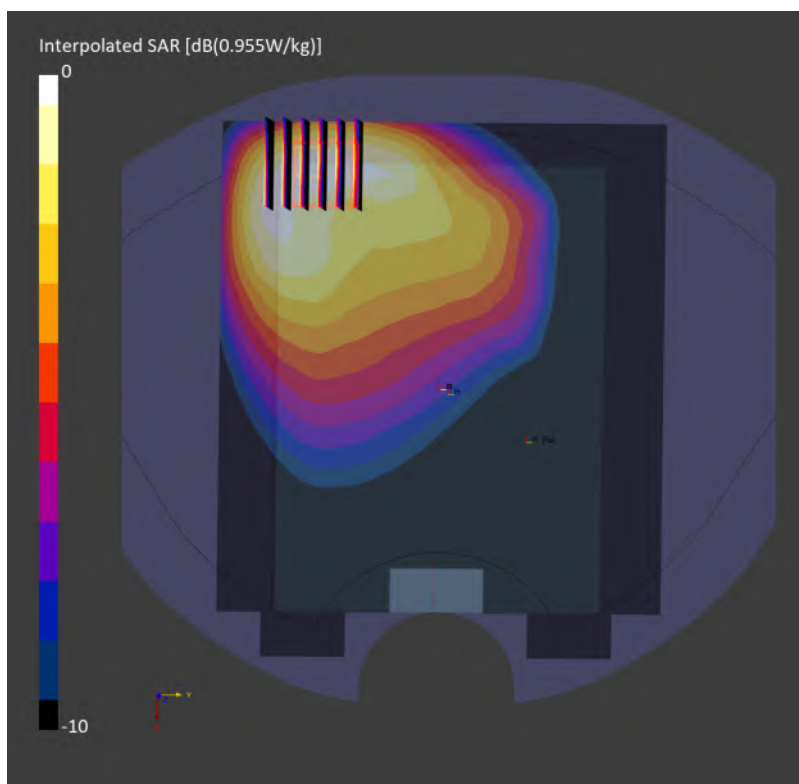

130_FR1 n13_10M_BPSK_25_14_Back_5mm_Ch156400

Communication System: NR FR1 FDD; Frequency: 782.000 MHz

Medium: HSL_600-7200_260902 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.930$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(10.04, 9.32, 9.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000029

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.643 W/kg; SAR (10g) = 0.421 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.03 dB

SAR (1g) = 0.656 W/kg; SAR (8g) = 0.400 W/kg; SAR (10g) = 0.374 W/kg

Smallest distance from peaks to all points 3 dB below = 13.0 mm

Ratio of SAR at M2 to SAR at M1 = 80.2 %

TSL Correction: Positive only

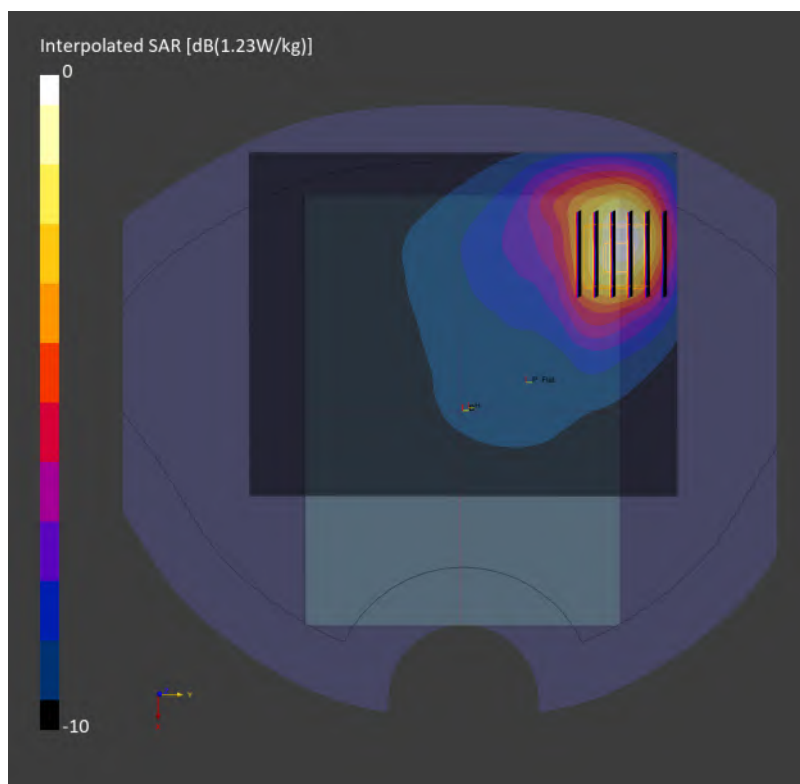

131_FR1 n14_HPUE_10M_BPSK_1_1_Back_5mm_Ch158600

Communication System: NR FR1 FDD; Frequency: 793.000 MHz

Medium: HSL_600-7200_260902 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(10.04, 9.32, 9.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000028

Area Scan (180.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.933 W/kg; SAR (10g) = 0.590 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.885 W/kg; SAR (8g) = 0.523 W/kg; SAR (10g) = 0.486 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 82.2 %

TSL Correction: Positive only

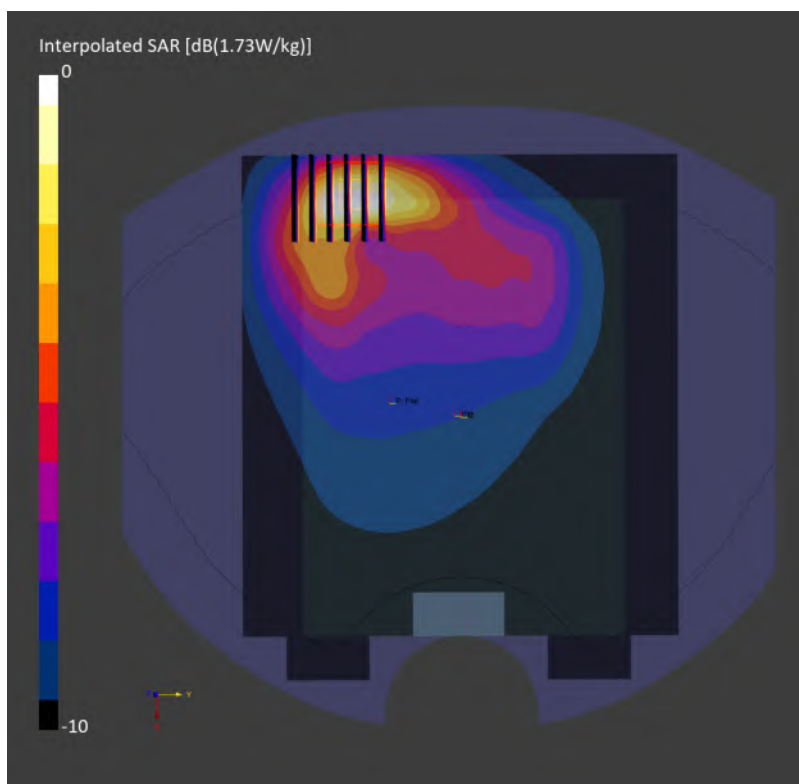

132_FR1 n25 _40M_BPSK_108_54_Back_5mm_Ch376500

Communication System: NR FR1 FDD; Frequency: 1882.500 MHz

Medium: HSL_600-7200_260903 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 42.7$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.64, 8.14, 7.69); Calibrated: 2026-01-27

- Sensor-Surface: 1.4 mm

- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13

- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat

- Measurement Software: 18.0.0.7250

- UID: NR FR1 FDD, 1000284

Area Scan (180.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.817 W/kg; SAR (10g) = 0.433 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.09 dB

SAR (1g) = 1.01 W/kg; SAR (8g) = 0.540 W/kg; SAR (10g) = 0.495 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 81.6 %

TSL Correction: Positive only

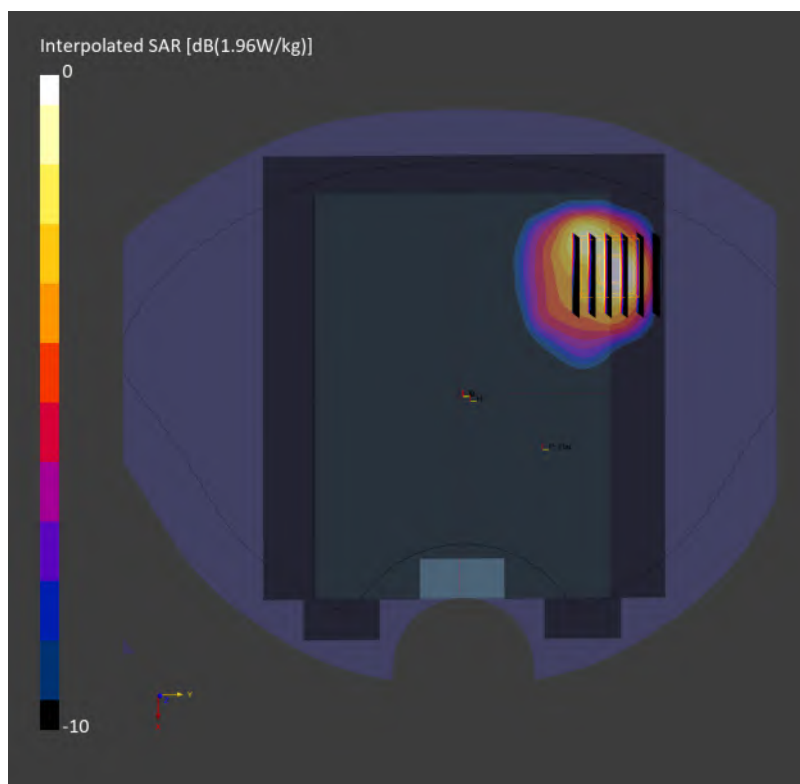

133_FR1 n26_HPUE_20M_BPSK_50_28_Back_5mm_Ch166300

Communication System: NR FR1 FDD; Frequency: 831.500 MHz

Medium: HSL_600-7200_260902 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.948$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(9.82, 9.12, 9.75); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000113

Area Scan (180.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.744 W/kg; SAR (10g) = 0.481 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.02 dB

SAR (1g) = 0.775 W/kg; SAR (8g) = 0.471 W/kg; SAR (10g) = 0.439 W/kg

Smallest distance from peaks to all points 3 dB below = 13.0 mm

Ratio of SAR at M2 to SAR at M1 = 80.4 %

TSL Correction: Positive only

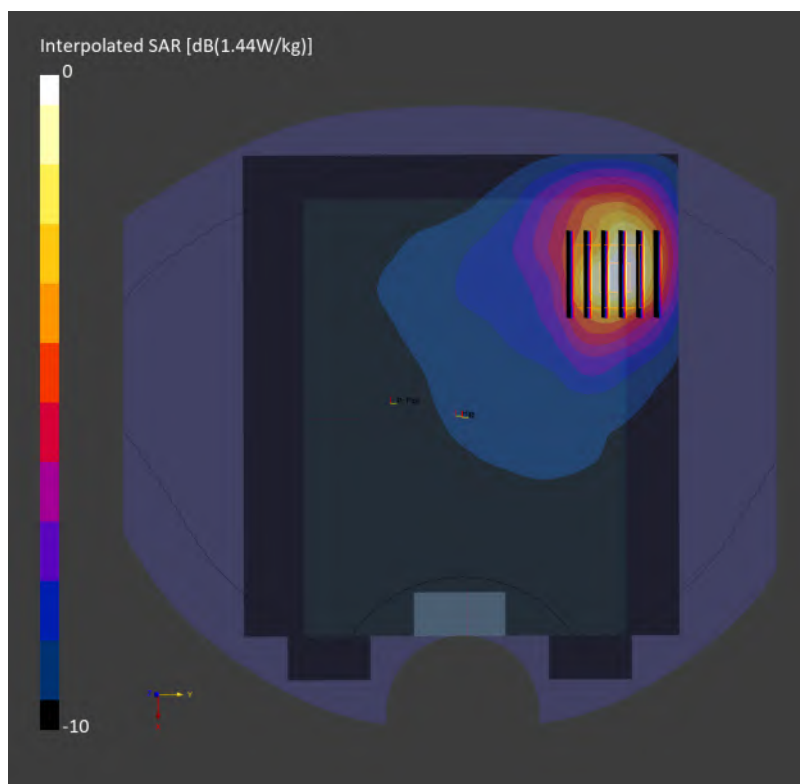

134_FR1 n30_10M_BPSK_25_14_Right Side_5mm_Ch462000

Communication System: NR FR1 FDD; Frequency: 2310.000 MHz

Medium: HSL_600-7200_260904 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.6, 7.06, 7.54); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000029

Area Scan (60.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.973 W/kg; SAR (10g) = 0.375 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.976 W/kg; SAR (8g) = 0.433 W/kg; SAR (10g) = 0.384 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 77.4 %

TSL Correction: Positive only

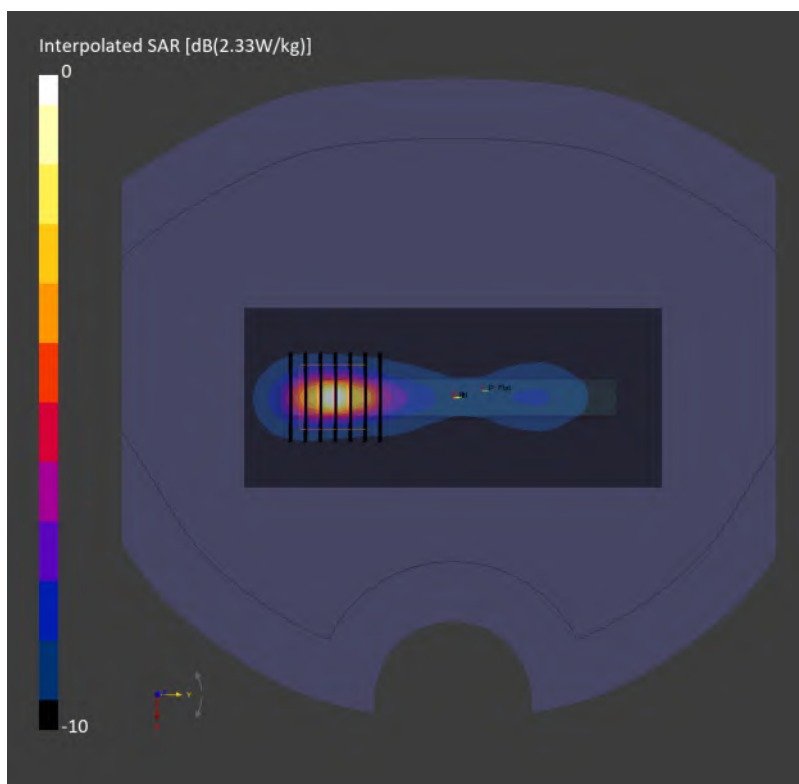

135_FR1 n66 _45M_BPSK_120_60_Back_5mm_Ch349000

Communication System: NR FR1 FDD; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260903 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 42.9$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.89, 8.41, 7.94); Calibrated: 2026-01-27

- Sensor-Surface: 1.4 mm

- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13

- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat

- Measurement Software: 18.0.0.7250

- UID: NR FR1 FDD, 1000326

Area Scan (180.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.917 W/kg; SAR (10g) = 0.490 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.09 dB

SAR (1g) = 1.08 W/kg; SAR (8g) = 0.574 W/kg; SAR (10g) = 0.526 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 80.4 %

TSL Correction: Positive only

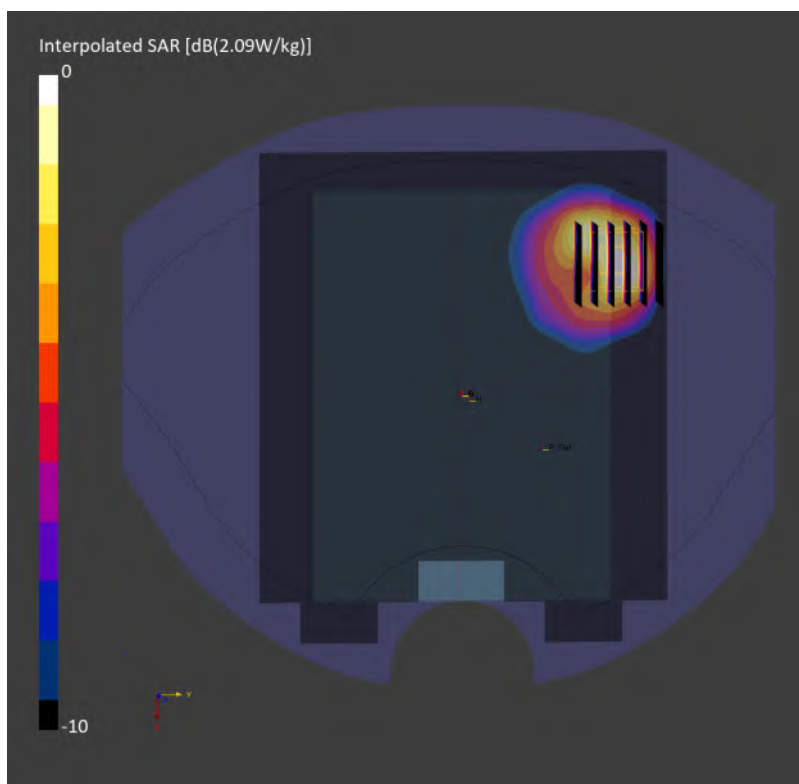

136_FR1 n70 _15M_BPSK_75_0_Back_5mm_Ch340500

Communication System: NR FR1 FDD; Frequency: 1702.500 MHz

Medium: HSL_600-7200_260901 Medium parameters used: $f = 1702.500$ MHz; $\sigma = 1.31$ S/m; $\epsilon_r = 41.6$

Ambient Temperature: 23.1°C; Liquid Temperature: 22.1°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.89, 8.41, 7.94); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000072

Area Scan (180.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.891 W/kg; SAR (10g) = 0.491 W/kg;

TSL Correction: No correction

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.17 dB

SAR (1g) = 0.889 W/kg; SAR (8g) = 0.507 W/kg; SAR (10g) = 0.469 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 82.7 %

TSL Correction: No correction

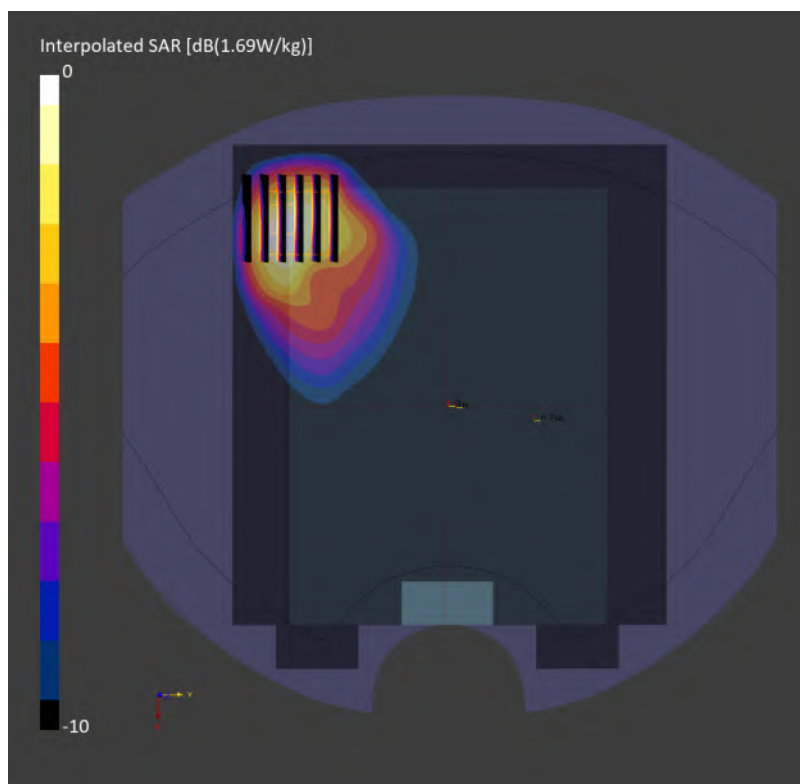

137_FR1 n71_HPUE_35M_BPSK_90_45_Back_5mm_Ch136100

Communication System: NR FR1 FDD; Frequency: 680.500 MHz

Medium: HSL_600-7200_260902 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 42.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(10.04, 9.32, 9.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000239

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.911 W/kg; SAR (10g) = 0.607 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.02 dB

SAR (1g) = 0.841 W/kg; SAR (8g) = 0.503 W/kg; SAR (10g) = 0.471 W/kg

Smallest distance from peaks to all points 3 dB below = 11.9 mm

Ratio of SAR at M2 to SAR at M1 = 77.4 %

TSL Correction: Positive only

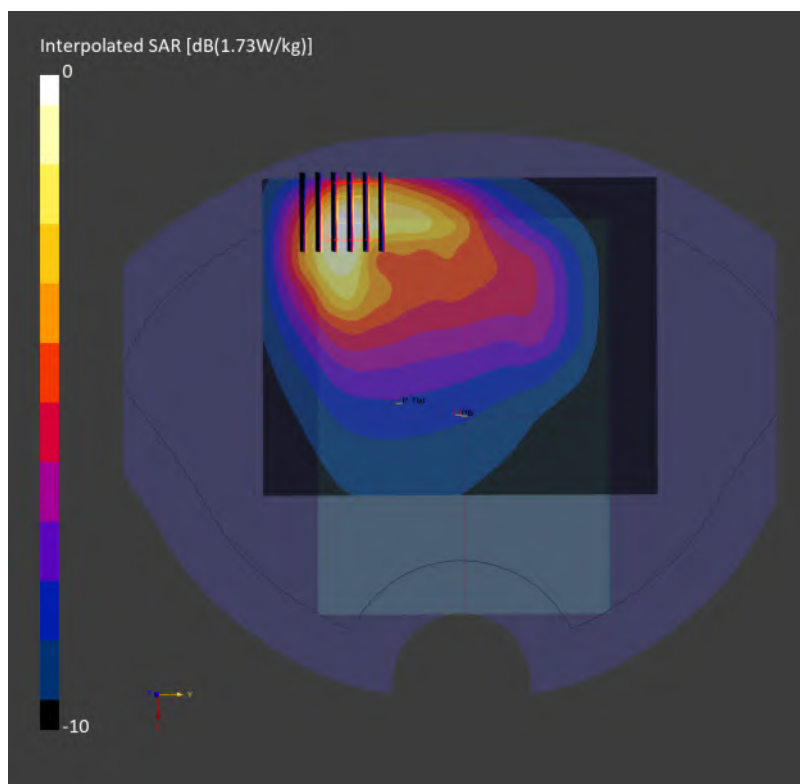

138_FR1 n41_100M_BPSK_270_0_Top Side_5mm_Ch518598

Communication System: NR FR1 TDD; Frequency: 2592.990 MHz

Medium: HSL_600-7200_260904 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 2.00$ S/m; $\epsilon_r = 40.4$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.32, 6.8, 7.27); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 TDD, 10868

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.921 W/kg; SAR (10g) = 0.341 W/kg;

TSL Correction: Positive only

Zoom Scan (36.8 mm x 36.8 mm x 31.2 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.5 mm


Power Drift = 0.05 dB

SAR (1g) = 0.929 W/kg; SAR (8g) = 0.392 W/kg; SAR (10g) = 0.345 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 78.1 %

TSL Correction: Positive only

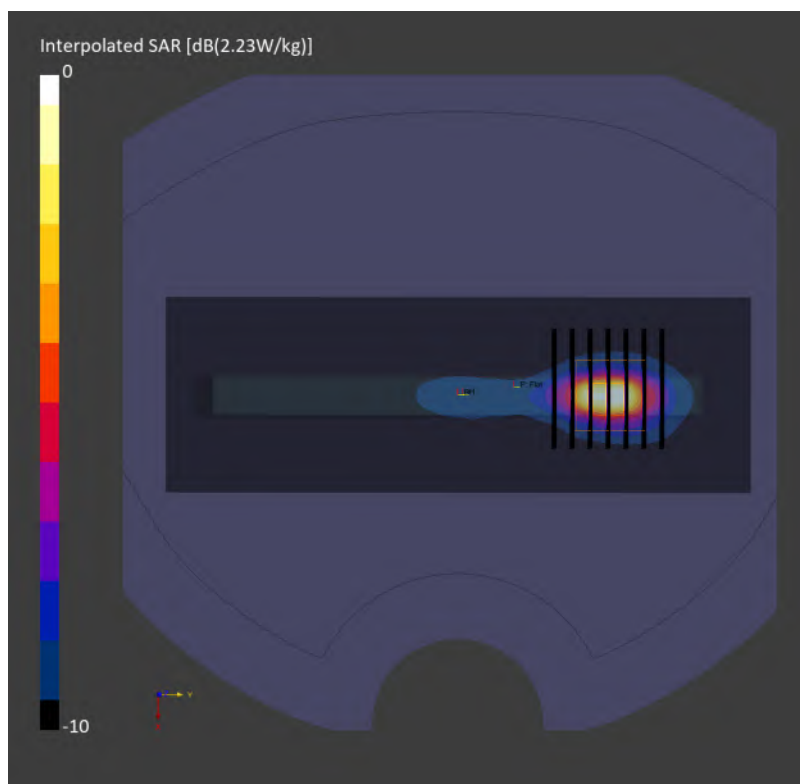

139_FR1 n48 _40M_BPSK_50_28_Right Side_5mm_Ch641666

Communication System: NR FR1 TDD; Frequency: 3624.990 MHz

Medium: HSL_600-7200_260829 Medium parameters used: $f = 3624.990$ MHz; $\sigma = 2.85$ S/m; $\epsilon_r = 37.8$

Ambient Temperature: 23.9°C; Liquid Temperature: 22.9°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(6.68, 7.12, 6.72); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 TDD, 1002255

Area Scan (60.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.932 W/kg; SAR (10g) = 0.317 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = -0.03 dB

SAR (1g) = 0.994 W/kg; SAR (8g) = 0.383 W/kg; SAR (10g) = 0.336 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 73.7 %

TSL Correction: Positive only

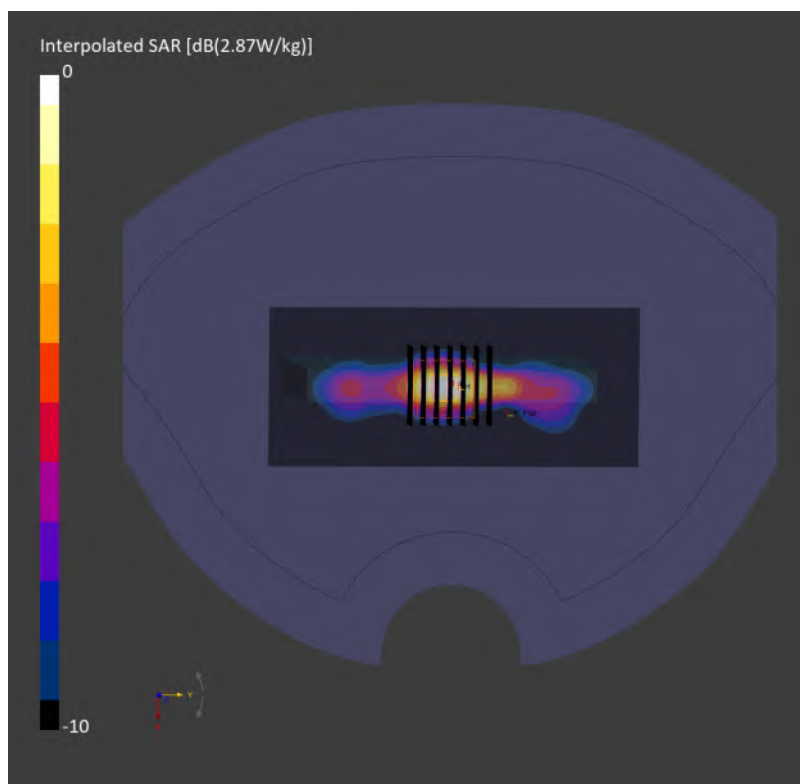

140_FR1 n77_100M_BPSK_1_1_Right Side_5mm_Ch661334

Communication System: NR FR1 TDD; Frequency: 3920.010 MHz

Medium: HSL_600-7200_261008 Medium parameters used: $f = 3920.010$ MHz; $\sigma = 3.05$ S/m; $\epsilon_r = 38.5$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(6.46, 6.89, 6.5); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAMV8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 TDD, 1003250

Area Scan (60.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.741 W/kg; SAR (10g) = 0.203 W/kg;

TSL Correction: Positive only

Zoom Scan (28.0 mm x 28.0 mm x 33.4 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.01 dB

SAR (1g) = 0.745 W/kg; SAR (8g) = 0.241 W/kg; SAR (10g) = 0.235 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 69.5 %

TSL Correction: Positive only

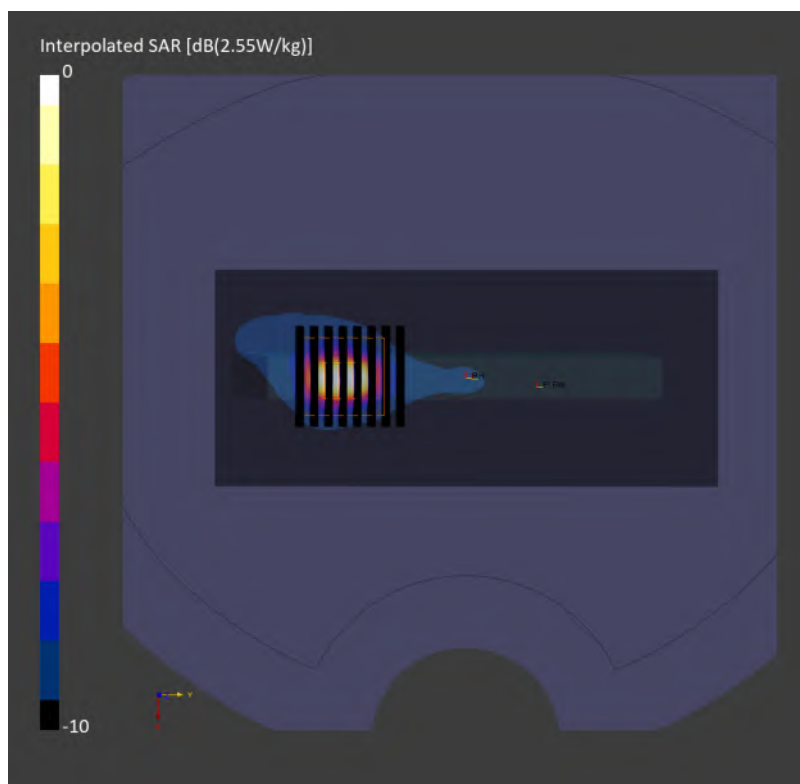

141_WLAN2.4GHz_802.11b 1Mbps_Right Side_5mm_Ch6

Communication System: WiFi (802.11b); Frequency: 2437.000 MHz

Medium: HSL_600-7200_260904 Medium parameters used: $f = 2437.000$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.44, 6.91, 7.38); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11b), 10415

Area Scan (60.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.933 W/kg; SAR (10g) = 0.400 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.949 W/kg; SAR (8g) = 0.456 W/kg; SAR (10g) = 0.410 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 78.4 %

TSL Correction: Positive only

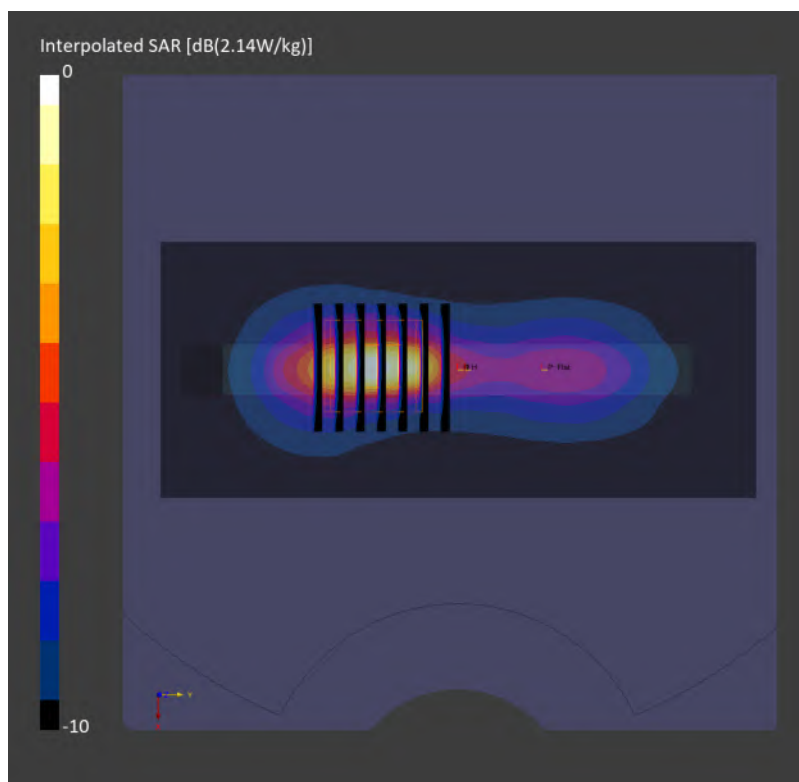

142_WLAN5GHz_802.11ac-VHT160 MCS0_Top Side_5mm_Ch50

Communication System: WiFi (802.11ac); Frequency: 5250.000 MHz

Medium: HSL_600-7200_260602 Medium parameters used: $f = 5250.000$ MHz; $\sigma = 4.70$ S/m; $\epsilon_r = 36.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(5.4, 5.76, 5.43); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11ac), 10554

Area Scan (60.0 mm x 180.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.583 W/kg; SAR (10g) = 0.187 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.01 dB

SAR (1g) = 0.698 W/kg; SAR (8g) = 0.239 W/kg; SAR (10g) = 0.208 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 63.2 %

TSL Correction: Positive only

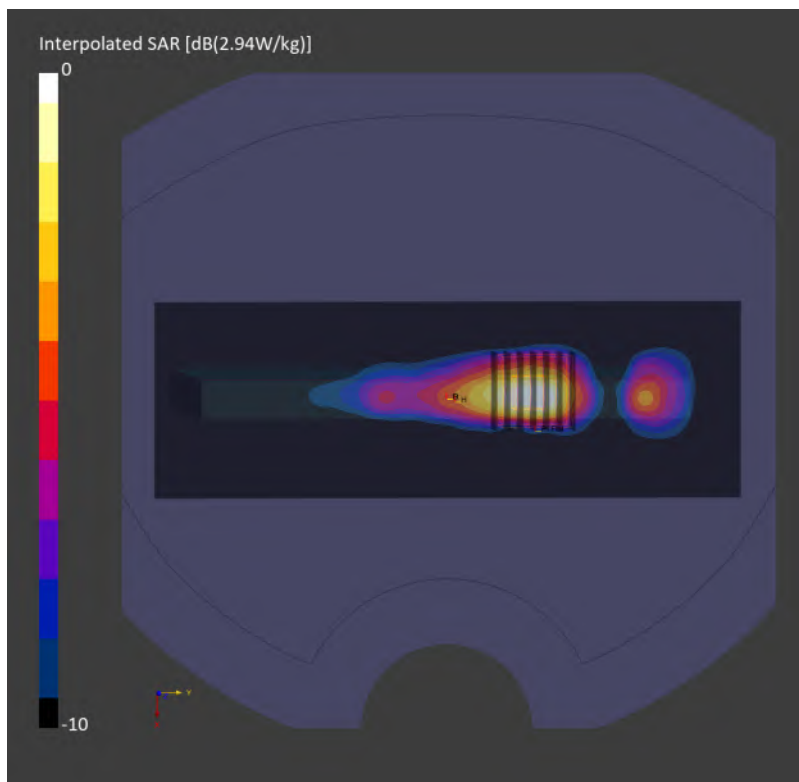

143_WLAN5GHz_802.11ac-VHT160 MCS0_Back_5mm_Ch114

Communication System: WiFi (802.11ac); Frequency: 5570.000 MHz

Medium: HSL_600-7200_260906 Medium parameters used: $f = 5570.000$ MHz; $\sigma = 4.88$ S/m; $\epsilon_r = 34.7$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(5.38, 5.0, 5.35); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11ac), 10554

Area Scan (180.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.537 W/kg; SAR (10g) = 0.188 W/kg;

TSL Correction: Positive only

Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm


Power Drift = -0.06 dB

SAR (1g) = 0.635 W/kg; SAR (8g) = 0.216 W/kg; SAR (10g) = 0.186 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 56.1 %

TSL Correction: Positive only

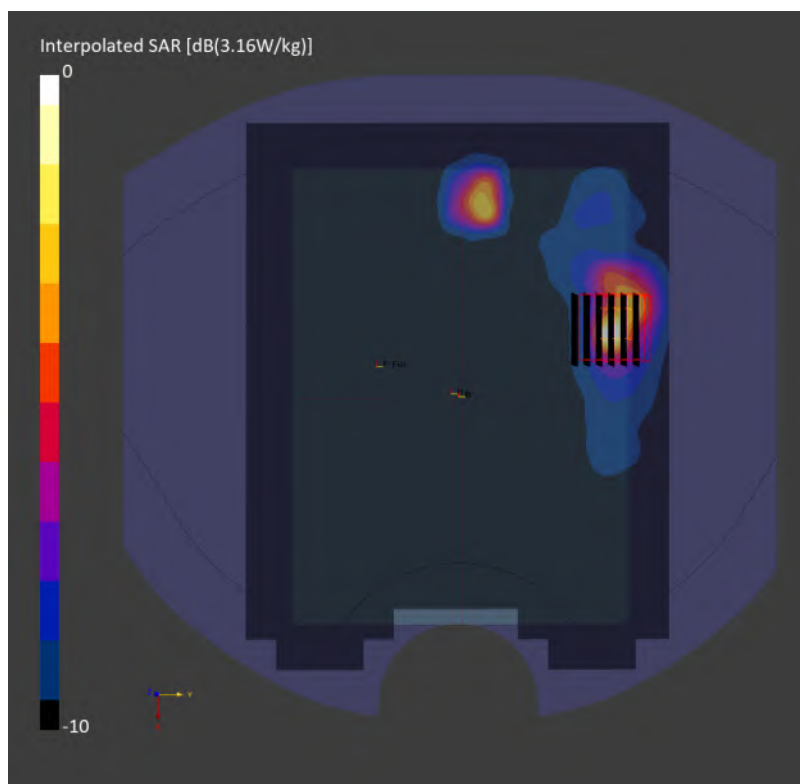

144_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch155

Communication System: WiFi (802.11ac); Frequency: 5775.000 MHz

Medium: HSL_600-7200_260902 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.34$ S/m; $\epsilon_r = 35.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(4.86, 5.17, 4.88); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11ac), 10544

Area Scan (180.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.546 W/kg; SAR (10g) = 0.190 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.01 dB

SAR (1g) = 0.709 W/kg; SAR (8g) = 0.230 W/kg; SAR (10g) = 0.195 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 59.7 %

TSL Correction: Positive only

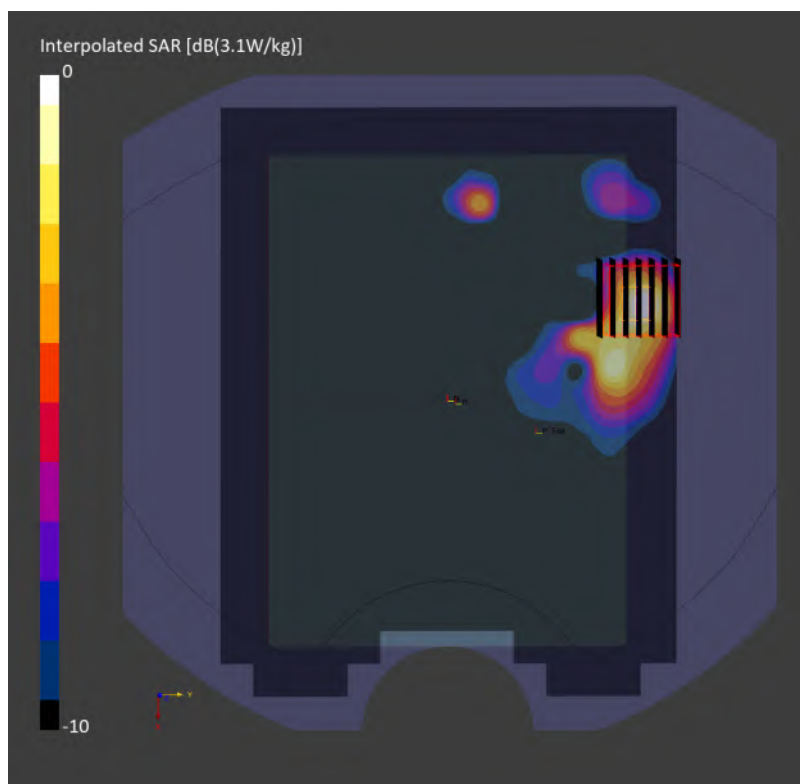

145_WLAN6GHz_802.11be-EHT320 MCS0_Back_5mm_Ch95

Communication System: WiFi; Frequency: 6425.000 MHz

Medium: HSL_600-7200_260907 Medium parameters used: $f = 6425.000$ MHz; $\sigma = 5.81$ S/m; $\epsilon_r = 33.0$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(5.49, 5.1, 5.45); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11be), 11026-

Area Scan (187.0 mm x 153.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.678 W/kg; SAR (10g) = 0.210 W/kg;

TSL Correction: Positive only

Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = 0.14 dB


SAR (1g) = 0.832 W/kg; SAR (8g) = 0.255 W/kg; SAR (10g) = 0.217 W/kg

Smallest distance from peaks to all points 3 dB below = 5.5 mm

Ratio of SAR at M2 to SAR at M1 = 52.8 %

psAPD (1.0cm², sq) = 8.32 [W/m²]; psAPD (4.0cm², sq) = 5.10 [W/m²]

TSL Correction: Positive only

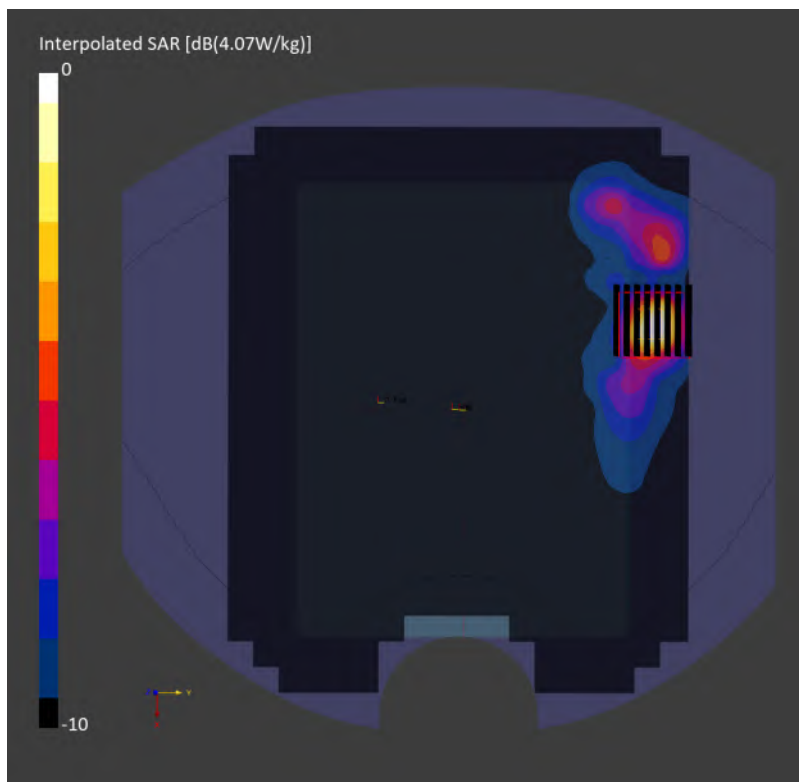

146_Bluetooth_1Mbps_Back_5mm_Ch39

Communication System: Bluetooth; Frequency: 2441.000 MHz

Medium: HSL_600-7200_260831 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 41.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.44, 6.91, 7.38); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: Bluetooth, 10035

Area Scan (180.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.695 W/kg; SAR (10g) = 0.323 W/kg;

TSL Correction: Positive only

Zoom Scan (34.2 mm x 34.2 mm x 33.4 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm


Power Drift = -0.10 dB

SAR (1g) = 0.851 W/kg; SAR (8g) = 0.365 W/kg; SAR (10g) = 0.325 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 78.8 %

TSL Correction: Positive only

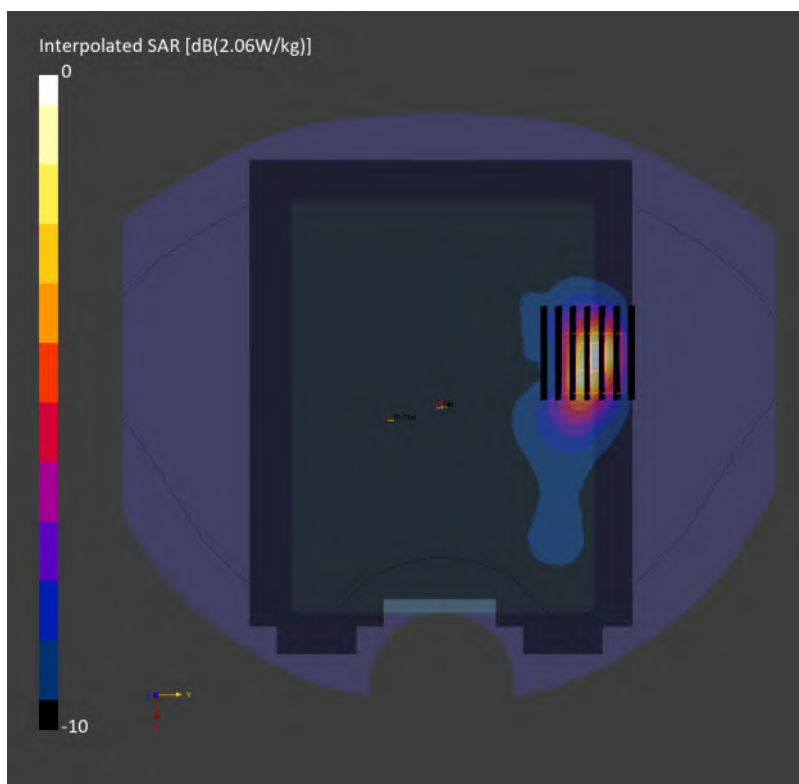

147_GSM1900_GPRS 4 Tx slots_Top Side_0mm_Ch810

Communication System: GSM; Frequency: 1909.800 MHz

Medium: HSL_600-7200_260901 Medium parameters used: $f = 1909.800$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.97, 7.4, 7.91); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: GSM, 10028

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 12.0 mm x 15.0 mm

SAR (1g) = 3.05 W/kg; SAR (10g) = 1.46 W/kg;

TSL Correction: Positive only

Zoom Scan (33.6 mm x 33.6 mm x 33.4 mm): Measurement Grid: 4.2 mm x 4.2 mm x 1.4 mm


Power Drift = 0.02 dB

SAR (1g) = 3.95 W/kg; SAR (8g) = 1.74 W/kg; SAR (10g) = 1.55 W/kg

Smallest distance from peaks to all points 3 dB below = 4.3 mm

Ratio of SAR at M2 to SAR at M1 = 71.4 %

TSL Correction: Positive only

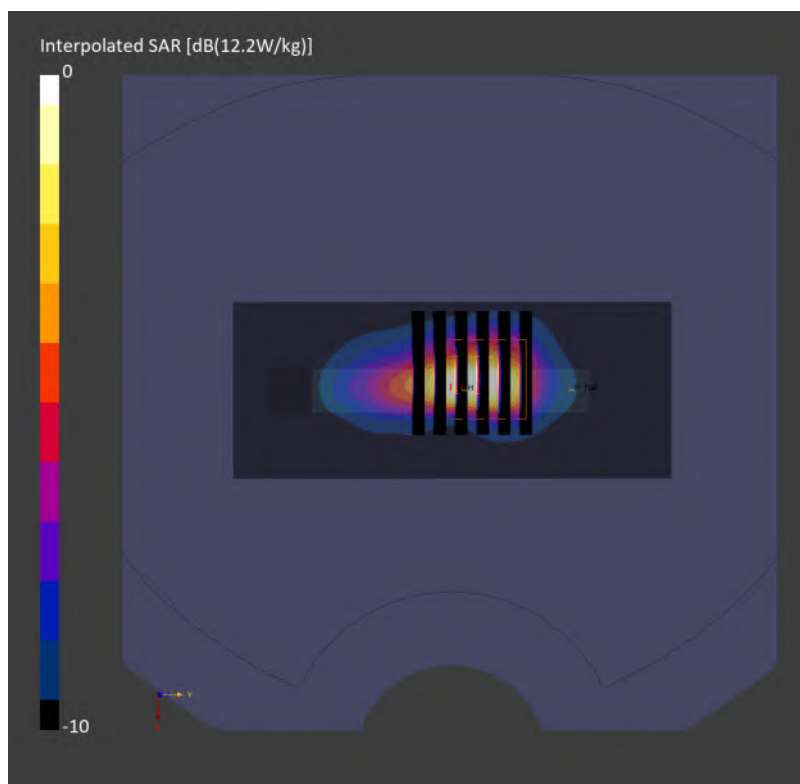

148_WCDMA II_RMC 12.2Kbps_Back1_0mm_Ch9262

Communication System: UMTS-FDD; Frequency: 1852.400 MHz

Medium: HSL_600-7200_260903 Medium parameters used: $f = 1852.400$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.64, 8.14, 7.69); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: UMTS-FDD, 10457

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 4.14 W/kg; SAR (10g) = 2.26 W/kg;

TSL Correction: Positive only

Zoom Scan (33.8 mm x 33.8 mm x 31.2 mm): Measurement Grid: 2.6 mm x 2.6 mm x 1.2 mm


Power Drift = 0.17 dB

SAR (1g) = 6.27 W/kg; SAR (8g) = 2.93 W/kg; SAR (10g) = 2.66 W/kg

Smallest distance from peaks to all points 3 dB below = 4.2 mm

Ratio of SAR at M2 to SAR at M1 = 76.1 %

TSL Correction: Positive only

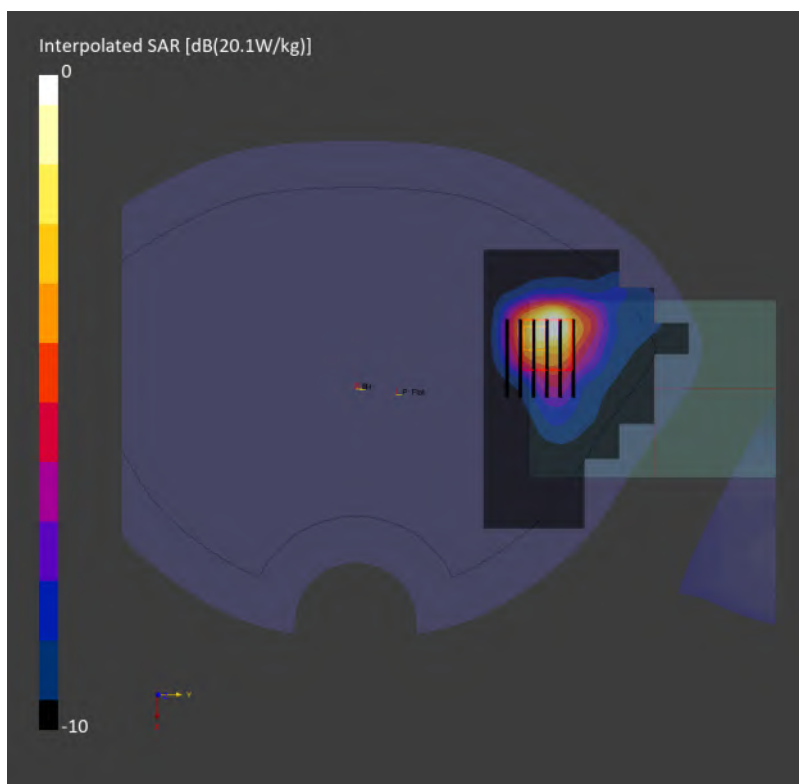

149_WCDMA IV_RMC 12.2Kbps_Back Top_0mm_Ch1312

Communication System: UMTS-FDD; Frequency: 1712.400 MHz

Medium: HSL_600-7200_260903 Medium parameters used: $f = 1712.400$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 43.1$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(7.89, 8.41, 7.94); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: UMTS-FDD, 10457

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 3.56 W/kg; SAR (10g) = 1.80 W/kg;

TSL Correction: Positive only

Zoom Scan (31.9 mm x 31.9 mm x 31.2 mm): Measurement Grid: 2.9 mm x 2.9 mm x 1.2 mm


Power Drift = -0.14 dB

SAR (1g) = 5.97 W/kg; SAR (8g) = 2.58 W/kg; SAR (10g) = 2.31 W/kg

Smallest distance from peaks to all points 3 dB below = 4.2 mm

Ratio of SAR at M2 to SAR at M1 = 72.5 %

TSL Correction: Positive only

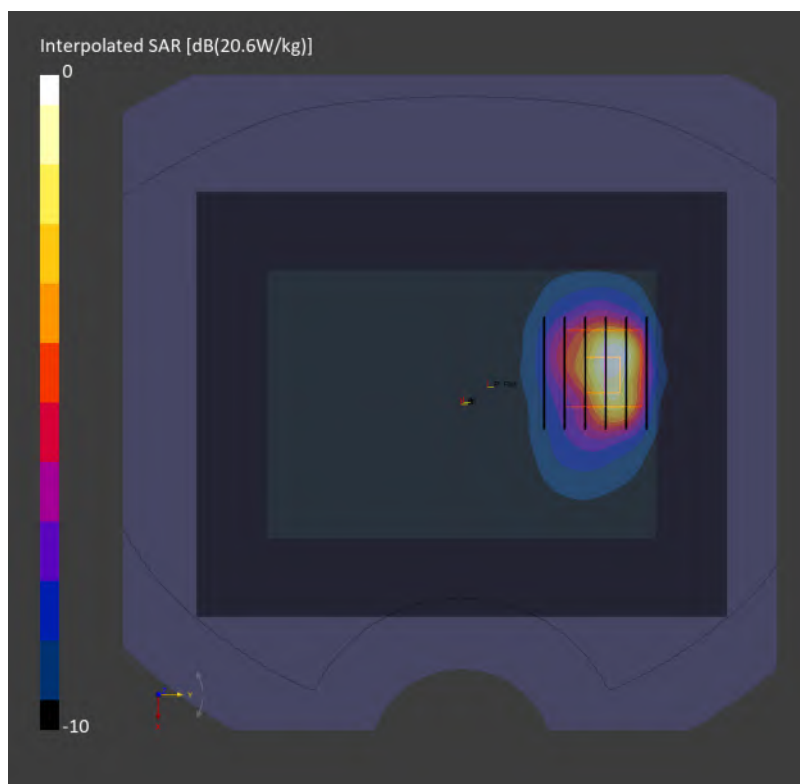

150_LTE Band 7_20M_QPSK_1_0_Back Right_0mm_Ch20850

Communication System: LTE-FDD; Frequency: 2510.000 MHz

Medium: HSL_600-7200_260829 Medium parameters used: $f = 2510.000$ MHz; $\sigma = 1.87$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.32, 6.8, 7.27); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 5.90 W/kg; SAR (10g) = 2.28 W/kg;

TSL Correction: Positive only

Zoom Scan (31.2 mm x 31.2 mm x 33.4 mm): Measurement Grid: 3.9 mm x 3.9 mm x 1.4 mm


Power Drift = 0.04 dB

SAR (1g) = 6.89 W/kg; SAR (8g) = 2.63 W/kg; SAR (10g) = 2.30 W/kg

Smallest distance from peaks to all points 3 dB below = 4.7 mm

Ratio of SAR at M2 to SAR at M1 = 70.2 %

TSL Correction: Positive only

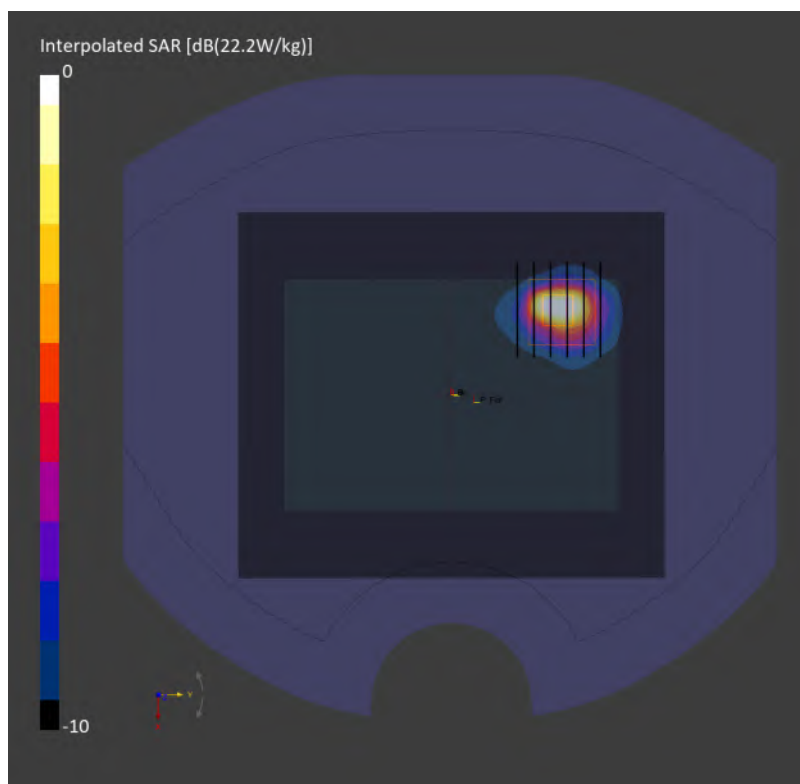

151_LTE Band 25_20M_QPSK_1_0_Back 1_0mm_Ch26140

Communication System: LTE-FDD; Frequency: 1860.000 MHz

Medium: HSL_600-7200_260901 Medium parameters used: $f = 1860.000$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.97, 7.4, 7.91); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 4.17 W/kg; SAR (10g) = 2.30 W/kg;

TSL Correction: Positive only

Zoom Scan (34.2 mm x 34.2 mm x 33.4 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm


Power Drift = -0.11 dB

SAR (1g) = 5.90 W/kg; SAR (8g) = 2.78 W/kg; SAR (10g) = 2.55 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 72.1 %

TSL Correction: Positive only

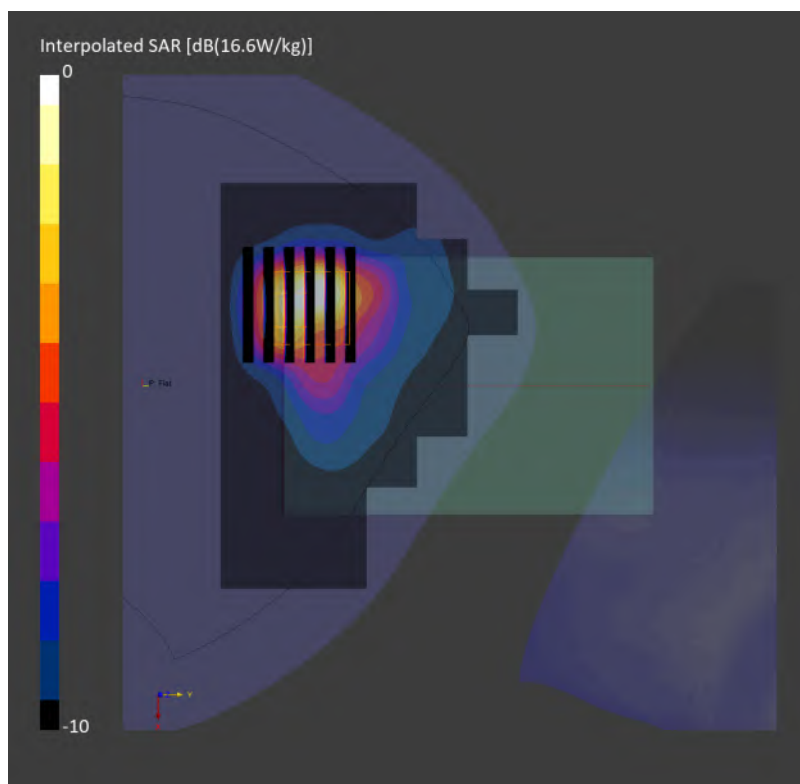

152_LTE Band 26_15M_QPSK_1_0_Back Right_0mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz

Medium: HSL_600-7200_260906 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.924$ S/m; $\epsilon_r = 44.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(9.51, 10.14, 9.57); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10181

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.32 W/kg; SAR (10g) = 0.831 W/kg;

TSL Correction: Positive only

Zoom Scan (33.8 mm x 33.8 mm x 31.2 mm): Measurement Grid: 2.6 mm x 2.6 mm x 1.2 mm


Power Drift = -0.03 dB

SAR (1g) = 2.71 W/kg; SAR (8g) = 1.16 W/kg; SAR (10g) = 1.05 W/kg

Smallest distance from peaks to all points 3 dB below = 3.2 mm

Ratio of SAR at M2 to SAR at M1 = 52.8 %

TSL Correction: Positive only

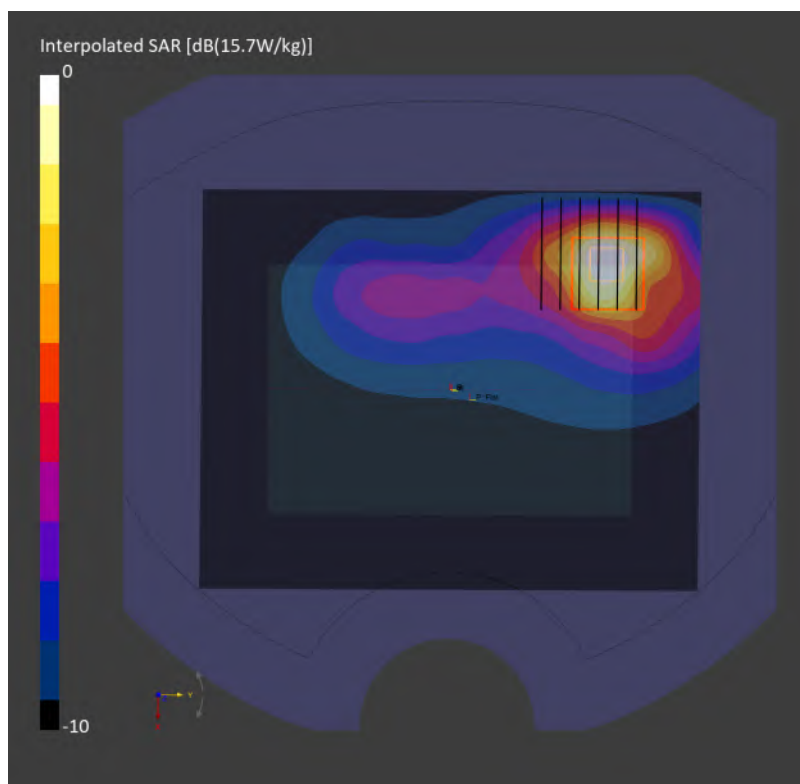

153_LTE Band 30_10M_QPSK_1_0_Back Top_0mm_Ch27710

Communication System: LTE-FDD; Frequency: 2310.000 MHz

Medium: HSL_600-7200_260904 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.78$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.6, 7.06, 7.54); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10175

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 7.50 W/kg; SAR (10g) = 2.85 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.06 dB

SAR (1g) = 7.98 W/kg; SAR (8g) = 3.11 W/kg; SAR (10g) = 2.73 W/kg

Smallest distance from peaks to all points 3 dB below = 5.0 mm

Ratio of SAR at M2 to SAR at M1 = 68.0 %

TSL Correction: Positive only

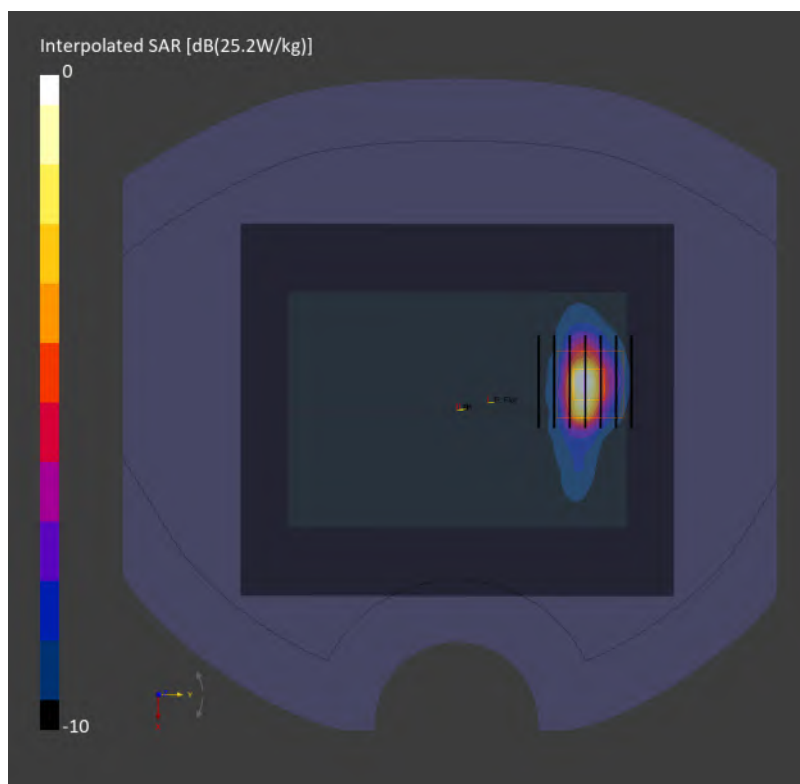

154_LTE Band 66_20M_QPSK_1_0_Back 1_0mm_Ch132572

Communication System: LTE-FDD; Frequency: 1770.000 MHz

Medium: HSL_600-7200_260901 Medium parameters used: $f = 1770.000$ MHz; $\sigma = 1.40$ S/m; $\epsilon_r = 41.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(8.25, 7.66, 8.19); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 3.98 W/kg; SAR (10g) = 2.24 W/kg;

TSL Correction: Positive only

Zoom Scan (34.2 mm x 34.2 mm x 33.4 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm


Power Drift = -0.15 dB

SAR (1g) = 5.66 W/kg; SAR (8g) = 2.72 W/kg; SAR (10g) = 2.50 W/kg

Smallest distance from peaks to all points 3 dB below = 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 71.3 %

TSL Correction: Positive only

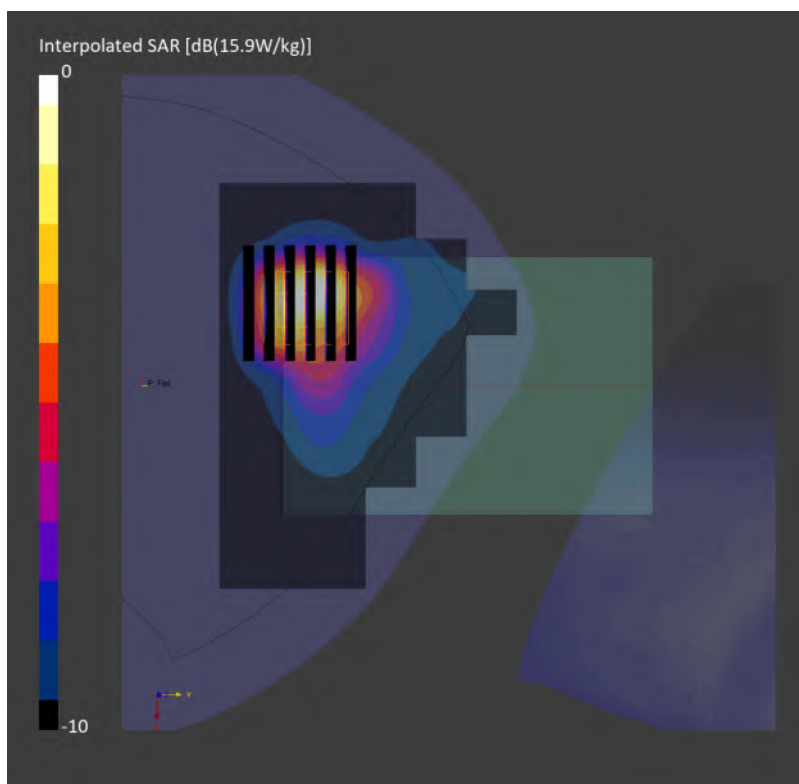

155_LTE Band 41_HPUE_20M_QPSK_1_0_Right Side_0mm_Ch40185

Communication System: LTE-TDD; Frequency: 2549.500 MHz

Medium: HSL_600-7200_260829 Medium parameters used: $f = 2549.500$ MHz; $\sigma = 1.90$ S/m; $\epsilon_r = 40.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.32, 6.8, 7.27); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-TDD, 10172

Area Scan (60.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 5.72 W/kg; SAR (10g) = 2.78 W/kg;

TSL Correction: Positive only

Zoom Scan (30.6 mm x 30.6 mm x 33.4 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm


Power Drift = -0.02 dB

SAR (1g) = 7.21 W/kg; SAR (8g) = 3.15 W/kg; SAR (10g) = 2.82 W/kg

Smallest distance from peaks to all points 3 dB below = 3.4 mm

Ratio of SAR at M2 to SAR at M1 = 62.5 %

TSL Correction: Positive only

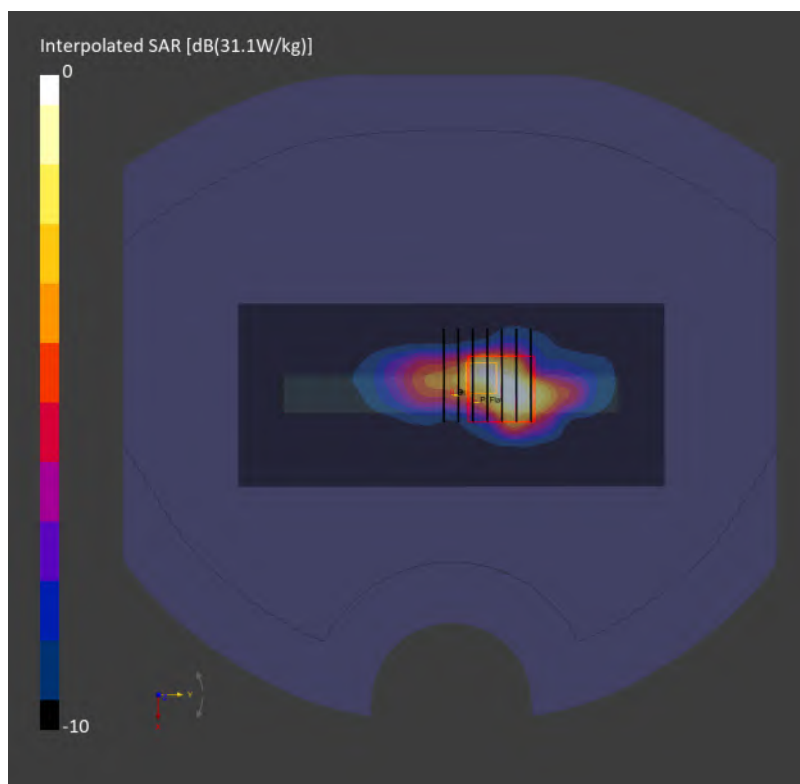

156_LTE Band 42_20M_QPSK_1_0_Bottom Side_0mm_Ch42190

Communication System: LTE-TDD; Frequency: 3460.000 MHz

Medium: HSL_600-7200_260904 Medium parameters used: $f = 3460.000$ MHz; $\sigma = 2.63$ S/m; $\epsilon_r = 38.3$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(6.54, 6.97, 6.58); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-TDD, 10435

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 5.21 W/kg; SAR (10g) = 2.16 W/kg;

TSL Correction: Positive only

Zoom Scan (29.4 mm x 29.4 mm x 29.1 mm): Measurement Grid: 4.2 mm x 4.2 mm x 1.4 mm


Power Drift = 0.02 dB

SAR (1g) = 7.42 W/kg; SAR (8g) = 2.65 W/kg; SAR (10g) = 2.33 W/kg

Smallest distance from peaks to all points 3 dB below = 4.2 mm

Ratio of SAR at M2 to SAR at M1 = 63.6 %

TSL Correction: Positive only

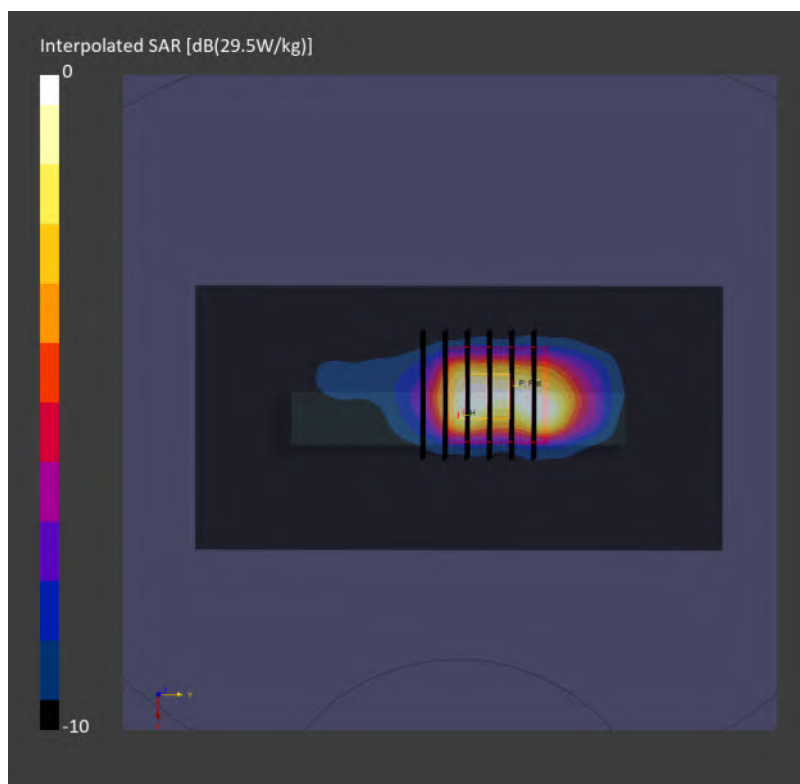

158_LTE Band 48_20M_QPSK_1_0_Bottom Side_0mm_Ch55340

Communication System: LTE-TDD; Frequency: 3560.000 MHz

Medium: HSL_600-7200_260904 Medium parameters used: $f = 3560.000$ MHz; $\sigma = 2.72$ S/m; $\epsilon_r = 38.1$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(6.54, 6.97, 6.58); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-TDD, 10435

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 5.22 W/kg; SAR (10g) = 2.15 W/kg;

TSL Correction: Positive only

Zoom Scan (30.6 mm x 30.6 mm x 33.4 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm


Power Drift = -0.02 dB

SAR (1g) = 7.40 W/kg; SAR (8g) = 2.64 W/kg; SAR (10g) = 2.33 W/kg

Smallest distance from peaks to all points 3 dB below = 3.4 mm

Ratio of SAR at M2 to SAR at M1 = 59.0 %

TSL Correction: Positive only

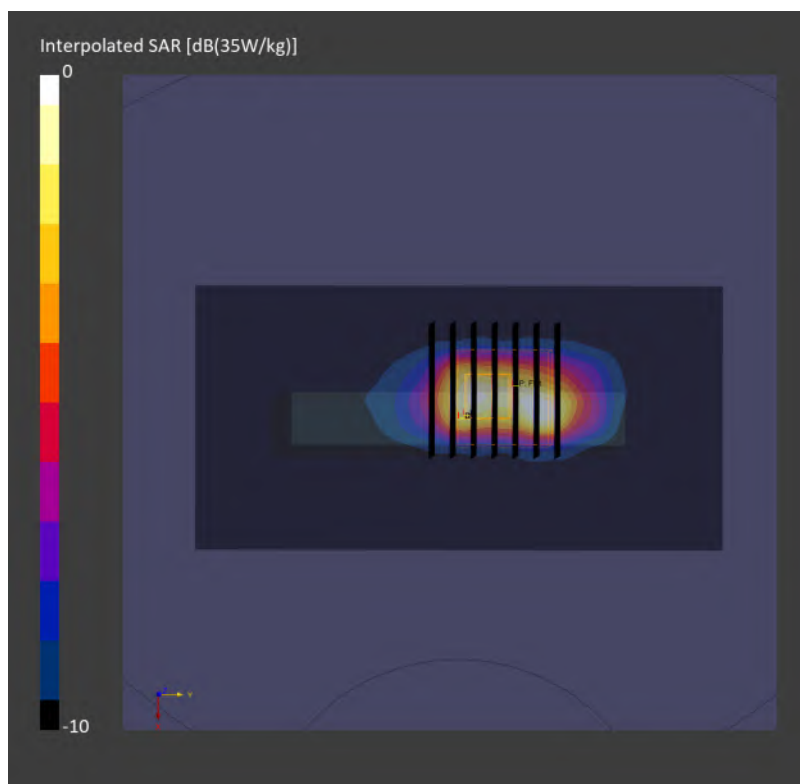

159_FR1 n7_50M_BPSK_270_0_Bottom Side_0mm_Ch507000

Communication System: NR FR1 FDD; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260824 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.32, 6.8, 7.27); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000375

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 5.64 W/kg; SAR (10g) = 2.32 W/kg;

TSL Correction: Positive only

Zoom Scan (30.6 mm x 30.6 mm x 33.4 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm


Power Drift = -0.00 dB

SAR (1g) = 7.25 W/kg; SAR (8g) = 2.76 W/kg; SAR (10g) = 2.42 W/kg

Smallest distance from peaks to all points 3 dB below = 4.0 mm

Ratio of SAR at M2 to SAR at M1 = 63.0 %

TSL Correction: Positive only

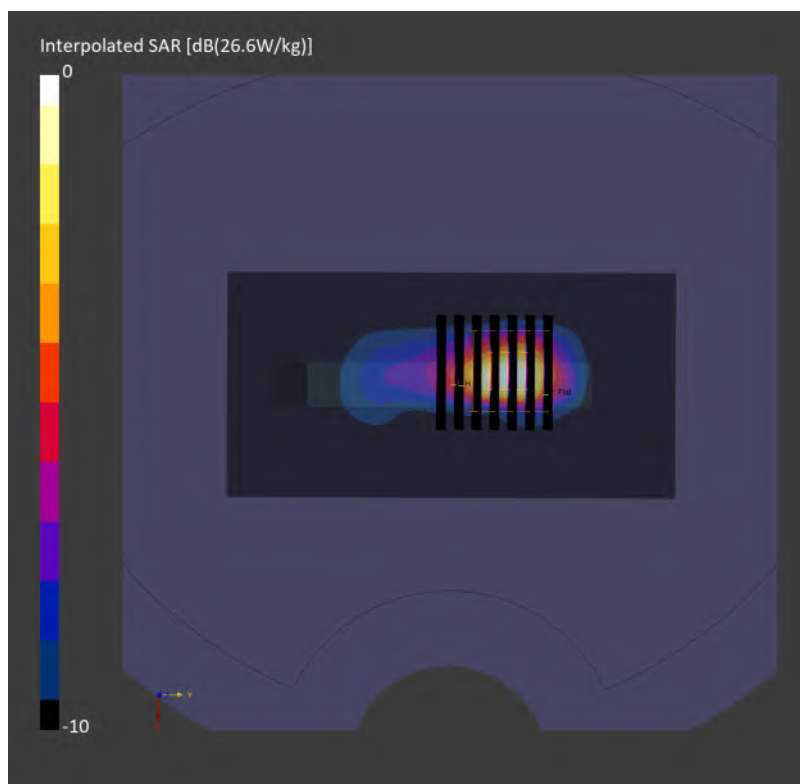

160_FR1 n14_HPUE_10M_BPSK_1_1_Back 1_0mm_Ch158600

Communication System: NR FR1 FDD; Frequency: 793.000 MHz

Medium: HSL_600-7200_260902 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.934$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(10.04, 9.32, 9.97); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000031

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.73 W/kg; SAR (10g) = 1.11 W/kg;

TSL Correction: Positive only

Zoom Scan (33.0 mm x 33.0 mm x 31.2 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 2.12 W/kg; SAR (8g) = 1.11 W/kg; SAR (10g) = 1.03 W/kg

Smallest distance from peaks to all points 3 dB below = 5.5 mm

Ratio of SAR at M2 to SAR at M1 = 66.0 %

TSL Correction: Positive only

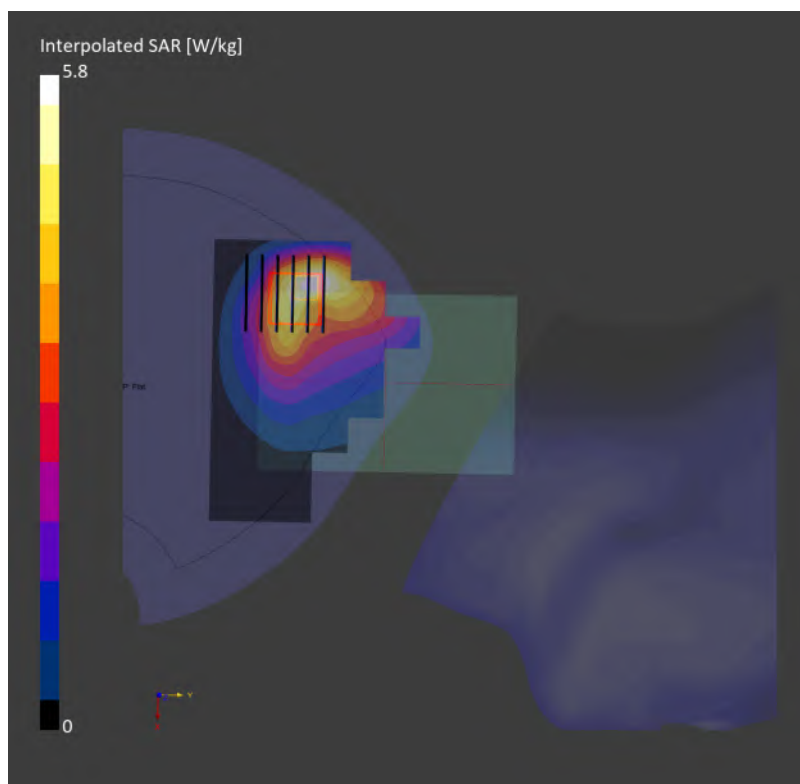

161_FR1 n25_40M_BPSK_216_0_Right Side_0mm_Ch376500

Communication System: NR FR1 FDD; Frequency: 1882.500 MHz

Medium: HSL_600-7200_260830 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.44$ S/m; $\epsilon_r = 40.2$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.97, 7.4, 7.91); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000285

Area Scan (48.0 mm x 150.0 mm): Measurement Grid: 12.0 mm x 15.0 mm

SAR (1g) = 5.20 W/kg; SAR (10g) = 2.37 W/kg;

TSL Correction: Positive only

Zoom Scan (36.8 mm x 36.8 mm x 33.4 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm


Power Drift = -0.02 dB

SAR (1g) = 6.60 W/kg; SAR (8g) = 2.88 W/kg; SAR (10g) = 2.57 W/kg

Smallest distance from peaks to all points 3 dB below = 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 75.8 %

TSL Correction: Positive only

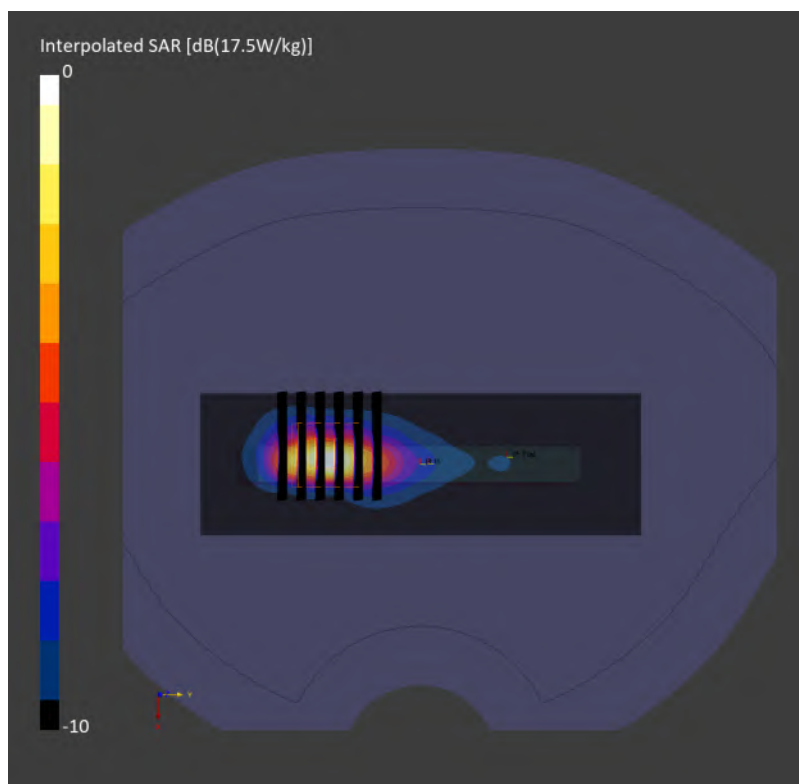

162_FR1 n26_HPUE_20M_BPSK_50_28_Back 1_0mm_Ch166300

Communication System: NR FR1 FDD; Frequency: 831.500 MHz

Medium: HSL_600-7200_260902 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.948$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(9.82, 9.12, 9.75); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000113

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 2.74 W/kg; SAR (10g) = 1.68 W/kg;

TSL Correction: Positive only

Zoom Scan (35.7 mm x 35.7 mm x 31.2 mm): Measurement Grid: 5.1 mm x 5.1 mm x 1.5 mm


Power Drift = -0.05 dB

SAR (1g) = 2.64 W/kg; SAR (8g) = 1.45 W/kg; SAR (10g) = 1.35 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 69.4 %

TSL Correction: Positive only

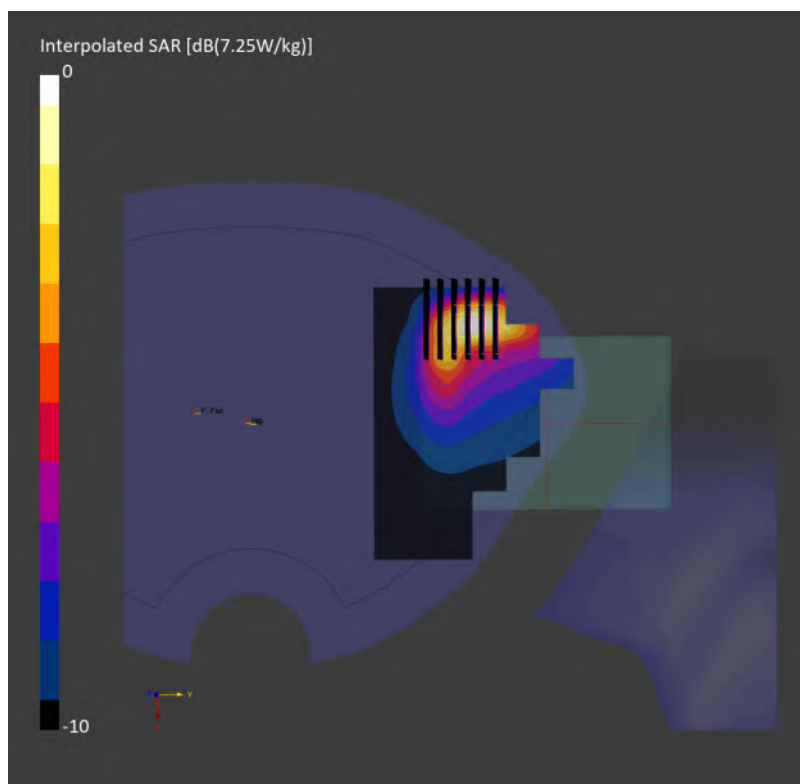

163_FR1 n30_10M_BPSK_1_1_Back Right_0mm_Ch462000

Communication System: NR FR1 FDD; Frequency: 2310.000 MHz

Medium: HSL_600-7200_260831 Medium parameters used: $f = 2310.000$ MHz; $\sigma = 1.76$ S/m; $\epsilon_r = 41.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.6, 7.06, 7.54); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000028

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 6.56 W/kg; SAR (10g) = 2.40 W/kg;

TSL Correction: Positive only

Zoom Scan (34.2 mm x 34.2 mm x 33.4 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm


Power Drift = -0.18 dB

SAR (1g) = 6.33 W/kg; SAR (8g) = 2.48 W/kg; SAR (10g) = 2.18 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 71.7 %

TSL Correction: Positive only

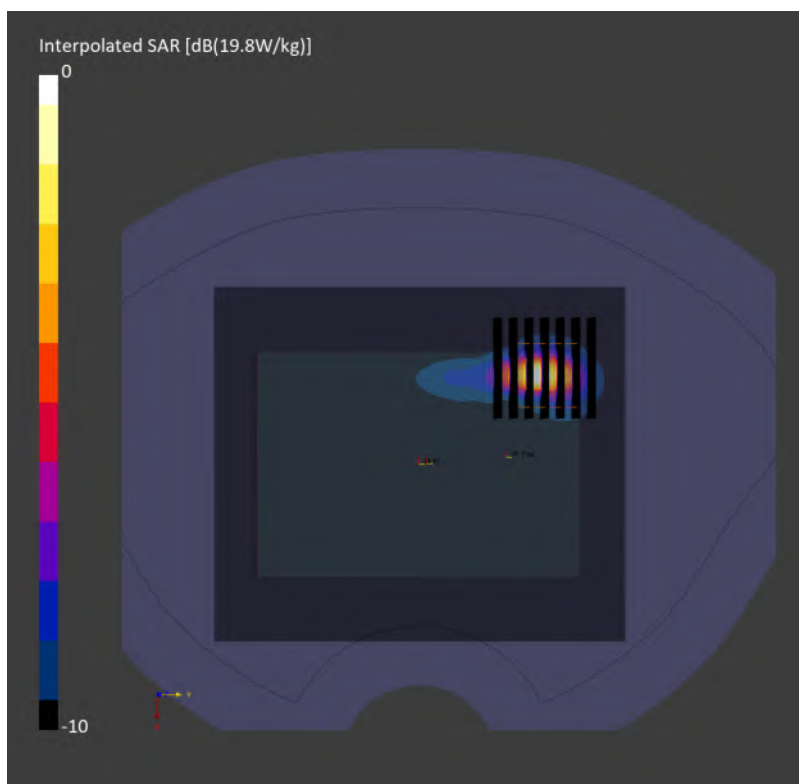

164_FR1 n66_45M_BPSK_120_60_Back 1_0mm_Ch349000

Communication System: NR FR1 FDD; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260830 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.35$ S/m; $\epsilon_r = 40.3$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(8.25, 7.66, 8.19); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000326

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 4.36 W/kg; SAR (10g) = 2.44 W/kg;

TSL Correction: Positive only

Zoom Scan (36.8 mm x 36.8 mm x 33.4 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.4 mm


Power Drift = 0.03 dB

SAR (1g) = 6.01 W/kg; SAR (8g) = 2.91 W/kg; SAR (10g) = 2.67 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 79.0 %

TSL Correction: Positive only

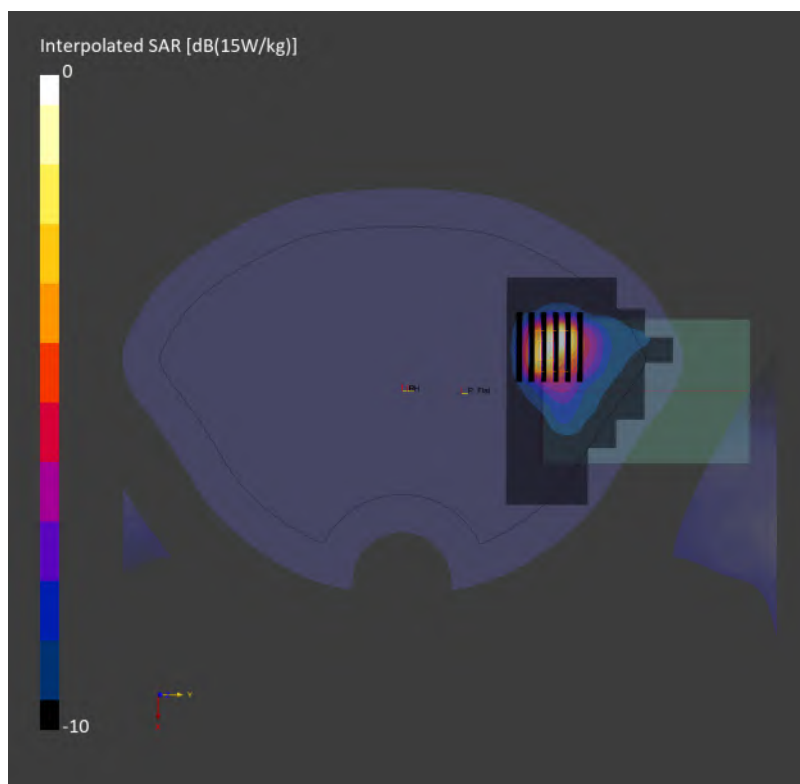

165_FR1 n70_15M_BPSK_75_0_Back 1_0mm_Ch340500

Communication System: NR FR1 FDD; Frequency: 1702.500 MHz

Medium: HSL_600-7200_260830 Medium parameters used: $f = 1702.500$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.3°C; Liquid Temperature: 22.3°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(8.25, 7.66, 8.19); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000072

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 3.54 W/kg; SAR (10g) = 1.68 W/kg;

TSL Correction: Positive only

Zoom Scan (33.8 mm x 33.8 mm x 31.2 mm): Measurement Grid: 2.6 mm x 2.6 mm x 1.2 mm


Power Drift = -0.18 dB

SAR (1g) = 5.83 W/kg; SAR (8g) = 2.46 W/kg; SAR (10g) = 2.20 W/kg

Smallest distance from peaks to all points 3 dB below = 3.7 mm

Ratio of SAR at M2 to SAR at M1 = 72.7 %

TSL Correction: Positive only

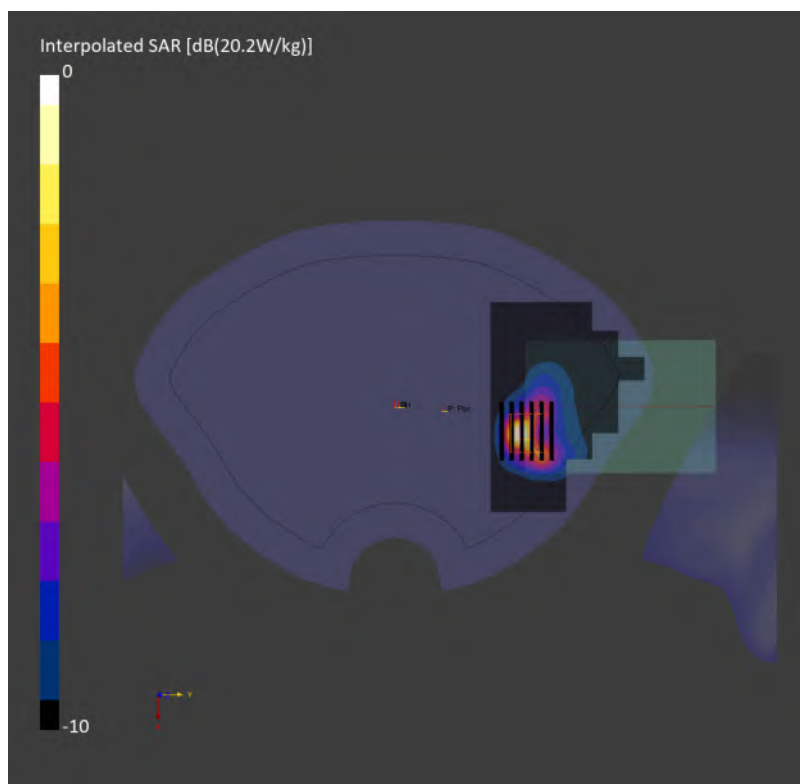

166_FR1 n41_100M_BPSK_135_69_Top Side_0mm_Ch518598

Communication System: NR FR1 TDD; Frequency: 2592.990 MHz

Medium: HSL_600-7200_260904 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 2.00$ S/m; $\epsilon_r = 40.4$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.32, 6.8, 7.27); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 TDD, 1003251

Area Scan (60.0 mm x 120.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 7.28 W/kg; SAR (10g) = 2.77 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 8.06 W/kg; SAR (8g) = 3.24 W/kg; SAR (10g) = 2.84 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 68.2 %

TSL Correction: Positive only

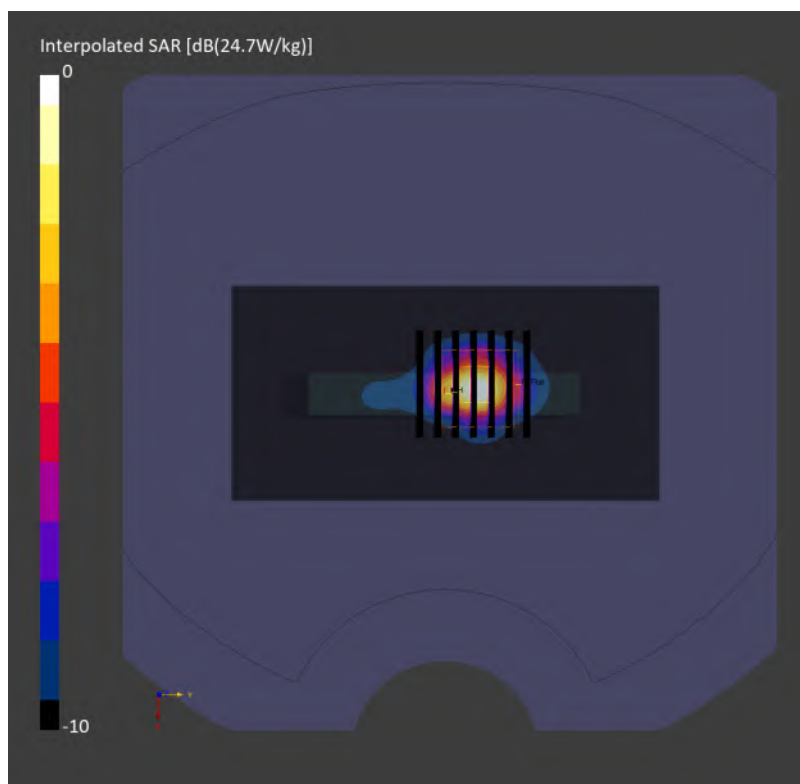

167_FR1 n48_40M_BPSK_50_28_Back Top_0mm_Ch638000

Communication System: NR FR1 TDD; Frequency: 3570.000 MHz

Medium: HSL_600-7200_260825 Medium parameters used: $f = 3570.000$ MHz; $\sigma = 2.76$ S/m; $\epsilon_r = 37.6$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(6.79, 6.3, 6.74); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 TDD, 1002255

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 8.86 W/kg; SAR (10g) = 2.71 W/kg;

TSL Correction: Positive only

Zoom Scan (34.2 mm x 34.2 mm x 33.4 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm


Power Drift = 0.10 dB

SAR (1g) = 10.5 W/kg; SAR (8g) = 3.31 W/kg; SAR (10g) = 2.83 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 67.0 %

TSL Correction: Positive only

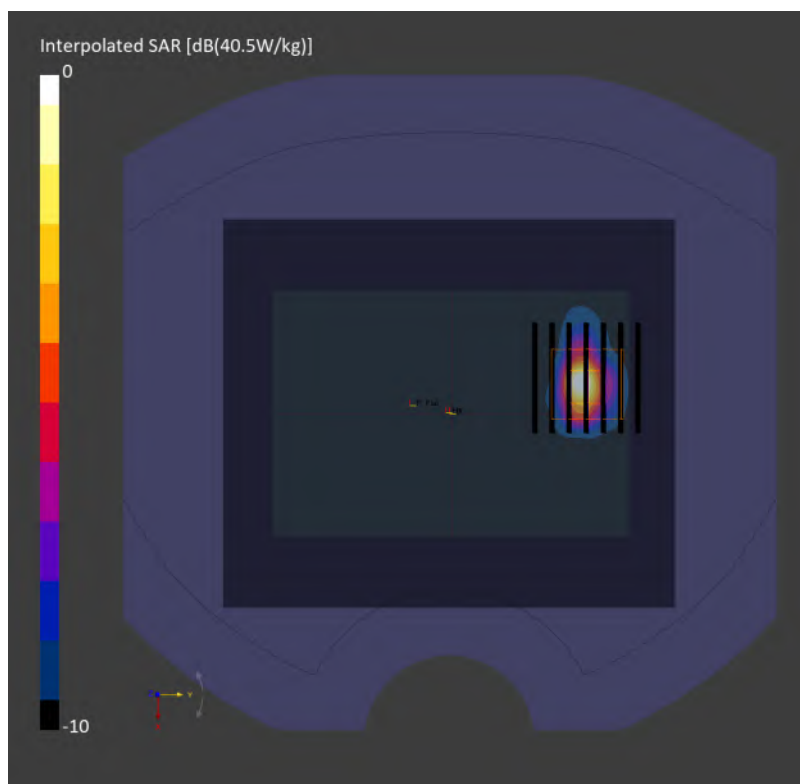

168_FR1 n77_100M_BPSK_1_1_Back Right_0mm_Ch662000

Communication System: NR FR1 TDD; Frequency: 3930.000 MHz

Medium: HSL_600-7200_261008 Medium parameters used: $f = 3930.000$ MHz; $\sigma = 3.10$ S/m; $\epsilon_r = 37.1$

Ambient Temperature: 23.8°C; Liquid Temperature: 22.8°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(6.46, 6.89, 6.5); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAMV8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 TDD, 1003247

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 6.85 W/kg; SAR (10g) = 2.16 W/kg;

TSL Correction: Positive only

Zoom Scan (28.0 mm x 28.0 mm x 31.2 mm): Measurement Grid: 2.7 mm x 2.7 mm x 1.2 mm


Power Drift = 0.05 dB

SAR (1g) = 9.13 W/kg; SAR (8g) = 2.65 W/kg; SAR (10g) = 2.41 W/kg

Smallest distance from peaks to all points 3 dB below = 3.9 mm

Ratio of SAR at M2 to SAR at M1 = 64.3 %

TSL Correction: Positive only

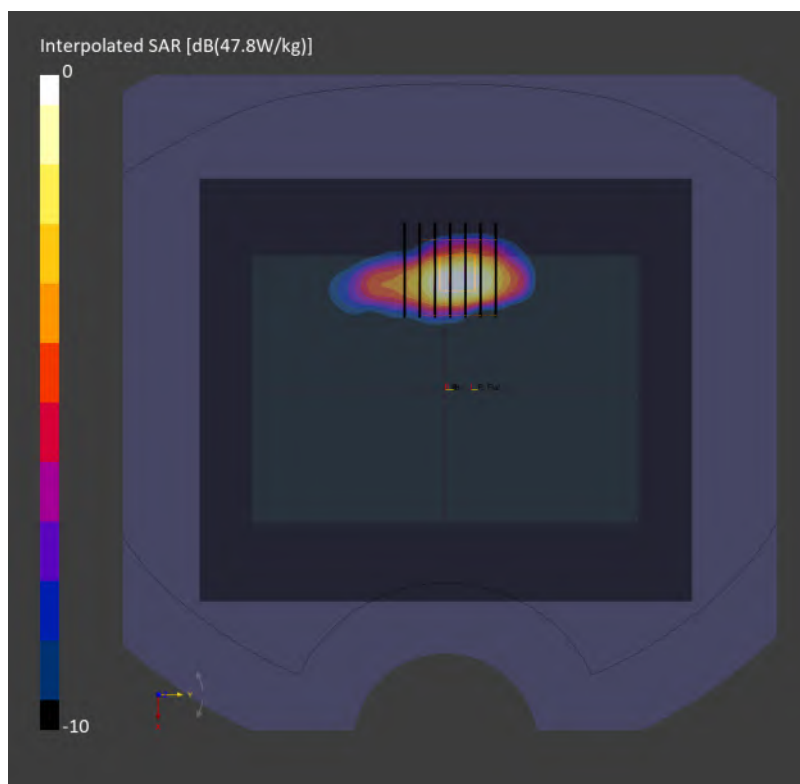

169_WLAN2.4GHz_802.11b 1Mbps_Back Right_0mm_Ch6

Communication System: WiFi (802.11b); Frequency: 2437.000 MHz

Medium: HSL_600-7200_260905 Medium parameters used: $f=2437.000$ MHz; $\sigma=1.85$ S/m; $\epsilon_r=41.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(7.44, 6.91, 7.38); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11b), 10315

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 4.16 W/kg; SAR (10g) = 1.75 W/kg;

TSL Correction: Positive only

Zoom Scan (31.5 mm x 31.5 mm x 31.2 mm): Measurement Grid: 4.5 mm x 4.5 mm x 1.5 mm


Power Drift = 0.14 dB

SAR (1g) = 4.64 W/kg; SAR (8g) = 1.90 W/kg; SAR (10g) = 1.69 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 69.6 %

TSL Correction: Positive only

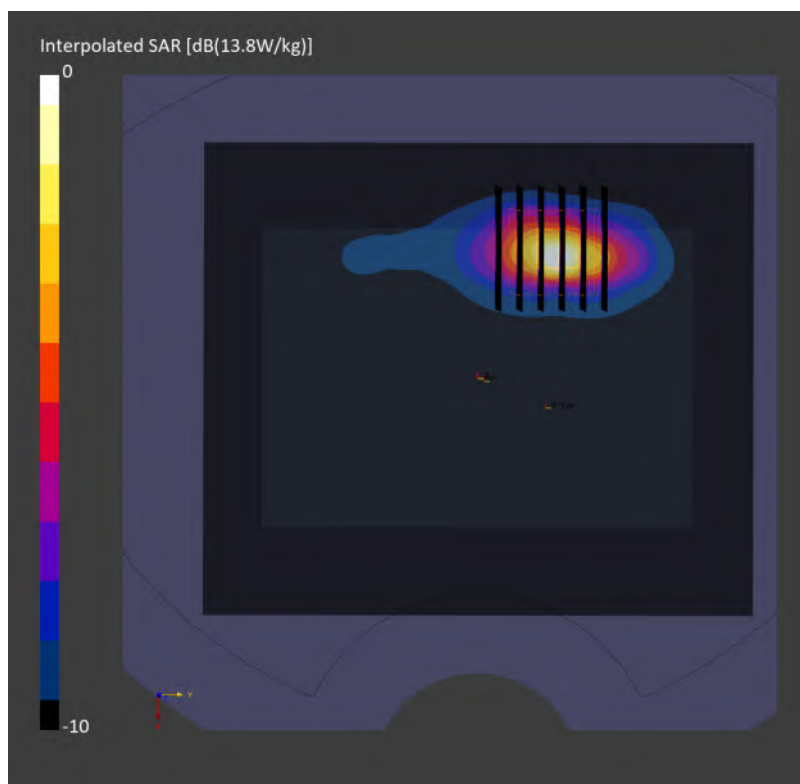

170_WLAN5GHz_802.11ac-VHT80 MCS0_Back Top_0mm_Ch42

Communication System: WiFi (802.11ac); Frequency: 5210.000 MHz

Medium: HSL_600-7200_260906 Medium parameters used: $f = 5210.000$ MHz; $\sigma = 4.45$ S/m; $\epsilon_r = 35.2$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(5.8, 5.38, 5.76); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11ac), 10554

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 4.57 W/kg; SAR (10g) = 1.39 W/kg;

TSL Correction: Positive only

Zoom Scan (23.4 mm x 23.4 mm x 25.0 mm): Measurement Grid: 2.6 mm x 2.6 mm x 1.2 mm


Power Drift = -0.19 dB

SAR (1g) = 6.81 W/kg; SAR (8g) = 2.04 W/kg; SAR (10g) = 1.73 W/kg

Smallest distance from peaks to all points 3 dB below = 3.7 mm

Ratio of SAR at M2 to SAR at M1 = 60.0 %

TSL Correction: Positive only

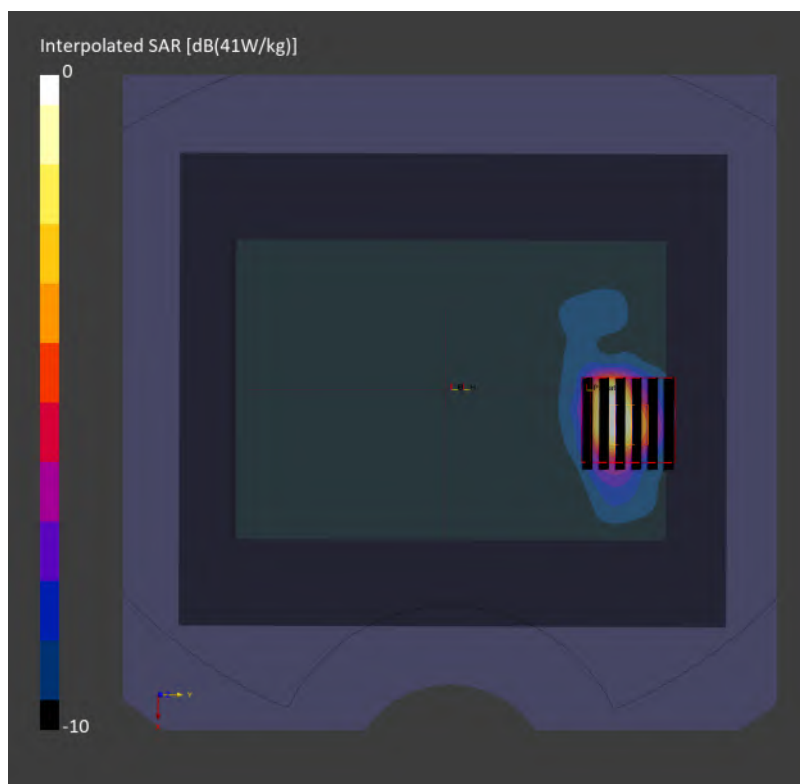

171_WLAN5GHz_802.11n-HT40 MCS0_Back Top_0mm_Ch54

Communication System: WiFi (802.11n); Frequency: 5270.000 MHz

Medium: HSL_600-7200_260902 Medium parameters used: $f = 5270.000$ MHz; $\sigma = 4.62$ S/m; $\epsilon_r = 35.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(5.4, 5.76, 5.43); Calibrated: 2026-01-27
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1776; Calibrated: 2026-02-13
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2144; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11n), 10117

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 5.37 W/kg; SAR (10g) = 1.53 W/kg;

TSL Correction: Positive only

Zoom Scan (28.8 mm x 28.8 mm x 22.9 mm): Measurement Grid: 3.6 mm x 3.6 mm x 1.4 mm


Power Drift = -0.16 dB

SAR (1g) = 6.57 W/kg; SAR (8g) = 2.12 W/kg; SAR (10g) = 1.80 W/kg

Smallest distance from peaks to all points 3 dB below = 4.4 mm

Ratio of SAR at M2 to SAR at M1 = 60.2 %

TSL Correction: Positive only

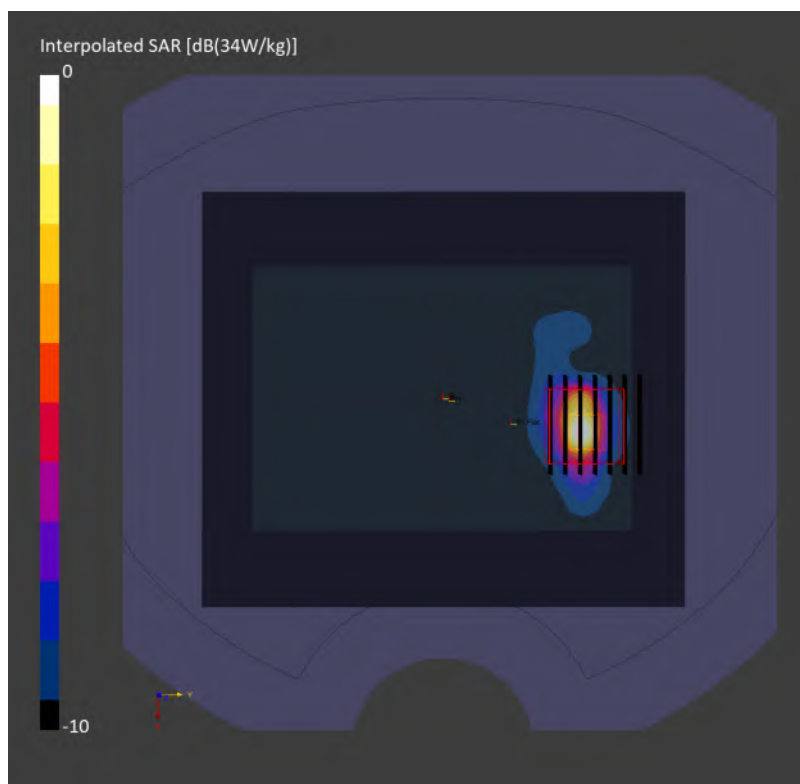

172_WLAN5GHz_802.11ac-VHT160 MCS0_Back Top_0mm_Ch114

Communication System: WiFi (802.11ac); Frequency: 5570.000 MHz

Medium: HSL_600-7200_260906 Medium parameters used: $f = 5570.000$ MHz; $\sigma = 4.88$ S/m; $\epsilon_r = 34.7$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(5.38, 5.0, 5.35); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11ac), 10554

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 5.57 W/kg; SAR (10g) = 1.51 W/kg;

TSL Correction: Positive only

Zoom Scan (23.2 mm x 23.2 mm x 25.0 mm): Measurement Grid: 2.9 mm x 2.9 mm x 1.2 mm


Power Drift = 0.14 dB

SAR (1g) = 5.88 W/kg; SAR (8g) = 1.83 W/kg; SAR (10g) = 1.56 W/kg

Smallest distance from peaks to all points 3 dB below = 3.9 mm

Ratio of SAR at M2 to SAR at M1 = 59.4 %

TSL Correction: Positive only

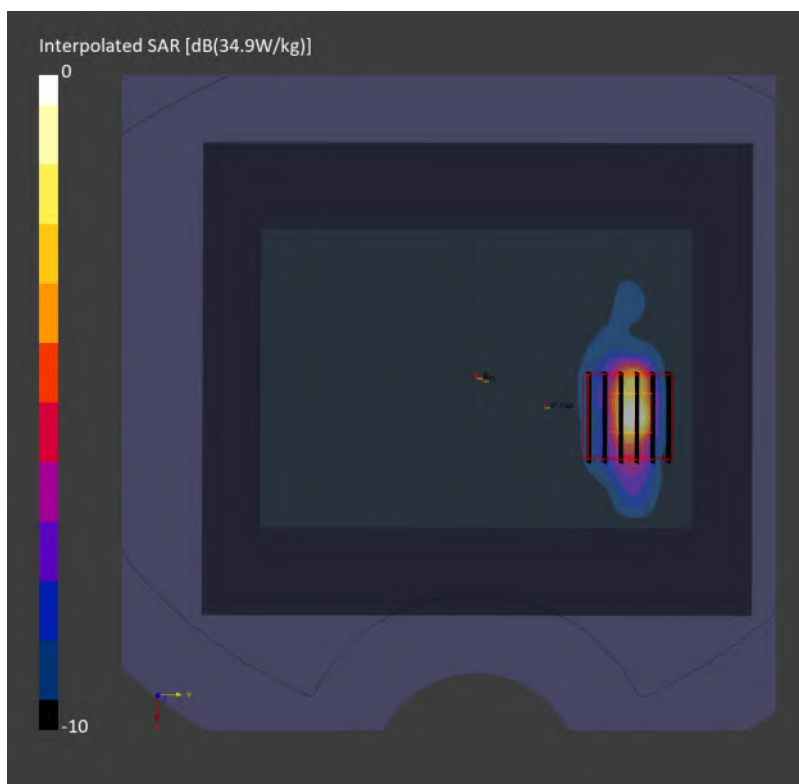

173_WLAN5GHz_802.11ac-VHT80 MCS0_Back Top_0mm_Ch155

Communication System: WiFi (802.11ac); Frequency: 5775.000 MHz

Medium: HSL_600-7200_260906 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.09$ S/m; $\epsilon_r = 34.2$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(5.23, 4.86, 5.19); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11ac), 10554

Area Scan (120.0 mm x 140.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 6.71 W/kg; SAR (10g) = 1.67 W/kg;

TSL Correction: Positive only

Zoom Scan (23.4 mm x 23.4 mm x 25.0 mm): Measurement Grid: 2.6 mm x 2.6 mm x 1.2 mm


Power Drift = -0.16 dB

SAR (1g) = 8.61 W/kg; SAR (8g) = 2.20 W/kg; SAR (10g) = 1.83 W/kg

Smallest distance from peaks to all points 3 dB below = 3.5 mm

Ratio of SAR at M2 to SAR at M1 = 57.7 %

TSL Correction: Positive only

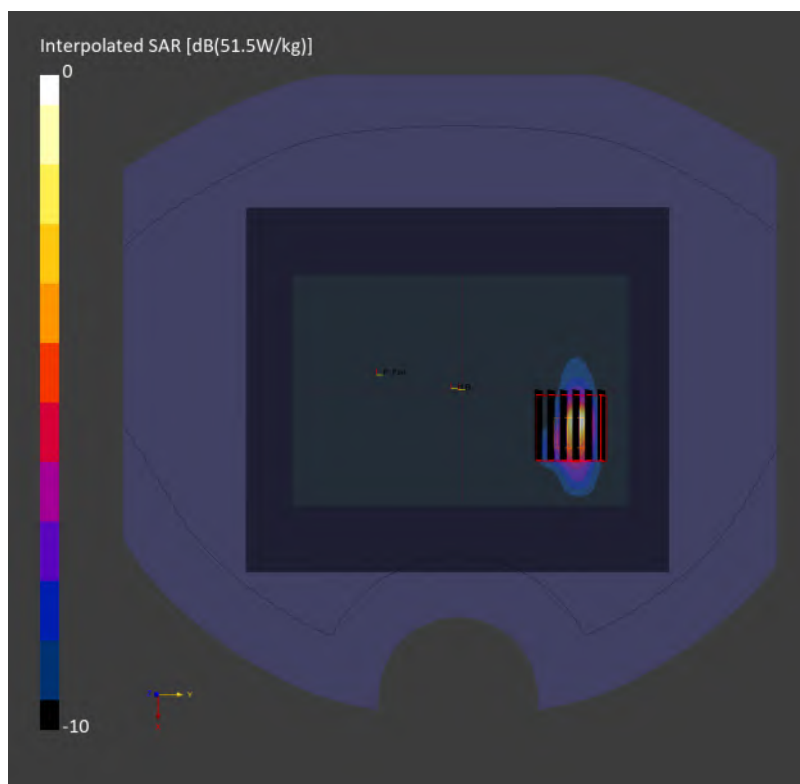

174_WLAN6GHz_802.11be-EHT320 MCS0_Back Top_0mm_Ch95

Communication System: WiFi; Frequency: 6425.000 MHz

Medium: HSL_600-7200_260907 Medium parameters used: $f = 6105.000$ MHz; $\sigma = 5.81$ S/m; $\epsilon_r = 33.0$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(5.49, 5.1, 5.45); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11be), 11026-

Area Scan (119.0 mm x 153.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.883 W/kg; SAR (10g) = 0.244 W/kg;

TSL Correction: Positive only

Zoom Scan (23.4 mm x 23.4 mm x 25.0 mm): Measurement Grid: 2.6 mm x 2.6 mm x 1.2 mm

Power Drift = 0.01 dB


SAR (1g) = 1.40 W/kg; SAR (8g) = 0.332 W/kg; SAR (10g) = 0.280 W/kg

Smallest distance from peaks to all points 3 dB below = 3.7 mm

Ratio of SAR at M2 to SAR at M1 = 53.8 %

psAPD (1.0cm², sq) = 14.0 [W/m²]; psAPD (4.0cm², sq) = 6.63 [W/m²]

TSL Correction: Positive only

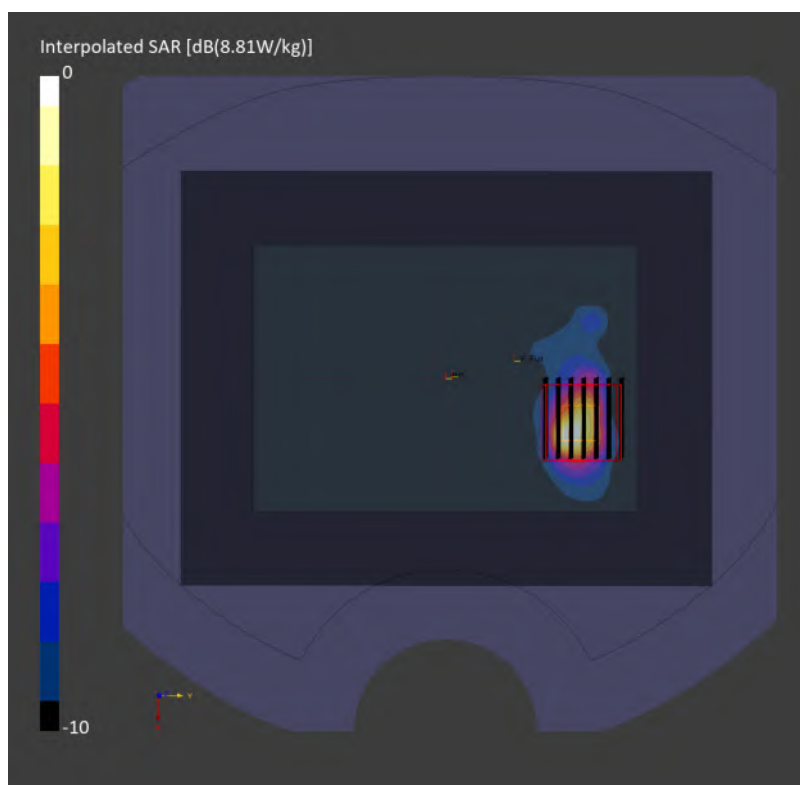

175_NFC_ASK_Back_0mm_Ch0

Communication System: CW; Frequency: 13.600 MHz

Medium: HSL_600-7200_260906 Medium parameters used: $f = 13.600$ MHz; $\sigma = 0.748$ S/m; $\epsilon_r = 55.4$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(14.15, 14.46, 14.12); Calibrated: 2026-08-14
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2025-10-20
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0

Area Scan (120.0 mm x 150.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.018 W/kg; SAR (10g) = 0.011 W/kg;

TSL Correction: Positive only

Zoom Scan (33.6 mm x 33.6 mm x 31.2 mm): Measurement Grid: 2.1 mm x 2.1 mm x 1.2 mm


Power Drift = -0.03 dB

SAR (1g) = 0.016 W/kg; SAR (8g) = 0.005 W/kg; SAR (10g) = 0.005 W/kg

Smallest distance from peaks to all points 3 dB below = 3.0 mm

Ratio of SAR at M2 to SAR at M1 = 54.5 %

TSL Correction: Positive only

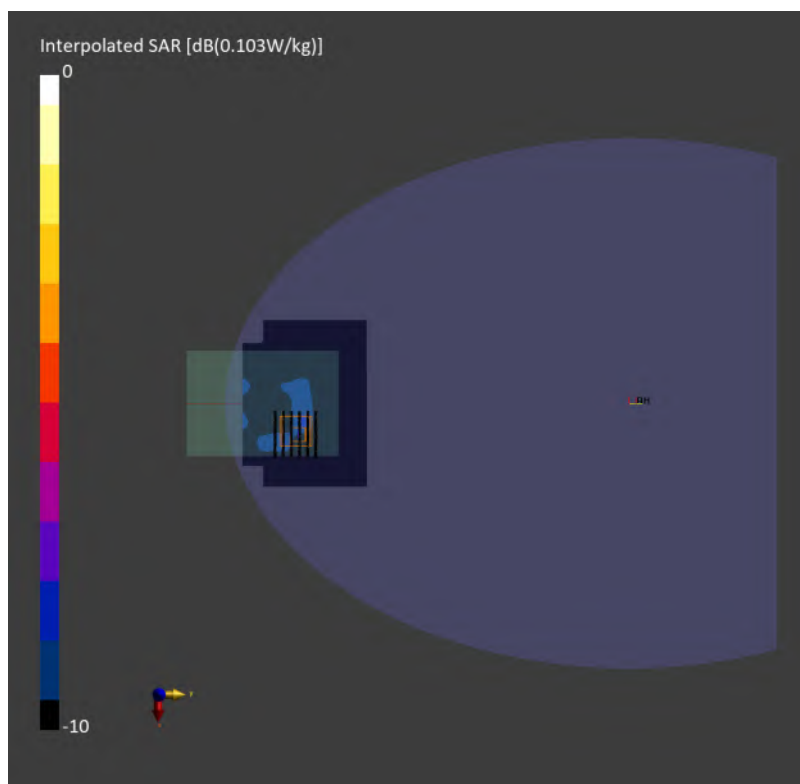

For PD

01_ Measurement Report for Device

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	Software Version	DUT Type
Device,	110.0 x 150.0 x 12.0	3.2.0.1840	Phone

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz]	Conversion Factor
5G	BACK, 5.00	6425.0	1.0

Hardware Setup

Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1044	Air –	EUmmWV4 – SN9461_F1–55GHz, 2025–10–15	DAE4 Sn1805, 2026–05–19

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	120.0 x 120.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	5.0

Measurement Results

Date	2026–09–07
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	1.65
psPDtot+ [W/m ²]	2.91
H _{max} [A/m]	0.175
E _{max} [V/m]	57.4
max _(Stot) [W/m ²]	5.50
Power Drift [dB]	–0.19
IPDn	1.68

