

01_GSM850_GPRS 4 Tx slots_Right Tilted_0mm_Ch189

Communication System: GSM; Frequency: 836.400 MHz

Medium: HSL_600-7200_260830 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 42.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(8.84, 8.67, 8.94); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: GSM, 10028

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.477 W/kg; SAR (10g) = 0.302 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.08 dB

SAR (1g) = 0.576 W/kg; SAR (8g) = 0.329 W/kg; SAR (10g) = 0.305 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 75.9 %

TSL Correction: Positive only

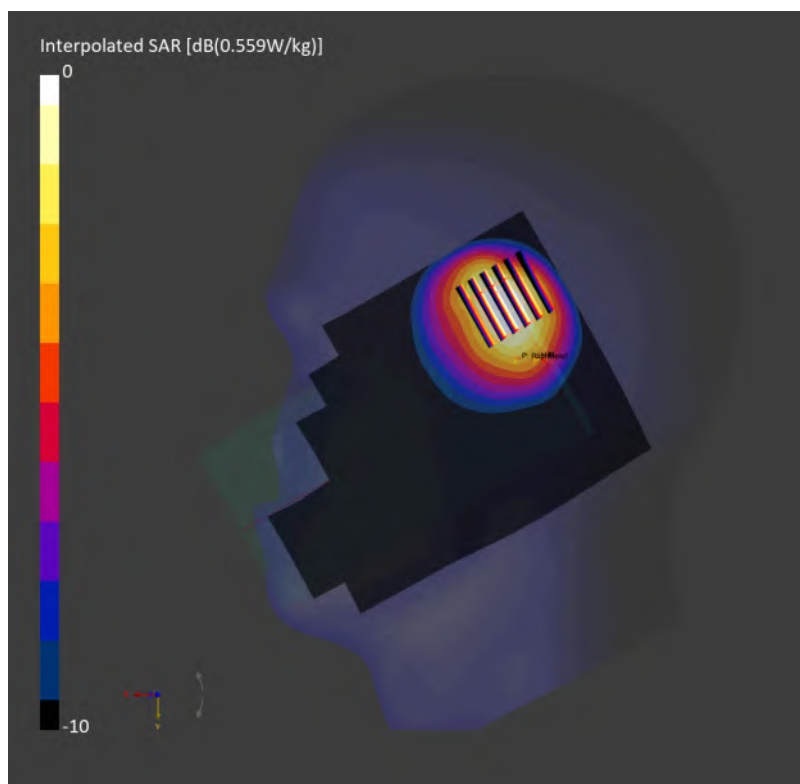

02_GSM1900_GPRS 4 Tx slots_Right Cheek_0mm_Ch661

Communication System: GSM; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260814 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.25, 7.12, 7.34); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: GSM, 10028

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.069 W/kg; SAR (10g) = 0.038 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.18 dB

SAR (1g) = 0.073 W/kg; SAR (8g) = 0.047 W/kg; SAR (10g) = 0.044 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 89.0 %

TSL Correction: Positive only

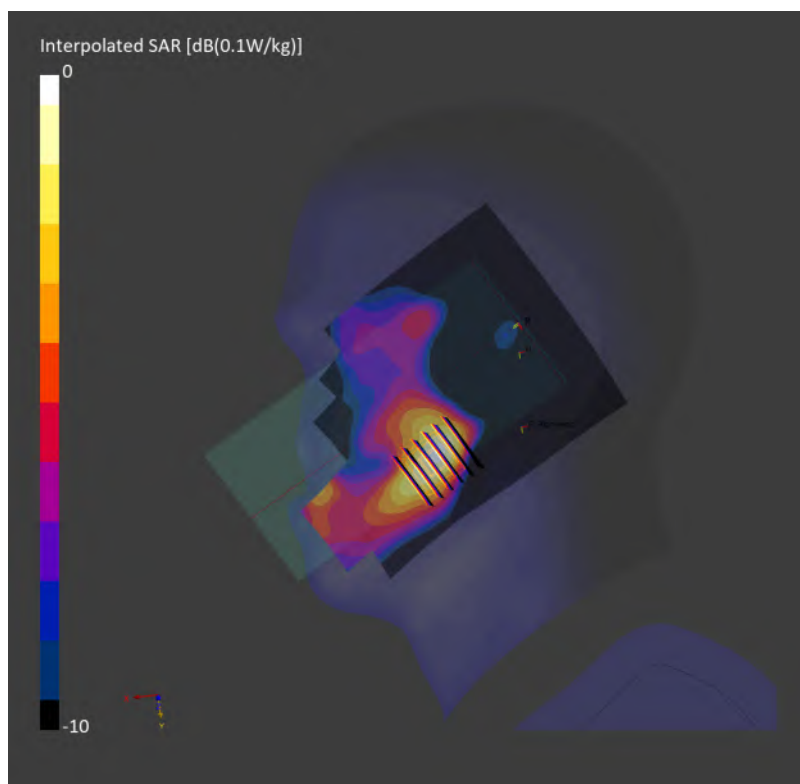

03_WCDMA II_RMC 12.2Kbps_Right Cheek_0mm_Ch9400

Communication System: UMTS-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260814 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.45$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.25, 7.12, 7.34); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: UMTS-FDD, 10011

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.152 W/kg; SAR (10g) = 0.088 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.10 dB

SAR (1g) = 0.159 W/kg; SAR (8g) = 0.108 W/kg; SAR (10g) = 0.101 W/kg

Smallest distance from peaks to all points 3 dB below = 12.5 mm

Ratio of SAR at M2 to SAR at M1 = 91.3 %

TSL Correction: Positive only

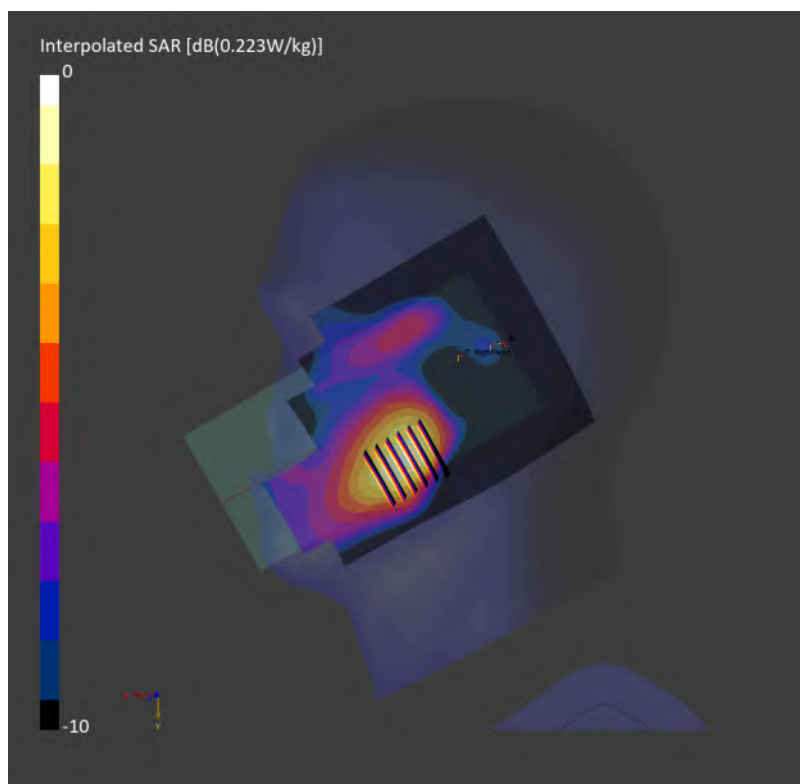

04_WCDMA IV_RMC 12.2Kbps_Right Cheek_0mm_Ch1413

Communication System: UMTS-FDD; Frequency: 1732.600 MHz

Medium: HSL_600-7200_260814 Medium parameters used: $f = 1732.600$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.44, 7.3, 7.52); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: UMTS-FDD, 10011

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.148 W/kg; SAR (10g) = 0.087 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.10 dB

SAR (1g) = 0.166 W/kg; SAR (8g) = 0.115 W/kg; SAR (10g) = 0.109 W/kg

Smallest distance from peaks to all points 3 dB below = 13.1 mm

Ratio of SAR at M2 to SAR at M1 = 92.6 %

TSL Correction: Positive only

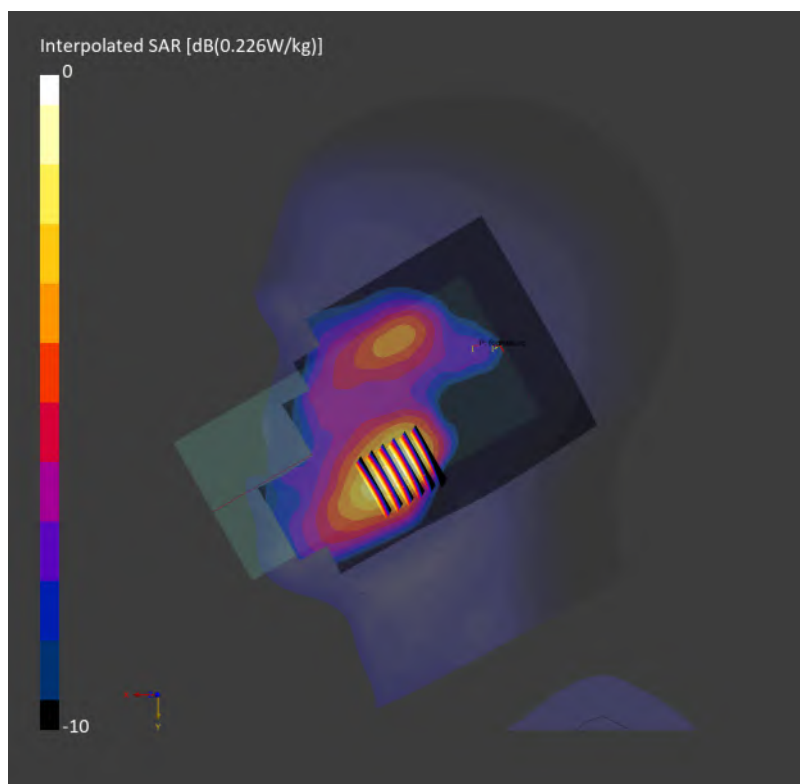

05_WCDMA V_RMC 12.2Kbps_Right Cheek_0mm_Ch4132

Communication System: UMTS-FDD; Frequency: 826.400 MHz

Medium: HSL_600-7200_260829 Medium parameters used: $f = 826.400$ MHz; $\sigma = 0.906$ S/m; $\epsilon_r = 42.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(8.84, 8.67, 8.94); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: UMTS-FDD, 10011

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.802 W/kg; SAR (10g) = 0.502 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.02 dB

SAR (1g) = 0.762 W/kg; SAR (8g) = 0.467 W/kg; SAR (10g) = 0.430 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 76.2 %

TSL Correction: Positive only

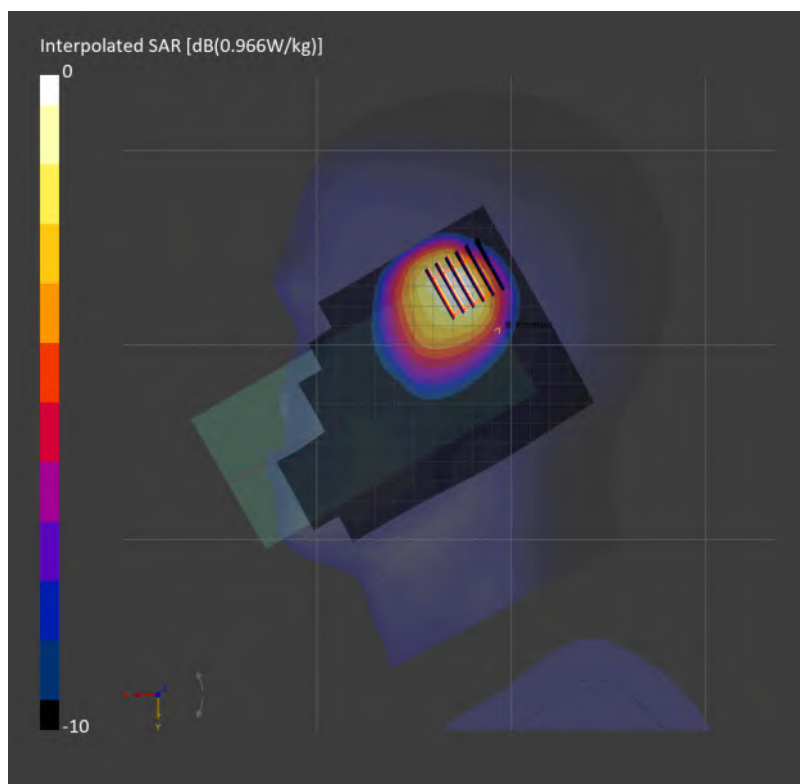

06_LTE Band 7_20M_QPSK_1_0_Left Cheek_0mm_Ch21100

Communication System: LTE-FDD; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260820 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.73, 7.27, 6.64); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.860 W/kg; SAR (10g) = 0.377 W/kg;

TSL Correction: Positive only

Zoom Scan (33.6 mm x 33.6 mm x 31.2 mm): Measurement Grid: 4.2 mm x 4.2 mm x 1.5 mm


Power Drift = -0.05 dB

SAR (1g) = 0.940 W/kg; SAR (8g) = 0.435 W/kg; SAR (10g) = 0.393 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 80.1 %

TSL Correction: Positive only

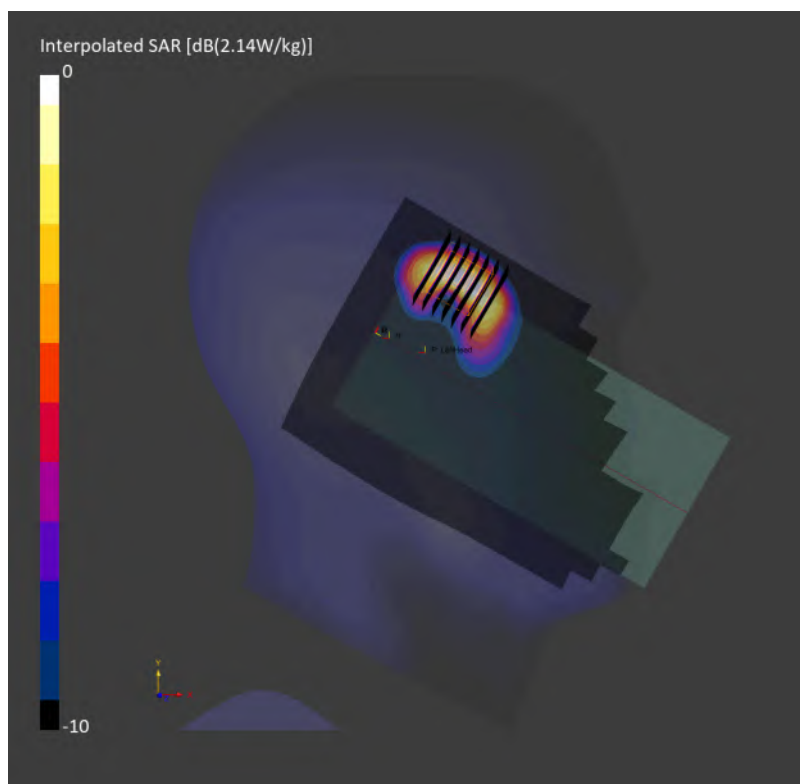

07_LTE Band 12_10M_QPSK_1_0_Right Cheek_0mm_Ch23095

Communication System: LTE-FDD; Frequency: 707.500 MHz

Medium: HSL_600-7200_260821 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.849$ S/m; $\epsilon_r = 42.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(9.08, 8.91, 9.18); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10175

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.553 W/kg; SAR (10g) = 0.344 W/kg;

TSL Correction: Positive only

Zoom Scan (35.7 mm x 35.7 mm x 31.2 mm): Measurement Grid: 5.1 mm x 5.1 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.545 W/kg; SAR (8g) = 0.331 W/kg; SAR (10g) = 0.311 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 70.9 %

TSL Correction: Positive only

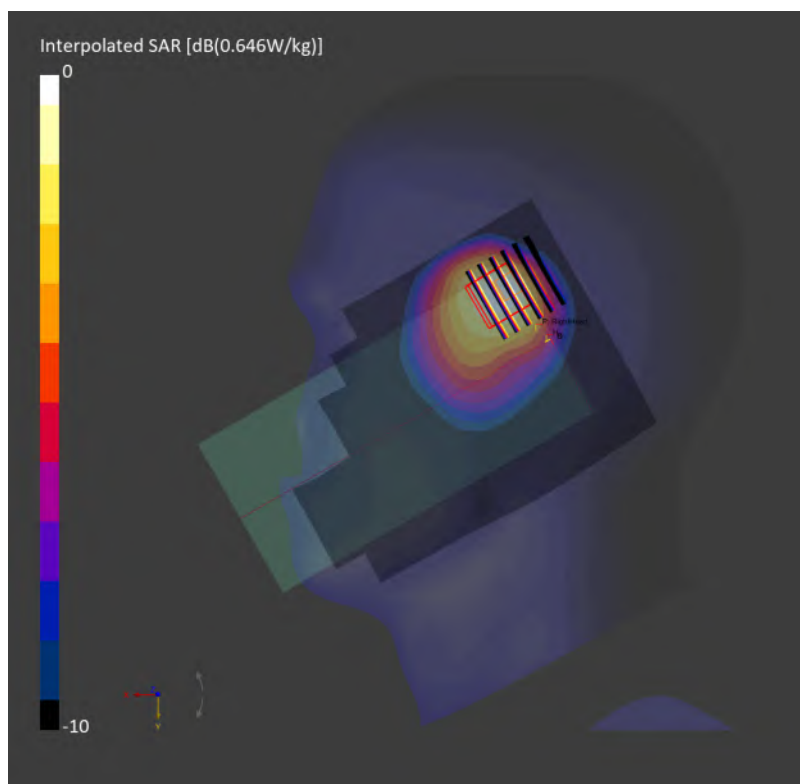

08_LTE Band 13_10M_QPSK_1_0_Right Cheek_0mm_Ch23230

Communication System: LTE-FDD; Frequency: 782.000 MHz

Medium: HSL_600-7200_260821 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.872$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(9.08, 8.91, 9.18); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10175

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.662 W/kg; SAR (10g) = 0.413 W/kg;

TSL Correction: Positive only

Zoom Scan (39.2 mm x 39.2 mm x 31.2 mm): Measurement Grid: 5.6 mm x 5.6 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 0.638 W/kg; SAR (8g) = 0.396 W/kg; SAR (10g) = 0.374 W/kg

Smallest distance from peaks to all points 3 dB below = 6.3 mm

Ratio of SAR at M2 to SAR at M1 = 72.7 %

TSL Correction: Positive only

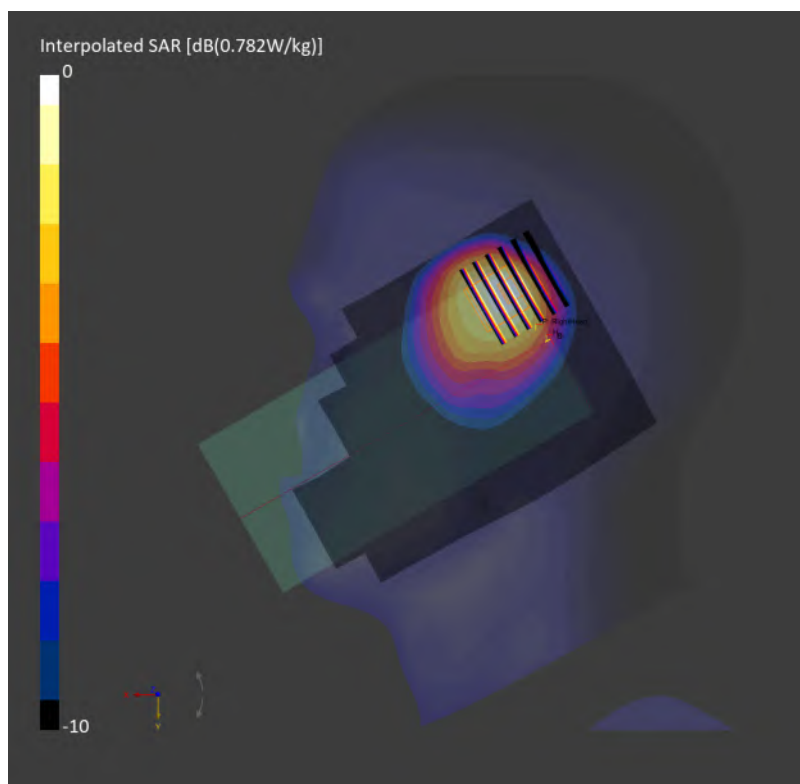

09_LTE Band 14_10M_QPSK_1_0_Right Cheek_0mm_Ch23330

Communication System: LTE-FDD; Frequency: 793.000 MHz

Medium: HSL_600-7200_260821 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(9.08, 8.91, 9.18); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10175

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.653 W/kg; SAR (10g) = 0.409 W/kg;

TSL Correction: Positive only

Zoom Scan (34.2 mm x 34.2 mm x 31.2 mm): Measurement Grid: 5.7 mm x 5.7 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.635 W/kg; SAR (8g) = 0.390 W/kg; SAR (10g) = 0.363 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 72.7 %

TSL Correction: Positive only

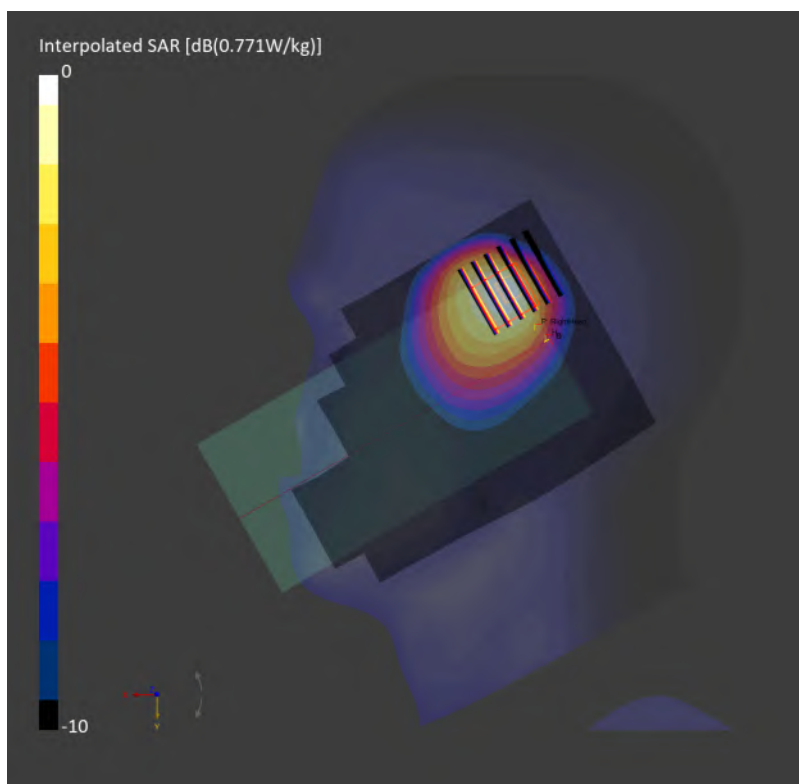

10_LTE Band 25_20M_QPSK_1_0_Right Cheek_0mm_Ch26590

Communication System: LTE-FDD; Frequency: 1905.000 MHz

Medium: HSL_600-7200_260822 Medium parameters used: $f = 1905.000$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 41.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(7.02, 7.58, 6.92); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.958 W/kg; SAR (10g) = 0.464 W/kg;

TSL Correction: Positive only

Zoom Scan (31.5 mm x 31.5 mm x 33.4 mm): Measurement Grid: 4.5 mm x 4.5 mm x 1.4 mm


Power Drift = 0.09 dB

SAR (1g) = 1.15 W/kg; SAR (8g) = 0.575 W/kg; SAR (10g) = 0.521 W/kg

Smallest distance from peaks to all points 3 dB below = 5.3 mm

Ratio of SAR at M2 to SAR at M1 = 79.4 %

TSL Correction: Positive only

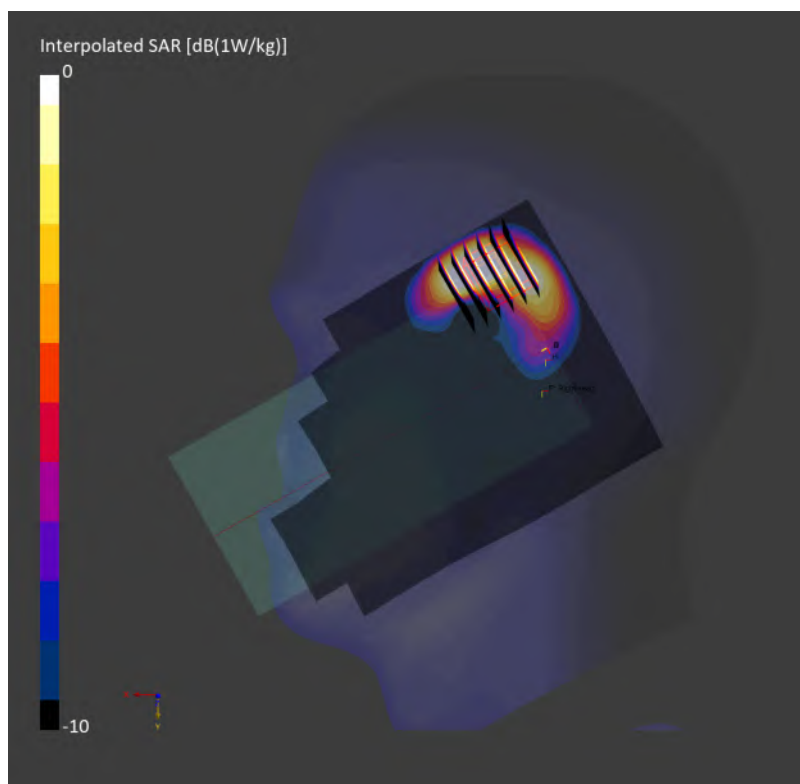

11_LTE Band 26_15M_QPSK_1_0_Right Cheek_0mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz

Medium: HSL_600-7200_260821 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.891$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(8.84, 8.67, 8.94); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10181

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.612 W/kg; SAR (10g) = 0.383 W/kg;

TSL Correction: Positive only

Zoom Scan (34.8 mm x 34.8 mm x 31.2 mm): Measurement Grid: 5.8 mm x 5.8 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.593 W/kg; SAR (8g) = 0.366 W/kg; SAR (10g) = 0.341 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 74.3 %

TSL Correction: Positive only

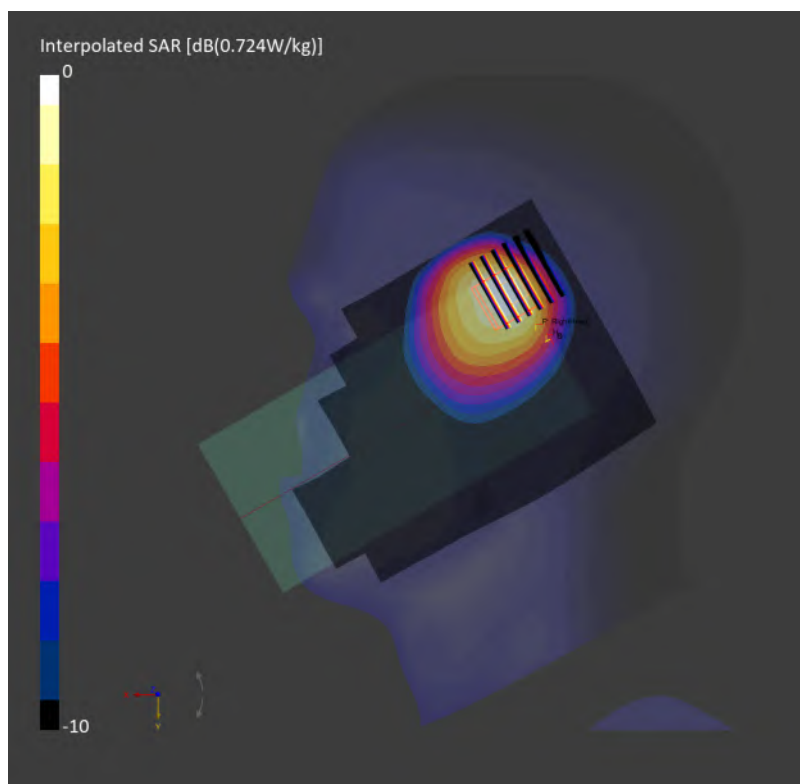

12_LTE Band 66_20M_QPSK_1_0_Right Cheek_0mm_Ch132572

Communication System: LTE-FDD; Frequency: 1770.000 MHz

Medium: HSL_600-7200_260823 Medium parameters used: $f = 1770.000$ MHz; $\sigma = 1.32$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.44, 7.3, 7.52); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.03 W/kg; SAR (10g) = 0.509 W/kg;

TSL Correction: Positive only

Zoom Scan (30.8 mm x 30.8 mm x 33.4 mm): Measurement Grid: 4.4 mm x 4.4 mm x 1.4 mm


Power Drift = 0.03 dB

SAR (1g) = 1.06 W/kg; SAR (8g) = 0.518 W/kg; SAR (10g) = 0.471 W/kg

Smallest distance from peaks to all points 3 dB below = 5.0 mm

Ratio of SAR at M2 to SAR at M1 = 75.2 %

TSL Correction: Positive only

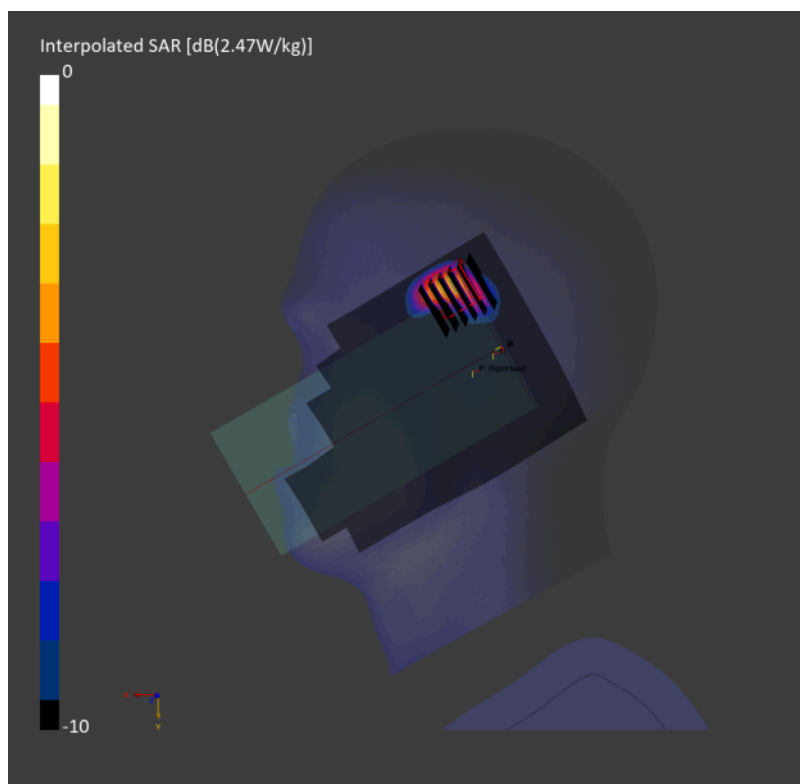

13_LTE Band 71_20M_QPSK_1_0_Right Cheek_0mm_Ch133297

Communication System: LTE-FDD; Frequency: 680.500 MHz

Medium: HSL_600-7200_260821 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.837$ S/m; $\epsilon_r = 43.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(9.08, 8.91, 9.18); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.560 W/kg; SAR (10g) = 0.347 W/kg;

TSL Correction: Positive only

Zoom Scan (32.4 mm x 32.4 mm x 31.2 mm): Measurement Grid: 5.4 mm x 5.4 mm x 1.5 mm


Power Drift = 0.04 dB

SAR (1g) = 0.549 W/kg; SAR (8g) = 0.329 W/kg; SAR (10g) = 0.305 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 71.4 %

TSL Correction: Positive only

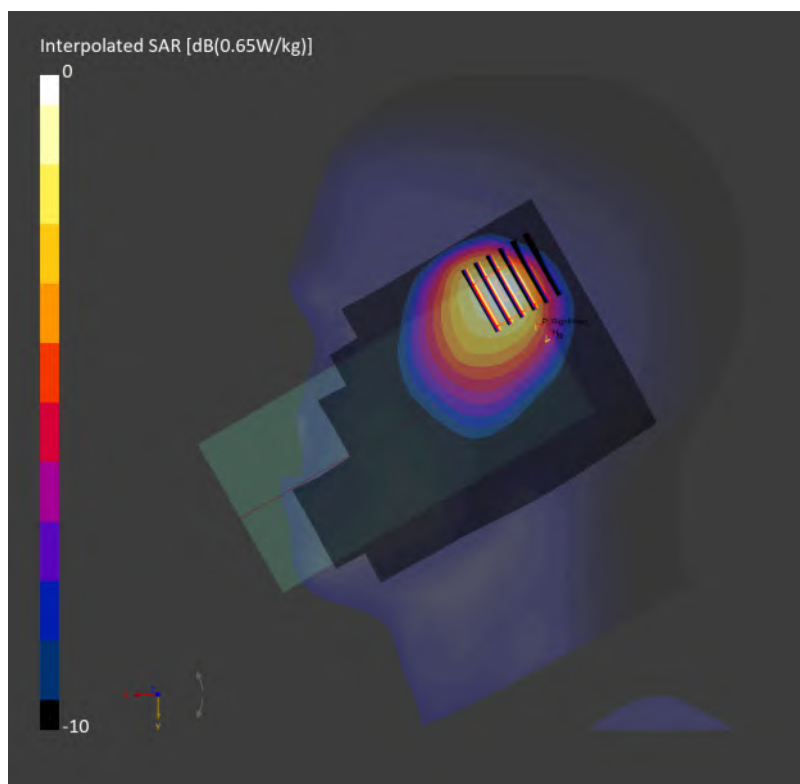

14_LTE Band 41_HPUE_20M_QPSK_1_0_Left Cheek_0mm_Ch40185

Communication System: LTE-TDD; Frequency: 2549.500 MHz

Medium: HSL_600-7200_260815 Medium parameters used: $f = 2549.500$ MHz; $\sigma = 1.90$ S/m; $\epsilon_r = 39.3$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.66, 6.54, 6.74); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: LTE-TDD, 10435

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.816 W/kg; SAR (10g) = 0.359 W/kg;

TSL Correction: Positive only

Zoom Scan (34.4 mm x 34.4 mm x 31.2 mm): Measurement Grid: 4.3 mm x 4.3 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 0.810 W/kg; SAR (8g) = 0.388 W/kg; SAR (10g) = 0.353 W/kg

Smallest distance from peaks to all points 3 dB below = 5.2 mm

Ratio of SAR at M2 to SAR at M1 = 83.1 %

TSL Correction: Positive only

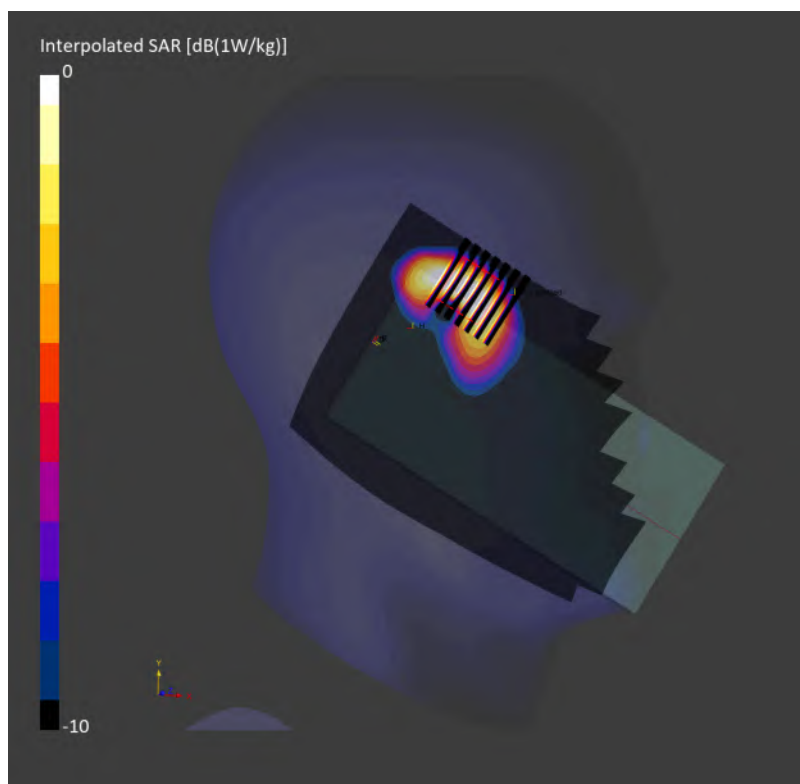

15_LTE Band 42_20M_QPSK_1_0_Right Cheek_0mm_Ch42990

Communication System: LTE-TDD; Frequency: 3540.000 MHz

Medium: HSL_600-7200_260824 Medium parameters used: $f = 3540.000$ MHz; $\sigma = 2.77$ S/m; $\epsilon_r = 37.8$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.96, 6.44, 5.88); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: LTE-TDD, 10435

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.864 W/kg; SAR (10g) = 0.387 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.06 dB

SAR (1g) = 0.867 W/kg; SAR (8g) = 0.431 W/kg; SAR (10g) = 0.387 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 80.0 %

TSL Correction: Positive only

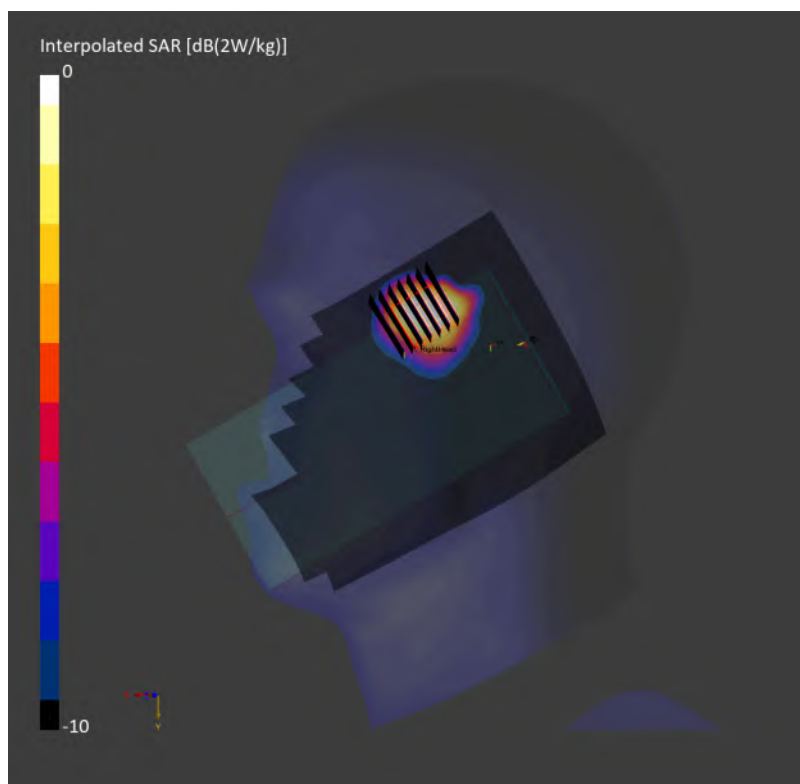

16_LTE Band 48_20M_QPSK_1_0_Right Cheek_0mm_Ch56640

Communication System: LTE-TDD; Frequency: 3690.000 MHz

Medium: HSL_600-7200_260830 Medium parameters used: $f = 3690.000$ MHz; $\sigma = 2.89$ S/m; $\epsilon_r = 37.4$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.88, 6.35, 5.8); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: LTE-TDD, 10435

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.833 W/kg; SAR (10g) = 0.374 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.01 dB

SAR (1g) = 0.875 W/kg; SAR (8g) = 0.430 W/kg; SAR (10g) = 0.390 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 77.4 %

TSL Correction: Positive only

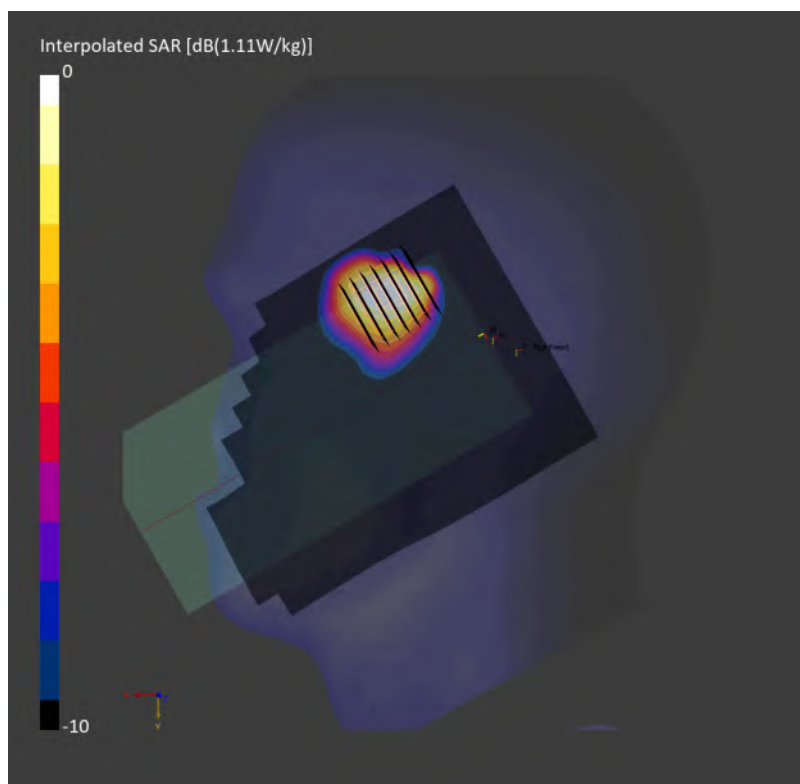

17_FR1 n7_50M_BPSK_135_68_Right Cheek_0mm_Ch507000

Communication System: NR FR1 FDD; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260818 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 39.7$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.66, 6.54, 6.74); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000383

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.00 W/kg; SAR (10g) = 0.425 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.00 dB

SAR (1g) = 1.03 W/kg; SAR (8g) = 0.472 W/kg; SAR (10g) = 0.421 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 86.5 %

TSL Correction: Positive only

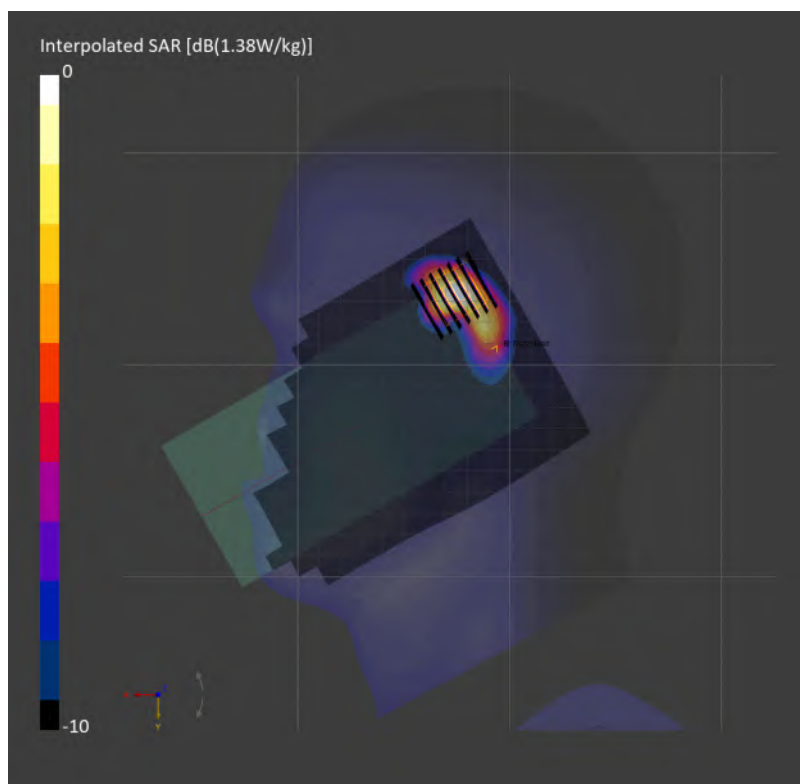

18_FR1 n12_15M_BPSK_36_22_Right Cheek_0mm_Ch141500

Communication System: NR FR1 FDD; Frequency: 707.500 MHz

Medium: HSL_600-7200_260816 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.884$ S/m; $\epsilon_r = 42.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.9, 9.61, 8.78); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000071

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.336 W/kg; SAR (10g) = 0.219 W/kg;

TSL Correction: Positive only

Zoom Scan (45.9 mm x 45.9 mm x 31.2 mm): Measurement Grid: 5.1 mm x 5.1 mm x 1.5 mm


Power Drift = 0.04 dB

SAR (1g) = 0.368 W/kg; SAR (8g) = 0.224 W/kg; SAR (10g) = 0.211 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 70.2 %

TSL Correction: Positive only

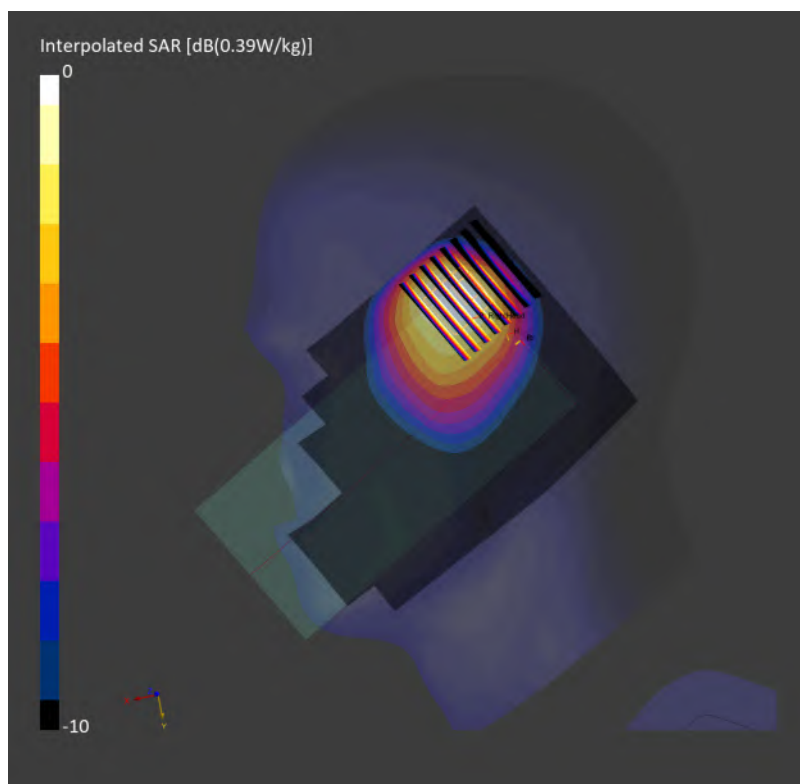

19_FR1 n13_10M_BPSK_25_14_Right Cheek_0mm_Ch156400

Communication System: NR FR1 FDD; Frequency: 782.000 MHz

Medium: HSL_600-7200_260816 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.904$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.9, 9.61, 8.78); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000029

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.535 W/kg; SAR (10g) = 0.339 W/kg;

TSL Correction: Positive only

Zoom Scan (33.0 mm x 33.0 mm x 31.2 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.559 W/kg; SAR (8g) = 0.338 W/kg; SAR (10g) = 0.313 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 70.9 %

TSL Correction: Positive only

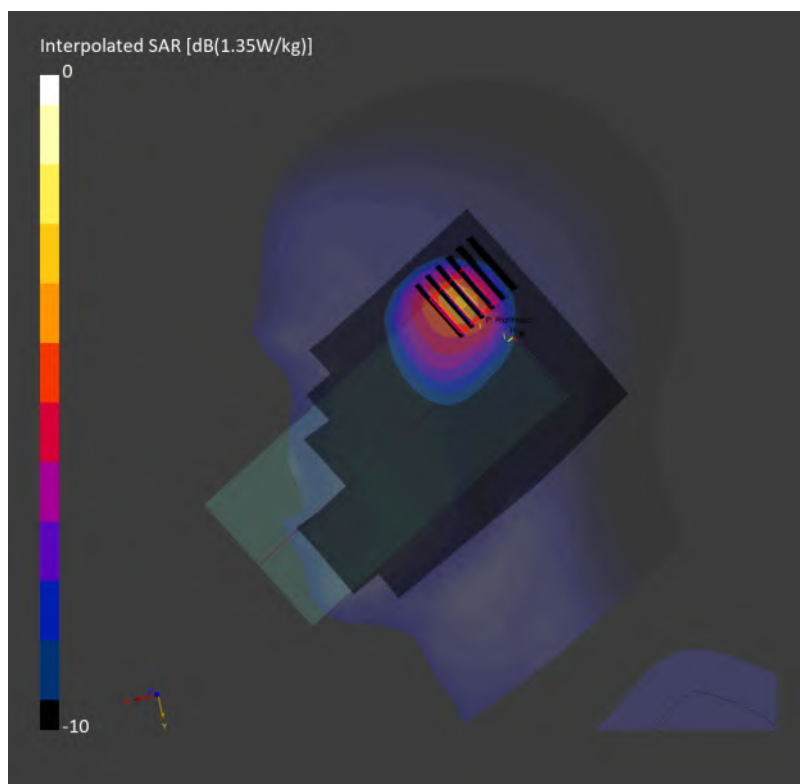

20_FR1 n14_10M_BPSK_50_0_Right Cheek_0mm_Ch158600

Communication System: NR FR1 FDD; Frequency: 793.000 MHz

Medium: HSL_600-7200_260816 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.910$ S/m; $\epsilon_r = 42.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.9, 9.61, 8.78); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000030

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.709 W/kg; SAR (10g) = 0.443 W/kg;

TSL Correction: Positive only

Zoom Scan (34.3 mm x 34.3 mm x 33.4 mm): Measurement Grid: 4.9 mm x 4.9 mm x 1.4 mm


Power Drift = 0.01 dB

SAR (1g) = 0.749 W/kg; SAR (8g) = 0.448 W/kg; SAR (10g) = 0.413 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 71.7 %

TSL Correction: Positive only

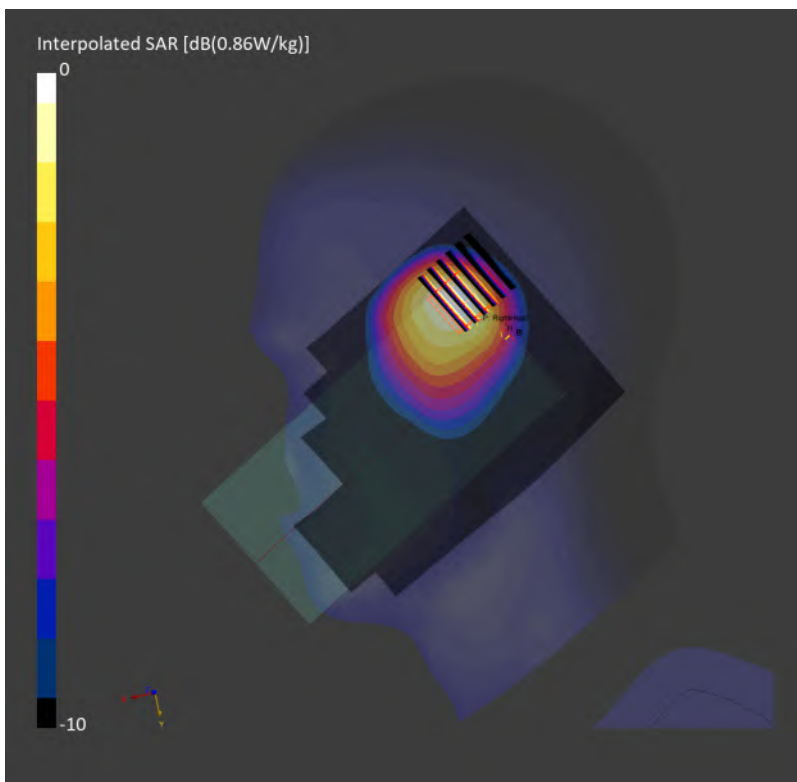

21_FR1 n25_40M_BPSK_216_0_Right Cheek_0mm_Ch376500

Communication System: NR FR1 FDD; Frequency: 1882.500 MHz

Medium: HSL_600-7200_260823 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 40.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.25, 7.12, 7.34); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000285

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.672 W/kg; SAR (10g) = 0.340 W/kg;

TSL Correction: Positive only

Zoom Scan (31.5 mm x 31.5 mm x 33.4 mm): Measurement Grid: 4.5 mm x 4.5 mm x 1.4 mm


Power Drift = -0.06 dB

SAR (1g) = 0.654 W/kg; SAR (8g) = 0.330 W/kg; SAR (10g) = 0.301 W/kg

Smallest distance from peaks to all points 3 dB below = 6.0 mm

Ratio of SAR at M2 to SAR at M1 = 82.4 %

TSL Correction: Positive only

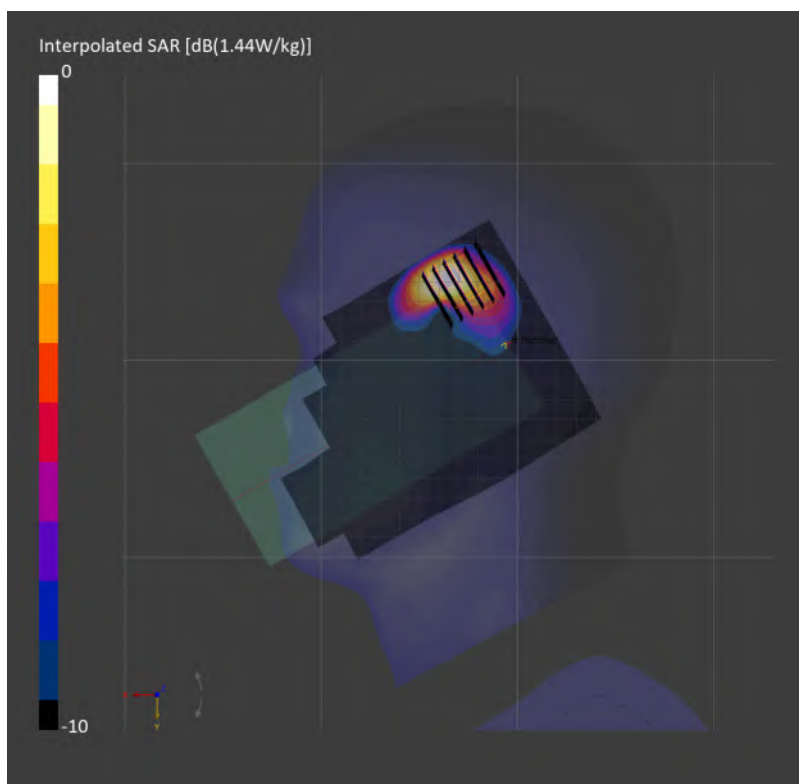

22_FR1 n26_HPUE_20M_BPSK_1_1_Right Cheek_0mm_Ch166300

Communication System: NR FR1 FDD; Frequency: 831.500 MHz

Medium: HSL_600-7200_260830 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 41.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(8.84, 8.67, 8.94); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000112

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.759 W/kg; SAR (10g) = 0.482 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.728 W/kg; SAR (8g) = 0.454 W/kg; SAR (10g) = 0.422 W/kg

Smallest distance from peaks to all points 3 dB below = 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 79.4 %

TSL Correction: Positive only

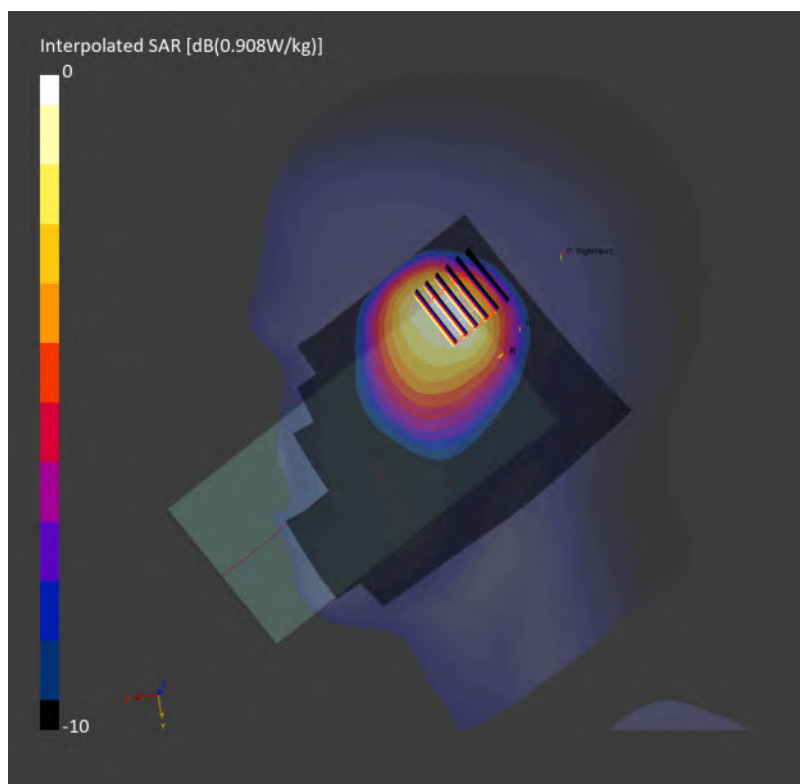

23_FR1 n66_45M_BPSK_240_0_Right Cheek_0mm_Ch349000

Communication System: NR FR1 FDD; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260823 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.32$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.44, 7.3, 7.52); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000327

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.02 W/kg; SAR (10g) = 0.499 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 33.4 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.02 dB

SAR (1g) = 1.00 W/kg; SAR (8g) = 0.497 W/kg; SAR (10g) = 0.451 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 78.6 %

TSL Correction: Positive only

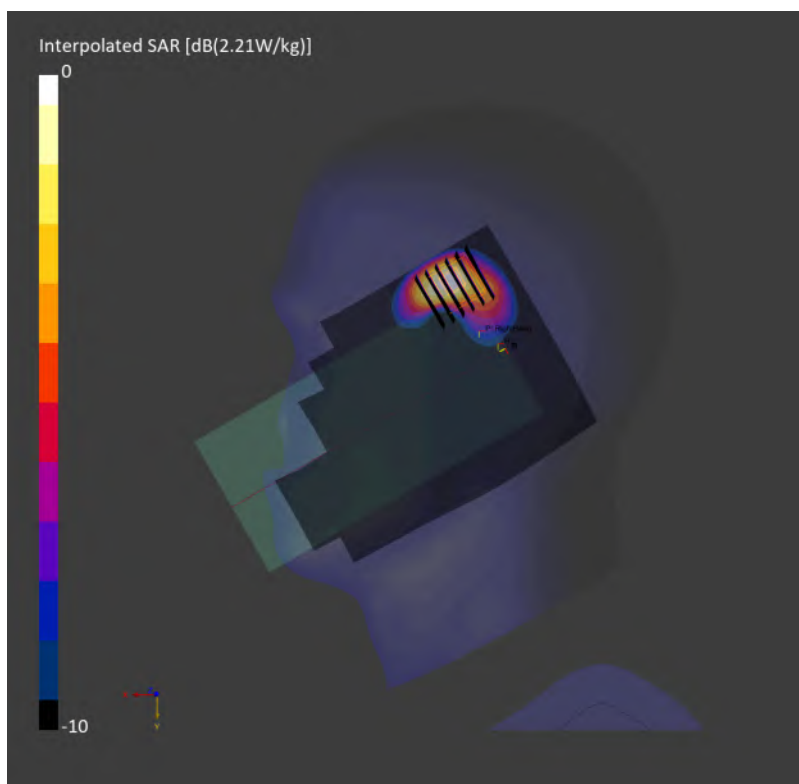

24_FR1 n70_15M_BPSK_75_0_Right Cheek_0mm_Ch340500

Communication System: NR FR1 FDD; Frequency: 1702.500 MHz

Medium: HSL_600-7200_260827 Medium parameters used: $f = 1702.500$ MHz; $\sigma = 1.31$ S/m; $\epsilon_r = 40.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.44, 7.3, 7.52); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000072

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.800 W/kg; SAR (10g) = 0.418 W/kg;

TSL Correction: Positive only

Zoom Scan (34.4 mm x 34.4 mm x 33.4 mm): Measurement Grid: 4.3 mm x 4.3 mm x 1.4 mm


Power Drift = 0.07 dB

SAR (1g) = 0.859 W/kg; SAR (8g) = 0.426 W/kg; SAR (10g) = 0.387 W/kg

Smallest distance from peaks to all points 3 dB below = 5.0 mm

Ratio of SAR at M2 to SAR at M1 = 78.8 %

TSL Correction: Positive only

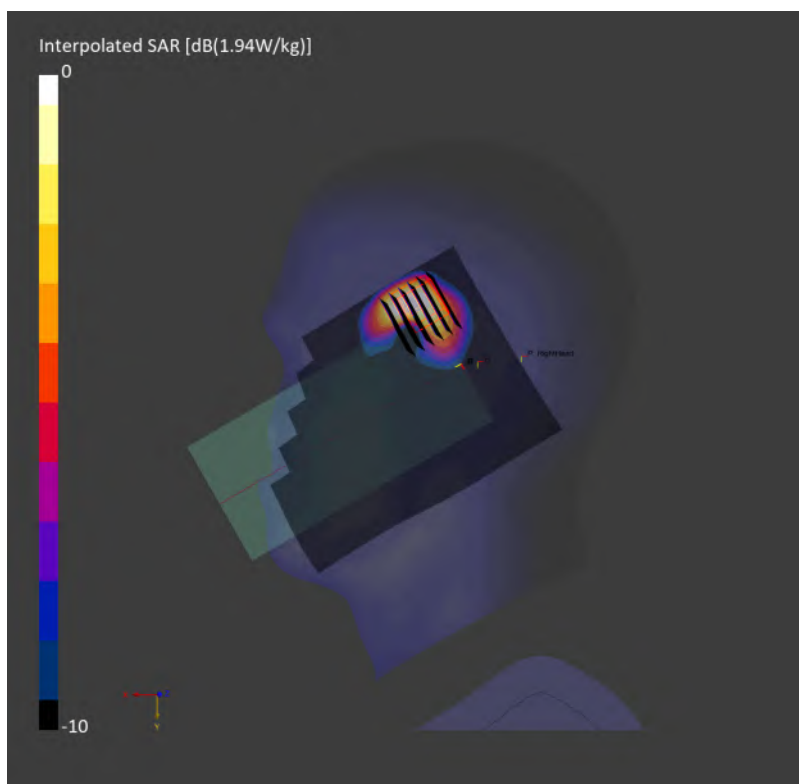

25_FR1 n71_35M_BPSK_90_45_Right Cheek_0mm_Ch136100

Communication System: NR FR1 FDD; Frequency: 680.500 MHz

Medium: HSL_600-7200_260816 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.874$ S/m; $\epsilon_r = 43.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.9, 9.61, 8.78); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000239

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.350 W/kg; SAR (10g) = 0.226 W/kg;

TSL Correction: Positive only

Zoom Scan (41.6 mm x 41.6 mm x 31.2 mm): Measurement Grid: 5.2 mm x 5.2 mm x 1.5 mm


Power Drift = 0.03 dB

SAR (1g) = 0.377 W/kg; SAR (8g) = 0.227 W/kg; SAR (10g) = 0.213 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 69.0 %

TSL Correction: Positive only

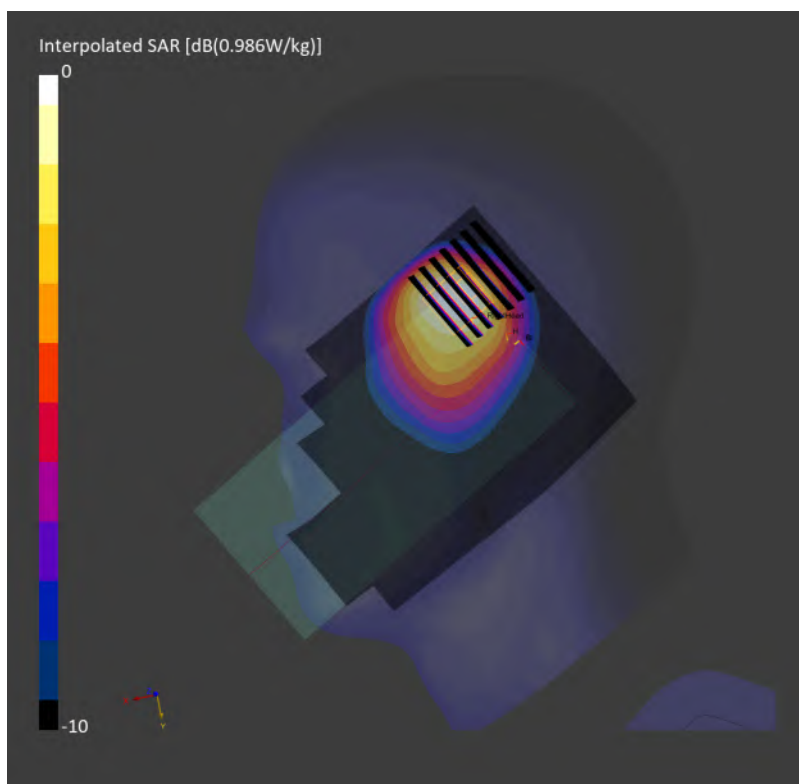

26_FR1 n41_HPUE_100M_BPSK_1_1_Right Cheek_0mm_Ch518598

Communication System: NR FR1 TDD; Frequency: 2592.990 MHz

Medium: HSL_600-7200_260818 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 39.7$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.66, 6.54, 6.74); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: RightHead
- Measurement Software: 18.0.0.7250
- UID: NR FR1 TDD, 1003246

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.04 W/kg; SAR (10g) = 0.437 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.04 dB

SAR (1g) = 1.05 W/kg; SAR (8g) = 0.486 W/kg; SAR (10g) = 0.434 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 85.6 %

TSL Correction: Positive only

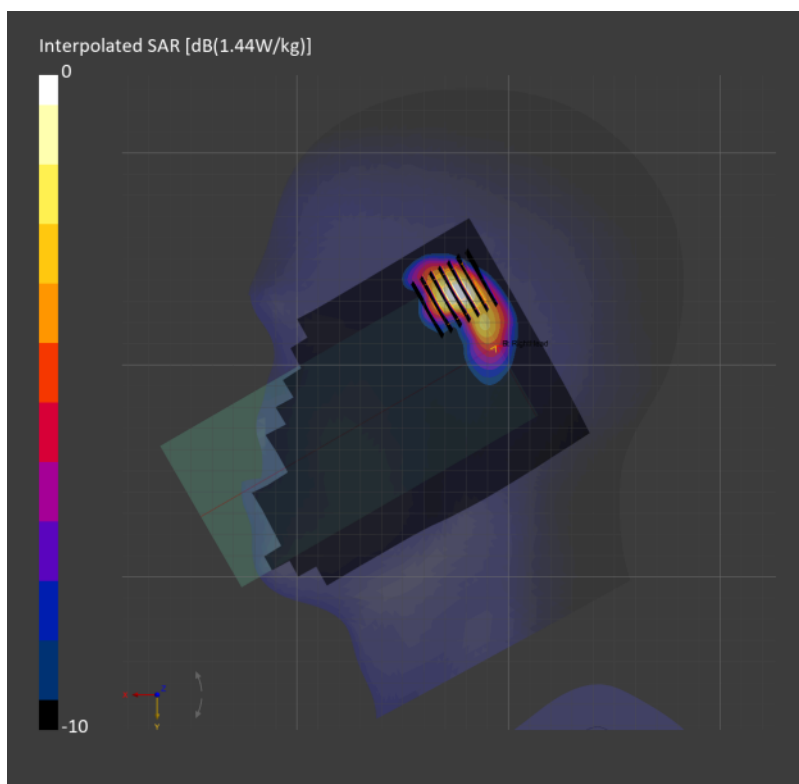

27_FR1 n48_40M_BPSK_1_1_Left Cheek_0mm_Ch638000

Communication System: NR FR1 TDD; Frequency: 3570.000 MHz

Medium: HSL_600-7200_260821 Medium parameters used: $f = 3570.000$ MHz; $\sigma = 2.82$ S/m; $\epsilon_r = 37.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.96, 6.44, 5.88); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: NR FR1 TDD, 1002251

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.08 W/kg; SAR (10g) = 0.443 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 29.1 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.00 dB

SAR (1g) = 1.09 W/kg; SAR (8g) = 0.472 W/kg; SAR (10g) = 0.421 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 72.5 %

TSL Correction: Positive only

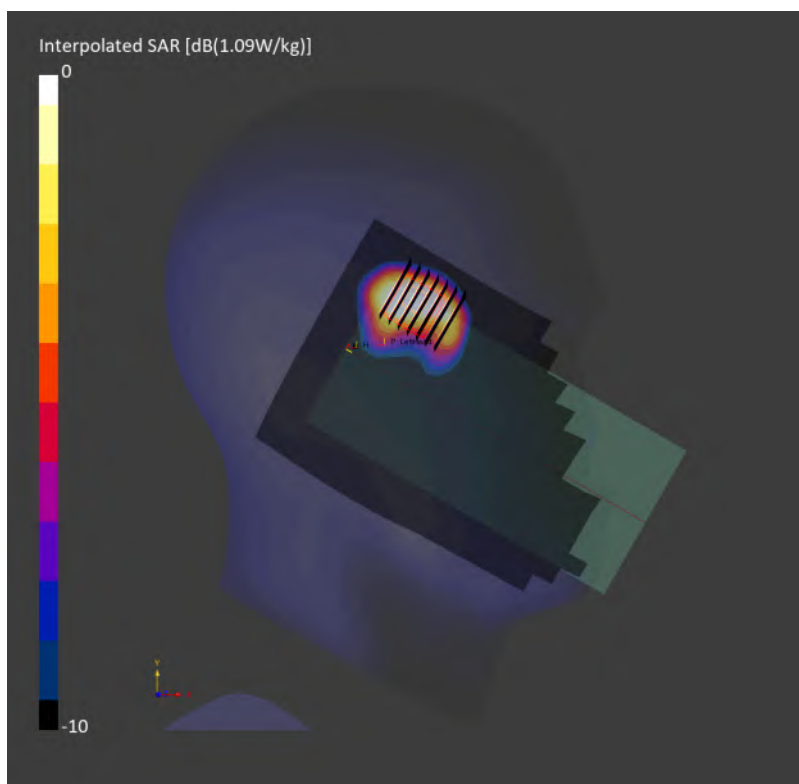

28_FR1 n77_100M_BPSK_1_1_Left Tilted_0mm_Ch650000

Communication System: NR FR1 TDD; Frequency: 3750.000 MHz

Medium: HSL_600-7200_260820 Medium parameters used: $f = 3750.000$ MHz; $\sigma = 2.86$ S/m; $\epsilon_r = 38.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.88, 6.35, 5.8); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: NR FR1 TDD, 1003247

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.10 W/kg; SAR (10g) = 0.382 W/kg;

TSL Correction: Positive only

Zoom Scan (28.8 mm x 28.8 mm x 29.1 mm): Measurement Grid: 4.8 mm x 4.8 mm x 1.4 mm


Power Drift = 0.03 dB

SAR (1g) = 1.10 W/kg; SAR (8g) = 0.421 W/kg; SAR (10g) = 0.370 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 70.3 %

TSL Correction: Positive only

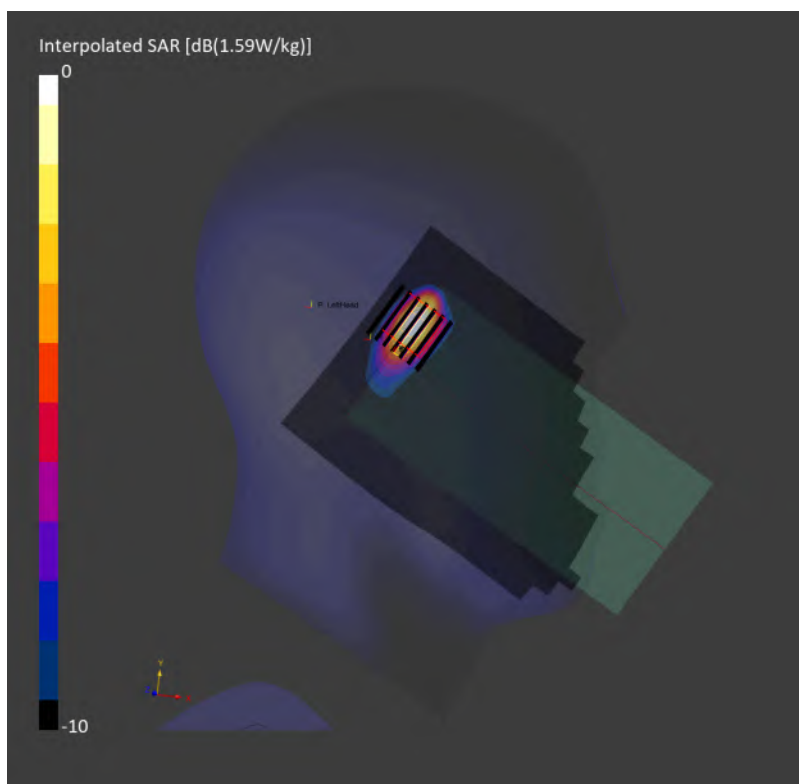

29_WLAN2.4GHz_802.11b 1Mbps_Left Cheek_0mm_Ch11

Communication System: WiFi (802.11b); Frequency: 2462.000 MHz

Medium: HSL_600-7200_260831 Medium parameters used: $f = 2462.000$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.56, 7.09, 6.47); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11b), 10315

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.891 W/kg; SAR (10g) = 0.428 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.03 dB

SAR (1g) = 0.910 W/kg; SAR (8g) = 0.464 W/kg; SAR (10g) = 0.421 W/kg

Smallest distance from peaks to all points 3 dB below = 9.8 mm

Ratio of SAR at M2 to SAR at M1 = 86.1 %

TSL Correction: Positive only

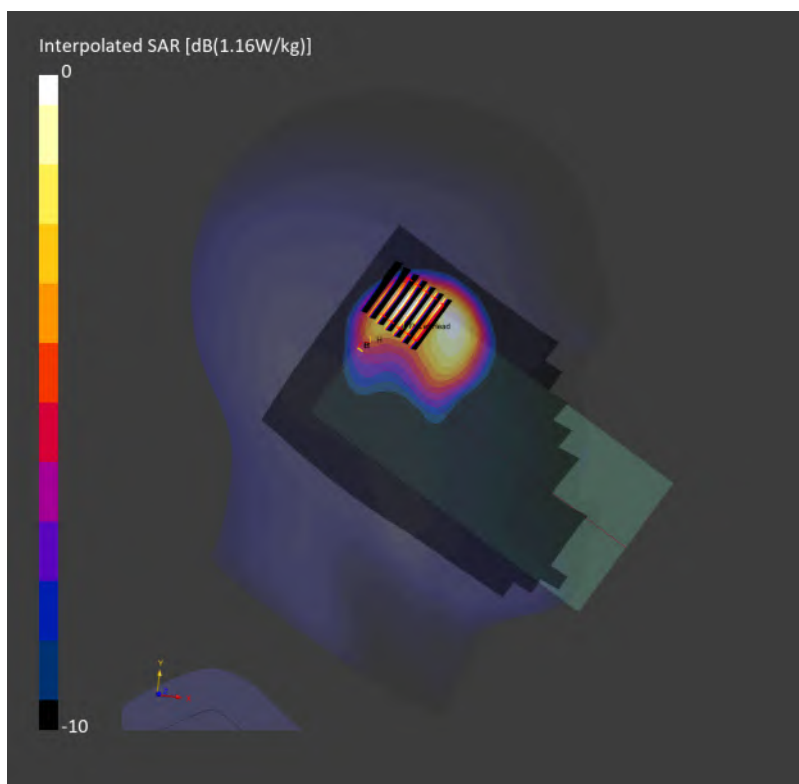

30_WLAN5GHz_802.11ac-VHT160 MCS0_Left Tilted_0mm_Ch50

Communication System: WiFi (802.11ac); Frequency: 5250.000 MHz

Medium: HSL_600-7200_260831 Medium parameters used: $f = 5250.000$ MHz; $\sigma = 4.52$ S/m; $\epsilon_r = 34.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.03, 5.43, 4.96); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11ac), 10554

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.614 W/kg; SAR (10g) = 0.224 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.08 dB

SAR (1g) = 0.670 W/kg; SAR (8g) = 0.252 W/kg; SAR (10g) = 0.223 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 60.9 %

TSL Correction: Positive only

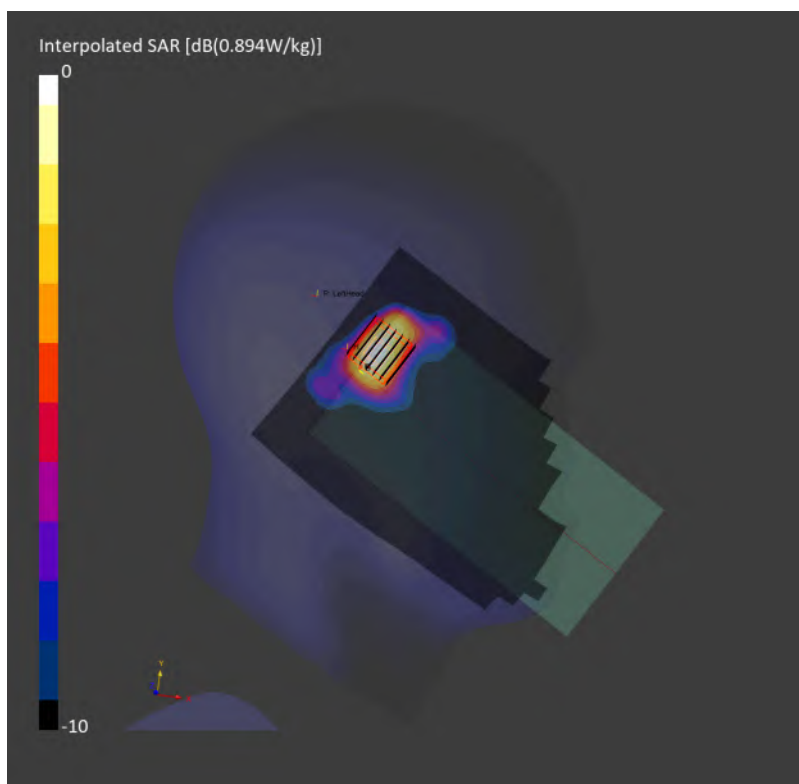

31_WLAN5GHz_802.11ac-VHT160 MCS0_Left Cheek_0mm_Ch114

Communication System: WiFi (802.11ac); Frequency: 5570.000 MHz

Medium: HSL_600-7200_260831 Medium parameters used: $f = 5570.000$ MHz; $\sigma = 4.84$ S/m; $\epsilon_r = 34.3$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(4.61, 4.98, 4.54); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11ac), 10554

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.673 W/kg; SAR (10g) = 0.250 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.04 dB

SAR (1g) = 0.751 W/kg; SAR (8g) = 0.283 W/kg; SAR (10g) = 0.249 W/kg

Smallest distance from peaks to all points 3 dB below = 7.8 mm

Ratio of SAR at M2 to SAR at M1 = 58.0 %

TSL Correction: Positive only

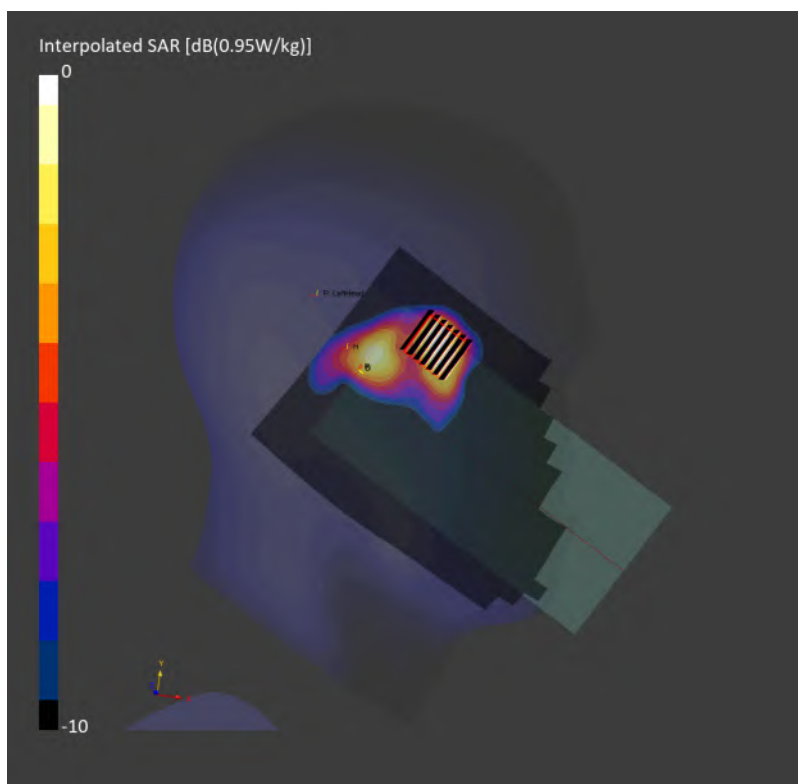

32_WLAN5GHz_802.11ac-VHT80 MCS0_Left Cheek_0mm_Ch155

Communication System: WiFi (802.11ac); Frequency: 5775.000 MHz

Medium: HSL_600-7200_260825 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.19$ S/m; $\epsilon_r = 33.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(4.54, 4.9, 4.48); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11ac), 10544

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.648 W/kg; SAR (10g) = 0.232 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.00 dB

SAR (1g) = 0.705 W/kg; SAR (8g) = 0.258 W/kg; SAR (10g) = 0.225 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 54.3 %

TSL Correction: Positive only

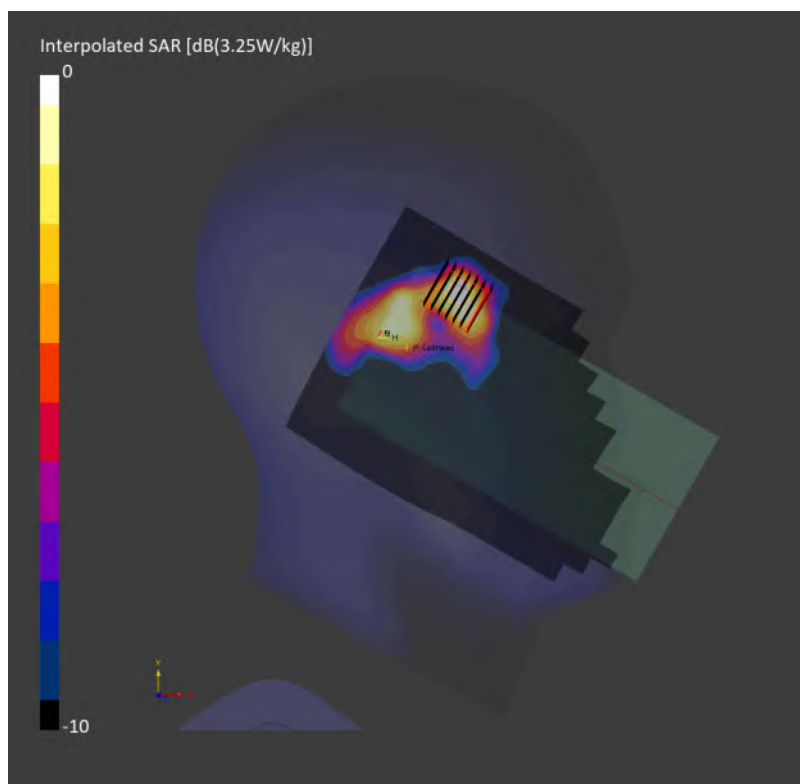

33_WLAN6GHz_802.11be-EHT320 MCS0_Left Tilted_0mm_Ch127

Communication System: WiFi (802.11be); Frequency: 6585.000 MHz

Medium: HSL_600-7200_260901 Medium parameters used: $f = 6585.000$ MHz; $\sigma = 6.11$ S/m; $\epsilon_r = 32.1$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(4.76, 5.14, 4.7); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11be), 11026

Area Scan (119.0 mm x 204.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.238 W/kg; SAR (10g) = 0.065 W/kg;

TSL Correction: Positive only

Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm


Power Drift = -0.04 dB

SAR (1g) = 0.258 W/kg; SAR (8g) = 0.077 W/kg; SAR (10g) = 0.065 W/kg

Smallest distance from peaks to all points 3 dB below = 4.3 mm

Ratio of SAR at M2 to SAR at M1 = 55.8 %

TSL Correction: Positive only

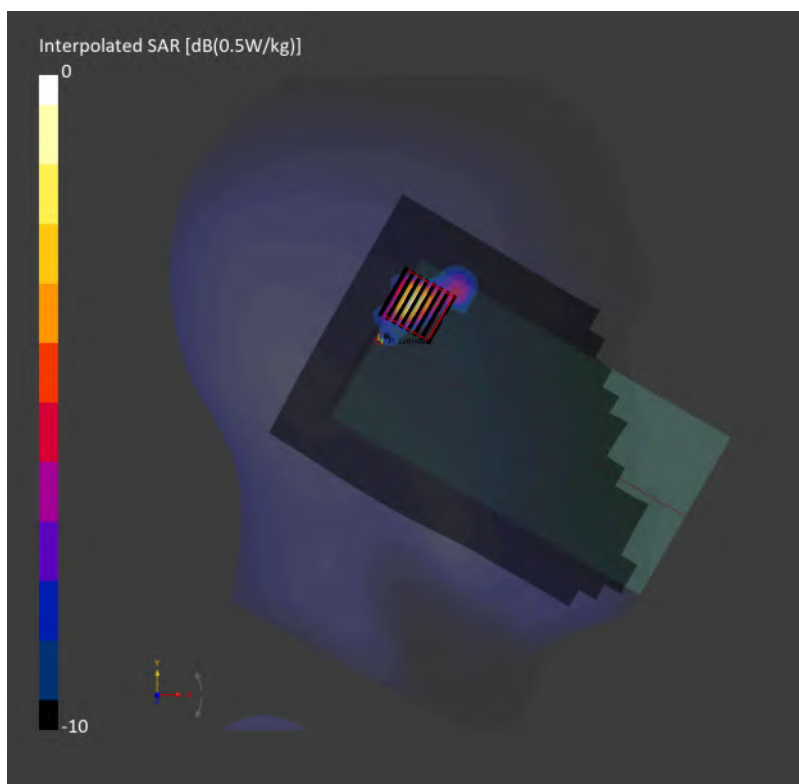

34_Bluetooth_1Mbps_Left Cheek_0mm_Ch39;push ant3

Communication System: Bluetooth; Frequency: 2441.000 MHz

Medium: HSL_600-7200_260907 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 40.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.79, 6.67, 6.87); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: Bluetooth, 10035

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.307 W/kg; SAR (10g) = 0.150 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.12 dB

SAR (1g) = 0.303 W/kg; SAR (8g) = 0.161 W/kg; SAR (10g) = 0.146 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 79.3 %

TSL Correction: Positive only

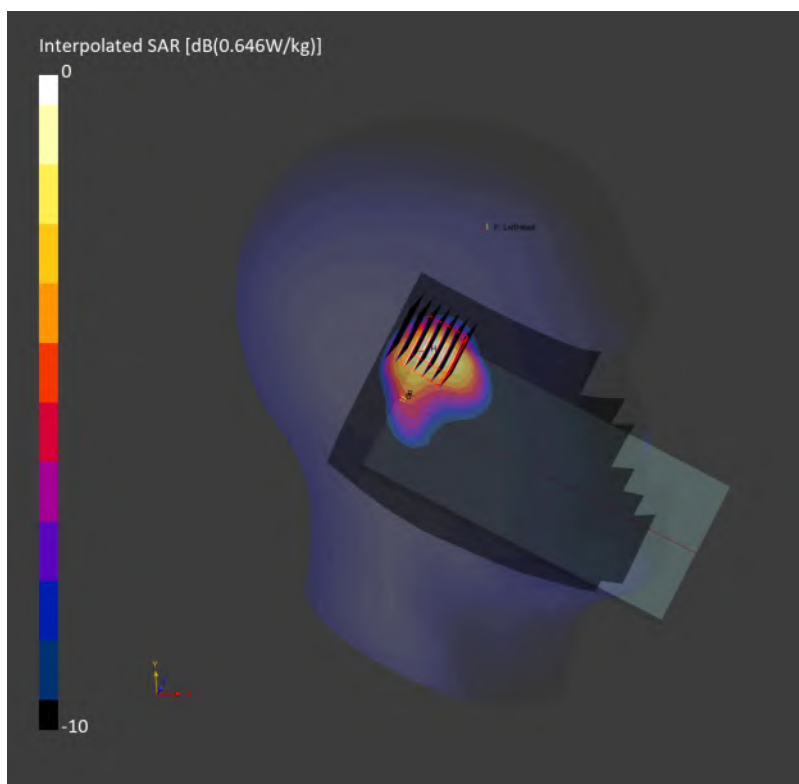

35_UWB_802.15.4ab_Left Cheek_0mm_Ch49

Communication System: Custom; Frequency: 5848.750 MHz

Medium: HSL_600-7200_260830 Medium parameters used: $f = 5848.750$ MHz; $\sigma = 5.17$ S/m; $\epsilon_r = 33.6$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(4.54, 4.9, 4.48); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: LeftHead
- Measurement Software: 18.0.0.7250
- UID: Custom, 2

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.489 W/kg; SAR (10g) = 0.172 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = -0.01 dB

SAR (1g) = 0.557 W/kg; SAR (8g) = 0.192 W/kg; SAR (10g) = 0.163 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 54.3 %

TSL Correction: Positive only

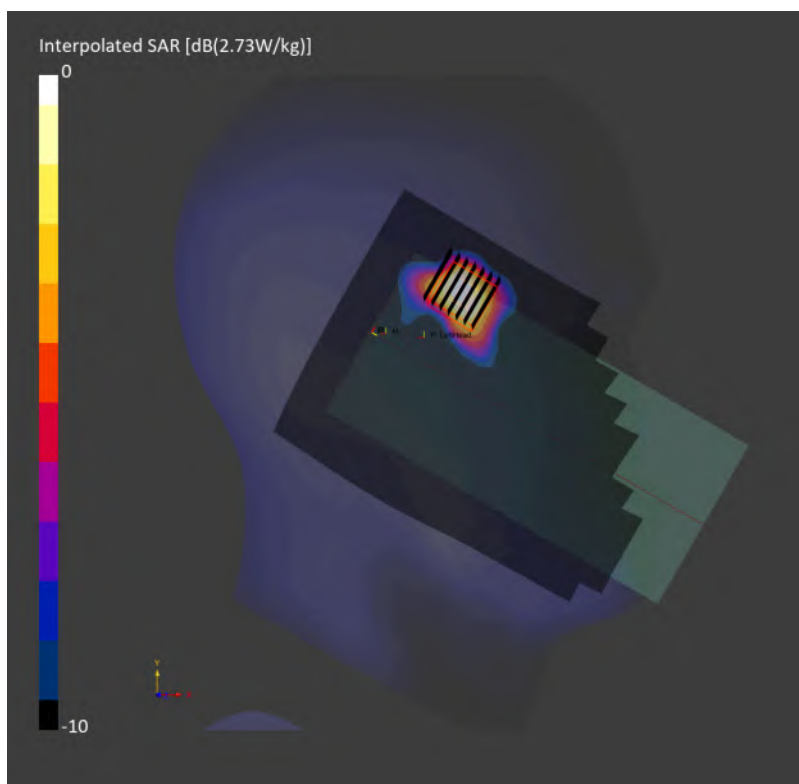

36_GSM850_GPRS 4 Tx slots_Back_5mm_Ch251

Communication System: GSM; Frequency: 848.800 MHz

Medium: HSL_600-7200_260830 Medium parameters used: $f = 848.800$ MHz; $\sigma = 0.920$ S/m; $\epsilon_r = 41.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(8.84, 8.67, 8.94); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: GSM, 10028

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.18 W/kg; SAR (10g) = 0.721 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.11 dB

SAR (1g) = 0.984 W/kg; SAR (8g) = 0.583 W/kg; SAR (10g) = 0.543 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 81.7 %

TSL Correction: Positive only

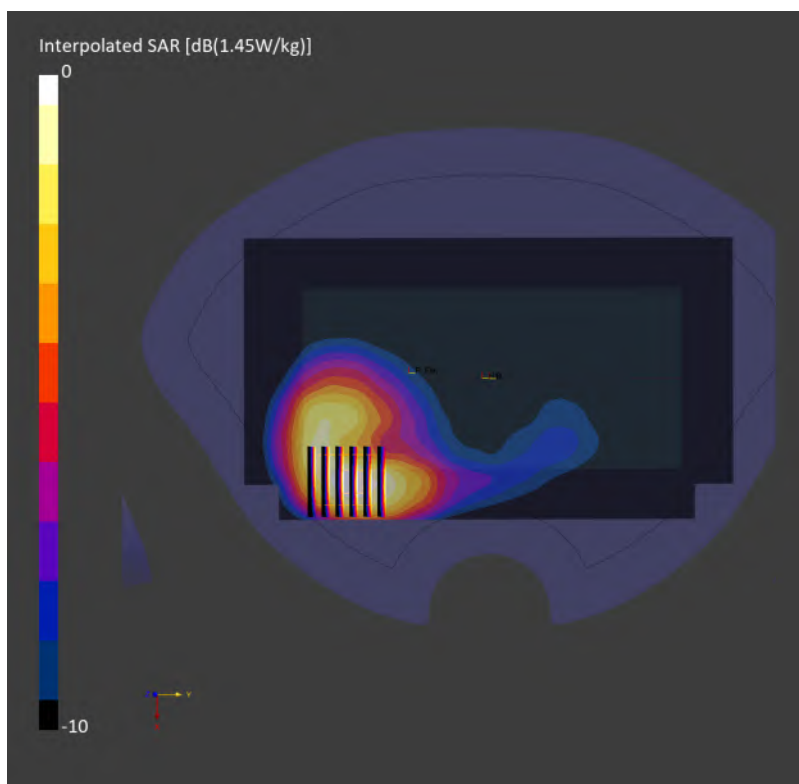

37_GSM1900_GPRS 4 Tx slots_Bottom Side_5mm_Ch512

Communication System: GSM; Frequency: 1850.200 MHz

Medium: HSL_600-7200_260822 Medium parameters used: $f = 1850.200$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.25, 7.12, 7.34); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: GSM, 10028

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.835 W/kg; SAR (10g) = 0.408 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 0.807 W/kg; SAR (8g) = 0.432 W/kg; SAR (10g) = 0.393 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 80.7 %

TSL Correction: Positive only

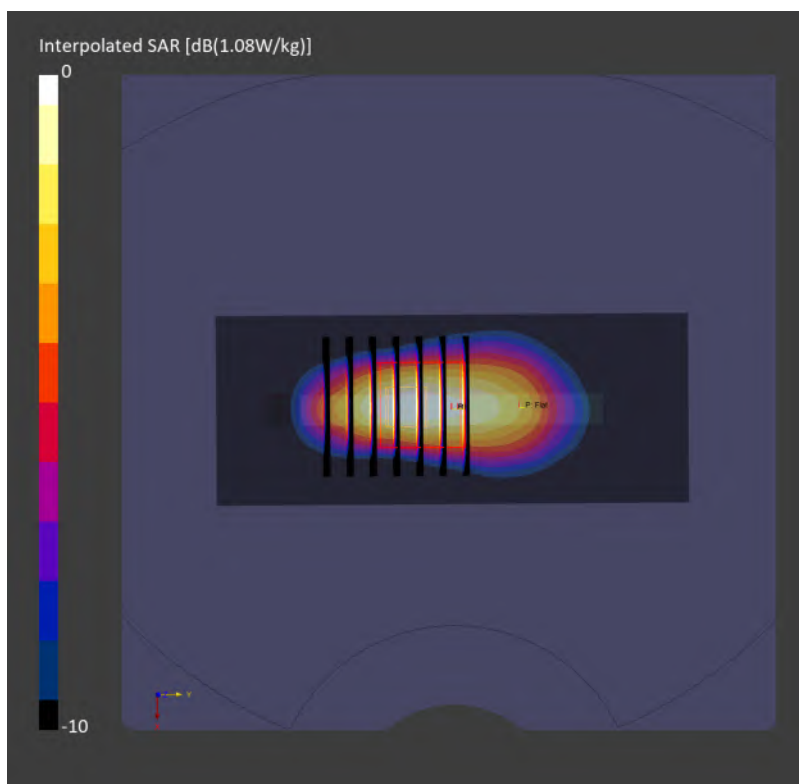

38_WCDMA II_RMC 12.2Kbps_Bottom Side_5mm_Ch9400

Communication System: UMTS-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260822 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 42.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(7.02, 7.58, 6.92); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: UMTS-FDD, 10011

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.933 W/kg; SAR (10g) = 0.449 W/kg;

TSL Correction: Positive only

Zoom Scan (33.0 mm x 33.0 mm x 31.2 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.903 W/kg; SAR (8g) = 0.468 W/kg; SAR (10g) = 0.422 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 78.4 %

TSL Correction: Positive only

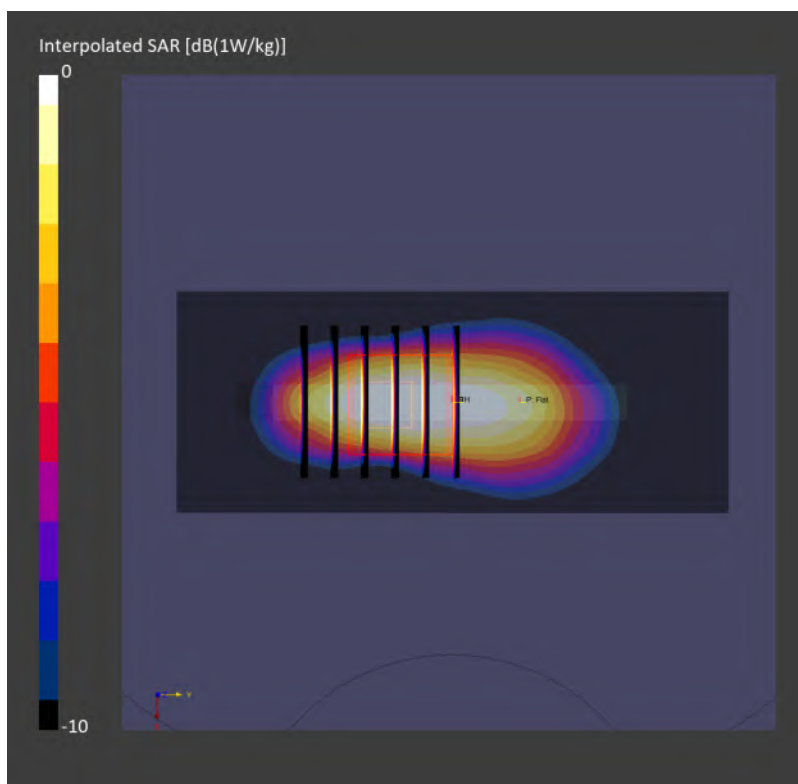

39_WCDMA IV_RMC 12.2Kbps_Bottom Side_5mm_Ch1513

Communication System: UMTS-FDD; Frequency: 1752.600 MHz

Medium: HSL_600-7200_260822 Medium parameters used: $f = 1752.600$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 42.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(7.42, 8.01, 7.32); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: UMTS-FDD, 10011

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.958 W/kg; SAR (10g) = 0.473 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.944 W/kg; SAR (8g) = 0.508 W/kg; SAR (10g) = 0.465 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 81.7 %

TSL Correction: Positive only

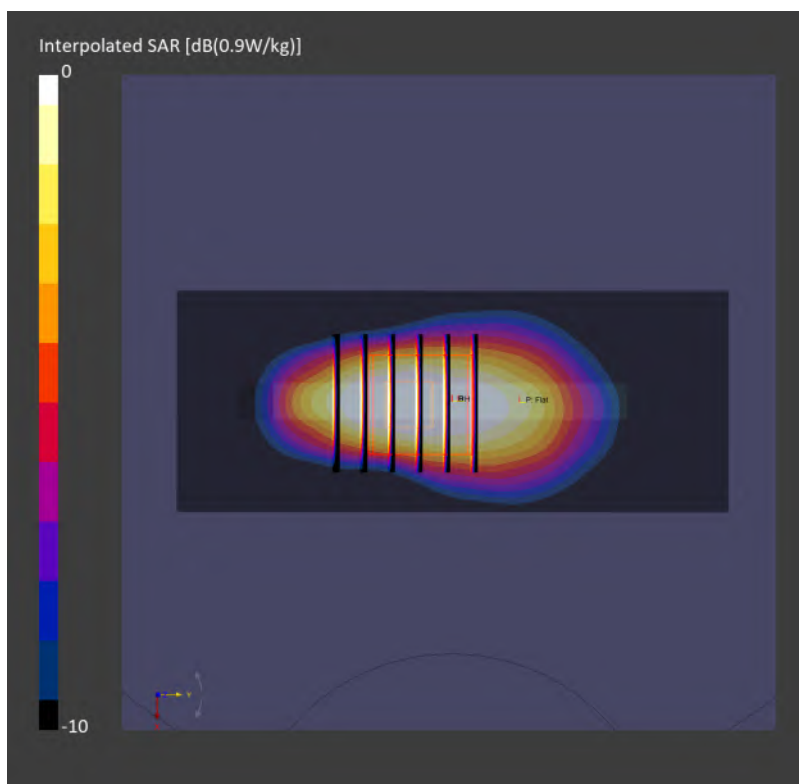

40_WCDMA V_RMC 12.2Kbps_Back_5mm_Ch4182

Communication System: UMTS-FDD; Frequency: 836.400 MHz

Medium: HSL_600-7200_260829 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 42.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(8.84, 8.67, 8.94); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: UMTS-FDD, 10011

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.938 W/kg; SAR (10g) = 0.620 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.13 dB

SAR (1g) = 0.896 W/kg; SAR (8g) = 0.581 W/kg; SAR (10g) = 0.542 W/kg

Smallest distance from peaks to all points 3 dB below = 12.0 mm

Ratio of SAR at M2 to SAR at M1 = 83.8 %

TSL Correction: Positive only

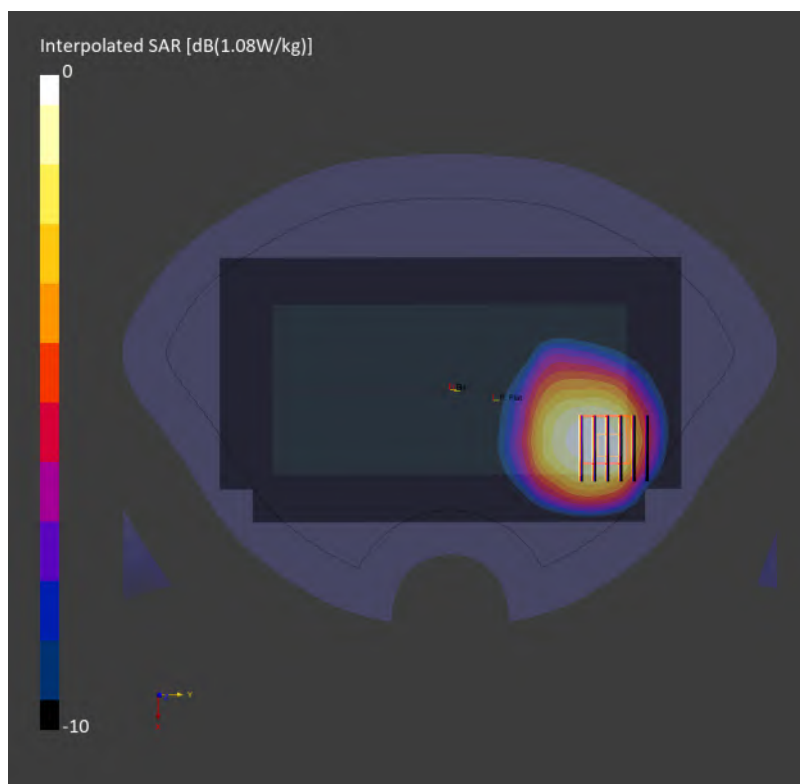

41_LTE Band 7_20M_QPSK_1_0_Back_5mm_Ch20850

Communication System: LTE-FDD; Frequency: 2510.000 MHz

Medium: HSL_600-7200_260901 Medium parameters used: $f = 2510.000$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 39.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.66, 6.54, 6.74); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.881 W/kg; SAR (10g) = 0.393 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.05 dB

SAR (1g) = 0.898 W/kg; SAR (8g) = 0.432 W/kg; SAR (10g) = 0.388 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 80.0 %

TSL Correction: Positive only

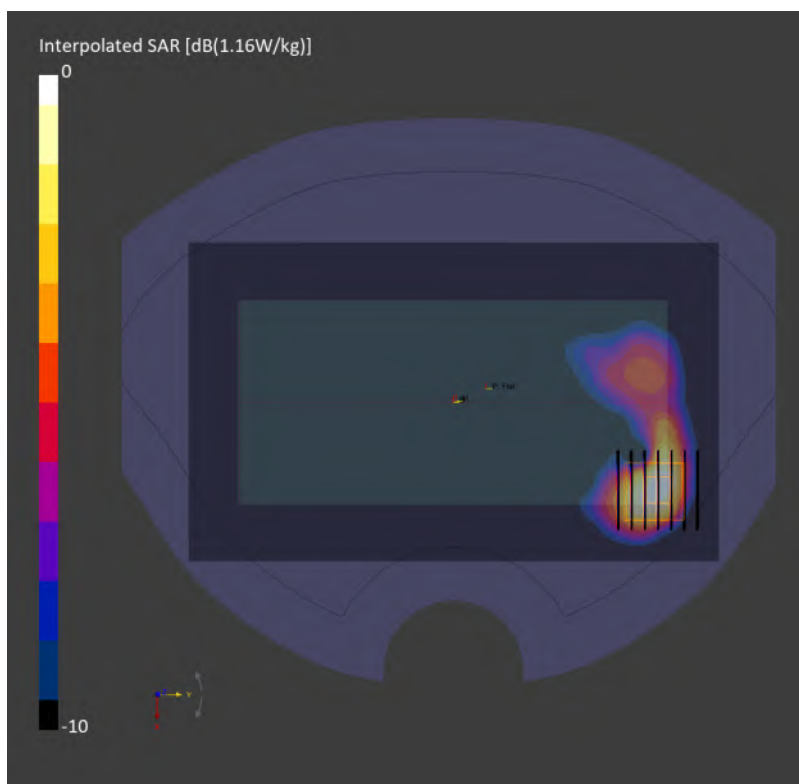

42_LTE Band 12_10M_QPSK_1_0_Back_5mm_Ch23095

Communication System: LTE-FDD; Frequency: 707.500 MHz

Medium: HSL_600-7200_260817 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.889$ S/m; $\epsilon_r = 43.0$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(9.08, 8.91, 9.18); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10175

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.869 W/kg; SAR (10g) = 0.553 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.952 W/kg; SAR (8g) = 0.561 W/kg; SAR (10g) = 0.522 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 82.2 %

TSL Correction: Positive only

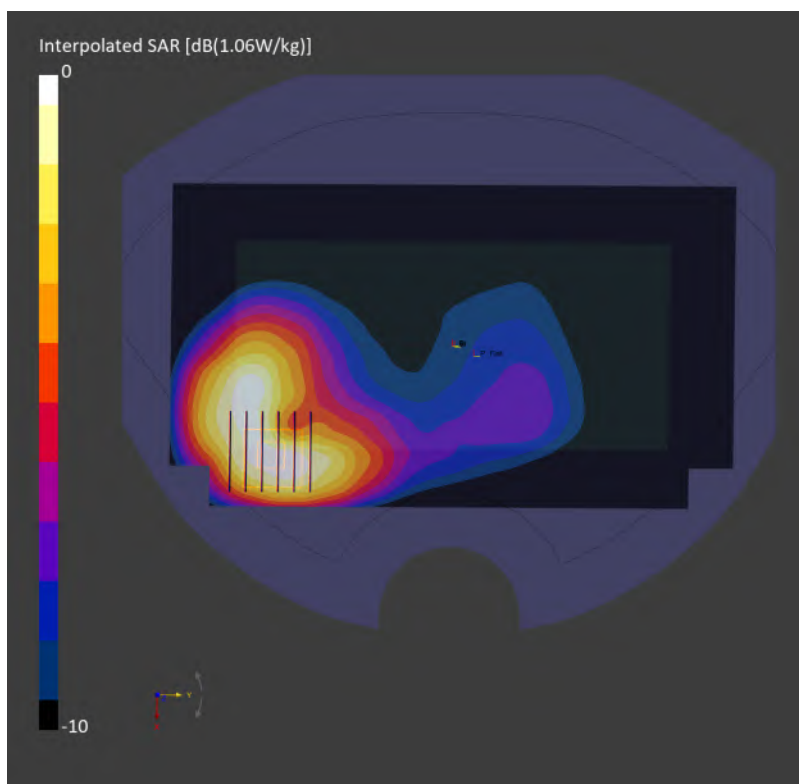

43_LTE Band 13_10M_QPSK_25_0_Back_5mm_Ch23230

Communication System: LTE-FDD; Frequency: 782.000 MHz

Medium: HSL_600-7200_260828 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 42.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(9.08, 8.91, 9.18); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10154

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.14 W/kg; SAR (10g) = 0.749 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 1.07 W/kg; SAR (8g) = 0.702 W/kg; SAR (10g) = 0.657 W/kg

Smallest distance from peaks to all points 3 dB below = 12.3 mm

Ratio of SAR at M2 to SAR at M1 = 79.1 %

TSL Correction: Positive only

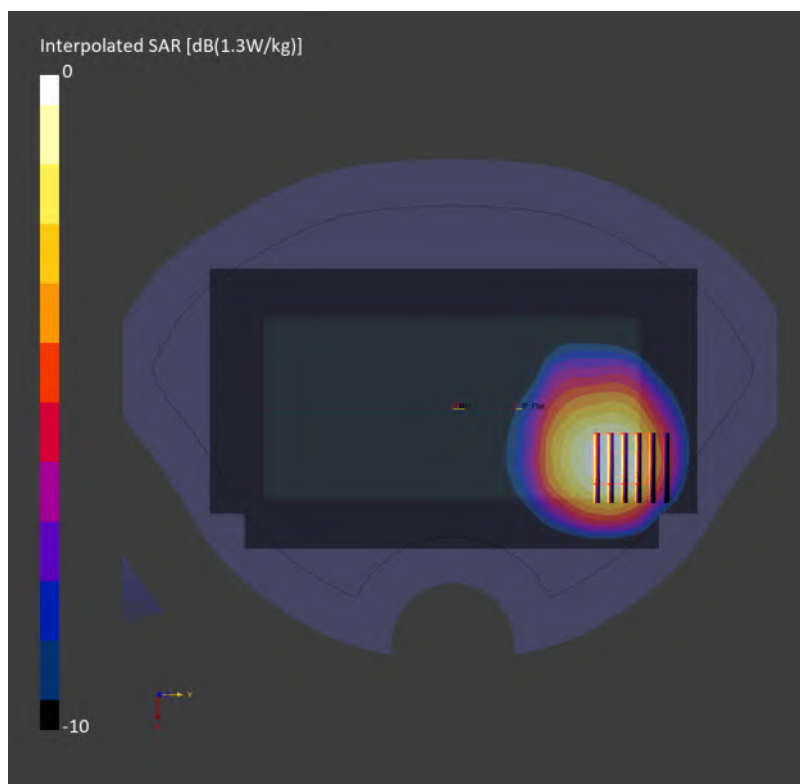

44_LTE Band 14_10M_QPSK_1_0_Back_5mm_Ch23330

Communication System: LTE-FDD; Frequency: 793.000 MHz

Medium: HSL_600-7200_260817 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 42.7$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(9.08, 8.91, 9.18); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10175

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.831 W/kg; SAR (10g) = 0.530 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.905 W/kg; SAR (8g) = 0.540 W/kg; SAR (10g) = 0.503 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 83.6 %

TSL Correction: Positive only

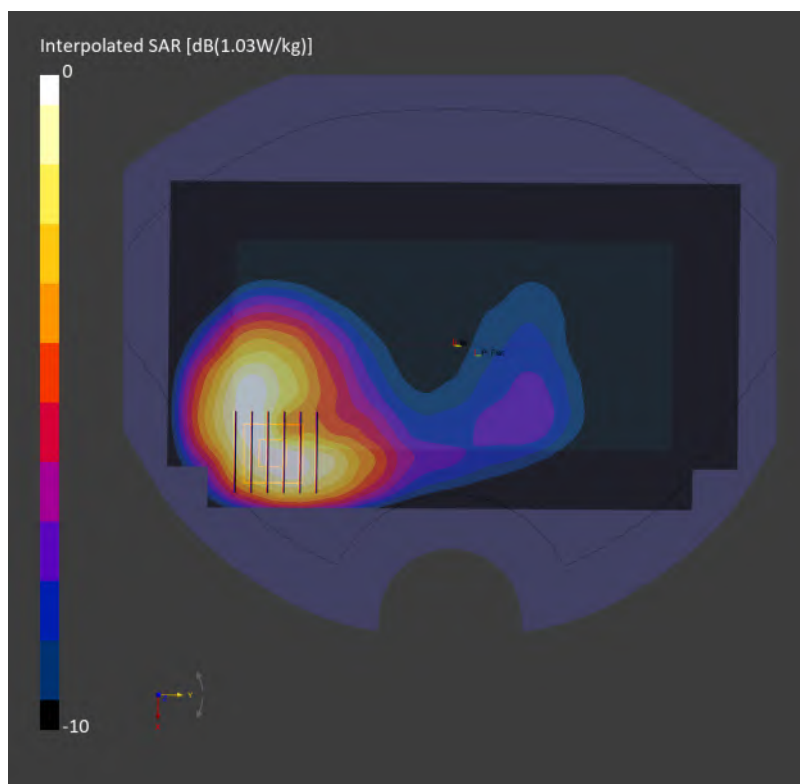

45_LTE Band 25_20M_QPSK_1_0_Bottom Side_5mm_Ch26590

Communication System: LTE-FDD; Frequency: 1905.000 MHz

Medium: HSL_600-7200_260822 Medium parameters used: $f = 1905.000$ MHz; $\sigma = 1.43$ S/m; $\epsilon_r = 41.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(7.02, 7.58, 6.92); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 1.08 W/kg; SAR (10g) = 0.530 W/kg;

TSL Correction: Positive only

Zoom Scan (35.4 mm x 35.4 mm x 31.2 mm): Measurement Grid: 5.9 mm x 5.9 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 1.07 W/kg; SAR (8g) = 0.564 W/kg; SAR (10g) = 0.513 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 79.2 %

TSL Correction: Positive only

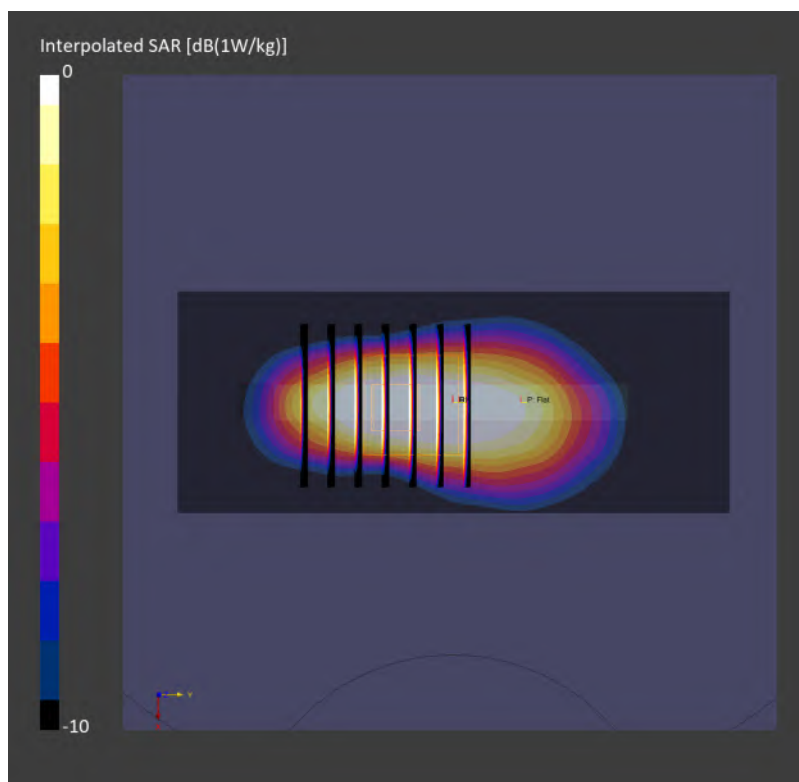

46_LTE Band 26_15M_QPSK_1_0_Back_5mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz

Medium: HSL_600-7200_260817 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.933$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(8.84, 8.67, 8.94); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10181

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.855 W/kg; SAR (10g) = 0.548 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.03 dB

SAR (1g) = 0.946 W/kg; SAR (8g) = 0.564 W/kg; SAR (10g) = 0.526 W/kg

Smallest distance from peaks to all points 3 dB below = 8.7 mm

Ratio of SAR at M2 to SAR at M1 = 84.4 %

TSL Correction: Positive only

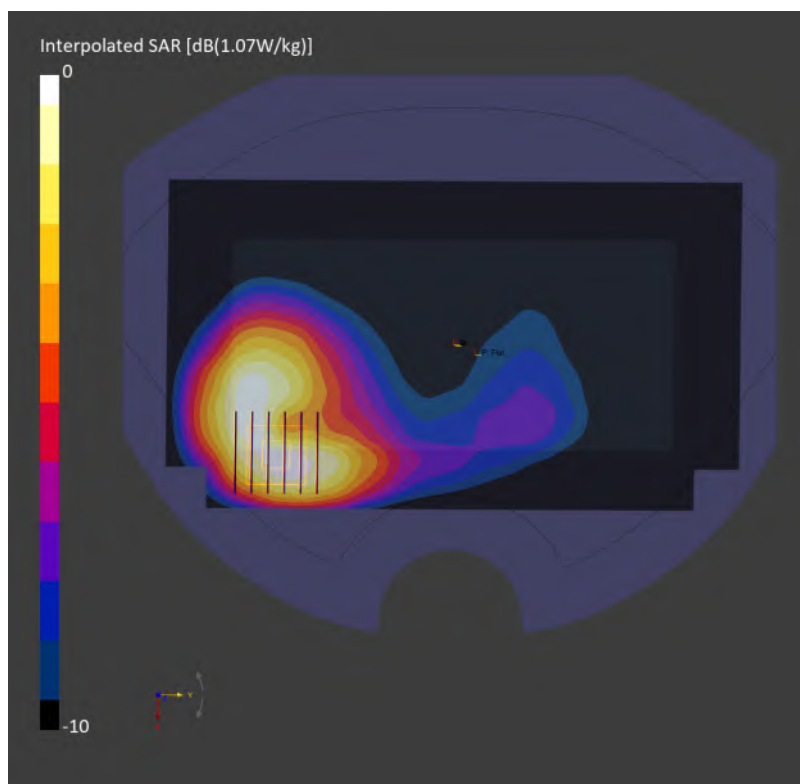

47_LTE Band 66_20M_QPSK_1_0_Bottom Side_5mm_Ch132322

Communication System: LTE-FDD; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260822 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.34$ S/m; $\epsilon_r = 42.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(7.42, 8.01, 7.32); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 1.03 W/kg; SAR (10g) = 0.512 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 1.02 W/kg; SAR (8g) = 0.550 W/kg; SAR (10g) = 0.502 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 81.5 %

TSL Correction: Positive only

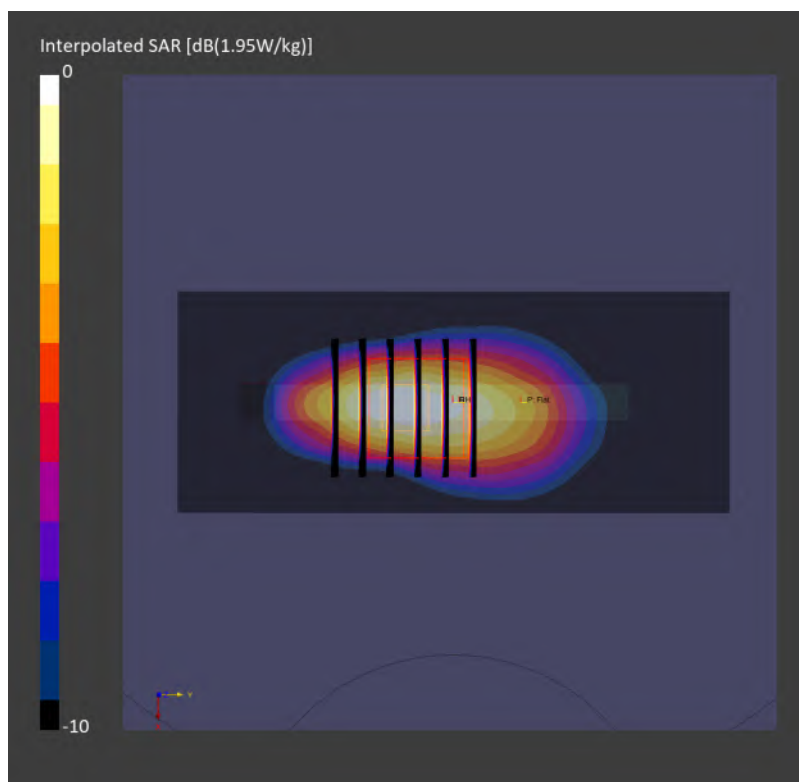

48_LTE Band 71_20M_QPSK_1_0_Left Side_5mm_Ch133297

Communication System: LTE-FDD; Frequency: 680.500 MHz

Medium: HSL_600-7200_260817 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 43.0$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(9.08, 8.91, 9.18); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 1.05 W/kg; SAR (10g) = 0.650 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 0.998 W/kg; SAR (8g) = 0.660 W/kg; SAR (10g) = 0.621 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 83.4 %

TSL Correction: Positive only

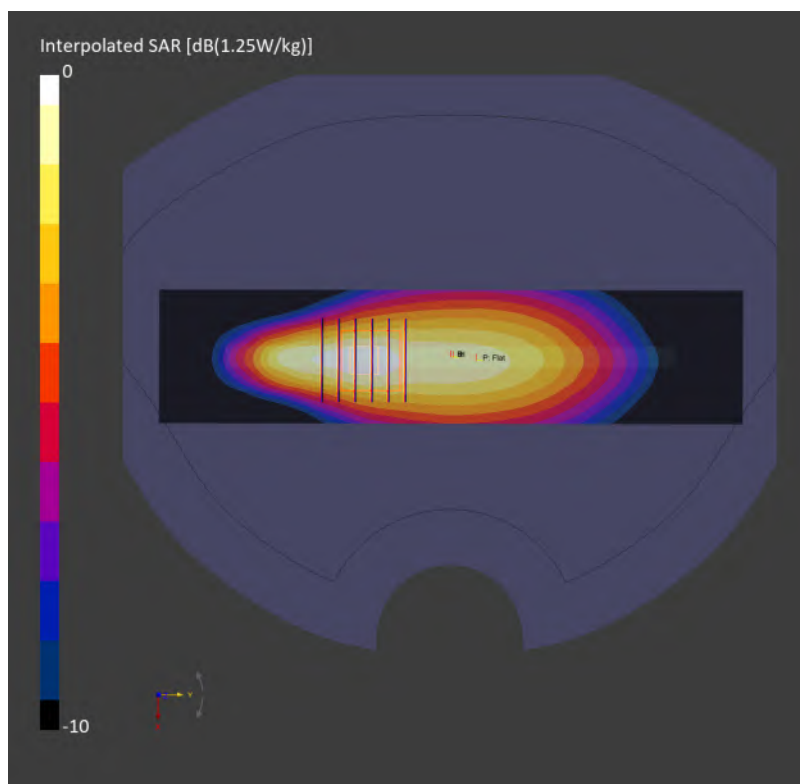

49_LTE Band 41_HPUE_20M_QPSK_1_0_Bottom Side_5mm_Ch41490

Communication System: LTE-TDD; Frequency: 2680.000 MHz

Medium: HSL_600-7200_260901 Medium parameters used: $f = 2680.000$ MHz; $\sigma = 1.99$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.66, 6.54, 6.74); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-TDD, 10172

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 1.19 W/kg; SAR (10g) = 0.475 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.03 dB

SAR (1g) = 1.23 W/kg; SAR (8g) = 0.555 W/kg; SAR (10g) = 0.495 W/kg

Smallest distance from peaks to all points 3 dB below = 6.4 mm

Ratio of SAR at M2 to SAR at M1 = 79.1 %

TSL Correction: Positive only

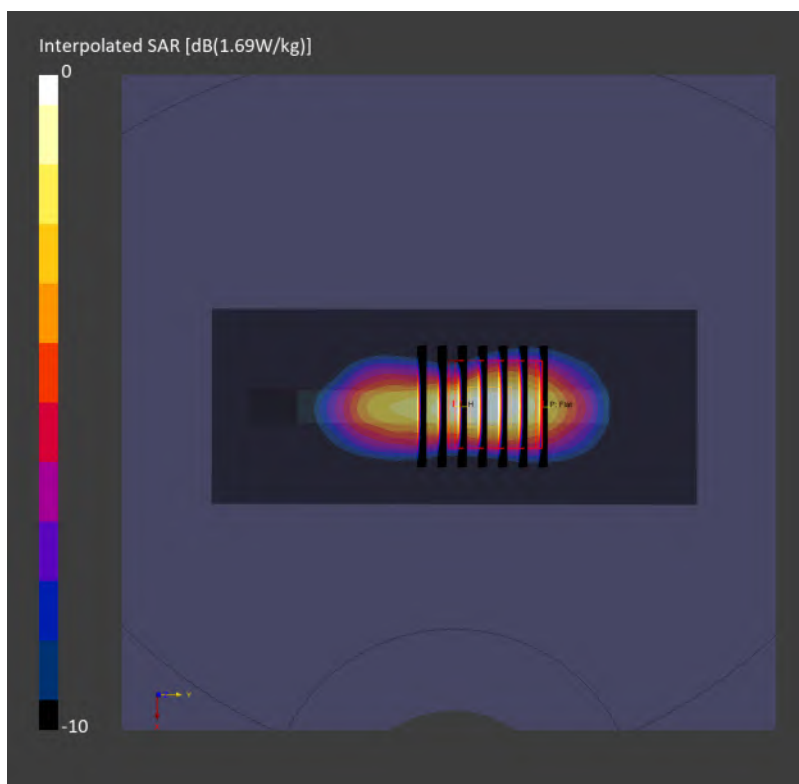

50_LTE Band 42_20M_QPSK_1_0_Back_5mm_Ch42190

Communication System: LTE-TDD; Frequency: 3460.000 MHz

Medium: HSL_600-7200_260830 Medium parameters used: $f = 3460.000$ MHz; $\sigma = 2.68$ S/m; $\epsilon_r = 38.0$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.96, 6.44, 5.88); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-TDD, 10435

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.830 W/kg; SAR (10g) = 0.327 W/kg;

TSL Correction: Positive only

Zoom Scan (31.5 mm x 31.5 mm x 29.1 mm): Measurement Grid: 4.5 mm x 4.5 mm x 1.4 mm


Power Drift = 0.01 dB

SAR (1g) = 0.911 W/kg; SAR (8g) = 0.389 W/kg; SAR (10g) = 0.346 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 75.2 %

TSL Correction: Positive only

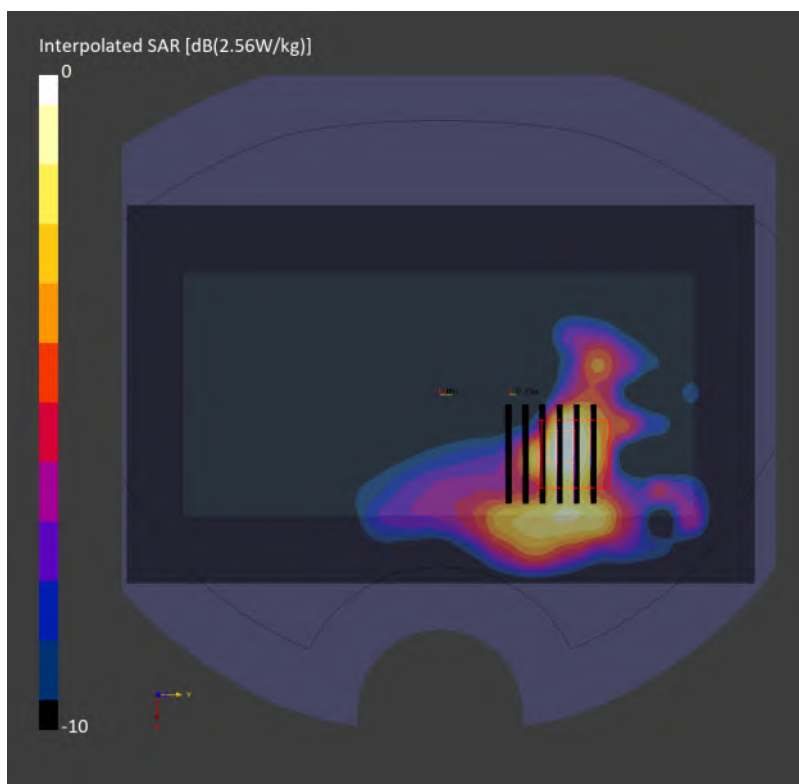

51_LTE Band 48_20M_QPSK_1_0_Back_5mm_Ch55340

Communication System: LTE-TDD; Frequency: 3560.000 MHz

Medium: HSL_600-7200_260826 Medium parameters used: $f = 3560.000$ MHz; $\sigma = 2.79$ S/m; $\epsilon_r = 37.9$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.96, 6.44, 5.88); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-TDD, 10435

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.695 W/kg; SAR (10g) = 0.276 W/kg;

TSL Correction: Positive only

Zoom Scan (28.8 mm x 28.8 mm x 29.1 mm): Measurement Grid: 4.8 mm x 4.8 mm x 1.4 mm


Power Drift = -0.05 dB

SAR (1g) = 0.764 W/kg; SAR (8g) = 0.323 W/kg; SAR (10g) = 0.287 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 72.3 %

TSL Correction: Positive only

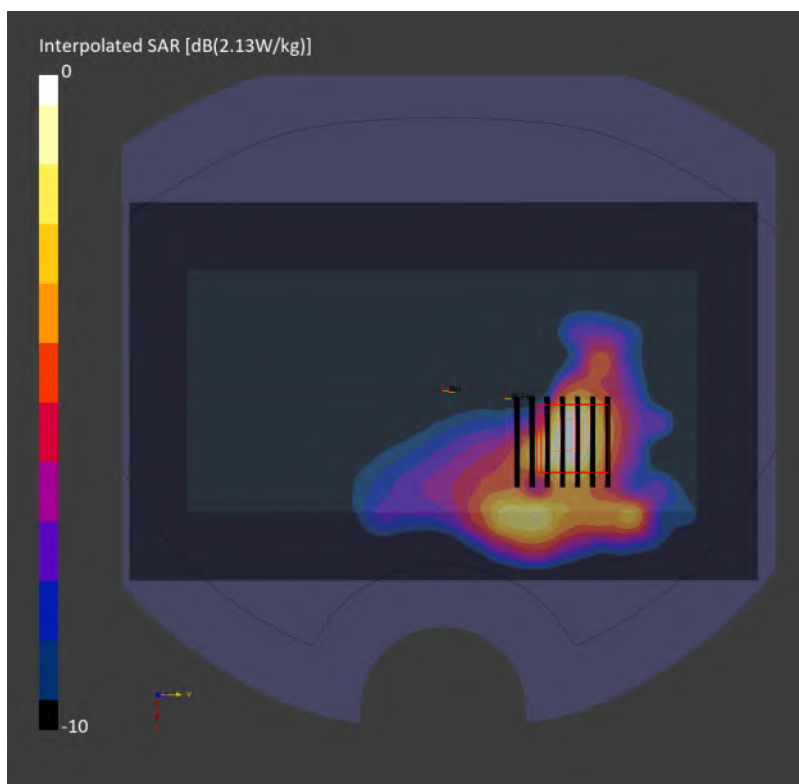

52_FR1 n7_50M_BPSK_1_1_Back_5mm_Ch507000

Communication System: NR FR1 FDD; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260824 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 39.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.66, 6.54, 6.74); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000370

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.08 W/kg; SAR (10g) = 0.476 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.18 dB

SAR (1g) = 1.12 W/kg; SAR (8g) = 0.537 W/kg; SAR (10g) = 0.482 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 80.6 %

TSL Correction: Positive only

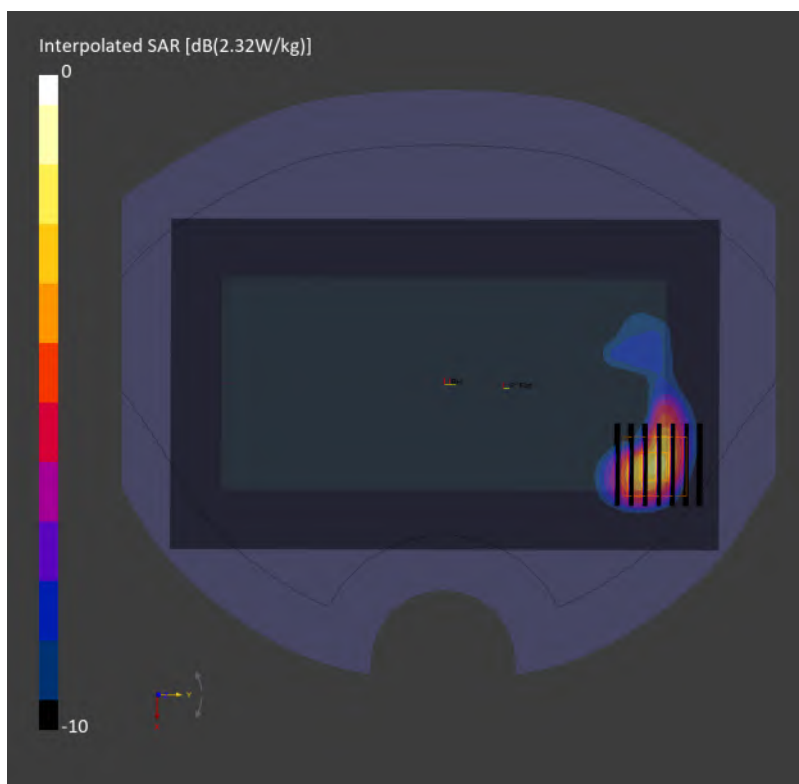

53_FR1 n12_15M_BPSK_1_1_Left Side_5mm_Ch141500

Communication System: NR FR1 FDD; Frequency: 707.500 MHz

Medium: HSL_600-7200_260817 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 42.7$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.9, 9.61, 8.78); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000070

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.636 W/kg; SAR (10g) = 0.393 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.00 dB

SAR (1g) = 0.648 W/kg; SAR (8g) = 0.404 W/kg; SAR (10g) = 0.379 W/kg

Smallest distance from peaks to all points 3 dB below = 10.8 mm

Ratio of SAR at M2 to SAR at M1 = 80.1 %

TSL Correction: Positive only

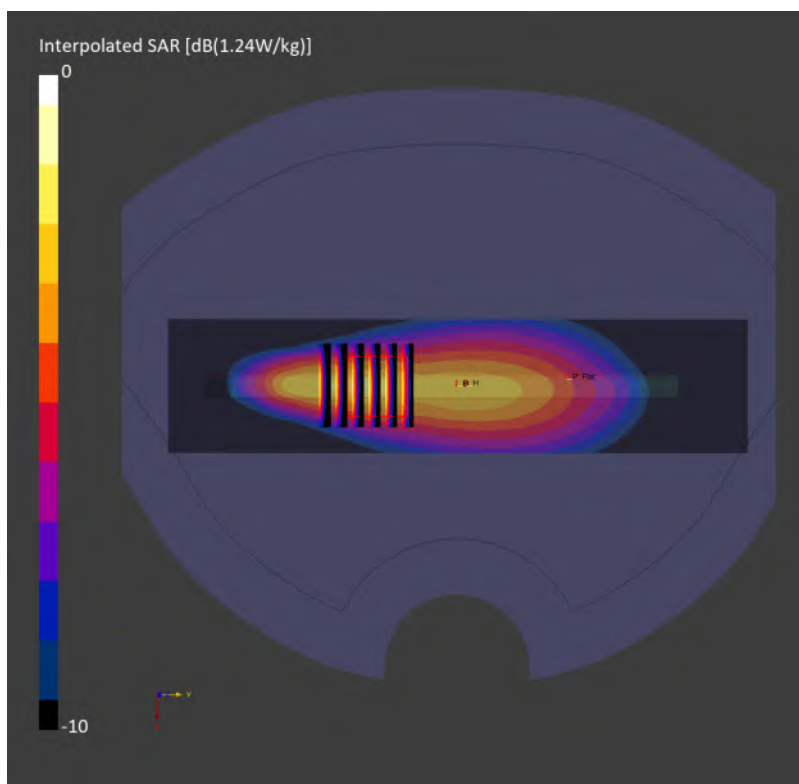

54_FR1 n13_10M_BPSK_1_1_Back_5mm_Ch156400

Communication System: NR FR1 FDD; Frequency: 782.000 MHz

Medium: HSL_600-7200_260830 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.893$ S/m; $\epsilon_r = 42.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(9.08, 8.91, 9.18); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000028

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.726 W/kg; SAR (10g) = 0.480 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.06 dB

SAR (1g) = 0.705 W/kg; SAR (8g) = 0.463 W/kg; SAR (10g) = 0.433 W/kg

Smallest distance from peaks to all points 3 dB below = 11.9 mm

Ratio of SAR at M2 to SAR at M1 = 78.4 %

TSL Correction: Positive only

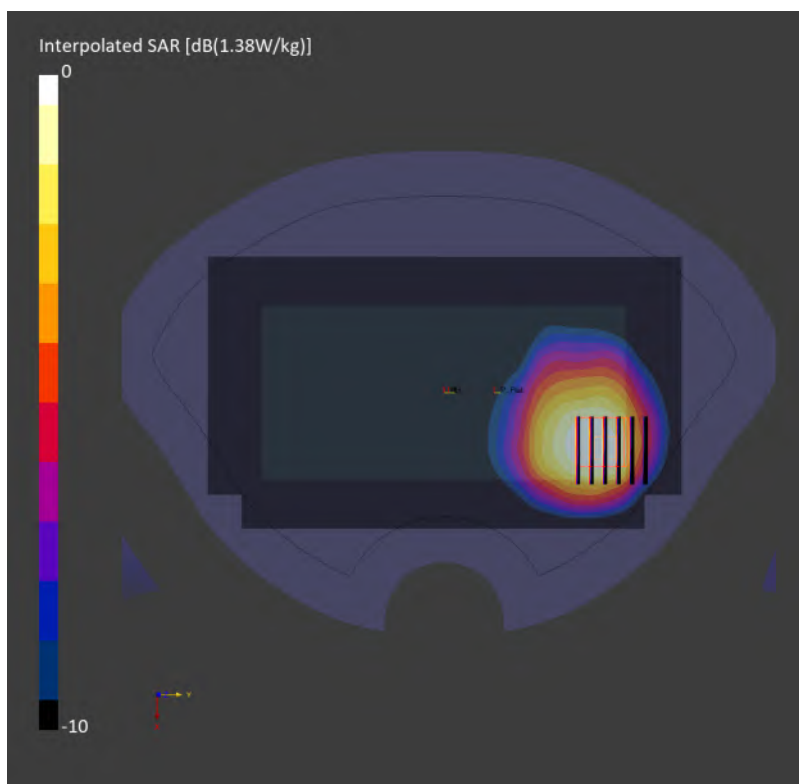

55_FR1 n14_10M_BPSK_1_1_Back_5mm_Ch158600

Communication System: NR FR1 FDD; Frequency: 793.000 MHz

Medium: HSL_600-7200_260830 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 42.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(9.08, 8.91, 9.18); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000028

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.867 W/kg; SAR (10g) = 0.576 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.15 dB

SAR (1g) = 0.812 W/kg; SAR (8g) = 0.540 W/kg; SAR (10g) = 0.502 W/kg

Smallest distance from peaks to all points 3 dB below = 12.3 mm

Ratio of SAR at M2 to SAR at M1 = 77.9 %

TSL Correction: Positive only

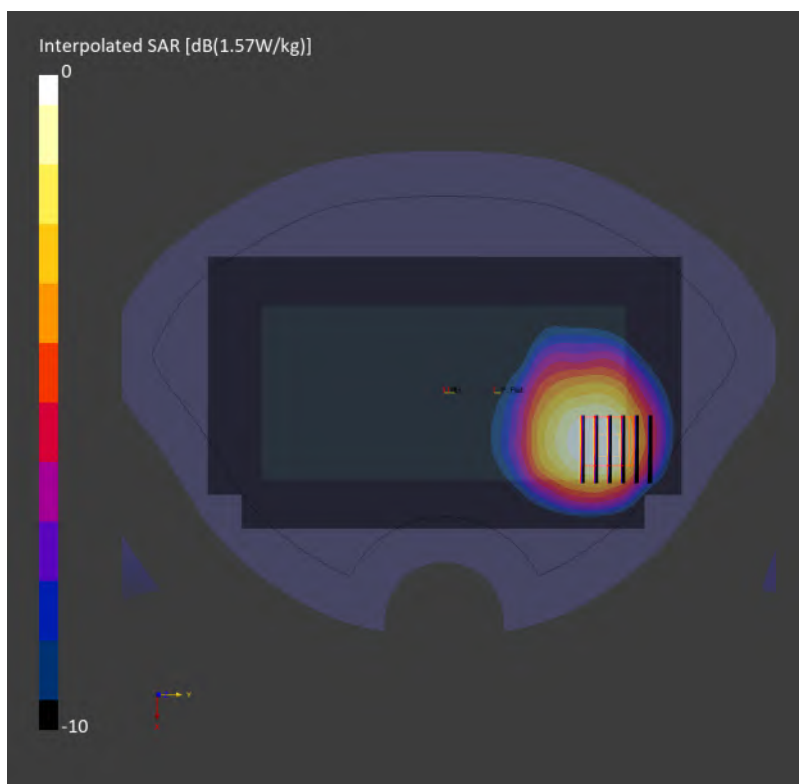

56_FR1 n25_40M_BPSK_1_1_Bottom Side_5mm_Ch376500

Communication System: NR FR1 FDD; Frequency: 1882.500 MHz

Medium: HSL_600-7200_260819 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.25, 7.12, 7.34); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000283

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.963 W/kg; SAR (10g) = 0.465 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.955 W/kg; SAR (8g) = 0.505 W/kg; SAR (10g) = 0.461 W/kg

Smallest distance from peaks to all points 3 dB below = 7.0 mm

Ratio of SAR at M2 to SAR at M1 = 82.3 %

TSL Correction: Positive only

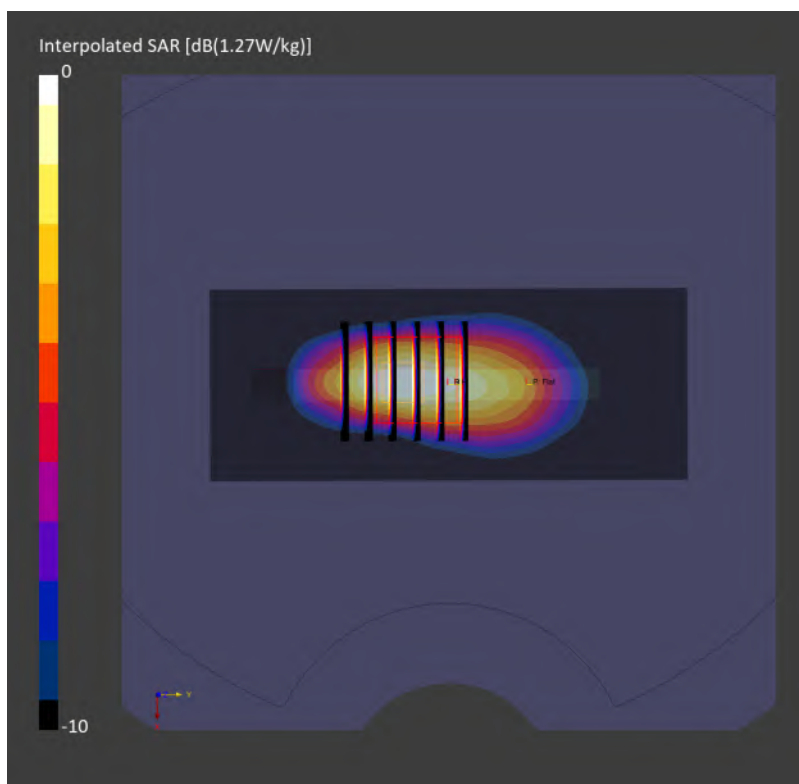

57_FR1 n26_HPUE_20M_BPSK_1_1_Back_5mm_Ch166300

Communication System: NR FR1 FDD; Frequency: 831.500 MHz

Medium: HSL_600-7200_260830 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 41.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(8.84, 8.67, 8.94); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000112

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.24 W/kg; SAR (10g) = 0.826 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.05 dB

SAR (1g) = 1.11 W/kg; SAR (8g) = 0.736 W/kg; SAR (10g) = 0.686 W/kg

Smallest distance from peaks to all points 3 dB below = 12.3 mm

Ratio of SAR at M2 to SAR at M1 = 79.2 %

TSL Correction: Positive only

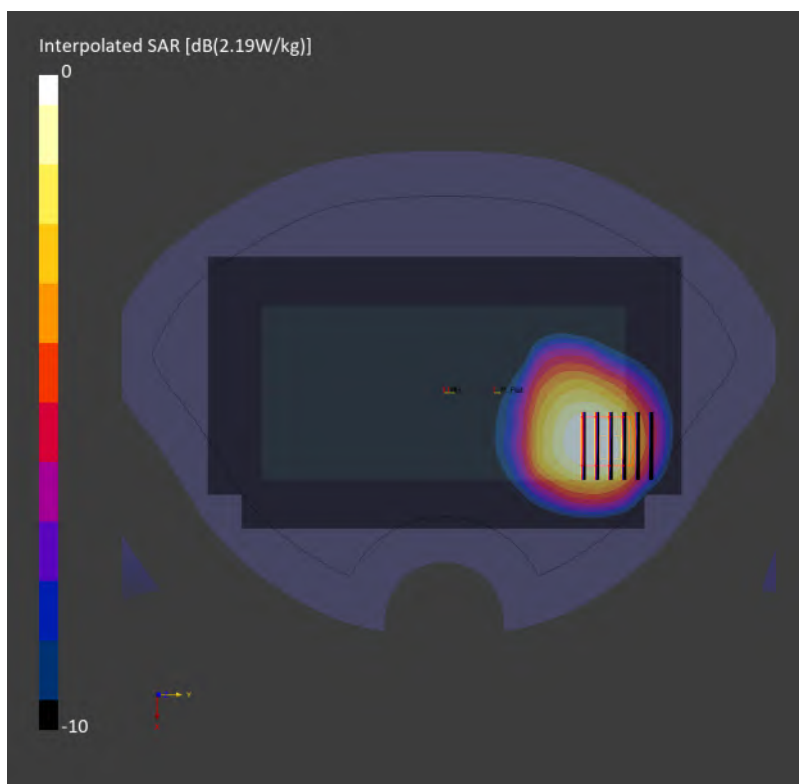

58_FR1 n66_45M_BPSK_120_60_Bottom Side_5mm_Ch349000

Communication System: NR FR1 FDD; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260819 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 41.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.44, 7.3, 7.52); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000326

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.502 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 1.03 W/kg; SAR (8g) = 0.549 W/kg; SAR (10g) = 0.503 W/kg

Smallest distance from peaks to all points 3 dB below = 7.2 mm

Ratio of SAR at M2 to SAR at M1 = 84.3 %

TSL Correction: Positive only

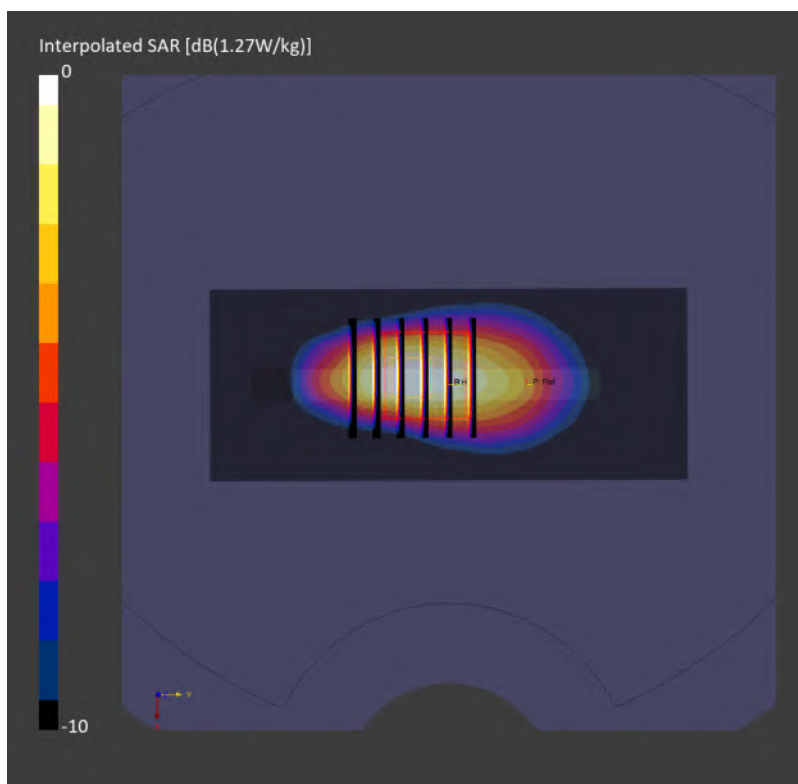

59_FR1 n70_15M_BPSK_36_22_Left Side_5mm_Ch340500

Communication System: NR FR1 FDD; Frequency: 1702.500 MHz

Medium: HSL_600-7200_260823 Medium parameters used: $f = 1702.500$ MHz; $\sigma = 1.29$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.44, 7.3, 7.52); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000071

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.760 W/kg; SAR (10g) = 0.353 W/kg;

TSL Correction: Positive only

Zoom Scan (33.0 mm x 33.0 mm x 31.2 mm): Measurement Grid: 5.5 mm x 5.5 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.786 W/kg; SAR (8g) = 0.394 W/kg; SAR (10g) = 0.356 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 83.6 %

TSL Correction: Positive only

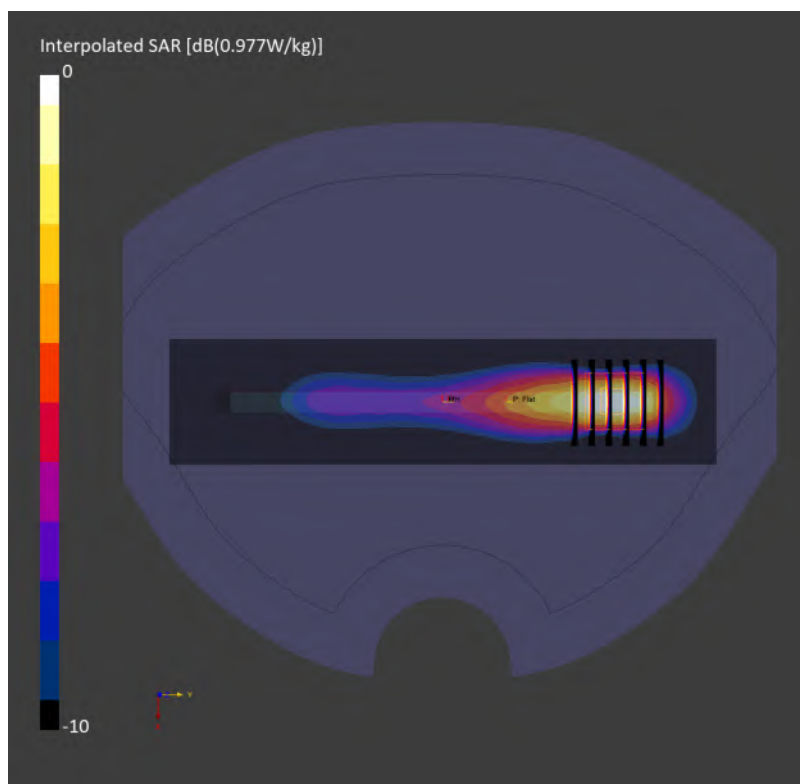

60_FR1 n71_35M_BPSK_90_45_Left Side_5mm_Ch136100

Communication System: NR FR1 FDD; Frequency: 680.500 MHz

Medium: HSL_600-7200_260817 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.872$ S/m; $\epsilon_r = 43.0$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.9, 9.61, 8.78); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000239

Area Scan (48.0 mm x 210.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 0.654 W/kg; SAR (10g) = 0.415 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.01 dB

SAR (1g) = 0.661 W/kg; SAR (8g) = 0.424 W/kg; SAR (10g) = 0.399 W/kg

Smallest distance from peaks to all points 3 dB below = 11.4 mm

Ratio of SAR at M2 to SAR at M1 = 82.2 %

TSL Correction: Positive only

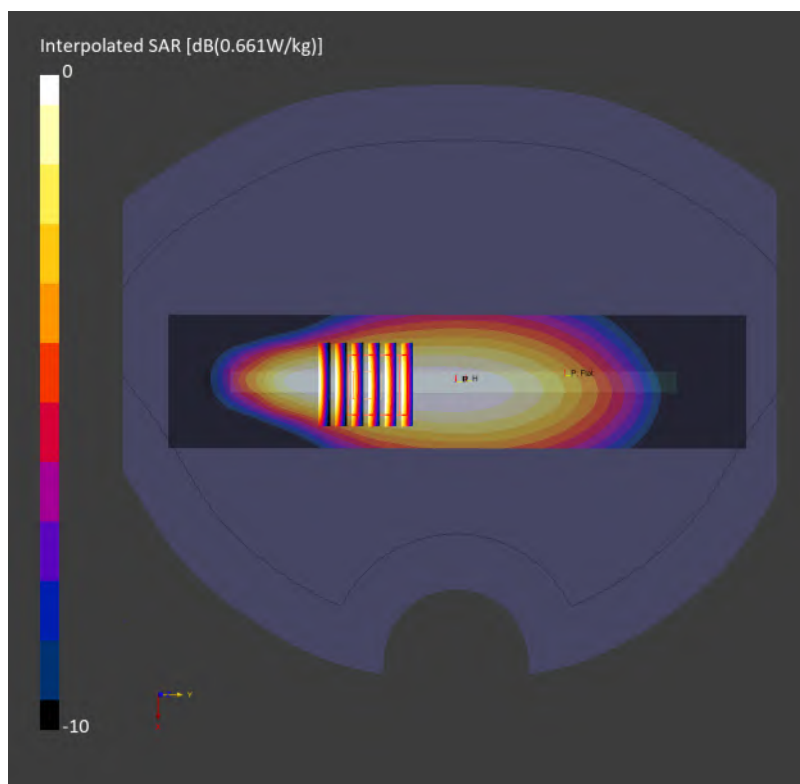

61_FR1 n41_100M_BPSK_135_69_Bottom Side_5mm_Ch518598

Communication System: NR FR1 TDD; Frequency: 2592.990 MHz

Medium: HSL_600-7200_260820 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.93$ S/m; $\epsilon_r = 39.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.66, 6.54, 6.74); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 TDD, 1003251

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 1.00 W/kg; SAR (10g) = 0.404 W/kg;

TSL Correction: Positive only

Zoom Scan (36.8 mm x 36.8 mm x 31.2 mm): Measurement Grid: 4.6 mm x 4.6 mm x 1.5 mm


Power Drift = 0.14 dB

SAR (1g) = 0.981 W/kg; SAR (8g) = 0.452 W/kg; SAR (10g) = 0.404 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 79.1 %

TSL Correction: Positive only

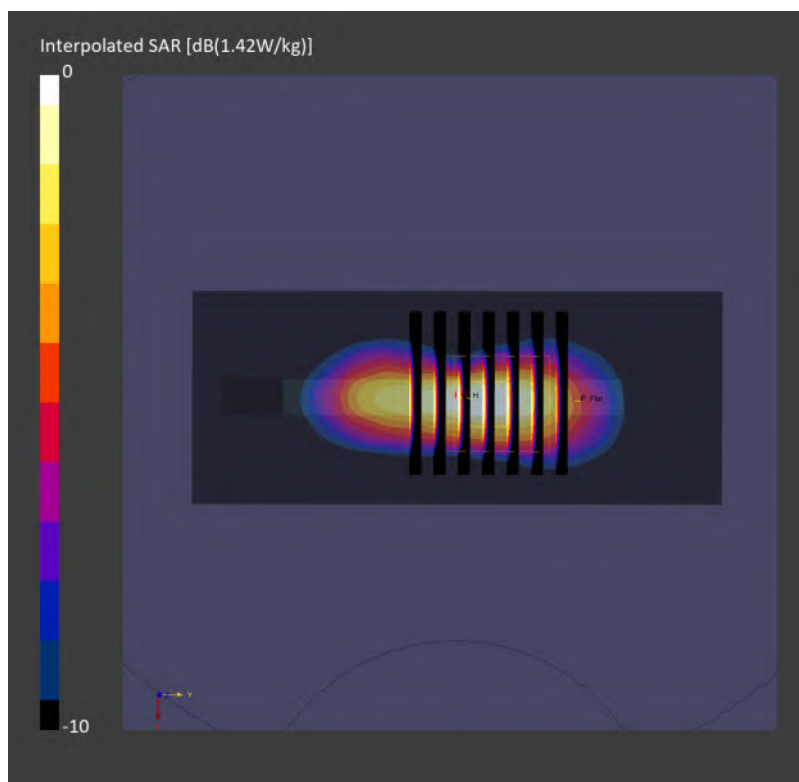

62_FR1 n48_40M_BPSK_50_28_Back_5mm_Ch641666

Communication System: NR FR1 TDD; Frequency: 3624.990 MHz

Medium: HSL_600-7200_260826 Medium parameters used: $f = 3624.990$ MHz; $\sigma = 2.85$ S/m; $\epsilon_r = 37.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.88, 6.35, 5.8); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 TDD, 1002255

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.741 W/kg; SAR (10g) = 0.285 W/kg;

TSL Correction: Positive only

Zoom Scan (31.5 mm x 31.5 mm x 29.1 mm): Measurement Grid: 4.5 mm x 4.5 mm x 1.4 mm


Power Drift = 0.15 dB

SAR (1g) = 0.798 W/kg; SAR (8g) = 0.342 W/kg; SAR (10g) = 0.304 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 75.5 %

TSL Correction: Positive only

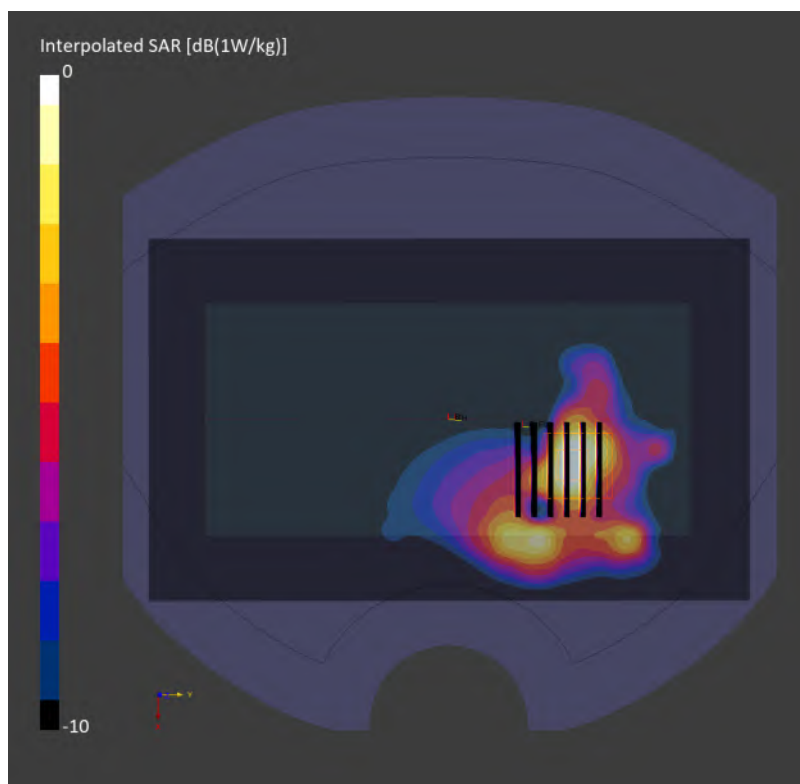

63_FR1 n77_100M_BPSK_1_1_Right Side_5mm_Ch655668

Communication System: NR FR1 TDD; Frequency: 3835.020 MHz

Medium: HSL_600-7200_260821 Medium parameters used: $f = 3835.020$ MHz; $\sigma = 3.07$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.79, 6.25, 5.71); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 TDD, 1003247

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 0.841 W/kg; SAR (10g) = 0.284 W/kg;

TSL Correction: Positive only

Zoom Scan (34.2 mm x 34.2 mm x 33.4 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm


Power Drift = -0.01 dB

SAR (1g) = 0.964 W/kg; SAR (8g) = 0.335 W/kg; SAR (10g) = 0.292 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 72.1 %

TSL Correction: Positive only

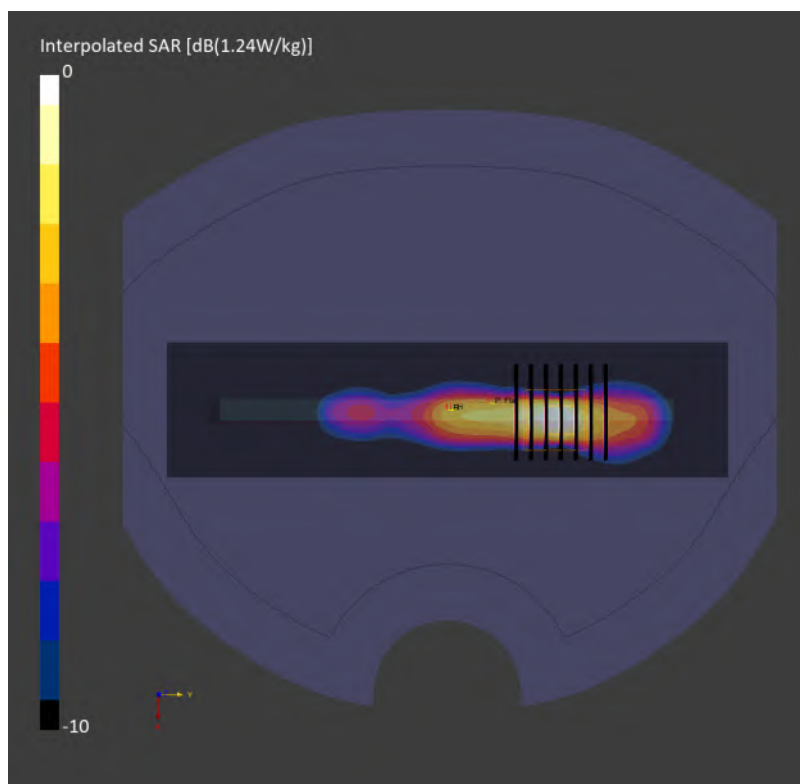

64_WLAN2.4GHz_802.11b 1Mbps_Back_5mm_Ch1

Communication System: WiFi (802.11b); Frequency: 2412.000 MHz

Medium: HSL_600-7200_260829 Medium parameters used: $f = 2412.000$ MHz; $\sigma = 1.80$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.56, 7.09, 6.47); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11b), 10315

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.707 W/kg; SAR (10g) = 0.364 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.14 dB

SAR (1g) = 0.737 W/kg; SAR (8g) = 0.398 W/kg; SAR (10g) = 0.362 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.5 %

TSL Correction: Positive only

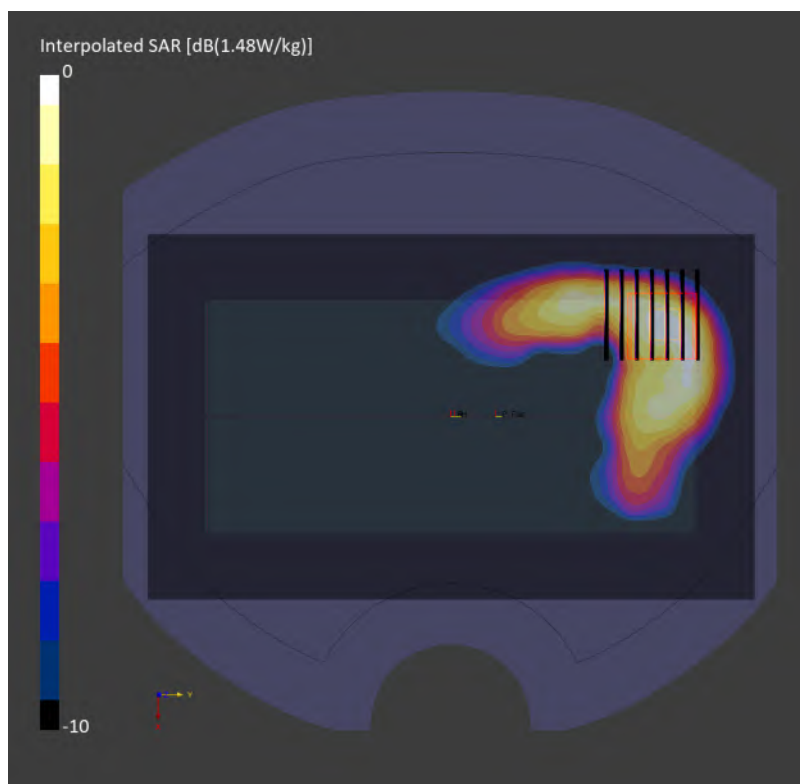

65_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch42

Communication System: WiFi (802.11ac); Frequency: 5210.000 MHz

Medium: HSL_600-7200_260825 Medium parameters used: $f = 5210.000$ MHz; $\sigma = 4.55$ S/m; $\epsilon_r = 34.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.03, 5.43, 4.96); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11ac), 10544

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.559 W/kg; SAR (10g) = 0.197 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.06 dB

SAR (1g) = 0.559 W/kg; SAR (8g) = 0.216 W/kg; SAR (10g) = 0.190 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 65.3 %

TSL Correction: Positive only

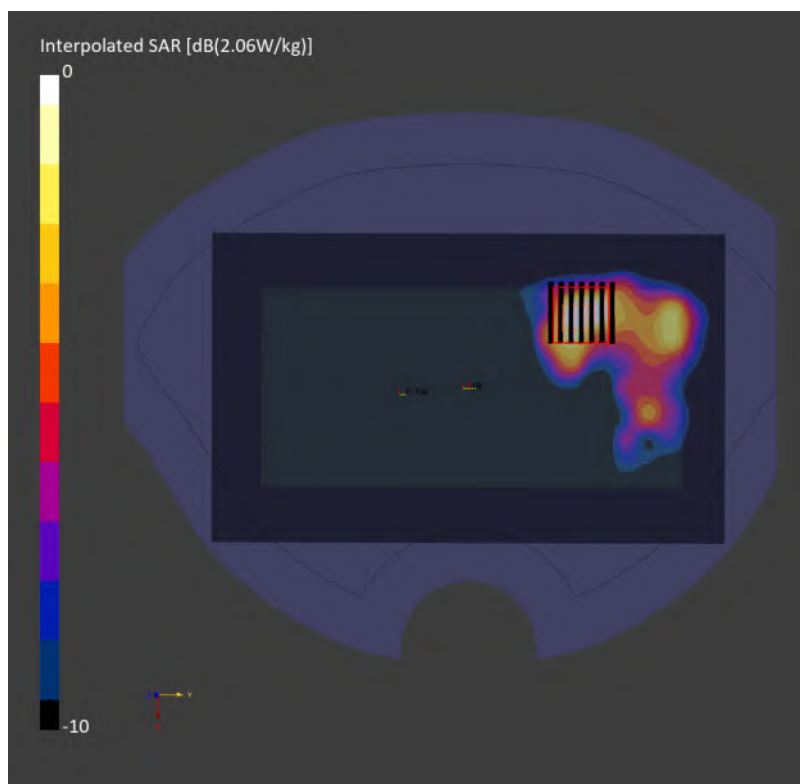

66_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch155

Communication System: WiFi (802.11ac); Frequency: 5775.000 MHz

Medium: HSL_600-7200_260825 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.19$ S/m; $\epsilon_r = 33.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(4.54, 4.9, 4.48); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11ac), 10544

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.631 W/kg; SAR (10g) = 0.250 W/kg;

TSL Correction: Positive only

Zoom Scan (25.2 mm x 25.2 mm x 25.0 mm): Measurement Grid: 2.8 mm x 2.8 mm x 1.2 mm


Power Drift = 0.10 dB

SAR (1g) = 0.918 W/kg; SAR (8g) = 0.297 W/kg; SAR (10g) = 0.258 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 61.1 %

TSL Correction: Positive only

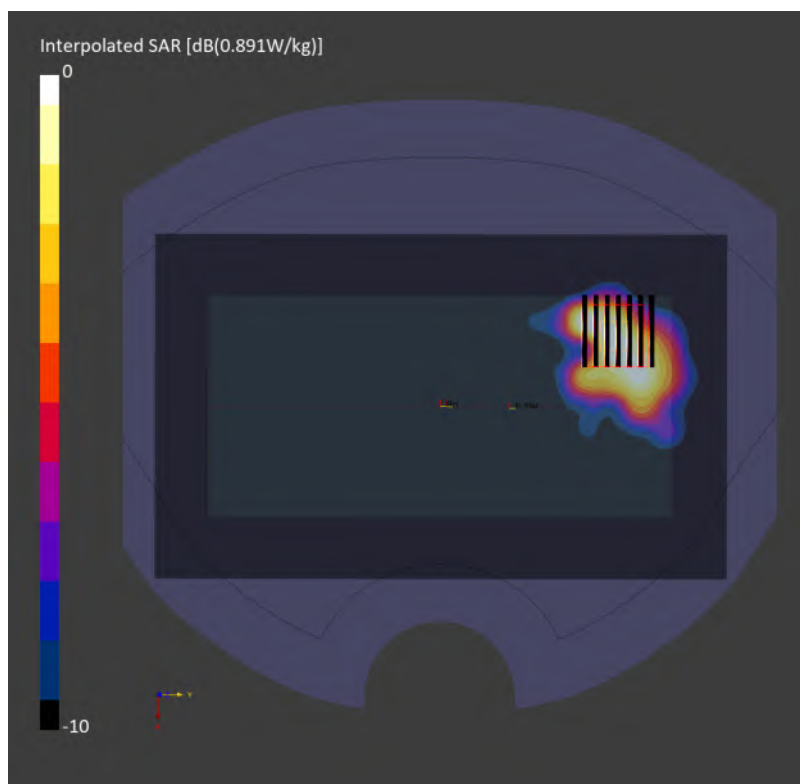

67_Bluetooth_1Mbps_Back_5mm_Ch39;push ant3

Communication System: Bluetooth; Frequency: 2441.000 MHz

Medium: HSL_600-7200_260907 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 40.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.79, 6.67, 6.87); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: Bluetooth, 10035

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.392 W/kg; SAR (10g) = 0.192 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.395 W/kg; SAR (8g) = 0.212 W/kg; SAR (10g) = 0.195 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 79.1 %

TSL Correction: Positive only

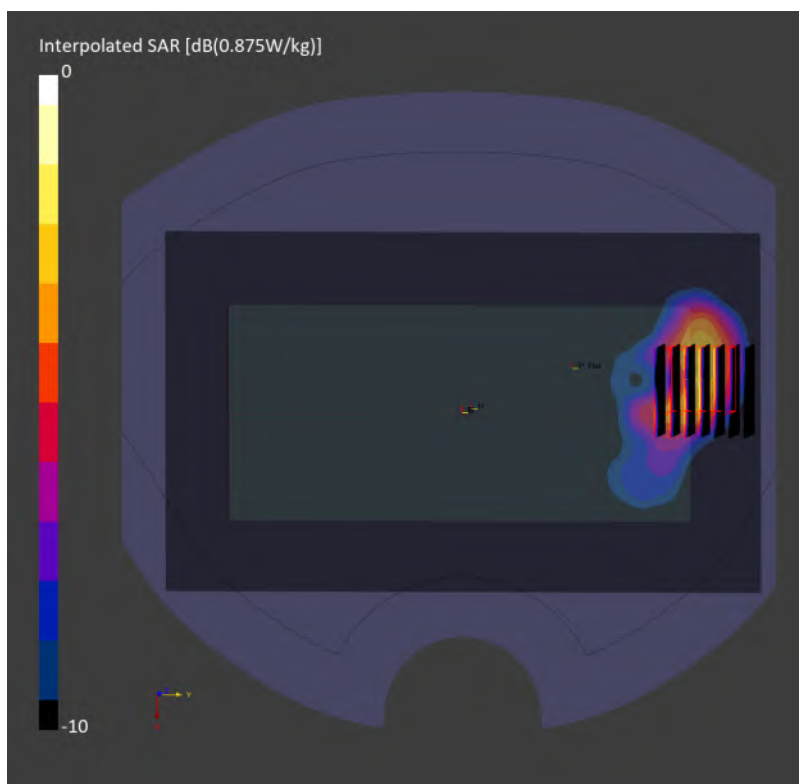

68_UWB_802.15.4ab_Back_5mm_Ch49

Communication System: Custom; Frequency: 5848.750 MHz

Medium: HSL_600-7200_260902 Medium parameters used: $f = 5848.750$ MHz; $\sigma = 5.17$ S/m; $\epsilon_r = 33.6$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(4.54, 4.9, 4.48); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: Custom, 2

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.360 W/kg; SAR (10g) = 0.142 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.01 dB

SAR (1g) = 0.532 W/kg; SAR (8g) = 0.168 W/kg; SAR (10g) = 0.146 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 57.7 %

TSL Correction: Positive only

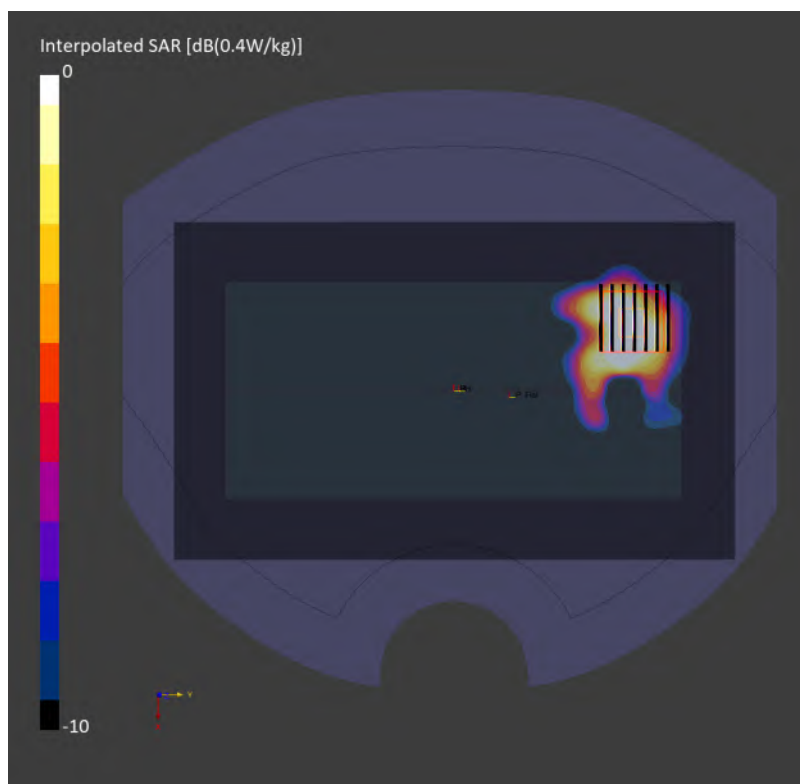

69_GSM850_GPRS 4 Tx slots_Back_5mm_Ch251

Communication System: GSM; Frequency: 848.800 MHz

Medium: HSL_600-7200_260830 Medium parameters used: $f = 848.800$ MHz; $\sigma = 0.920$ S/m; $\epsilon_r = 41.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(8.84, 8.67, 8.94); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: GSM, 10028

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.18 W/kg; SAR (10g) = 0.721 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.11 dB

SAR (1g) = 0.984 W/kg; SAR (8g) = 0.583 W/kg; SAR (10g) = 0.543 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 81.7 %

TSL Correction: Positive only

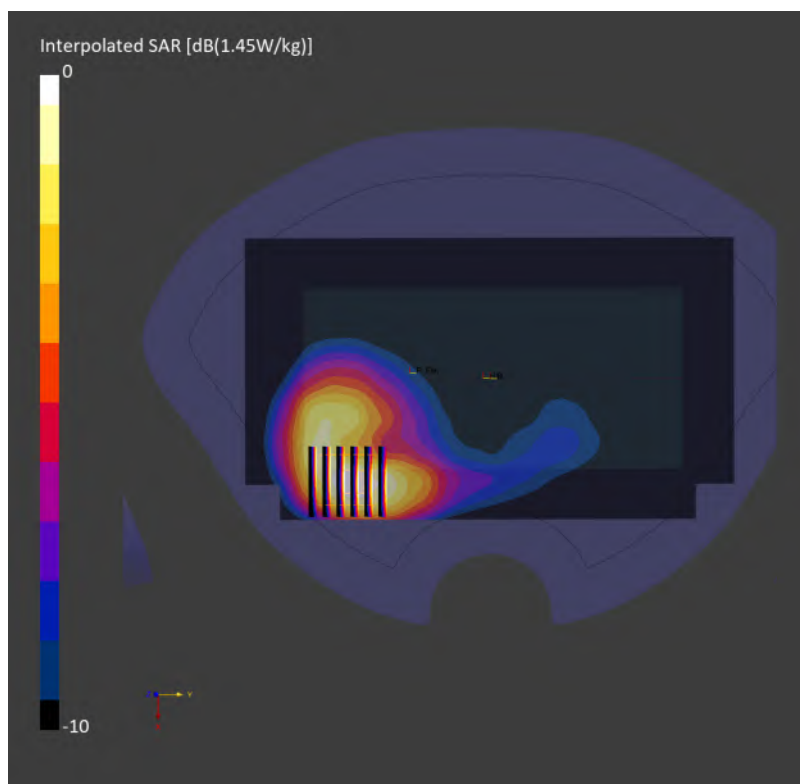

70_GSM1900_GPRS 4 Tx slots_Back_5mm_Ch512

Communication System: GSM; Frequency: 1850.200 MHz

Medium: HSL_600-7200_260822 Medium parameters used: $f = 1850.200$ MHz; $\sigma = 1.37$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.25, 7.12, 7.34); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: GSM, 10028

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.598 W/kg; SAR (10g) = 0.328 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.05 dB

SAR (1g) = 0.619 W/kg; SAR (8g) = 0.349 W/kg; SAR (10g) = 0.323 W/kg

Smallest distance from peaks to all points 3 dB below = 9.6 mm

Ratio of SAR at M2 to SAR at M1 = 83.7 %

TSL Correction: Positive only

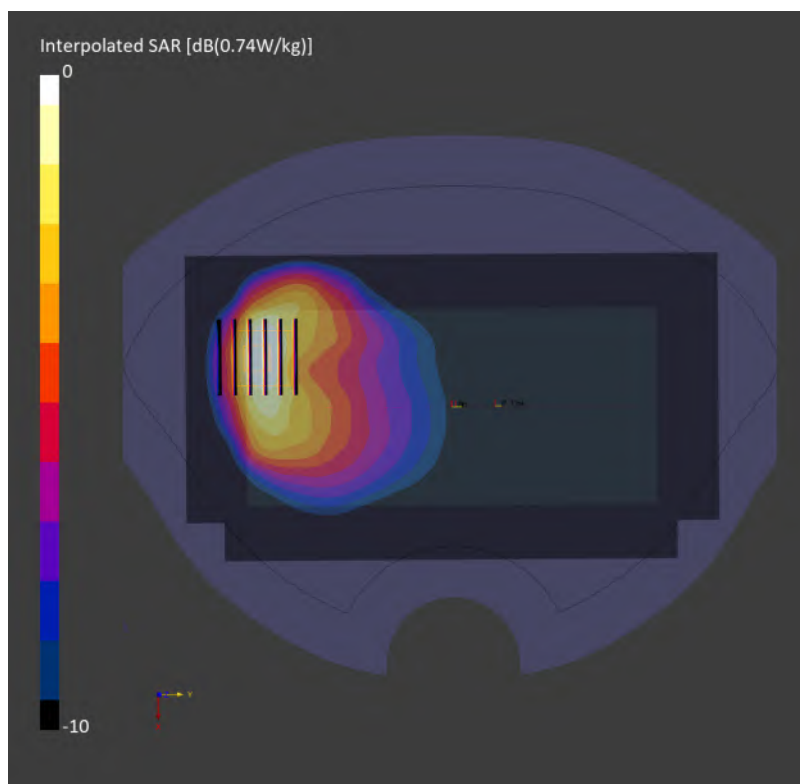

71_WCDMA II_RMC 12.2Kbps_Front_5mm_Ch9400

Communication System: UMTS-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260822 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.25, 7.12, 7.34); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: UMTS-FDD, 10011

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.714 W/kg; SAR (10g) = 0.405 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.17 dB

SAR (1g) = 0.932 W/kg; SAR (8g) = 0.499 W/kg; SAR (10g) = 0.458 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 80.0 %

TSL Correction: Positive only

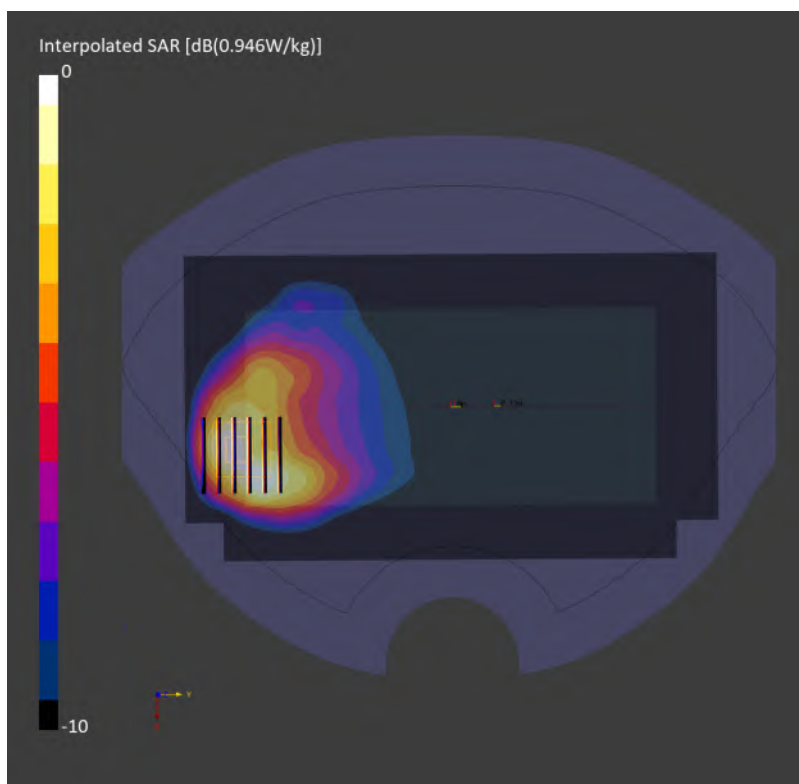

72_WCDMA IV_RMC 12.2Kbps_Back_5mm_Ch1413

Communication System: UMTS-FDD; Frequency: 1732.600 MHz

Medium: HSL_600-7200_260822 Medium parameters used: $f = 1732.600$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.44, 7.3, 7.52); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: UMTS-FDD, 10011

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.873 W/kg; SAR (10g) = 0.477 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.06 dB

SAR (1g) = 0.903 W/kg; SAR (8g) = 0.510 W/kg; SAR (10g) = 0.471 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 83.5 %

TSL Correction: Positive only

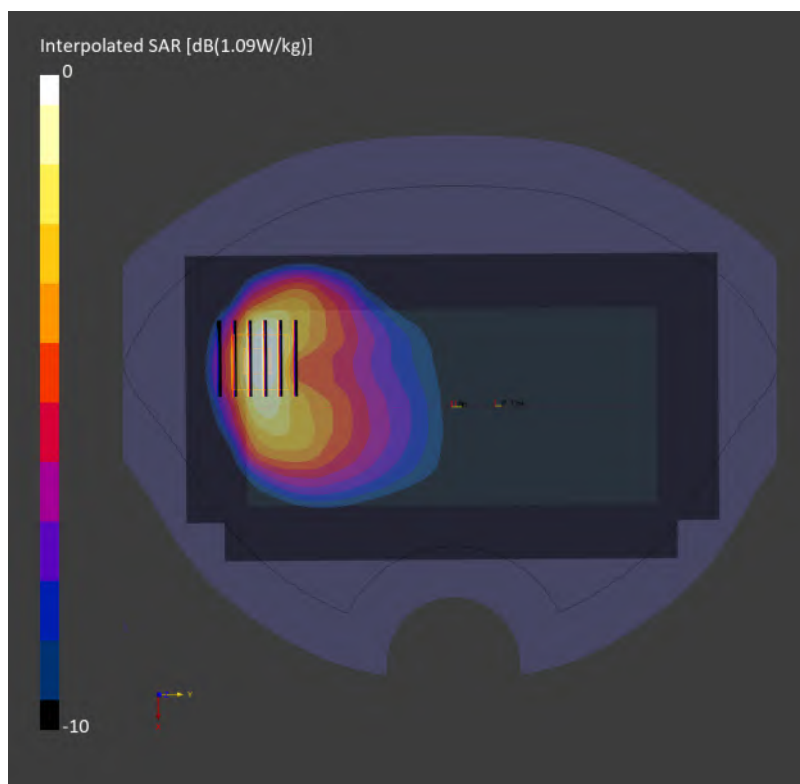

73_WCDMA V_RMC 12.2Kbps_Back_5mm_Ch4132

Communication System: UMTS-FDD; Frequency: 826.400 MHz

Medium: HSL_600-7200_260817 Medium parameters used: $f = 826.400$ MHz; $\sigma = 0.931$ S/m; $\epsilon_r = 42.6$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(8.84, 8.67, 8.94); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: UMTS-FDD, 10011

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.01 W/kg; SAR (10g) = 0.619 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.03 dB

SAR (1g) = 1.09 W/kg; SAR (8g) = 0.648 W/kg; SAR (10g) = 0.603 W/kg

Smallest distance from peaks to all points 3 dB below = 8.5 mm

Ratio of SAR at M2 to SAR at M1 = 84.0 %

TSL Correction: Positive only

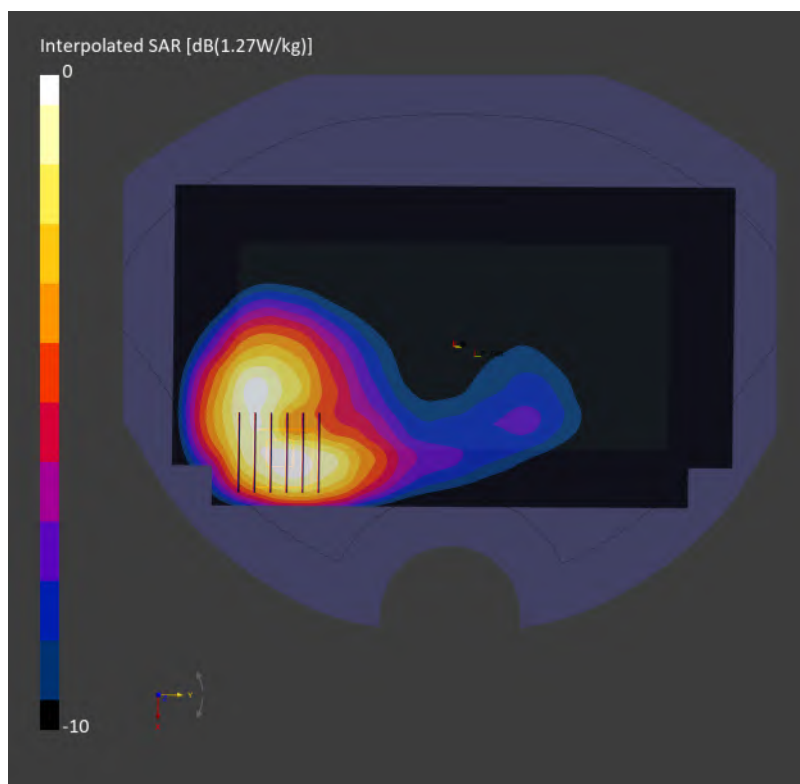

74_LTE Band 7_20M_QPSK_1_0_Back_5mm_Ch20850

Communication System: LTE-FDD; Frequency: 2510.000 MHz

Medium: HSL_600-7200_260901 Medium parameters used: $f = 2510.000$ MHz; $\sigma = 1.88$ S/m; $\epsilon_r = 39.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.66, 6.54, 6.74); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.881 W/kg; SAR (10g) = 0.393 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.05 dB

SAR (1g) = 0.898 W/kg; SAR (8g) = 0.432 W/kg; SAR (10g) = 0.388 W/kg

Smallest distance from peaks to all points 3 dB below = 7.1 mm

Ratio of SAR at M2 to SAR at M1 = 80.0 %

TSL Correction: Positive only

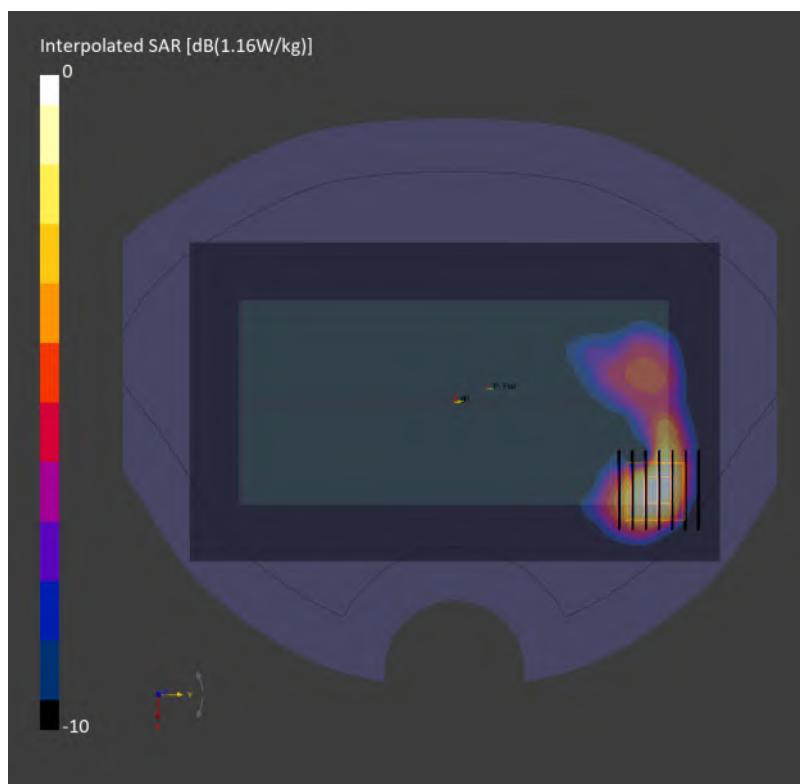

75_LTE Band 12_10M_QPSK_1_0_Back_5mm_Ch23095

Communication System: LTE-FDD; Frequency: 707.500 MHz

Medium: HSL_600-7200_260817 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.889$ S/m; $\epsilon_r = 43.0$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(9.08, 8.91, 9.18); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10175

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.869 W/kg; SAR (10g) = 0.553 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.952 W/kg; SAR (8g) = 0.561 W/kg; SAR (10g) = 0.522 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 82.2 %

TSL Correction: Positive only

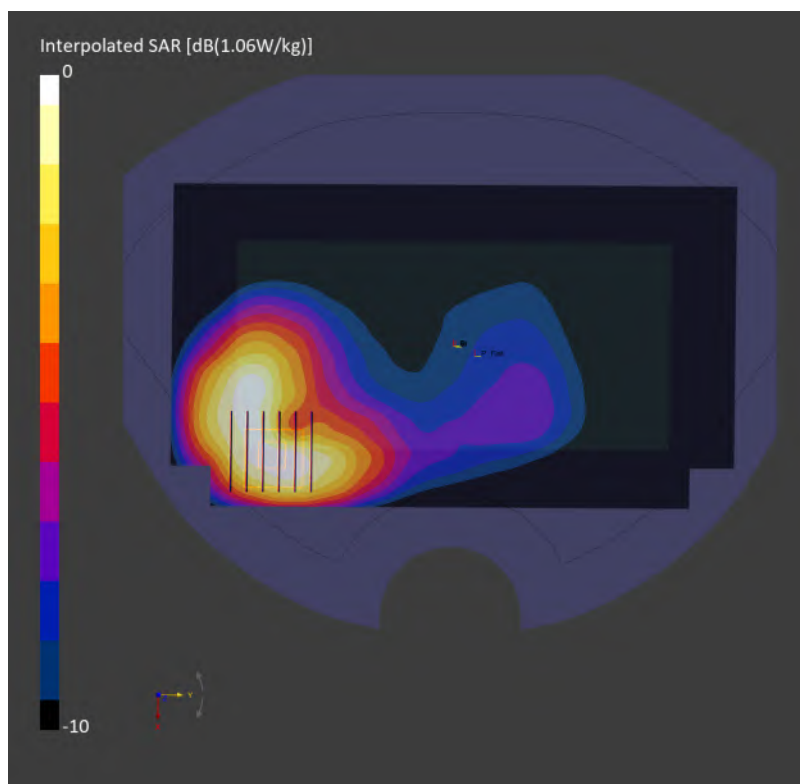

76_LTE Band 13_10M_QPSK_25_0_Back_5mm_Ch23230

Communication System: LTE-FDD; Frequency: 782.000 MHz

Medium: HSL_600-7200_260828 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.892$ S/m; $\epsilon_r = 42.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(9.08, 8.91, 9.18); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10154

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.14 W/kg; SAR (10g) = 0.749 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 1.07 W/kg; SAR (8g) = 0.702 W/kg; SAR (10g) = 0.657 W/kg

Smallest distance from peaks to all points 3 dB below = 12.3 mm

Ratio of SAR at M2 to SAR at M1 = 79.1 %

TSL Correction: Positive only

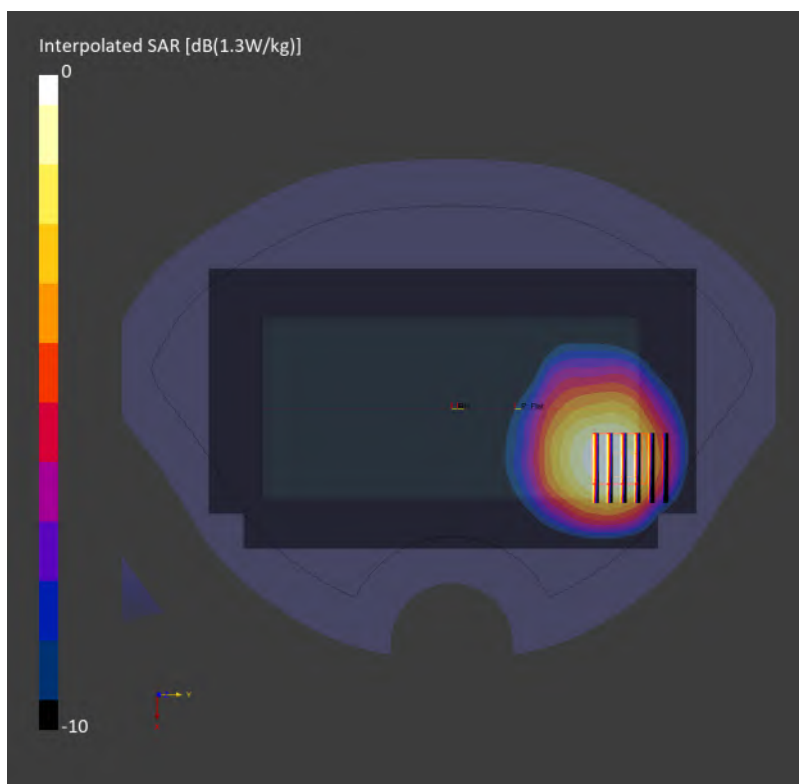

77_LTE Band 14_10M_QPSK_1_0_Back_5mm_Ch23330

Communication System: LTE-FDD; Frequency: 793.000 MHz

Medium: HSL_600-7200_260817 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.917$ S/m; $\epsilon_r = 42.7$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(9.08, 8.91, 9.18); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10175

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.831 W/kg; SAR (10g) = 0.530 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.905 W/kg; SAR (8g) = 0.540 W/kg; SAR (10g) = 0.503 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 83.6 %

TSL Correction: Positive only

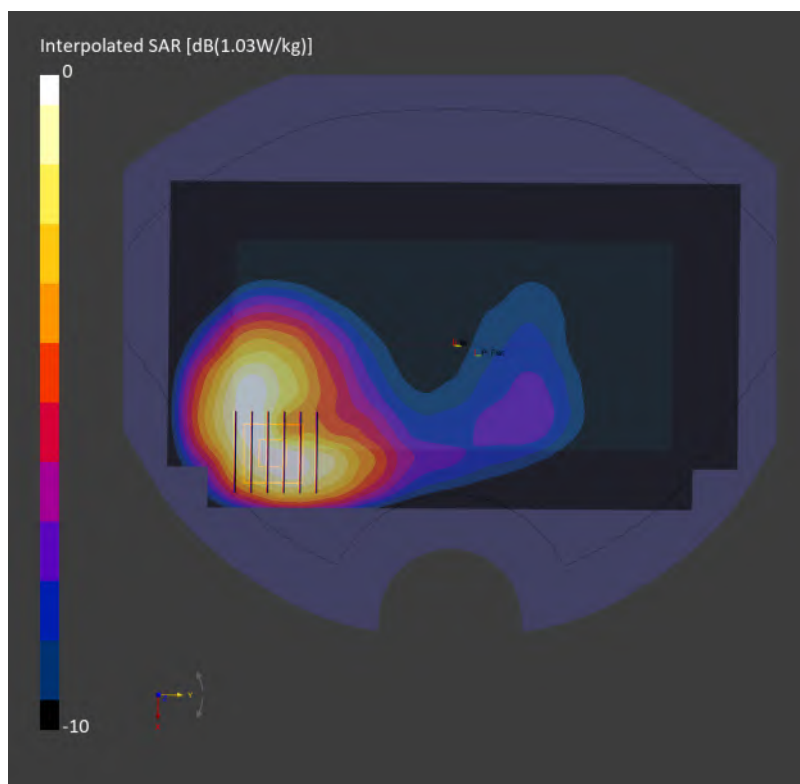

78_LTE Band 25_20M_QPSK_1_0_Back_5mm_Ch26140

Communication System: LTE-FDD; Frequency: 1860.000 MHz

Medium: HSL_600-7200_260901 Medium parameters used: $f = 1860.000$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 40.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.25, 7.12, 7.34); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.937 W/kg; SAR (10g) = 0.455 W/kg;

TSL Correction: Positive only

Zoom Scan (34.4 mm x 34.4 mm x 33.4 mm): Measurement Grid: 4.3 mm x 4.3 mm x 1.4 mm


Power Drift = -0.12 dB

SAR (1g) = 1.18 W/kg; SAR (8g) = 0.560 W/kg; SAR (10g) = 0.505 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 83.4 %

TSL Correction: Positive only

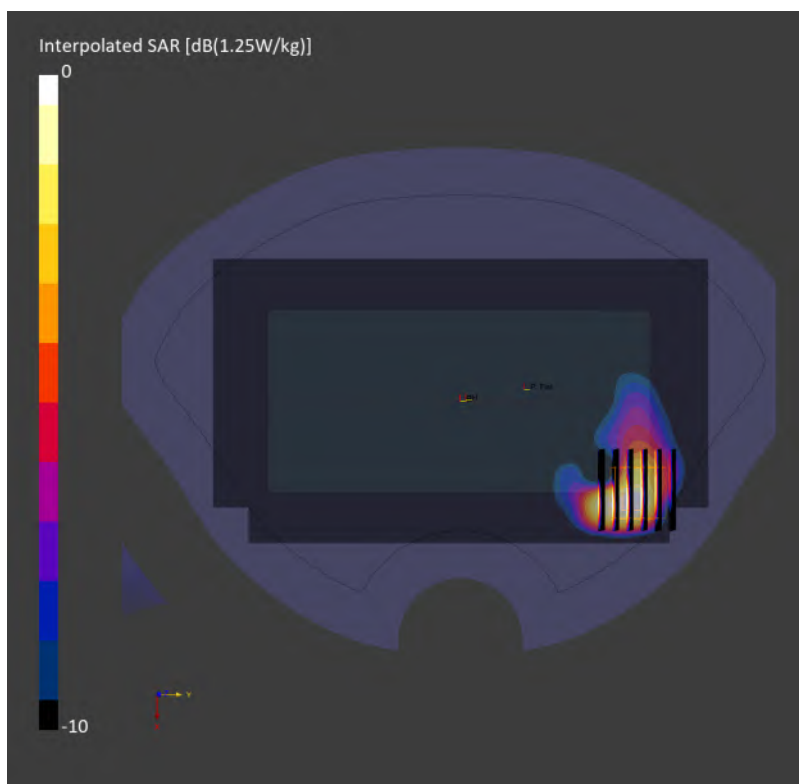

79_LTE Band 26_15M_QPSK_1_0_Back_5mm_Ch26865

Communication System: LTE-FDD; Frequency: 831.500 MHz

Medium: HSL_600-7200_260828 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.911$ S/m; $\epsilon_r = 41.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(8.84, 8.67, 8.94); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10181

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.852 W/kg; SAR (10g) = 0.569 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.776 W/kg; SAR (8g) = 0.516 W/kg; SAR (10g) = 0.480 W/kg

Smallest distance from peaks to all points 3 dB below = 13.5 mm

Ratio of SAR at M2 to SAR at M1 = 78.6 %

TSL Correction: Positive only

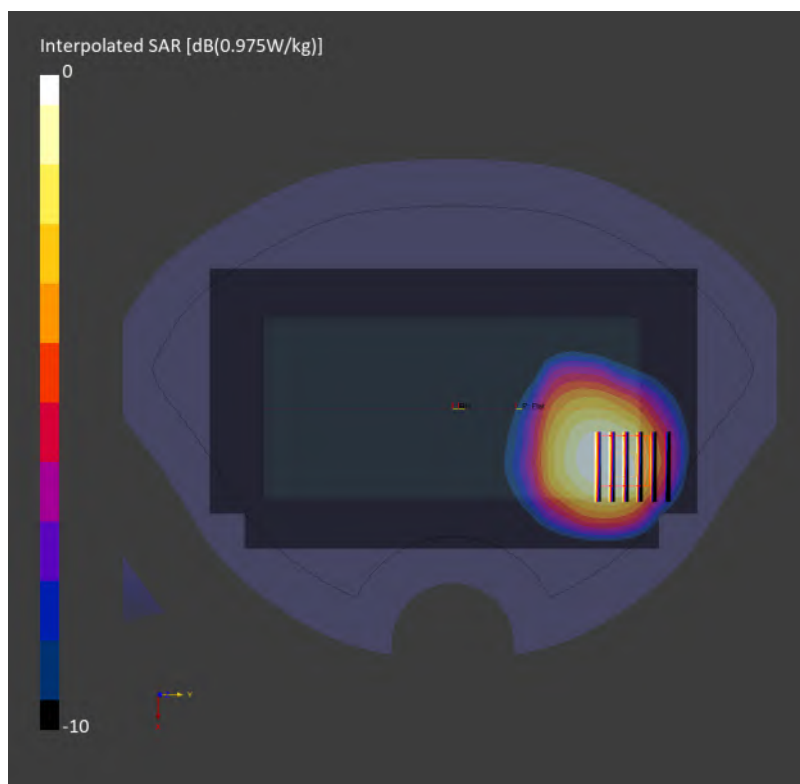

80_LTE Band 66_20M_QPSK_1_0_Back_5mm_Ch132072

Communication System: LTE-FDD; Frequency: 1720.000 MHz

Medium: HSL_600-7200_260822 Medium parameters used: $f = 1720.000$ MHz; $\sigma = 1.30$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.44, 7.3, 7.52); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.897 W/kg; SAR (10g) = 0.488 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.00 dB

SAR (1g) = 0.982 W/kg; SAR (8g) = 0.549 W/kg; SAR (10g) = 0.507 W/kg

Smallest distance from peaks to all points 3 dB below = 8.4 mm

Ratio of SAR at M2 to SAR at M1 = 83.5 %

TSL Correction: Positive only

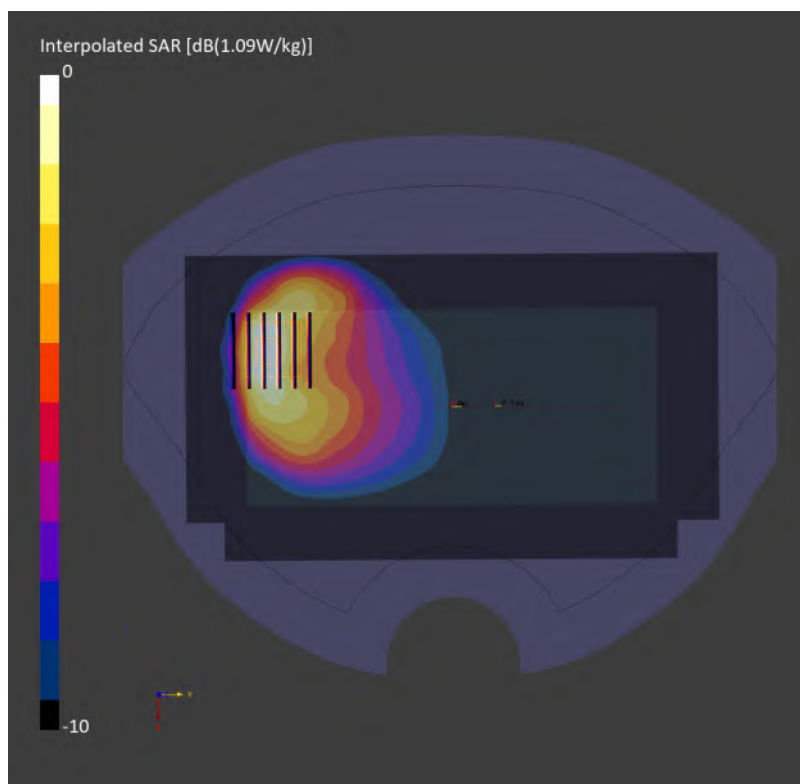

81_LTE Band 71_20M_QPSK_1_0_Back_5mm_Ch133297

Communication System: LTE-FDD; Frequency: 680.500 MHz

Medium: HSL_600-7200_260817 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 43.0$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(9.08, 8.91, 9.18); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.650 W/kg; SAR (10g) = 0.414 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 33.4 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.4 mm


Power Drift = 0.19 dB

SAR (1g) = 0.675 W/kg; SAR (8g) = 0.386 W/kg; SAR (10g) = 0.358 W/kg

Smallest distance from peaks to all points 3 dB below = 7.3 mm

Ratio of SAR at M2 to SAR at M1 = 80.3 %

TSL Correction: Positive only

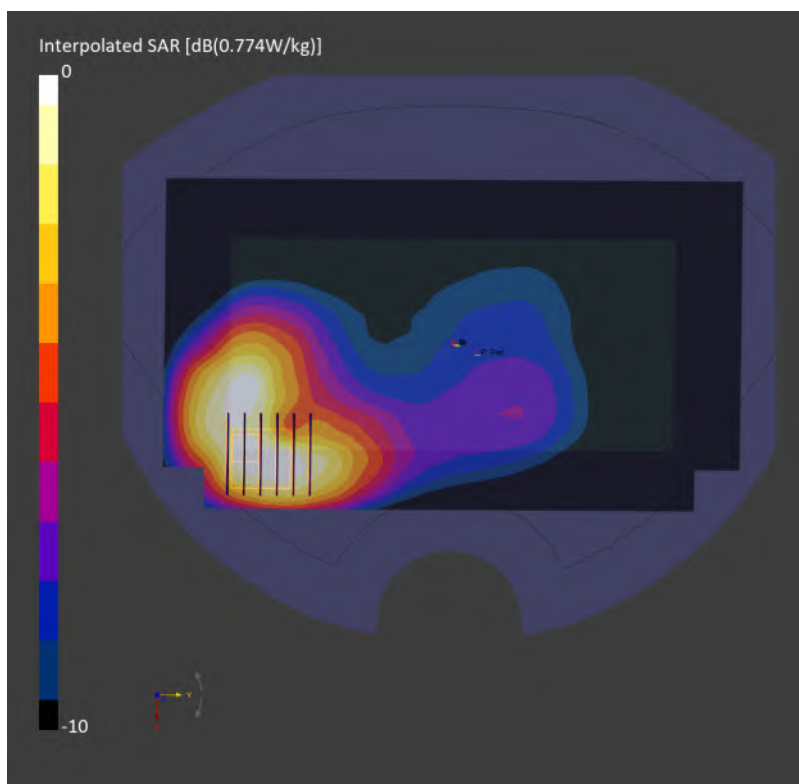

82_LTE Band 41_HPUE_20M_QPSK_1_0_Back_5mm_Ch41490

Communication System: LTE-TDD; Frequency: 2680.000 MHz

Medium: HSL_600-7200_260829 Medium parameters used: $f = 2680.000$ MHz; $\sigma = 2.03$ S/m; $\epsilon_r = 39.3$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.73, 7.27, 6.64); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-TDD, 10172

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.889 W/kg; SAR (10g) = 0.377 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.08 dB

SAR (1g) = 0.944 W/kg; SAR (8g) = 0.438 W/kg; SAR (10g) = 0.394 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 79.6 %

TSL Correction: Positive only

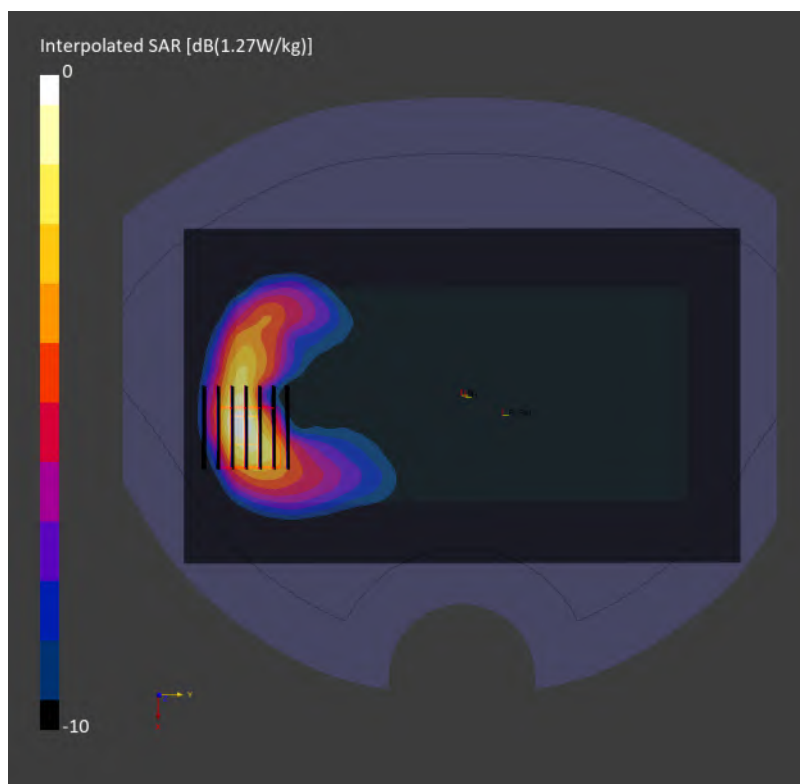

83_LTE Band 42_20M_QPSK_1_0_Back_5mm_Ch42190

Communication System: LTE-TDD; Frequency: 3460.000 MHz

Medium: HSL_600-7200_260830 Medium parameters used: $f = 3460.000$ MHz; $\sigma = 2.68$ S/m; $\epsilon_r = 38.0$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.96, 6.44, 5.88); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-TDD, 10435

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.830 W/kg; SAR (10g) = 0.327 W/kg;

TSL Correction: Positive only

Zoom Scan (31.5 mm x 31.5 mm x 29.1 mm): Measurement Grid: 4.5 mm x 4.5 mm x 1.4 mm


Power Drift = 0.01 dB

SAR (1g) = 0.911 W/kg; SAR (8g) = 0.389 W/kg; SAR (10g) = 0.346 W/kg

Smallest distance from peaks to all points 3 dB below = 6.1 mm

Ratio of SAR at M2 to SAR at M1 = 75.2 %

TSL Correction: Positive only

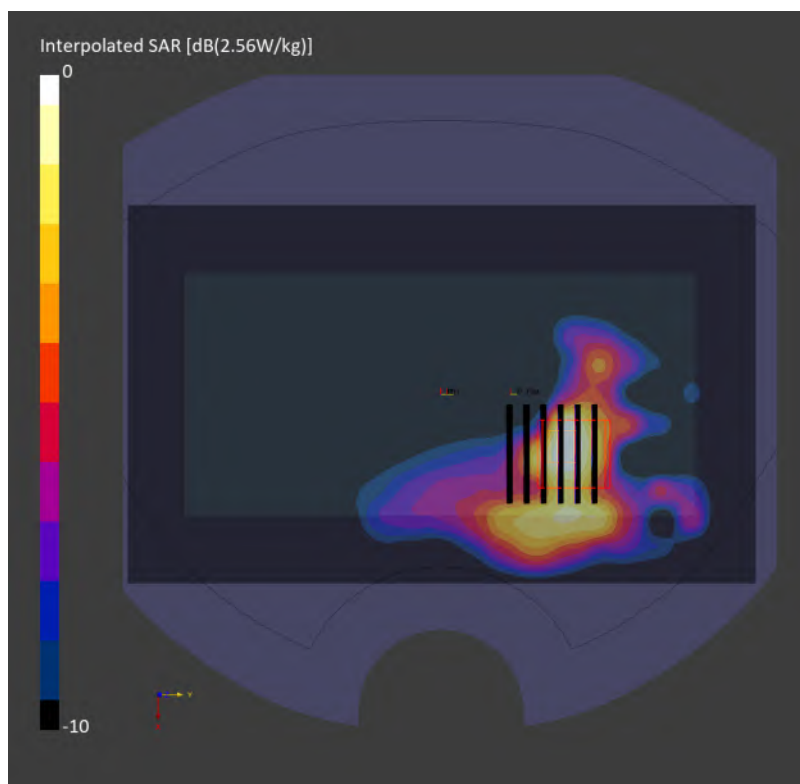

84_LTE Band 48_20M_QPSK_1_0_Back_5mm_Ch55340

Communication System: LTE-TDD; Frequency: 3560.000 MHz

Medium: HSL_600-7200_260826 Medium parameters used: $f = 3560.000$ MHz; $\sigma = 2.79$ S/m; $\epsilon_r = 37.9$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.96, 6.44, 5.88); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-TDD, 10435

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.695 W/kg; SAR (10g) = 0.276 W/kg;

TSL Correction: Positive only

Zoom Scan (28.8 mm x 28.8 mm x 29.1 mm): Measurement Grid: 4.8 mm x 4.8 mm x 1.4 mm


Power Drift = -0.05 dB

SAR (1g) = 0.764 W/kg; SAR (8g) = 0.323 W/kg; SAR (10g) = 0.287 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 72.3 %

TSL Correction: Positive only

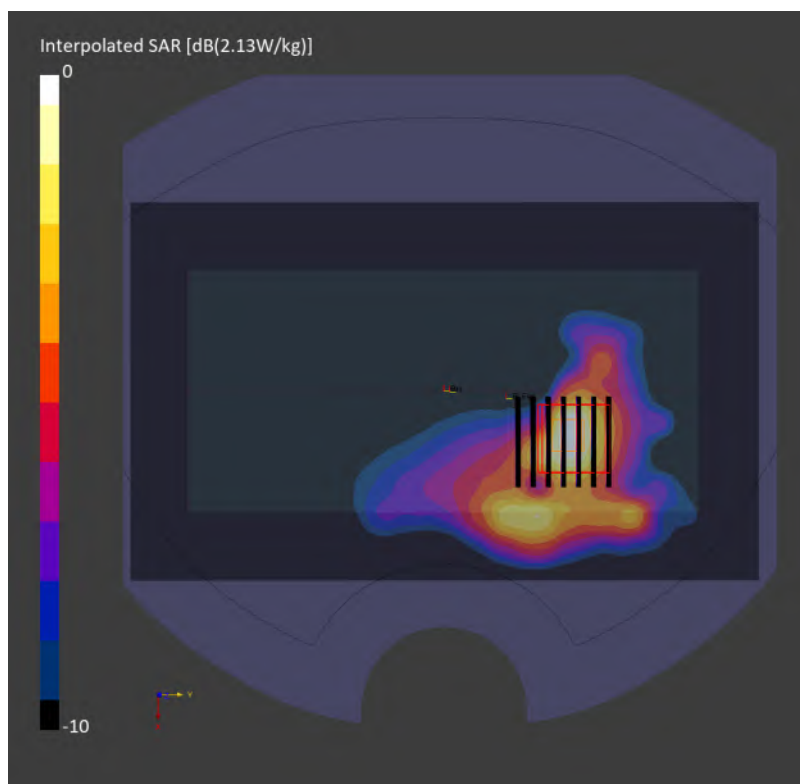

85_FR1 n7_50M_BPSK_1_1_Back_5mm_Ch507000

Communication System: NR FR1 FDD; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260825 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 39.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.66, 6.54, 6.74); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000370

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.07 W/kg; SAR (10g) = 0.463 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.04 dB

SAR (1g) = 1.08 W/kg; SAR (8g) = 0.518 W/kg; SAR (10g) = 0.466 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 80.7 %

TSL Correction: Positive only

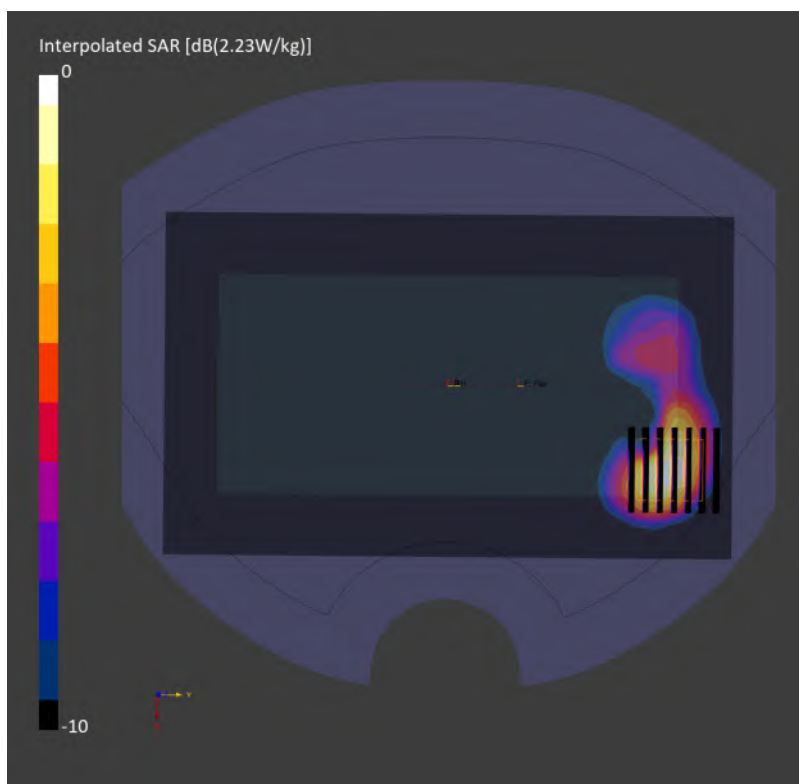

86_FR1 n12_15M_BPSK_1_1_Back_5mm_Ch141500

Communication System: NR FR1 FDD; Frequency: 707.500 MHz

Medium: HSL_600-7200_260817 Medium parameters used: $f = 707.500$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 42.7$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.9, 9.61, 8.78); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000070

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.498 W/kg; SAR (10g) = 0.322 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.00 dB

SAR (1g) = 0.551 W/kg; SAR (8g) = 0.324 W/kg; SAR (10g) = 0.301 W/kg

Smallest distance from peaks to all points 3 dB below = 8.8 mm

Ratio of SAR at M2 to SAR at M1 = 81.6 %

TSL Correction: Positive only

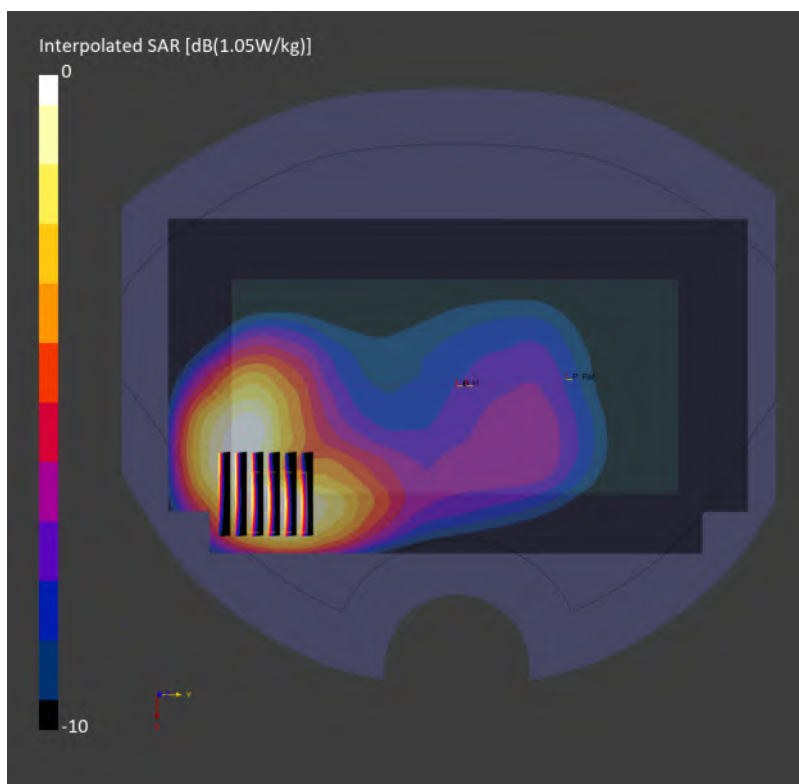

87_FR1 n13_10M_BPSK_1_1_Back_5mm_Ch156400

Communication System: NR FR1 FDD; Frequency: 782.000 MHz

Medium: HSL_600-7200_260830 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.893$ S/m; $\epsilon_r = 42.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(9.08, 8.91, 9.18); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000028

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.726 W/kg; SAR (10g) = 0.480 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.06 dB

SAR (1g) = 0.705 W/kg; SAR (8g) = 0.463 W/kg; SAR (10g) = 0.433 W/kg

Smallest distance from peaks to all points 3 dB below = 11.9 mm

Ratio of SAR at M2 to SAR at M1 = 78.4 %

TSL Correction: Positive only

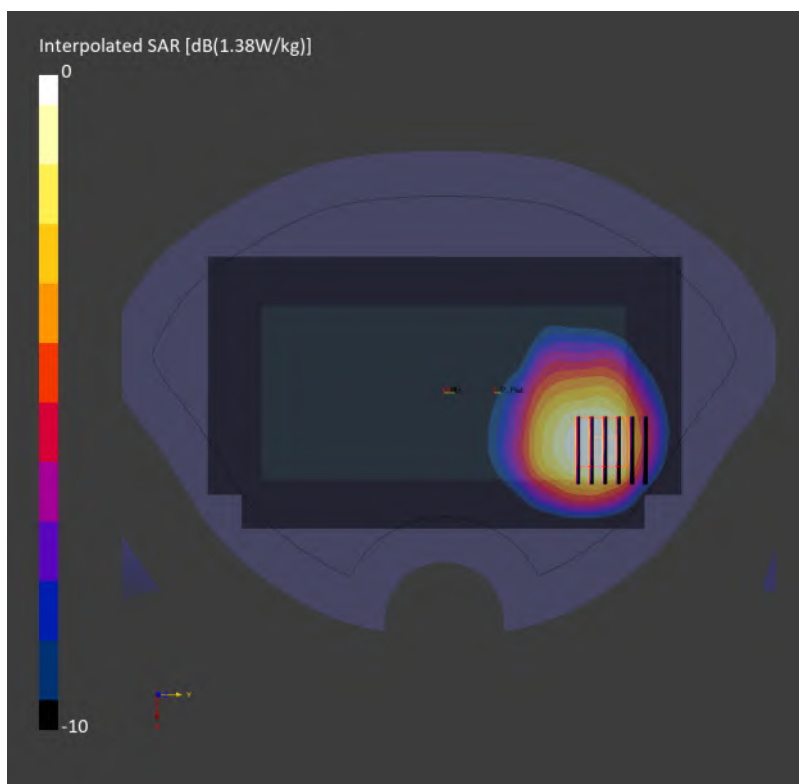

88_FR1 n14_10M_BPSK_1_1_Back_5mm_Ch158600

Communication System: NR FR1 FDD; Frequency: 793.000 MHz

Medium: HSL_600-7200_260830 Medium parameters used: $f = 793.000$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 42.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(9.08, 8.91, 9.18); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000028

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.867 W/kg; SAR (10g) = 0.576 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.15 dB

SAR (1g) = 0.812 W/kg; SAR (8g) = 0.540 W/kg; SAR (10g) = 0.502 W/kg

Smallest distance from peaks to all points 3 dB below = 12.3 mm

Ratio of SAR at M2 to SAR at M1 = 77.9 %

TSL Correction: Positive only

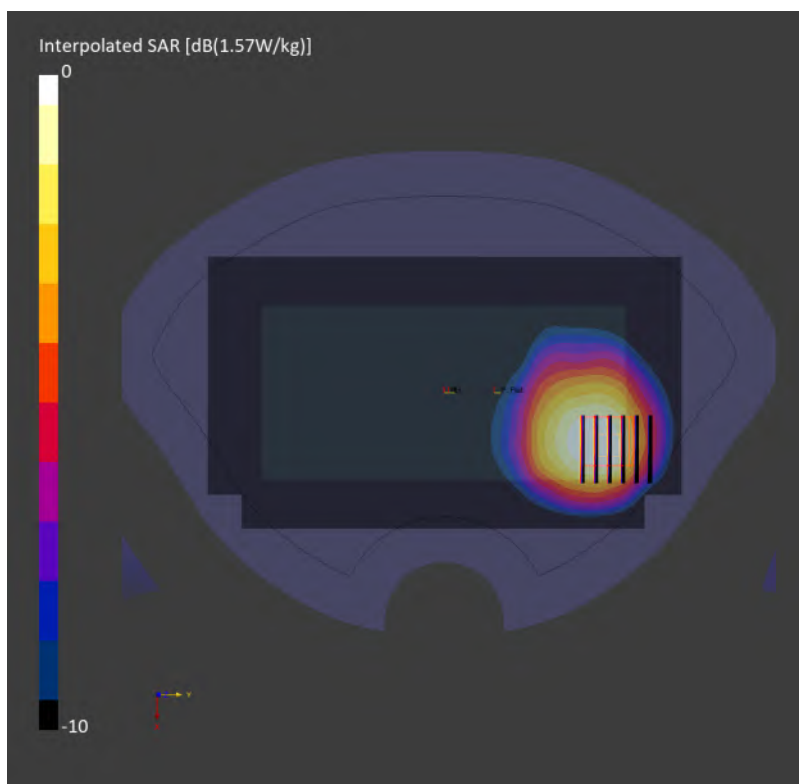

89_FR1 n25_40M_BPSK_108_54_Front_5mm_Ch376500

Communication System: NR FR1 FDD; Frequency: 1882.500 MHz

Medium: HSL_600-7200_260819 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.39$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.25, 7.12, 7.34); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000284

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.879 W/kg; SAR (10g) = 0.455 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.13 dB

SAR (1g) = 0.921 W/kg; SAR (8g) = 0.487 W/kg; SAR (10g) = 0.447 W/kg

Smallest distance from peaks to all points 3 dB below = 7.6 mm

Ratio of SAR at M2 to SAR at M1 = 80.2 %

TSL Correction: Positive only

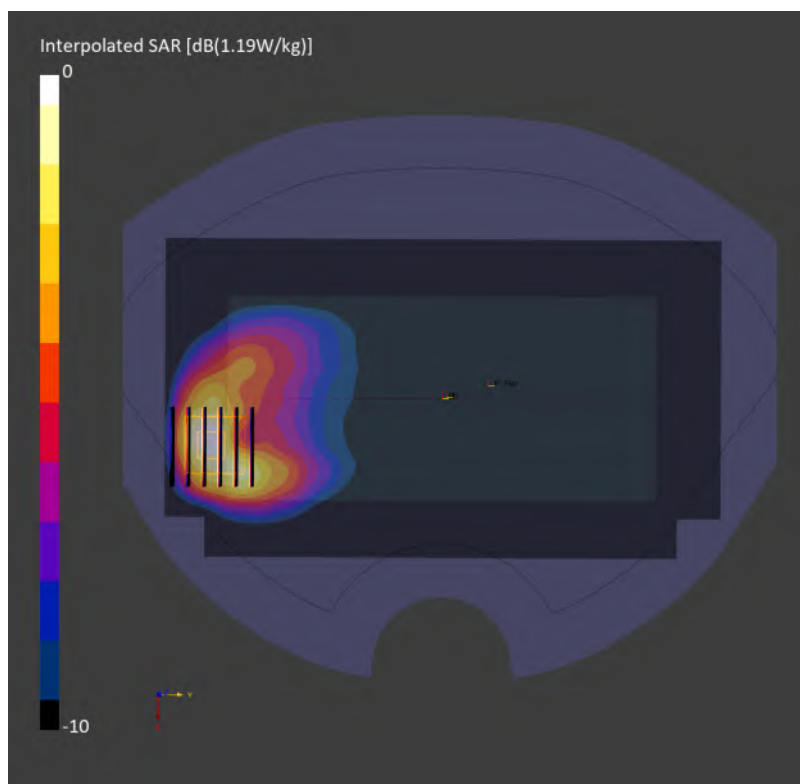

90_FR1 n26_HPUE_20M_BPSK_1_1_Back_5mm_Ch166300

Communication System: NR FR1 FDD; Frequency: 831.500 MHz

Medium: HSL_600-7200_260830 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 41.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(8.84, 8.67, 8.94); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000112

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.24 W/kg; SAR (10g) = 0.826 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = -0.05 dB

SAR (1g) = 1.11 W/kg; SAR (8g) = 0.736 W/kg; SAR (10g) = 0.686 W/kg

Smallest distance from peaks to all points 3 dB below = 12.3 mm

Ratio of SAR at M2 to SAR at M1 = 79.2 %

TSL Correction: Positive only

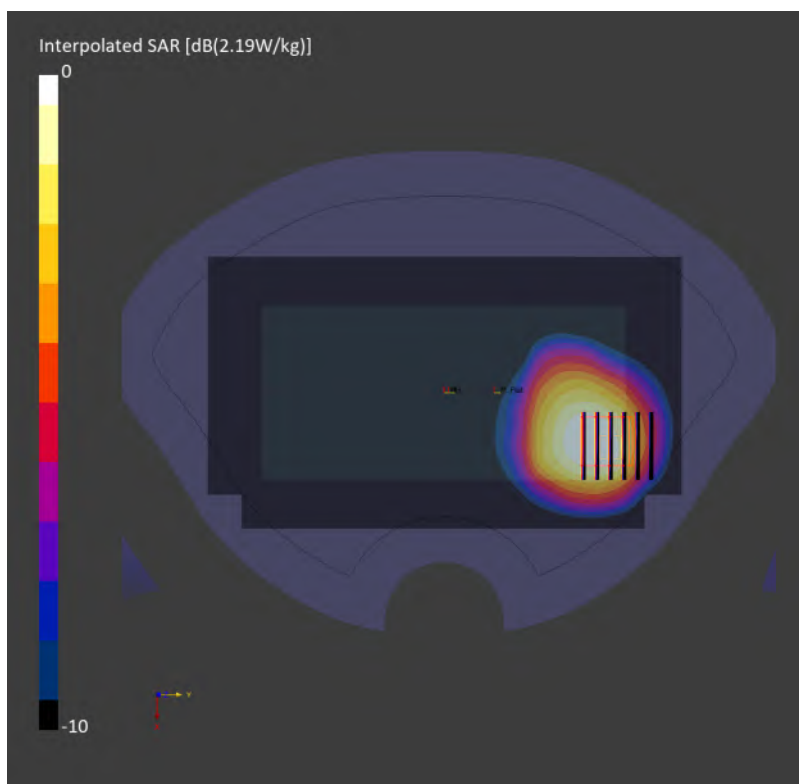

91_FR1 n66_45M_BPSK_1_1_Back_5mm_Ch349000

Communication System: NR FR1 FDD; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260901 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 40.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.44, 7.3, 7.52); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000325

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.722 W/kg; SAR (10g) = 0.398 W/kg;

TSL Correction: Positive only

Zoom Scan (31.5 mm x 31.5 mm x 33.4 mm): Measurement Grid: 4.5 mm x 4.5 mm x 1.4 mm


Power Drift = 0.08 dB

SAR (1g) = 1.12 W/kg; SAR (8g) = 0.535 W/kg; SAR (10g) = 0.482 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 78.0 %

TSL Correction: Positive only

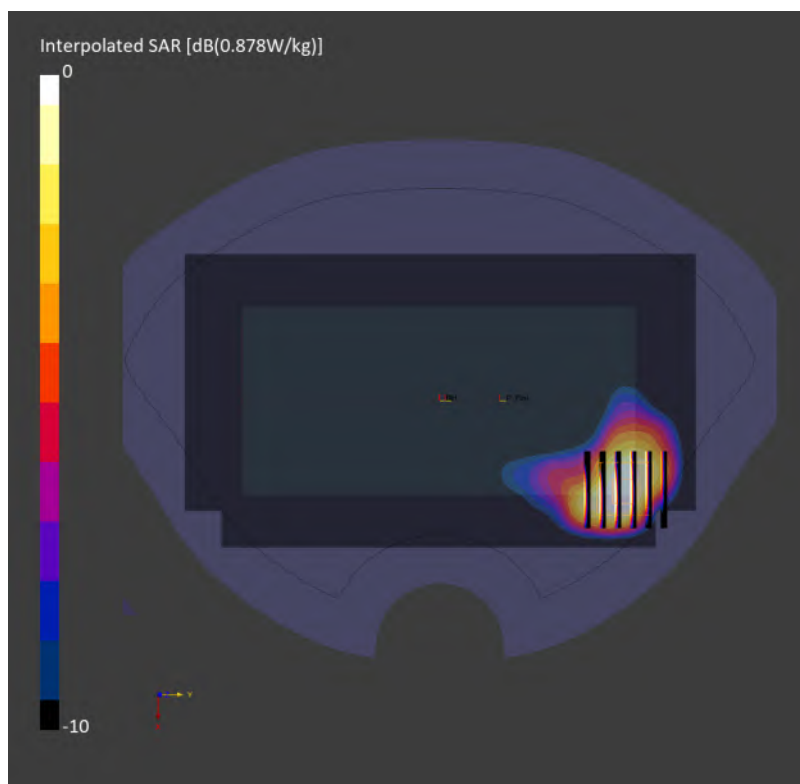

92_FR1 n70_15M_BPSK_1_1_Front_5mm_Ch340500

Communication System: NR FR1 FDD; Frequency: 1702.500 MHz

Medium: HSL_600-7200_260827 Medium parameters used: $f = 1702.500$ MHz; $\sigma = 1.31$ S/m; $\epsilon_r = 40.2$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.44, 7.3, 7.52); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000070

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.676 W/kg; SAR (10g) = 0.342 W/kg;

TSL Correction: Positive only

Zoom Scan (35.7 mm x 35.7 mm x 31.2 mm): Measurement Grid: 5.1 mm x 5.1 mm x 1.5 mm


Power Drift = -0.09 dB

SAR (1g) = 0.787 W/kg; SAR (8g) = 0.416 W/kg; SAR (10g) = 0.380 W/kg

Smallest distance from peaks to all points 3 dB below = 6.6 mm

Ratio of SAR at M2 to SAR at M1 = 82.6 %

TSL Correction: Positive only

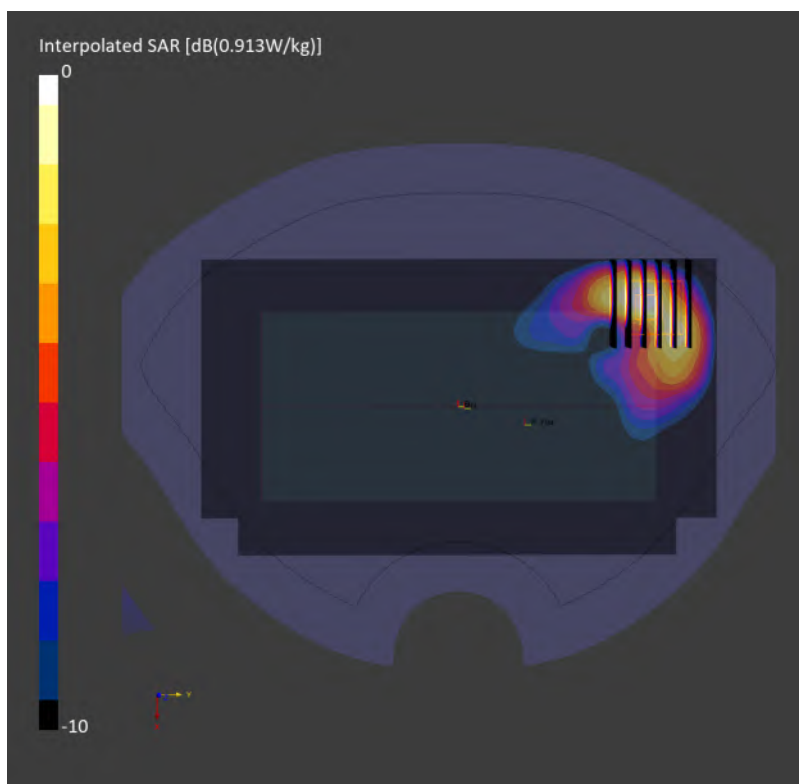

93_FR1 n71_35M_BPSK_90_45_Back_5mm_Ch136100

Communication System: NR FR1 FDD; Frequency: 680.500 MHz

Medium: HSL_600-7200_260817 Medium parameters used: $f = 680.500$ MHz; $\sigma = 0.872$ S/m; $\epsilon_r = 43.0$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.9, 9.61, 8.78); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000239

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.373 W/kg; SAR (10g) = 0.237 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 6.0 mm x 6.0 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.397 W/kg; SAR (8g) = 0.235 W/kg; SAR (10g) = 0.218 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 81.5 %

TSL Correction: Positive only

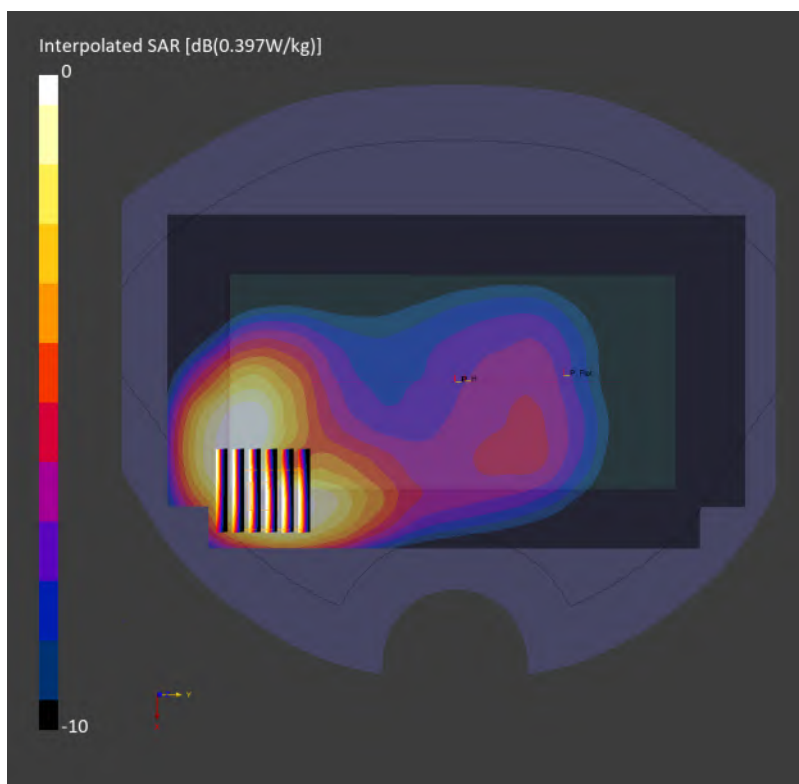

94_FR1 n41_100M_BPSK_135_69_Back_5mm_Ch518598

Communication System: NR FR1 TDD; Frequency: 2592.990 MHz

Medium: HSL_600-7200_260818 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.92$ S/m; $\epsilon_r = 39.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.66, 6.54, 6.74); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 TDD, 1003251

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.983 W/kg; SAR (10g) = 0.422 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.17 dB

SAR (1g) = 1.04 W/kg; SAR (8g) = 0.486 W/kg; SAR (10g) = 0.437 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 80.7 %

TSL Correction: Positive only

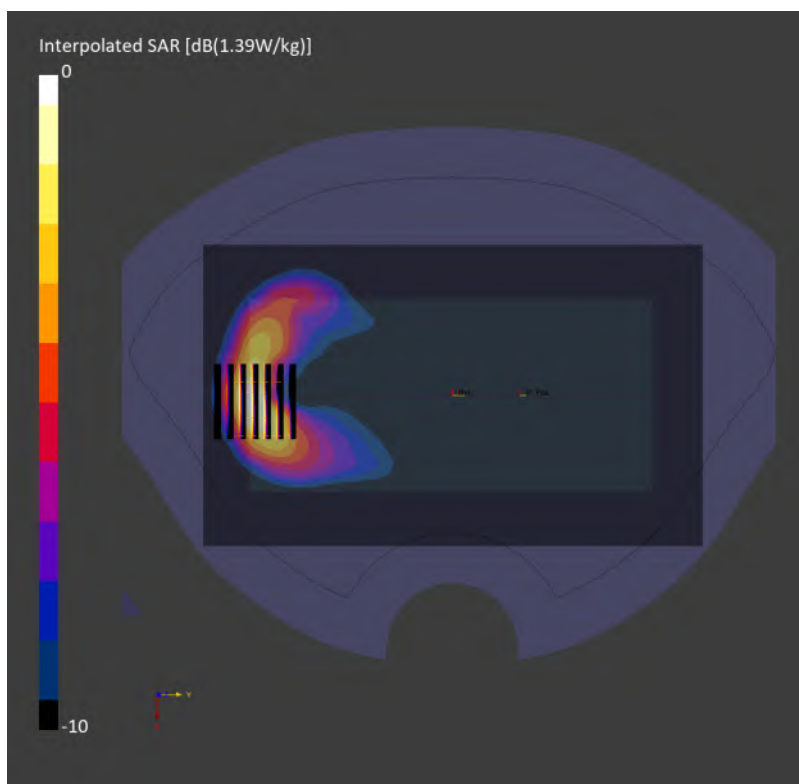

95_FR1 n48_40M_BPSK_1_1_Front_5mm_Ch645332

Communication System: NR FR1 TDD; Frequency: 3679.980 MHz

Medium: HSL_600-7200_260828 Medium parameters used: $f = 3679.980$ MHz; $\sigma = 2.88$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.88, 6.35, 5.8); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 TDD, 1002251

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.664 W/kg; SAR (10g) = 0.284 W/kg;

TSL Correction: Positive only

Zoom Scan (32.8 mm x 32.8 mm x 33.4 mm): Measurement Grid: 4.1 mm x 4.1 mm x 1.4 mm


Power Drift = -0.02 dB

SAR (1g) = 0.858 W/kg; SAR (8g) = 0.331 W/kg; SAR (10g) = 0.293 W/kg

Smallest distance from peaks to all points 3 dB below = 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 72.9 %

TSL Correction: Positive only

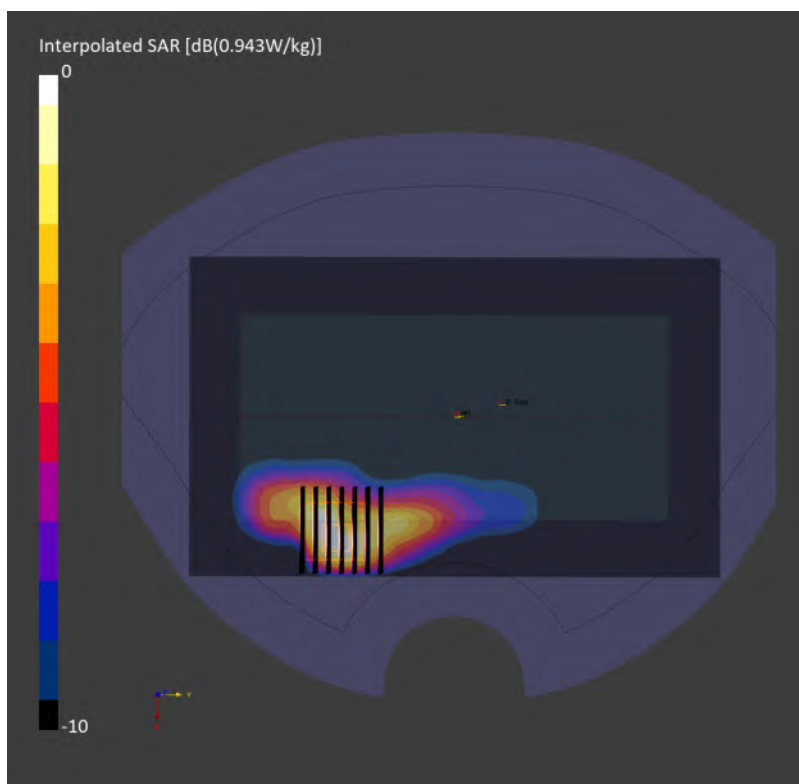

96_FR1 n77_100M_BPSK_1_1_Back_5mm_Ch650000

Communication System: NR FR1 TDD; Frequency: 3750.000 MHz

Medium: HSL_600-7200_260828 Medium parameters used: $f = 3750.000$ MHz; $\sigma = 2.92$ S/m; $\epsilon_r = 37.3$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.88, 6.35, 5.8); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 TDD, 1003247

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.717 W/kg; SAR (10g) = 0.300 W/kg;

TSL Correction: Positive only

Zoom Scan (28.8 mm x 28.8 mm x 29.1 mm): Measurement Grid: 4.8 mm x 4.8 mm x 1.4 mm


Power Drift = -0.10 dB

SAR (1g) = 0.782 W/kg; SAR (8g) = 0.325 W/kg; SAR (10g) = 0.286 W/kg

Smallest distance from peaks to all points 3 dB below = 6.2 mm

Ratio of SAR at M2 to SAR at M1 = 69.2 %

TSL Correction: Positive only

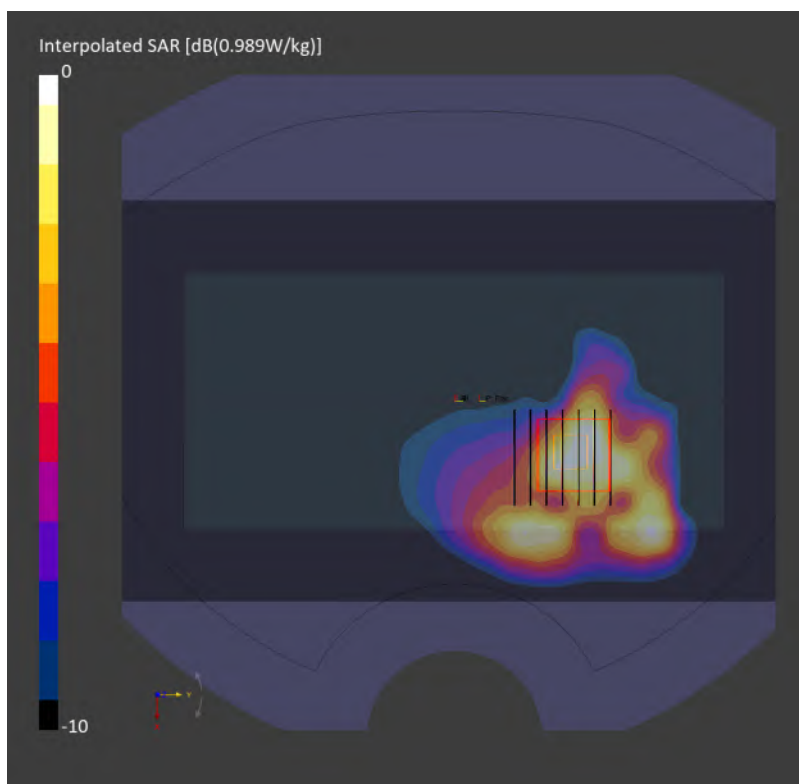

97_WLAN2.4GHz_802.11b 1Mbps_Back_5mm_Ch1

Communication System: WiFi (802.11b); Frequency: 2412.000 MHz

Medium: HSL_600-7200_260829 Medium parameters used: $f = 2412.000$ MHz; $\sigma = 1.80$ S/m; $\epsilon_r = 39.9$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.56, 7.09, 6.47); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11b), 10315

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.707 W/kg; SAR (10g) = 0.364 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = -0.14 dB

SAR (1g) = 0.737 W/kg; SAR (8g) = 0.398 W/kg; SAR (10g) = 0.362 W/kg

Smallest distance from peaks to all points 3 dB below = 8.0 mm

Ratio of SAR at M2 to SAR at M1 = 79.5 %

TSL Correction: Positive only

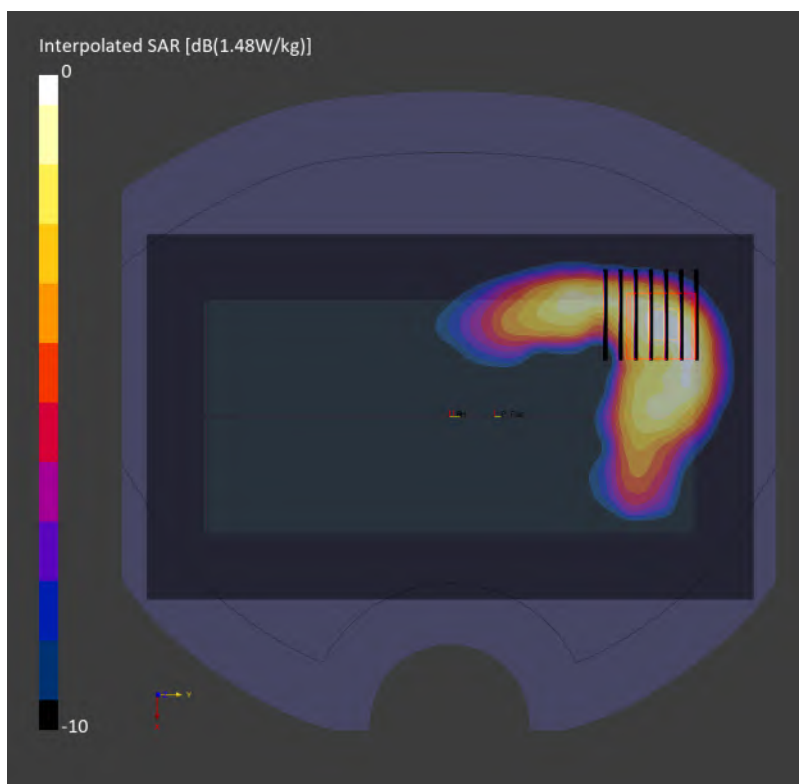

98_WLAN5GHz_802.11ac-VHT160 MCS0_Back_5mm_Ch50

Communication System: WiFi (802.11ac); Frequency: 5250.000 MHz

Medium: HSL_600-7200_260825 Medium parameters used: $f = 5250.000$ MHz; $\sigma = 4.57$ S/m; $\epsilon_r = 34.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.03, 5.43, 4.96); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11ac), 10554

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.551 W/kg; SAR (10g) = 0.222 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.01 dB

SAR (1g) = 0.608 W/kg; SAR (8g) = 0.253 W/kg; SAR (10g) = 0.223 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 61.7 %

TSL Correction: Positive only

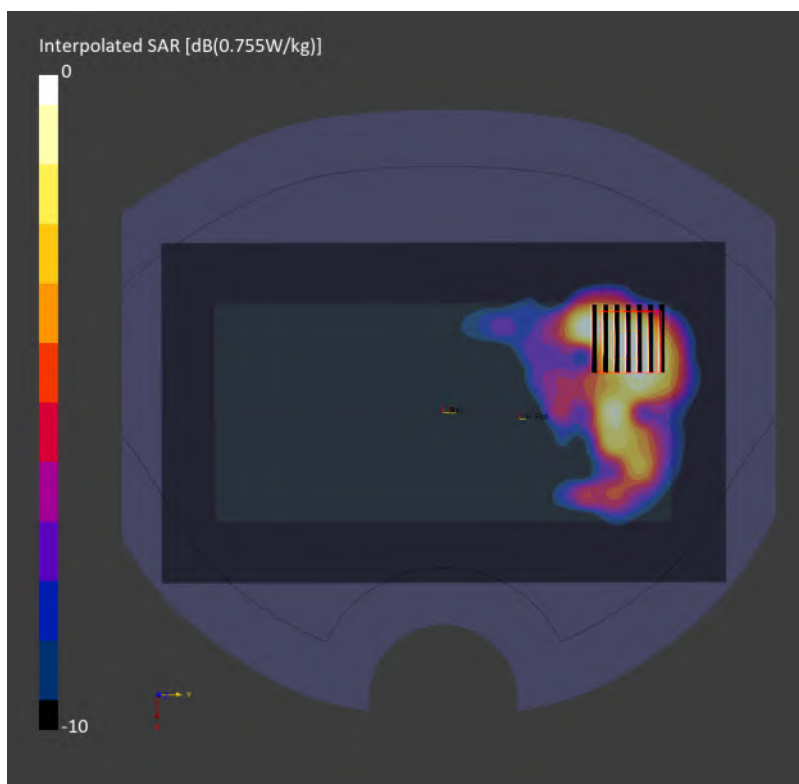

99_WLAN5GHz_802.11ac-VHT160 MCS0_Back_5mm_Ch114

Communication System: WiFi (802.11ac); Frequency: 5570.000 MHz

Medium: HSL_600-7200_260825 Medium parameters used: $f = 5570.000$ MHz; $\sigma = 4.93$ S/m; $\epsilon_r = 34.1$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(4.61, 4.98, 4.54); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11ac), 10554

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.530 W/kg; SAR (10g) = 0.212 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.01 dB

SAR (1g) = 0.605 W/kg; SAR (8g) = 0.249 W/kg; SAR (10g) = 0.219 W/kg

Smallest distance from peaks to all points 3 dB below = 7.4 mm

Ratio of SAR at M2 to SAR at M1 = 64.7 %

TSL Correction: Positive only

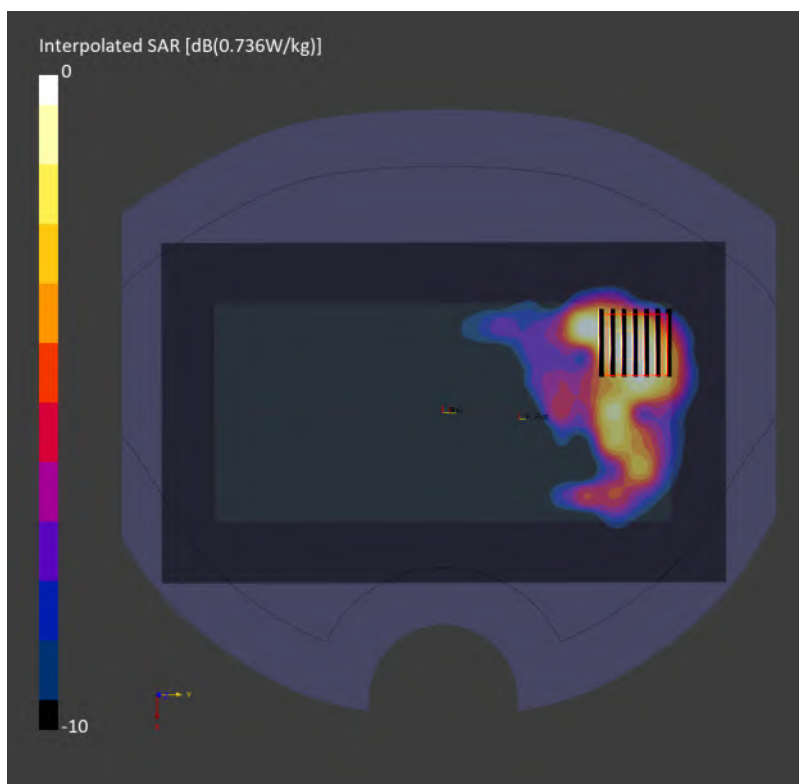

100_WLAN5GHz_802.11ac-VHT80 MCS0_Back_5mm_Ch155

Communication System: WiFi (802.11ac); Frequency: 5775.000 MHz

Medium: HSL_600-7200_260825 Medium parameters used: $f = 5775.000$ MHz; $\sigma = 5.19$ S/m; $\epsilon_r = 33.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(4.54, 4.9, 4.48); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11ac), 10544

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.631 W/kg; SAR (10g) = 0.250 W/kg;

TSL Correction: Positive only

Zoom Scan (25.2 mm x 25.2 mm x 25.0 mm): Measurement Grid: 2.8 mm x 2.8 mm x 1.2 mm


Power Drift = 0.10 dB

SAR (1g) = 0.918 W/kg; SAR (8g) = 0.297 W/kg; SAR (10g) = 0.258 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 61.1 %

TSL Correction: Positive only

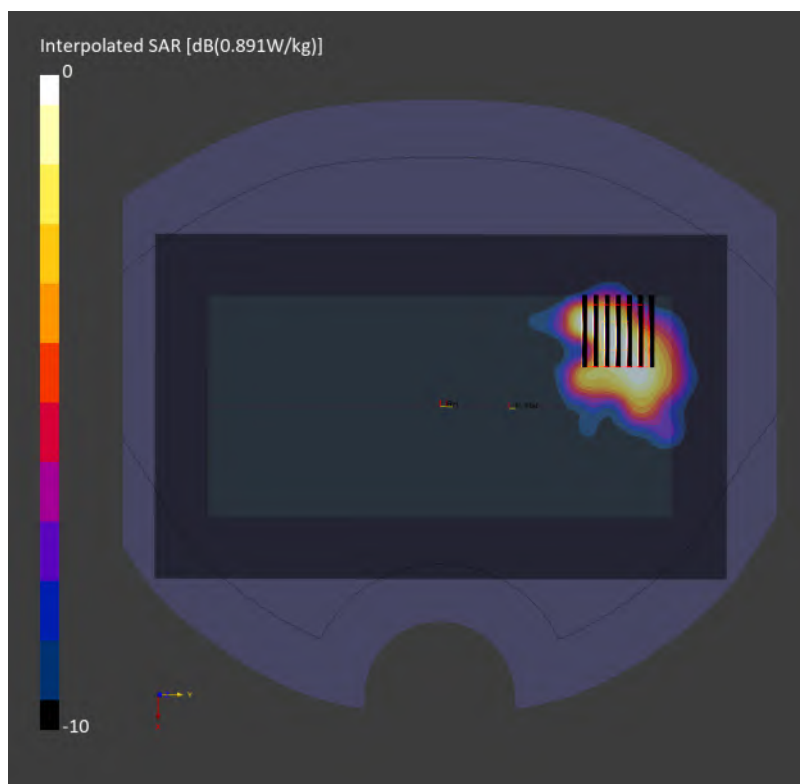

101_WLAN6GHz_802.11be-EHT320 MCS0 _Back _5mm _Ch127

Communication System: WiFi (802.11be); Frequency: 6585.000 MHz

Medium: HSL_600-7200_260901 Medium parameters used: $f = 6585.000$ MHz; $\sigma = 6.11$ S/m; $\epsilon_r = 32.1$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(4.76, 5.14, 4.7); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11be), 11026

Area Scan (119.0 mm x 204.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.529 W/kg; SAR (10g) = 0.167 W/kg;

TSL Correction: Positive only

Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm


Power Drift = 0.05 dB

SAR (1g) = 0.634 W/kg; SAR (8g) = 0.211 W/kg; SAR (10g) = 0.182 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 50.1 %

TSL Correction: Positive only

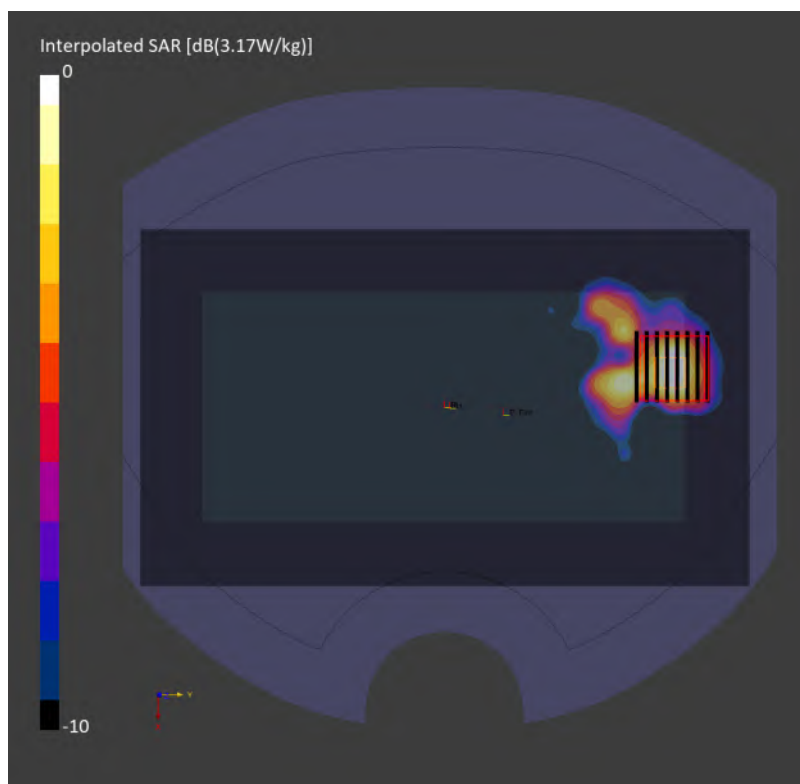

102_Bluetooth_1Mbps_Back_5mm_Ch39;push ant3

Communication System: Bluetooth; Frequency: 2441.000 MHz

Medium: HSL_600-7200_260907 Medium parameters used: $f = 2441.000$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 40.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.79, 6.67, 6.87); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: Bluetooth, 10035

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.392 W/kg; SAR (10g) = 0.192 W/kg;

TSL Correction: Positive only

Zoom Scan (30.0 mm x 30.0 mm x 31.2 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 0.395 W/kg; SAR (8g) = 0.212 W/kg; SAR (10g) = 0.195 W/kg

Smallest distance from peaks to all points 3 dB below = 6.5 mm

Ratio of SAR at M2 to SAR at M1 = 79.1 %

TSL Correction: Positive only

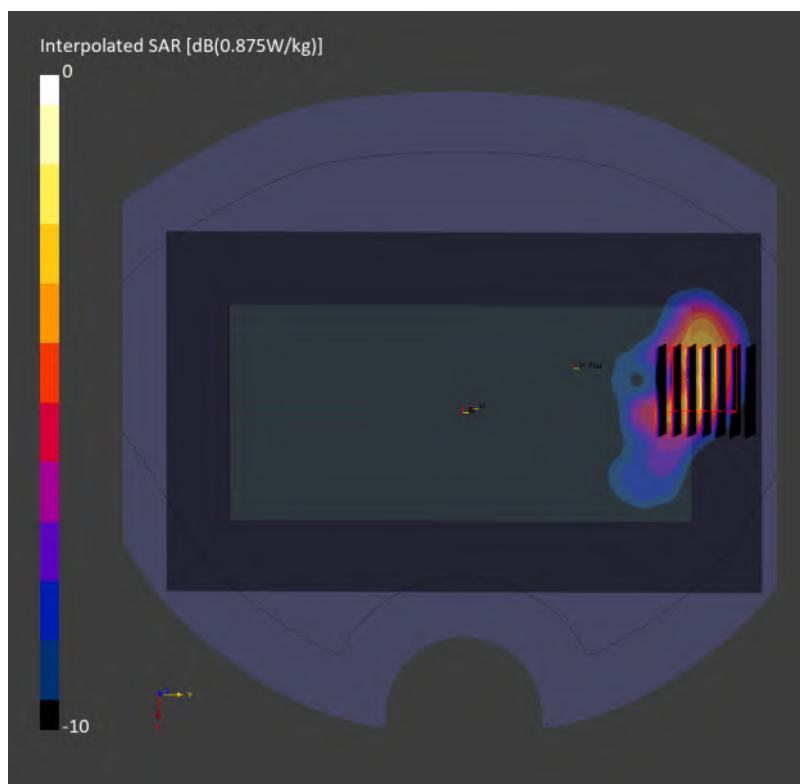

103_UWB_802.15.4ab_Back_5mm_Ch49

Communication System: Custom; Frequency: 5848.750 MHz

Medium: HSL_600-7200_260902 Medium parameters used: $f = 5848.750$ MHz; $\sigma = 5.17$ S/m; $\epsilon_r = 33.6$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(4.54, 4.9, 4.48); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: Custom, 2

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 0.360 W/kg; SAR (10g) = 0.142 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.01 dB

SAR (1g) = 0.532 W/kg; SAR (8g) = 0.168 W/kg; SAR (10g) = 0.146 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 57.7 %

TSL Correction: Positive only

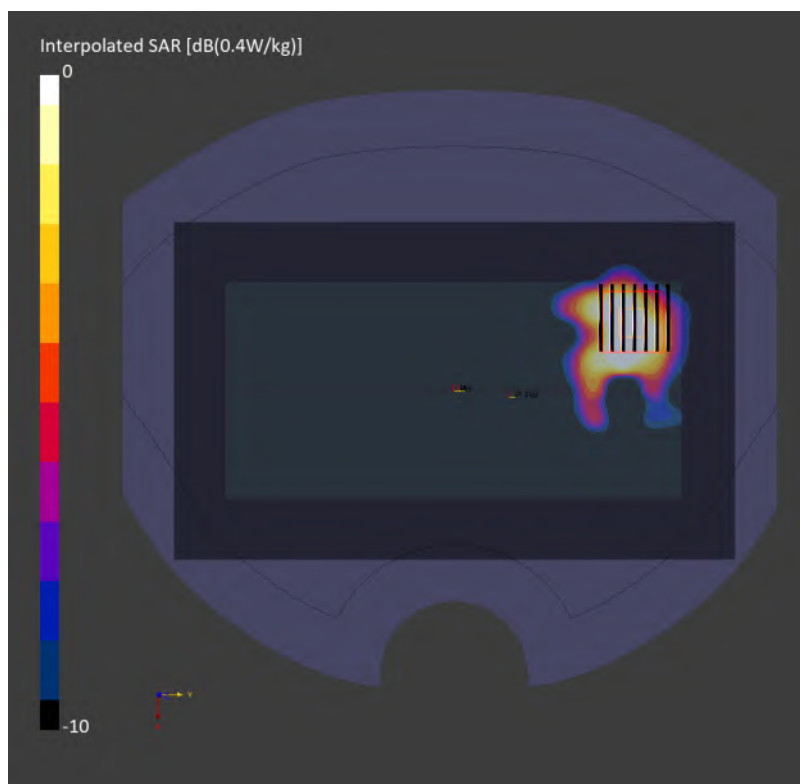

104_GSM850_GPRS 4 Tx slots_Back_0mm_Ch189

Communication System: GSM; Frequency: 836.400 MHz

Medium: HSL_600-7200_260818 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.74, 9.44, 8.62); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: GSM, 10028

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 2.92 W/kg; SAR (10g) = 1.71 W/kg;

TSL Correction: Positive only

Zoom Scan (34.2 mm x 34.2 mm x 31.2 mm): Measurement Grid: 5.7 mm x 5.7 mm x 1.5 mm


Power Drift = 0.01 dB

SAR (1g) = 2.98 W/kg; SAR (8g) = 1.51 W/kg; SAR (10g) = 1.49 W/kg

Smallest distance from peaks to all points 3 dB below = 6.7 mm

Ratio of SAR at M2 to SAR at M1 = 69.6 %

TSL Correction: Positive only

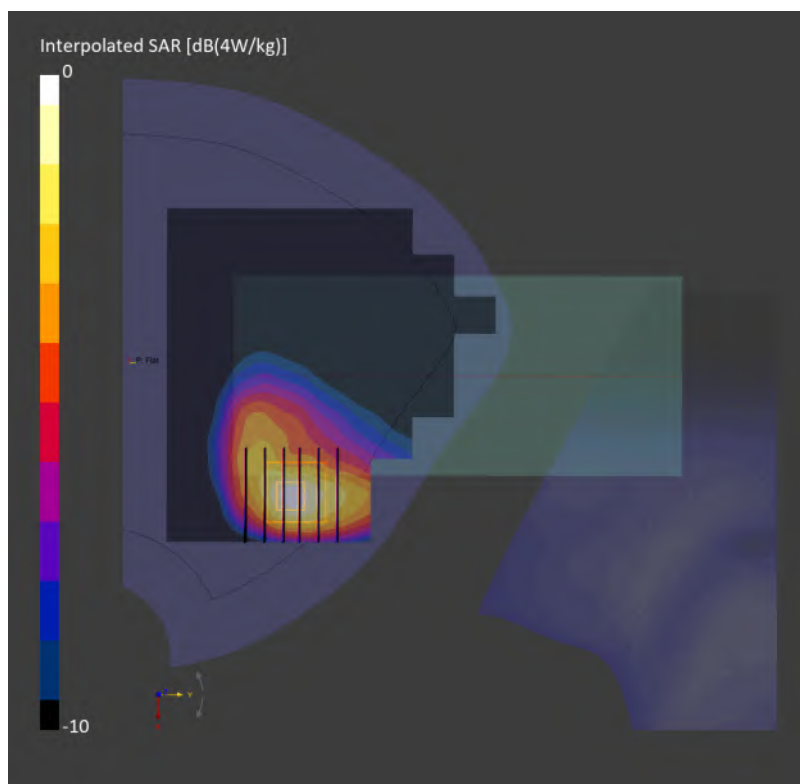

105_GSM1900_GPRS 4 Tx slots_Bottom Side_0mm_Ch661

Communication System: GSM; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260822 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.25, 7.12, 7.34); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: GSM, 10028

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 2.28 W/kg; SAR (10g) = 0.988 W/kg;

TSL Correction: Positive only

Zoom Scan (30.6 mm x 30.6 mm x 33.4 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm


Power Drift = -0.02 dB

SAR (1g) = 2.57 W/kg; SAR (8g) = 0.997 W/kg; SAR (10g) = 0.886 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 66.9 %

TSL Correction: Positive only

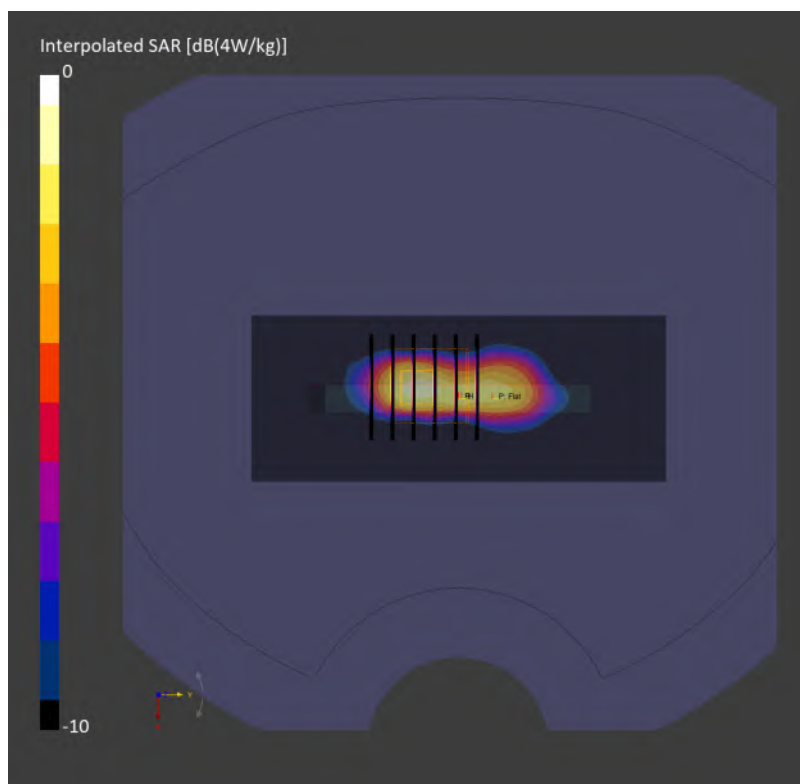

106_WCDMA II_RMC 12.2Kbps_Front_0mm_Ch9400

Communication System: UMTS-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260822 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 40.5$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.25, 7.12, 7.34); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: UMTS-FDD, 10011

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 3.68 W/kg; SAR (10g) = 2.06 W/kg;

TSL Correction: Positive only

Zoom Scan (34.2 mm x 34.2 mm x 33.4 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm


Power Drift = 0.04 dB

SAR (1g) = 5.96 W/kg; SAR (8g) = 2.75 W/kg; SAR (10g) = 2.48 W/kg

Smallest distance from peaks to all points 3 dB below = 4.6 mm

Ratio of SAR at M2 to SAR at M1 = 73.1 %

TSL Correction: Positive only

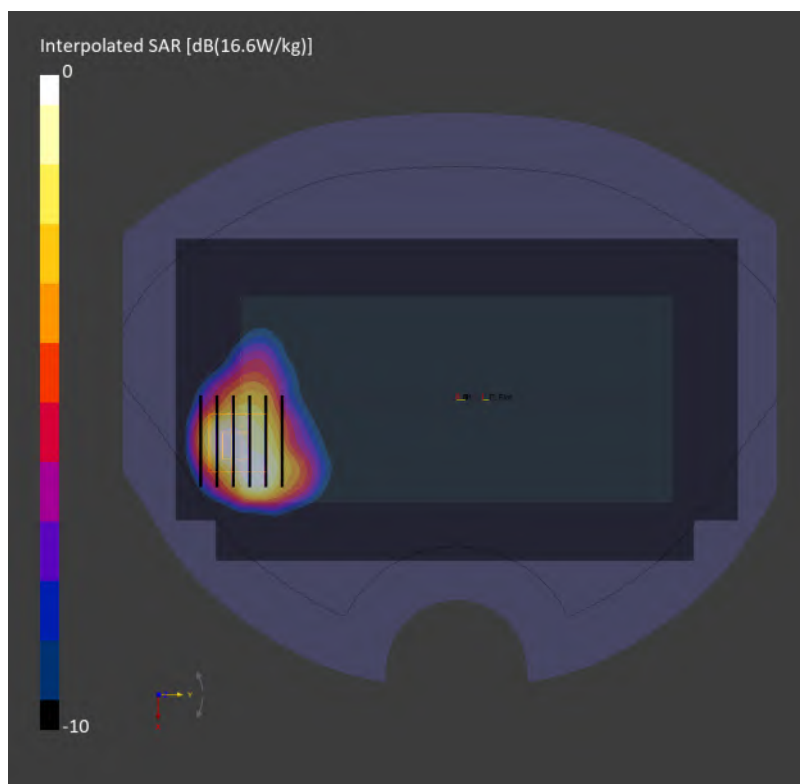

107_WCDMA IV_RMC 12.2Kbps_Bottom Side_0mm_Ch1513

Communication System: UMTS-FDD; Frequency: 1752.600 MHz

Medium: HSL_600-7200_260822 Medium parameters used: $f = 1752.600$ MHz; $\sigma = 1.33$ S/m; $\epsilon_r = 40.8$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.44, 7.3, 7.52); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: UMTS-FDD, 10011

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 5.64 W/kg; SAR (10g) = 2.68 W/kg;

TSL Correction: Positive only

Zoom Scan (34.2 mm x 34.2 mm x 33.4 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm


Power Drift = 0.00 dB

SAR (1g) = 5.94 W/kg; SAR (8g) = 2.74 W/kg; SAR (10g) = 2.44 W/kg

Smallest distance from peaks to all points 3 dB below = 4.5 mm

Ratio of SAR at M2 to SAR at M1 = 61.6 %

TSL Correction: Positive only

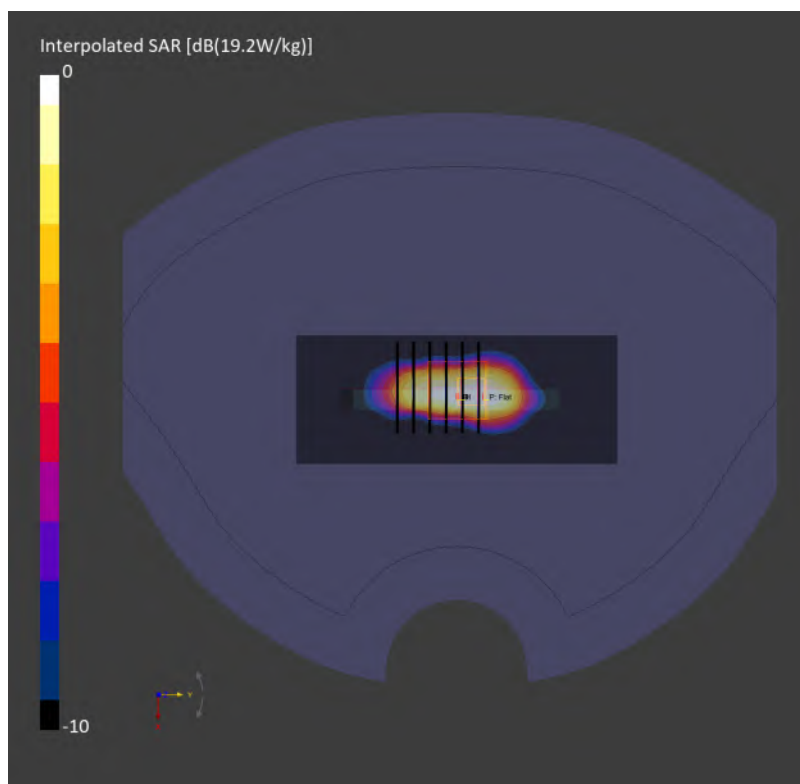

108_WCDMA V_RMC 12.2Kbps_Back Left_0mm_Ch4182

Communication System: UMTS-FDD; Frequency: 836.400 MHz

Medium: HSL_600-7200_260818 Medium parameters used: $f = 836.400$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 42.4$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.74, 9.44, 8.62); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: UMTS-FDD, 10011

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 2.82 W/kg; SAR (10g) = 1.62 W/kg;

TSL Correction: Positive only

Zoom Scan (33.8 mm x 33.8 mm x 31.2 mm): Measurement Grid: 2.6 mm x 2.6 mm x 1.2 mm


Power Drift = -0.15 dB

SAR (1g) = 5.33 W/kg; SAR (8g) = 2.09 W/kg; SAR (10g) = 1.87 W/kg

Smallest distance from peaks to all points 3 dB below = 3.5 mm

Ratio of SAR at M2 to SAR at M1 = 52.7 %

TSL Correction: Positive only

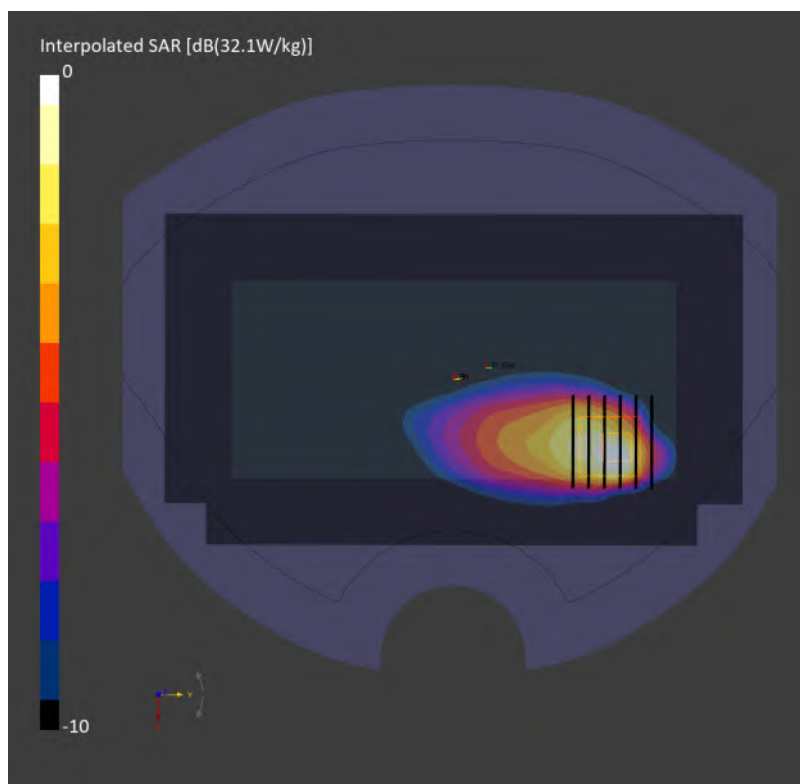

109_LTE Band 7_20M_QPSK_1_0_Bottom Side_0mm_Ch21100

Communication System: LTE-FDD; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260825 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 39.7$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.66, 6.54, 6.74); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 7.34 W/kg; SAR (10g) = 2.79 W/kg;

TSL Correction: Positive only

Zoom Scan (34.2 mm x 34.2 mm x 33.4 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm


Power Drift = -0.02 dB

SAR (1g) = 7.50 W/kg; SAR (8g) = 2.97 W/kg; SAR (10g) = 2.59 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 67.4 %

TSL Correction: Positive only

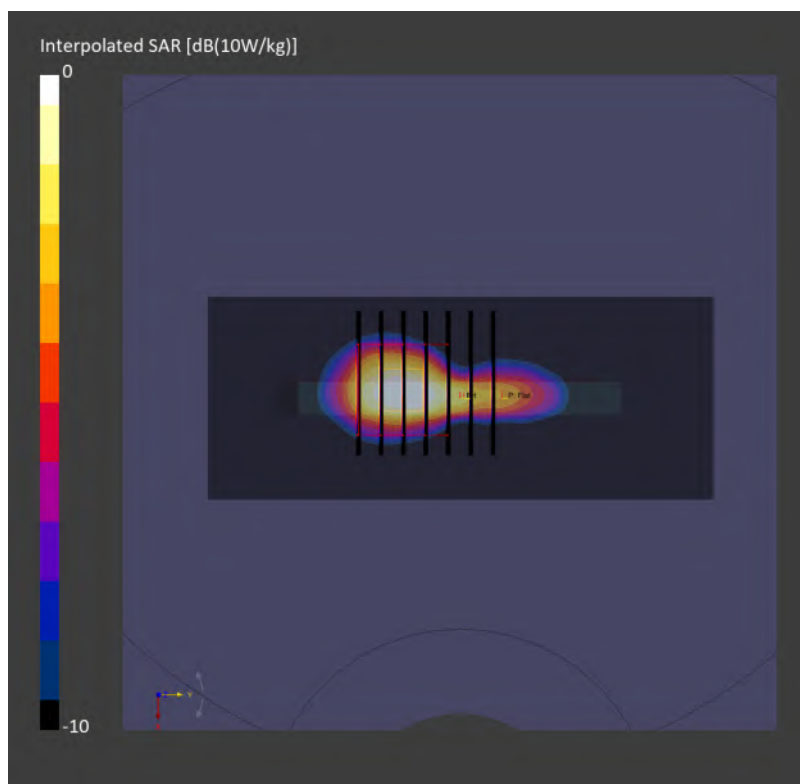

110_LTE Band 13_10M_QPSK_1_0_Back Top_0mm_Ch23230

Communication System: LTE-FDD; Frequency: 782.000 MHz

Medium: HSL_600-7200_260818 Medium parameters used: $f = 782.000$ MHz; $\sigma = 0.899$ S/m; $\epsilon_r = 42.2$

Ambient Temperature: 23.7°C; Liquid Temperature: 22.7°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(8.9, 9.61, 8.78); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10175

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 1.74 W/kg; SAR (10g) = 1.05 W/kg;

TSL Correction: Positive only

Zoom Scan (39.2 mm x 39.2 mm x 31.2 mm): Measurement Grid: 5.6 mm x 5.6 mm x 1.5 mm


Power Drift = -0.03 dB

SAR (1g) = 2.30 W/kg; SAR (8g) = 1.13 W/kg; SAR (10g) = 1.04 W/kg

Smallest distance from peaks to all points 3 dB below = 6.8 mm

Ratio of SAR at M2 to SAR at M1 = 61.9 %

TSL Correction: Positive only

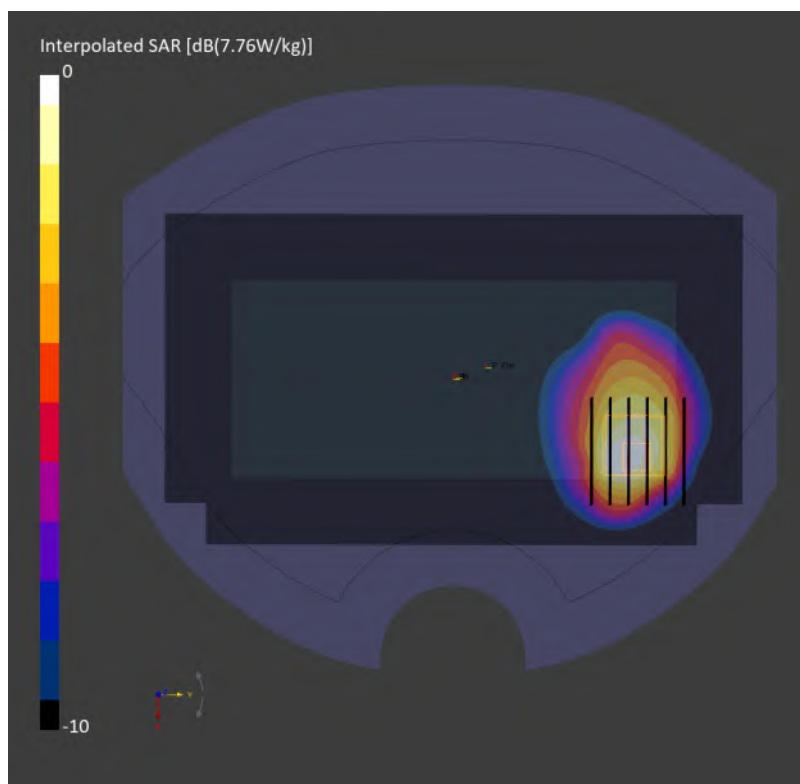

111_LTE Band 25_20M_QPSK_1_0_Top Side_0mm_Ch26340

Communication System: LTE-FDD; Frequency: 1880.000 MHz

Medium: HSL_600-7200_260901 Medium parameters used: $f = 1880.000$ MHz; $\sigma = 1.42$ S/m; $\epsilon_r = 40.2$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.25, 7.12, 7.34); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 5.20 W/kg; SAR (10g) = 2.30 W/kg;

TSL Correction: Positive only

Zoom Scan (34.4 mm x 34.4 mm x 33.4 mm): Measurement Grid: 4.3 mm x 4.3 mm x 1.4 mm


Power Drift = -0.17 dB

SAR (1g) = 4.94 W/kg; SAR (8g) = 2.34 W/kg; SAR (10g) = 2.12 W/kg

Smallest distance from peaks to all points 3 dB below = 5.3 mm

Ratio of SAR at M2 to SAR at M1 = 72.7 %

TSL Correction: Positive only

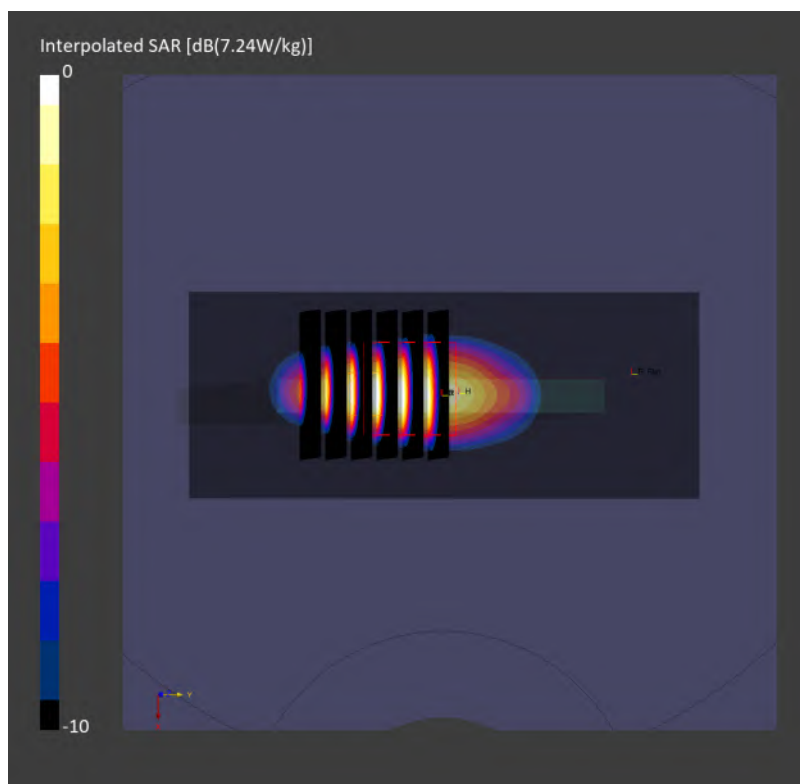

112_LTE Band 66_20M_QPSK_1_0_Top Side_0mm_Ch132572

Communication System: LTE-FDD; Frequency: 1770.000 MHz

Medium: HSL_600-7200_260901 Medium parameters used: $f = 1770.000$ MHz; $\sigma = 1.36$ S/m; $\epsilon_r = 40.3$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.44, 7.3, 7.52); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-FDD, 10169

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 5.82 W/kg; SAR (10g) = 2.61 W/kg;

TSL Correction: Positive only

Zoom Scan (33.6 mm x 33.6 mm x 33.4 mm): Measurement Grid: 4.2 mm x 4.2 mm x 1.4 mm


Power Drift = -0.01 dB

SAR (1g) = 5.64 W/kg; SAR (8g) = 2.75 W/kg; SAR (10g) = 2.46 W/kg

Smallest distance from peaks to all points 3 dB below = 5.2 mm

Ratio of SAR at M2 to SAR at M1 = 71.9 %

TSL Correction: Positive only

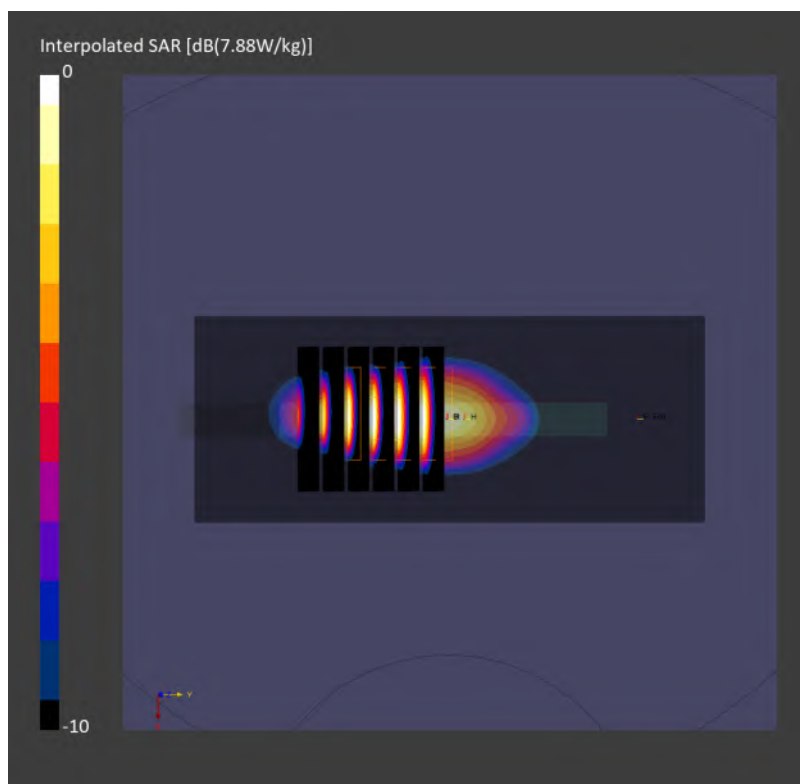

113_LTE Band 41_HPUE_20M_QPSK_1_0_Bottom Side_0mm_Ch40185

Communication System: LTE-TDD; Frequency: 2549.500 MHz

Medium: HSL_600-7200_260901 Medium parameters used: $f = 2549.500$ MHz; $\sigma = 1.89$ S/m; $\epsilon_r = 39.0$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.66, 6.54, 6.74); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-TDD, 10172

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 7.15 W/kg; SAR (10g) = 2.70 W/kg;

TSL Correction: Positive only

Zoom Scan (31.5 mm x 31.5 mm x 31.2 mm): Measurement Grid: 4.5 mm x 4.5 mm x 1.5 mm


Power Drift = -0.03 dB

SAR (1g) = 7.02 W/kg; SAR (8g) = 2.81 W/kg; SAR (10g) = 2.47 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 69.5 %

TSL Correction: Positive only

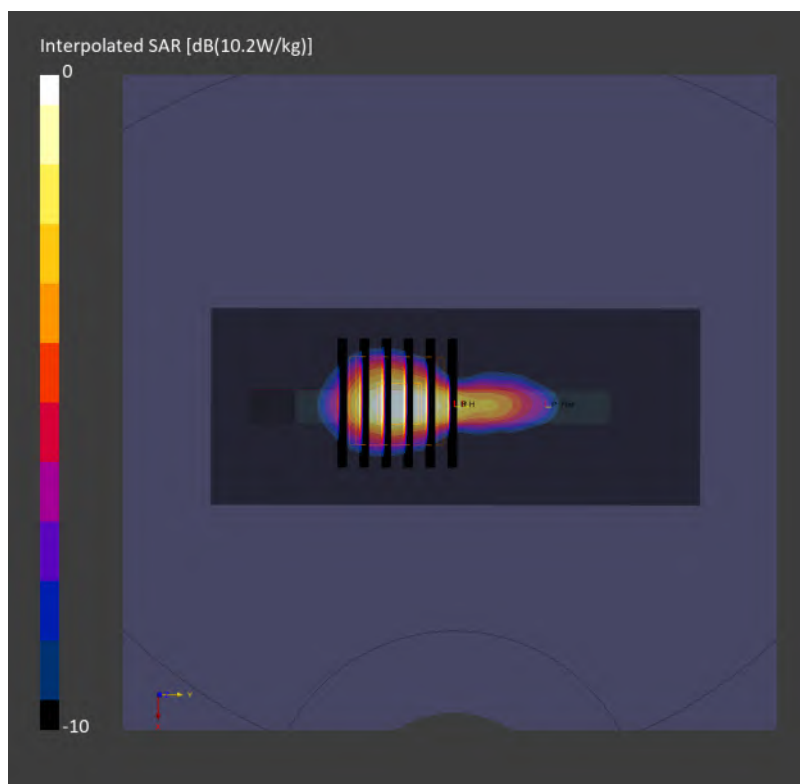

114_LTE Band 42_20M_QPSK_1_0_Back Right_0mm_Ch42990

Communication System: LTE-TDD; Frequency: 3540.000 MHz

Medium: HSL_600-7200_260830 Medium parameters used: $f = 3540.000$ MHz; $\sigma = 2.76$ S/m; $\epsilon_r = 38.0$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.96, 6.44, 5.88); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-TDD, 10435

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 7.96 W/kg; SAR (10g) = 2.47 W/kg;

TSL Correction: Positive only

Zoom Scan (29.0 mm x 29.0 mm x 31.2 mm): Measurement Grid: 2.9 mm x 2.9 mm x 1.2 mm


Power Drift = 0.12 dB

SAR (1g) = 8.64 W/kg; SAR (8g) = 2.88 W/kg; SAR (10g) = 2.49 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 68.7 %

TSL Correction: Positive only

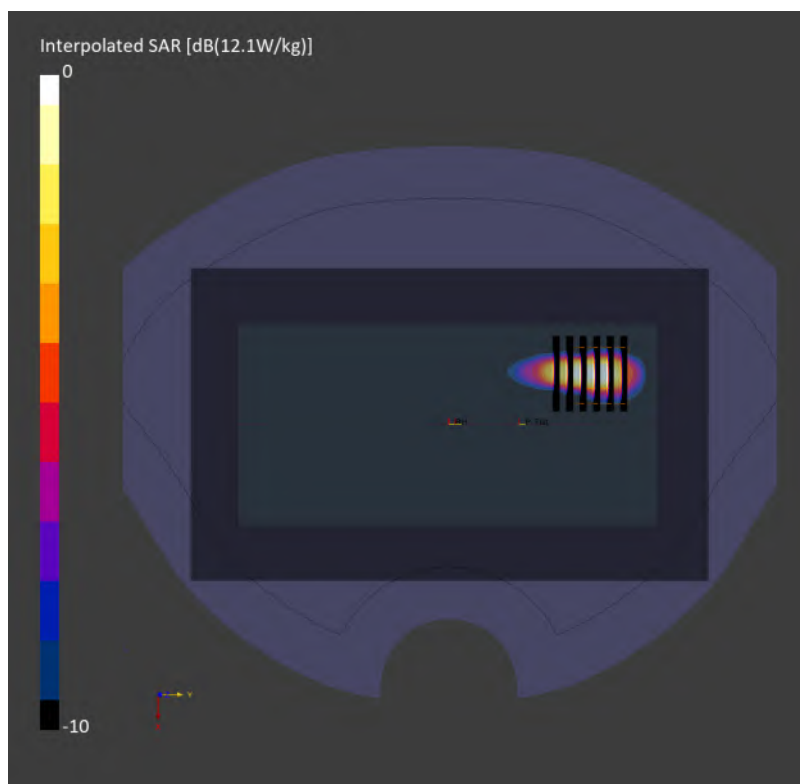

115_LTE Band 48_20M_QPSK_1_0_Back Right_0mm_Ch55340

Communication System: LTE-TDD; Frequency: 3560.000 MHz

Medium: HSL_600-7200_260824 Medium parameters used: $f = 3560.000$ MHz; $\sigma = 2.78$ S/m; $\epsilon_r = 37.8$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.96, 6.44, 5.88); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: LTE-TDD, 10435

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 6.56 W/kg; SAR (10g) = 2.18 W/kg;

TSL Correction: Positive only

Zoom Scan (29.0 mm x 29.0 mm x 31.2 mm): Measurement Grid: 2.9 mm x 2.9 mm x 1.2 mm


Power Drift = 0.05 dB

SAR (1g) = 7.20 W/kg; SAR (8g) = 2.63 W/kg; SAR (10g) = 2.30 W/kg

Smallest distance from peaks to all points 3 dB below = 4.7 mm

Ratio of SAR at M2 to SAR at M1 = 70.1 %

TSL Correction: Positive only

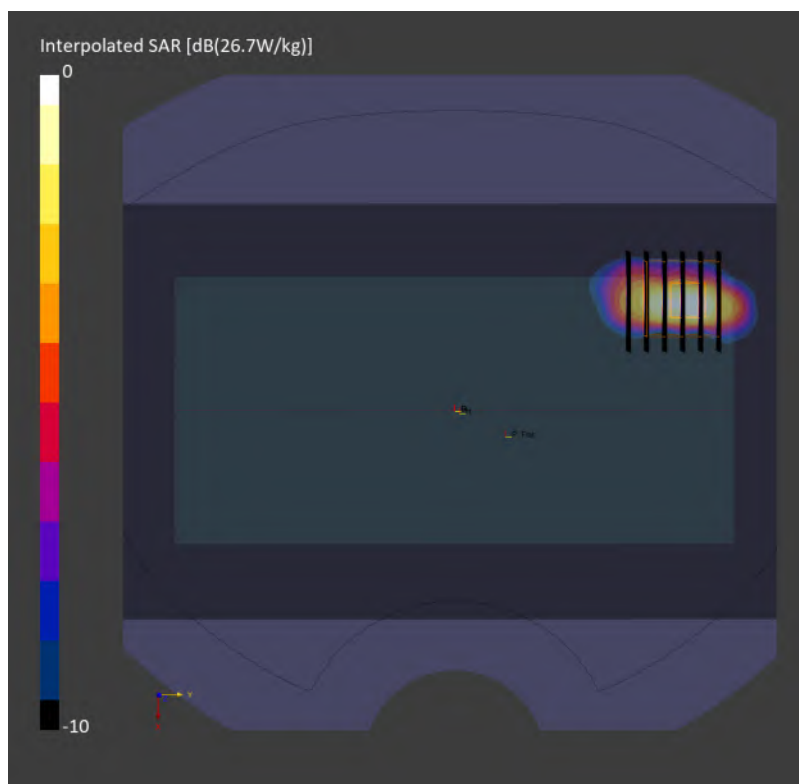

116_FR1 n7_50M_BPSK_1_1_Top Side_0mm_Ch507000

Communication System: NR FR1 FDD; Frequency: 2535.000 MHz

Medium: HSL_600-7200_260824 Medium parameters used: $f = 2535.000$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 39.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.66, 6.54, 6.74); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000370

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 6.14 W/kg; SAR (10g) = 2.33 W/kg;

TSL Correction: Positive only

Zoom Scan (33.6 mm x 33.6 mm x 31.2 mm): Measurement Grid: 4.2 mm x 4.2 mm x 1.5 mm


Power Drift = 0.04 dB

SAR (1g) = 6.06 W/kg; SAR (8g) = 2.50 W/kg; SAR (10g) = 2.22 W/kg

Smallest distance from peaks to all points 3 dB below = 5.2 mm

Ratio of SAR at M2 to SAR at M1 = 69.2 %

TSL Correction: Positive only

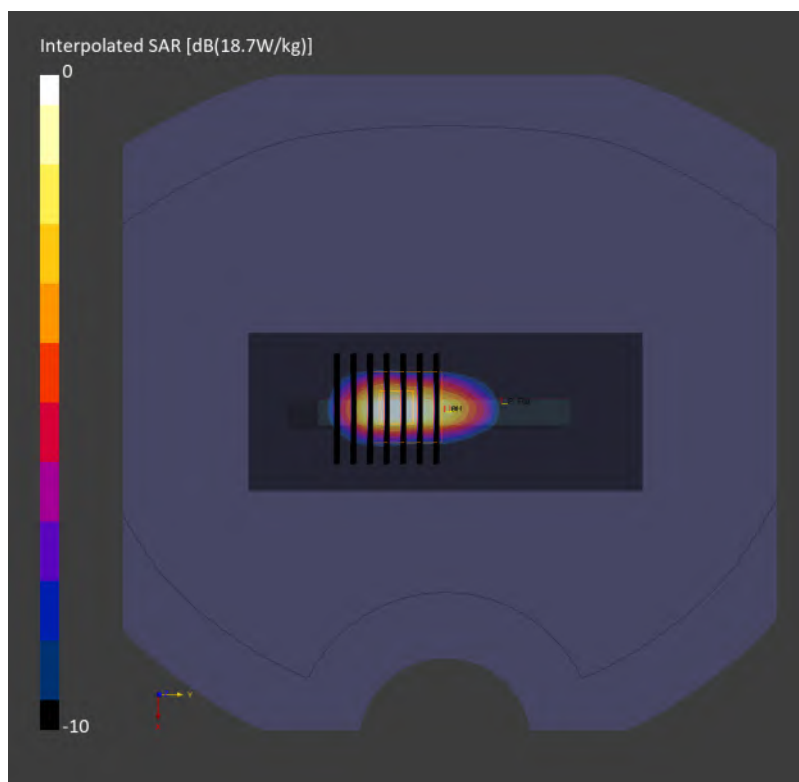

117_FR1 n25_40M_BPSK_1_1_Bottom Side_0mm_Ch376500

Communication System: NR FR1 FDD; Frequency: 1882.500 MHz

Medium: HSL_600-7200_260823 Medium parameters used: $f = 1882.500$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 40.4$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.25, 7.12, 7.34); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000283

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 5.50 W/kg; SAR (10g) = 2.38 W/kg;

TSL Correction: Positive only

Zoom Scan (34.2 mm x 34.2 mm x 33.4 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm


Power Drift = -0.01 dB

SAR (1g) = 5.59 W/kg; SAR (8g) = 2.44 W/kg; SAR (10g) = 2.20 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 70.0 %

TSL Correction: Positive only

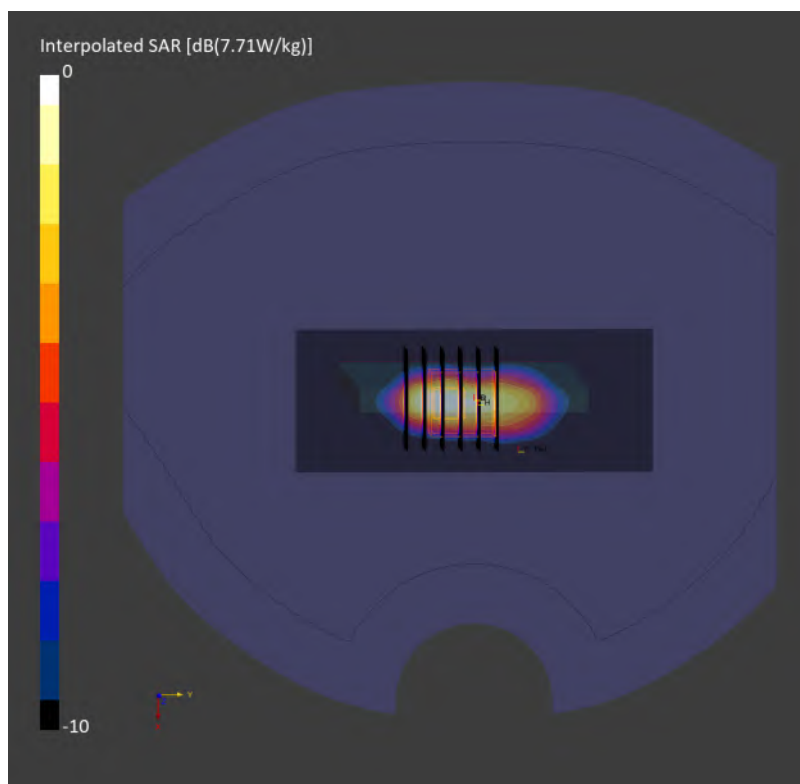

118_FR1 n26_HPUE_20M_BPSK_1_1_Back Top_0mm_Ch166300

Communication System: NR FR1 FDD; Frequency: 831.500 MHz

Medium: HSL_600-7200_260830 Medium parameters used: $f = 831.500$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 41.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(8.84, 8.67, 8.94); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000112

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 3.52 W/kg; SAR (10g) = 1.89 W/kg;

TSL Correction: Positive only

Zoom Scan (36.0 mm x 36.0 mm x 33.4 mm): Measurement Grid: 3.6 mm x 3.6 mm x 1.4 mm


Power Drift = -0.13 dB

SAR (1g) = 6.71 W/kg; SAR (8g) = 2.45 W/kg; SAR (10g) = 2.21 W/kg

Smallest distance from peaks to all points 3 dB below = 3.9 mm

Ratio of SAR at M2 to SAR at M1 = 52.5 %

TSL Correction: Positive only

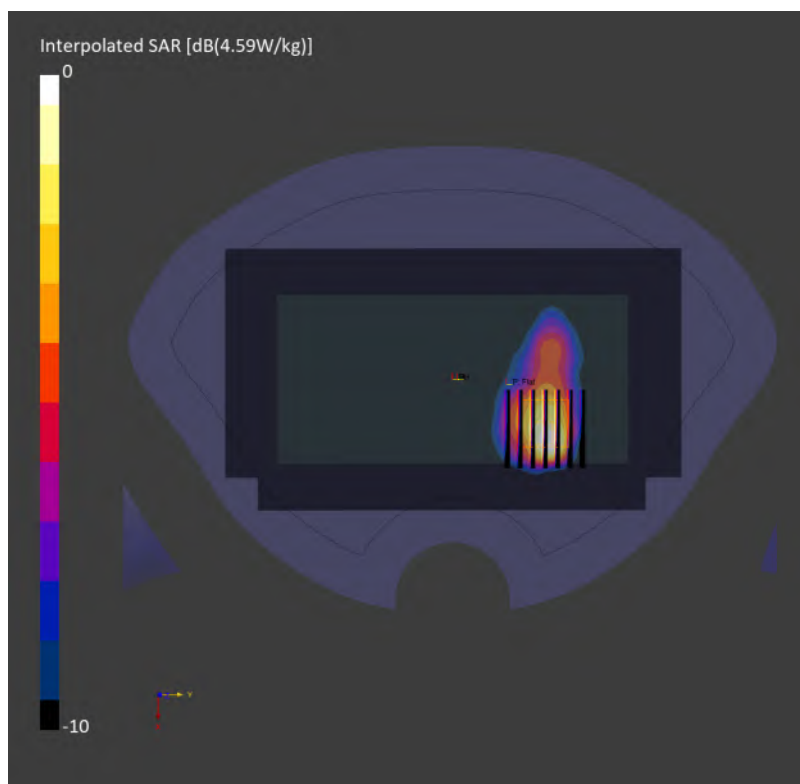

119_FR1 n66_45M_BPSK_120_60_Top Side_0mm_Ch349000

Communication System: NR FR1 FDD; Frequency: 1745.000 MHz

Medium: HSL_600-7200_260823 Medium parameters used: $f = 1745.000$ MHz; $\sigma = 1.32$ S/m; $\epsilon_r = 40.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.44, 7.3, 7.52); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000326

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 5.56 W/kg; SAR (10g) = 2.45 W/kg;

TSL Correction: Positive only

Zoom Scan (34.2 mm x 34.2 mm x 33.4 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm


Power Drift = -0.02 dB

SAR (1g) = 5.29 W/kg; SAR (8g) = 2.48 W/kg; SAR (10g) = 2.23 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 68.1 %

TSL Correction: Positive only

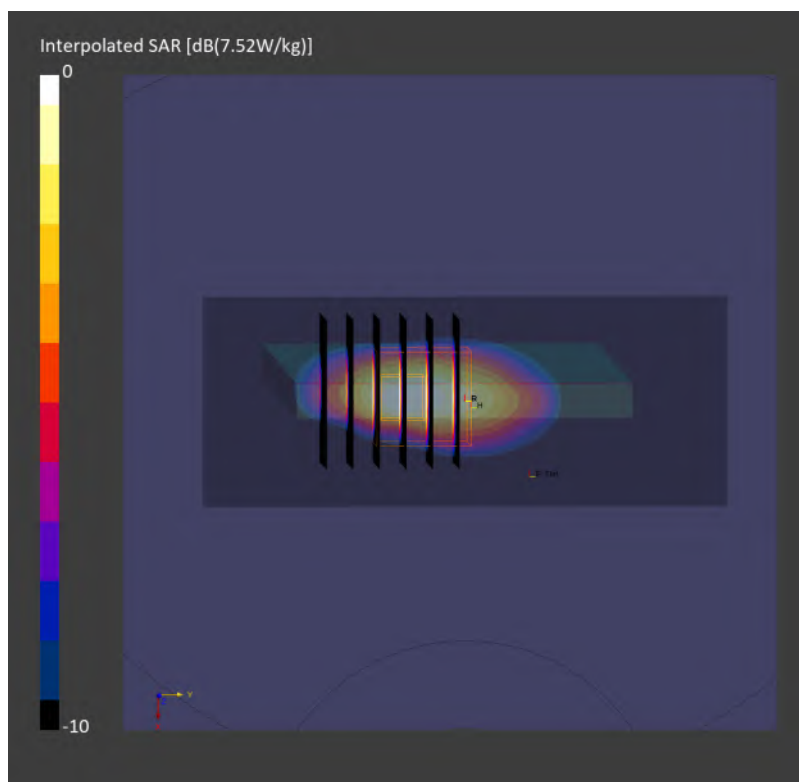

120_FR1 n70_15M_BPSK_1_1_Top Side_0mm_Ch340500

Communication System: NR FR1 FDD; Frequency: 1702.500 MHz

Medium: HSL_600-7200_260819 Medium parameters used: $f = 1702.500$ MHz; $\sigma = 1.30$ S/m; $\epsilon_r = 40.9$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(7.44, 7.3, 7.52); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 FDD, 1000070

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 15.0 mm

SAR (1g) = 4.93 W/kg; SAR (10g) = 2.17 W/kg;

TSL Correction: Positive only

Zoom Scan (31.2 mm x 31.2 mm x 33.4 mm): Measurement Grid: 3.9 mm x 3.9 mm x 1.4 mm


Power Drift = 0.14 dB

SAR (1g) = 4.90 W/kg; SAR (8g) = 2.24 W/kg; SAR (10g) = 2.00 W/kg

Smallest distance from peaks to all points 3 dB below = 5.0 mm

Ratio of SAR at M2 to SAR at M1 = 70.8 %

TSL Correction: Positive only

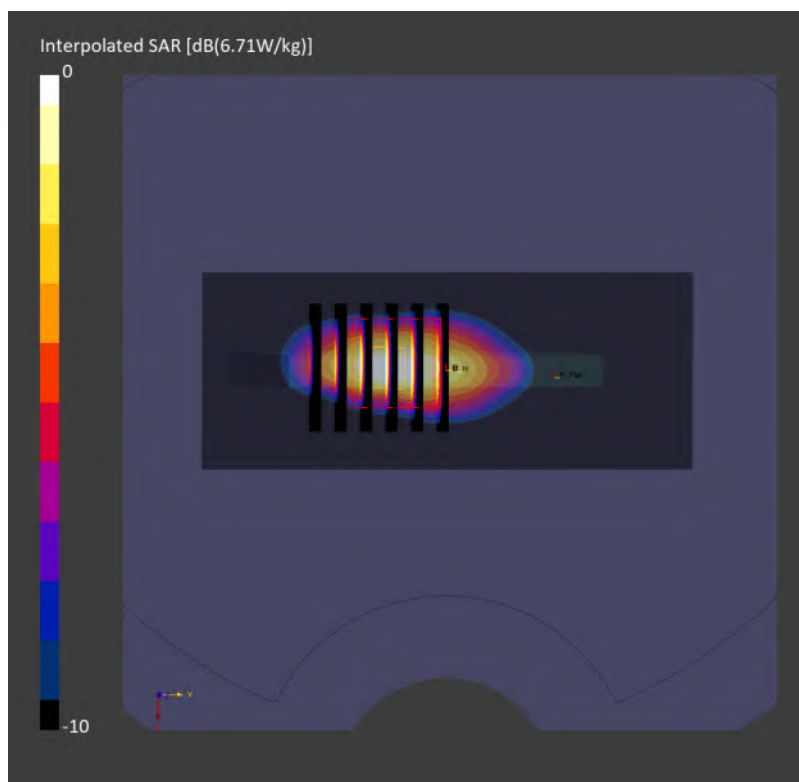

121_FR1 n41_100M_BPSK_270_0_Top Side_0mm_Ch518598

Communication System: NR FR1 TDD; Frequency: 2592.990 MHz

Medium: HSL_600-7200_260824 Medium parameters used: $f = 2592.990$ MHz; $\sigma = 1.91$ S/m; $\epsilon_r = 39.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN3728; ConvF(6.66, 6.54, 6.74); Calibrated: 2026-03-26
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn376; Calibrated: 2026-04-20
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2126; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 TDD, 1003255

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 6.53 W/kg; SAR (10g) = 2.52 W/kg;

TSL Correction: Positive only

Zoom Scan (32.0 mm x 32.0 mm x 33.4 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.03 dB

SAR (1g) = 6.59 W/kg; SAR (8g) = 2.72 W/kg; SAR (10g) = 2.42 W/kg

Smallest distance from peaks to all points 3 dB below = 5.1 mm

Ratio of SAR at M2 to SAR at M1 = 67.7 %

TSL Correction: Positive only

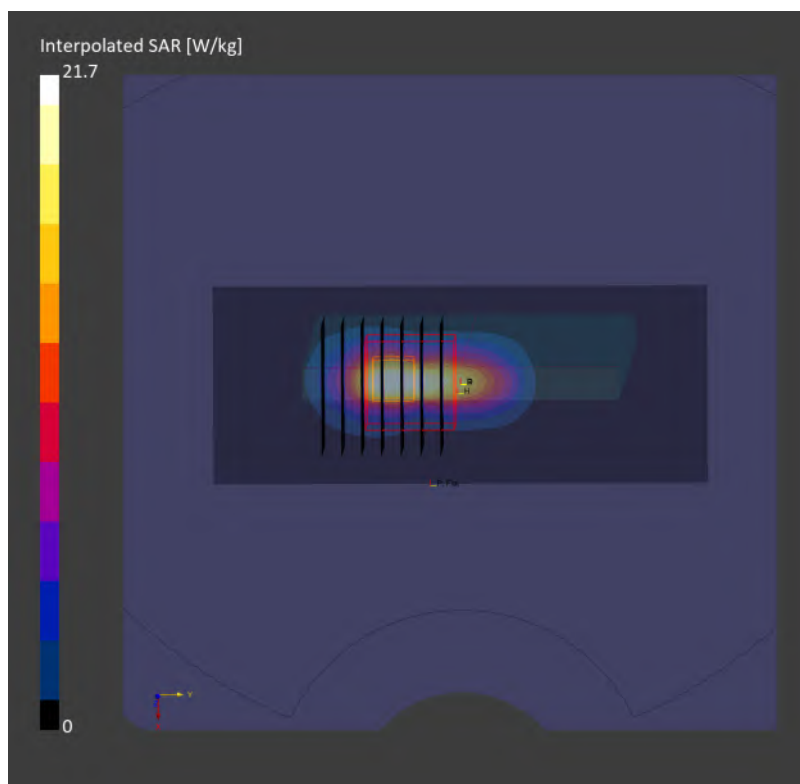

122_FR1 n48_40M_BPSK_100_0_Top Side_0mm_Ch641666

Communication System: NR FR1 TDD; Frequency: 3624.990 MHz

Medium: HSL_600-7200_260824 Medium parameters used: $f = 3624.990$ MHz; $\sigma = 2.85$ S/m; $\epsilon_r = 37.7$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.88, 6.35, 5.8); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 TDD, 1002259

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 7.48 W/kg; SAR (10g) = 2.33 W/kg;

TSL Correction: Positive only

Zoom Scan (32.8 mm x 32.8 mm x 33.4 mm): Measurement Grid: 4.1 mm x 4.1 mm x 1.4 mm


Power Drift = 0.04 dB

SAR (1g) = 8.33 W/kg; SAR (8g) = 2.72 W/kg; SAR (10g) = 2.34 W/kg

Smallest distance from peaks to all points 3 dB below = 5.0 mm

Ratio of SAR at M2 to SAR at M1 = 63.1 %

TSL Correction: Positive only

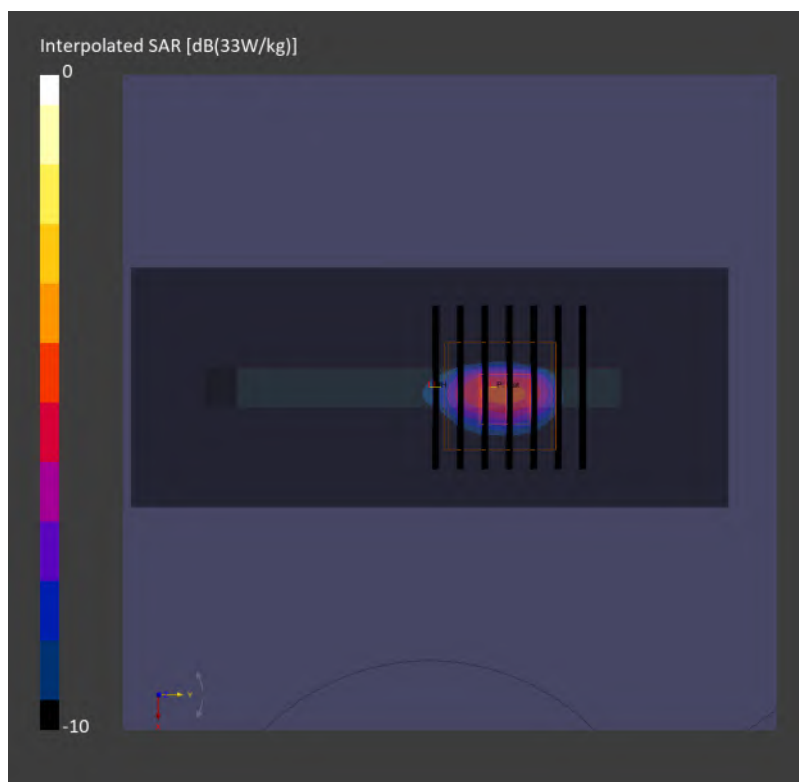

123_FR1 n77_100M_BPSK_1_1_Top Side_0mm_Ch650000

Communication System: NR FR1 TDD; Frequency: 3750.000 MHz

Medium: HSL_600-7200_260824 Medium parameters used: $f = 3750.000$ MHz; $\sigma = 2.95$ S/m; $\epsilon_r = 37.5$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(5.88, 6.35, 5.8); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: NR FR1 TDD, 1003251

Area Scan (48.0 mm x 120.0 mm): Measurement Grid: 8.0 mm x 10.0 mm

SAR (1g) = 7.49 W/kg; SAR (10g) = 2.28 W/kg;

TSL Correction: Positive only

Zoom Scan (31.2 mm x 31.2 mm x 33.4 mm): Measurement Grid: 3.9 mm x 3.9 mm x 1.4 mm


Power Drift = 0.02 dB

SAR (1g) = 8.11 W/kg; SAR (8g) = 2.69 W/kg; SAR (10g) = 2.31 W/kg

Smallest distance from peaks to all points 3 dB below = 5.0 mm

Ratio of SAR at M2 to SAR at M1 = 63.5 %

TSL Correction: Positive only

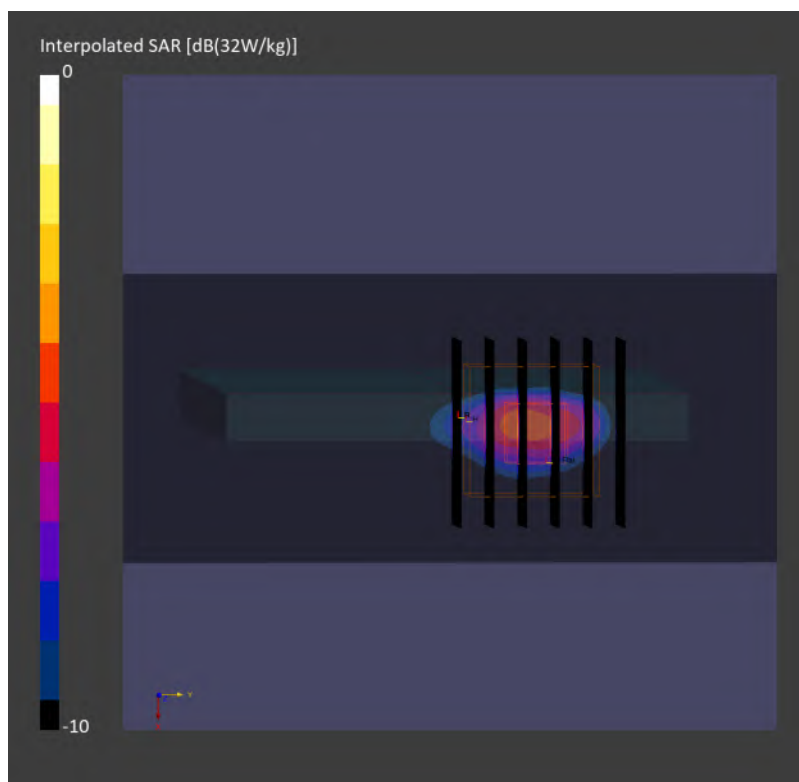

124_WLAN2.4GHz_802.11b 1Mbps_Back Right_0mm_Ch11

Communication System: WiFi (802.11b); Frequency: 2462.000 MHz

Medium: HSL_600-7200_260829 Medium parameters used: $f = 2462.000$ MHz; $\sigma = 1.85$ S/m; $\epsilon_r = 39.8$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(6.56, 7.09, 6.47); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11b), 10315

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 5.36 W/kg; SAR (10g) = 2.25 W/kg;

TSL Correction: Positive only

Zoom Scan (33.6 mm x 33.6 mm x 31.2 mm): Measurement Grid: 4.2 mm x 4.2 mm x 1.5 mm


Power Drift = -0.02 dB

SAR (1g) = 6.03 W/kg; SAR (8g) = 2.53 W/kg; SAR (10g) = 2.25 W/kg

Smallest distance from peaks to all points 3 dB below = 4.2 mm

Ratio of SAR at M2 to SAR at M1 = 68.0 %

TSL Correction: Positive only

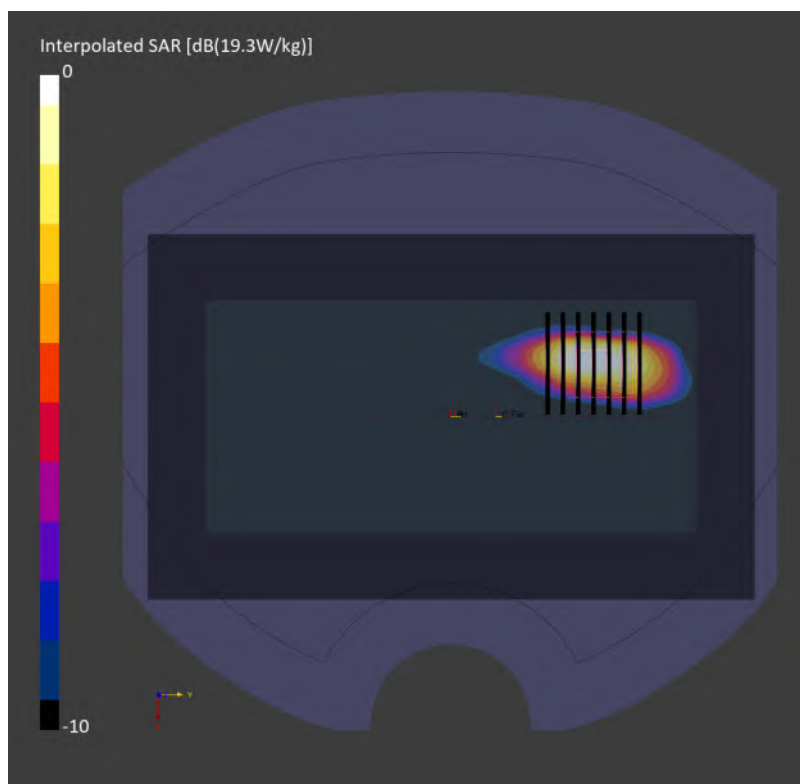

125_WLAN5.3GHz_802.11n-HT20 MCS0_Back Top_0mm_Ch52

Communication System: WiFi ; Frequency: 5260.000 MHz

Medium: HSL_600-7200_260906 Medium parameters used: $f = 5260.000$ MHz; $\sigma = 4.54$ S/m; $\epsilon_r = 35.4$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(5.8, 5.38, 5.76); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11n), 10591

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 2.24 W/kg; SAR (10g) = 0.736 W/kg;

TSL Correction: Positive only

Zoom Scan (30.4 mm x 34.2 mm x 22.9 mm): Measurement Grid: 3.8 mm x 3.8 mm x 1.4 mm


Power Drift = 0.01 dB

SAR (1g) = 2.53 W/kg; SAR (8g) = 0.989 W/kg; SAR (10g) = 0.864 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 60.0 %

TSL Correction: Positive only

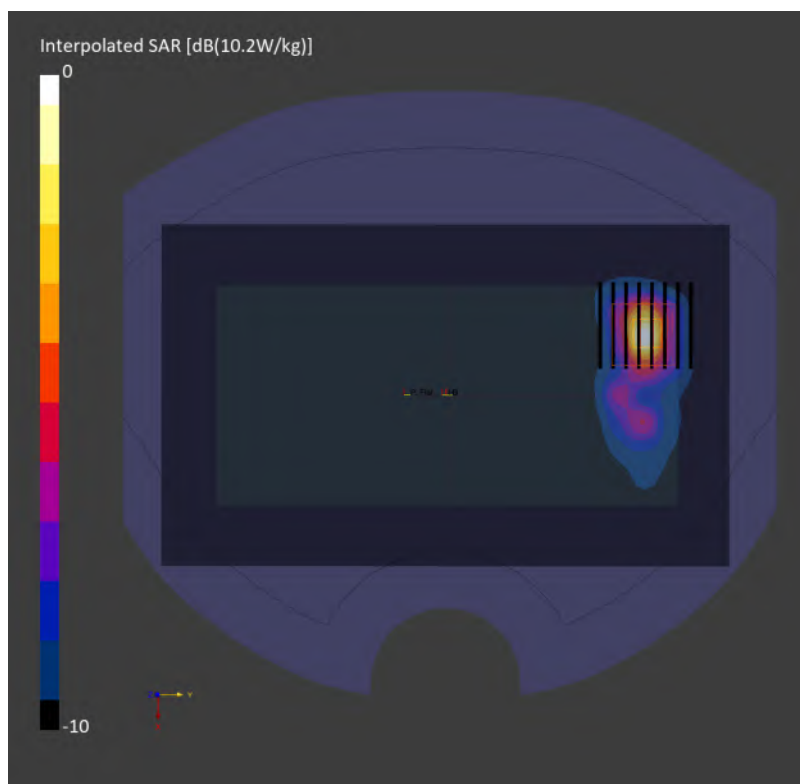

126_WLAN5.5GHz_802.11a 6Mbps_Back Right_0mm_Ch144

Communication System: WiFi ; Frequency: 5720.000 MHz

Medium: HSL_600-7200_260906 Medium parameters used: $f = 5720.000$ MHz; $\sigma = 5.04$ S/m; $\epsilon_r = 34.5$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7694; ConvF(5.23, 4.86, 5.19); Calibrated: 2025-10-23
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1424; Calibrated: 2025-12-03
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2145; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11a), 10417

Area Scan (60.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 2.48 W/kg; SAR (10g) = 0.660 W/kg;

TSL Correction: Positive only

Zoom Scan (30.6 mm x 34.0 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm


Power Drift = 0.03 dB

SAR (1g) = 4.98 W/kg; SAR (8g) = 1.68 W/kg; SAR (10g) = 1.43 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 55.3 %

TSL Correction: Positive only

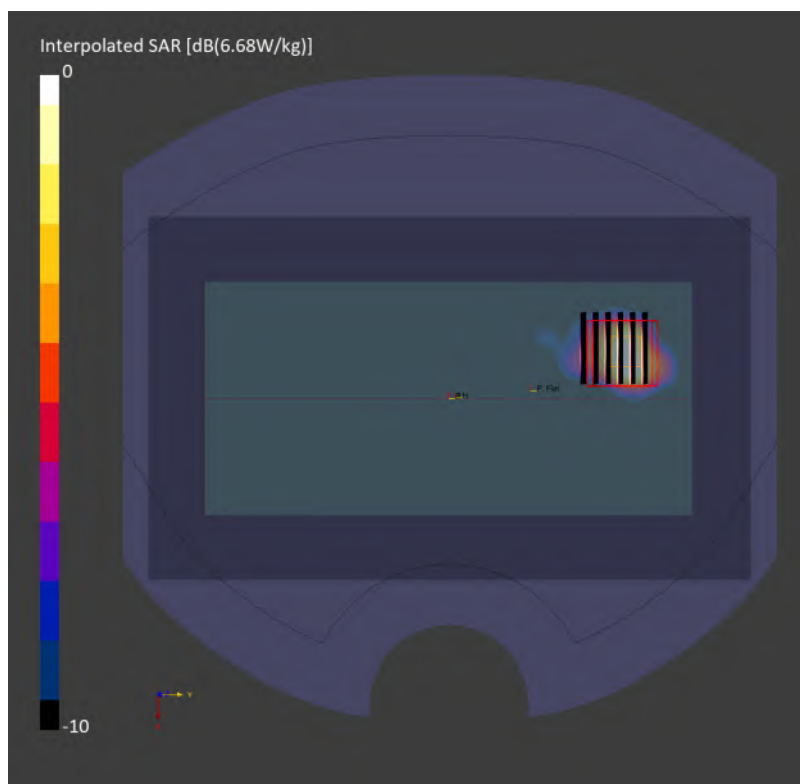

127_WLAN5GHz_802.11ac-VHT20 MCS0_Back Right_0mm_Ch165

Communication System: WiFi (802.11ac); Frequency: 5825.000 MHz

Medium: HSL_600-7200_260825 Medium parameters used: $f = 5825.000$ MHz; $\sigma = 5.20$ S/m; $\epsilon_r = 33.6$

Ambient Temperature: 23.5°C; Liquid Temperature: 22.5°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(4.54, 4.9, 4.48); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11ac), 10554

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 2.51 W/kg; SAR (10g) = 0.838 W/kg;

TSL Correction: Positive only

Zoom Scan (23.2 mm x 23.2 mm x 25.0 mm): Measurement Grid: 2.9 mm x 2.9 mm x 1.2 mm


Power Drift = 0.06 dB

SAR (1g) = 3.65 W/kg; SAR (8g) = 1.14 W/kg; SAR (10g) = 0.968 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 56.1 %

TSL Correction: Positive only

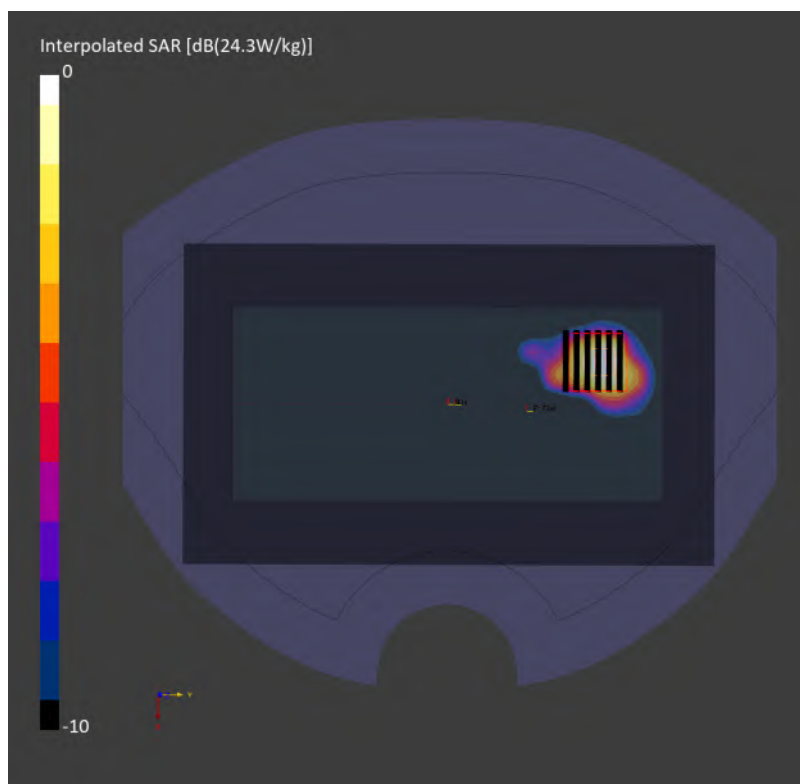

128_WLAN6GHz_802.11be-EHT320 MCS0 _Back Top _0mm_Ch127

Communication System: WiFi (802.11be); Frequency: 6585.000 MHz

Medium: HSL_600-7200_260901 Medium parameters used: $f = 6585.000$ MHz; $\sigma = 6.11$ S/m; $\epsilon_r = 32.1$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(4.76, 5.14, 4.7); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: WiFi (802.11be), 11026

Area Scan (119.0 mm x 204.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 1.08 W/kg; SAR (10g) = 0.303 W/kg;

TSL Correction: Positive only

Zoom Scan (23.8 mm x 23.8 mm x 22.9 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm


Power Drift = 0.09 dB

SAR (1g) = 1.25 W/kg; SAR (8g) = 0.377 W/kg; SAR (10g) = 0.322 W/kg

Smallest distance from peaks to all points 3 dB below = 4.9 mm

Ratio of SAR at M2 to SAR at M1 = 51.4 %

TSL Correction: Positive only

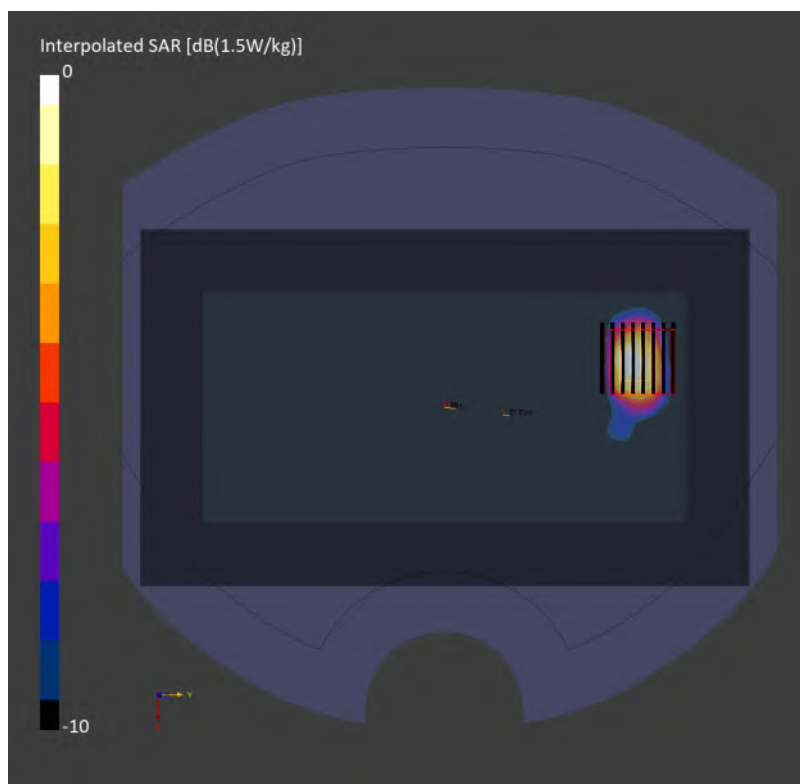

129_NFC_ASK_Back_0mm_Ch0

Communication System: CW; Frequency: 13.600 MHz

Medium: HSL_4-250_260906 Medium parameters used: $f = 13.600$ MHz; $\sigma = 0.748$ S/m; $\epsilon_r = 55.4$

Ambient Temperature: 23.6°C; Liquid Temperature: 22.6°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7695; ConvF(14.15, 14.46, 14.12); Calibrated: 2026-08-14
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1647; Calibrated: 2025-10-20
- Phantom: ELI V8.0 (20deg probe tilt); Serial: 2156_0mm_0716; Section: Flat
- Measurement Software: 16.4.0.5005
- UID: CW, 0--

Area Scan (120.0 mm x 210.0 mm): Measurement Grid: 15.0 mm x 15.0 mm

SAR (1g) = 0.017 W/kg; SAR (10g) = 0.008 W/kg;

TSL Correction: Positive only

Zoom Scan (36.0 mm x 36.0 mm x 33.4 mm): Measurement Grid: 3.6 mm x 3.6 mm x 1.4 mm


Power Drift = -0.05 dB

SAR (1g) = 0.018 W/kg; SAR (8g) = 0.006 W/kg; SAR (10g) = 0.005 W/kg

Smallest distance from peaks to all points 3 dB below = 4.1 mm

Ratio of SAR at M2 to SAR at M1 = 53.6 %

TSL Correction: Positive only

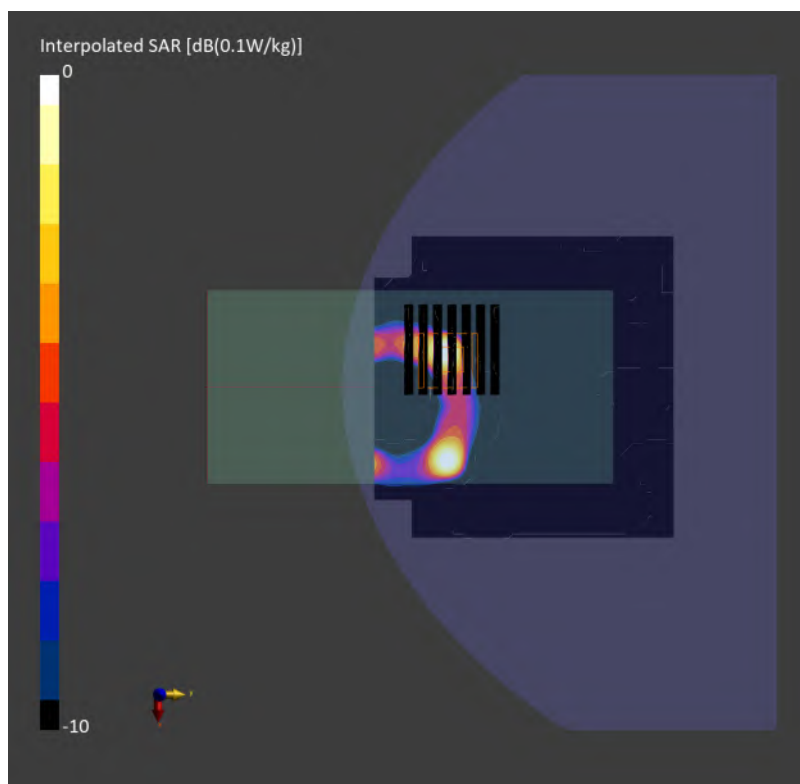

130_UWB_802.15.4ab_Front_0mm_Ch49

Communication System: Custom; Frequency: 5848.750 MHz

Medium: HSL_600-7200_260902 Medium parameters used: $f = 5848.750$ MHz; $\sigma = 5.17$ S/m; $\epsilon_r = 33.6$

Ambient Temperature: 23.4°C; Liquid Temperature: 22.4°C

DASY8 Configuration:

- Probe: EX3DV4 - SN7791; ConvF(4.54, 4.9, 4.48); Calibrated: 2026-02-20
- Sensor-Surface: 1.4 mm
- Electronics: DAE4 Sn1399; Calibrated: 2026-03-11
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2127; Section: Flat
- Measurement Software: 18.0.0.7250
- UID: Custom, 2

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm

SAR (1g) = 1.04 W/kg; SAR (10g) = 0.314 W/kg;

TSL Correction: Positive only

Zoom Scan (24.0 mm x 24.0 mm x 22.9 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm


Power Drift = 0.08 dB

SAR (1g) = 1.38 W/kg; SAR (8g) = 0.430 W/kg; SAR (10g) = 0.368 W/kg

Smallest distance from peaks to all points 3 dB below = 5.4 mm

Ratio of SAR at M2 to SAR at M1 = 52.0 %

TSL Correction: Positive only

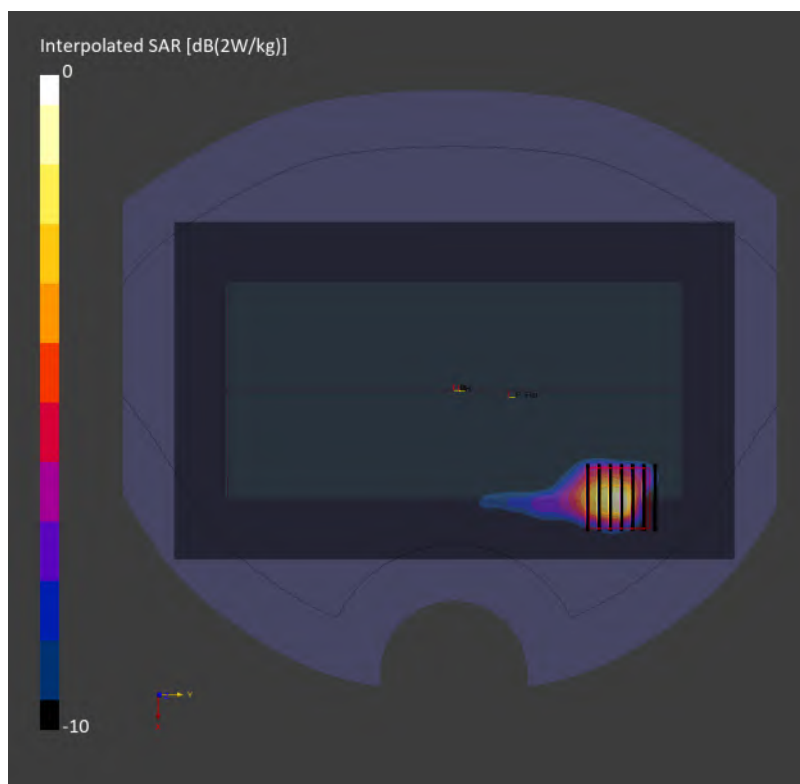

01_Measurement Report for Device

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	Software Version	DUT Type
Device,	162.0 x 77.0 x 8.0	3.2.0.1840	Phone

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz]	Conversion Factor
5G	BACK, 2.00	6585.0	1.0

Hardware Setup


Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1044	Air –	EUmmWV4 – SN9461_F1–55GHz, 2025–10–15	DAE4 Sn1647, 2025–10–20

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	120.0 x 105.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Date	2026–09–02
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	2.06
psPDtot+ [W/m ²]	2.72
H _{max} [A/m]	0.241
E _{max} [V/m]	80.3
max _(Stot) [W/m ²]	6.04
Power Drift [dB]	0.10
IPDn	0.823

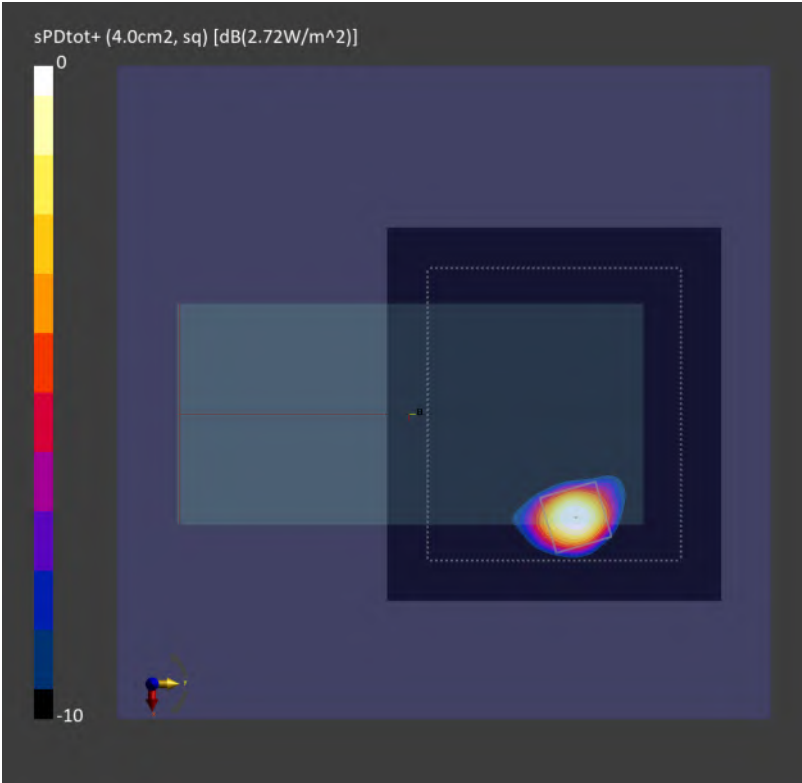

02_Measurement Report for Device

Device Under Test Properties

Model, Manufacturer	Dimensions [mm]	Software Version	DUT Type
Device,	162.0 x 77.0 x 8.0	3.2.0.1840	Phone

Exposure Conditions

Phantom Section	Position, Test Distance [mm]	Frequency [MHz]	Conversion Factor
5G	BACK, 2.00	6585.0	1.0

Hardware Setup

Phantom	Medium	Probe, Calibration Date	DAE, Calibration Date
mmWave – 1044	Air –	EUmmWV4 – SN9461_F1–55GHz, 2025–10–15	DAE4 Sn1647, 2025–10–20

Scans Setup

Scan Type	5G Scan
Grid Extents [mm]	105.0 x 120.0
Grid Steps [lambda]	0.0625 x 0.0625
Sensor Surface [mm]	2.0

Measurement Results

Date	2026–09–02
Avg. Area [cm ²]	4.00
psPDn+ [W/m ²]	0.424
psPDtot+ [W/m ²]	0.577
H _{max} [A/m]	0.120
E _{max} [V/m]	40.2
max _(Stot) [W/m ²]	1.33
Power Drift [dB]	0.14
IPDn	0.291

